



RF EXPOSURE LAB, LLC

2867 Progress Place, Suite 4D • Escondido, CA 92029 • U.S.A.

TEL (760) 737-3131 • FAX (760) 737-9131

<http://www.rfexposurelab.com>

CERTIFICATE OF COMPLIANCE SAR EVALUATION

Huawei Corp.
1700 Alma Drive, Suite 100
Plano, TX 75075

Dates of Test: September 6 - 7, 2008
Test Report Number: SAR.20080902
Revision A

FCC ID:	QISEC168
Model(s):	EC168
Test Sample:	Engineering Unit Same as Production
Serial No.:	KWZAC10871400176
Equipment Type:	Wireless Modem
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	824.7 – 848.5 MHz, 1851.25 – 1908.75 MHz
Frequency Tolerance:	± 25 ppm
Maximum RF Output:	835 MHz – 24.07 dBm, 1900 MHz – 23.61 dBm Conducted
Signal Modulation:	CDMA
Antenna Type (Length):	Internal
Application Type:	Certification
FCC Rule Parts:	Part 22, 24
Industry Canada:	RSS-102

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2003, OET Bulletin 65 Supp. C, RSS-102 and Safety Code 6 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application has been denied FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

Jay M. Moulton
Vice President



Certificate # 2387.01

Table of Contents

1.	Introduction	3
	SAR Definition [5].....	3
2.	SAR Measurement Setup	4
	Robotic System	4
	System Hardware	4
	System Description	4
	E-Field Probe	5
3.	Robot Specifications	7
4.	Probe and Dipole Calibration	8
5.	Phantom & Simulating Tissue Specifications.....	9
	SAM Phantom.....	9
	Brain & Muscle Simulating Mixture Characterization	9
	Device Holder	9
6.	Definition of Reference Points.....	10
	Ear Reference Point.....	10
	Device Reference Points	10
7.	Test Configuration Positions	11
	Positioning for Cheek/Touch [5].....	11
	Positioning for Ear / 15° Tilt [5].....	12
	Body Worn Configurations	13
8.	ANSI/IEEE C95.1 – 1999 RF Exposure Limits [2].....	14
	Uncontrolled Environment.....	14
	Controlled Environment	14
9.	Measurement Uncertainty	15
10.	System Validation	16
	Tissue Verification.....	16
	Test System Verification	16
11.	SAR Test Data Summary	17
	Procedures Used To Establish Test Signal.....	17
	Device Test Condition	17
12.	FCC 3G Measurement Procedures – March 2008.....	18
	12.1 Procedures Used to Establish RF Signal for SAR.....	18
	12.2 SAR Measurement Conditions	18
	SAR Data Summary – 835 MHz Body – IS2000.....	21
	SAR Data Summary – 835 MHz Body – Rev 0.....	22
	SAR Data Summary – 835 MHz Body – Rev A	23
	SAR Data Summary – 1900 MHz Body – IS2000.....	24
	SAR Data Summary – 1900 MHz Body – Rev 0.....	25
	SAR Data Summary – 1900 MHz Body – Rev A	26
13.	Test Equipment List	27
14.	Conclusion	28
15.	References.....	29
	Appendix A – System Validation Plots and Data	30
	Appendix B – SAR Test Data Plots.....	44
	Appendix C – SAR Test Setup Photos	195
	Appendix D – Probe Calibration Data Sheets.....	199
	Appendix E – Dipole Calibration Data Sheets	220
	Appendix F – Phantom Calibration Data Sheets	243

1. Introduction

This measurement report shows compliance of the Huawei Corp. Model EC168 FCC ID: QISEC168 with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices. The FCC have adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], FCC OET Bulletin 65 Supp. C – 2001 [4], IEEE Std.1528 – 2003 Recommended Practice [5], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

2. SAR Measurement Setup

Robotic System

The measurements are conducted utilizing the ALSAS-10-U automated dosimetric assessment system. The ALSAS-10-U is designed and manufactured by Aprel Laboratories in Nepean, Ontario, Canada. The system utilizes a Robcomm 3 robot manufactured by ThermoCRS located in Michigan USA.

System Hardware

The system consists of a six axis articulated arm, controller for precise probe positioning (0.05 mm repeatability), a power supply, a teach pendant for teaching area scans, near field probe, an IBM Pentium 4™ 2.66 GHz PC with Windows XP Pro™, and custom software developed to enable communications between the robot controller software and the host operating system.

An amplifier is located on the articulated arm, which is isolated from the custom designed end effector and robot arm. The end effector provides the mechanical touch detection functionality and probe connection interface. The amplifier is functionally validated within the manufacturer's site and calibrated at NCL Calibration Laboratories. A Data Acquisition Card (DAC) is used to collect the signal as detected by the isotropic e-field probe. The DAC manufacturer calibrates the DAC to NIST standards. A formal validation is executed using all mechanical and electronic components to prove conformity of the measurement platform as a whole.

System Description

The ALSAS-10-U has been designed to measure devices within the compliance environment to meet all recognized standards. The system also conforms to standards, which are currently being developed by the scientific and manufacturing community.

The course scan resolution is defined by the operator and reflects the requirements of the standard to which the device is being tested. Precise measurements are made within the predefined course scan area and the values are logged.

The user predefines the sample rate for which the measurements are made so as to ensure that the full duty-cycle of a pulse modulation device is covered during the sample. The following algorithm is an example of the function used by the system for linearization of the output for the probe.

$$V_i = U_i + U_i^2 \bullet \frac{cf}{dcp_i}$$



The April E-Field probe is evaluated to establish the diode compression point.

A complex algorithm is then used to calculate the values within the measured points down to a resolution of 1mm. The data from this process is then used to provide the co-ordinates from which the cube scan is created for the determination of the 1 g and 10 g averages.

Cube scan averaging consists of a number of complex algorithms, which are used to calculate the one, and ten gram averages. The basis for the cube scan process is centered on the location where the maximum measured SAR value was found. When a secondary peak value is found which is within 60% of the initial peak value, the system will report this back to the operator who can then assess the need for further analysis of both the peak values prior to the one and ten-gram cube scan averaging process. The algorithm consists of 3D cubic Spline, and Lagrange extrapolation to the surface, which form the matrix for calculating the measurement output for the one and ten gram average values. The resolution for the physical scan integral is user defined with a final calculated resolution down to 1mm.

In-depth analysis for the differential of the physical scanning resolution for the cube scan analysis has been carried out, to identify the optimum setting for the probe positioning steps, and this has been determined at 8mm increments on the X, & Y planes. The reduction of the physical step increment increased the time taken for analysis but did not provide a better uncertainty or return on measured values.

The final output from the system provides data for the area scan measurements, physical and splined (1mm resolution) cube scan with physical and calculated values (1mm resolution).



The overall uncertainty for the methodology and algorithms the ALSAS-10-U used during the SAR calculation was evaluated using the data from IEEE 1528 f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

The probe used during the measurement process has been assessed to provide values for diode compression. These values are calculated during the probe calibration exercise and are used in the mathematical calculations for the assessment of SAR.

E-Field Probe

The E-field probe used by RF Exposure Lab, LLC, has been fully calibrated and assessed for isotropic, and boundary effect. The probe utilizes a triangular sensor arrangement as detailed in the diagram below right.



The SAR is assessed with the probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (Z height). The diagram above right shows how the center of the sensor is defined with the location of the diode placed at the center of the dipole. The 5mm default in the Z axis is the optimum height for assessing SAR where the boundary effect is at its least, with the probe located closest to the phantom surface (boundary).

The manufacturer specified precision of the robot is ± 0.05 mm and the precision of the APREL bottom detection device is ± 0.1 mm. These precisions are calibrated and tested in the manufacturing process of the bottom detection device. A constant distance is maintained because the surface of the phantom is dynamically detected for each point. The surface detection algorithm corrects the position of the robot so that the probe rests on the surface of the phantom. The probe is then moved to the measurement location 2.44 mm above the phantom surface resulting in the probe center location to be at 4.0 mm above the phantom surface which is the sum of the position (2.44 mm) and the sensor offset (1.56 mm). Therefore, the probe sensor will be at 4.0 mm above the phantom surface ± 0.1 mm for each SAR location for frequencies below 3 GHz. For frequencies above 3 GHz, the probe is moved to the measurement location 1.44 mm above the phantom surface resulting in the probe center location to be at 2.0 mm above the phantom surface which is the sum of the probe position (1.44 mm) and the probe offset (0.56 mm). Therefore, the probe sensor will be at 2.0 mm above the phantom surface ± 0.1 mm for each SAR location for frequencies above 3 GHz.

The probe boundary effect compensation cannot be disabled in the ALSAS-10U testing system. The probe tip will always be at least half a probe tip diameter from the phantom surface. For frequencies up to 3 GHz, the probe diameter is 5 mm. With the sensor offset set at 1.56 mm (default setting) and the probe position set at 2.44 mm (default setting), the sensor to phantom gap will be 4.0 mm which is greater than half the probe tip diameter of 5.0 mm. For frequencies greater than 3 GHz, the probe diameter is 3 mm. With the sensor offset set at 0.56 mm (default setting) and the probe position set at 1.44 mm (default setting), the sensor to phantom gap will be 3.0 mm which is greater than half the probe tip diameter of 3.0 mm.

The separation of the first 2 measurement points in the zoom scan is specified in the test setup software. For frequencies below 3 GHz, the user must specify a zoom scan resolution of less than 6 mm in the z-axis to have the first two measurements within 1 cm of the surface. The z-axis is set to 4 mm as shown on each of the data sheets in Appendix B. For frequencies above 3 GHz, the user must specify a zoom scan resolution of less than 3 mm in the z-axis to have the first two measurements within 5 mm of the surface. The z-axis is set to 2 mm as shown on each of the data sheets in Appendix B.

The zoom scan volume for devices ≤ 3 GHz with a cube scan of 5x5x8 yields a volume of 32x32x28 mm³. For devices >3 GHz and <4.5 GHz, the cube scan of 9x9x9 yields a volume of 32x32x24 mm³. For devices ≥ 4.5 GHz, the cube scan of 7x7x12 yields a volume of 24x24x22 mm³.

3. Robot Specifications

Specifications

Positioner: ThermoCRS, Robot Model: Robocomm 3
Repeatability: 0.05 mm
No. of axis: 6

Data Acquisition Card (DAC) System

Cell Controller

Processor: Pentium 4™
Clock Speed: 2.66 GHz
Operating System: Windows XP Pro™

Data Converter

Features: Signal Amplifier, End Effector, DAC
Software: ALSAS 10-U Software

E-Field Probe

Model: Various See Probe Calibration Sheet
Serial Number: Various See Probe Calibration Sheet
Construction: Triangular Core Touch Detection System
Frequency: 10MHz to 6GHz

Phantom

Phantom: Uniphantom, Right Phantom, Left Phantom



4. Probe and Dipole Calibration

See Appendix D and E.

5. Phantom & Simulating Tissue Specifications

SAM Phantom



The Aprel system utilizes three separate phantoms. Each phantom for SAR assessment testing is a low loss dielectric shell, with shape and dimensions derived from the anthropomorphic data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM phantom shell is bisected along the mid sagittal plane into right and left halves. The perimeter sidewalls of each phantom half is extended to allow filling with liquid to a depth of 15 cm that is sufficient to minimize reflections from the upper surface [5]. The Uni-Phantom is used to conduct body measurements and held to face measurements. The depth of the phantom allows for 15 cm of tissue material to be filled within the phantom. See photos in Appendix C.

Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of the material based on the table listed below. The mixture is measured to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue; when necessary, the composition of ingredients is adjusted to achieve the required parameters. Body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations.

Table 5.1 Typical Composition of Ingredients for Tissue

Ingredients		Simulating Tissue	
		835 MHz Muscle	1900 MHz Muscle
Mixing Percentage			
Water		52.40	69.91
Sugar		45.00	0.00
Salt		1.40	0.13
HEC		1.00	0.00
Bactericide		0.10	0.00
DGBE		0.00	29.96
Dielectric Constant	Target	55.20	53.30
Conductivity (S/m)	Target	0.97	1.52

Device Holder



In combination with the SAM phantom, the mounting device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can easily, accurately, and repeatably be positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, and uni-phantom).

6. Definition of Reference Points

Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 6.1 Close-up side view of ERP's



Figure 6.2 Front, back and side view of SAM

Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 6.3). The “test device reference point” is then located at the same level as the center of the ear reference point. The test device is positioned so that the “vertical centerline” is bisecting the front surface of the device at it’s top and bottom edges, positioning the “ear reference point” on the outer surface of both the left and right head phantoms on the ear reference point [5].

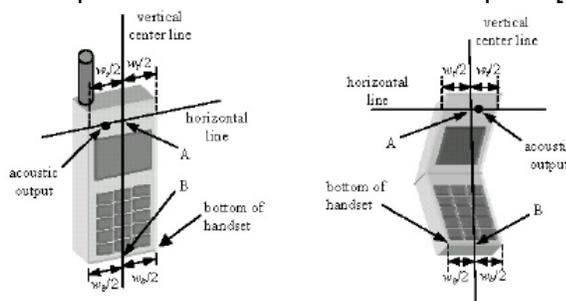


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

7. Test Configuration Positions

Positioning for Cheek/Touch [5]

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.1), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom.

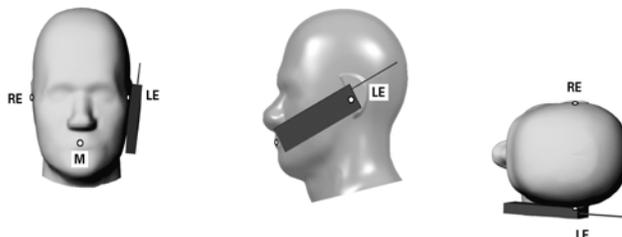


Figure 7.1 Front, Side and Top View of Cheek/Touch Position

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure 7.2.




Figure 7.2 Side view w/ relevant markings

Positioning for Ear / 15° Tilt [5]

With the test device aligned in the Cheek/Touch Position”:

1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
2. Rotate the device around the horizontal line by 15 degrees.
3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure 7.3).

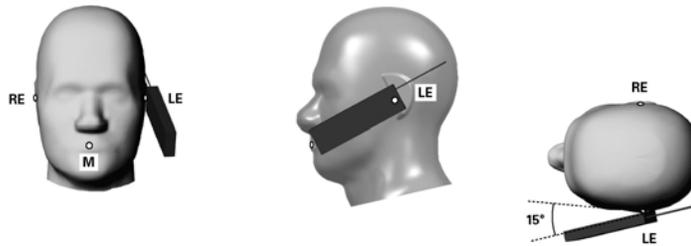


Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position

Body Worn Configurations

Body-worn operating configurations are tested with the accessories attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then, when multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

8. ANSI/IEEE C95.1 – 1999 RF Exposure Limits [2]

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

9. Measurement Uncertainty

Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c_i^{-1} (1-g)	c_i^{-1} (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	4.2	rectangular	•3	1	1	2.4	2.4
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	0.5	normal	1	0.7	0.5	0.4	0.3
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.0	normal	1	0.6	0.5	0.6	0.5
Combined Uncertainty		RSS				9.6	9.4
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.1	18.8

10. System Validation

Tissue Verification

Table 10.1 Measured Tissue Parameters

		1900 MHz Body		1900 MHz Body		835 MHz Body	
Date(s)		Sept. 6, 2008		Sept. 7, 2008		Sept. 7, 2008	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		53.30	53.48	53.30	54.46	55.20	56.37
Conductivity: σ		1.52	1.46	1.52	1.53	0.97	0.99

		835 MHz Body	
Date(s)		Sept. 8, 2008	
Liquid Temperature (°C)	20.0	Target	Measured
Dielectric Constant: ϵ		55.20	56.65
Conductivity: σ		0.97	0.96

See Appendix A for data printout.

Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at the test frequency by using the system kit. Power is extrapolated to 1 watt. (Graphic Plots Attached)

Table 10.2 System Dipole Validation Target & Measured

	Test Frequency	Targeted SAR _{1g} (W/kg)	Measure SAR _{1g} (W/kg)	Deviation (%)
06-Sep-2008	1900 MHz	40.99	39.37	- 3.95
07-Sep-2008	1900 MHz	40.99	40.12	- 2.12
07-Sep-2008	835 MHz	9.75	9.92	+ 1.74
08-Sep-2008	835 MHz	9.75	10.14	+ 4.00

See Appendix A for data plots.

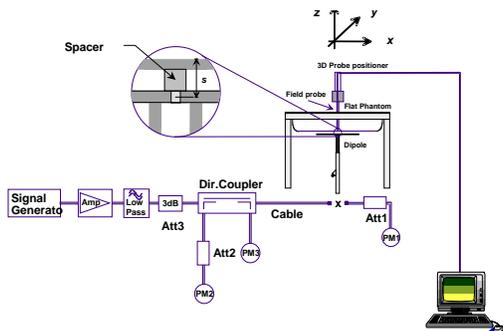


Figure 10.1 Dipole Validation Test Setup

11. SAR Test Data Summary

See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
See Appendix C for SAR Test Setup Photos.

Procedures Used To Establish Test Signal

The device was placed into simulated transmit mode using the manufacturer's test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. When test modes are not available or inappropriate for testing a device, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Condition

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a SAR drift of more than 5% occurred, the test was repeated.

The testing was conducted on all four sides of the modem. The bottom side testing was conducted with the modem installed in a side USB port on an HP Model Pavilion dv8000. The left side testing was conducted with the modem installed in a side USB port on a IBM/Lenovo Model Thinkpad T61. The top and right side testing was conducted with the modem installed on a 12 inch USB extension cable. The extension cable was installed in a side USB port on a IBM/Lenovo Model Thinkpad T61. The gap was measured to be 13 mm from the phantom for all sides.

The 1xRTT testing was conducted in RC3 with the device configured using TDSO/SO32 with FCH transmitting at full rate. The power control was set to "All Bits Up." Multiple code channels were not tested due to the conducted power measured was less than $\frac{1}{4}$ dB higher than with FCH only.

The Rev. 0 and Rev. A Subtype 0/1 testing was conducted with the Reverse Data Channel rate of 153.6 kbps. The Forward Traffic Channel data rate is set to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots. The power control was set to "All Bits Up." Other rates were not tested due to the conducted power measured was less than $\frac{1}{4}$ dB higher than 153.6 kbps.

The Rev. A Subtype 2 testing was conducted with the Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots. The Forward Traffic Channel data rate is set to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots. The power control was set to "All Bits Up." Other rates were not tested due to the conducted power measured was less than $\frac{1}{4}$ dB higher than 4096 bits.

12. FCC 3G Measurement Procedures – March 2008

Power measurements were performed using a base station simulator under average power.

12.1 Procedures Used to Establish RF Signal for SAR

The device was placed into a simulated call using a base station simulator in a screen room. Such test signals offer a consistent means for testing SAR and recommended for evaluating SAR. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If a SAR drift of more than 5% occurred, the test was repeated.

12.2 SAR Measurement Conditions

12.2.1 Output Power Verification Ev-Do

Maximum output power is verified on the High, Middle, and Low channels according to the procedures in section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rev. 0 and section 4.3.4 of 3GPP2 C.S0033-1 for Rev. A. For Rev. A, maximum output power for both Subtype 0/1 and Subtype 2 Physical Layer configurations should be measured. The device operating configurations under TAP/ETAP shall be documented in the test report; including power control, code channel and RF channel output power levels. The measurement results should be tabulated in the SAR report with any measurement difficulties and equipment limitations clearly identified.

12.2.2 Body SAR Measurements

SAR is measured using FTAP/RTAP and FETAP/RETAP respectively for Rev. 0 and Rev. A devices. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations. Both FTAP and FETAP are configured with a Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots. AT power control should be in All Bits Up conditions for TAP/ETAP modes.

Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. SAR for Subtype 2 Physical Layer configurations is not required for Rev. A when the maximum average output of each RF channel is less than that measured in Subtype 0/1 Physical Layer configurations. Otherwise, SAR is measured on the maximum output channel for Rev. A using the exposure configurations that results in the highest SAR for that RF channel in Rev. 0.

1x RTT Support

For Ev-Do devices that also support 1x RTT voice and/or data operations, SAR is not required for 1x RTT when the maximum average output of each channel is less than ¼ dB higher than that measured in Subtype 0/1 Physical Layer configurations for Rev. 0. Otherwise, the 'Body SAR Measurements' procedures in the 'CDMA-2000 1x Handsets' section should be applied.

12.2.3 Output Power Verification 1x RTT

Maximum output power is verified on the High, Middle, and Low channels according to procedures in section 4.4.5.2 of 3 GPP2 C.S0011/TIA-98-E. Results for at least steps 3, 4 and 10 of the power measurement procedures should be tabulated in the SAR report. Steps 3 and 4 should be measured using SO55 with power control bits in "All Up" condition. TDSO / SO32 may be used instead of SO55 for step 4. Step 10 should be measured using TDSO / SO32 with power control bits in the "Bits Hold"

condition (i.e. alternative Up/Down Bits). All power measurements defined in C.S0011/TIA-98-E that are inapplicable to the DUT or cannot be measured due to technical or equipment limitations should be clearly identified in the test report.

1xRTT Power Measurements

IS-2000	Channel	SO2 [dBm]	SO2 [dBm]	SO2 [dBm]	SO55 [dBm]	SO55 [dBm]	SO9 [dBm]	SO9 [dBm]	SO55 [dBm]	TDSO SO32 FCH Only [dBm]	TDSO SO32 FCH+SCH [dBm]
	F-RC	RC1	RC3	RC4	RC1	RC3	RC2	RC5	RC2	RC3	RC3
Band	Vocoder Rate	Full	Full	Full	Full	Full	Full	Full	Full	Full	Full
Cellular	1013	23.61	23.59	23.64	23.55	23.58	23.62	23.60	23.67	23.64	23.65
	384	23.73	23.68	23.60	23.64	23.66	23.69	23.62	23.67	23.72	23.71
	777	23.94	23.99	23.92	23.97	23.92	23.98	24.06	24.00	24.02	24.05
PCS	25	23.57	23.51	23.49	23.44	23.50	23.61	23.55	23.51	23.57	23.60
	600	23.22	23.23	23.19	23.12	23.17	23.14	23.19	23.17	23.21	23.24
	1175	23.49	23.43	23.48	23.44	23.38	23.39	23.50	23.46	23.41	23.49

EvDo Rev 0 Power Measurements

1x EvDo Rev. 0 [dBm] - FTAP rate = 2 Slot Version 307.2 kbps						
	RTAP Rate	9.6 kbps	19.2 kbps	38.4 kbps	76.8 kbps	153.6 kbps
Band	Channel					
Cellular	1013	23.82	23.81	23.86	23.84	23.88
	384	23.71	23.67	23.72	23.74	23.75
	777	23.85	23.89	23.91	23.92	23.97
PCS	25	23.39	23.36	23.38	23.37	23.38
	600	23.04	23.05	23.00	23.01	23.02
	1175	22.78	22.76	22.75	22.80	22.83

EvDo Rev A Power Measurements

1x EvDo Rev. A Type 0 [dBm] - FTAP rate = 2 Slot Version 307.2 kbps						
	RTAP Rate	9.6 kbps	19.2 kbps	38.4 kbps	76.8 kbps	153.6 kbps
Band	Channel					
Cellular	1013	23.45	23.48	23.46	23.52	23.57
	384	23.68	23.69	23.74	23.71	23.75
	777	23.87	23.84	23.88	23.90	23.92
PCS	25	23.40	23.38	23.42	23.46	23.48
	600	22.87	22.89	22.96	22.91	22.97
	1175	23.16	23.11	23.09	23.14	23.19

EvDo Rev A Power Measurements

1x EvDo Rev. A Type 2 [dBm] - FTAP rate = 2 Slot Version 307.2 kbps													
	RETAP Payload	128 bits	256 bits	512 bits	768 bits	1024 bits	1536 bits	2048 bits	3072 bits	4096 bits	6144 bits	8192 bits	12288 bits
Band	Channel												
Cellular	1013	23.81	23.74	23.78	23.82	23.76	23.80	23.79	23.82	23.89	23.88	23.91	23.87
	384	23.89	23.91	23.85	23.86	23.82	23.88	23.92	23.90	23.95	23.94	23.92	23.96
	777	23.98	24.07	24.04	23.92	23.94	24.02	23.96	23.99	24.06	24.02	24.01	24.05
PCS	25	23.41	23.45	23.49	23.41	23.48	23.47	23.44	23.50	23.52	23.53	23.50	23.49
	600	23.11	23.03	23.07	23.13	23.09	23.01	23.13	23.17	23.19	23.17	23.13	23.19
	1175	23.29	23.25	23.22	23.29	23.30	23.29	23.24	23.31	23.35	23.31	23.32	23.36

Power Control was set in “All Bits Up” for all measurements.

SAR Data Summary – 835 MHz Body – IS2000

MEASUREMENT RESULTS									
Gap	Side	Frequency		Modulation	Begin/End Power		RC	Configuration	SAR (W/kg)
		MHz	Ch.		(dBm)	(dBm)			
13 mm	Top	824.7	1013	CDMA	23.65	23.64	RC3	TDSO/SO32 FCH Only	0.906
		836.6	384	CDMA	23.71	23.69	RC3	TDSO/SO32 FCH Only	0.750
		848.5	777	CDMA	24.05	24.04	RC3	TDSO/SO32 FCH Only	0.755
	Bottom	824.7	1013	CDMA	23.64	23.62	RC3	TDSO/SO32 FCH Only	0.727
		836.6	384	CDMA	23.70	23.68	RC3	TDSO/SO32 FCH Only	0.648
		848.5	777	CDMA	24.04	24.02	RC3	TDSO/SO32 FCH Only	0.682
	Right Side	824.7	1013	CDMA	23.64	23.61	RC3	TDSO/SO32 FCH Only	0.449
		836.6	384	CDMA	23.70	23.70	RC3	TDSO/SO32 FCH Only	0.390
		848.5	777	CDMA	24.03	24.00	RC3	TDSO/SO32 FCH Only	0.386
	Left Side	824.7	1013	CDMA	23.63	23.61	RC3	TDSO/SO32 FCH Only	0.582
		836.6	384	CDMA	23.69	23.65	RC3	TDSO/SO32 FCH Only	0.503
		848.5	777	CDMA	24.04	24.03	RC3	TDSO/SO32 FCH Only	0.436

Muscle
1.6 W/kg (mW/g)
averaged over 1 gram

1. Battery is fully charged for all tests.
 Power Measured Conducted ERP EIRP
2. SAR Measurement
 Phantom Configuration Left Head Uniphantom Right Head
 SAR Configuration Head Body
3. Test Signal Call Mode Test Code Base Station Simulator
4. Test Configuration With Belt Clip Without Belt Clip N/A



Jay M. Moulton
Vice President

SAR Data Summary – 835 MHz Body – Rev 0

MEASUREMENT RESULTS									
Gap	Side	Frequency		Modulation	Begin/End Power		Reverse Channel	Forward Channel	SAR (W/kg)
		MHz	Ch.		(dBm)	(dBm)			
13 mm	Top	824.7	1013	CDMA	23.88	23.86	153.6 kbps	2 Slot 307.2 kbps	0.985
		836.6	384	CDMA	23.75	23.73	153.6 kbps	2 Slot 307.2 kbps	0.816
		848.5	777	CDMA	23.97	23.96	153.6 kbps	2 Slot 307.2 kbps	0.831
	Bottom	824.7	1013	CDMA	23.87	23.85	153.6 kbps	2 Slot 307.2 kbps	0.850
		836.6	384	CDMA	23.75	23.71	153.6 kbps	2 Slot 307.2 kbps	0.786
		848.5	777	CDMA	23.95	23.92	153.6 kbps	2 Slot 307.2 kbps	0.804
	Right Side	824.7	1013	CDMA	23.86	23.85	153.6 kbps	2 Slot 307.2 kbps	0.400
		836.6	384	CDMA	23.74	23.70	153.6 kbps	2 Slot 307.2 kbps	0.344
		848.5	777	CDMA	23.95	23.92	153.6 kbps	2 Slot 307.2 kbps	0.358
	Left Side	824.7	1013	CDMA	23.88	23.85	153.6 kbps	2 Slot 307.2 kbps	0.590
		836.6	384	CDMA	23.23	23.70	153.6 kbps	2 Slot 307.2 kbps	0.525
		848.5	777	CDMA	23.95	23.91	153.6 kbps	2 Slot 307.2 kbps	0.519

Muscle
1.6 W/kg (mW/g)
averaged over 1 gram

1. Battery is fully charged for all tests.
 Power Measured Conducted ERP EIRP
2. SAR Measurement
 Phantom Configuration Left Head Uniphantom Right Head
 SAR Configuration Head Body
3. Test Signal Call Mode Test Code Base Station Simulator
4. Test Configuration With Belt Clip Without Belt Clip N/A



 Jay M. Moulton
 Vice President

SAR Data Summary – 835 MHz Body – Rev A

MEASUREMENT RESULTS									
Gap	Side	Frequency		Modulation	Begin/End Power		Reverse Channel	Forward Channel	SAR (W/kg)
		MHz	Ch.		(dBm)	(dBm)			
13 mm	Top	824.7	1013	CDMA	23.89	23.85	4096 bits	2 Slot 307.2 kbps	1.058
		836.6	384	CDMA	23.95	23.92	4096 bits	2 Slot 307.2 kbps	0.838
		848.5	777	CDMA	24.06	24.01	4096 bits	2 Slot 307.2 kbps	0.882
	Bottom	824.7	1013	CDMA	23.88	23.86	4096 bits	2 Slot 307.2 kbps	0.976
		836.6	384	CDMA	23.92	23.90	4096 bits	2 Slot 307.2 kbps	0.837
		848.5	777	CDMA	24.02	24.02	4096 bits	2 Slot 307.2 kbps	0.858
	Right Side	824.7	1013	CDMA	23.86	23.81	4096 bits	2 Slot 307.2 kbps	0.463
		836.6	384	CDMA	23.91	23.88	4096 bits	2 Slot 307.2 kbps	0.416
		848.5	777	CDMA	24.02	24.00	4096 bits	2 Slot 307.2 kbps	0.432
	Left Side	824.7	1013	CDMA	23.87	23.86	4096 bits	2 Slot 307.2 kbps	0.589
		836.6	384	CDMA	23.93	23.90	4096 bits	2 Slot 307.2 kbps	0.524
		848.5	777	CDMA	24.02	23.99	4096 bits	2 Slot 307.2 kbps	0.496

Muscle
1.6 W/kg (mW/g)
averaged over 1 gram

1. Battery is fully charged for all tests.
 Power Measured Conducted ERP EIRP
2. SAR Measurement
 Phantom Configuration Left Head Uniphantom Right Head
 SAR Configuration Head Body
3. Test Signal Call Mode Test Code Base Station Simulator
4. Test Configuration With Belt Clip Without Belt Clip N/A



 Jay M. Moulton
 Vice President

SAR Data Summary – 1900 MHz Body – IS2000

MEASUREMENT RESULTS									
Gap	Side	Frequency		Modulation	Begin/End Power		RC	Configuration	SAR (W/kg)
		MHz	Ch.		(dBm)	(dBm)			
13 mm	Top	1851.25	25	CDMA	23.60	23.57	RC3	TDSO/SO32 FCH Only	1.145
		1880.00	600	CDMA	23.24	23.23	RC3	TDSO/SO32 FCH Only	1.389
		1908.75	1175	CDMA	23.49	23.47	RC3	TDSO/SO32 FCH Only	1.510
	Bottom	1851.25	25	CDMA	23.57	23.54	RC3	TDSO/SO32 FCH Only	1.415
		1880.00	600	CDMA	23.22	23.20	RC3	TDSO/SO32 FCH Only	1.345
		1908.75	1175	CDMA	23.45	23.41	RC3	TDSO/SO32 FCH Only	1.511
	Right Side	1851.25	25	CDMA	23.59	23.55	RC3	TDSO/SO32 FCH Only	0.505
		1880.00	600	CDMA	23.25	23.23	RC3	TDSO/SO32 FCH Only	0.535
		1908.75	1175	CDMA	23.48	23.47	RC3	TDSO/SO32 FCH Only	0.557
	Left Side	1851.25	25	CDMA	23.55	23.52	RC3	TDSO/SO32 FCH Only	0.480
		1880.00	600	CDMA	23.23	23.21	RC3	TDSO/SO32 FCH Only	0.535
		1908.75	1175	CDMA	23.44	23.43	RC3	TDSO/SO32 FCH Only	0.644

Muscle
1.6 W/kg (mW/g)
averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured

 Conducted

 ERP

 EIRP

2. SAR Measurement

Phantom Configuration

 Left Head

 Uniphantom

 Right Head

SAR Configuration

 Head

 Body

3. Test Signal Call Mode

 Test Code

 Base Station Simulator

4. Test Configuration

 With Belt Clip

 Without Belt Clip

 N/A



 Jay M. Moulton
 Vice President

SAR Data Summary – 1900 MHz Body – Rev 0
MEASUREMENT RESULTS

Gap	Side	Frequency		Modulation	Begin/End Power		Reverse Channel	Forward Channel	SAR (W/kg)
		MHz	Ch.		(dBm)	(dBm)			
13 mm	Top	1851.25	25	CDMA	23.38	23.34	153.6 kbps	2 Slot 307.2 kbps	1.313
		1880.00	600	CDMA	23.02	23.00	153.6 kbps	2 Slot 307.2 kbps	1.404
		1908.75	1175	CDMA	22.83	22.79	153.6 kbps	2 Slot 307.2 kbps	1.412
	Bottom	1851.25	25	CDMA	23.36	23.34	153.6 kbps	2 Slot 307.2 kbps	1.138
		1880.00	600	CDMA	22.99	22.97	153.6 kbps	2 Slot 307.2 kbps	1.164
		1908.75	1175	CDMA	22.81	22.78	153.6 kbps	2 Slot 307.2 kbps	1.304
	Right Side	1851.25	25	CDMA	23.36	23.32	153.6 kbps	2 Slot 307.2 kbps	0.487
		1880.00	600	CDMA	23.00	22.97	153.6 kbps	2 Slot 307.2 kbps	0.521
		1908.75	1175	CDMA	22.82	22.78	153.6 kbps	2 Slot 307.2 kbps	0.539
	Left Side	1851.25	25	CDMA	23.36	23.33	153.6 kbps	2 Slot 307.2 kbps	0.558
		1880.00	600	CDMA	22.99	22.98	153.6 kbps	2 Slot 307.2 kbps	0.673
		1908.75	1175	CDMA	22.80	22.79	153.6 kbps	2 Slot 307.2 kbps	0.848

Muscle
1.6 W/kg (mW/g)
 averaged over 1 gram

1. Battery is fully charged for all tests.

 Power Measured Conducted ERP EIRP

2. SAR Measurement

 Phantom Configuration Left Head Uniphantom Right Head
 SAR Configuration Head Body

3. Test Signal Call Mode

 Test Code Base Station Simulator

4. Test Configuration

 With Belt Clip Without Belt Clip N/A



 Jay M. Moulton
 Vice President

SAR Data Summary – 1900 MHz Body – Rev A

MEASUREMENT RESULTS									
Gap	Side	Frequency		Modulation	Begin/End Power		Reverse Channel	Forward Channel	SAR (W/kg)
		MHz	Ch.		(dBm)	(dBm)			
13 mm	Top	1851.25	25	CDMA	23.52	23.49	4096 bits	2 Slot 307.2 kbps	1.143
		1880.00	600	CDMA	23.19	23.16	4096 bits	2 Slot 307.2 kbps	1.277
		1908.75	1175	CDMA	23.35	23.34	4096 bits	2 Slot 307.2 kbps	1.515
	Bottom	1851.25	25	CDMA	23.50	23.47	4096 bits	2 Slot 307.2 kbps	1.170
		1880.00	600	CDMA	23.16	23.13	4096 bits	2 Slot 307.2 kbps	1.196
		1908.75	1175	CDMA	23.31	23.29	4096 bits	2 Slot 307.2 kbps	1.419
	Right Side	1851.25	25	CDMA	23.52	23.50	4096 bits	2 Slot 307.2 kbps	0.560
		1880.00	600	CDMA	23.17	23.14	4096 bits	2 Slot 307.2 kbps	0.583
		1908.75	1175	CDMA	23.33	23.31	4096 bits	2 Slot 307.2 kbps	0.617
	Left Side	1851.25	25	CDMA	23.51	23.49	4096 bits	2 Slot 307.2 kbps	0.616
		1880.00	600	CDMA	23.18	23.13	4096 bits	2 Slot 307.2 kbps	0.703
		1908.75	1175	CDMA	23.34	23.33	4096 bits	2 Slot 307.2 kbps	0.862

Muscle
1.6 W/kg (mW/g)
averaged over 1 gram

1. Battery is fully charged for all tests.
 Power Measured Conducted ERP EIRP
2. SAR Measurement
 Phantom Configuration Left Head Uniphantom Right Head
 SAR Configuration Head Body
3. Test Signal Call Mode Test Code Base Station Simulator
4. Test Configuration With Belt Clip Without Belt Clip N/A



 Jay M. Moulton
 Vice President

13. Test Equipment List

Table 12.1 Equipment Specifications

Type	Calibration Due Date	Serial Number
ThermoCRS Robot	N/A	RAF0338198
ThermoCRS Controller	N/A	RCF0338224
ThermoCRS Teach Pendant (Joystick)	N/A	STP0334405
IBM Computer, 2.66 MHz P4	N/A	8189D8U KCPR08N
Aprel E-Field Probe ALS-E020	12/03/2008	RFE-217
Aprel E-Field Probe ALS-E030	04/14/2009	RFE-001
Aprel Dummy Probe	N/A	023
Aprel Left Phantom	N/A	RFE-267
Aprel Right Phantom	N/A	RFE-268
Aprel UniPhantom	N/A	RFE-273
Aprel Validation Dipole ALS-D-450-S-2	04/30/2009	RFE-362
Aprel Validation Dipole ALS-D-835-S-2	02/22/2010	RFE-274
Aprel Validation Dipole ALS-D-1900-S-2	02/21/2010	RFE-277
Aprel Validation Dipole ALS-D-2450-S-2	02/20/2010	RFE-278
Aprel Validation Dipole ALS-D-BB-S-2	05/23/2009	5258-235-00801
Agilent (HP) 437B Power Meter	12/03/2008	3125U08837
Agilent (HP) 8481B Power Sensor	12/03/2008	3318A05384
Advantest R3261A Spectrum Analyzer	12/03/2008	31720068
Agilent (HP) 8350B Signal Generator	01/28/2009	2749A10226
Agilent (HP) 83525A RF Plug-In	01/28/2009	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	01/28/2009	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	01/28/2009	2904A00595
Agilent (HP) E55125C Base Station Sim.	03/08/2009	GB41450395
Aprel Dielectric Probe Assembly	N/A	0011
Brain Equivalent Matter (450 MHz)	N/A	N/A
Brain Equivalent Matter (835 MHz)	N/A	N/A
Brain Equivalent Matter (1900 MHz)	N/A	N/A
Brain Equivalent Matter (2450 MHz)	N/A	N/A
Muscle Equivalent Matter (450 MHz)	N/A	N/A
Muscle Equivalent Matter (835 MHz)	N/A	N/A
Muscle Equivalent Matter (1900 MHz)	N/A	N/A
Muscle Equivalent Matter (2450 MHz)	N/A	N/A
Muscle Equivalent Matter (5200 MHz)	N/A	N/A
Muscle Equivalent Matter (5800 MHz)	N/A	N/A

14. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

15. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996

- [2] ANSI/IEEE C95.1 – 1999, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.

- [3] ANSI/IEEE C95.3 – 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.

- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields, July 2001.

- [5] IEEE Standard 1528 – 2003, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, October 2003.

- [6] Industry Canada, RSS – 102e, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), November 2005.

- [7] Industry Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 1999.

Appendix A – System Validation Plots and Data

Test Result for UIM Dielectric Parameter

Sat 06/Sep/2008 07:55:15

Freq Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8700	53.30	1.52	53.63	1.42
1.8800	53.30	1.52	53.61	1.44
1.8900	53.30	1.52	53.52	1.45
1.9000	53.30	1.52	53.48	1.46
1.9100	53.30	1.52	53.38	1.48
1.9200	53.30	1.52	53.31	1.50
1.9300	53.30	1.52	53.26	1.52

Test Result for UIM Dielectric Parameter

Sun 07/sep/2008 06:56:11

Freq Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8700	53.30	1.52	54.59	1.48
1.8800	53.30	1.52	54.52	1.50
1.8900	53.30	1.52	54.50	1.51
1.9000	53.30	1.52	54.46	1.53
1.9100	53.30	1.52	54.41	1.54
1.9200	53.30	1.52	54.39	1.54
1.9300	53.30	1.52	54.38	1.57

Test Result for UIM Dielectric Parameter

Sun 07/Sep/2008 09:42:12

Freq Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8050	55.32	0.97	56.45	0.94
0.8150	55.28	0.97	56.41	0.94
0.8250	55.24	0.97	56.38	0.97
0.8350	55.20	0.97	56.37	0.99
0.8450	55.17	0.98	56.28	1.01
0.8550	55.14	0.99	56.26	1.02
0.8650	55.11	1.01	56.23	1.03

Test Result for UIM Dielectric Parameter

Mon 08/Sep/2008 07:24:22

Freq Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8050	55.32	0.97	56.87	0.93
0.8150	55.28	0.97	56.82	0.93
0.8250	55.24	0.97	56.75	0.95
0.8350	55.20	0.97	56.65	0.96
0.8450	55.17	0.98	56.63	0.99
0.8550	55.14	0.99	56.53	0.99
0.8650	55.11	1.01	56.49	1.00

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 08:03:41 AM
End Time : 06-Sep-2008 08:17:00 AM
Scanning Time : 799 secs

Product Data

Device Name : Validation
Serial No. : 1900
Type : Dipole
Model : ALS-D-1900-S-2
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.1 W
Drift Time : 0 min(s)
Length : 68 mm
Width : 3.6 mm
Depth : 39.5 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 4.265 W/kg
Power Drift-Finish: 4.284 W/kg
Power Drift (%) : 0.453

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 49.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : Probe 217 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 23.00 °C
Set-up Date : 06-Sep-2008
Set-up Time : 8:39:41 AM
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Touch
Separation : 10
Channel : Mid

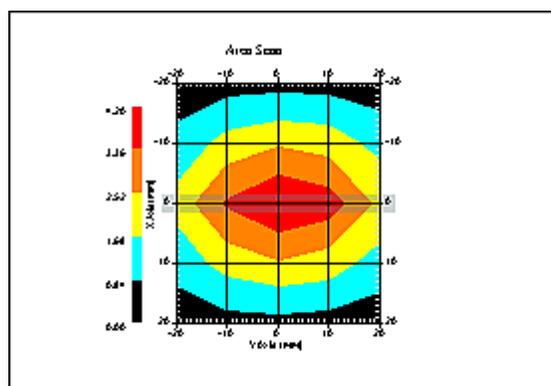

1 gram SAR value : 3.937 W/kg
10 gram SAR value : 1.933 W/kg
Area Scan Peak SAR : 4.200 W/kg
Zoom Scan Peak SAR : 6.816 W/kg

SAR-Z Axis at Hotspot x:0.25 y:-0.17

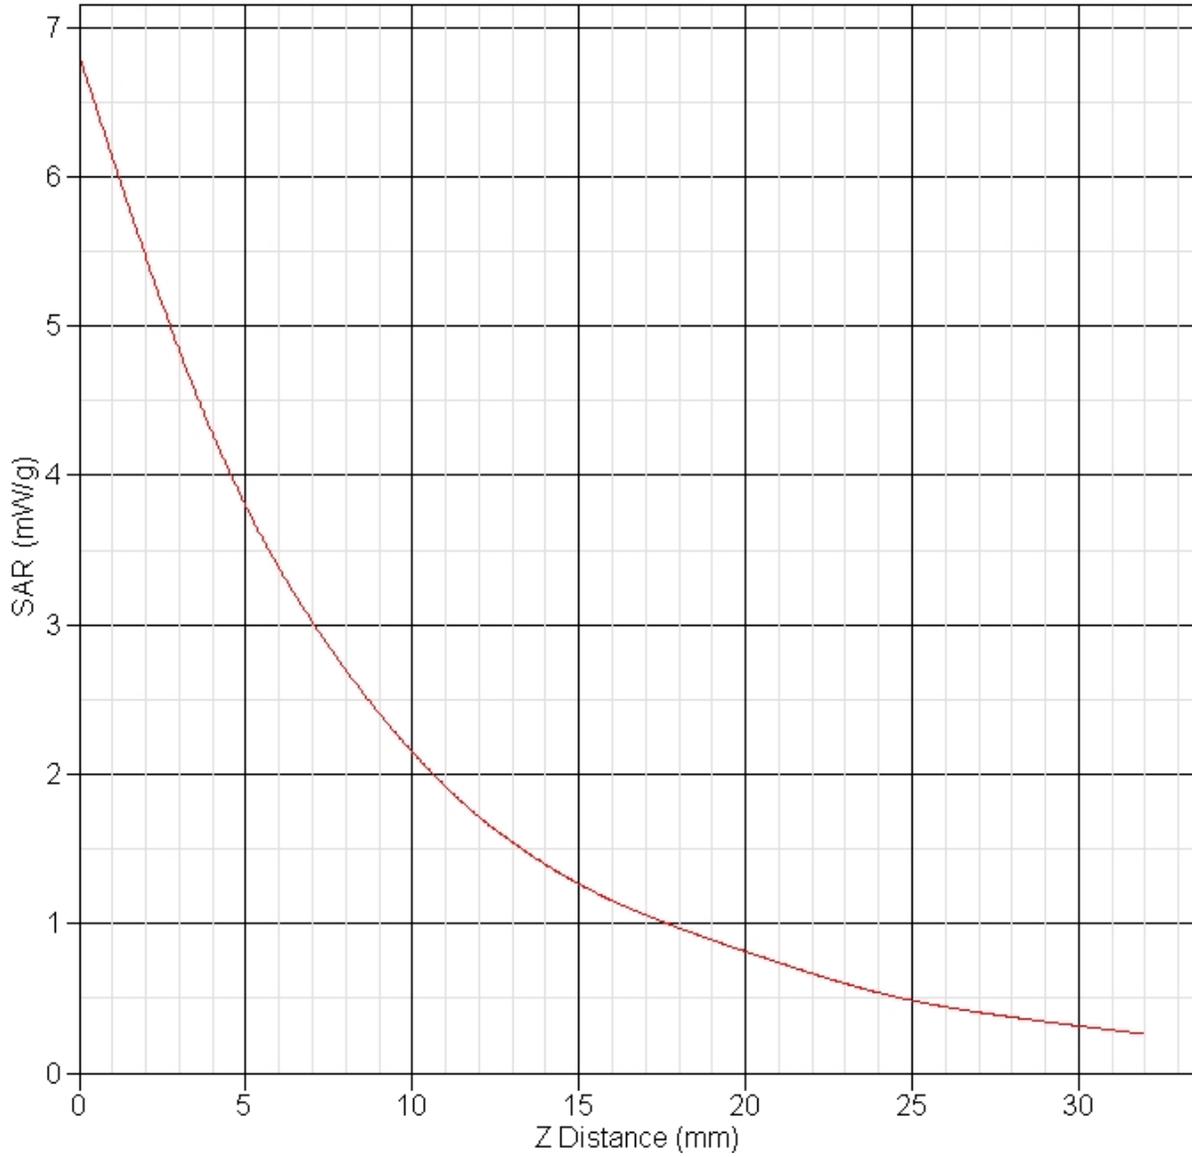

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 07:00:15 AM
End Time : 07-Sep-2008 07:13:18 AM
Scanning Time : 783 secs

Product Data

Device Name : Validation
Serial No. : 1900
Type : Dipole
Model : ALS-D-1900-S-2
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.1 W
Drift Time : 0 min(s)
Length : 68 mm
Width : 3.6 mm
Depth : 39.5 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 4.658 W/kg
Power Drift-Finish: 4.657 W/kg
Power Drift (%) : -0.024

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 49.00 RH%
Epsilon : 54.46 F/m
Sigma : 1.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : Probe 217 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 23.00 °C
Set-up Date : 07-Sep-2008
Set-up Time : 8:39:41 AM
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Touch
Separation : 10
Channel : Mid

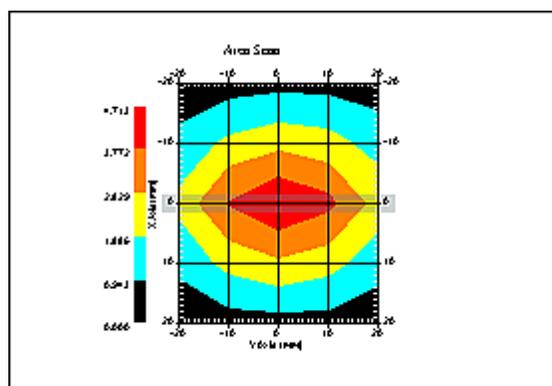

1 gram SAR value : 4.012 W/kg
10 gram SAR value : 2.091 W/kg
Area Scan Peak SAR : 4.713 W/kg
Zoom Scan Peak SAR : 7.006 W/kg

SAR-Z Axis at Hotspot x:0.22 y:-0.15

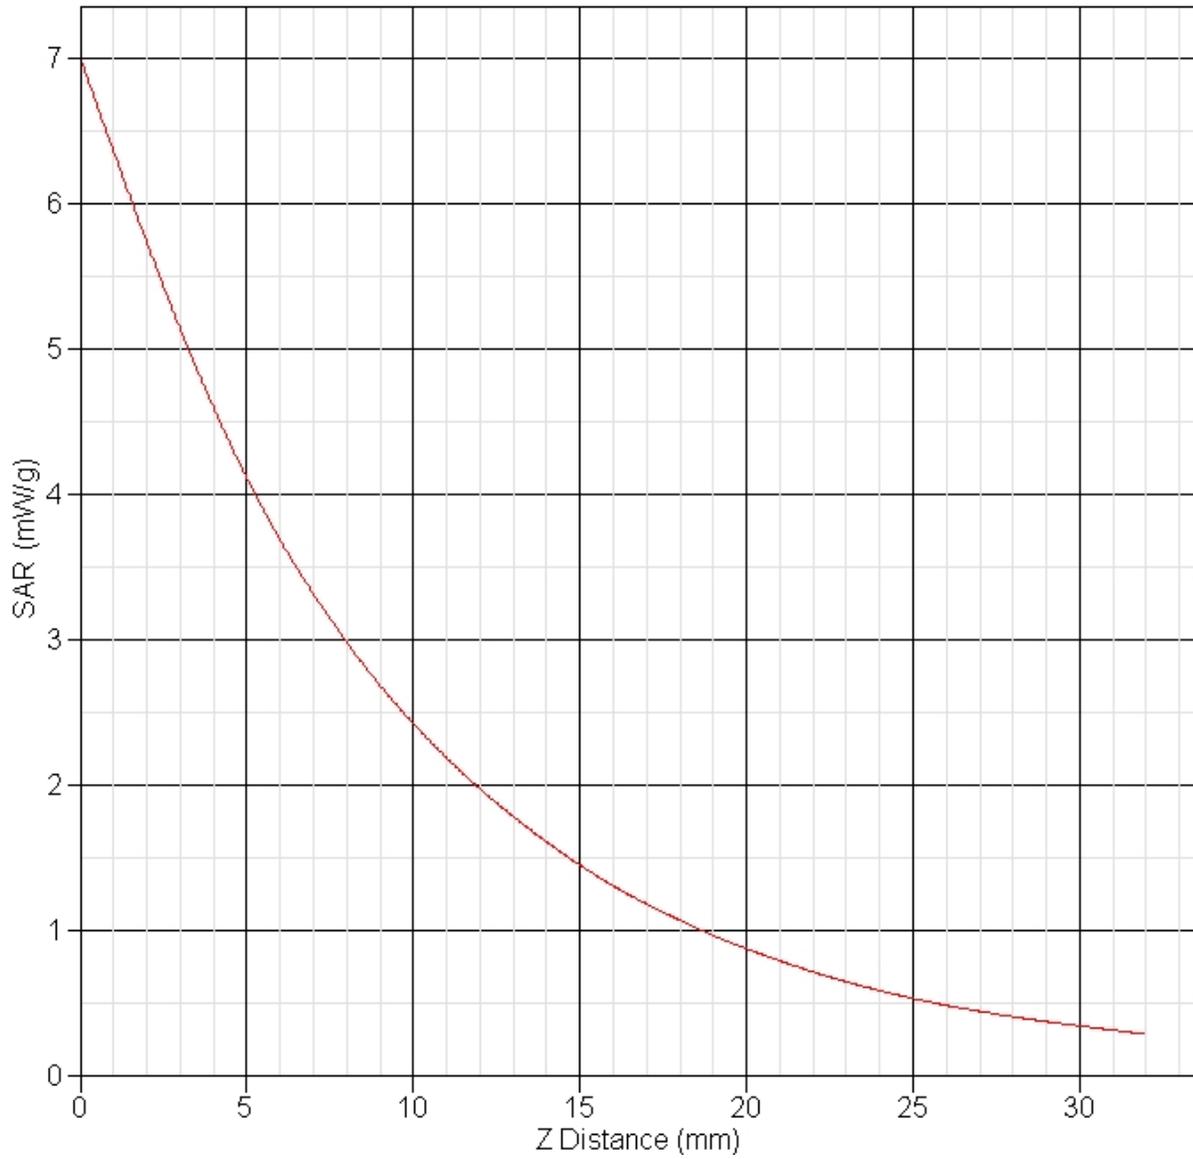

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 09:47:14 AM
End Time : 07-Sep-2008 10:02:33 AM
Scanning Time : 919 secs

Product Data

Device Name : Validation
Serial No. : 835
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.1 W
Drift Time : 0 min(s)
Length : 161 mm
Width : 3.6 mm
Depth : 89.8 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 1.084 W/kg
Power Drift-Finish: 1.073 W/kg
Power Drift (%) : -1.005

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 49.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : Probe 217 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 25.00 °C
Set-up Date : 07-Sep-2008
Set-up Time : 9:21:48 AM
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Touch
Separation : 15
Channel : Mid

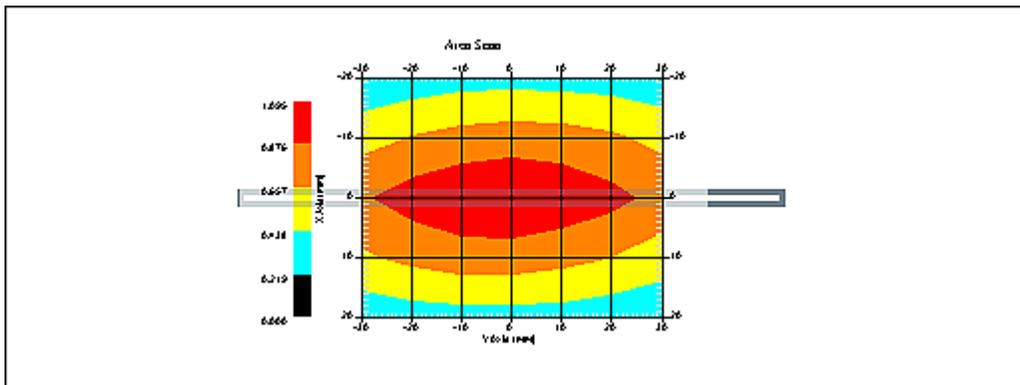

1 gram SAR value : 0.992 W/kg
10 gram SAR value : 0.626 W/kg
Area Scan Peak SAR : 1.094 W/kg
Zoom Scan Peak SAR : 1.541 W/kg

SAR-Z Axis at Hotspot x:0.23 y:-0.13

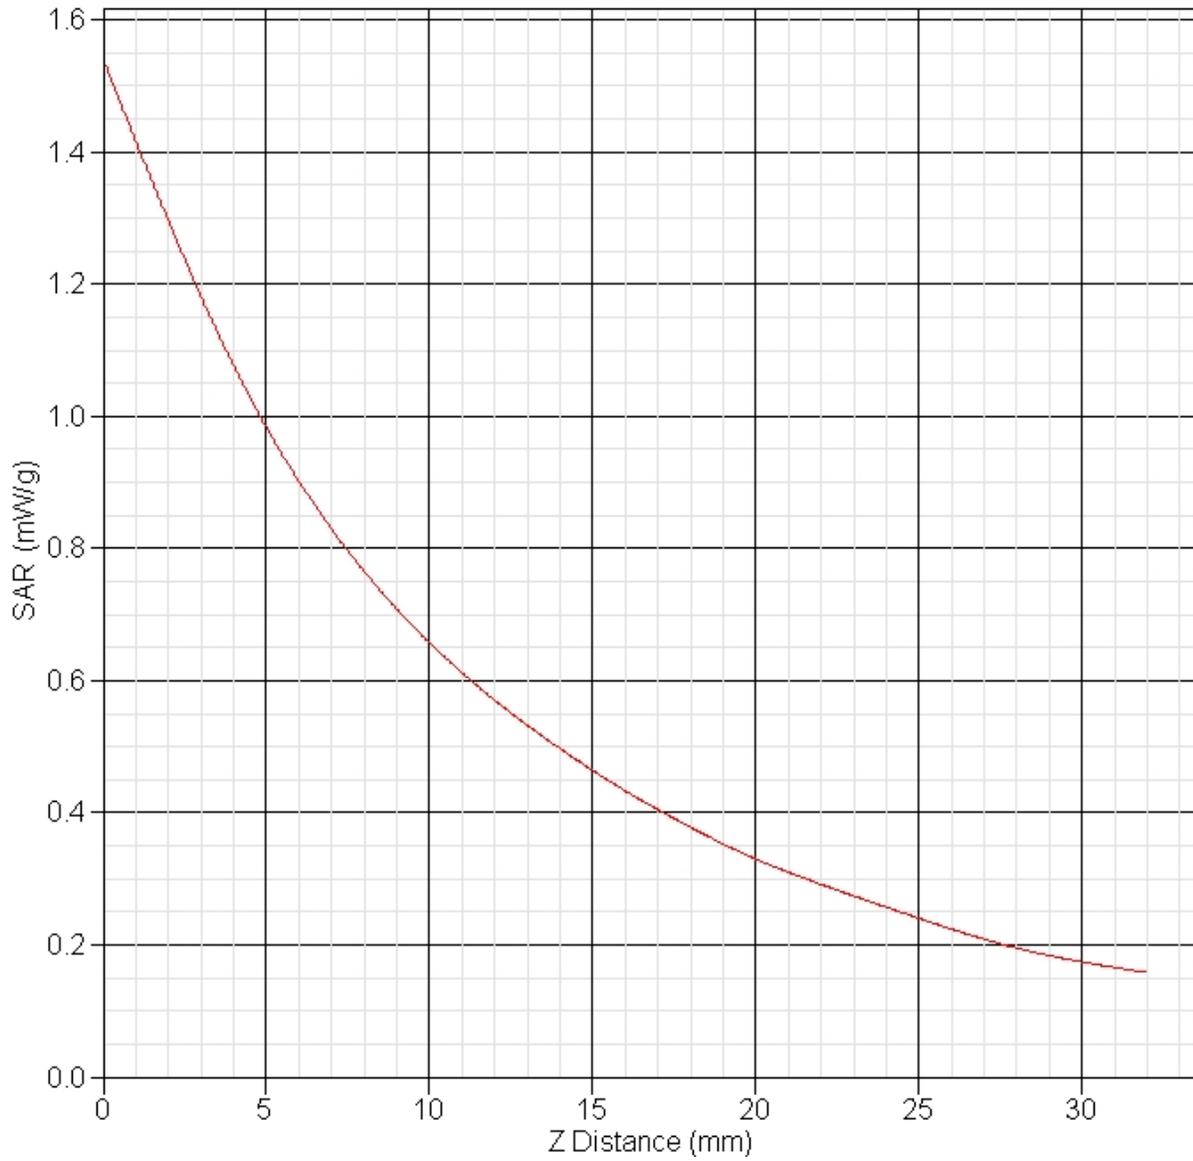

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 07:31:11 AM
End Time : 08-Sep-2008 07:46:12 AM
Scanning Time : 901 secs

Product Data

Device Name : Validation
Serial No. : 835
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.1 W
Drift Time : 0 min(s)
Length : 161 mm
Width : 3.6 mm
Depth : 89.8 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 1.114 W/kg
Power Drift-Finish: 1.098 W/kg
Power Drift (%) : -1.442

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 49.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : Probe 217 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 25.00 °C
Set-up Date : 08-Sep-2008
Set-up Time : 9:21:48 AM
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Touch
Separation : 15
Channel : Mid

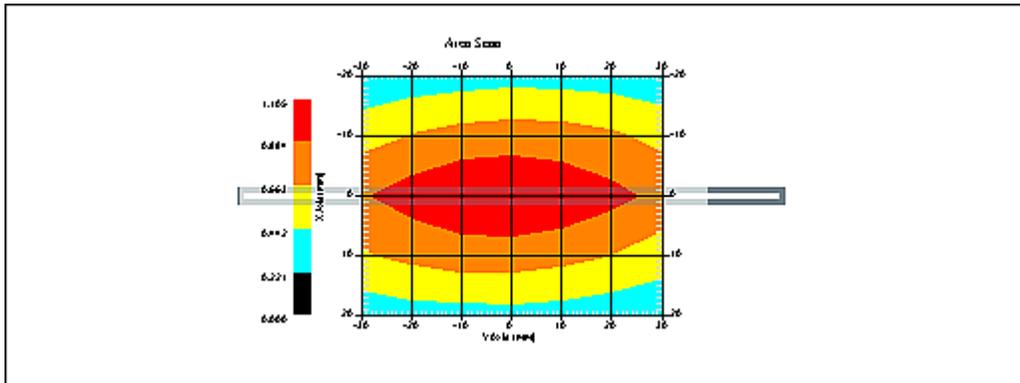

1 gram SAR value : 1.014 W/kg
10 gram SAR value : 0.641 W/kg
Area Scan Peak SAR : 1.105 W/kg
Zoom Scan Peak SAR : 1.571 W/kg

SAR-Z Axis at Hotspot x:0.20 y:-0.14

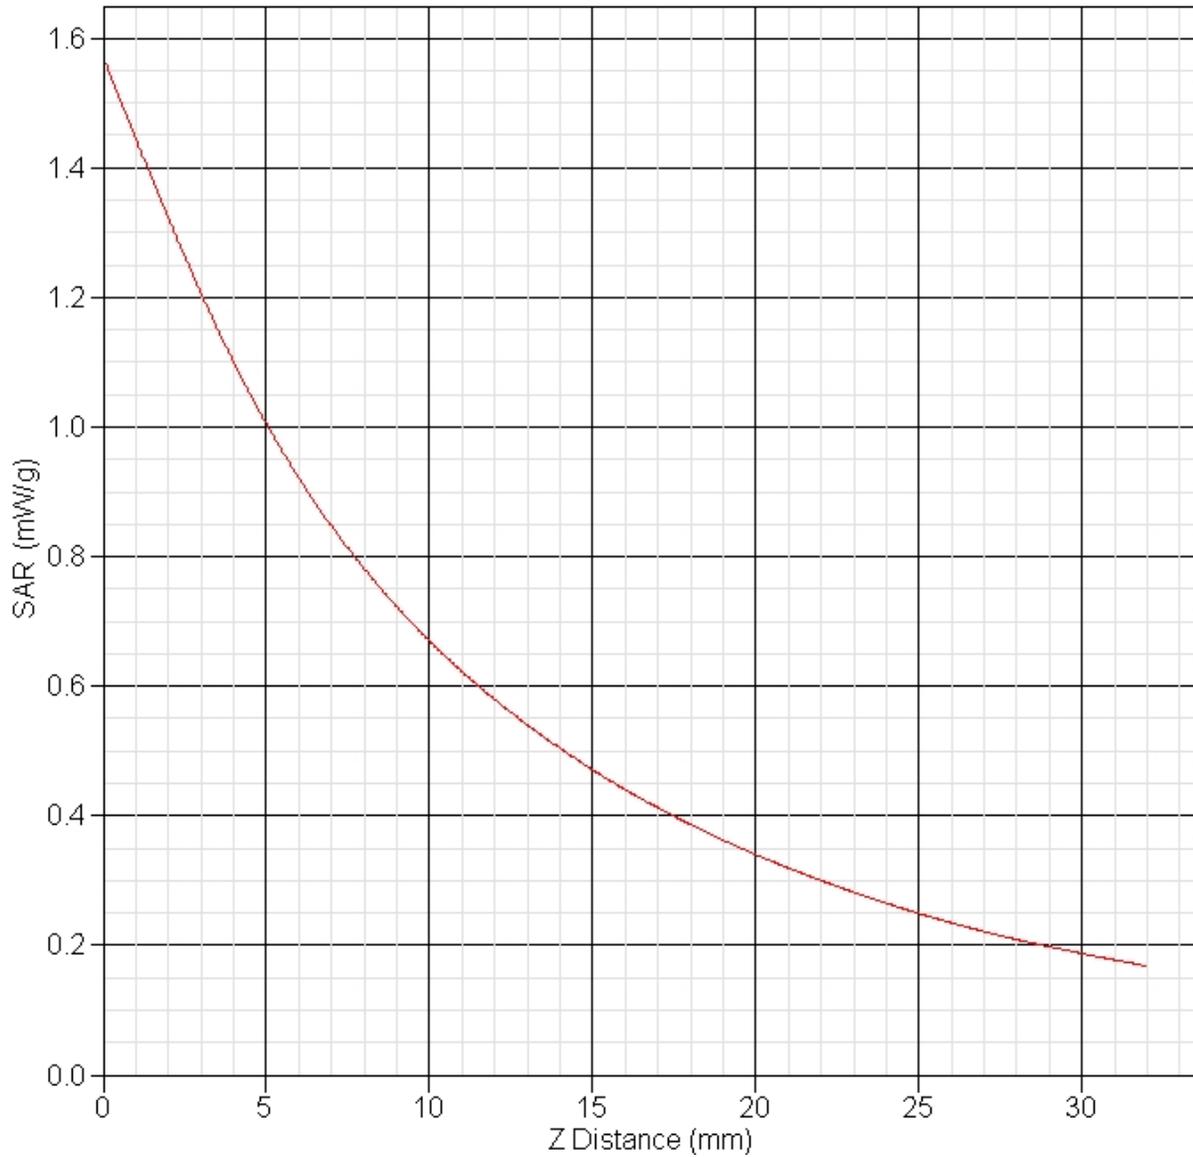

Appendix B – SAR Test Data Plots

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 12:01:52 PM
End Time : 08-Sep-2008 12:16:35 PM
Scanning Time : 883 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.914 W/kg
Power Drift-Finish: 0.904 W/kg
Power Drift (%) : -1.096

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Low

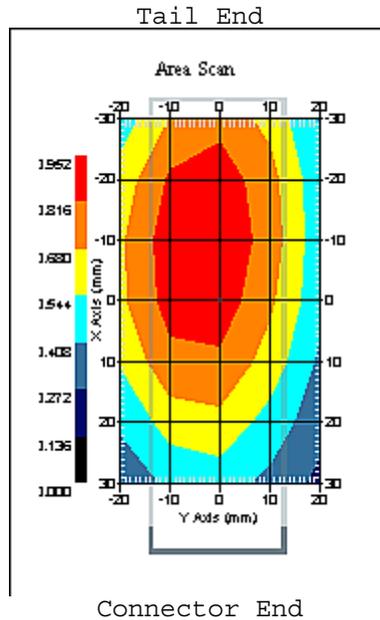

1 gram SAR value : 0.906 W/kg
 10 gram SAR value : 0.620 W/kg
 Area Scan Peak SAR : 0.951 W/kg
 Zoom Scan Peak SAR : 1.271 W/kg

SAR-Z Axis at Hotspot x:-9.79 y:-0.14

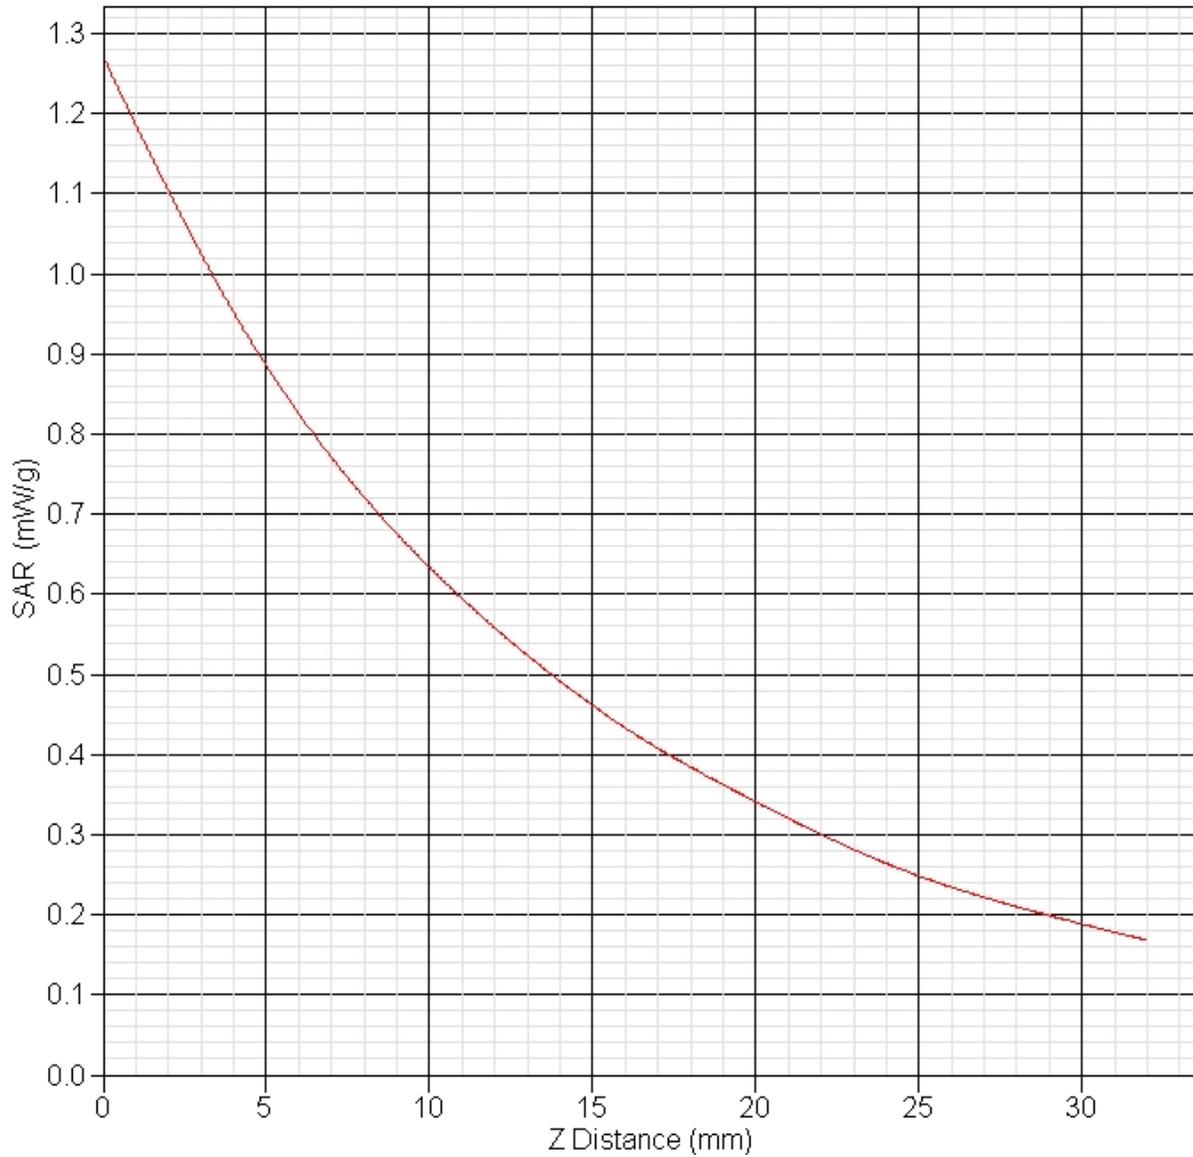

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 11:45:14 AM
End Time : 08-Sep-2008 11:59:57 AM
Scanning Time : 883 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.758 W/kg
Power Drift-Finish: 0.767 W/kg
Power Drift (%) : 1.156

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Mid

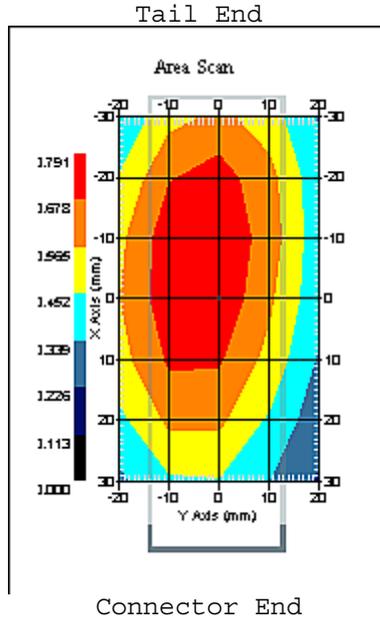

1 gram SAR value : 0.750 W/kg
 10 gram SAR value : 0.512 W/kg
 Area Scan Peak SAR : 0.788 W/kg
 Zoom Scan Peak SAR : 1.050 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 11:28:55 AM
End Time : 08-Sep-2008 11:43:46 AM
Scanning Time : 891 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.836 W/kg
Power Drift-Finish: 0.800 W/kg
Power Drift (%) : -4.292

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : High

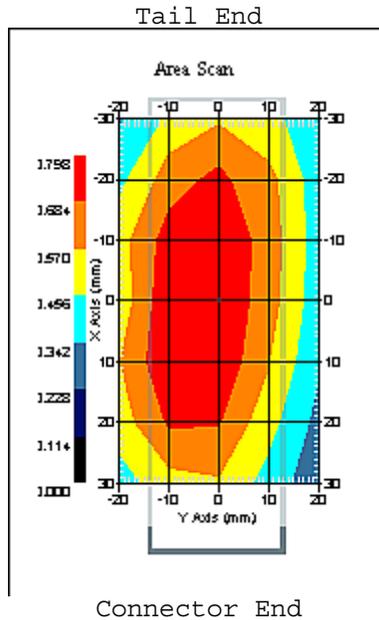

1 gram SAR value : 0.755 W/kg
 10 gram SAR value : 0.516 W/kg
 Area Scan Peak SAR : 0.795 W/kg
 Zoom Scan Peak SAR : 0.980 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 10:22:42 AM
End Time : 08-Sep-2008 10:37:22 AM
Scanning Time : 880 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 0.708 W/kg
Power Drift-Finish: 0.741 W/kg
Power Drift (%) : 4.723

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Low

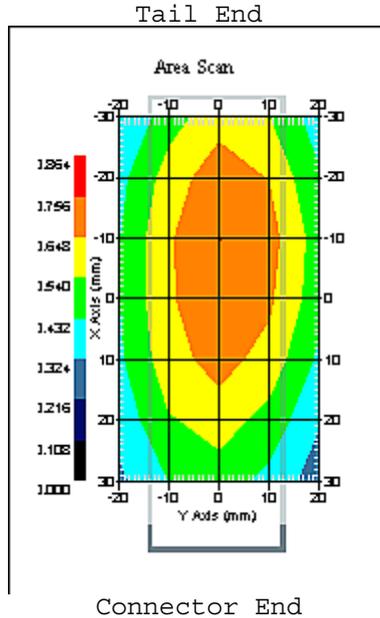

1 gram SAR value : 0.727 W/kg
 10 gram SAR value : 0.504 W/kg
 Area Scan Peak SAR : 0.758 W/kg
 Zoom Scan Peak SAR : 1.000 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 10:54:41 AM
End Time : 08-Sep-2008 11:09:37 AM
Scanning Time : 896 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 0.708 W/kg
Power Drift-Finish: 0.681 W/kg
Power Drift (%) : -3.779

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Mid

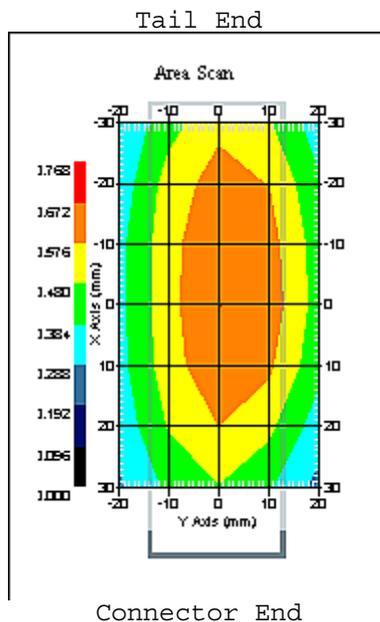

1 gram SAR value : 0.648 W/kg
 10 gram SAR value : 0.450 W/kg
 Area Scan Peak SAR : 0.673 W/kg
 Zoom Scan Peak SAR : 0.890 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 11:10:51 AM
End Time : 08-Sep-2008 11:25:41 AM
Scanning Time : 890 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 0.699 W/kg
Power Drift-Finish: 0.697 W/kg
Power Drift (%) : -0.270

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : High

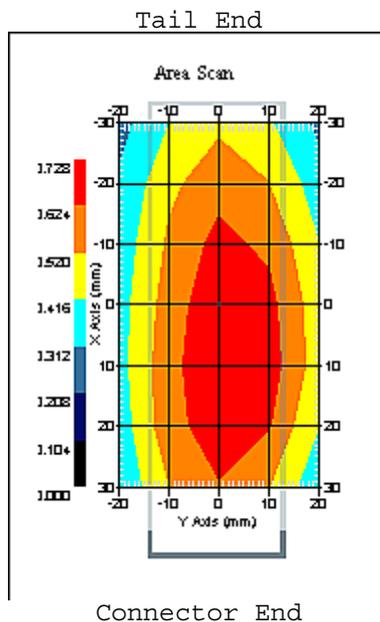

1 gram SAR value : 0.682 W/kg
 10 gram SAR value : 0.461 W/kg
 Area Scan Peak SAR : 0.727 W/kg
 Zoom Scan Peak SAR : 0.950 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 09:32:22 AM
End Time : 08-Sep-2008 09:47:12 AM
Scanning Time : 890 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.488 W/kg
Power Drift-Finish: 0.471 W/kg
Power Drift (%) : -3.528

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Low

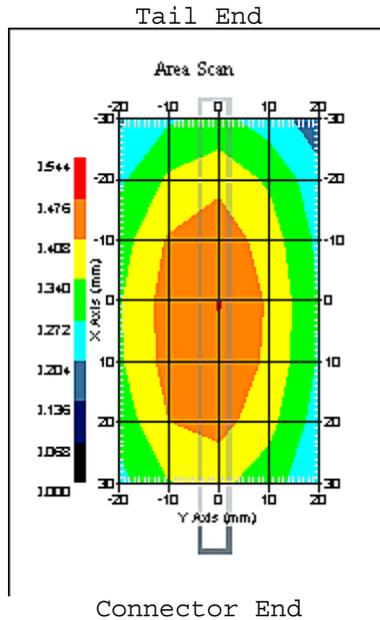

1 gram SAR value : 0.449 W/kg
 10 gram SAR value : 0.311 W/kg
 Area Scan Peak SAR : 0.478 W/kg
 Zoom Scan Peak SAR : 0.620 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 09:16:46 AM
End Time : 08-Sep-2008 09:31:33 AM
Scanning Time : 887 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.393 W/kg
Power Drift-Finish: 0.409 W/kg
Power Drift (%) : 4.070

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Mid

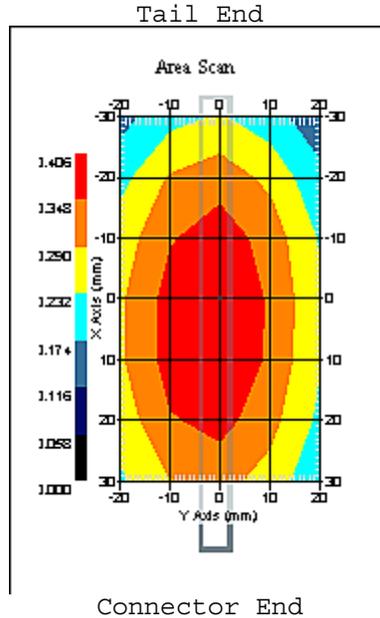

1 gram SAR value : 0.390 W/kg
 10 gram SAR value : 0.273 W/kg
 Area Scan Peak SAR : 0.403 W/kg
 Zoom Scan Peak SAR : 0.540 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 09:00:30 AM
End Time : 08-Sep-2008 09:15:05 AM
Scanning Time : 875 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.401 W/kg
Power Drift-Finish: 0.390 W/kg
Power Drift (%) : -2.536

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 23.00 °C
Set-up Date : 08-Sep-2008
Set-up Time : 8:05:14 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
Separation : 13 mm
Channel : High

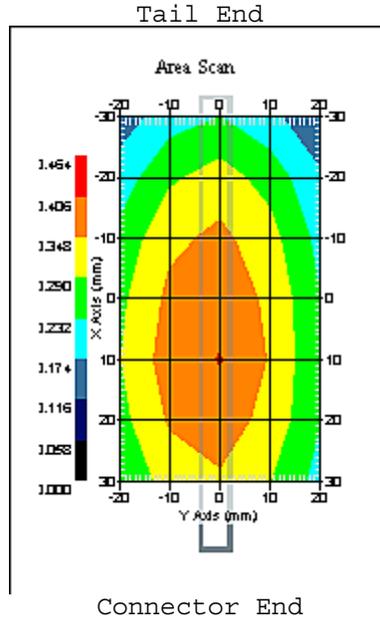

1 gram SAR value : 0.386 W/kg
10 gram SAR value : 0.269 W/kg
Area Scan Peak SAR : 0.408 W/kg
Zoom Scan Peak SAR : 0.540 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 08:05:20 AM
End Time : 08-Sep-2008 08:20:46 AM
Scanning Time : 926 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.633 W/kg
Power Drift-Finish: 0.612 W/kg
Power Drift (%) : -3.313

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Low

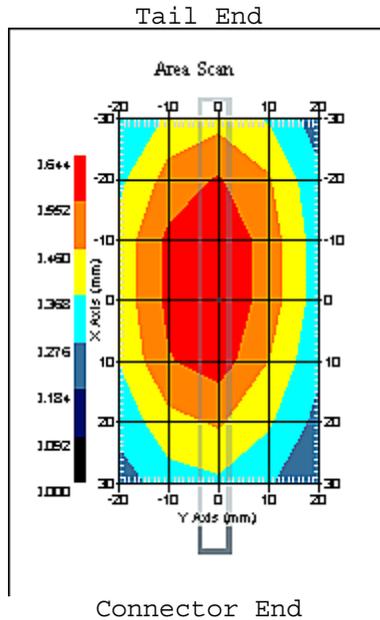

1 gram SAR value : 0.582 W/kg
 10 gram SAR value : 0.394 W/kg
 Area Scan Peak SAR : 0.641 W/kg
 Zoom Scan Peak SAR : 0.830 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 08:27:56 AM
End Time : 08-Sep-2008 08:42:42 AM
Scanning Time : 886 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.562 W/kg
Power Drift-Finish: 0.534 W/kg
Power Drift (%) : -4.996

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Mid

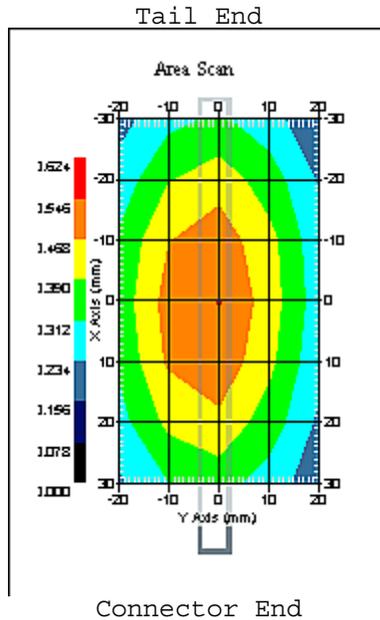

1 gram SAR value : 0.503 W/kg
 10 gram SAR value : 0.341 W/kg
 Area Scan Peak SAR : 0.549 W/kg
 Zoom Scan Peak SAR : 0.710 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 08:44:09 AM
End Time : 08-Sep-2008 08:59:01 AM
Scanning Time : 892 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.537 W/kg
Power Drift-Finish: 0.521 W/kg
Power Drift (%) : -3.028

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : High

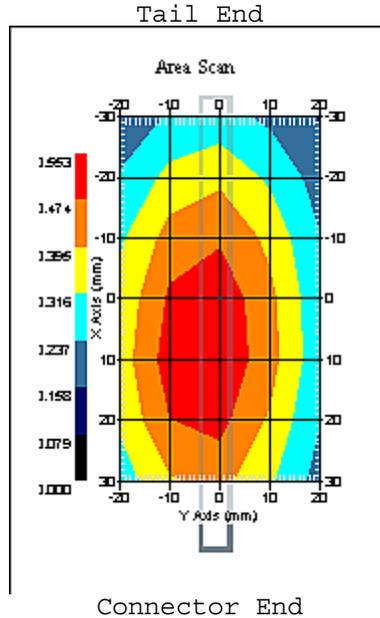

1 gram SAR value : 0.436 W/kg
 10 gram SAR value : 0.293 W/kg
 Area Scan Peak SAR : 0.550 W/kg
 Zoom Scan Peak SAR : 0.700 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 02:01:39 PM
End Time : 07-Sep-2008 02:16:32 PM
Scanning Time : 893 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.914 W/kg
Power Drift-Finish: 0.903 W/kg
Power Drift (%) : -1.208

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Low

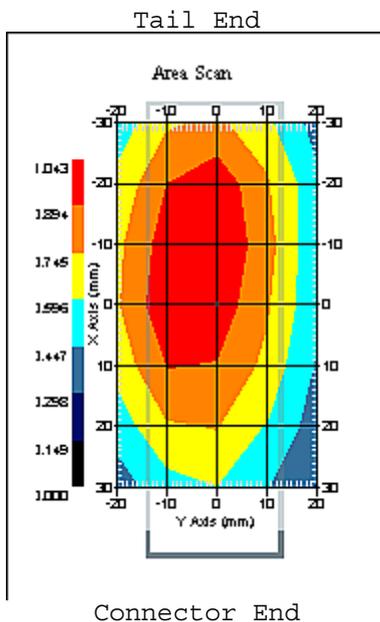

1 gram SAR value : 0.985 W/kg
 10 gram SAR value : 0.625 W/kg
 Area Scan Peak SAR : 1.040 W/kg
 Zoom Scan Peak SAR : 1.571 W/kg

SAR-Z Axis at Hotspot x:-9.79 y:-8.15

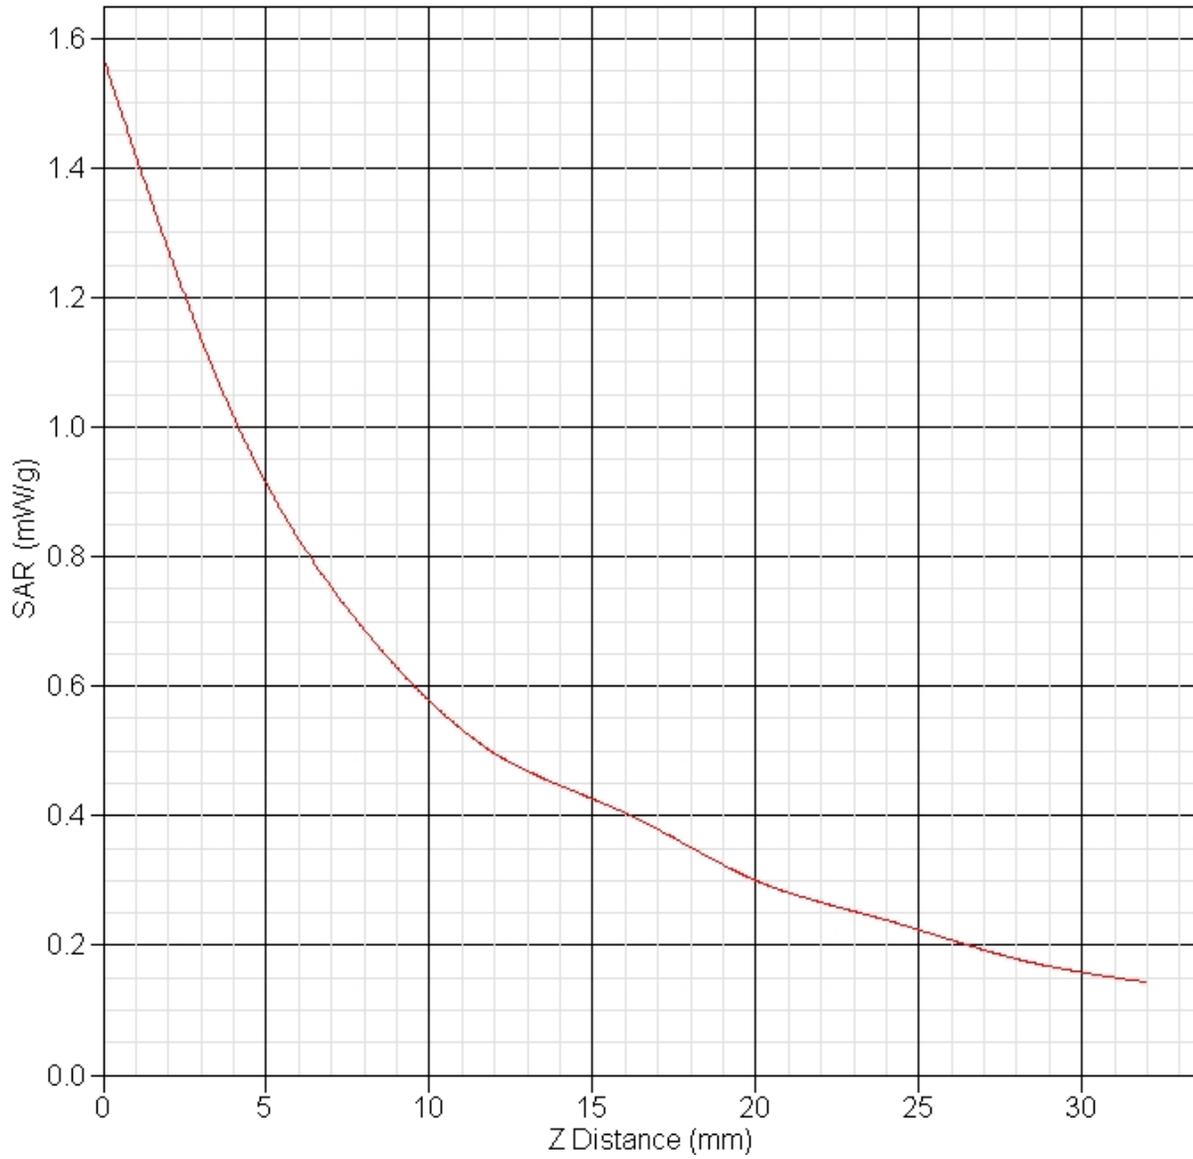

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 02:17:46 PM
End Time : 07-Sep-2008 02:32:44 PM
Scanning Time : 898 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.784 W/kg
Power Drift-Finish: 0.788 W/kg
Power Drift (%) : 0.433

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Mid

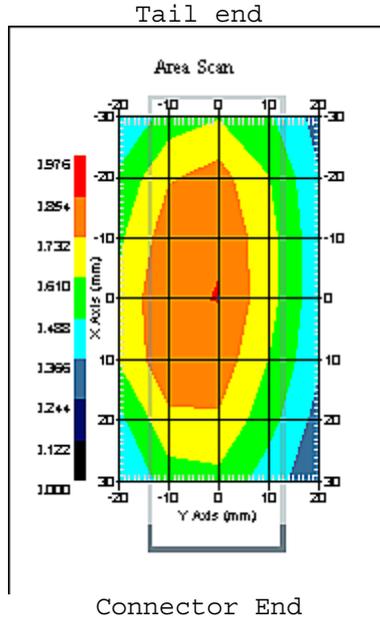

1 gram SAR value : 0.816 W/kg
 10 gram SAR value : 0.517 W/kg
 Area Scan Peak SAR : 0.856 W/kg
 Zoom Scan Peak SAR : 1.341 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 02:34:14 PM
End Time : 07-Sep-2008 02:49:15 PM
Scanning Time : 901 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.785 W/kg
Power Drift-Finish: 0.761 W/kg
Power Drift (%) : -3.051

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : High

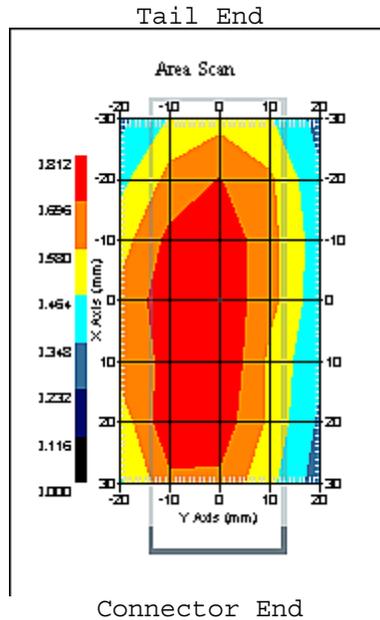

1 gram SAR value : 0.831 W/kg
 10 gram SAR value : 0.531 W/kg
 Area Scan Peak SAR : 0.810 W/kg
 Zoom Scan Peak SAR : 1.331 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 03:24:40 PM
End Time : 07-Sep-2008 03:39:33 PM
Scanning Time : 893 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 0.884 W/kg
Power Drift-Finish: 0.896 W/kg
Power Drift (%) : 1.280

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Low

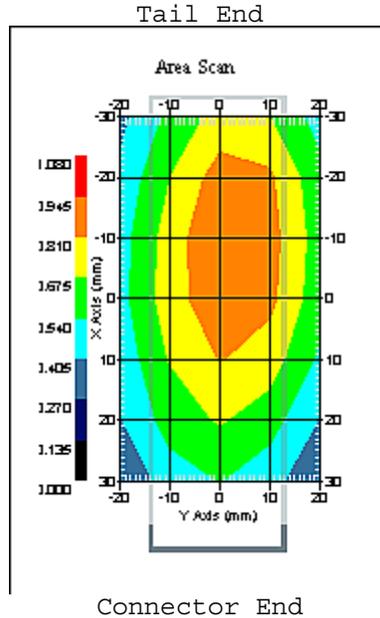

1 gram SAR value : 0.850 W/kg
 10 gram SAR value : 0.590 W/kg
 Area Scan Peak SAR : 0.946 W/kg
 Zoom Scan Peak SAR : 1.241 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 03:08:36 PM
End Time : 07-Sep-2008 03:23:33 PM
Scanning Time : 897 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 0.712 W/kg
Power Drift-Finish: 0.704 W/kg
Power Drift (%) : -1.125

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Mid

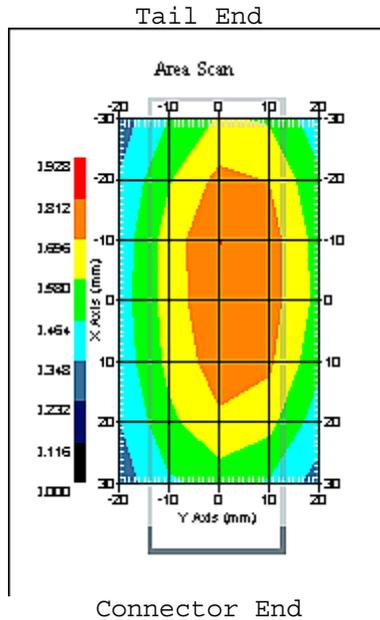

1 gram SAR value : 0.786 W/kg
 10 gram SAR value : 0.501 W/kg
 Area Scan Peak SAR : 0.814 W/kg
 Zoom Scan Peak SAR : 1.281 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 02:51:55 PM
End Time : 07-Sep-2008 03:06:51 PM
Scanning Time : 896 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 0.728 W/kg
Power Drift-Finish: 0.703 W/kg
Power Drift (%) : -3.437

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : High

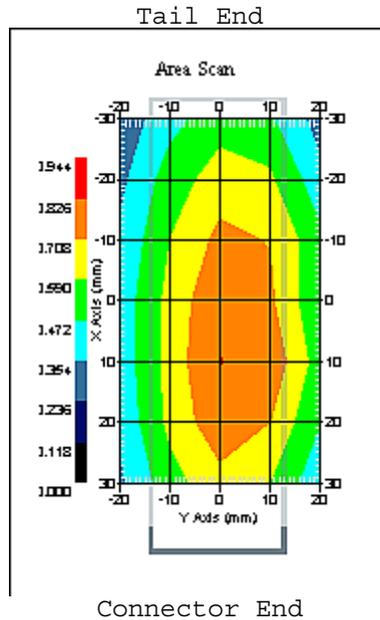

1 gram SAR value : 0.804 W/kg
 10 gram SAR value : 0.500 W/kg
 Area Scan Peak SAR : 0.829 W/kg
 Zoom Scan Peak SAR : 1.301 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 12:39:15 PM
End Time : 08-Sep-2008 12:53:56 PM
Scanning Time : 881 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.417 W/kg
Power Drift-Finish: 0.411 W/kg
Power Drift (%) : -1.560

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Low

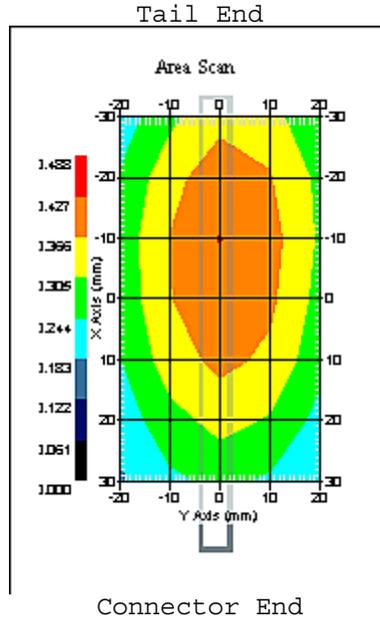

1 gram SAR value : 0.400 W/kg
 10 gram SAR value : 0.280 W/kg
 Area Scan Peak SAR : 0.429 W/kg
 Zoom Scan Peak SAR : 0.550 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 12:56:00 PM
End Time : 08-Sep-2008 01:10:49 PM
Scanning Time : 889 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.348 W/kg
Power Drift-Finish: 0.350 W/kg
Power Drift (%) : 0.538

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Mid

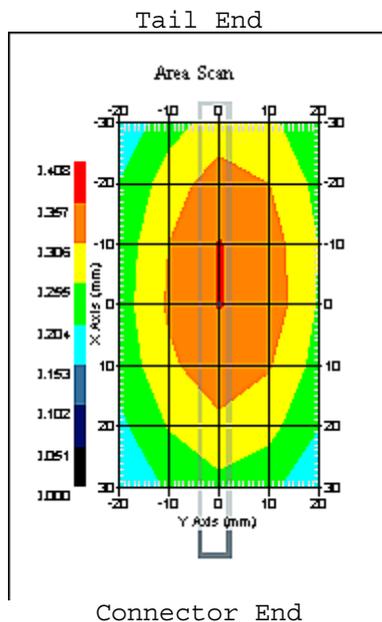

1 gram SAR value : 0.344 W/kg
 10 gram SAR value : 0.241 W/kg
 Area Scan Peak SAR : 0.360 W/kg
 Zoom Scan Peak SAR : 0.470 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 01:19:19 PM
End Time : 08-Sep-2008 01:34:12 PM
Scanning Time : 893 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.392 W/kg
Power Drift-Finish: 0.380 W/kg
Power Drift (%) : -2.974

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : High

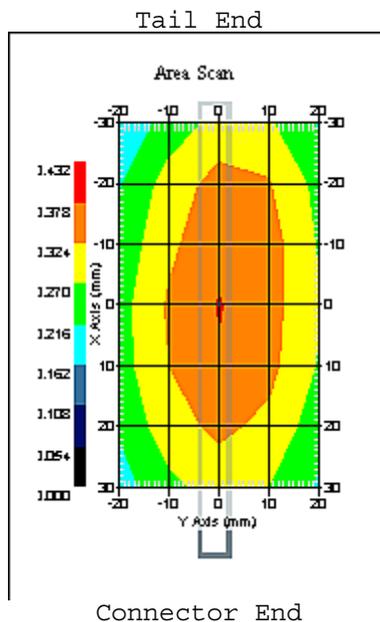

1 gram SAR value : 0.358 W/kg
 10 gram SAR value : 0.250 W/kg
 Area Scan Peak SAR : 0.381 W/kg
 Zoom Scan Peak SAR : 0.460 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 02:16:19 PM
End Time : 08-Sep-2008 02:31:07 PM
Scanning Time : 888 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.618 W/kg
Power Drift-Finish: 0.600 W/kg
Power Drift (%) : -3.036

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 23.00 °C
Set-up Date : 08-Sep-2008
Set-up Time : 8:05:14 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Installed In IBM/Lenovo Laptop
Separation : 13 mm
Channel : Low

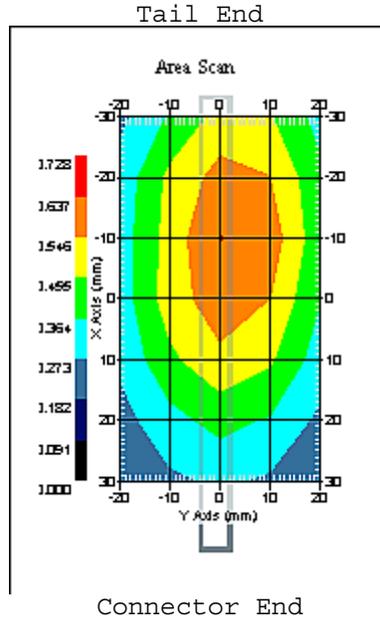

1 gram SAR value : 0.590 W/kg
10 gram SAR value : 0.398 W/kg
Area Scan Peak SAR : 0.640 W/kg
Zoom Scan Peak SAR : 0.820 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 01:53:12 PM
End Time : 08-Sep-2008 02:08:06 PM
Scanning Time : 894 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.541 W/kg
Power Drift-Finish: 0.551 W/kg
Power Drift (%) : 1.790

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Mid

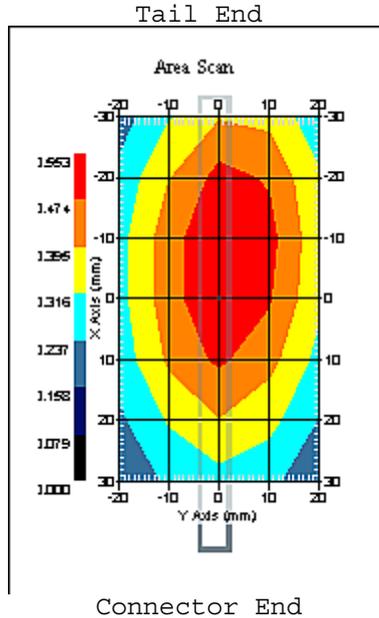

1 gram SAR value : 0.525 W/kg
 10 gram SAR value : 0.351 W/kg
 Area Scan Peak SAR : 0.550 W/kg
 Zoom Scan Peak SAR : 0.740 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 08-Sep-2008
Starting Time : 08-Sep-2008 01:36:17 PM
End Time : 08-Sep-2008 01:51:03 PM
Scanning Time : 886 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.571 W/kg
Power Drift-Finish: 0.555 W/kg
Power Drift (%) : -2.806

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 08-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.65 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 08-Sep-2008
 Set-up Time : 8:05:14 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : High

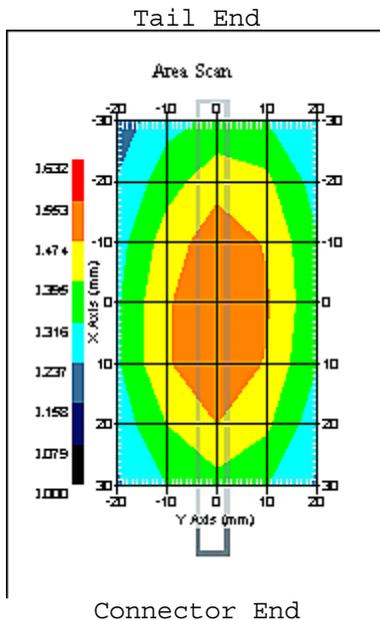

1 gram SAR value : 0.519 W/kg
 10 gram SAR value : 0.350 W/kg
 Area Scan Peak SAR : 0.554 W/kg
 Zoom Scan Peak SAR : 0.730 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 01:44:38 PM
End Time : 07-Sep-2008 01:59:23 PM
Scanning Time : 885 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.986 W/kg
Power Drift-Finish: 1.006 W/kg
Power Drift (%) : 2.048

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Low

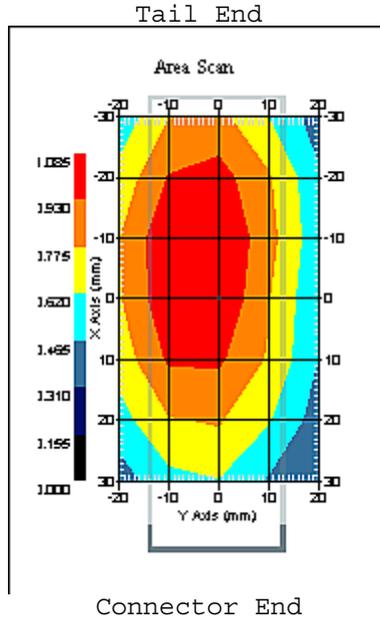

1 gram SAR value : 1.058 W/kg
 10 gram SAR value : 0.671 W/kg
 Area Scan Peak SAR : 1.082 W/kg
 Zoom Scan Peak SAR : 1.731 W/kg

SAR-Z Axis at Hotspot x:-9.71 y:-0.20

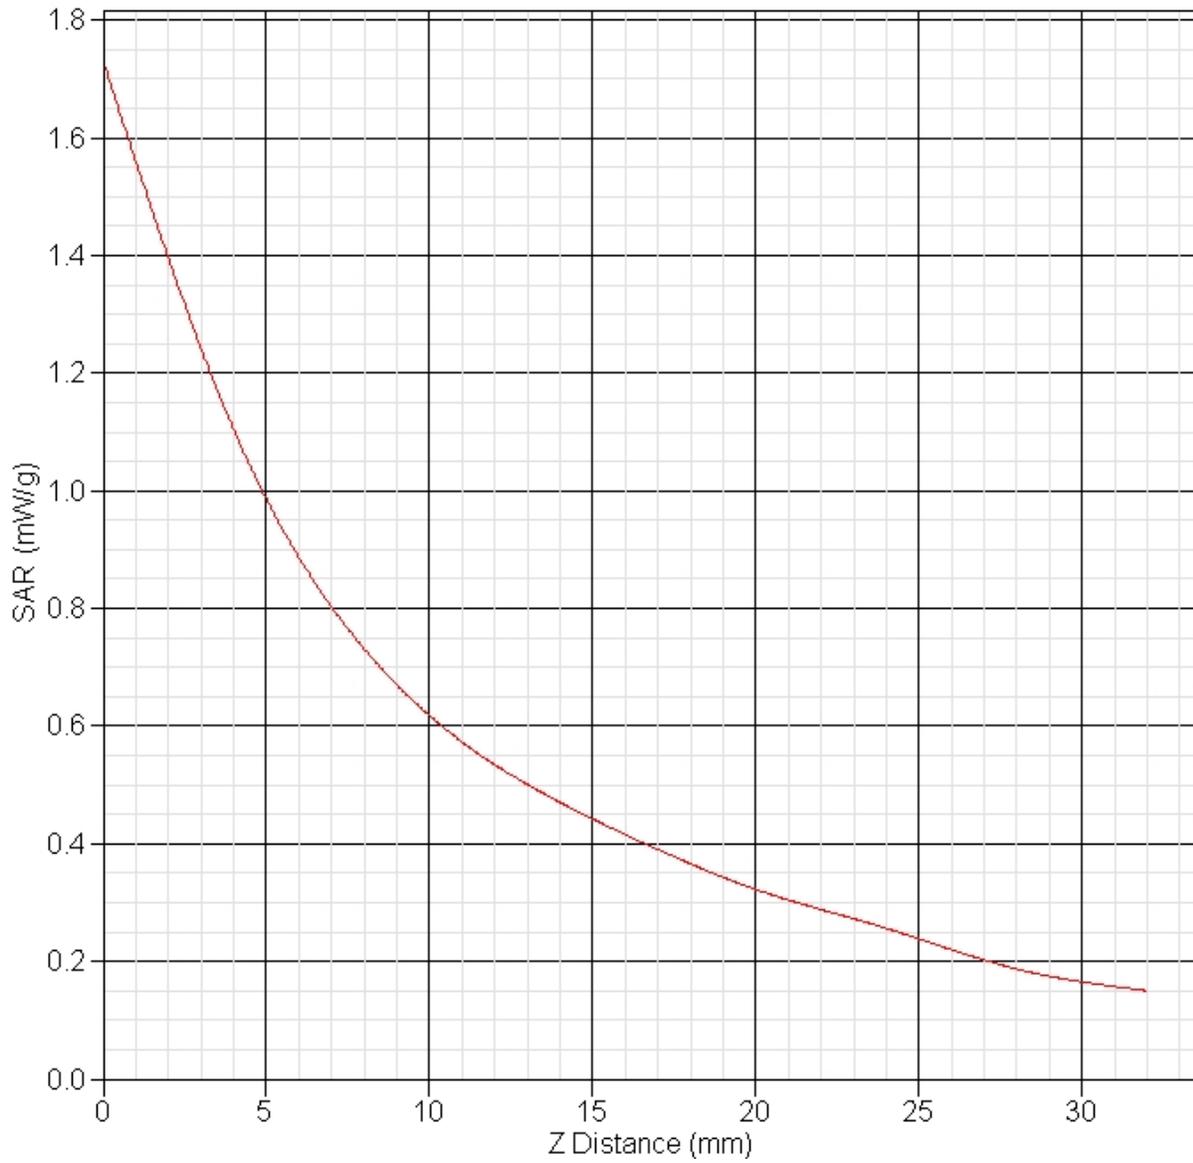

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 01:28:35 PM
End Time : 07-Sep-2008 01:43:23 PM
Scanning Time : 888 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.778 W/kg
Power Drift-Finish: 0.753 W/kg
Power Drift (%) : -3.217

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Mid

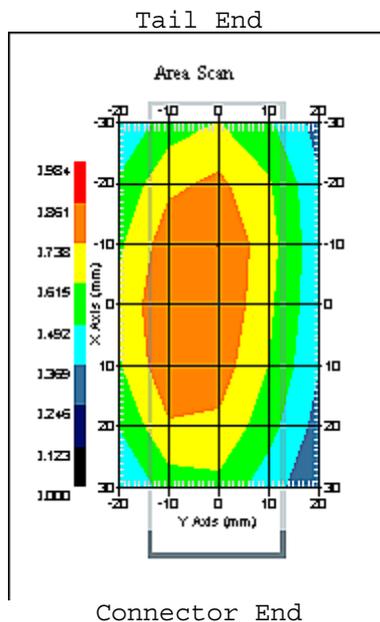

1 gram SAR value : 0.838 W/kg
 10 gram SAR value : 0.569 W/kg
 Area Scan Peak SAR : 0.862 W/kg
 Zoom Scan Peak SAR : 1.101 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 01:12:25 PM
End Time : 07-Sep-2008 01:27:28 PM
Scanning Time : 903 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 0.830 W/kg
Power Drift-Finish: 0.801 W/kg
Power Drift (%) : -3.493

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : High

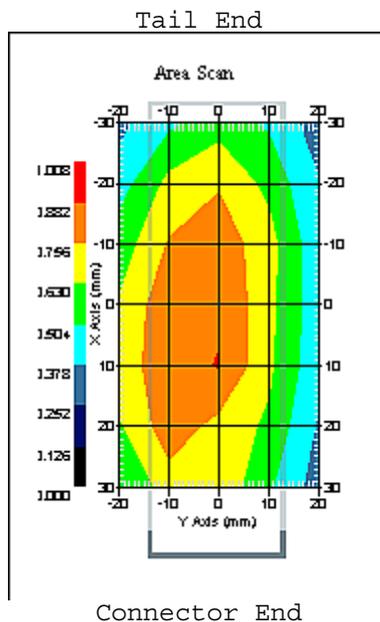

1 gram SAR value : 0.882 W/kg
 10 gram SAR value : 0.568 W/kg
 Area Scan Peak SAR : 0.885 W/kg
 Zoom Scan Peak SAR : 1.441 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 12:07:33 PM
End Time : 07-Sep-2008 12:22:53 PM
Scanning Time : 920 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 1.016 W/kg
Power Drift-Finish: 1.028 W/kg
Power Drift (%) : 1.216

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Low

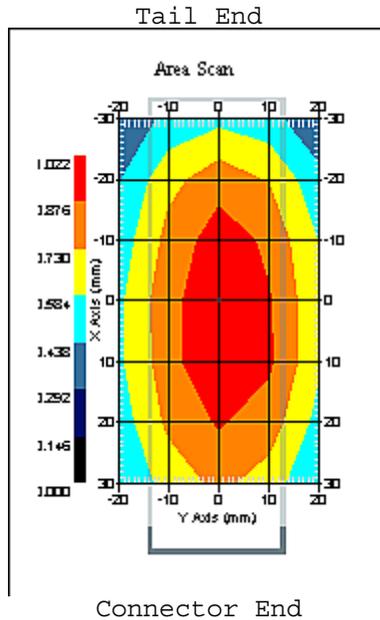

1 gram SAR value : 0.976 W/kg
 10 gram SAR value : 0.631 W/kg
 Area Scan Peak SAR : 1.019 W/kg
 Zoom Scan Peak SAR : 1.521 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 12:23:50 PM
End Time : 07-Sep-2008 12:38:39 PM
Scanning Time : 889 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 0.796 W/kg
Power Drift-Finish: 0.777 W/kg
Power Drift (%) : -2.388

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Mid

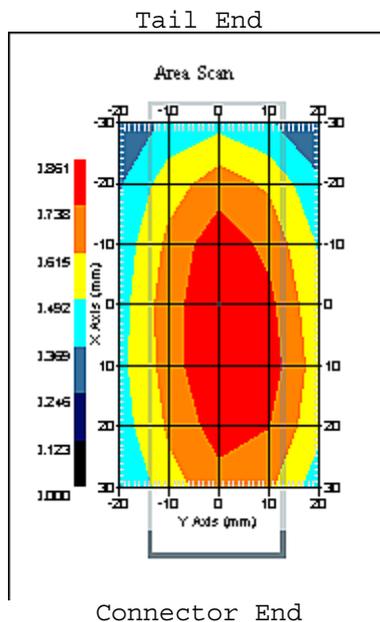

1 gram SAR value : 0.837 W/kg
 10 gram SAR value : 0.540 W/kg
 Area Scan Peak SAR : 0.861 W/kg
 Zoom Scan Peak SAR : 1.371 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 12:39:28 PM
End Time : 07-Sep-2008 12:54:13 PM
Scanning Time : 885 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 0.890 W/kg
Power Drift-Finish: 0.854 W/kg
Power Drift (%) : -4.049

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 12:07:27 PM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : High

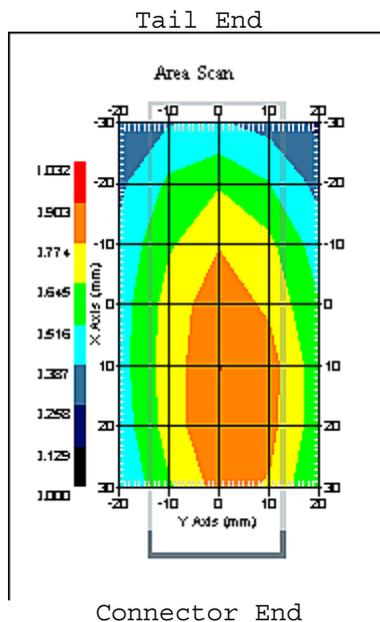

1 gram SAR value : 0.858 W/kg
 10 gram SAR value : 0.555 W/kg
 Area Scan Peak SAR : 0.906 W/kg
 Zoom Scan Peak SAR : 1.261 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 11:47:25 AM
End Time : 07-Sep-2008 12:02:22 PM
Scanning Time : 897 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.516 W/kg
Power Drift-Finish: 0.510 W/kg
Power Drift (%) : -1.196

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 9:04:59 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Low

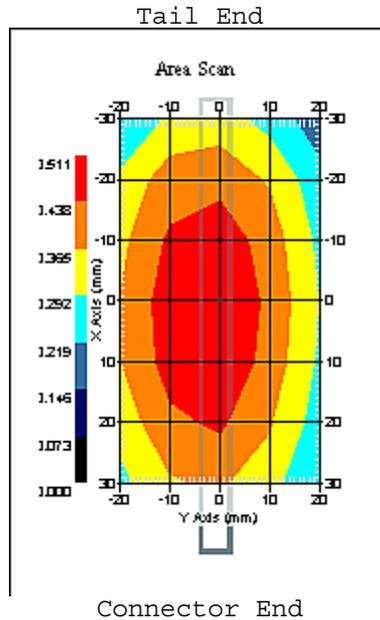

1 gram SAR value : 0.463 W/kg
 10 gram SAR value : 0.303 W/kg
 Area Scan Peak SAR : 0.510 W/kg
 Zoom Scan Peak SAR : 0.640 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 11:31:28 AM
End Time : 07-Sep-2008 11:46:29 AM
Scanning Time : 901 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.432 W/kg
Power Drift-Finish: 0.417 W/kg
Power Drift (%) : -3.464

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 9:04:59 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Mid

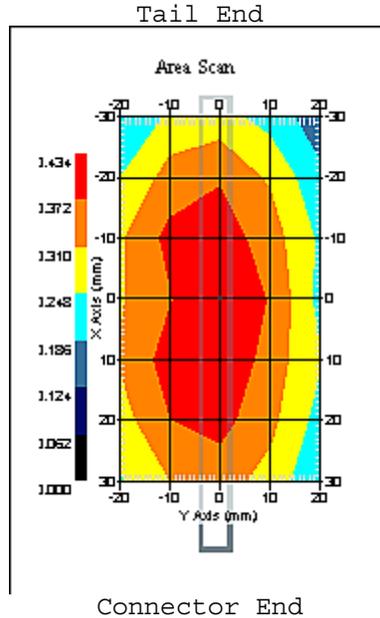

1 gram SAR value : 0.416 W/kg
 10 gram SAR value : 0.273 W/kg
 Area Scan Peak SAR : 0.432 W/kg
 Zoom Scan Peak SAR : 0.680 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 11:15:08 AM
End Time : 07-Sep-2008 11:29:59 AM
Scanning Time : 891 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.419 W/kg
Power Drift-Finish: 0.438 W/kg
Power Drift (%) : 4.581

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 9:04:59 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : High

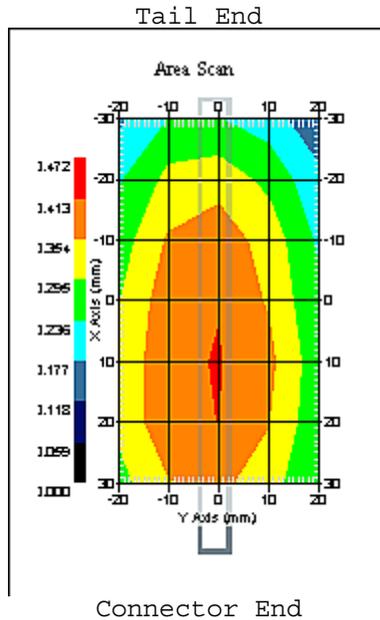

1 gram SAR value : 0.432 W/kg
 10 gram SAR value : 0.283 W/kg
 Area Scan Peak SAR : 0.416 W/kg
 Zoom Scan Peak SAR : 0.720 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 10:41:50 AM
End Time : 07-Sep-2008 10:56:49 AM
Scanning Time : 899 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.623 W/kg
Power Drift-Finish: 0.627 W/kg
Power Drift (%) : 0.712

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 9:04:59 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Low

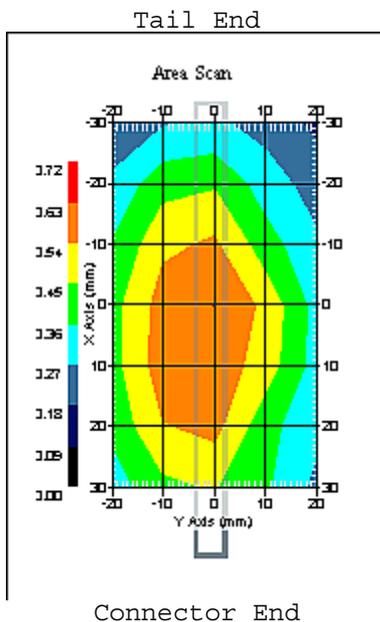

1 gram SAR value : 0.589 W/kg
 10 gram SAR value : 0.405 W/kg
 Area Scan Peak SAR : 0.632 W/kg
 Zoom Scan Peak SAR : 0.800 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 10:23:40 AM
End Time : 07-Sep-2008 10:38:44 AM
Scanning Time : 904 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.427 W/kg
Power Drift-Finish: 0.432 W/kg
Power Drift (%) : 1.174

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 9:04:59 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Mid

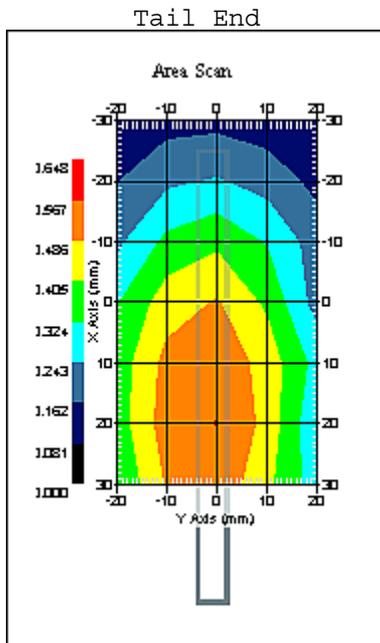

1 gram SAR value : 0.524 W/kg
 10 gram SAR value : 0.348 W/kg
 Area Scan Peak SAR : 0.568 W/kg
 Zoom Scan Peak SAR : 0.800 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 10:57:43 AM
End Time : 07-Sep-2008 11:12:36 AM
Scanning Time : 893 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.423 W/kg
Power Drift-Finish: 0.411 W/kg
Power Drift (%) : -2.830

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 40.00 RH%
Epsilon : 56.37 F/m
Sigma : 0.99 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.1
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 9:04:59 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : High

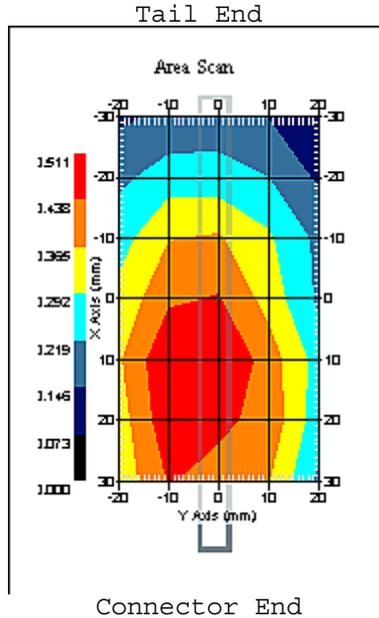

1 gram SAR value : 0.496 W/kg
 10 gram SAR value : 0.324 W/kg
 Area Scan Peak SAR : 0.510 W/kg
 Zoom Scan Peak SAR : 0.740 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 09:48:00 AM
End Time : 06-Sep-2008 10:03:01 AM
Scanning Time : 901 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.296 W/kg
Power Drift-Finish: 1.303 W/kg
Power Drift (%) : 0.517

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Low

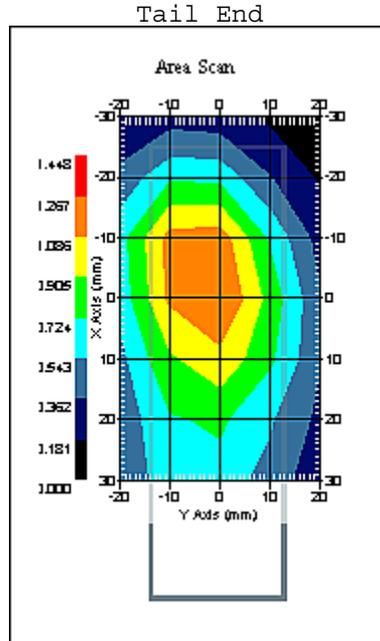

1 gram SAR value : 1.145 W/kg
 10 gram SAR value : 0.630 W/kg
 Area Scan Peak SAR : 1.268 W/kg
 Zoom Scan Peak SAR : 1.971 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 09:32:01 AM
End Time : 06-Sep-2008 09:47:01 AM
Scanning Time : 900 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.454 W/kg
Power Drift-Finish: 1.418 W/kg
Power Drift (%) : -2.448

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Mid

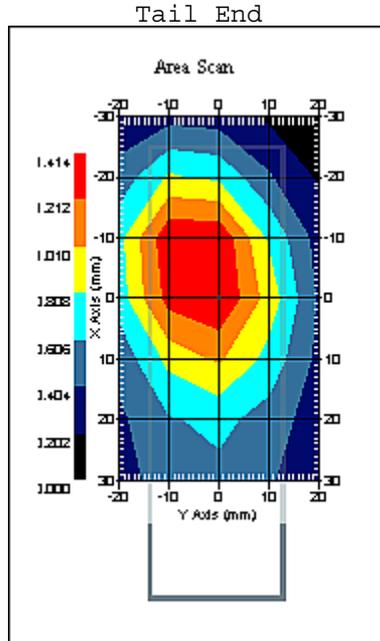

1 gram SAR value : 1.389 W/kg
 10 gram SAR value : 0.736 W/kg
 Area Scan Peak SAR : 1.412 W/kg
 Zoom Scan Peak SAR : 2.702 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 09:16:05 AM
End Time : 06-Sep-2008 09:30:58 AM
Scanning Time : 893 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.656 W/kg
Power Drift-Finish: 1.638 W/kg
Power Drift (%) : -1.089

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : High

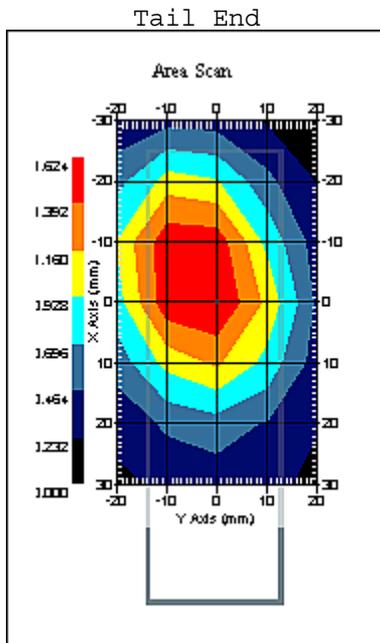

1 gram SAR value : 1.510 W/kg
 10 gram SAR value : 0.833 W/kg
 Area Scan Peak SAR : 1.624 W/kg
 Zoom Scan Peak SAR : 2.592 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 08:41:30 AM
End Time : 06-Sep-2008 08:56:24 AM
Scanning Time : 894 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 1.433 W/kg
Power Drift-Finish: 1.473 W/kg
Power Drift (%) : 2.742

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Low

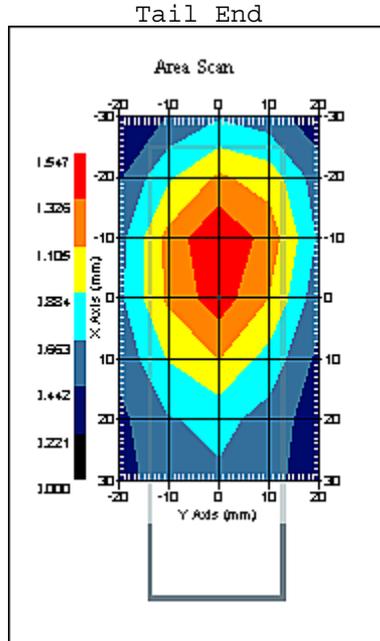

Connector End

1 gram SAR value : 1.415 W/kg
 10 gram SAR value : 0.810 W/kg
 Area Scan Peak SAR : 1.544 W/kg
 Zoom Scan Peak SAR : 2.332 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 08:24:45 AM
End Time : 06-Sep-2008 08:40:11 AM
Scanning Time : 926 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 1.359 W/kg
Power Drift-Finish: 1.387 W/kg
Power Drift (%) : 2.068

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Mid

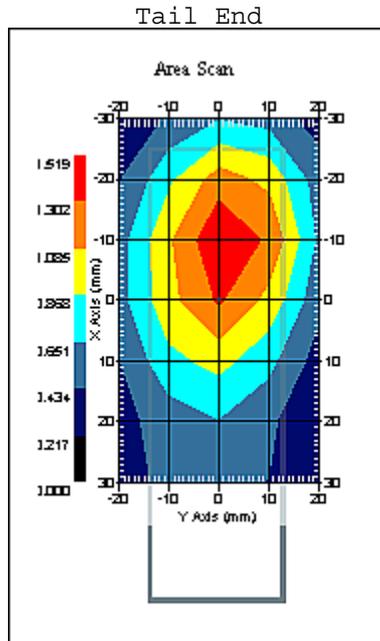

Connector End

1 gram SAR value : 1.345 W/kg
 10 gram SAR value : 0.749 W/kg
 Area Scan Peak SAR : 1.519 W/kg
 Zoom Scan Peak SAR : 2.322 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 08:57:40 AM
End Time : 06-Sep-2008 09:12:35 AM
Scanning Time : 895 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 1.558 W/kg
Power Drift-Finish: 1.529 W/kg
Power Drift (%) : -1.900

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : High

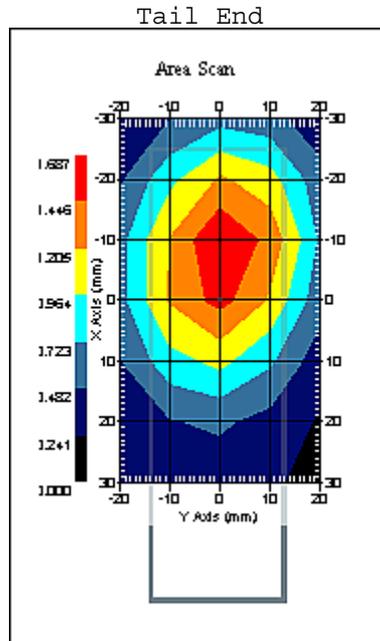

1 gram SAR value : 1.511 W/kg
 10 gram SAR value : 0.848 W/kg
 Area Scan Peak SAR : 1.684 W/kg
 Zoom Scan Peak SAR : 2.472 W/kg

SAR-Z Axis at Hotspot x:-9.74 y:-0.18

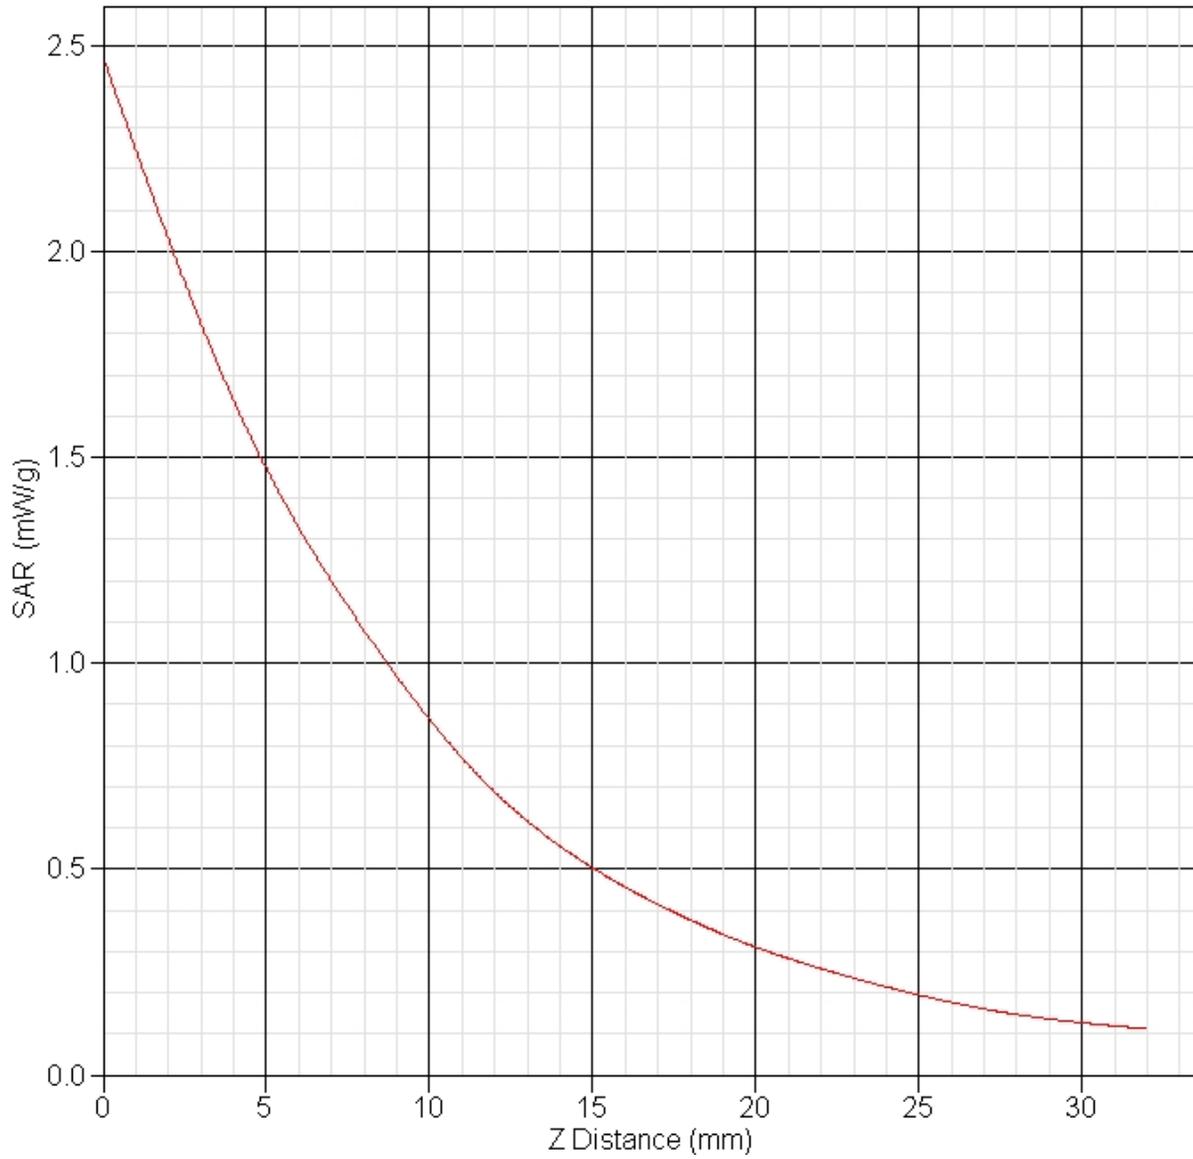

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 11:30:31 AM
End Time : 06-Sep-2008 11:45:38 AM
Scanning Time : 907 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.536 W/kg
Power Drift-Finish: 0.531 W/kg
Power Drift (%) : -0.949

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Low

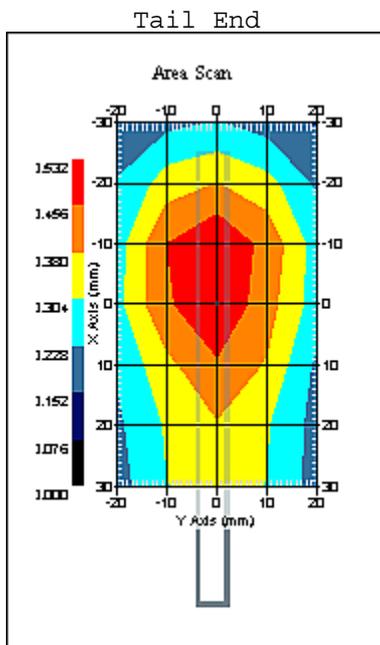

1 gram SAR value : 0.505 W/kg
 10 gram SAR value : 0.299 W/kg
 Area Scan Peak SAR : 0.530 W/kg
 Zoom Scan Peak SAR : 0.840 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 11:14:26 AM
End Time : 06-Sep-2008 11:29:20 AM
Scanning Time : 894 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.544 W/kg
Power Drift-Finish: 0.543 W/kg
Power Drift (%) : -0.216

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Mid

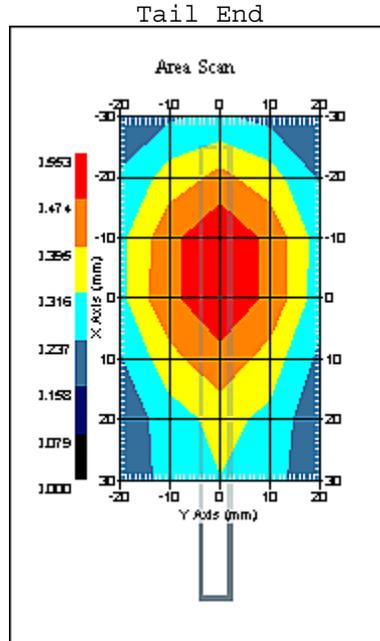

Connector End

1 gram SAR value : 0.535 W/kg
 10 gram SAR value : 0.312 W/kg
 Area Scan Peak SAR : 0.551 W/kg
 Zoom Scan Peak SAR : 0.860 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 10:58:25 AM
End Time : 06-Sep-2008 11:13:25 AM
Scanning Time : 900 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.592 W/kg
Power Drift-Finish: 0.573 W/kg
Power Drift (%) : -3.200

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : High

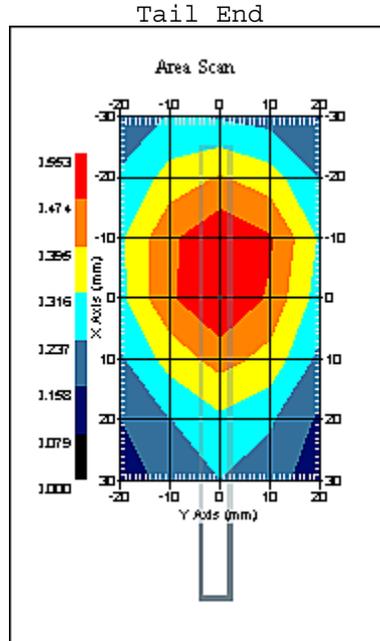

Connector End

1 gram SAR value : 0.557 W/kg
 10 gram SAR value : 0.327 W/kg
 Area Scan Peak SAR : 0.552 W/kg
 Zoom Scan Peak SAR : 0.920 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 10:07:46 AM
End Time : 06-Sep-2008 10:22:49 AM
Scanning Time : 903 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.520 W/kg
Power Drift-Finish: 0.513 W/kg
Power Drift (%) : -1.201

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Low

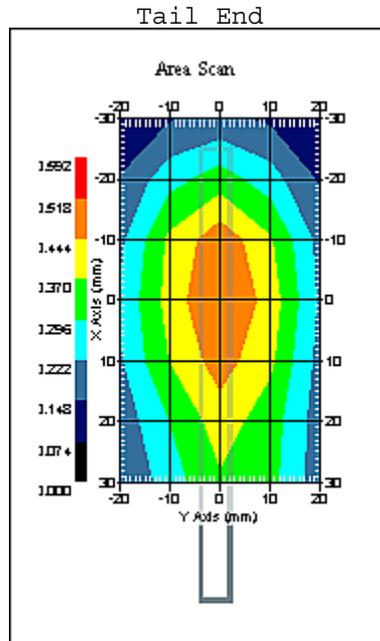

Connector End

1 gram SAR value : 0.480 W/kg
 10 gram SAR value : 0.276 W/kg
 Area Scan Peak SAR : 0.520 W/kg
 Zoom Scan Peak SAR : 0.800 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 10:24:00 AM
End Time : 06-Sep-2008 10:38:58 AM
Scanning Time : 898 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.566 W/kg
Power Drift-Finish: 0.578 W/kg
Power Drift (%) : 2.176

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Mid

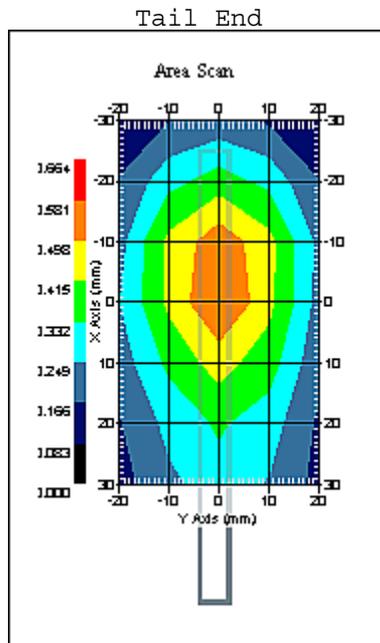

Connector End

1 gram SAR value : 0.535 W/kg
 10 gram SAR value : 0.306 W/kg
 Area Scan Peak SAR : 0.583 W/kg
 Zoom Scan Peak SAR : 0.910 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 10:40:05 AM
End Time : 06-Sep-2008 10:55:00 AM
Scanning Time : 895 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : 1xRTT
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.713 W/kg
Power Drift-Finish: 0.697 W/kg
Power Drift (%) : -2.233

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : High

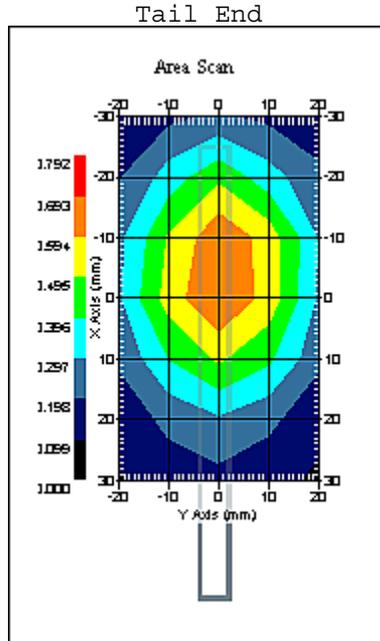

Connector End

1 gram SAR value : 0.644 W/kg
 10 gram SAR value : 0.365 W/kg
 Area Scan Peak SAR : 0.696 W/kg
 Zoom Scan Peak SAR : 1.090 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 03:15:38 PM
End Time : 06-Sep-2008 03:30:34 PM
Scanning Time : 896 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.400 W/kg
Power Drift-Finish: 1.394 W/kg
Power Drift (%) : -0.398

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Low

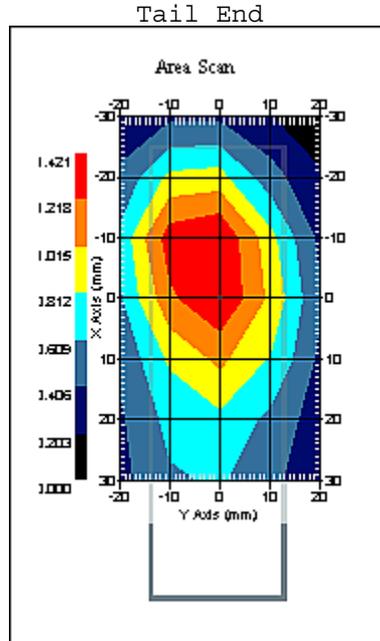

1 gram SAR value : 1.313 W/kg
 10 gram SAR value : 0.714 W/kg
 Area Scan Peak SAR : 1.420 W/kg
 Zoom Scan Peak SAR : 2.262 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 03:31:54 PM
End Time : 06-Sep-2008 03:46:55 PM
Scanning Time : 901 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.481 W/kg
Power Drift-Finish: 1.510 W/kg
Power Drift (%) : 1.958

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Mid

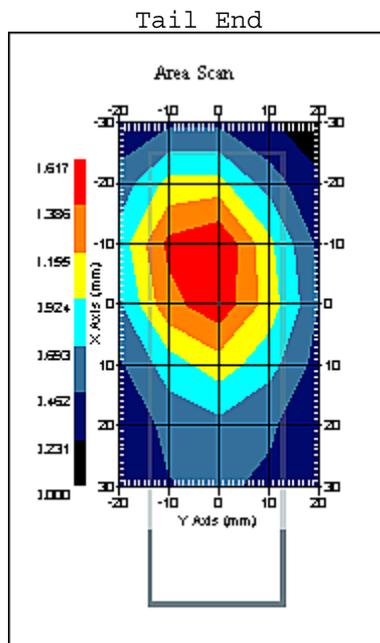

Connector End

1 gram SAR value : 1.404 W/kg
 10 gram SAR value : 0.697 W/kg
 Area Scan Peak SAR : 1.615 W/kg
 Zoom Scan Peak SAR : 2.672 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 04:03:36 PM
End Time : 06-Sep-2008 04:18:30 PM
Scanning Time : 894 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.525 W/kg
Power Drift-Finish: 1.522 W/kg
Power Drift (%) : -0.191

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : High

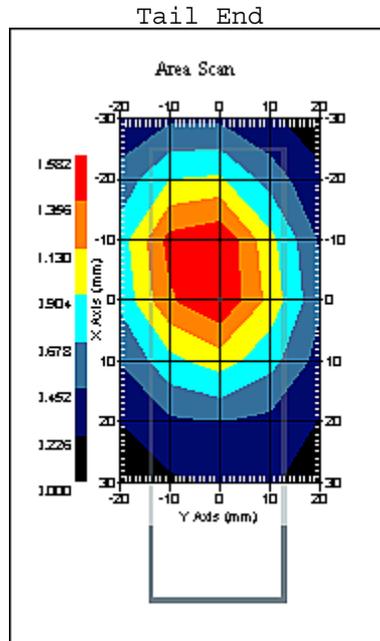

1 gram SAR value : 1.412 W/kg
 10 gram SAR value : 0.752 W/kg
 Area Scan Peak SAR : 1.580 W/kg
 Zoom Scan Peak SAR : 2.742 W/kg

SAR-Z Axis
at Hotspot x:0.27 y:-8.15

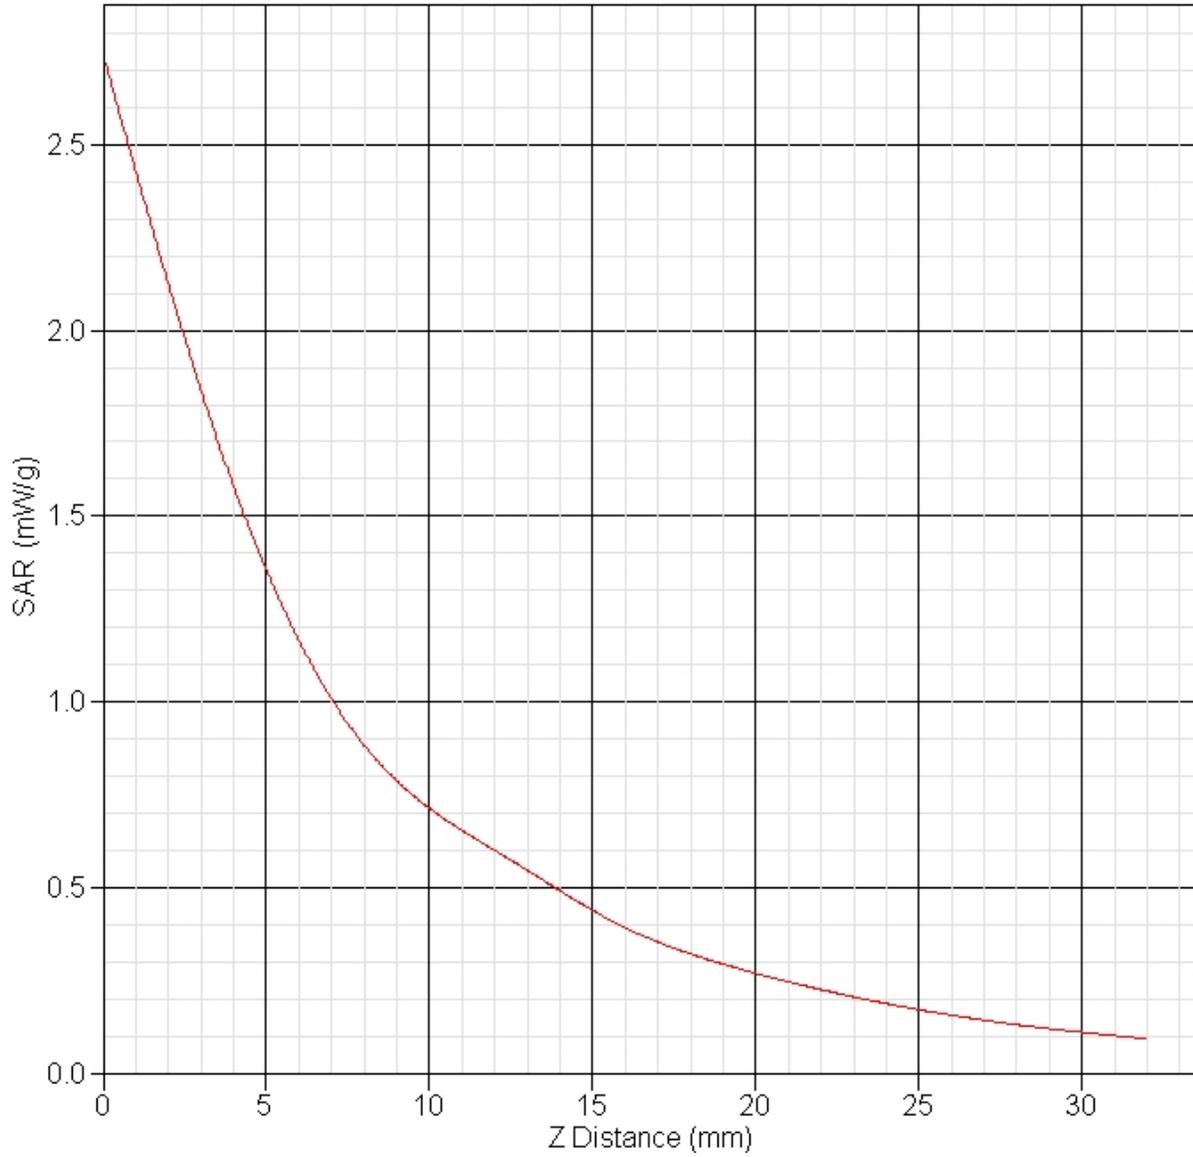

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 04:53:30 PM
End Time : 06-Sep-2008 05:08:35 PM
Scanning Time : 905 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 1.211 W/kg
Power Drift-Finish: 1.213 W/kg
Power Drift (%) : 0.170

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Low

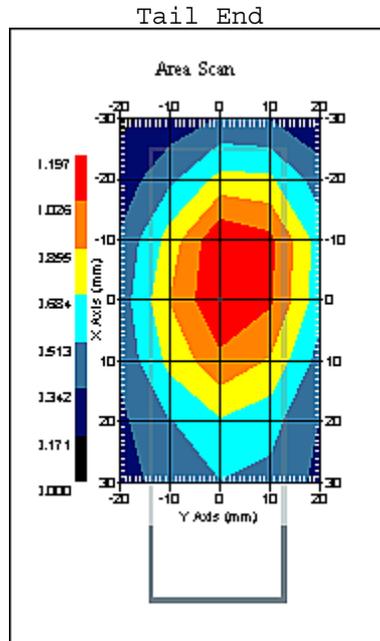

Connector End

1 gram SAR value : 1.138 W/kg
 10 gram SAR value : 0.645 W/kg
 Area Scan Peak SAR : 1.194 W/kg
 Zoom Scan Peak SAR : 1.921 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 04:37:13 PM
End Time : 06-Sep-2008 04:52:09 PM
Scanning Time : 896 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 1.254 W/kg
Power Drift-Finish: 1.241 W/kg
Power Drift (%) : -1.092

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : Mid

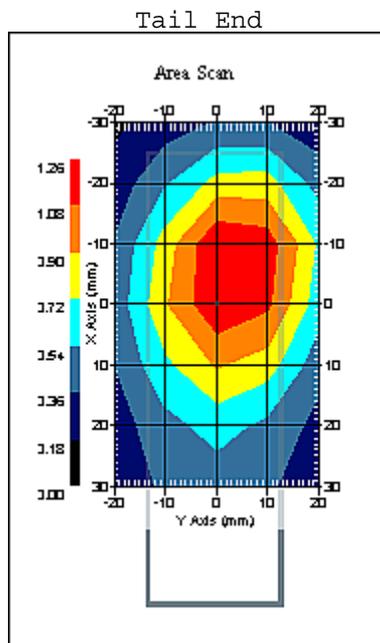

1 gram SAR value : 1.164 W/kg
 10 gram SAR value : 0.650 W/kg
 Area Scan Peak SAR : 1.259 W/kg
 Zoom Scan Peak SAR : 2.011 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 04:20:48 PM
End Time : 06-Sep-2008 04:35:58 PM
Scanning Time : 910 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Installed In HP Laptop
Power Drift-Start : 1.410 W/kg
Power Drift-Finish: 1.400 W/kg
Power Drift (%) : -0.702

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Installed In HP Laptop
 Separation : 13 mm
 Channel : High

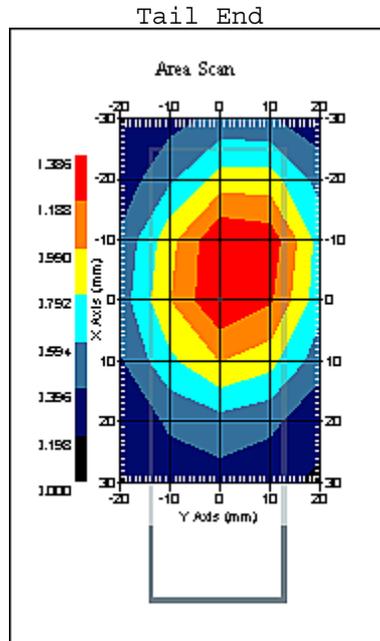

1 gram SAR value : 1.304 W/kg
 10 gram SAR value : 0.694 W/kg
 Area Scan Peak SAR : 1.386 W/kg
 Zoom Scan Peak SAR : 2.191 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 01:32:35 PM
End Time : 06-Sep-2008 01:47:38 PM
Scanning Time : 903 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.514 W/kg
Power Drift-Finish: 0.499 W/kg
Power Drift (%) : -2.919

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Low

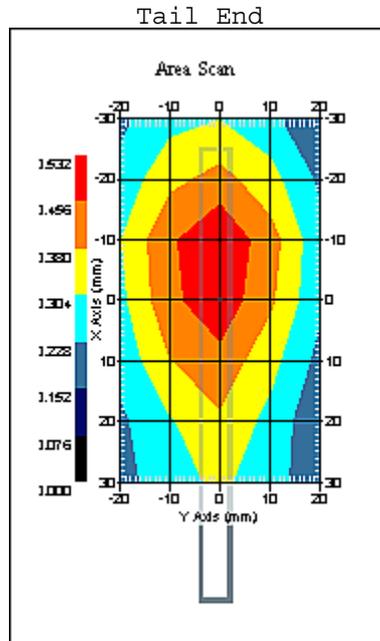

1 gram SAR value : 0.487 W/kg
 10 gram SAR value : 0.287 W/kg
 Area Scan Peak SAR : 0.530 W/kg
 Zoom Scan Peak SAR : 0.810 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 01:48:47 PM
End Time : 06-Sep-2008 02:03:48 PM
Scanning Time : 901 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.523 W/kg
Power Drift-Finish: 0.549 W/kg
Power Drift (%) : 4.938

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Mid

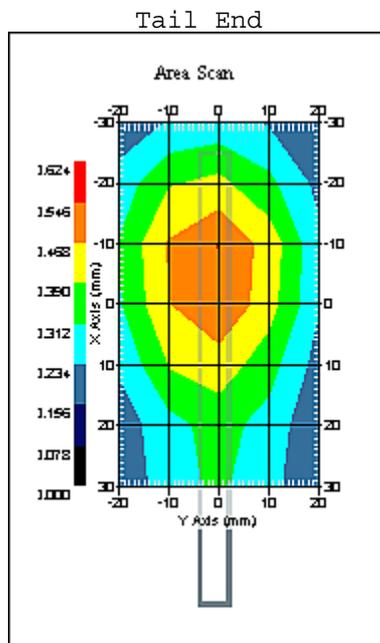

Connector End

1 gram SAR value : 0.521 W/kg
 10 gram SAR value : 0.303 W/kg
 Area Scan Peak SAR : 0.548 W/kg
 Zoom Scan Peak SAR : 0.850 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 02:07:31 PM
End Time : 06-Sep-2008 02:22:33 PM
Scanning Time : 902 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.565 W/kg
Power Drift-Finish: 0.545 W/kg
Power Drift (%) : -3.531

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 23.00 °C
Set-up Date : 06-Sep-2008
Set-up Time : 8:23:27 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
Separation : 13 mm
Channel : High

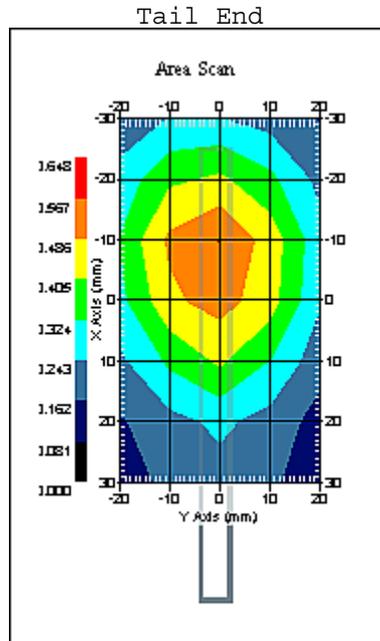

1 gram SAR value : 0.539 W/kg
10 gram SAR value : 0.306 W/kg
Area Scan Peak SAR : 0.570 W/kg
Zoom Scan Peak SAR : 0.870 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 02:56:46 PM
End Time : 06-Sep-2008 03:11:47 PM
Scanning Time : 901 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.621 W/kg
Power Drift-Finish: 0.638 W/kg
Power Drift (%) : 2.623

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Low

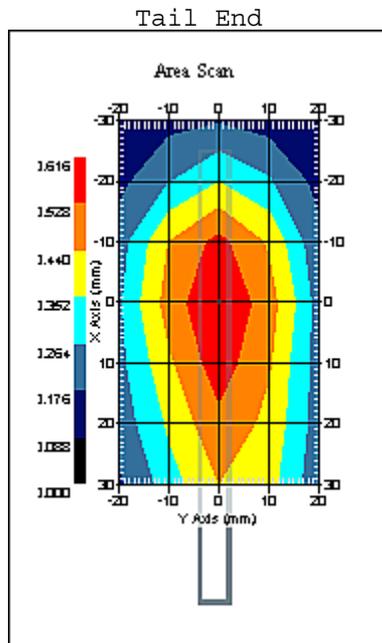

1 gram SAR value : 0.558 W/kg
 10 gram SAR value : 0.326 W/kg
 Area Scan Peak SAR : 0.613 W/kg
 Zoom Scan Peak SAR : 0.910 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 02:40:48 PM
End Time : 06-Sep-2008 02:55:40 PM
Scanning Time : 892 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.688 W/kg
Power Drift-Finish: 0.702 W/kg
Power Drift (%) : 3.237

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Mid

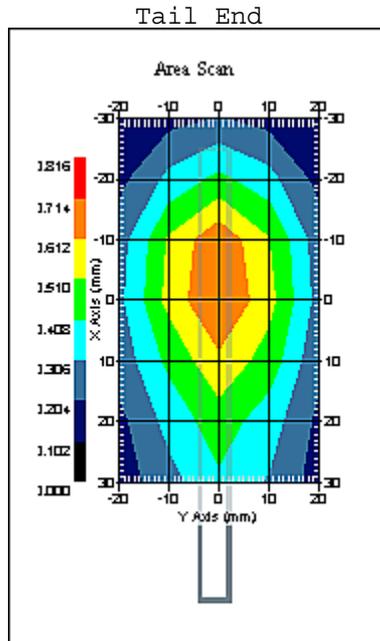

1 gram SAR value : 0.673 W/kg
 10 gram SAR value : 0.381 W/kg
 Area Scan Peak SAR : 0.717 W/kg
 Zoom Scan Peak SAR : 1.161 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 02:24:41 PM
End Time : 06-Sep-2008 02:39:33 PM
Scanning Time : 892 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. 0
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.895 W/kg
Power Drift-Finish: 0.868 W/kg
Power Drift (%) : -3.010

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : High

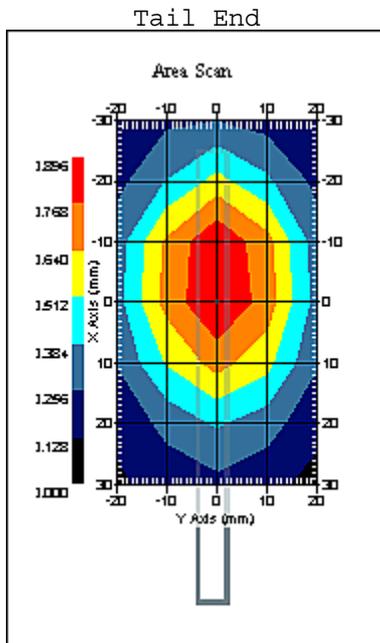

Connector End

1 gram SAR value : 0.848 W/kg
 10 gram SAR value : 0.467 W/kg
 Area Scan Peak SAR : 0.895 W/kg
 Zoom Scan Peak SAR : 1.491 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 06:47:12 PM
End Time : 06-Sep-2008 07:01:11 PM
Scanning Time : 839 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.188 W/kg
Power Drift-Finish: 1.192 W/kg
Power Drift (%) : 0.376

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Low

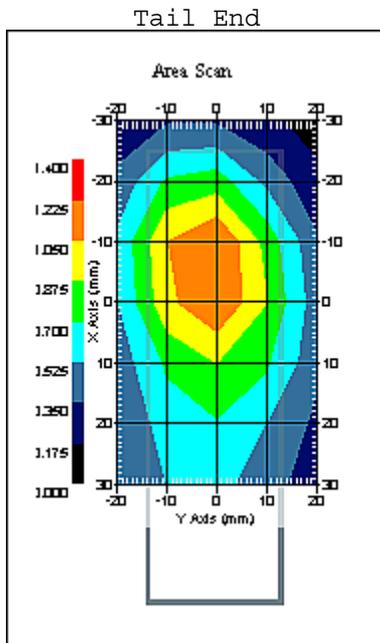

1 gram SAR value : 1.143 W/kg
 10 gram SAR value : 0.624 W/kg
 Area Scan Peak SAR : 1.227 W/kg
 Zoom Scan Peak SAR : 2.021 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 06:30:56 PM
End Time : 06-Sep-2008 06:44:57 PM
Scanning Time : 841 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.322 W/kg
Power Drift-Finish: 1.313 W/kg
Power Drift (%) : -0.728

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : Mid

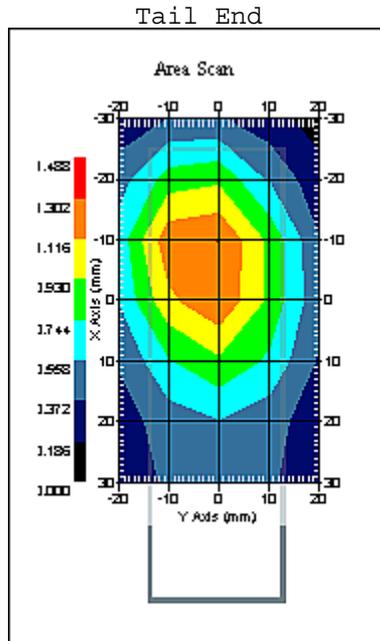

1 gram SAR value : 1.277 W/kg
 10 gram SAR value : 0.696 W/kg
 Area Scan Peak SAR : 1.304 W/kg
 Zoom Scan Peak SAR : 2.312 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 06:14:40 PM
End Time : 06-Sep-2008 06:28:42 PM
Scanning Time : 842 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Top With USB Cable
Power Drift-Start : 1.695 W/kg
Power Drift-Finish: 1.642 W/kg
Power Drift (%) : -3.116

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data


DUT Position : Top With USB Cable
 Separation : 13 mm
 Channel : High

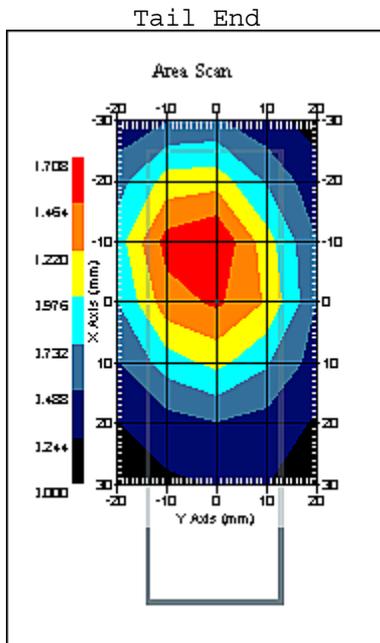

Connector End

1 gram SAR value : 1.515 W/kg
 10 gram SAR value : 0.801 W/kg
 Area Scan Peak SAR : 1.707 W/kg
 Zoom Scan Peak SAR : 2.752 W/kg

SAR-Z Axis
at Hotspot x:-1.80 y:-0.12

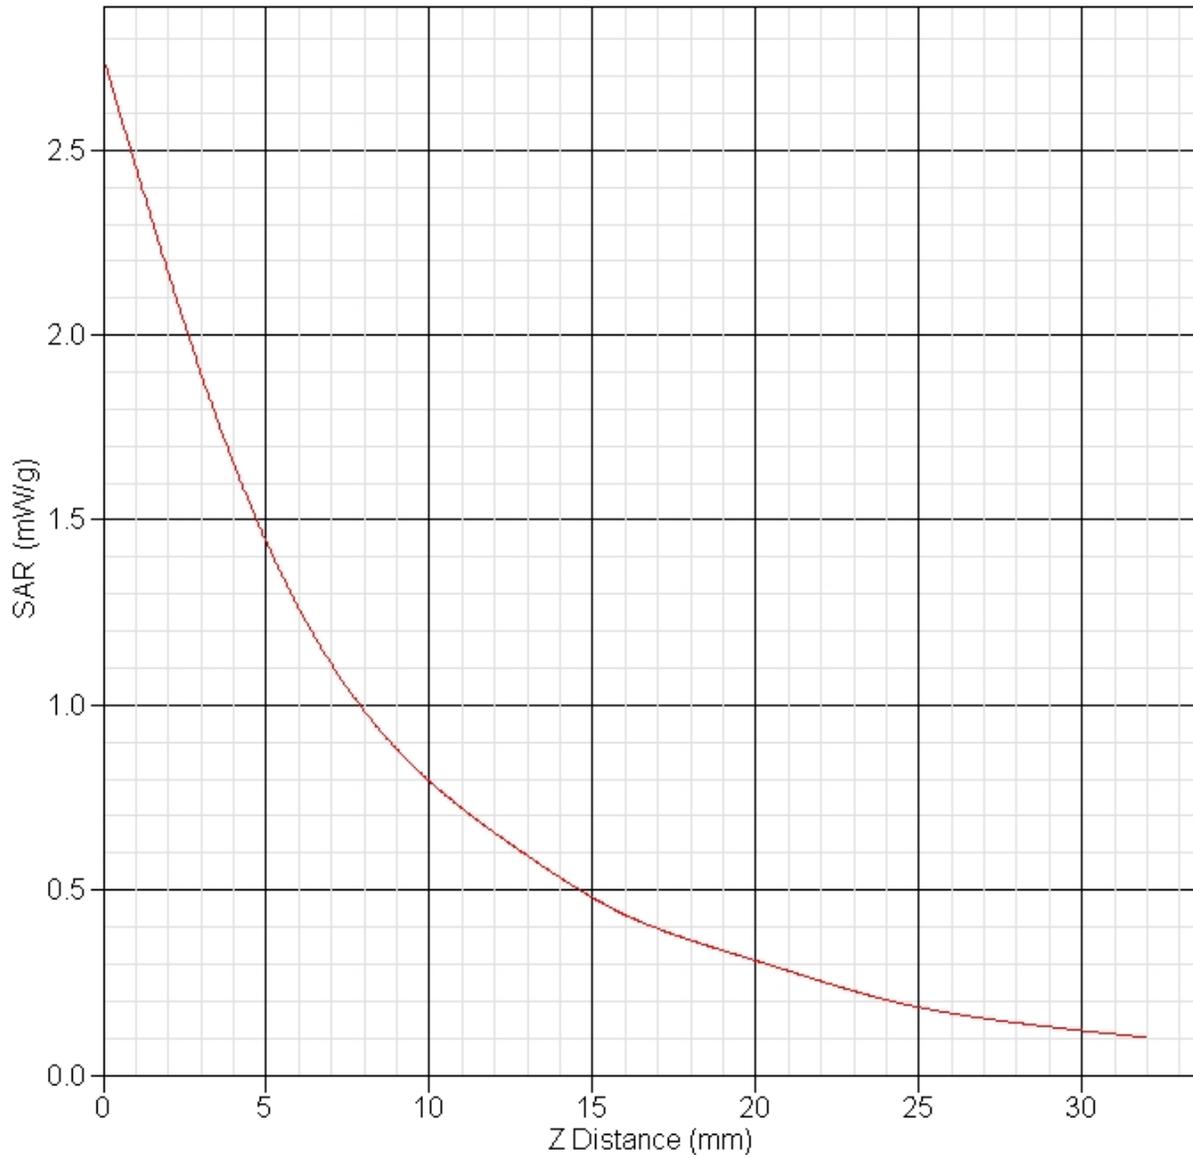

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 05:10:20 PM
End Time : 06-Sep-2008 05:25:06 PM
Scanning Time : 886 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Install In HP Laptop
Power Drift-Start : 1.241 W/kg
Power Drift-Finish: 1.211 W/kg
Power Drift (%) : -2.466

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Install In HP Laptop
 Separation : 13 mm
 Channel : Low

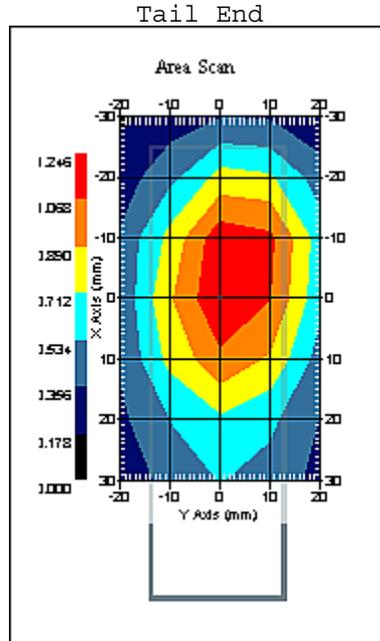

Connector End

1 gram SAR value : 1.170 W/kg
 10 gram SAR value : 0.661 W/kg
 Area Scan Peak SAR : 1.244 W/kg
 Zoom Scan Peak SAR : 2.001 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 05:26:07 PM
End Time : 06-Sep-2008 05:41:02 PM
Scanning Time : 895 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Install In HP Laptop
Power Drift-Start : 1.284 W/kg
Power Drift-Finish: 1.320 W/kg
Power Drift (%) : 2.778

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Install In HP Laptop
 Separation : 13 mm
 Channel : Mid

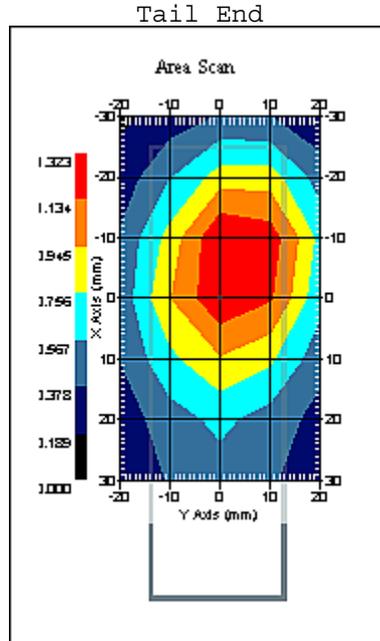

1 gram SAR value : 1.196 W/kg
 10 gram SAR value : 0.667 W/kg
 Area Scan Peak SAR : 1.321 W/kg
 Zoom Scan Peak SAR : 1.991 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 06-Sep-2008
Starting Time : 06-Sep-2008 05:58:12 PM
End Time : 06-Sep-2008 06:12:35 PM
Scanning Time : 863 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 28 mm
Depth : 8 mm
Antenna Type : Internal
Orientation : Bottom Install In HP Laptop
Power Drift-Start : 1.461 W/kg
Power Drift-Finish: 1.451 W/kg
Power Drift (%) : -0.684

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 06-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 53.48 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 06-Sep-2008
 Set-up Time : 8:23:27 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Bottom Install In HP Laptop
 Separation : 13 mm
 Channel : High

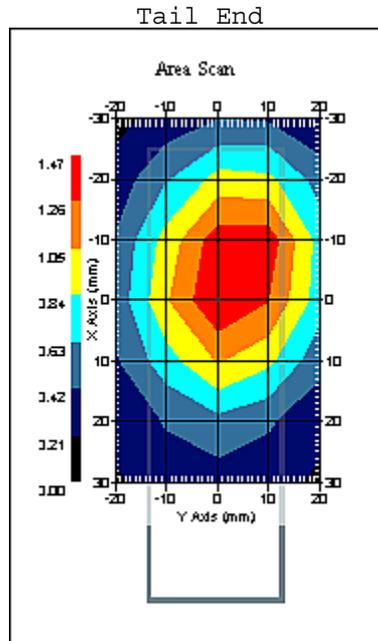

1 gram SAR value : 1.419 W/kg
 10 gram SAR value : 0.777 W/kg
 Area Scan Peak SAR : 1.470 W/kg
 Zoom Scan Peak SAR : 2.552 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 07:25:19 AM
End Time : 07-Sep-2008 07:40:45 AM
Scanning Time : 926 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.589 W/kg
Power Drift-Finish: 0.565 W/kg
Power Drift (%) : -4.078

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 54.46 F/m
Sigma : 1.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 7:20:56 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Low

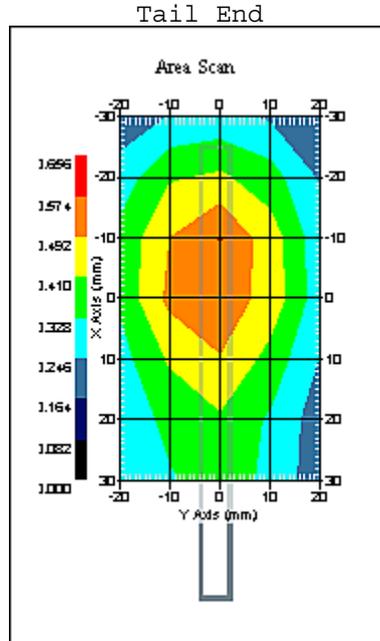

Connector End

1 gram SAR value : 0.560 W/kg
 10 gram SAR value : 0.336 W/kg
 Area Scan Peak SAR : 0.577 W/kg
 Zoom Scan Peak SAR : 0.890 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 07:41:41 AM
End Time : 07-Sep-2008 07:56:26 AM
Scanning Time : 885 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.602 W/kg
Power Drift-Finish: 0.599 W/kg
Power Drift (%) : -0.497

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 54.46 F/m
Sigma : 1.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 7:20:56 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : Mid

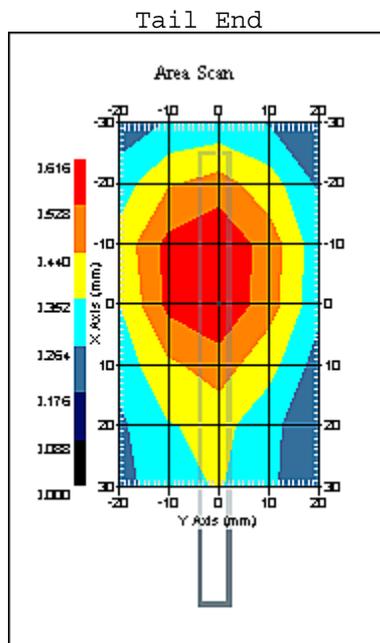

1 gram SAR value : 0.583 W/kg
 10 gram SAR value : 0.348 W/kg
 Area Scan Peak SAR : 0.615 W/kg
 Zoom Scan Peak SAR : 0.930 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 07:57:47 AM
End Time : 07-Sep-2008 08:12:32 AM
Scanning Time : 885 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Right Side With USB Cable
Power Drift-Start : 0.642 W/kg
Power Drift-Finish: 0.621 W/kg
Power Drift (%) : -3.270

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 54.46 F/m
Sigma : 1.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 7:20:56 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Right Side With USB Cable
 Separation : 13 mm
 Channel : High

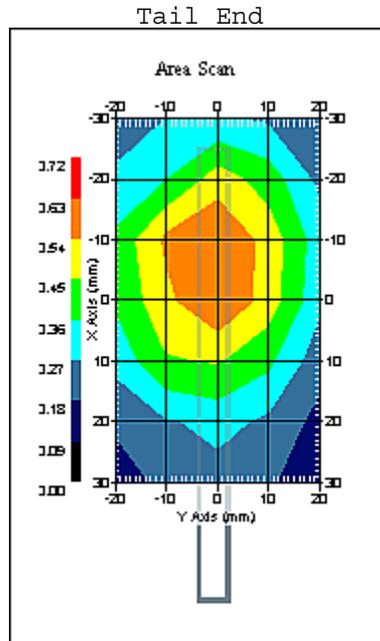

1 gram SAR value : 0.617 W/kg
 10 gram SAR value : 0.362 W/kg
 Area Scan Peak SAR : 0.631 W/kg
 Zoom Scan Peak SAR : 1.050 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 08:46:18 AM
End Time : 07-Sep-2008 09:01:08 AM
Scanning Time : 890 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.641 W/kg
Power Drift-Finish: 0.643 W/kg
Power Drift (%) : 0.214

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 54.46 F/m
Sigma : 1.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 7:20:56 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Low

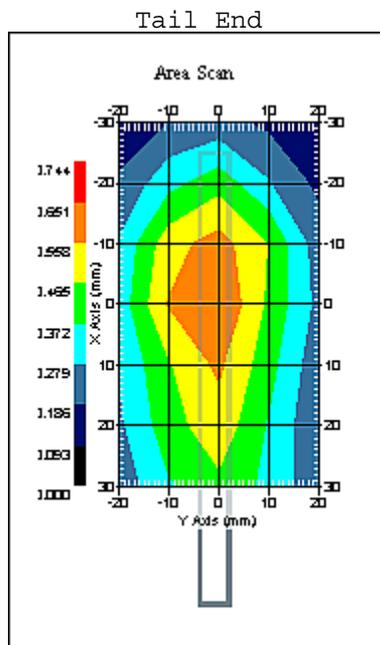

Connector End

1 gram SAR value : 0.616 W/kg
 10 gram SAR value : 0.355 W/kg
 Area Scan Peak SAR : 0.652 W/kg
 Zoom Scan Peak SAR : 1.070 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 08:30:28 AM
End Time : 07-Sep-2008 08:45:20 AM
Scanning Time : 892 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.718 W/kg
Power Drift-Finish: 0.717 W/kg
Power Drift (%) : -0.199

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 54.46 F/m
Sigma : 1.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 7:20:56 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : Mid

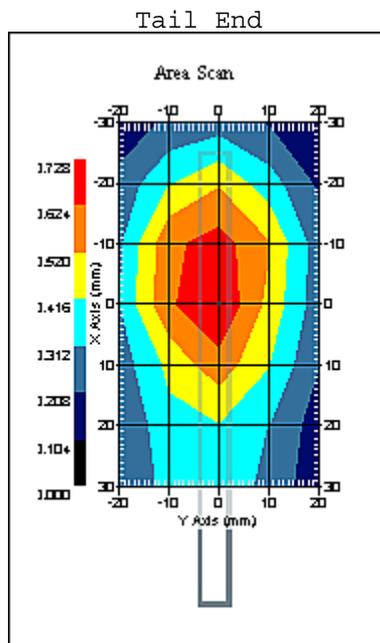

Connector End

1 gram SAR value : 0.703 W/kg
 10 gram SAR value : 0.389 W/kg
 Area Scan Peak SAR : 0.725 W/kg
 Zoom Scan Peak SAR : 1.211 W/kg

SAR Test Report

By Operator : Jay
Measurement Date : 07-Sep-2008
Starting Time : 07-Sep-2008 08:14:27 AM
End Time : 07-Sep-2008 08:29:20 AM
Scanning Time : 893 secs

Product Data

Device Name : Huawei Corp.
Serial No. : KWZAC10871400176
Mode : EvDo Rev. A
Model : EC168
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 89 mm
Width : 8 mm
Depth : 28 mm
Antenna Type : Internal
Orientation : Vertical - Left Side Installed In IBM/Lenovo Laptop
Power Drift-Start : 0.928 W/kg
Power Drift-Finish: 0.911 W/kg
Power Drift (%) : -1.922

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 07-Sep-2008
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 52.00 RH%
Epsilon : 54.46 F/m
Sigma : 1.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : RFEL 217
Model : E020
Type : E-Field Triangle
Serial No. : 217
Last Calib. Date : 03-Dec-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.85
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
 Scan Type : Complete
 Tissue Temp. : 20.00 °C
 Ambient Temp. : 23.00 °C
 Set-up Date : 07-Sep-2008
 Set-up Time : 7:20:56 AM
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Vertical - Left Side Installed In IBM/Lenovo Laptop
 Separation : 13 mm
 Channel : High

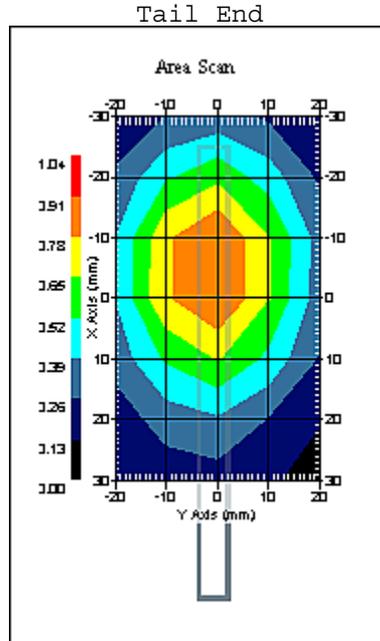

1 gram SAR value : 0.862 W/kg
 10 gram SAR value : 0.470 W/kg
 Area Scan Peak SAR : 0.911 W/kg
 Zoom Scan Peak SAR : 1.471 W/kg

Appendix C – SAR Test Setup Photos

System Body Configuration

Body Tissue Depth

Top With USB Cable

Bottom Installed In HP Laptop

Vertical - Right Side With USB Cable

Vertical - Left Side Installed In IBM/Lenovo Laptop

Front of Device

Back of Device

Appendix D – Probe Calibration Data Sheets

NCL CALIBRATION LABORATORIES

Calibration File No.: CP-840

Client.: RFEL

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the **NCL CALIBRATION LABORATORIES** by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 835 MHz

BODY Calibration

Manufacturer: APREL Laboratories

Model No.: E-020

Serial No.: 217

Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2

Project No: RFEB-ALS-E-020-5318

Calibrated: 3rd December 2007

Released on: 3rd December 2007

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary
This calibration has been conducted in line with the SCC ISO-IEC 17025 Scope of Accreditation
Accredited Laboratory Number 48

Released By: _____

NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-020 217.

References

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

SSI-TP-011 Tissue Calibration Procedure

IEC 62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1 & 2: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"

IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz


Conditions

Probe 217 was a re-calibration.


Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.



Stuart Nicol



Jesse Hones

Calibration Results Summary

Probe Type:	E-Field Probe E-020
Serial Number:	217
Frequency:	835 MHz
Sensor Offset:	1.56 mm
Sensor Length:	2.5 mm
Tip Enclosure:	Ertalyte*
Tip Diameter:	<5 mm
Tip Length:	60 mm
Total Length:	290 mm

*Resistive to recommended tissue recipes per IEEE-1528

Sensitivity in Air

Channel X:	1.2 $\mu\text{V}/(\text{V}/\text{m})^2$
Channel Y:	1.2 $\mu\text{V}/(\text{V}/\text{m})^2$
Channel Z:	1.2 $\mu\text{V}/(\text{V}/\text{m})^2$
Diode Compression Point:	95 mV

Sensitivity in Body Tissue Measured

Frequency: 835 MHz

Epsilon: 55.2 (+/-5%) **Sigma:** 1.05 S/m (+/-10%)

ConvF

Channel X: 6.1

Channel Y: 6.1

Channel Z: 6.1

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.


Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.44mm.



Spatial Resolution:

The measured probe tip diameter is 5 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.

Receiving Pattern 835 MHz (Air)

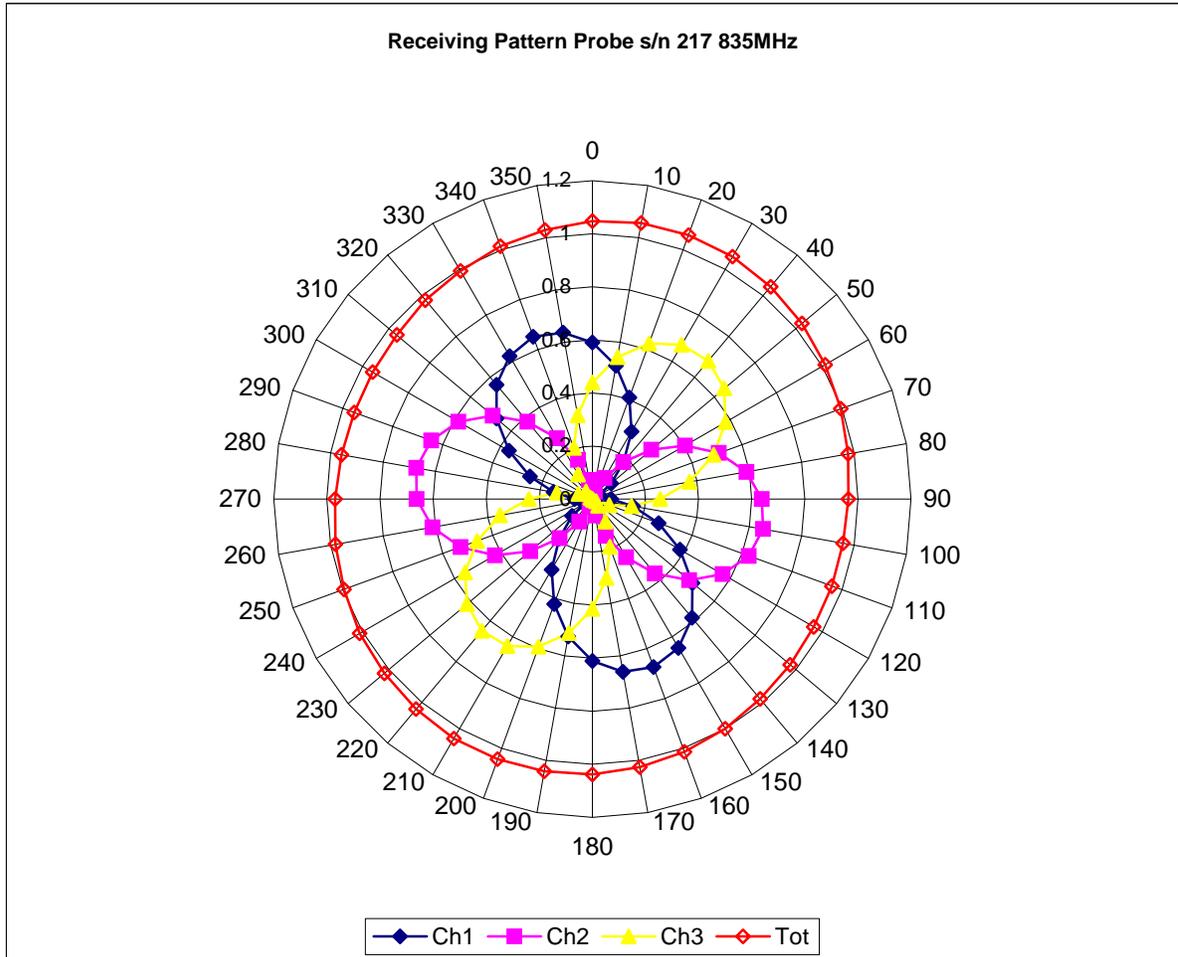


Isotropy Error 835 MHz (Air)

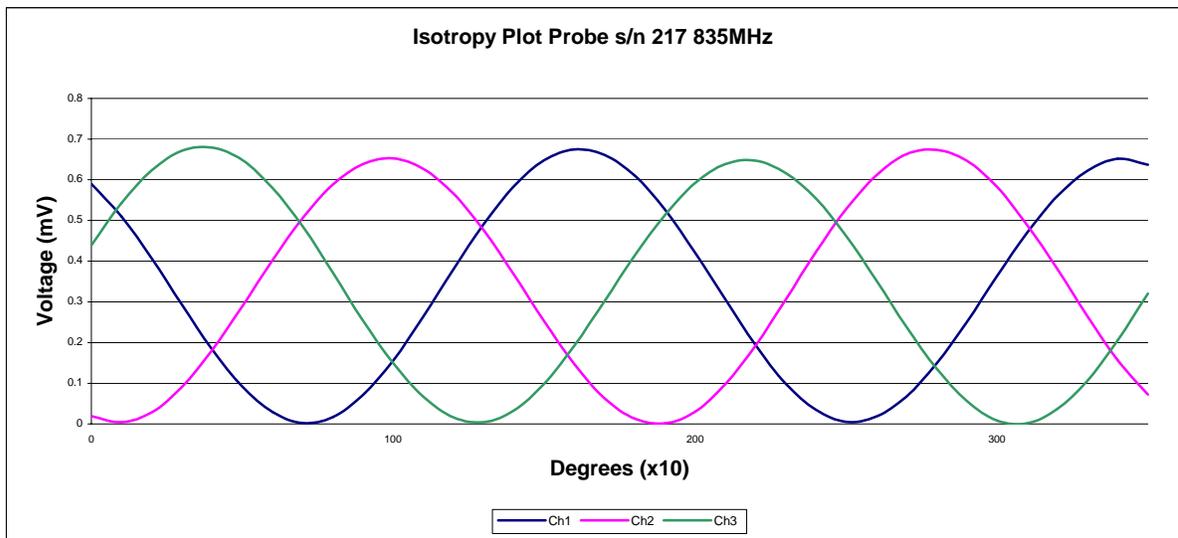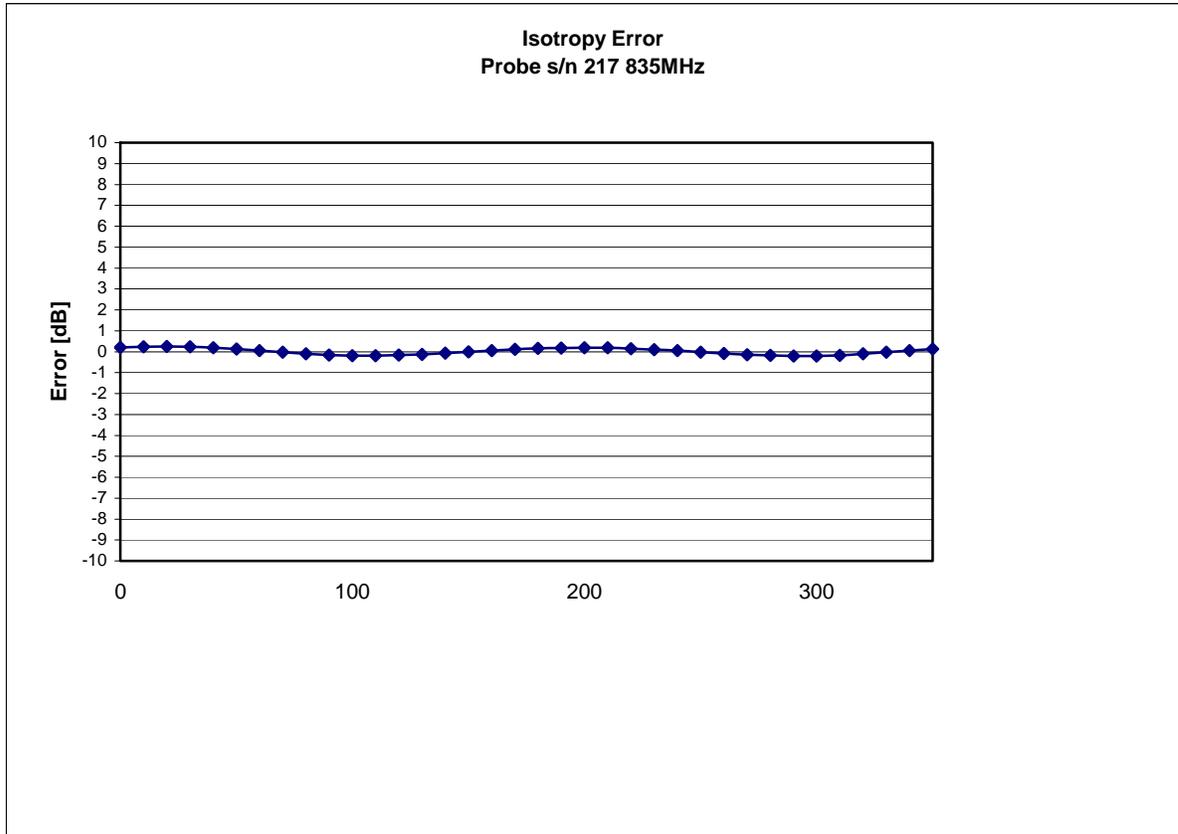

Isotropicity Tissue:


0.10 dB

Dynamic Range

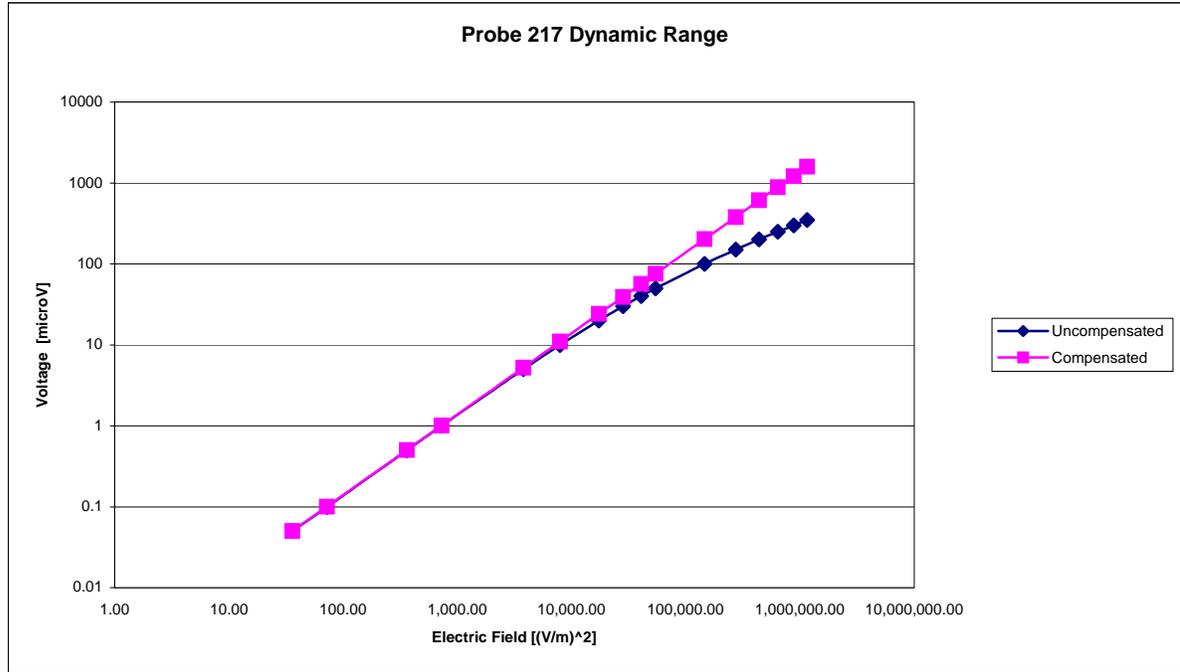

Video Bandwidth

Probe Frequency Characteristics

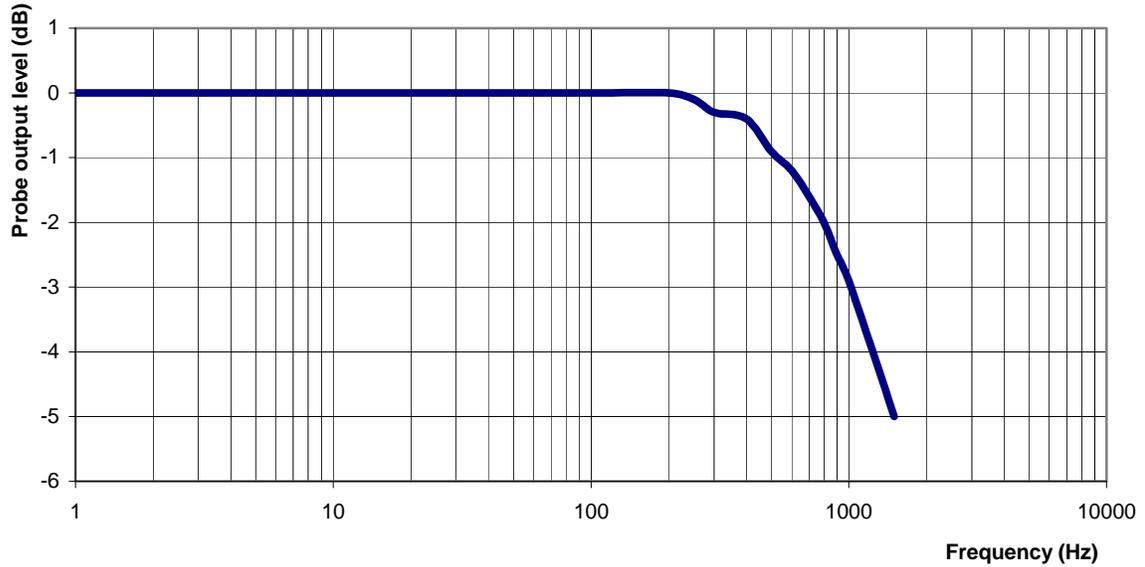

Video Bandwidth at 500 Hz 1 dB
Video Bandwidth at 1.02 KHz: 3 dB

Conversion Factor Uncertainty Assessment Measured

Sensitivity in Body Tissue

Frequency: 835 MHz
Epsilon: 55.2 (+/-5%) **Sigma:** 1.05 S/m (+/-10%)

ConvF

Channel X: 6.1 7%(K=2)
Channel Y: 6.1 7%(K=2)
Channel Z: 6.1 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.

Boundary Effect:

For a distance of 2.5mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2007.

NCL CALIBRATION LABORATORIES

Calibration File No.: CP-842

Client.: RFEL

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 1900 MHz

BODY Calibration

Manufacturer: APREL Laboratories

Model No.: E-020

Serial No.: 217

Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2

Project No: RFEB-ALS-E-020-5318

Calibrated: 3rd December 2007

Released on: 3rd December 2007

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary
This calibration has been conducted in line with the SCC ISO-IEC 17025 Scope of Accreditation
Accredited Laboratory Number 48

Released By: _____

NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-020 217.

References

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

SSI-TP-011 Tissue Calibration Procedure

IEC 62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1 & 2: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"

IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz


Conditions

Probe 217 was a re-calibration.


Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.



Stuart Nicol



Jesse Hones

Calibration Results Summary

Probe Type:	E-Field Probe E-020
Serial Number:	217
Frequency:	1900 MHz
Sensor Offset:	1.56 mm
Sensor Length:	2.5 mm
Tip Enclosure:	Ertalyte*
Tip Diameter:	<5 mm
Tip Length:	60 mm
Total Length:	290 mm

*Resistive to recommended tissue recipes per IEEE-1528

Sensitivity in Air

Channel X:	1.2 $\mu\text{V}/(\text{V}/\text{m})^2$
Channel Y:	1.2 $\mu\text{V}/(\text{V}/\text{m})^2$
Channel Z:	1.2 $\mu\text{V}/(\text{V}/\text{m})^2$
Diode Compression Point:	95 mV

Sensitivity in Body Tissue Measured

Frequency: 1900 MHz

Epsilon: 54.2 (+/-5%) **Sigma:** 1.57 S/m (+/-5%)

ConvF

Channel X: 4.85

Channel Y: 4.85

Channel Z: 4.85

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.


Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.44mm.



Spatial Resolution:

The measured probe tip diameter is 5 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.

Receiving Pattern 1900 MHz (Air)

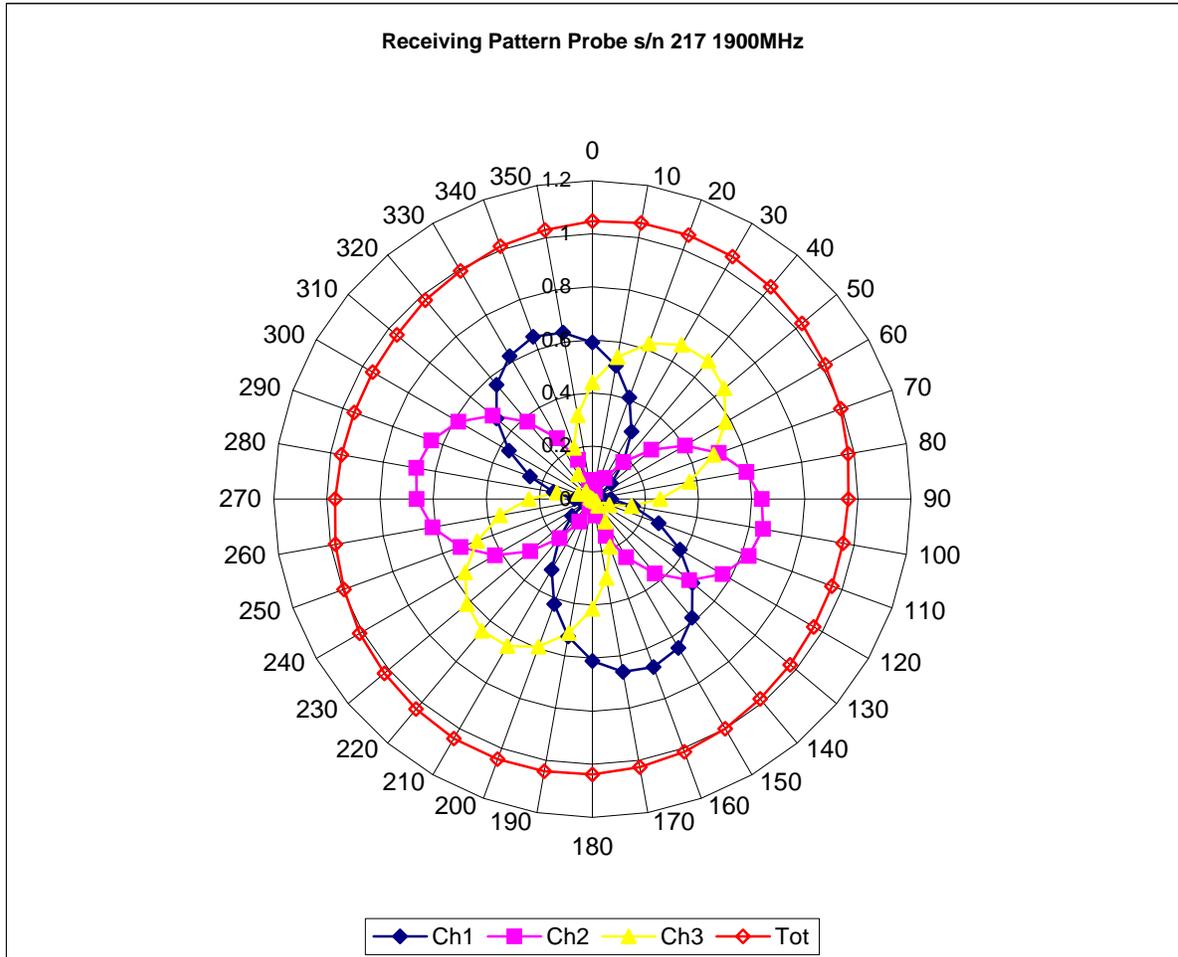


Isotropy Error 1900 MHz (Air)

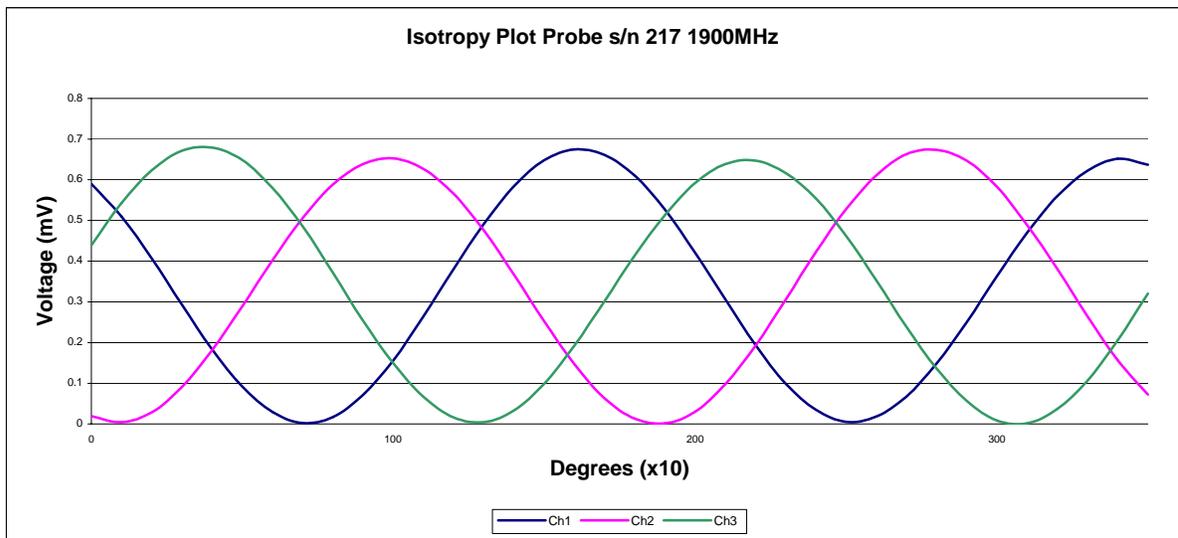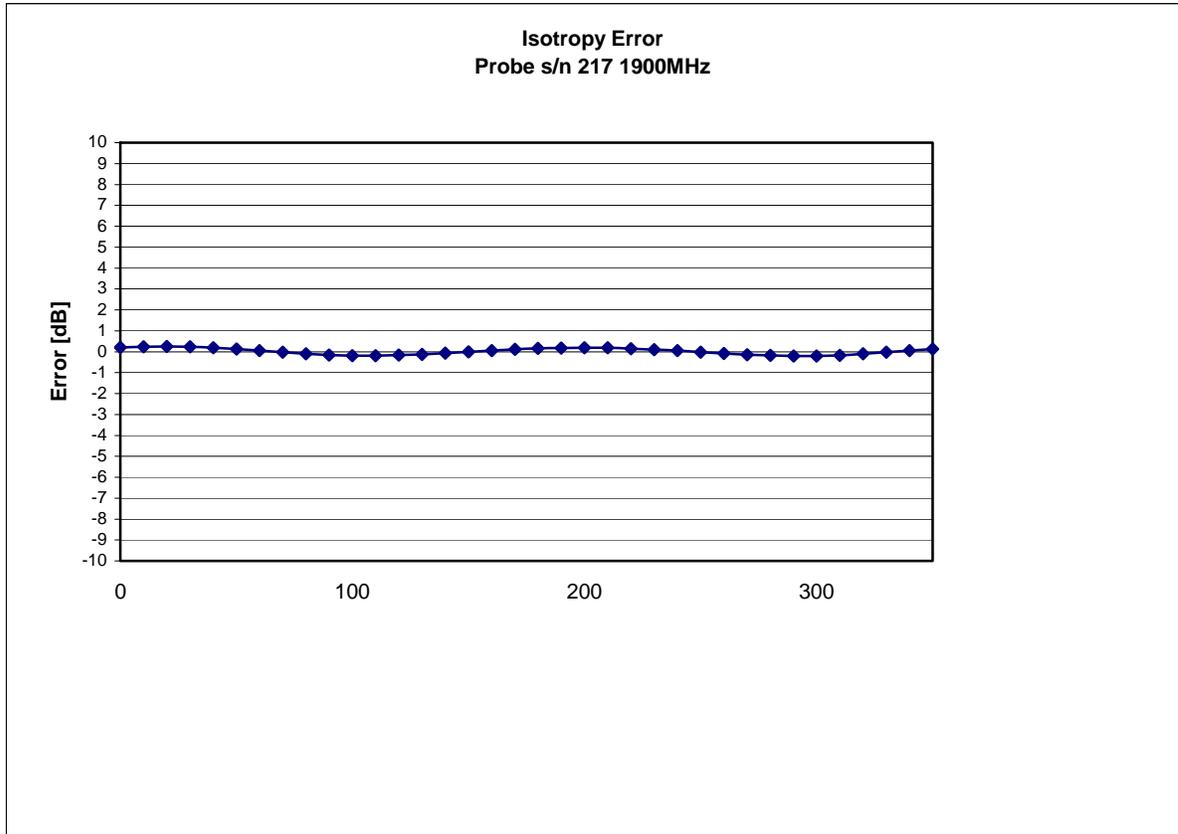

Isotropicity Tissue:


0.10 dB

Dynamic Range

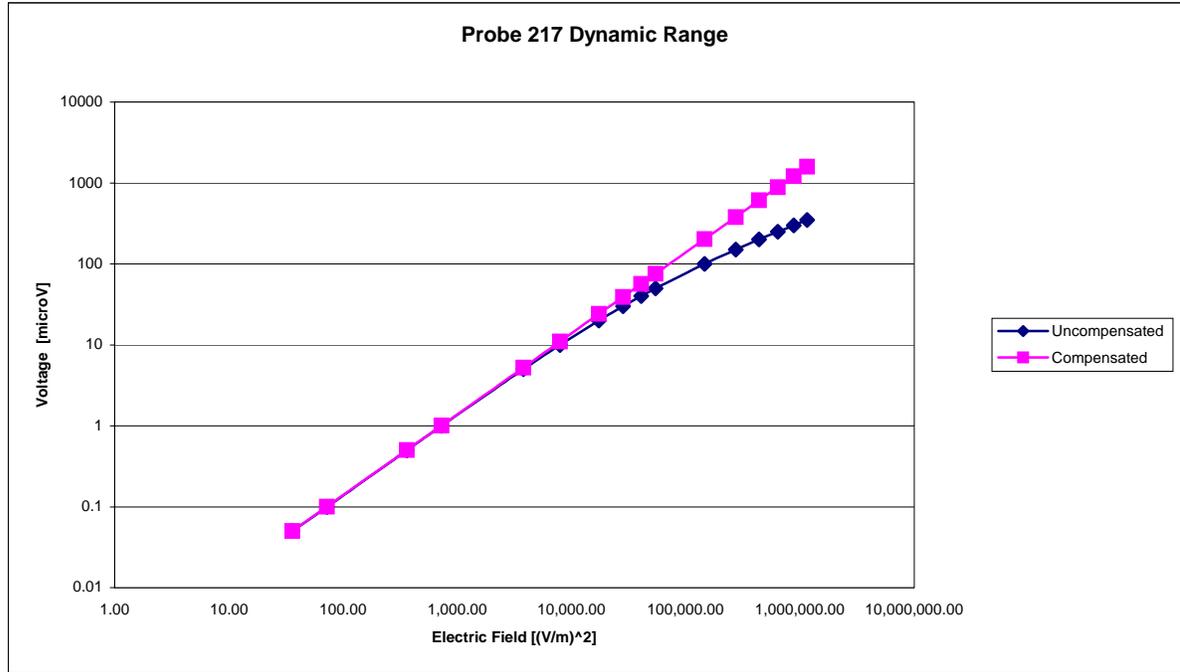

Video Bandwidth

Probe Frequency Characteristics

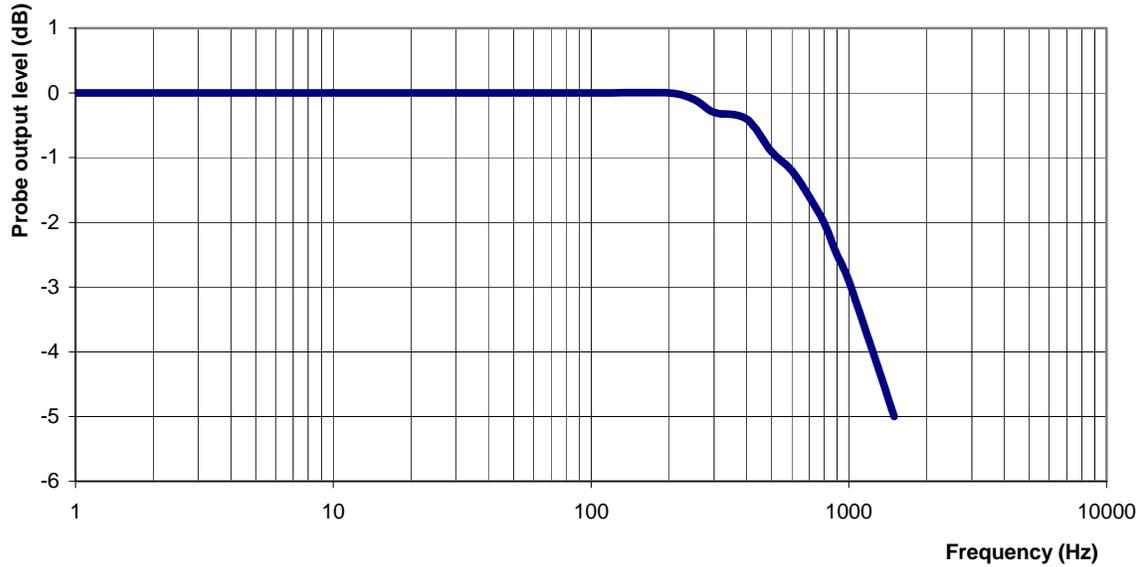

Video Bandwidth at 500 Hz 1 dB
Video Bandwidth at 1.02 KHz: 3 dB

Conversion Factor Uncertainty Assessment Measured

Sensitivity in Body Tissue

Frequency: 1900 MHz

Epsilon: 54.2 (+/-5%) **Sigma:** 1.57 S/m (+/-5%)

ConvF

Channel X: 4.85 7%(K=2)

Channel Y: 4.85 7%(K=2)

Channel Z: 4.85 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.

Boundary Effect:

For a distance of 2.5mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2007.

Appendix E – Dipole Calibration Data Sheets

RF Exposure Lab, LLC

Calibration File No: CAL.20080203

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated at RF Exposure Lab, LLC by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole

Manufacturer: APREL Laboratories

Part Number: ALS-D-835-S-2

Frequency: 835 MHz

Serial No: RFE-274

Manufactured: 20 February 2004
Calibrated: 22 February 2008

Calibrated By: Signature on File
Jay Moulton – Technical Manager

Approved By: Signature on File
Tamara Moulton – Quality Manager

Measurement Uncertainty:

Repeatability:	23%
Tissue Uncertainty:	3.2%
Network Analyzer:	25%



RF EXPOSURE LAB, LLC

2867 Progress Place, Suite 4D
Escondido, CA 92029

Tel: (760) 737-3131
FAX: (760) 737-9131

Calibration Results Summary

The following results relate to the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length: 161.8 mm
Height: 91.1 mm

Electrical Specifications

Head

SWR: 1.1182 U
Return Loss: -27.508 dB
Impedance: 49.648 Ω

System Validation Results

Frequency	1 Gram	10 Gram
835 MHz	9.500	6.000

Body

SWR: 1.1533 U
Return Loss: -23.596 dB
Impedance: 51.395 Ω

System Validation Results

Frequency	1 Gram	10 Gram
835 MHz	9.750	6.240

Head Measurement Conditions

The measurements were performed in the Uni-Phantom filled with head simulating liquid of the following electrical parameters at 835 MHz:

Relative Dielectricity	41.48	± 5%
Conductivity	0.92 mho/m	± 5%

The APREL Laboratories ALSAS system with a dosimetric E-field probe E-020 (SN:217, Conversion factor 6.0 at 835 MHz) was used for the measurements.

The dipole was mounted so that the dipole feed point was positioned below the center marking of the flat phantom and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from the dipole center to the solution surface.

The coarse grid with a grid spacing of 10mm was aligned with the dipole. The 5x5x8 fine cube was chosen for cube integration. The dipole input power (forward power) was 100mW ± 3%. The results are normalized to 1W input power.

The laboratories environmental conditions were as follows during the calibration sequence.


Ambient Temperature of the Laboratory:	24 °C ± 1.0 °C
Temperature of the Tissue:	20 °C ± 1.0 °C
Relative Humidity:	40%

SAR Measurement

Standard SAR measurements were performed according to the measurement conditions described above. The results have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR values measured with the dosimetric probe E-020 SN:217 and applying the advanced extrapolation are:

Averaged over 1 cm³ (1 g) of tissue: 9.500 mW/g ± 19.0% (k=2)¹
 Averaged over 10 cm³ (10 g) of tissue: 6.000 mW/g ± 18.5% (k=2)¹

Area Scan

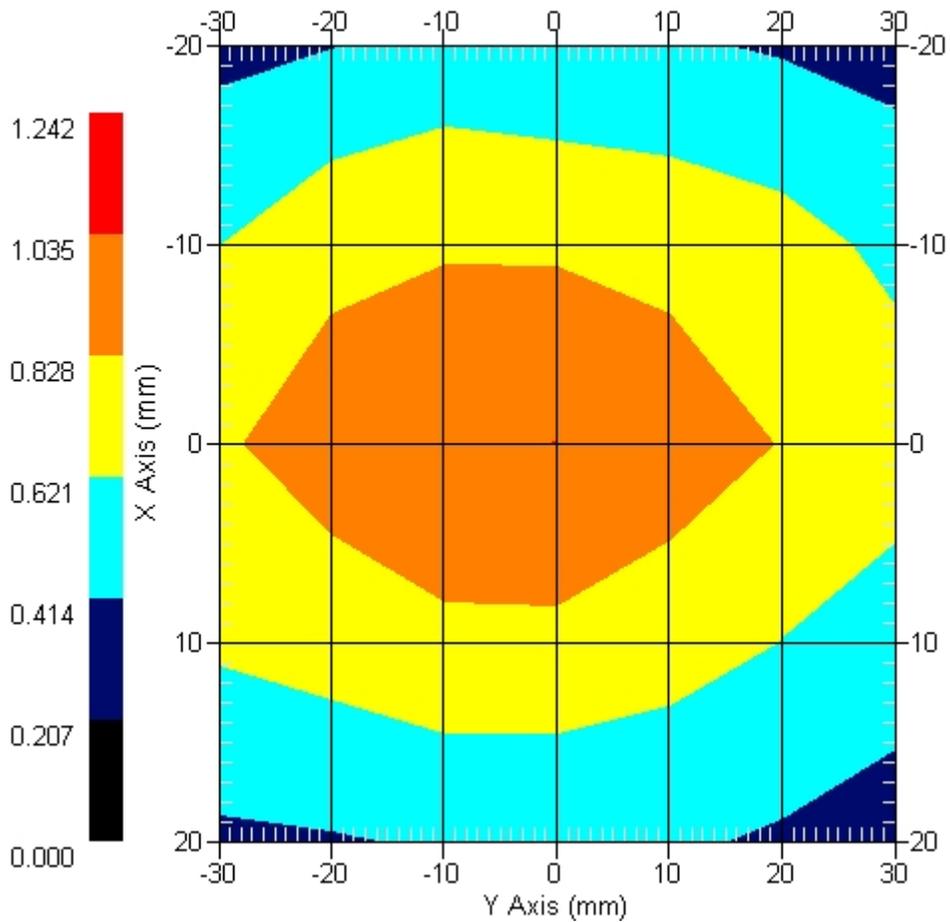

1 gram SAR value : 0.950 W/kg
 10 gram SAR value : 0.600 W/kg
 Area Scan Peak SAR : 1.037 W/kg
 Zoom Scan Peak SAR : 1.541 W/kg

¹ validation uncertainty


Dipole Impedance and Return Loss

The impedance was measured at the SMA connector with a network analyzer. The dipole was positioned at the flat phantom sections according to measurement conditions stated above during impedance measurements.


Test	Result
S11 R/L	-27.508 dB
SWR	1.1182 U
Impedance	49.648 Ω

The following graphs are the results as displayed on the Vector Network Analyzer.


S11 Parameter Return Loss

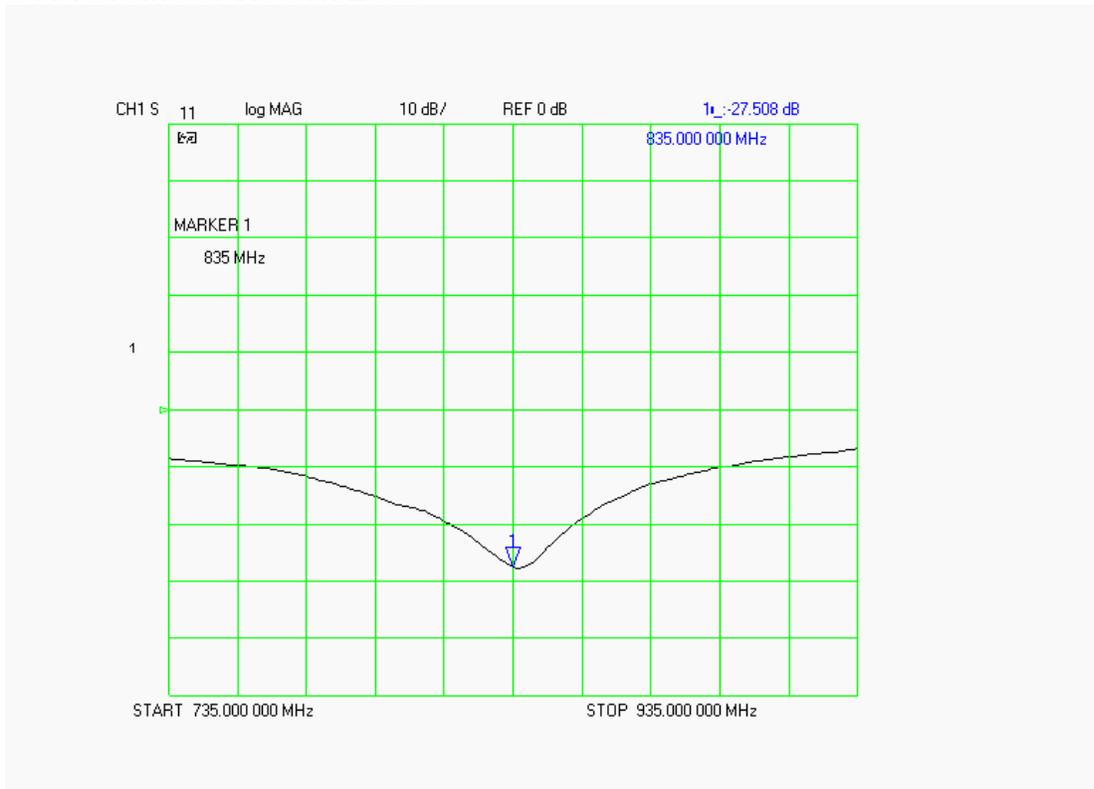

SWR

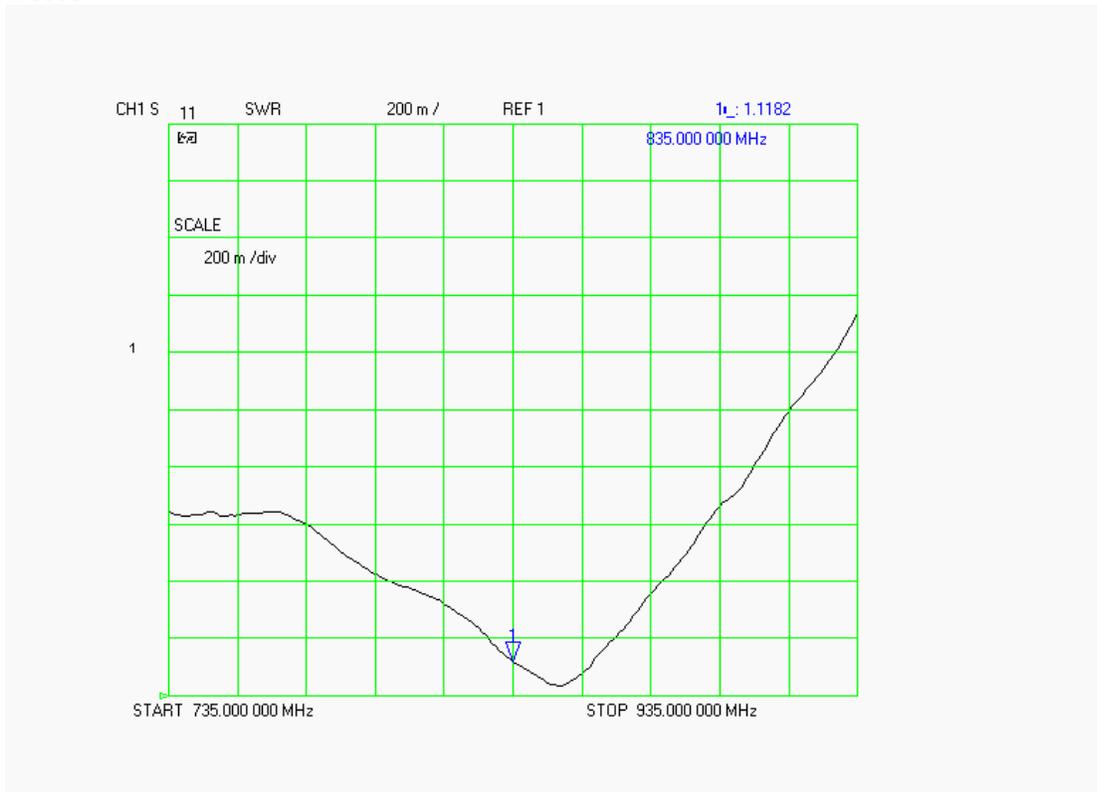

Smith Chart Dipole Impedance

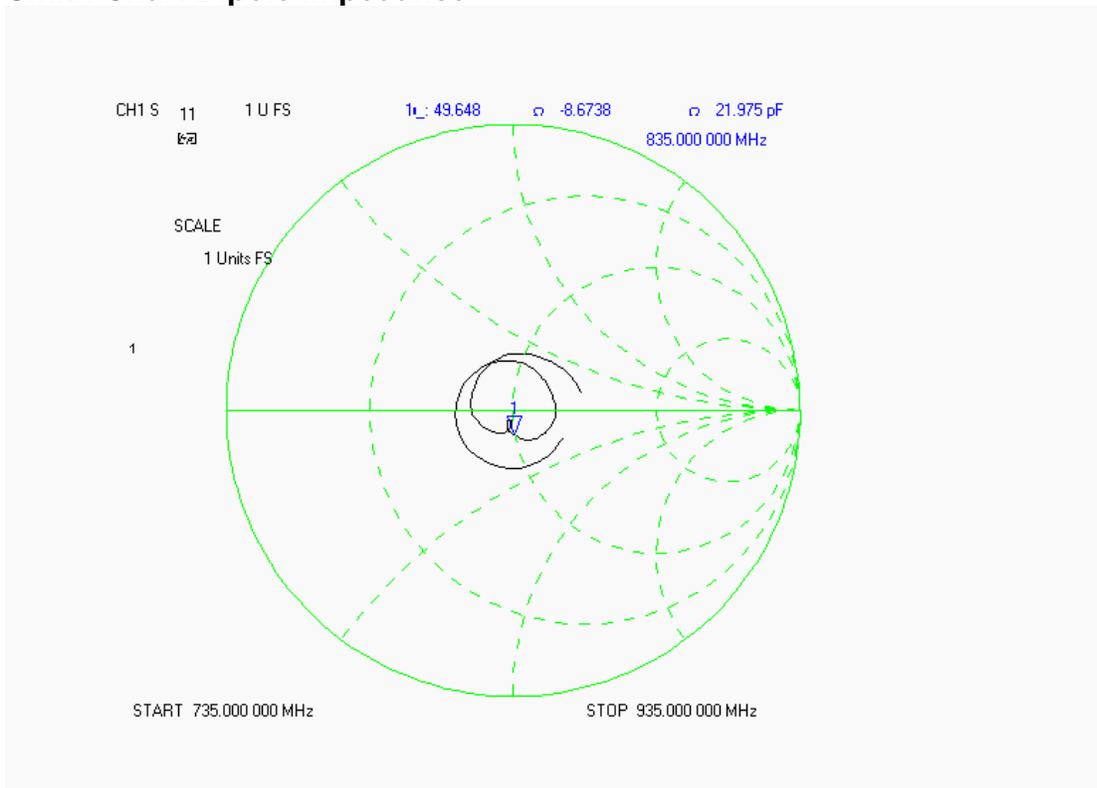

Body Measurement Conditions

The measurements were performed in the Uni-Phantom filled with body simulating liquid of the following electrical parameters at 835 MHz:

Relative Dielectricity	55.20	± 5%
Conductivity	0.96 mho/m	± 5%

The APREL Laboratories ALSAS system with a dosimetric E-field probe E-020 (SN:217, Conversion factor 6.1 at 835 MHz) was used for the measurements.

The dipole was mounted so that the dipole feed point was positioned below the center marking of the flat phantom and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from the dipole center to the solution surface.

The coarse grid with a grid spacing of 10mm was aligned with the dipole. The 5x5x8 fine cube was chosen for cube integration. The dipole input power (forward power) was 100mW ± 3%. The results are normalized to 1W input power.

The laboratories environmental conditions were as follows during the calibration sequence.


Ambient Temperature of the Laboratory:	24 °C ± 1.0 °C
Temperature of the Tissue:	20 °C ± 1.0 °C
Relative Humidity:	40%

SAR Measurement

Standard SAR measurements were performed according to the measurement conditions described above. The results have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR values measured with the dosimetric probe E-020 SN:217 and applying the advanced extrapolation are:

Averaged over 1 cm³ (1 g) of tissue: 9.750 mW/g ± 19.1% (k=2)¹
 Averaged over 10 cm³ (10 g) of tissue: 6.240 mW/g ± 18.6% (k=2)¹

Area Scan

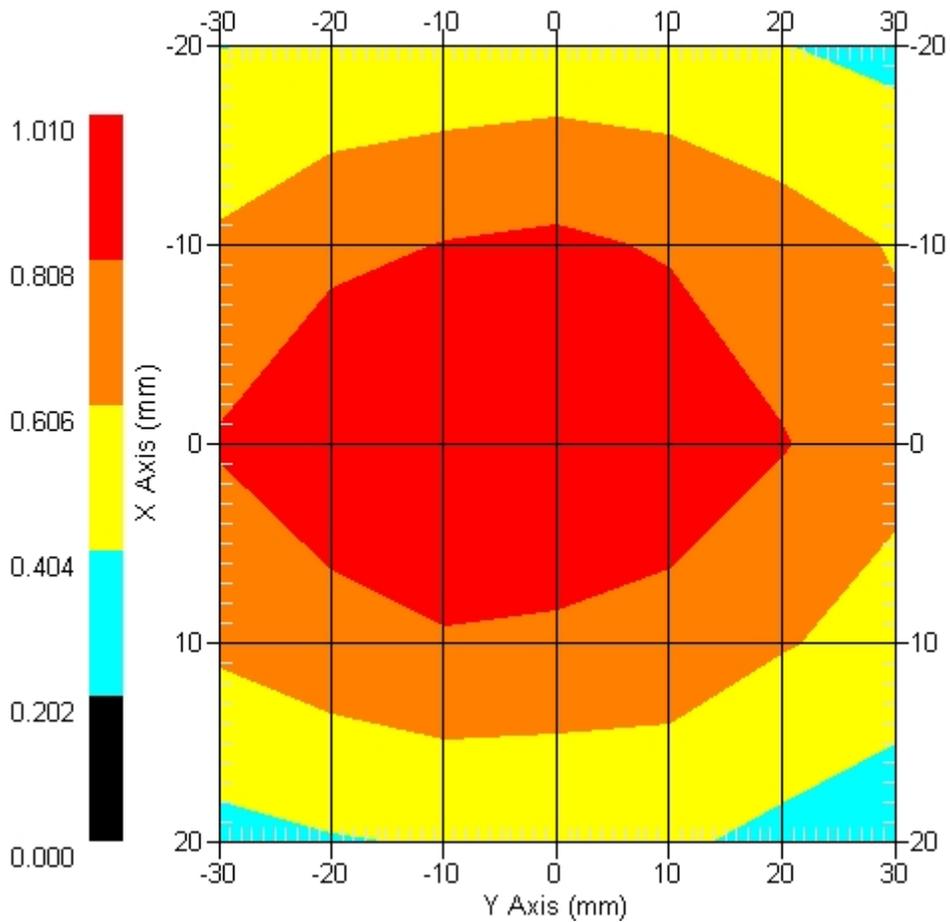

1 gram SAR value : 0.975 W/kg
 10 gram SAR value : 0.624 W/kg
 Area Scan Peak SAR : 1.009 W/kg
 Zoom Scan Peak SAR : 1.571 W/kg

¹ validation uncertainty


Dipole Impedance and Return Loss

The impedance was measured at the SMA connector with a network analyzer. The dipole was positioned at the flat phantom sections according to measurement conditions stated above during impedance measurements.


Test	Result
S11 R/L	-23.596 dB
SWR	1.1533 U
Impedance	51.395 Ω

The following graphs are the results as displayed on the Vector Network Analyzer.


S11 Parameter Return Loss

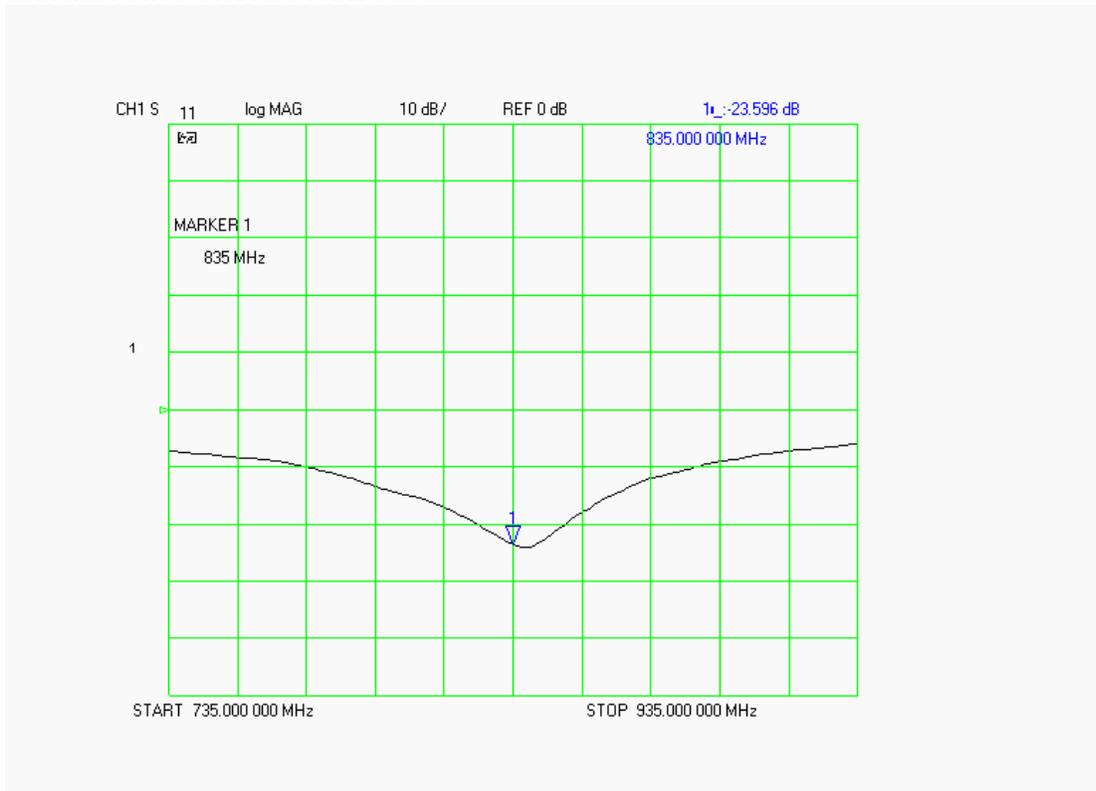

SWR

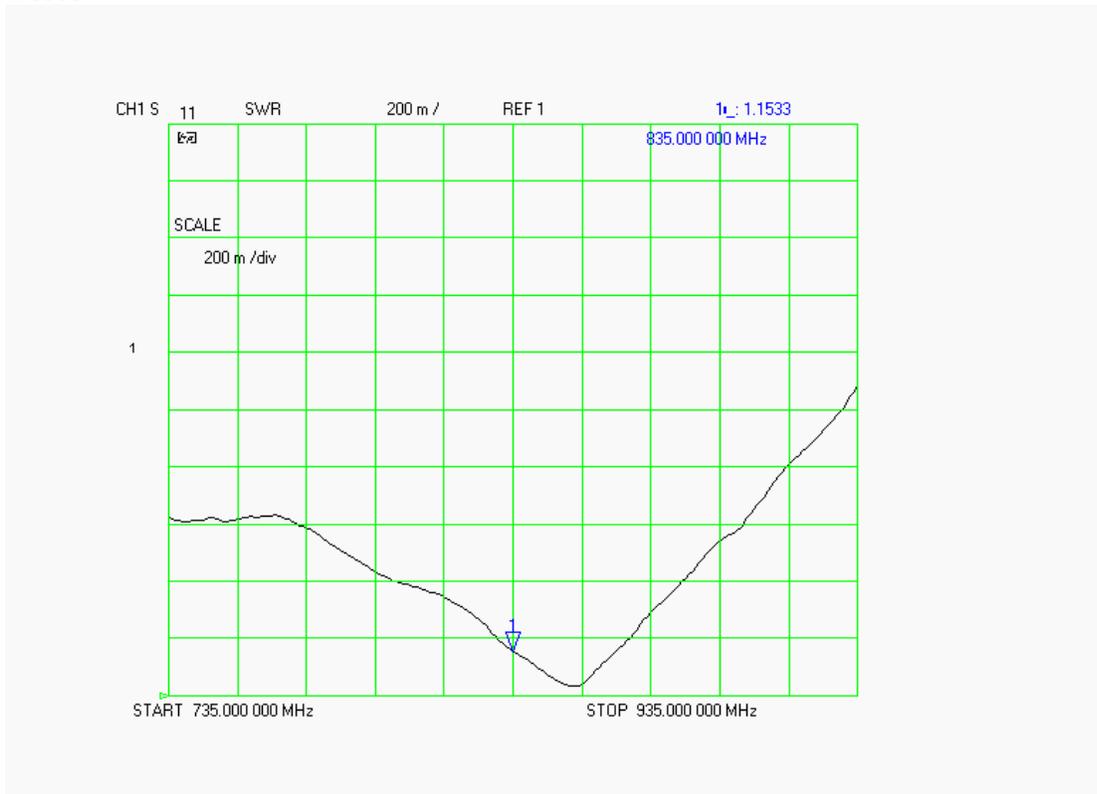

Smith Chart Dipole Impedance

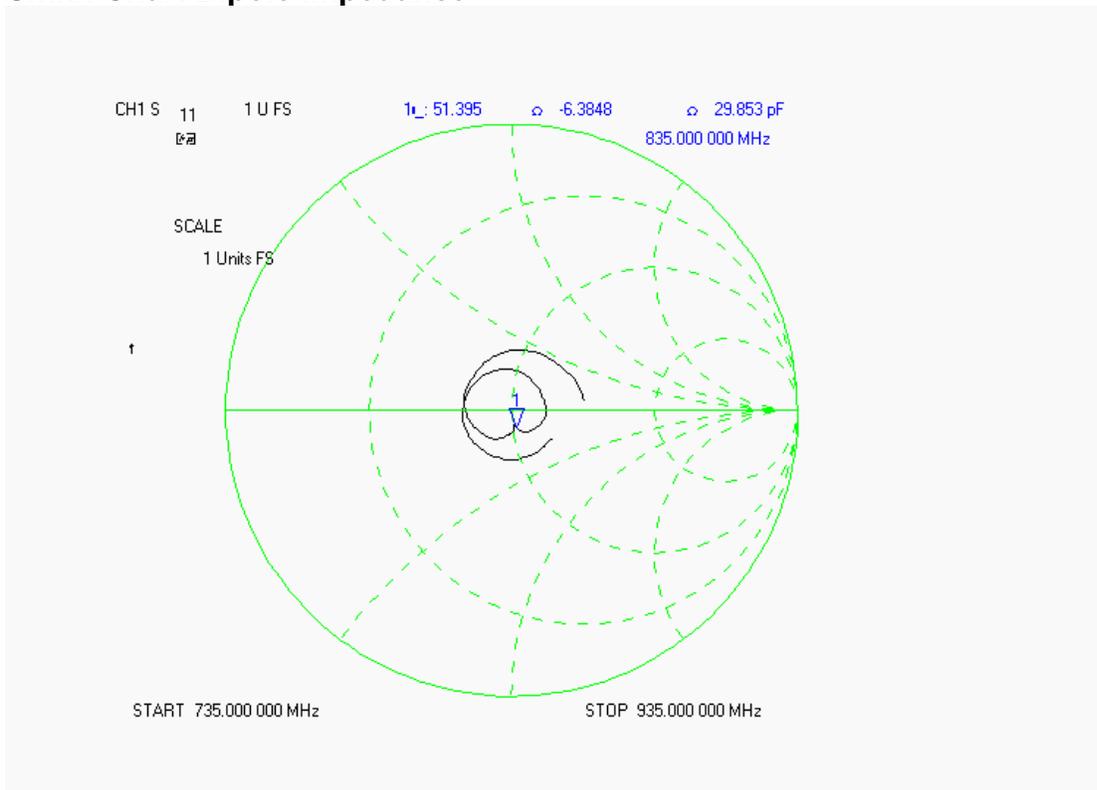

Test Equipment List

The test equipment used during Dipole Calibration, manufacturer, model number and, current calibration status are listed and located on the RF Exposure Lab, LLC system computer C:\Test Equipment\Calibration Equipment\Instrument List February 2008.

RF Exposure Lab, LLC

Calibration File No: CAL.20080202

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated at RF Exposure Lab, LLC by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole

Manufacturer: APREL Laboratories

Part Number: ALS-D-1900-S-2

Frequency: 1.9 GHz

Serial No: RFE-277

Manufactured: 20 February 2004
Calibrated: 21 February 2008

Calibrated By: Signature on File
Jay Moulton – Technical Manager

Approved By: Signature on File
Tamara Moulton – Quality Manager

Measurement Uncertainty:

Repeatability:	23%
Tissue Uncertainty:	3.2%
Network Analyzer:	25%



RF EXPOSURE LAB, LLC

2867 Progress Place, Suite 4D
Escondido, CA 92029

Tel: (760) 737-3131
FAX: (760) 737-9131

Calibration Results Summary

The following results relate to the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length: 68.0 mm
Height: 37.5 mm

Electrical Specifications

Head

SWR: 1.0793 U
Return Loss: -38.514 dB
Impedance: 49.063 Ω

System Validation Results

Frequency	1 Gram	10 Gram
1.9 GHz	39.380	20.270

Body

SWR: 1.1006 U
Return Loss: -41.682 dB
Impedance: 53.580 Ω

System Validation Results

Frequency	1 Gram	10 Gram
1.9 GHz	40.990	21.090

Head Measurement Conditions

The measurements were performed in the Uni-Phantom filled with head simulating liquid of the following electrical parameters at 1900 MHz:

Relative Dielectricity	39.97	± 5%
Conductivity	1.41 mho/m	± 5%

The APREL Laboratories ALSAS system with a dosimetric E-field probe E-020 (SN:217, Conversion factor 4.65 at 1900 MHz) was used for the measurements.

The dipole was mounted so that the dipole feed point was positioned below the center marking of the flat phantom and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from the dipole center to the solution surface.

The coarse grid with a grid spacing of 10mm was aligned with the dipole. The 5x5x8 fine cube was chosen for cube integration. The dipole input power (forward power) was 100mW ± 3%. The results are normalized to 1W input power.


The laboratories environmental conditions were as follows during the calibration sequence.

Ambient Temperature of the Laboratory:	23 °C ± 1.0 °C
Temperature of the Tissue:	20 °C ± 1.0 °C
Relative Humidity:	40%

SAR Measurement

Standard SAR measurements were performed according to the measurement conditions described above. The results have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR values measured with the dosimetric probe E-020 SN:217 and applying the advanced extrapolation are:

Averaged over 1 cm³ (1 g) of tissue: 39.380 mW/g ± 19.2% (k=2)¹
 Averaged over 10 cm³ (10 g) of tissue: 20.270 mW/g ± 18.8% (k=2)¹

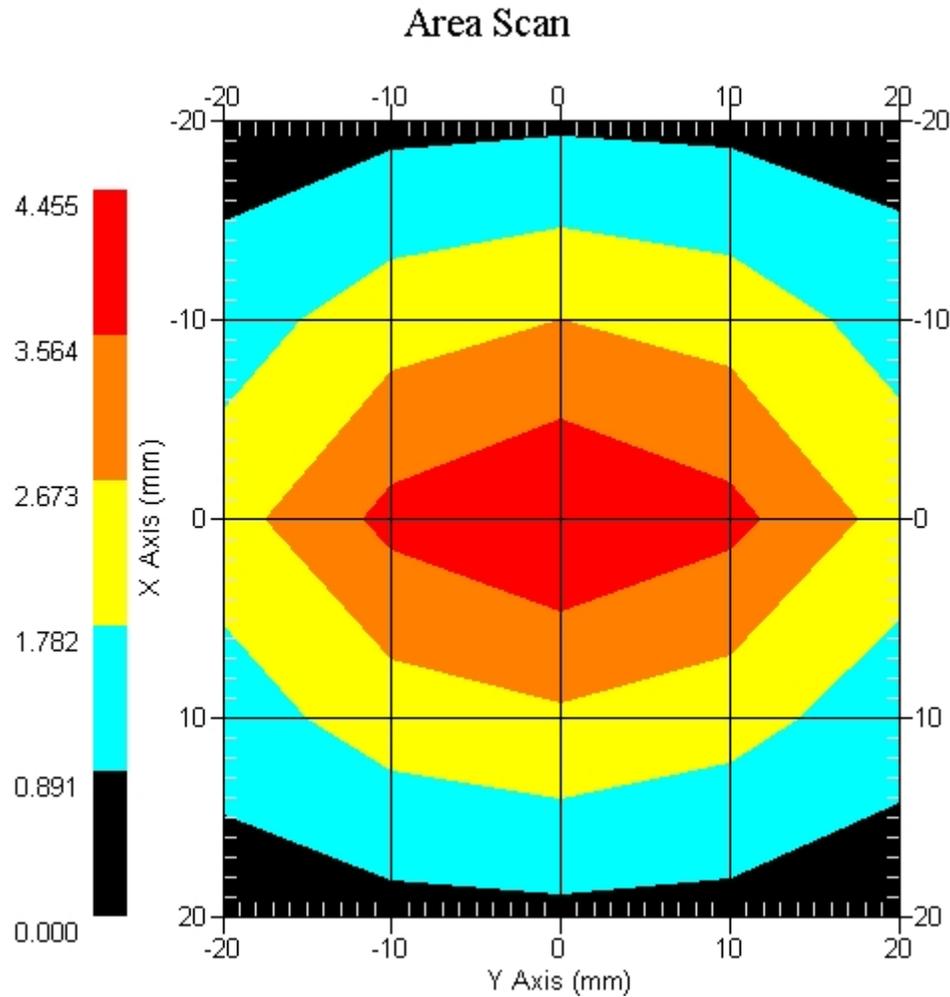

1 gram SAR value : 3.938 W/kg
 10 gram SAR value : 2.027 W/kg
 Area Scan Peak SAR : 4.455 W/kg
 Zoom Scan Peak SAR : 7.246 W/kg

¹ validation uncertainty


Dipole Impedance and Return Loss

The impedance was measured at the SMA connector with a network analyzer. The dipole was positioned at the flat phantom sections according to measurement conditions stated above during impedance measurements.


Test	Result
S11 R/L	-38.514 dB
SWR	1.0793 U
Impedance	49.063 Ω

The following graphs are the results as displayed on the Vector Network Analyzer.


S11 Parameter Return Loss

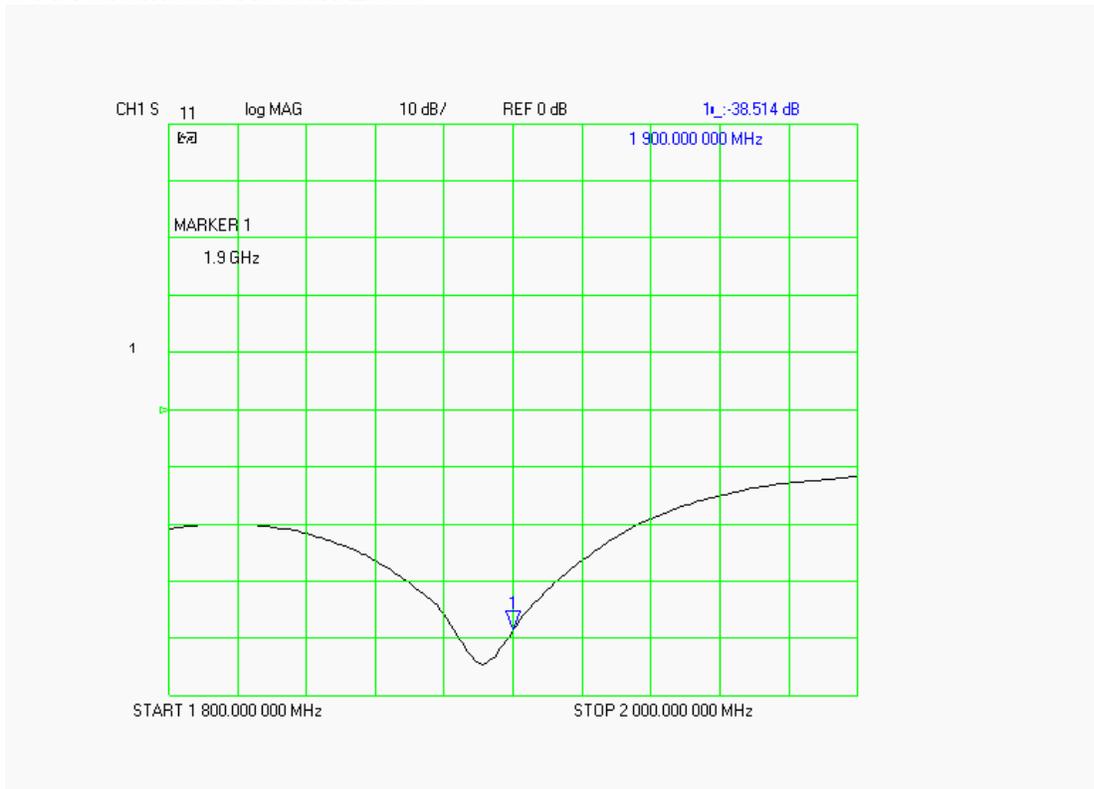

SWR

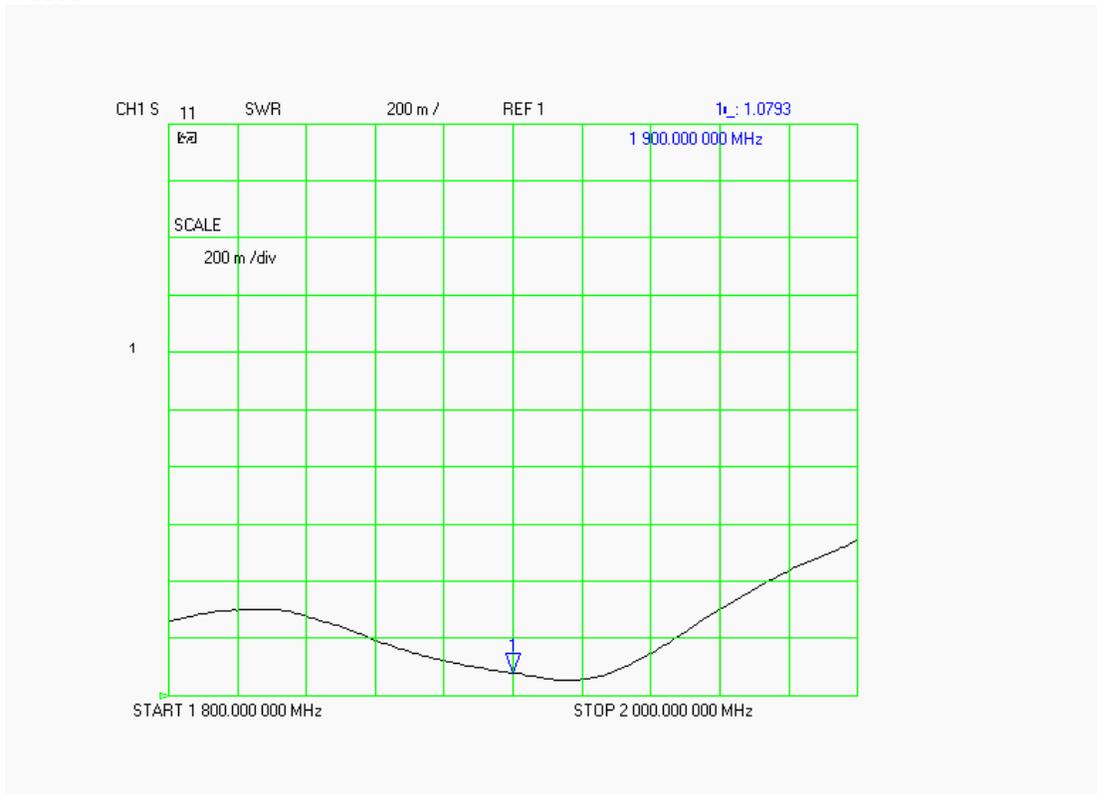

Smith Chart Dipole Impedance

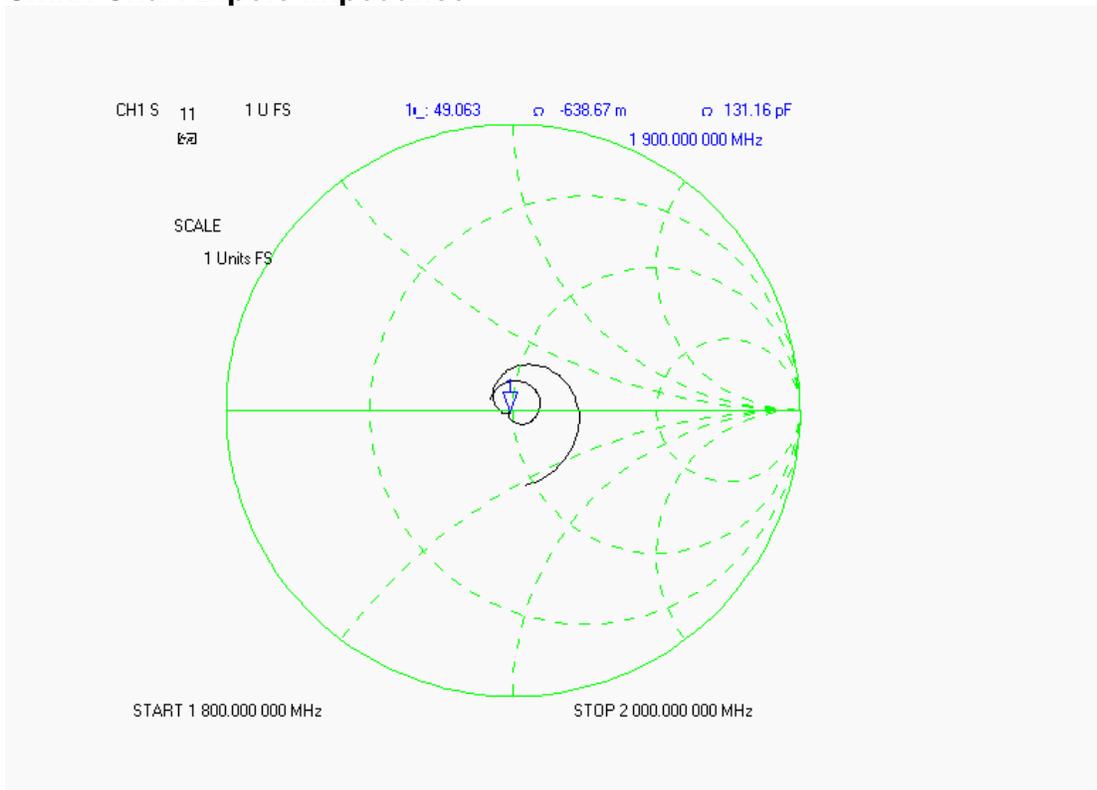

Body Measurement Conditions

The measurements were performed in the Uni-Phantom filled with body simulating liquid of the following electrical parameters at 1900 MHz:

Relative Dielectricity	53.27	± 5%
Conductivity	1.50 mho/m	± 5%

The APREL Laboratories ALSAS system with a dosimetric E-field probe E-020 (SN:217, Conversion factor 4.85 at 1900 MHz) was used for the measurements.

The dipole was mounted so that the dipole feed point was positioned below the center marking of the flat phantom and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from the dipole center to the solution surface.

The coarse grid with a grid spacing of 10mm was aligned with the dipole. The 5x5x8 fine cube was chosen for cube integration. The dipole input power (forward power) was 100mW ± 3%. The results are normalized to 1W input power.


The laboratories environmental conditions were as follows during the calibration sequence.

Ambient Temperature of the Laboratory:	23 °C ± 1.0 °C
Temperature of the Tissue:	20 °C ± 1.0 °C
Relative Humidity:	40%

SAR Measurement

Standard SAR measurements were performed according to the measurement conditions described above. The results have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR values measured with the dosimetric probe E-020 SN:217 and applying the advanced extrapolation are:

Averaged over 1 cm³ (1 g) of tissue: 40.990 mW/g ± 18.9% (k=2)¹
 Averaged over 10 cm³ (10 g) of tissue: 21.090 mW/g ± 18.5% (k=2)¹

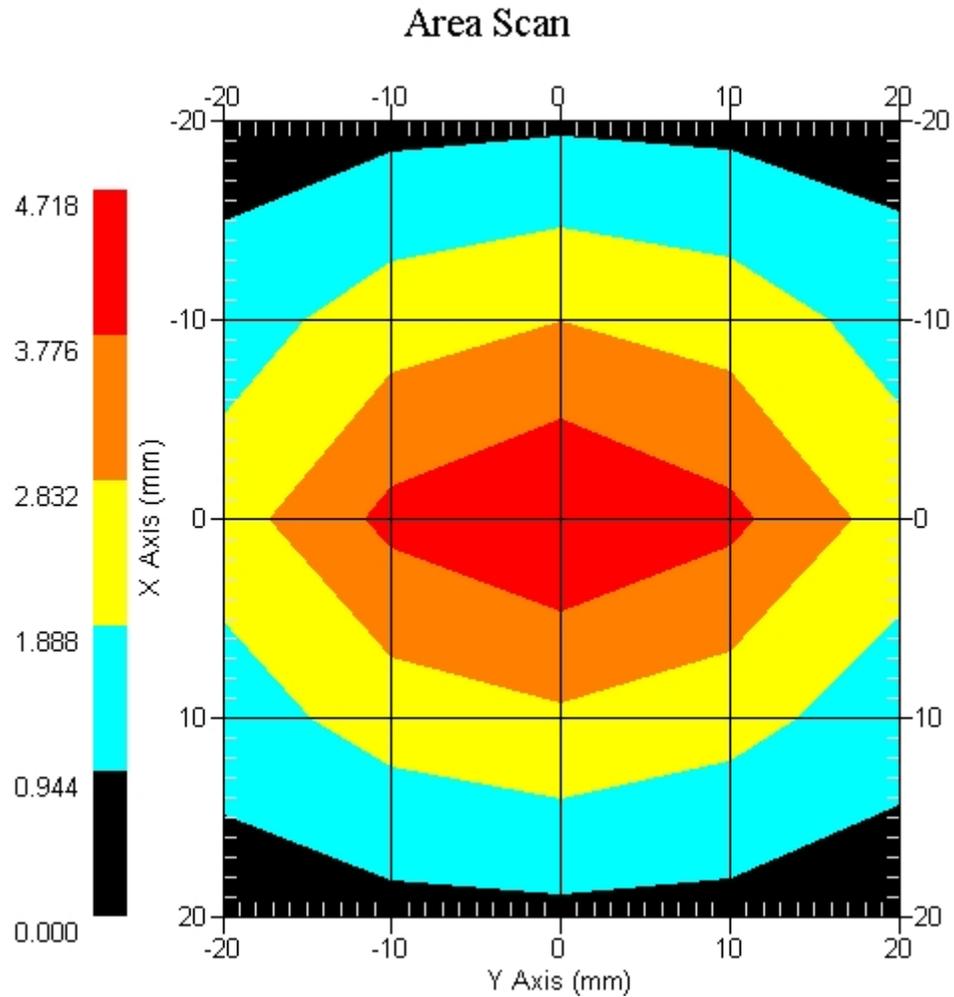

1 gram SAR value : 4.099 W/kg
 10 gram SAR value : 2.109 W/kg
 Area Scan Peak SAR : 4.718 W/kg
 Zoom Scan Peak SAR : 7.606 W/kg

¹ validation uncertainty


Dipole Impedance and Return Loss

The impedance was measured at the SMA connector with a network analyzer. The dipole was positioned at the flat phantom sections according to measurement conditions stated above during impedance measurements.


Test	Result
S11 R/L	-41.682 dB
SWR	1.1006 U
Impedance	53.580 Ω

The following graphs are the results as displayed on the Vector Network Analyzer.


S11 Parameter Return Loss

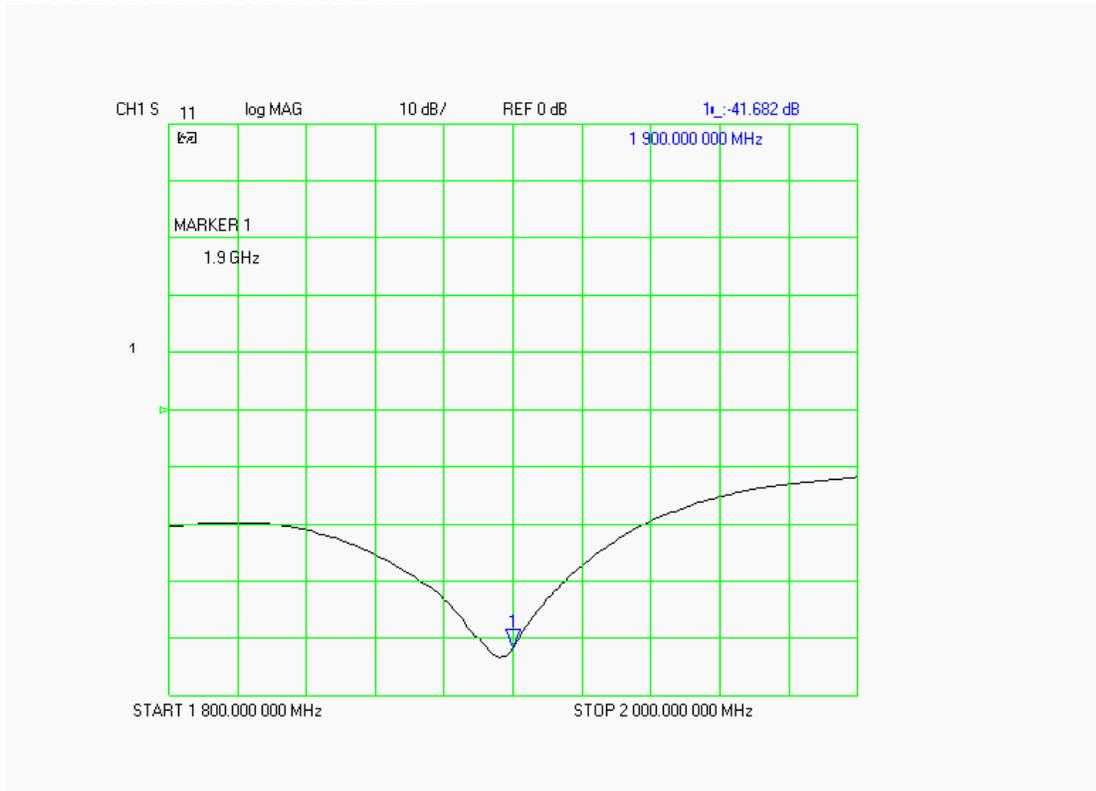

SWR

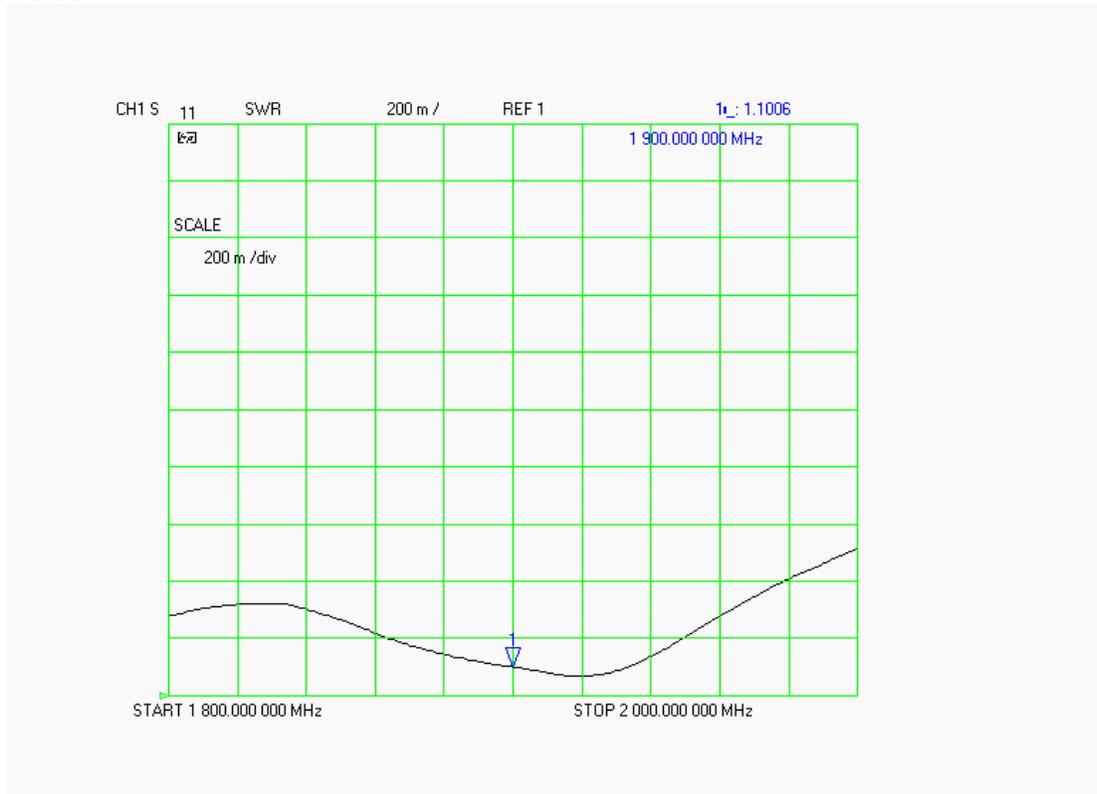

Smith Chart Dipole Impedance

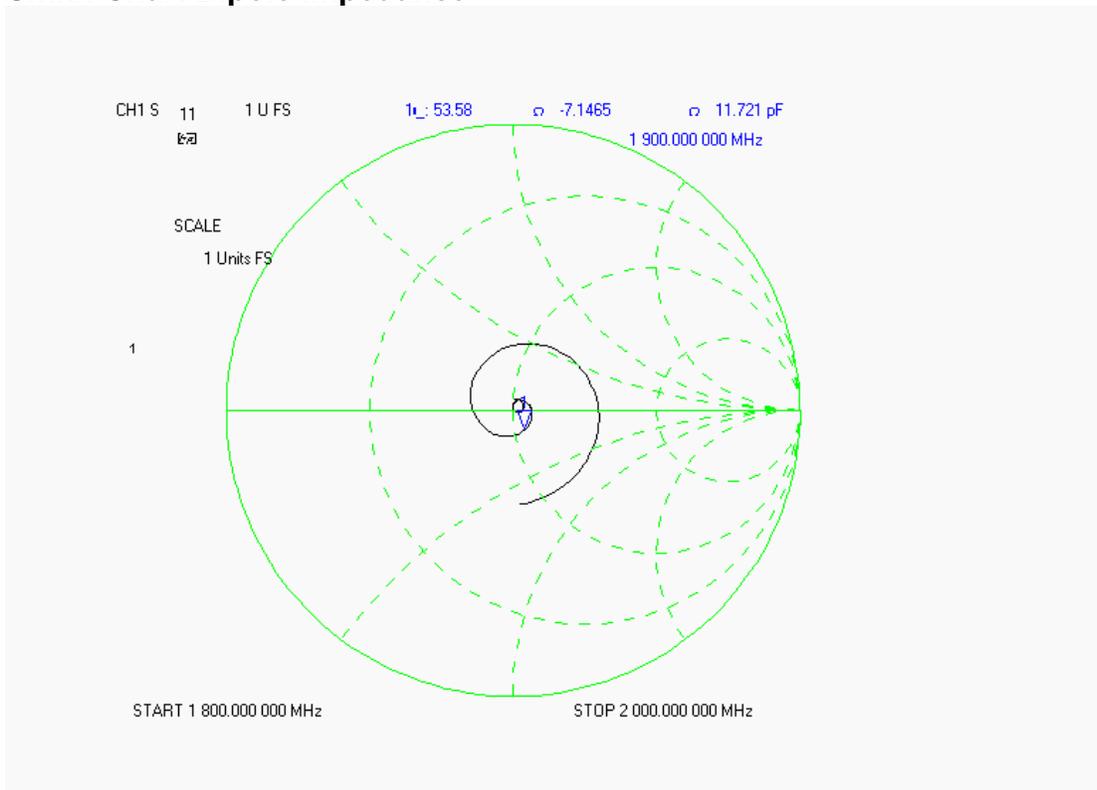

Test Equipment List

The test equipment used during Dipole Calibration, manufacturer, model number and, current calibration status are listed and located on the RF Exposure Lab, LLC system computer C:\Test Equipment\Calibration Equipment\Instrument List February 2008.

Appendix F – Phantom Calibration Data Sheets

NCL CALIBRATION LABORATORIES

Calibration File No.: RFE-273

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the **NCL CALIBRATION LABORATORIES** by qualified personnel following recognized procedures and using transfer standards traceable to National Standards.

Thickness of the UniPhantom is 2 mm \pm 10%
Pinna thickness is 6 mm \pm 10%

Resolution:	0.01 mm	Calibrated to:	0.0 mm
Stability:	OK	Accuracy:	< 0.1 mm

Calibrated By: Karen K. Feb 17/04.

NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161