




Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Vertical
------------	----------------	-----------------	------	------	----------

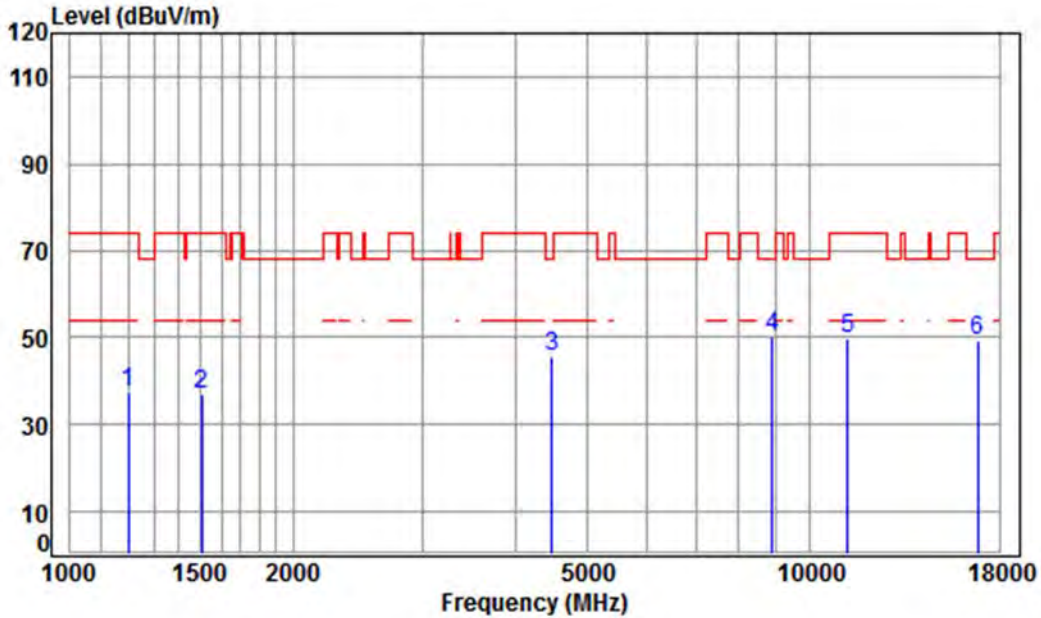


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5610 TX RSE
 : Ant 2 5G WIFI 11AC(80) CH122

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1199.726	4.42	24.48	41.18	49.73	37.45	74.00	-36.55 peak
2	1507.470	5.47	25.83	41.41	47.29	37.18	74.00	-36.82 peak
3	4482.150	7.54	33.60	42.41	47.12	45.85	68.20	-22.35 peak
4 pp	8891.725	10.37	36.47	38.78	42.06	50.12	68.20	-18.08 peak
5	11220.000	11.86	37.88	38.02	38.12	49.84	74.00	-24.16 peak
6	16830.000	15.97	42.77	40.14	30.58	49.18	68.20	-19.02 peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

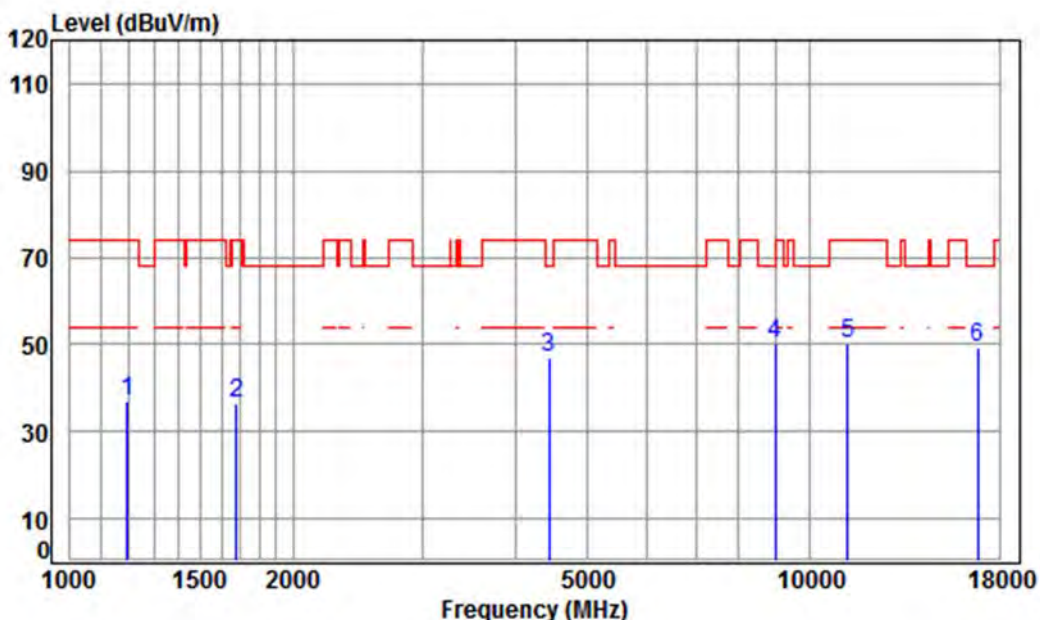

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5610 TX RSE

: Ant 2 5G WIFI 11AC(80) CH122

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	49.15	36.83	74.00	-37.17 peak
2	1677.621	5.25	26.58	41.52	46.34	36.65	74.00	-37.35 peak
3	4430.628	7.48	33.60	42.41	48.50	47.17	68.20	-21.03 peak
4 pp	8969.161	10.39	36.56	38.66	41.77	50.06	68.20	-18.14 peak
5	11220.000	11.86	37.88	38.02	38.69	50.41	74.00	-23.59 peak
6	16830.000	15.97	42.77	40.14	30.60	49.20	68.20	-19.00 peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Vertical
------------	----------------	-----------------	------	------	----------

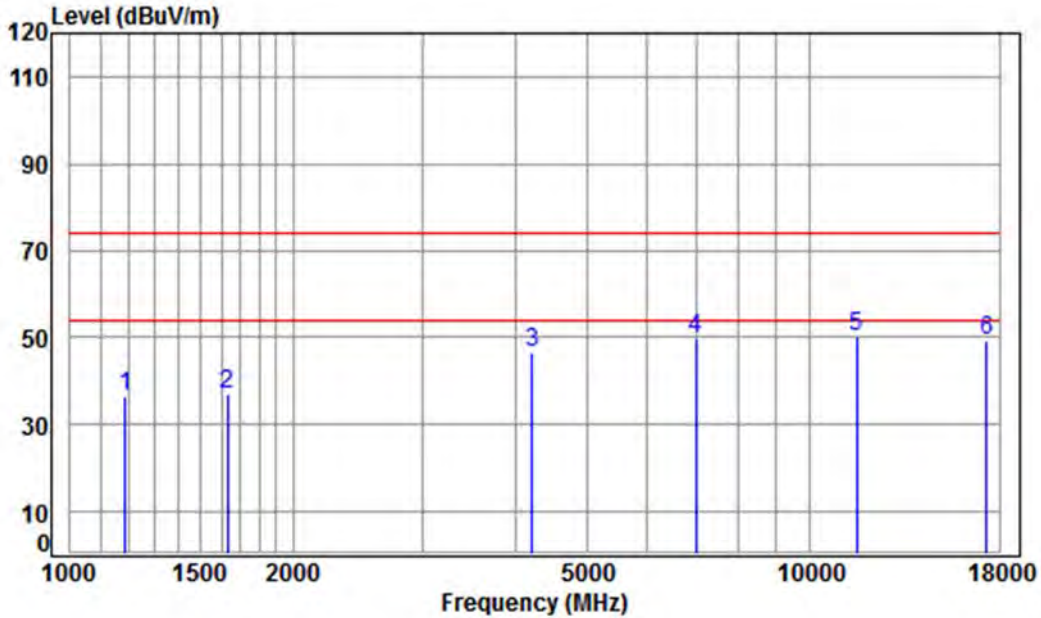

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5775 TX RSE

: Ant 2 5G WIFI 11AC(80) CH155

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	4.38	24.43	41.17	48.85	36.49	74.00	-37.51	peak
2	1634.543	5.31	26.40	41.49	46.73	36.95	74.00	-37.05	peak
3	4206.011	7.23	33.60	42.36	47.99	46.46	74.00	-27.54	peak
4	7015.420	10.13	36.49	40.84	44.18	49.96	74.00	-24.04	peak
5	pp11550.000	12.16	38.15	38.23	38.25	50.33	74.00	-23.67	peak
6	17325.000	15.98	43.19	40.55	30.63	49.25	74.00	-24.75	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 258 of 818

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

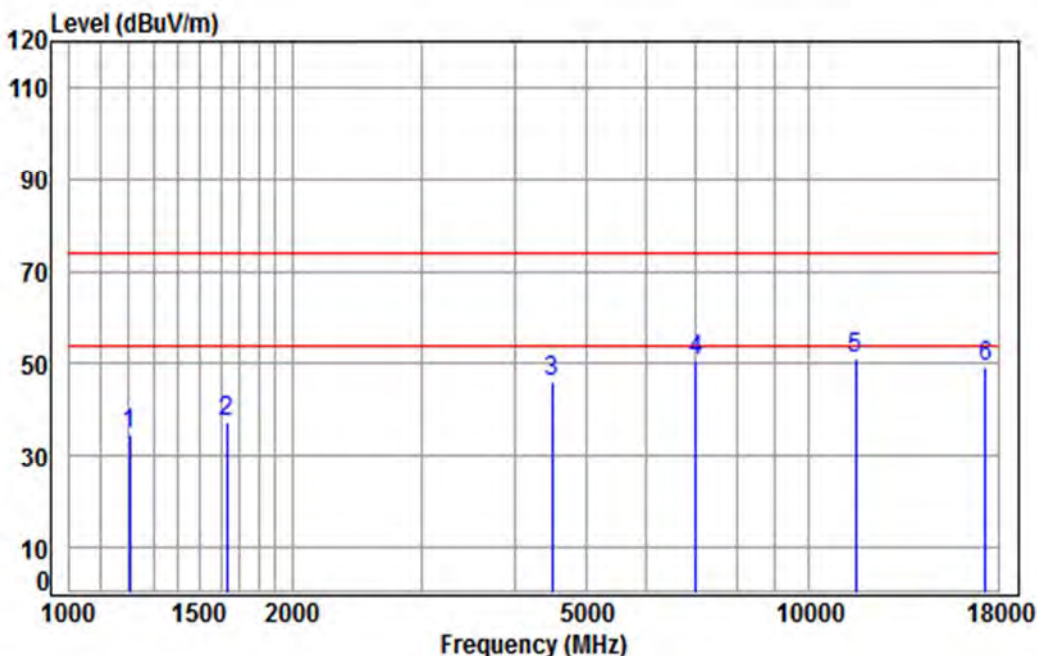

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5775 TX RSE

: Ant 2 5G WIFI 11AC(80) CH155


	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4.44	24.51	41.19	47.10	34.86	74.00	-39.14	peak
2	5.31	26.38	41.49	47.14	37.34	74.00	-36.66	peak
3	7.55	33.60	42.42	47.53	46.26	74.00	-27.74	peak
4	10.12	36.49	40.83	44.80	50.58	74.00	-23.42	peak
5	12.16	38.15	38.23	38.81	50.89	74.00	-23.11	peak
6	15.98	43.19	40.55	30.81	49.43	74.00	-24.57	peak



MIMO

Test plot as follows:

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	---------------	-----------------	------	------	----------

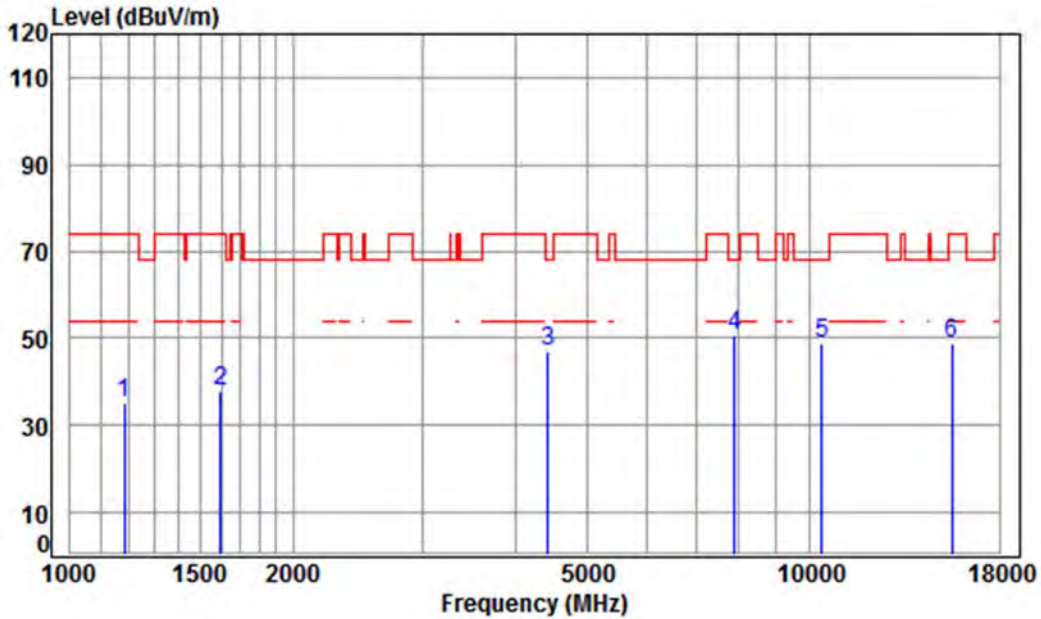

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5180 TX RSE

: Ant 1+2 5G WIFI 11N CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	4.36	24.41	41.17	47.65	35.25	74.00	-38.75	peak
2	1597.181	5.35	26.24	41.47	47.68	37.80	74.00	-36.20	peak
3	4417.841	7.47	33.60	42.40	48.12	46.79	68.20	-21.41	peak
4	pp 7898.049	9.96	36.54	40.26	44.46	50.70	68.20	-17.50	peak
5	10360.000	11.19	37.24	37.45	37.82	48.80	68.20	-19.40	peak
6	15540.000	14.30	41.38	39.00	31.96	48.64	74.00	-25.36	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 260 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

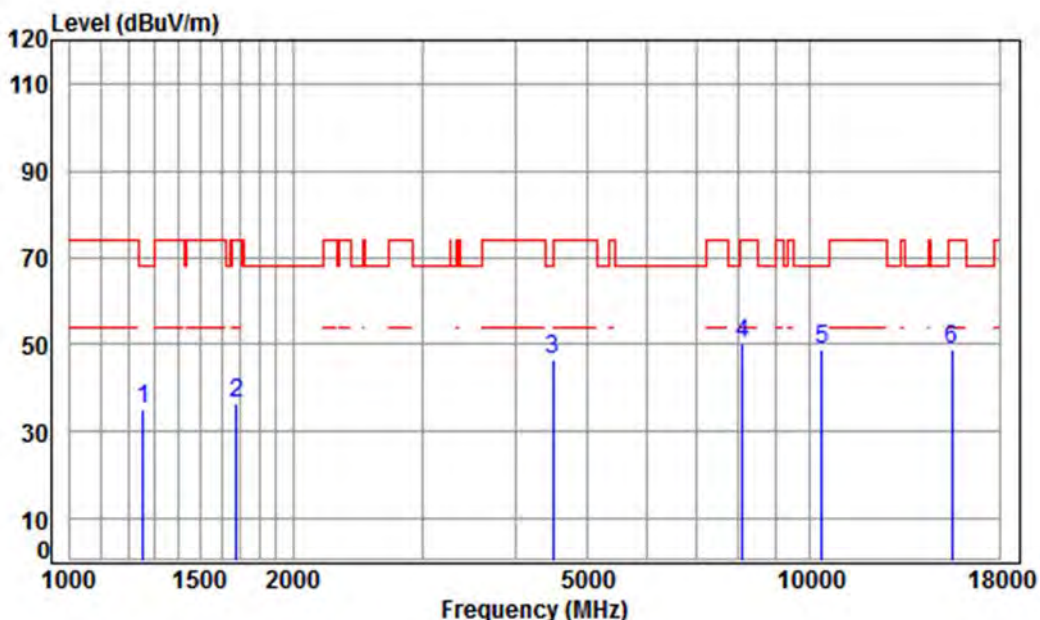


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5180 TX RSE
 : Ant 1+2 5G WIFI 11N CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.75	41.23	46.87	35.03	68.20	-33.17	peak
2	1677.621	5.25	26.58	41.52	46.33	36.64	74.00	-37.36	peak
3	4495.125	7.55	33.60	42.42	47.62	46.35	68.20	-21.85	peak
4	8106.200	10.02	36.47	40.02	43.58	50.05	74.00	-23.95	peak
5	pp10360.000	11.19	37.24	37.45	37.67	48.65	68.20	-19.55	peak
6	15540.000	14.30	41.38	39.00	32.21	48.89	74.00	-25.11	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5220	Peak	Vertical
------------	---------------	-----------------	------	------	----------

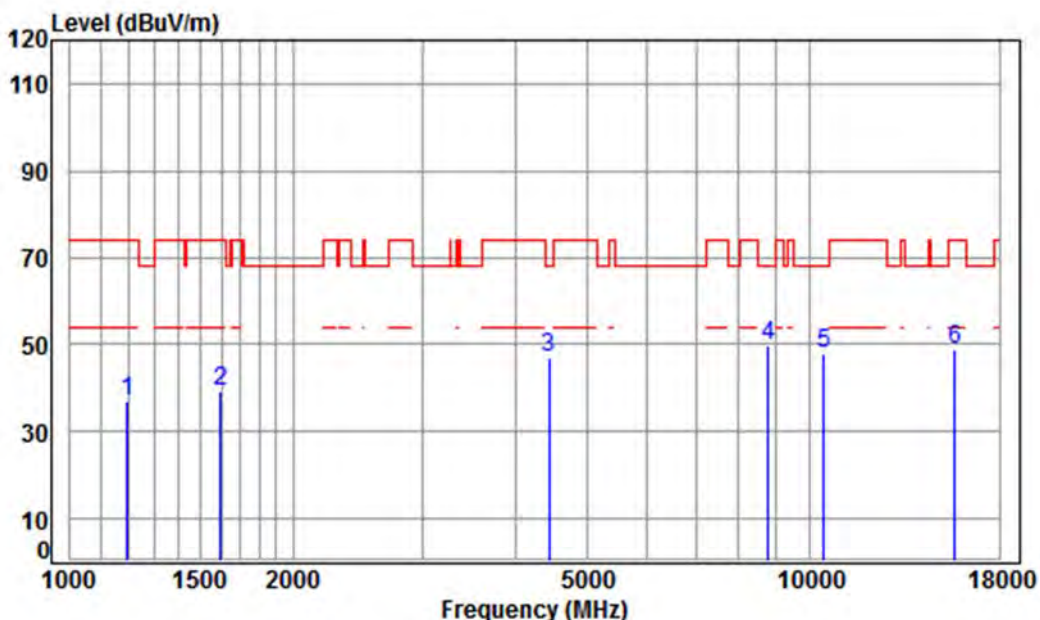

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5220 TX RSE
 : Ant 1+2 5G WIFI 11N CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	49.43	37.11	74.00	-36.89 peak
2	1597.181	5.35	26.24	41.47	48.99	39.11	74.00	-34.89 peak
3	4430.628	7.48	33.60	42.41	48.18	46.85	68.20	-21.35 peak
4 pp	8764.146	10.34	36.32	38.97	42.19	49.88	68.20	-18.32 peak
5	10440.000	11.25	37.16	37.51	37.22	48.12	68.20	-20.08 peak
6	15660.000	14.48	41.34	39.11	32.16	48.87	74.00	-25.13 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 262 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5220	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

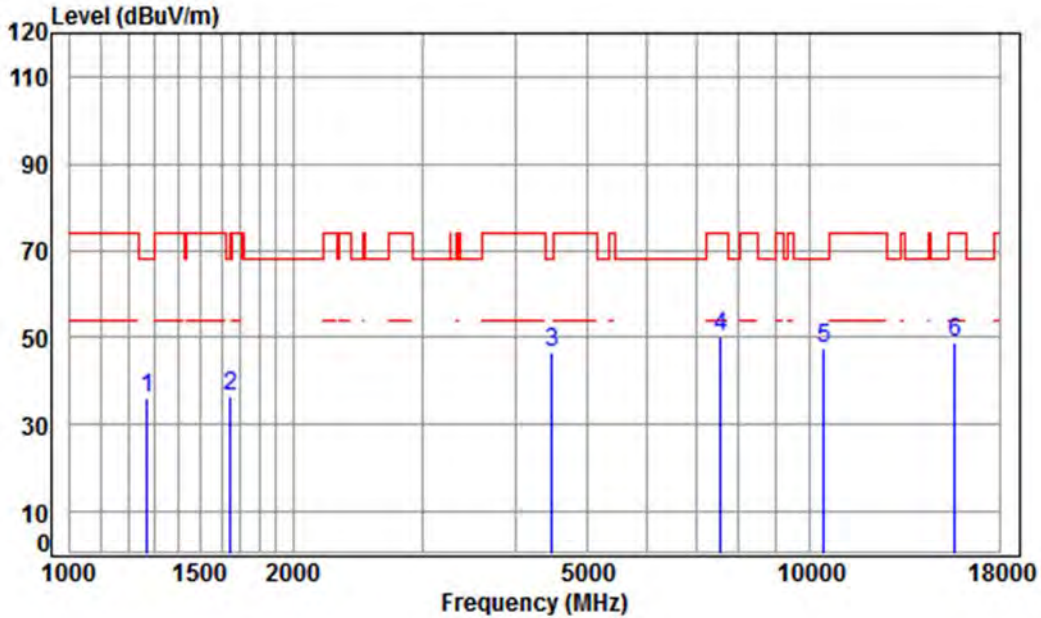

Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5220 TX RSE
 : Ant 1+2 5G WIFI 11N CH44

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	47.77	36.04	68.20	-32.16	peak
2	1648.778	5.29	26.46	41.50	46.34	36.59	68.20	-31.61	peak
3	4482.150	7.54	33.60	42.41	47.86	46.59	68.20	-21.61	peak
4	7562.942	9.99	36.34	40.47	44.35	50.21	74.00	-23.79	peak
5	pp10440.000	11.25	37.16	37.51	36.70	47.60	68.20	-20.60	peak
6	15660.000	14.48	41.34	39.11	32.27	48.98	74.00	-25.02	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 263 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	---------------	-----------------	------	------	----------

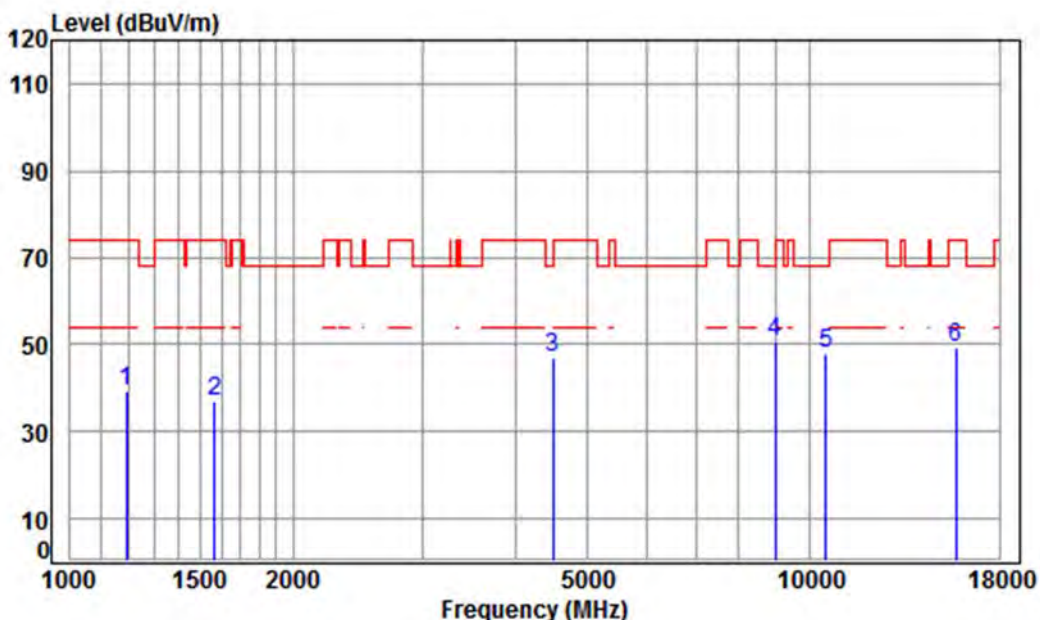

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5240 TX RSE
 : Ant 1+2 5G WIFI 11N CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	4.39	24.44	41.18	51.62	39.27	74.00	-34.73	peak
2	1569.721	5.39	26.12	41.45	46.85	36.91	74.00	-37.09	peak
3	4495.125	7.55	33.60	42.42	48.07	46.80	68.20	-21.40	peak
4	pp 8969.161	10.39	36.56	38.66	42.56	50.85	68.20	-17.35	peak
5	10480.000	11.28	37.12	37.53	37.26	48.13	68.20	-20.07	peak
6	15720.000	14.57	41.31	39.17	32.61	49.32	74.00	-24.68	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 264 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

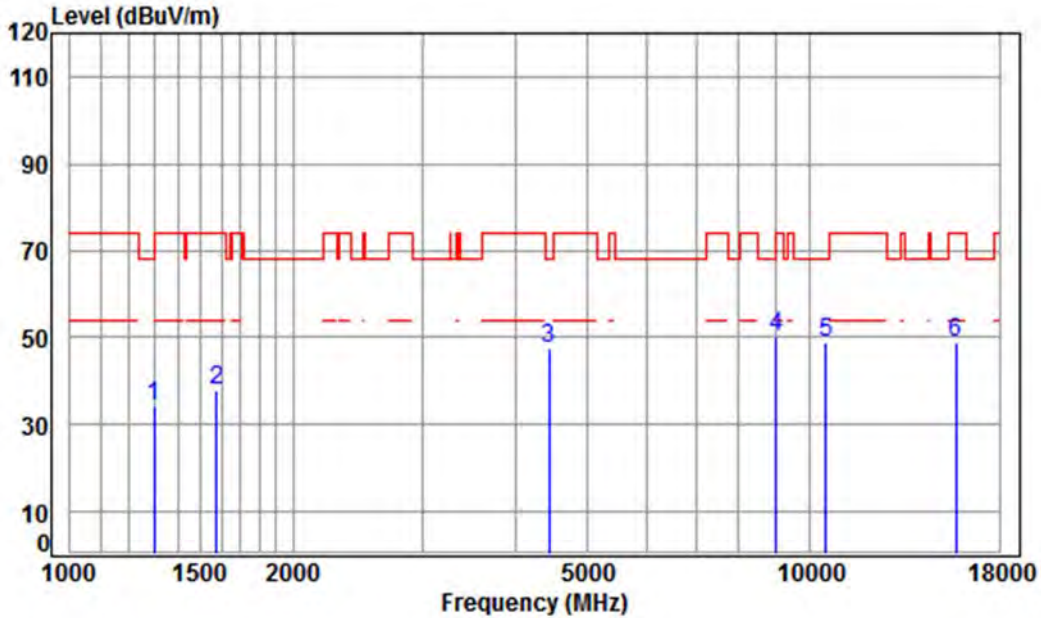

Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5240 TX RSE
 : Ant 1+2 5G WIFI 11N CH48

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	4.79	24.94	41.26	45.71	34.18	68.20	-34.02 peak
2	1578.822	5.38	26.16	41.46	47.69	37.77	74.00	-36.23 peak
3	4430.628	7.48	33.60	42.41	48.72	47.39	68.20	-20.81 peak
4 pp	8995.123	10.40	36.59	38.62	41.78	50.15	68.20	-18.05 peak
5	10480.000	11.28	37.12	37.53	38.13	49.00	68.20	-19.20 peak
6	15720.000	14.57	41.31	39.17	32.17	48.88	74.00	-25.12 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 265 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	---------------	-----------------	------	------	----------

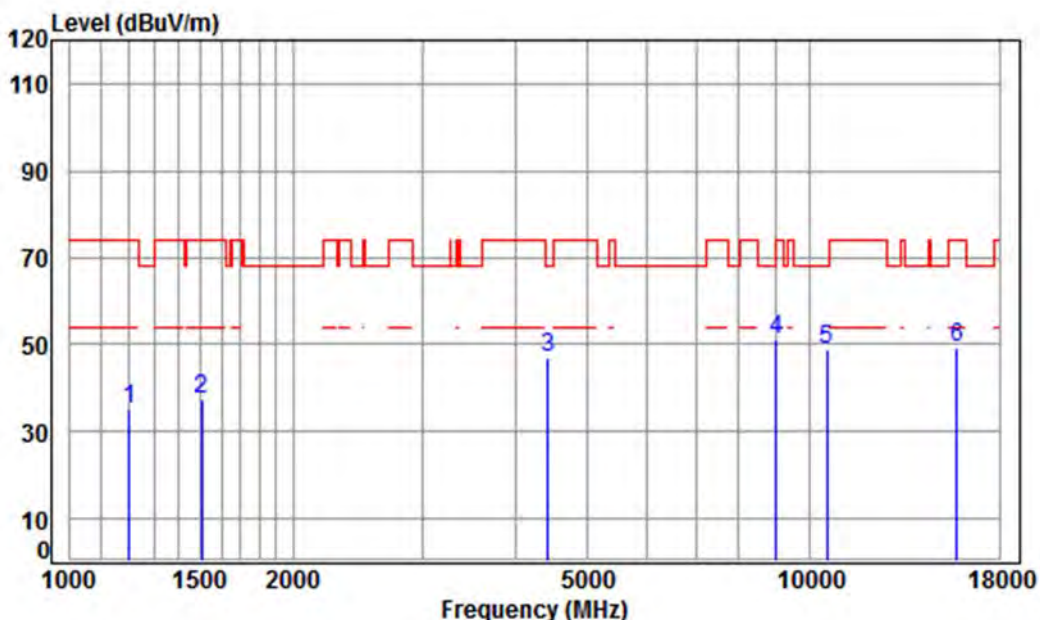

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5260 TX RSE
 : Ant 1+2 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	47.19	34.92	74.00	-39.08 peak
2	1507.470	5.47	25.83	41.41	47.36	37.25	74.00	-36.75 peak
3	4417.841	7.47	33.60	42.40	48.25	46.92	68.20	-21.28 peak
4 pp	8995.123	10.40	36.59	38.62	42.77	51.14	68.20	-17.06 peak
5	10520.000	11.30	37.12	37.56	37.80	48.66	68.20	-19.54 peak
6	15780.000	14.66	41.29	39.22	32.57	49.30	74.00	-24.70 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 266 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

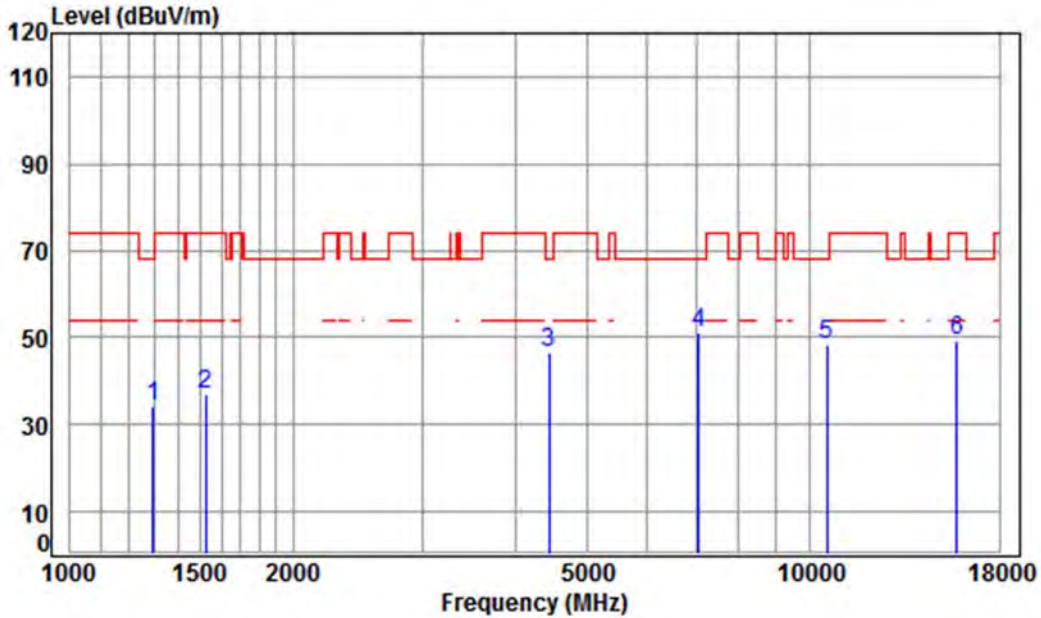


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5260 TX RSE
 : Ant 1+2 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1293.359	4.77	24.92	41.26	45.80	34.23	68.20	-33.97 peak
2	1525.000	5.45	25.91	41.42	47.20	37.14	74.00	-36.86 peak
3	4430.628	7.48	33.60	42.41	47.94	46.61	68.20	-21.59 peak
4 pp	7076.516	10.11	36.47	40.80	45.55	51.33	68.20	-16.87 peak
5	10520.000	11.30	37.12	37.56	37.47	48.33	68.20	-19.87 peak
6	15780.000	14.66	41.29	39.22	32.44	49.17	74.00	-24.83 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5300	Peak	Vertical
------------	---------------	-----------------	------	------	----------

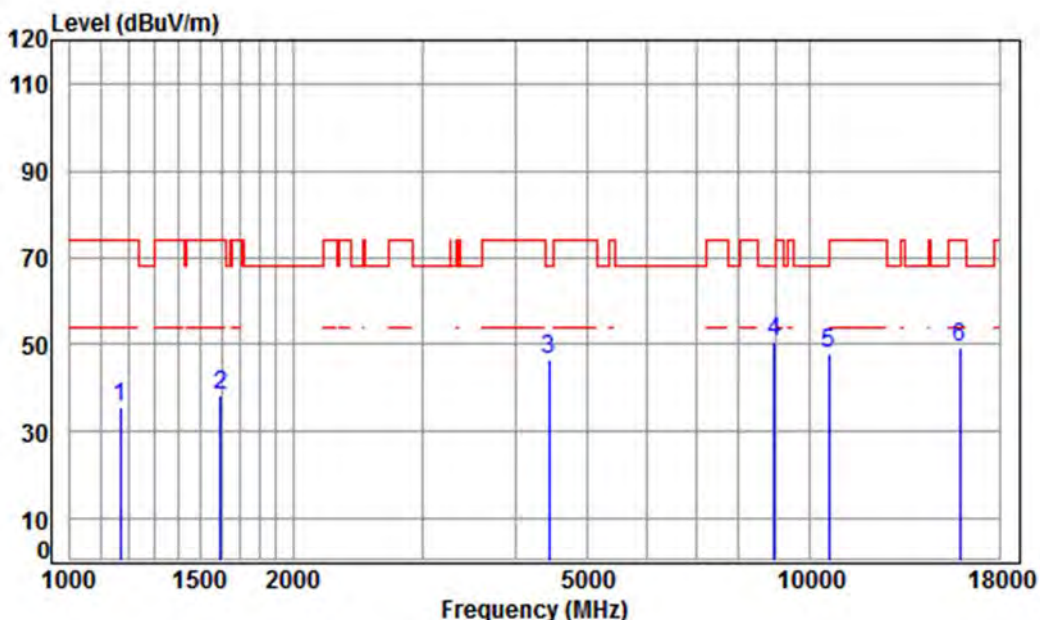


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5300 TX RSE
 : Ant 1+2 5G WIFI 11N CH60

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1168.920	4.29	24.32	41.16	47.98	35.43	74.00	-38.57	peak
2	1597.181	5.35	26.24	41.47	47.99	38.11	74.00	-35.89	peak
3	4430.628	7.48	33.60	42.41	47.82	46.49	68.20	-21.71	peak
4	pp 8943.274	10.39	36.53	38.70	42.22	50.44	68.20	-17.76	peak
5	10600.000	11.36	37.22	37.62	37.01	47.97	68.20	-20.23	peak
6	15900.000	14.84	41.24	39.33	32.67	49.42	74.00	-24.58	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5300	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

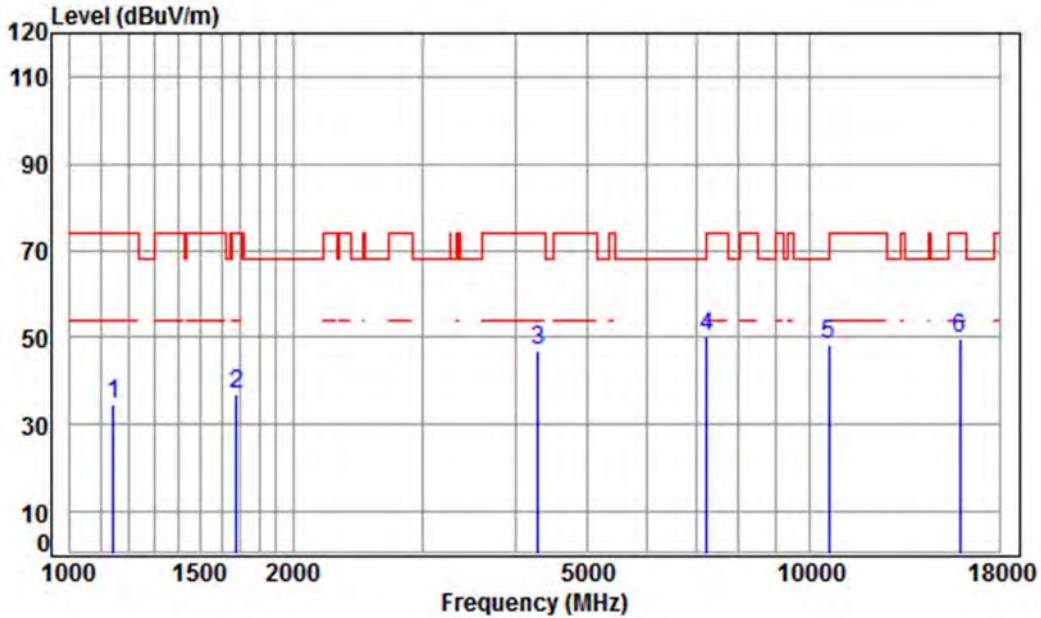


Condition: 3m HORIZONTAL
Job No : 2939RG
Mode : 5300 TX RSE
: Ant 1+2 5G WIFI 11N CH60

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	47.61	34.87	74.00	-39.13	peak
2	1677.621	5.25	26.58	41.52	46.68	36.99	74.00	-37.01	peak
3	4291.977	7.33	33.60	42.38	48.28	46.83	74.00	-27.17	peak
4	pp 7242.052	10.07	36.40	40.69	44.57	50.35	68.20	-17.85	peak
5	10600.000	11.36	37.22	37.62	37.48	48.44	68.20	-19.76	peak
6	15900.000	14.84	41.24	39.33	33.10	49.85	74.00	-24.15	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	---------------	-----------------	------	------	----------

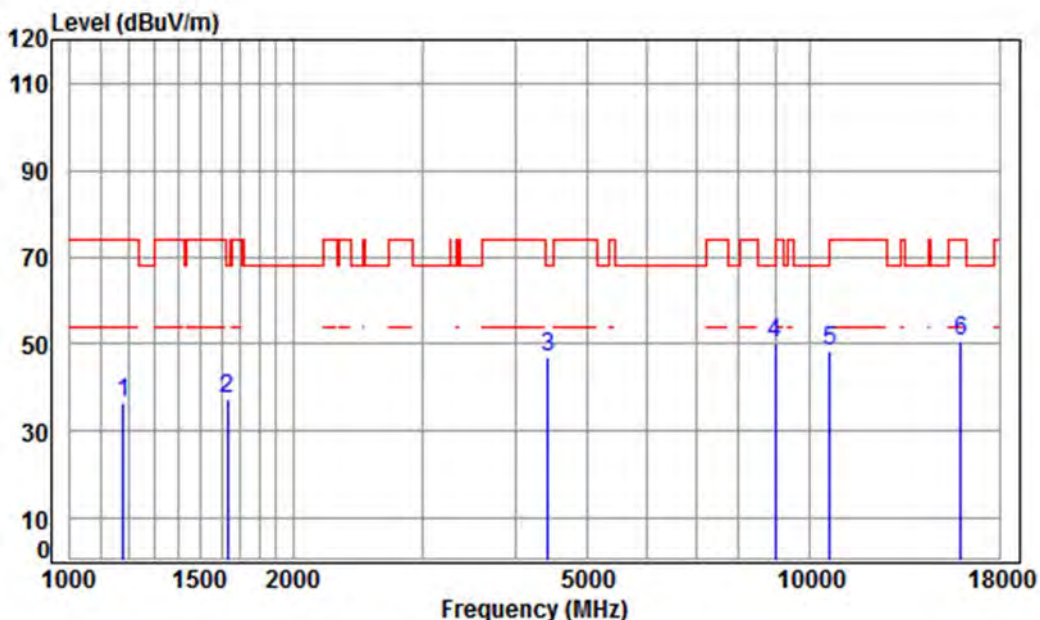


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5320 TX RSE
 : Ant 1+2 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1179.100	4.33	24.38	41.16	48.82	36.37	74.00	-37.63	peak
2	1634.543	5.31	26.40	41.49	47.08	37.30	68.20	-30.90	peak
3	4417.841	7.47	33.60	42.40	48.29	46.96	68.20	-21.24	peak
4 pp	8969.161	10.39	36.56	38.66	41.68	49.97	68.20	-18.23	peak
5	10640.000	11.39	37.27	37.64	37.24	48.26	74.00	-25.74	peak
6	15960.000	14.93	41.22	39.38	33.98	50.75	74.00	-23.25	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

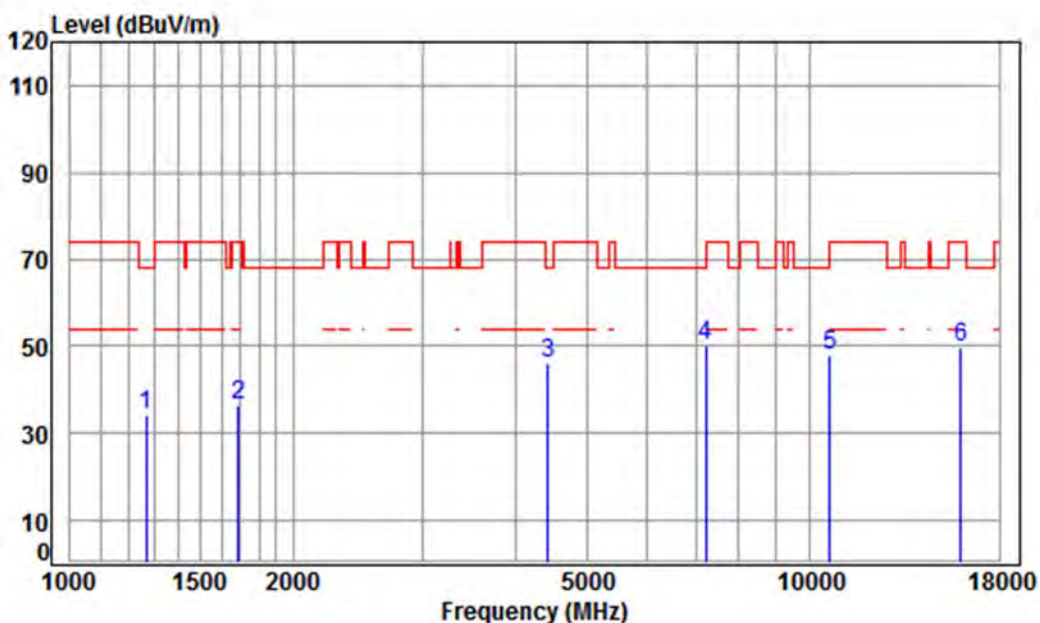

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5320 TX RSE

: Ant 1+2 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	45.85	34.09	68.20	-34.11	peak
2	1687.347	5.24	26.62	41.52	45.99	36.33	74.00	-37.67	peak
3	4417.841	7.47	33.60	42.40	47.63	46.30	68.20	-21.90	peak
4 pp	7221.150	10.07	36.41	40.70	44.31	50.09	68.20	-18.11	peak
5	10640.000	11.39	37.27	37.64	36.86	47.88	74.00	-26.12	peak
6	15960.000	14.93	41.22	39.38	32.96	49.73	74.00	-24.27	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	---------------	-----------------	------	------	----------

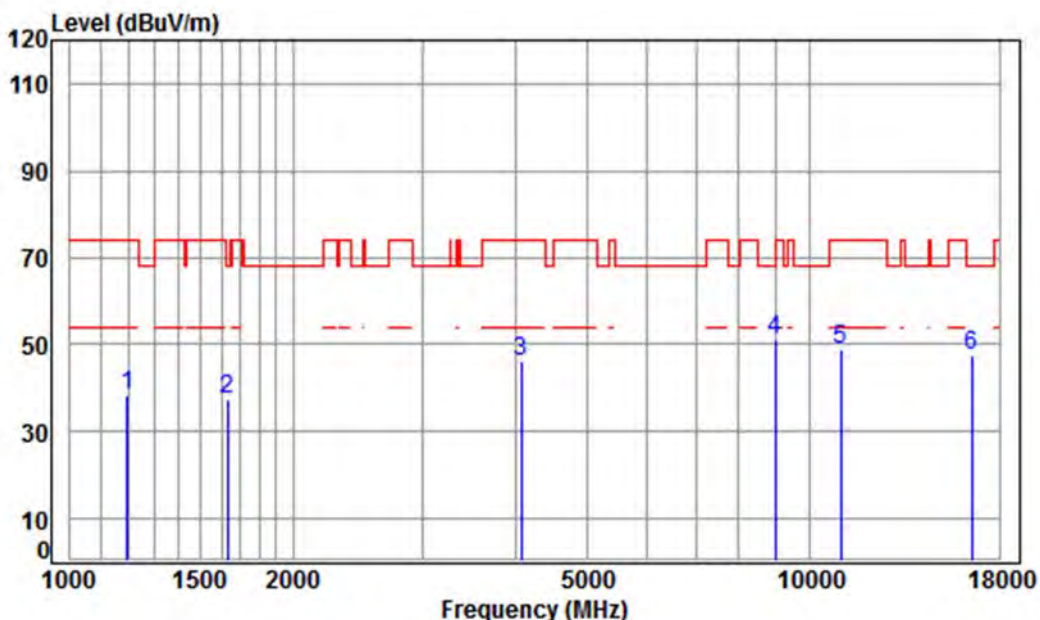

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5500 TX RSE
 : Ant 1+2 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	50.63	38.31	74.00	-35.69	peak
2	1634.543	5.31	26.40	41.49	47.19	37.41	68.20	-30.79	peak
3	4074.388	7.07	33.60	42.34	47.96	46.29	74.00	-27.71	peak
4	pp 8969.161	10.39	36.56	38.66	42.89	51.18	68.20	-17.02	peak
5	11000.000	11.63	37.70	37.88	37.22	48.67	74.00	-25.33	peak
6	16500.000	14.50	42.70	39.86	30.31	47.65	68.20	-20.55	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 272 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

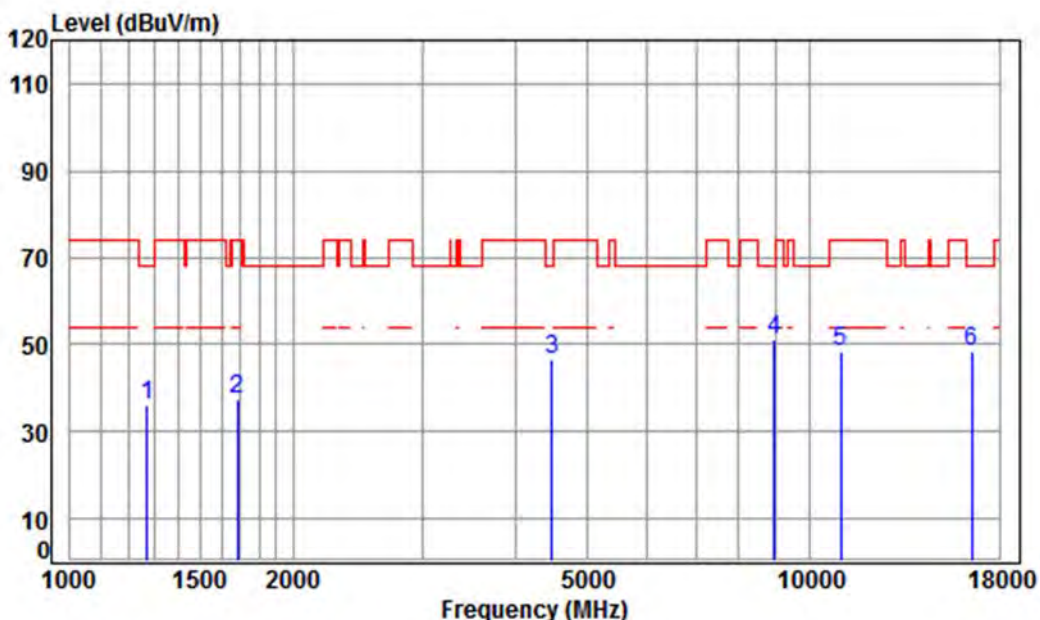

Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5500 TX RSE
 : Ant 1+2 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	
1	1271.123	4.69	24.82	41.24	47.61	35.88	68.20	-32.32 peak
2	1682.477	5.25	26.60	41.52	47.11	37.44	74.00	-36.56 peak
3	4482.150	7.54	33.60	42.41	47.81	46.54	68.20	-21.66 peak
4 pp	8943.274	10.39	36.53	38.70	42.95	51.17	68.20	-17.03 peak
5	11000.000	11.63	37.70	37.88	36.89	48.34	74.00	-25.66 peak
6	16500.000	14.50	42.70	39.86	31.00	48.34	68.20	-19.86 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 273 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5580	Peak	Vertical
------------	---------------	-----------------	------	------	----------

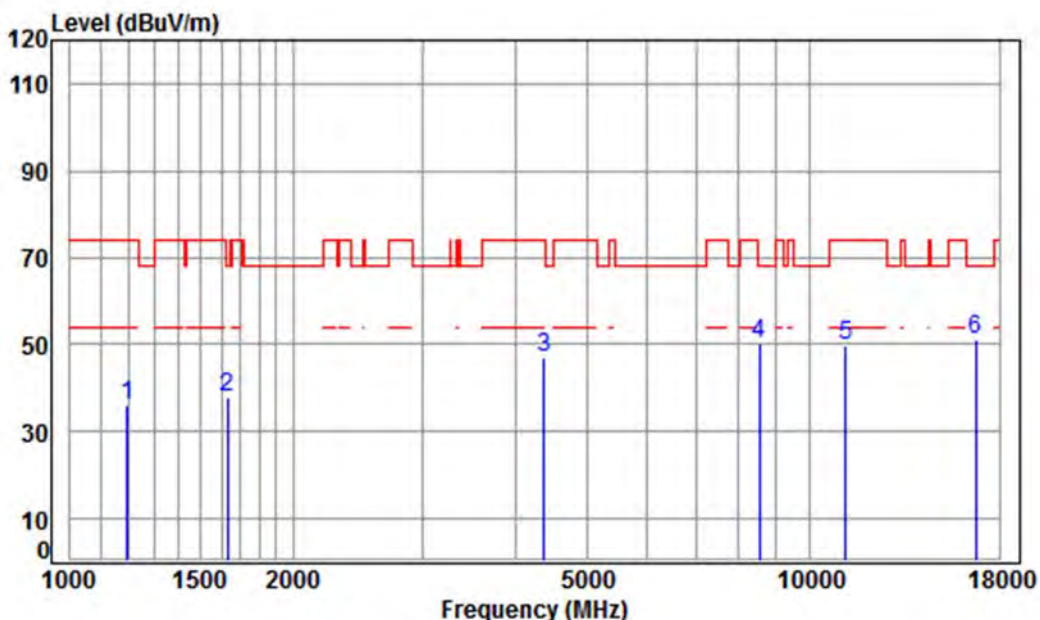


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5580 TX RSE
 : Ant 1+2 5G WIFI 11N CH116

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	48.30	35.98	74.00	-38.02 peak
2	1629.825	5.31	26.38	41.49	47.58	37.78	68.20	-30.42 peak
3	4367.058	7.41	33.60	42.39	48.46	47.08	74.00	-26.92 peak
4	8539.102	10.28	36.05	39.32	43.03	50.04	68.20	-18.16 peak
5	11160.000	11.80	37.83	37.98	38.07	49.72	74.00	-24.28 peak
6	pp16740.000	15.57	42.75	40.07	32.65	50.90	68.20	-17.30 peak

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Test mode:	802.11n(HT20)	Frequency(MHz):	5580	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

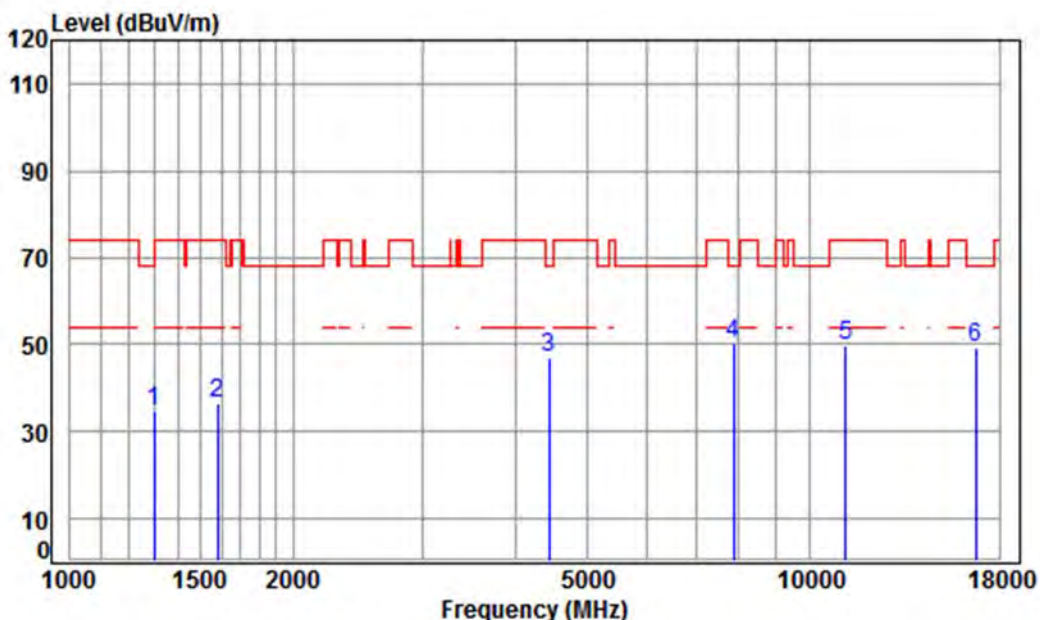


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5580 TX RSE
 : Ant 1+2 5G WIFI 11N CH116

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1297.103	4.79	24.94	41.26	46.03	34.50	68.20	-33.70 peak
2	1583.392	5.37	26.18	41.46	46.53	36.62	74.00	-37.38 peak
3	4430.628	7.48	33.60	42.41	48.46	47.13	68.20	-21.07 peak
4 pp	7875.254	9.96	36.53	40.28	44.20	50.41	68.20	-17.79 peak
5	11160.000	11.80	37.83	37.98	38.18	49.83	74.00	-24.17 peak
6	16740.000	15.57	42.75	40.07	31.12	49.37	68.20	-18.83 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	---------------	-----------------	------	------	----------

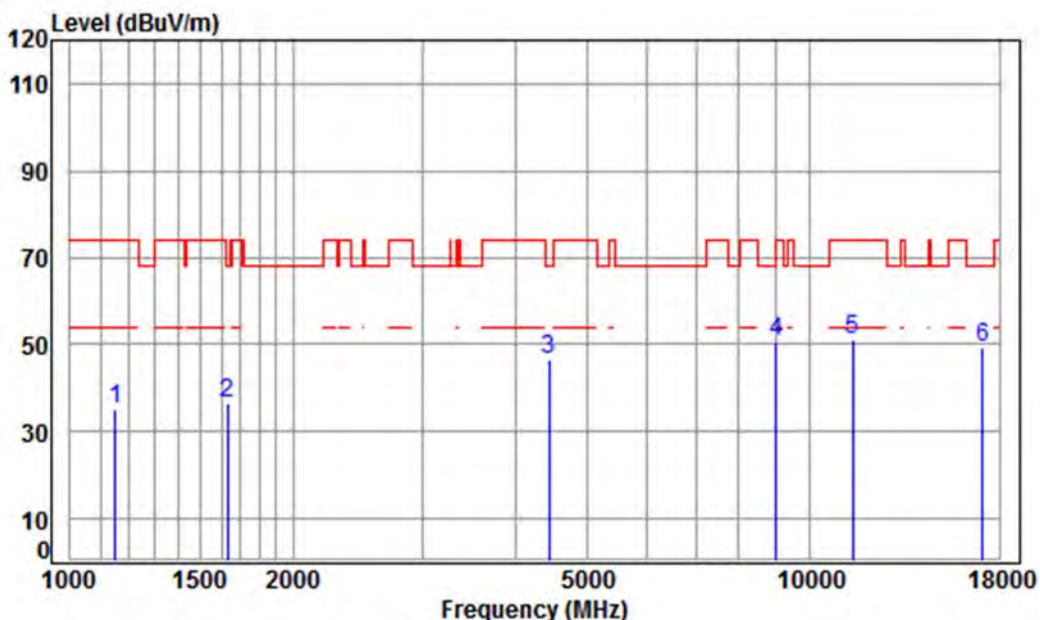

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5700 TX RSE

: Ant 1+2 5G WIFI 11N CH140

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1152.148	4.22	24.24	41.14	47.89	35.21	74.00	-38.79 peak
2	1629.825	5.31	26.38	41.49	46.49	36.69	68.20	-31.51 peak
3	4430.628	7.48	33.60	42.41	48.08	46.75	68.20	-21.45 peak
4	pp 8995.123	10.40	36.59	38.62	42.43	50.80	68.20	-17.40 peak
5	11400.000	12.04	38.02	38.13	39.08	51.01	74.00	-22.99 peak
6	17100.000	16.49	42.92	40.37	30.45	49.49	68.20	-18.71 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 276 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

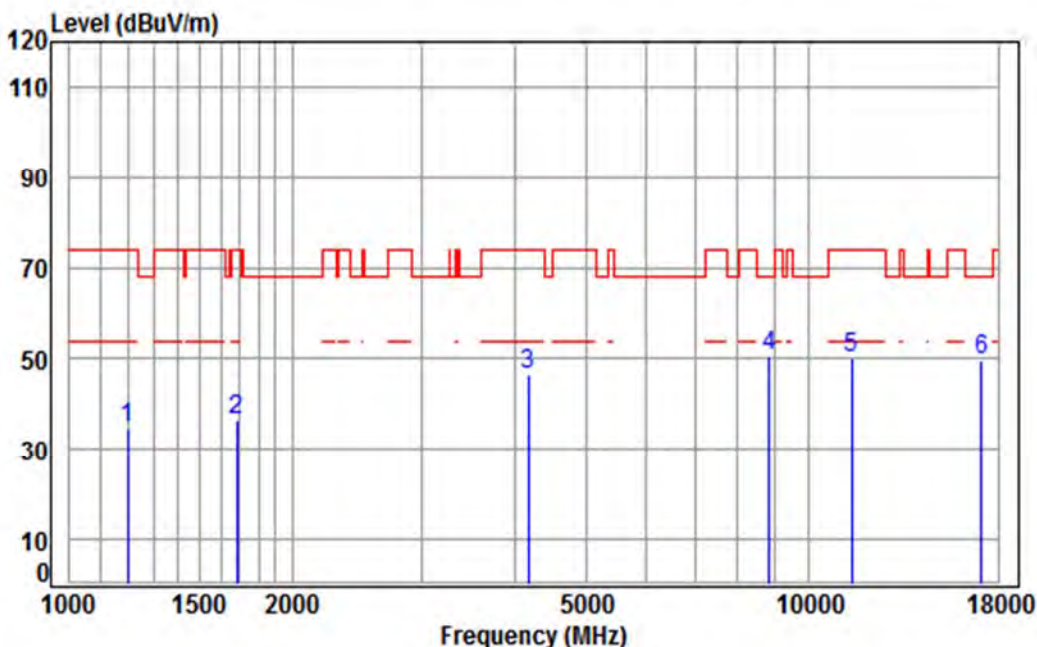

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5700 TX RSE

: Ant 1+2 5G WIFI 11N CH140

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	47.16	34.88	74.00	-39.12 peak
2	1682.477	5.25	26.60	41.52	46.12	36.45	74.00	-37.55 peak
3	4169.698	7.18	33.60	42.36	48.15	46.57	74.00	-27.43 peak
4	pp 8840.473	10.36	36.41	38.86	42.94	50.85	68.20	-17.35 peak
5	11400.000	12.04	38.02	38.13	38.09	50.02	74.00	-23.98 peak
6	17100.000	16.49	42.92	40.37	30.61	49.65	68.20	-18.55 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	---------------	-----------------	------	------	----------

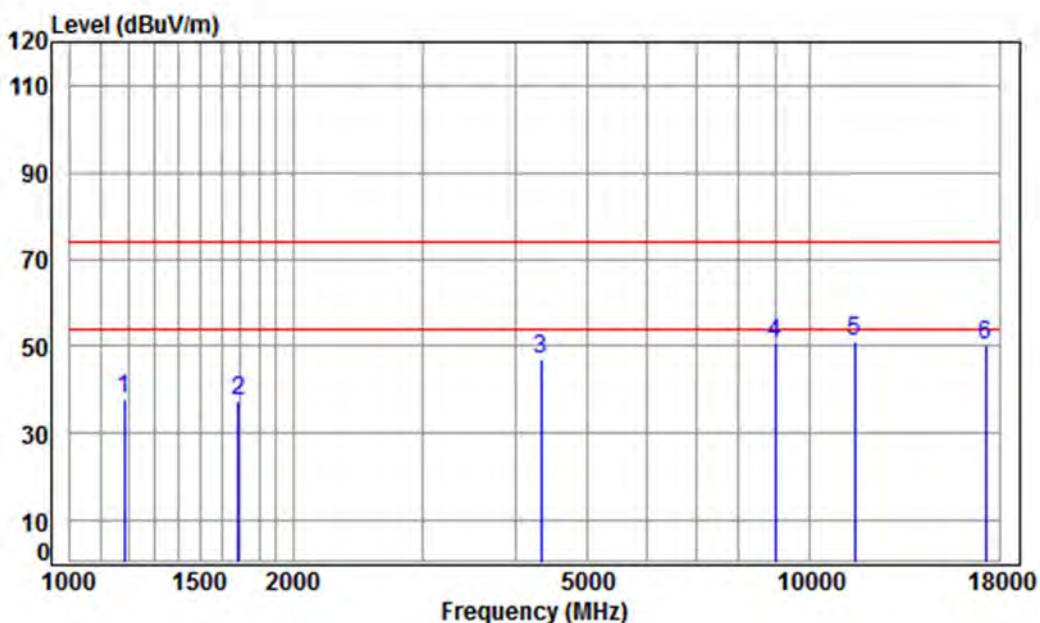

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11N CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1185.936	4.36	24.41	41.17	50.48	38.08	74.00	-35.92 peak
2	1687.347	5.24	26.62	41.52	47.20	37.54	74.00	-36.46 peak
3	4329.354	7.37	33.60	42.39	48.26	46.84	74.00	-27.16 peak
4	8969.161	10.39	36.56	38.66	42.29	50.58	74.00	-23.42 peak
5	pp11490.000	12.13	38.09	38.19	39.20	51.23	74.00	-22.77 peak
6	17235.000	16.18	43.08	40.48	31.24	50.02	74.00	-23.98 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

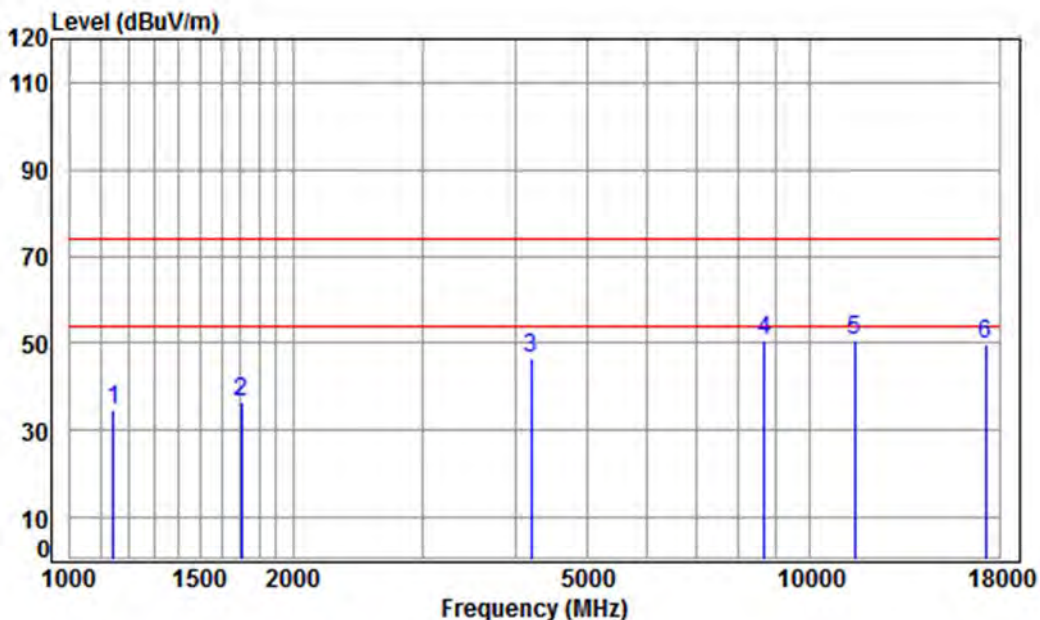

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11N CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	41.14	47.58	34.84	74.00	-39.16 peak
2	1702.042	5.23	26.68	41.53	46.26	36.64	74.00	-37.36 peak
3	4193.872	7.21	33.60	42.36	48.19	46.64	74.00	-27.36 peak
4 pp	8663.404	10.31	36.20	39.13	43.39	50.77	74.00	-23.23 peak
5	11490.000	12.13	38.09	38.19	38.40	50.43	74.00	-23.57 peak
6	17235.000	16.18	43.08	40.48	30.74	49.52	74.00	-24.48 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5785	Peak	Vertical
------------	---------------	-----------------	------	------	----------

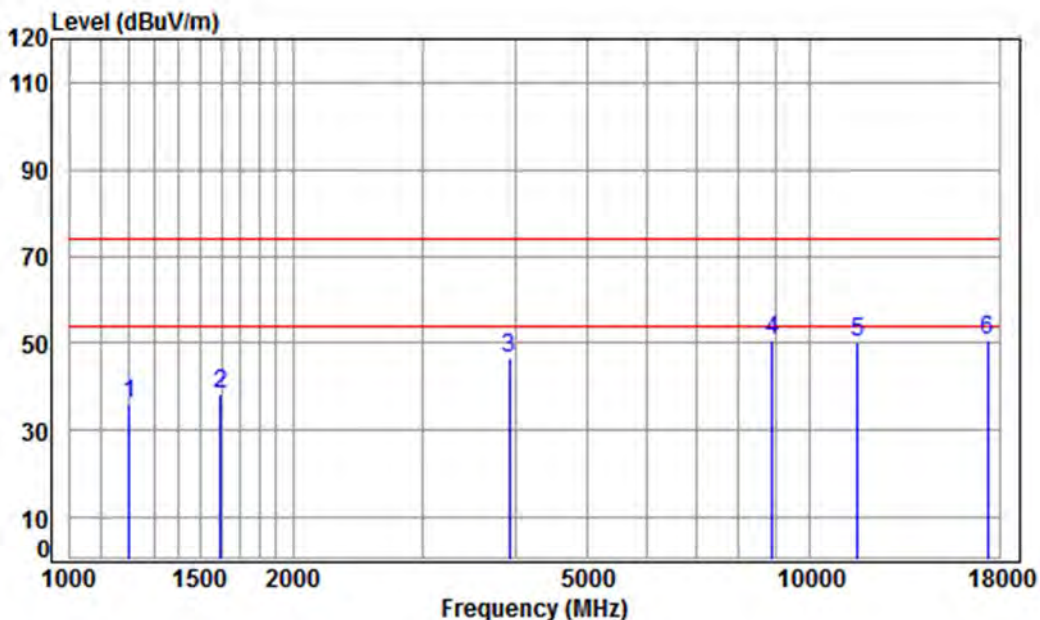

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11N CH157

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	48.13	35.86	74.00	-38.14 peak
2	1597.181	5.35	26.24	41.47	48.32	38.44	74.00	-35.56 peak
3	3924.135	6.91	33.40	42.31	48.57	46.57	74.00	-27.43 peak
4 pp	8891.725	10.37	36.47	38.78	42.68	50.74	74.00	-23.26 peak
5	11570.000	12.17	38.17	38.24	38.14	50.24	74.00	-23.76 peak
6	17355.000	15.92	43.23	40.58	32.02	50.59	74.00	-23.41 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

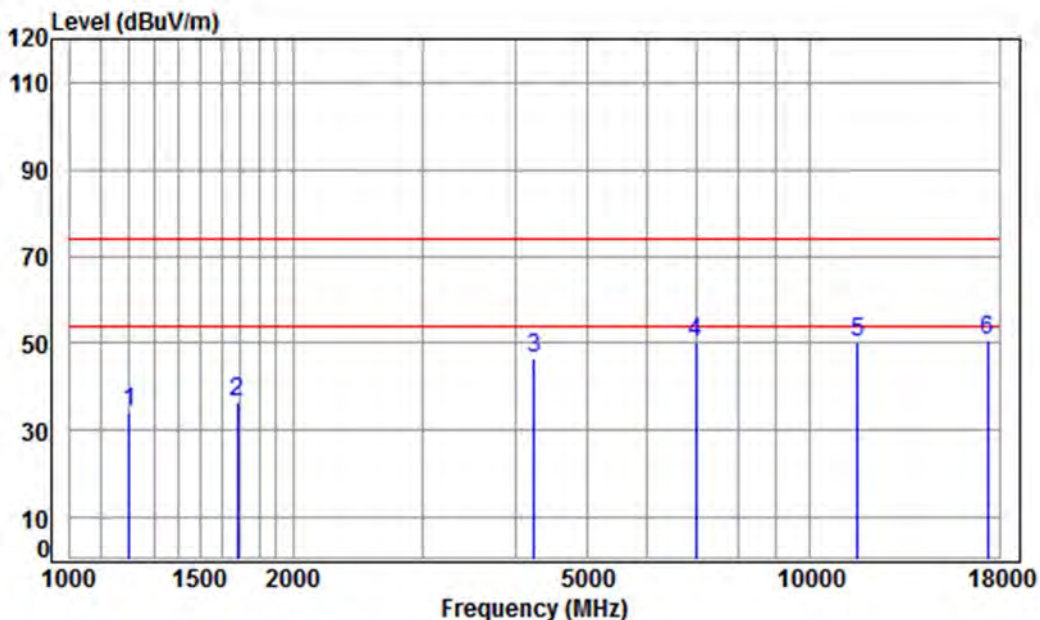

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11N CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	46.55	34.28	74.00	-39.72	peak
2	1682.477	5.25	26.60	41.52	46.36	36.69	74.00	-37.31	peak
3	4230.396	7.26	33.60	42.37	48.12	46.61	74.00	-27.39	peak
4	7015.420	10.13	36.49	40.84	44.61	50.39	74.00	-23.61	peak
5	11570.000	12.17	38.17	38.24	38.15	50.25	74.00	-23.75	peak
6	pp17355.000	15.92	43.23	40.58	32.30	50.87	74.00	-23.13	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	---------------	-----------------	------	------	----------

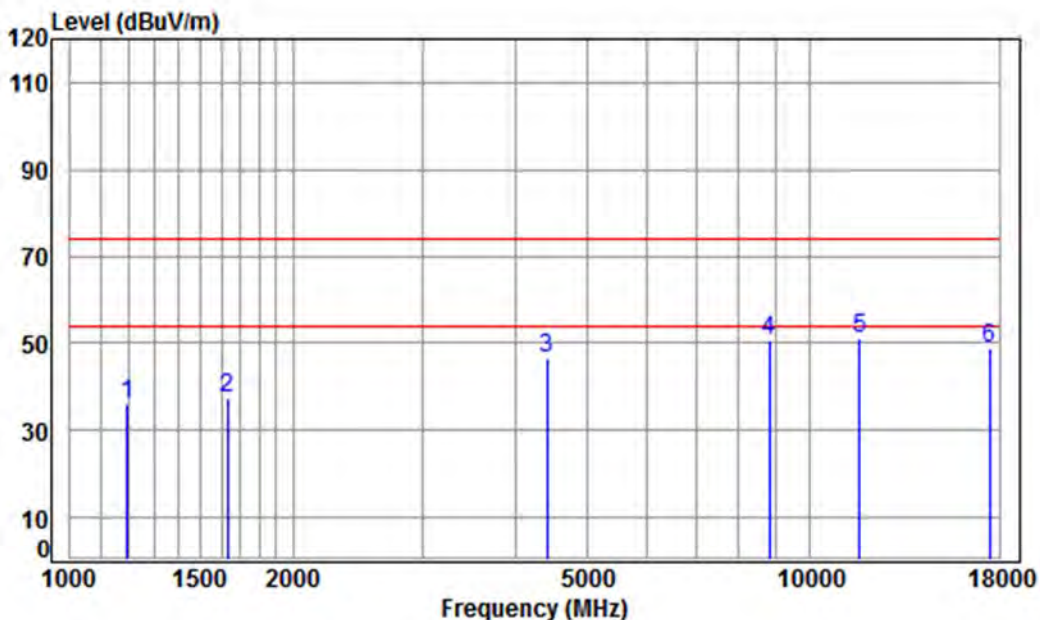

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11N CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	48.47	36.15	74.00	-37.85	peak
2	1634.543	5.31	26.40	41.49	47.11	37.33	74.00	-36.67	peak
3	4405.090	7.46	33.60	42.40	47.89	46.55	74.00	-27.45	peak
4	8814.957	10.35	36.38	38.90	42.62	50.45	74.00	-23.55	peak
5	pp11650.000	12.20	38.25	38.29	38.86	51.02	74.00	-22.98	peak
6	17475.000	15.65	43.37	40.68	30.56	48.90	74.00	-25.10	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 282 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

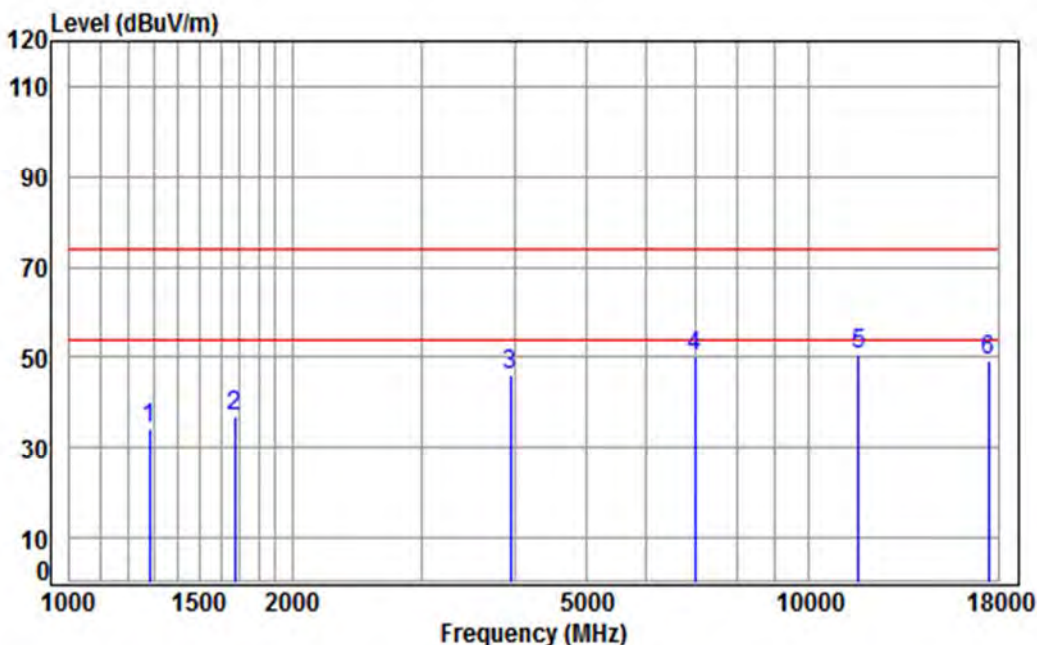

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11N CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	4.73	24.87	41.25	45.87	34.22	74.00	-39.78	peak
2	1672.779	5.26	26.56	41.52	46.64	36.94	74.00	-37.06	peak
3	3946.885	6.93	33.46	42.31	48.13	46.21	74.00	-27.79	peak
4	7015.420	10.13	36.49	40.84	44.53	50.31	74.00	-23.69	peak
5	pp11650.000	12.20	38.25	38.29	38.66	50.82	74.00	-23.18	peak
6	17475.000	15.65	43.37	40.68	31.13	49.47	74.00	-24.53	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	----------------	-----------------	------	------	----------

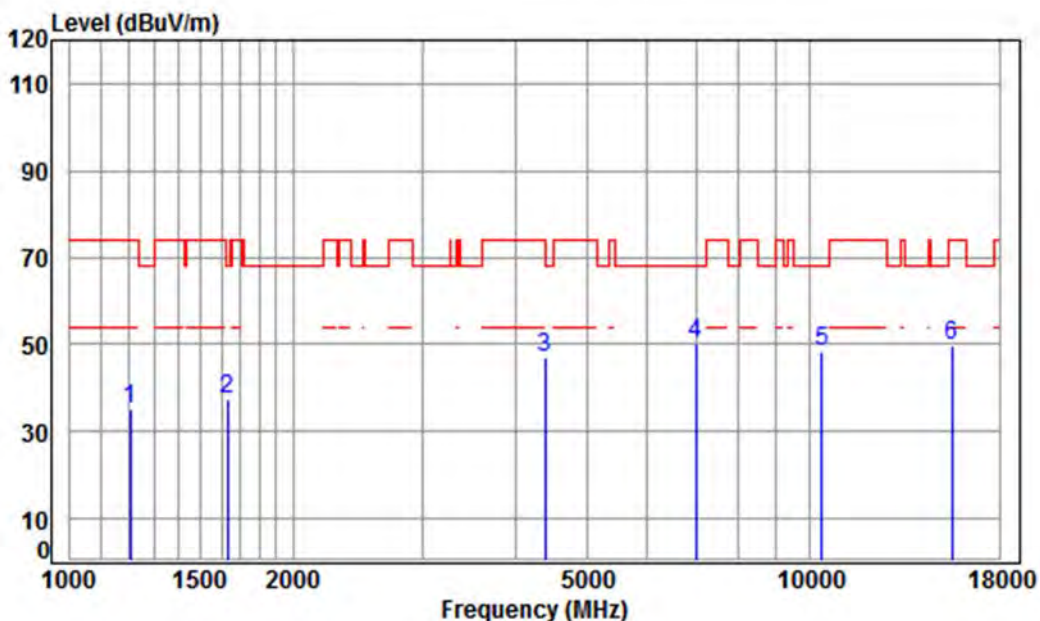

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5180 TX RSE

: Ant 1+2 5G WIFI 11AC CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	41.19	47.24	35.00	74.00	-39.00	peak
2	1634.543	5.31	26.40	41.49	47.05	37.27	68.20	-30.93	peak
3	4379.699	7.43	33.60	42.40	48.27	46.90	74.00	-27.10	peak
4 pp	7015.420	10.13	36.49	40.84	44.33	50.11	68.20	-18.09	peak
5	10360.000	11.19	37.24	37.45	37.53	48.51	68.20	-19.69	peak
6	15540.000	14.30	41.38	39.00	32.84	49.52	74.00	-24.48	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 284 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

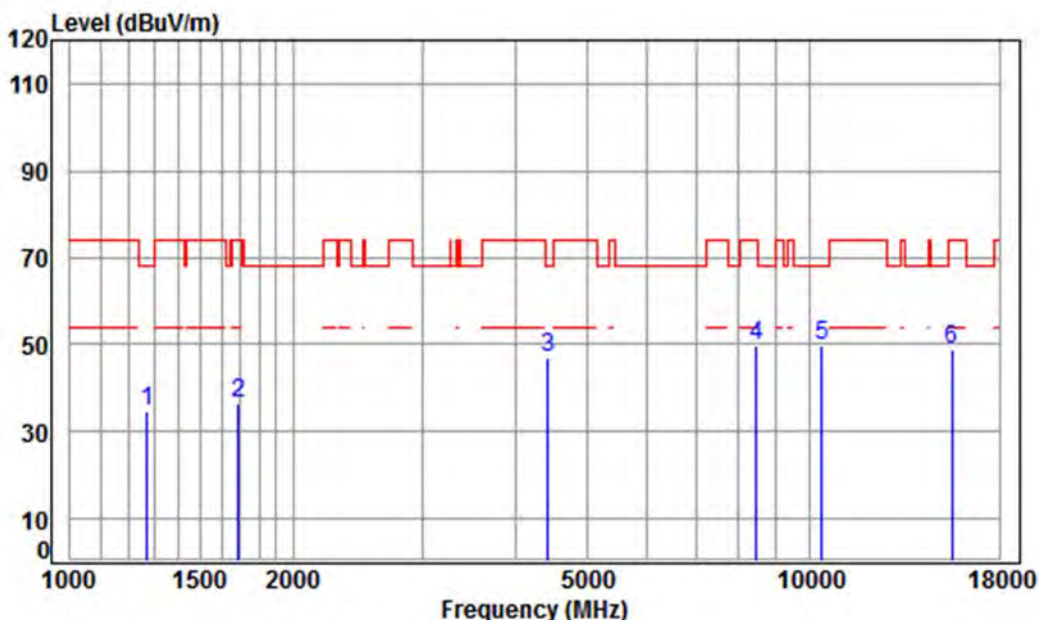

Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5180 TX RSE
 : Ant 1+2 5G WIFI 11AC CH36

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.41	34.68	68.20	-33.52 peak
2	1687.347	5.24	26.62	41.52	46.04	36.38	74.00	-37.62 peak
3	4417.841	7.47	33.60	42.40	48.55	47.22	68.20	-20.98 peak
4	8465.379	10.25	36.04	39.44	43.03	49.88	74.00	-24.12 peak
5	pp10360.000	11.19	37.24	37.45	38.56	49.54	68.20	-18.66 peak
6	15540.000	14.30	41.38	39.00	32.36	49.04	74.00	-24.96 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 285 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5220	Peak	Vertical
------------	----------------	-----------------	------	------	----------

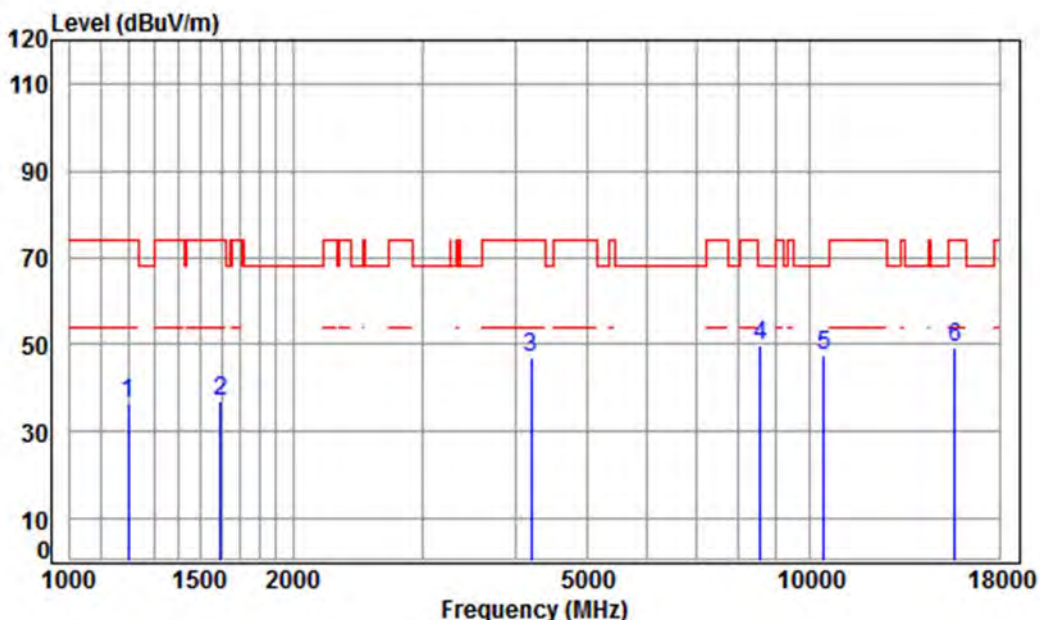


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5220 TX RSE
 : Ant 1+2 5G WIFI 11AC CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	48.78	36.50	74.00	-37.50	peak
2	1597.181	5.35	26.24	41.47	46.83	36.95	74.00	-37.05	peak
3	4193.872	7.21	33.60	42.36	48.36	46.81	74.00	-27.19	peak
4	pp 8563.818	10.29	36.08	39.28	42.79	49.88	68.20	-18.32	peak
5	10440.000	11.25	37.16	37.51	36.74	47.64	68.20	-20.56	peak
6	15660.000	14.48	41.34	39.11	32.54	49.25	74.00	-24.75	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5220	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

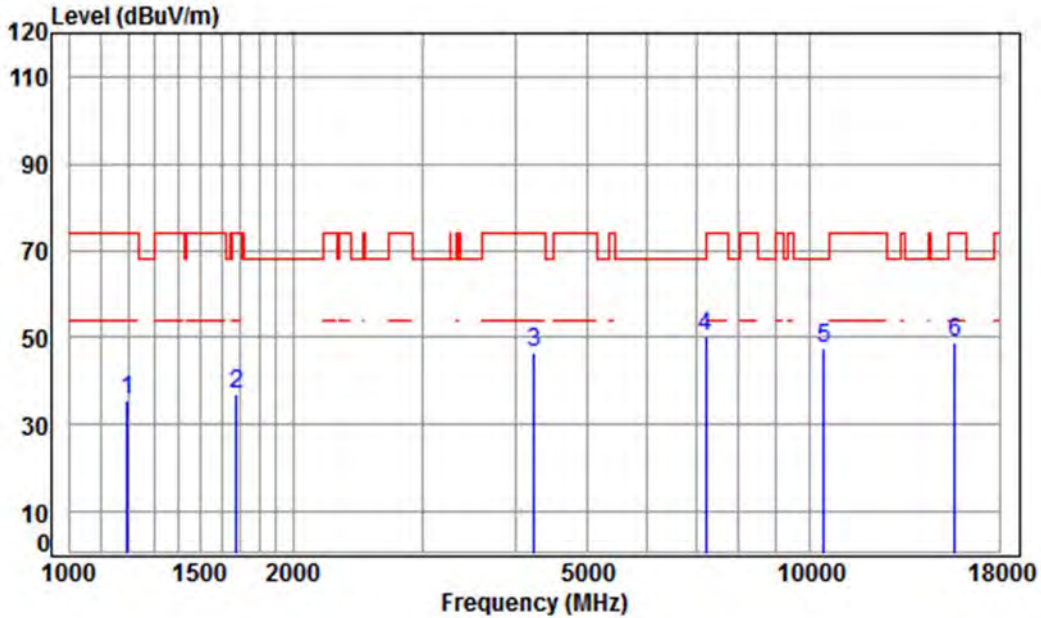


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5220 TX RSE
 : Ant 1+2 5G WIFI 11AC CH44

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	47.75	35.43	74.00	-38.57	peak
2	1677.621	5.25	26.58	41.52	46.47	36.78	74.00	-37.22	peak
3	4230.396	7.26	33.60	42.37	48.20	46.69	74.00	-27.31	peak
4 pp	7221.150	10.07	36.41	40.70	44.23	50.01	68.20	-18.19	peak
5	10440.000	11.25	37.16	37.51	36.71	47.61	68.20	-20.59	peak
6	15660.000	14.48	41.34	39.11	32.22	48.93	74.00	-25.07	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	----------------	-----------------	------	------	----------

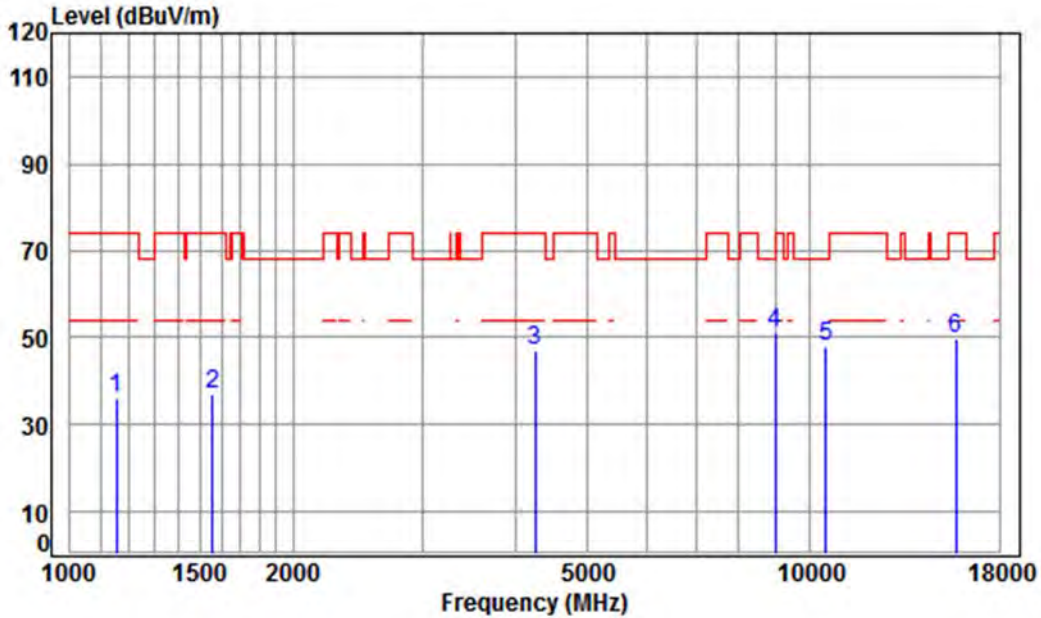


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5240 TX RSE
 : Ant 1+2 5G WIFI 11AC CH48

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1155.483	4.24	24.26	41.14	48.59	35.95	74.00	-38.05 peak
2	1556.169	5.41	26.06	41.44	47.03	37.06	74.00	-36.94 peak
3	4254.921	7.28	33.60	42.37	48.46	46.97	74.00	-27.03 peak
4 pp	8969.161	10.39	36.56	38.66	42.99	51.28	68.20	-16.92 peak
5	10480.000	11.28	37.12	37.53	36.98	47.85	68.20	-20.35 peak
6	15720.000	14.57	41.31	39.17	32.82	49.53	74.00	-24.47 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

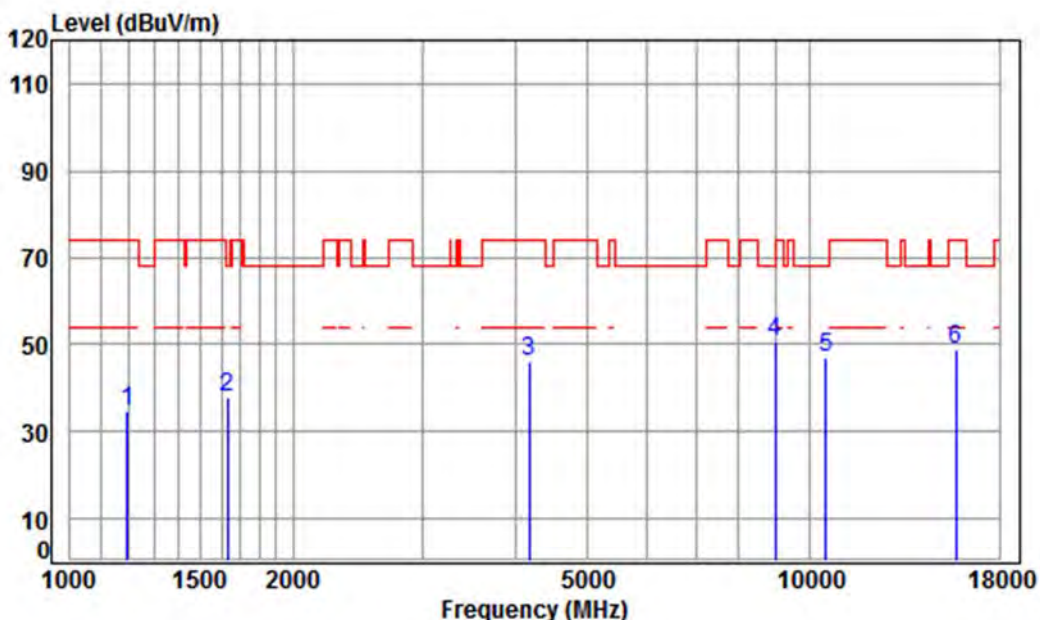


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5240 TX RSE
 : Ant 1+2 5G WIFI 11AC CH48

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	46.82	34.50	74.00	-39.50 peak
2	1634.543	5.31	26.40	41.49	47.50	37.72	68.20	-30.48 peak
3	4169.698	7.18	33.60	42.36	47.85	46.27	74.00	-27.73 peak
4 pp	8969.161	10.39	36.56	38.66	42.17	50.46	68.20	-17.74 peak
5	10480.000	11.28	37.12	37.53	36.23	47.10	68.20	-21.10 peak
6	15720.000	14.57	41.31	39.17	31.98	48.69	74.00	-25.31 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	----------------	-----------------	------	------	----------

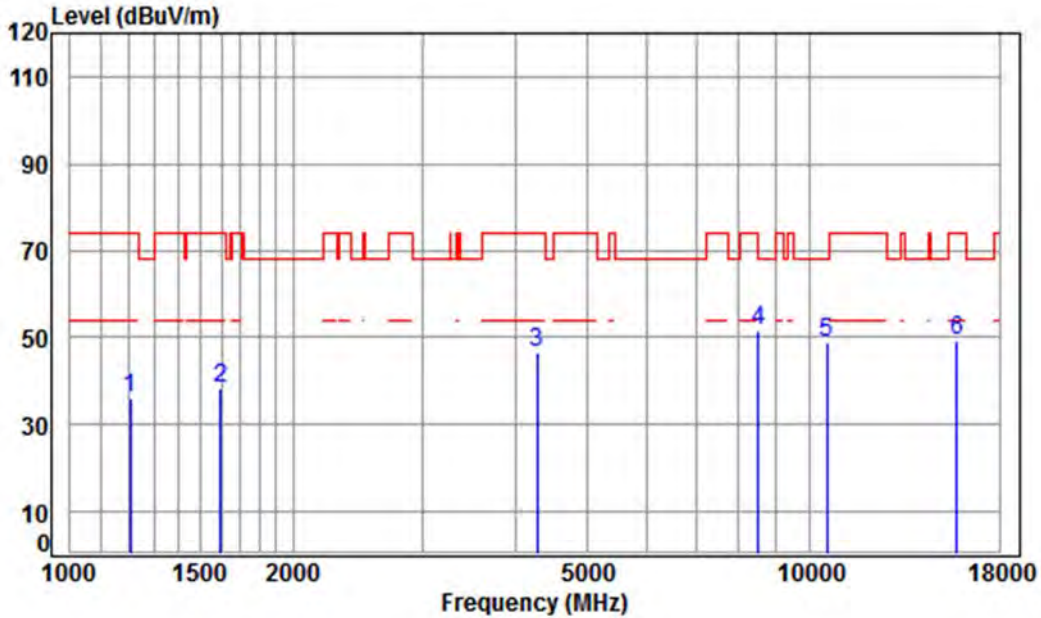

Condition: 3m VERTICAL
Job No : 2939RG
Mode : 5260 TX RSE
: Ant 1+2 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1206.682	4.44	24.51	41.19	48.27	36.03	74.00	-37.97 peak
2	1597.181	5.35	26.24	41.47	47.99	38.11	74.00	-35.89 peak
3	4279.589	7.31	33.60	42.38	47.99	46.52	74.00	-27.48 peak
4 pp	8514.456	10.27	36.02	39.36	44.53	51.46	68.20	-16.74 peak
5	10520.000	11.30	37.12	37.56	37.84	48.70	68.20	-19.50 peak
6	15780.000	14.66	41.29	39.22	32.61	49.34	74.00	-24.66 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 290 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

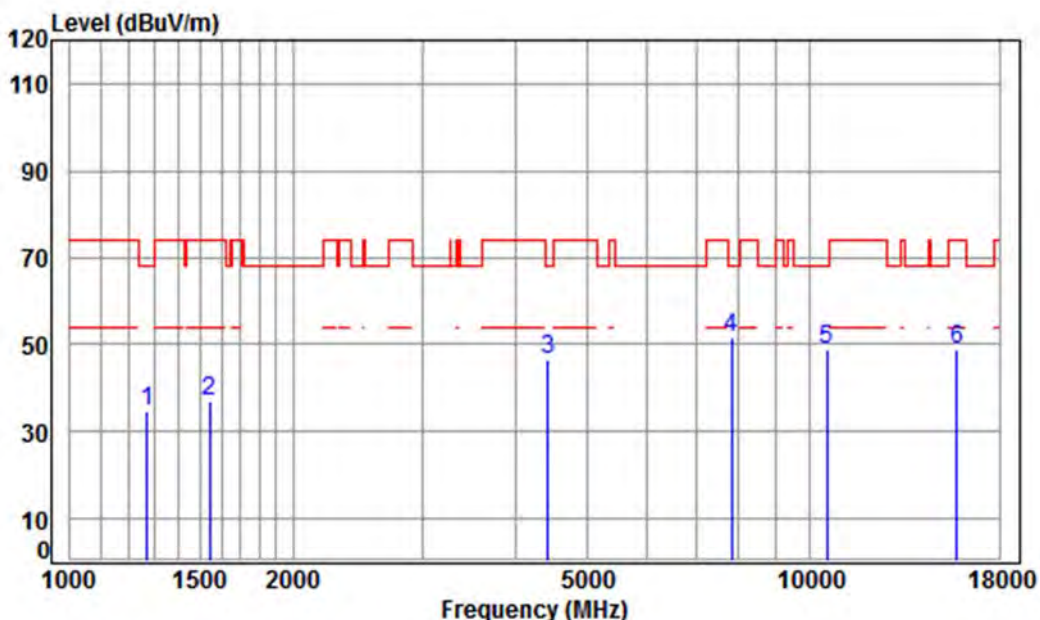


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5260 TX RSE
 : Ant 1+2 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.37	34.64	68.20	-33.56 peak
2	1542.733	5.42	26.00	41.43	47.01	37.00	74.00	-37.00 peak
3	4417.841	7.47	33.60	42.40	47.71	46.38	68.20	-21.82 peak
4 pp	7829.860	9.97	36.50	40.31	45.54	51.70	68.20	-16.50 peak
5	10520.000	11.30	37.12	37.56	38.19	49.05	68.20	-19.15 peak
6	15780.000	14.66	41.29	39.22	32.13	48.86	74.00	-25.14 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5300	Peak	Vertical
------------	----------------	-----------------	------	------	----------

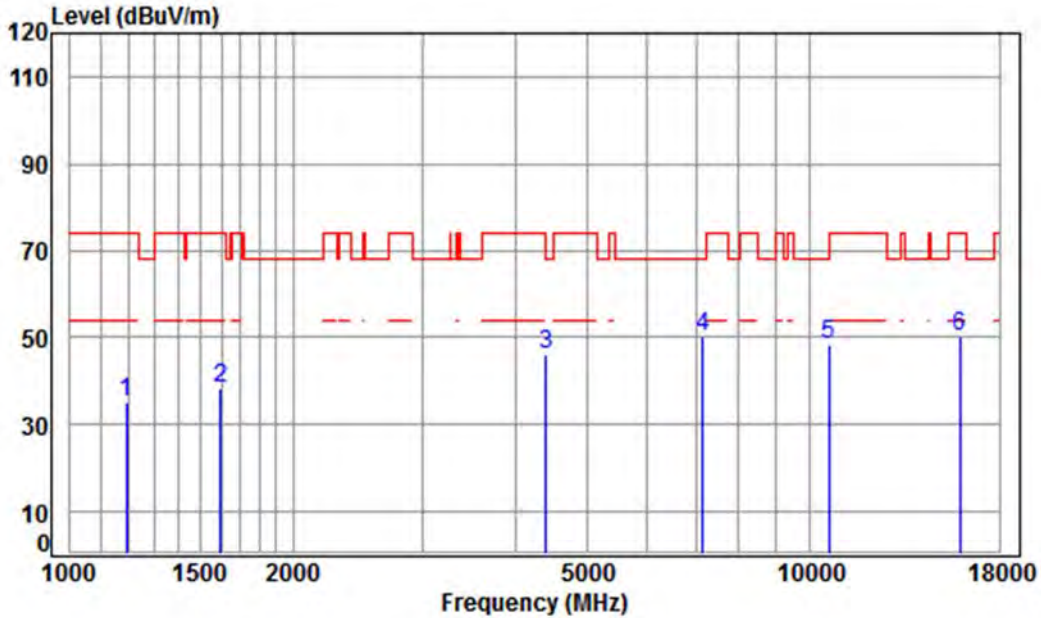

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5300 TX RSE
 : Ant 1+2 5G WIFI 11AC CH60

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1192.811	4.39	24.44	41.18	47.26	34.91	74.00	-39.09 peak
2	1597.181	5.35	26.24	41.47	48.30	38.42	74.00	-35.58 peak
3	4392.376	7.44	33.60	42.40	47.60	46.24	74.00	-27.76 peak
4 pp	7158.806	10.09	36.43	40.74	44.62	50.40	68.20	-17.80 peak
5	10600.000	11.36	37.22	37.62	37.51	48.47	68.20	-19.73 peak
6	15900.000	14.84	41.24	39.33	33.22	49.97	74.00	-24.03 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 292 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5300	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

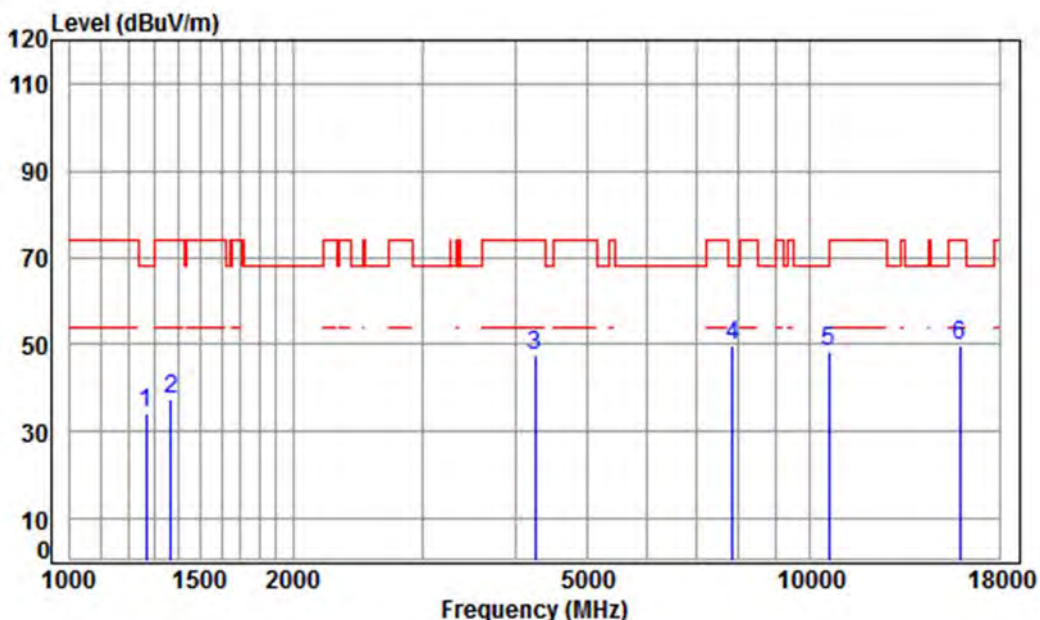

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5300 TX RSE

: Ant 1+2 5G WIFI 11AC CH60

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	46.07	34.31	68.20	-33.89	peak
2	1370.328	5.05	25.26	41.32	48.34	37.33	74.00	-36.67	peak
3	4242.641	7.27	33.60	42.37	48.92	47.42	74.00	-26.58	peak
4 pp	7852.524	9.96	36.51	40.29	43.63	49.81	68.20	-18.39	peak
5	10600.000	11.36	37.22	37.62	37.23	48.19	68.20	-20.01	peak
6	15900.000	14.84	41.24	39.33	33.18	49.93	74.00	-24.07	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 293 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	----------------	-----------------	------	------	----------

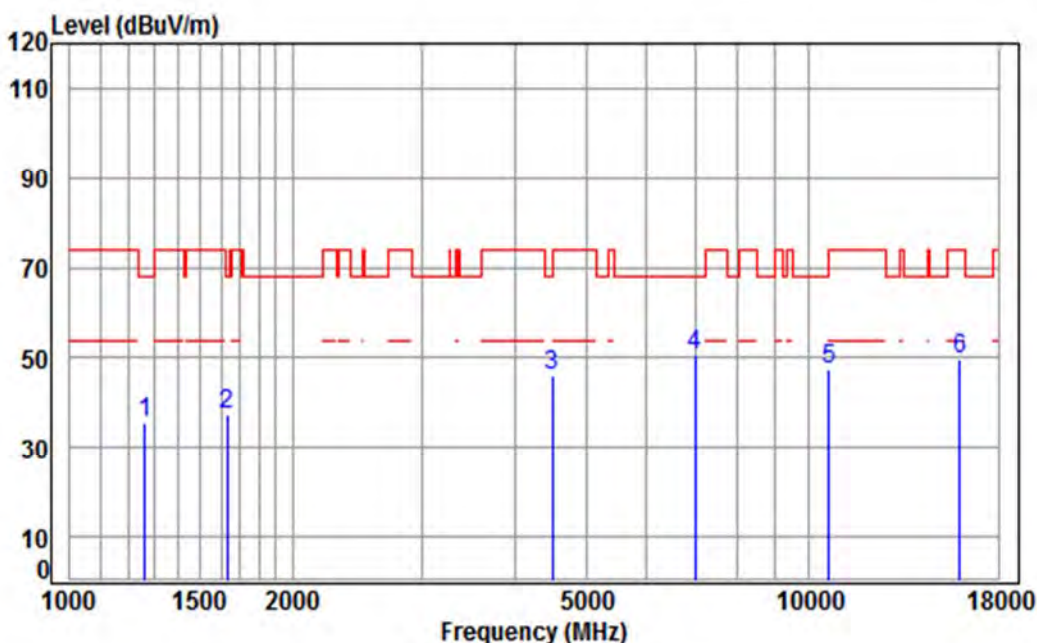

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5320 TX RSE

: Ant 1+2 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	41.23	47.18	35.40	68.20	-32.80	peak
2	1634.543	5.31	26.40	41.49	47.03	37.25	68.20	-30.95	peak
3	4495.125	7.55	33.60	42.42	47.39	46.12	68.20	-22.08	peak
4 pp	7015.420	10.13	36.49	40.84	44.80	50.58	68.20	-17.62	peak
5	10640.000	11.39	37.27	37.64	36.64	47.66	74.00	-26.34	peak
6	15960.000	14.93	41.22	39.38	32.99	49.76	74.00	-24.24	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

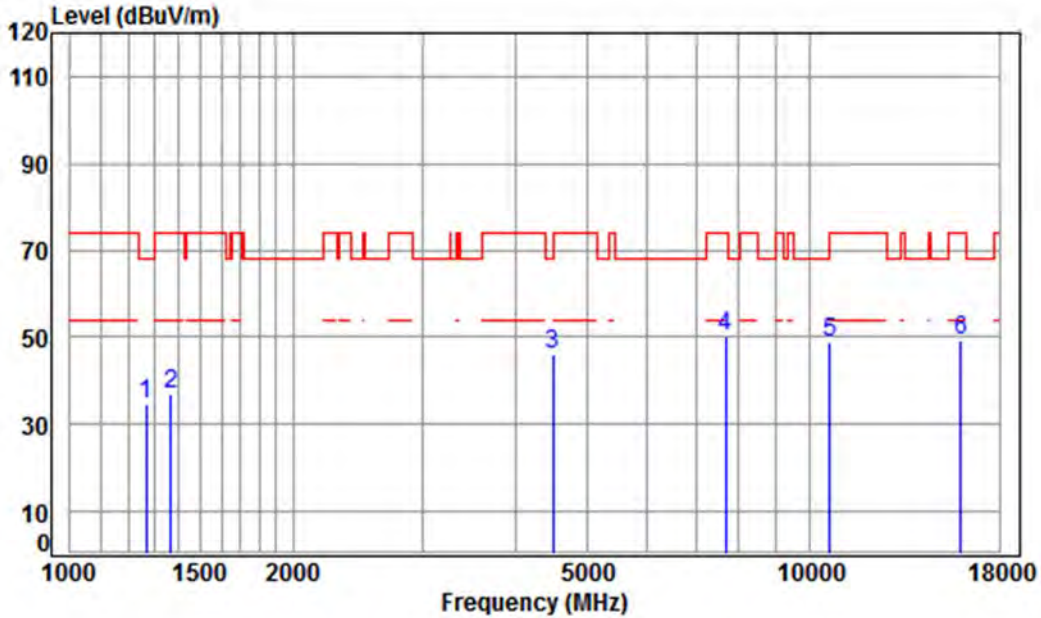

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5320 TX RSE

: Ant 1+2 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	46.32	34.56	68.20	-33.64	peak
2	1370.328	5.05	25.26	41.32	47.95	36.94	74.00	-37.06	peak
3 pp	4495.125	7.55	33.60	42.42	47.46	46.19	68.20	-22.01	peak
4	7695.244	9.98	36.42	40.39	43.97	49.98	74.00	-24.02	peak
5	10640.000	11.39	37.27	37.64	38.02	49.04	74.00	-24.96	peak
6	15960.000	14.93	41.22	39.38	32.67	49.44	74.00	-24.56	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 295 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	----------------	-----------------	------	------	----------

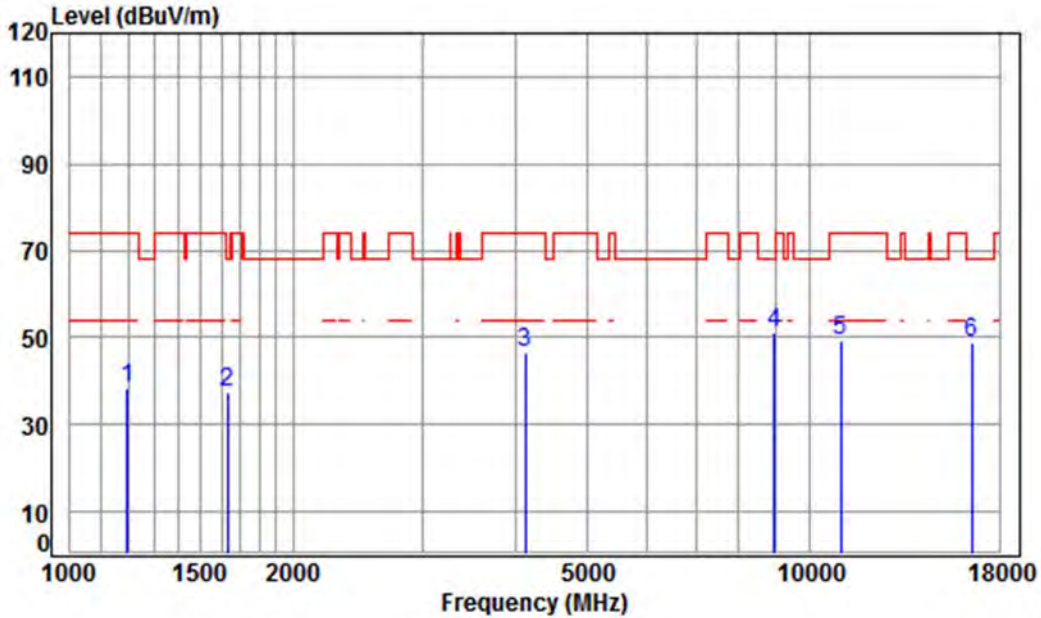

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5500 TX RSE

: Ant 1+2 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	50.81	38.49	74.00	-35.51	peak
2	1629.825	5.31	26.38	41.49	47.26	37.46	68.20	-30.74	peak
3	4121.768	7.13	33.60	42.35	47.97	46.35	74.00	-27.65	peak
4 pp	8943.274	10.39	36.53	38.70	42.70	50.92	68.20	-17.28	peak
5	11000.000	11.63	37.70	37.88	37.96	49.41	74.00	-24.59	peak
6	16500.000	14.50	42.70	39.86	31.29	48.63	68.20	-19.57	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 296 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

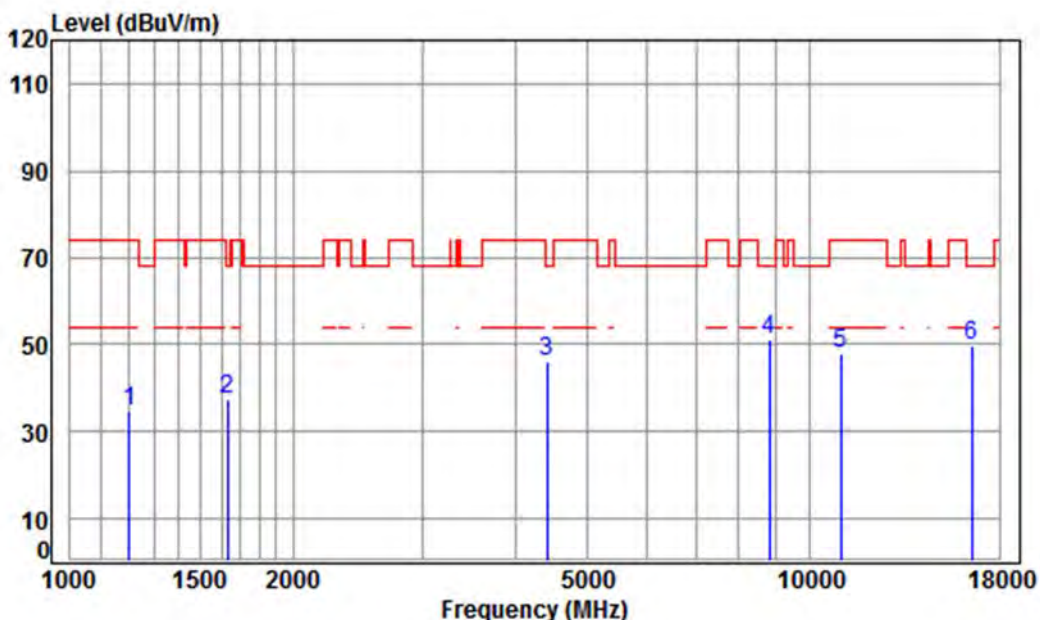

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5500 TX RSE

: Ant 1+2 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	46.97	34.70	74.00	-39.30	peak
2	1634.543	5.31	26.40	41.49	47.24	37.46	68.20	-30.74	peak
3	4405.090	7.46	33.60	42.40	47.62	46.28	68.20	-21.92	peak
4 pp	8789.516	10.35	36.35	38.93	43.55	51.32	68.20	-16.88	peak
5	11000.000	11.63	37.70	37.88	36.53	47.98	74.00	-26.02	peak
6	16500.000	14.50	42.70	39.86	32.23	49.57	68.20	-18.63	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5580	Peak	Vertical
------------	----------------	-----------------	------	------	----------

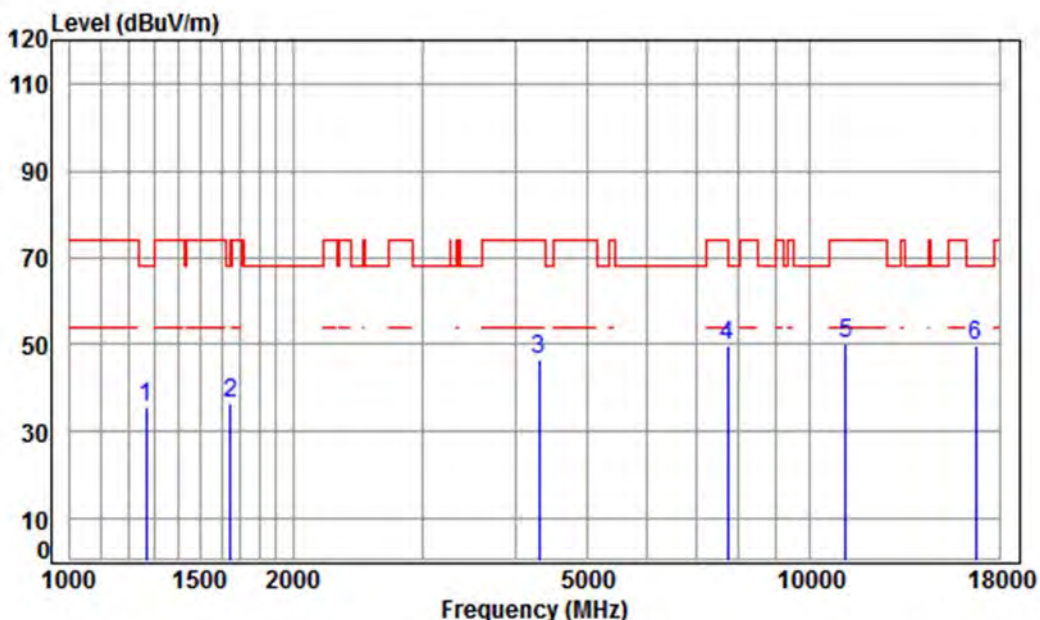

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5580 TX RSE

: Ant 1+2 5G WIFI 11AC CH116

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	47.48	35.72	68.20	-32.48	peak
2	1648.778	5.29	26.46	41.50	46.18	36.43	68.20	-31.77	peak
3	4304.400	7.34	33.60	42.38	47.90	46.46	74.00	-27.54	peak
4	7739.857	9.98	36.45	40.36	43.78	49.85	74.00	-24.15	peak
5	11160.000	11.80	37.83	37.98	38.34	49.99	74.00	-24.01	peak
6	pp16740.000	15.57	42.75	40.07	31.55	49.80	68.20	-18.40	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5580	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

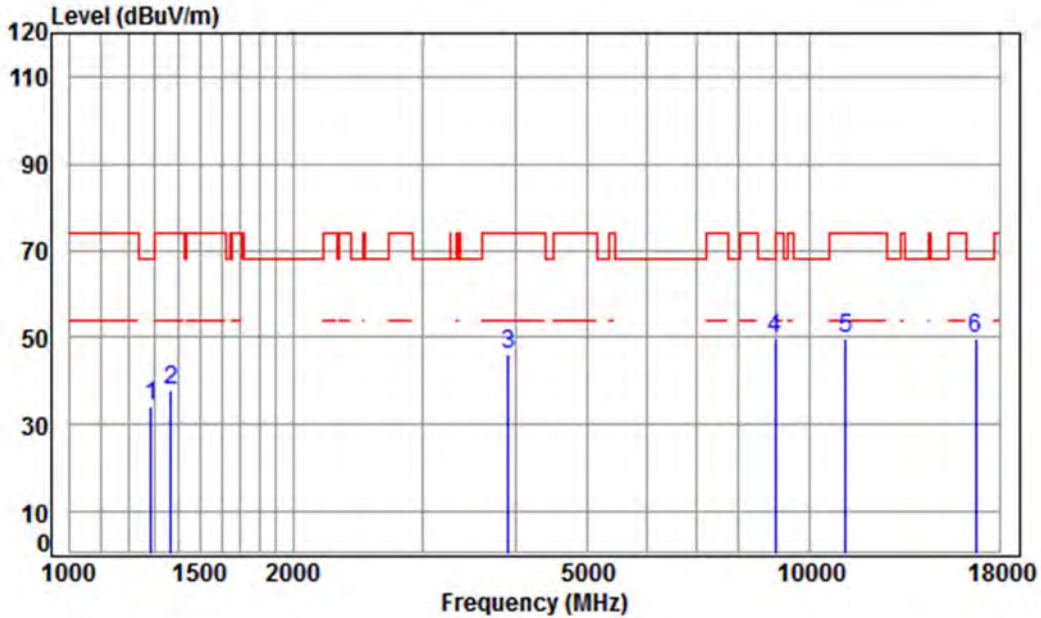


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5580 TX RSE
 : Ant 1+2 5G WIFI 11AC CH116

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1285.904	4.75	24.89	41.25	45.80	34.19	68.20	-34.01 peak
2	1370.328	5.05	25.26	41.32	48.90	37.89	74.00	-36.11 peak
3	3912.809	6.89	33.37	42.31	48.23	46.18	74.00	-27.82 peak
4	8969.161	10.39	36.56	38.66	41.55	49.84	68.20	-18.36 peak
5	11160.000	11.80	37.83	37.98	37.96	49.61	74.00	-24.39 peak
6	pp16740.000	15.57	42.75	40.07	31.62	49.87	68.20	-18.33 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	----------------	-----------------	------	------	----------

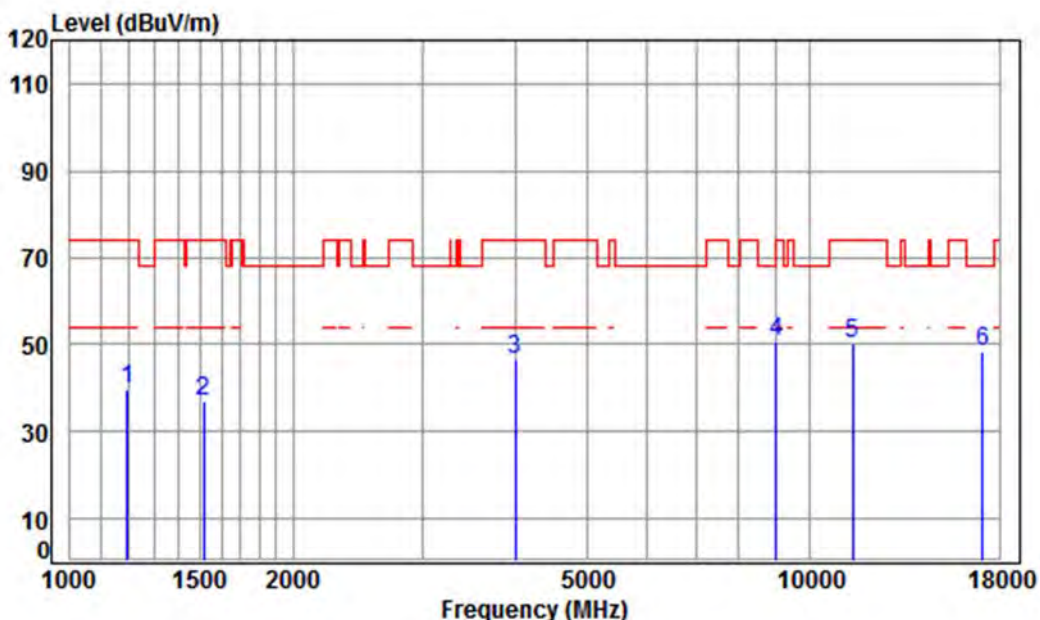

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5700 TX RSE

: Ant 1+2 5G WIFI 11AC CH140

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	52.05	39.73	74.00	-34.27	peak
2	1516.210	5.46	25.87	41.42	46.90	36.81	74.00	-37.19	peak
3	3992.781	6.97	33.58	42.32	48.46	46.69	74.00	-27.31	peak
4	pp 8995.123	10.40	36.59	38.62	42.29	50.66	68.20	-17.54	peak
5	11400.000	12.04	38.02	38.13	38.46	50.39	74.00	-23.61	peak
6	17100.000	16.49	42.92	40.37	29.51	48.55	68.20	-19.65	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

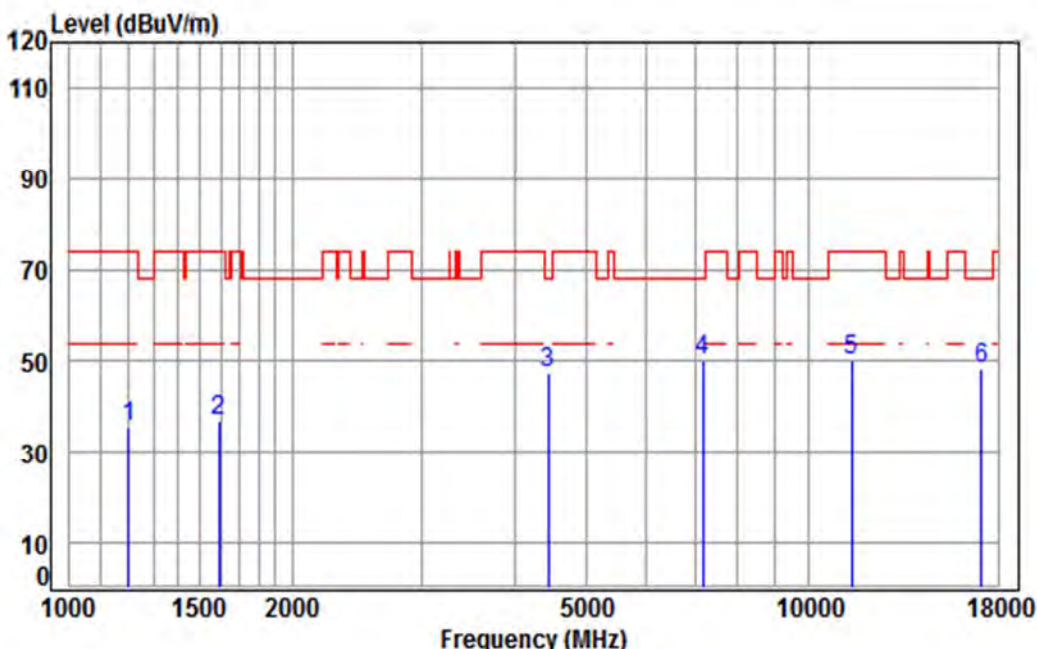

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5700 TX RSE

: Ant 1+2 5G WIFI 11AC CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	47.71	35.44	74.00	-38.56 peak
2	1592.571	5.36	26.22	41.47	46.76	36.87	74.00	-37.13 peak
3	4430.628	7.48	33.60	42.41	48.73	47.40	68.20	-20.80 peak
4	pp 7179.527	10.08	36.43	40.73	44.39	50.17	68.20	-18.03 peak
5	11400.000	12.04	38.02	38.13	38.20	50.13	74.00	-23.87 peak
6	17100.000	16.49	42.92	40.37	29.50	48.54	68.20	-19.66 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	----------------	-----------------	------	------	----------

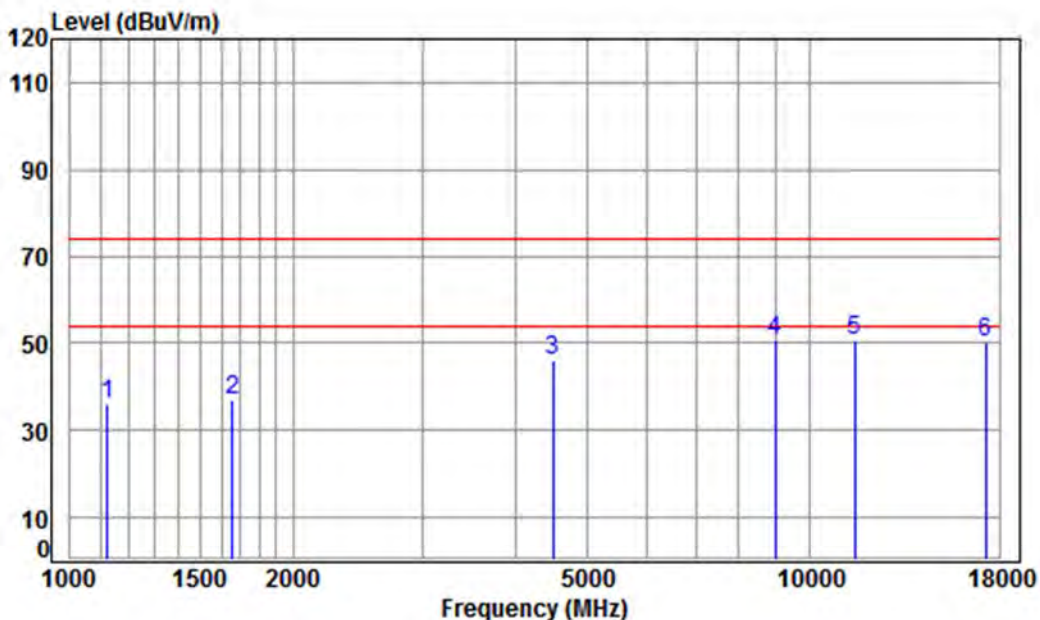

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11AC CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1122.563	4.10	24.08	41.12	49.16	36.22	74.00	-37.78	peak
2	1658.337	5.28	26.50	41.51	46.80	37.07	74.00	-36.93	peak
3	4495.125	7.55	33.60	42.42	47.53	46.26	74.00	-27.74	peak
4	8969.161	10.39	36.56	38.66	42.14	50.43	74.00	-23.57	peak
5	pp11490.000	12.13	38.09	38.19	38.60	50.63	74.00	-23.37	peak
6	17235.000	16.18	43.08	40.48	31.49	50.27	74.00	-23.73	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

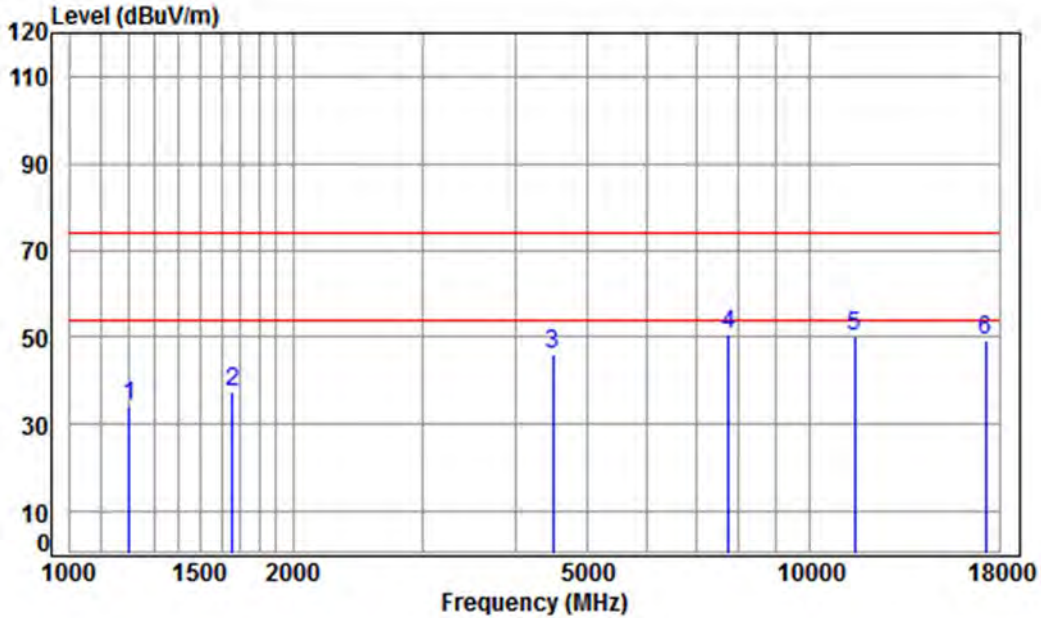

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11AC CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	46.38	34.11	74.00	-39.89	peak
2	1658.337	5.28	26.50	41.51	46.93	37.20	74.00	-36.80	peak
3	4495.125	7.55	33.60	42.42	47.39	46.12	74.00	-27.88	peak
4 pp	7762.260	9.97	36.46	40.35	44.35	50.43	74.00	-23.57	peak
5	11490.000	12.13	38.09	38.19	38.10	50.13	74.00	-23.87	peak
6	17235.000	16.18	43.08	40.48	30.59	49.37	74.00	-24.63	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Vertical
------------	----------------	-----------------	------	------	----------

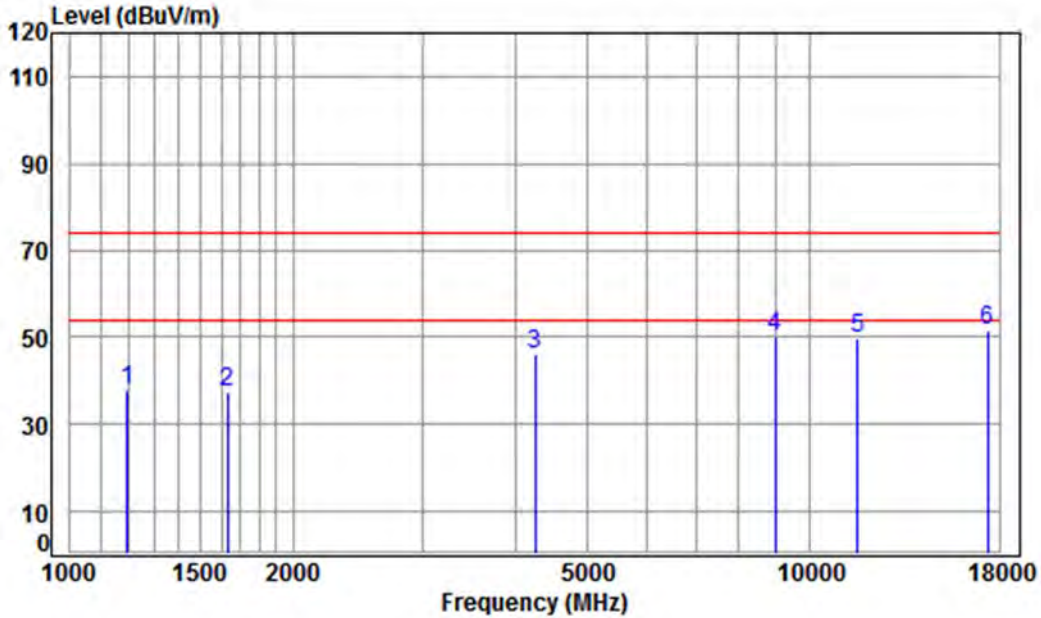

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11AC CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	50.01	37.69	74.00	-36.31 peak
2	1629.825	5.31	26.38	41.49	47.37	37.57	74.00	-36.43 peak
3	4242.641	7.27	33.60	42.37	47.77	46.27	74.00	-27.73 peak
4	8969.161	10.39	36.56	38.66	41.80	50.09	74.00	-23.91 peak
5	11570.000	12.17	38.17	38.24	37.69	49.79	74.00	-24.21 peak
6	pp17355.000	15.92	43.23	40.58	32.81	51.38	74.00	-22.62 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

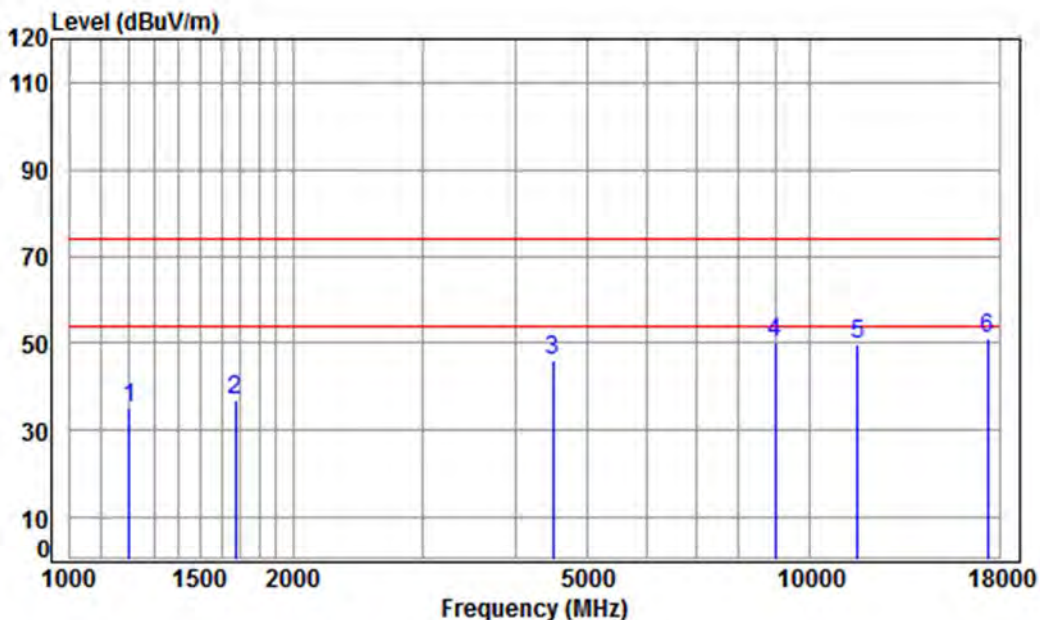

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11AC CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	47.58	35.31	74.00	-38.69 peak
2	1672.779	5.26	26.56	41.52	46.86	37.16	74.00	-36.84 peak
3	4495.125	7.55	33.60	42.42	47.38	46.11	74.00	-27.89 peak
4	8969.161	10.39	36.56	38.66	41.90	50.19	74.00	-23.81 peak
5	11570.000	12.17	38.17	38.24	37.61	49.71	74.00	-24.29 peak
6	pp17355.000	15.92	43.23	40.58	32.38	50.95	74.00	-23.05 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	----------------	-----------------	------	------	----------

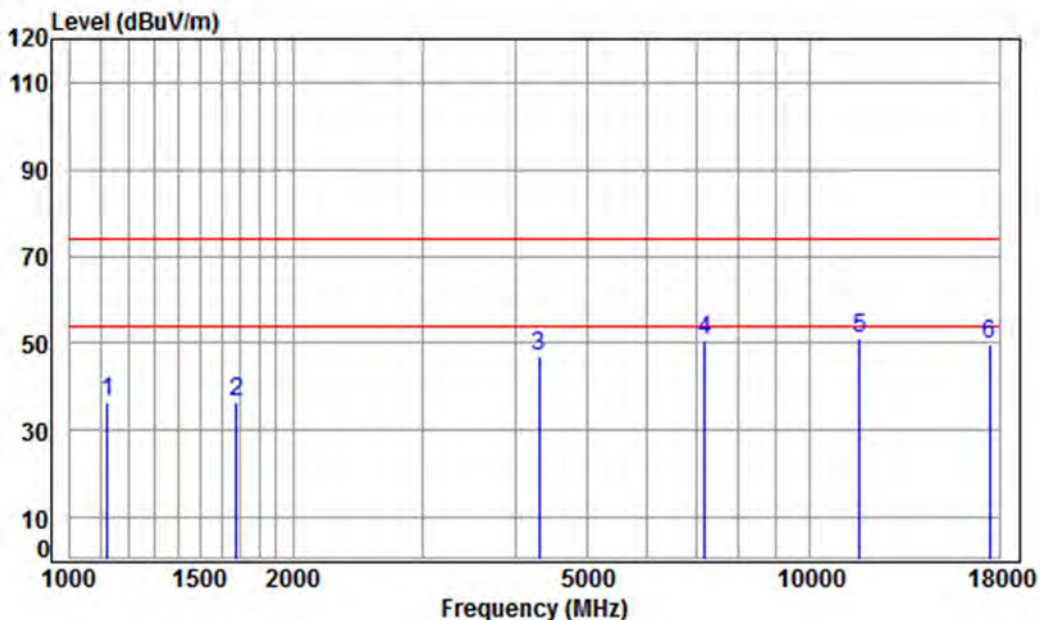

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11AC CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1122.563	4.10	24.08	41.12	49.23	36.29	74.00	-37.71	peak
2	1677.621	5.25	26.58	41.52	46.22	36.53	74.00	-37.47	peak
3	4304.400	7.34	33.60	42.38	48.33	46.89	74.00	-27.11	peak
4	7200.309	10.08	36.42	40.72	44.96	50.74	74.00	-23.26	peak
5	pp11650.000	12.20	38.25	38.29	38.95	51.11	74.00	-22.89	peak
6	17475.000	15.65	43.37	40.68	31.47	49.81	74.00	-24.19	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

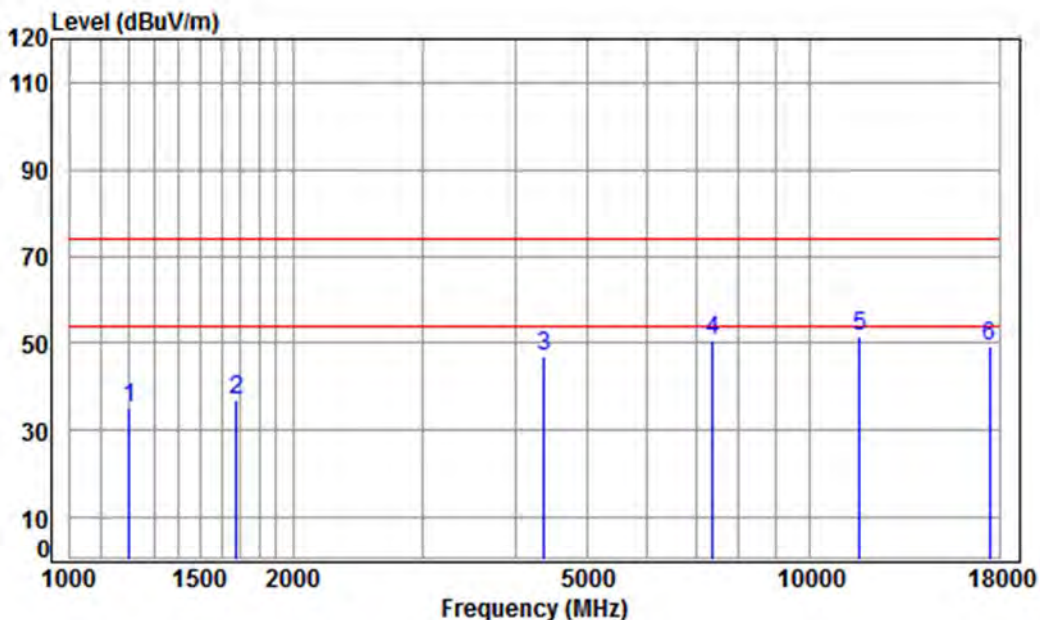

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11AC CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	47.28	35.01	74.00	-38.99	peak
2	1677.621	5.25	26.58	41.52	46.81	37.12	74.00	-36.88	peak
3	4367.058	7.41	33.60	42.39	48.17	46.79	74.00	-27.21	peak
4	7390.070	10.03	36.34	40.59	44.91	50.69	74.00	-23.31	peak
5	pp11650.000	12.20	38.25	38.29	39.31	51.47	74.00	-22.53	peak
6	17475.000	15.65	43.37	40.68	31.05	49.39	74.00	-24.61	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

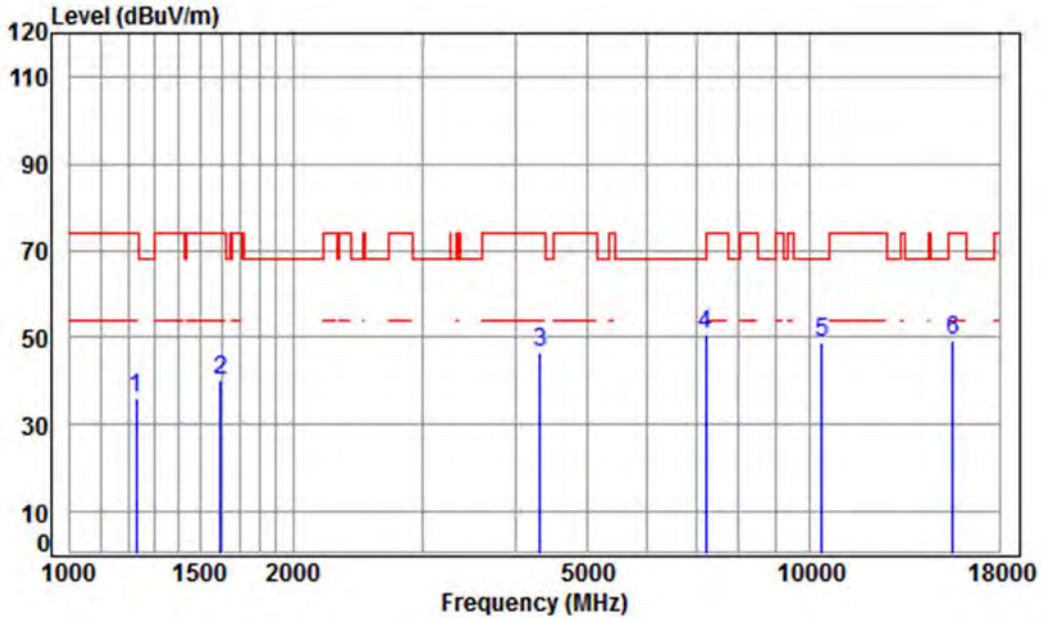

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5190 TX RSE
 : Ant 1+2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	4.53	24.61	41.21	48.20	36.13	74.00	-37.87	peak
2	1597.181	5.35	26.24	41.47	49.84	39.96	74.00	-34.04	peak
3	4316.859	7.36	33.60	42.38	48.00	46.58	74.00	-27.42	peak
4 pp	7221.150	10.07	36.41	40.70	45.08	50.86	68.20	-17.34	peak
5	10380.000	11.21	37.22	37.47	37.75	48.71	68.20	-19.49	peak
6	15570.000	14.35	41.37	39.03	32.69	49.38	74.00	-24.62	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 308 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

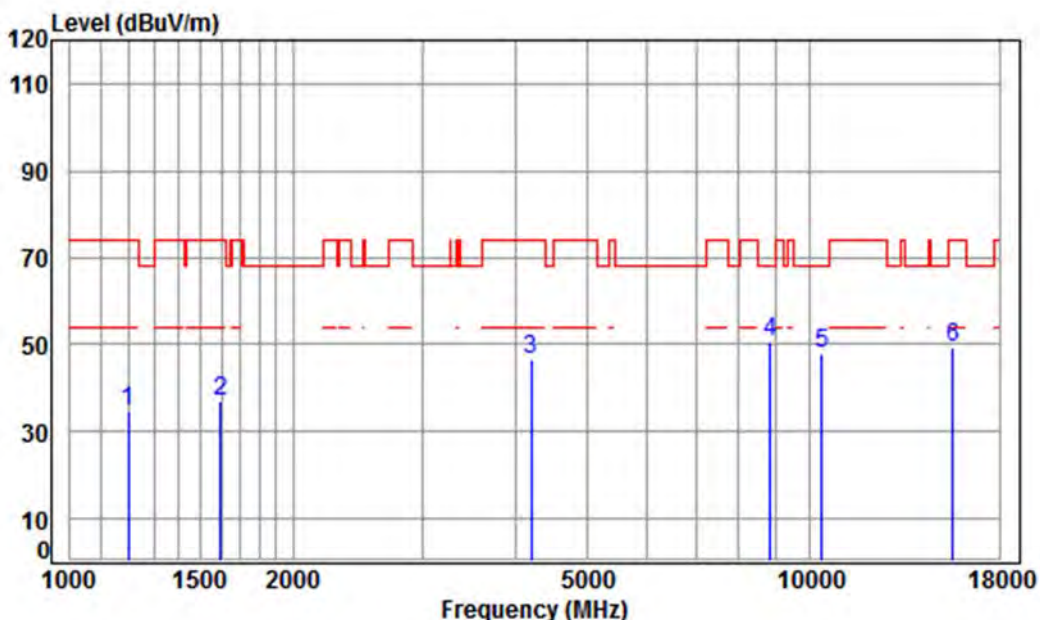

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	46.90	34.62	74.00 -39.38	peak
2	1597.181	5.35	26.24	41.47	46.78	36.90	74.00 -37.10	peak
3	4193.872	7.21	33.60	42.36	48.14	46.59	74.00 -27.41	peak
4 pp	8840.473	10.36	36.41	38.86	42.61	50.52	68.20 -17.68	peak
5	10380.000	11.21	37.22	37.47	37.09	48.05	68.20 -20.15	peak
6	15570.000	14.35	41.37	39.03	32.55	49.24	74.00 -24.76	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

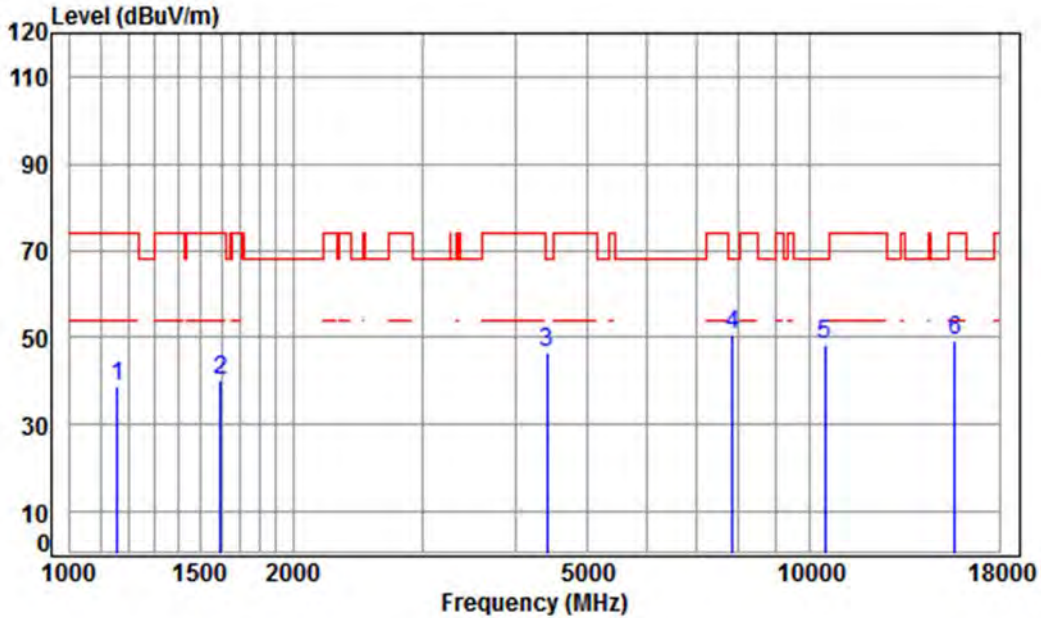


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5230 TX RSE
 : Ant 1+2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1158.828	4.25	24.27	41.15	51.47	38.84	74.00	-35.16 peak
2	1597.181	5.35	26.24	41.47	50.17	40.29	74.00	-33.71 peak
3	4405.090	7.46	33.60	42.40	47.67	46.33	68.20	-21.87 peak
4 pp	7852.524	9.96	36.51	40.29	44.59	50.77	68.20	-17.43 peak
5	10460.000	11.26	37.14	37.52	37.48	48.36	68.20	-19.84 peak
6	15690.000	14.53	41.32	39.14	32.68	49.39	74.00	-24.61 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

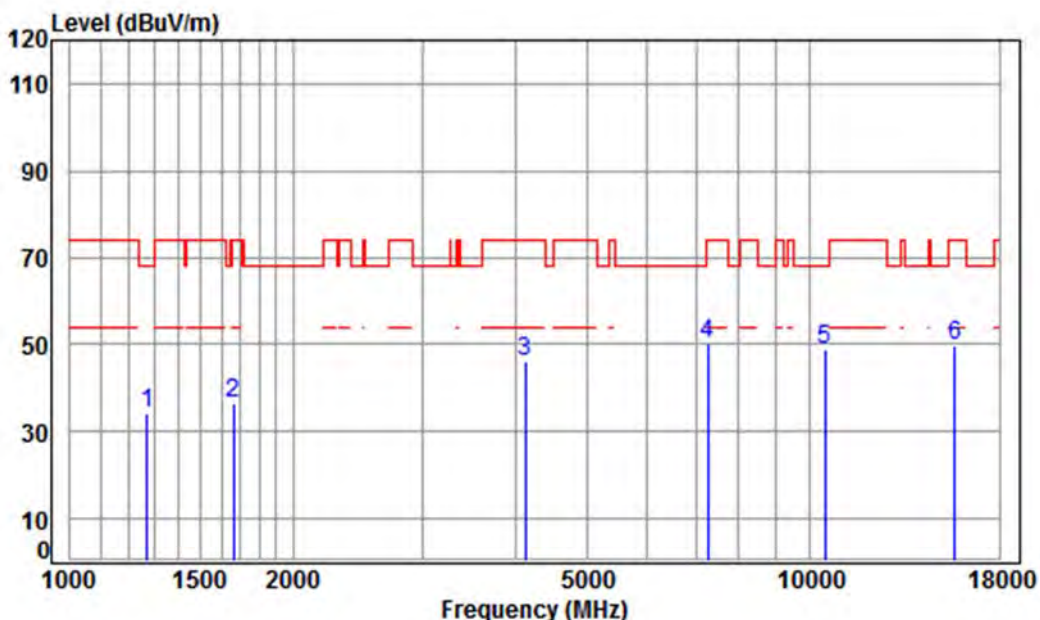

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1271.123	4.69	24.82	41.24	45.98	34.25	68.20	-33.95 peak
2	1663.137	5.27	26.52	41.51	46.41	36.69	74.00	-37.31 peak
3	4121.768	7.13	33.60	42.35	47.83	46.21	74.00	-27.79 peak
4	7263.015	10.06	36.39	40.67	44.40	50.18	74.00	-23.82 peak
5	pp10460.000	11.26	37.14	37.52	37.86	48.74	68.20	-19.46 peak
6	15690.000	14.53	41.32	39.14	33.07	49.78	74.00	-24.22 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

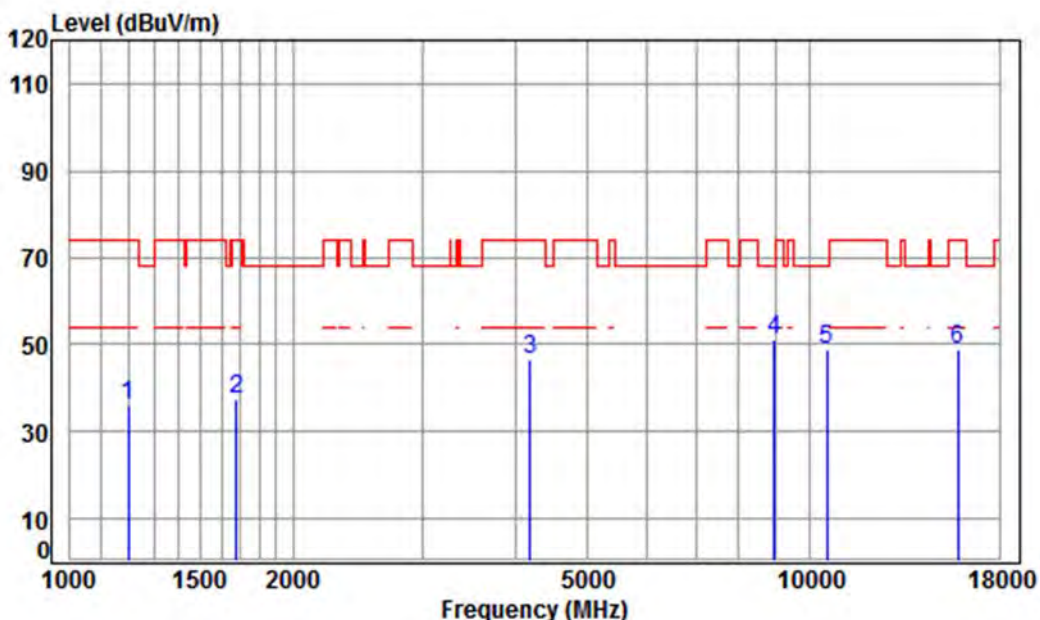

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	48.25	35.97	74.00	-38.03 peak
2	1677.621	5.25	26.58	41.52	47.02	37.33	74.00	-36.67 peak
3	4181.768	7.20	33.60	42.36	48.31	46.75	74.00	-27.25 peak
4 pp	8943.274	10.39	36.53	38.70	42.90	51.12	68.20	-17.08 peak
5	10540.000	11.32	37.15	37.57	37.86	48.76	68.20	-19.44 peak
6	15810.000	14.71	41.28	39.25	31.96	48.70	74.00	-25.30 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

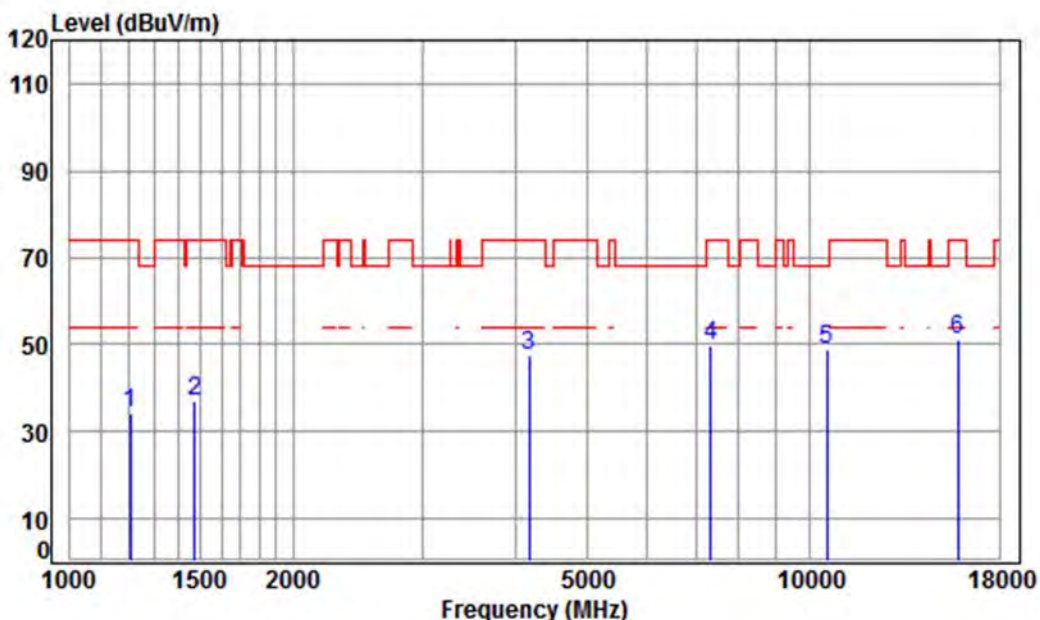

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	41.19	46.28	34.04	74.00	-39.96	peak
2	1473.013	5.39	25.69	41.39	47.37	37.06	74.00	-36.94	peak
3	4169.698	7.18	33.60	42.36	48.98	47.40	74.00	-26.60	peak
4	7326.267	10.04	36.37	40.63	44.15	49.93	74.00	-24.07	peak
5	pp10540.000	11.32	37.15	37.57	38.15	49.05	68.20	-19.15	peak
6	15810.000	14.71	41.28	39.25	34.29	51.03	74.00	-22.97	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

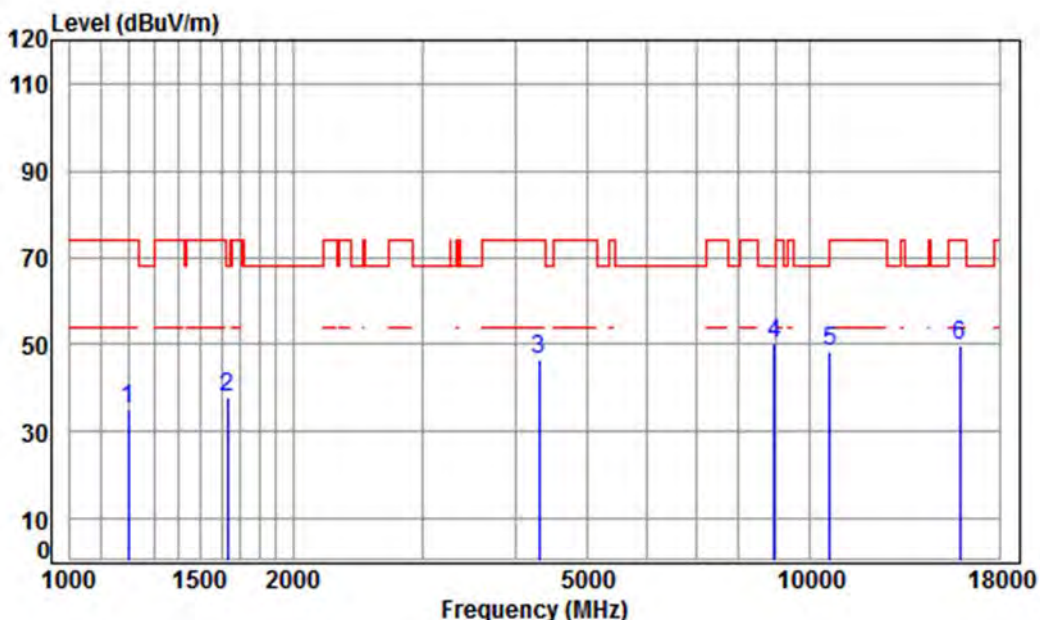

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5310 TX RSE
 : Ant 1+2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	47.39	35.11	74.00	-38.89	peak
2	1629.825	5.31	26.38	41.49	47.50	37.70	68.20	-30.50	peak
3	4304.400	7.34	33.60	42.38	47.86	46.42	74.00	-27.58	peak
4	pp 8943.274	10.39	36.53	38.70	41.75	49.97	68.20	-18.23	peak
5	10620.000	11.37	37.25	37.63	37.24	48.23	74.00	-25.77	peak
6	15930.000	14.89	41.23	39.36	33.13	49.89	74.00	-24.11	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 314 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

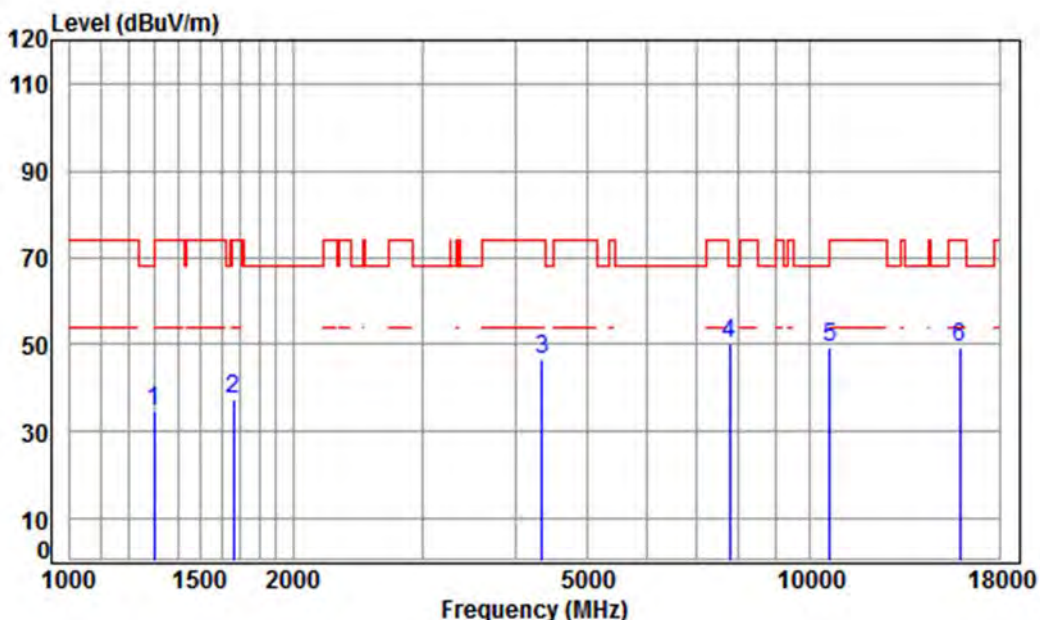

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	41.26	46.38	34.85	68.20	-33.35	peak
2	1663.137	5.27	26.52	41.51	47.00	37.28	74.00	-36.72	peak
3	4341.886	7.38	33.60	42.39	47.88	46.47	74.00	-27.53	peak
4 pp	7784.729	9.97	36.47	40.33	44.07	50.18	68.20	-18.02	peak
5	10620.000	11.37	37.25	37.63	38.11	49.10	74.00	-24.90	peak
6	15930.000	14.89	41.23	39.36	32.59	49.35	74.00	-24.65	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

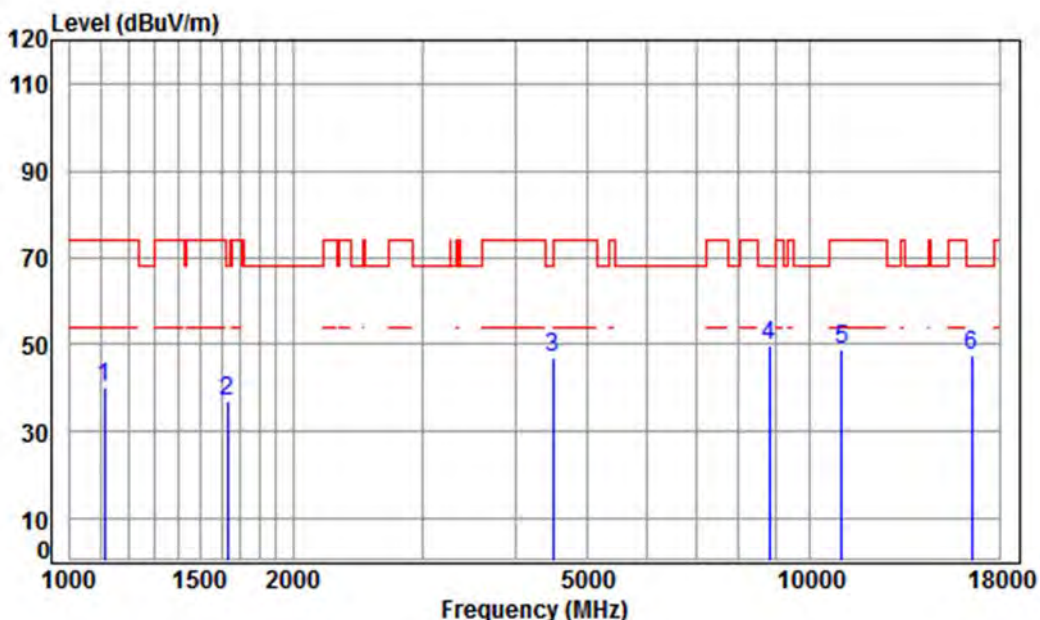

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5510 TX RSE
 : Ant 1+2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1112.872	4.06	24.03	41.11	53.17	40.15	74.00	-33.85 peak
2	1634.543	5.31	26.40	41.49	46.86	37.08	68.20	-31.12 peak
3	4495.125	7.55	33.60	42.42	48.36	47.09	68.20	-21.11 peak
4 pp	8789.516	10.35	36.35	38.93	42.11	49.88	68.20	-18.32 peak
5	11020.000	11.65	37.72	37.89	37.44	48.92	74.00	-25.08 peak
6	16530.000	14.63	42.71	39.89	29.87	47.32	68.20	-20.88 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 316 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

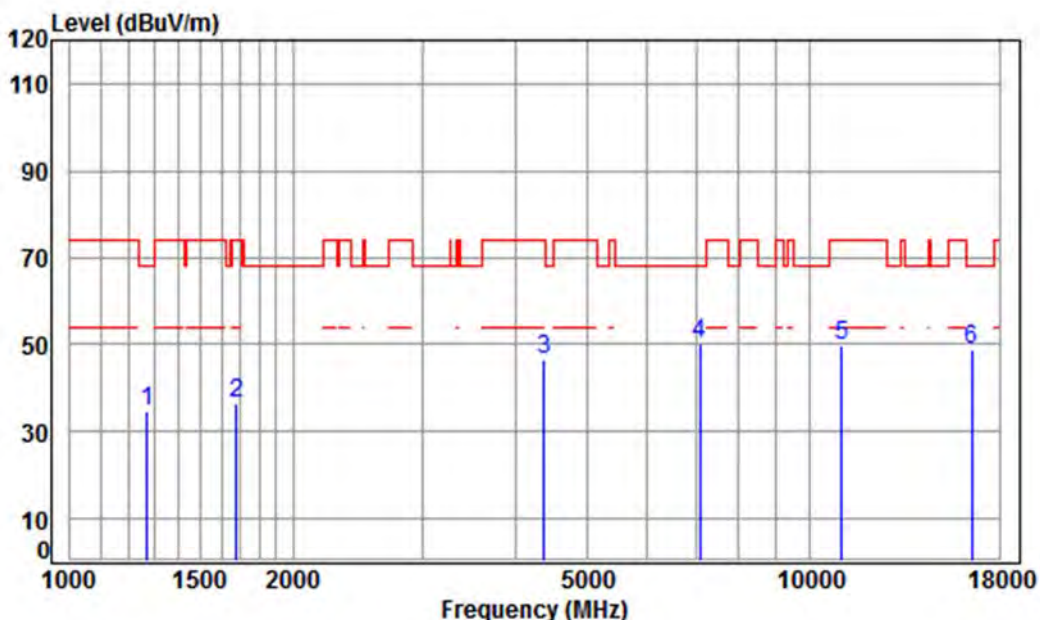

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1271.123	4.69	24.82	41.24	46.26	34.53	68.20	-33.67 peak
2	1677.621	5.25	26.58	41.52	46.33	36.64	74.00	-37.36 peak
3	4367.058	7.41	33.60	42.39	47.99	46.61	74.00	-27.39 peak
4	pp 7096.999	10.10	36.46	40.79	44.49	50.26	68.20	-17.94 peak
5	11020.000	11.65	37.72	37.89	38.17	49.65	74.00	-24.35 peak
6	16530.000	14.63	42.71	39.89	31.37	48.82	68.20	-19.38 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Vertical
------------	---------------	-----------------	------	------	----------

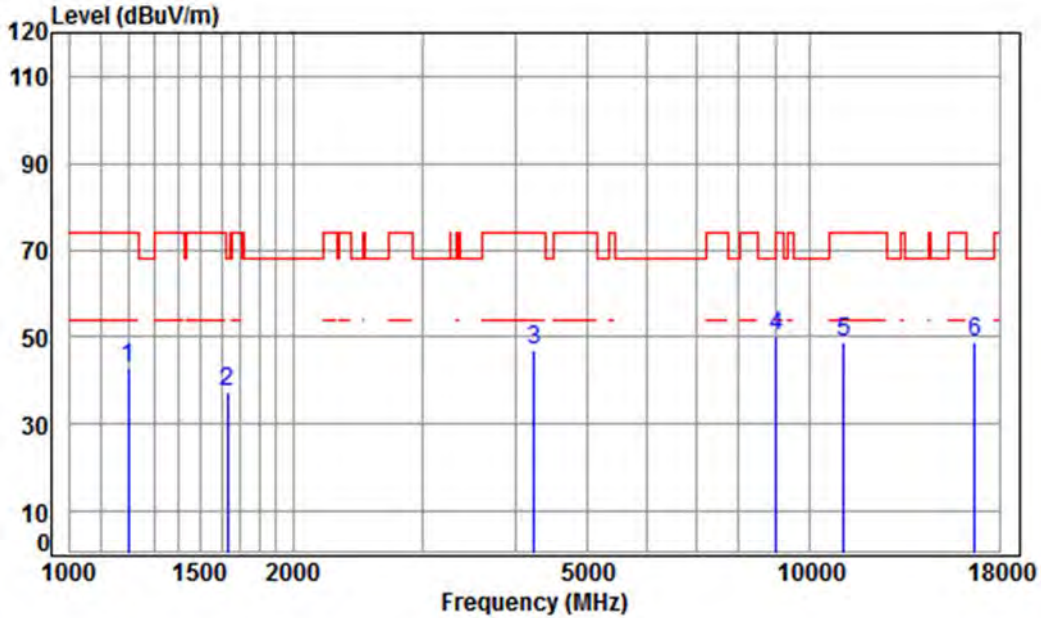


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5550 TX RSE
 : Ant 1+2 5G WIFI 11N(40) CH110

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	54.96	42.68	74.00	-31.32 peak
2	1629.825	5.31	26.38	41.49	47.24	37.44	68.20	-30.76 peak
3	4230.396	7.26	33.60	42.37	48.28	46.77	74.00	-27.23 peak
4 pp	8995.123	10.40	36.59	38.62	42.04	50.41	68.20	-17.79 peak
5	11100.000	11.73	37.78	37.94	37.09	48.66	74.00	-25.34 peak
6	16650.000	15.17	42.73	39.99	30.93	48.84	68.20	-19.36 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

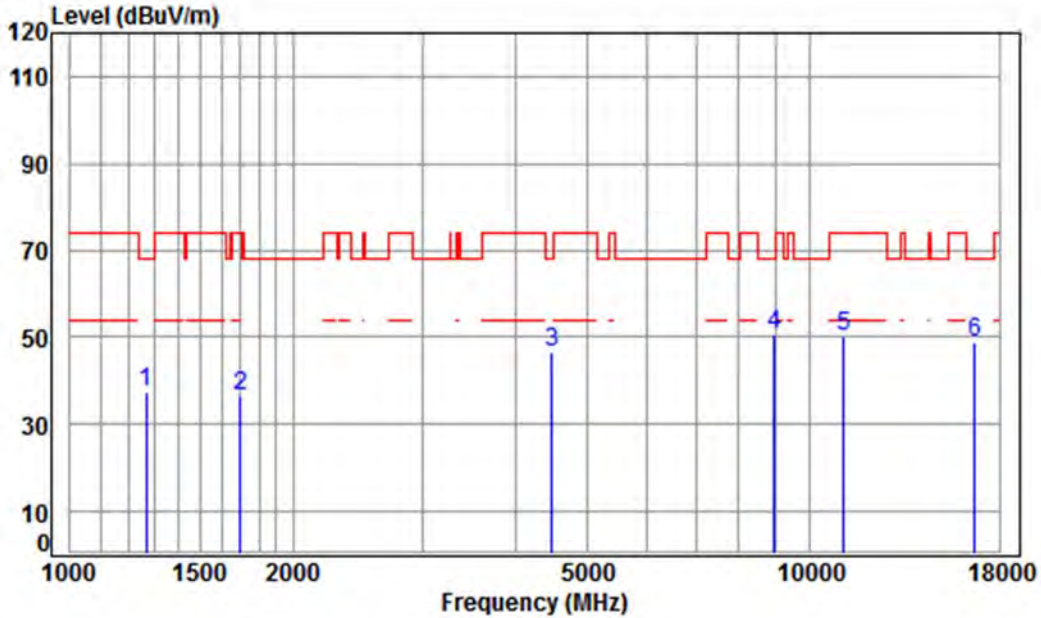

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5550 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1267.454	4.68	24.80	41.24	49.40	37.64	68.20	-30.56 peak
2	1697.129	5.23	26.66	41.53	46.29	36.65	74.00	-37.35 peak
3	4482.150	7.54	33.60	42.41	47.84	46.57	68.20	-21.63 peak
4 pp	8943.274	10.39	36.53	38.70	42.32	50.54	68.20	-17.66 peak
5	11100.000	11.73	37.78	37.94	38.50	50.07	74.00	-23.93 peak
6	16650.000	15.17	42.73	39.99	30.83	48.74	68.20	-19.46 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

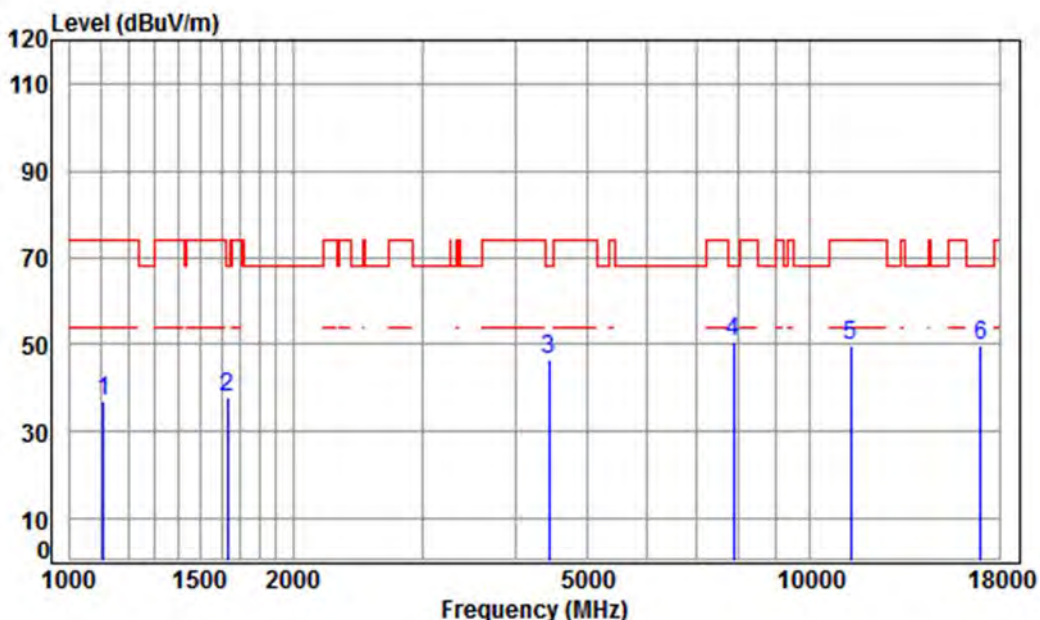

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5670 TX RSE
 : Ant 1+2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1109.660	4.05	24.02	41.10	49.82	36.79	74.00	-37.21 peak
2	1629.825	5.31	26.38	41.49	47.56	37.76	68.20	-30.44 peak
3	4430.628	7.48	33.60	42.41	47.99	46.66	68.20	-21.54 peak
4 pp	7875.254	9.96	36.53	40.28	44.30	50.51	68.20	-17.69 peak
5	11340.000	11.98	37.97	38.10	37.85	49.70	74.00	-24.30 peak
6	17010.000	16.69	42.81	40.29	30.52	49.73	68.20	-18.47 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 320 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

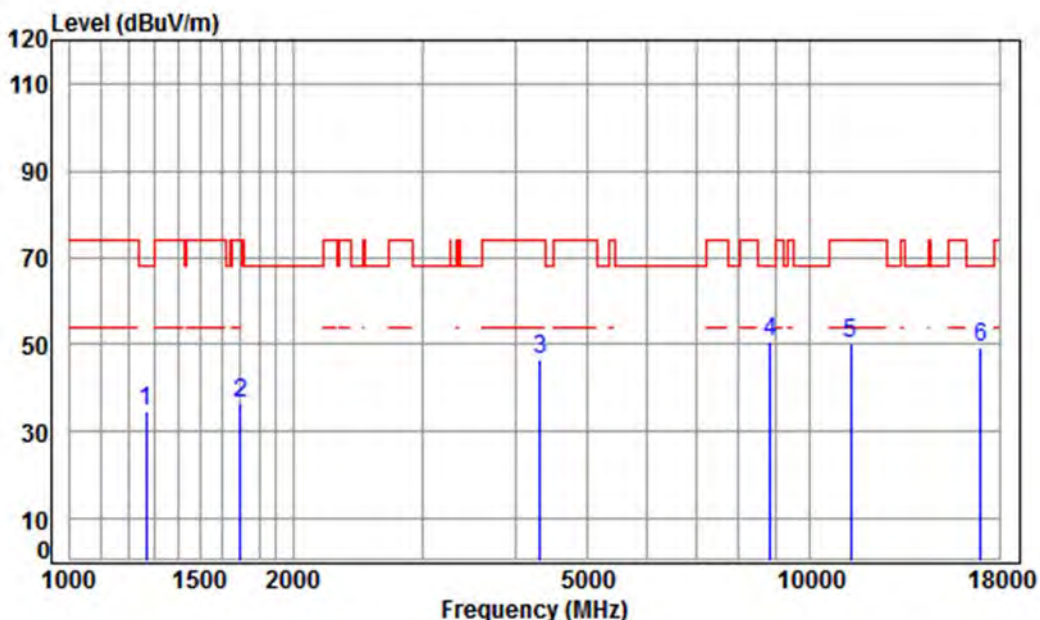

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5670 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1267.454	4.68	24.80	41.24	46.27	34.51	68.20	-33.69 peak
2	1697.129	5.23	26.66	41.53	45.95	36.31	74.00	-37.69 peak
3	4316.859	7.36	33.60	42.38	48.04	46.62	74.00	-27.38 peak
4	pp 8840.473	10.36	36.41	38.86	42.52	50.43	68.20	-17.77 peak
5	11340.000	11.98	37.97	38.10	38.47	50.32	74.00	-23.68 peak
6	17010.000	16.69	42.81	40.29	30.02	49.23	68.20	-18.97 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 321 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

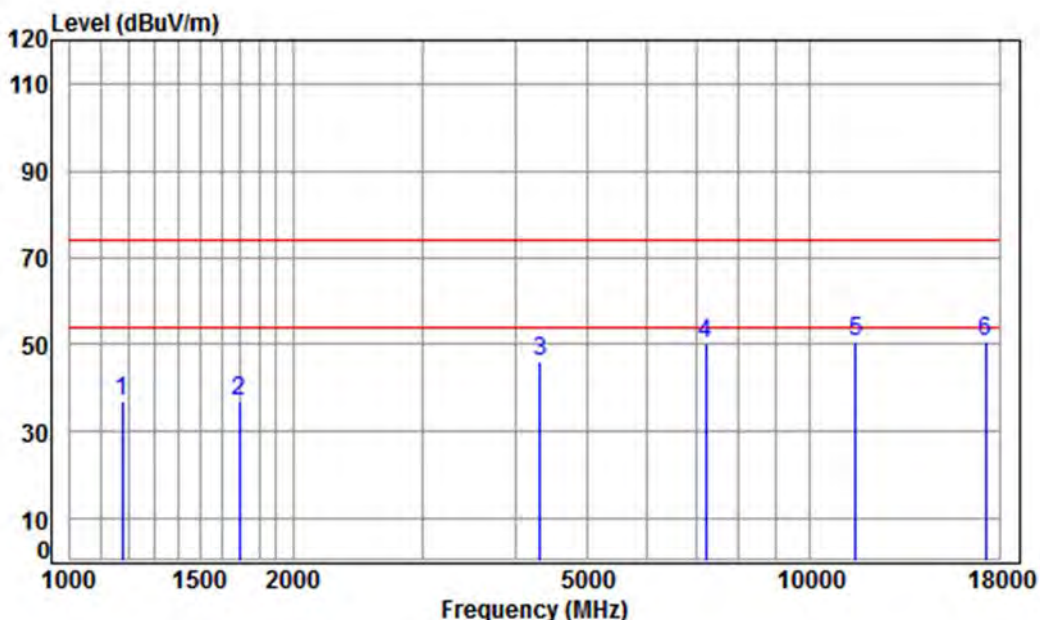

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5755 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1175.697	4.32	24.36	41.16	49.29	74.00	-37.19	peak
2	1692.231	5.24	26.64	41.53	46.81	74.00	-36.84	peak
3	4316.859	7.36	33.60	42.38	47.60	74.00	-27.82	peak
4	7221.150	10.07	36.41	40.70	44.30	74.00	-23.92	peak
5	11510.000	12.14	38.11	38.20	38.55	74.00	-23.40	peak
6	pp17265.000	16.12	43.12	40.51	31.99	74.00	-23.28	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 322 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

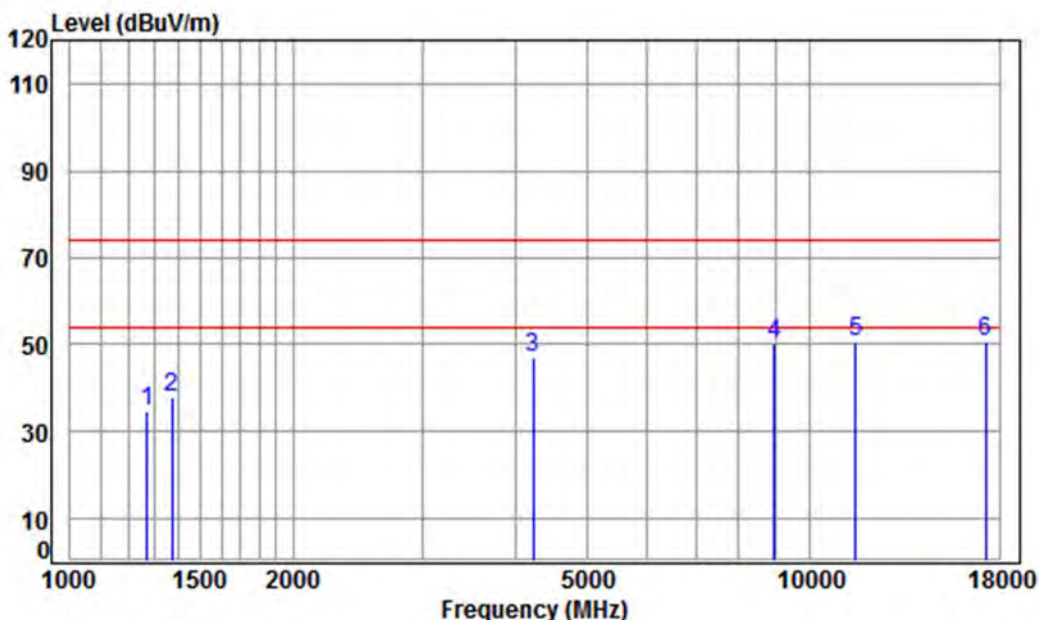

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5755 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.63	34.90	74.00 -39.10	peak
2	1374.295	5.06	25.28	41.32	48.84	37.86	74.00 -36.14	peak
3	4218.186	7.24	33.60	42.37	48.37	46.84	74.00 -27.16	peak
4	8943.274	10.39	36.53	38.70	41.89	50.11	74.00 -23.89	peak
5	11510.000	12.14	38.11	38.20	38.55	50.60	74.00 -23.40	peak
6	pp17265.000	16.12	43.12	40.51	32.07	50.80	74.00 -23.20	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 323 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

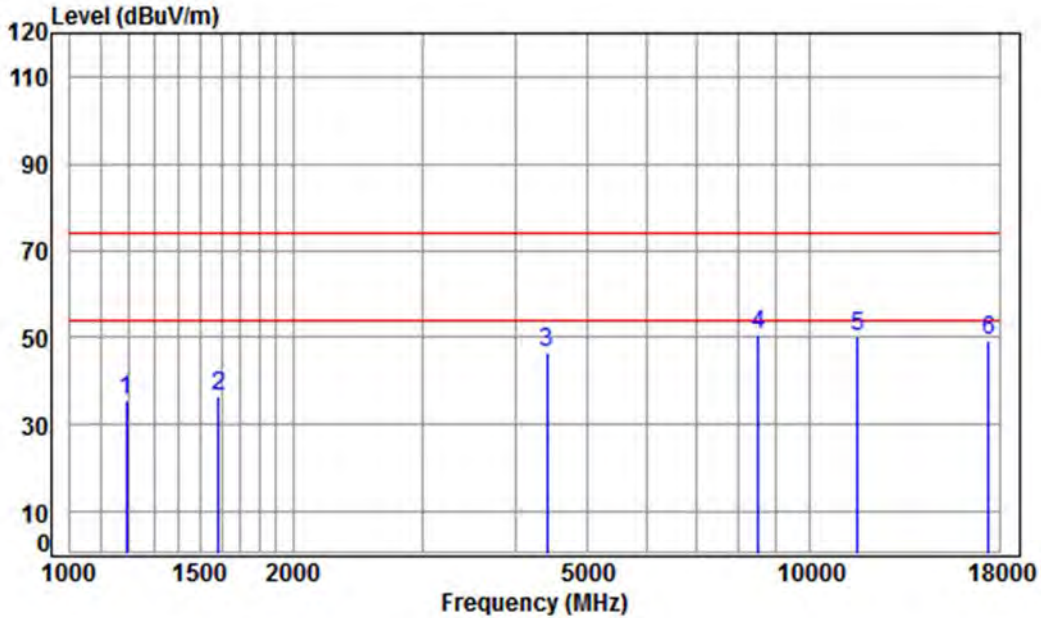


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5795 TX RSE
 : Ant 1+2 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	4.39	24.44	41.18	48.10	35.75	74.00	-38.25	peak
2	1587.975	5.37	26.20	41.46	46.44	36.55	74.00	-37.45	peak
3	4405.090	7.46	33.60	42.40	48.09	46.75	74.00	-27.25	peak
4 pp	8514.456	10.27	36.02	39.36	43.81	50.74	74.00	-23.26	peak
5	11590.000	12.17	38.19	38.25	38.23	50.34	74.00	-23.66	peak
6	17385.000	15.85	43.26	40.60	30.63	49.14	74.00	-24.86	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

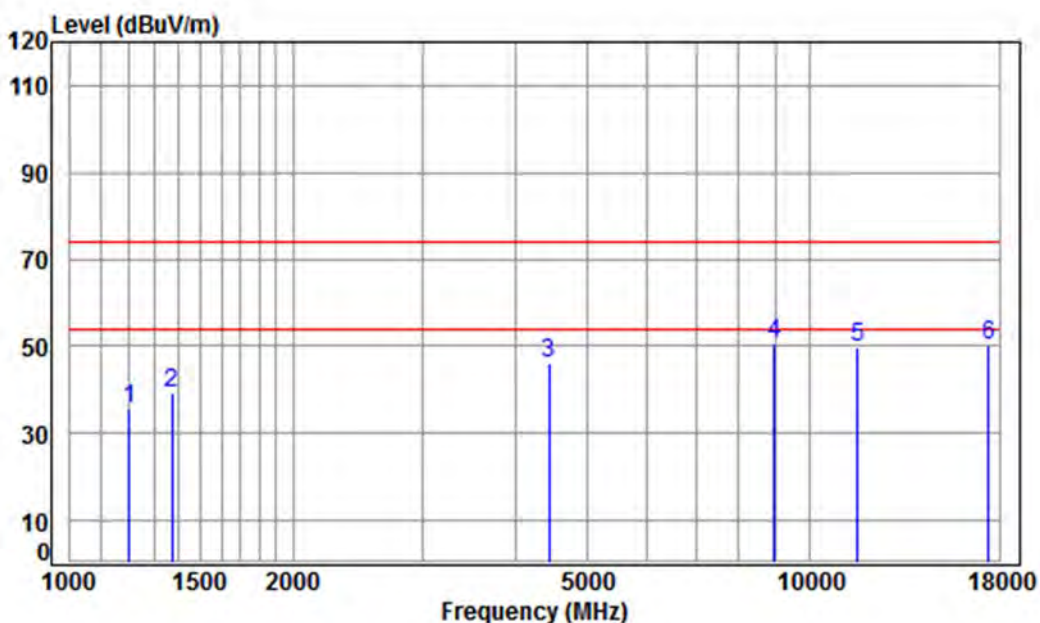

Condition: 3m HORIZONTAL

Job No : 2939RG


Mode : 5795 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	47.86	35.59	74.00	-38.41 peak
2	1374.295	5.06	25.28	41.32	50.04	39.06	74.00	-34.94 peak
3	4430.628	7.48	33.60	42.41	47.41	46.08	74.00	-27.92 peak
4 pp	8943.274	10.39	36.53	38.70	42.32	50.54	74.00	-23.46 peak
5	11590.000	12.17	38.19	38.25	37.52	49.63	74.00	-24.37 peak
6	17385.000	15.85	43.26	40.60	31.70	50.21	74.00	-23.79 peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

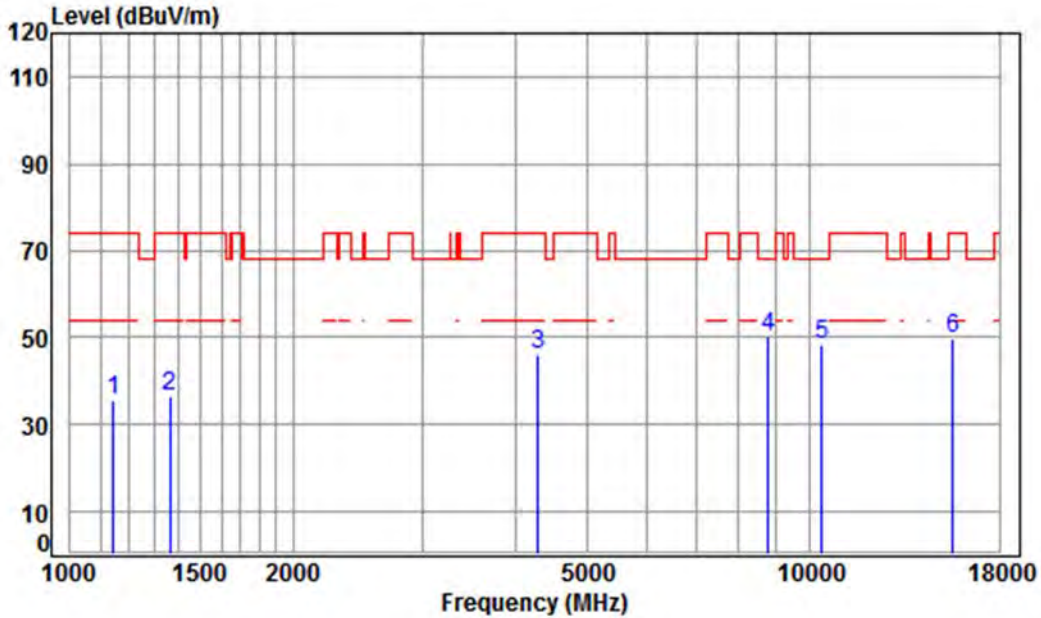

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5190 TX RSE
 : Ant 1+2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	48.22	35.48	74.00	-38.52 peak
2	1366.374	5.04	25.25	41.31	47.66	36.64	74.00	-37.36 peak
3	4291.977	7.33	33.60	42.38	47.66	46.21	74.00	-27.79 peak
4 pp	8764.146	10.34	36.32	38.97	42.71	50.40	68.20	-17.80 peak
5	10380.000	11.21	37.22	37.47	37.48	48.44	68.20	-19.76 peak
6	15570.000	14.35	41.37	39.03	32.90	49.59	74.00	-24.41 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 326 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

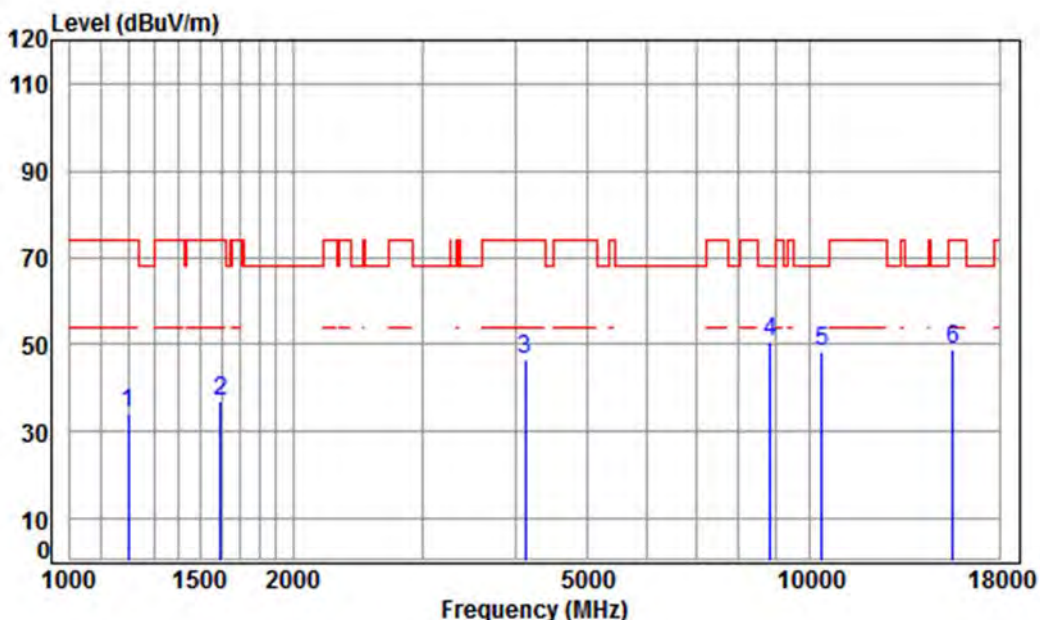

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	46.35	34.07	74.00	-39.93	peak
2	1597.181	5.35	26.24	41.47	46.67	36.79	74.00	-37.21	peak
3	4121.768	7.13	33.60	42.35	48.35	46.73	74.00	-27.27	peak
4 pp	8840.473	10.36	36.41	38.86	42.87	50.78	68.20	-17.42	peak
5	10380.000	11.21	37.22	37.47	37.28	48.24	68.20	-19.96	peak
6	15570.000	14.35	41.37	39.03	32.17	48.86	74.00	-25.14	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 327 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

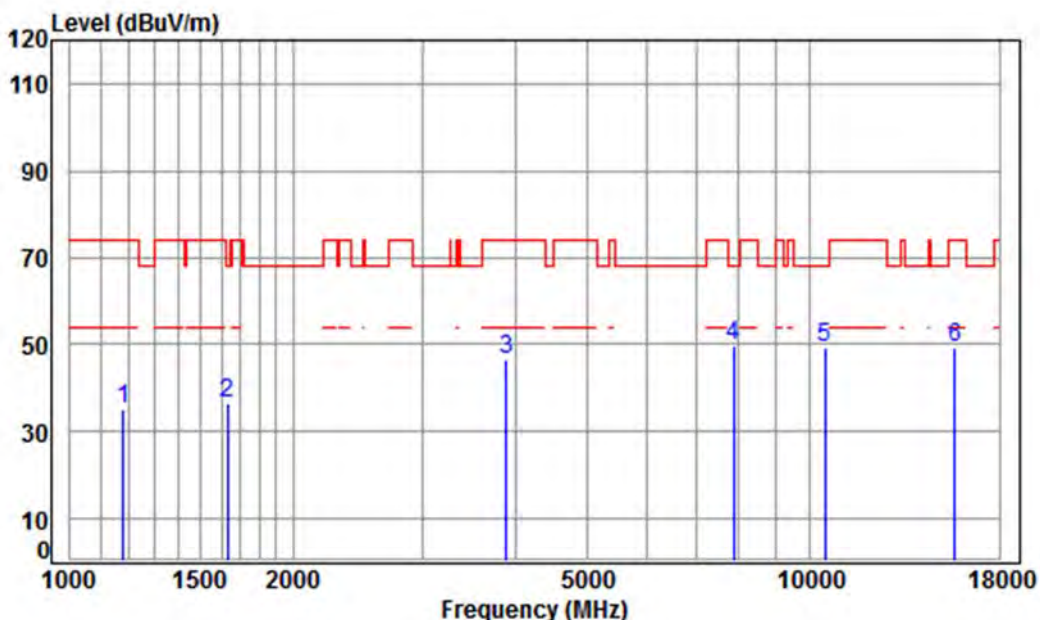

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5230 TX RSE
 : Ant 1+2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1179.100	4.33	24.38	41.16	47.60	35.15	74.00	-38.85	peak
2	1629.825	5.31	26.38	41.49	46.44	36.64	68.20	-31.56	peak
3	3890.255	6.87	33.31	42.30	48.80	46.68	74.00	-27.32	peak
4 pp	7875.254	9.96	36.53	40.28	43.65	49.86	68.20	-18.34	peak
5	10460.000	11.26	37.14	37.52	38.25	49.13	68.20	-19.07	peak
6	15690.000	14.53	41.32	39.14	32.49	49.20	74.00	-24.80	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 328 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

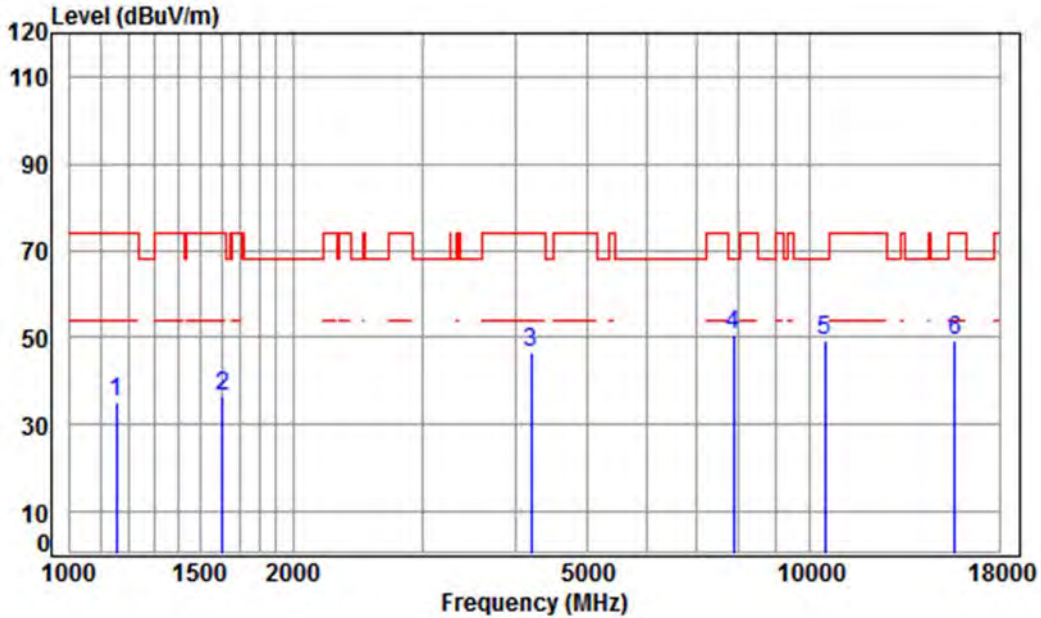


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5230 TX RSE
 : Ant 1+2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1155.483	4.24	24.26	41.14	47.62	34.98	74.00	-39.02	peak
2	1606.441	5.34	26.28	41.47	46.23	36.38	74.00	-37.62	peak
3	4193.872	7.21	33.60	42.36	48.09	46.54	74.00	-27.46	peak
4	pp 7875.254	9.96	36.53	40.28	44.47	50.68	68.20	-17.52	peak
5	10460.000	11.26	37.14	37.52	38.32	49.20	68.20	-19.00	peak
6	15690.000	14.53	41.32	39.14	32.51	49.22	74.00	-24.78	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

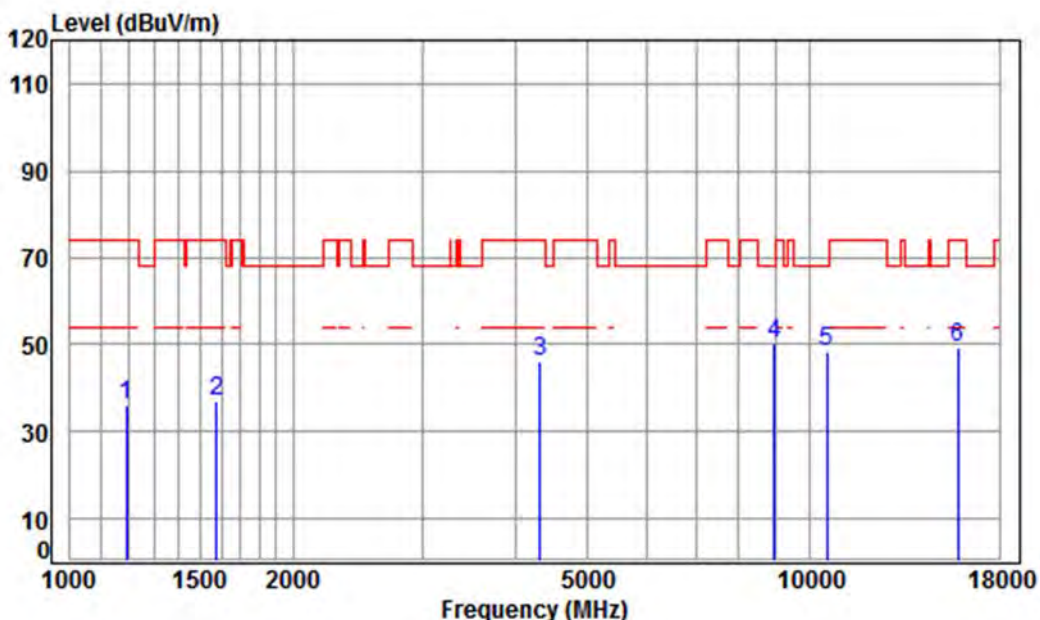


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5270 TX RSE
 : Ant 1+2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	4.39	24.44	41.18	48.36	36.01	74.00	-37.99	peak
2	1578.822	5.38	26.16	41.46	46.85	36.93	74.00	-37.07	peak
3	4316.859	7.36	33.60	42.38	47.69	46.27	74.00	-27.73	peak
4	pp 8943.274	10.39	36.53	38.70	41.86	50.08	68.20	-18.12	peak
5	10540.000	11.32	37.15	37.57	37.42	48.32	68.20	-19.88	peak
6	15810.000	14.71	41.28	39.25	32.57	49.31	74.00	-24.69	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

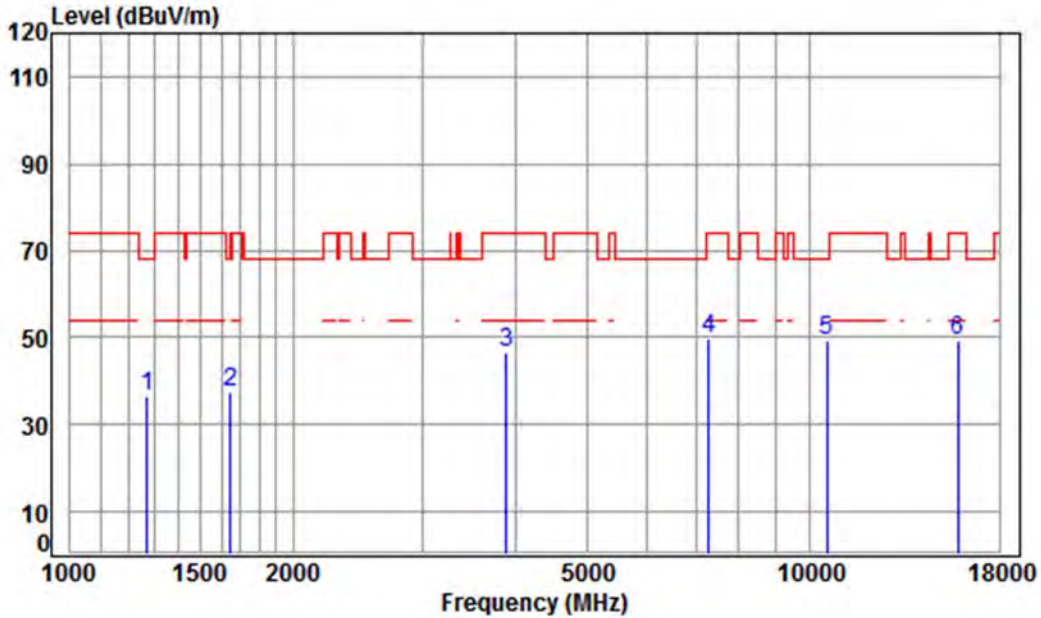


Condition: 3m HORIZONTAL
 Job No : 2939RG
 Mode : 5270 TX RSE
 : Ant 1+2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	48.17	36.44	68.20	-31.76	peak
2	1648.778	5.29	26.46	41.50	46.94	37.19	68.20	-31.01	peak
3	3890.255	6.87	33.31	42.30	48.61	46.49	74.00	-27.51	peak
4	7284.038	10.06	36.38	40.66	44.12	49.90	74.00	-24.10	peak
5	pp10540.000	11.32	37.15	37.57	38.20	49.10	68.20	-19.10	peak
6	15810.000	14.71	41.28	39.25	32.74	49.48	74.00	-24.52	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

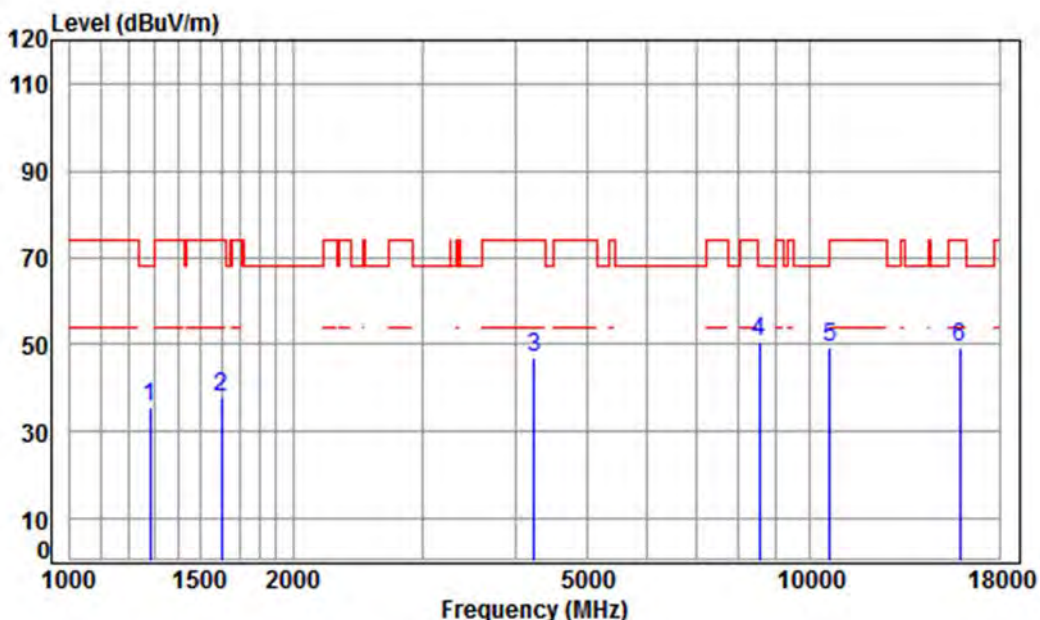

Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5310 TX RSE
 : Ant 1+2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1282.193	4.73	24.87	41.25	47.28	35.63	68.20	-32.57 peak
2	1601.804	5.35	26.26	41.47	47.84	37.98	74.00	-36.02 peak
3	4230.396	7.26	33.60	42.37	48.46	46.95	74.00	-27.05 peak
4 pp	8539.102	10.28	36.05	39.32	43.61	50.62	68.20	-17.58 peak
5	10620.000	11.37	37.25	37.63	38.08	49.07	74.00	-24.93 peak
6	15930.000	14.89	41.23	39.36	32.46	49.22	74.00	-24.78 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 332 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

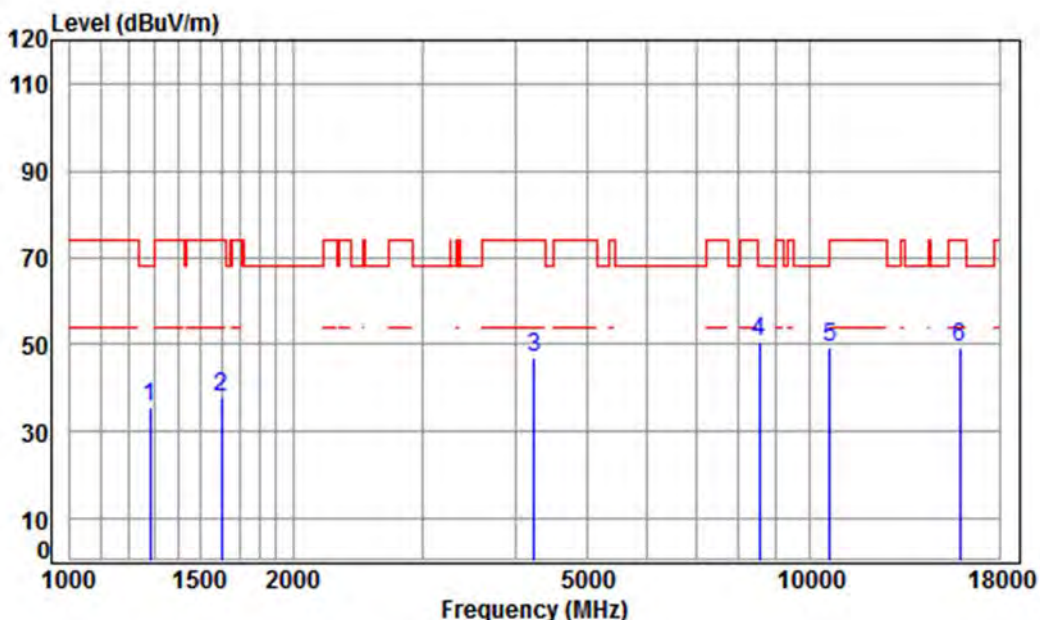


Condition: 3m VERTICAL
 Job No : 2939RG
 Mode : 5310 TX RSE
 : Ant 1+2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	4.73	24.87	41.25	47.28	35.63	68.20	-32.57	peak
2	1601.804	5.35	26.26	41.47	47.84	37.98	74.00	-36.02	peak
3	4230.396	7.26	33.60	42.37	48.46	46.95	74.00	-27.05	peak
4 pp	8539.102	10.28	36.05	39.32	43.61	50.62	68.20	-17.58	peak
5	10620.000	11.37	37.25	37.63	38.08	49.07	74.00	-24.93	peak
6	15930.000	14.89	41.23	39.36	32.46	49.22	74.00	-24.78	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

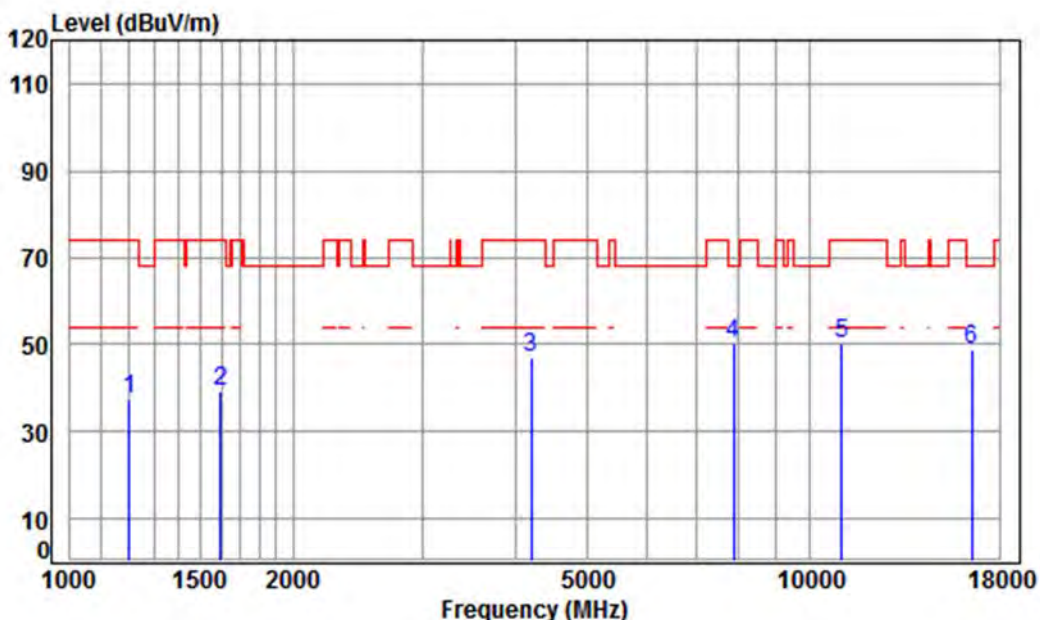

Condition: 3m VERTICAL

Job No : 2939RG


Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	49.62	37.35	74.00	-36.65 peak
2	1597.181	5.35	26.24	41.47	49.18	39.30	74.00	-34.70 peak
3	4193.872	7.21	33.60	42.36	48.57	47.02	74.00	-26.98 peak
4 pp	7875.254	9.96	36.53	40.28	43.96	50.17	68.20	-18.03 peak
5	11020.000	11.65	37.72	37.89	38.61	50.09	74.00	-23.91 peak
6	16530.000	14.63	42.71	39.89	31.40	48.85	68.20	-19.35 peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

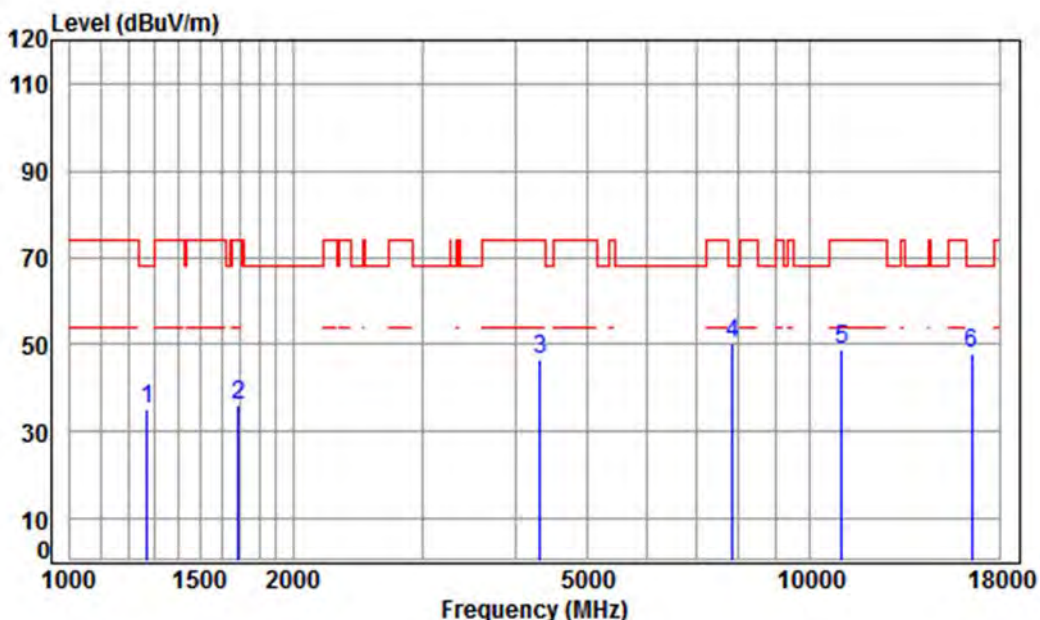

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.79	35.06	68.20	-33.14	peak
2	1687.347	5.24	26.62	41.52	45.83	36.17	74.00	-37.83	peak
3	4316.859	7.36	33.60	42.38	48.02	46.60	74.00	-27.40	peak
4 pp	7852.524	9.96	36.51	40.29	44.14	50.32	68.20	-17.88	peak
5	11020.000	11.65	37.72	37.89	37.31	48.79	74.00	-25.21	peak
6	16530.000	14.63	42.71	39.89	30.68	48.13	68.20	-20.07	peak