


Appendix I: Conducted Emission at Power Port

Note: RBW = 9 kHz, VBW = 30 kHz

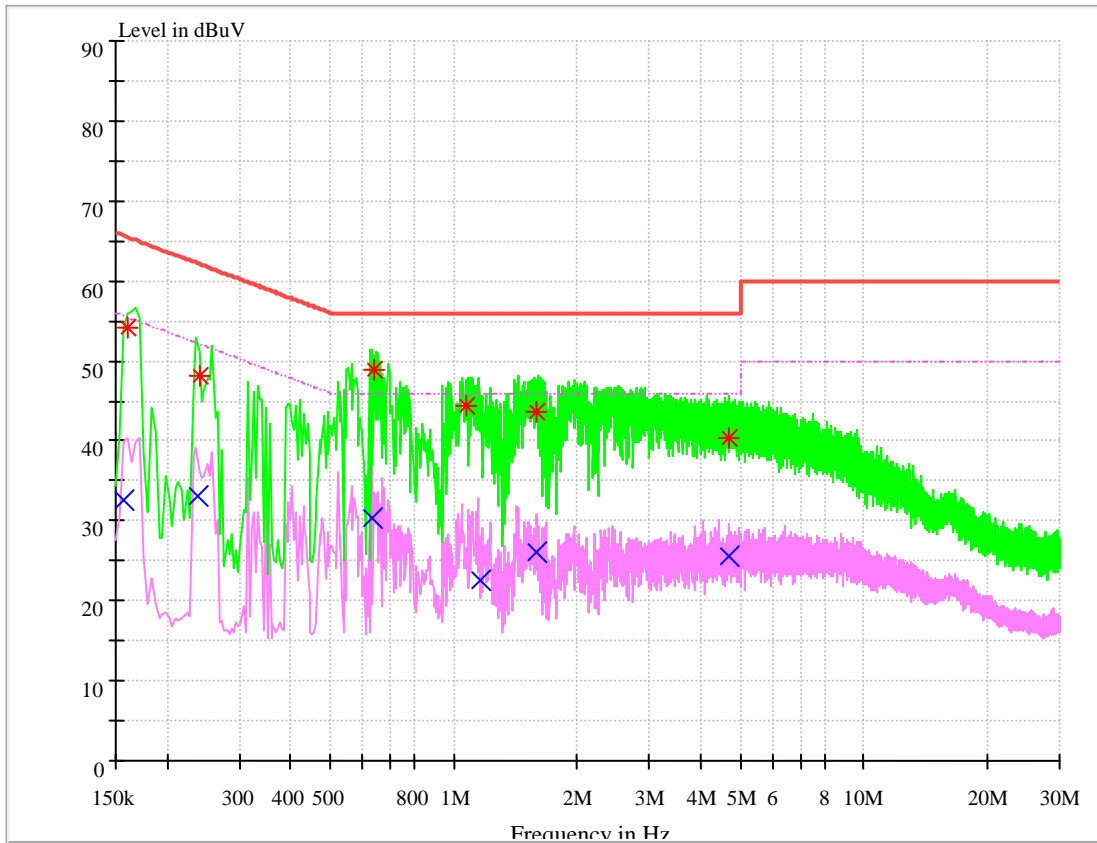

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Transd. (dB)	Margin (dB)	Line	PE
0.159765	54.19	65.48	9.7	11.29	L1	FLO
0.239907	48.10	62.10	9.7	14.00	N	FLO
0.636751	48.92	56.00	9.7	7.08	L1	FLO
1.071096	44.35	56.00	9.7	11.65	L1	FLO
1.595568	43.52	56.00	9.7	12.48	N	FLO
4.698314	40.48	56.00	9.7	15.52	N	FLO

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Transd. (dB)	Margin (dB)	Line	PE
0.156359	32.59	55.66	9.7	23.07	L1	FLO
0.237538	32.98	52.18	9.7	19.20	L1	FLO
0.635752	30.31	46.00	9.7	15.69	N	FLO
1.160966	22.54	46.00	9.7	23.46	N	FLO
1.587654	26.07	46.00	9.7	19.93	L1	FLO
4.699083	25.64	46.00	9.7	20.36	L1	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END