



www.ecmg-global.net

EMI TEST REPORT

On Model Name: IP Phone

Model Number: eSpace 6870, eSpace 6870+, eSpace 6801x

Brand Name:



Prepared for Huawei Technologies Co., Ltd

FCC ID Number: QISESPACE6870

According to FCC 47 CFR Part 15, Subpart B


Test Report #: SHE-1107-10675-FCC

Prepared by: Sewen Guo

Reviewed by: Jawen Yin

QC Manager: Swall Zhang

Test Report Released by:



Swall Zhang

August 19, 2011

Date

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

Test Site Location : Galanz

*25 South Ronggui Rd., Shunde, Foshan,
Guangdong, China*

Tel : 86-757-23612785

Fax : 86-757-23612537

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

- *CNAL - LAB Code: L2244*

Galanz EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- *FCC - Registration No.: 580210*

Galanz EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.

Table of Contents

GOVERNMENT DISCLAIMER NOTICE	2
REPRODUCTION CLAUSE	2
OPINIONS AND INTERPRETATIONS	2
STATEMENT OF MEASUREMENT UNCERTAINTY	2
ADMINISTRATIVE DATA	3
EUT DESCRIPTION	4
EUT MODEL DERIVED	5
TEST SUMMARY	5
TEST MODE JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATION	6
TEST SYSTEM DETAILS	7
CONFIGURATION OF TESTED SYSTEM	9
ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS	10
ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT	15

List Attached Files

Exhibit Type	File Description	File Name
<i>Test Report</i>	<i>Test Report</i>	<i>QISESPACE6870 _Test report.pdf</i>
<i>Operation Description</i>	<i>Technical Description</i>	<i>QISESPACE6870_operation description.pdf</i>
<i>External Photos</i>	<i>External Photos</i>	<i>QISESPACE6870_External Photos</i>
<i>Internal Photos</i>	<i>Internal Photos</i>	<i>QISESPACE6870_Internal Photos</i>
<i>Block Diagram</i>	<i>Block Diagram</i>	<i>QISESPACE6870_Block Diagram.pdf</i>
<i>Schematics</i>	<i>Circuit Diagram</i>	<i>QISESPACE6870 _Schematics.pdf</i>
<i>ID Label/Location</i>	<i>Label and Location</i>	<i>QISESPACE6870 _Label & Location.pdf</i>
<i>User Manual</i>	<i>User Manual</i>	<i>QISESPACE6870 _User Manual.pdf</i>
<i>Test setup photos</i>	<i>Test setup photos</i>	<i>QISESPACE6870 _Test Setup Photos</i>

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from EMC Compliance Management Group.

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of EMC Compliance Management Group Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : IP Phone

Model Numbers : eSpace 6870, eSpace 6870+ eSpace 6801x

Model Tested : eSpace 6870+ eSpace 6801x

Receipt Date : August 8, 2011

Date Tested : August 9, 2011 to August 11, 2011

Applicant : Huawei Technologies Co., Ltd
: Administration Building, Huawei Base Bantian
Longgang District, Shenzhen 518129 P.R.C

Telephone : 86-755-28786132

Fax : 86-755-28566543

Manufacturer : Huawei Technologies Co., Ltd
: Administration Building, Huawei Base Bantian
Longgang District, Shenzhen 518129 P.R.C

Telephone : 86-755-28786132

Fax : 86-755-28566543

Factory : Huawei Technologies Co., Ltd
: Administration Building, Huawei Base Bantian
Longgang District, Shenzhen 518129 P.R.C

Telephone : 86-755-28786132

Fax : 86-755-28566543

EUT Description

Huawei Technologies Co., Ltd. model tested eSpace 6870+ eSpace 6801x (referred to as the EUT in this report) is an IP Phone.

The EUT is an IP Phone whose main technical specifications are as below:

Parameter		Range
<i>Basic parameters</i>	<i>Rated voltage</i>	5VDC
	<i>Rated Current</i>	0.5A
<i>I/O Ports</i>	<i>LAN Port</i>	<i>10/100Mbps RJ-45 Port for LAN connection, Integrated PoE</i>
	<i>PC Port</i>	<i>10/100Mbps RJ-45 Port for PC connection,</i>
	<i>Power Jack</i>	<i>5VDC Input Port</i>
	<i>Ext port*2pcs</i>	<i>Connects the eSpace 6870 Extension unit directly to the eSpace 6870 using connection cable</i>
	<i>Headset Jack</i>	<i>RJ22 headset jack and 2.5 mm earphone jack</i>
	<i>Headset Jack</i>	<i>RJ11</i>
<i>Adapter #1</i>	<i>Input</i>	<i>100-240VAC 50/60Hz 0.15A</i>
	<i>Output</i>	<i>5VDC, 800mA, 4.0W</i>
	<i>Model</i>	<i>SCF0500080A1BA</i>
	<i>Brand name</i>	<i>Mass</i>
<i>Adapter #2</i>	<i>Input</i>	<i>100-240VAC 50/60Hz 0.2A</i>
	<i>Output</i>	<i>5VDC, 800mA, 4.0W</i>
	<i>Model</i>	<i>AK00G-0500080UW</i>
	<i>Brand name</i>	<i>All-Key(AK)</i>

NOTE: For more detailed informations or features please refer to user's manual of EUT.

EUT Model Derived

Model of eSpace 6870 and eSpace 6870+ eSpace 6801x are the same series of products.

The difference between them is only that model of eSpace 6870+ eSpace 6801x has extension board but model of eSpace 6870 hasn't, they are only used for different market purpose and anything else are the same.

Model of eSpace 6870+ eSpace 6801x was chosen for the final testing.

Test Summary

The Electromagnetic Compatibility requirements on model eSpace 6870+ eSpace 6801x for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
FCC Part 15.107 ANSI C63.4 -2003	Conducted Emission	Passed	AC Input Port	Attachment 1
FCC Part 15.109 ANSI C63.4 -2003	Radiated Emission	Passed	Enclosure	Attachment 2

Test Mode Justification

Pre-scan has been conducted to determine the worst-case modes from all possible combinations between available operational modes. the following modes were chosen for final test as described below.

IP Call mode:

Connected the EUT to another an IP Phone by a RJ-45 signal line and established a call communication between them, then connected a notebook PC to PC port of the EUT by a RJ-45 signal line and ping 192.168.0.180 to EUT and measured it.

PoE Mode:

Removed AC/DC adaptor of the EUT, Let the EUT operated in PoE mode and measured it.

EUT Exercise Software

No test software support this test.

Equipment Modification

Any modifications installed previous to testing by Huawei Technologies Co., Ltd. will be incorporated in each production model sold or leased in United States.

There were no modifications installed by EMC Compliance Management Group test personnel.

Test System Details

EUT			
Model Number:	<i>eSpace 6870, eSpace 6870+ eSpace 6801x</i>		
Model Tested:	<i>eSpace 6870+ eSpace 6801x</i>		
Description:	<i>IP Phone</i>		
Input:	<i>AC 120V/60Hz</i>		
Manufacturer:	<i>Huawei Technologies Co., Ltd</i>		
Support Equipment			
Description	Model Number	Serial Number	Manufacturer
Notebook PC	NC4000	CNU4122BCL	HP
Adapter Of Notebook PC	PPP009H	239427-003	HP
Mouse	MO32B0	23-033131	HP
Keyboard	SK-1788	N/A	LENOVO
Monitor	177V+	N/A	AOC


Cable Description					
Description	From	To	Length (Meters)	Shielded (Y/N)	Ferrite (Y/N)
<i>Adaptor Cord Of Notebook PC</i>	<i>Adaptor</i>	<i>Notebook PC</i>	1.6	N	Y
	<i>AC Plug</i>	<i>Adaptor</i>	1.2	N	Y
<i>Mouse cord</i>	<i>Mouse</i>	<i>Plug</i>	1.2	N	Y
<i>Keyboard cord</i>	<i>Keyboard</i>	<i>Plug</i>	1.2	N	Y
<i>VGA cord</i>	<i>Notebook PC</i>	<i>Monitor</i>	1.2	Y	Y
<i>EXT Cord</i>	<i>EUT</i>	<i>Extension Board</i>	0.23	N	N
<i>RJ-45 Cord</i>	<i>EUT</i>	<i>Notebook PC</i>	1.5	N	Y
<i>Adaptor #1 cord</i>	<i>EUT</i>	<i>Plug</i>	1.8	N	N
<i>Adaptor #2 cord</i>	<i>EUT</i>	<i>Plug</i>	1.8	N	N

Note: The "EUT" means "IP Phone".

Note:


The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.

Configuration of Tested System

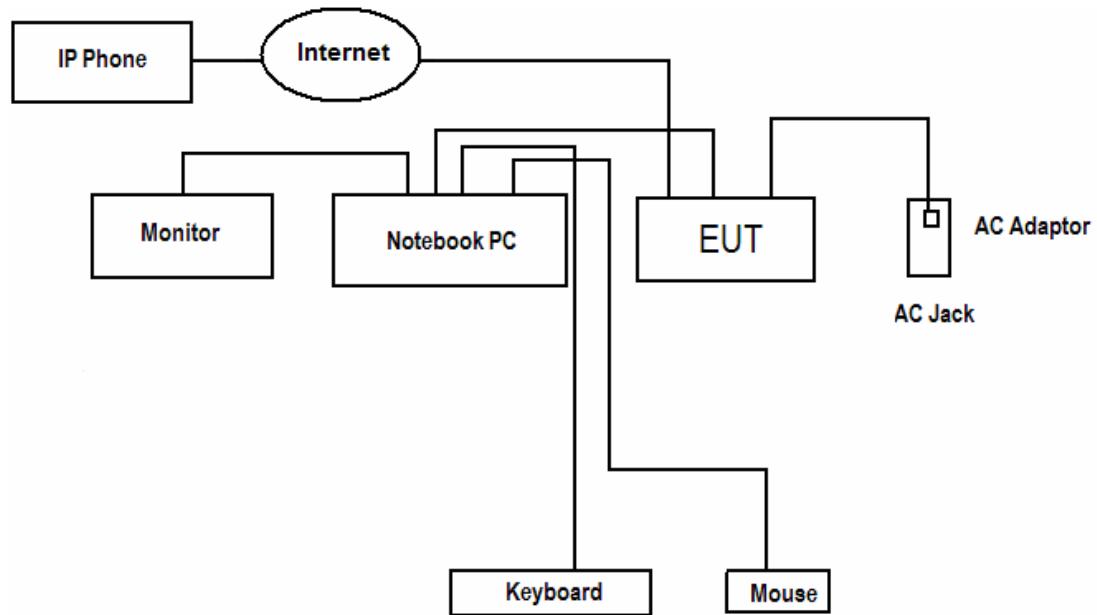


Note : The same system configuration shall still apply to PoE mode when removed AC Adaptor of EUT.


ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS

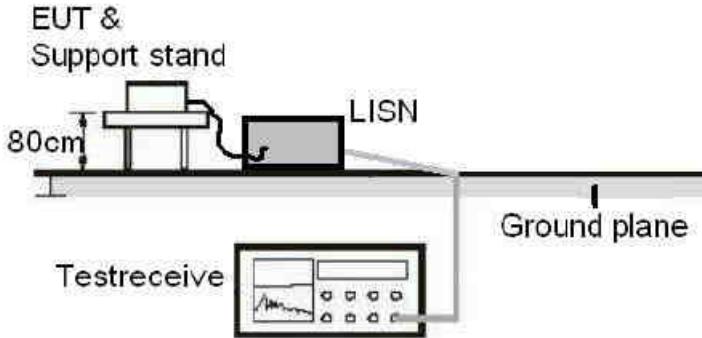CLIENT:	Huawei Technologies Co., Ltd	TEST STANDERD:	FCC Part 15, Subpart B, Section 15.107
MODEL NUMBERS:	eSpace 6870, eSpace 6870+ eSpace 6801x	PRODUCT:	IP Phone
MODEL TESTED:	eSpace 6870+ eSpace 6801x	EUT DESIGNATION:	Commercial and Residential use
TEMPERATURE:	21°C	HUMIDITY:	56%
ATM PRESSURE:	101kPa	GROUNDING:	None
TESTED BY:	Sewen Guo	DATE OF TEST:	August 10, 2011
TEST REFERENCE:	ANSI C63.4- 2003		
TEST PROCEDURE:	The EUT was set up according to the guidelines of ANSI C63.4-2003 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150KHz to 30MHz.		
DESCRIPTION OF TEST MODE	IP Call mode. for more detailed information please refer to test mode justification.		
TEST SET UP			
TESTED RANGE:	150kHz to 30MHz		
TEST VOLTAGE:	AC 120V/60Hz		
RESULTS:	The EUT meets the requirements of test reference for conducted emissions. The test results relate only to the equipment under test provided by client.		
Changes or Modifications:	There were no modifications installed by EMC Compliance Management Group test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB		

Adaptor #1:(Mass)

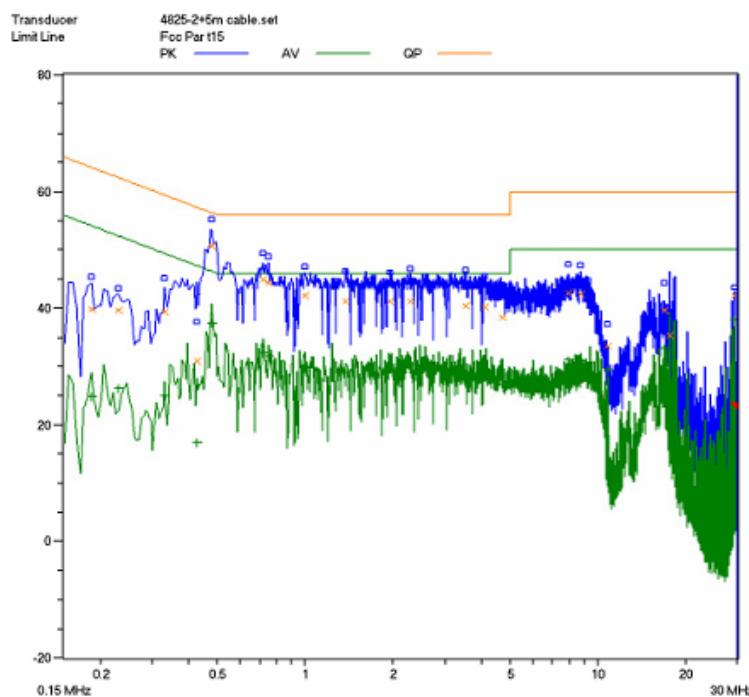


Line L Conducted Emission Graph -IP Call

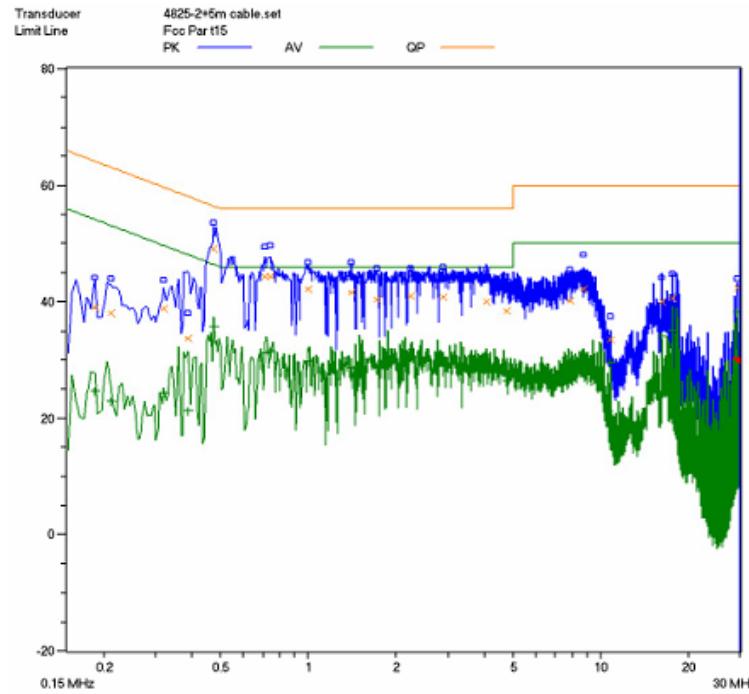


Line N Conducted Emission Graph -IP Call

Adaptor #2: (AK)

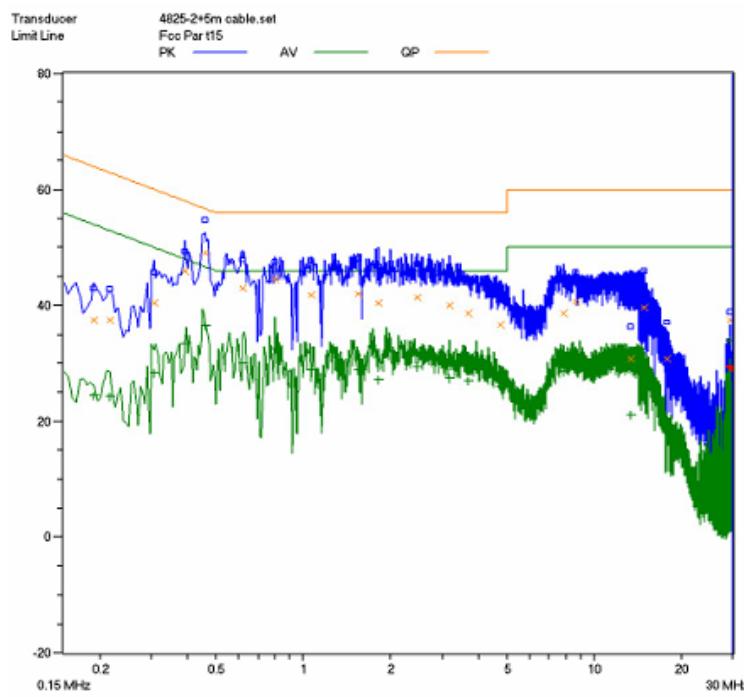

Line L Conducted Emission Graph -IP Call

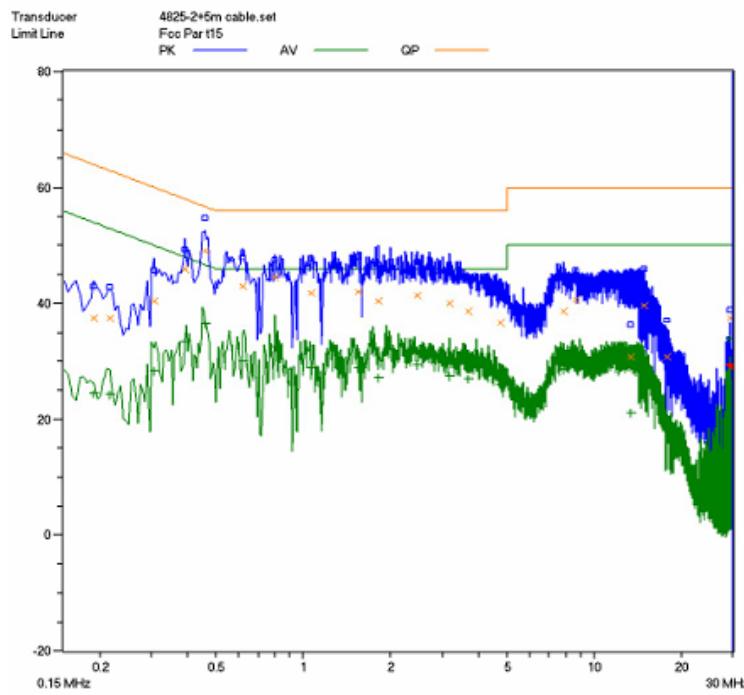

Line N Conducted Emission Graph -IP Call

Test Data:

Adaptor #1(Mass):

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
IP Call Mode								
L	0.480	50.7	56.3	-5.6	0.480	37.5	46.3	-8.8
L	0.720	44.9	56	-11.1	0.720	32.3	46	-13.7
L	0.745	44.5	56	-11.5	0.745	31.8	46	-14.2
N	0.475	49.2	56.4	-7.2	0.475	35.6	46.4	-10.8
N	0.740	44.4	56	-11.6	0.740	31.6	46	-14.4
N	8.720	42.2	60	-17.8	8.720	31.2	50	-18.8
<p>Note :</p> <ol style="list-style-type: none"> 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not use. 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values. 3) The other reading are too low against official limits that are not be recorded. 								

Adaptor #2(AK):

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
IP Call Mode								
L	0.390	46.0	58	-12.0	0.390	34.4	48	-13.6
L	0.460	49.3	56.7	-7.4	0.460	36.8	46.7	-9.9
L	0.795	44.7	56	-11.3	0.795	32.8	46	-13.2
N	0.390	45.9	58	-12.1	0.390	33.4	48	-14.6
N	0.460	49.0	56.7	-7.7	0.460	36.4	46.7	-10.3
N	0.795	44.5	56	-11.5	0.795	32.5	46	-13.5
<p>Note :</p> <ol style="list-style-type: none"> 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not use. 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values. 3) The other reading are too low against official limits that are not be recorded. 								

Test Equipment List:

<i>Test Equipment</i>	<i>Model No.</i>	<i>Manufacturer</i>	<i>Serial No.</i>	<i>Last Cal.</i>	<i>Cal. Interval</i>
Receiver	SMR4503	SCHAFFNER	11725	2011.07.08	2012.07.08
Line impedance stabilization network	4825/2	ETS	1161	2011.07.08	2012.07.08

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

SIGNED BY:*Severinus***ENGINEER****REVIEWED BY:***Jamelyn***SENIOR ENGINEER****Conducted Emission Test Set-up**


ATTACHMENT 2 – RADIATED EMISSION MEASUREMENT

CLIENT:	Huawei Technologies Co., Ltd	TEST STANDERD:	FCC Part 15,Subpart B, Section 15.109
MODEL NUMBERS:	eSpace 6870, eSpace 6870+ eSpace 6801x	PRODUCT:	IP Phone
EUT MODEL:	eSpace 6870+ eSpace 6801x	EUT DESIGNATION:	Commercial and Residential use
TEMPERATURE:	23°C	HUMIDITY:	47%RH
ATM PRESSURE:	101.0kPa	GROUNDING:	None
TESTED BY:	Sewen Guo	DATE OF TEST:	August 10, 2011
TEST REFERENCE:	ANSI C63.4-2003		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4-2003 for radiated emissions.</p> <p>An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. signal discrimination was then performed and the significant peaks marked. these peaks were then quasi-peaked in the frequency range of 30 MHz to 1GHz and average and peak in the frequency range of 1GHz to 3GHz at an semi-anechoic chamber.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TEST MODE	IP Call Mode and PoE mode Note : for more detailed informations please refer to test mode justfication.		
TESTED RANGE:	The EUT's highest operational frequency is 208MHz for DSP module, so test frequency range is from 30MHz up to 2.08GHz		
TEST VOLTAGE:	AC 120V/60Hz		
RESULTS:	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.		


Continue on to next page...

	<p>Figure 1 : Frequencies measured below 1 GHz configuration</p>
TEST SET-UP	<p>Figure 2 : Frequencies measured above 1 GHz configuration</p>
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group. test personnel.
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB

Adaptor #1(Mass)

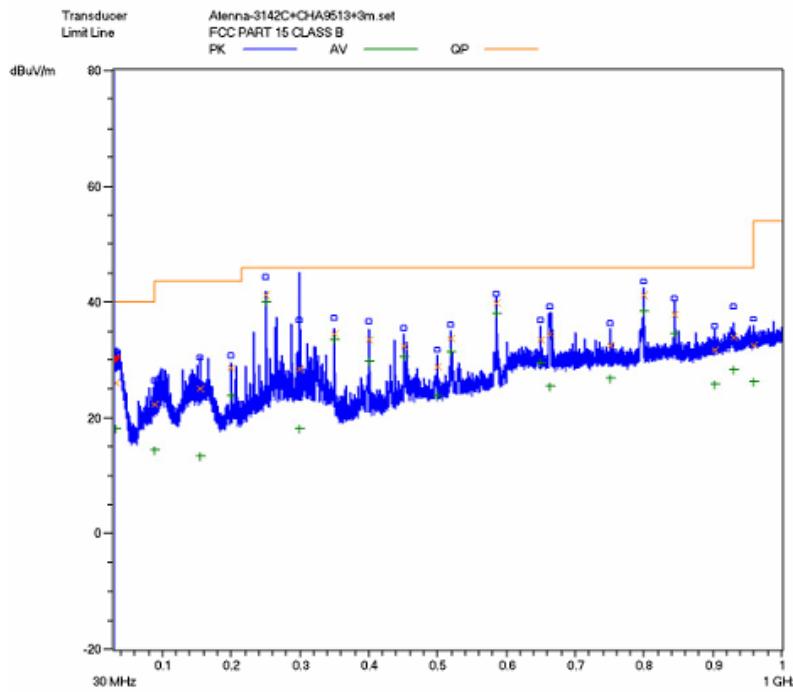


Horizontal:Radiated Emission Test Plot-IP Call

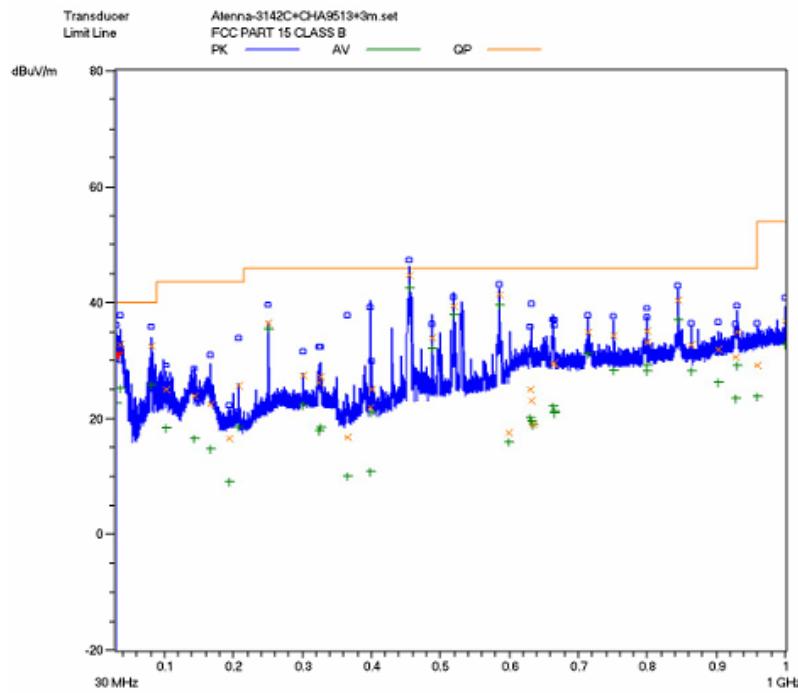


Vertical:Radiated Emission Test Plot- IP Call


Adaptor #2:(AK)

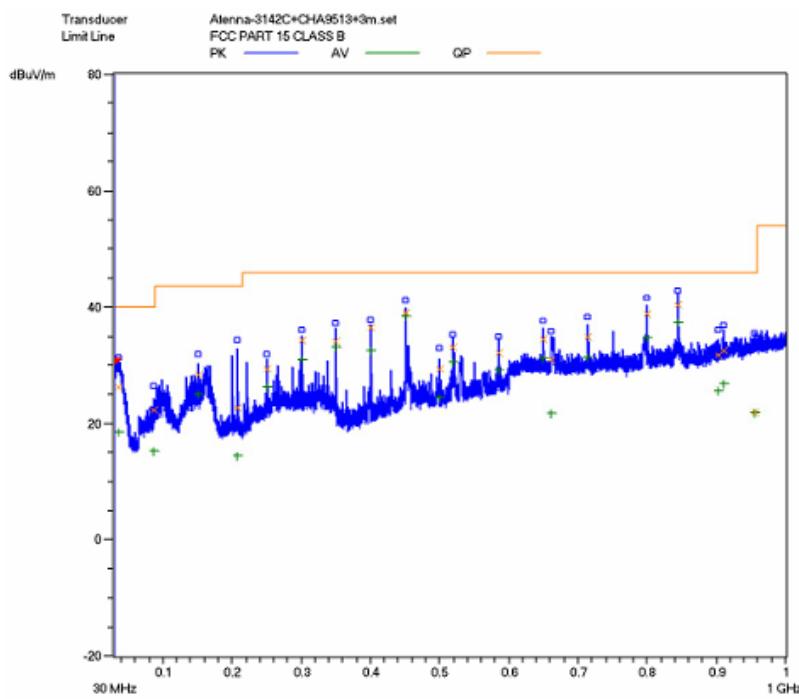


Horizontal:Radiated Emission Test Plot-IP Call

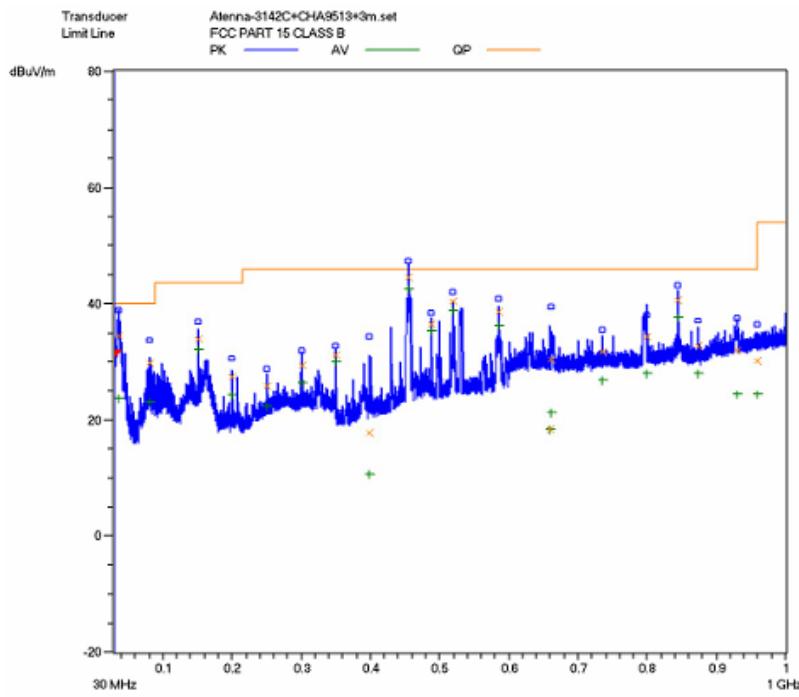

Vertical:Radiated Emission Test Plot- IP Call

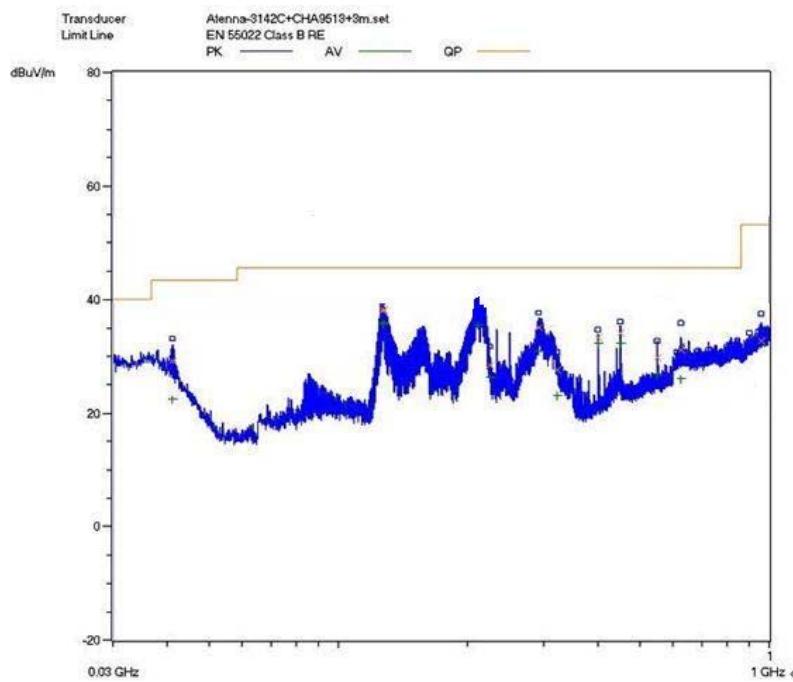

Horizontal:Radiated Emission Test Plot-PoE Mode

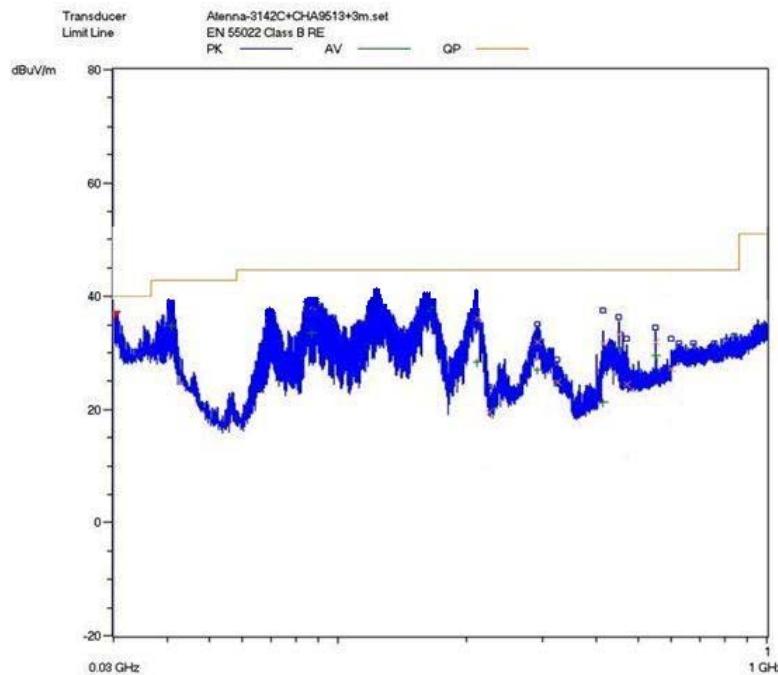

Vertical:Radiated Emission Test Plot -PoE Mode

Test Data:

Adaptor #1(Mass):

IP Call Mode/Below 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
32.160	0.02	17.3	/	8.68	26.0	40	-14.0
155.520	0.02	9.6	/	15.98	25.6	43.5	-17.9
200.000	0.10	6.8	/	21.7	28.6	43.5	-14.9
250.000	0.12	11.8	/	29.28	41.2	46	-4.8
584.720	0.30	18.7	/	20.9	39.9	46	-6.1
800.000	0.39	22.2	/	18.61	41.2	46	-4.8
Vertical							
36.160	0.02	18.4	/	14.28	32.7	40	-7.3
250.000	0.12	11.8	/	24.68	36.6	46	-9.4
454.800	0.20	16.8	/	27.7	44.7	46	-1.3
584.720	0.30	18.7	/	22.5	41.5	46	-4.5
800.000	0.39	22.2	/	12.51	35.1	46	-10.9
844.560	0.42	22.6	/	17.38	40.4	46	-5.6

Note:

- a) All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
- b) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- c) The other emission levels are 20dB below the official limits that are not reported.

IP Call Mode/Above 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.224	1.40	24.5	-33.6	-7.47	52.03	74	-21.97	H
1.392	1.42	25.3	-33.6	-7.05	53.27	74	-20.73	H
1.856	1.93	27.5	-33.1	-13.6	48.93	74	-25.07	H
1.224	1.40	24.5	-33.6	-7.78	51.72	74	-22.28	V
1.592	1.42	25.3	-33.3	-9.29	50.73	74	-23.27	V
1.856	1.93	27.5	-33.1	-29.82	50.08	74	-23.92	V
Average Measurement								
1.056	1.39	23.9	-33.6	-19.99	38.90	54	-15.1	H
1.192	1.48	24.2	-33.6	-22.38	36.90	54	-17.1	H
1.328	1.57	25.3	-33.6	-23.98	36.49	54	-17.51	H
1.192	1.48	24.2	-33.6	-20.16	39.12	54	-14.88	V
1.328	1.57	25.3	-33.6	-23.27	37.20	54	-16.8	V
1.592	1.73	26.3	-33.6	-24.49	37.14	54	-16.86	V

Note:

- a) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- b) The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
- c) The other emission levels are 20dB below the official limits that are not reported.

Adaptor #2:(AK)

IP Call Mode/Below 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
36.400	0.02	18.4	/	7.88	26.3	40	-13.7
150.000	0.02	8.8	/	19.58	28.4	43.5	-15.1
400.000	0.16	14.7	/	21.64	36.5	46	-9.5
450.000	0.20	16.8	/	22.1	39.1	46	-6.9
800.000	0.39	22.2	/	16.21	38.8	46	-7.2
844.560	0.42	22.6	/	17.48	40.5	46	-5.5
Vertical							
36.560	0.02	18.4	/	16.08	34.5	40	-5.5
150.000	0.02	8.8	/	25.08	33.9	43.5	-9.6
454.800	0.20	16.8	/	27.7	44.7	46	-1.3
486.800	0.20	17.5	/	18.8	36.5	46	-9.5
519.760	0.30	18.4	/	21.7	40.4	46	-5.6
844.560	0.42	22.6	/	17.68	40.7	46	-5.3

Note:

- d) All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
- e) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- f) The other emission levels are 20dB below the official limits that are not reported.

IP Call Mode/Above 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.224	1.40	24.5	-33.6	-7.47	52.03	74	-21.97	H
1.392	1.42	25.3	-33.6	-7.05	53.27	74	-20.73	H
1.856	1.93	27.5	-33.1	-13.6	48.93	74	-25.07	H
1.224	1.40	24.5	-33.6	-7.78	51.72	74	-22.28	V
1.592	1.42	25.3	-33.3	-9.29	50.73	74	-23.27	V
1.856	1.93	27.5	-33.1	-29.82	50.08	74	-23.92	V
Average Measurement								
1.056	1.39	23.9	-33.6	-19.99	38.90	54	-15.1	H
1.192	1.48	24.2	-33.6	-22.38	36.90	54	-17.1	H
1.328	1.57	25.3	-33.6	-23.98	36.49	54	-17.51	H
1.192	1.48	24.2	-33.6	-20.16	39.12	54	-14.88	V
1.328	1.57	25.3	-33.6	-23.27	37.20	54	-16.8	V
1.592	1.73	26.3	-33.6	-24.49	37.14	54	-16.86	V

Note:

- a) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- b) The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
- c) The other emission levels are 20dB below the official limits that are not reported.

PoE Mode/Below 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
126.800	0.02	6.9	/	25.18	32.1	43.5	-11.4
139.280	0.02	7.8	/	29.48	37.3	43.5	-6.2
224.080	0.12	9	/	27.78	36.9	46.0	-9.1
292.080	0.16	12.9	/	27.04	40.1	46.0	-5.9
311.360	0.16	13.7	/	21.84	35.7	46.0	-10.3
622.000	0.36	20.2	/	12.04	32.6	46.0	-13.4
Vertical							
86.720	0.02	6.1	/	29.08	35.2	40.0	-4.8
162.960	0.02	10.2	/	27.48	37.7	43.5	-5.8
224.160	0.12	9	/	27.38	36.5	46.0	-9.5
324.720	0.16	13.6	/	24.94	38.7	46.0	-7.3
450.600	0.2	16.8	/	22.1	39.1	46.0	-6.9
550.000	0.3	18.5	/	21.3	40.1	46.0	-5.9

Note:

- a) All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
- b) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- c) The other emission levels are 20dB below the official limits that are not reported.

PoE Mode/Above 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.170	1.12	24.5	-34.45	-12.75	47.32	74	-26.68	H
2.046	1.58	27.5	-37.37	-23.55	42.90	74	-31.1	H
1.860	1.31	26.7	-37.37	-24.28	41.10	74	-32.9	H
1.170	1.12	24.5	-34.45	-12.97	47.10	74	-26.9	V
1.856	1.30	26.3	-37.37	-23.47	41.50	74	-32.5	V
1.860	1.31	26.7	-37.37	-25.18	40.20	74	-33.8	V
Average Measurement								
1.170	1.12	24.5	-34.45	-33.57	26.50	54	-27.5	H
1.346	1.23	24.7	-35.60	-36.51	25.02	54	-28.98	H
1.860	1.31	26.7	-37.37	-43.41	21.97	54	-32.03	H
1.170	1.12	24.5	-34.45	-32.55	27.52	54	-26.48	V
1.856	1.30	26.3	-37.37	-42.87	22.10	54	-31.9	V
1.860	1.31	26.7	-37.37	-45.08	20.30	54	-33.7	V

Note:

- a) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- b) The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
- c) The other emission levels are 20dB below the official limits that are not reported.

Test Equipment List:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Due
Receiver	SMR4503	SCHAFFNER	11725	2011.07.08	2012.07.07
Double-ridged Wave guide horn	3115	ETS	6587	2011.08.02	2012.08.01
Microwave system amplifier	83017A	Agilent	MY39500438	2011.07.11	2012.07.10
Biconilog Antenna	3142C	ETS	00042672	2011.09.28	2011.09.27
Band-pass Filter	BRM50702	Micro-Tronic	S/N-030	2011.11.30	2012.11.29
Spectrum Analyzer	FSP30	R&S	100755	2011.11.30	2012.11.29
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.</i>					

SIGNED BY:




ENGINEER

REVIEWED BY:



SENIOR ENGINEER

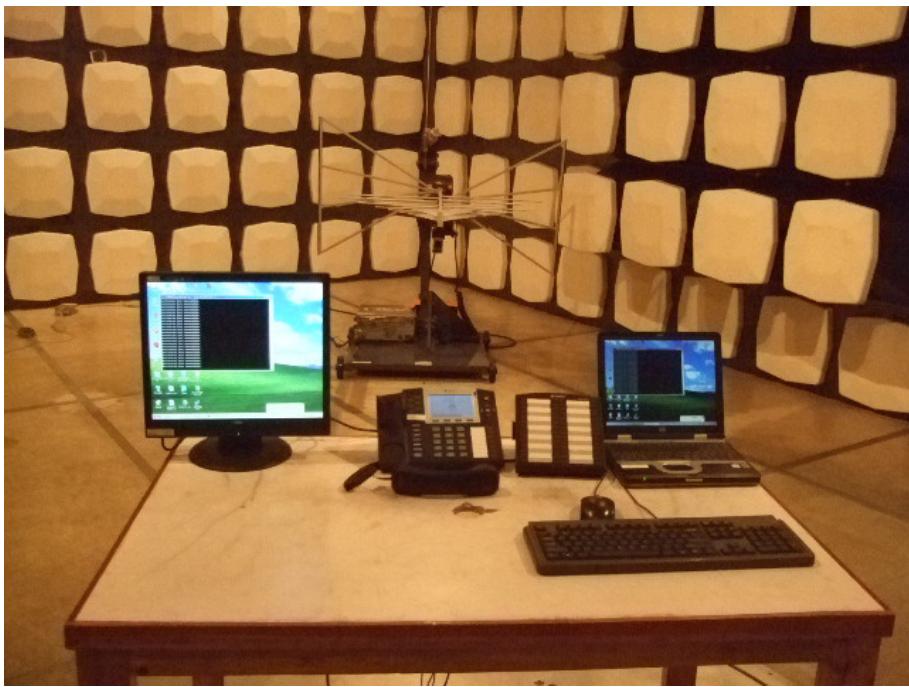

Radiated Emission Test Set-up(Below 1GHz)



Radiated Emission Test Set-up(Above 1GHz)