



## FCC SAR Compliance Test Report

**Product Name:** Fixed Wireless Terminal

**Model:** F255, HUAF255SPC

**Report No.:** SYBH(Z-SAR)035032014-2

**FCC ID:** QISF255

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>gongzhong</i>
DATE	2014-04-22	2014-04-22

The test results of this test report relate exclusively to the item(s) tested, The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

### Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

## Table of Contents

1	General Information.....	4
1.1	Statement of Compliance .....	4
1.2	RF exposure limits.....	5
1.3	EUT Description .....	6
1.3.1	General Description .....	6
1.3.2	Test position specification.....	6
1.4	Test specification(s).....	7
1.5	Testing laboratory.....	7
1.6	Applicant and Manufacturer .....	7
1.7	Application details.....	7
1.8	Ambient Condition .....	7
2	SAR Measurement System.....	8
2.1	SAR Measurement Set-up .....	8
2.2	Test environment.....	9
2.3	Data Acquisition Electronics description .....	9
2.4	Probe description.....	10
2.5	Phantom description.....	11
2.6	Device holder description .....	12
2.7	Test Equipment List.....	13
3	SAR Measurement Procedure .....	14
3.1	Scanning procedure .....	14
3.2	Spatial Peak SAR Evaluation .....	15
3.3	Data Storage and Evaluation .....	16
4	System Verification Procedure .....	18
4.1	Tissue Verification .....	18
4.2	System Check .....	19
4.3	System check Procedure.....	20
5	SAR measurement variability and uncertainty .....	21
5.1	SAR measurement variability .....	21
5.2	SAR measurement uncertainty .....	21
6	SAR Test Configuration.....	22
6.1	CDMA Test Configuration.....	22
6.1.1	CDMA 1x Devices .....	22
7	SAR Measurement Results .....	23
7.1	Conducted power measurements .....	23
7.1.1	Conducted power measurements of CDMA BC0 .....	23
7.1.2	Conducted power measurements of CDMA BC1 .....	23
7.1.3	Conducted power measurements of CDMA BC10 .....	23
7.1.4	Conducted power measurements of BT .....	23
7.2	SAR measurement Results .....	24
7.2.1	SAR measurement Result of CDMA BC0.....	25
7.2.2	SAR measurement Result of CDMA BC1.....	26
7.2.3	SAR measurement Result of CDMA BC10 .....	27
7.2.4	Stand-alone SAR test exclusion .....	28
7.2.5	Simultaneous Transmission Possibilities.....	28
	Appendix A. System Check Plots.....	29
	Appendix B. SAR Measurement Plots.....	29
	Appendix C. Calibration Certificate .....	29
	Appendix D. Photo documentation.....	29



※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2014-04-22	Gong Zhong

## 1 General Information

### 1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for F255, HUAUF255SPC are as below Table 1.

Band	Max Reported SAR(W/kg)
	1-g Body(25mm)
CDMA BC0	1.337
CDMA BC1	1.069
CDMA BC10	1.281

Table 1:Summary of test result

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005.

## 1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain/Body/Arms/Legs)	<b>1.60 mW/g</b>	8.00 mW/g
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g	0.40 mW/g
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

**Notes:**

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

### 1.3 EUT Description

Device Information:			
DUT Name:	Fixed Wireless Terminal		
Type Identification:	F255, HUAF255SPC		
FCC ID :	QISF255		
SN No.:	Q4P01A9421300096		
Device Type :	Portable device		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	WL1F255I		
Software Version :	V100R001		
Antenna Type :	External antenna		
Device Operating Configurations:			
Supporting Mode(s)	CDMA BC0/BC1/BC10(tested),BT		
Test Modulation	QPSK		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	CDMA BC0	824-849	869-894
	CDMA BC1	1850-1910	1930-1990
	CDMA BC10	816-824	861-869
	BT	2400-2483	2400-2483
Power Class:	Tested with power control all up (CDMA BC0)		
	Tested with power control all up (CDMA BC1)		
	Tested with power control all up (CDMA BC10)		
Test Channels (low-mid-high):	1013-384-777 (CDMA BC0)		
	25-600-1175 (CDMA BC1)		
	465-552-653 (CDMA BC10)		
	0-39-78(BT)		

Table 3:Device information and operating configuration

#### 1.3.1 General Description

F255/HUAF255SPC is a CDMA Fixed Wireless Terminal. It's operated in Band Class 0, Band Class 1 , Band Class10 and Bluetooth. The Wireless Terminal implements such functions as RF signal receiving / Transmitting, CDMA protocol processing, voice, Bluetooth connections etc. The TX is 824MHz-849MHz, the RX is 869MHz-894MHz for Band Class 0; the TX is 1850MHz-1910MHz, the RX is 1930MHz-1990MHz for Band Class 1; the TX is 816MHz-824MHz, the RX is 861MHz-869MHz for Band Class 10. It supports A-GPS service and CDMA2000 1X advanced. Externally it provides USB interface (to computers for upgrade), antenna interface, RJ11 ports and power interface.

#### Battery:

Name	Manufacture	Serials number	Description
Rechargeable Ni-MH	HUAWEI Technologies Co.LTD.	1#:SN-GRP13120218800 2#:SN-HGY13010705179	Battery Model: HGB-15AAx3 Rated capacity: 1500mAh Nominal Voltage:  3.6V Charging Voltage:  4.2V

#### 1.3.2 Test position specification

The device has an external swivel transmitting antenna. The antenna is located on the top side of the DUT, and can be oriented in two ways: with antenna horizontal and with antenna vertical. According to the usage scenarios, the following positions with the transmitting antenna located at a distance 25mm from the Flat phantom are tested:

- 1) Top side with antenna horizontal(25mm)
- 2) Top side with antenna vertical(25mm)
- 3) Front side with antenna horizontal (25mm)

#### 1.4 Test specification(s)

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 4 of March 2010)
KDB941225 D01	SAR test for 3G devices v02
KDB447498 D01	General RF Exposure Guidance v05r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r03
KDB865664 D02	SAR Reporting v01r01

#### 1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone K3,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01

#### 1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

#### 1.7 Application details


Start Date of test	2014-03-25
End Date of test	2014-03-27

#### 1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

## 2 SAR Measurement System

### 2.1 SAR Measurement Set-up

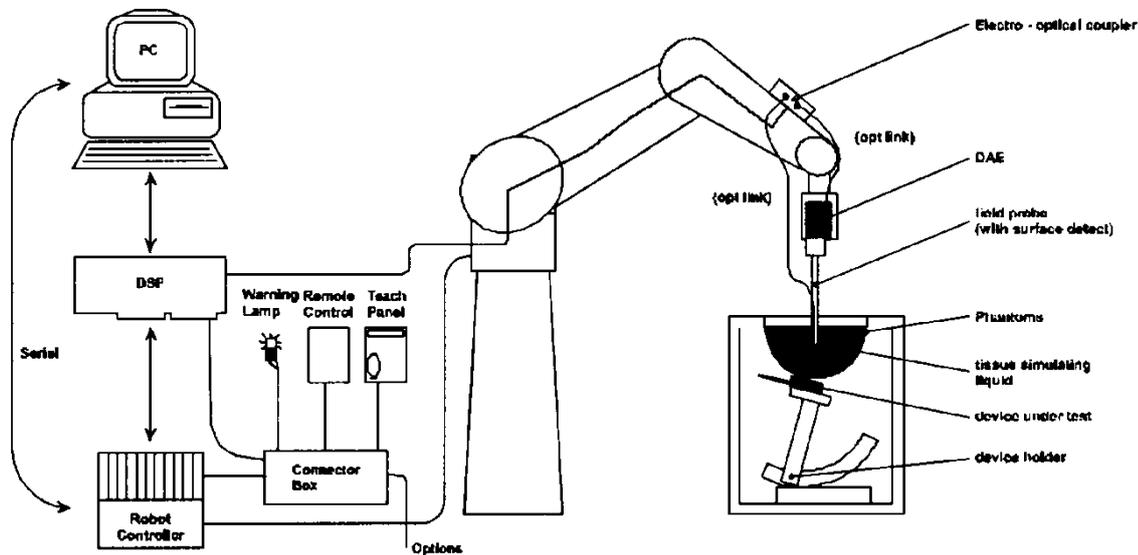

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

## 2.2 Test environment

The DASY4 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m<sup>3</sup>, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m<sup>2</sup> array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

## 2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


### DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

## 2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor ( $\pm 2$  dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

### Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

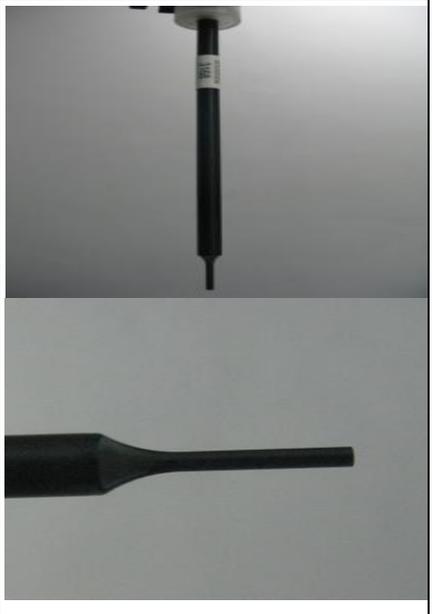Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)	
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

### Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)	
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


## 2.5 Phantom description

### SAM Twin Phantom

Shell Thickness	2mm +/- 0.2 mm; The ear region: 6mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

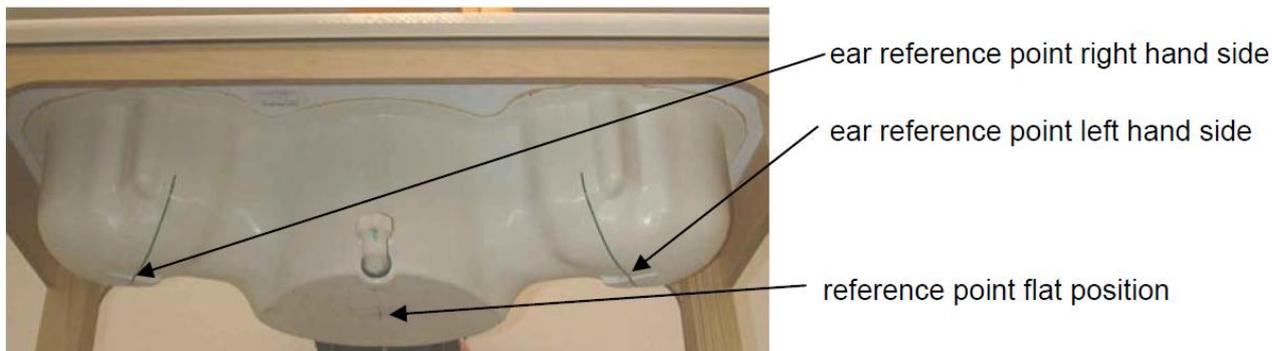

### ELI4 Phantom

Shell Thickness	2mm +/- 0.2 mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity  $2 \leq \epsilon_r \leq 5$  at  $\leq 3$  GHz,  $3 \leq \epsilon_r \leq 4$  at  $> 3$  GHz and a loss tangent  $\leq 0.05$ .

## 2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\sigma = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of  $\pm 1^\circ$  in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

## 2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period
<input type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2013-07-26	One year
<input type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2013-05-10	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2013-09-30	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d059	2013-05-02	Three years
<input type="checkbox"/>	SPEAG	1800 MHz Dipole	D1800V2	2d157	2013-11-27	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2011-09-26	Three years
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1052	2011-03-10	Three years
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1016	2011-11-22	Three years
<input type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	735	2013-06-11	Three years
<input type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2011-11-22	Three years
<input type="checkbox"/>	SPEAG	5GHz Dipole	D5GHzV2	1155	2013-06-04	Three years
<input type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	851	2013-07-31	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2013-11-27	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1038	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2013-06-08	One year
<input type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	111379	2013-08-09	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071B	MY42404956	2014-01-11	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2014-01-18	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1123001	NCR	NCR
<input type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZVE-8G+	129601322	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	311190	2013-05-13	One year
<input type="checkbox"/>	SHX	Directional Coupler	DDTO/4/20	07122401	2013-10-17	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	MY44420359	2013-08-28	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	100740	2013-08-28	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2014-01-18	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2014-01-18	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within  $5\Omega$  from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

### 3 SAR Measurement Procedure

#### 3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$ , 2-4GHz -  $\leq 5\text{ mm}$  and 4-6 GHz- $\leq 4\text{mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$ , 3-4 GHz-  $\leq 4\text{mm}$  and 4-6GHz- $\leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ( $\Delta x_{area}, \Delta y_{area}$ )	Maximun Zoom Scan spatial resolution ( $\Delta x_{Zoom}, \Delta y_{Zoom}$ )	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume ( $x,y,z$ )
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
$\leq 2$ GHz	$\leq 15$ mm	$\leq 8$ mm	$\leq 5$ mm	$\leq 4$ mm	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 30$ mm
2-3GHz	$\leq 12$ mm	$\leq 5$ mm	$\leq 5$ mm	$\leq 4$ mm	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 30$ mm
3-4GHz	$\leq 12$ mm	$\leq 5$ mm	$\leq 4$ mm	$\leq 3$ mm	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 28$ mm
4-5GHz	$\leq 10$ mm	$\leq 4$ mm	$\leq 3$ mm	$\leq 2.5$ mm	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 25$ mm
5-6GHz	$\leq 10$ mm	$\leq 4$ mm	$\leq 2$ mm	$\leq 2$ mm	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 22$ mm

### 3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points( with 8mm horizontal resolution) or 7 x 7 x 7 points( with 5mm horizontal resolution) or 8 x 8 x 7 points( with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensates boundary effects on E-field probes.

### 3.3 Data Storage and Evaluation

#### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>10</sub> , a <sub>11</sub> , a <sub>12</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V <sub>i</sub>	= compensated signal of channel i	(i = x, y, z)
	U <sub>i</sub>	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp <sub>i</sub>	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i (i = x, y, z)  
 [mV/(V/m)<sup>2</sup>] for E-field Probes  
 ConvF = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 f = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

with  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{\text{tot}}$  = total electric field strength in V/m  
 $H_{\text{tot}}$  = total magnetic field strength in A/m

## 4 System Verification Procedure

### 4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Body Tissue					
	450	835	1800	1900	2450	2600
Frequency Band (MHz)	450	835	1800	1900	2450	2600
Water	51.16	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.49	1.40	0.13	0.13	0.04	0.024
Sugar	46.78	45.0	0.0	0.0	0.0	0.0
HEC	0.52	1.0	0.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized,  $16M\Omega+$  resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r$ (+/-5%)	$\sigma$ (S/m) (+/-5%)	$\epsilon_r$	$\sigma$ (S/m)		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	53.47	0.959	21.4°C	2014-03-26
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	53.44	0.967		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	53.23	0.993		
1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.56	1.479	21.4°C	2014-03-25
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.45	1.513		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.45	1.520		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.32	1.528		

$\epsilon_r$ = Relative permittivity,  $\sigma$ = Conductivity

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

### 4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D835V2 Body	9.42 (8.48~10.36)	6.19 (5.57~6.80)	9.52	6.24	21.4°C	2014-03-26
D1900V2 Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	40.00	21.12	21.4°C	2014-03-25

Table 6: System Check Results

### 4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

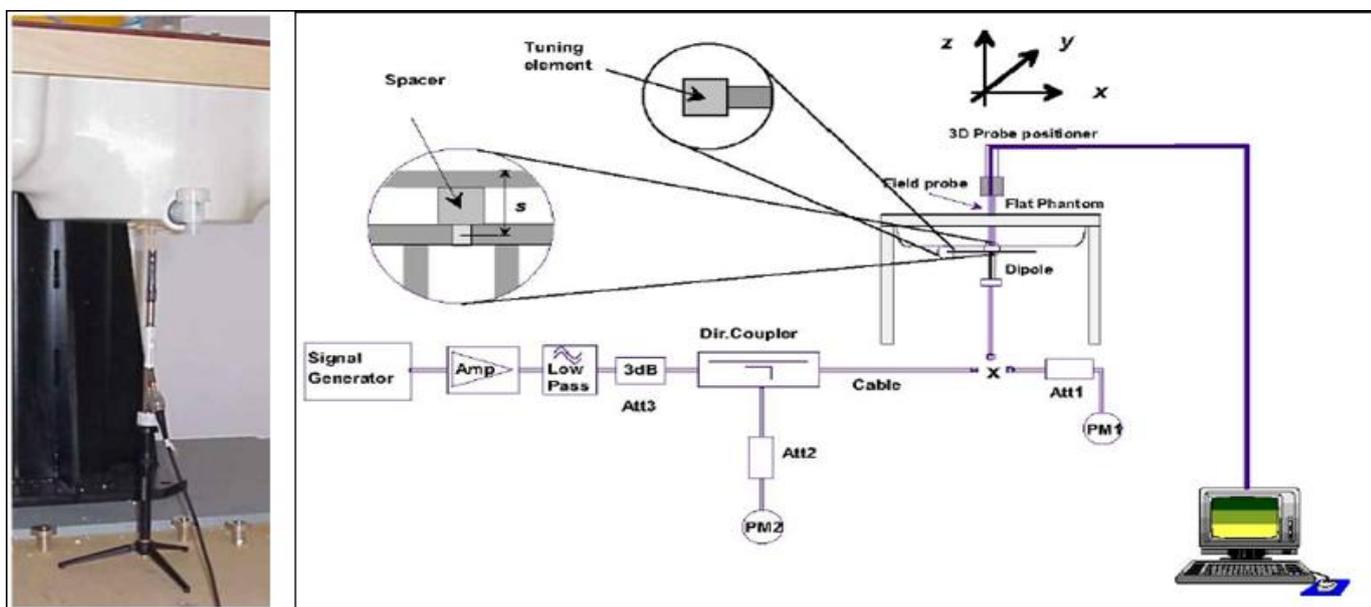

## 5 SAR measurement variability and uncertainty

### 5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r03, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

### 5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6 SAR Test Configuration

### 6.1 CDMA Test Configuration

#### 6.1.1 CDMA 1x Devices

For SAR test, the maximum power output is very important and essential; it is identical under the measurement uncertainty. It is proper to use typical Test Mode 3(FW RC3, RVS RC3, SO55) as the worst case for SAR test.

Test Parameter setup for maximum RF output power according to section 4.4.5 of 3GPP2;

Parameter	Units	Value
I or	dBm/1.23MHz	-104
PilotE c/I or	dB	-7
TrafficE c /I or	dB	-7.4

Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.

Test communication setup meet as followings:

Communication standard between mobile station and base station simulator	3GPP2 C.S0011-B
Radio configuration	RC3(Supporting CDMA 1X)
Spreading Rate	SR1
Data Rate	9600bps
Service Options	SO55(Loopback service)
Multiplex Options	The mobile station does not support this service

## 7 SAR Measurement Results

### 7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

#### 7.1.1 Conducted power measurements of CDMA BC0

CDMA BC0		Average Power (dBm)		
		1013CH	384CH	777CH
RC1	SO55	24.75	24.76	24.65
RC3	SO55	<b>24.77</b>	<b>24.79</b>	<b>24.62</b>

Table 7:Conducted power measurement results of CDMA BC0

Note:

- 1) The conducted power of CDMA BC0 is measured with RMS detector.
- 2) This device only supports CDMA SO55(Loopback service) mode. Body SAR is measured in RC3. Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3.

#### 7.1.2 Conducted power measurements of CDMA BC1

CDMA BC1		Average Power (dBm)		
		25CH	600CH	1175CH
RC1	SO55	24.46	24.28	24.13
RC3	SO55	<b>24.44</b>	<b>24.28</b>	<b>24.19</b>

Table 8:Conducted power measurement results of CDMA BC1

Note: 1) The conducted power of CDMA BC1 is measured with RMS detector.

- 2) This device only supports CDMA SO55(Loopback service) mode. Body SAR is measured in RC3. Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3.

#### 7.1.3 Conducted power measurements of CDMA BC10

CDMA BC10		Average Power (dBm)		
		465CH	552CH	653CH
RC1	SO55	24.55	24.52	24.54
RC3	SO55	<b>24.54</b>	<b>24.49</b>	<b>24.51</b>

Table 9:Conducted power measurement results of CDMA BC10

Note: 1) The conducted power of CDMA BC10 is measured with RMS detector.

- 2) This device only supports CDMA SO55(Loopback service) mode. Body SAR is measured in RC3. Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3.

#### 7.1.4 Conducted power measurements of BT

BT 2450	Average Conducted Power (dBm)		
	0CH	39CH	78CH
DH5	1.62	1.40	1.69
2DH5	0.60	0.35	0.65
3DH5	-0.27	-0.58	-0.23

Table 10:Conducted power measurement results of BT

Note: The conducted power of BT is measured with RMS detector.

## 7.2 SAR measurement Results

### General Notes:

- 1) Per KDB447498 D01v05r02, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/Kg; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45$  W/Kg, only one repeated measurement is required.
- 4) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5$  W/kg, or  $> 7.0$  W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).
- 5) All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

## 7.2.1 SAR measurement Result of CDMA BC0

Test Position of Body-Worn with 25mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side-antenna horizontal	777/848.31	CDMA 1xRTT	0.538	0.384	-0.040	24.62	25.50	0.659	21.4°C
Front Side-antenna horizontal	384/836.52	CDMA 1xRTT	0.777	0.554	-0.040	24.79	25.50	0.915	21.4°C
Front Side-antenna horizontal	1013/824.7	CDMA 1xRTT	0.941	0.670	-0.100	24.77	25.50	1.113	21.4°C
Top Side-antenna horizontal	777/848.31	CDMA 1xRTT	0.642	0.454	-0.020	24.62	25.50	0.786	21.4°C
Top Side-antenna horizontal	384/836.52	CDMA 1xRTT	0.864	0.615	0.050	24.79	25.50	1.017	21.4°C
Top Side-antenna horizontal	1013/824.7	CDMA 1xRTT	1.120	0.797	0.030	24.77	25.50	1.325	21.4°C
Top Side-antenna vertical	777/848.31	CDMA 1xRTT	0.665	0.475	0.040	24.62	25.50	0.814	21.4°C
Top Side-antenna vertical	384/836.52	CDMA 1xRTT	0.818	0.585	-0.040	24.79	25.50	0.963	21.4°C
Top Side-antenna vertical	1013/824.7	CDMA 1xRTT	0.961	0.687	0.000	24.77	25.50	1.137	21.4°C
Tested data at the worst position with battery 2#									
Top Side-antenna horizontal	1013/824.7	CDMA 1xRTT	1.130	0.806	-0.040	24.77	25.50	<b>1.337</b>	21.4°C
Top Side-antenna horizontal-repeated*	1013/824.7	CDMA 1xRTT	1.120	0.794	-0.030	24.77	25.50	1.325	21.4°C
Test data at the worst position with battery 2# and adapter									
Top Side-antenna horizontal	1013/824.7	CDMA 1xRTT	1.080	0.768	-0.120	24.77	25.50	1.278	21.4°C

Table 11: Test results Body SAR CDMA BC0

Note:

- 1) The maximum SAR value of each test band is marked **bold**.
- 2) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

**7.2.2 SAR measurement Result of CDMA BC1**

Test Position of Body-Worn with 25mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side-antenna horizontal	1175/1908.75	CDMA 1xRTT	0.550	0.355	-0.110	24.19	25.50	0.744	21.4°C
Front Side-antenna horizontal	600/1880	CDMA 1xRTT	0.666	0.431	0.040	24.28	25.50	0.882	21.4°C
Front Side-antenna horizontal	25/1851.25	CDMA 1xRTT	0.505	0.327	0.190	24.44	25.50	0.645	21.4°C
Top Side-antenna horizontal	1175/1908.75	CDMA 1xRTT	0.687	0.438	0.140	24.19	25.50	0.929	21.4°C
Top Side-antenna horizontal	600/1880	CDMA 1xRTT	0.802	0.510	-0.080	24.28	25.50	1.062	21.4°C
Top Side-antenna horizontal-repeated*	600/1880	CDMA 1xRTT	<b>0.807</b>	<b>0.516</b>	<b>-0.030</b>	<b>24.28</b>	<b>25.50</b>	<b>1.069</b>	21.4°C
Top Side-antenna horizontal	25/1851.25	CDMA 1xRTT	0.682	0.433	0.030	24.44	25.50	0.871	21.4°C
Top Side-antenna vertical	600/1880	CDMA 1xRTT	0.530	0.338	-0.030	24.28	25.50	0.702	21.4°C
Test data at the worst position with battery 2#									
Top Side-antenna horizontal	600/1880	CDMA 1xRTT	0.733	0.470	0.190	24.28	25.50	0.971	21.4°C
Test data at the worst position with battery 1# and adapter									
Top Side-antenna horizontal	600/1880	CDMA 1xRTT	0.568	0.365	0.100	24.28	25.50	0.752	21.4°C

Table 12: Test results Body SAR CDMA BC1

Note:

- 1) The maximum SAR value of each test band is marked **bold**.
- 2) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

**7.2.3 SAR measurement Result of CDMA BC10**

Test Position of Body-Worn with 25mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Test data with battery 1#									
Front Side-antenna horizontal	653/822.3	CDMA 1xRTT	0.930	0.654	0.020	24.51	25.50	1.168	21.4°C
Front Side-antenna horizontal	552/819.8	CDMA 1xRTT	0.838	0.588	0.010	24.49	25.50	1.057	21.4°C
Front Side-antenna horizontal	465/817.6	CDMA 1xRTT	0.790	0.557	0.040	24.54	25.50	0.985	21.4°C
Top Side-antenna horizontal	653/822.3	CDMA 1xRTT	1.010	0.719	-0.030	24.51	25.50	1.269	21.4°C
Top Side-antenna horizontal	552/819.8	CDMA 1xRTT	0.888	0.631	-0.030	24.49	25.50	1.121	21.4°C
Top Side-antenna horizontal	465/817.6	CDMA 1xRTT	0.829	0.589	-0.010	24.54	25.50	1.034	21.4°C
Top Side-antenna vertical	653/822.3	CDMA 1xRTT	0.871	0.623	-0.060	24.51	25.50	1.094	21.4°C
Top Side-antenna vertical	552/819.8	CDMA 1xRTT	0.839	0.601	-0.050	24.49	25.50	1.059	21.4°C
Top Side-antenna vertical	465/817.6	CDMA 1xRTT	0.819	0.586	-0.070	24.54	25.50	1.022	21.4°C
Tested data at the worst position with battery 2#									
Top Side-antenna horizontal	653/822.3	CDMA 1xRTT	1.020	0.722	0.100	24.51	25.50	<b>1.281</b>	21.4°C
Top Side-antenna horizontal-repeated*	653/822.3	CDMA 1xRTT	1.000	0.711	-0.020	24.51	25.50	1.256	21.4°C
Test data at the worst position with battery 2# and adapter									
Top Side-antenna horizontal	653/822.3	CDMA 1xRTT	0.964	0.687	-0.030	24.51	25.50	1.211	21.4°C

Table 13: Test results Body SAR CDMA BC10

Note:

- 1) The maximum SAR value of each test band is marked **bold**.
- 2) \* - repeated at the highest SAR measurement according to the FCC KDB 865664

### 7.2.4 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v05, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body	3.00	2.00	25	2.450	0.12	3.00	Yes

Table 14: Standalone SAR test exclusion for BT

Note:

1)\* - maximum possible output power declared by manufacturer

### 7.2.5 Simultaneous Transmission Possibilities

CDMA and BT cannot transmit simultaneously for this device. So the simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v05r02.



**Appendix A. System Check Plots**  
(Pls See Appendix A.)

**Appendix B. SAR Measurement Plots**  
(Pls See Appendix B.)

**Appendix C. Calibration Certificate**  
(Pls See Appendix C.)

**Appendix D. Photo documentation**  
(Pls See Appendix D.)

---

**End**