


**2.3.3.2 Channel 2@Ant 1**

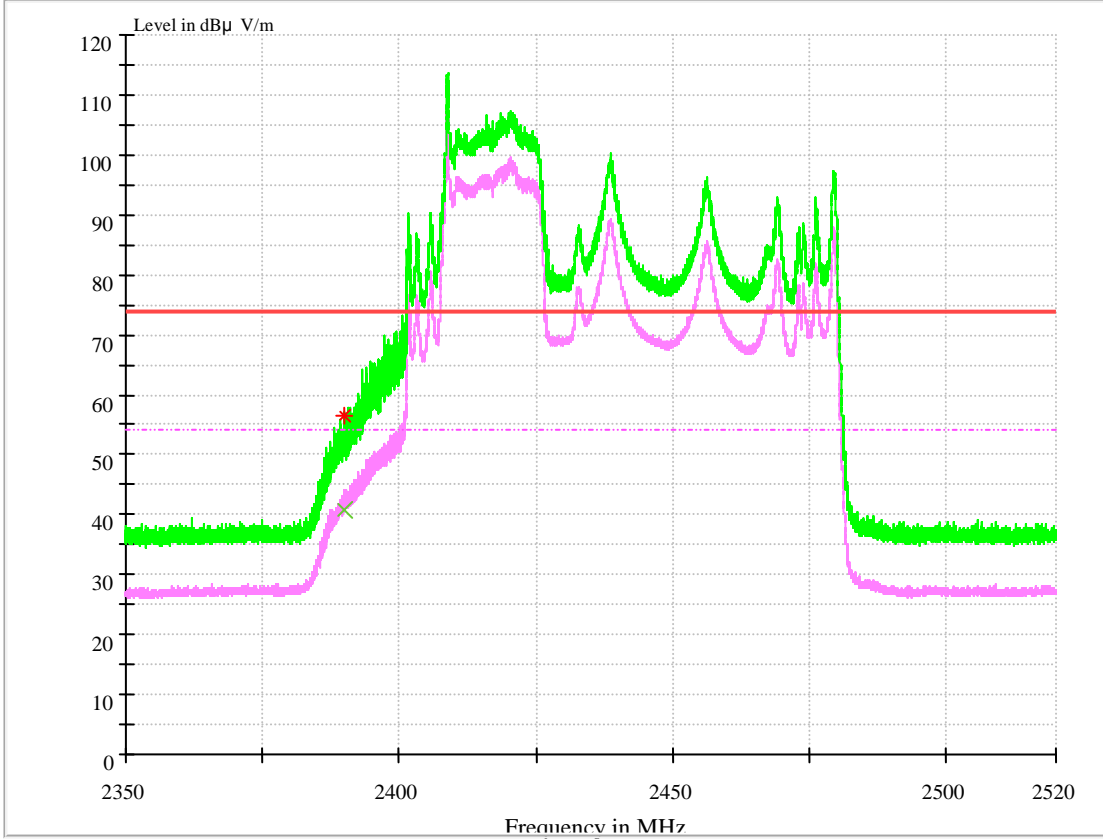

**MEASUREMENT RESULT: AV Detector**

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h(deg)	Transd. (dB)
2390	40.85	54.00	13.15	150.0	H	225.0	-8.6

**MEASUREMENT RESULT: PK Detector**

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	56.41	74.00	17.59	150.0	H	176.0	-8.6


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

**2.3.3.3 Channel 10@Ant 1**

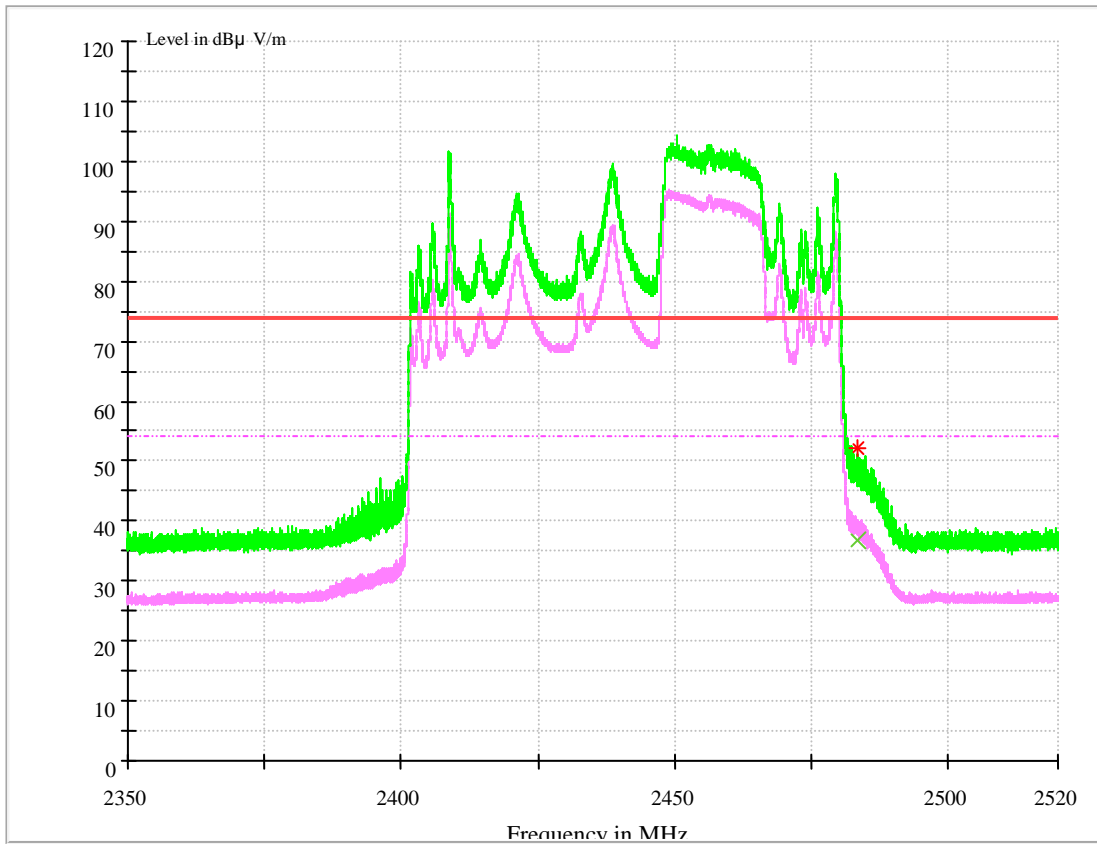

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	36.68	54.00	17.32	150.0	H	225.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	52.04	74.00	21.96	150.0	H	164.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

2.3.3.4 Channel 11@Ant 1

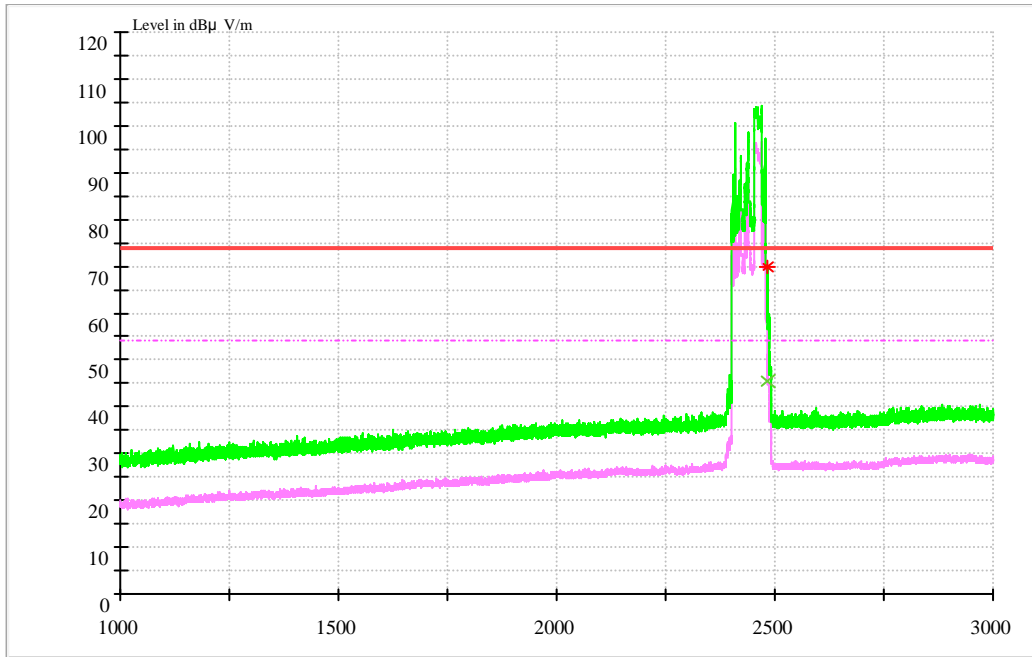

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	45.53	54.00	8.47	150.0	H	107.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	69.89	74.00	4.11	150.0	H	106.0	-6.8

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

**2.3.4 Test Mode: 11N40**

**2.3.4.1 Channel 3 @Ant 1**

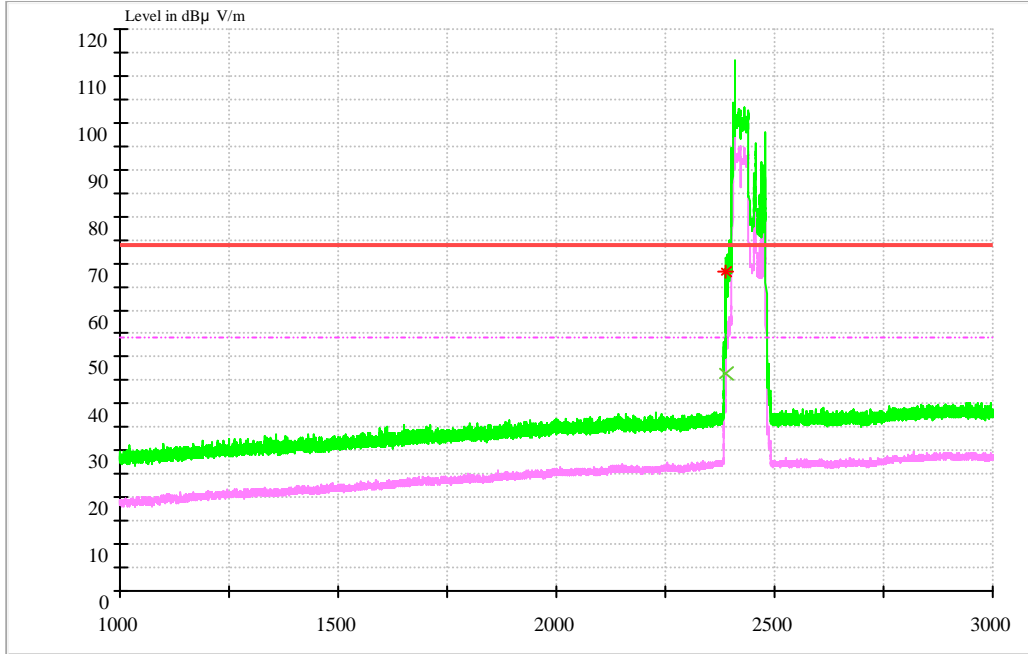

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	46.62	54.00	7.38	150.0	H	146.0	-8.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	68.25	74.00	5.75	150.0	H	153.0	-8.6


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

**2.3.4.2 Channel 4 @Ant 1**

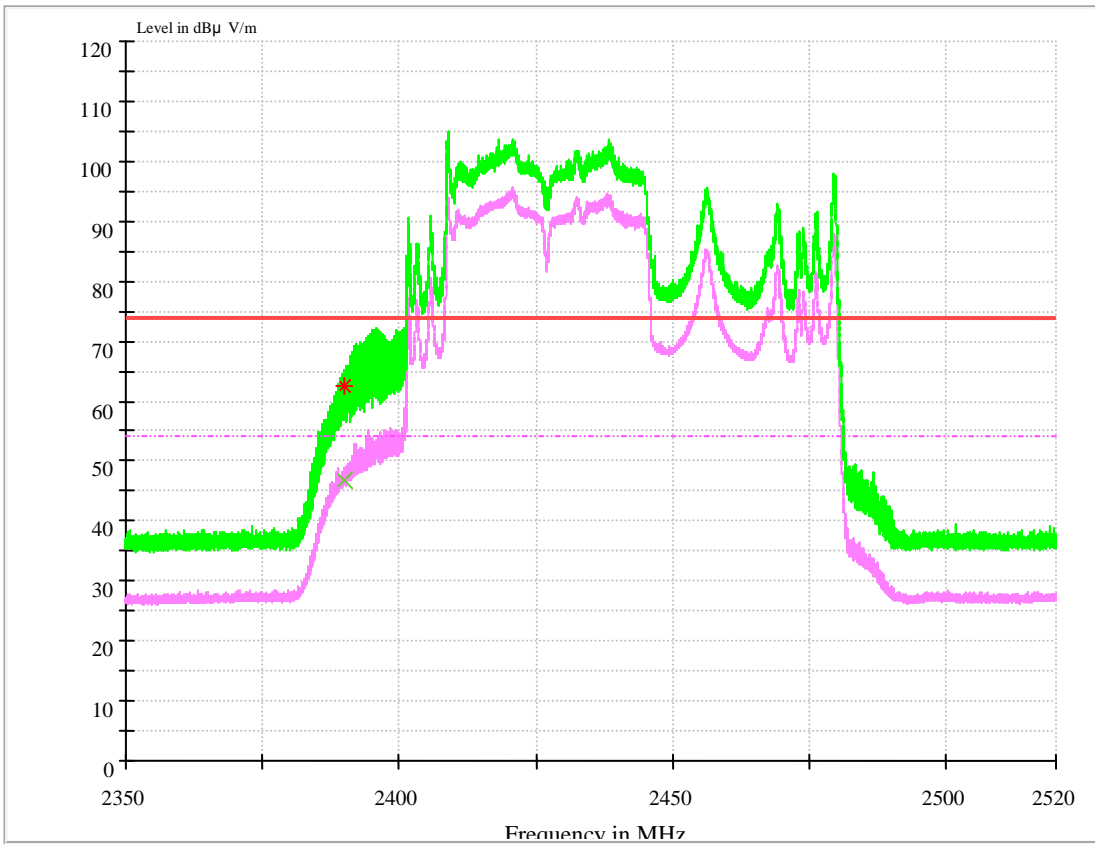

**MEASUREMENT RESULT: AV Detector**

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	46.96	54.00	7.04	150.0	H	225.0	-8.6

**MEASUREMENT RESULT: PK Detector**

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	62.59	74.00	11.41	150.0	H	253.0	-8.6


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

**2.3.4.3 Channel 8@Ant 1**

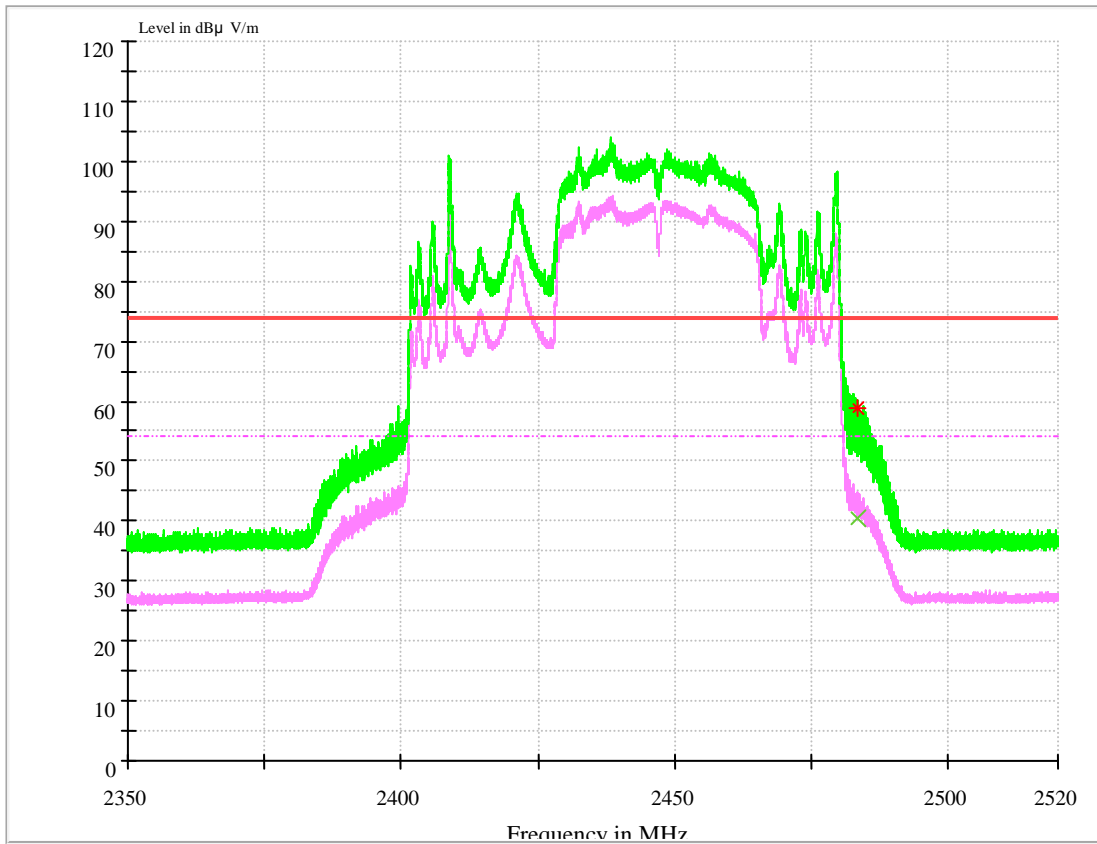

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	40.31	54.00	13.69	150.0	H	225.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	58.72	74.00	15.28	150.0	H	165.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

### 2.3.4.4 Channel 9@Ant 1

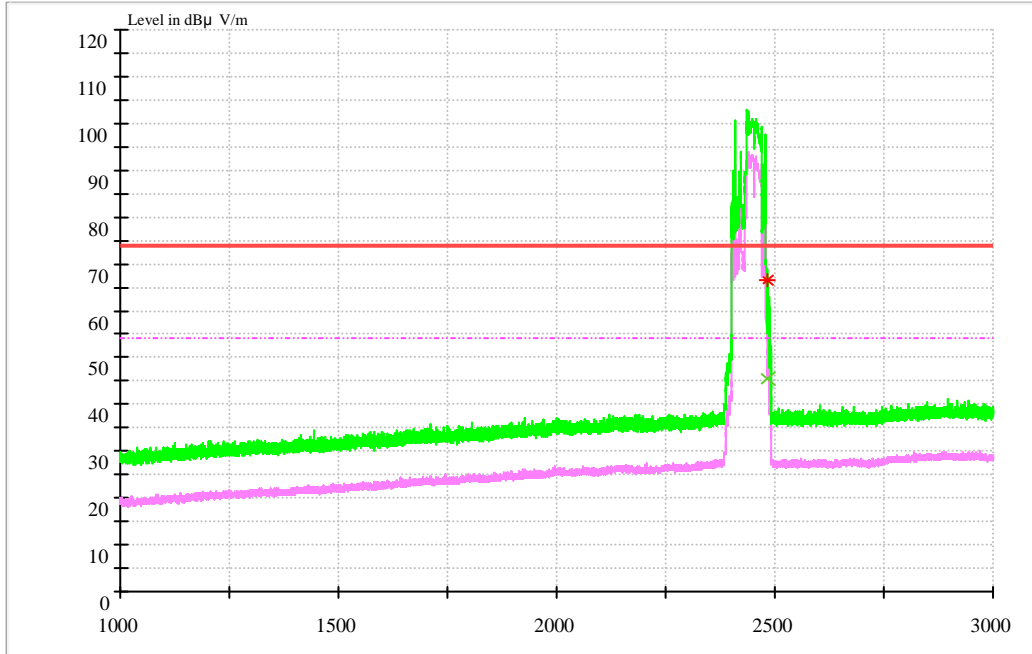

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2484.538500	45.61	54.00	8.39	150.0	H	108.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2484.836600	66.42	74.00	7.58	150.0	H	59.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

## 2.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

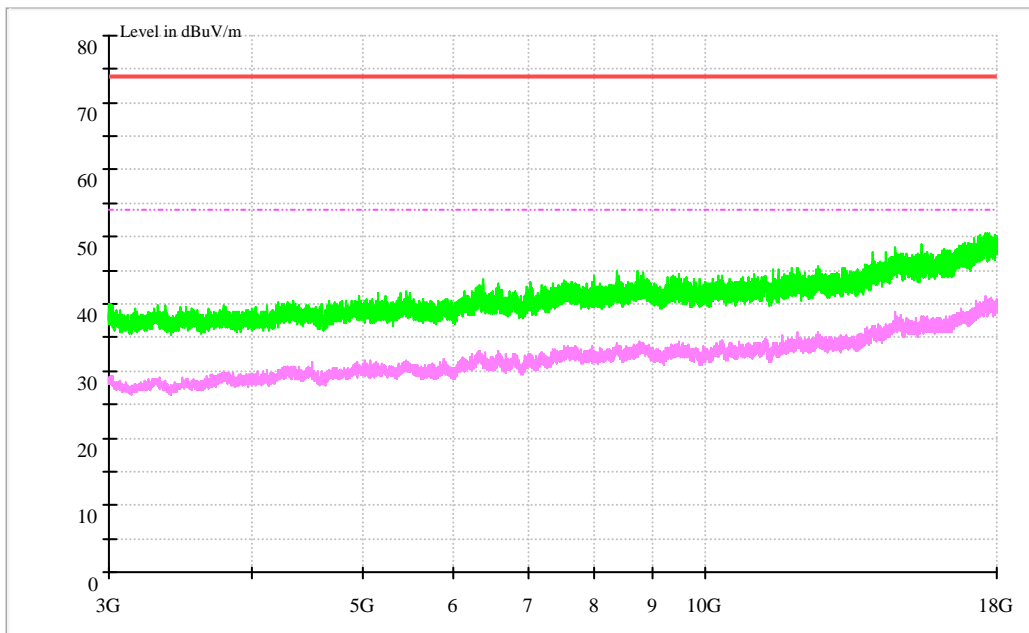






## 2.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE: No peak found in the Test Range of “18 GHz to 26.5GHz”

## Appendix I: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

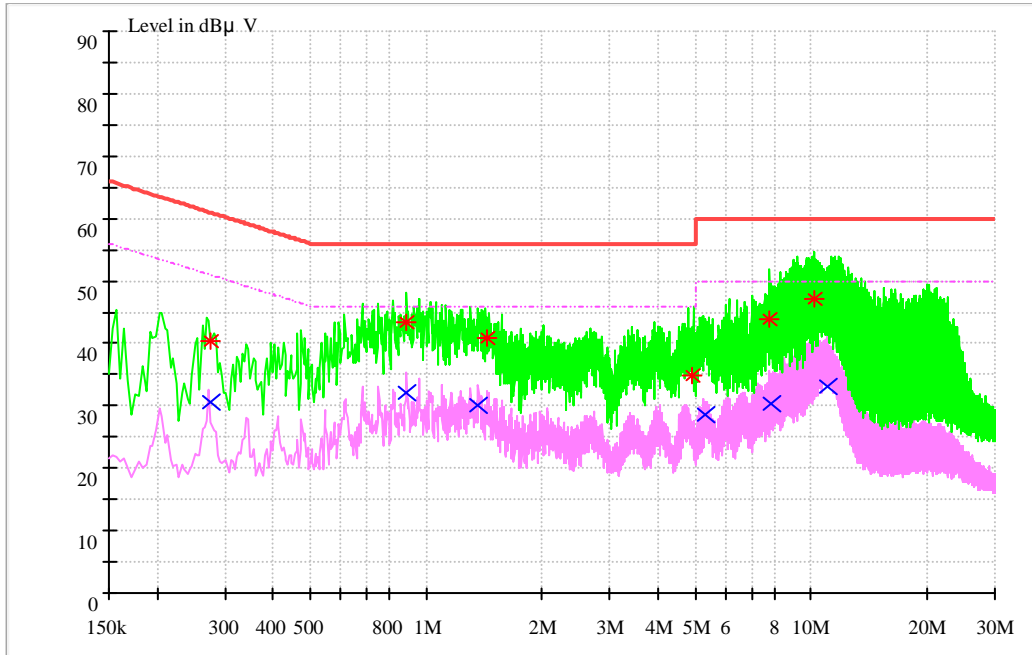

### MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V)	Limit (dBµ V)	Transd. (dB)	Margin (dB)	Line	PE
0.274501	30.55	50.98	9.7	20.43	L1	FLO
0.888363	32.14	46	9.7	13.86	N	FLO
1.364754	30.12	46	9.7	15.88	N	FLO
5.28039	28.46	50	9.8	21.54	N	FLO
7.823678	30.22	50	9.9	19.78	N	FLO
11.0551	32.99	50	10	17.01	N	FLO

### MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V)	Limit (dBµ V)	Transd. (dB)	Margin (dB)	Line	PE
0.274294	40.44	60.99	9.7	20.55	N	FLO
0.888612	43.35	56	9.7	12.65	N	FLO
1.43661	40.76	56	9.7	15.24	N	FLO
4.926951	34.89	56	9.8	21.11	N	FLO
7.821518	43.89	60	9.9	16.11	N	FLO



---

---

10.156144	47.01	60	10	12.99	N	FLO
-----------	-------	----	----	-------	---	-----

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

---

END