



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,  
Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: SZEM180100052901

Rev : 01

Page : 1 of 169

# FCC SAR TEST REPORT

**Application No:** SZEM1801000529RG  
**Applicant:** Huawei Technologies Co., Ltd.  
**Manufacturer:** Huawei Technologies Co., Ltd.  
**Factory:** Huawei Technologies Co., Ltd.  
**Product Name:** Smart Phone  
**Model No.(EUT):** FLA-LX3  
**Trade Mark:** HUAWEI  
**FCC ID:** QISFLA-LX3  
**Standards:** FCC 47CFR §2.1093  
**Date of Receipt:** 2018-01-12  
**Date of Test:** 2018-01-23 to 2018-02-08  
**Date of Issue:** 2018-02-22  
**Test conclusion:** **PASS \***

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



## REVISION HISTORY

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-02-22		Original



## TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)			
	Head SAR1g	Body-worn SAR1g	Hotspot SAR1g	Limbs SAR10g
GSM850	1.09	0.41	0.38	NA
GSM1900	0.94	0.45	1.09	1.88
WCDMA Band II	0.85	0.68	1.05	3.19
WCDMA Band IV	0.73	0.52	0.75	2.73
WCDMA Band V	0.91	0.39	0.46	NA
LTE Band 2	0.61	0.74	0.72	3.18
LTE Band 4	0.77	0.66	0.54	3.19
LTE Band 5	0.86	0.35	0.49	NA
LTE Band 7	0.59	0.54	0.87	NA
WI-FI (2.4GHz)	0.28	<0.10	0.15	NA
SAR Limited(W/kg)	1.6			4
Maximum Simultaneous Transmission SAR (W/kg)				
Scenario	Head SAR1g	Body-worn SAR1g	Hotspot SAR1g	Limbs SAR10g
Sum SAR	1.52	0.86	1.09	3.34
SPLSR	NA	NA	NA	NA
SPLSR Limited	0.04			0.1

Approved & Released by

Simon Ling

SAR Manager

Tested by

Gavin Gao

SAR Engineer



## CONTENTS

<b>1</b>	<b>GENERAL INFORMATION</b>	<b>7</b>
1.1	DETAILS OF CLIENT	7
1.2	TEST LOCATION	7
1.3	TEST FACILITY	8
1.4	GENERAL DESCRIPTION OF EUT	9
1.4.1	DUT Antenna Locations	11
1.4.2	Dynamic antenna switching specification	12
1.4.3	Dynamic antenna tuning Test Configurations	13
1.4.4	Power reduction specification	14
1.5	TEST SPECIFICATION	16
1.6	RF EXPOSURE LIMITS	17
<b>2</b>	<b>LABORATORY ENVIRONMENT</b>	<b>18</b>
<b>3</b>	<b>SAR MEASUREMENTS SYSTEM CONFIGURATION</b>	<b>19</b>
3.1	THE SAR MEASUREMENT SYSTEM	19
3.2	ISOTROPIC E-FIELD PROBE EX3DV4	20
3.3	DATA ACQUISITION ELECTRONICS (DAE)	21
3.4	SAM TWIN PHANTOM	21
3.5	ELI PHANTOM	22
3.6	DEVICE HOLDER FOR TRANSMITTERS	23
3.7	MEASUREMENT PROCEDURE	24
3.7.1	Scanning procedure	24
3.7.2	Data Storage	26
3.7.3	Data Evaluation by SEMCAD	26
<b>4</b>	<b>SAR MEASUREMENT VARIABILITY AND UNCERTAINTY</b>	<b>28</b>
4.1	SAR MEASUREMENT VARIABILITY	28
4.2	SAR MEASUREMENT UNCERTAINTY	29
<b>5</b>	<b>DESCRIPTION OF TEST POSITION</b>	<b>30</b>
5.1	HEAD EXPOSURE CONDITION	30
5.1.1	SAM Phantom Shape	30
5.1.2	EUT constructions	31



5.1.3	Definition of the “cheek” position.....	31
5.1.4	Definition of the “tilted” position.....	32
<b>5.2</b>	<b>BODY EXPOSURE CONDITION .....</b>	<b>33</b>
5.2.1	Body-worn accessory exposure conditions.....	33
5.2.2	Wireless Router exposure conditions.....	34
<b>5.3</b>	<b>EXTREMITY EXPOSURE CONDITIONS .....</b>	<b>35</b>
<b>5.4</b>	<b>PROXIMITY SENSOR TRIGGERING TEST .....</b>	<b>36</b>
5.4.1	Main antenna Proximity Sensor.....	36
5.4.2	Wifi antenna Determining Proximity Sensor.....	43
<b>6</b>	<b>SAR SYSTEM VERIFICATION PROCEDURE .....</b>	<b>46</b>
<b>6.1</b>	<b>TISSUE SIMULATE LIQUID .....</b>	<b>46</b>
6.1.1	Recipes for Tissue Simulate Liquid.....	46
6.1.2	Measurement for Tissue Simulate Liquid.....	47
<b>6.2</b>	<b>SAR SYSTEM CHECK .....</b>	<b>48</b>
6.2.1	Justification for Extended SAR Dipole Calibrations .....	49
6.2.2	Summary System Check Result(s).....	50
6.2.3	Detailed System Check Results.....	50
<b>7</b>	<b>TEST CONFIGURATION .....</b>	<b>51</b>
<b>7.1</b>	<b>3G SAR TEST REDUCTION PROCEDURE .....</b>	<b>51</b>
<b>7.2</b>	<b>OPERATION CONFIGURATIONS .....</b>	<b>51</b>
7.2.1	GSM Test Configuration.....	51
7.2.2	WCDMA Test Configuration.....	52
7.2.3	WiFi Test Configuration.....	58
7.2.4	LTE Test Configuration .....	62
<b>8</b>	<b>TEST RESULT .....</b>	<b>63</b>
<b>8.1</b>	<b>MEASUREMENT OF RF CONDUCTED POWER.....</b>	<b>63</b>
8.1.1	Conducted Power of Ant 1(Main Antenna).....	63
8.1.2	Conducted Power of Ant 2(Second Antenna).....	90
8.1.1	Conducted Power of WIFI and BT.....	117
<b>8.2</b>	<b>STAND-ALONE SAR TEST EVALUATION .....</b>	<b>119</b>
<b>8.3</b>	<b>MEASUREMENT OF SAR DATA.....</b>	<b>120</b>
8.3.1	SAR Result Of GSM850.....	120
8.3.2	SAR Result Of GSM1900 .....	122



8.3.3	SAR Result Of WCDMA Band II .....	125
8.3.4	SAR Result Of WCDMA Band IV.....	128
8.3.5	SAR Result Of WCDMA Band V.....	131
8.3.6	SAR Result Of LTE Band 2 .....	133
8.3.1	SAR Result Of LTE Band 4 .....	140
8.3.2	SAR Result Of LTE Band 5 .....	146
8.3.3	SAR Result Of LTE Band 7 .....	150
8.3.4	SAR Result Of 2.4GHz WIFI .....	155
<b>8.4</b>	<b>MULTIPLE TRANSMITTER EVALUATION .....</b>	<b>156</b>
8.4.1	Simultaneous SAR SAR test evaluation.....	156
8.4.2	Estimated SAR .....	157
<b>9</b>	<b>EQUIPMENT LIST .....</b>	<b>167</b>
<b>10</b>	<b>CALIBRATION CERTIFICATE.....</b>	<b>168</b>
<b>11</b>	<b>PHOTOGRAPHS .....</b>	<b>168</b>
	<b>APPENDIX A: DETAILED SYSTEM VALIDATION RESULTS .....</b>	<b>169</b>
	<b>APPENDIX B: DETAILED TEST RESULTS .....</b>	<b>169</b>
	<b>APPENDIX C: CALIBRATION CERTIFICATE .....</b>	<b>169</b>
	<b>APPENDIX D: PHOTOGRAPHS .....</b>	<b>169</b>



## 1 General Information

### 1.1 Details of Client

Applicant:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Manufacturer:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.2 Test Location

Company: SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch  
Address: No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China  
Post code: 518057  
Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
E-mail: [ee.shenzhen@sgs.com](mailto:ee.shenzhen@sgs.com)



## 1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.





## 1.4 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	Smart Phone		
Model No.(EUT):	FLA-LX3		
FCC ID:	QISFLA-LX3		
Trade Mark:	HUAWEI		
Product Phase:	production unit		
SN:	SRV0117C19000517/SRV0117C19000519		
Hardware Version:	HL2FLAM		
Software Version:	FLA-LX3 8.0.0.25 (C900)		
Antenna Type:	Inner Antenna		
Device Operating Configurations :			
Modulation Mode:	GSM:GMSK, 8PSK;WCDMA: QPSK;LTE:QPSK,16QAM WIFI: DSSS,OFDM;BT: GFSK, $\pi/4$ DQPSK,8DPSK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	14	HSUPA UE Category	6
DC-HSDPA UE Category:	24		
LTE Release	10		
Power Class	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(UMTS Band II/IV/V)		
	3, tested with power control Max Power(LTE Band 2/4/5/7)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 - 849	869 - 894
	GSM1900	1850-1910	1930-1990
	WCDMA Band V	824 - 849	869 - 894
	WCDMA Band IV	1710–1755	2110–2155
	WCDMA Band II	1850-1910	1930-1990
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710–1755	2110–2155
	LTE Band 5	824 - 849	869 - 894
	LTE Band 7	2500-2570	2620-2690
	Bluetooth	2402-2480	2402-2480
	Wi-Fi 2.4G	2412-2462	2412-2462



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.:SZEM180100052901

Rev : 01

Page : 10 of 169

Battery Information1#:	Model: HB406689ECW
	Rated capacity :3900mAh
	Battery Type: Rechargeable Li-ion Battery
	Manufacturer: Huizhou Desay Battery Co., Ltd.
Battery Information2#:	Model: HB406689ECW
	Rated capacity :3900mAh
	Battery Type: Rechargeable Li-ion Battery
	Manufacturer: SCUD(Fujian)Electronics Co.,Ltd
Headset Information1#:	Model: MEMD1532B528A00
	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co., LTD.
Headset Information2#:	Model: HA1-3W
	Manufacturer: GoerTek Inc.
Headset Information3#:	Model: 1293-3283-3.5mm-300
	Manufacturer: Boluo County Quancheng Electronic Co., Ltd.
Headset Information4#:	Model: EPAB542-2WH03-DH
	Manufacturer: FOXCONN INTERCONNECT TECHNOLOGY LIMITED.

### 1.4.1 DUT Antenna Locations



The test device is a mobile phone. The display diagonal dimension is 151.4mm and the overall diagonal dimension of this device is 174.3 mm.

According to the distance between LTE/WCDMA/GSM&WIFI antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing						
Mode	Front	Back	Left	Right	Top	Bottom
Ant 1(Main Antenna)	Yes	Yes	Yes	Yes	No	Yes
Ant 2(Second Antenna)	Yes	Yes	Yes	No	Yes	No
2.4G WIFI&BT	Yes	Yes	No	Yes	Yes	No

Table 1: EUT Sides for SAR Testing

Note:

- 1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.



### **1.4.2 Dynamic antenna switching specification**

The device has two 2G/3G/4G Tx antennas (Main Antenna and Second Antenna). It can transmit from either Main Antenna or Second Antenna, but they cannot transmit simultaneously.

SAR test procedure for dynamic antenna switching is as below:

The Main Antenna and Second Antenna are set to the MAX transmit power level respectively and test the SAR respectively in all applicable RF exposure conditions. Some commands or test scripts are supplied to fix the operation state and choose the antenna so that only one TX antenna is chosen and tested at a time. All independent antennas will be completely covered by the appropriate SAR measurements and all simultaneous transmission possibilities will be fully considered to ensure SAR compliance.



### **1.4.3 Dynamic antenna tuning Test Configurations**

The device also supports the dynamic antenna tuning function to optimize transmission efficiency for 2500MHz~2700MHz frequency operations, especially in any hand usage scenario.

The dynamic antenna tuning function is only applicable for some frequency bands of the 4G main Tx antenna: G LTE Band 7; which is located in the bottom part of the device. The main antenna has two fixed states for these tuning bands: The two states (**state 1** and **state 2**) shares the same antenna, RF path, test channel and conductive power. The software will choose better RSSI as the working state of the main TX antenna based on the RSSI comparison and switch algorithm.

For dynamic antenna tuning SAR test of each model device, all the tuning states will be considered for SAR compliance:

- a) Firstly, some AT commands are used to fix the tuning state at state1 or state 2, so that only one antenna tuning state is chosen at a time for SAR test. The antenna is set to the MAX transmit output power level.
- b) Secondly, in order to reduce the number of SAR tests required to demonstrate compliance for the numerous tuning states, we plan to perform one single point zoom scan SAR measurement between state1 and state 2 for each antenna tuning band and applicable RF exposure condition to identify the higher SAR tuning state that need the full set of normally required SAR measurements and allow SAR test reduction for the lower SAR conditions.
- c) Thirdly, full normally required SAR measurements are performed for the higher SAR tuning state. Moreover, the SAR worst case check will also be tested for the other tuning state in each antenna tuning band and applicable RF exposure condition to ensure the SAR compliance.

Note: For this device, the antenna tuning and operating parameters are implemented using a fixed table look-up mechanism that is fully contained within the approved transmitter; therefore, antenna tuning is static and remains unchanged for the same device operating configurations. Per KDB 388624 D02 v16r02 note, a PAG is not required.



#### **1.4.4 Power reduction specification**

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation:

- 1) A fixed level power reduction is applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
- 2) A fixed level power reduction is applied for some frequency bands when capacitive proximity sensor mode becomes active to ensure body SAR compliance.
- 3) A fixed level power reduction is applied for some frequency bands when handset operate "held to the ear" condition, the power reduction triggered by audio receiver detection. The audio receiver detection is used to determine head or body scenario.

The following tables summarize the key power reduction information. The detailed full power which is the Max. power the state can use and reduced tune-up specifications and conducted power measurement results are provided in Section 8 of this report.

Band	Power Reduction Level Amount (dB)						
	Antenna 1				Antenna 2		
	Full Power	Hotspot actived	Sensor on	Hotspot +Sensor On	Full Power	"Held to the ear" REC ON	Hotspot actived
GSM 850	0	0	0	0	0	2.2	2.2
GSM 1900	0	1.5	0	1.5	0	1.5	1.5
UMTS Band II	0	3	1	4	0	5	5
UMTS Band IV	0	3	2	5	0	2.5	2.5
UMTS Band V	0	0	0	0	0	3	3
LTE Band 2	0	5.7	1	6.7	0	5.6	5.7
LTE Band 4	0	5	1.5	6.5	0	3.3	3.3
LTE Band 5	0	0	0	0	0	3	3
LTE Band 7	0	0	2.3	2.3	0	9	9



This device uses an infrared proximity sensor to facilitate triggering WIFI power reduction when the phone is held close to a user's ear exposure condition.

Band	Power Reduction Level Amount (dB)			
	infrared proximity sensor on		infrared proximity sensor off	
	WiFi Antenna and 2G&3G&4G antenna (Voice mode) simultaneous transmission	infrared proximity sensor On VoWIFI (Voice mode)	WiFi Antenna and 2G&3G&4G antenna (Voice mode) simultaneous transmission	Full Power (other conditions)
WiFi 2.4G 802.11b	6	6	0	0
WiFi 2.4G 802.11g	6.5	6.5	0	0
WiFi 2.4G 802.11n(20M)	5.5	5.5	0	0
WiFi 2.4G 802.11n(40M)	5	5	0	0



## 1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE Std C95.1 – 1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01 3G SAR Procedures v03r01	3G SAR Measurement Procedures
KDB 941225 D05 SAR for LTE Devices v02r05	SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES
KDB 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02	Rel. 10 LTE SAR Test Guidance and KDB Inquiries
KDB 248227 D01 802.11 Wi-Fi SAR v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 941225 D06 Hotspot Mode SAR v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
KDB 648474 D04 Handset SAR v01r03	SAR Evaluation Considerations for Wireless Handsets
KDB447498 D01 General RF Exposure Guidance v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB447498 D03 Supplement C Cross-Reference v01	OET Bulletin 65, Supplement C Cross-Reference
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting v01r02	RF Exposure Compliance Reporting and Documentation Considerations





## 1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain*Trunk)	1.60 mW/g	8.00 mW/g
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g	0.40 mW/g
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

### Notes:

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



## 2 Laboratory Environment


Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 2 : The Ambient Conditions




- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.


### 3.2 Isotropic E-field Probe EX3DV4

	<p>Symmetrical design with triangular core  Built-in shielding against static charges  PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p>
<b>Calibration</b>	ISO/IEC 17025 <a href="#">calibration service</a> available.
<b>Frequency</b>	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
<b>Application</b>	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
<b>Compatibility</b>	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

### 3.3 Data Acquisition Electronics (DAE)

<b>Model</b>	DAE4	
<b>Construction</b>	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
<b>Input Offset Voltage</b>	< 5μV (with auto zero)	
<b>Input Bias Current</b>	< 50 f A	
<b>Dimensions</b>	60 x 60 x 68 mm	


### 3.4 SAM Twin Phantom

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
<b>Shell Thickness</b>	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
<b>Dimensions (incl. Wooden Support)</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet	
<b>Filling Volume</b>	approx. 25 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

### 3.5 ELI Phantom

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

### 3.6 Device Holder for Transmitters



**F-2. Device Holder for Transmitters**

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.





## **3.7 Measurement procedure**

### **3.7.1 Scanning procedure**

#### **Step 1: Power reference measurement**

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

#### **Step 2: Area scan**

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm\*15mm or 12mm\*12mm or 10mm\*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

#### **Step 3: Zoom scan**

Around this point, a volume of 32mm\*32mm\*30mm ( $f \leq 2\text{GHz}$ ), 30mm\*30mm\*30mm ( $f$  for 2-3GHz) and 24mm\*24mm\*22mm ( $f$  for 5-6GHz) was assessed by measuring 5x5x7 points ( $f \leq 2\text{GHz}$ ), 7x7x7 points ( $f$  for 2-3GHz) and 7x7x12 points ( $f$  for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.





			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

#### Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5 \%$



### 3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )

$U_i$  = input signal of channel  $i$  ( $i = x, y, z$ )

cf = crest factor of exciting field (DASY parameter)

dcp  $i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:



$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)

[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

$E_{tot}$  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\epsilon$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{tot}$  = total electric field strength in V/m

$H_{tot}$  = total magnetic field strength in A/m



## **4 SAR measurement variability and uncertainty**

### **4.1 SAR measurement variability**

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.



## **4.2 SAR measurement uncertainty**

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 5 Description of Test Position


### 5.1 Head Exposure Condition

#### 5.1.1 SAM Phantom Shape




F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

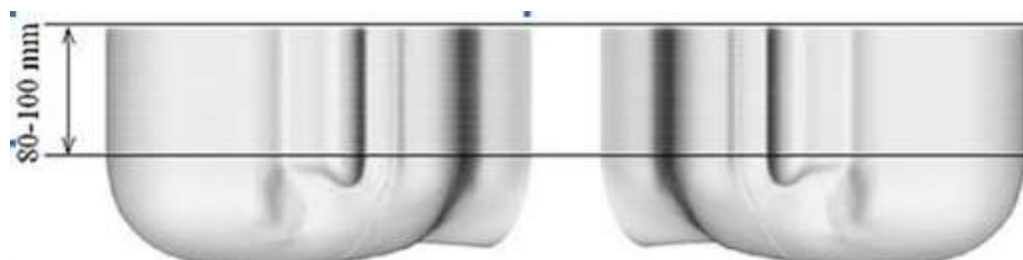

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

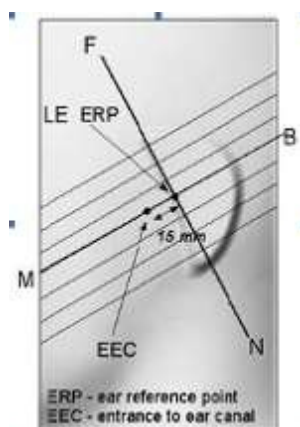


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

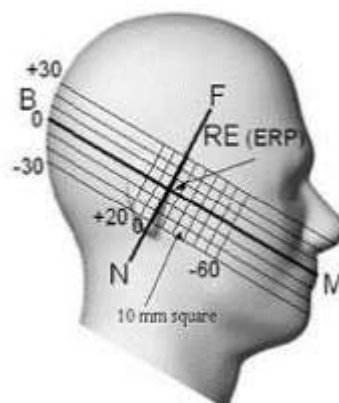


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations

### 5.1.2 EUT constructions

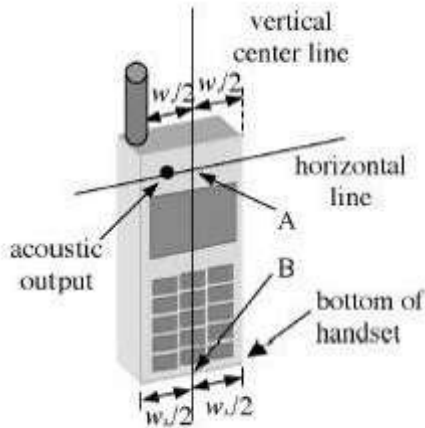

F-7. Handset vertical and horizontal reference lines—"fixed case"

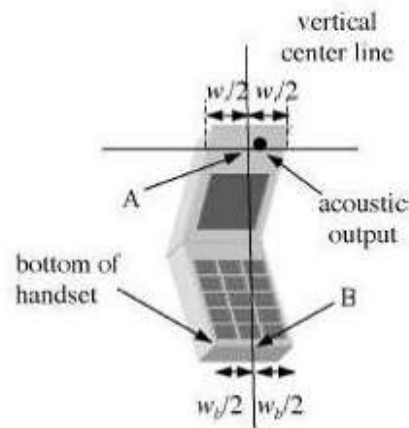

F-8. Handset vertical and horizontal reference lines—"clam-shell case"


### 5.1.3 Definition of the "cheek" position

- Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.
- Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.




#### 5.1.4 Definition of the “tilted” position

- Position the device in the “cheek” position described above;
- While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

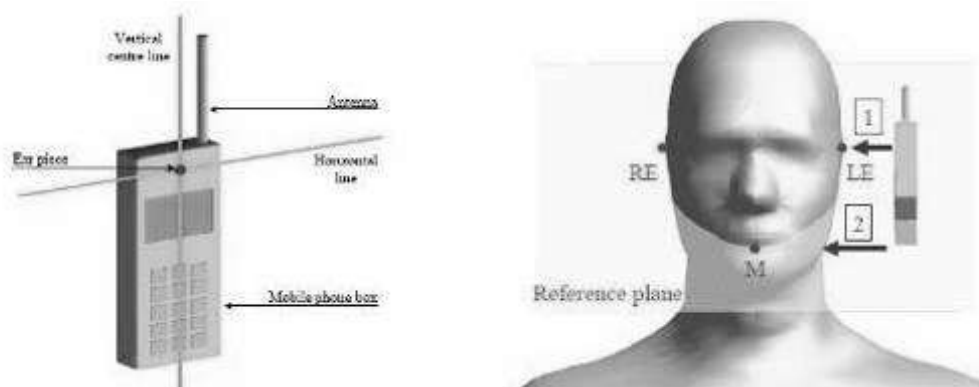

F-9. Definition of the reference lines and points, on the phone and on the phantom and initial position

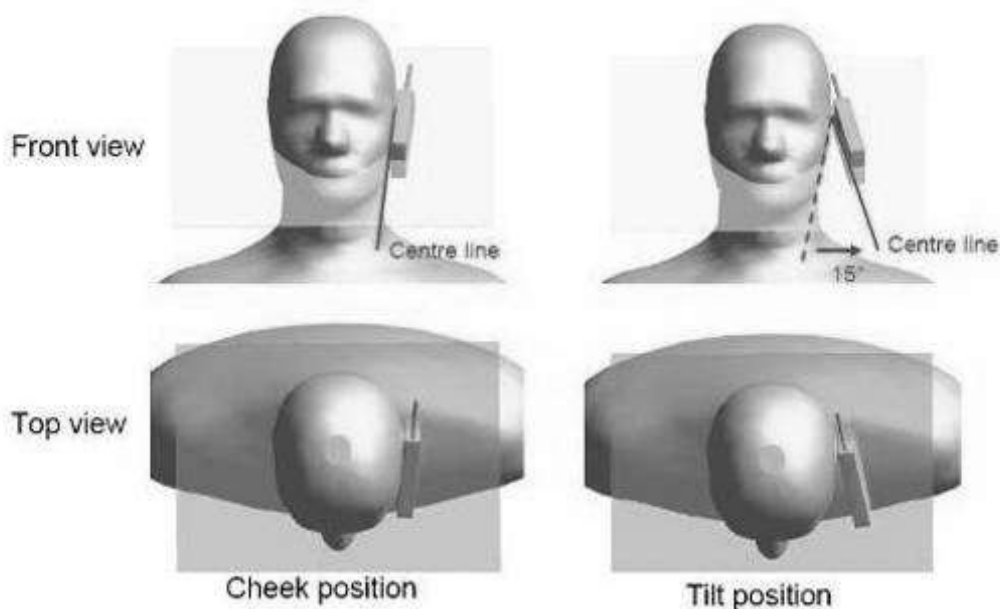

F-10. “Cheek” and “tilt” positions of the mobile phone on the left side



## 5.2 Body Exposure Condition


### 5.2.1 Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

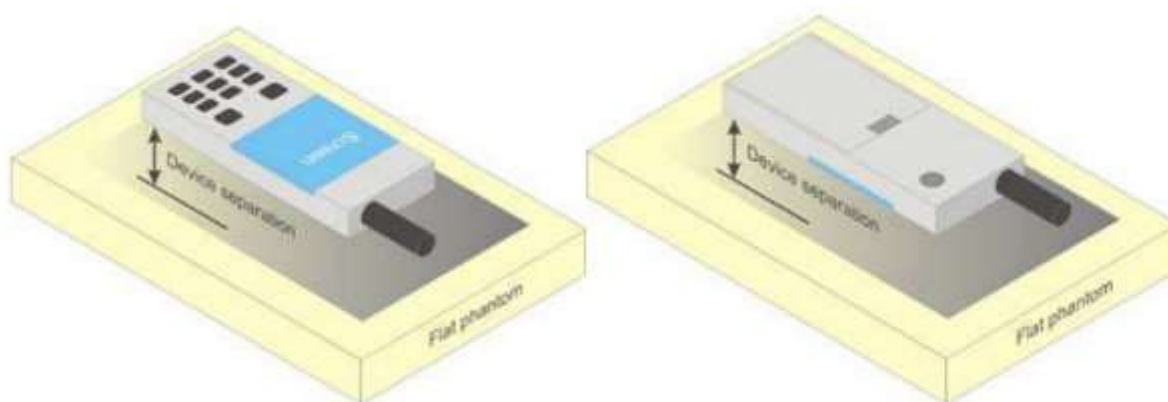

**F-11. Test positions for body-worn devices**



## **5.2.2 Wireless Router exposure conditions**

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.



### 5.3 Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, only the following frequency bands need to test with 0mm for the Product Specific 10-g SAR, the others are not required.


Main Antenna Test data											
Band	Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scale factor	Scaled SAR(W/kg)	Limbs SAR Required
Hotspot Test data(10mm) Sensor On											
GSM 1900	Bottom side	GPRS 4TS	810/1909.8	1:2.075	0.83	0.07	22.00	24.70	1.86	1.54	Yes
WCDMA B2	Front side	RMC	9400/1880	1:1	0.39	0.04	18.92	24.30	3.45	1.36	Yes
	Back side	RMC	9400/1880	1:1	0.47	0.07	18.92	24.30	3.45	1.63	Yes
	Bottom side	RMC	9538/1907.6	1:1	0.77	0.01	18.93	24.30	3.44	2.65	Yes
WCDMA B4	Back side	RMC	1412/1732.4	1:1	0.33	0.05	18.23	24.30	4.05	1.33	Yes
	Bottom side	RMC	1412/1732.4	1:1	0.59	0.16	18.23	24.30	4.05	2.37	Yes
LTE B2	Back side	QPSK	19100/1900	1:1	0.33	0.07	16.47	22.70	4.20	1.39	Yes
	Bottom side	QPSK	19100/1900	1:1	0.59	0.10	16.47	22.70	4.20	2.49	Yes
LTE B4	Bottom side	QPSK	20300/1745	1:1	0.50	0.01	17.16	22.80	3.66	1.83	Yes

## 5.4 Proximity Sensor Triggering Test

### 5.4.1 Main antenna Proximity Sensor

#### 1) Proximity sensor triggering distances

The Proximity sensor triggering was applied to WCDMA Band 2, 4; LTE Band 2, 4,7. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.

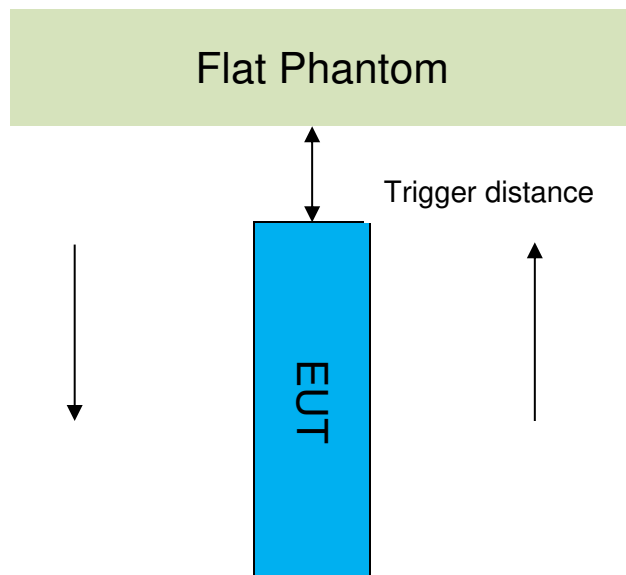

Proximity Sensor Triggering Distance(mm)			
Position	Front	Back	Bottom
Minimum	13	17	17
Required SAR Test	12	16	16

Antenna	Band	Trigger Condition	Body exposure condition
			Power reduction(dB)
Main Antenna	WCDMA B2	Front side: Close to 13mm Back side: Close to 17mm Bottom side: Close to 17mm;	1
Main Antenna	WCDMA B4	Front side: Close to 13mm Back side: Close to 17mm Bottom side: Close to 17mm;	2
Main Antenna	LTE B2	Front side: Close to 13mm Back side: Close to 17mm Bottom side: Close to 17mm;	1



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 37 of 169



Main Antenna	LTE B4	Front side: Close to 13mm Back side: Close to 17mm Bottom side: Close to 17mm;	1.5
Main Antenna	LTE B7	Front side: Close to 13mm Back side: Close to 17mm Bottom side: Close to 17mm;	2


Note: SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.

Band	Ch	Measured Power(dBm)		Reduction levels(dB)
		Max. Power	Power back-off	
WCDMA Band II	9400	23.04	21.97	1.07
WCDMA Band IV	1412	23.3	21.26	2.04
LTE Band 2	18900	21.43	21.34	0.91
LTE Band 4	20175	21.87	21.43	1.39
LTE Band 7	21100	21.14	20.22	2.25





● DUT Moving Toward (Trigger) the Phantom

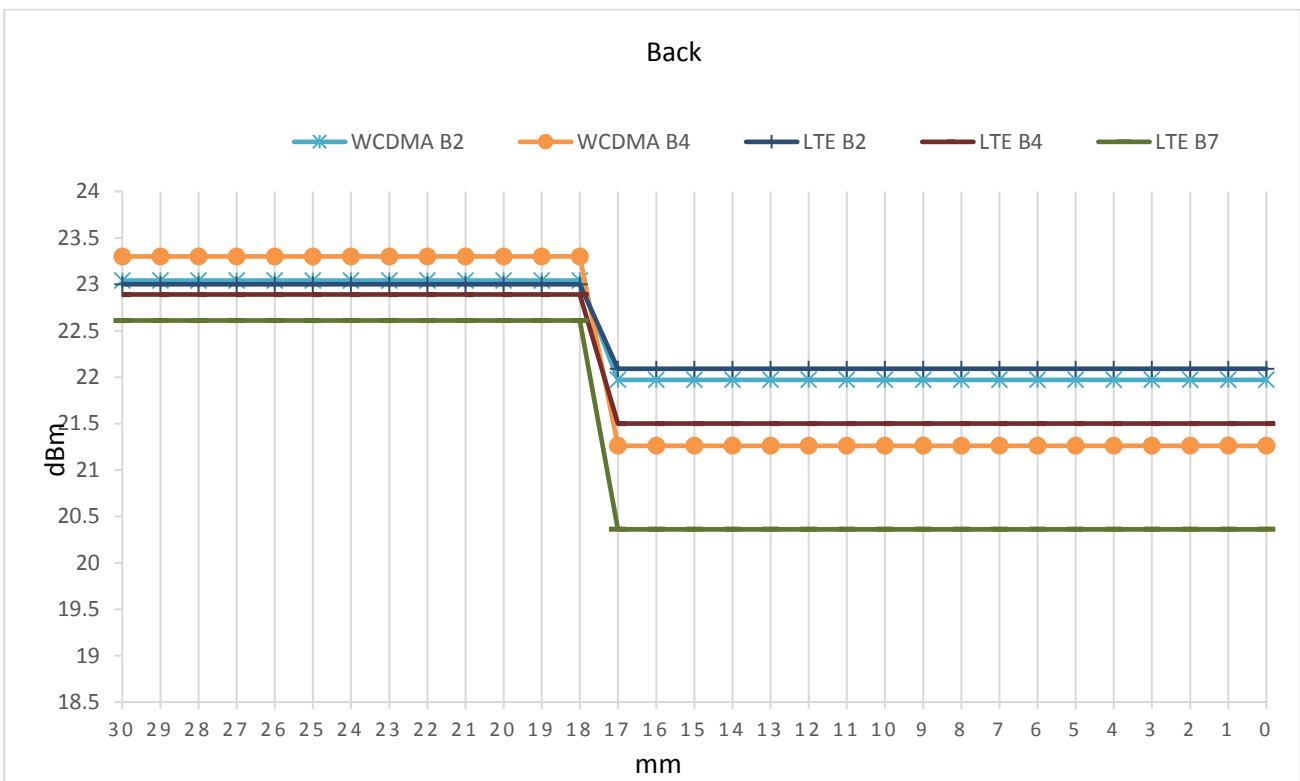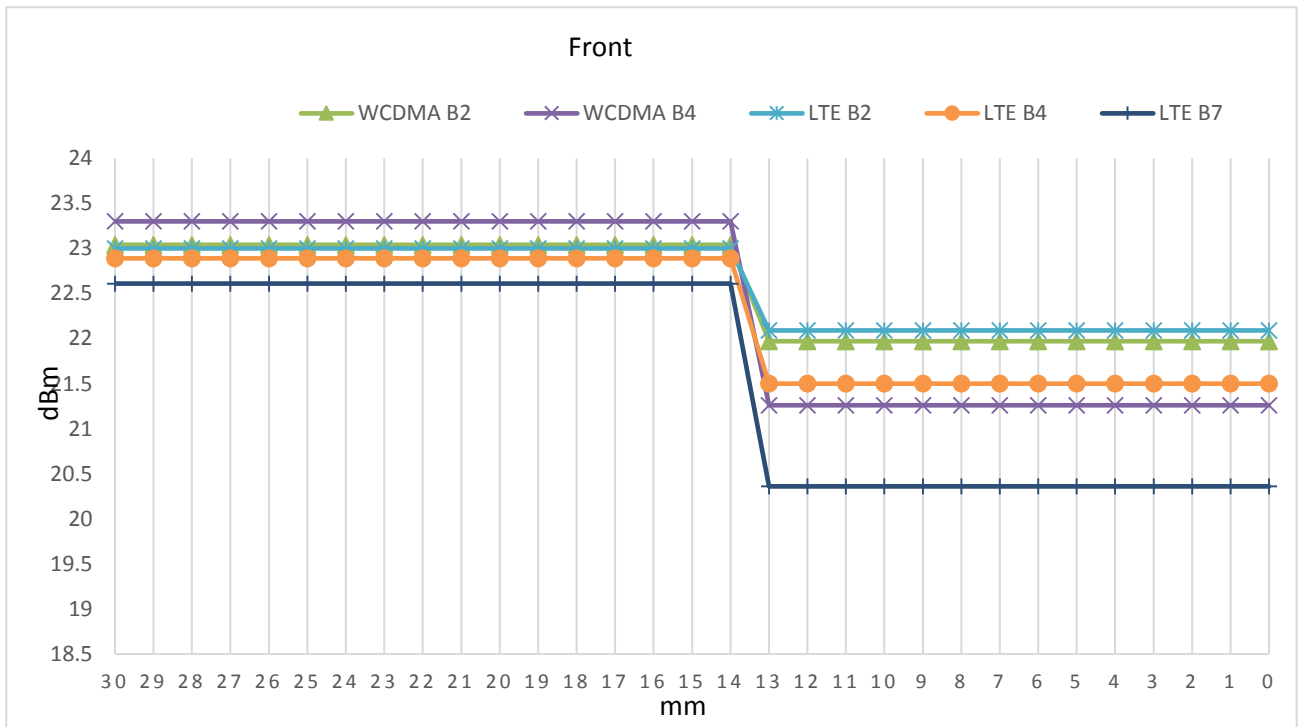

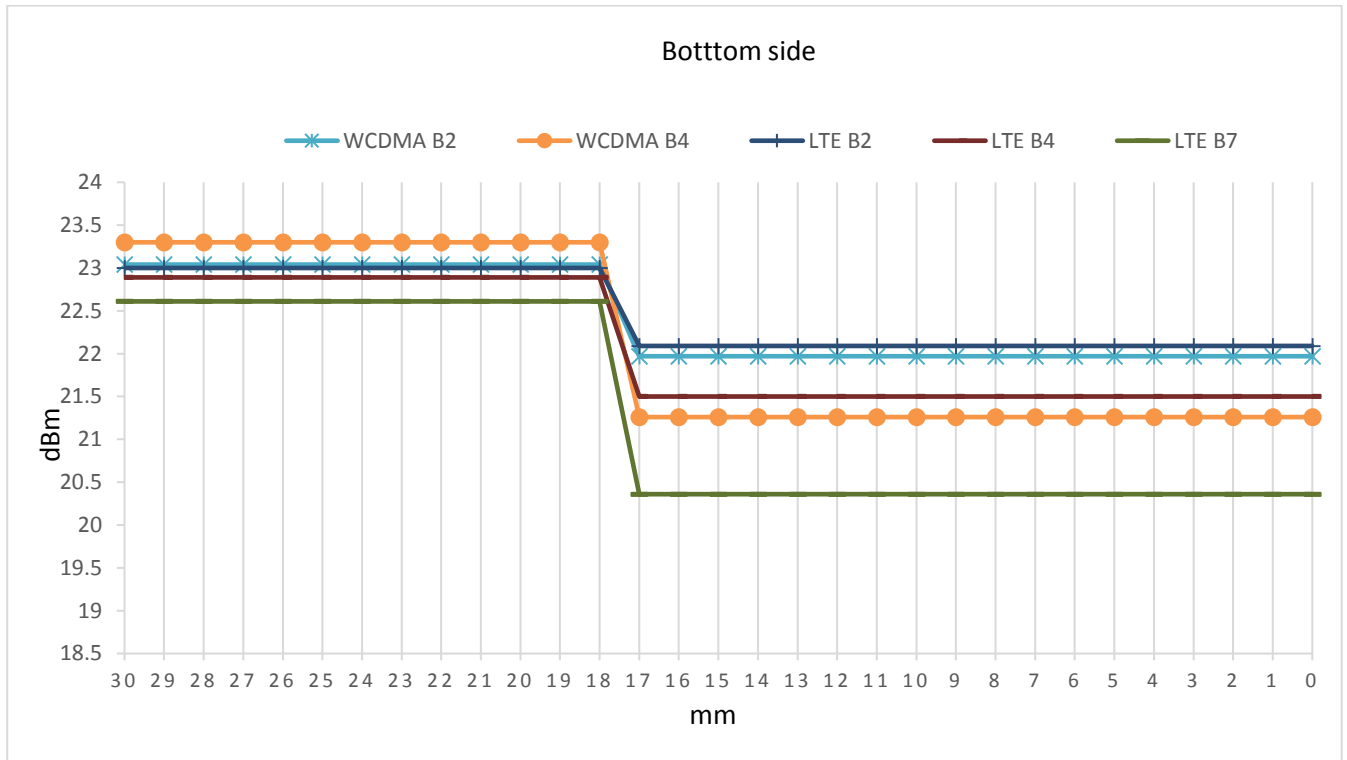




● DUT Moving Away (Release) from the Phantom

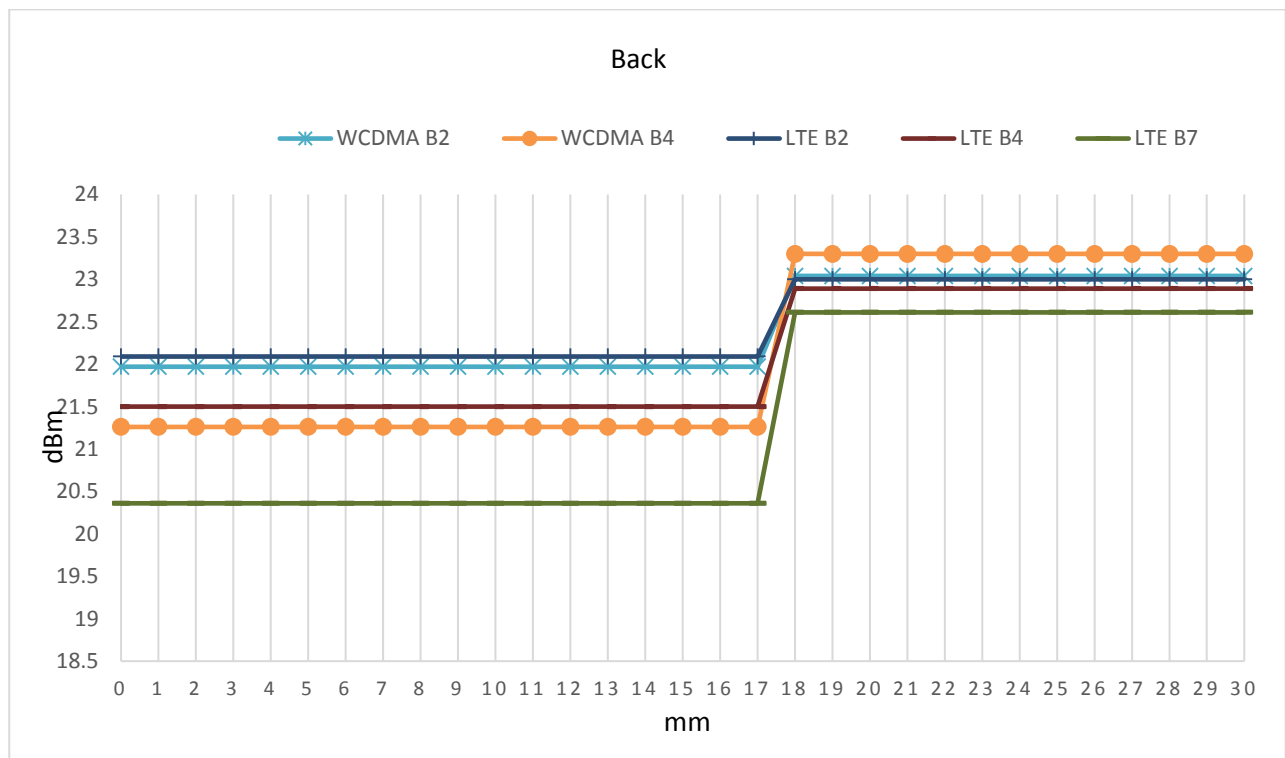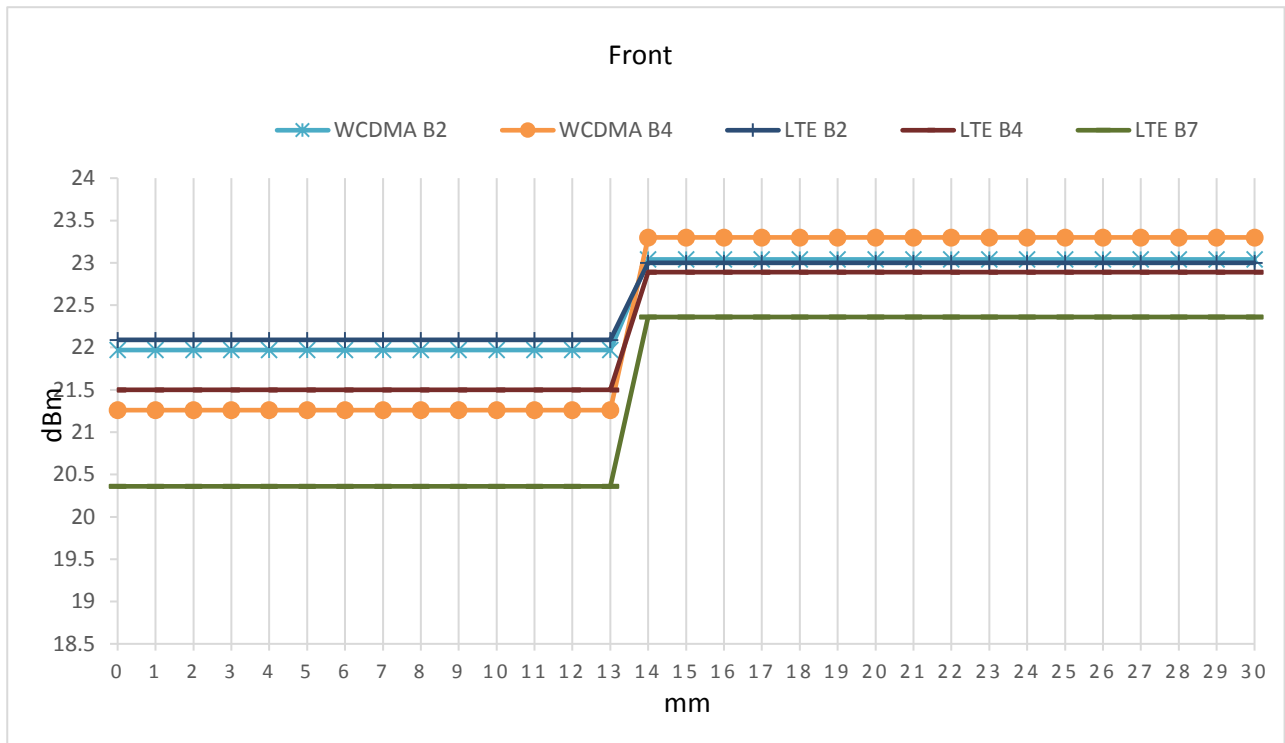



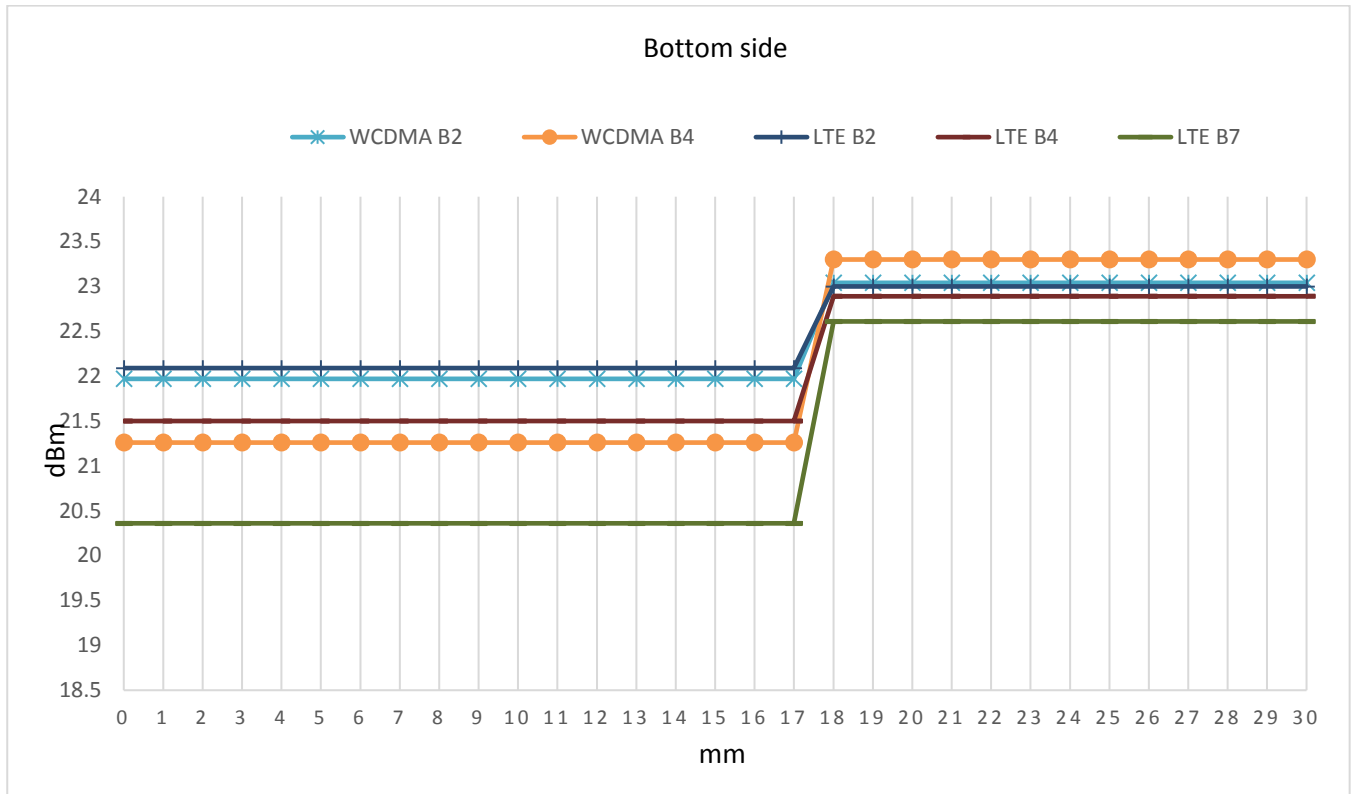

## 2) Proximity sensor coverage


If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset.

## 3) Device tilt angle influences to proximity sensor triggering

The influence of device tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom.

Rotating the tablet around the edge next to the phantom in  $\leq 10^\circ$  increments until the tablet is  $\pm 45^\circ$  from the vertical position at  $0^\circ$ , and the maximum output power remains in the reduced mode.

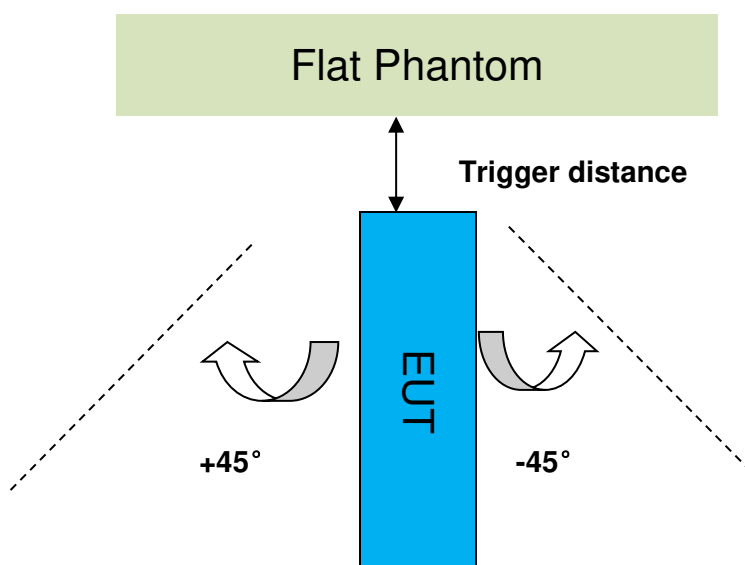


The Sensor Triggering Distance(mm)	
Position	Bottom
Minimum	17
Required SAR Test	16

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering for Bottom Side													
Band(MHz)	Minimum trigger distance Per KDB616217§6.2	Minimum trigger distance at which power reduction was maintained over $\pm 45^\circ$	Power Reduction Status										
			-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°
WCDMA B2	17mm	17mm	on	on	on	on	on	on	on	on	on	on	on
WCDMA B4	17mm	17mm	on	on	on	on	on	on	on	on	on	on	on
LTE B2	17mm	17mm	on	on	on	on	on	on	on	on	on	on	on
LTE B4	17mm	17mm	on	on	on	on	on	on	on	on	on	on	on
LTE B7	17mm	17mm	on	on	on	on	on	on	on	on	on	on	on

## 5.4.2 Wifi antenna Determining Proximity Sensor

### 1) Determining proximity sensor triggering distances

The procedure per KDB 616217 D04§6.2 is used to determine the triggering distances. As the proximity sensor locates on the front face of the device and detects objects approaching only from the front side, so triggering distance only need to be checked for the front side of Wi-Fi band when Wi-Fi and 2G&3G&4G main or second antenna voice mode transmit simultaneously.

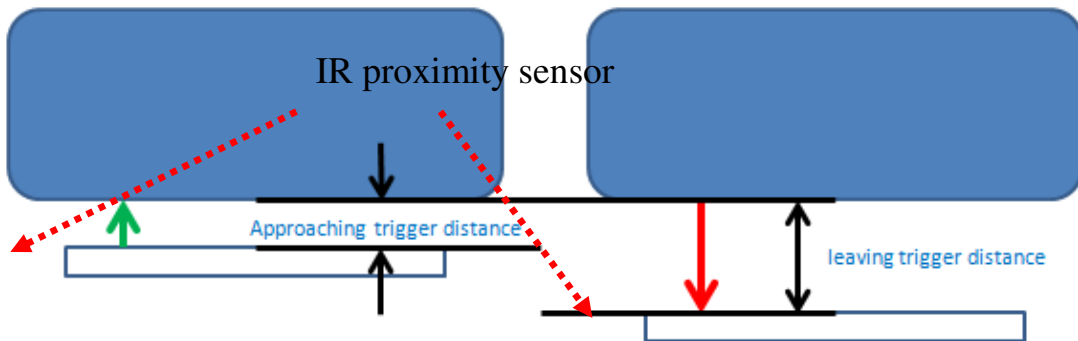

Picture: Proximity sensor triggering distances assessment (Front side)  
the DUT is moved towards from the flat phantom:


Distance between phantom to DUT in mm	45	40	35	30	25	20	15
Condition of Sensor in the front side of the device(under voice mode)	off	off	off	off	off	on	on

the DUT is moved away from the flat phantom:


Distance between phantom to DUT in mm	75	70	65	60	55	50	45
Condition of Sensor in the front side of the device(under voice mode)	off	off	off	off	off	on	on




● DUT Moving Toward (Trigger) the Phantom

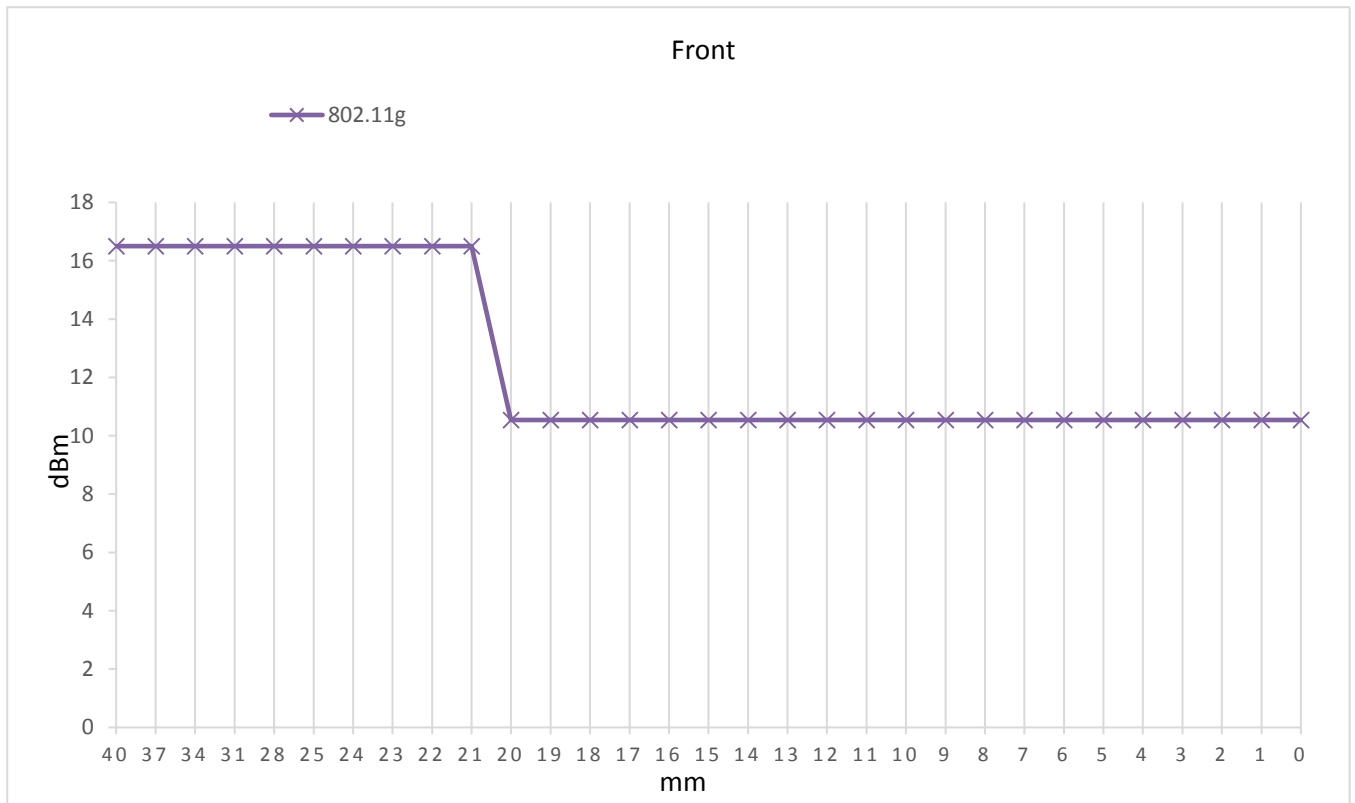

● DUT Moving Away (Release) from the Phantom

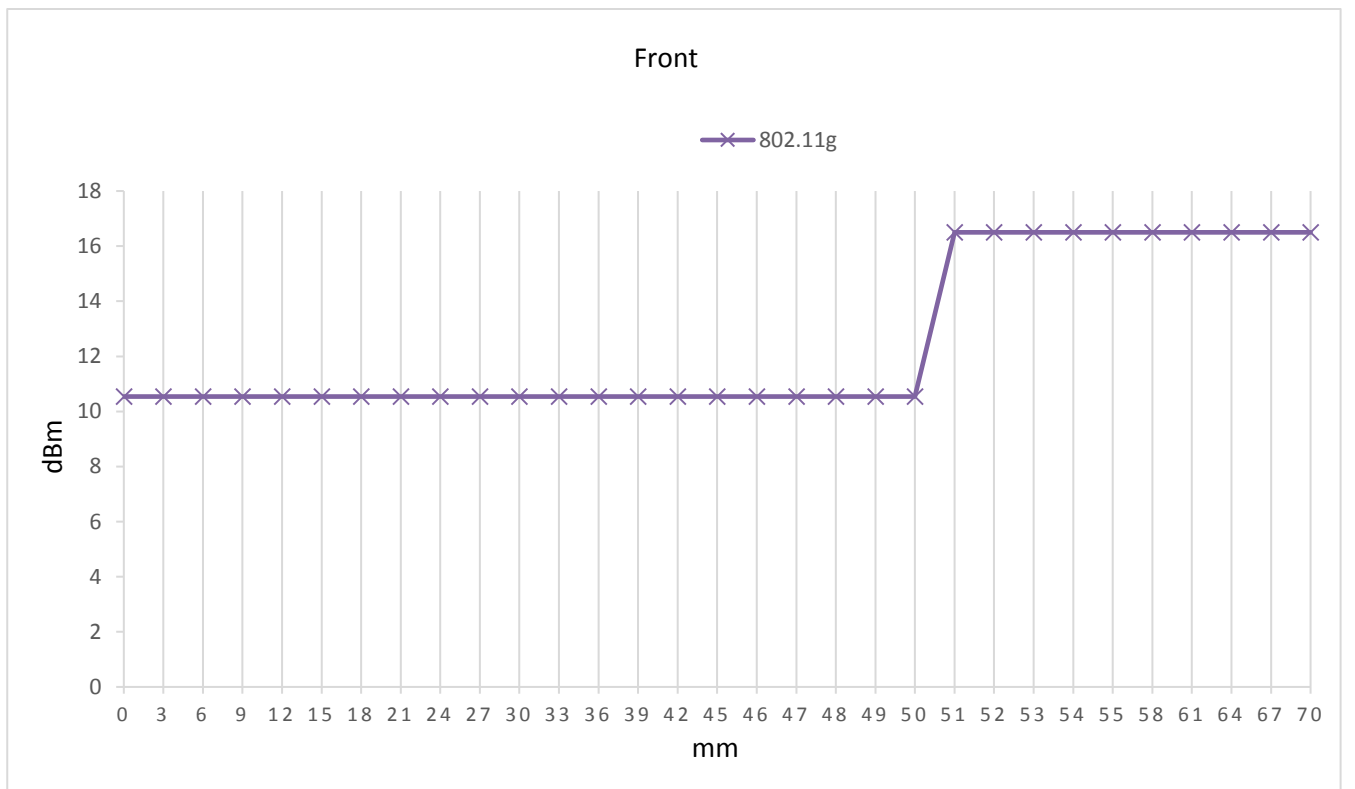

## 2) Determining device tilt angle influences to proximity sensor triggering

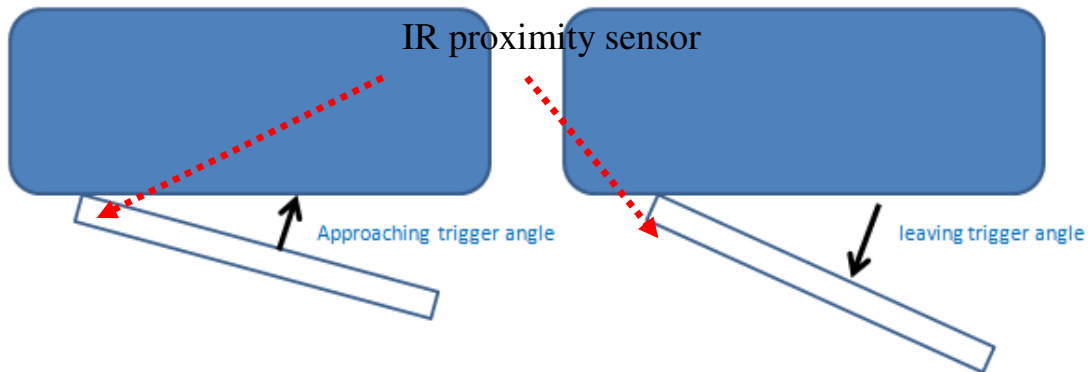

The DUT is moved towards and away from SAM phantom.

angle between phantom to DUT in degree	0	5	10	15	20	25	30
Condition of Sensor	on	on	on	on	on	on	on



## 6 SAR System Verification Procedure

### 6.1 Tissue Simulate Liquid

#### 6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)							
	450		835		1800-2000		2300-2700	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	40.30	50.75	55.24	70.17	55.00	68.53
Salt (NaCl)	3.95	1.49	1.38	0.94	0.31	0.39	0.2	0.1
Sucrose	56.32	46.78	57.90	48.21	0	0	0	0
HEC	0.98	0.52	0.24	0	0	0	0	0
Bactericide	0.19	0.05	0.18	0.10	0	0	0	0
Tween	0	0	0	0	44.45	29.44	44.80	31.37
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ <sup>+</sup> resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate								
Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose								
HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%								
MSL5GHz is composed of the following ingredients: Water: 64-78% Mineral oil: 11-18% Emulsifiers: 9-15% Sodium salt: 2-3%								

Table 3 : Recipe of Tissue Simulate Liquid



## 6.1.2 Measurement for Tissue Simulate Liquid


The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was  $22\pm 2^{\circ}\text{C}$ .

Measurement for Tissue Simulate Liquid							
Tissue Type	Measured Frequency (MHz)	Target Tissue ( $\pm 5\%$ )		Measured Tissue		Liquid Temp. ( $^{\circ}\text{C}$ )	Measured Date
		$\epsilon_r$	$\sigma(\text{S/m})$	$\epsilon_r$	$\sigma(\text{S/m})$		
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	42.04	0.909	22.1	2018/1/23
835 Body	835	55.2 (52.44~57.96)	0.97 (0.92~1.02)	53.955	0.98	22.1	2018/2/2
835 Body	835	55.2 (52.44~57.96)	0.97 (0.92~1.02)	53.853	0.986	22.1	2018/2/1
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.679	1.336	22.2	2018/1/25
1750 Body	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	53.088	1.537	22.2	2018/1/27
1750 Body	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	53.107	1.541	22.2	2018/1/26
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.64	1.372	22.3	2018/1/28
1900 Body	1900	53.3 (50.64~55.97)	1.52 (1.44~1.60)	53.19	1.513	22.3	2018/1/31
1900 Body	1900	53.3 (50.64~55.97)	1.52 (1.44~1.60)	53.234	1.51	22.3	2018/1/29
1900 Body	1900	53.3 (50.64~55.97)	1.52 (1.44~1.60)	51.834	1.502	22.3	2018/1/30
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.903	1.825	22	2018/2/8
2450 Body	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	53.809	1.984	22	2018/2/7
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	38.658	1.982	22.1	2018/2/3
2600 Body	2600	52.50 (49.88~55.13)	2.16 (2.05~2.27)	53.353	2.163	22.1	2018/2/4

Table 4 : Measurement result of Tissue electric parameters

## 6.2 SAR System Check

The microwave circuit arrangement for system check is sketched in bellow figure. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within  $\pm 10\%$  from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table. During the tests, the ambient temperature of the laboratory was in the range  $22\pm 2^{\circ}\text{C}$ , the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

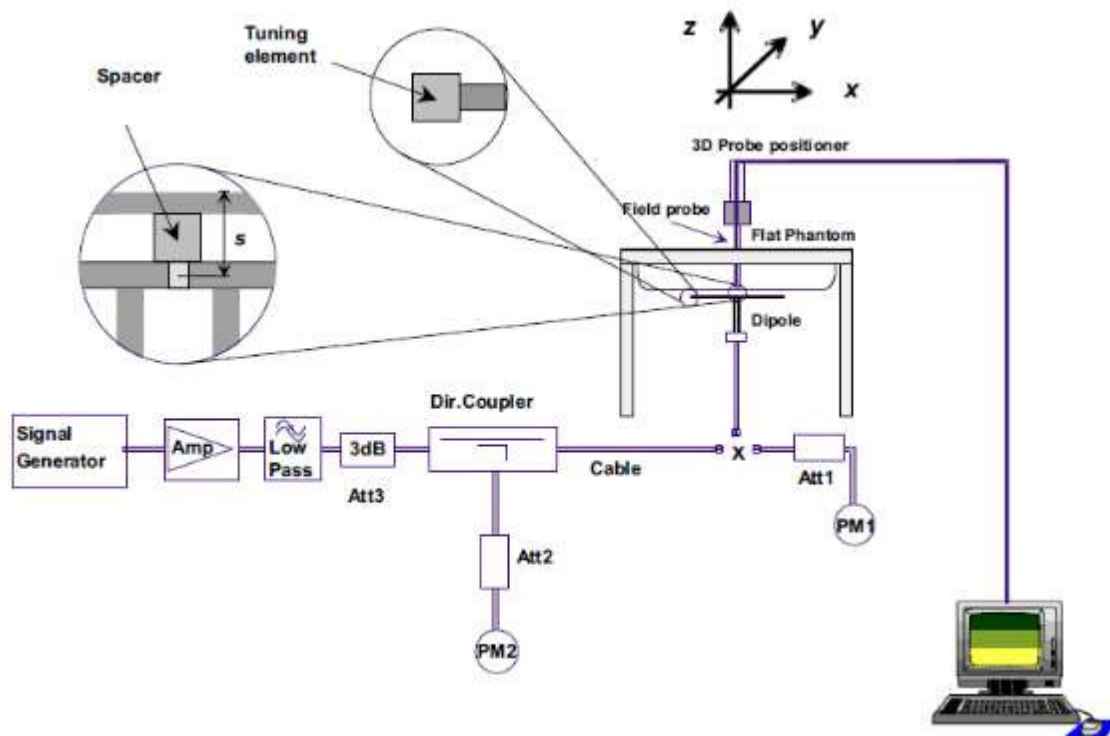

F-12. the microwave circuit arrangement used for SAR system check





### **6.2.1 Justification for Extended SAR Dipole Calibrations**

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within  $5\Omega$  from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



## 6.2.2 Summary System Check Result(s)

SAR System Validation Result(s)									
Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D835V2	Head	2.43	1.56	9.72	6.24	9.59 (8.63~10.55)	6.29 (5.66~6.92)	22.1	2018/1/23
	Body	2.56	1.62	10.24	6.48	9.65 (8.69~10.62)	6.46 (5.81~7.11)	22.1	2018/2/2
	Body	2.47	1.55	9.88	6.2	9.65 (8.69~10.62)	6.46 (5.81~7.11)	22.1	2018/2/1
D1750V2	Head	9.02	5.04	36.08	20.16	36.7 (33.03~40.37)	19.5 (17.55~21.45)	22.2	2018/1/25
	Body	9.49	5.1	37.96	20.4	37 (33.30~40.70)	19.7 (17.73~21.67)	22.2	2018/1/27
	Body	9.79	5.23	39.16	20.92	37 (33.30~40.70)	19.7 (17.73~21.67)	22.2	2018/1/26
D1900V2	Head	10.6	5.02	42.4	20.08	40.7 (36.63~44.77)	21.1 (18.99~23.21)	22.3	2018/1/28
	Body	10.1	5.62	40.4	22.48	41.6 (37.44~45.76)	21.4 (19.26~23.54)	22.3	2018/1/31
	Body	10.2	5.66	40.8	22.64	41.6 (37.44~45.76)	21.4 (19.26~23.54)	22.3	2018/1/29
	Body	10.2	5.58	40.8	22.32	41.6 (37.44~45.76)	21.4 (19.26~23.54)	22.3	2018/1/30
D2450V2	Head	14.2	6.54	56.8	26.16	53.1 (47.79~58.41)	24.9 (22.41~27.39)	22	2018/2/8
	Body	13.1	6.11	52.4	24.44	51.0 (45.9~56.1)	23.5 (21.15~25.85)	22	2018/2/7
D2600V2	Head	14.3	5.83	57.2	23.32	56.6 (50.94~62.26)	25.4 (22.86~27.94)	22.1	2018/2/3
	Body	12.6	5.71	50.4	22.84	54.2 (48.78~59.62)	24.3 (21.87~26.73)	22.1	2018/2/4

Table 5 : SAR System Check Result

## 6.2.3 Detailed System Check Results

Please see the Appendix A



## **7 Test Configuration**

### **7.1 3G SAR Test Reduction Procedure**

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

### **7.2 Operation Configurations**

#### **7.2.1 GSM Test Configuration**

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5” and “0” in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode



## **7.2.2 WCDMA Test Configuration**

### **1) . Output Power Verification**

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

### **2) . Head SAR**

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure

### **3) . Body SAR**

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

### **4) . HSDPA / HSUPA / DC-HSDPA**

According to KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

#### **a) HSDPA**

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.



Sub-test	$\beta_c$	Bd	$\beta_d(\text{SF})$	$\beta_c/\beta_d$	$\beta_{hs}$	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
<p>Note1: <math>\Delta\text{ACK}</math>, <math>\Delta\text{NACK}</math> and <math>\Delta\text{CQI}=8</math> Ahs = <math>\beta_{hs}/\beta_c=30/15</math> <math>\beta_{hs}=30/15*\beta_c</math> Note2:For the HS-DPCCH power mask requirement test in clause 5.2C,5.7A,and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A,and HSDPA EVM with phase discontinuity in clause 5.13.1AA, <math>\Delta\text{ACK}</math> and <math>\Delta\text{NACK}=8</math> ( Ahs=30/15) with <math>\beta_{hs}=30/15*\beta_c</math>,and <math>\Delta\text{CQI}=7</math> ( Ahs=24/15) with <math>\beta_{hs}=24/15*\beta_c</math>. Note3: CM=1 for <math>\beta_c/\beta_d=12/15</math>, <math>\beta_{hs}/\beta_c=24/15</math>. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.</p>							

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 6 : settings of required H-Set 1 QPSK acc. to 3GPP 34.121



HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	MaximumH S-DSCH Transport BlockBits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 7 : HSDPA UE category

**b) HSUPA**

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset“ and „Release 5 HSUPA Data Device“ sections of 3G device.



Sub-test <sup>⓪</sup>	$\beta_c$ <sup>⓪</sup>	$\beta_d$ <sup>⓪</sup>	$\beta_d$ (SF) <sup>⓪</sup>	$\beta_o/\beta_d$ <sup>⓪</sup>	$\beta_{hs}$ <sup>(1)</sup> <sup>⓪</sup>	$\beta_{sc}$ <sup>⓪</sup>	$\beta_{ed}$ <sup>⓪</sup>	$\beta_c$ (SF) <sup>⓪</sup>	$\beta_{ed}$ (code) <sup>⓪</sup>	CM <sup>(2)</sup> (dB) <sup>⓪</sup>	MP R <sup>⓪</sup> (dB) <sup>⓪</sup>	AG <sup>(4)</sup> Inde x <sup>⓪</sup>	E- TFC I <sup>⓪</sup>
1 <sup>⓪</sup>	11/15 <sup>(3)</sup> <sup>⓪</sup>	15/15 <sup>(3)</sup> <sup>⓪</sup>	64 <sup>⓪</sup>	11/15 <sup>(3)</sup> <sup>⓪</sup>	22/15 <sup>⓪</sup>	209/225 <sup>⓪</sup>	1039/225 <sup>⓪</sup>	4 <sup>⓪</sup>	1 <sup>⓪</sup>	1.0 <sup>⓪</sup>	0.0 <sup>⓪</sup>	20 <sup>⓪</sup>	75 <sup>⓪</sup>
2 <sup>⓪</sup>	6/15 <sup>⓪</sup>	15/15 <sup>⓪</sup>	64 <sup>⓪</sup>	6/15 <sup>⓪</sup>	12/15 <sup>⓪</sup>	12/15 <sup>⓪</sup>	94/75 <sup>⓪</sup>	4 <sup>⓪</sup>	1 <sup>⓪</sup>	3.0 <sup>⓪</sup>	2.0 <sup>⓪</sup>	12 <sup>⓪</sup>	67 <sup>⓪</sup>
3 <sup>⓪</sup>	15/15 <sup>⓪</sup>	9/15 <sup>⓪</sup>	64 <sup>⓪</sup>	15/9 <sup>⓪</sup>	30/15 <sup>⓪</sup>	30/15 <sup>⓪</sup>	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$ <sup>⓪</sup>	4 <sup>⓪</sup>	2 <sup>⓪</sup>	2.0 <sup>⓪</sup>	1.0 <sup>⓪</sup>	15 <sup>⓪</sup>	92 <sup>⓪</sup>
4 <sup>⓪</sup>	2/15 <sup>⓪</sup>	15/15 <sup>⓪</sup>	64 <sup>⓪</sup>	2/15 <sup>⓪</sup>	4/15 <sup>⓪</sup>	2/15 <sup>⓪</sup>	56/75 <sup>⓪</sup>	4 <sup>⓪</sup>	1 <sup>⓪</sup>	3.0 <sup>⓪</sup>	2.0 <sup>⓪</sup>	17 <sup>⓪</sup>	71 <sup>⓪</sup>
5 <sup>⓪</sup>	15/15 <sup>(4)</sup> <sup>⓪</sup>	15/15 <sup>(4)</sup> <sup>⓪</sup>	64 <sup>⓪</sup>	15/15 <sup>(4)</sup> <sup>⓪</sup>	30/15 <sup>⓪</sup>	24/15 <sup>⓪</sup>	134/15 <sup>⓪</sup>	4 <sup>⓪</sup>	1 <sup>⓪</sup>	1.0 <sup>⓪</sup>	0.0 <sup>⓪</sup>	21 <sup>⓪</sup>	81 <sup>⓪</sup>
Note 1: $\Delta ACK$ , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$ , $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference <sup>⓪</sup> Note 3 : For subtest 1 the $\beta_c/\beta_d$ ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ <sup>⓪</sup> Note 4 : For subtest 5 the $\beta_c/\beta_d$ ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ <sup>⓪</sup> Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g <sup>⓪</sup> Note 6: $\beta_{ed}$ can not be set directly; it is set by Absolute Grant Value. <sup>⓪</sup>													

Table 8 : Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).						

Table 9 : HSUPA UE category





c) **DC-HSDPA**

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0.

A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.


Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 10 : settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.



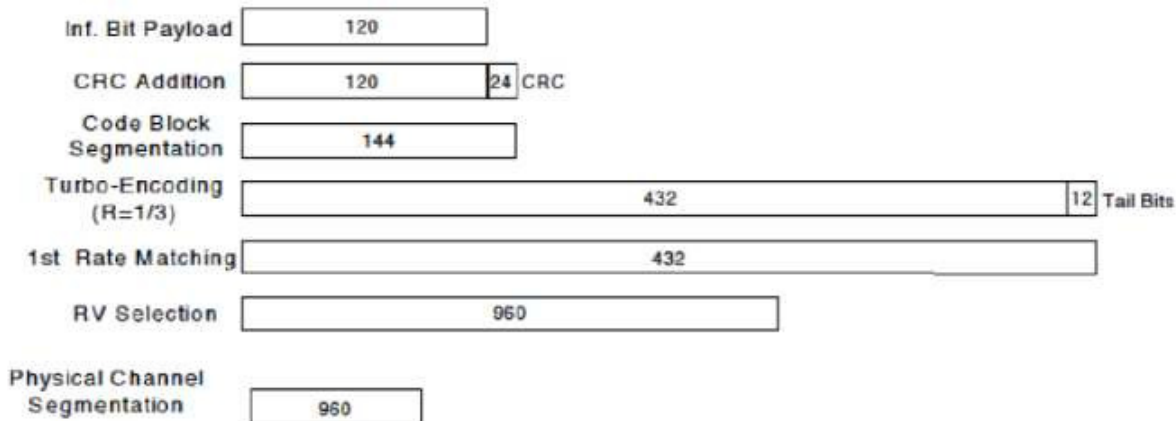

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c/\beta_d$ <sup>o</sup>	$\beta_{hs}(1)$ <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI=8$       $A_{hs}=\beta_{hs}/\beta_c=30/15$       $\beta_{hs}=30/15 * \beta_c$   
Note 2 : CM=1 for  $\beta_c/\beta_d=12/15$ ,  $\beta_{hs}/\beta_c=24/15$ . For all other combinations of DPDCH, DPCCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.  
Note 3 : For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c=11/15$  and  $\beta_d=15/15$

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.




### 7.2.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

#### 7.2.3.1 Duty cycle

2.4GHz Wi-Fi 802.11b:

duty cycle=2.06/2.11=97.6%

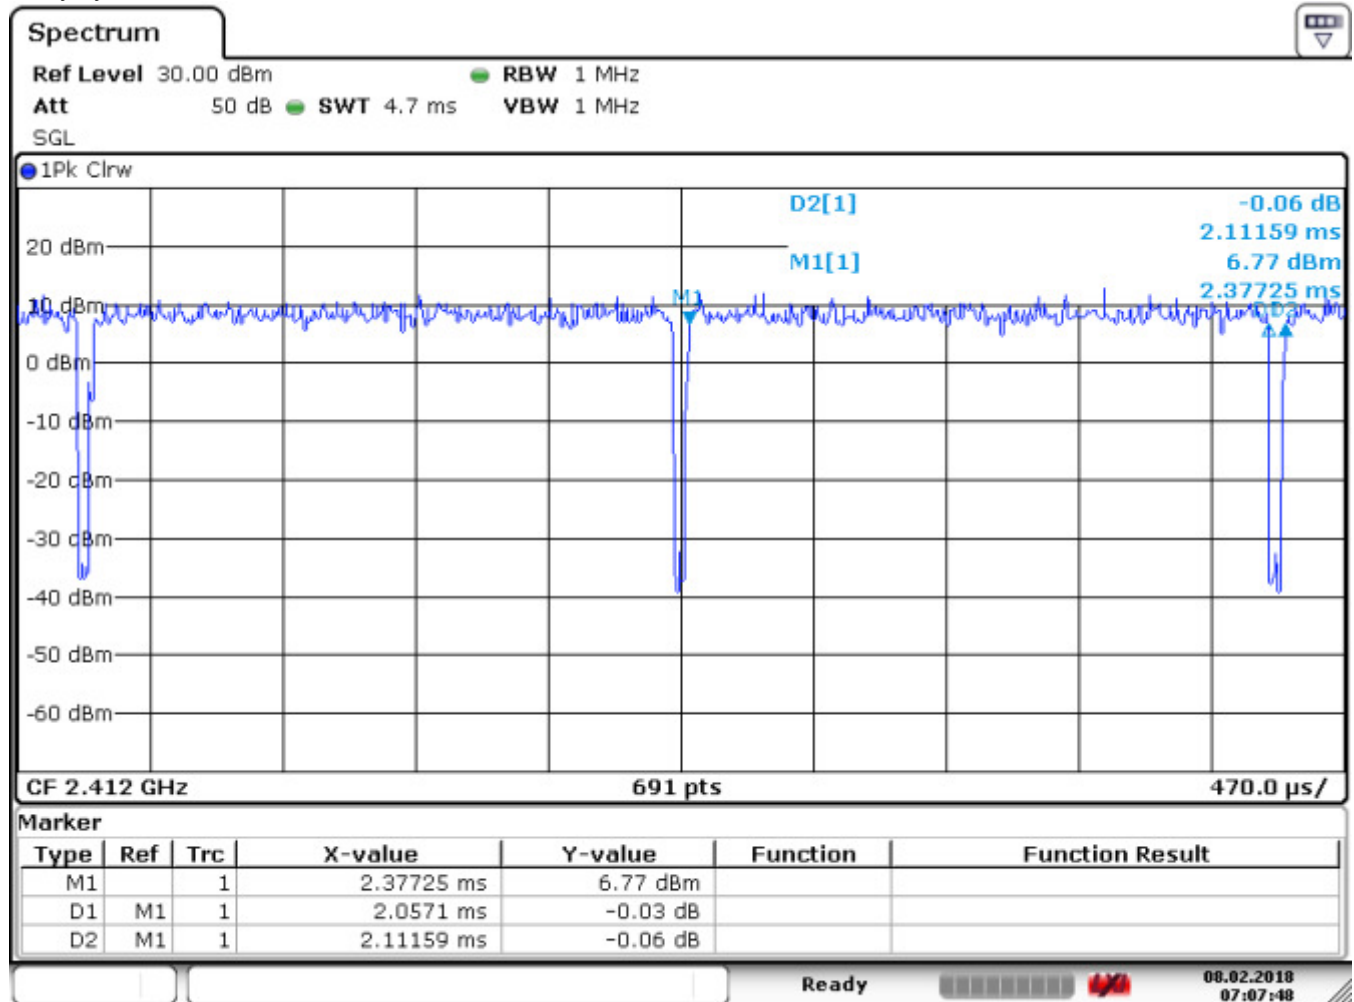

Date: 8.FEB.2018 07:07:49



#### 7.2.3.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

#### 7.2.3.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is  $> 0.8$  W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is  $\leq 1.2$  W/kg or all required channels are tested.

#### 7.2.3.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum



- output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
- a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
  - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is  $> 1.2$  W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
- a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
  - b) replace “initial test configuration” with “all tested higher output power configurations”



#### **7.2.3.5 2.4 GHz WiFi SAR Procedures**

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.





#### **7.2.4 LTE Test Configuration**

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

##### **A) Spectrum Plots for RB Configurations**

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

##### **B) MPR**

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

##### **C) A-MPR**

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

##### **D) Largest channel bandwidth standalone SAR test requirements**

###### **1) QPSK with 1 RB allocation**

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

###### **2) QPSK with 50% RB allocation**

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

###### **3) QPSK with 100% RB allocation**

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

###### **4) Higher order modulations**

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

##### **E) Other channel bandwidth standalone SAR test requirements**

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.



## 8 Test Result

### 8.1 Measurement of RF Conducted Power

#### 8.1.1 Conducted Power of Ant 1(Main Antenna)

##### 8.1.1.1 Conducted Power Of GSM

GSM 850 full power										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	32.07	31.99	31.91	33.5	-9.19	22.88	22.8	22.72	24.31
GPRS/EGPRS (GMSK)	1 TX Slot	32.06	31.99	31.92	33.5	-9.19	22.87	22.8	22.73	24.31
	2 TX Slots	29.78	29.72	29.65	30.5	-6.18	23.6	23.54	23.47	24.32
	3 TX Slots	27.61	27.52	27.44	28.7	-4.42	23.19	23.1	23.02	24.28
	4 TX Slots	26.34	26.31	26.21	27.5	-3.17	23.17	23.14	23.04	24.33
EGPRS(8PSK)	1 TX Slot	26.12	26.16	26.21	26.5	-9.19	16.93	16.97	17.02	17.31
	2 TX Slots	22.15	22.24	22.26	23.5	-6.18	15.97	16.06	16.08	17.32
	3 TX Slots	20.34	20.51	20.55	22.2	-4.42	15.92	16.09	16.13	17.78
	4 TX Slots	19.27	19.37	19.42	21	-3.17	16.1	16.2	16.25	17.83
GSM 1900 full power										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	29.77	29.66	29.57	30.7	-9.19	20.58	20.47	20.38	21.51
GPRS/EGPRS (GMSK)	1 TX Slot	29.75	29.67	29.58	30.7	-9.19	20.56	20.48	20.39	21.51
	2 TX Slots	26.65	26.59	26.53	27.7	-6.18	20.47	20.41	20.35	21.52
	3 TX Slots	24.93	24.89	24.81	25.9	-4.42	20.51	20.47	20.39	21.48
	4 TX Slots	23.61	23.55	23.48	24.7	-3.17	20.44	20.38	20.31	21.53
EGPRS(8PSK)	1 TX Slot	25.48	25.45	25.46	25.5	-9.19	16.29	16.26	16.27	16.31
	2 TX Slots	21.96	21.82	21.74	23	-6.18	15.78	15.64	15.56	16.82
	3 TX Slots	20.01	20.09	19.98	21.7	-4.42	15.59	15.67	15.56	17.28
	4 TX Slots	18.95	18.93	18.89	20.5	-3.17	15.78	15.76	15.72	17.33

GSM 1900 Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	28.39	28.33	28.26	29.2	-9.19	19.2	19.14	19.07	20.01
GPRS/EGPRS (GMSK)	1 TX Slot	28.39	28.32	28.24	29.2	-9.19	19.2	19.13	19.05	20.01
	2 TX Slots	25.15	25.09	25.01	26.2	-6.18	18.97	18.91	18.83	20.02
	3 TX Slots	23.43	23.39	23.32	24.4	-4.42	19.01	18.97	18.9	19.98
	4 TX Slots	22.11	22.07	22	23.2	-3.17	18.94	18.9	18.83	20.03
EGPRS(8PSK)	1 TX Slot	23.96	23.94	23.91	24	-9.19	14.77	14.75	14.72	14.81
	2 TX Slots	20.39	20.37	20.41	21.5	-6.18	14.21	14.19	14.23	15.32
	3 TX Slots	18.84	18.78	18.72	20.2	-4.42	14.42	14.36	14.3	15.78
	4 TX Slots	17.53	17.52	17.42	19	-3.17	14.36	14.35	14.25	15.83

Table 11: Conducted Power Of GSM



Note:

- 1) . CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

- 2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:  
Frame-averaged power =  $10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$
- 3) . When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used





**8.1.1.2 Conducted Power Of WCDMA**

WCDMA Band II full power					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	<b>23.06</b>	23.04	23.03	24.3
	12.2kbps AMR	23.05	23.02	23.01	24.3
HSDPA	Subtest 1	22.05	22.09	22.07	23.8
	Subtest 2	22.11	22.01	21.99	23.3
	Subtest 3	21.64	21.55	21.51	23.3
	Subtest 4	21.67	21.52	21.49	23.3
HSUPA	Subtest 1	21.18	21.37	21.29	22.3
	Subtest 2	19.86	19.56	19.71	20.8
	Subtest 3	22.06	22.01	22.02	23.3
	Subtest 4	19.89	19.78	19.99	20.8
	Subtest 5	22.13	21.97	22.07	23.3
DC-HSDPA	Subtest 1	22.01	21.96	21.99	23.8
	Subtest 2	21.99	21.92	21.91	23.3
	Subtest 3	22.05	21.93	22.05	23.3
	Subtest 4	21.97	21.89	22.02	23.3

WCDMA Band II Sensor on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	<b>21.99</b>	21.97	21.98	23.3
	12.2kbps AMR	21.96	21.94	21.96	23.3
HSDPA	Subtest 1	20.96	21.06	20.96	22.8
	Subtest 2	21.02	20.99	20.94	22.3
	Subtest 3	20.53	20.5	20.49	22.3
	Subtest 4	20.58	20.49	20.38	22.3
HSUPA	Subtest 1	20.09	20.35	20.24	21.3
	Subtest 2	18.75	18.51	18.69	19.8
	Subtest 3	20.97	20.98	20.84	22.3
	Subtest 4	18.8	18.76	18.94	19.8
	Subtest 5	21.02	20.92	21.07	22.3
DC-HSDPA	Subtest 1	20.92	20.93	20.88	22.8
	Subtest 2	20.9	20.9	20.86	22.3
	Subtest 3	20.94	20.88	21.03	22.3
	Subtest 4	20.88	20.86	20.91	22.3

WCDMA Band II Hotspot on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	<b>20.02</b>	<b>20.02</b>	20.01	21.3
	12.2kbps AMR	20	20.01	19.98	21.3
HSDPA	Subtest 1	18.96	19.15	18.99	20.8



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 66 of 169

	Subtest 2	19.07	19.05	19.02	20.3
	Subtest 3	18.52	18.53	18.51	20.3
	Subtest 4	18.58	18.58	18.41	20.3
HSUPA	Subtest 1	18.14	18.41	18.32	19.3
	Subtest 2	16.74	16.54	16.71	17.8
	Subtest 3	18.97	19.07	18.87	20.3
	Subtest 4	16.85	16.82	17.02	17.8
	Subtest 5	19.01	18.95	19.07	20.3
DC-HSDPA	Subtest 1	18.92	19.12	19.01	20.8
	Subtest 2	18.95	18.96	18.94	20.3
	Subtest 3	18.95	18.91	19.02	20.3
	Subtest 4	18.88	18.95	18.94	20.3

WCDMA Band II Sensor on+ Hotspot on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	18.9	18.92	<b>18.93</b>	20.3
	12.2kbps AMR	18.88	18.9	18.91	20.3
HSDPA	Subtest 1	17.81	18.09	17.91	19.8
	Subtest 2	17.97	17.96	17.99	19.3
	Subtest 3	17.36	17.41	17.42	19.3
	Subtest 4	17.43	17.52	17.33	19.3
HSUPA	Subtest 1	17.04	17.32	17.29	18.3
	Subtest 2	15.58	15.42	15.62	16.8
	Subtest 3	17.82	18.01	17.79	19.3
	Subtest 4	15.75	15.73	15.99	16.8
	Subtest 5	17.85	17.83	17.98	19.3
DC-HSDPA	Subtest 1	17.77	17.96	17.83	19.8
	Subtest 2	17.85	17.87	17.91	19.3
	Subtest 3	17.77	17.79	17.96	19.3
	Subtest 4	17.73	17.89	17.86	19.3

WCDMA Band IV full power					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	<b>23.33</b>	23.3	23.18	24.3
	12.2kbps AMR	23.31	23.26	23.15	24.3
HSDPA	Subtest 1	22.32	22.31	22.24	23.8
	Subtest 2	22.35	22.22	22.13	23.3
	Subtest 3	21.85	21.74	21.63	23.3
	Subtest 4	21.94	21.74	21.66	23.3
HSUPA	Subtest 1	21.42	21.58	21.43	22.3
	Subtest 2	20.07	19.75	19.83	20.8
	Subtest 3	22.33	22.23	22.12	23.3
	Subtest 4	20.13	19.99	20.13	20.8
	Subtest 5	22.34	22.16	22.19	23.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 67 of 169

DC-HSDPA	Subtest 1	22.28	22.18	22.16	23.8
	Subtest 2	22.23	22.13	22.05	23.3
	Subtest 3	22.26	22.12	22.17	23.3
	Subtest 4	22.24	22.11	22.19	23.3

WCDMA Band IV Sensor on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	21.25	<b>21.26</b>	21.11	22.3
	12.2kbps AMR	21.22	21.24	21.1	22.3
HSDPA	Subtest 1	20.25	20.3	20.13	21.8
	Subtest 2	20.32	20.2	20.06	21.3
	Subtest 3	19.85	19.69	19.44	21.3
	Subtest 4	19.87	19.73	19.55	21.3
HSUPA	Subtest 1	19.39	19.56	19.36	20.3
	Subtest 2	18.07	17.7	17.64	18.8
	Subtest 3	20.26	20.22	20.01	21.3
	Subtest 4	18.1	17.97	18.06	18.8
	Subtest 5	20.34	20.11	20	21.3
DC-HSDPA	Subtest 1	20.21	20.17	20.05	21.8
	Subtest 2	20.2	20.11	20.08	21.3
	Subtest 3	20.26	20.07	19.98	21.3
	Subtest 4	20.17	20.1	20.08	21.3

WCDMA Band IV Hotspot on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	20.33	<b>20.34</b>	20.18	21.3
	12.2kbps AMR	20.32	20.32	20.16	21.3
HSDPA	Subtest 1	19.3	19.42	19.2	20.8
	Subtest 2	19.42	19.29	19.18	20.3
	Subtest 3	18.89	18.75	18.5	20.3
	Subtest 4	18.92	18.85	18.62	20.3
HSUPA	Subtest 1	18.49	18.65	18.48	19.3
	Subtest 2	17.11	16.76	16.7	17.8
	Subtest 3	19.31	19.34	19.18	20.3
	Subtest 4	17.2	17.06	17.18	17.8
	Subtest 5	19.28	19.07	19.16	20.3
DC-HSDPA	Subtest 1	19.26	19.29	19.12	20.8
	Subtest 2	19.3	19.2	19.1	20.3
	Subtest 3	19.3	19.13	19.04	20.3
	Subtest 4	19.22	19.22	19.15	20.3

WCDMA Band IV Sensor on+ Hotspot on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	<b>18.25</b>	18.23	18.12	19.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 68 of 169

	12.2kbps AMR	18.23	18.22	18.11	19.3
HSDPA	Subtest 1	17.19	17.35	17.14	18.8
	Subtest 2	17.36	17.19	17.17	18.3
	Subtest 3	16.77	16.62	16.43	18.3
	Subtest 4	16.81	16.78	16.56	18.3
HSUPA	Subtest 1	16.43	16.55	16.47	17.3
	Subtest 2	14.99	14.63	14.63	15.8
	Subtest 3	17.2	17.27	17.02	18.3
	Subtest 4	15.14	14.96	15.17	15.8
	Subtest 5	17.26	17.14	16.99	18.3
DC-HSDPA	Subtest 1	17.15	17.22	17.06	18.8
	Subtest 2	17.34	17.12	17.09	18.3
	Subtest 3	17.28	17.08	16.97	18.3
	Subtest 4	17.17	17.15	17.09	18.3

WCDMA Band V full power					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	<b>23.51</b>	23.45	23.4	24.8
	12.2kbps AMR	23.5	23.42	23.38	24.8
HSDPA	Subtest 1	22.49	22.43	22.45	24.3
	Subtest 2	22.5	22.35	22.36	23.8
	Subtest 3	21.98	21.9	21.88	23.8
	Subtest 4	22.11	21.86	21.87	23.8
HSUPA	Subtest 1	21.57	21.71	21.66	22.8
	Subtest 2	20.2	19.95	20.08	21.8
	Subtest 3	22.52	22.35	22.33	23.8
	Subtest 4	20.28	20.12	20.36	21.3
	Subtest 5	22.45	22.37	22.45	23.3
DC-HSDPA	Subtest 1	22.45	22.33	22.37	24.3
	Subtest 2	22.39	22.26	22.29	23.8
	Subtest 3	22.39	22.25	22.42	23.8
	Subtest 4	22.44	22.23	22.4	23.8

Table 12: Conducted Power Of WCDMA

Note:

- 1) when the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.



### 8.1.1.3 Conducted Power Of LTE

LTE Band 2 full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	22.85	23	22.98	23.7
		1	2	22.94	23.01	22.95	23.7
		1	5	22.77	22.91	22.79	23.7
		3	0	22.92	22.97	23	23.7
		3	2	22.91	22.99	22.91	23.7
		3	3	22.87	22.88	22.92	23.7
		6	0	22	22.02	22.1	23
	16QAM	1	0	22.2	22.23	22.26	23
		1	2	22.22	22.24	22.25	23
		1	5	22.15	22.17	22.08	23
		3	0	21.99	22.06	22.15	23
		3	2	21.99	22.01	22.07	23
		3	3	21.96	21.98	22.03	23
		6	0	21.08	21.2	21.25	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	22.67	22.87	22.87	23.7
		1	7	22.9	23.04	22.98	23.7
		1	14	22.44	22.74	22.48	23.7
		8	0	21.86	22.08	22.1	23
		8	4	21.85	22.02	22.09	23
		8	7	21.74	21.95	21.96	23
		15	0	21.85	21.97	22.05	23
	16QAM	1	0	22.13	22.24	21.74	23
		1	7	22.07	22.28	22.04	23
		1	14	21.94	22.13	22.07	23
		8	0	20.96	21.29	21.11	22.5
		8	4	21.05	21.14	21.23	22.5
		8	7	20.9	21.04	21.11	22.5
		15	0	20.99	21.1	21.09	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18625	18900	19175	
5MHz	QPSK	1	0	22.63	22.97	23.09	23.7
		1	13	22.9	23.04	23.09	23.7
		1	24	22.46	22.67	22.41	23.7
		12	0	21.92	22.13	22.25	23
		12	6	21.95	22.16	22.19	23
		12	13	21.78	21.97	22.02	23
		25	0	21.85	22.03	22.18	23
	16QAM	1	0	21.99	21.92	22.24	23
		1	13	22.32	21.84	22.57	23
		1	24	21.58	22.18	21.96	23
		12	0	21.01	21.34	21.43	22.5



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 70 of 169

		12	6	21.05	21.28	21.23	22.5
		12	13	21.01	21.07	21.11	22.5
		25	0	20.9	21.12	21.24	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	22.7	22.94	23.11	23.7
		1	25	23.02	23.06	23.26	23.7
		1	49	22.67	22.7	22.62	23.7
		25	0	21.96	22.16	22.36	23
		25	13	22.11	22.16	22.31	23
		25	25	21.98	22.11	22.15	23
		50	0	21.9	22.18	22.19	23
	16QAM	1	0	22.08	21.65	21.9	23
		1	25	22.42	22.38	22.62	23
		1	49	22.12	21.87	22.04	23
		25	0	21.01	21.22	21.51	22.5
		25	13	21.11	21.24	21.37	22.5
		25	25	21.12	21.06	21.18	22.5
		50	0	21.02	21.18	21.28	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	22.6	22.84	22.84	23.8
		1	38	23.23	23.15	23.53	23.8
		1	74	22.54	22.48	22.43	23.8
		36	0	22.01	22.18	22.28	23
		36	18	22.23	22.26	22.46	23
		36	39	22.02	22.11	22.18	23
		75	0	21.96	22.05	22.18	23
	16QAM	1	0	21.94	22.31	22.32	23
		1	38	22.61	22.75	22.9	23
		1	74	22.04	22.02	21.9	23
		36	0	21.12	21.38	21.34	22.5
		36	18	21.31	21.39	21.54	22.5
		36	39	21.1	21.21	21.22	22.5
		75	0	21.04	21.15	21.27	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	
20MHz	QPSK	1	0	21.19	21.43	21.66	22.7
		1	50	21.82	21.95	22.3	22.7
		1	99	20.9	21.23	21.23	22.7
		50	0	21.88	22.02	22.09	23
		50	25	22.13	22.21	22.22	23
		50	50	21.83	22	21.92	23
		100	0	21.8	22.01	21.94	23
	16QAM	1	0	21.55	22.02	21.97	23
		1	50	22.2	22.33	22.55	23
		1	99	21.35	21.25	21.56	23
		50	0	21.02	21.15	21.26	22.5

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 71 of 169

		50	25	21.21	21.26	21.32	22.5
		50	50	20.86	20.99	21.01	22.5
		100	0	20.94	21.05	21.02	22.5

LTE Band 2 Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	21.96	22.09	22.16	23
		1	2	22.03	22.11	22.17	23
		1	5	21.88	22	21.96	23
		3	0	21.98	22.08	22.15	23
		3	2	22.04	22.05	22.07	23
		3	3	21.99	21.99	22.09	23
		6	0	21.18	21.2	21.3	22.5
	16QAM	1	0	21.37	21.4	21.5	22
		1	2	21.39	21.45	21.46	22
		1	5	21.24	21.32	21.31	22
		3	0	21.15	21.23	21.37	22
		3	2	21.17	21.2	21.29	22
		3	3	21.15	21.16	21.29	22
		6	0	20.13	20.23	20.33	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	21.74	21.81	21.82	23
		1	7	21.94	21.99	22.07	23
		1	14	21.48	21.78	21.45	23
		8	0	20.99	21.14	21.15	22.5
		8	4	20.98	21.1	21.19	22.5
		8	7	20.89	21.05	21.07	22.5
		15	0	20.93	21.05	21.16	22.5
	16QAM	1	0	20.85	21.33	21.42	22
		1	7	21.36	21.36	21.44	22
		1	14	20.74	20.83	20.99	22
		8	0	20.04	20.19	20.32	21.5
		8	4	19.98	20.05	20.27	21.5
		8	7	19.9	20.03	20.14	21.5
		15	0	19.8	20.02	20.27	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18625	18900	19175	
5MHz	QPSK	1	0	21.66	21.88	22.05	23
		1	13	21.83	22.12	22.1	23
		1	24	21.47	21.71	21.49	23
		12	0	21.03	21.24	21.4	22.5
		12	6	21.06	21.22	21.29	22.5
		12	13	20.91	21.01	21.09	22.5
		25	0	20.92	21.16	21.24	22.5
	16QAM	1	0	21.29	21.08	21.57	22

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 72 of 169

		1	13	21.22	21.58	21.63	22
		1	24	20.6	21.05	20.99	22
		12	0	20.02	20.2	20.47	21.5
		12	6	20.01	20.21	20.37	21.5
		12	13	19.77	19.98	20.08	21.5
		25	0	19.86	20.05	20.25	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	21.61	21.86	22.06	23
		1	25	21.85	21.97	22.17	23
		1	49	22.09	22.06	22.33	23
		25	0	21.74	21.94	22.14	22.5
		25	13	21.81	22	22.25	22.5
		25	25	21.97	22.03	22.29	22.5
		50	0	21.03	21.15	21.38	22.5
	16QAM	1	0	21.08	20.98	21.12	22
		1	25	20.94	21.3	21.81	22
		1	49	21.3	21.51	21.96	22
		25	0	20.87	21.12	21.26	21.5
		25	13	20.84	21.1	21.38	21.5
		25	25	21.07	21.09	21.4	21.5
		50	0	19.95	20.07	20.38	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	21.39	21.7	21.58	23
		1	38	22.08	22.12	22.39	23
		1	74	21.29	21.43	21.24	23
		36	0	20.95	21.21	21.23	22.5
		36	18	21.14	21.23	21.42	22.5
		36	39	20.92	21	21.13	22.5
		75	0	20.91	20.95	21.14	22.5
	16QAM	1	0	20.9	21.05	21.29	22
		1	38	21.07	21.64	21.65	22
		1	74	20.74	20.75	20.8	22
		36	0	19.93	20.16	20.27	21.5
		36	18	20.09	20.17	20.44	21.5
		36	39	19.94	19.96	20.14	21.5
		75	0	19.9	19.87	20.14	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	
20MHz	QPSK	1	0	21.18	21.34	21.65	22.7
		1	50	21.94	21.86	22.25	22.7
		1	99	21.02	21.16	21.25	22.7
		50	0	21.09	21.18	21.24	22.5
		50	25	21.28	21.32	21.38	22.5
		50	50	21	21.1	21.15	22.5
		100	0	21.02	21.12	21.17	22.5
	16QAM	1	0	20.71	20.96	20.77	22

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 73 of 169

		1	50	21.65	21.81	21.78	22
		1	99	20.61	20.37	20.76	22
		50	0	20.07	20.2	20.37	21.5
		50	25	20.21	20.31	20.42	21.5
		50	50	19.98	20.03	20.23	21.5
		100	0	19.98	20.09	20.27	21.5

LTE Band 2 Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 18607	Channel 18900	Channel 19193	Tune up
1.4MHz	QPSK	1	0	17.15	17.29	17.62	18.3
		1	2	17.24	17.34	17.67	18.3
		1	5	17.09	17.2	17.43	18.3
		3	0	17.2	17.31	17.67	18.3
		3	2	17.22	17.3	17.62	18.3
		3	3	17.17	17.24	17.52	18.3
		6	0	17.18	17.27	17.6	18.3
	16QAM	1	0	17.41	17.46	17.84	18.3
		1	2	17.44	17.57	17.87	18.3
		1	5	17.3	17.41	17.66	18.3
		3	0	17.2	17.32	17.64	18.3
		3	2	17.25	17.32	17.61	18.3
		3	3	17.18	17.26	17.52	18.3
		6	0	17.14	17.24	17.55	18.3
Bandwidth	Modulation	RB size	RB offset	Channel 18615	Channel 18900	Channel 19185	Tune up
3MHz	QPSK	1	0	16.85	17.03	17.37	18.3
		1	7	17.2	17.21	17.71	18.3
		1	14	16.73	16.89	17.18	18.3
		8	0	17.05	17.29	17.55	18.3
		8	4	17.08	17.25	17.56	18.3
		8	7	16.96	17.18	17.38	18.3
		15	0	17	17.19	17.52	18.3
	16QAM	1	0	17.23	17.49	17.55	18.3
		1	7	17.48	17.63	17.84	18.3
		1	14	17.08	17.17	17.39	18.3
		8	0	16.89	17.27	17.4	18.3
		8	4	16.97	17.33	17.54	18.3
		8	7	17	17	17.32	18.3
		15	0	16.89	17.15	17.47	18.3
Bandwidth	Modulation	RB size	RB offset	Channel 18625	Channel 18900	Channel 19175	Tune up
5MHz	QPSK	1	0	16.82	17.08	17.46	18.3
		1	13	17.04	17.28	17.61	18.3
		1	24	16.58	16.87	17.01	18.3
		12	0	17.09	17.27	17.65	18.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 74 of 169

		12	6	17.12	17.35	17.59	18.3
		12	13	16.97	17.12	17.43	18.3
		25	0	16.98	17.18	17.52	18.3
	16QAM	1	0	17.26	17.55	17.93	18.3
		1	13	17.4	17.54	17.85	18.3
		1	24	17.02	17.12	17.14	18.3
		12	0	17.02	17.19	17.58	18.3
		12	6	17.02	17.38	17.51	18.3
		12	13	16.81	17.08	17.37	18.3
		25	0	16.95	17.15	17.49	18.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	16.9	17.13	17.44	18.3
		1	25	17.2	17.33	17.79	18.3
		1	49	16.79	16.82	17.01	18.3
		25	0	17.05	17.23	17.65	18.3
		25	13	17.14	17.24	17.63	18.3
		25	25	17.01	17.12	17.48	18.3
		50	0	16.99	17.2	17.59	18.3
	16QAM	1	0	17.33	17.41	17.49	18.3
		1	25	17.59	17.68	18.11	18.3
		1	49	17	17.13	17.04	18.3
		25	0	16.94	17.13	17.56	18.3
		25	13	17.05	17.24	17.53	18.3
		25	25	16.95	17.08	17.44	18.3
		50	0	16.87	17.07	17.47	18.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	16.63	16.88	16.99	18.3
		1	38	17.35	17.28	17.73	18.3
		1	74	16.57	16.79	16.85	18.3
		36	0	17.02	17.28	17.46	18.3
		36	18	17.2	17.3	17.64	18.3
		36	39	16.97	17.05	17.45	18.3
		75	0	16.96	17.07	17.44	18.3
	16QAM	1	0	16.93	16.8	17.66	18.3
		1	38	17.64	17.52	18.05	18.3
		1	74	16.92	17.06	17.04	18.3
		36	0	16.92	17.21	17.38	18.3
		36	18	17.15	17.23	17.57	18.3
		36	39	16.95	17.03	17.37	18.3
		75	0	16.89	16.99	17.35	18.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	
20MHz	QPSK	1	0	16.61	16.76	17.18	18.3
		1	50	17.4	17.45	17.88	18.3
		1	99	16.33	16.68	16.82	18.3
		50	0	17.01	17.15	17.43	18.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 75 of 169

		50	25	17.22	17.31	<b>17.6</b>	18.3
		50	50	16.91	17.06	17.31	18.3
		100	0	16.92	17.07	17.33	18.3
	16QAM	1	0	16.58	17.1	17.81	18.3
		1	50	17.41	17.06	18.31	18.3
		1	99	16.79	17.24	17.04	18.3
		50	0	16.93	17.08	17.39	18.3
		50	25	17.13	17.24	17.55	18.3
		50	50	16.85	16.98	17.21	18.3
		100	0	16.84	16.96	17.27	18.3

LTE Band 2 Sensor on+ Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	16.29	16.35	16.52	17.3
		1	2	16.34	16.42	16.61	17.3
		1	5	16.23	16.28	16.6	17.3
		3	0	16.28	16.39	16.58	17.3
		3	2	16.29	16.38	16.52	17.3
		3	3	16.24	16.31	16.69	17.3
		6	0	16.25	16.34	16.5	17.3
	16QAM	1	0	16.46	16.59	16.72	17.3
		1	2	16.56	16.61	16.79	17.3
		1	5	16.42	16.48	16.76	17.3
		3	0	16.28	16.43	16.59	17.3
		3	2	16.28	16.39	16.54	17.3
		3	3	16.22	16.32	16.7	17.3
		6	0	16.25	16.34	16.47	17.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	15.83	16.11	16.27	17.3
		1	7	16.14	16.34	16.46	17.3
		1	14	15.7	15.94	16.27	17.3
		8	0	16.02	16.28	16.37	17.3
		8	4	16.06	16.27	16.4	17.3
		8	7	15.95	16.17	16.28	17.3
		15	0	15.98	16.21	16.34	17.3
	16QAM	1	0	16.02	16.29	16.78	17.3
		1	7	16.33	16.61	16.72	17.3
		1	14	16.09	16.02	16.07	17.3
		8	0	16.06	16.3	16.3	17.3
		8	4	16	16.24	16.36	17.3
		8	7	15.93	16.06	16.31	17.3
		15	0	15.93	16.15	16.26	17.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18625	18900	19175	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 76 of 169

5MHz	QPSK	1	0	15.76	16.14	16.36	17.3
		1	13	16.12	16.34	16.57	17.3
		1	24	15.56	15.87	16.15	17.3
		12	0	16.06	16.29	16.51	17.3
		12	6	16.11	16.34	16.45	17.3
		12	13	15.94	16.13	16.3	17.3
		25	0	15.96	16.2	16.4	17.3
	16QAM	1	0	16.28	16.27	16.48	17.3
		1	13	16.25	16.46	16.87	17.3
		1	24	15.96	15.94	16.21	17.3
		12	0	16.03	16.15	16.37	17.3
		12	6	16.07	16.32	16.31	17.3
		12	13	15.84	16.05	16.27	17.3
		25	0	15.91	16.12	16.34	17.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	15.89	16.04	16.12	17.3
		1	25	16.31	16.33	16.61	17.3
		1	49	15.79	15.89	15.95	17.3
		25	0	16.06	16.26	16.47	17.3
		25	13	16.15	16.28	16.47	17.3
		25	25	16.01	16.15	16.33	17.3
		50	0	15.99	16.22	16.43	17.3
	16QAM	1	0	16.23	16.25	16.39	17.3
		1	25	16.6	16.74	16.88	17.3
		1	49	15.73	16.09	16.36	17.3
		25	0	15.98	16.2	16.44	17.3
		25	13	16.13	16.2	16.47	17.3
		25	25	15.95	16.06	16.31	17.3
		50	0	15.94	16.1	16.37	17.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	15.56	15.84	15.81	17.3
		1	38	16.33	16.33	16.6	17.3
		1	74	15.47	15.51	15.63	17.3
		36	0	15.98	16.25	16.29	17.3
		36	18	16.17	16.29	16.51	17.3
		36	39	15.94	16.03	16.24	17.3
		75	0	15.92	16.04	16.22	17.3
	16QAM	1	0	15.93	16.21	16.03	17.3
		1	38	16.64	16.77	16.64	17.3
		1	74	15.74	16.08	16.11	17.3
		36	0	15.86	16.14	16.26	17.3
		36	18	16.09	16.29	16.51	17.3
		36	39	15.9	15.93	16.25	17.3
		75	0	15.88	15.95	16.16	17.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 77 of 169

20MHz	QPSK	1	0	15.63	15.81	16.09	17.3
		1	50	16.46	16.54	<b>16.69</b>	17.3
		1	99	15.34	15.55	15.7	17.3
		50	0	16.05	16.2	16.29	17.3
		50	25	16.25	16.38	<b>16.47</b>	17.3
		50	50	15.95	16.12	16.18	17.3
		100	0	15.96	16.13	16.18	17.3
	16QAM	1	0	16.14	15.88	15.8	17.3
		1	50	16.73	16.89	17.09	17.3
		1	99	15.37	15.73	15.85	17.3
		50	0	16.04	16.12	16.22	17.3
		50	25	16.21	16.27	16.38	17.3
		50	50	15.89	16.06	16.16	17.3
		100	0	15.88	16.07	16.12	17.3

LTE Band 4 full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	22.68	22.89	22.98	24.3
		1	2	22.7	22.92	23	24.3
		1	5	22.59	22.77	22.88	24.3
		3	0	22.71	22.92	22.99	24.3
		3	2	22.72	22.92	22.97	24.3
		3	3	22.68	22.86	22.91	24.3
		6	0	21.76	21.98	22.07	23.3
	16QAM	1	0	22	22.12	22.35	23.3
		1	2	22.07	22.25	22.37	23.3
		1	5	21.91	22.08	22.23	23.3
		3	0	21.82	22	22.11	23.3
		3	2	21.84	21.99	22.14	23.3
		3	3	21.79	21.97	22.1	23.3
		6	0	20.9	21.11	21.25	22.8
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	22.69	22.73	22.77	24.3
		1	7	22.92	23.05	22.89	24.3
		1	14	22.67	22.77	22.53	24.3
		8	0	21.9	21.95	21.93	23.3
		8	4	21.92	22.01	22	23.3
		8	7	21.83	21.93	21.9	23.3
		15	0	21.85	21.94	21.92	23.3
	16QAM	1	0	21.91	22.02	22.09	23.3
		1	7	22.38	22.31	21.91	23.3
		1	14	21.57	21.98	22.1	23.3
		8	0	21.01	21.11	20.99	22.8
		8	4	21.1	21.11	21.06	22.8
		8	7	21.05	21.07	20.99	22.8

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 78 of 169

Bandwidth	Modulation	15 RB size	0 RB offset	20.96 Channel 19975	21.07 Channel 20175	20.95 Channel 20375	22.8 Tune up
5MHz	QPSK	1	0	22.77	22.91	22.72	24.3
		1	13	23.06	22.9	22.93	24.3
		1	24	22.69	22.57	22.53	24.3
		12	0	21.97	22.05	22	23.3
		12	6	22.07	22.11	22.05	23.3
		12	13	21.96	21.92	21.9	23.3
		25	0	21.95	21.99	21.94	23.3
	16QAM	1	0	21.99	22.15	22.12	23.3
		1	13	22.58	22.26	22.34	23.3
		1	24	21.9	21.85	21.66	23.3
		12	0	21.05	21.15	21.15	22.8
		12	6	21.11	21.25	21.16	22.8
		12	13	20.98	20.95	20.96	22.8
		25	0	21.07	21.01	21.07	22.8
Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
10MHz	QPSK	1	0	22.76	22.85	22.81	24.3
		1	25	23.12	23.16	22.99	24.3
		1	49	22.75	22.6	22.5	24.3
		25	0	22.02	22.13	22.01	23.3
		25	13	22.12	22.11	22	23.3
		25	25	22.03	21.92	21.93	23.3
		50	0	22.05	21.99	21.99	23.3
	16QAM	1	0	22	21.99	22.42	23.3
		1	25	22.35	22.09	22.41	23.3
		1	49	22.16	21.99	22.19	23.3
		25	0	21.14	21.14	21.04	22.8
		25	13	21.16	21.12	21.04	22.8
		25	25	21.06	20.95	21.03	22.8
		50	0	21.16	21.02	20.96	22.8
Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up
15MHz	QPSK	1	0	22.82	22.97	22.85	24.5
		1	38	23.26	23.15	23.15	24.5
		1	74	22.83	22.85	22.71	24.5
		36	0	22.16	22.25	22.1	23.3
		36	18	22.29	22.24	22.19	23.3
		36	39	22.18	22.07	22.02	23.3
		75	0	22.14	22.15	22.07	23.3
	16QAM	1	0	21.73	22.13	22.3	23.3
		1	38	22.54	22.6	22.41	23.3
		1	74	22.35	21.9	22.02	23.3
		36	0	21.19	21.25	21.18	22.8
		36	18	21.33	21.29	21.22	22.8
		36	39	21.29	21.11	21.06	22.8

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 79 of 169

Bandwidth	Modulation	75	0	21.19	21.22	21.13	22.8
		RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
20MHz	QPSK	1	0	21.6	21.87	21.74	22.8
		1	50	<b>22.12</b>	22.02	22.09	22.8
		1	99	21.56	21.3	21.48	22.8
		50	0	22.03	22.12	21.92	23.3
		50	25	22.17	22.04	22	23.3
		50	50	22.07	21.83	21.94	23.3
		100	0	22.11	22.01	21.94	23.3
	16QAM	1	0	22.09	22.08	22.06	23.3
		1	50	22.58	22.34	22.34	23.3
		1	99	22.15	20.97	21.99	23.3
		50	0	21.14	21.19	20.93	22.8
		50	25	21.25	21.06	20.95	22.8
		50	50	21.16	20.87	21.02	22.8
		100	0	21.15	21.07	20.9	22.8

LTE Band 4 Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	21.26	21.5	21.57	22.8
		1	2	21.32	21.56	21.67	22.8
		1	5	21.2	21.39	21.51	22.8
		3	0	21.33	21.52	21.68	22.8
		3	2	21.34	21.51	21.67	22.8
		3	3	21.3	21.51	21.62	22.8
		6	0	20.41	20.66	20.77	21.8
	16QAM	1	0	20.57	20.84	20.95	21.8
		1	2	20.67	20.99	21	21.8
		1	5	20.58	20.78	20.88	21.8
		3	0	20.46	20.72	20.82	21.8
		3	2	20.52	20.74	20.78	21.8
		3	3	20.48	20.65	20.74	21.8
		6	0	19.45	19.7	19.81	21.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	21.12	21.34	21.31	22.8
		1	7	21.52	21.58	21.53	22.8
		1	14	21.15	21.15	21.16	22.8
		8	0	20.44	20.55	20.55	21.8
		8	4	20.49	20.62	20.57	21.8
		8	7	20.39	20.52	20.49	21.8
		15	0	20.43	20.56	20.55	21.8
	16QAM	1	0	20.32	20.25	20.61	21.8
		1	7	21.09	21.06	20.81	21.8

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 80 of 169

		1	14	20.73	19.91	20.7	21.8
		8	0	19.45	19.47	19.5	21.3
		8	4	19.41	19.68	19.74	21.3
		8	7	19.47	19.7	19.57	21.3
		15	0	19.33	19.46	19.52	21.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19975	20175	20375	
5MHz	QPSK	1	0	21.17	21.43	21.26	22.8
		1	13	21.56	21.64	21.51	22.8
		1	24	21.15	21.12	21.08	22.8
		12	0	20.5	20.61	20.58	21.8
		12	6	20.6	20.7	20.64	21.8
		12	13	20.48	20.48	20.43	21.8
		25	0	20.48	20.56	20.48	21.8
	16QAM	1	0	20.4	20.59	20.48	21.8
		1	13	20.09	20.18	20.17	21.8
		1	24	20.55	20.68	20.55	21.8
		12	0	19.56	19.58	19.7	21.3
		12	6	19.61	19.76	19.71	21.3
		12	13	19.52	19.44	19.54	21.3
		25	0	19.35	19.54	19.48	21.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20000	20175	20350	
10MHz	QPSK	1	0	21.15	21.35	21.41	22.8
		1	25	21.4	21.46	21.43	22.8
		1	49	21.68	21.64	21.53	22.8
		25	0	21.28	21.46	21.43	21.8
		25	13	21.43	21.52	21.45	21.8
		25	25	21.6	21.53	21.51	21.8
		50	0	20.52	20.63	20.54	21.8
	16QAM	1	0	20.56	20.46	20.31	21.8
		1	25	20.56	21.03	20.66	21.8
		1	49	21.11	21.23	21.12	21.8
		25	0	20.41	20.56	20.52	21.3
		25	13	20.46	20.59	20.55	21.3
		25	25	20.7	20.57	20.6	21.3
		50	0	19.44	19.59	19.48	21.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20025	20175	20325	
15MHz	QPSK	1	0	21.22	21.36	21.25	22.8
		1	38	21.67	21.59	21.53	22.8
		1	74	21.03	21.3	21.13	22.8
		36	0	20.59	20.68	20.56	21.8
		36	18	20.74	20.69	20.66	21.8
		36	39	20.62	20.5	20.47	21.8
		75	0	20.59	20.6	20.53	21.8
	16QAM	1	0	20.3	20.7	20.94	21.8
		1	38	20.76	20.56	21.03	21.8

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 81 of 169

		1	74	20.32	20.71	20.62	21.8
		36	0	19.51	19.66	19.52	21.3
		36	18	19.67	19.67	19.58	21.3
		36	39	19.59	19.47	19.47	21.3
		75	0	19.5	19.54	19.48	21.3
Bandwidth	Modulation	RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
20MHz	QPSK	1	0	21.12	21.43	21.33	22.8
		1	50	21.72	21.66	21.67	22.8
		1	99	21.16	20.92	21.12	22.8
		50	0	20.63	20.75	20.55	21.8
		50	25	20.8	20.7	20.61	21.8
		50	50	20.64	20.48	20.54	21.8
		100	0	20.66	20.65	20.53	21.8
	16QAM	1	0	20.69	20.88	20.09	21.8
		1	50	20.43	21.05	21.32	21.8
		1	99	20.6	19.85	20.38	21.8
		50	0	19.59	19.68	19.54	21.3
		50	25	19.73	19.66	19.61	21.3
		50	50	19.61	19.42	19.52	21.3
		100	0	19.62	19.6	19.49	21.3

LTE Band 4 Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 19957	Channel 20175	Channel 20393	Tune up
1.4MHz	QPSK	1	0	17.89	18.11	18.32	19.3
		1	2	18	18.2	18.43	19.3
		1	5	17.88	18.09	18.32	19.3
		3	0	17.96	18.22	18.42	19.3
		3	2	17.95	18.23	18.43	19.3
		3	3	17.97	18.17	18.37	19.3
		6	0	17.96	18.19	18.38	19.3
	16QAM	1	0	18.24	18.36	18.62	19.3
		1	2	18.33	18.55	18.72	19.3
		1	5	18.13	18.39	18.59	19.3
		3	0	18.02	18.22	18.48	19.3
		3	2	18.01	18.26	18.48	19.3
		3	3	18	18.19	18.42	19.3
		6	0	17.96	18.2	18.41	19.3
Bandwidth	Modulation	RB size	RB offset	Channel 19965	Channel 20175	Channel 20385	Tune up
3MHz	QPSK	1	0	18.01	17.86	17.91	19.3
		1	7	18.16	18.25	18.33	19.3
		1	14	17.75	17.78	17.86	19.3
		8	0	18	18.07	18.18	19.3
		8	4	18.09	18.22	18.23	19.3
		8	7	17.98	18.11	18.12	19.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 82 of 169

		15	0	17.98	18.14	18.14	19.3
		1	0	17.74	18.18	18.17	19.3
		1	7	18.26	18.49	18.61	19.3
		1	14	17.92	17.93	18.15	19.3
	16QAM	8	0	17.95	18.14	18.19	19.3
		8	4	18.08	18.25	18.21	19.3
		8	7	18.1	18.13	18.03	19.3
		15	0	17.89	18.06	18.07	19.3
Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
5MHz	QPSK	1	0	17.78	17.98	17.98	19.3
		1	13	18.14	18.24	18.3	19.3
		1	24	17.86	17.69	17.7	19.3
		12	0	18.09	18.16	18.18	19.3
		12	6	18.2	18.26	18.25	19.3
		12	13	18.07	18.04	18.06	19.3
		25	0	18.07	18.1	18.09	19.3
	16QAM	1	0	18.54	17.98	17.99	19.3
		1	13	18.59	18.42	18.12	19.3
		1	24	17.72	18.28	18.38	19.3
		12	0	17.98	18.18	18.26	19.3
		12	6	18.18	18.39	18.27	19.3
		12	13	18.01	18	18.11	19.3
		25	0	17.97	18.03	18.07	19.3
Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
10MHz	QPSK	1	0	17.74	17.9	17.98	19.3
		1	25	18.42	18.27	18.3	19.3
		1	49	18.06	17.65	17.71	19.3
		25	0	18.12	18.18	18.14	19.3
		25	13	18.22	18.17	18.14	19.3
		25	25	18.2	17.98	18.02	19.3
		50	0	18.08	18.06	18.12	19.3
	16QAM	1	0	17.65	18.12	18.2	19.3
		1	25	18.59	18.79	18.77	19.3
		1	49	18.3	17.79	18.14	19.3
		25	0	18.03	18.1	18.03	19.3
		25	13	18.19	18.15	18.05	19.3
		25	25	18.09	17.96	17.98	19.3
		50	0	17.99	18	18.07	19.3
Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up
15MHz	QPSK	1	0	17.86	17.95	18.04	19.3
		1	38	18.41	18.31	18.33	19.3
		1	74	17.81	17.91	17.75	19.3
		36	0	18.14	18.21	18.15	19.3
		36	18	18.3	18.21	18.25	19.3
		36	39	18.17	18.02	18.1	19.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 83 of 169

		75	0	18.14	18.12	18.13	19.3
		1	0	18.39	18.5	18.03	19.3
		1	38	18.84	18.76	18.66	19.3
		1	74	18.14	18.24	17.96	19.3
	16QAM	36	0	18.17	18.28	18.08	19.3
		36	18	18.29	18.18	18.21	19.3
		36	39	18.17	17.98	18.04	19.3
		75	0	18.11	18.1	18.07	19.3
Bandwidth	Modulation	RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
20MHz	QPSK	1	0	17.91	18.32	17.89	19.3
		1	50	<b>18.52</b>	18.35	18.45	19.3
		1	99	17.71	17.41	17.78	19.3
		50	0	18.28	18.25	18.02	19.3
		50	25	<b>18.44</b>	18.2	18.17	19.3
		50	50	18.28	17.94	18.11	19.3
		100	0	18.31	18.12	18.08	19.3
	16QAM	1	0	18.23	18.71	18.31	19.3
		1	50	18.8	18.2	19.07	19.3
		1	99	18.34	17.95	18.35	19.3
		50	0	18.25	18.24	17.99	19.3
		50	25	18.43	18.2	18.12	19.3
		50	50	18.13	17.99	18.07	19.3
		100	0	18.14	18.11	18.02	19.3

LTE Band 4 Sensor on+ Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 19957	Channel 20175	Channel 20393	Tune up
1.4MHz	QPSK	1	0	16.5	16.78	17.02	17.8
		1	2	16.59	16.83	17.14	17.5
		1	5	16.51	16.68	17	17.5
		3	0	16.57	16.8	17.09	17.5
		3	2	16.58	16.79	17.08	17.5
		3	3	16.55	16.75	17.1	17.5
		6	0	16.55	16.76	17.1	17.5
	16QAM	1	0	16.75	17.05	17.32	17.5
		1	2	16.87	17.06	17.4	17.5
		1	5	16.69	16.94	17.25	17.5
		3	0	16.59	16.8	17.13	17.5
		3	2	16.62	16.79	17.11	17.5
		3	3	16.57	16.79	17.03	17.5
		6	0	16.56	16.74	17.1	17.5
Bandwidth	Modulation	RB size	RB offset	Channel 19965	Channel 20175	Channel 20385	Tune up
3MHz	QPSK	1	0	16.46	16.57	16.68	17.8

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 84 of 169

		1	7	16.82	16.81	16.98	17.5
		1	14	16.47	16.45	16.8	17.5
		8	0	16.65	16.79	16.91	17.5
		8	4	16.65	16.8	16.92	17.5
		8	7	16.65	16.74	16.84	17.5
		15	0	16.67	16.77	16.85	17.5
	16QAM	1	0	16.88	17.24	16.92	17.5
		1	7	17.18	17.04	17.37	17.5
		1	14	16.82	16.9	17	17.5
		8	0	16.71	16.74	16.83	17.5
		8	4	16.71	16.67	16.94	17.5
		8	7	16.56	16.58	16.78	17.5
		15	0	16.61	16.67	16.84	17.5
Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
5MHz	QPSK	1	0	16.47	16.7	16.69	17.8
		1	13	16.82	16.89	16.86	17.5
		1	24	16.37	16.34	16.57	17.5
		12	0	16.68	16.84	16.91	17.5
		12	6	16.77	16.9	16.97	17.5
		12	13	16.72	16.69	16.78	17.5
		25	0	16.71	16.77	16.84	17.5
	16QAM	1	0	16.97	17.14	16.87	17.5
		1	13	16.83	17.44	17.41	17.5
		1	24	16.81	16.78	16.86	17.5
		12	0	16.62	16.81	16.77	17.5
		12	6	16.82	16.86	16.93	17.5
		12	13	16.57	16.63	16.75	17.5
		25	0	16.66	16.67	16.79	17.5
Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
10MHz	QPSK	1	0	16.45	16.68	16.72	17.8
		1	25	16.95	16.98	16.91	17.5
		1	49	16.44	16.39	16.63	17.5
		25	0	16.76	16.86	16.86	17.5
		25	13	16.86	16.84	16.86	17.5
		25	25	16.74	16.66	16.75	17.5
		50	0	16.74	16.74	16.83	17.5
	16QAM	1	0	16.74	16.79	16.9	17.5
		1	25	17.16	17.29	17.26	17.5
		1	49	16.97	16.76	16.89	17.5
		25	0	16.67	16.77	16.75	17.5
		25	13	16.76	16.78	16.76	17.5
		25	25	16.61	16.54	16.76	17.5
		50	0	16.71	16.69	16.73	17.5
Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up
15MHz	QPSK	1	0	16.44	16.72	16.83	17.8

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 85 of 169

		1	38	16.97	16.93	17.09	17.5
		1	74	16.47	16.53	16.59	17.5
		36	0	16.75	16.89	16.83	17.5
		36	18	16.97	16.89	16.94	17.5
		36	39	16.87	16.71	16.79	17.5
		75	0	16.82	16.81	16.82	17.5
	16QAM	1	0	16.86	16.9	16.81	17.5
		1	38	17.26	17.55	17.2	17.5
		1	74	16.93	17.04	16.84	17.5
		36	0	16.78	16.86	16.79	17.5
		36	18	16.89	16.81	16.91	17.5
		36	39	16.82	16.59	16.75	17.5
		75	0	16.78	16.74	16.75	17.5
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Channel 20050</b>	<b>Channel 20175</b>	<b>Channel 20300</b>	<b>Tune up</b>
<b>20MHz</b>	QPSK	1	0	16.4	16.78	16.64	17.8
		1	50	16.9	16.92	<b>17.16</b>	17.5
		1	99	16.54	16.3	16.62	17.5
		50	0	16.8	16.92	16.73	17.5
		50	25	<b>17.05</b>	16.84	16.81	17.5
		50	50	16.92	16.61	16.86	17.5
		100	0	16.92	16.83	16.77	17.5
	16QAM	1	0	16.73	17.19	16.76	17.5
		1	50	17.45	17.19	17.34	17.5
		1	99	16.82	16.5	16.99	17.5
		50	0	16.83	16.89	16.62	17.5
		50	25	16.98	16.82	16.72	17.5
		50	50	16.77	16.53	16.77	17.5
		100	0	16.78	16.75	16.68	17.5

LTE Band 5 full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20407	20525	20643	
<b>1.4MHz</b>	QPSK	1	0	23.06	23.08	23.24	24.5
		1	2	23.13	23.08	23.27	24.5
		1	5	23.02	22.98	22.97	24.5
		3	0	23.07	23.06	23.32	24.3
		3	2	23.14	23.08	23.18	24.3
		3	3	23.12	23.06	23.08	24.3
		6	0	22.19	22.2	22.16	23.5
	16QAM	1	0	22.33	22.32	22.41	23.3
		1	2	22.39	22.39	22.46	23.3
		1	5	22.31	22.23	22.21	23.3
		3	0	22.15	22.21	22.28	23.5
		3	2	22.2	22.19	22.2	23.5
		3	3	22.14	22.16	22.06	23.5
		6	0	21.22	21.3	21.26	22.5

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 86 of 169

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20415	20525	20635	
3MHz	QPSK	1	0	22.89	22.98	23.19	24.5
		1	7	23.24	23.14	23.3	24.5
		1	14	22.81	22.8	22.86	24.5
		8	0	22.1	22.08	22.21	23.5
		8	4	22.17	22.15	22.23	23.5
		8	7	22.08	22.12	22.07	23.5
		15	0	22.09	22.11	22.14	23.5
	16QAM	1	0	22.27	21.74	22.65	23.3
		1	7	22.46	22.58	22.79	23.3
		1	14	22.29	22.28	21.39	23.3
		8	0	21.15	21.2	21.16	22.5
		8	4	21.26	21.31	21.25	22.5
		8	7	21.01	21.06	21.05	22.5
		15	0	21.15	21.13	21.25	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20425	20525	20625	
5MHz	QPSK	1	0	22.77	22.85	23.15	24.6
		1	13	23.07	23.23	23.34	24.6
		1	24	22.7	22.68	22.69	24.6
		12	0	22.11	22.1	22.29	23.5
		12	6	22.18	22.16	22.32	23.5
		12	13	21.99	22.05	22.05	23.5
		25	0	22.05	22.16	22.14	23.5
	16QAM	1	0	22.22	22.21	22.14	23.3
		1	13	22.11	22.65	22.02	23.3
		1	24	21.98	22.11	22.01	23.3
		12	0	21.1	20.99	21.36	22.5
		12	6	21.15	21.12	21.32	22.5
		12	13	20.97	20.99	21.11	22.5
		25	0	20.97	21.06	21.08	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20450	20525	20600	
10MHz	QPSK	1	0	21.52	21.54	21.73	23
		1	25	22.05	22.08	<b>22.31</b>	23
		1	49	21.27	21.53	21.53	23
		25	0	21.99	22	22.17	23.5
		25	13	22.11	22.16	<b>22.24</b>	23.5
		25	25	21.89	21.95	21.96	23.5
		50	0	22	22.03	22.12	23.5
	16QAM	1	0	21.86	22.01	21.58	23.5
		1	25	22.46	22.56	22.47	23.5
		1	49	21.65	21.99	21.63	23.5
		25	0	20.94	21	21.18	22.5
		25	13	21.13	21.13	21.19	22.5
		25	25	20.94	20.87	20.96	22.5
		50	0	20.97	21.02	21.13	22.5

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



LTE Band 7 full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	22.19	22.61	22.65	23.7
		1	13	22.35	22.77	22.83	23.7
		1	24	22.02	22.38	22.48	23.7
		12	0	21.51	21.83	21.99	22.7
		12	6	21.57	21.85	22	22.7
		12	13	21.38	21.7	21.76	22.7
		25	0	21.41	21.77	21.97	22.7
	16QAM	1	0	21.49	21.89	21.97	22.7
		1	13	21.66	22.12	22.21	22.7
		1	24	21.27	21.67	21.77	22.7
		12	0	20.63	20.99	21.16	21.7
		12	6	20.65	21.02	21.17	21.7
		12	13	20.49	20.87	20.97	21.7
		25	0	20.49	20.87	21.04	21.7
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	1	0	22.33	22.63	22.8	23.7
		1	25	22.61	22.77	22.9	23.7
		1	49	22.13	22.49	22.53	23.7
		25	0	21.55	21.83	21.92	22.7
		25	13	21.56	21.89	21.96	22.7
		25	25	21.35	21.73	21.86	22.7
		50	0	21.41	21.8	22.04	22.7
	16QAM	1	0	21.35	21.58	21.85	22.7
		1	25	22.11	21.84	22.62	22.7
		1	49	21.33	21.46	22	22.7
		25	0	20.59	20.86	21.03	21.7
		25	13	20.56	20.96	21.07	21.7
		25	25	20.36	20.79	20.97	21.7
		50	0	20.45	20.89	21.13	21.7
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	22.17	22.4	22.48	23.9
		1	38	22.59	22.92	22.94	23.9
		1	74	21.93	22.31	22.39	23.9
		36	0	21.46	21.8	21.89	22.7
		36	18	21.55	21.89	22.06	22.7
		36	39	21.39	21.72	21.86	22.7
		75	0	21.34	21.78	21.98	22.7
	16QAM	1	0	21.33	21.83	21.79	22.7
		1	38	21.91	21.94	22.17	22.7
		1	74	21.31	21.74	21.75	22.7



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 88 of 169

		36	0	20.51	20.95	21	21.7
		36	18	20.65	21.03	21.19	21.7
		36	39	20.4	20.82	21.07	21.7
		75	0	20.39	20.84	21.08	21.7
Bandwidth	Modulation	RB size	RB offset	Channel 20850	Channel 21100	Channel 21350	Tune up
20MHz	QPSK	1	0	20.83	21.14	21.03	22.6
		1	50	21.05	21.51	<b>21.51</b>	22.6
		1	99	20.63	20.86	21.08	22.6
		50	0	21.51	21.99	21.96	22.7
		50	25	21.59	22.06	<b>22.17</b>	22.7
		50	50	21.5	21.9	22.03	22.7
		100	0	21.5	21.93	22.03	22.7
	16QAM	1	0	21.17	20.97	21.05	22.7
		1	50	21.15	21.89	22.12	22.7
		1	99	20.98	21.19	21.49	22.7
		50	0	20.6	21.12	21.09	21.7
		50	25	20.61	21.05	21.27	21.7
		50	50	20.6	21.06	21.13	21.7
		100	0	20.54	21.01	21.17	21.7

LTE Band 7 Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20775	Channel 21100	Channel 21425	Tune up
5MHz	QPSK	1	0	20.07	20.36	20.47	21.4
		1	13	20.24	20.57	20.75	21.4
		1	24	19.76	20.16	20.29	21.4
		12	0	19.29	19.66	19.75	20.4
		12	6	19.31	19.69	19.83	20.4
		12	13	19.12	19.54	19.61	20.4
		25	0	19.17	19.62	19.69	20.4
	16QAM	1	0	19.34	19.71	19.78	20.4
		1	13	19.51	20.02	20.08	20.4
		1	24	19.04	19.49	19.53	20.4
		12	0	18.39	18.65	18.92	19.4
		12	6	18.38	18.67	18.94	19.4
		12	13	18.17	18.51	18.71	19.4
		25	0	18.19	18.52	18.77	19.4
Bandwidth	Modulation	RB size	RB offset	Channel 20800	Channel 21100	Channel 21400	Tune up
10MHz	QPSK	1	0	19.96	20.29	20.46	21.4
		1	25	20.16	20.61	20.71	21.4
		1	49	19.62	20.12	20.22	21.4
		25	0	19.1	19.54	19.72	20.4
		25	13	19.1	19.61	19.69	20.4
		25	25	18.87	19.42	19.55	20.4

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 89 of 169

		50	0	18.99	19.49	19.65	20.4
		1	0	18.45	19.57	19.4	20.4
		1	25	19.49	19.92	20.04	20.4
		1	49	19.01	19.48	19.68	20.4
	16QAM	25	0	18.19	18.55	18.64	19.4
		25	13	18.23	18.54	18.75	19.4
		25	25	17.91	18.34	18.58	19.4
		50	0	18.03	18.46	18.74	19.4
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Tune up</b>
				20825	21100	21375	
		1	0	19.79	19.96	19.95	21.4
		1	38	20.08	20.55	20.7	21.4
		1	74	19.45	19.86	20.07	21.4
	QPSK	36	0	18.96	19.44	19.53	20.4
		36	18	19.04	19.56	19.8	20.4
		36	39	18.86	19.41	19.54	20.4
		75	0	18.83	19.48	19.58	20.4
<b>15MHz</b>		1	0	18.79	19.25	19.45	20.4
		1	38	19.26	20.22	19.74	20.4
		1	74	18.94	19.3	19.06	20.4
	16QAM	36	0	18.07	18.38	18.51	19.4
		36	18	18.2	18.55	18.79	19.4
		36	39	17.94	18.38	18.52	19.4
		75	0	17.93	18.4	18.62	19.4
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Tune up</b>
				20850	21100	21350	
		1	0	20.06	20.22	20.35	21.4
		1	50	20.07	20.68	<b>20.78</b>	21.4
		1	99	19.81	20.08	20.35	21.4
	QPSK	50	0	19.09	19.64	19.69	20.4
		50	25	19.22	19.81	<b>19.9</b>	20.4
		50	50	19.06	19.66	19.85	20.4
		100	0	19.1	19.67	19.83	20.4
<b>20MHz</b>		1	0	18.99	19.82	19.82	20.4
		1	50	19.27	19.99	20.34	20.4
		1	99	18.55	19.47	19.27	20.4
	16QAM	50	0	18.14	18.53	18.66	19.4
		50	25	18.28	18.7	18.93	19.4
		50	50	18.02	18.59	18.75	19.4
		100	0	18.1	18.58	18.79	19.4

Table 13 : Conducted Power Of LTE



## 8.1.2 Conducted Power of Ant 2(Second Antenna)

### 8.1.2.1 Conducted Power Of GSM

GSM 850 Receiver off										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	31.63	31.53	31.54	33.5	-9.19	22.44	22.34	22.35	24.31
GPRS/EGPRS (GMSK)	1 TX Slot	31.68	31.56	31.59	33.5	-9.19	22.49	22.37	22.4	24.31
	2 TX Slots	29.35	29.23	29.08	30.5	-6.18	<b>23.17</b>	23.05	22.9	24.32
	3 TX Slots	27.15	26.97	26.86	28.7	-4.42	22.73	22.55	22.44	24.28
	4 TX Slots	25.91	25.73	25.58	27.5	-3.17	22.74	22.56	22.41	<b>24.33</b>
EGPRS(8PSK)	1 TX Slot	25.99	26.04	25.98	26.5	-9.19	16.8	16.85	16.79	17.31
	2 TX Slots	22.19	22.18	22.09	23.5	-6.18	16.01	16	15.91	17.32
	3 TX Slots	20.31	20.39	20.38	22.2	-4.42	15.89	15.97	15.96	17.78
	4 TX Slots	19.07	19.09	19.11	21	-3.17	15.9	15.92	15.94	17.83
GSM 1900 Receiver off										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	29.63	29.55	29.4	30.7	-9.19	<b>20.44</b>	20.36	20.21	21.51
GPRS/EGPRS (GMSK)	1 TX Slot	29.63	29.53	29.39	30.7	-9.19	<b>20.44</b>	20.34	20.2	21.51
	2 TX Slots	26.42	26.44	26.43	27.7	-6.18	20.24	20.26	20.25	21.52
	3 TX Slots	24.69	24.72	24.73	25.9	-4.42	20.27	20.3	20.31	21.48
	4 TX Slots	23.39	23.41	23.43	24.7	-3.17	20.22	20.24	20.26	<b>21.53</b>
EGPRS(8PSK)	1 TX Slot	25.46	25.44	25.36	25.5	-9.19	16.27	16.25	16.17	16.31
	2 TX Slots	21.77	21.62	21.56	23	-6.18	15.59	15.44	15.38	16.82
	3 TX Slots	19.92	19.82	19.99	21.7	-4.42	15.5	15.4	15.57	17.28
	4 TX Slots	18.72	18.73	18.67	20.5	-3.17	15.55	15.56	15.5	17.33

GSM 850 Receiver on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	29.83	29.72	29.6	<b>31.5</b>	-9.19	20.64	20.53	20.41	22.31
GPRS/EGPRS (GMSK)	1 TX Slot	29.84	29.74	29.61	<b>31.5</b>	-9.19	20.65	20.55	20.42	22.31
	2 TX Slots	27.47	27.36	27.18	28.5	-6.18	<b>21.29</b>	21.18	21	22.32
	3 TX Slots	25.17	25.02	24.86	26.7	-4.42	20.75	20.6	20.44	22.28
	4 TX Slots	23.92	23.78	23.59	25.5	-3.17	20.75	20.61	20.42	<b>22.33</b>
EGPRS(8PSK)	1 TX Slot	26.01	26.03	25.96	26.5	-9.19	16.82	16.84	16.77	17.31
	2 TX Slots	22.18	22.2	22.12	23.5	-6.18	16	16.02	15.94	17.32
	3 TX Slots	20.32	20.39	20.41	22.2	-4.42	15.9	15.97	15.99	17.78
	4 TX Slots	19.05	19.07	19.05	21	-3.17	15.88	15.9	15.88	17.83
GSM 1900 Receiver on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	28.25	28.21	28.17	<b>29.2</b>	-9.19	<b>19.06</b>	19.02	18.98	20.01
GPRS/EGPRS (GMSK)	1 TX Slot	28.25	28.21	28.16	<b>29.2</b>	-9.19	<b>19.06</b>	19.02	18.97	20.01
	2 TX Slots	25	24.99	25.01	<b>26.2</b>	-6.18	18.82	18.81	18.83	20.02
	3 TX Slots	23.27	23.29	23.33	24.4	-4.42	18.85	18.87	18.91	19.98
	4 TX Slots	21.92	21.93	22.01	23.2	-3.17	18.75	18.76	18.84	<b>20.03</b>

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 91 of 169

EGPRS(8PSK)	1 TX Slot	25.46	25.43	25.36	25.5	-9.19	16.27	16.24	16.17	16.31
	2 TX Slots	22.12	21.92	21.85	23	-6.18	15.94	15.74	15.67	16.82
	3 TX Slots	20.36	20.23	20.17	21.7	-4.42	15.94	15.81	15.75	17.28
	4 TX Slots	18.99	18.84	18.79	20.5	-3.17	15.82	15.67	15.62	17.33

GSM 850 Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	29.76	29.67	29.56	31.5	-9.19	20.57	20.48	20.37	22.31
GPRS/EGPRS (GMSK)	1 TX Slot	29.77	29.65	29.57	31.5	-9.19	20.58	20.46	20.38	22.31
	2 TX Slots	27.42	27.29	27.1	28.5	-6.18	<b>21.24</b>	21.11	20.92	22.32
	3 TX Slots	25.08	24.95	24.78	26.7	-4.42	20.66	20.53	20.36	22.28
	4 TX Slots	23.86	23.71	23.53	25.5	-3.17	20.69	20.54	20.36	<b>22.33</b>
EGPRS(8PSK)	1 TX Slot	26.02	26.01	25.96	26.5	-9.19	16.83	16.82	16.77	17.31
	2 TX Slots	22.18	22.16	22.12	23.5	-6.18	16	15.98	15.94	17.32
	3 TX Slots	20.19	20.28	20.26	22.2	-4.42	15.77	15.86	15.84	17.78
	4 TX Slots	19.05	19.1	19.06	21	-3.17	15.88	15.93	15.89	17.83
GSM 1900 Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	28.19	28.17	28.09	29.2	-9.19	19	18.98	18.9	20.01
GPRS/EGPRS (GMSK)	1 TX Slot	28.2	28.15	28.12	29.2	-9.19	<b>19.01</b>	18.96	18.93	20.01
	2 TX Slots	24.95	24.96	24.97	26.2	-6.18	18.77	18.78	18.79	20.02
	3 TX Slots	23.22	23.23	23.27	24.4	-4.42	18.8	18.81	18.85	19.98
	4 TX Slots	21.85	21.89	21.92	23.2	-3.17	18.68	18.72	18.75	<b>20.03</b>
EGPRS(8PSK)	1 TX Slot	25.46	25.42	25.36	25.5	-9.19	16.27	16.23	16.17	16.31
	2 TX Slots	21.78	21.64	21.59	23	-6.18	15.6	15.46	15.41	16.82
	3 TX Slots	19.94	19.87	20.01	21.7	-4.42	15.52	15.45	15.59	17.28
	4 TX Slots	18.84	18.69	18.65	20.5	-3.17	15.67	15.52	15.48	17.33

Table 14: Conducted Power Of GSM

Note:

- 1) . CMU200 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

- 2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:  
Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8
- 3) . When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used



**8.1.2.2 Conducted Power Of WCDMA**

WCDMA Band II Receiver off					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	<b>22.85</b>	22.71	22.57	24.3
	12.2kbps AMR	<b>22.83</b>	22.7	22.55	24.3
HSDPA	Subtest 1	21.89	21.76	21.59	23.8
	Subtest 2	21.91	21.73	21.55	23.3
	Subtest 3	21.38	21.29	21.17	23.3
	Subtest 4	21.35	21.31	31.19	23.3
HSUPA	Subtest 1	21.02	21.07	21.02	22.3
	Subtest 2	19.66	19.56	19.51	20.8
	Subtest 3	21.96	21.91	21.95	23.3
	Subtest 4	19.69	19.58	19.66	20.8
	Subtest 5	22.03	21.82	21.97	23.3
DC-HSDPA	Subtest 1	21.82	21.61	21.59	23.8
	Subtest 2	21.73	21.57	21.42	23.3
	Subtest 3	21.79	21.63	21.55	23.3
	Subtest 4	21.72	21.55	21.62	23.3

WCDMA Band II Receiver on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	<b>17.83</b>	17.71	17.67	19.3
	12.2kbps AMR	<b>17.81</b>	17.7	17.63	19.3
HSDPA	Subtest 1	16.9	16.79	16.72	18.8
	Subtest 2	16.92	16.76	16.68	18.3
	Subtest 3	16.35	16.28	16.26	18.3
	Subtest 4	16.36	16.34	14.96	18.3
HSUPA	Subtest 1	16.03	16.1	16.15	17.3
	Subtest 2	14.63	14.55	14.6	15.8
	Subtest 3	16.97	16.94	17.08	18.3
	Subtest 4	14.7	14.61	14.79	15.8
	Subtest 5	17	16.81	17.06	18.3
DC-HSDPA	Subtest 1	16.83	16.64	16.72	18.8
	Subtest 2	16.74	16.6	16.55	18.3
	Subtest 3	16.76	16.62	16.64	18.3
	Subtest 4	16.73	16.58	16.75	18.3

WCDMA Band II Hotspot on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	<b>17.83</b>	17.73	17.69	19.3
	12.2kbps AMR	<b>17.82</b>	17.71	17.65	19.3
HSDPA	Subtest 1	16.93	16.84	16.77	18.8



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 93 of 169

	Subtest 2	16.95	16.81	16.73	18.3
	Subtest 3	16.34	16.29	16.27	18.3
	Subtest 4	16.39	16.39	16.28	18.3
HSUPA	Subtest 1	16.06	16.15	16.2	17.3
	Subtest 2	14.62	14.56	14.61	15.8
	Subtest 3	17	16.99	17.13	18.3
	Subtest 4	14.73	14.66	14.84	15.8
	Subtest 5	16.99	16.82	17.07	18.3
DC-HSDPA	Subtest 1	16.86	16.69	16.77	18.8
	Subtest 2	16.77	16.65	16.6	18.3
	Subtest 3	16.75	16.63	16.65	18.3
	Subtest 4	16.76	16.63	16.8	18.3

WCDMA Band IV Receiver off					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	23.03	<b>23.1</b>	23.02	24.3
	12.2kbps AMR	23.01	<b>23.07</b>	23	24.3
HSDPA	Subtest 1	22.1	22.18	22.07	23.8
	Subtest 2	22.12	22.15	22.03	23.3
	Subtest 3	21.55	21.67	21.61	23.3
	Subtest 4	21.56	21.73	9.61	23.3
HSUPA	Subtest 1	21.23	21.49	21.5	22.3
	Subtest 2	19.83	19.94	19.95	20.8
	Subtest 3	22.17	22.33	22.43	23.3
	Subtest 4	19.9	20	20.14	20.8
DC-HSDPA	Subtest 1	22.03	22.03	22.07	23.8
	Subtest 2	21.94	21.99	21.9	23.3
	Subtest 3	21.96	22.01	21.99	23.3
	Subtest 4	21.93	21.97	22.1	23.3

WCDMA Band IV Receiver on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	20.53	<b>20.54</b>	20.47	21.8
	12.2kbps AMR	20.51	<b>20.52</b>	20.44	21.8
HSDPA	Subtest 1	19.63	19.65	19.55	21.3
	Subtest 2	19.65	19.62	19.51	20.8
	Subtest 3	19.04	19.1	19.05	20.8
	Subtest 4	19.09	19.2	-9.41	20.8
HSUPA	Subtest 1	18.76	18.96	18.98	19.8
	Subtest 2	17.32	17.37	17.39	18.3
	Subtest 3	19.7	19.8	19.91	20.8
	Subtest 4	17.43	17.47	17.62	18.3
	Subtest 5	19.69	19.63	19.85	20.8
DC-HSDPA	Subtest 1	19.56	19.5	19.55	21.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 94 of 169

	Subtest 2	19.47	19.46	19.38	20.8
	Subtest 3	19.45	19.44	19.43	20.8
	Subtest 4	19.46	19.44	19.58	20.8

WCDMA Band IV Hotspot on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	20.56	<b>20.57</b>	20.5	21.8
	12.2kbps AMR	<b>20.55</b>	20.53	20.44	21.8
HSDPA	Subtest 1	19.69	19.71	19.61	21.3
	Subtest 2	19.71	19.68	19.57	20.8
	Subtest 3	19.06	19.12	19.07	20.8
	Subtest 4	19.15	19.26	-28.45	20.8
HSUPA	Subtest 1	18.82	19.02	19.04	19.8
	Subtest 2	17.34	17.39	17.41	18.3
	Subtest 3	19.76	19.86	19.97	20.8
	Subtest 4	17.49	17.53	17.68	18.3
	Subtest 5	19.71	19.65	19.87	20.8
DC-HSDPA	Subtest 1	19.62	19.56	19.61	21.3
	Subtest 2	19.53	19.52	19.44	20.8
	Subtest 3	19.47	19.46	19.45	20.8
	Subtest 4	19.52	19.5	19.64	20.8

WCDMA Band V Receiver off					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	<b>23.35</b>	23.3	23.27	24.8
	12.2kbps AMR	<b>23.32</b>	23.26	23.24	24.8
HSDPA	Subtest 1	22.24	22.22	22.15	24.3
	Subtest 2	22.26	22.19	22.11	23.8
	Subtest 3	21.69	21.67	21.65	23.8
	Subtest 4	21.7	21.77	-11.81	23.8
HSUPA	Subtest 1	21.37	21.53	21.58	22.8
	Subtest 2	19.97	19.94	19.99	21.8
	Subtest 3	22.31	22.37	22.51	23.8
	Subtest 4	20.04	20.04	20.22	21.3
	Subtest 5	22.34	22.2	22.45	23.3
DC-HSDPA	Subtest 1	22.17	22.07	22.15	24.3
	Subtest 2	22.08	22.03	21.98	23.8
	Subtest 3	22.1	22.01	22.03	23.8
	Subtest 4	22.07	22.01	22.18	23.8

WCDMA Band V Receiver on					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	20.31	<b>20.38</b>	20.35	21.8
	12.2kbps AMR	20.3	<b>20.36</b>	20.32	21.8

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 95 of 169

HSDPA	Subtest 1	19.23	19.1	18.98	21.3
	Subtest 2	19.25	19.07	18.94	20.8
	Subtest 3	18.64	18.55	18.48	20.8
	Subtest 4	18.69	18.65	-8.64	20.8
HSUPA	Subtest 1	18.36	18.41	18.41	19.8
	Subtest 2	16.92	16.82	16.82	18.8
	Subtest 3	19.3	19.25	19.34	20.8
	Subtest 4	17.03	16.92	17.05	18.3
	Subtest 5	19.29	19.08	19.28	20.3
DC-HSDPA	Subtest 1	19.16	18.95	18.98	21.3
	Subtest 2	19.07	18.91	18.81	20.8
	Subtest 3	19.05	18.89	18.86	20.8
	Subtest 4	19.06	18.89	19.01	20.8

WCDMA Band V Hotspot on					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	<b>20.32</b>	20.25	20.26	21.8
	12.2kbps AMR	<b>20.31</b>	20.22	20.24	21.8
HSDPA	Subtest 1	19.27	19	18.92	21.3
	Subtest 2	19.29	18.97	18.88	20.8
	Subtest 3	18.64	18.41	18.38	20.8
	Subtest 4	18.73	18.55	-26.99	20.8
HSUPA	Subtest 1	18.4	18.31	18.35	19.8
	Subtest 2	16.92	16.68	16.72	18.8
	Subtest 3	19.34	19.15	19.28	20.8
	Subtest 4	17.07	16.82	16.99	18.3
	Subtest 5	19.29	18.94	19.18	20.3
DC-HSDPA	Subtest 1	19.2	18.85	18.92	21.3
	Subtest 2	19.11	18.81	18.75	20.8
	Subtest 3	19.05	18.75	18.76	20.8
	Subtest 4	19.1	18.79	18.95	20.8

Table 15: Conducted Power Of WCDMA

Note:

- 1) when the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.





### 8.1.2.3 Conducted Power Of LTE

LTE Band 2 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	22.94	22.63	22.62	23.7
		1	2	22.96	22.63	22.61	23.7
		1	5	22.85	22.57	22.4	23.7
		3	0	22.94	22.64	22.6	23.7
		3	2	22.92	22.6	22.5	23.7
		3	3	22.86	22.55	22.46	23.7
		6	0	22	21.72	21.63	23
	16QAM	1	0	22.18	21.93	21.83	23
		1	2	22.25	21.96	21.84	23
		1	5	22.09	21.88	21.63	23
		3	0	22.02	21.77	21.65	23
		3	2	22.03	21.73	21.64	23
		3	3	21.94	21.7	21.55	23
		6	0	21.13	20.85	20.75	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	22.6	22.43	22.42	23.7
		1	7	22.85	22.48	22.67	23.7
		1	14	22.45	22.2	22.35	23.7
		8	0	21.83	21.54	21.61	23
		8	4	21.86	21.5	21.67	23
		8	7	21.76	21.48	21.55	23
		15	0	21.78	21.5	21.64	23
	16QAM	1	0	21.91	21.75	21.37	23
		1	7	22.38	21.8	22.14	23
		1	14	22.05	21.7	21.31	23
		8	0	20.96	20.76	20.83	22.5
		8	4	20.98	20.67	20.81	22.5
		8	7	20.88	20.62	20.65	22.5
		15	0	21.01	20.56	20.78	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18625	18900	19175	
5MHz	QPSK	1	0	22.67	22.45	22.8	23.7
		1	13	22.96	22.52	22.7	23.7
		1	24	22.47	22.14	22.11	23.7
		12	0	21.93	21.6	21.85	23
		12	6	22	21.64	21.69	23
		12	13	21.88	21.49	21.55	23
		25	0	21.92	21.5	21.69	23
	16QAM	1	0	22.14	21.86	21.76	23
		1	13	22.17	21.81	22.16	23
		1	24	21.81	21.49	21.42	23
		12	0	21.1	20.68	20.94	22.5

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 97 of 169

		12	6	21.15	20.72	20.84	22.5
		12	13	21.02	20.58	20.7	22.5
		25	0	20.98	20.61	20.77	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	22.7	22.41	23.12	23.7
		1	25	23.08	22.54	23.01	23.7
		1	49	22.6	22.3	22.25	23.7
		25	0	21.98	21.58	22.04	23
		25	13	22.12	21.59	21.87	23
		25	25	22	21.55	21.65	23
		50	0	21.95	21.6	21.79	23
	16QAM	1	0	21.79	21.85	22.24	23
		1	25	22.59	21.86	22.12	23
		1	49	22.04	21.81	21.78	23
		25	0	21.08	20.65	21.16	22.5
		25	13	21.19	20.68	20.95	22.5
		25	25	21.12	20.62	20.78	22.5
		50	0	21.02	20.67	20.95	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	22.43	22.21	22.81	23.8
		1	38	23.09	22.5	23.14	23.8
		1	74	22.2	22.08	21.89	23.8
		36	0	22	21.55	22.04	23
		36	18	22.2	21.56	22.12	23
		36	39	21.93	21.45	21.66	23
		75	0	21.94	21.48	21.83	23
	16QAM	1	0	21.58	21.75	21.88	23
		1	38	22.51	21.79	22.53	23
		1	74	21.72	21.46	21.33	23
		36	0	21.07	20.74	21.15	22.5
		36	18	21.24	20.77	21.21	22.5
		36	39	20.98	20.58	20.72	22.5
		75	0	20.98	20.5	20.89	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	
20MHz	QPSK	1	0	21.2	21.29	21.48	22.8
		1	50	21.97	21.51	22.21	22.8
		1	99	20.78	20.87	20.82	22.8
		50	0	21.94	21.73	21.92	23
		50	25	22.1	21.8	22.12	23
		50	50	21.79	21.63	21.78	23
		100	0	21.84	21.67	21.83	23
	16QAM	1	0	21.74	21.48	21.68	23
		1	50	21.77	21.8	22.18	23
		1	99	21.01	21.41	21.02	23
		50	0	21.08	20.84	21.08	22.5

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 98 of 169

		50	25	21.23	20.88	21.25	22.5
		50	50	20.89	20.73	20.85	22.5
		100	0	20.93	20.7	20.89	22.5

LTE Band 2 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	17.28	16.93	17.25	18.1
		1	2	17.36	17.04	17.26	18.1
		1	5	17.23	16.89	17.06	18.1
		3	0	17.32	17	17.25	18.1
		3	2	17.33	16.98	17.18	18.1
		3	3	17.29	16.91	17.16	18.1
		6	0	17.3	16.96	17.16	18.1
	16QAM	1	0	17.49	17.22	17.49	18.1
		1	2	17.61	17.24	17.44	18.1
		1	5	17.49	17.13	17.29	18.1
		3	0	17.33	17.01	17.24	18.1
		3	2	17.33	16.97	17.17	18.1
		3	3	17.32	16.96	17.14	18.1
		6	0	17.3	16.9	17.16	18.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	16.92	16.58	17.01	18.1
		1	7	17.32	16.94	17.16	18.1
		1	14	16.84	16.51	16.65	18.1
		8	0	17.15	16.81	17.14	18.1
		8	4	17.21	16.79	17.1	18.1
		8	7	17.11	16.7	16.99	18.1
		15	0	17.13	16.72	17.04	18.1
	16QAM	1	0	17.2	16.63	17.26	18.1
		1	7	17.74	17.12	17.46	18.1
		1	14	17.27	16.82	16.72	18.1
		8	0	17.19	16.73	17	18.1
		8	4	17.15	16.78	17.05	18.1
		8	7	17.07	16.7	16.94	18.1
		15	0	17.09	16.61	16.96	18.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18625	18900	19175	
5MHz	QPSK	1	0	17.07	16.71	17.24	18.1
		1	13	17.36	16.88	17.28	18.1
		1	24	16.93	16.44	16.66	18.1
		12	0	17.26	16.82	17.31	18.1
		12	6	17.35	16.87	17.22	18.1
		12	13	17.21	16.68	16.97	18.1
		25	0	17.2	16.74	17.1	18.1
	16QAM	1	0	17.14	16.92	17.7	18.1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 99 of 169

		1	13	17.52	16.82	17.3	18.1
		1	24	16.84	16.76	16.94	18.1
		12	0	17.28	16.71	17.23	18.1
		12	6	17.27	16.82	17.14	18.1
		12	13	17.06	16.66	16.99	18.1
		25	0	17.09	16.73	17	18.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	17.02	16.67	17.45	18.1
		1	25	17.54	16.92	17.47	18.1
		1	49	17.04	16.53	16.69	18.1
		25	0	17.29	16.79	17.43	18.1
		25	13	17.42	16.81	17.35	18.1
		25	25	17.3	16.71	17.06	18.1
		50	0	17.26	16.77	17.2	18.1
	16QAM	1	0	17.17	16.84	17.16	18.1
		1	25	17.67	16.89	17.69	18.1
		1	49	16.81	16.76	16.87	18.1
		25	0	17.18	16.67	17.27	18.1
		25	13	17.3	16.77	17.31	18.1
		25	25	17.21	16.64	16.98	18.1
		50	0	17.09	16.7	17.12	18.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	16.79	16.46	17.12	18.1
		1	38	17.63	16.84	17.51	18.1
		1	74	16.65	16.49	16.39	18.1
		36	0	17.26	16.78	17.42	18.1
		36	18	17.47	16.79	17.46	18.1
		36	39	17.18	16.62	17.01	18.1
		75	0	17.18	16.6	17.18	18.1
	16QAM	1	0	16.91	16.26	17.29	18.1
		1	38	17.83	17.31	18.02	18.1
		1	74	16.83	16.87	16.86	18.1
		36	0	17.13	16.74	17.42	18.1
		36	18	17.39	16.73	17.46	18.1
		36	39	17.12	16.49	16.99	18.1
		75	0	17.09	16.53	17.15	18.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	
20MHz	QPSK	1	0	16.7	16.59	16.99	18.1
		1	50	17.5	17.06	17.75	18.1
		1	99	16.15	16.49	16.4	18.1
		50	0	17.14	16.85	17.33	18.1
		50	25	17.32	16.93	17.53	18.1
		50	50	16.93	16.71	17.12	18.1
		100	0	16.99	16.73	17.19	18.1
	16QAM	1	0	17.02	16.55	17.08	18.1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 100 of 169

		1	50	17.72	17.28	18	18.1
		1	99	16.53	16.81	16.74	18.1
		50	0	17.05	16.77	17.27	18.1
		50	25	17.24	16.88	17.46	18.1
		50	50	16.85	16.57	16.99	18.1
		100	0	16.9	16.67	17.11	18.1

LTE Band 2 Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 18607	Channel 18900	Channel 19193	Tune up
1.4MHz	QPSK	1	0	17.22	16.95	17.3	18
		1	2	17.37	17	17.31	18
		1	5	17.22	16.93	17.1	18
		3	0	17.31	17.03	17.28	18
		3	2	17.33	17	17.21	18
		3	3	17.28	16.94	17.18	18
		6	0	17.28	16.97	17.19	18
	16QAM	1	0	17.43	17.24	17.49	18
		1	2	17.57	17.25	17.44	18
		1	5	17.43	17.13	17.31	18
		3	0	17.36	17	17.26	18
		3	2	17.38	17	17.19	18
		3	3	17.33	16.94	17.16	18
		6	0	17.31	16.95	17.18	18
Bandwidth	Modulation	RB size	RB offset	Channel 18615	Channel 18900	Channel 19185	Tune up
3MHz	QPSK	1	0	16.99	16.54	17	18
		1	7	17.26	16.81	17.22	18
		1	14	16.84	16.45	16.68	18
		8	0	17.22	16.79	17.11	18
		8	4	17.26	16.78	17.06	18
		8	7	17.18	16.72	16.95	18
		15	0	17.17	16.71	17.01	18
	16QAM	1	0	17.26	16.83	17.06	18
		1	7	17.62	17.35	17.2	18
		1	14	17.18	16.58	17.1	18
		8	0	17.11	16.62	16.96	18
		8	4	17.15	16.67	16.96	18
		8	7	17.12	16.63	16.98	18
		15	0	17.14	16.66	17.01	18
Bandwidth	Modulation	RB size	RB offset	Channel 18625	Channel 18900	Channel 19175	Tune up
5MHz	QPSK	1	0	17.03	16.63	17.19	18
		1	13	17.29	16.81	17.31	18
		1	24	17.01	16.51	16.61	18
		12	0	17.26	16.81	17.29	18
		12	6	17.33	16.85	17.19	18

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 101 of 169

	16QAM	12	13	17.2	16.67	16.96	18
		25	0	17.18	16.71	17.08	18
		1	0	17	16.27	17.4	18
		1	13	17.03	17.14	17.54	18
		1	24	17.32	16.29	16.48	18
		12	0	17.17	16.66	17.13	18
		12	6	17.28	16.79	17.12	18
		12	13	17.18	16.65	16.93	18
		25	0	17.12	16.59	16.95	18
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	16.99	16.7	17.3	18
		1	25	17.45	16.92	17.49	18
		1	49	17.02	16.46	16.67	18
		25	0	17.29	16.78	17.43	18
		25	13	17.41	16.79	17.34	18
		25	25	17.3	16.71	17.05	18
		50	0	17.24	16.76	17.19	18
	16QAM	1	0	17.04	16.92	17.48	18
		1	25	17.73	16.86	17.2	18
		1	49	16.97	16.68	16.73	18
		25	0	17.16	16.71	17.28	18
		25	13	17.33	16.64	17.19	18
		25	25	17.22	16.59	16.93	18
		50	0	17.16	16.68	17.12	18
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	16.8	16.43	17.11	18
		1	38	17.62	16.9	17.56	18
		1	74	16.53	16.55	16.45	18
		36	0	17.24	16.78	17.43	18
		36	18	17.42	16.8	17.47	18
		36	39	17.14	16.63	17.02	18
		75	0	17.14	16.61	17.19	18
	16QAM	1	0	16.92	16.98	17.06	18
		1	38	17.47	17.17	17.81	18
		1	74	16.79	16.67	16.6	18
		36	0	17.17	16.69	17.35	18
		36	18	17.34	16.74	17.42	18
		36	39	17.09	16.56	16.94	18
		75	0	17.02	16.5	17.1	18
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	
20MHz	QPSK	1	0	16.7	16.55	17.05	18
		1	50	17.45	17.02	<b>17.77</b>	18
		1	99	16.07	16.47	16.47	18
		50	0	17.14	16.82	17.36	18
		50	25	17.31	16.97	17.55	18

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 102 of 169

	16QAM	50	50	16.93	16.73	17.15	18
		100	0	16.99	16.76	17.21	18
		1	0	16.64	16.81	17.19	18
		1	50	17.51	17.46	18.15	18
		1	99	16.71	16.64	16.79	18
		50	0	17.05	16.77	17.3	18
		50	25	17.29	16.88	17.53	18
		50	50	16.88	16.6	17.05	18
		100	0	16.97	16.69	17.15	18

LTE Band 4 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	22.8	22.46	23	24
		1	2	22.87	22.49	23	24
		1	5	22.75	22.34	22.82	24
		3	0	22.81	22.42	22.99	24
		3	2	22.82	22.47	22.96	24
		3	3	22.79	22.43	22.9	24
		6	0	21.94	21.54	22.09	23.3
	16QAM	1	0	22.11	21.72	22.28	23.1
		1	2	22.22	21.82	22.31	23.1
		1	5	22.09	21.65	22.16	23.1
		3	0	21.95	21.62	22.13	23.1
		3	2	21.98	21.62	22.13	23.1
		3	3	21.96	21.58	22.05	23.1
		6	0	21.06	20.62	21.19	22.4
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	22.55	22.36	22.81	24
		1	7	22.76	22.58	23.04	24
		1	14	22.48	22.19	22.63	24
		8	0	21.75	21.49	22.05	23.3
		8	4	21.78	21.6	22.06	23.3
		8	7	21.71	21.52	21.94	23.3
		15	0	21.77	21.54	21.98	23.3
	16QAM	1	0	21.98	21.7	21.88	23.1
		1	7	22.38	21.76	22.52	23.1
		1	14	22.17	21.57	21.96	23.1
		8	0	20.81	20.72	21.12	22.4
		8	4	20.92	20.8	21.15	22.4
		8	7	20.94	20.59	21.05	22.4
		15	0	20.85	20.6	21.04	22.4
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19975	20175	20375	
5MHz	QPSK	1	0	22.66	22.47	22.87	24
		1	13	22.87	22.57	23.01	24

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 103 of 169

		1	24	22.53	22.09	22.55	24
		12	0	21.88	21.59	22.07	23.3
		12	6	21.98	21.68	22.13	23.3
		12	13	21.87	21.48	21.92	23.3
		25	0	21.84	21.55	22.02	23.3
	16QAM	1	0	22.06	21.82	22.31	23.1
		1	13	21.77	21.7	21.95	23.1
		1	24	21.93	21.48	21.9	23.1
		12	0	20.95	20.67	21.13	22.4
		12	6	20.99	20.63	21.36	22.4
		12	13	20.92	20.48	20.96	22.4
		25	0	20.84	20.48	21	22.4
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Tune up</b>
				20000	20175	20350	
<b>10MHz</b>	<b>QPSK</b>	1	0	22.55	22.46	22.76	24
		1	25	22.91	22.74	23.08	24
		1	49	22.45	22.09	22.54	24
		25	0	21.91	21.59	21.98	23.3
		25	13	21.97	21.63	22.01	23.3
		25	25	21.8	21.53	21.91	23.3
		50	0	21.84	21.48	21.96	23.3
	<b>16QAM</b>	1	0	22.01	21.68	21.96	23.1
		1	25	21.82	21.85	22.5	23.1
		1	49	21.88	21.71	21.74	23.1
		25	0	20.97	20.72	21	22.4
		25	13	20.99	20.72	21.09	22.4
		25	25	20.81	20.47	20.96	22.4
		50	0	20.85	20.5	21.02	22.4
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Tune up</b>
				20025	20175	20325	
<b>15MHz</b>	<b>QPSK</b>	1	0	22.62	22.6	22.52	24.3
		1	38	22.91	22.63	22.93	24.3
		1	74	22.39	22.38	22.65	24.3
		36	0	21.92	21.68	21.84	23.3
		36	18	22	21.68	22.03	23.3
		36	39	21.8	21.55	21.97	23.3
		75	0	21.84	21.62	21.91	23.3
	<b>16QAM</b>	1	0	22.18	21.68	22.01	23.1
		1	38	22.12	22.09	22.46	23.1
		1	74	21.72	21.95	21.87	23.1
		36	0	21.01	20.71	20.88	22.4
		36	18	21.07	20.6	21.08	22.4
		36	39	20.91	20.51	21.01	22.4
		75	0	20.89	20.62	20.96	22.4
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Tune up</b>
				20050	20175	20300	
<b>20MHz</b>	<b>QPSK</b>	1	0	21.53	21.55	21.32	22.8
		1	50	21.85	21.49	22.11	22.8

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 104 of 169

		1	99	21.04	21.12	21.58	22.8
		50	0	22.02	21.7	21.78	23.3
		50	25	21.99	21.66	21.99	23.3
		50	50	21.68	21.57	<b>22.05</b>	23.3
		100	0	21.87	21.66	21.9	23.3
	16QAM	1	0	21.71	21.98	21.56	23.1
		1	50	22.11	21.85	22.62	23.1
		1	99	21.42	21.19	22.02	23.1
		50	0	21.08	20.73	20.77	22.4
		50	25	21.02	20.74	21.01	22.4
		50	50	20.7	20.58	21.1	22.4
		100	0	20.95	20.69	20.91	22.4

LTE Band 4 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	19.9	19.62	20.35	21
		1	2	20.06	19.72	20.41	21
		1	5	19.95	19.56	20.21	21
		3	0	20.02	19.65	20.35	21
		3	2	20.09	19.67	20.36	21
		3	3	20.04	19.61	20.33	21
	16QAM	6	0	20.02	19.62	20.35	21
		1	0	20.23	19.83	20.61	21
		1	2	20.39	19.89	20.68	21
		1	5	20.27	19.79	20.54	21
		3	0	20.03	19.67	20.41	21
		3	2	20.09	19.66	20.4	21
		3	3	20.04	19.61	20.33	21
		6	0	19.99	19.65	20.31	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	19.81	19.62	20.11	21
		1	7	20.17	19.83	20.37	21
		1	14	19.72	19.45	19.99	21
		8	0	19.96	19.72	20.25	21
		8	4	20	19.8	20.32	21
		8	7	19.99	19.69	20.23	21
		15	0	19.99	19.72	20.26	21
	16QAM	1	0	19.87	19.85	20.12	21
		1	7	20.5	20.33	21.05	21
		1	14	19.9	19.47	20.13	21
		8	0	20.07	19.6	20.25	21
		8	4	20.05	19.75	20.23	21
		8	7	19.87	19.65	20.12	21
		15	0	19.85	19.58	20.2	21
Bandwidth	Modulation		RB offset	Channel	Channel	Channel	Tune up

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 105 of 169

		RB size		19975	20175	20375	
5MHz	QPSK	1	0	19.79	19.61	20.03	21
		1	13	20.2	19.77	20.32	21
		1	24	19.73	19.37	19.85	21
		12	0	20	19.75	20.28	21
		12	6	20.18	19.84	20.39	21
		12	13	20.08	19.65	20.19	21
		25	0	20.04	19.7	20.23	21
	16QAM	1	0	20.33	20.24	20.52	21
		1	13	20.33	20.15	20.4	21
		1	24	19.65	19.67	20.2	21
		12	0	20.04	19.79	20.3	21
		12	6	20.06	19.87	20.34	21
		12	13	19.98	19.65	20.12	21
		25	0	20.13	19.69	20.11	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20000	20175	20350	
10MHz	QPSK	1	0	19.76	19.64	20.07	21
		1	25	20.29	19.93	20.37	21
		1	49	19.7	19.39	19.89	21
		25	0	20.11	19.8	20.23	21
		25	13	20.18	19.77	20.27	21
		25	25	20	19.6	20.16	21
		50	0	20.03	19.74	20.2	21
	16QAM	1	0	19.89	20.09	20.15	21
		1	25	20.56	20.09	20.67	21
		1	49	19.67	19.43	19.97	21
		25	0	20.03	19.77	20.1	21
		25	13	20.09	19.75	20.23	21
		25	25	19.91	19.58	20.12	21
		50	0	19.99	19.62	20.12	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20025	20175	20325	
15MHz	QPSK	1	0	19.82	19.64	19.75	21
		1	38	20.24	19.94	20.4	21
		1	74	19.54	19.61	19.98	21
		36	0	20.12	19.9	20.07	21
		36	18	20.21	19.88	20.26	21
		36	39	19.99	19.75	20.18	21
		75	0	20.04	19.83	20.13	21
	16QAM	1	0	20.28	19.98	19.56	21
		1	38	20.49	19.93	20.29	21
		1	74	19.9	20.11	19.82	21
		36	0	20.1	19.74	20.03	21
		36	18	20.15	19.83	20.17	21
		36	39	19.92	19.73	20.09	21
		75	0	20.04	19.79	20.07	21



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 106 of 169

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20050	20175	20300	
20MHz	QPSK	1	0	19.72	19.73	19.51	21
		1	50	20.1	19.72	<b>20.39</b>	21
		1	99	19.37	19.36	19.93	21
		50	0	20.11	19.82	19.87	21
		50	25	20.1	19.76	20.12	21
		50	50	19.75	19.65	<b>20.18</b>	21
		100	0	20	19.75	20.06	21
	16QAM	1	0	19.97	19.59	19.41	21
		1	50	20.47	20.33	20.33	21
		1	99	19.37	19.54	20.22	21
		50	0	20.06	19.73	19.84	21
		50	25	20.07	19.69	20.09	21
		50	50	19.77	19.6	20.18	21
		100	0	19.89	19.68	19.97	21

LTE Band 4 Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	19.95	19.64	20.36	21
		1	2	20.11	19.74	20.4	21
		1	5	19.98	19.58	20.21	21
		3	0	20.08	19.68	20.41	21
		3	2	20.12	19.7	20.4	21
		3	3	20.08	19.64	20.33	21
		6	0	20.06	19.65	20.35	21
	16QAM	1	0	20.26	19.89	20.61	21
		1	2	20.33	20.04	20.66	21
		1	5	20.18	19.91	20.45	21
		3	0	20.09	19.77	20.39	21
		3	2	20.18	19.81	20.41	21
		3	3	20.17	19.72	20.32	21
		6	0	20.09	19.71	20.32	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	19.74	19.6	20.16	21
		1	7	20.15	19.92	20.41	21
		1	14	19.68	19.5	19.96	21
		8	0	19.97	19.68	20.3	21
		8	4	20.03	19.81	20.29	21
		8	7	19.95	19.71	20.18	21
		15	0	19.95	19.73	20.23	21
	16QAM	1	0	20.37	19.88	20.34	21
		1	7	19.78	19.78	20.97	21
		1	14	19.86	19.58	19.85	21
		8	0	20.06	19.76	20.34	21

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 107 of 169

		8	4	19.94	19.77	20.16	21
		8	7	19.99	19.69	20.17	21
		15	0	19.98	19.67	20.2	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19975	20175	20375	
5MHz	QPSK	1	0	19.76	19.59	20.06	21
		1	13	20.09	19.91	20.41	21
		1	24	19.66	19.35	19.88	21
		12	0	20.05	19.74	20.32	21
		12	6	20.15	19.89	20.37	21
		12	13	20.04	19.69	20.16	21
		25	0	20.02	19.75	20.22	21
	16QAM	1	0	19.59	19.16	20.41	21
		1	13	20.77	20.52	20.53	21
		1	24	20.2	19.8	19.57	21
		12	0	20.08	19.77	20.24	21
		12	6	20.13	19.8	20.31	21
		12	13	19.98	19.56	20.18	21
		25	0	20.08	19.71	20.21	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20000	20175	20350	
10MHz	QPSK	1	0	19.8	19.64	20.01	21
		1	25	20.34	19.98	20.34	21
		1	49	19.68	19.32	19.84	21
		25	0	20.1	19.8	20.21	21
		25	13	20.19	19.78	20.25	21
		25	25	20	19.61	20.15	21
		50	0	20.03	19.69	20.18	21
	16QAM	1	0	20.05	20.04	19.88	21
		1	25	20.29	20.42	20.58	21
		1	49	19.84	19.98	20.18	21
		25	0	20	19.8	20.07	21
		25	13	20.11	19.83	20.14	21
		25	25	19.96	19.65	20.08	21
		50	0	20.03	19.67	20.11	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20025	20175	20325	
15MHz	QPSK	1	0	19.74	19.63	19.74	21
		1	38	20.23	19.85	20.34	21
		1	74	19.54	19.65	19.9	21
		36	0	20.13	19.84	20.08	21
		36	18	20.22	19.83	20.28	21
		36	39	19.99	19.69	20.19	21
		75	0	20.04	19.77	20.14	21
	16QAM	1	0	19.69	19.83	20.27	21
		1	38	20.16	20.37	20.81	21
		1	74	19.72	20.29	20.04	21
		36	0	20.08	19.82	20.05	21

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 108 of 169

		36	18	20.17	19.83	20.23	21
		36	39	19.9	19.72	20.11	21
		75	0	19.95	19.75	20.03	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20050	20175	20300	
20MHz	QPSK	1	0	19.71	19.71	19.51	21
		1	50	20.13	19.93	<b>20.4</b>	21
		1	99	19.34	19.33	19.98	21
		50	0	20.11	19.82	19.87	21
		50	25	20.1	19.77	20.17	21
		50	50	19.81	19.65	<b>20.23</b>	21
		100	0	20.02	19.75	20.06	21
	16QAM	1	0	19.8	19.84	19.56	21
		1	50	20.52	20.09	20.94	21
		1	99	19.51	19.89	20.13	21
		50	0	20.12	19.75	19.84	21
		50	25	20.09	19.77	20.05	21
		50	50	19.71	19.62	20.22	21
		100	0	19.9	19.73	19.96	21

LTE Band 5 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20407	20525	20643	
1.4MHz	QPSK	1	0	23.04	23.07	23.2	24.3
		1	2	23.17	23.02	23.15	24.3
		1	5	23.05	22.99	22.93	24.3
		3	0	23.11	23.05	23.18	24.3
		3	2	23.14	23.08	23.07	24.3
		3	3	23.09	23.02	22.99	24.3
		6	0	22.16	22.13	22.09	23.5
	16QAM	1	0	22.35	22.31	22.31	23.3
		1	2	22.44	22.32	22.34	23.3
		1	5	22.26	22.25	22.05	23.3
		3	0	22.19	22.15	22.23	23.5
		3	2	22.25	22.18	22.13	23.5
		3	3	22.2	22.09	22.05	23.5
		6	0	21.23	21.11	21.14	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20415	20525	20635	
3MHz	QPSK	1	0	22.77	22.78	22.96	23.3
		1	7	23.05	22.98	23.06	23.3
		1	14	22.64	22.67	22.59	23.3
		8	0	21.98	21.91	22.01	23.5
		8	4	22.03	21.98	22.03	23.5
		8	7	21.92	21.91	21.95	23.5
		15	0	21.95	21.98	22	23.5
	16QAM	1	0	21.96	22.29	22.31	23.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 109 of 169

		1	7	22.15	22.43	22.19	23.3
		1	14	22.04	21.66	21.76	23.3
		8	0	20.98	21.03	21.04	22.5
		8	4	21.16	21.12	21.15	22.5
		8	7	21	20.99	20.85	22.5
		15	0	20.95	20.98	21	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20425	20525	20625	
5MHz	QPSK	1	0	22.76	22.77	23.08	24.5
		1	13	23.01	22.93	23.16	24.5
		1	24	22.56	22.51	22.52	24.5
		12	0	22.01	21.94	22.13	23.5
		12	6	22.07	22.03	22.16	23.5
		12	13	21.86	21.93	21.89	23.5
		25	0	21.93	22.02	21.97	23.5
	16QAM	1	0	22.25	21.83	21.83	23.3
		1	13	22.28	22.14	22.21	23.3
		1	24	21.79	21.95	21.76	23.3
		12	0	21.01	20.91	21.08	22.5
		12	6	21.08	21.06	21.17	22.5
		12	13	20.86	20.85	20.93	22.5
		25	0	20.91	20.96	20.98	22.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20450	20525	20600	
10MHz	QPSK	1	0	21.45	21.42	21.64	23
		1	25	21.97	21.9	<b>22.37</b>	23
		1	49	21.21	21.49	21.35	23
		25	0	21.89	21.89	22.13	23.5
		25	13	22	22.09	<b>22.19</b>	23.5
		25	25	21.79	21.88	21.9	23.5
		50	0	21.85	21.98	22.07	23.5
	16QAM	1	0	21.85	21.62	22.18	23.3
		1	25	21.64	21.93	22.49	23.3
		1	49	21.8	21.79	21.52	23.3
		25	0	20.91	20.85	21.12	22.5
		25	13	20.95	21.1	21.18	22.5
		25	25	20.79	20.76	20.87	22.5
		50	0	20.88	20.89	21.06	22.5

LTE Band 5 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20407	20525	20643	
1.4MHz	QPSK	1	0	20.18	20.21	20.24	21.5
		1	2	20.31	20.24	20.33	21.5
		1	5	20.21	20.12	20.01	21.5
		3	0	20.27	20.24	20.35	21.5
		3	2	20.32	20.29	20.26	21.5

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 110 of 169

	16QAM	3	3	20.27	20.21	20.14	21.5
		6	0	20.26	20.25	20.23	21.5
		1	0	20.4	20.44	20.45	21.5
		1	2	20.52	20.48	20.58	21.5
		1	5	20.44	20.34	20.23	21.5
		3	0	20.26	20.25	20.37	21.5
		3	2	20.31	20.28	20.24	21.5
		3	3	20.25	20.24	20.15	21.5
		6	0	20.27	20.21	20.2	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20415	20525	20635	
3MHz	QPSK	1	0	19.92	19.88	20.13	21.5
		1	7	20.3	20.21	20.33	21.5
		1	14	19.84	19.81	19.72	21.5
		8	0	20.11	20.03	20.16	21.5
		8	4	20.23	20.15	20.2	21.5
		8	7	20.14	20.07	20.04	21.5
		15	0	20.15	20.14	20.16	21.5
	16QAM	1	0	20.28	20.39	20.44	21.5
		1	7	20.41	20.42	20.54	21.5
		1	14	20.18	20.51	20.04	21.5
		8	0	20.19	20.04	20.12	21.5
		8	4	20.15	20.16	20.14	21.5
		8	7	20.09	20.02	20.11	21.5
		15	0	20.23	20.04	20.06	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20425	20525	20625	
5MHz	QPSK	1	0	19.8	19.87	20.22	21.5
		1	13	20.22	20.17	20.28	21.5
		1	24	19.65	19.8	19.59	21.5
		12	0	20.17	20	20.22	21.5
		12	6	20.23	20.18	20.27	21.5
		12	13	20.01	20.05	20.02	21.5
		25	0	20.07	20.13	20.12	21.5
	16QAM	1	0	20.2	20.17	20.68	21.5
		1	13	20.15	20.3	20.59	21.5
		1	24	20.05	20.03	19.95	21.5
		12	0	20.09	19.96	20.3	21.5
		12	6	20.17	20.11	20.25	21.5
		12	13	20.01	20.07	19.99	21.5
		25	0	20.08	20.07	20.01	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20450	20525	20600	
10MHz	QPSK	1	0	19.81	19.61	19.91	21.5
		1	25	20.21	20.29	20.41	21.5
		1	49	19.56	19.82	19.53	21.5
		25	0	19.98	19.95	20.23	21.5
		25	13	20.07	20.19	20.28	21.5

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 111 of 169

	16QAM	25	25	19.83	19.99	19.98	21.5
		50	0	19.96	20.03	20.15	21.5
		1	0	19.72	19.91	20.03	21.5
		1	25	20.64	20.46	20.96	21.5
		1	49	19.72	19.7	19.52	21.5
		25	0	19.92	19.82	20.07	21.5
		25	13	20	20.1	20.21	21.5
		25	25	19.8	19.89	19.83	21.5
		50	0	19.85	19.97	20.08	21.5

LTE Band 5 Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20407	Channel 20525	Channel 20643	Tune up
1.4MHz	QPSK	1	0	20.24	20.22	20.25	21.4
		1	2	20.36	20.28	20.38	21.4
		1	5	20.21	20.16	20.05	21.4
		3	0	20.28	20.25	20.34	21.4
		3	2	20.33	20.29	20.25	21.4
		3	3	20.28	20.22	20.14	21.4
		6	0	20.27	20.25	20.23	21.4
	16QAM	1	0	20.37	20.45	20.51	21.4
		1	2	20.57	20.51	20.58	21.4
		1	5	20.4	20.36	20.27	21.4
		3	0	20.3	20.27	20.38	21.4
		3	2	20.37	20.3	20.26	21.4
		3	3	20.29	20.25	20.18	21.4
		6	0	20.26	20.23	20.22	21.4
Bandwidth	Modulation	RB size	RB offset	Channel 20415	Channel 20525	Channel 20635	Tune up
3MHz	QPSK	1	0	20.05	19.93	20.07	21.4
		1	7	20.41	20.34	20.34	21.4
		1	14	19.85	19.91	19.63	21.4
		8	0	20.2	20.07	20.21	21.4
		8	4	20.24	20.19	20.22	21.4
		8	7	20.12	20.12	20.02	21.4
		15	0	20.13	20.12	20.12	21.4
	16QAM	1	0	20.08	20.1	20.37	21.4
		1	7	20.41	20.77	20.43	21.4
		1	14	20.18	20.07	19.44	21.4
		8	0	20.07	20.08	20.25	21.4
		8	4	20.15	20.24	20.19	21.4
		8	7	20.18	20.15	19.97	21.4
		15	0	20.06	20.07	20.1	21.4
Bandwidth	Modulation	RB size	RB offset	Channel 20425	Channel 20525	Channel 20625	Tune up
5MHz	QPSK	1	0	19.95	19.85	20.18	21.4
		1	13	20.27	20.23	20.3	21.4

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 112 of 169

		1	24	19.68	19.84	19.56	21.4
		12	0	20.16	20.03	20.27	21.4
		12	6	20.23	20.16	20.29	21.4
		12	13	20	20.03	20.01	21.4
		25	0	20.07	20.13	20.1	21.4
	16QAM	1	0	19.96	20.18	20.36	21.4
		1	13	20.55	20.41	20.59	21.4
		1	24	19.7	20	19.57	21.4
		12	0	20.13	19.98	20.21	21.4
		12	6	20.24	20.1	20.32	21.4
		12	13	19.93	19.89	19.91	21.4
		25	0	19.99	20.07	20.04	21.4
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Tune up</b>
				20450	20525	20600	
<b>10MHz</b>	QPSK	1	0	19.75	19.7	19.94	21.4
		1	25	20.23	20.32	<b>20.46</b>	21.4
		1	49	19.57	19.78	19.57	21.4
		25	0	19.98	19.94	20.21	21.4
		25	13	20.07	20.16	<b>20.27</b>	21.4
		25	25	19.82	19.96	19.96	21.4
		50	0	19.96	20.02	20.13	21.4
	16QAM	1	0	19.77	20.21	20.36	21.4
		1	25	20.86	20.53	20.47	21.4
		1	49	19.88	20.14	20.05	21.4
		25	0	19.95	19.88	20.13	21.4
		25	13	19.99	20.05	20.26	21.4
		25	25	19.81	19.95	19.89	21.4
		50	0	19.88	20.01	20.11	21.4

LTE Band 7 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
<b>5MHz</b>	QPSK	1	0	20.12	20.29	20.45	21.5
		1	13	20.47	20.62	20.75	21.5
		1	24	20.09	20.23	20.38	21.5
		12	0	20.38	20.5	20.7	21.5
		12	6	20.46	20.56	20.75	21.5
		12	13	20.34	20.45	20.61	21.5
		25	0	20.32	20.48	20.65	21.5
	16QAM	1	0	20.28	20.5	20.7	21.5
		1	13	20.61	20.75	20.98	21.5
		1	24	20.18	20.36	20.53	21.5
		12	0	20.32	20.45	20.68	21.5
		12	6	20.37	20.49	20.72	21.5
		12	13	20.27	20.4	20.53	21.5
		25	0	20.22	20.4	20.56	21.5
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Tune up</b>

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 113 of 169

				20800	21100	21400	
10MHz	QPSK	1	0	20.08	19.93	20.07	21.5
		1	25	20.49	20.55	20.52	21.5
		1	49	19.88	20.19	20.24	21.5
		25	0	20.24	20.17	20.17	21.5
		25	13	20.33	20.35	20.38	21.5
		25	25	20.15	20.3	20.38	21.5
		50	0	20.15	20.31	20.33	21.5
	16QAM	1	0	20.02	20.11	20.42	21.5
		1	25	20.16	20.56	20.85	21.5
		1	49	20.03	20.61	20.41	21.5
		25	0	20.17	20.1	20.14	21.5
		25	13	20.17	20.33	20.27	21.5
		25	25	20.02	20.28	20.27	21.5
		50	0	20.09	20.21	20.22	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	19.77	19.6	19.69	21.5
		1	38	20.39	20.49	20.4	21.5
		1	74	19.45	20.06	20.15	21.5
		36	0	20.17	20.04	20.03	21.5
		36	18	20.29	20.3	20.26	21.5
		36	39	19.9	20.32	20.28	21.5
		75	0	20.1	20.25	20.23	21.5
	16QAM	1	0	20.09	20.09	19.91	21.5
		1	38	20.31	20.74	20.76	21.5
		1	74	19.75	20.38	20.24	21.5
		36	0	20.13	20.01	20	21.5
		36	18	20.13	20.27	20.29	21.5
		36	39	19.9	20.31	20.25	21.5
		75	0	20.01	20.13	20.18	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	20.26	19.91	20.44	21.5
		1	50	20.5	20.52	20.44	21.5
		1	99	19.75	20.34	20.21	21.5
		50	0	20.37	20.34	20.47	21.5
		50	25	20.49	20.6	20.55	21.5
		50	50	20.15	20.61	20.49	21.5
		100	0	20.27	20.47	20.51	21.5
	16QAM	1	0	20.36	20.21	20.56	21.5
		1	50	20.98	21.05	20.76	21.5
		1	99	20.29	20.49	20.61	21.5
		50	0	20.35	20.31	20.42	21.5
		50	25	20.3	20.55	20.5	21.5
		50	50	20.14	20.63	20.48	21.5
		100	0	20.25	20.44	20.45	21.5



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 114 of 169

LTE Band 7 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	13.12	13.41	13.68	14.7
		1	13	13.55	13.79	14.08	14.7
		1	24	13.14	13.42	13.73	14.7
		12	0	13.42	13.63	13.97	14.7
		12	6	13.53	13.71	14.11	14.7
		12	13	13.41	13.62	13.95	14.7
		25	0	13.37	13.63	13.96	14.7
	16QAM	1	0	13.34	13.63	13.93	14.7
		1	13	13.77	13.93	14.29	14.7
		1	24	13.33	13.6	14.01	14.7
		12	0	13.37	13.57	13.95	14.7
		12	6	13.46	13.65	14.04	14.7
		12	13	13.35	13.59	13.91	14.7
		25	0	13.3	13.62	13.90	14.7
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	1	0	13.31	13.3	13.28	14.7
		1	25	13.87	13.91	13.87	14.7
		1	49	13.24	13.64	13.77	14.7
		25	0	13.67	13.58	13.61	14.7
		25	13	13.77	13.79	13.81	14.7
		25	25	13.5	13.74	13.85	14.7
		50	0	13.52	13.67	13.79	14.7
	16QAM	1	0	13.62	13.47	13.42	14.7
		1	25	14.03	14.35	14.13	14.7
		1	49	13.65	14.03	13.77	14.7
		25	0	13.57	13.47	13.59	14.7
		25	13	13.6	13.69	13.78	14.7
		25	25	13.49	13.68	13.74	14.7
		50	0	13.44	13.63	13.69	14.7
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	13.18	12.85	13.01	14.7
		1	38	13.7	13.85	13.73	14.7
		1	74	12.76	13.48	13.6	14.7
		36	0	13.58	13.41	13.44	14.7
		36	18	13.68	13.72	13.69	14.7
		36	39	13.4	13.74	13.76	14.7
		75	0	13.43	13.6	13.62	14.7
	16QAM	1	0	13.67	12.99	12.96	14.7
		1	38	13.72	14.05	13.92	14.7
		1	74	12.85	13.76	13.96	14.7
		36	0	13.45	13.33	13.34	14.7
		36	18	13.53	13.69	13.65	14.7

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 115 of 169

		36	39	13.19	13.7	13.7	14.7
		75	0	13.26	13.52	13.55	14.7
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	13.28	12.87	13.56	14.7
		1	50	13.69	<b>13.86</b>	13.73	14.7
		1	99	12.82	13.71	13.67	14.7
		50	0	13.56	13.41	13.69	14.7
		50	25	13.59	13.72	13.75	14.7
		50	50	13.21	<b>13.77</b>	13.71	14.7
		100	0	13.38	13.58	13.71	14.7
	16QAM	1	0	13.77	12.93	14.02	14.7
		1	50	13.9	14.38	14.09	14.7
		1	99	13.45	13.98	14.18	14.7
		50	0	13.53	13.35	13.6	14.7
		50	25	13.51	13.61	13.66	14.7
		50	50	13.11	13.71	13.59	14.7
		100	0	13.27	13.5	13.65	14.7

LTE Band 7 Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	13.17	13.37	13.65	14.7
		1	13	13.56	13.73	14.04	14.7
		1	24	13.16	13.41	13.61	14.7
		12	0	13.43	13.63	13.93	14.7
		12	6	13.54	13.71	14.02	14.7
		12	13	13.42	13.63	13.9	14.7
		25	0	13.39	13.63	13.92	14.7
	16QAM	1	0	13.34	13.63	13.93	14.7
		1	13	13.79	13.96	14.34	14.7
		1	24	13.38	13.62	13.94	14.7
		12	0	13.39	13.6	13.94	14.7
		12	6	13.51	13.7	14.02	14.7
		12	13	13.4	13.6	13.88	14.7
		25	0	13.32	13.57	13.87	14.7
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	1	0	13.39	13.27	13.4	14.7
		1	25	13.79	13.92	13.84	14.7
		1	49	13.21	13.56	13.71	14.7
		25	0	13.69	13.56	13.61	14.7
		25	13	13.77	13.76	13.81	14.7
		25	25	13.5	13.7	13.85	14.7
		50	0	13.53	13.64	13.78	14.7
	16QAM	1	0	13.29	13.58	13.44	14.7
		1	25	14.26	14.02	14.4	14.7

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 116 of 169

		1	49	13.76	13.89	13.85	14.7
		25	0	13.63	13.36	13.5	14.7
		25	13	13.62	13.63	13.71	14.7
		25	25	13.48	13.61	13.81	14.7
		50	0	13.46	13.58	13.73	14.7
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	13.2	12.83	13.04	14.7
		1	38	13.69	13.85	13.69	14.7
		1	74	12.72	13.33	13.53	14.7
		36	0	13.6	13.41	13.39	14.7
		36	18	13.64	13.7	13.64	14.7
		36	39	13.33	13.72	13.72	14.7
		75	0	13.38	13.58	13.58	14.7
	16QAM	1	0	13.24	13.18	13.45	14.7
		1	38	13.91	14.1	13.87	14.7
		1	74	13.04	13.5	13.8	14.7
		36	0	13.52	13.36	13.31	14.7
		36	18	13.6	13.61	13.6	14.7
		36	39	13.31	13.59	13.69	14.7
		75	0	13.3	13.51	13.44	14.7
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	13.41	13.02	13.76	14.7
		1	50	13.67	<b>13.81</b>	13.8	14.7
		1	99	12.81	13.66	13.71	14.7
		50	0	13.54	13.45	13.72	14.7
		50	25	13.51	13.75	13.76	14.7
		50	50	13.15	<b>13.84</b>	13.71	14.7
		100	0	13.32	13.64	13.74	14.7
	16QAM	1	0	13.38	13.26	14.02	14.7
		1	50	13.61	14.2	14.36	14.7
		1	99	13.17	14.04	14.02	14.7
		50	0	13.39	13.37	13.66	14.7
		50	25	13.45	13.7	13.74	14.7
		50	50	13.07	13.74	13.68	14.7
		100	0	13.26	13.54	13.69	14.7



### 8.1.1 Conducted Power of WIFI and BT

WIFI2.4G Full Power						
Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11b	1	2412	1	17	15.86	Yes
	6	2437		17	15.03	No
	11	2462		17	15.79	No
802.11g	1	2412	6	17.5	<b>16.50</b>	No
	6	2437		17.5	15.78	No
	11	2462		17.5	16.39	No
802.11n HT20	1	2412	6.5	16.5	14.96	No
	6	2437		16.5	14.56	No
	11	2462		16.5	14.94	No
802.11n HT40	3	2422	13.5	16	13.86	No
	6	2437		16	14.34	No
	9	2452		16	14.98	No

WIFI2.4G infrared proximity sensor on						
Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11b	1	2412	1	11	9.90	Yes
	6	2437		11	9.02	No
	11	2462		11	9.82	No
802.11g	1	2412	6	11	10.54	No
	6	2437		11	9.79	No
	11	2462		11	10.48	No
802.11n HT20	1	2412	6.5	11	8.66	No
	6	2437		11	8.04	No
	11	2462		11	8.58	No
802.11n HT40	3	2422	13.5	11	8.03	No
	6	2437		11	8.73	No
	9	2452		11	9.29	No

Table 16: Conducted Power Of WIFI

#### Note:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
- 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
  - 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

BT			Tune up (dBm)	Average Conducted Power(dBm)
Modulation	Channel	Frequency(MHz)		GFSK
GFSK	0	2402	9.5	8.3
	39	2441		8.2
	78	2480		8.3
π/4DQPSK	0	2402		8.2
	39	2441		8.3
	78	2480		8.2
8DPSK	0	2402		8.4
	39	2441		8.2
	78	2480		8.4

BLE			Tune up (dBm)	Average Conducted Power(dBm)
Modulation	Channel	Frequency(MHz)		GFSK
GFSK	0	2402	6	3.83
	19	2440		2.46
	39	2480		2.04

Table 17: Conducted Power Of BT



## 8.2 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Wi-Fi	2.48	Head	11	12.59	0	3.97	3	N
		Body-worn	17.5	56.23	15	5.90	3	N
		Hotspot	17.5	56.23	10	8.86	3	N
Bluetooth	2.48	Head	9.5	8.91	0	2.81	3	Y
		Body-worn	9.5	8.91	15	0.94	3	Y
		Limbs	9.5	8.91	0	2.81	7.5	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})] \leq 3.0$$
for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.



## 8.3 Measurement of SAR Data

### 8.3.1 SAR Result Of GSM850

Main Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	190/836.6	1:8.3	0.168	0.01	31.99	33.5	1.416	0.238	22.1
Left tilted	GSM	190/836.6	1:8.3	0.115	0.12	31.99	33.5	1.416	0.163	22.1
Right cheek	GSM	190/836.6	1:8.3	0.216	-0.08	31.99	33.5	1.416	<b>0.306</b>	22.1
Right tilted	GSM	190/836.6	1:8.3	0.112	0.11	31.99	33.5	1.416	0.159	22.1
Head Test Data at the worst case with SIM2										
Right cheek	GSM	190/836.6	1:8.3	0.208	0.13	31.99	33.5	1.416	0.294	22.1
Head Test Data at the worst case with Battery 2#										
Right cheek	GSM	190/836.6	1:8.3	0.206	0.03	31.99	33.5	1.416	0.292	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	190/836.6	1:8.3	0.203	0.06	31.99	33.5	1.416	0.287	22.1
Back side	GSM	190/836.6	1:8.3	0.29	0.01	31.99	33.5	1.416	<b>0.411</b>	22.1
Front side	GPRS 4TS	190/836.6	1:2.075	0.194	0.01	26.31	27.5	1.315	0.255	22.1
Back side	GPRS 4TS	190/836.6	1:2.075	0.27	0.01	26.31	27.5	1.315	0.355	22.1
Body worn Test data with SIM2										
Back side	GSM	190/836.6	1:8.3	0.283	0.02	31.99	33.5	1.416	0.401	22.1
Body worn Test data with Battery 2#										
Back side	GSM	190/836.6	1:8.3	0.287	0.02	31.99	33.5	1.416	0.406	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	190/836.6	1:2.075	0.198	0.152	26.31	27.5	1.315	0.260	22.1
Back side	GPRS 4TS	190/836.6	1:2.075	0.276	0.02	26.31	27.5	1.315	0.363	22.1
Left side	GPRS 4TS	190/836.6	1:2.075	0.148	0.06	26.31	27.5	1.315	0.195	22.1
Right side	GPRS 4TS	190/836.6	1:2.075	0.289	0.04	26.31	27.5	1.315	<b>0.380</b>	22.1
Bottom side	GPRS 4TS	190/836.6	1:2.075	0.157	0.09	26.31	27.5	1.315	0.206	22.1
Hotspot Test Data at the worst case with SIM2(10mm)										
Right side	GPRS 4TS	190/836.6	1:2.075	0.281	0.03	26.31	27.5	1.315	0.370	22.1
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Right side	GPRS 4TS	190/836.6	1:2.075	0.276	0.04	26.31	27.5	1.315	0.363	22.1





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 121 of 169

Second Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	190/836.6	1:8.3	0.499	0.01	29.72	31.3	1.439	0.718	22.1
Left tilted	GSM	190/836.6	1:8.3	0.364	0.11	29.72	31.3	1.439	0.524	22.1
Right cheek	GSM	190/836.6	1:8.3	0.757	0.12	29.72	31.3	1.439	<b>1.089</b>	22.1
Right tilted	GSM	190/836.6	1:8.3	0.651	0.01	29.72	31.3	1.439	0.937	22.1
Right cheek	GSM	128/824.2	1:8.3	0.768	-0.11	29.83	31.3	1.403	1.077	22.1
Right cheek	GSM	251/848.8	1:8.3	0.639	0.04	29.6	31.3	1.479	0.945	22.1
Head Test Data at the worst case with SIM2										
Right cheek	GSM	190/836.6	1:8.3	0.666	-0.07	29.72	31.3	1.439	0.958	22.1
Head Test Data at the worst case with Battery 2#										
Right cheek	GSM	190/836.6	1:8.3	0.667	0.05	29.72	31.3	1.439	0.960	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	190/836.6	1:8.3	0.116	0.01	31.53	33.5	1.574	0.183	22.1
Back side	GSM	190/836.6	1:8.3	0.136	0.05	31.53	33.5	1.574	<b>0.214</b>	22.1
Front side	GPRS 4TS	190/836.6	1:2.075	0.105	0.02	25.73	27.5	1.503	0.158	22.1
Back side	GPRS 4TS	190/836.6	1:2.075	0.123	-0.02	25.73	27.5	1.503	0.185	22.1
Body worn Test data with SIM2										
Back side	GSM	190/836.6	1:8.3	0.133	0.05	31.53	33.5	1.574	0.209	22.1
Body worn Test data with Battery 2#										
Back side	GSM	190/836.6	1:8.3	0.134	0.05	31.53	33.5	1.574	0.211	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	190/836.6	1:2.075	0.138	0.02	23.71	25.5	1.510	0.208	22.1
Back side	GPRS 4TS	190/836.6	1:2.075	0.109	0.05	23.71	25.5	1.510	0.165	22.1
Left side	GPRS 4TS	190/836.6	1:2.075	0.141	0.07	23.71	25.5	1.510	0.213	22.1
Top side	GPRS 4TS	190/836.6	1:2.075	0.18	0.08	23.71	25.5	1.510	0.272	22.1
Hotspot Test Data at the worst case with SIM2(10mm)										
Top side	GPRS 4TS	190/836.6	1:2.075	0.174	0.09	23.71	25.5	1.510	0.263	22.1
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Top side	GPRS 4TS	190/836.6	1:2.075	0.181	0.02	23.71	25.5	1.510	<b>0.273</b>	22.1

Table 18: SAR of GSM850 for Head and Body.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).



### 8.3.2 SAR Result Of GSM1900

Main Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	661/1880	1:8.3	0.0354	0.06	29.66	30.7	1.271	0.045	22.1
Left tilted	GSM	661/1880	1:8.3	0.0358	0.01	29.66	30.7	1.271	0.045	22.1
Right cheek	GSM	661/1880	1:8.3	0.0536	0.06	29.66	30.7	1.271	<b>0.068</b>	22.1
Right tilted	GSM	661/1880	1:8.3	0.0262	0.07	29.66	30.7	1.271	0.033	22.1
Head Test Data at the worst case with SIM2										
Right cheek	GSM	661/1880	1:8.3	0.0465	0.01	29.66	30.7	1.271	0.059	22.1
Head Test Data at the worst case with Battery 2#										
Right cheek	GSM	661/1880	1:8.3	0.0479	0.05	29.66	30.7	1.271	0.061	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	661/1880	1:8.3	0.247	0.08	29.66	30.7	1.271	0.314	22.1
Back side	GSM	661/1880	1:8.3	0.352	0.12	29.66	30.7	1.271	<b>0.447</b>	22.1
Front side	GPRS 4TS	661/1880	1:2.075	0.213	0.04	23.55	24.7	1.303	0.278	22.1
Back side	GPRS 4TS	661/1880	1:4.15	0.238	-0.08	23.55	24.7	1.303	0.310	22.1
Body worn Test Data at the worst case with SIM2										
Back side	GSM	661/1880	1:8.3	0.35	-0.12	29.66	30.7	1.271	0.445	22.1
Body worn Test Data at the worst case with Battery 2#										
Back side	GSM	661/1880	1:8.3	0.325	0.09	29.66	30.7	1.271	0.413	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	661/1880	1:2.075	0.296	0.09	22.07	23.2	1.297	0.384	22.1
Back side	GPRS 4TS	661/1880	1:2.075	0.358	0.07	22.07	23.2	1.297	0.464	22.1
Left side	GPRS 4TS	661/1880	1:2.075	0.0173	0.05	22.07	23.2	1.297	0.022	22.1
Right side	GPRS 4TS	661/1880	1:2.075	0.035	0.06	22.07	23.2	1.297	0.045	22.1
Bottom side	GPRS 4TS	661/1880	1:2.075	0.79	0.08	22.07	23.2	1.297	1.025	22.1
Bottom side	GPRS 4TS	512/1850.2	1:2.075	0.544	0.06	22.11	23.2	1.285	0.699	22.1
Bottom side	GPRS 4TS	810/1909.8	1:2.075	0.827	0.07	22	23.2	1.318	<b>1.090</b>	22.1
Bottom side Repeat	GPRS 4TS	810/1909.8	1:2.075	0.756	-0.16	22	23.2	1.318	0.997	22.1
Hotspot Test Data at the worst case with SIM2(10mm)										
Bottom side	GPRS 4TS	810/1909.8	1:2.075	0.818	0.06	22	23.2	1.318	1.078	22.1
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Bottom side	GPRS 4TS	810/1909.8	1:2.075	0.814	0.07	22	23.2	1.318	1.073	22.1



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 123 of 169

Second Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	661/1880	1:8.3	0.346	0.03	28.21	29.2	1.256	0.435	22.1
Left tilted	GSM	661/1880	1:8.3	0.213	0.04	28.21	29.2	1.256	0.268	22.1
Right cheek	GSM	661/1880	1:8.3	0.641	-0.1	28.21	29.2	1.256	0.805	22.1
Right tilted	GSM	661/1880	1:8.3	0.462	-0.15	28.21	29.2	1.256	0.580	22.1
Right cheek	GSM	512/1850.2	1:8.3	0.731	-0.04	28.25	29.2	1.245	0.910	22.1
Right cheek	GSM	810/1909.8	1:8.3	0.739	-0.14	28.17	29.2	1.268	<b>0.937</b>	22.1
Head Test Data at the worst case with SIM2										
Right cheek	GSM	810/1909.8	1:8.3	0.728	-0.01	28.17	29.2	1.268	0.923	22.1
Head Test Data at the worst case with Battery 2#										
Right cheek	GSM	810/1909.8	1:8.3	0.531	-0.1	28.17	29.2	1.268	0.673	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	661/1880	1:8.3	0.0454	0.09	29.55	30.7	1.303	0.059	22.1
Back side	GSM	661/1880	1:8.3	0.0453	0.18	29.55	30.7	1.303	0.059	22.1
Front side	GPRS 4TS	661/1880	1:2.075	0.0473	0.08	23.41	24.7	1.346	0.064	22.1
Back side	GPRS 4TS	661/1880	1:2.075	0.048	0.1	23.41	24.7	1.346	0.065	22.1
Body worn Test Data at the worst case with SIM2										
Back side	GPRS 4TS	661/1880	1:2.075	0.0539	0.19	23.41	24.7	1.346	0.073	22.1
Body worn Test Data at the worst case with Battery 2#										
Back side	GPRS 4TS	661/1880	1:2.075	0.0583	0.02	23.41	24.7	1.346	<b>0.078</b>	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	661/1880	1:2.075	0.06	0.05	21.89	23.2	1.352	0.081	22.1
Back side	GPRS 4TS	661/1880	1:2.075	0.0569	0.09	21.89	23.2	1.352	0.077	22.1
Left side	GPRS 4TS	661/1880	1:2.075	0.0765	0.18	21.89	23.2	1.352	0.103	22.1
Top side	GPRS 4TS	661/1880	1:2.075	0.0319	0.06	21.89	23.2	1.352	0.043	22.1
Hotspot Test Data at the worst case with SIM2(10mm)										
Left side	GPRS 4TS	661/1880	1:2.075	0.0692	0.13	21.89	23.2	1.352	0.094	22.1
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Left side	GPRS 4TS	661/1880	1:2.075	0.0851	0.07	21.89	23.2	1.352	<b>0.115</b>	22.1

Table 19: SAR of GSM1900 for Head and Body.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 124 of 169

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	512/1850.2	0.827	0.756	1.09	N/A	N/A
Note: 1) When the original highest measured SAR is $\geq 0.80$ W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was $> 1.20$ or when the original or repeated measurement was $\geq 1.45$ W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was $\geq 1.5$ W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is $> 1.20$ .						
4) Repeated measurements are not required when the original highest measured SAR is $< 0.80$ W/kg						

Table 20: SAR Measurement Variability Results

Main Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Limb Test data(Separate 10mm)										
Bottom side	GPRS 4TS	512/1850.2	1:2.075	1.44	0.02	23.55	24.7	1.303	<b>1.877</b>	22.1
Limb Test Data at the worst case with Battery 2#(10mm)										
Bottom side	GPRS 4TS	810/1909.8	1:2.075	1.38	0.02	23.55	24.7	1.303	1.798	22.1

Table 21: SAR of GSM1900 for Limb.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 2$  W/kg then testing at the other channels is not required for such test configuration(s).



### 8.3.3 SAR Result Of WCDMA Band II

Main Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	9400/1880	1:1	0.0655	0.04	23.04	24.3	1.337	0.088	22.3
Left tilted	RMC	9400/1880	1:1	0.0758	0.16	23.04	24.3	1.337	0.101	22.3
Right cheek	RMC	9400/1880	1:1	0.103	0.04	23.04	24.3	1.337	<b>0.138</b>	22.3
Right tilted	RMC	9400/1880	1:1	0.0792	0.09	23.04	24.3	1.337	0.106	22.3
Head Test Data at the worst case with SIM2										
Right cheek	RMC	9400/1880	1:1	0.087	0.04	23.04	24.3	1.337	0.116	22.3
Head Test Data at the worst case with Battery 2#										
Right cheek	RMC	9400/1880	1:1	0.1	0.05	23.04	24.3	1.337	0.134	22.3
Body worn Test data(Separate 15mm) Sensor off										
Front side	RMC	9400/1880	1:1	0.497	-0.06	23.04	24.3	1.337	0.664	22.3
Body worn Test data(Separate 15mm) Sensor on										
Back side	RMC	9400/1880	1:1	0.392	-0.16	21.97	23.3	1.358	0.532	22.3
Body Worn Test data(Separate 16m) Sensor off										
Back side	RMC	9400/1880	1:1	0.508	-0.08	23.04	24.3	1.337	<b>0.679</b>	22.3
Body worn Test Data at the worst case with SIM2 Sensor off										
Back side	RMC	9400/1880	1:1	0.467	0.01	23.04	24.3	1.337	0.624	22.3
Body worn Test Data at the worst case with Battery 2# Sensor off										
Back side	RMC	9400/1880	1:1	0.393	0.02	23.04	24.3	1.337	0.525	22.3
Hotspot Test data(Separate 10mm) Sensor on										
Front side	RMC	9400/1880	1:1	0.394	0.04	18.92	20.3	1.374	0.541	22.3
Back side	RMC	9400/1880	1:1	0.473	0.07	18.92	20.3	1.374	0.650	22.3
Bottom side	RMC	9400/1880	1:1	0.722	0.09	18.92	20.3	1.374	0.992	22.3
Bottom side	RMC	9262/1852.4	1:1	0.634	0.1	18.9	20.3	1.380	0.875	22.3
Bottom side	RMC	9538/1907.6	1:1	0.769	0.01	18.93	20.3	1.371	<b>1.054</b>	22.3
Hotspot Test data(Separate 10mm) Sensor off										
Left side	RMC	9400/1880	1:1	0.051	0.01	20.02	21.3	1.343	0.068	22.3
Right side	RMC	9400/1880	1:1	0.034	0.06	20.02	21.3	1.343	0.046	22.3
Hotspot Test data(Separate 12mm) Sensor off										
Front side	RMC	9400/1880	1:1	0.459	0.01	20.02	21.3	1.343	0.616	22.3
Hotspot Test data(Separate 16m) Sensor off										
Back side	RMC	9538/1907.6	1:1	0.25	0.138	20.02	21.3	1.343	0.336	22.3
Bottom side	RMC	9538/1907.6	1:1	0.503	0.07	20.02	21.3	1.343	0.675	22.3
Hotspot Test Data at the worst case with SIM2(10mm) Sensor on										
Bottom side	RMC	9538/1907.6	1:1	0.745	0.01	18.93	20.3	1.371	1.021	22.3
Hotspot Test Data at the worst case with Battery 2#(10mm) Sensor on										
Bottom side	RMC	9538/1907.6	1:1	0.754	0.338	18.93	20.3	1.371	1.034	22.1



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 126 of 169

Second Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	9400/1880	1:1	0.206	0.09	17.71	19.3	1.442	0.297	22.3
Left tilted	RMC	9400/1880	1:1	0.154	0.05	17.71	19.3	1.442	0.222	22.3
Right cheek	RMC	9400/1880	1:1	0.557	-0.06	17.71	19.3	1.442	0.803	22.3
Right tilted	RMC	9400/1880	1:1	0.292	0.01	17.71	19.3	1.442	0.421	22.3
Right cheek	RMC	9262/1852.4	1:1	0.461	-0.04	17.83	19.3	1.403	0.647	22.3
Right cheek	RMC	9538/1907.6	1:1	0.582	0.12	17.67	19.3	1.455	<b>0.847</b>	22.3
Head Test Data at the worst case with SIM2										
Right cheek	RMC	9538/1907.6	1:1	0.569	0.01	17.67	19.3	1.455	0.828	22.3
Head Test Data at the worst case with Battery 2#										
Right cheek	RMC	9538/1907.6	1:1	0.463	0.08	17.67	19.3	1.455	0.674	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	9400/1880	1:1	0.0843	-0.01	22.71	24.3	1.442	0.122	22.3
Back side	RMC	9400/1880	1:1	0.0844	0.09	22.71	24.3	1.442	0.122	22.3
Body worn Test Data at the worst case with SIM2										
Back side	RMC	9400/1880	1:1	0.0856	0.06	22.71	24.3	1.442	0.123	22.3
Body worn Test Data at the worst case with Battery 2#										
Back side	RMC	9400/1880	1:1	0.0865	0.04	22.71	24.3	1.442	<b>0.125</b>	22.3
Hotspot Test data(Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.038	0.01	17.73	19.3	1.435	0.055	22.3
Back side	RMC	9400/1880	1:1	0.046	0.15	17.73	19.3	1.435	0.066	22.3
Left side	RMC	9400/1880	1:1	0.061	0.05	17.73	19.3	1.435	0.088	22.3
Top side	RMC	9400/1880	1:1	0.027	0.17	17.73	19.3	1.435	0.039	22.3
Hotspot Test Data at the worst case with SIM2(10mm)										
Left side	RMC	9400/1880	1:1	0.06	-0.03	17.73	19.3	1.435	0.086	22.3
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Left side	RMC	9400/1880	1:1	0.077	0.16	17.73	19.3	1.435	<b>0.111</b>	22.1

Table 22: SAR of WCDMA Band II for Head and Body

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 127 of 169

Main Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Limb Test data(Separate 0mm) Sensor on										
Front side	RMC	9262/1852.4	1:1	1.638	0.04	21.99	23.3	1.352	2.215	22.3
Front side	RMC	9400/1880	1:1	1.61	0.05	21.97	23.3	1.358	2.187	22.3
Front side	RMC	9538/1907.6	1:1	1.46	0.04	21.98	23.3	1.355	1.979	22.3
Back side	RMC	9400/1880	1:1	1.84	0.01	21.97	23.3	1.358	2.499	22.3
Back side	RMC	9262/1852.4	1:1	2.02	0.08	21.99	23.3	1.352	2.731	22.3
Back side	RMC	9538/1907.6	1:1	1.61	-0.09	21.98	23.3	1.355	2.182	22.3
Bottom side	RMC	9400/1880	1:1	2.11	0.09	21.97	23.3	1.358	2.866	22.3
Bottom side	RMC	9262/1852.4	1:1	2.36	0.09	21.99	23.3	1.352	<b>3.191</b>	22.3
Bottom side	RMC	9538/1907.6	1:1	1.83	-0.09	21.98	23.3	1.355	2.480	22.3
Limb Test data(Separate 0mm With SIM2) Sensor on										
Bottom side	RMC	9262/1852.4	1:1	2.36	0.16	21.99	23.3	1.352	<b>3.191</b>	22.3
Limb Test data(Separate 0mm With Battery2) Sensor on										
Bottom side	RMC	9262/1852.4	1:1	2.35	-0.12	21.99	23.3	1.352	3.177	22.3
Limb Test data(Separate 12mm) Sensor off										
Front side	RMC	9400/1880	1:1	0.435	0.19	23.04	24.3	1.337	0.581	22.3
Limb Test data(Separate 16mm) Sensor off										
Back side	RMC	9400/1880	1:1	0.276	-0.08	23.04	24.3	1.337	0.369	22.3
Bottom side	RMC	9400/1880	1:1	0.424	0.07	23.04	24.3	1.337	0.567	22.3

Table 23: SAR of WCDMA Band II for Limbs

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 2.0$  W/kg then testing at the other channels is not required for such test configuration(s).





### 8.3.4 SAR Result Of WCDMA Band IV

Main Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	1412/1732.4	1:1	0.0627	-0.07	23.3	24.3	1.259	0.079	22.3
Left tilted	RMC	1412/1732.4	1:1	0.0625	0.05	23.3	24.3	1.259	0.079	22.3
Right cheek	RMC	1412/1732.4	1:1	0.096	0.01	23.3	24.3	1.259	0.121	22.3
Right tilted	RMC	1412/1732.4	1:1	0.0517	0.07	23.3	24.3	1.259	0.065	22.3
Head Test Data at the worst case with SIM2										
Right cheek	RMC	1412/1732.4	1:1	0.111	0.03	23.3	24.3	1.259	<b>0.140</b>	22.3
Head Test Data at the worst case with Battery 2#										
Right cheek	RMC	1412/1732.4	1:1	0.099	0.04	23.3	24.3	1.259	0.125	22.3
Body worn Test data(Separate 15mm) Sensor Off										
Front side	RMC	1412/1732.4	1:1	0.41	0.05	23.3	24.3	1.259	<b>0.516</b>	22.3
Body worn Test data(Separate 15mm) Sensor on										
Back side	RMC	1412/1732.4	1:1	0.303	0.01	21.26	22.3	1.271	0.385	22.3
Body worn Test data(Separate 16m) Sensor off										
Back side	RMC	1412/1732.4	1:1	0.26	0.08	20.34	21.3	1.247	0.324	22.3
Body worn Test Data at the worst case with SIM2 Sensor of										
Front side	RMC	1412/1732.4	1:1	0.375	0.18	23.3	24.3	1.259	0.472	22.3
Body worn Test Data at the worst case with Battery 2# Sensor of										
Front side	RMC	1412/1732.4	1:1	0.366	0.18	23.3	24.3	1.259	0.461	22.3
Hotspot Test data(Separate 10mm) Sensor On										
Front side	RMC	1412/1732.4	1:1	0.257	-0.07	18.23	19.3	1.279	0.329	22.3
Back side	RMC	1412/1732.4	1:1	0.328	0.05	18.23	19.3	1.279	0.420	22.3
Bottom side	RMC	1412/1732.4	1:1	0.585	0.16	18.23	19.3	1.279	<b>0.748</b>	22.3
Hotspot Test data(Separate 10mm) Sensor off										
Left side	RMC	1412/1732.4	1:1	0.074	0.17	20.34	21.3	1.247	0.092	22.3
Right side	RMC	1412/1732.4	1:1	0.109	0.04	20.34	21.3	1.247	0.136	22.3
Hotspot Test data(Separate 12mm) Sensor off										
Front side	RMC	1412/1732.4	1:1	0.424	0.15	20.34	21.3	1.247	0.529	22.3
Hotspot Test data(Separate 16mm) Sensor off										
Bottom side	RMC	1412/1732.4	1:1	0.377	0.07	20.34	21.3	1.247	0.470	22.3
Back side	RMC	1412/1732.4	1:1	0.26	0.08	20.34	21.3	1.247	0.324	22.3
Hotspot Test Data at the worst case with SIM2(Separate 10mm)										
Bottom side	RMC	1412/1732.4	1:1	0.576	0.04	18.23	19.3	1.279	0.737	22.3
Hotspot Test Data at the worst case with Battery 2#(Separate 10mm)										
Bottom side	RMC	1412/1732.4	1:1	0.38	0.01	18.23	19.3	1.279	0.486	22.3





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 129 of 169

Second Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	1412/1732.4	1:1	0.275	0.01	20.54	21.8	1.337	0.368	22.3
Left tilted	RMC	1412/1732.4	1:1	0.182	0.01	20.54	21.8	1.337	0.243	22.3
Right cheek	RMC	1412/1732.4	1:1	0.548	0.18	20.54	21.8	1.337	<b>0.732</b>	22.3
Right tilted	RMC	1412/1732.4	1:1	0.396	0.08	20.54	21.8	1.337	0.529	22.3
Head Test Data at the worst case with SIM2										
Right cheek	RMC	1412/1732.4	1:1	0.503	-0.02	20.54	21.8	1.337	0.672	22.3
Head Test Data at the worst case with Battery 2#										
Right cheek	RMC	1412/1732.4	1:1	0.511	-0.17	20.54	21.8	1.337	0.683	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	1412/1732.4	1:1	0.073	0.03	23.1	24.3	1.318	0.096	22.3
Back side	RMC	1412/1732.4	1:1	0.097	0.03	23.1	24.3	1.318	0.128	22.3
Body worn Test Data at the worst case with SIM2										
Back side	RMC	1412/1732.4	1:1	0.098	0.07	23.1	24.3	1.318	<b>0.129</b>	22.3
Body worn Test Data at the worst case with Battery 2#										
Back side	RMC	1412/1732.4	1:1	0.0889	0.09	23.1	24.3	1.318	0.117	22.3
Hotspot Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.107	0.06	20.57	21.8	1.327	0.142	22.3
Back side	RMC	1412/1732.4	1:1	0.148	0.07	20.57	21.8	1.327	<b>0.196</b>	22.3
Left side	RMC	1412/1732.4	1:1	0.106	-0.1	20.57	21.8	1.327	0.141	22.3
Top side	RMC	1412/1732.4	1:1	0.076	0.09	20.57	21.8	1.327	0.101	22.3
Hotspot Test Data at the worst case with SIM2										
Back side	RMC	1412/1732.4	1:1	0.135	0.01	20.57	21.8	1.327	0.179	22.3
Hotspot Test Data at the worst case with Battery 2#										
Back side	RMC	1412/1732.4	1:1	0.0868	0.01	20.57	21.8	1.327	0.115	22.3

Table 24: SAR of WCDMA Band IV for Head and Body

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).



Main Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Limb Test data(Separate 0mm) Sensor On										
Back side	RMC	1412/1732.4	1:1	1.39	0.09	21.26	22.3	1.271	1.766	22.3
Bottom side	RMC	1412/1732.4	1:1	2.14	0.09	21.26	22.3	1.271	2.719	22.3
Bottom side	RMC	1312/1712.4	1:1	2.11	0.02	21.25	22.3	1.274	2.687	22.3
Bottom side	RMC	1513/1752.6	1:1	2.06	-0.08	21.11	22.3	1.315	2.709	22.3
Limb Test Data at the worst case with Battery 2#(Separate 0mm) Sensor On										
Bottom side	RMC	1412/1732.4	1:1	2.15	0.06	21.26	22.3	1.271	<b>2.732</b>	22.3
Limb Test data(Separate 16mm) Sensor off										
Back side	RMC	1412/1732.4	1:1	0.296	0.16	23.3	24.3	1.259	0.373	22.3
Bottom side	RMC	1412/1732.4	1:1	0.461	0.08	23.3	24.3	1.259	0.580	22.3
Limb Test Data at the worst case with Battery 2#(Separate 16mm) Sensor off										
Bottom side	RMC	1412/1732.4	1:1	0.419	0.03	23.3	24.3	1.259	0.527	22.3

Table 25: SAR of WCDMA Band IV for limbs

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 2$  W/kg then testing at the other channels is not required for such test configuration(s).



### 8.3.5 SAR Result Of WCDMA Band V

Main Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	4182/836.4	1:1	0.183	0.04	23.45	24.8	1.365	0.250	22.3
Left tilted	RMC	4182/836.4	1:1	0.104	0.08	23.45	24.8	1.365	0.142	22.3
Right cheek	RMC	4182/836.4	1:1	0.222	0.08	23.45	24.8	1.365	0.303	22.3
Right tilted	RMC	4182/836.4	1:1	0.119	0.07	23.45	24.8	1.365	0.162	22.3
Head Test Data at the worst case with SIM2										
Right cheek	RMC	4182/836.4	1:1	0.233	-0.01	23.45	24.8	1.365	<b>0.318</b>	22.3
Head Test Data at the worst case with Battery 2#										
Right cheek	RMC	4182/836.4	1:1	0.225	-0.16	23.45	24.8	1.365	0.307	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	4182/836.4	1:1	0.194	0.03	23.45	24.8	1.365	0.265	22.3
Back side	RMC	4182/836.4	1:1	0.283	-0.07	23.45	24.8	1.365	<b>0.386</b>	22.3
Body worn Test Data at the worst case with SIM2										
Back side	RMC	4182/836.4	1:1	0.279	0.1	23.45	24.8	1.365	0.381	22.3
Body worn Test Data at the worst case with Battery 2#										
Back side	RMC	4182/836.4	1:1	0.275	-0.05	23.45	24.8	1.365	0.375	22.3
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.206	0.01	23.45	24.8	1.365	0.281	22.3
Back side	RMC	4182/836.4	1:1	0.291	0.01	23.45	24.8	1.365	0.397	22.3
Left side	RMC	4182/836.4	1:1	0.18	0.06	23.45	24.8	1.365	0.246	22.3
Right side	RMC	4182/836.4	1:1	0.336	0.06	23.45	24.8	1.365	<b>0.458</b>	22.3
Bottom side	RMC	4182/836.4	1:1	0.18	0.09	23.45	24.8	1.365	0.246	22.3
Hotspot Test Data at the worst case with SIM2										
Right side	RMC	4182/836.4	1:1	0.327	0.06	23.45	24.8	1.365	0.446	22.3
Hotspot Test Data at the worst case with Battery 2#										
Right side	RMC	4182/836.4	1:1	0.321	0.04	23.45	24.8	1.365	0.438	22.3



Second Antenna Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	4182/836.6	1:1	0.435	-0.05	20.38	21.8	1.387	0.603	22.3
Left tilted	RMC	4182/836.6	1:1	0.395	0.08	20.38	21.8	1.387	0.548	22.3
Right cheek	RMC	4182/836.6	1:1	0.646	0.07	20.38	21.8	1.387	0.896	22.3
Right tilted	RMC	4182/836.4	1:1	0.628	0.01	20.38	21.8	1.387	0.871	22.3
Right cheek	RMC	4132/826.4	1:1	0.63	0.12	20.31	21.8	1.409	0.888	22.3
Right cheek	RMC	4233/846.6	1:1	0.653	0.05	20.35	21.8	1.396	<b>0.912</b>	22.3
Head Test Data at the worst case with SIM2										
Right cheek	RMC	4233/846.6	1:1	0.63	-0.07	20.35	21.8	1.396	0.880	22.3
Head Test Data at the worst case with Battery 2#										
Right cheek	RMC	4233/846.6	1:1	0.637	-0.02	20.35	21.8	1.396	0.889	22.3
Body worn Test data (Separate 15mm)										
Front side	RMC	4182/836.4	1:1	0.121	0.14	23.3	24.8	1.413	<b>0.171</b>	22.3
Back side	RMC	4182/836.4	1:1	0.117	0.06	23.3	24.8	1.413	0.165	22.3
Body wornTest Data at the worst case with SIM2										
Front side	RMC	4182/836.4	1:1	0.116	0.02	23.3	24.8	1.413	0.164	22.3
Body worn Test Data at the worst case with Battery 2#										
Front side	RMC	4182/836.4	1:1	0.116	0.06	23.3	24.8	1.413	0.164	22.3
Hotspot Test data (Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.124	0.16	20.25	21.8	1.429	<b>0.177</b>	22.3
Back side	RMC	4182/836.4	1:1	0.093	0.09	20.25	21.8	1.429	0.133	22.3
Left side	RMC	4182/836.4	1:1	0.103	0.04	20.25	21.8	1.429	0.147	22.3
Top side	RMC	4182/836.4	1:1	0.111	-0.03	20.25	21.8	1.429	0.159	22.3
Hotspot Test Data at the worst case with SIM2										
Front side	RMC	4182/836.4	1:1	0.111	0.06	20.25	21.8	1.429	0.159	22.3
Hotspot Test Data at the worst case with Battery 2#										
Front side	RMC	4182/836.4	1:1	0.109	0.01	20.25	21.8	1.429	0.156	22.3

Table 26: SAR of WCDMA Band V for Head and Body.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).



### 8.3.6 SAR Result Of LTE Band 2

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_50 offset)											
Left cheek	20	QPSK	19100/1900	1:1	0.091	0.01	22.3	22.7	1.096	0.100	22.3
Left tilted	20	QPSK	19100/1900	1:1	0.088	-0.02	22.3	22.7	1.096	0.096	22.3
Right cheek	20	QPSK	19100/1900	1:1	0.165	0.09	22.3	22.7	1.096	<b>0.181</b>	22.3
Right tilted	20	QPSK	19100/1900	1:1	0.099	0.07	22.3	22.7	1.096	0.109	22.3
Head Test data(50%RB_25 offset)											
Left cheek	20	QPSK	19100/1900	1:1	0.068	0.06	22.22	23	1.197	0.081	22.3
Left tilted	20	QPSK	19100/1900	1:1	0.063	0.05	22.22	23	1.197	0.075	22.3
Right cheek	20	QPSK	19100/1900	1:1	0.123	0.06	22.22	23	1.197	0.147	22.3
Right tilted	20	QPSK	19100/1900	1:1	0.075	0.01	22.22	23	1.197	0.090	22.3
Head Test Data at the worst case with SIM2											
Right cheek	20	QPSK	19100/1900	1:1	0.121	0.01	22.3	22.7	1.096	0.133	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	20	QPSK	19100/1900	1:1	0.113	0.01	22.3	22.7	1.096	0.124	22.3
Body worn Test data(Separate 15mm 1RB_50 offset) Sensor off											
Front side	20	QPSK	19100/1900	1:1	0.633	0.07	22.3	22.7	1.096	0.694	22.3
Back side	20	QPSK	19100/1900	1:1	0.67	-0.04	22.3	22.7	1.096	<b>0.735</b>	22.3
Body worn Test data (Separate 15mm 50%RB_25 offset) Sensor off											
Front side	20	QPSK	19100/1900	1:1	0.483	0.03	22.22	23.5	1.343	0.649	22.3
Back side	20	QPSK	19100/1900	1:1	0.431	0.03	22.22	23.5	1.343	0.579	22.3
Body worn Test Data at the worst case with SIM2											
Back side	20	QPSK	19100/1900	1:1	0.595	0.06	22.3	22.7	1.096	0.652	22.3
Body worn Test Data at the worst case with Battery 2#											
Back side	20	QPSK	19100/1900	1:1	0.524	0.03	22.3	22.7	1.096	0.575	22.3
Hotspot Test data(Separate 10mm 1RB_50 offset) Sensor On											
Front side	20	QPSK	19100/1900	1:1	0.26	0.04	16.69	17.3	1.151	0.299	22.3
Back side	20	QPSK	19100/1900	1:1	0.354	0.175	16.69	17.3	1.151	0.407	22.3
Bottom side	20	QPSK	19100/1900	1:1	0.575	0.08	16.69	17.3	1.151	0.662	22.3
Hotspot Test data(Separate 10mm 1RB_50 offset) Sensor Off											
Left side	20	QPSK	19100/1900	1:1	0.0342	0.09	17.88	18.3	1.102	0.038	22.3
Right side	20	QPSK	19100/1900	1:1	0.02	0.02	17.88	18.3	1.102	0.022	22.3
Hotspot Test data (Separate 10mm 50%RB_25 offset) Sensor On											
Front side	20	QPSK	19100/1900	1:1	0.265	0.03	16.47	17.3	1.211	0.321	22.3
Back side	20	QPSK	19100/1900	1:1	0.332	0.07	16.47	17.3	1.211	0.402	22.3
Bottom side	20	QPSK	19100/1900	1:1	0.593	0.1	16.47	17.3	1.211	<b>0.718</b>	22.3
Hotspot Test data (Separate 10mm 50%RB_25 offset) Sensor off											
Left side	20	QPSK	19100/1900	1:1	0.0318	-0.13	17.6	18.3	1.175	0.037	22.3



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.:SZEM180100052901

Rev : 01

Page : 134 of 169

Right side	20	QPSK	19100/1900	1:1	0.0197	0.06	17.6	18.3	1.175	0.023	22.3
Hotspot Test Data at the worst case 12mm Sensor off											
Front side	20	QPSK	19100/1900	1:1	0.265	0.141	17.88	18.3	1.102	0.292	22.3
Hotspot Test Data at the worst case 16mm Sensor off											
Back side	20	QPSK	19100/1900	1:1	0.181	0.06	17.88	18.3	1.102	0.199	22.3
Hotspot Test Data at the worst case 16mm Sensor off											
Bottom side	20	QPSK	19100/1900	1:1	0.332	0.183	17.88	18.8	1.236	0.410	22.3
Hotspot Test Data at the worst case with SIM2 10mm Sensor off											
Bottom side	20	QPSK	19100/1900	1:1	0.556	0.01	16.47	17.3	1.211	0.673	22.3
Hotspot Test Data at the worst case with Battery 2#10mm Sensor off											
Bottom side	20	QPSK	19100/1900	1:1	0.533	0.07	16.47	17.3	1.211	0.645	22.3



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 135 of 169

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_38 offset)											
Left cheek	15	QPSK	19125/1902.5	1:1	0.081	0.053	23.53	24.2	1.167	0.095	22.3
Left tilted	15	QPSK	19125/1902.5	1:1	0.062	0.01	23.53	24.2	1.167	0.072	22.3
Right cheek	15	QPSK	19125/1902.5	1:1	0.116	0.01	23.53	24.2	1.167	0.135	22.3
Right tilted	15	QPSK	19125/1902.5	1:1	0.096	0.06	23.53	24.2	1.167	0.112	22.3
Right cheek	15	QPSK	18675/1857.5	1:1	0.0945	0.03	23.23	24.2	1.250	0.118	22.3
Right cheek	15	QPSK	18900/1880	1:1	0.125	0.06	23.15	24.2	1.274	<b>0.159</b>	22.3
Head Test Data at the worst case with SIM2											
Right cheek	15	QPSK	18900/1880	1:1	0.124	0.5	23.15	24.2	1.274	0.158	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	15	QPSK	18900/1880	1:1	0.111	0.09	23.15	24.2	1.274	0.141	22.3
Head Test Data at the worst case (1RB_25 offset)											
Right cheek	10	QPSK	19150/1905	1:1	0.121	0.06	23.26	24	1.186	0.143	22.3
Head Test Data at the worst case (1RB_13 offset)											
Right cheek	5	QPSK	19175/1907.5	1:1	0.111	0.05	23.09	24	1.233	0.137	22.3
Head Test Data at the worst case (1RB_7 offset)											
Right cheek	3	QPSK	18900/1880	1:1	0.117	0.05	23.04	24	1.247	0.146	22.3
Head Test Data at the worst case (1RB_2 offset)											
Right cheek	1.4	QPSK	18900/1880	1:1	0.118	0.01	23.01	24	1.256	0.148	22.3
Body worn Test data(Separate 15mm 1RB_38 offset) Sensor off											
Front side	15	QPSK	19125/1902.5	1:1	0.554	0.09	23.53	24.2	1.167	<b>0.646</b>	22.3
Body worn Test Data at the worst case with SIM2 Sensor off											
Front side	15	QPSK	19125/1902.5	1:1	0.499	0.09	23.53	24.2	1.167	0.582	22.3
Body worn Test Data at the worst case with Battery2# Sensor off											
Front side	15	QPSK	19125/1902.5	1:1	0.498	0.1	23.53	24.2	1.167	0.581	22.3
Body worn Test Data at the worst case (1RB_25 offset) Sensor off											
Front side	10	QPSK	19150/1905	1:1	0.536	0.01	23.26	24	1.186	<b>0.636</b>	22.3
Body worn Test Data at the worst case (1RB_13 offset) Sensor off											
Front side	5	QPSK	19175/1907.5	1:1	0.505	0.06	23.09	24	1.233	0.623	22.3
Body worn Test Data at the worst case (1RB_7 offset) Sensor off											
Front side	3	QPSK	18900/1880	1:1	0.437	0.19	23.04	24	1.247	0.545	22.3
Body worn Test Data at the worst case (1RB_2 offset) Sensor off											
Front side	1.4	QPSK	18900/1880	1:1	0.439	0.04	23.01	24	1.256	0.551	22.3



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 136 of 169

Second Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_50 offset)											
Left cheek	20	QPSK	19100/1900	1:1	0.248	-0.01	17.75	18.1	1.084	0.269	22.3
Left tilted	20	QPSK	19100/1900	1:1	0.151	0.12	17.75	18.1	1.084	0.164	22.3
Right cheek	20	QPSK	19100/1900	1:1	0.548	-0.12	17.75	18.1	1.084	0.594	22.3
Right tilted	20	QPSK	19100/1900	1:1	0.35	0.05	17.75	18.1	1.084	0.379	22.3
Head Test data(50%RB_25 offset)											
Left cheek	20	QPSK	19100/1900	1:1	0.239	0.08	17.53	18.1	1.140	0.273	22.3
Left tilted	20	QPSK	19100/1900	1:1	0.148	0.04	17.53	18.1	1.140	0.169	22.3
Right cheek	20	QPSK	19100/1900	1:1	0.532	0.1	17.53	18.1	1.140	<b>0.607</b>	22.3
Right tilted	20	QPSK	19100/1900	1:1	0.343	0.08	17.53	18.1	1.140	0.391	22.3
Head Test Data at the worst case with SIM2											
Right cheek	20	QPSK	19100/1900	1:1	0.495	0.12	17.75	18.1	1.084	0.537	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	20	QPSK	19100/1900	1:1	0.458	-0.12	17.75	18.1	1.084	0.496	22.3
Body worn Test data(Separate 15mm 1RB_50 offset)											
Front side	20	QPSK	19100/1900	1:1	0.102	0.08	22.21	22.8	1.146	0.117	22.3
Back side	20	QPSK	19100/1900	1:1	0.096	0.02	22.21	22.8	1.146	0.110	22.3
Body worn Test data (Separate 15mm 50%RB_25 offset)											
Front side	20	QPSK	19100/1900	1:1	0.094	0.18	22.12	23	1.225	0.115	22.3
Back side	20	QPSK	19100/1900	1:1	0.057	-0.04	22.12	23	1.225	0.070	22.3
Body worn Test data at the worst case with SIM2											
Front side	20	QPSK	18700/1860	1:1	0.091	0.17	21.97	22.8	1.211	0.110	22.3
Body worn Test data at the worst case with Battery 2#											
Front side	20	QPSK	18700/1860	1:1	0.101	0.09	21.97	22.8	1.211	<b>0.122</b>	22.3
Hotspot Test data(Separate 10mm 1RB_50 offset)											
Front side	20	QPSK	19100/1900	1:1	0.046	0.03	17.77	18	1.054	0.049	22.3
Back side	20	QPSK	19100/1900	1:1	0.047	0.06	17.77	18	1.054	0.050	22.3
Left side	20	QPSK	19100/1900	1:1	0.059	0.12	17.77	18	1.054	0.062	22.3
Top side	20	QPSK	19100/1900	1:1	0.025	0.06	17.77	18	1.054	0.026	22.3
Hotspot Test data (Separate 10mm 50%RB_25 offset)											
Front side	20	QPSK	19100/1900	1:1	0.045	-0.08	17.55	18	1.109	0.050	22.3
Back side	20	QPSK	19100/1900	1:1	0.045	0.06	17.55	18	1.109	0.050	22.3
Left side	20	QPSK	19100/1900	1:1	0.059	0.14	17.55	18	1.109	0.065	22.3
Top side	20	QPSK	19100/1900	1:1	0.025	0.09	17.55	18	1.109	0.028	22.3
Hotspot Test Data at the worst case with SIM2											
Left side	20	QPSK	19100/1900	1:1	0.054	0.04	17.02	18	1.253	0.068	22.3
Hotspot Test Data at the worst case with Battery 2#											
Left side	20	QPSK	19100/1900	1:1	0.0659	0.16	17.02	18	1.253	<b>0.083</b>	22.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





Second Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Body worn Test data(Separate 15mm 1RB_38 offset)											
Front side	15	QPSK	19125/1902.5	1:1	0.087	0.12	23.14	24.2	1.276	0.111	22.3
Back side	15	QPSK	19125/1902.5	1:1	0.09	0.01	23.14	24.2	1.276	0.115	22.3
Back side	15	QPSK	18675/1857.5	1:1	0.081	-0.04	23.09	24.2	1.291	0.105	22.3
Back side	15	QPSK	18900/1880	1:1	0.076	-0.05	22.5	24.2	1.479	0.112	22.3
Body worn Test data at the worst case with SIM2											
Back side	15	QPSK	19125/1902.5	1:1	0.076	0.17	23.14	24.2	1.276	0.097	22.3
Body worn Test data at the worst case with Battery 2#											
Back side	15	QPSK	19125/1902.5	1:1	0.078	0.03	23.14	24.2	1.276	0.100	22.3
Body worn Test Data at the worst case (1RB_0 offset)											
Back side	10	QPSK	19150/1905	1:1	0.091	0.14	23.12	24	1.225	0.111	22.3
Body worn Test Data at the worst case (1RB_13 offset)											
Back side	5	QPSK	18625/1852.5	1:1	0.09	0.01	22.96	24	1.271	<b>0.114</b>	22.3
Body worn Test Data at the worst case (1RB_7 offset)											
Back side	3	QPSK	18615	1:1	0.089	0.01	22.85	22.85	1.000	0.089	22.3
Body worn Test Data at the worst case (1RB_2 offset)											
Back side	1.4	QPSK	18607/1850.7	1:1	0.09	0.06	22.96	24	1.271	0.114	22.3

Table 27: SAR of LTE Band 2 for Head and Body

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 138 of 169

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Limb Test data(Separate 0mm 1RB_50 offset) Sensor On											
Back side	20	QPSK	19100/1900	1:1	1.83	0.01	22.25	23	1.189	2.175	22.3
Back side	20	QPSK	18700/1860	1:1	2.29	0.01	21.82	23	1.312	3.005	22.3
Back side	20	QPSK	18900/1880	1:1	2.01	-0.04	21.95	23	1.274	2.560	22.3
Bottom side	20	QPSK	19100/1900	1:1	1.96	0.04	22.25	23	1.189	2.329	22.3
Bottom side	20	QPSK	18700/1860	1:1	2.36	0.05	21.94	23	1.276	3.012	22.3
Bottom side	20	QPSK	18900/1880	1:1	2.34	0.01	21.86	23	1.300	3.042	22.3
Limb Test data (Separate 0mm 50%RB_25 offset) Sensor On											
Back side	20	QPSK	19100/1900	1:1	1.46	0.07	21.38	22.5	1.294	1.890	22.3
Bottom side	20	QPSK	19100/1900	1:1	1.94	-0.06	21.38	22.5	1.294	2.511	22.3
Bottom side	20	QPSK	18700/1860	1:1	1.9	-0.16	21.28	22.5	1.324	2.516	22.3
Bottom side	20	QPSK	18900/1880	1:1	1.91	-0.01	21.32	22.5	1.312	2.506	22.3
Limb Test data (Separate 0mm 100%RB_0 offset) Sensor On											
Back side	20	QPSK	19100/1900	1:1	1.41	0.09	21.17	22.5	1.358	1.915	22.3
Bottom side	20	QPSK	19100/1900	1:1	1.85	0.03	21.17	22.5	1.358	2.513	22.3
Limb Test data at the worst case with Battery 2# (Separate 0mm 100%RB_0 offset) Sensor On											
Bottom side	20	QPSK	18700/1860	1:1	2.42	0.16	21.82	23	1.312	<b>3.176</b>	22.3
Bottom side Repeat	20	QPSK	18700/1860	1:1	2.39	0.12	21.82	23	1.312	3.136	22.3
Limb Test data (Separate 16mm 1RB_0 offset) Sensor off											
Back side	20	QPSK	19100/1900	1:1	0.363	-0.04	22.3	22.7	1.096	0.398	22.3
Bottom side	20	QPSK	19100/1900	1:1	0.663	-0.03	22.3	22.7	1.096	0.727	22.3
Bottom side	15	QPSK	19125/1902.5	1:1	0.549	0.03	23.53	23.8	1.064	0.584	22.3
Bottom side	10	QPSK	19150/1905	1:1	0.519	0.03	23.26	23.7	1.107	0.574	22.3
Bottom side	5	QPSK	19175/1907.5	1:1	0.504	-0.08	23.09	23.7	1.151	0.58	22.3
Bottom side	3	QPSK	18900/1880	1:1	0.365	-0.06	23.04	23.7	1.164	0.425	22.3
Bottom side	1.4	QPSK	18900/1880	1:1	0.365	-0.05	23.01	23.7	1.172	0.428	22.3
Limb Test data with SIM 2(Separate 16mm 1RB_0 offset) Sensor off											
Bottom side	20	QPSK	19100/1900	1:1	0.578	0.06	22.3	22.7	1.096	0.634	22.3
Limb Test data with Battery 2 (Separate 16mm 1RB_0 offset) Sensor off											
Bottom side	20	QPSK	19100/1900	1:1	0.59	0.09	22.3	22.7	1.096	0.647	22.3

Table 28: SAR of LTE Band 2 for Limbs

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 139 of 169

2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 2$  W/kg then testing at the other channels is not required for such test configuration(s).

Test Position	Channel/ Frequency	Measured SAR (10g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (10g)		SAR (10g)	SAR (10g)
Bottom side	18700/1860	2.42	2.39	1.01	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 2.0$ W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 3.62$  W/kg ( $\sim 10\%$  from the 10-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 3.75$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 2.0$ W/kg

Table 29: SAR Measurement Variability Results



### 8.3.1 SAR Result Of LTE Band 4

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_50 offset)											
Left cheek	20	QPSK	20050/1720	1:1	0.075	0.05	22.12	22.8	1.169	0.088	22.3
Left tilted	20	QPSK	20050/1720	1:1	0.0753	0.03	22.12	22.8	1.169	0.088	22.3
Right cheek	20	QPSK	20050/1720	1:1	0.116	0.02	22.12	22.8	1.169	0.136	22.3
Right tilted	20	QPSK	20050/1720	1:1	0.056	0.07	22.12	22.8	1.169	0.065	22.3
Head Test data(50%RB_25 offset)											
Left cheek	20	QPSK	20050/1720	1:1	0.058	0.1	22.17	23.3	1.169	0.068	22.3
Left tilted	20	QPSK	20050/1720	1:1	0.0579	0.09	22.17	23.3	1.297	0.075	22.3
Right cheek	20	QPSK	20050/1720	1:1	0.089	0.09	22.17	23.3	1.297	0.115	22.3
Right tilted	20	QPSK	20050/1720	1:1	0.0451	0.05	22.17	23.3	1.297	0.059	22.3
Head Test Data at the worst case with SIM2											
Right cheek	20	QPSK	20050/1720	1:1	0.121	0.05	22.12	22.8	1.169	<b>0.142</b>	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	20	QPSK	20050/1720	1:1	0.118	0.06	22.12	22.8	1.169	0.138	22.3
Body worn Test data(Separate 15mm 1RB_50 offset) Sensor off											
Front side	20	QPSK	20050/1720	1:1	0.51	0.19	22.12	22.8	1.169	0.596	22.3
Back side	20	QPSK	20050/1720	1:1	0.568	-0.04	22.12	22.8	1.169	<b>0.664</b>	22.3
Body worn Test data (Separate 15mm 50%RB_25 offset) Sensor off											
Front side	20	QPSK	20050/1720	1:1	0.353	-0.05	22.17	23.3	1.297	0.458	22.3
Back side	20	QPSK	20050/1720	1:1	0.312	0.05	22.17	23.3	1.297	0.405	22.3
Body worn Test Data at the worst case with SIM2 Sensor off											
Back side	20	QPSK	20050/1720	1:1	0.48	0.18	22.12	22.8	1.169	0.561	22.3
Body worn Test Data at the worst case with Battery 2# Sensor off											
Back side	20	QPSK	20050/1720	1:1	0.453	0.01	22.12	22.8	1.169	0.530	22.3
Hotspot Test data (Separate 10mm 1RB_50 offset) Sensor On											
Front side	20	QPSK	20300/1745	1:1	0.218	0.08	17.16	17.5	1.081	0.236	22.3
Back side	20	QPSK	20300/1745	1:1	0.304	0.08	17.16	17.5	1.081	0.329	22.3
Bottom side	20	QPSK	20300/1745	1:1	0.498	0.01	17.16	17.5	1.081	<b>0.539</b>	22.3
Hotspot Test data (Separate 10mm 1RB_50 offset) Sensor Off											
Left side	20	QPSK	20050/1720	1:1	0.032	0.01	18.52	19.3	1.197	0.038	22.3
Right side	20	QPSK	20050/1720	1:1	0.041	0.03	18.52	19.3	1.197	0.049	22.3
Hotspot Test data (Separate 10mm 50%RB_25 offset) Sensor On											
Front side	20	QPSK	20050/1720	1:1	0.22	0.09	17.05	17.5	1.109	0.244	22.3
Back side	20	QPSK	20050/1720	1:1	0.256	-0.06	17.05	17.5	1.109	0.284	22.3
Bottom side	20	QPSK	20050/1720	1:1	0.446	-0.12	17.05	17.5	1.109	0.495	22.3
Hotspot Test data (Separate 10mm 50%RB_25 offset) Sensor off											
Left side	20	QPSK	20050/1720	1:1	0.029	-0.19	18.44	19.3	1.219	0.035	22.3
Right side	20	QPSK	20050/1720	1:1	0.035	-0.01	18.44	19.3	1.219	0.043	22.3
Hotspot Test data at the worst case 12mm sensor Off											



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 141 of 169

Front side	20	QPSK	20050/1720	1:1	0.244	0.06	18.52	19.3	1.197	0.292	22.3
Hotspot Test data at the worst case 16mm sensor Off											
Back side	20	QPSK	20050/1720	1:1	0.184	0.01	18.52	19.3	1.197	0.220	22.3
Bottom side	20	QPSK	20050/1720	1:1	0.279	0.04	18.52	19.3	1.197	0.334	22.3
Hotspot Test Data at the worst case with SIM2 Sensor Off											
Bottom side	20	QPSK	20050/1720	1:1	0.473	0.07	17.16	17.5	1.081	0.512	22.3
Hotspot Test Data at the worst case with Battery 2# Sensor Off											
Bottom side	20	QPSK	20300/1745	1:1	0.464	0.01	17.16	17.5	1.081	0.502	22.3

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_38 offset)											
Left cheek	15	QPSK	20025/1717.5	1:1	0.0859	0.02	23.26	24.5	1.330	0.114	22.3
Left tilted	15	QPSK	20025/1717.5	1:1	0.0706	0.06	23.26	24.5	1.330	0.094	22.3
Right cheek	15	QPSK	20025/1717.5	1:1	0.111	0.04	23.26	24.5	1.330	0.148	22.3
Right tilted	15	QPSK	20025/1717.5	1:1	0.0573	0.08	23.26	24.5	1.330	0.076	22.3
Head Test Data at the worst case with SIM2											
Right cheek	15	QPSK	20025/1717.5	1:1	0.104	0.09	23.26	24.5	1.330	0.138	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	15	QPSK	20025/1717.5	1:1	0.121	0.06	23.26	24.5	1.330	<b>0.161</b>	22.3
Head Test Data at the worst case (1RB_25 offset)											
Right cheek	10	QPSK	20175/1732.5	1:1	0.0743	0.05	23.16	24.3	1.300	0.097	22.3
Head Test Data at the worst case (1RB_13 offset)											
Right cheek	5	QPSK	19975/1712.5	1:1	0.0981	0.04	23.06	24.3	1.330	0.131	22.3
Head Test Data at the worst case (1RB_7 offset)											
Right cheek	3	QPSK	20175/1732.5	1:1	0.0706	0.08	23.05	24.3	1.334	0.094	22.3
Head Test Data at the worst case (3RB_0 offset)											
Right cheek	1.4	QPSK	20393/1754.3	1:1	0.0936	0.03	22.99	24.3	1.352	0.127	22.3
Body worn Test data(Separate 15mm 1RB_38 offset)											
Front side	15	QPSK	20025/1717.5	1:1	0.488	-0.09	23.26	24.5	1.330	<b>0.649</b>	22.3
Body worn Test Data at the worst case with SIM2											
Front side	15	QPSK	20025/1717.5	1:1	0.487	0.07	23.26	24.5	1.330	0.648	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	15	QPSK	20025/1717.5	1:1	0.415	-0.09	23.26	24.5	1.330	0.552	22.3
Body worn Test Data at the worst case (1RB_25 offset)											
Front side	10	QPSK	20175/1732.5	1:1	0.337	0.02	23.16	24.3	1.300	0.438	22.3
Body worn Test Data at the worst case (1RB_13 offset)											
Front side	5	QPSK	19975/1712.5	1:1	0.424	0.08	23.06	24.3	1.330	0.564	22.3
Body worn Test Data at the worst case (1RB_7 offset)											
Front side	3	QPSK	20175/1732.5	1:1	0.328	0.02	23.05	24.3	1.334	0.437	22.3
Body worn Test Data at the worst case (3RB_0 offset)											
Front side	1.4	QPSK	20393/1754.3	1:1	0.452	0.11	22.99	24.3	1.352	0.611	22.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 142 of 169

Second Antenna Test data											
Test position	BW	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scale d factor	Scaled SAR(W/kg)	Liqui d Temp.
Head Test data(1RB_50 offset)											
Left cheek	20	QPSK	20300/1745	1:1	0.407	0.16	20.39	21	1.151	0.468	22.3
Left tilted	20	QPSK	20300/1745	1:1	0.294	0.01	20.39	21	1.151	0.338	22.3
Right cheek	20	QPSK	20300/1745	1:1	0.667	0.06	20.39	21	1.151	<b>0.768</b>	22.3
Right tilted	20	QPSK	20300/1745	1:1	0.425	0.03	20.39	21	1.151	0.489	22.3
Head Test data(50%RB_25 offset)											
Left cheek	20	QPSK	20300/1745	1:1	0.293	0.07	20.18	21	1.208	0.354	22.3
Left tilted	20	QPSK	20300/1745	1:1	0.217	0.1	20.18	21	1.208	0.262	22.3
Right cheek	20	QPSK	20300/1745	1:1	0.527	0.05	20.18	21	1.208	0.637	22.3
Right tilted	20	QPSK	20300/1745	1:1	0.314	0.09	20.18	21	1.208	0.379	22.3
Head Test Data at the worst case with SIM2											
Right cheek	20	QPSK	20300/1745	1:1	0.641	-0.04	20.39	21	1.151	0.738	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	20	QPSK	20300/1745	1:1	0.435	-0.03	20.39	21	1.151	0.501	22.3
Body worn Test data (Separate 15mm 1RB_50 offset)											
Front side	20	QPSK	20300/1745	1:1	0.0509	-0.05	22.11	22.8	1.172	0.060	22.3
Back side	20	QPSK	20300/1745	1:1	0.0688	-0.02	22.11	22.8	1.172	0.081	22.3
Body worn Test data (Separate 15mm 50%RB_50 offset)											
Front side	20	QPSK	20300/1745	1:1	0.0398	0.01	22.05	23.3	1.334	0.053	22.3
Back side	20	QPSK	20300/1745	1:1	0.0544	0.03	22.05	23.3	1.334	0.073	22.3
Body worn Test Data at the worst case with SIM2											
Back side	20	QPSK	20300/1745	1:1	0.0899	0.05	22.11	22.8	1.172	0.105	22.3
Body worn Test Data at the worst case with Battery 2#											
Back side	20	QPSK	20300/1745	1:1	0.121	0.07	22.11	22.8	1.172	<b>0.142</b>	22.3
Hotspot Test data (Separate 10mm 1RB_50 offset)											
Front side	20	QPSK	20300/1745	1:1	0.0906	0.01	20.4	21	1.148	0.104	22.3
Back side	20	QPSK	20300/1745	1:1	0.104	0.03	20.4	21	1.148	<b>0.119</b>	22.3
Left side	20	QPSK	20300/1745	1:1	0.0892	0.08	20.4	21	1.148	0.102	22.3
Top side	20	QPSK	20300/1745	1:1	0.075	0.09	20.4	21	1.148	0.086	22.3
Hotspot Test data (Separate 10mm 50%RB_50 offset)											
Front side	20	QPSK	20300/1745	1:1	0.0893	0.03	20.23	21	1.194	0.107	22.3
Back side	20	QPSK	20300/1745	1:1	0.0688	0.06	20.23	21	1.194	0.082	22.3
Left side	20	QPSK	20300/1745	1:1	0.0651	0.08	20.23	21	1.194	0.078	22.3
Top side	20	QPSK	20300/1745	1:1	0.054	0.02	20.23	21	1.194	0.064	22.3
Hotspot Test Data at the worst case with SIM2											
Back side	20	QPSK	20300/1745	1:1	0.0762	0.04	20.4	21	1.148	0.087	22.3
Hotspot Test Data at the worst case with Battery 2#											
Back side	20	QPSK	20300/1745	1:1	0.047	-0.04	20.4	21	1.148	0.054	22.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 143 of 169

Second Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Body worn Test data (Separate 15mm 1RB_38 offset)											
Front side	15	QPSK	20325/1747.5	1:1	0.0819	0.15	22.93	24.5	1.435	0.118	22.3
Back side	15	QPSK	20325/1747.5	1:1	0.105	0.08	22.93	24.5	1.435	<b>0.151</b>	22.3
Back side	15	QPSK	20175/1732.5	1:1	0.0918	0.06	22.63	24.5	1.538	0.141	22.3
Back side	15	QPSK	20025/1717.5	1:1	0.084	0.05	22.91	24.5	1.442	0.121	22.3
Body worn Test Data at the worst case with SIM2											
Back side	15	QPSK	20325/1747.5	1:1	0.104	0.09	22.93	24.5	1.435	0.149	22.3
Body worn Test Data at the worst case with Battery 2#											
Back side	15	QPSK	20325/1747.5	1:1	0.104	0.02	22.93	24.5	1.435	0.149	22.3
Body worn Test Data at the worst case (1RB_25 offset)											
Back side	10	QPSK	20350/1750	1:1	0.0892	-0.08	23.08	24.3	1.324	0.118	22.3
Body worn Test Data at the worst case (1RB_13 offset)											
Back side	5	QPSK	20375/1752.5	1:1	0.0776	0.01	23.01	24.3	1.346	0.104	22.3
Body worn Test Data at the worst case (1RB_7 offset)											
Back side	3	QPSK	20385/1753.5	1:1	0.069	0.02	23.04	24.3	1.337	0.092	22.3
Body worn Test Data at the worst case (3RB_0 offset)											
Back side	1.4	QPSK	20393/1754.3	1:1	0.074	0.06	22.96	24.3	1.361	0.101	22.3

Table 30: SAR of LTE Band 4 for Head and Body.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 144 of 169

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Limb Test data (Separate 0mm 1RB_50 offset) Sensor on											
Bottom side	20	QPSK	20050/1720	1:1	2.16	0.02	21.72	22.8	1.282	2.770	22.3
Bottom side	20	QPSK	20175/1732.5	1:1	2.29	0.03	21.66	22.8	1.300	2.977	22.3
Bottom side	20	QPSK	20300/1745	1:1	2.31	0.1	21.67	22.8	1.297	2.996	22.3
Limb Test data (Separate 0mm 50%RB_25 offset) Sensor on											
Bottom side	20	QPSK	20050/1720	1:1	1.78	0.11	20.8	21.8	1.259	2.241	22.3
Bottom side	20	QPSK	20175/1732.5	1:1	1.8	0.1	20.7	21.8	1.288	2.319	22.3
Bottom side	20	QPSK	20300/1745	1:1	1.99	0.09	20.61	21.8	1.315	2.617	22.3
Limb Test data (Separate 0mm 100%RB_0offset) Sensor on											
Bottom side	20	QPSK	20050/1720	1:1	1.73	0.11	20.66	21.8	1.300	2.249	22.3
Limb Test data at the worst case with SIM2 Sensor on											
Bottom side	20	QPSK	20300/1745	1:1	2.46	0.15	21.67	22.8	1.297	<b>3.191</b>	22.3
Bottom side Repeat	20	QPSK	20300/1745	1:1	2.43	0.02	21.67	22.8	1.297	3.152	22.3
Limb Test data at the worst case with Battery 2 Sensor on											
Bottom side	20	QPSK	20300/1745	1:1	2.45	0.18	21.67	22.8	1.297	3.178	22.3
Limb Test data (Separate 16mm 1RB_50 offset) Sensor off											
Bottom side	20	QPSK	20050/1720	1:1	0.55	-0.01	22.12	22.8	1.169	0.643	22.3
Bottom side	15	QPSK	20025/1717.5	1:1	0.512	0.11	22.12	22.8	1.169	0.599	22.3
Bottom side	10	QPSK	20175/1732.5	1:1	0.376	0.12	22.12	22.8	1.169	0.44	22.3
Bottom side	5	QPSK	19975/1712.5	1:1	0.439	0.13	22.12	22.8	1.169	0.513	22.3
Bottom side	3	QPSK	20175/1732.5	1:1	0.365	0.12	22.12	22.8	1.169	0.427	22.3
Bottom side	1.4	QPSK	20393/1754.3	1:1	0.535	0.11	22.12	22.8	1.169	0.626	22.3
Limb Test data at the worst case with Battery 2 Sensor off											
Bottom side	20	QPSK	20050/1720	1:1	0.477	0.02	22.12	22.8	1.169	0.558	22.3

Table 31: SAR of LTE Band 4 for Limbs.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 2.0$  W/kg then testing at the other channels is not required for such test configuration(s).





**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.:SZEM180100052901

Rev : 01

Page : 145 of 169

Test Position	Channel/ Frequency	Measured SAR (10g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (10g)		SAR (10g)	SAR (10g)
Bottom side	20300/1745	2.46	2.43	1.01	N/A	N/A
Note: 1) When the original highest measured SAR is $\geq 2.0\text{W/kg}$ , the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was $> 1.20$ or when the original or repeated measurement was $\geq 3.62\text{ W/kg}$ (~ 10% from the 10-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was $\geq 3.75\text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is $> 1.20$ .						
4) Repeated measurements are not required when the original highest measured SAR is $< 2.0\text{W/kg}$						

Table 32: SAR Measurement Variability Results



### 8.3.2 SAR Result Of LTE Band 5

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_25 offset)											
Left cheek	10	QPSK	20600/844	1:1	0.202	-0.06	22.31	23	1.172	0.237	22.3
Left tilted	10	QPSK	20600/844	1:1	0.123	0.095	22.31	23	1.172	0.144	22.3
Right cheek	10	QPSK	20600/844	1:1	0.251	0.05	22.31	23	1.172	<b>0.294</b>	22.3
Right tilted	10	QPSK	20600/844	1:1	0.114	0.08	22.31	23	1.172	0.134	22.3
Head Test data(50%RB_13 offset)											
Left cheek	10	QPSK	20600/844	1:1	0.153	-0.09	22.24	23.5	1.337	0.204	22.3
Left tilted	10	QPSK	20600/844	1:1	0.0915	0.05	22.24	23.5	1.337	0.122	22.3
Right cheek	10	QPSK	20600/844	1:1	0.193	-0.07	22.24	23.5	1.337	0.258	22.3
Right tilted	10	QPSK	20600/844	1:1	0.09	0.08	22.24	23.5	1.337	0.120	22.3
Head Test Data at the worst case with SIM2											
Right cheek	10	QPSK	20600/844	1:1	0.236	-0.08	22.31	23	1.172	0.277	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	10	QPSK	20600/844	1:1	0.206	0.07	22.31	23	1.172	0.241	22.3
Body worn Test data(Separate 15mm 1RB_25 offset)											
Front side	10	QPSK	20600/844	1:1	0.209	0.09	22.31	23	1.172	0.245	22.3
Back side	10	QPSK	20600/844	1:1	0.295	0.06	22.31	23	1.172	0.346	22.3
Body worn Test data (Separate 15mm 25%RB_13 offset)											
Front side	10	QPSK	20600/844	1:1	0.153	0.118	22.24	23.5	1.337	0.204	22.3
Back side	10	QPSK	20600/844	1:1	0.223	-0.01	22.24	23.5	1.337	0.298	22.3
Body worn Test data at the worst case with SIM2											
Back side	10	QPSK	20600/844	1:1	0.284	0.05	22.31	23	1.172	<b>0.351</b>	22.3
Body worn Test data at the worst case with Battery 2#											
Back side	10	QPSK	20600/844	1:1	0.283	-0.07	22.31	23	1.172	0.350	22.3
Hotspot Test data(Separate 10mm 1RB_25 offset)											
Front side	10	QPSK	20600/844	1:1	0.217	-0.08	22.31	23	1.172	0.254	22.3
Back side	10	QPSK	20600/844	1:1	0.299	-0.01	22.31	23	1.172	0.350	22.3
Left side	10	QPSK	20600/844	1:1	0.199	0.05	22.31	23	1.172	0.233	22.3
Right side	10	QPSK	20600/844	1:1	0.419	0.03	22.31	23	1.172	<b>0.491</b>	22.3
Bottom side	10	QPSK	20600/844	1:1	0.193	0.04	22.31	23	1.172	0.226	22.3
Hotspot Test data (Separate 10mm 25%RB_13 offset)											
Front side	10	QPSK	20600/844	1:1	0.16	-0.01	22.24	23.5	1.337	0.214	22.3
Back side	10	QPSK	20600/844	1:1	0.231	-0.03	22.24	23.5	1.337	0.309	22.3
Left side	10	QPSK	20600/844	1:1	0.135	-0.03	22.24	23.5	1.337	0.180	22.3
Right side	10	QPSK	20600/844	1:1	0.292	0.1	22.24	23.5	1.337	0.390	22.3



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 147 of 169

Bottom side	10	QPSK	20600/844	1:1	0.133	0.03	22.24	23.5	1.337	0.178	22.3
Hotspot Test data at the worst case with SIM2											
Right side	10	QPSK	20600/844	1:1	0.416	0.02	22.31	23	1.172	0.488	22.3
Hotspot Test data at the worst case with Battery 2#											
Right side	10	QPSK	20600/844	1:1	0.405	0.05	22.31	23	1.172	0.475	22.3
Main antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_0 offset)											
Left cheek	5	QPSK	20625/846.5	1:1	0.183	0.01	23.34	24.6	1.337	0.245	22.3
Left tilted	5	QPSK	20625/846.5	1:1	0.118	0.02	23.34	24.6	1.337	0.158	22.3
Right cheek	5	QPSK	20625/846.5	1:1	0.213	0.03	23.34	24.6	1.337	<b>0.285</b>	22.3
Right tilted	5	QPSK	20625/846.5	1:1	0.111	-0.08	23.34	24.6	1.337	0.148	22.3
Head Test Data at the worst case with SIM2											
Right cheek	5	QPSK	20625/846.5	1:1	0.174	0.09	23.34	24.6	1.337	0.233	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	5	QPSK	20625/846.5	1:1	0.174	0.08	23.34	24.6	1.337	0.233	22.3
Head Test Data at the worst case ()											
Right cheek	3	QPSK	20635/847.5	1:1	0.215	0.02	23.3	24.5	1.318	0.283	22.3
Head Test Data at the worst case ()											
Right cheek	1.4	QPSK	20643/848.3	1:1	0.213	0.14	23.27	24.5	1.327	0.283	22.3
Body worn Test data(Separate 15mm 1RB_13 offset)											
Front side	5	QPSK	20625/846.5	1:1	0.192	0.04	23.34	24.7	1.368	0.263	22.3
Back side	5	QPSK	20625/846.5	1:1	0.27	-0.01	23.34	24.7	1.368	0.369	22.3
Body worn Test data at the worst case with SIM2											
Back side	5	QPSK	20625/846.5	1:1	0.275	-0.01	23.23	24.7	1.403	<b>0.386</b>	22.3
Body worn Test data at the worst case with Battery 2#											
Back side	5	QPSK	20625/846.5	1:1	0.271	0.02	23.23	24.7	1.403	0.380	22.3
Body worn Test Data at the worst case (1RB_7 offset)											
Back side	3	QPSK	20635/847.5	1:1	0.267	0.15	23.3	24.5	1.318	0.352	22.3
Body worn Test Data at the worst case (1RB_2 offset)											
Back side	1.4	QPSK	20643/848.3	1:1	0.265	-0.03	23.27	24.5	1.327	0.352	22.3
Hotspot Test data(Separate 10mm 1RB_13 offset)											
Front side	5	QPSK	20625/846.5	1:1	0.197	-0.05	23.34	24.7	1.368	0.269	22.3
Back side	5	QPSK	20625/846.5	1:1	0.271	0.02	23.34	24.7	1.368	0.371	22.3
Left side	5	QPSK	20625/846.5	1:1	0.174	0.12	23.34	24.7	1.368	0.238	22.3
Right side	5	QPSK	20625/846.5	1:1	0.381	0.09	23.34	24.7	1.368	<b>0.521</b>	22.3
Bottom side	5	QPSK	20625/846.5	1:1	0.187	0.05	23.34	24.7	1.368	0.256	22.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 148 of 169

Body worn Test data at the worst case with SIM2											
Right side	5	QPSK	20525	1:1	0.351	-0.04	23.23	24.7	1.403	0.492	22.3
Body worn Test data at the worst case with Battery 2#											
Right side	5	QPSK	20525	1:1	0.366	0.15	23.23	24.7	1.403	0.513	22.3
Body worn Test Data at the worst case (1RB_7 offset)											
Right side	3	QPSK	20635/847.5	1:1	0.372	0.08	23.3	24.5	1.318	0.490	22.3
Body worn Test Data at the worst case (1RB_2 offset)											
Right side	1.4	QPSK	20643/848.3	1:1	0.37	0.04	23.27	24.5	1.327	0.491	22.3

Second Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB 25ffset)											
Left cheek	10	QPSK	20600/844	1:1	0.45	-0.16	20.41	21.5	1.285	0.578	22.3
Left tilted	10	QPSK	20600/844	1:1	0.396	-0.07	20.41	21.5	1.285	0.509	22.3
Right cheek	10	QPSK	20600/844	1:1	0.66	-0.01	20.41	21.5	1.285	0.848	22.3
Right tilted	10	QPSK	20600/844	1:1	0.607	-0.02	20.41	21.5	1.285	0.780	22.3
Right cheek	10	QPSK	20450/829	1:1	0.609	0.09	20.21	21.5	1.346	0.820	22.3
Right cheek	10	QPSK	20525/836.5	1:1	0.642	0.01	20.29	21.5	1.321	0.848	22.3
Head Test data(25%RB_13 offset)											
Left cheek	10	QPSK	20600/844	1:1	0.423	0.09	20.28	21.5	1.324	0.560	22.3
Left tilted	10	QPSK	20600/844	1:1	0.373	-0.06	20.28	21.5	1.324	0.494	22.3
Right cheek	10	QPSK	20600/844	1:1	0.637	-0.01	20.28	21.5	1.324	0.844	22.3
Right tilted	10	QPSK	20600/844	1:1	0.592	0.09	20.28	21.5	1.324	0.784	22.3
Right cheek	10	QPSK	20450/829	1:1	0.586	-0.01	20.07	21.5	1.390	0.815	22.3
Right cheek	10	QPSK	20525/836.5	1:1	0.621	0.07	20.19	21.5	1.352	0.840	22.3
Head Test Data at the worst case with SIM2											
Right cheek	10	QPSK	20600/844	1:1	0.632	0.03	20.15	21.5	1.365	<b>0.862</b>	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	10	QPSK	20600/844	1:1	0.607	0.09	20.15	21.5	1.365	0.828	22.3
Body worn Test data(Separate 15mm 1RB_25 offset)											
Front side	10	QPSK	20600/844	1:1	0.147	0.03	22.37	23	1.156	<b>0.170</b>	22.3
Back side	10	QPSK	20600/844	1:1	0.118	0.02	22.37	23	1.156	0.136	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	10	QPSK	20600/844	1:1	0.109	0.064	22.19	23.5	1.352	0.147	22.3
Back side	10	QPSK	20600/844	1:1	0.089	-0.03	22.19	23.5	1.352	0.120	22.3
Body worn Test Data at the worst case with SIM2											
Front side	10	QPSK	20600/844	1:1	0.132	0.03	22.37	23	1.156	0.153	22.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 149 of 169

Body worn Test Data at the worst case with Battery 2#											
Front side	10	QPSK	20600/844	1:1	0.145	0.04	22.37	23	1.156	0.168	22.3
Hotspot Test data(Separate 10mm 1RB_25 offset)											
Front side	10	QPSK	20600/844	1:1	0.161	0.04	20.46	21.5	1.271	<b>0.205</b>	22.3
Back side	10	QPSK	20600/844	1:1	0.129	0.02	20.46	21.5	1.271	0.164	22.3
Left side	10	QPSK	20600/844	1:1	0.11	0.06	20.46	21.5	1.271	0.140	22.3
Top side	10	QPSK	20600/844	1:1	0.153	0.07	20.46	21.5	1.271	0.194	22.3
Hotspot Test data (Separate 10mm 25%RB_13 offset)											
Front side	10	QPSK	20600/844	1:1	0.134	0.04	20.27	21.5	1.327	0.178	22.3
Back side	10	QPSK	20600/844	1:1	0.113	0.08	20.27	21.5	1.327	0.150	22.3
Left side	10	QPSK	20600/844	1:1	0.107	0.04	20.27	21.5	1.327	0.142	22.3
Top side	10	QPSK	20600/844	1:1	0.144	0.03	20.27	21.5	1.327	0.191	22.3
Hotspot Test Data at the worst case with SIM2											
Front side	10	QPSK	20600/844	1:1	0.144	0.04	20.46	21.5	1.271	0.183	22.3
Hotspot Test Data at the worst case with Battery 2#											
Front side	10	QPSK	20600/844	1:1	0.132	0.02	20.46	21.5	1.271	0.168	22.3

Second Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Body worn Test data (Separate 15mm 1RB_13 offset)											
Front side	5	QPSK	20625/846.5	1:1	0.174	0.01	23.16	24.5	1.361	<b>0.237</b>	22.3
Back side	5	QPSK	20625/846.5	1:1	0.117	-0.01	23.16	24.5	1.361	0.159	22.3
Body worn Test Data at the worst case with SIM2											
Front side	5	QPSK	20625/846.5	1:1	0.143	0.01	23.16	24.5	1.361	0.195	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	5	QPSK	20625/846.5	1:1	0.136	0.05	23.16	24.5	1.361	0.185	22.3
Body worn Test Data at the worst case (1RB_7 offset)											
Front side	3	QPSK	20635/847.5	1:1	0.133	0.05	23.06	23.3	1.057	0.141	22.3
Body worn Test Data at the worst case (1RB_0 offset)											
Front side	1.4	QPSK	20643/848.3	1:1	0.142	0.03	23.2	24.3	1.288	0.183	22.3

Table 33: SAR of LTE Band 5 for Head and Body.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).



### 8.3.3 SAR Result Of LTE Band 7

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_50 offset) state 1											
Left cheek	20	QPSK	21350/2560	1:1	0.02	0.01	21.51	22.6	1.285	0.026	22.3
Head Test data(1RB_50 offset) state 2											
Left cheek	20	QPSK	21350/2560	1:1	0.206	0.09	21.51	22.6	1.285	0.265	22.3
Left tilted	20	QPSK	21350/2560	1:1	0.124	0.01	21.51	22.6	1.285	0.159	22.3
Right cheek	20	QPSK	21350/2560	1:1	0.455	0.05	21.51	22.6	1.285	<b>0.585</b>	22.3
Right tilted	20	QPSK	21350/2560	1:1	0.249	0.05	21.51	22.6	1.285	0.320	22.3
Head Test data(50%RB_25 offset) state 2											
Left cheek	20	QPSK	21350/2560	1:1	0.154	-0.08	22.17	22.7	1.130	0.174	22.3
Left tilted	20	QPSK	21350/2560	1:1	0.095	0.01	22.17	22.7	1.130	0.107	22.3
Right cheek	20	QPSK	21350/2560	1:1	0.34	0.01	22.17	22.7	1.130	0.384	22.3
Right tilted	20	QPSK	21350/2560	1:1	0.186	-0.08	22.17	22.7	1.130	0.210	22.3
Head Test Data at the worst case with SIM2 state 2											
Right cheek	20	QPSK	21350/2560	1:1	0.448	0.02	21.51	22.6	1.285	0.576	22.3
Head Test Data at the worst case with Battery 2# state 2											
Right cheek	20	QPSK	21350/2560	1:1	0.398	0.01	21.51	22.6	1.285	0.512	22.3
Body worn Test data(Separate 15mm 1RB_50 offset) state 2 Sensor off											
Front side	20	QPSK	21350/2560	1:1	0.416	0.08	21.51	22.6	1.285	<b>0.535</b>	22.3
Back side	20	QPSK	21350/2560	1:1	0.239	0.16	21.51	22.6	1.285	0.307	22.3
Body worn Test data (Separate 15mm 50%RB_25 offset) State2											
Front side	20	QPSK	21350/2560	1:1	0.327	0.08	22.17	22.7	1.130	0.369	22.3
Back side	20	QPSK	21350/2560	1:1	0.154	-0.05	22.17	22.7	1.130	0.174	22.3
Body worn Test Data at the worst case with SIM2 State2											
Front side	20	QPSK	21350/2560	1:1	0.408	0.07	21.51	22.6	1.285	0.524	22.3
Body worn Test Data at the worst case with Battery 2# State2											
Front side	20	QPSK	21350/2560	1:1	0.383	0.06	21.51	22.6	1.285	0.492	22.3
Hotspot Test data(Separate 10mm 1RB_99 offset) State1											
Right side	20	QPSK	21350/2560	1:1	0.339	0.09	21.51	22.6	1.285	0.436	22.3
Hotspot Test data(Separate 10mm 1RB_99 offset) State2 Sensor On											
Front side	20	QPSK	21350/2560	1:1	0.488	0.04	20.78	21.4	1.153	0.563	22.3
Back side	20	QPSK	21350/2560	1:1	0.391	0.03	20.78	21.4	1.153	0.451	22.3
Bottom side	20	QPSK	21350/2560	1:1	0.219	0.03	20.78	21.4	1.153	0.253	22.3
Hotspot Test data(Separate 10mm 1RB_99 offset) State2 Sensor Off											
Left side	20	QPSK	21350/2560	1:1	0.143	0.06	21.51	22.6	1.285	0.184	22.3
Right side	20	QPSK	21350/2560	1:1	0.579	0.12	21.51	22.6	1.285	0.744	22.3
Hotspot Test data (Separate 10mm 50%RB_25 offset) State2 Sensor On											
Front side	20	QPSK	21350/2560	1:1	0.379	0.05	19.9	20.4	1.122	0.425	22.3
Back side	20	QPSK	21350/2560	1:1	0.307	0.03	19.9	20.4	1.122	0.344	22.3
Bottom side	20	QPSK	21350/2560	1:1	0.168	0.17	19.9	20.4	1.122	0.188	22.3



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 151 of 169

Hotspot Test data (Separate 10mm 50%RB_25 offset) State2 Sensor Off											
Left side	20	QPSK	21350/2560	1:1	0.114	-0.02	22.17	22.7	1.130	0.129	22.3
Right side	20	QPSK	21350/2560	1:1	0.455	-0.07	22.17	22.7	1.130	0.514	22.3
Hotspot Test Data at the worst case (Separate 10mm 1RB_50 offset) 12mm State2 Sensor off											
Front side	20	QPSK	21350/2560	1:1	0.677	0.07	21.51	22.6	1.285	<b>0.870</b>	22.3
Front side	20	QPSK	21100/2535.5	1:1	0.569	0.04	21.51	22.6	1.285	0.731	22.3
Front side	20	QPSK	20850/2510	1:1	0.57	0.09	21.05	22.6	1.429	0.814	22.3
Hotspot Test Data at the worst case (Separate 10mm 1RB_50 offset) 16mm State2 Sensor off											
Back side	20	QPSK	21350/2560	1:1	0.302	0.09	21.51	22.6	1.285	0.388	22.3
Bottom side	20	QPSK	21350/2560	1:1	0.221	0.12	21.51	22.6	1.285	0.284	22.3
Hotspot Test Data at the worst case with SIM2 State2											
Front side	20	QPSK	21350/2560	1:1	0.607	0.09	21.51	22.6	1.285	0.780	22.3
Hotspot Test Data at the worst case with Battery 2# State2											
Front side	20	QPSK	21350/2560	1:1	0.591	0.04	21.51	22.6	1.285	0.760	22.3





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 152 of 169

Main Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_38 offset) State2											
Left cheek	15	QPSK	21375	1:1	0.175	0.08	22.94	23.9	1.247	0.218	22.3
Left tilted	15	QPSK	21375	1:1	0.126	0.09	22.94	23.9	1.247	0.157	22.3
Right cheek	15	QPSK	21375	1:1	0.294	0.01	22.94	23.9	1.247	<b>0.367</b>	22.3
Right tilted	15	QPSK	21375	1:1	0.208	0.09	22.94	23.9	1.247	0.259	22.3
Head Test Data at the worst case with SIM2 State2											
Right cheek	15	QPSK	21375	1:1	0.288	0.01	22.94	23.9	1.247	0.359	22.3
Head Test Data at the worst case with Battery 2# State2											
Right cheek	15	QPSK	21375	1:1	0.287	-0.09	22.94	23.9	1.247	0.358	22.3
Head Test Data at the worst case (1RB_25 offset) State2											
Right cheek	10	QPSK	21400	1:1	0.266	-0.01	22.9	23.7	1.202	0.320	22.3
Head Test Data at the worst case (1RB_13 offset) State2											
Right cheek	5	QPSK	21425	1:1	0.261	-0.05	22.83	23.7	1.222	0.319	22.3
Body worn Test data(Separate 15mm 1RB_38 offset) State2 sensor off											
Front side	15	QPSK	21375	1:1	0.364	0.1	22.94	23.9	1.247	<b>0.454</b>	22.3
Body worn Test Data at the worst case with SIM2 State2 sensor off											
Front side	15	QPSK	21375	1:1	0.352	0.04	22.94	23.9	1.247	0.439	22.3
Body worn Test Data at the worst case with Battery 2# State2 sensor off											
Front side	15	QPSK	21375	1:1	0.352	0.04	22.94	23.9	1.247	0.439	22.3
Body worn Test data(Separate 15mm 1RB_25 offset) State2 sensor off											
Front side	10	QPSK	21400	1:1	0.339	0.03	22.9	23.7	1.202	0.408	22.3
Body worn Test data(Separate 15mm 1RB_13 offset) State2 sensor off											
Front side	5	QPSK	21425	1:1	0.329	0.01	22.83	23.7	1.222	0.402	22.3





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 153 of 169

Second Antenna Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_50 offset)											
Left cheek	20	QPSK	21100/2535.5	1:1	0.325	-0.12	13.86	14.7	1.213	0.394	22.3
Left tilted	20	QPSK	21100/2535.5	1:1	0.239	0.02	13.86	14.7	1.213	0.290	22.3
Right cheek	20	QPSK	21100/2535.5	1:1	0.487	0.15	13.86	14.7	1.213	<b>0.591</b>	22.3
Right tilted	20	QPSK	21100/2535.5	1:1	0.348	0.01	13.86	14.7	1.213	0.422	22.3
Head Test data(50%RB_50 offset)											
Left cheek	20	QPSK	21100/2535.5	1:1	0.241	-0.03	13.77	14.7	1.239	0.299	22.3
Left tilted	20	QPSK	21100/2535.5	1:1	0.176	0.02	13.77	14.7	1.239	0.218	22.3
Right cheek	20	QPSK	21100/2535.5	1:1	0.394	0.14	13.77	14.7	1.239	0.488	22.3
Right tilted	20	QPSK	21100/2535.5	1:1	0.264	0.03	13.77	14.7	1.239	0.327	22.3
Head Test Data at the worst case with SIM2											
Right cheek	20	QPSK	21100/2535.5	1:1	0.469	0.07	13.86	14.7	1.213	0.569	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	20	QPSK	21100/2535.5	1:1	0.401	0.06	13.86	14.7	1.213	0.487	22.3
Body worn Test data(Separate 15mm 1RB_50 offset)											
Front side	20	QPSK	21100/2535.5	1:1	0.135	0.06	20.52	21.5	1.253	0.169	22.3
Back side	20	QPSK	21100/2535.5	1:1	0.13	0.071	20.52	21.5	1.253	0.163	22.3
Body worn Test data (Separate 15mm 50%RB_50 offset)											
Front side	20	QPSK	21100/2535.5	1:1	0.139	0.09	20.61	21.5	1.227	0.171	22.3
Back side	20	QPSK	21100/2535.5	1:1	0.137	0.01	20.61	21.5	1.227	0.168	22.3
Body worn Test Data at the worst case with SIM2											
Front side	20	QPSK	21100/2535.5	1:1	0.143	0.19	20.61	21.5	1.227	0.176	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	20	QPSK	21100/2535.5	1:1	0.143	0.02	20.61	21.5	1.227	<b>0.176</b>	22.3
Hotspot Test data (Separate 10mm 1RB_50 offset)											
Front side	20	QPSK	21100/2535.5	1:1	0.0451	0.07	13.81	14.7	1.227	0.055	22.3
Back side	20	QPSK	21100/2535.5	1:1	0.05	0.13	13.81	14.7	1.227	0.061	22.3
Left side	20	QPSK	21100/2535.5	1:1	0.0428	0.02	13.81	14.7	1.227	0.053	22.3
Top side	20	QPSK	21100/2535.5	1:1	0.0153	0.02	13.81	14.7	1.227	0.019	22.3
Hotspot Test data (Separate 10mm 50%RB_50 offset)											
Front side	20	QPSK	21100/2535.5	1:1	0.0444	0.12	13.84	14.7	1.219	0.054	22.3
Back side	20	QPSK	21100/2535.5	1:1	0.0515	0.08	13.84	14.7	1.219	<b>0.063</b>	22.3
Left side	20	QPSK	21100/2535.5	1:1	0.0433	-0.02	13.84	14.7	1.219	0.053	22.3
Top side	20	QPSK	21100/2535.5	1:1	0.0161	0.09	13.84	14.7	1.219	0.020	22.3
Hotspot Test Data at the worst case with SIM2(Separate 10mm 50%RB_50 offset)											
Back side	20	QPSK	21100/2535.5	1:1	0.0501	0.08	13.84	14.7	1.219	0.061	22.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 154 of 169

Hotspot Test Data at the worst case with Battery 2#(Separate 10mm 50%RB_50 offset)											
Back side	20	QPSK	21100/2535.5	1:1	0.0485	0.02	13.84	14.7	1.219	0.059	22.3

Table 34: SAR of LTE Band 7 for Head and Body.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).



### 8.3.4 SAR Result Of 2.4GHz WIFI

WiFi 1 Test data											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data											
Left cheek	802.11b	1/2412	97.60%	1.025	0.234	0.04	10.71	11	1.069	0.256	22
Left tilted	802.11b	1/2412	97.60%	1.025	0.163	0.04	10.71	11	1.069	0.179	22
Right cheek	802.11b	1/2412	97.60%	1.025	0.137	0.05	10.71	11	1.069	<b>0.150</b>	22
Right tilted	802.11b	1/2412	97.60%	1.025	0.124	0.15	10.71	11	1.069	0.136	22
Head Test Data at the worst case with Battery 2#											
Left cheek	802.11b	1/2412	97.60%	1.025	0.256	0.05	10.71	11	1.069	<b>0.281</b>	22
Body worn Test data(Separate 15mm)											
Front side	802.11b	1/2412	97.60%	1.025	0.0468	0.05	15.86	17	1.300	0.062	22
Back side	802.11b	1/2412	97.60%	1.025	0.0437	-0.09	15.86	17	1.300	0.058	22
Body worn Test Data at the worst case with Battery 2#											
Front side	802.11b	1/2412	97.60%	1.025	0.0669	0.09	15.86	17	1.300	<b>0.087</b>	22.3
Hotspot Test data (Separate 10mm)											
Front side	802.11b	1/2412	97.60%	1.025	0.0945	0.05	15.86	17	1.300	0.126	22
Back side	802.11b	1/2412	97.60%	1.025	0.0763	0.02	15.86	17	1.300	0.102	22
Right side	802.11b	1/2412	97.60%	1.025	0.0572	-0.12	15.86	17	1.300	0.076	22
Top side	802.11b	1/2412	97.60%	1.025	0.0914	-0.09	15.86	17	1.300	0.122	22
Hotspot Test Data at the worst case with Battery 2#											
Front side	802.11b	1/2412	97.60%	1.025	0.112	0.02	15.86	17	1.300	<b>0.146</b>	22.3

Table 35: SAR of 2.4GHz WIFI for Head and Body

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).
- 3) Each channel was tested at the lowest data rate.
- 4) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, 802.11g/n OFDM SAR Test is not required.



## 8.4 Multiple Transmitter Evaluation

### 8.4.1 Simultaneous SAR SAR test evaluation

#### Simultaneous Transmission

NO.	Simultaneous Tx Combination	Head	Body-worn	Hotspot (10mm)	Product Specific 10-g (0mm)
1	GSM Voice(Main ant) + BT	Yes	Yes	NA	Yes
2	GSM DATA(Main ant) + BT	N/A	Yes	NA	Yes
3	GSM Voice(Second ant) + BT	Yes	Yes	NA	Yes
4	GSM DATA(Second ant)+ BT	N/A	Yes	NA	Yes
5	GSM Voice(Main ant) + WiFi	Yes	Yes	NA	Yes
6	GSM DATA(Main ant) + WiFi	N/A	Yes	Yes	Yes
7	GSM Voice(Second ant) + WiFi	Yes	Yes	NA	Yes
8	GSM DATA(Second ant) + WiFi	N/A	Yes	Yes	Yes
9	UMTS Voice(Main ant) + BT	Yes	Yes	NA	Yes
10	UMTS Data(Main ant) + BT	N/A	Yes	NA	Yes
11	UMTS Voice(Second ant) + BT	Yes	Yes	NA	Yes
12	UMTS Data(Second ant) + BT	N/A	Yes	NA	Yes
13	UMTS Voice(Main ant) + WiFi	Yes	Yes	NA	Yes
14	UMTS Data (Main ant) + WiFi	Yes*	Yes	Yes	Yes
15	UMTS Voice (Second ant)+ WiFi	Yes	Yes	NA	Yes
16	UMTS Data (Second ant)+ WiFi	Yes*	Yes	Yes	Yes
17	LTE(Main ant) + WiFi	Yes*	Yes*	Yes	Yes
18	LTE(Main ant) + BT	Yes*	Yes*	NA	Yes
19	LTE (Second ant)+ WiFi	Yes*	Yes*	Yes	Yes
20	LTE (Second ant) + BT	Yes*	Yes*	NA	Yes

Note:

- 1) Wi-Fi 2.4G and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) The device does not support DTM function.
- 3) \* VoLTE or pre-installed VOIP applications are considered.
- 4) The Main Antenna and Second Antenna can't transmit simultaneously.
- 5) The device supports VoWIFI function.



## 8.4.2 Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ;

Where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50 \text{ mm}$ .

### Estimated SAR Result

Freq. Band	Frequency (GHz)	Test Position	Max. power(dBm)	Max. power(mw)	Test Separation (mm)	Estimated SAR 1g (W/kg)
Bluetooth	2.48	Head	9.5	8.91	0	0.374
Bluetooth	2.48	Body-worn	9.5	8.91	15	0.125
Freq. Band	Frequency (GHz)	Test Position	Max. power(dBm)	Max. power(mw)	Test Separation (mm)	Estimated SAR 10g (W/kg)
Bluetooth	2.48	Limb	9.5	8.91	0	0.150



**1) Simultaneous Transmission SAR Summation Scenario for head**

WWAN Band Main Antenna	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ BT SAR	Σ 1-g SAR ①+②	Σ 1-g SAR ①+③	Case NO.
GSM 850	Left Cheek	0.238	0.281	0.374	0.519	0.612	No
	Left Tilt	0.163	0.179	0.374	0.342	0.537	No
	Right Cheek	0.306	0.150	0.374	0.456	0.680	No
	Right Tilt	0.159	0.136	0.374	0.295	0.533	No
GSM 1900	Left Cheek	0.045	0.281	0.374	0.326	0.419	No
	Left Tilt	0.045	0.179	0.374	0.224	0.419	No
	Right Cheek	0.068	0.150	0.374	0.218	0.442	No
	Right Tilt	0.033	0.136	0.374	0.169	0.407	No
WCDMA Band V	Left Cheek	0.25	0.281	0.374	0.531	0.624	No
	Left Tilt	0.142	0.179	0.374	0.321	0.516	No
	Right Cheek	0.318	0.150	0.374	0.468	0.692	No
	Right Tilt	0.162	0.136	0.374	0.298	0.536	No
WCDMA Band II	Left Cheek	0.088	0.281	0.374	0.369	0.462	No
	Left Tilt	0.101	0.179	0.374	0.280	0.475	No
	Right Cheek	0.138	0.150	0.374	0.288	0.512	No
	Right Tilt	0.106	0.136	0.374	0.242	0.480	No
WCDMA Band IV	Left Cheek	0.079	0.281	0.374	0.360	0.453	No
	Left Tilt	0.079	0.179	0.374	0.258	0.453	No
	Right Cheek	0.14	0.150	0.374	0.290	0.514	No
	Right Tilt	0.065	0.136	0.374	0.201	0.439	No
LTE B2	Left Cheek	0.1	0.281	0.374	0.381	0.474	No
	Left Tilt	0.096	0.179	0.374	0.275	0.470	No
	Right Cheek	0.181	0.150	0.374	0.331	0.555	No
	Right Tilt	0.112	0.136	0.374	0.248	0.486	No
LTE B4	Left Cheek	0.114	0.281	0.374	0.395	0.488	No
	Left Tilt	0.094	0.179	0.374	0.273	0.468	No
	Right Cheek	0.161	0.150	0.374	0.311	0.535	No
	Right Tilt	0.076	0.136	0.374	0.212	0.450	No
LTE B5	Left Cheek	<b>0.245</b>	0.281	0.374	0.526	0.619	No
	Left Tilt	0.158	0.179	0.374	0.337	0.532	No
	Right Cheek	0.294	0.150	0.374	0.444	0.668	No
	Right Tilt	0.148	0.136	0.374	0.284	0.522	No
LTE B7	Left Cheek	0.265	0.281	0.374	0.546	0.639	No
	Left Tilt	0.159	0.179	0.374	0.338	0.533	No
	Right Cheek	0.585	0.150	0.374	0.735	<b>0.959</b>	No
	Right Tilt	0.32	0.136	0.374	0.456	0.694	No



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 159 of 169

WWAN Band Second Antenna	Test position	① WWAN Ant. 1 SAR	② 2.4G WIFI1 SAR	③ BT SAR	Σ 1-g SAR ①+②	Σ 1-g SAR ①+③	Case NO.
GSM 850	Left Cheek	0.718	0.281	0.374	0.999	1.126	No
	Left Tilt	0.524	0.179	0.374	0.703	0.922	No
	Right Cheek	1.089	0.150	0.374	1.239	<b>1.515</b>	No
	Right Tilt	0.937	0.136	0.374	1.073	1.355	No
GSM 1900	Left Cheek	0.435	0.281	0.374	0.716	0.809	No
	Left Tilt	0.268	0.179	0.374	0.447	0.642	No
	Right Cheek	0.937	0.150	0.374	1.087	1.311	No
	Right Tilt	0.580	0.136	0.374	0.716	0.954	No
WCDMA Band V	Left Cheek	0.603	0.281	0.374	0.884	0.977	No
	Left Tilt	0.548	0.179	0.374	0.727	0.922	No
	Right Cheek	0.912	0.150	0.374	1.062	1.286	No
	Right Tilt	0.871	0.136	0.374	1.007	1.245	No
WCDMA Band II	Left Cheek	0.297	0.281	0.374	0.578	0.671	No
	Left Tilt	0.222	0.179	0.374	0.401	0.596	No
	Right Cheek	0.847	0.150	0.374	0.997	1.221	No
	Right Tilt	0.421	0.136	0.374	0.557	0.795	No
WCDMA Band IV	Left Cheek	0.368	0.281	0.374	0.649	0.742	No
	Left Tilt	0.243	0.179	0.374	0.422	0.617	No
	Right Cheek	0.732	0.150	0.374	0.882	1.106	No
	Right Tilt	0.529	0.136	0.374	0.665	0.903	No
LTE B2	Left Cheek	0.273	0.281	0.374	0.554	0.647	No
	Left Tilt	0.169	0.179	0.374	0.348	0.543	No
	Right Cheek	0.607	0.150	0.374	0.757	0.981	No
	Right Tilt	0.391	0.136	0.374	0.527	0.765	No
LTE B4	Left Cheek	0.468	0.281	0.374	0.749	0.842	No
	Left Tilt	0.338	0.179	0.374	0.517	0.712	No
	Right Cheek	0.768	0.150	0.374	0.918	1.142	No
	Right Tilt	0.489	0.136	0.374	0.625	0.863	No
LTE B5	Left Cheek	0.578	0.281	0.374	0.859	0.952	No
	Left Tilt	0.509	0.179	0.374	0.688	0.883	No
	Right Cheek	0.862	0.150	0.374	1.012	1.236	No
	Right Tilt	0.784	0.136	0.374	0.920	1.158	No
LTE B7	Left Cheek	0.394	0.281	0.374	0.675	0.768	No
	Left Tilt	0.290	0.179	0.374	0.469	0.664	No
	Right Cheek	0.591	0.150	0.374	0.741	0.965	No
	Right Tilt	0.422	0.136	0.374	0.558	0.796	No



**2) Simultaneous Transmission SAR Summation Scenario for body worn**

WWAN Band (Main Antenna)	Exposure position	① MAX.WWAN	② MAX.WLAN SAR(W/kg)	③MAX.BT SAR(W/kg)	Summed SAR①+	Summed SAR①+	Case NO.
		SAR(W/kg)			②	③	
GSM850	Front(voice)	0.287	0.087	0.125	0.374	0.412	No
	Back(voice)	0.411	0.058	0.125	0.469	0.536	No
	Front(data)	0.255	0.087	0.125	0.342	0.380	No
	Back(data)	0.355	0.058	0.125	0.413	0.480	No
GSM1900	Front(voice)	0.314	0.087	0.125	0.401	0.439	No
	Back(voice)	0.447	0.058	0.125	0.505	0.572	No
	Front(data)	0.278	0.087	0.125	0.365	0.403	No
	Back(data)	0.310	0.058	0.125	0.368	0.435	No
WCDMA Band II	Front	0.664	0.087	0.125	0.751	0.789	No
	Back	0.532	0.058	0.125	0.590	0.657	No
WCDMA Band IV	Front	0.516	0.087	0.125	0.603	0.641	No
	Back	0.385	0.058	0.125	0.443	0.510	No
WCDMA Band V	Front	0.265	0.087	0.125	0.352	0.390	No
	Back	0.386	0.058	0.125	0.444	0.511	No
LTE Band 2	Front	0.694	0.087	0.125	0.781	0.819	No
	Back	0.735	0.058	0.125	0.793	<b>0.860</b>	No
LTE Band 4	Front	0.649	0.087	0.125	0.736	0.774	No
	Back	0.664	0.058	0.125	0.722	0.789	No
LTE Band 5	Front	0.263	0.087	0.125	0.350	0.388	No
	Back	0.386	0.058	0.125	0.444	0.511	No
LTE Band 7	Front	0.535	0.087	0.125	0.622	0.660	No
	Back	0.307	0.058	0.125	0.365	0.432	No





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 161 of 169

WWAN Band (Second Antenna)	Exposure position	① MAX.WWAN	② MAX.WLAN SAR(W/kg)	③MAX.BT SAR(W/kg)	Summed SAR①+	Summed SAR①+	Case NO.
		SAR(W/kg)			②	③	
GSM850	Front(voice)	0.183	0.087	0.125	0.270	0.308	No
	Back(voice)	0.214	0.058	0.125	0.272	0.339	No
	Front(data)	0.158	0.087	0.125	0.245	0.283	No
	Back(data)	0.185	0.058	0.125	0.243	0.310	No
GSM1900	Front(voice)	0.059	0.087	0.125	0.146	0.184	No
	Back(voice)	0.059	0.058	0.125	0.117	0.184	No
	Front(data)	0.064	0.087	0.125	0.151	0.189	No
	Back(data)	0.078	0.058	0.125	0.136	0.203	No
WCDMA Band II	Front	0.122	0.087	0.125	0.209	0.247	No
	Back	0.125	0.058	0.125	0.183	0.250	No
WCDMA Band IV	Front	0.096	0.087	0.125	0.183	0.221	No
	Back	0.129	0.058	0.125	0.187	0.254	No
WCDMA Band V	Front	0.171	0.087	0.125	0.258	0.296	No
	Back	0.165	0.058	0.125	0.223	0.290	No
LTE Band 2	Front	0.122	0.087	0.125	0.209	0.247	No
	Back	0.115	0.058	0.125	0.173	0.240	No
LTE Band 4	Front	0.118	0.087	0.125	0.205	0.243	No
	Back	0.151	0.058	0.125	0.209	0.276	No
LTE Band 5	Front	0.237	0.087	0.125	0.324	<b>0.362</b>	No
	Back	0.159	0.058	0.125	0.217	0.284	No
LTE Band 7	Front	0.176	0.087	0.125	0.263	0.301	No
	Back	0.168	0.058	0.125	0.226	0.293	No



**3) Simultaneous Transmission SAR Summation Scenario for hotspot**

WWAN Band (Main Antenna)	Exposure position	①MAX.WWAN	②MAX.WLAN SAR(W/kg)	Summed SAR①+②	Case NO.
		SAR(W/kg)			
GSM850	Front	0.26	0.146	0.406	No
	Back	0.363	0.102	0.465	No
	Left	0.195	0.000	0.195	No
	Right	0.38	0.076	0.456	No
	Top	0	0.122	0.122	No
	Bottom	0.206	0.000	0.206	No
GSM1900	Front	0.384	0.146	0.530	No
	Back	0.464	0.102	0.566	No
	Left	0.022	0.000	0.022	No
	Right	0.045	0.076	0.121	No
	Top	0	0.122	0.122	No
	Bottom	1.09	0.000	<b>1.090</b>	No
WCDMA Band II	Front	0.541	0.146	0.687	No
	Back	0.65	0.102	0.752	No
	Left	0.068	0.000	0.068	No
	Right	0.046	0.076	0.122	No
	Top	0	0.122	0.122	No
	Bottom	1.054	0.000	1.054	No
WCDMA Band IV	Front	0.329	0.146	0.475	No
	Back	0.42	0.102	0.522	No
	Left	0.092	0.000	0.092	No
	Right	0.136	0.076	0.212	No
	Top	0	0.122	0.122	No
	Bottom	0.748	0.000	0.748	No
WCDMA Band V	Front	0.281	0.146	0.427	No
	Back	0.397	0.102	0.499	No
	Left	0.246	0.000	0.246	No
	Right	0.458	0.076	0.534	No
	Top	0	0.122	0.122	No
	Bottom	0.246	0.000	0.246	No
LTE Band 2	Front	0.321	0.146	0.467	No
	Back	0.407	0.102	0.509	No
	Left	0.038	0.000	0.038	No
	Right	0.023	0.076	0.099	No
	Top	0	0.122	0.122	No
	Bottom	0.718	0.000	0.718	No
LTE Band 4	Front	0.244	0.146	0.390	No
	Back	0.329	0.102	0.431	No
	Left	0.038	0.000	0.038	No
	Right	0.049	0.076	0.125	No
	Top	0	0.122	0.122	No
	Bottom	0.539	0.000	0.539	No

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.:SZEM180100052901

Rev : 01

Page : 163 of 169

LTE Band 5	Front	0.269	0.146	0.415	No
	Back	0.371	0.102	0.473	No
	Left	0.238	0.000	0.238	No
	Right	0.521	0.076	0.597	No
	Top	0	0.122	0.122	No
	Bottom	0.256	0.000	0.256	No
LTE Band 7	Front	0.563	0.146	0.709	No
	Back	0.451	0.102	0.553	No
	Left	0.184	0.000	0.184	No
	Right	0.744	0.076	0.820	No
	Top	0	0.122	0.122	No
	Bottom	0.253	0.000	0.253	No



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:SZEM180100052901

Rev : 01

Page : 164 of 169

WWAN Band (Second Antenna)	Exposure position	①MAX.WWAN	②MAX.WLAN SAR(W/kg)	Summed SAR ①+②	Case NO.
		SAR(W/kg)			
GSM850	Front	0.208	0.146	0.354	No
	Back	0.165	0.102	0.267	No
	Left	0.213	0.000	0.213	No
	Right	0.000	0.076	0.076	No
	Top	0.273	0.122	<b>0.395</b>	No
	Bottom	0	0.000	0.000	No
GSM1900	Front	0.081	0.146	0.227	No
	Back	0.077	0.102	0.179	No
	Left	0.115	0.000	0.115	No
	Right	0.000	0.076	0.076	No
	Top	0.043	0.122	0.165	No
	Bottom	0.000	0.000	0.000	No
WCDMA Band II	Front	0.055	0.146	0.201	No
	Back	0.066	0.102	0.168	No
	Left	0.111	0.000	0.111	No
	Right	0.000	0.076	0.076	No
	Top	0.039	0.122	0.161	No
	Bottom	0.000	0.000	0.000	No
WCDMA Band IV	Front	0.142	0.146	0.288	No
	Back	0.196	0.102	0.298	No
	Left	0.141	0.000	0.141	No
	Right	0.000	0.076	0.076	No
	Top	0.101	0.122	0.223	No
	Bottom	0.000	0.000	0.000	No
WCDMA Band V	Front	0.177	0.146	0.323	No
	Back	0.133	0.102	0.235	No
	Left	0.147	0.000	0.147	No
	Right	0	0.076	0.076	No
	Top	0.159	0.122	0.281	No
	Bottom	0.000	0.000	0.000	No
LTE Band 2	Front	0.050	0.146	0.196	No
	Back	0.050	0.102	0.152	No
	Left	0.083	0.000	0.083	No
	Right	0.000	0.076	0.076	No
	Top	0.028	0.122	0.150	No
	Bottom	0.000	0.000	0.000	No
LTE Band 4	Front	0.107	0.146	0.253	No
	Back	0.119	0.102	0.221	No
	Left	0.102	0.000	0.102	No
	Right	0.000	0.076	0.076	No
	Top	0.086	0.122	0.208	No
	Bottom	0.000	0.000	0.000	No
LTE Band 5	Front	0.205	0.146	0.351	No

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.:SZEM180100052901

Rev : 01

Page : 165 of 169

	Back	0.164	0.102	0.266	No
	Left	0.142	0.000	0.142	No
	Right	0.000	0.076	0.076	No
	Top	0.194	0.122	0.316	No
	Bottom	0.000	0.000	0.000	No
LTE Band 7	Front	0.055	0.146	0.201	No
	Back	0.063	0.102	0.165	No
	Left	0.053	0.000	0.053	No
	Right	0	0.076	0.076	No
	Top	0.02	0.122	0.142	No
	Bottom	0	0.000	0.000	No



**4) Simultaneous Transmission SAR Summation Scenario for Limb**

WWAN Band (Main Antenna)	Exposure position	① MAX.WWAN	② MAX.WLAN SAR(W/kg)	③ MAX.BT SAR(W/kg)	Summed SAR①+ ②	Summed SAR①+ ③	Case NO.
		SAR(W/kg)					
GSM 1900	Bottom	1.877	0	0.15	1.877	2.027	No
WCDMA B2	Front	2.215	0	0.15	2.215	2.365	No
	Back	2.731	0	0.15	2.731	2.881	No
	Bottom	3.191	0	0.15	3.191	3.341	No
WCDMA B4	Back	1.766	0	0.15	1.766	1.916	No
	Bottom	2.732	0	0.15	2.732	2.882	No
LTE B2	Back	3.042	0	0.15	3.042	3.192	No
	Bottom	3.176	0	0.15	3.176	3.326	No
LTE B4	Bottom	3.191	0	0.15	3.191	<b>3.341</b>	No



## 9 Equipment list

Test Platform		SPEAG DASY5 Professional				
Location		SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch				
Description		SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference		DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
<input checked="" type="checkbox"/>	Robot	Staubli	RX90L	F03/5V32A1/A01	NCR	NCR
<input checked="" type="checkbox"/>	ELI	SPEAG	ELI V5.0	1239	NCR	NCR
<input checked="" type="checkbox"/>	Twin Phantom	SPEAG	SAM 1	1824	NCR	NCR
<input checked="" type="checkbox"/>	DAE	SPEAG	DAE4	1267	2017-11-28	2018-11-27
<input checked="" type="checkbox"/>	E-Field Probe	SPEAG	EX3DV4	3923	2017-08-24	2018-08-23
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D835V2	4d105	2016-12-08	2019-12-07
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D1750V2	1149	2016-06-23	2019-06-22
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D1900V2	5d028	2016-12-07	2019-12-06
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D2450V2	733	2016-12-07	2019-12-06
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D2600V2	1125	2016-06-22	2019-06-21
<input checked="" type="checkbox"/>	Agilent Network Analyzer	Agilent	E5071C	MY46523590	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	Dielectric Probe Kit	Agilent	85070E	US01440210	NCR	NCR
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMU200	123090	2017-06-21	2018-06-20
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	152271	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
<input checked="" type="checkbox"/>	Signal Generator	Agilent	N5171B	MY53050736	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	Preamplifier	Mini-Circuits	ZHL-42W	15542	NCR	NCR
<input checked="" type="checkbox"/>	Power Meter	Agilent	E4416A	GB41292095	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	Power Sensor	Agilent	8481H	MY41091234	2017-03-05	2018-03-04
<input checked="" type="checkbox"/>	Power Sensor	R&S	NRP-Z92	100025	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
<input checked="" type="checkbox"/>	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
<input checked="" type="checkbox"/>	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
<input checked="" type="checkbox"/>	50 Ω coaxial load	Mini-Circuits	KARN-50+	00850	NCR	NCR
<input checked="" type="checkbox"/>	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
<input checked="" type="checkbox"/>	Speed reading thermometer	MingGao	T809	NA	2017-03-08	2018-03-07
<input checked="" type="checkbox"/>	Humidity and Temperature Indicator	KIMTOKA	KIMTOKA	NA	2017-03-08	2018-03-07



## **10 Calibration certificate**

Please see the Appendix C

## **11 Photographs**

Please see the Appendix D





## **Appendix A: Detailed System Validation Results**

## **Appendix B: Detailed Test Results**

## **Appendix C: Calibration certificate**

## **Appendix D: Photographs**

**---END---**

---