



Appendix B. SAR Measurement Plots

Table of contents
HAC(RF) Measurement plots of GSM850 (Second Antenna)
HAC(RF) Measurement plots of GSM850 (Main Antenna)
HAC(RF) Measurement plots of GSM1900 (Main Antenna)

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-251CH Second Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 67.77 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 40.87 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 43.91 dBV/m	Grid 2 M2 45.89 dBV/m	Grid 3 M3 43.97 dBV/m
Grid 4 M4 39.17 dBV/m	Grid 5 M3 40.87 dBV/m	Grid 6 M4 39.7 dBV/m
Grid 7 M4 34.48 dBV/m	Grid 8 M4 35.7 dBV/m	Grid 9 M4 35.67 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 45.89 dBV/m

E Category: M2

Location: 0, -25, 8.7 mm

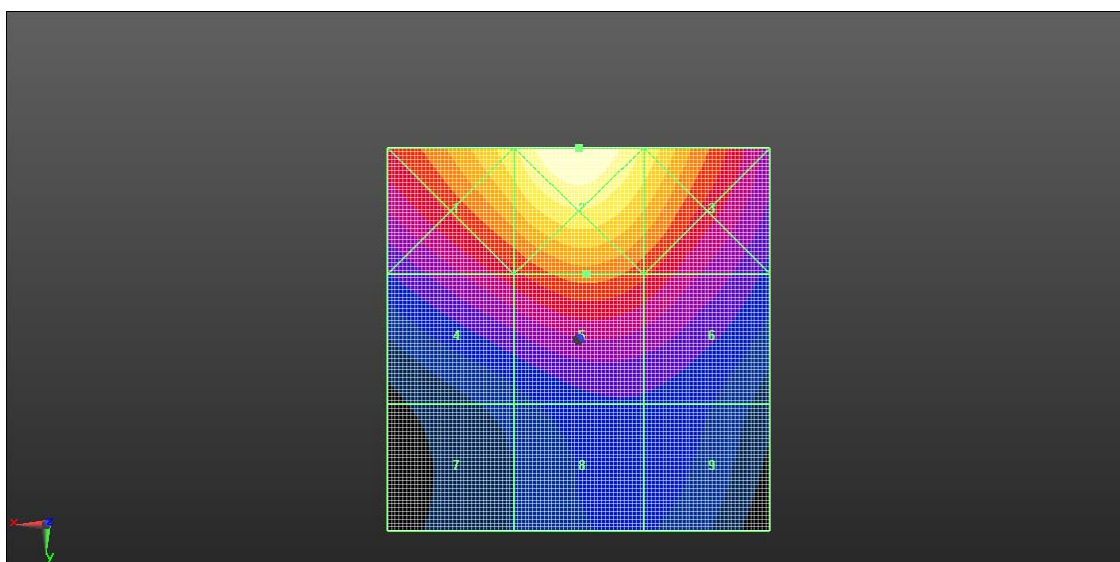

0 dB = 197.0 V/m = 45.89 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-190CH Second Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 62.93 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 40.09 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 43.08 dBV/m	Grid 2 M2 45.04 dBV/m	Grid 3 M3 43.15 dBV/m
Grid 4 M4 38.38 dBV/m	Grid 5 M3 40.09 dBV/m	Grid 6 M4 39 dBV/m
Grid 7 M4 34.02 dBV/m	Grid 8 M4 35.29 dBV/m	Grid 9 M4 35.26 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 45.04 dBV/m

E Category: M2

Location: 0, -25, 8.7 mm

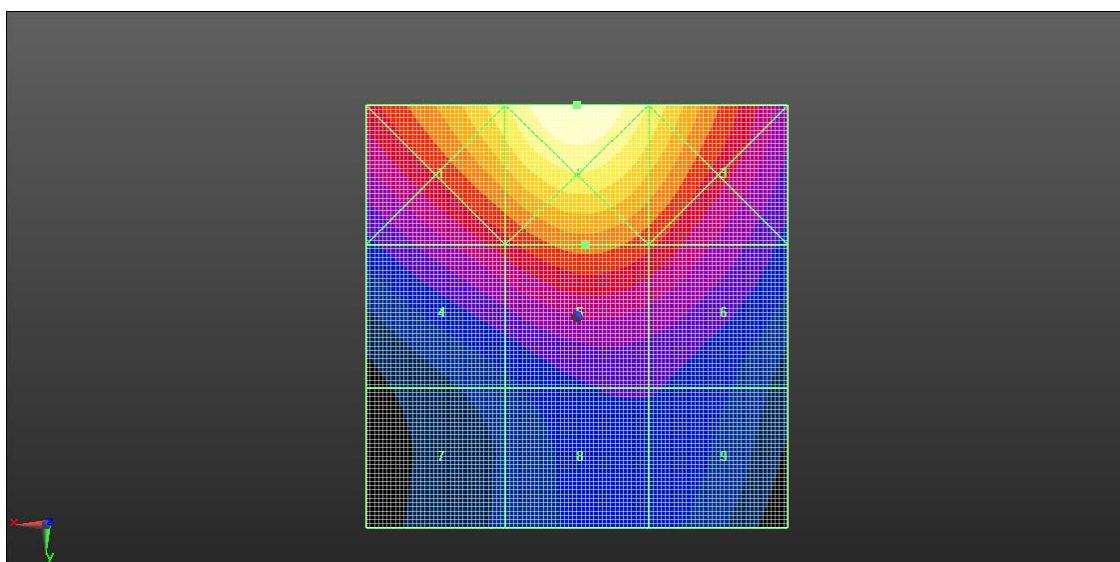

0 dB = 178.6 V/m = 45.04 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-128CH Second Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 51.74 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 38.39 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M3 41.3 dBV/m	Grid 2 M3 43.34 dBV/m	Grid 3 M3 41.53 dBV/m
Grid 4 M4 36.57 dBV/m	Grid 5 M4 38.39 dBV/m	Grid 6 M4 37.39 dBV/m
Grid 7 M4 32.32 dBV/m	Grid 8 M4 33.94 dBV/m	Grid 9 M4 33.95 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 43.34 dBV/m

E Category: M3

Location: 0, -25, 8.7 mm

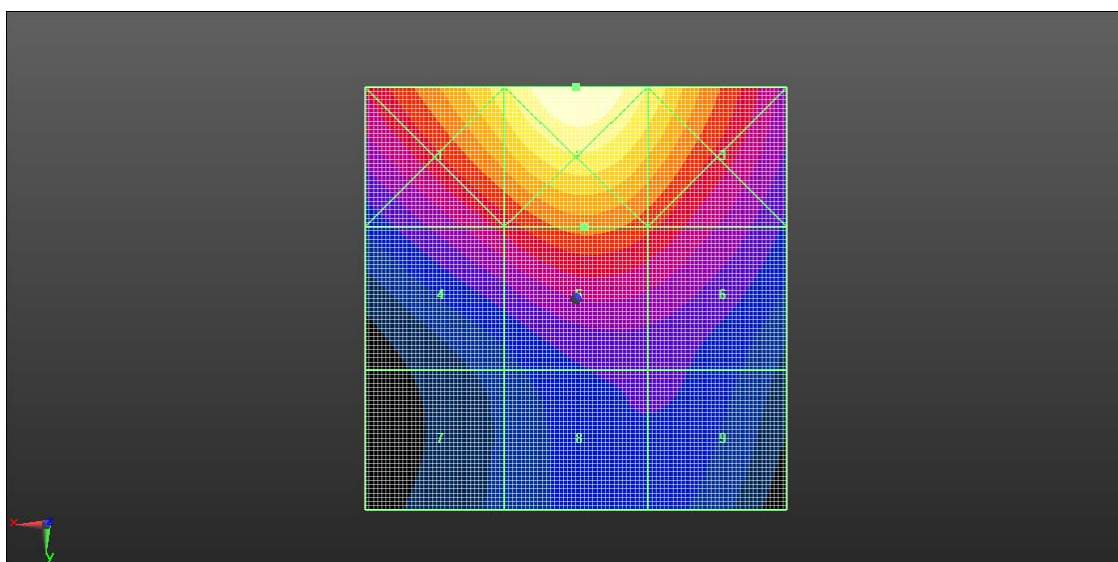

0 dB = 146.9 V/m = 43.34 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-251CH Second Antenna with Battery 2**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 66.72 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 40.73 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 43.8 dBV/m	Grid 2 M2 45.74 dBV/m	Grid 3 M3 43.83 dBV/m
Grid 4 M4 39.02 dBV/m	Grid 5 M3 40.73 dBV/m	Grid 6 M4 39.55 dBV/m
Grid 7 M4 34.35 dBV/m	Grid 8 M4 35.55 dBV/m	Grid 9 M4 35.53 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 45.74 dBV/m

E Category: M2

Location: 0, -25, 8.7 mm

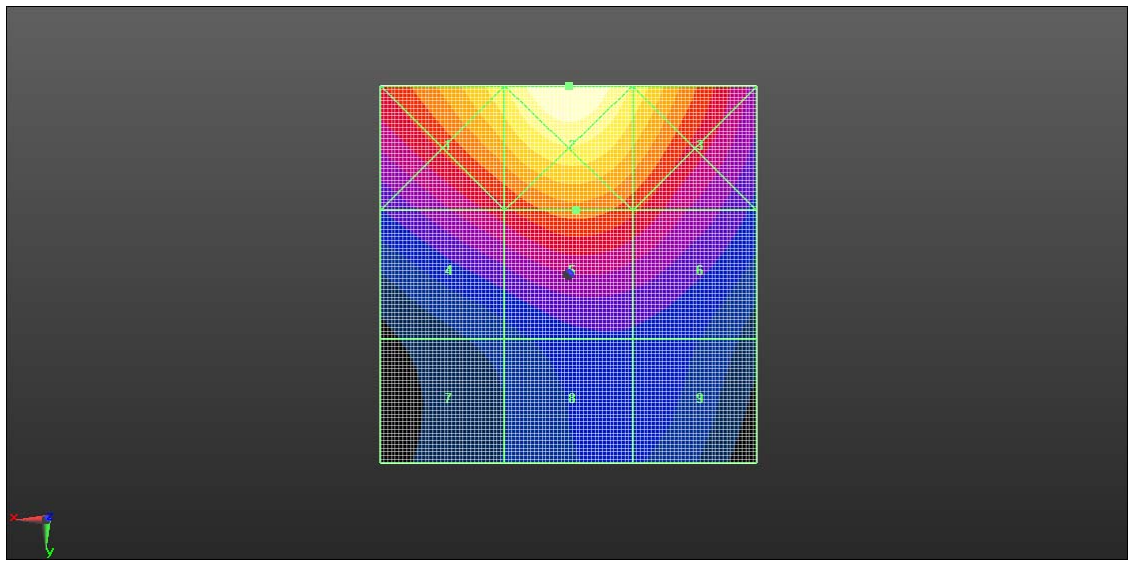

0 dB = 193.7 V/m = 45.74 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-251CH Second Antenna with Battery 3**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 74.44 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 41.43 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 44.05 dBV/m	Grid 2 M2 46.19 dBV/m	Grid 3 M3 44.33 dBV/m
Grid 4 M4 39.5 dBV/m	Grid 5 M3 41.43 dBV/m	Grid 6 M3 40.27 dBV/m
Grid 7 M4 34.84 dBV/m	Grid 8 M4 36.29 dBV/m	Grid 9 M4 36.26 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 46.19 dBV/m

E Category: M2

Location: 0, -25, 8.7 mm

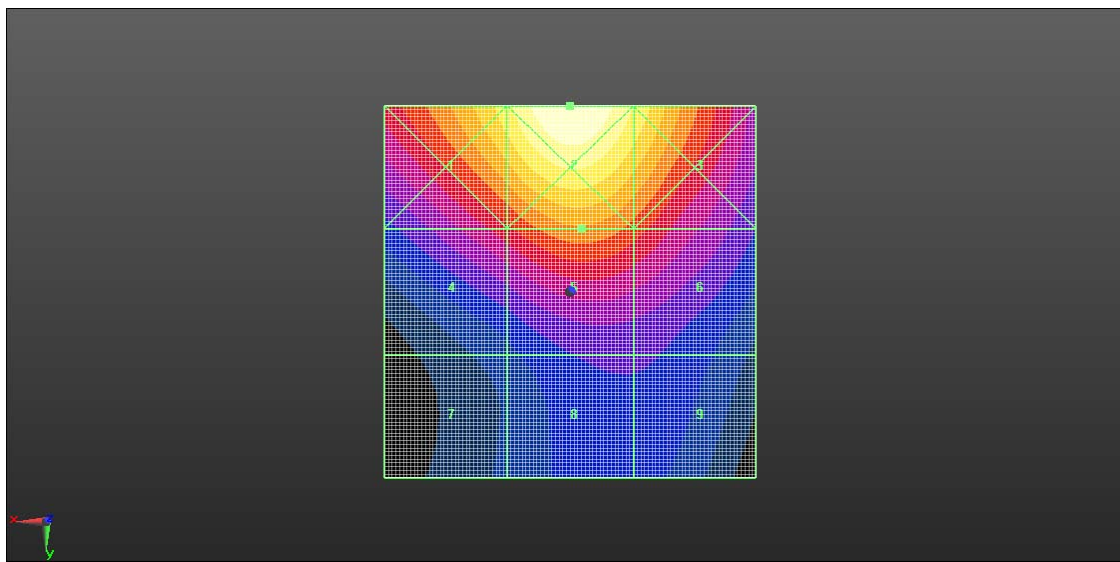

0 dB = 203.8 V/m = 46.18 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-251CH Main Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 38.31 V/m; Power Drift = -0.10 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.73 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 32.07 dBV/m	Grid 2 M4 33.08 dBV/m	Grid 3 M4 33.06 dBV/m
Grid 4 M4 32.36 dBV/m	Grid 5 M4 33.73 dBV/m	Grid 6 M4 33.73 dBV/m
Grid 7 M4 33.38 dBV/m	Grid 8 M4 34.26 dBV/m	Grid 9 M4 34.22 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 34.26 dBV/m

E Category: M4

Location: -5.5, 25, 8.7 mm

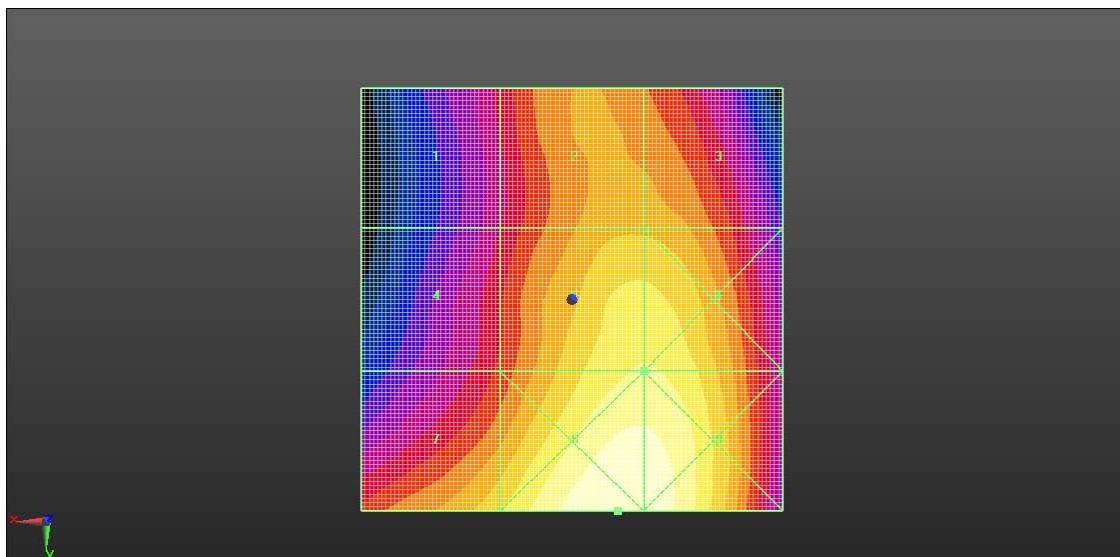

0 dB = 51.67 V/m = 34.26 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-190CH Main Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 42.71 V/m; Power Drift = -0.09 dB

Applied MIF = 3.63 dB

RF audio interference level = 34.55 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 33.33 dBV/m	Grid 2 M4 34.01 dBV/m	Grid 3 M4 33.97 dBV/m
Grid 4 M4 33.28 dBV/m	Grid 5 M4 34.55 dBV/m	Grid 6 M4 34.53 dBV/m
Grid 7 M4 34.15 dBV/m	Grid 8 M4 35.01 dBV/m	Grid 9 M4 34.97 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 35.01 dBV/m

E Category: M4

Location: -5, 25, 8.7 mm

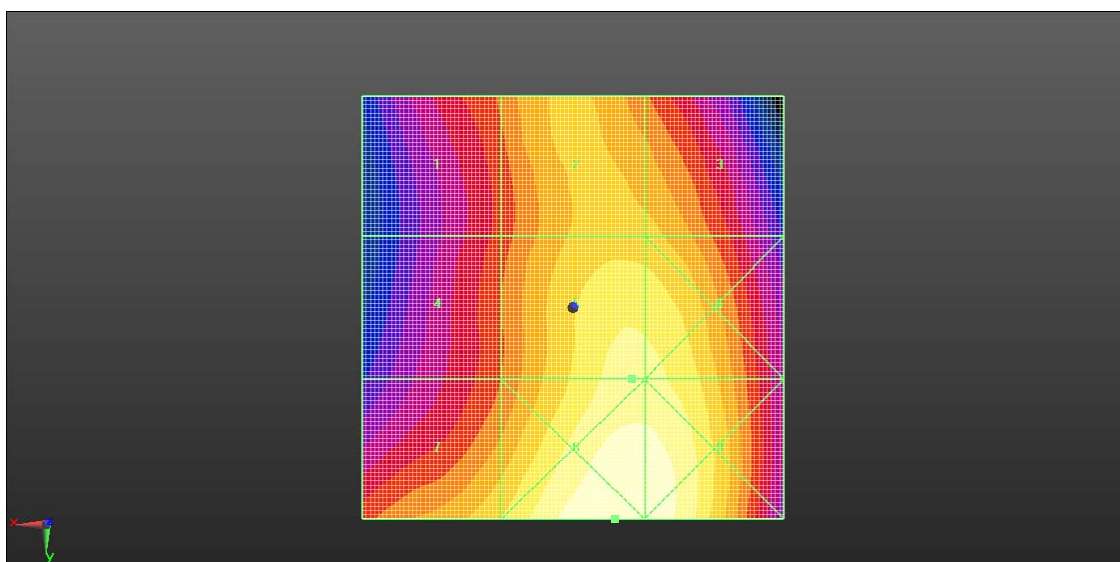

0 dB = 56.30 V/m = 35.01 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-128CH Main Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 41.57 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 34.33 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 33.85 dBV/m	Grid 2 M4 34.33 dBV/m	Grid 3 M4 33.68 dBV/m
Grid 4 M4 33.22 dBV/m	Grid 5 M4 34.17 dBV/m	Grid 6 M4 34.17 dBV/m
Grid 7 M4 33.99 dBV/m	Grid 8 M4 34.69 dBV/m	Grid 9 M4 34.63 dBV/m


Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 34.69 dBV/m

E Category: M4

Location: -4.5, 25, 8.7 mm

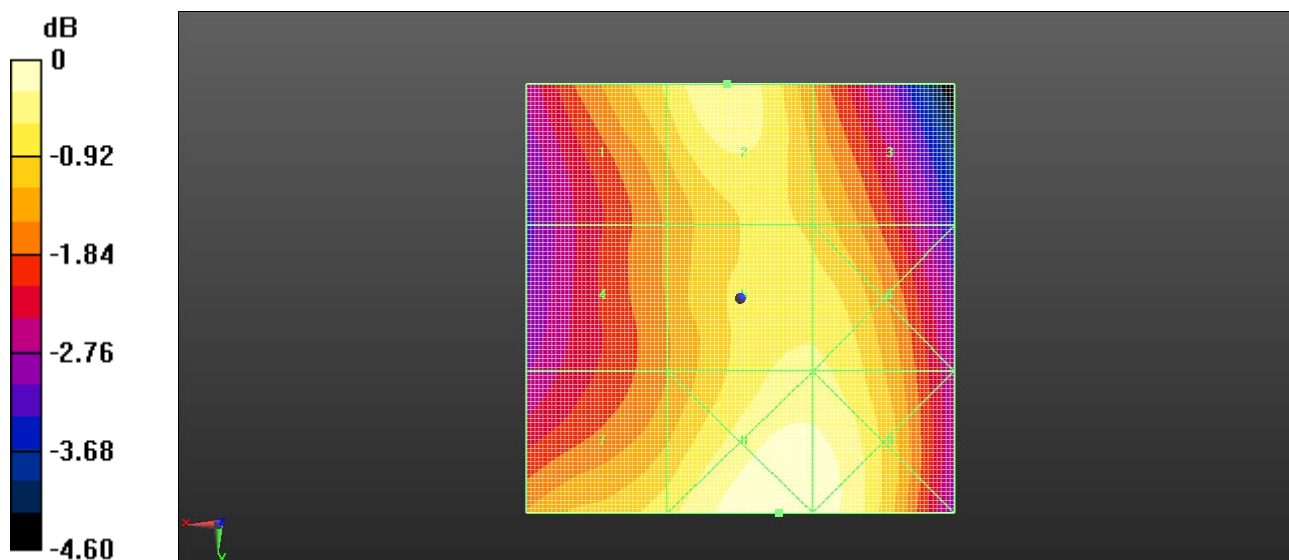

0 dB = 54.29 V/m = 34.69 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-190CH Main Antenna with Battery 2**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 39.04 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.73 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 33.03 dBV/m	Grid 2 M4 33.42 dBV/m	Grid 3 M4 33.07 dBV/m
Grid 4 M4 32.76 dBV/m	Grid 5 M4 33.73 dBV/m	Grid 6 M4 33.69 dBV/m
Grid 7 M4 33.63 dBV/m	Grid 8 M4 34.18 dBV/m	Grid 9 M4 34.07 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 34.18 dBV/m

E Category: M4

Location: -3.5, 25, 8.7 mm

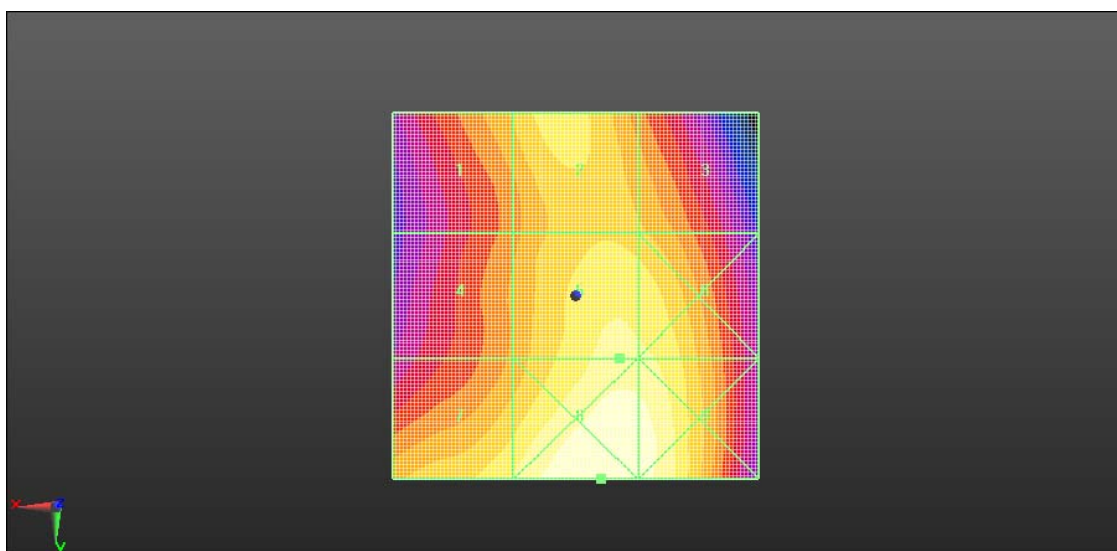

0 dB = 51.19 V/m = 34.18 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM850-190CH Main Antenna with Battery 3**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 42.95 V/m; Power Drift = -0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 34.67 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 33.33 dBV/m	Grid 2 M4 34.09 dBV/m	Grid 3 M4 34.05 dBV/m
Grid 4 M4 33.5 dBV/m	Grid 5 M4 34.67 dBV/m	Grid 6 M4 34.66 dBV/m
Grid 7 M4 34.41 dBV/m	Grid 8 M4 35.1 dBV/m	Grid 9 M4 35.05 dBV/m


Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 35.10 dBV/m

E Category: M4

Location: -3.5, 25, 8.7 mm

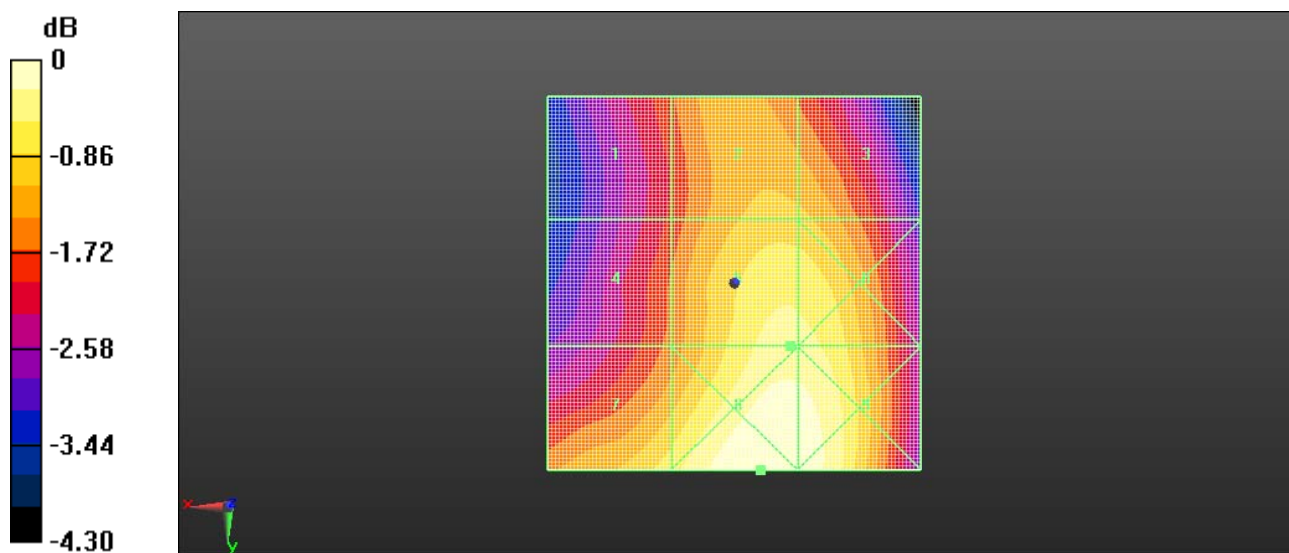

0 dB = 56.87 V/m = 35.10 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM1900-810CH Main Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.367 V/m; Power Drift = 0.12 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.68 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 27.34 dBV/m	Grid 2 M4 27.4 dBV/m	Grid 3 M4 27.6 dBV/m
Grid 4 M4 23.15 dBV/m	Grid 5 M4 24.85 dBV/m	Grid 6 M4 25.68 dBV/m
Grid 7 M4 19.19 dBV/m	Grid 8 M4 20.77 dBV/m	Grid 9 M4 22.09 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 27.60 dBV/m

E Category: M4

Location: -13.5, -25, 8.7 mm

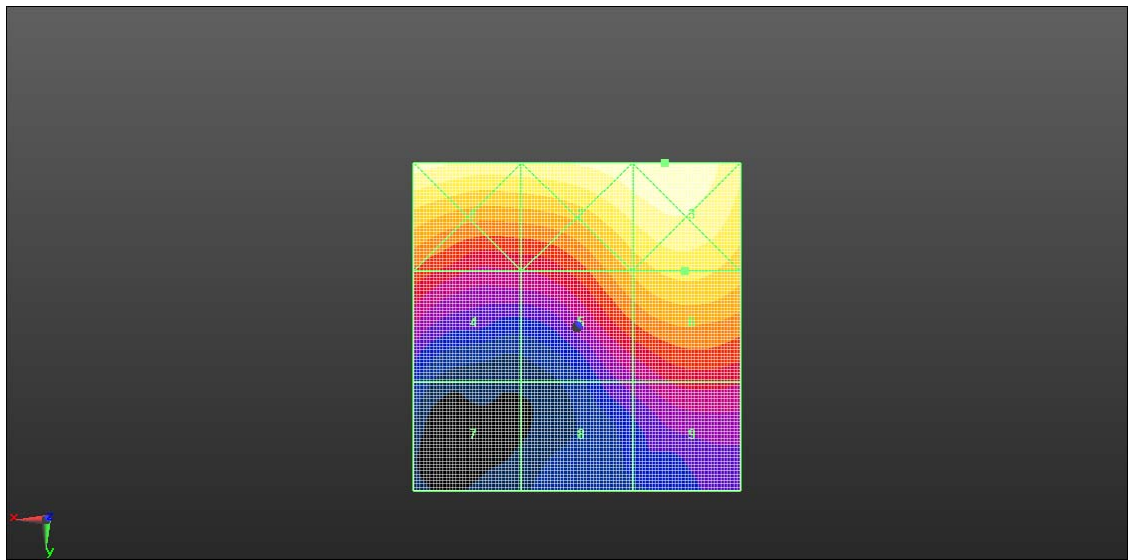

0 dB = 23.98 V/m = 27.60 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM1900-661CH Main Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.994 V/m; Power Drift = 0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.34 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 26.59 dBV/m	Grid 2 M4 26.92 dBV/m	Grid 3 M4 27.23 dBV/m
Grid 4 M4 22.27 dBV/m	Grid 5 M4 24.37 dBV/m	Grid 6 M4 25.34 dBV/m
Grid 7 M4 19.18 dBV/m	Grid 8 M4 20.24 dBV/m	Grid 9 M4 21.96 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 27.23 dBV/m

E Category: M4

Location: -14, -25, 8.7 mm

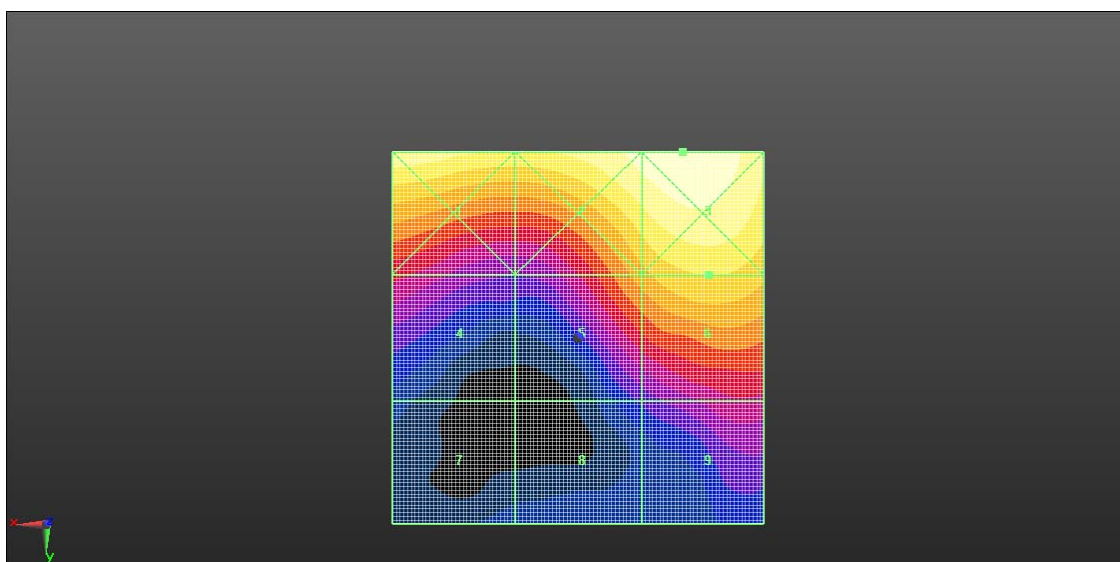

0 dB = 22.99 V/m = 27.23 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM1900-512CH Main Antenna**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.566 V/m; Power Drift = 0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.29 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 26.96 dBV/m	Grid 2 M4 26.96 dBV/m	Grid 3 M4 27.49 dBV/m
Grid 4 M4 22.1 dBV/m	Grid 5 M4 23.79 dBV/m	Grid 6 M4 25.29 dBV/m
Grid 7 M4 20.66 dBV/m	Grid 8 M4 21.33 dBV/m	Grid 9 M4 22.24 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 27.49 dBV/m

E Category: M4

Location: -15.5, -25, 8.7 mm

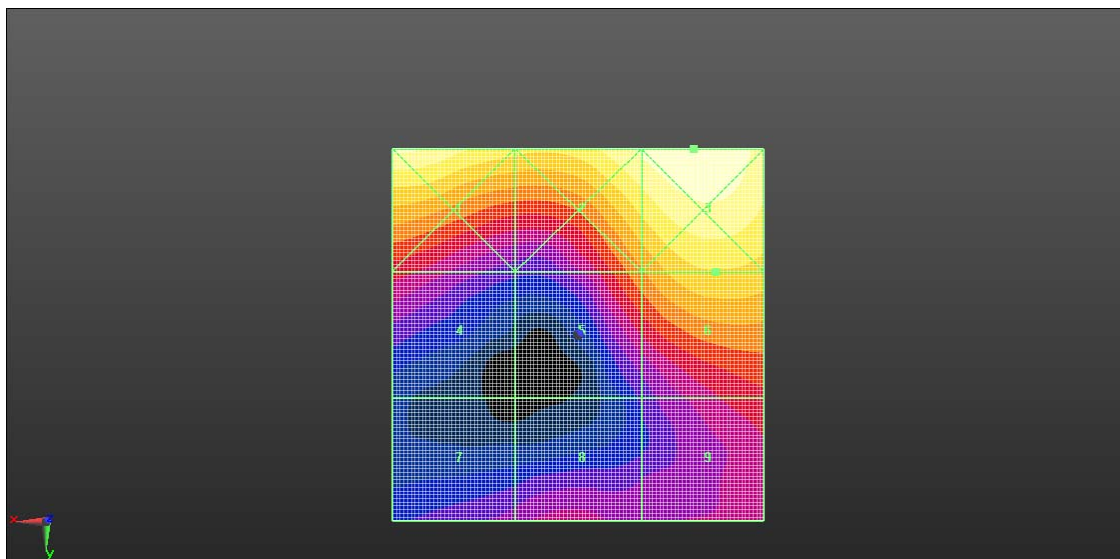

0 dB = 23.70 V/m = 27.49 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM1900-810CH Main Antenna with Battery 2**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.100 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.84 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 27.58 dBV/m	Grid 2 M4 27.77 dBV/m	Grid 3 M4 27.92 dBV/m
Grid 4 M4 22.56 dBV/m	Grid 5 M4 25.13 dBV/m	Grid 6 M4 25.84 dBV/m
Grid 7 M4 19.8 dBV/m	Grid 8 M4 21.35 dBV/m	Grid 9 M4 22.49 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 27.92 dBV/m

E Category: M4

Location: -13.5, -25, 8.7 mm

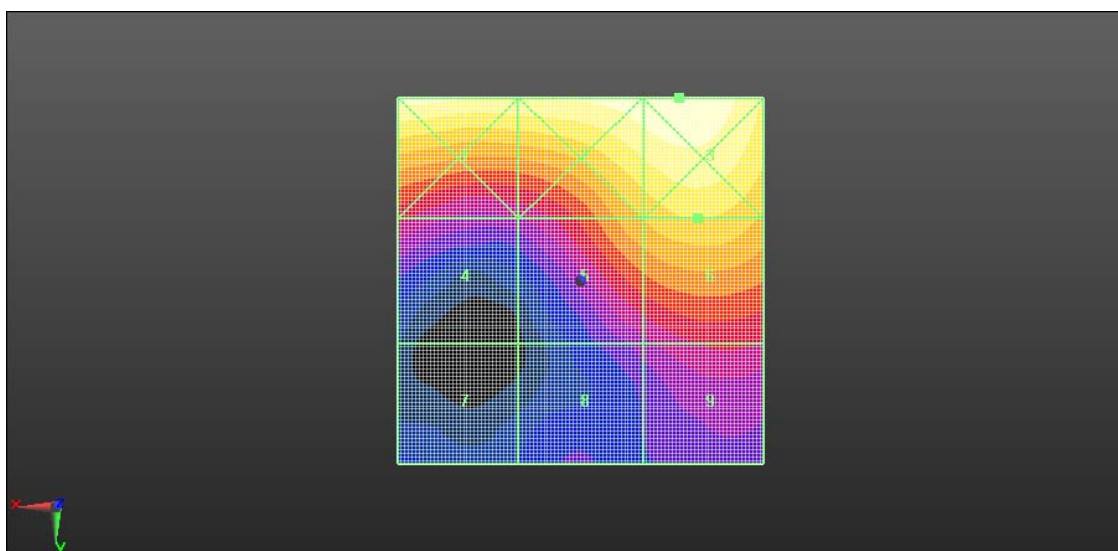

0 dB = 24.88 V/m = 27.92 dBV/m

Test Laboratory: HUAWEI SAR/HAC Lab

HAC_ER3DV6_FRD-L04-GSM1900-810CH Main Antenna with Battery 3**DUT: FRD-L04; Type: Smart Phone; Serial: SAR1**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY Configuration:

- ζ Probe: ER3DV6 - SN2441; ConvF(1, 1, 1); Calibrated: 2015-11-25;
- ζ Sensor-Surface: (Fix Surface), z = 8.7
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1053
- ζ DASY52 52.8.8(1222);

Device E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.842 V/m; Power Drift = 0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.10 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 27.1 dBV/m	Grid 2 M4 29.94 dBV/m	Grid 3 M3 30.05 dBV/m
Grid 4 M4 21.43 dBV/m	Grid 5 M4 26.83 dBV/m	Grid 6 M4 27.43 dBV/m
Grid 7 M4 20.63 dBV/m	Grid 8 M4 22.11 dBV/m	Grid 9 M4 23.52 dBV/m



Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 30.05 dBV/m

E Category: M3

Location: -11.5, -25, 8.7 mm

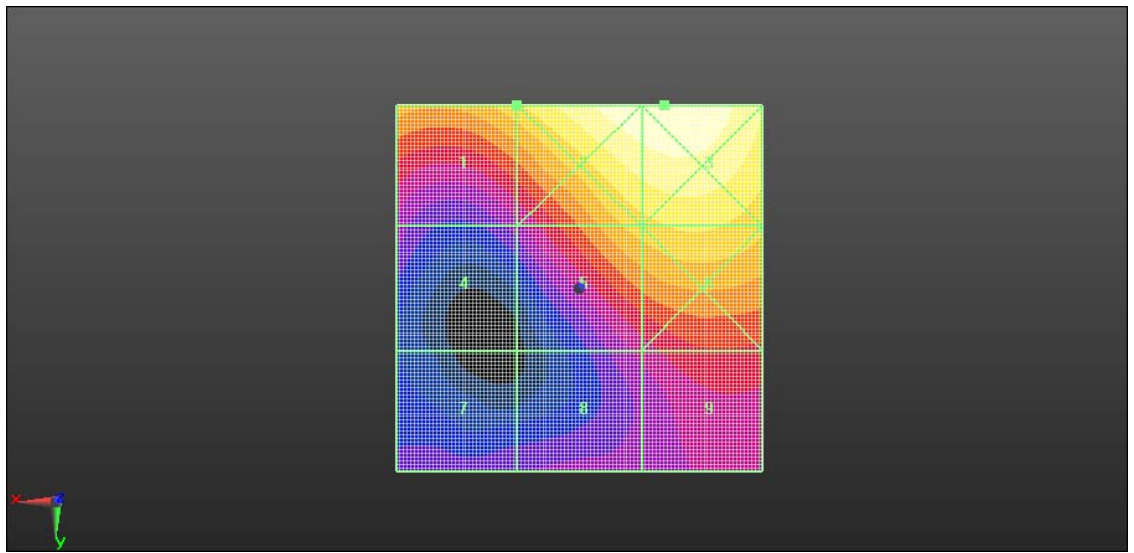

0 dB = 31.79 V/m = 30.05 dBV/m