



# FCC RF Test Report

**APPLICANT** : Huawei Technologies Co., Ltd.  
**EQUIPMENT** : Smart Phone  
**BRAND NAME** : HUAWEI  
**MODEL NAME** : GLK-LX1U  
**FCC ID** : QISGLK-LX1U  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on May 16, 2019 and testing was completed on May 30, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

*Derreck Chen*

Reviewed by: Derreck Chen / Supervisor

*Eric Shih*

Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Product Feature of Equipment Under Test..... 5

    1.3 Product Specification of Equipment Under Test..... 5

    1.4 Modification of EUT ..... 6

    1.5 Testing Location ..... 6

    1.6 Applicable Standards..... 6

    1.7 Specification of Accessory..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB Bandwidth Measurement ..... 12

    3.2 Output Power Measurement..... 14

    3.3 Power Spectral Density Measurement ..... 15

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 17

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 30

    3.6 AC Conducted Emission Measurement..... 34

    3.7 Antenna Requirements ..... 36

**4 LIST OF MEASURING EQUIPMENT ..... 37**

**5 UNCERTAINTY OF EVALUATION ..... 38**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR932820-01C	Rev. 01	Initial issue of report	Jun. 06, 2019



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.25 dB at 2483.620 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.31 dB at 0.490 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	GLK-LX1U
FCC ID	QISGLK-LX1U
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(16QAM Uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver/GNSS
IMEI Code	Conducted: 865951040001537 Conduction: 865951040001362 Radiation: 865951040001479
HW Version	HL7SENEM
SW Version	9.1.0.102(C900E102R1P1)

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report for GLK-LX1U, the change note could be referred to the product equality declaration which is exhibit separately. According to the change, all the test items are verified from original test report (Sporton Report Number FR932820C)

## 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum Output Power to antenna	802.11b : 16.90 dBm (0.0490 W) 802.11g : 13.80 dBm (0.0240 W) 802.11n HT20 : 11.60 dBm (0.0145 W) 802.11n HT40 : 11.70 dBm (0.0148 W)
Antenna Type / Gain	Internal Antenna with gain -0.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.5 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272

### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r01
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



### 1.7 Specification of Accessory

AC Adapter 1	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200U02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: Salcomp	SN	
AC Adapter 2	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200U02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: BYD	SN	
AC Adapter 3	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200U02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: HUNTKEY	SN	
AC Adapter 4	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200U02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: PHIHONG	SN	
AC Adapter 5	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200E02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: Salcomp	SN	
AC Adapter 6	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200E02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: BYD	SN	
AC Adapter 7	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200E02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: HUNTKEY	SN	
AC Adapter 8	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200E02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: PHIHONG	SN	
AC Adapter 9	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200B02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: Salcomp	SN	
AC Adapter 10	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200B02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: BYD	SN	
AC Adapter 11	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200B02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: HUNTKEY	SN	
AC Adapter 12	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200B02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: PHIHONG	SN	
AC Adapter 13	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200A02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: Salcomp	SN	
AC Adapter 14	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200A02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: BYD	SN	
USB Cable 1	Brand Name	Ningbo Broad Telecommunication Co., Ltd	Model Name	WA0020
	Signal Line	<u>1</u> meter, non-shielded cable, with w/o ferrite core		



USB Cable 2	Brand Name	Dongguan Mingji Electronics Technology Group Co.,Ltd	Model Name	203-1572-0
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
USB Cable 3	Brand Name	Freeport Resources Enterprises (Jiangxi) Co.,Ltd	Model Name	18-93C2CHO-001HF
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
USB Cable 4	Brand Name	HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD	Model Name	CUDU01B-HC295-EH
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
USB Cable 5	Brand Name	LUXSHARE Precision Industry Co., Ltd.	Model Name	L99UC131-CS-H
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
USB Cable 6	Brand Name	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.	Model Name	330-50507
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 1	Brand Name	HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD	Model Name	EPAB542-2WH06-DH
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 2	Brand Name	HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD	Model Name	EPAB542-2WH05-DH
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 3	Brand Name	Boluo County Quancheng Electronic Co., Ltd.	Model Name	1293-3283-3.5MM-322
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 4	Brand Name	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	Model Name	MEND1532B528A02
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 5	Brand Name	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	Model Name	MEND1532B528B00
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Battery	Brand Name	HuaweiTechnologies Co., Ltd.	Model Name	HB446486ECW
	Power Rating	_3.82_ Vdc, _3900_ mAh	Type	Li-ion, <u>Yes</u>





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		


## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 :PCS1900 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter 1) + Earphone 1
<b>Remark:</b> For Radiated Test Cases, The tests were performed with Adapter 5, Earphone 5 and USB Cable 5.	

## 2.3 Connection Diagram of Test System

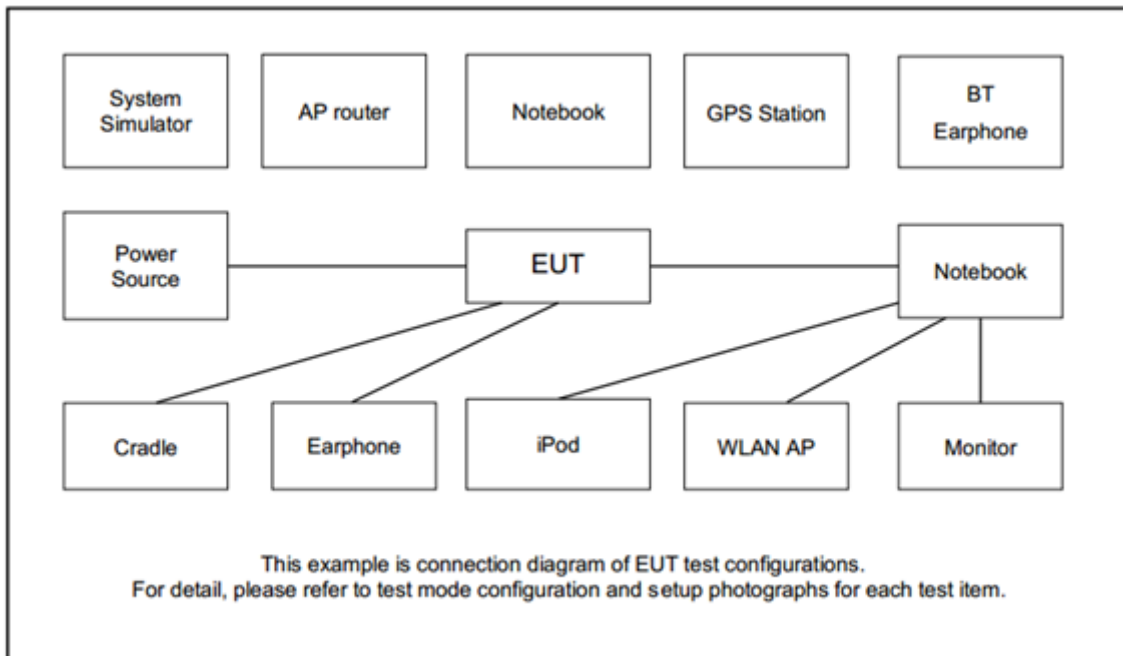



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A

### 2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

### 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


##### 3.1.4 Test Setup

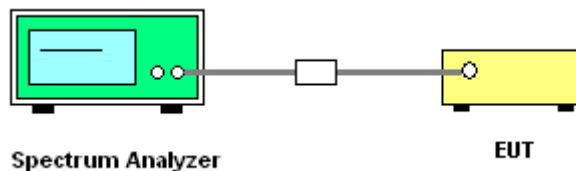



### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

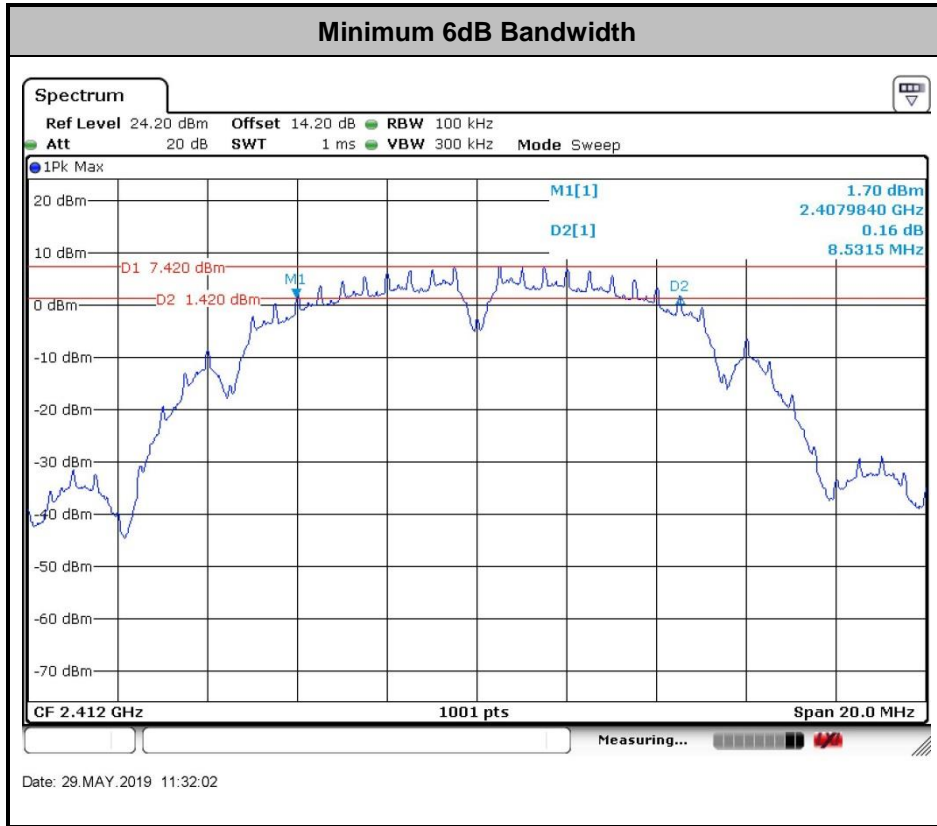

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

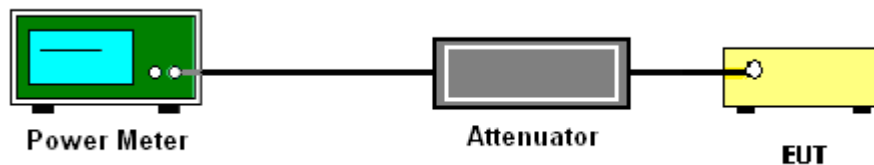

### 3.2.5 Test Result of Average output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


#### 3.3.4 Test Setup

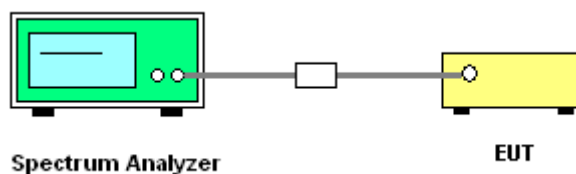



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

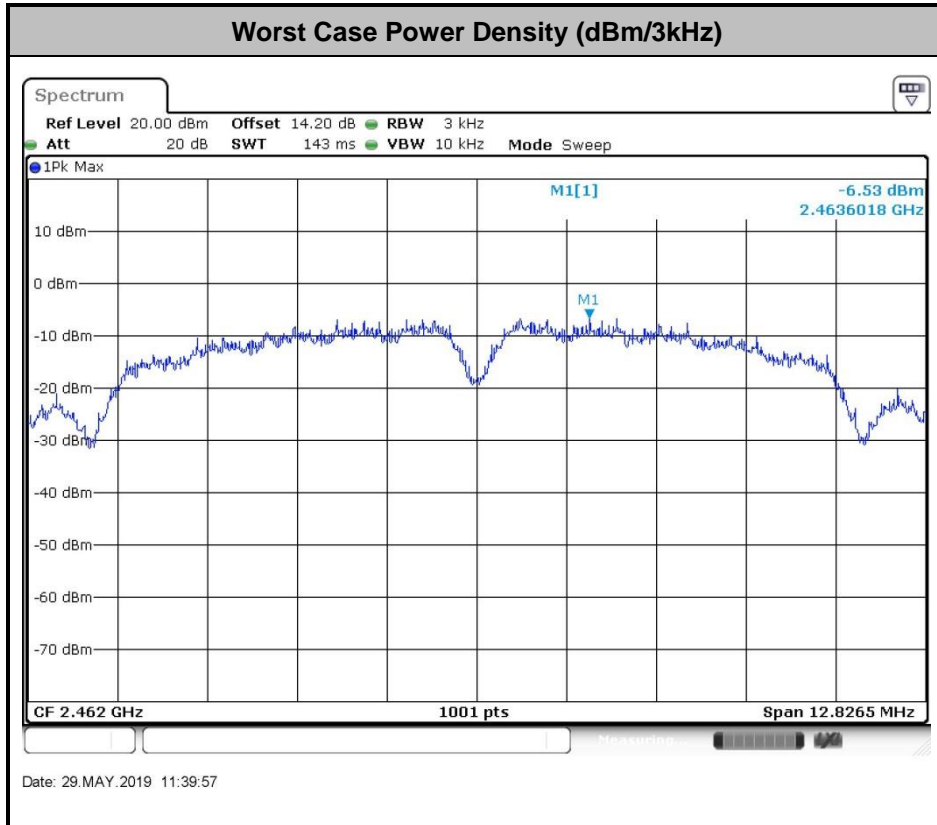



## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup


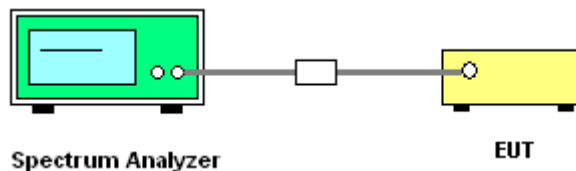




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer : Jensen Wu	Temperature :	21~25°C
	Relative Humidity :	51~54%


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

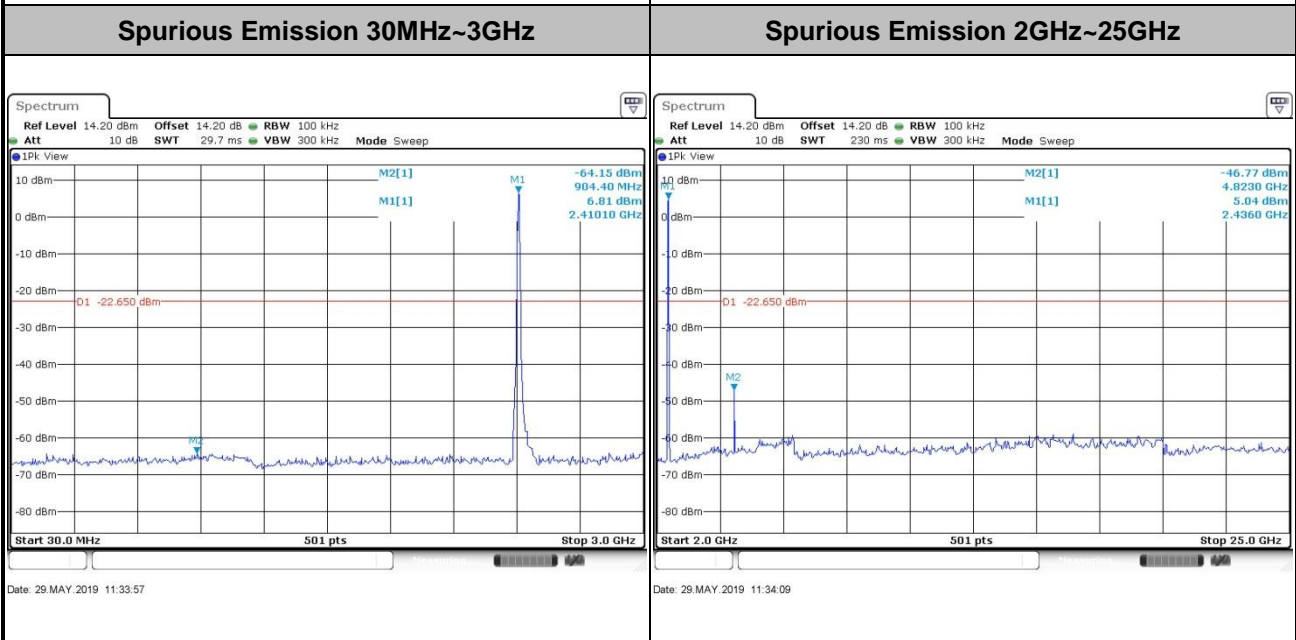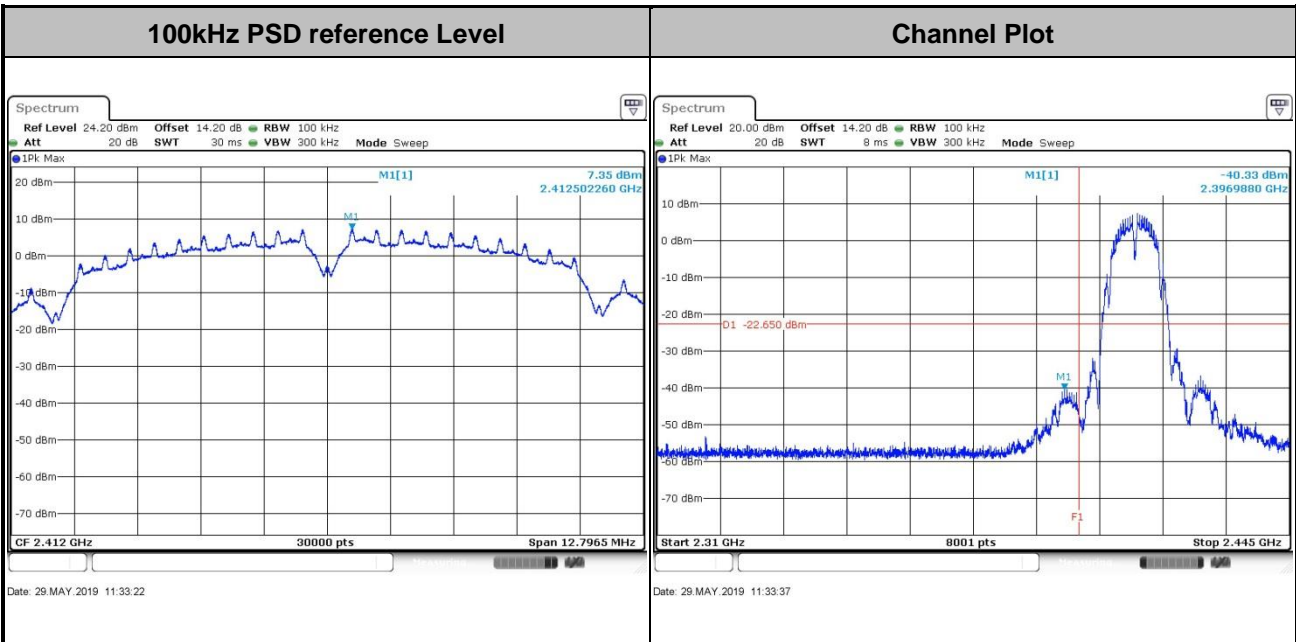





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

<b>100kHz PSD reference Level</b>	<b>Channel Plot</b>
-----------------------------------	---------------------


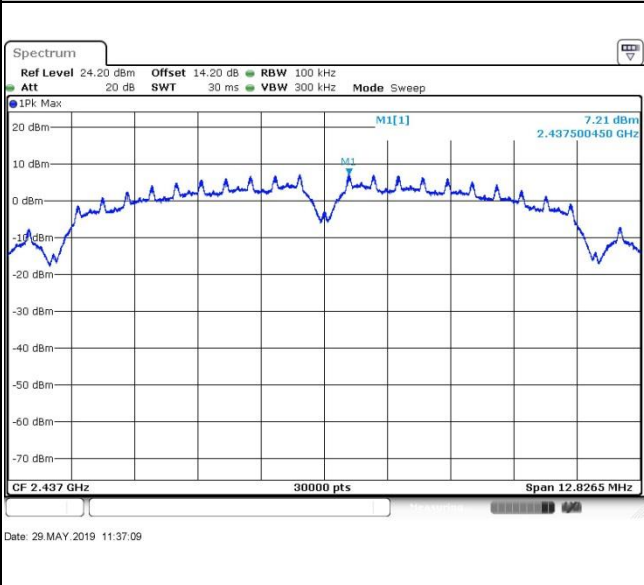


<b>Spurious Emission 30MHz~3GHz</b>	<b>Spurious Emission 2GHz~25GHz</b>
-------------------------------------	-------------------------------------

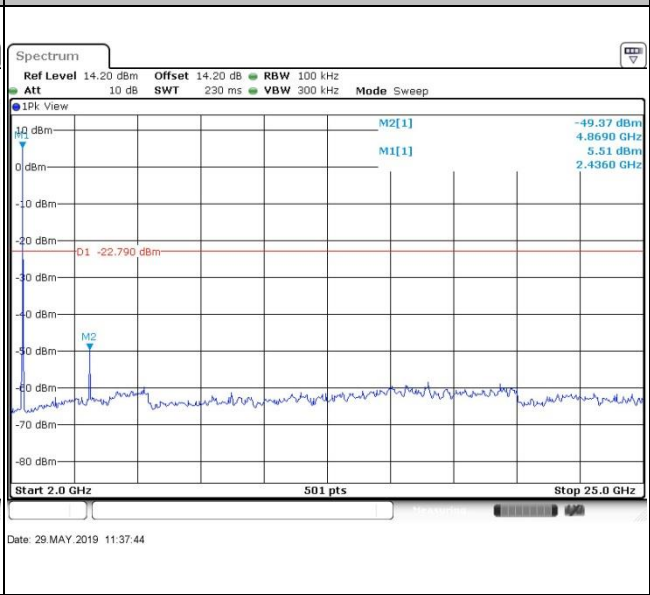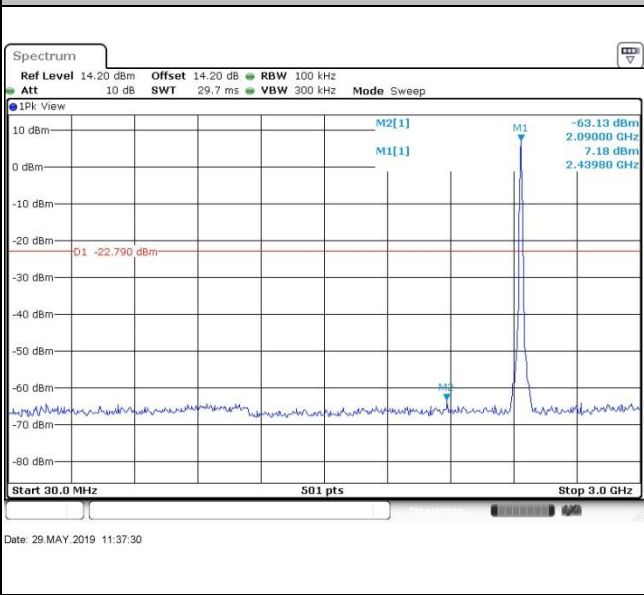





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

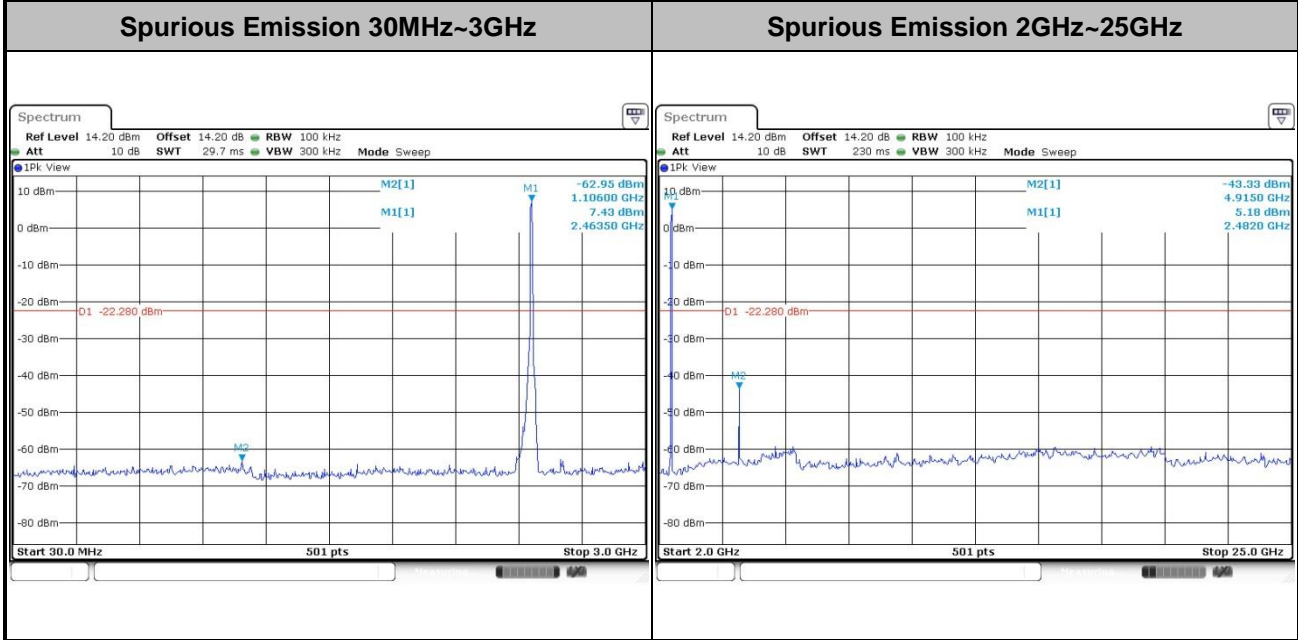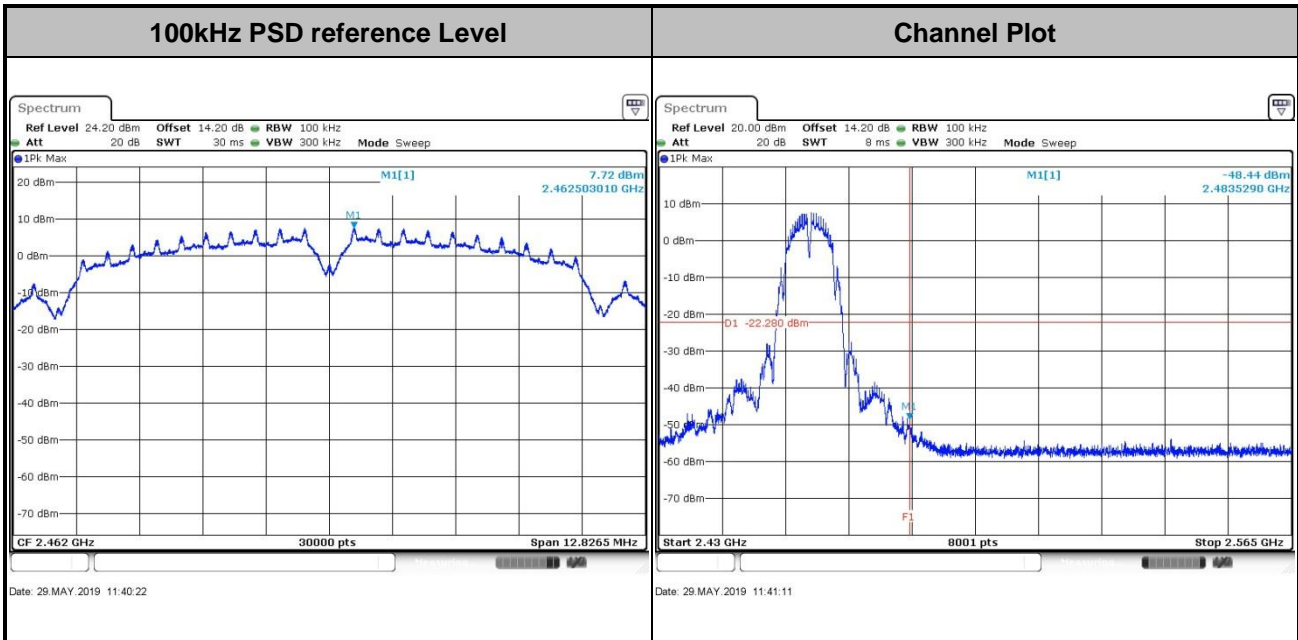




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

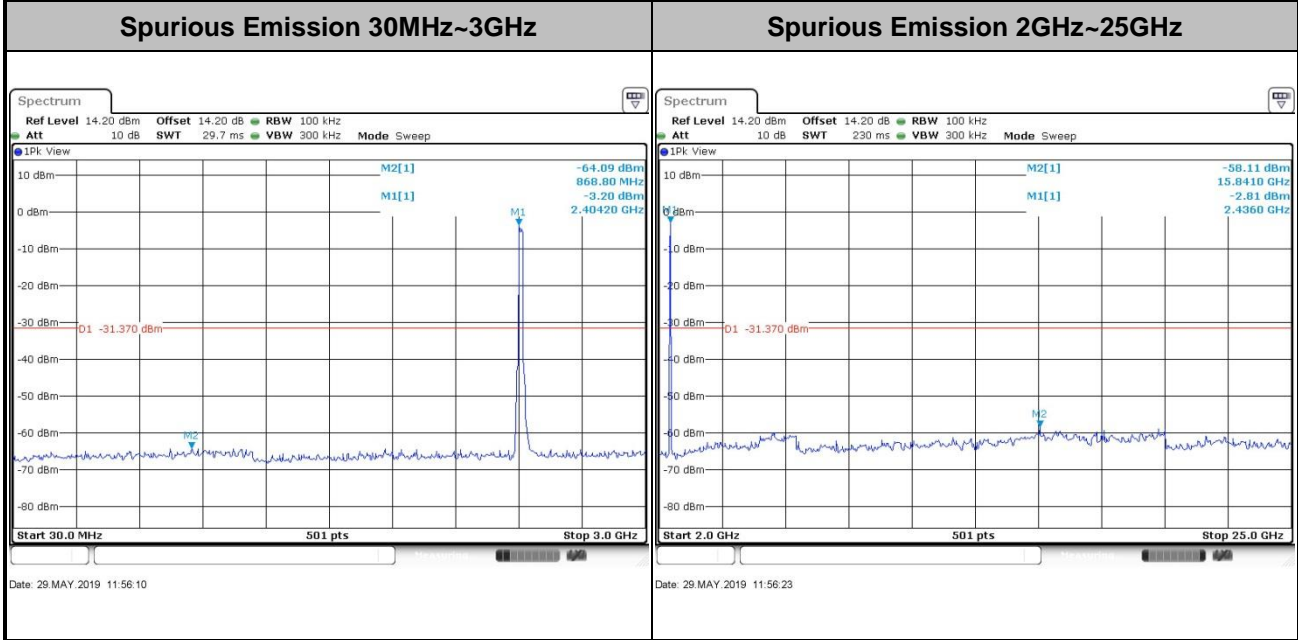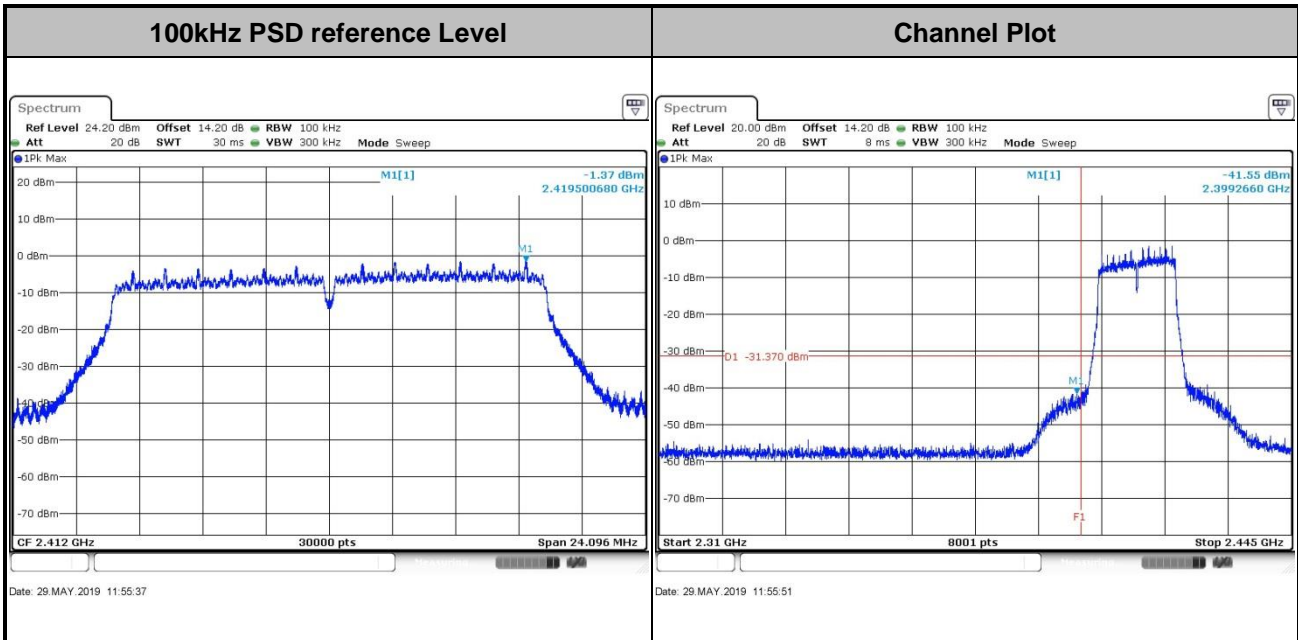





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

<b>100kHz PSD reference Level</b>	<b>Channel Plot</b>
-----------------------------------	---------------------

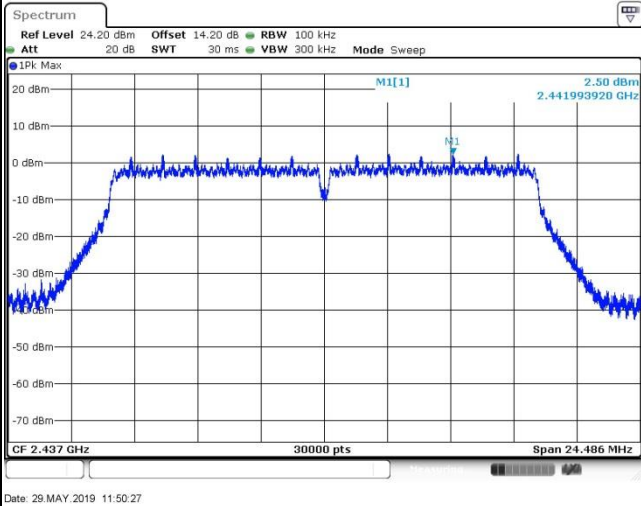



**Spurious Emission 30MHz~3GHz**

**Spurious Emission 2GHz~25GHz**

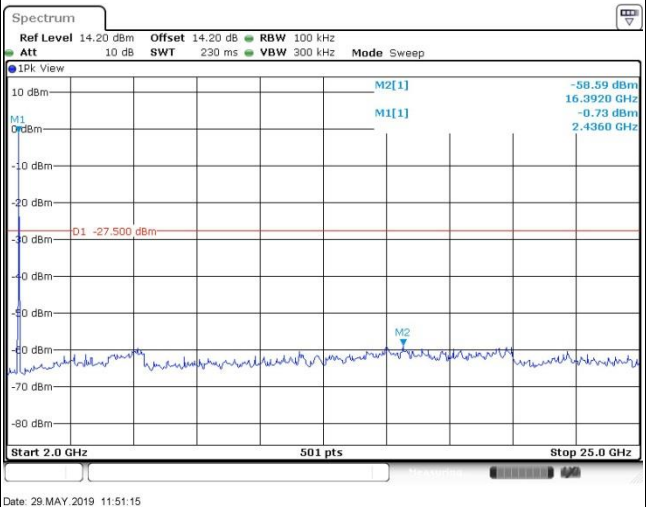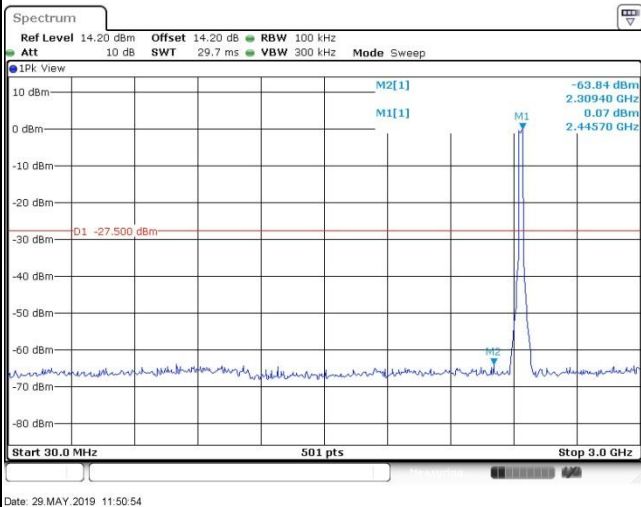





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

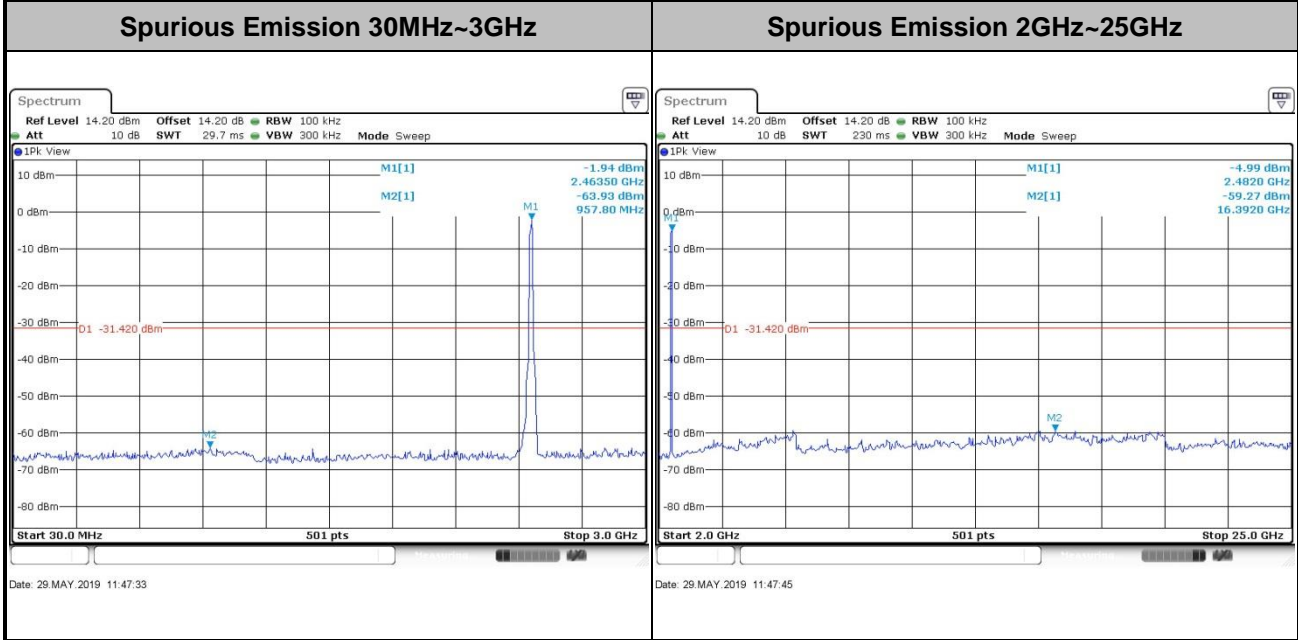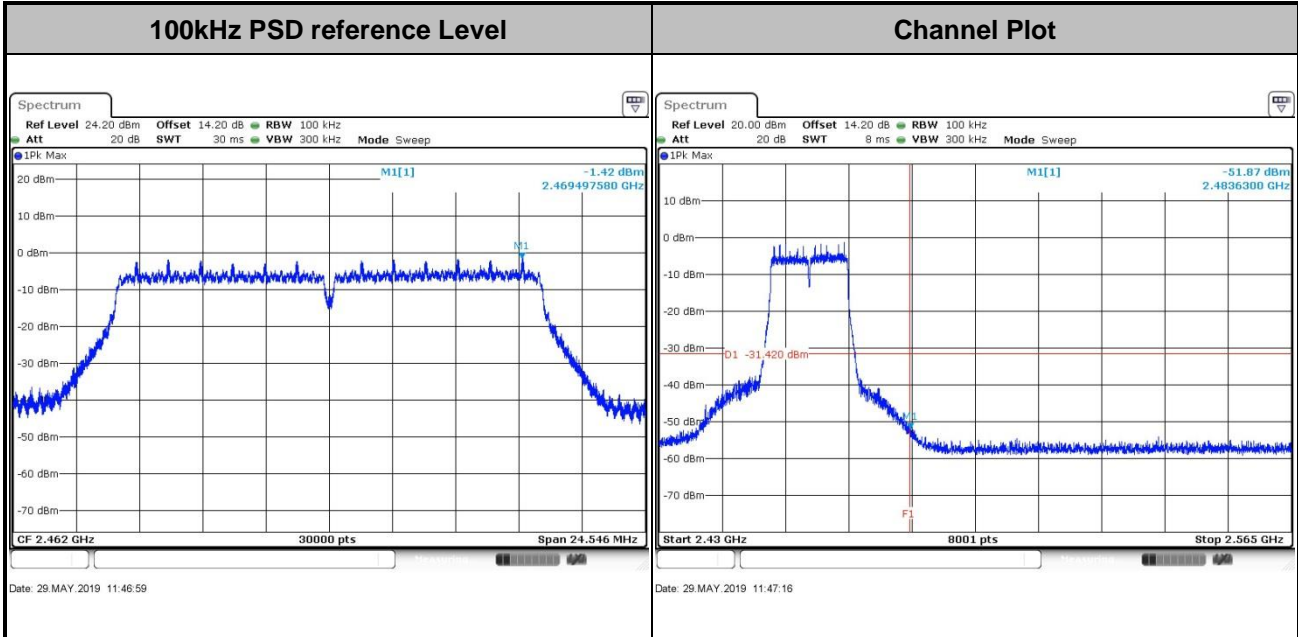





Test Mode : 802.11n HT20 Test Channel : 01

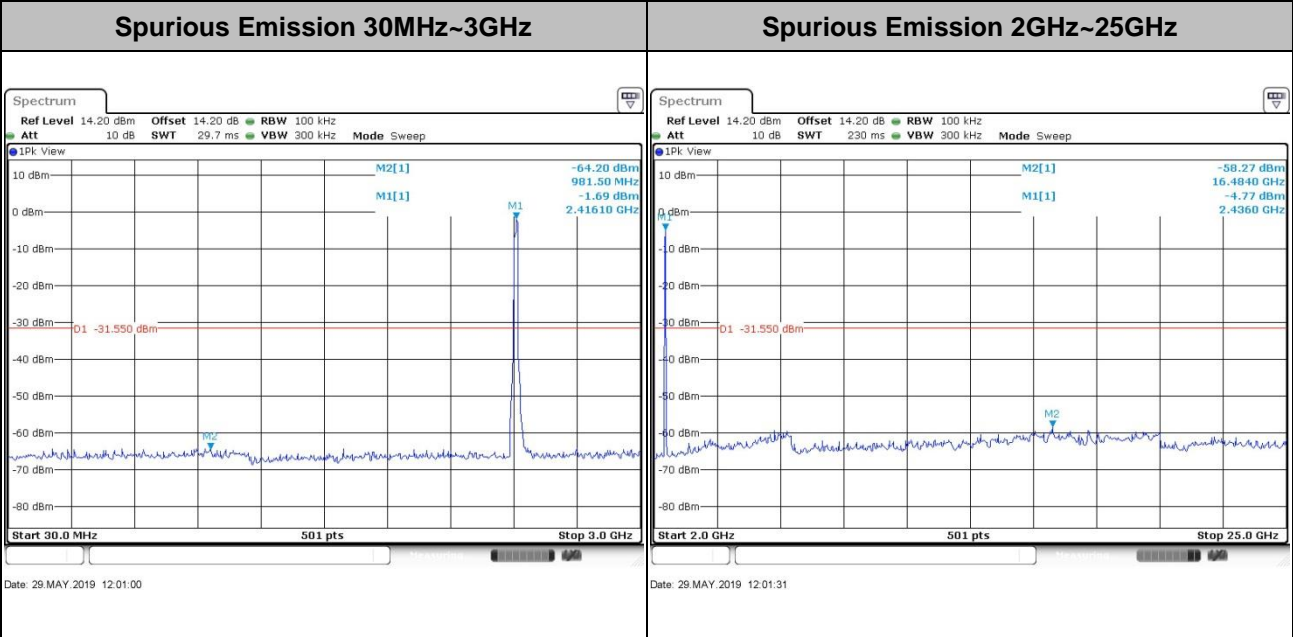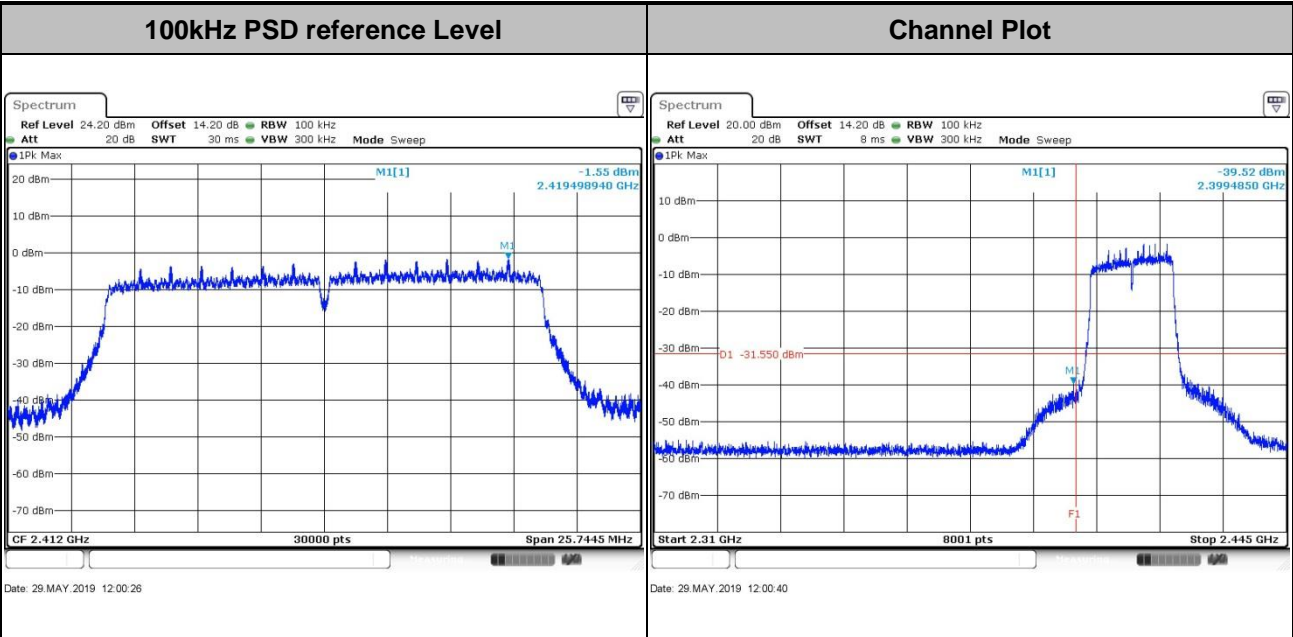







Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

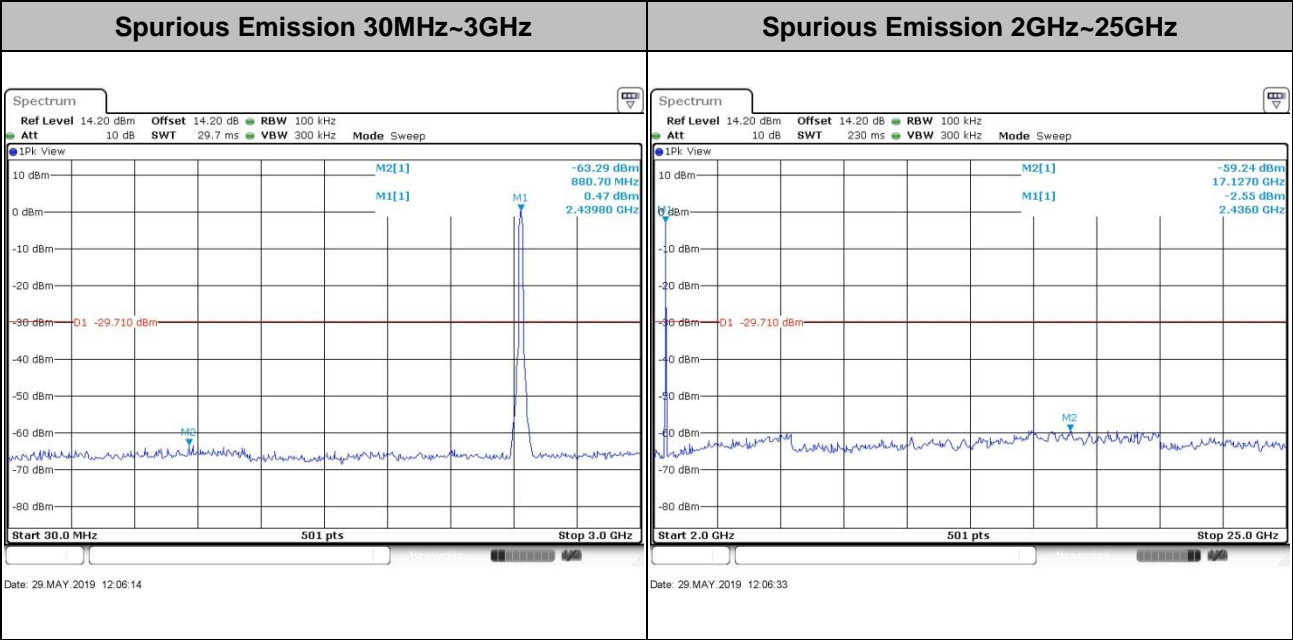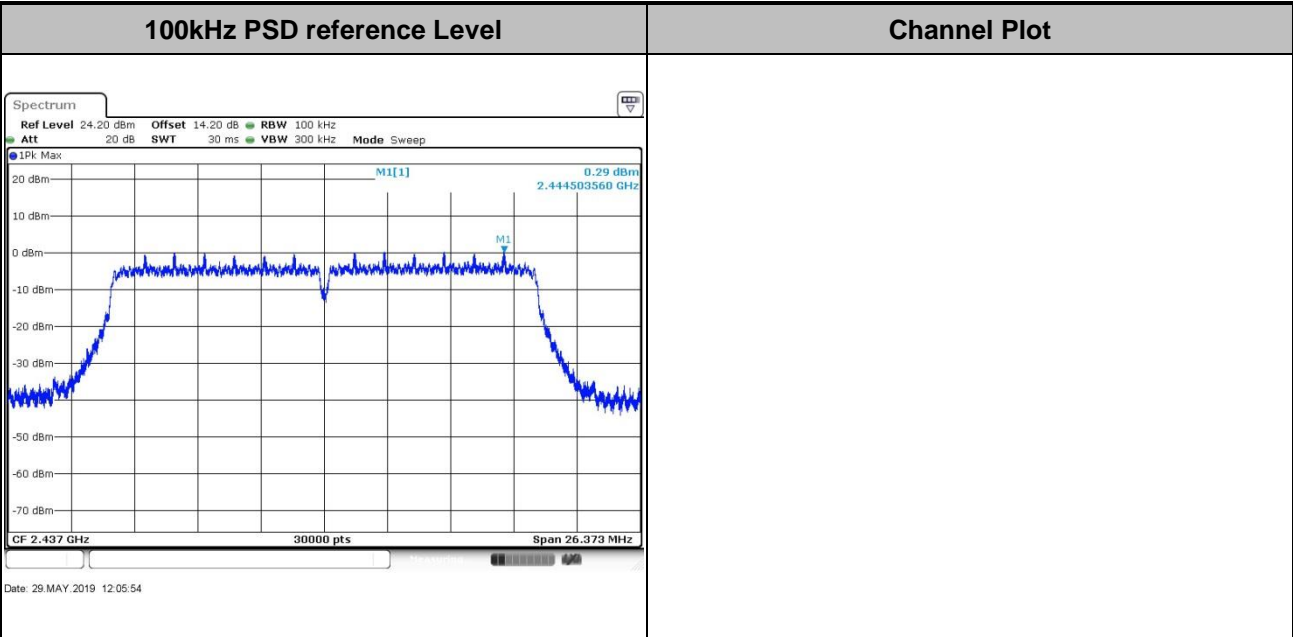





Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

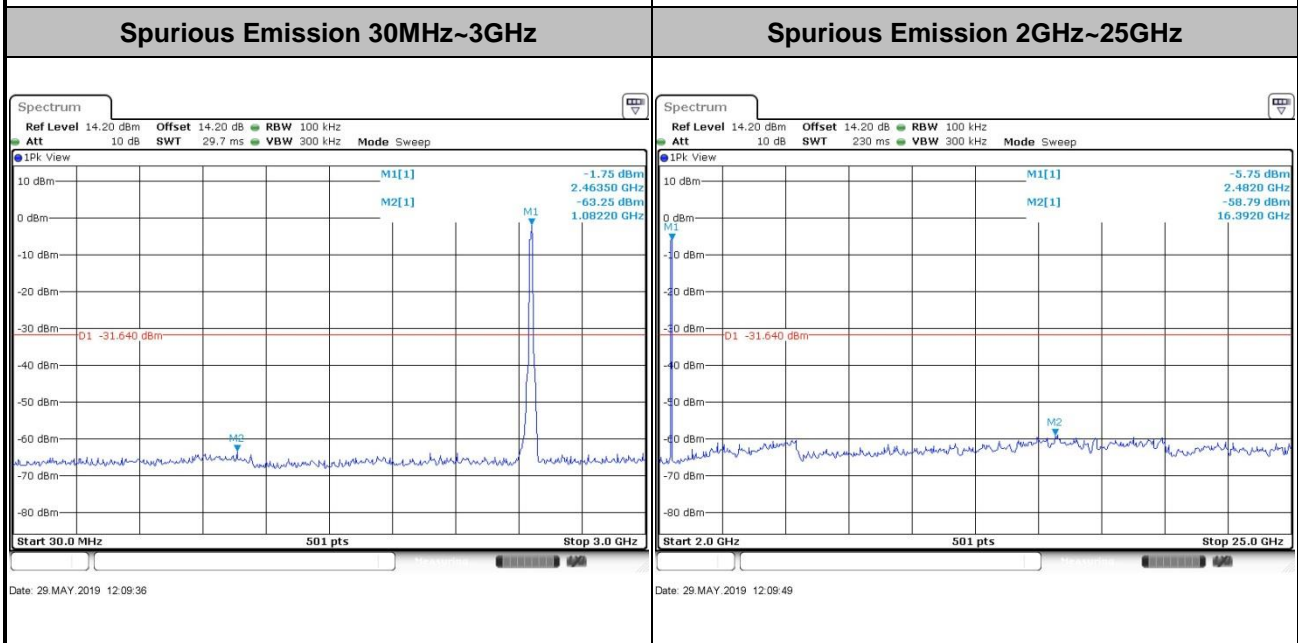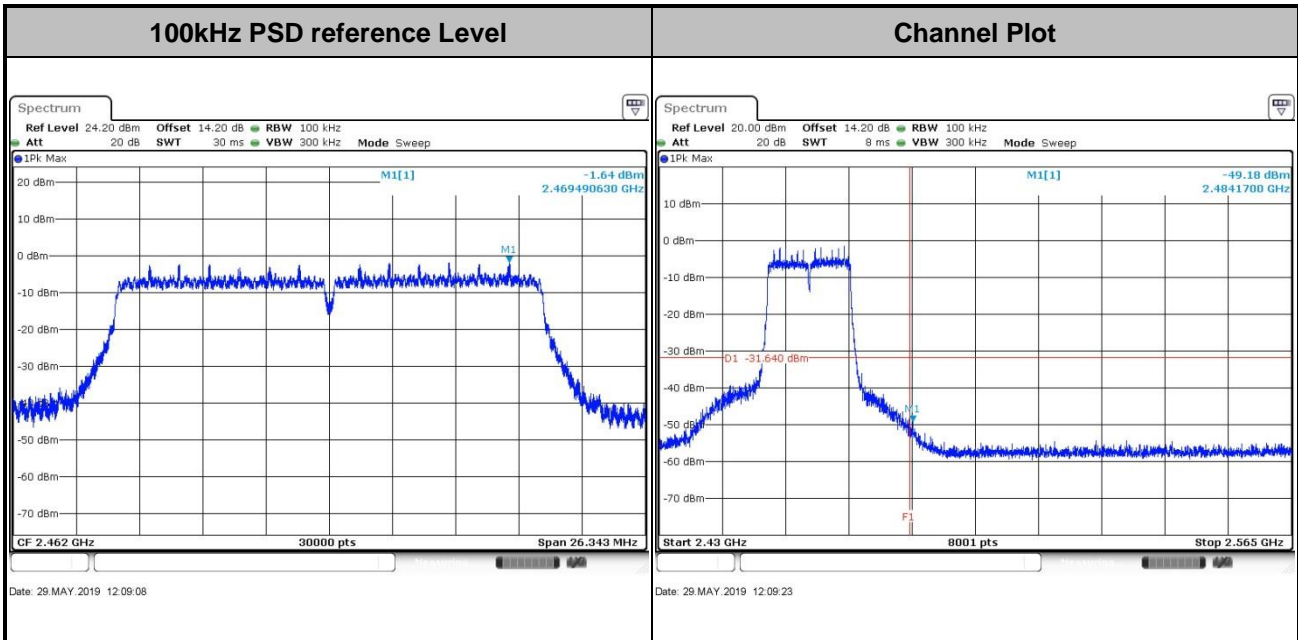





Test Mode : 802.11n HT40 Test Channel : 03

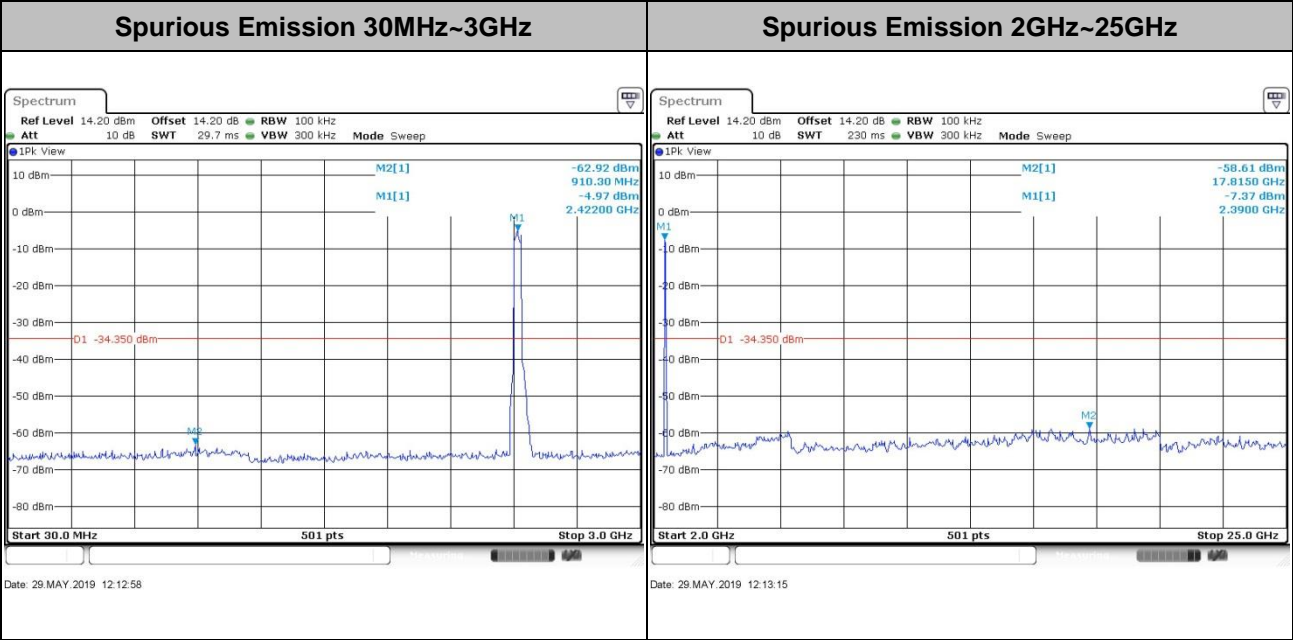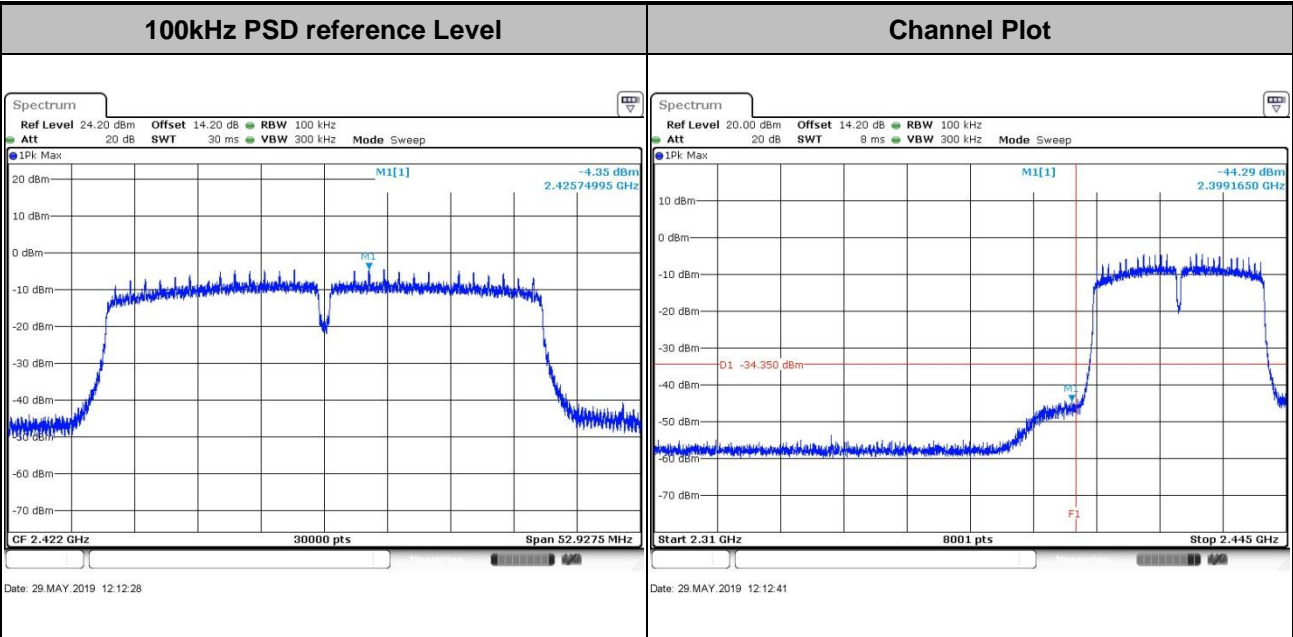





Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

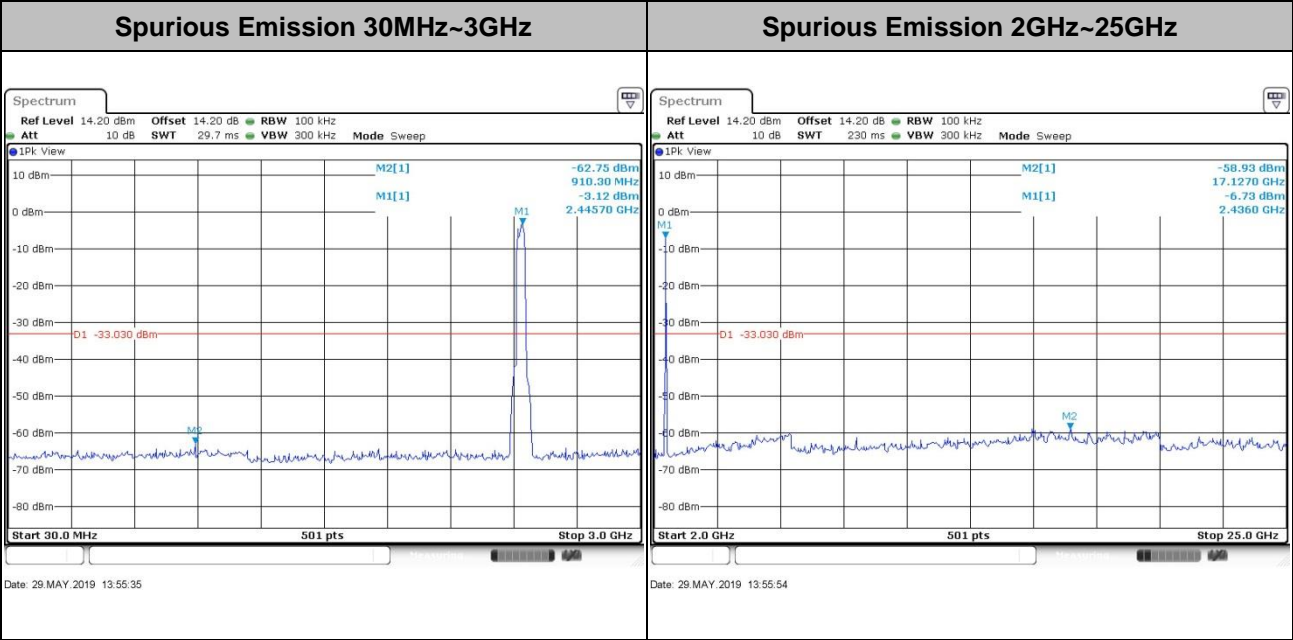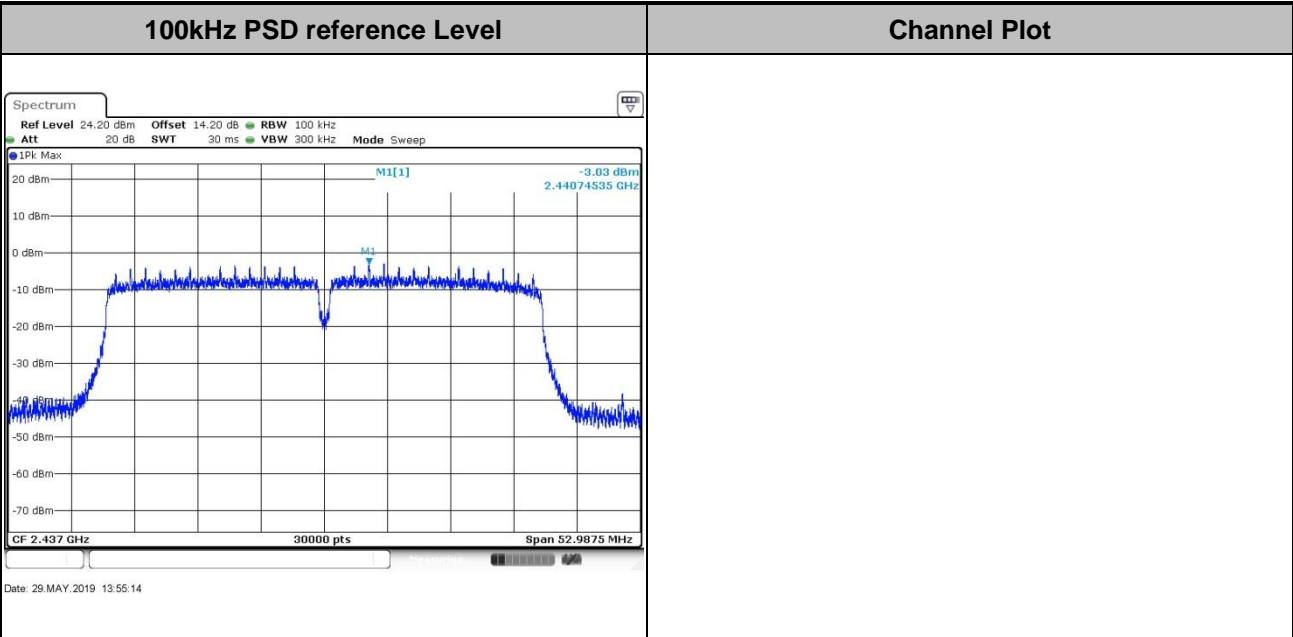



Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----

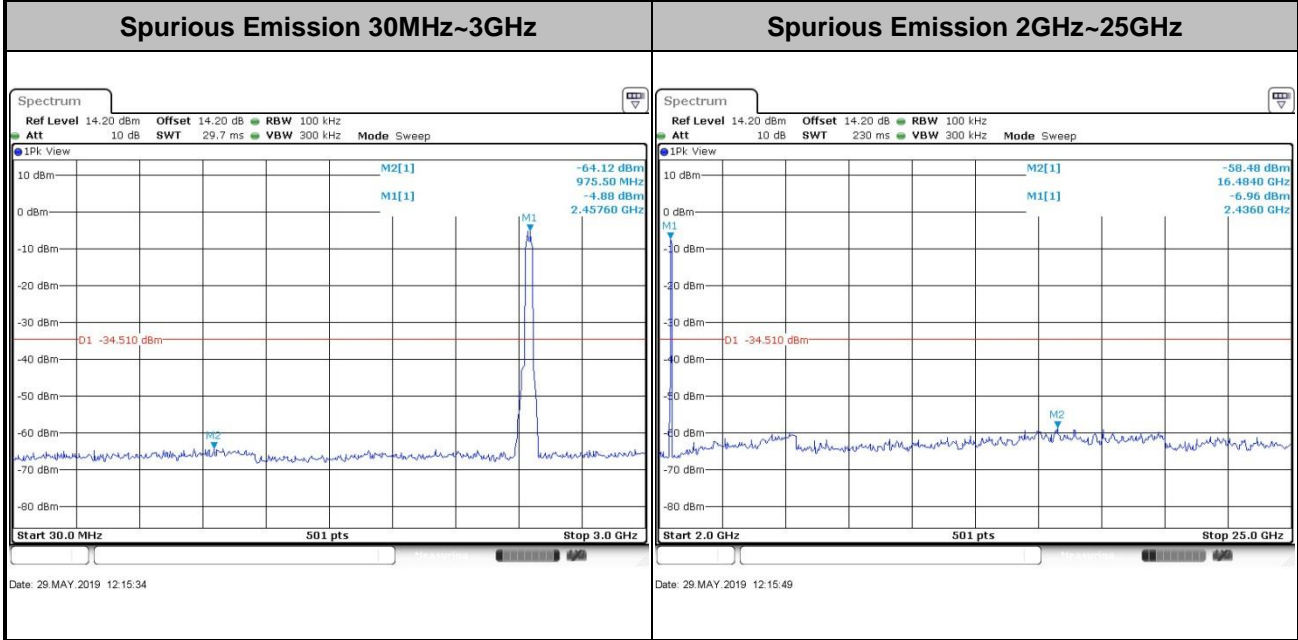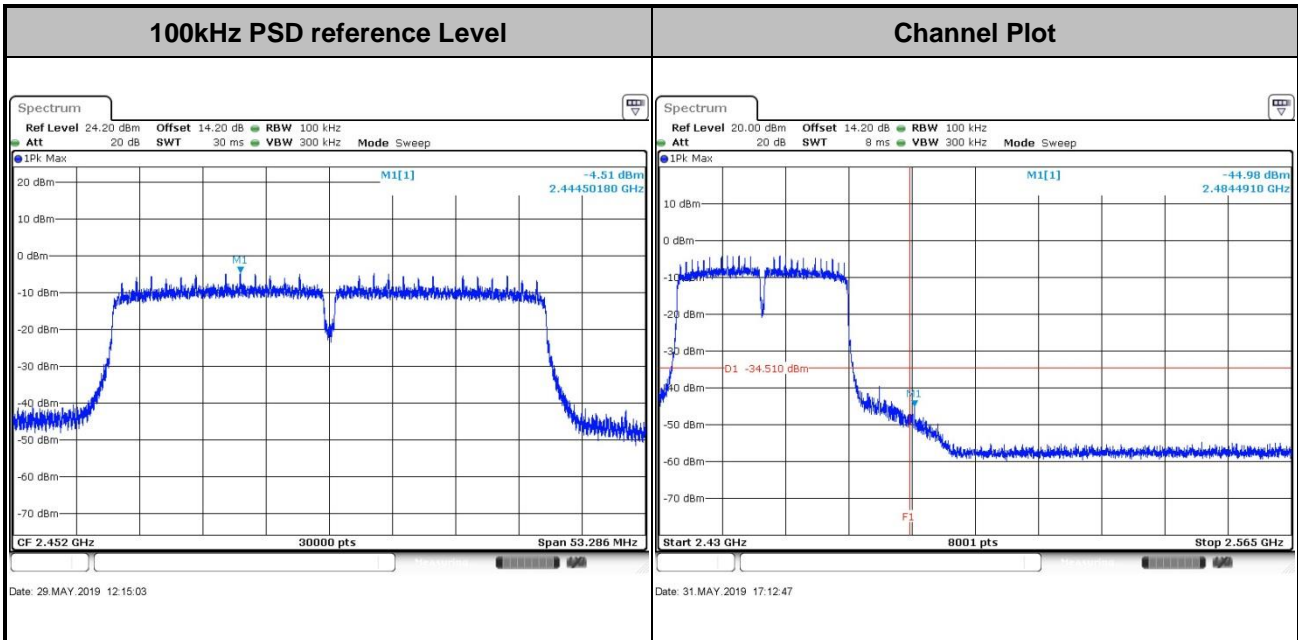



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

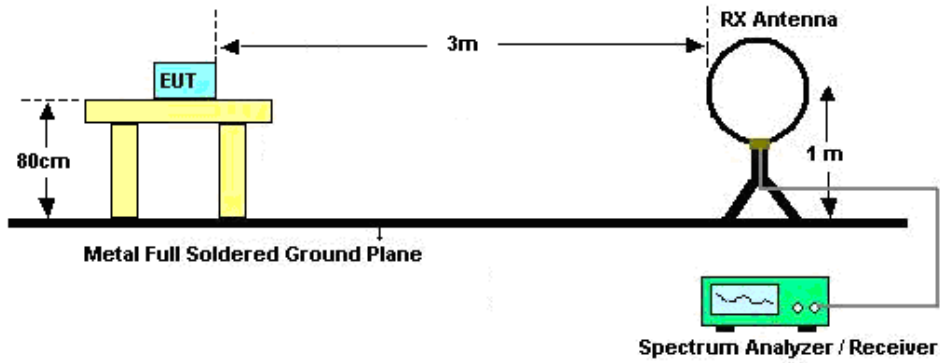

For radiated emissions from 30MHz to 1GHz

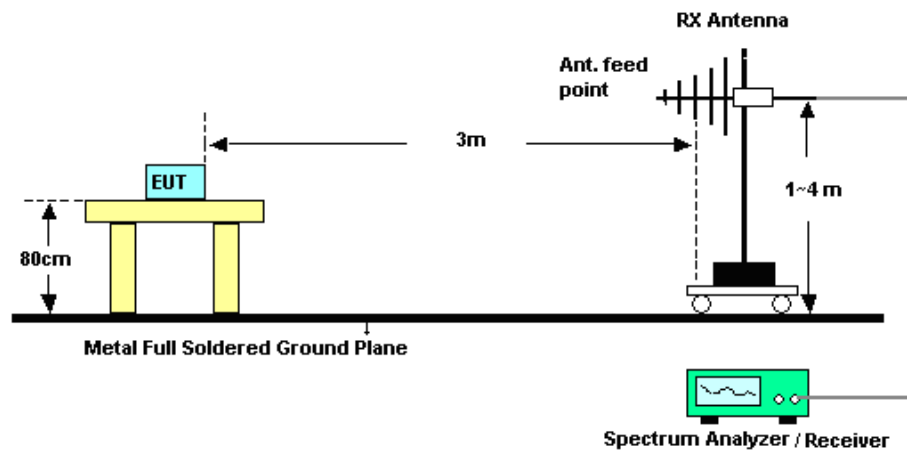

For radiated emissions above 1GHz

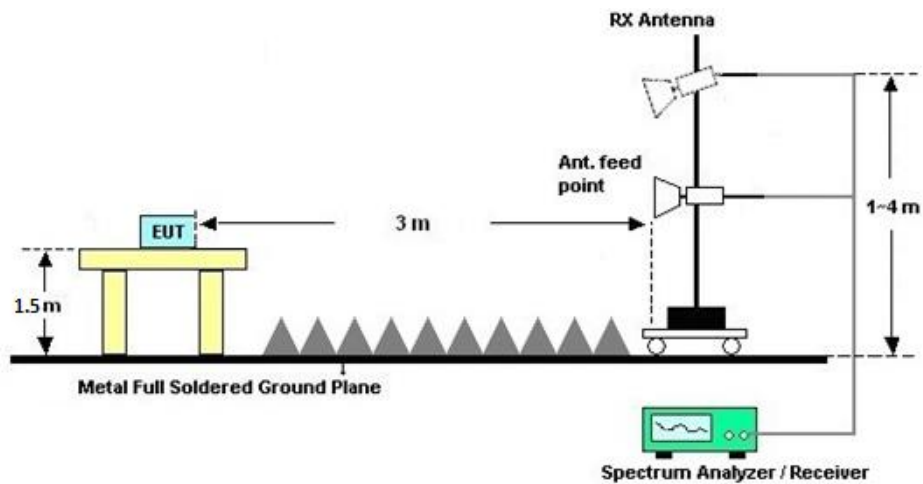





### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix C.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

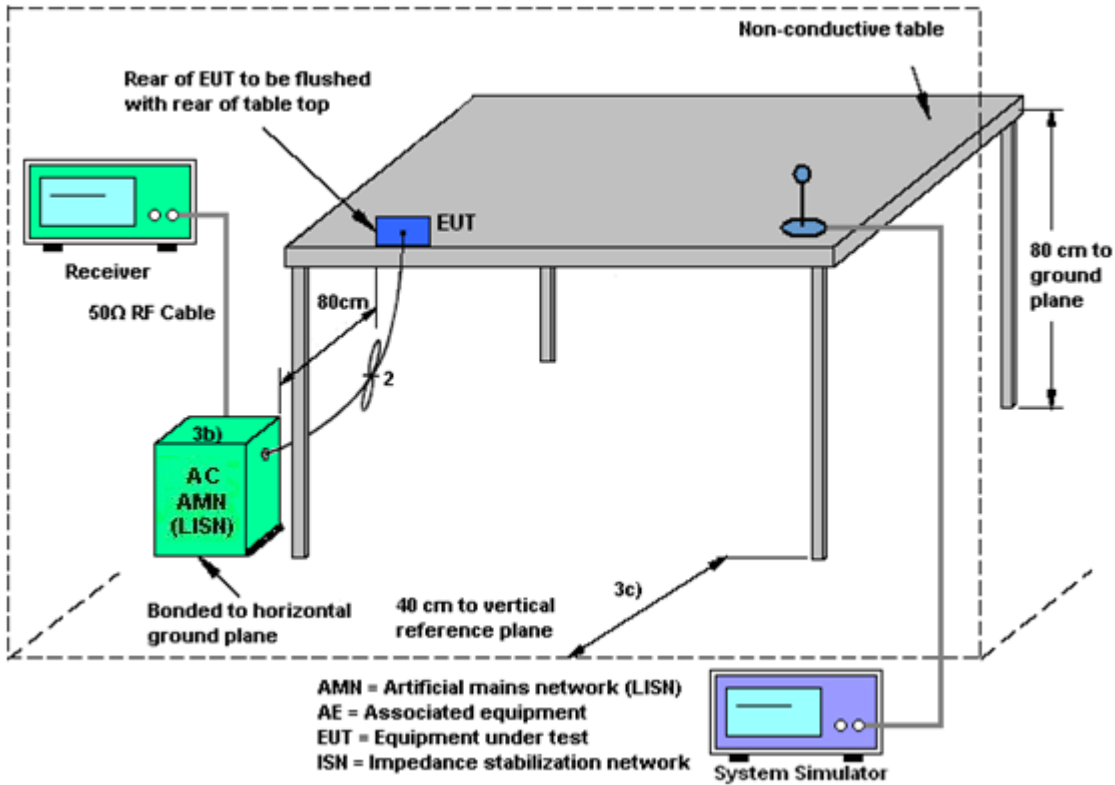

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 18, 2019	May 29, 2019	Apr. 17, 2020	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 22, 2018	May 29, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 22, 2018	May 29, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Aug. 30, 2018	May 30, 2019	Aug. 29, 2019	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 28, 2019	May 30, 2019	May 27, 2020	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jun. 05, 2018	May 30, 2019	Jun. 04, 2019	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	119436	1GHz~18GHz	Jun. 28, 2018	May 30, 2019	Jun. 27, 2019	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Mar. 30, 2019	May 30, 2019	Mar. 29, 2020	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 19, 2019	May 30, 2019	Apr. 18, 2020	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1707137	1GHz~18GHz	Oct. 19, 2018	May 30, 2019	Oct. 18, 2019	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270104	0.5GHz~26.5GHz	Dec. 22, 2018	May 30, 2019	Dec. 21, 2019	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 17, 2018	May 30, 2019	Jul. 16, 2019	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	May 30, 2019	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 30, 2019	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 30, 2019	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 23, 2018	May 28, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 18, 2018	May 28, 2019	Oct. 17, 2019	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 23, 2018	May 28, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 18, 2018	May 28, 2019	Jul. 17, 2019	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.6dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------



## **Appendix A. Conducted Test Results**

Report Number : FR932820-01C

Test Engineer:	Jensen Wu	Temperature:	21~25	°C
Test Date:	2019/5/29	Relative Humidity:	51~54	%



**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	1	1	2412	10.94	-	8.53	-	0.50	Pass
11b	1Mbps	1	6	2437	10.94	-	8.55	-	0.50	Pass
11b	1Mbps	1	11	2462	10.84	-	8.55	-	0.50	Pass
11g	6Mbps	1	1	2412	16.58	-	16.06	-	0.50	Pass
11g	6Mbps	1	6	2437	16.63	-	16.32	-	0.50	Pass
11g	6Mbps	1	11	2462	16.63	-	16.36	-	0.50	Pass
HT20	MCS0	1	1	2412	17.63	-	17.16	-	0.50	Pass
HT20	MCS0	1	6	2437	17.68	-	17.58	-	0.50	Pass
HT20	MCS0	1	11	2462	17.63	-	17.56	-	0.50	Pass
HT40	MCS0	1	3	2422	35.76	-	35.28	-	0.50	Pass
HT40	MCS0	1	6	2437	36.06	-	35.32	-	0.50	Pass
HT40	MCS0	1	9	2452	36.06	-	35.52	-	0.50	Pass

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	16.50	-		30.00	-	-0.50	-	16.00	-	36.00	-	Pass
11b	1Mbps	1	6	2437	16.40	-		30.00	-	-0.50	-	15.90	-	36.00	-	Pass
11b	1Mbps	1	11	2462	16.90	-		30.00	-	-0.50	-	16.40	-	36.00	-	Pass
11g	6Mbps	1	1	2412	9.70	-		30.00	-	-0.50	-	9.20	-	36.00	-	Pass
11g	6Mbps	1	2	2417	13.70	-		30.00	-	-0.50	-	13.20	-	36.00	-	Pass
11g	6Mbps	1	6	2437	13.80	-		30.00	-	-0.50	-	13.30	-	36.00	-	Pass
11g	6Mbps	1	10	2457	13.70	-		30.00	-	-0.50	-	13.20	-	36.00	-	Pass
11g	6Mbps	1	11	2462	10.00	-		30.00	-	-0.50	-	9.50	-	36.00	-	Pass
HT20	MCS0	1	1	2412	9.60	-		30.00	-	-0.50	-	9.10	-	36.00	-	Pass
HT20	MCS0	1	2	2417	11.50	-		30.00	-	-0.50	-	11.00	-	36.00	-	Pass
HT20	MCS0	1	6	2437	11.60	-		30.00	-	-0.50	-	11.10	-	36.00	-	Pass
HT20	MCS0	1	10	2457	11.50	-		30.00	-	-0.50	-	11.00	-	36.00	-	Pass
HT20	MCS0	1	11	2462	9.90	-		30.00	-	-0.50	-	9.40	-	36.00	-	Pass
HT40	MCS0	1	3	2422	9.60	-		30.00	-	-0.50	-	9.10	-	36.00	-	Pass
HT40	MCS0	1	4	2427	11.60	-		30.00	-	-0.50	-	11.10	-	36.00	-	Pass
HT40	MCS0	1	6	2437	11.70	-		30.00	-	-0.50	-	11.20	-	36.00	-	Pass
HT40	MCS0	1	8	2447	11.60	-		30.00	-	-0.50	-	11.10	-	36.00	-	Pass
HT40	MCS0	1	9	2452	9.70	-		30.00	-	-0.50	-	9.20	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Power Spectral Density**


2.4GHz Band												
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	-7.05	-	-	-0.50	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-7.08	-	-	-0.50	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-6.53	-	-	-0.50	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-14.90	-	-	-0.50	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-10.82	-	-	-0.50	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-15.59	-	-	-0.50	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-15.44	-	-	-0.50	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-13.22	-	-	-0.50	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-14.75	-	-	-0.50	-	8.00	-	Pass
HT40	MCS0	1	3	2422	-17.98	-	-	-0.50	-	8.00	-	Pass
HT40	MCS0	1	6	2437	-17.22	-	-	-0.50	-	8.00	-	Pass
HT40	MCS0	1	9	2452	-18.64	-	-	-0.50	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Bear Xiong	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line

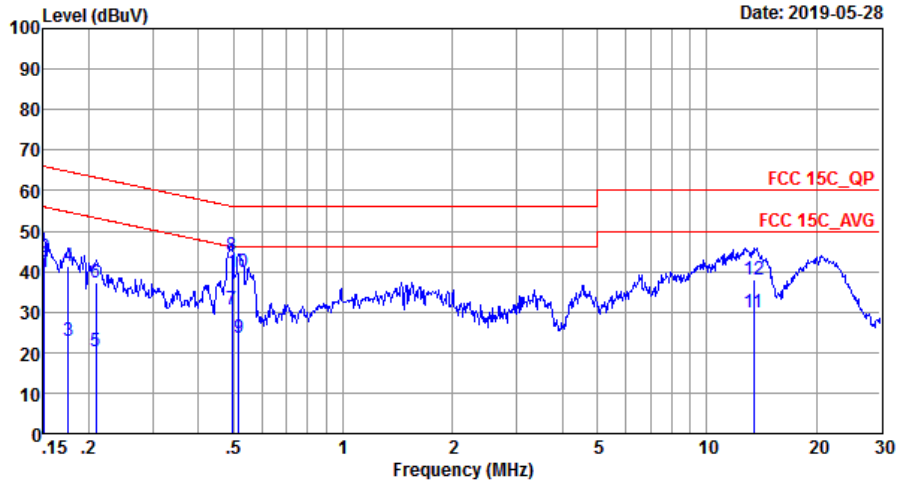


Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20180719\_L LINE

Mode : Mode 1  
 IMEI : 865951040001362

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	39.85	-16.11	55.96	29.66	0.03	10.16	Average
2	0.15	43.39	-22.57	65.96	33.20	0.03	10.16	QP
3	0.18	22.89	-31.79	54.68	12.70	0.03	10.16	Average
4	0.18	41.19	-23.49	64.68	31.00	0.03	10.16	QP
5	0.21	20.29	-32.94	53.23	10.10	0.03	10.16	Average
6	0.21	37.41	-25.82	63.23	27.22	0.03	10.16	QP
7	0.49	30.59	-15.51	46.10	20.40	0.02	10.17	Average
8 *	0.49	43.79	-12.31	56.10	33.60	0.02	10.17	QP
9	0.52	23.49	-22.51	46.00	13.30	0.02	10.17	Average
10	0.52	39.99	-16.01	56.00	29.80	0.02	10.17	QP
11	13.48	30.04	-19.96	50.00	19.30	0.47	10.27	Average
12	13.48	38.04	-21.96	60.00	27.30	0.47	10.27	QP



Test Engineer :	Bear Xiong	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

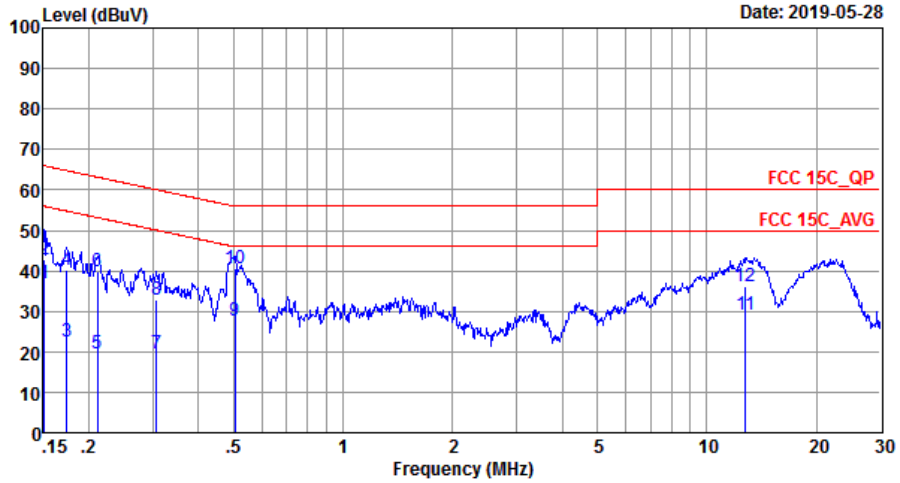

Site : C001-SZ  
 Condition: FCC 15C OP LISN\_20180719\_N NEUTRAL

Mode : Mode 1  
 IMEI : 865951040001362

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	36.79	-19.17	55.96	26.60	0.03	10.16	Average
2	0.15	42.79	-23.17	65.96	32.60	0.03	10.16	QP
3	0.17	22.59	-32.18	54.77	12.40	0.03	10.16	Average
4	0.17	40.39	-24.38	64.77	30.20	0.03	10.16	QP
5	0.21	19.69	-33.45	53.14	9.50	0.03	10.16	Average
6	0.21	39.69	-23.45	63.14	29.50	0.03	10.16	QP
7	0.31	19.70	-30.36	50.06	9.50	0.03	10.17	Average
8	0.31	32.90	-27.16	60.06	22.70	0.03	10.17	QP
9	0.50	27.59	-18.41	46.00	17.40	0.02	10.17	Average
10 *	0.50	40.69	-15.31	56.00	30.50	0.02	10.17	QP
11	12.78	29.03	-20.97	50.00	18.50	0.26	10.27	Average
12	12.78	36.33	-23.67	60.00	25.80	0.26	10.27	QP



## Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.59	53.56	-20.44	74	45.92	31.5	9.14	33	163	33	P	H
		2390	43.49	-10.51	54	35.85	31.5	9.14	33	163	33	A	H
	*	2412	104.91	-	-	97.2	31.57	9.14	33	163	33	P	H
	*	2412	102.24	-	-	94.53	31.57	9.14	33	163	33	A	H
		2357.56	52.98	-21.02	74	45.4	31.54	9.04	33	222	102	P	V
		2390	43.04	-10.96	54	35.4	31.5	9.14	33	222	102	A	V
	*	2412	100.37	-	-	92.66	31.57	9.14	33	222	102	P	V
	*	2412	98.69	-	-	90.98	31.57	9.14	33	222	102	A	V
802.11b CH 06 2437MHz		2341.36	53.58	-20.42	74	46.09	31.55	8.94	33	163	33	P	H
		2389.8	42.63	-11.37	54	34.99	31.5	9.14	33	163	33	A	H
	*	2437	104.51	-	-	96.59	31.71	9.21	33	163	33	P	H
	*	2438	101.74	-	-	93.82	31.71	9.21	33	163	33	A	H
		2492.16	54.04	-19.96	74	45.83	31.93	9.28	33	163	33	P	H
		2486.91	43.09	-10.91	54	34.95	31.86	9.28	33	163	33	A	H
		2379.86	53.07	-20.93	74	45.51	31.52	9.04	33	222	102	P	V
		2389.66	42.58	-11.42	54	34.94	31.5	9.14	33	222	102	A	V
	*	2437	101.1	-	-	93.18	31.71	9.21	33	222	102	P	V
	*	2437	99.32	-	-	91.4	31.71	9.21	33	222	102	A	V
		2485.09	54.37	-19.63	74	46.23	31.86	9.28	33	222	102	P	V
	2496.71	43.07	-10.93	54	34.86	31.93	9.28	33	222	102	A	V	



802.11b CH 11 2462MHz	*	2462	104.58	-	-	96.58	31.79	9.21	33	163	33	P	H
	*	2462	101.76	-	-	93.76	31.79	9.21	33	163	33	A	H
		2483.72	54.56	-19.44	74	46.42	31.86	9.28	33	163	33	P	H
		2483.52	45.1	-8.9	54	36.96	31.86	9.28	33	163	33	A	H
	*	2462	100.99	-	-	92.99	31.79	9.21	33	222	102	P	V
	*	2462	99.09	-	-	91.09	31.79	9.21	33	222	102	A	V
		2499	54.14	-19.86	74	45.93	31.93	9.28	33	222	102	P	V
		2483.52	44.31	-9.69	54	36.17	31.86	9.28	33	222	102	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 01 (2412MHz), CH 06 (2437MHz), and CH 11 (2462MHz).

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.





2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11g CH 01 (2412MHz) and CH 06 (2437MHz).



802.11g CH 11 2462MHz	*	2462	100.13	-	-	92.13	31.79	9.21	33	152	22	P	H
	*	2462	92.34	-	-	84.34	31.79	9.21	33	152	22	A	H
		2484.32	54.19	-19.81	74	46.05	31.86	9.28	33	152	22	P	H
		2483.52	44.8	-9.2	54	36.66	31.86	9.28	33	152	22	A	H
	*	2462	99.11	-	-	91.11	31.79	9.21	33	222	102	P	V
	*	2462	91.18	-	-	83.18	31.79	9.21	33	222	102	A	V
		2483.72	54.68	-19.32	74	46.54	31.86	9.28	33	222	102	P	V
		2483.64	44.55	-9.45	54	36.41	31.86	9.28	33	222	102	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 01 (2412MHz) and CH 06 (2437MHz) and CH 11 (2462MHz).



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11n HT20 CH 01 (2412MHz) and CH 06 (2437MHz).



<b>802.11n</b> <b>HT20</b> <b>CH 11</b> <b>2462MHz</b>	*	2462	100.91	-	-	92.91	31.79	9.21	33	164	25	P	H
	*	2462	90.79	-	-	82.79	31.79	9.21	33	164	25	A	H
		2491.4	54.7	-19.3	74	46.49	31.93	9.28	33	164	25	P	H
		2483.56	45.19	-8.81	54	37.05	31.86	9.28	33	164	25	A	H
	*	2462	97.73	-	-	89.73	31.79	9.21	33	222	103	P	V
	*	2462	90.35	-	-	82.35	31.79	9.21	33	222	103	A	V
		2495.48	53.55	-20.45	74	45.34	31.93	9.28	33	222	103	P	V
		2483.72	44.6	-9.4	54	36.46	31.86	9.28	33	222	103	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		4824	44.53	-29.47	74	55.34	33.77	12.9	57.48	145	255	P	H
		4824	43.89	-30.11	74	54.7	33.77	12.9	57.48	174	75	P	V
802.11n HT20 CH 06 2437MHz		4874	44.54	-29.46	74	55.3	33.75	13.01	57.52	172	146	P	H
		7311	47.31	-26.69	74	54.26	35.46	16.51	58.92	227	189	P	H
		4874	43.72	-30.28	74	54.48	33.75	13.01	57.52	165	106	P	V
		7311	45.61	-28.39	74	52.56	35.46	16.51	58.92	174	100	P	V
802.11n HT20 CH 11 2462MHz		4924	44.77	-29.23	74	55.38	33.73	13.21	57.55	183	227	P	H
		7386	47	-27	74	53.75	35.61	16.6	58.96	175	315	P	H
		4924	43.34	-30.66	74	53.95	33.73	13.21	57.55	150	285	P	V
		7386	45.09	-28.91	74	51.84	35.61	16.6	58.96	155	274	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 03 2422MHz		2387.84	53.73	-20.27	74	46.09	31.5	9.14	33	168	31	P	H
		2389.94	45.2	-8.8	54	37.56	31.5	9.14	33	168	31	A	H
	*	2422	96.6	-	-	88.82	31.64	9.14	33	168	31	P	H
	*	2422	89.5	-	-	81.72	31.64	9.14	33	168	31	A	H
		2493.21	54.07	-19.93	74	45.86	31.93	9.28	33	168	31	P	H
		2498.88	44.15	-9.85	54	35.94	31.93	9.28	33	168	31	A	H
		2322.88	53.54	-20.46	74	46.03	31.57	8.94	33	236	90	P	V
		2389.8	44.07	-9.93	54	36.43	31.5	9.14	33	236	90	A	V
	*	2422	93.96	-	-	86.18	31.64	9.14	33	236	90	P	V
	*	2422	87.08	-	-	79.3	31.64	9.14	33	236	90	A	V
		2489.5	53.72	-20.28	74	45.51	31.93	9.28	33	236	90	P	V
		2483.5	44.25	-9.75	54	36.11	31.86	9.28	33	236	90	A	V
802.11n HT40 CH 06 2437MHz		2375.66	53.93	-20.07	74	46.37	31.52	9.04	33	168	28	P	H
		2389.94	44.84	-9.16	54	37.2	31.5	9.14	33	168	28	A	H
	*	2437	100.32	-	-	92.4	31.71	9.21	33	168	28	P	H
	*	2437	92.84	-	-	84.92	31.71	9.21	33	168	28	A	H
		2484.11	55.96	-18.04	74	47.82	31.86	9.28	33	168	28	P	H
		2483.55	45.65	-8.35	54	37.51	31.86	9.28	33	168	28	A	H
		2388.12	53.32	-20.68	74	45.68	31.5	9.14	33	220	86	P	V
		2389.94	44.21	-9.79	54	36.57	31.5	9.14	33	220	86	A	V
	*	2437	98.02	-	-	90.1	31.71	9.21	33	220	86	P	V
	*	2437	91.22	-	-	83.3	31.71	9.21	33	220	86	A	V
	2497.41	54.25	-19.75	74	46.04	31.93	9.28	33	220	86	P	V	
	2483.5	45.01	-8.99	54	36.87	31.86	9.28	33	220	86	A	V	



<b>802.11n</b> <b>HT40</b> <b>CH 09</b> <b>2452MHz</b>		2316.16	53.7	-20.3	74	46.17	31.59	8.94	33	167	28	P	H
		2383.92	43.97	-10.03	54	36.41	31.52	9.04	33	167	28	A	H
	*	2452	99.22	-	-	91.3	31.71	9.21	33	167	28	P	H
	*	2452	91.39	-	-	83.47	31.71	9.21	33	167	28	A	H
		2484.81	59.25	-14.75	74	51.11	31.86	9.28	33	167	28	P	H
		2483.62	47.75	-6.25	54	39.61	31.86	9.28	33	167	28	A	H
		2319.8	53.75	-20.25	74	46.24	31.57	8.94	33	223	82	P	V
		2363.2	43.7	-10.3	54	36.12	31.54	9.04	33	223	82	A	V
	*	2452	96.77	-	-	88.85	31.71	9.21	33	223	82	P	V
	*	2452	89.72	-	-	81.8	31.71	9.21	33	223	82	A	V
		2484.39	56.89	-17.11	74	48.75	31.86	9.28	33	223	82	P	V
		2483.62	46.21	-7.79	54	38.07	31.86	9.28	33	223	82	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n		4844	44.96	-29.04	74	55.67	33.77	13.01	57.49	150	75	P	H
HT40		7266	47.57	-26.43	74	54.62	35.4	16.46	58.91	185	56	P	H
CH 03		4844	44.67	-29.33	74	55.38	33.77	13.01	57.49	150	350	P	V
2422MHz		7266	45.07	-28.93	74	52.12	35.4	16.46	58.91	200	360	P	V
802.11n		4874	45.91	-28.09	74	56.67	33.75	13.01	57.52	165	230	P	H
HT40		7311	47.71	-26.29	74	54.66	35.46	16.51	58.92	186	323	P	H
CH 06		4874	44.16	-29.84	74	54.92	33.75	13.01	57.52	166	185	P	V
2437MHz		7311	45.3	-28.7	74	52.25	35.46	16.51	58.92	163	298	P	V
802.11n		4904	45.44	-28.56	74	56.13	33.74	13.11	57.54	150	360	P	H
HT40		7356	47.51	-26.49	74	54.35	35.55	16.55	58.94	165	335	P	H
CH 09		4904	44.97	-29.03	74	55.66	33.74	13.11	57.54	162	318	P	V
2452MHz		7356	44.69	-29.31	74	51.53	35.55	16.55	58.94	189	298	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11n HT40 LF		30	24.5	-15.5	40	30.44	24.4	0.96	31.3	-	-	P	H
		255.04	28.47	-17.53	46	38.08	19.2	2.85	31.66	-	-	P	H
		289.96	29.01	-16.99	46	38.37	19.05	3.04	31.45	-	-	P	H
		497.54	29.75	-16.25	46	33.64	23.35	3.98	31.22	-	-	P	H
		616.85	29.97	-16.03	46	32.5	24.57	4.43	31.53	-	-	P	H
		815.7	31.05	-14.95	46	31.04	26.25	5.1	31.34	177	249	P	H
		30	25.24	-14.76	40	31.18	24.4	0.96	31.3	-	-	P	V
		226.91	23.64	-22.36	46	36.47	16	2.68	31.51	-	-	P	V
		362.71	25.84	-20.16	46	33.05	20.71	3.4	31.32	-	-	P	V
		453.89	28.11	-17.89	46	33.2	22.57	3.8	31.46	-	-	P	V
	660.5	32.21	-13.79	46	34.34	24.74	4.58	31.45	162	214	P	V	
	960.23	32.46	-21.54	54	31.18	27.04	5.52	31.28	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- 1. Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- 2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- 1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- 2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**


- 1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- 2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



### Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100.00	-	-	10Hz
802.11g	97.04	1.428	0.701	1kHz
802.11n HT20	97.43	1.920	0.521	1kHz
802.11n HT40	96.69	1.268	0.789	1kHz

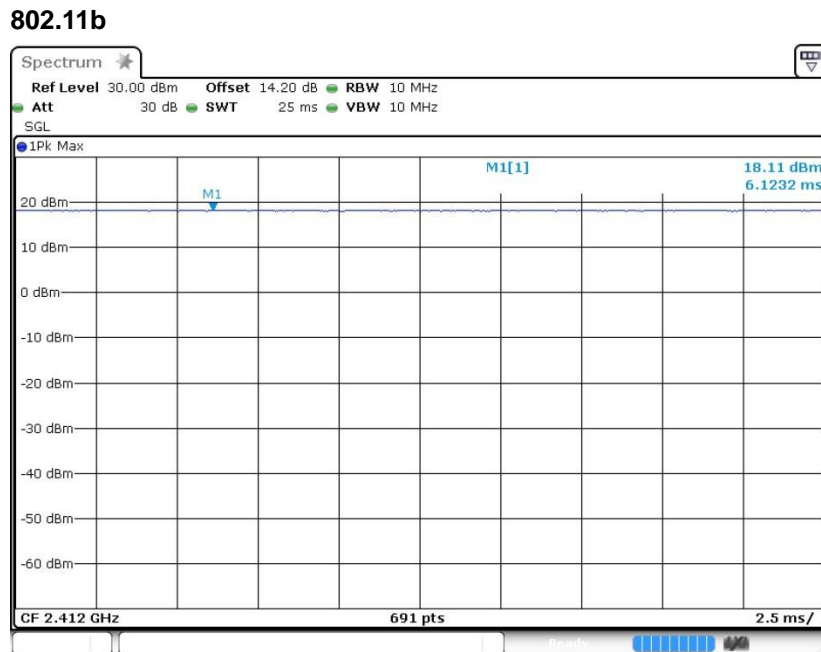




802.11g



802.11n HT20

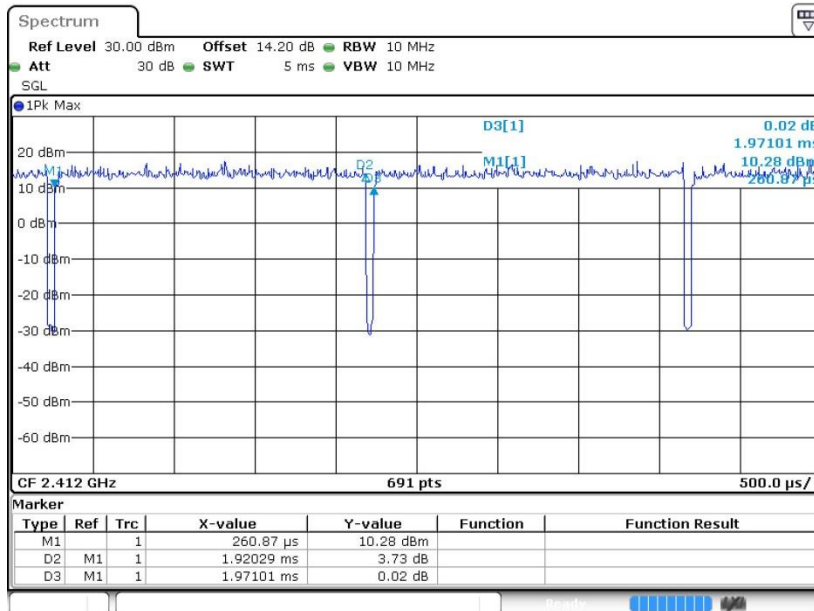



802.11n HT40

