



FCC Test Report

APPLICANT : Huawei Technologies Co., Ltd.
EQUIPMENT : Smart Phone
BRAND NAME : HUAWEI
MODEL NAME : GLK-LX1U
FCC ID : QISGLK-LX1U
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on May 16, 2019 and testing was completed on May 22, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Derreck Chen

Reviewed by: Derreck Chen / Supervisor

Eric Shih

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Product Feature of Equipment Under Test 5

 1.3. Product Specification of Equipment Under Test 6

 1.4. Modification of EUT 7

 1.5. Test Location 7

 1.6. Applicable Standards 7

 1.7. Specification of Accessory 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system 11

 2.4. EUT Operation Test Setup 12

3. TEST RESULT 13

 3.1. Test of Radiated Emission Measurement 13

4. LIST OF MEASURING EQUIPMENT 18

5. UNCERTAINTY OF EVALUATION 19

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC932820-01	Rev. 01	Initial issue of report	Jun. 06, 2019



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.82 dB at 36.790 MHz



1. General Description

1.1. Applicant

Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.2. Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	GLK-LX1U
FCC ID	QISGLK-LX1U
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(1 6QAM Uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver/GNSS
IMEI Code	Radiation: 865951040001362
HW Version	HL7SEMEM
SW Version	9.1.0.102(C900E102R1P1)

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report for GLK-LX1U, the change note could be referred to the product equality declaration which is exhibit separately. According to the change, the test cases of Radiation from original test report (Sporton Report Number FC932820) were verified for the differences.



1.3. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz NFC : 13.56 MHz
Antenna Type	WWAN : Internal Antenna WLAN : Internal Antenna Bluetooth : Internal Antenna GNSS: Fixed Internal Antenna NFC : Fixed Internal Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (16QAM uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM /256QAM)



	Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK
--	--

1.4. Modification of EUT

No modifications are made to the EUT during all test items.

1.5. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.6. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



1.7. Specification of Accessory

AC Adapter 1	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200U02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: Salcomp	SN	
AC Adapter 2	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200U02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: BYD	SN	
AC Adapter 3	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200U02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: HUNTKEY	SN	
AC Adapter 4	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200U02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: PHIHONG	SN	
AC Adapter 5	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200E02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: Salcomp	SN	
AC Adapter 6	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200E02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: BYD	SN	
AC Adapter 7	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200E02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: HUNTKEY	SN	
AC Adapter 8	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200E02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: PHIHONG	SN	
AC Adapter 9	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200B02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: Salcomp	SN	
AC Adapter 10	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200B02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: BYD	SN	
AC Adapter 11	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200B02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: HUNTKEY	SN	
AC Adapter 12	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200B02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: PHIHONG	SN	
AC Adapter 13	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200A02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: Salcomp	SN	
AC Adapter 14	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050200A02
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA		
	Manufacturer	Manufacturer: BYD	SN	
USB Cable 1	Brand Name	Ningbo Broad Telecommunication Co., Ltd	Model Name	WA0020
	Signal Line	<u>1</u> meter, non-shielded cable, with w/o ferrite core		



USB Cable 2	Brand Name	Dongguan Mingji Electronics Technology Group Co.,Ltd	Model Name	203-1572-0
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
USB Cable 3	Brand Name	Freeport Resources Enterprises (Jiangxi) Co.,Ltd	Model Name	18-93C2CHO-001HF
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
USB Cable 4	Brand Name	HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD	Model Name	CUDU01B-HC295-EH
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
USB Cable 5	Brand Name	LUXSHARE Precision Industry Co., Ltd.	Model Name	L99UC131-CS-H
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
USB Cable 6	Brand Name	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.	Model Name	330-50507
	Signal Line	_1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 1	Brand Name	HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD	Model Name	EPAB542-2WH06-DH
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 2	Brand Name	HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD	Model Name	EPAB542-2WH05-DH
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 3	Brand Name	Boluo County Quancheng Electronic Co., Ltd.	Model Name	1293-3283-3.5MM-322
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 4	Brand Name	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	Model Name	MEND1532B528A02
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Earphone 5	Brand Name	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	Model Name	MEND1532B528B00
	Signal Line	_1.1_ meter, non-shielded cable, with w/o ferrite core		
Battery	Brand Name	HuaweiTechnologies Co., Ltd.	Model Name	HB446486ECW
	Power Rating	_3.82_ Vdc, _3900_ mAh	Type	Li-ion, <u>Yes</u>



2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
Radiated Emissions	Mode 1: WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 5(Charging from Adapter 5) + SIM 1
	Mode 2: WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 6(Notebook USB Data Link to EUT) + SIM 1
	Mode 3: WCDMA 1700 Idle + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone 5 + USB cable 6(EUT USB Data Link to Notebook) + SIM 1
	Mode 4: WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 6(Notebook USB Data Link to SD Card) + SIM 1
	Mode 5: WCDMA 1700 Idle + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone 5 + USB cable 6(SD Card USB Data Link to Notebook) + SIM 1
Remark: <ol style="list-style-type: none"> <li data-bbox="284 1249 1233 1283">1. The worst case of RE is mode 1; only the test data of this mode is reported. <li data-bbox="284 1301 1350 1377">2. Data Link with Notebook means data application transferred mode between EUT and Notebook. 	

2.2. Connection Diagram of Test System

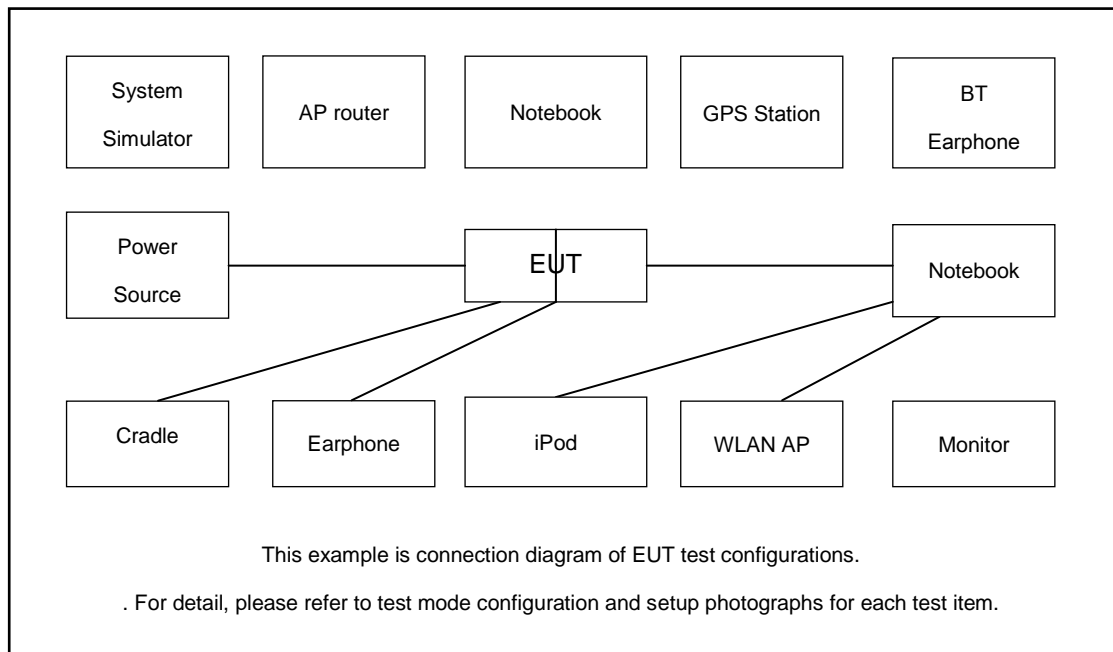

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	GNSS Station	RACELOGIC	RLLS03-2P	Fcc DoC	N/A	Unshielded, 1.8m
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	Bluetooth Earphone	Samsung	EO-MG900	CCAH14LP1680T5	N/A	N/A
5.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	iPod	Apple	MC525 ZP/A	DoC	Shielded, 1.0m	N/A



2.4. EUT Operation Test Setup

The EUT was in WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



3. Test Result

3.1. Test of Radiated Emission Measurement

3.1.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.1.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.1.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

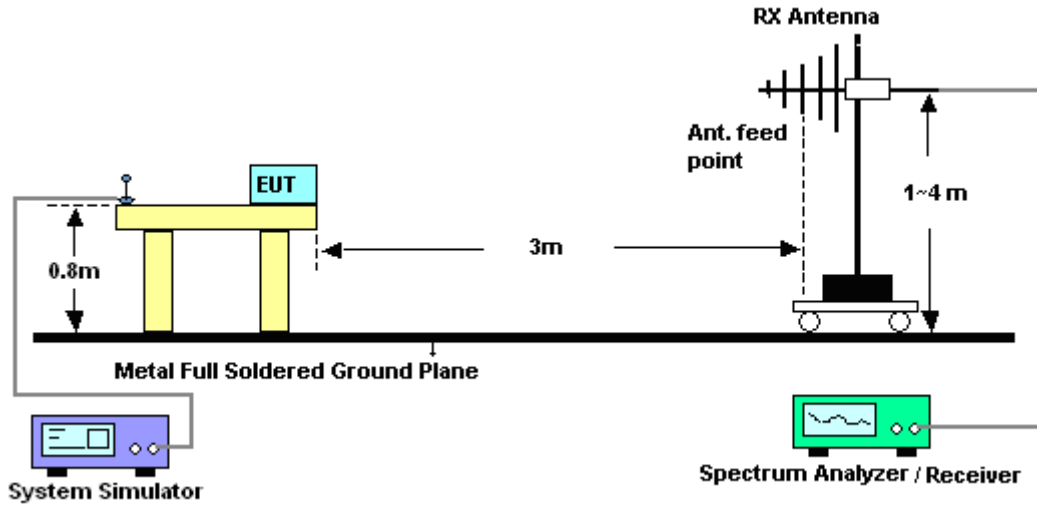


For radiated emissions above 1GHz

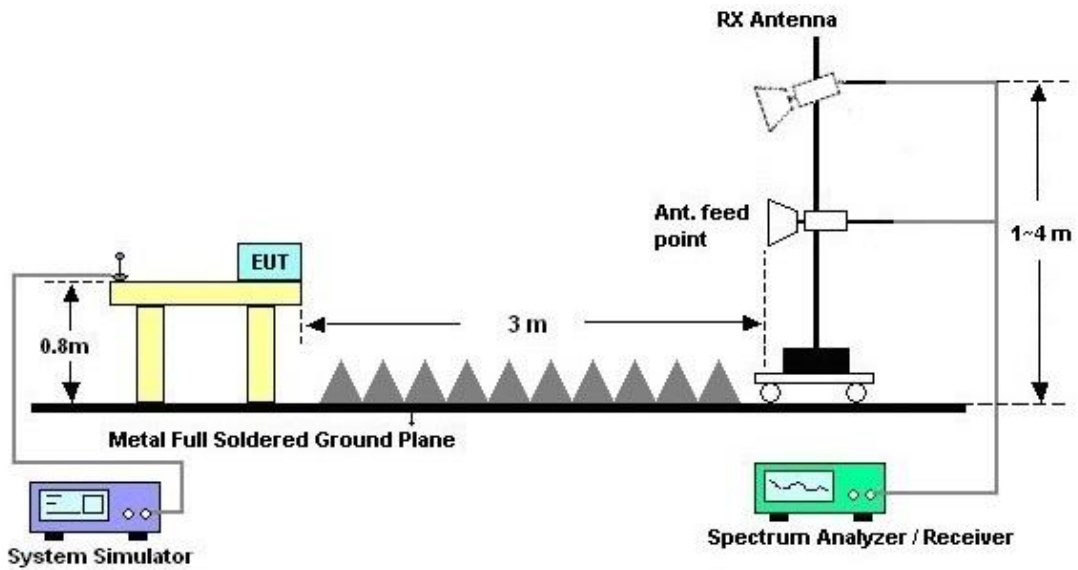



3.1.5. Test Result of Radiated Emission

Test Engineer :	Fuquan Wu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

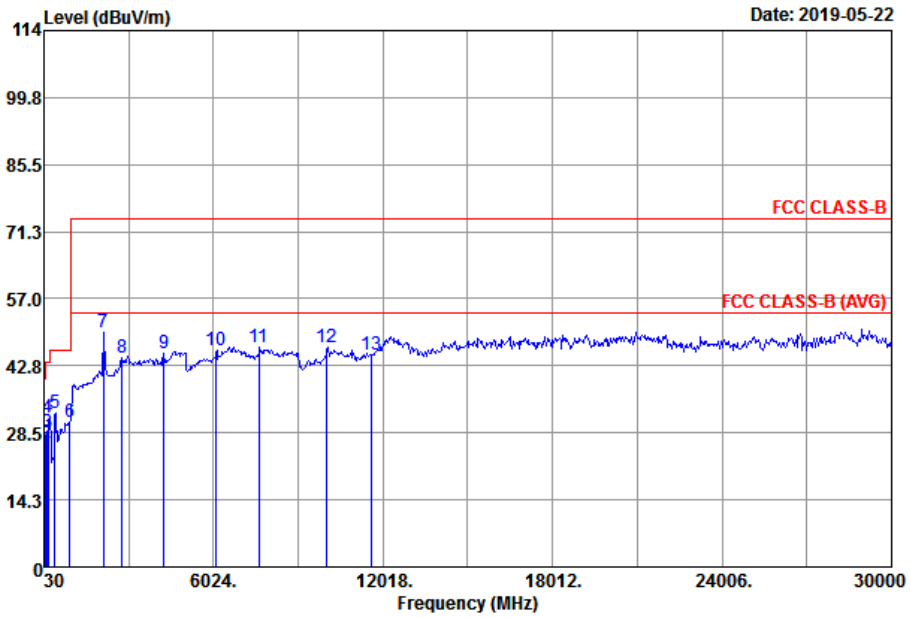


Site : 03CH01-SZ
 Condition : FCC CLASS-B 3m LF_ANT(35408)_6 HORIZONTAL

Plane	: Y										
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	24.05	-15.95	40.00	29.99	24.40	0.96	31.30	---	---	Peak
2	94.02	26.35	-17.15	43.50	40.72	15.50	1.73	31.60	---	---	Peak
3	147.37	28.51	-14.99	43.50	40.87	16.87	2.17	31.40	---	---	Peak
4	187.14	31.74	-11.76	43.50	45.28	15.34	2.44	31.32	100	59	Peak
5	420.91	32.86	-13.14	46.00	38.67	21.98	3.65	31.44	---	---	Peak
6	935.98	30.82	-15.18	46.00	29.91	26.82	5.45	31.36	---	---	Peak
7	2132.00	49.78			69.93	31.47	6.29	57.91	---	---	Peak
8	2780.00	44.59	-29.41	74.00	62.56	32.00	7.48	57.45	---	---	Peak
9	4268.00	45.47	-28.53	74.00	58.55	33.61	10.40	57.09	---	---	Peak
10	6096.00	45.91	-28.09	74.00	55.41	34.57	13.65	57.72	---	---	Peak
11	7640.00	46.79	-27.21	74.00	57.31	35.77	12.77	59.06	100	71	Peak
12	10028.00	46.64	-27.36	74.00	54.65	36.82	14.53	59.36	---	---	Peak
13	11632.00	45.19	-28.81	74.00	49.99	37.89	14.92	57.61	---	---	Peak



Test Engineer :	Fuquan Wu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

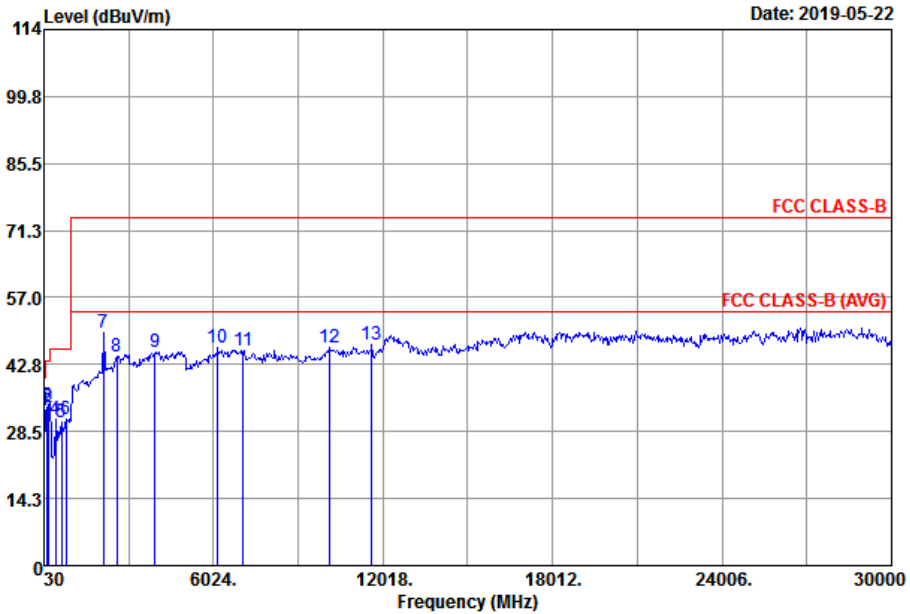

Site : 03CH01-SZ
 Condition : FCC CLASS-B 3m LF_ANT(35408)_6 VERTICAL

Plane	: Y										
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	36.79	33.18	-6.82	40.00	43.29	20.34	1.05	31.50	100	76	Peak
2	149.31	33.79	-9.71	43.50	46.28	16.73	2.18	31.40	---	---	Peak
3	187.14	34.06	-9.44	43.50	47.60	15.34	2.44	31.32	---	---	Peak
4	428.67	31.16	-14.84	46.00	36.81	22.12	3.69	31.46	---	---	Peak
5	638.19	30.36	-15.64	46.00	32.66	24.65	4.50	31.45	---	---	Peak
6	806.00	31.06	-14.94	46.00	31.08	26.22	5.07	31.31	---	---	Peak
7	2132.00	49.64			69.79	31.47	6.29	57.91	---	---	Peak
8	2594.00	44.58	-29.42	74.00	63.09	32.00	7.07	57.58	---	---	Peak
9	3958.00	45.41	-28.59	74.00	58.79	33.45	10.08	56.91	---	---	Peak
10	6162.00	46.22	-27.78	74.00	55.61	34.62	13.79	57.80	---	---	Peak
11	7070.00	45.88	-28.12	74.00	55.53	35.02	14.16	58.83	---	---	Peak
12	10112.00	46.52	-27.48	74.00	54.36	36.87	14.56	59.27	---	---	Peak
13	11604.00	46.85	-27.15	74.00	51.70	37.87	14.91	57.63	100	142	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Aug. 30, 2018	May 22, 2019	Aug. 29, 2019	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270104	0.5GHz~26.5GHz	Dec. 22, 2018	May 22, 2019	Dec. 21, 2019	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jun. 05, 2018	May 22, 2019	Jun. 04, 2019	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	119436	1GHz~18GHz	Jun. 28, 2018	May 22, 2019	Jun. 27, 2019	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 19, 2019	May 22, 2019	Apr. 18, 2020	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1707137	1GHz~18GHz	Oct. 19, 2018	May 22, 2019	Oct. 18, 2019	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 17, 2018	May 22, 2019	Jul. 16, 2019	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar. 30, 2019	May 22, 2019	Mar. 29, 2020	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	May 22, 2019	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 22, 2019	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 22, 2019	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3dB
---	-------