




Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

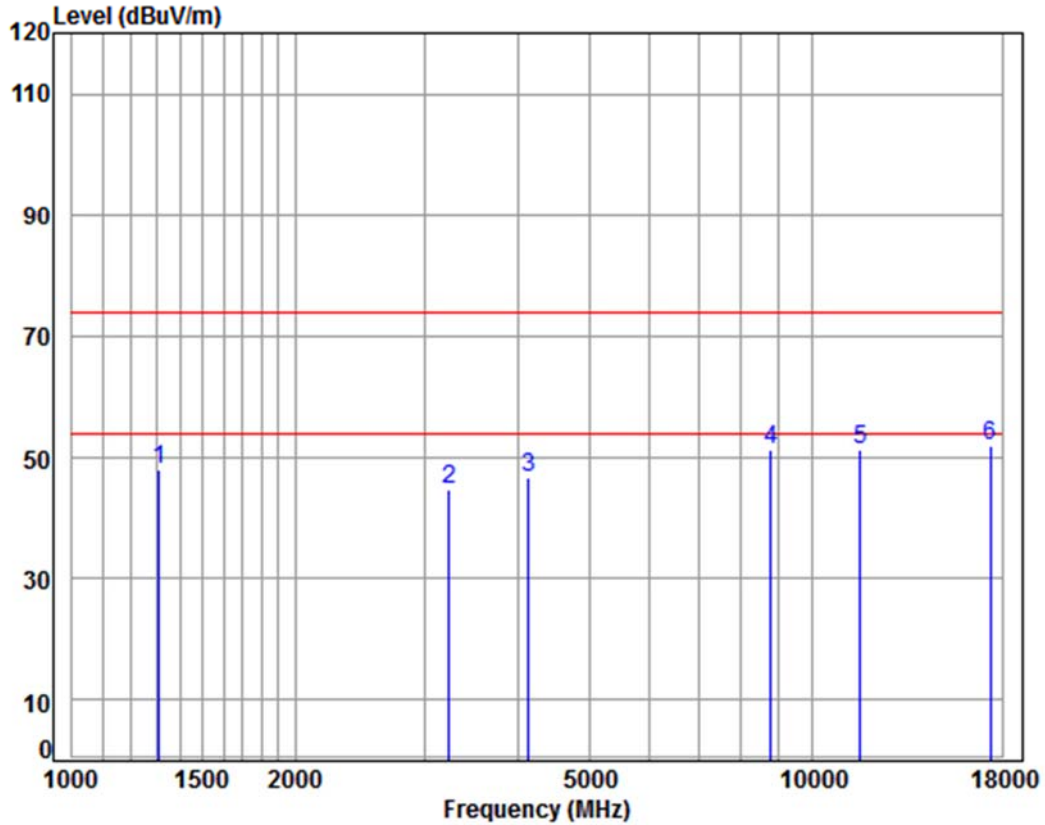

Condition: 3m HORIZONTAL

Job No : 09260RG


Mode : 5785 TX RSE

: 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1312.187	4.84	25.01	38.06	56.37	48.16	74.00	-25.84	Peak
2	3233.260	6.21	31.74	37.93	44.85	44.87	74.00	-29.13	peak
3	4133.699	7.14	33.60	38.07	44.10	46.77	74.00	-27.23	peak
4	8764.146	10.34	36.32	35.63	40.45	51.48	74.00	-22.52	Peak
5	11570.000	12.17	38.17	36.10	37.16	51.40	74.00	-22.60	peak
6	pp17355.000	15.92	43.23	36.12	28.81	51.84	74.00	-22.16	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	----------------	-----------------	------	------	----------

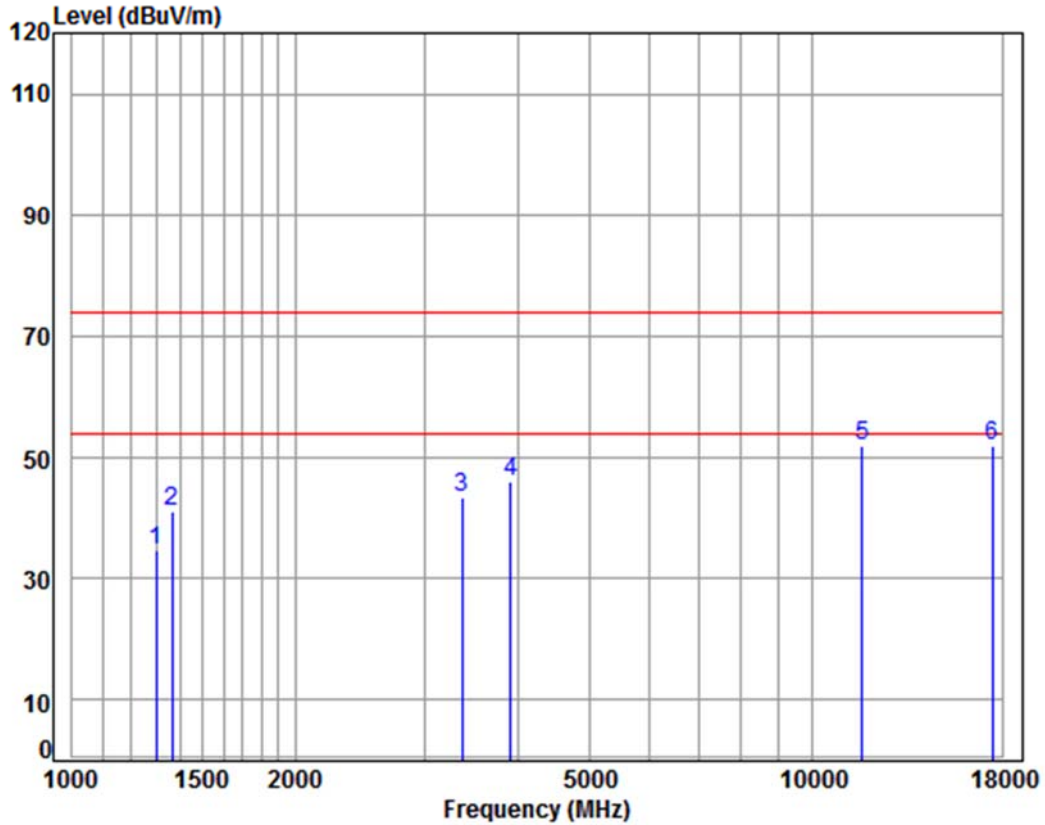


Condition: 3m VERTICAL
 Job No : 09260RG
 Mode : 5825 TX RSE
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	42.88	34.55	74.00	-39.45	peak
2	1366.374	5.04	25.25	38.05	48.94	41.18	74.00	-32.82	peak
3	3357.061	6.33	31.96	37.94	43.06	43.41	74.00	-30.59	peak
4	3912.809	6.89	33.37	37.99	43.99	46.26	74.00	-27.74	peak
5	pp11650.000	12.20	38.25	36.19	37.62	51.88	74.00	-22.12	peak
6	17475.000	15.65	43.37	36.06	28.89	51.85	74.00	-22.15	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

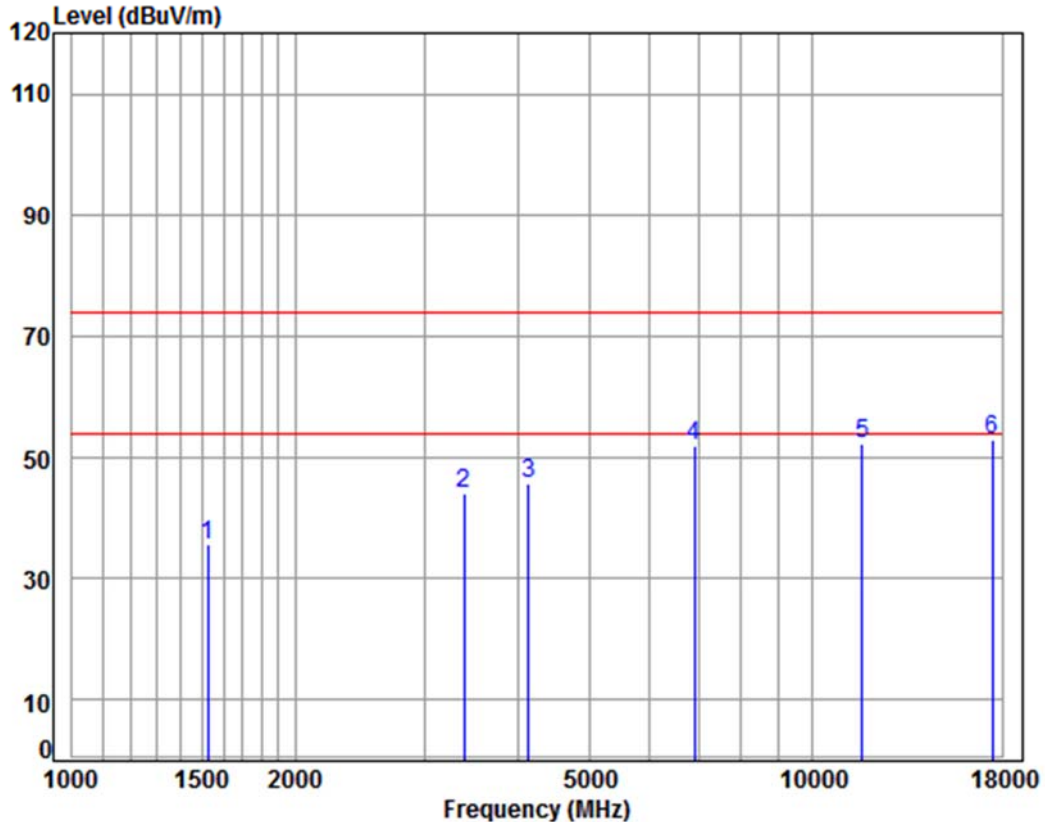


Condition: 3m HORIZONTAL
 Job No : 09260RG
 Mode : 5825 TX RSE
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1525.000	5.45	25.91	38.04	42.47	35.79	74.00	-38.21	Peak
2	3386.297	6.36	32.01	37.94	43.75	44.18	74.00	-29.82	peak
3	4133.699	7.14	33.60	38.07	43.27	45.94	74.00	-28.06	peak
4	6914.763	10.36	36.27	37.38	42.61	51.86	74.00	-22.14	Peak
5	11650.000	12.20	38.25	36.19	37.90	52.16	74.00	-21.84	peak
6	pp17475.000	15.65	43.37	36.06	30.15	53.11	74.00	-20.89	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

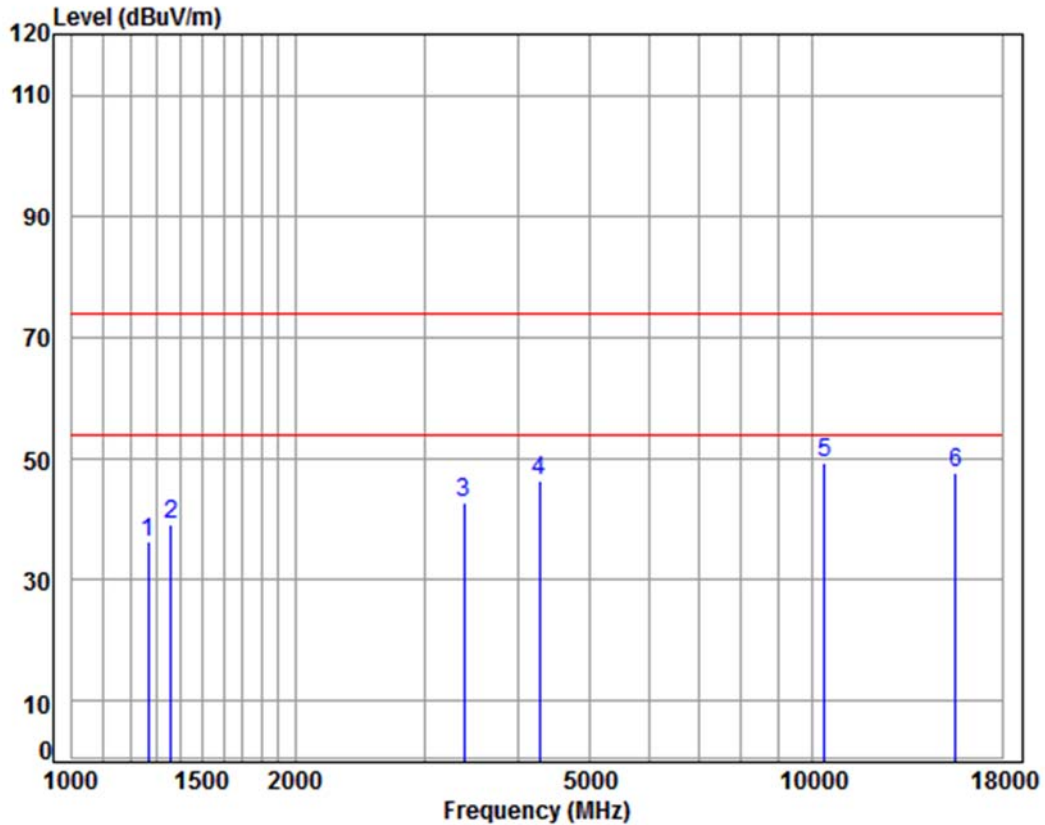


Condition: 3m HORIZONTAL
 Job No : 09260RG
 Mode : 5190 TX RSE
 : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	45.02	36.43	74.00	-37.57	peak
2	1362.430	5.02	25.23	38.06	46.97	39.16	74.00	-34.84	peak
3	3386.297	6.36	32.01	37.94	42.42	42.85	74.00	-31.15	peak
4	4279.589	7.31	33.60	38.15	43.70	46.46	74.00	-27.54	peak
5	pp10380.000	11.21	37.22	35.10	36.12	49.45	74.00	-24.55	peak
6	15570.000	14.35	41.37	38.26	30.36	47.82	74.00	-26.18	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

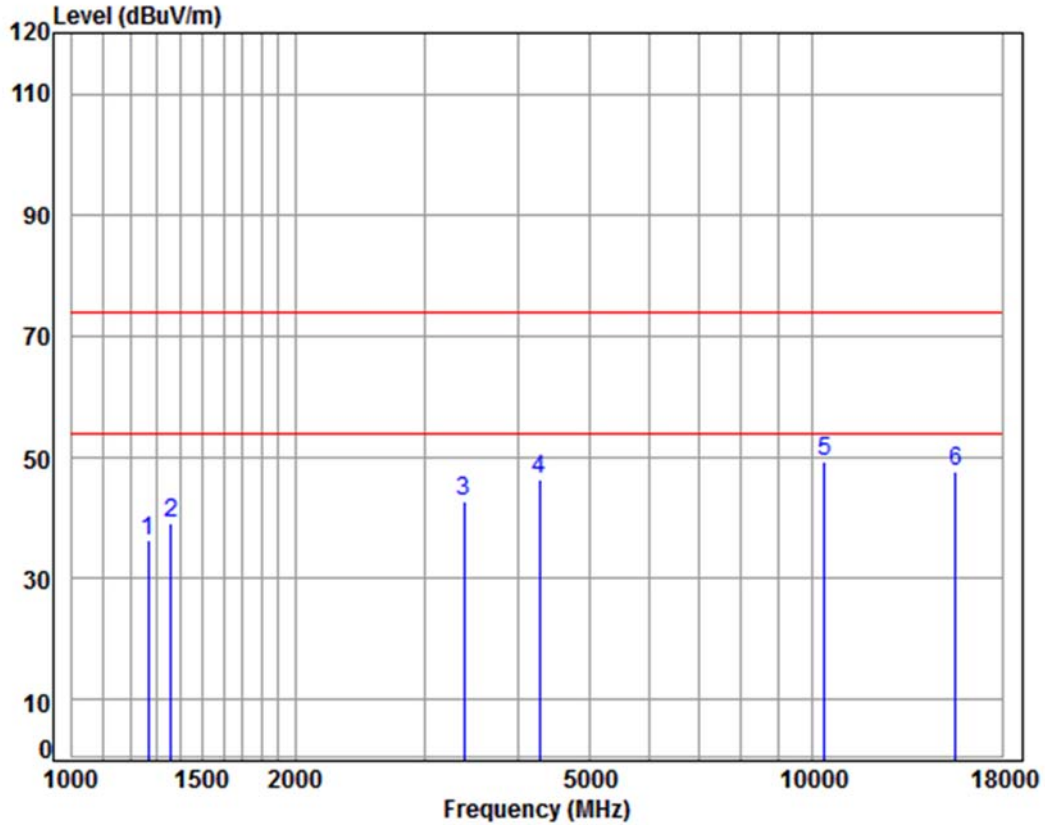


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5190 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	45.02	36.43	74.00	-37.57	peak
2	1362.430	5.02	25.23	38.06	46.97	39.16	74.00	-34.84	peak
3	3386.297	6.36	32.01	37.94	42.42	42.85	74.00	-31.15	peak
4	4279.589	7.31	33.60	38.15	43.70	46.46	74.00	-27.54	peak
5	pp10380.000	11.21	37.22	35.10	36.12	49.45	74.00	-24.55	peak
6	15570.000	14.35	41.37	38.26	30.36	47.82	74.00	-26.18	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

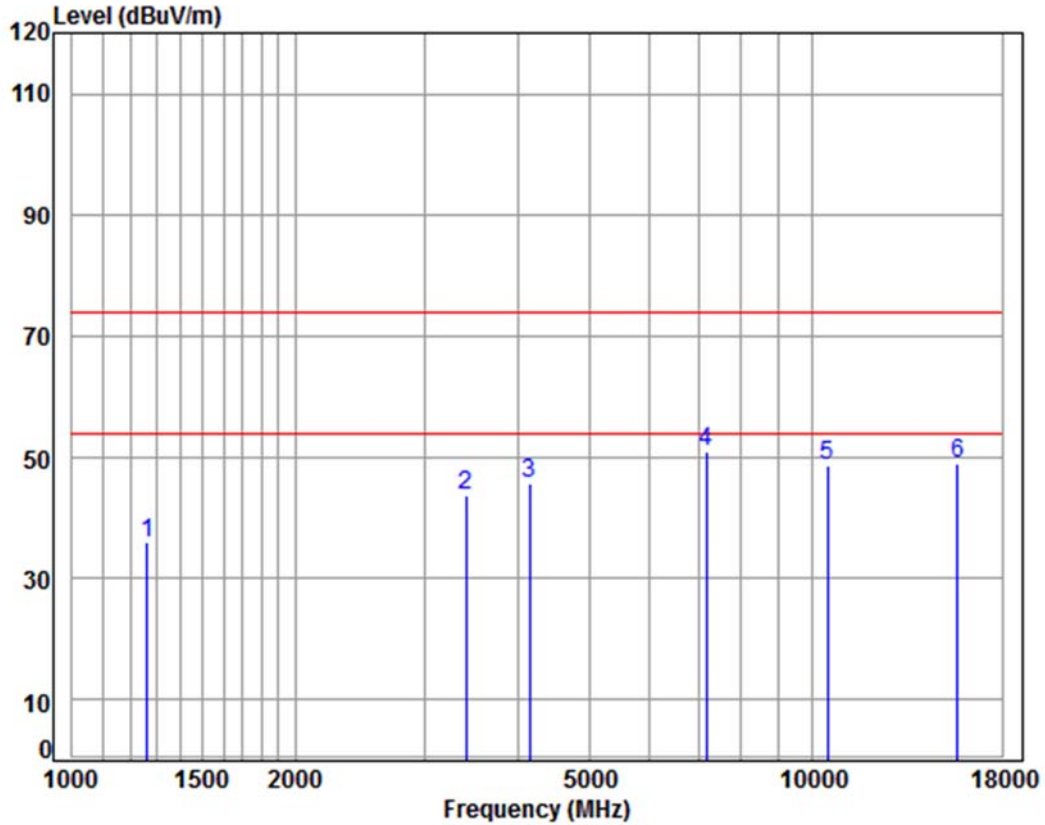


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5230 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	44.60	35.98	74.00	-38.02	peak
2	3405.929	6.38	32.04	37.94	43.42	43.90	74.00	-30.10	peak
3	4145.664	7.16	33.60	38.08	43.03	45.71	74.00	-28.29	peak
4 pp	7179.527	10.08	36.43	37.13	41.73	51.11	74.00	-22.89	Peak
5	10460.000	11.26	37.14	35.14	35.33	48.59	74.00	-25.41	peak
6	15690.000	14.53	41.32	38.13	31.24	48.96	74.00	-25.04	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

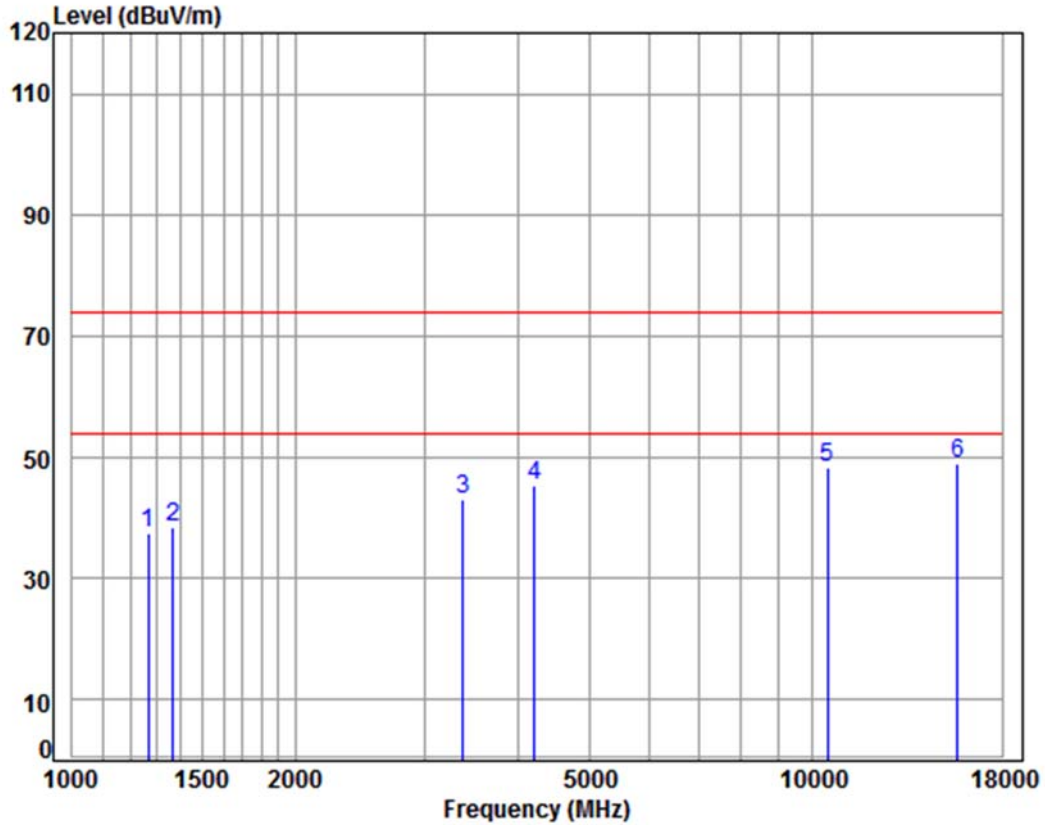


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5230 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	46.04	37.45	74.00	-36.55	peak
2	1370.328	5.05	25.26	38.05	46.48	38.74	74.00	-35.26	peak
3	3366.778	6.34	31.97	37.94	42.70	43.07	74.00	-30.93	peak
4	4206.011	7.23	33.60	38.11	42.79	45.51	74.00	-28.49	peak
5	10460.000	11.26	37.14	35.14	35.23	48.49	74.00	-25.51	peak
6	pp15690.000	14.53	41.32	38.13	31.37	49.09	74.00	-24.91	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

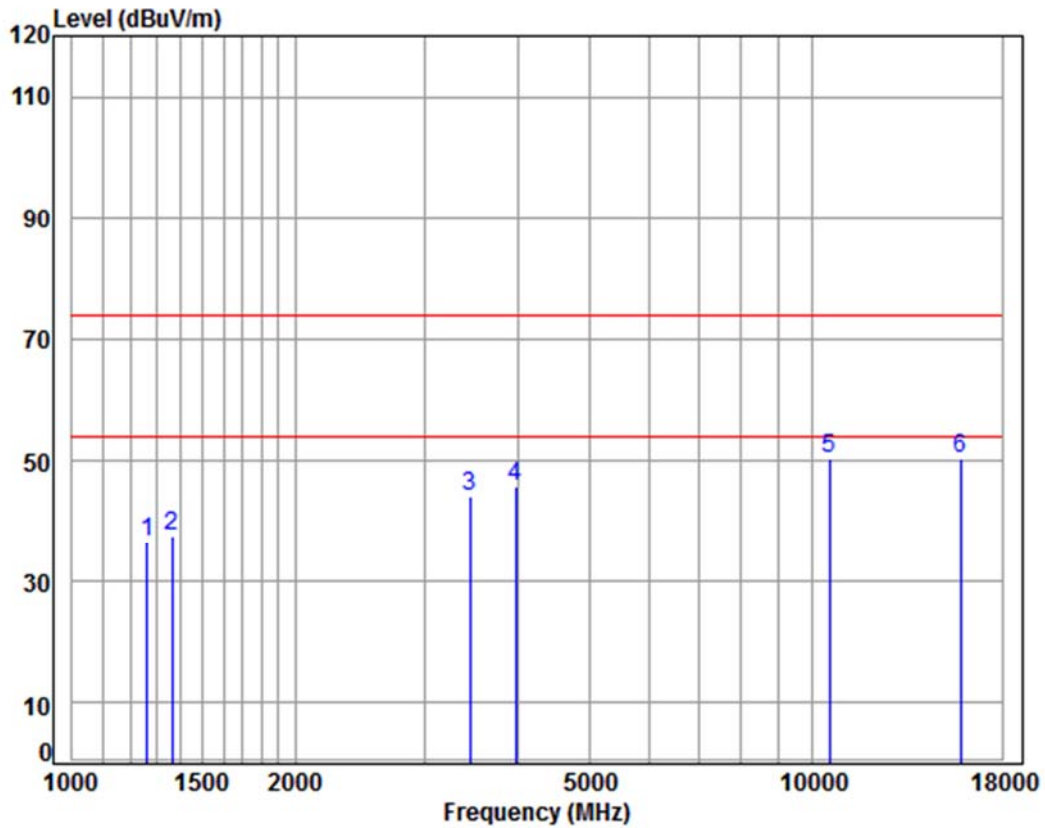


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5270 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	45.33	36.71	74.00	-37.29	peak
2	1366.374	5.04	25.25	38.05	45.21	37.45	74.00	-36.55	peak
3	3445.535	6.41	32.11	37.95	43.46	44.03	74.00	-29.97	peak
4	3969.767	6.95	33.52	38.00	43.15	45.62	74.00	-28.38	peak
5	10540.000	11.32	37.15	35.18	37.05	50.34	74.00	-23.66	peak
6	pp15810.000	14.71	41.28	38.00	32.39	50.38	74.00	-23.62	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

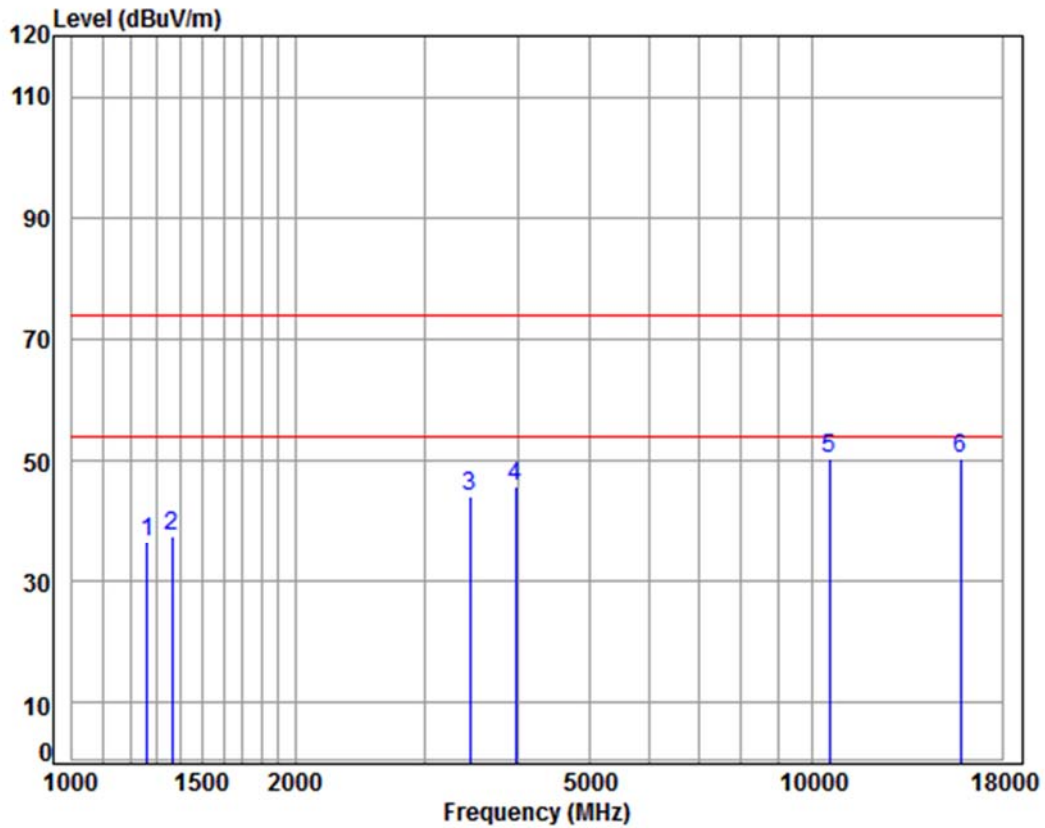


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5270 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	45.33	36.71	74.00	-37.29	peak
2	1366.374	5.04	25.25	38.05	45.21	37.45	74.00	-36.55	peak
3	3445.535	6.41	32.11	37.95	43.46	44.03	74.00	-29.97	peak
4	3969.767	6.95	33.52	38.00	43.15	45.62	74.00	-28.38	peak
5	10540.000	11.32	37.15	35.18	37.05	50.34	74.00	-23.66	peak
6	pp15810.000	14.71	41.28	38.00	32.39	50.38	74.00	-23.62	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

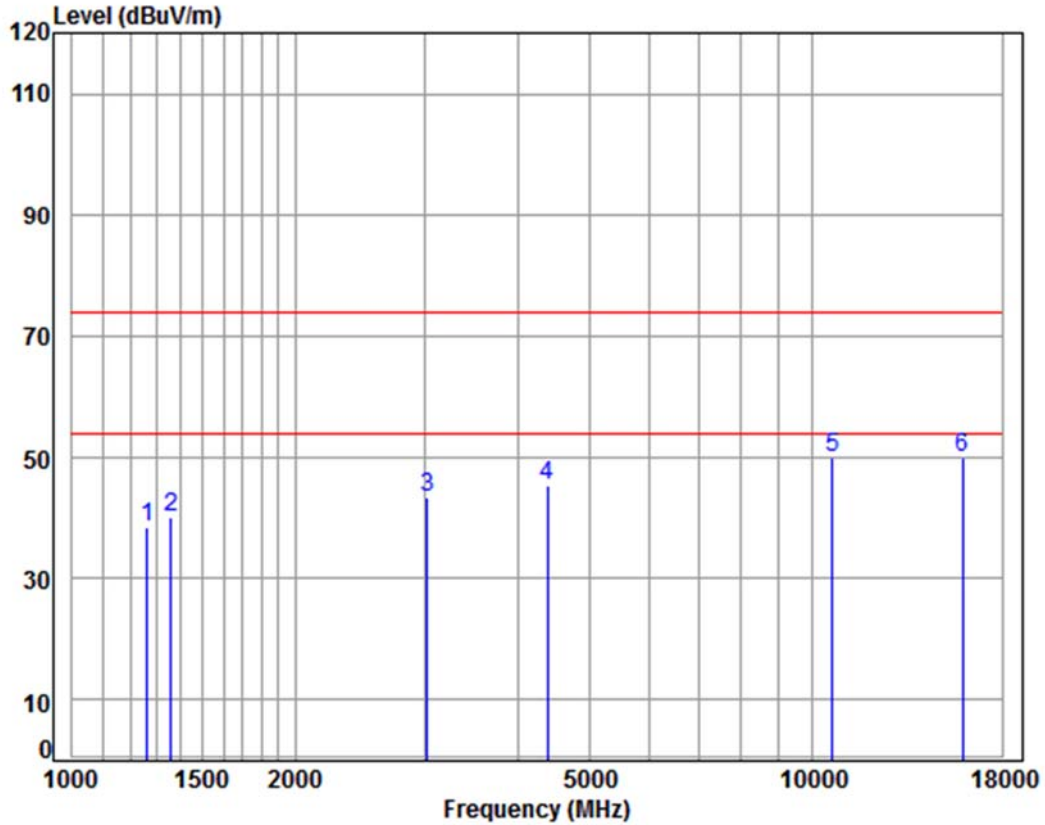


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5310 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	47.05	38.43	74.00	-35.57	peak
2	1362.430	5.02	25.23	38.06	48.01	40.20	74.00	-33.80	peak
3	3016.575	6.00	31.33	37.90	44.01	43.44	74.00	-30.56	peak
4	4379.699	7.43	33.60	38.20	42.58	45.41	74.00	-28.59	peak
5	10620.000	11.37	37.25	35.22	36.71	50.11	74.00	-23.89	peak
6	pp15930.000	14.89	41.23	37.87	31.88	50.13	74.00	-23.87	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

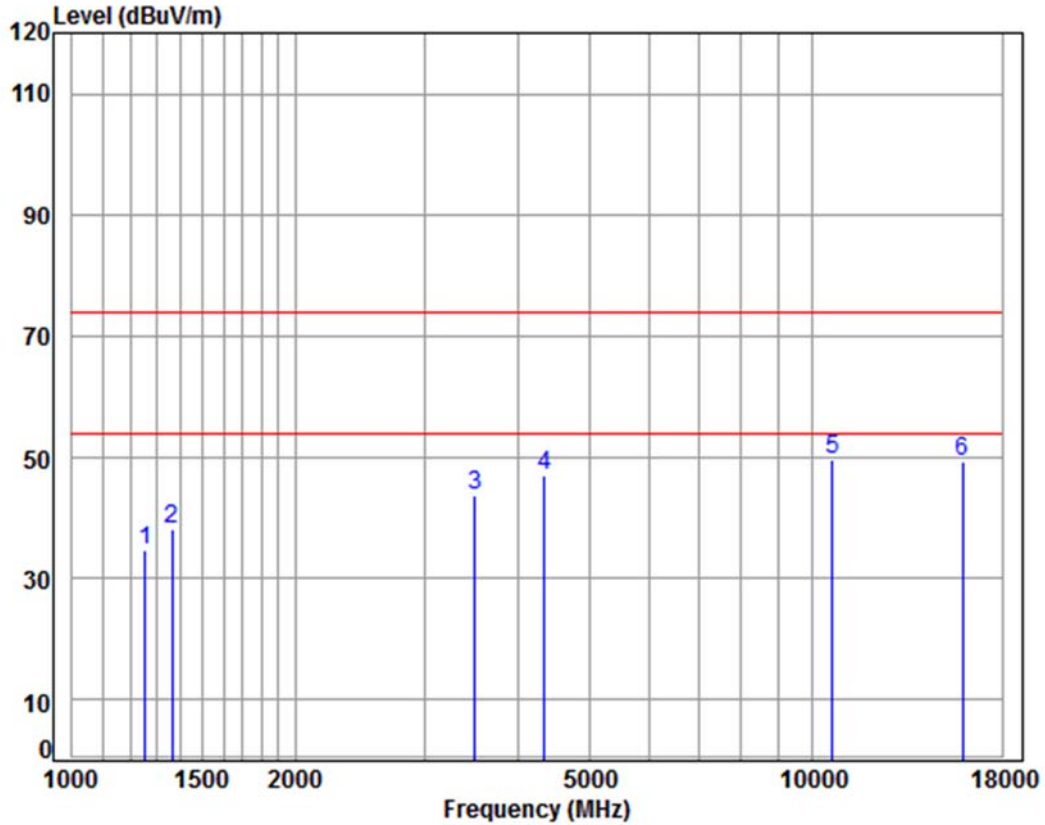


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5310 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.75	38.07	43.18	34.50	74.00	-39.50	peak
2	1366.374	5.04	25.25	38.05	45.92	38.16	74.00	-35.84	peak
3	3495.691	6.46	32.19	37.95	43.21	43.91	74.00	-30.09	peak
4	4341.886	7.38	33.60	38.18	44.23	47.03	74.00	-26.97	peak
5	pp10620.000	11.37	37.25	35.22	36.45	49.85	74.00	-24.15	peak
6	15930.000	14.89	41.23	37.87	31.01	49.26	74.00	-24.74	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

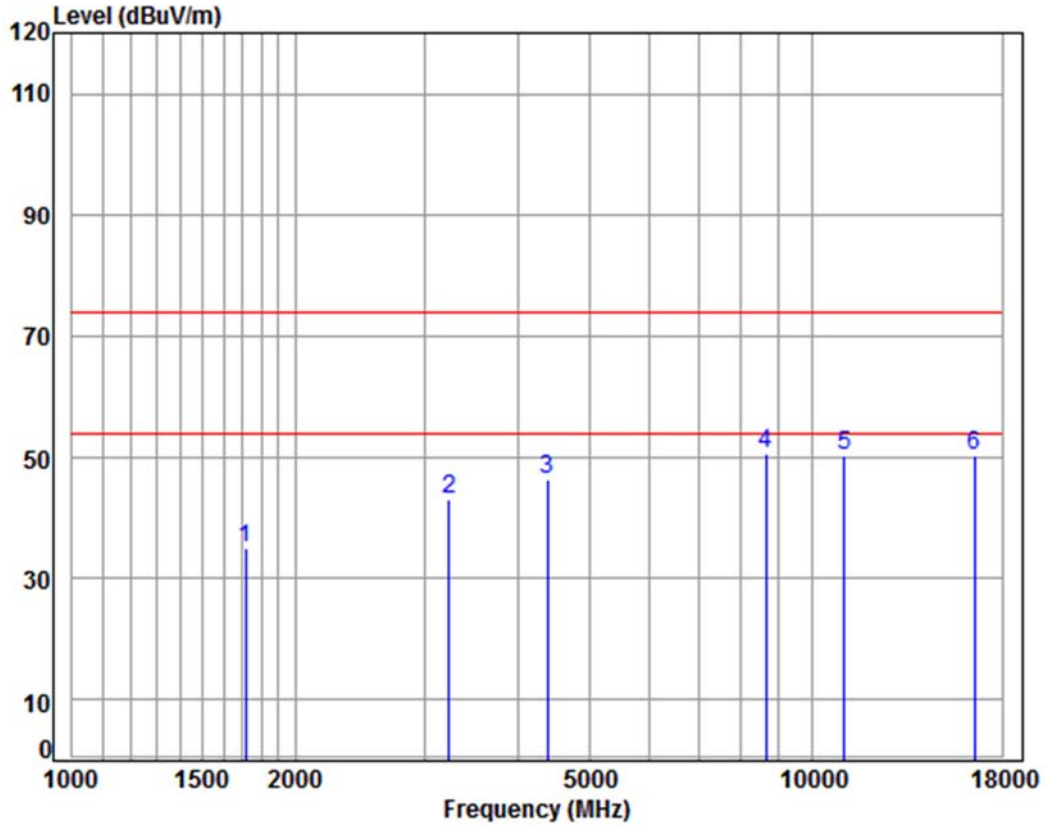


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5510 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1716.864	5.21	26.74	38.02	41.04	34.97	74.00	-39.03	Peak
2	3233.260	6.21	31.74	37.93	43.05	43.07	74.00	-30.93	peak
3	4379.699	7.43	33.60	38.20	43.64	46.47	74.00	-27.53	peak
4	pp 8638.399	10.31	36.17	35.75	39.79	50.52	74.00	-23.48	Peak
5	11020.000	11.65	37.72	35.43	36.30	50.24	74.00	-23.76	peak
6	16530.000	14.63	42.71	36.99	30.14	50.49	74.00	-23.51	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

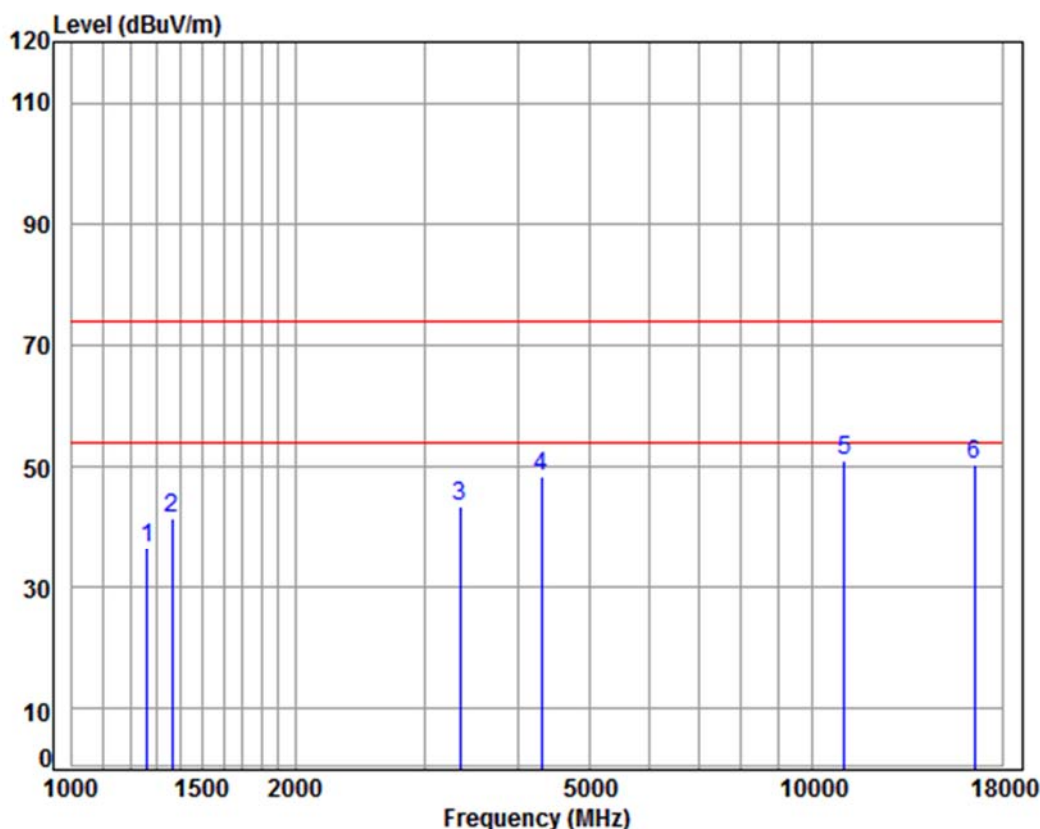

Condition: 3m HORIZONTAL

Job No : 09260RG


Mode : 5510 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	45.21	36.59	74.00	-37.41	peak
2	1366.374	5.04	25.25	38.05	49.15	41.39	74.00	-32.61	peak
3	3337.710	6.31	31.92	37.94	43.19	43.48	74.00	-30.52	peak
4	4304.400	7.34	33.60	38.16	45.50	48.28	74.00	-25.72	peak
5	pp11020.000	11.65	37.72	35.43	37.19	51.13	74.00	-22.87	peak
6	16530.000	14.63	42.71	36.99	29.94	50.29	74.00	-23.71	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5590	Peak	Vertical
------------	---------------	-----------------	------	------	----------

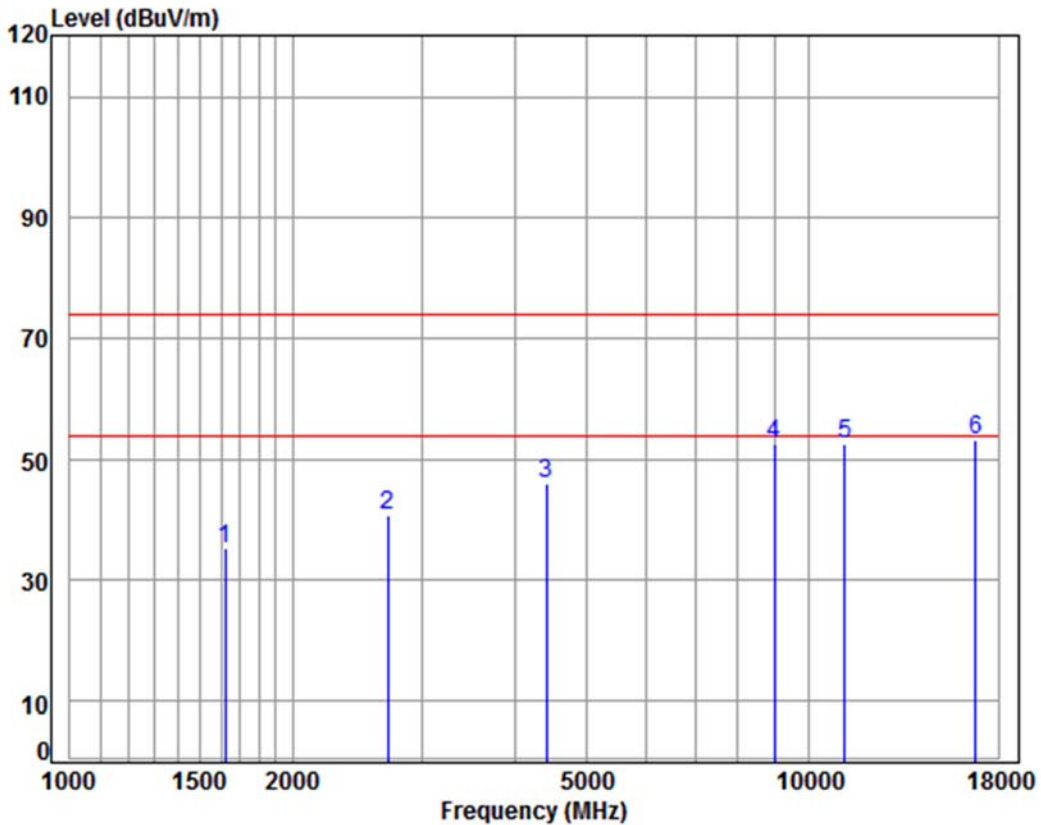


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5590 TX SE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1620.431	5.32	26.34	38.03	41.60	35.23	74.00	-38.77	Peak
2	2694.998	5.77	30.18	37.93	42.91	40.93	74.00	-33.07	Peak
3	4405.090	7.46	33.60	38.22	43.23	46.07	74.00	-27.93	peak
4	8969.161	10.39	36.56	35.43	41.23	52.75	74.00	-21.25	peak
5	11180.000	11.82	37.85	35.62	38.63	52.68	74.00	-21.32	peak
6	pp16770.000	15.70	42.75	36.64	31.62	53.43	74.00	-20.57	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5590	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

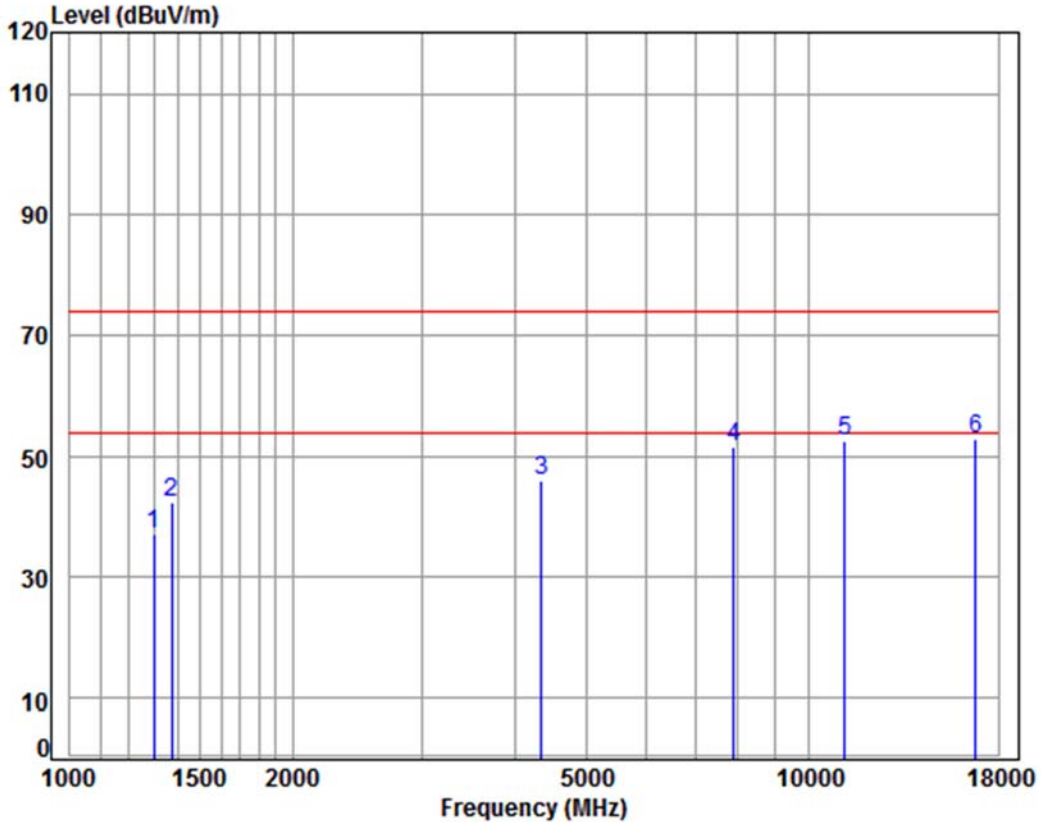


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5590 TX SE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	45.63	37.30	74.00	-36.70	peak
2	1374.295	5.06	25.28	38.05	50.20	42.49	74.00	-31.51	peak
3	4341.886	7.38	33.60	38.18	43.16	45.96	74.00	-28.04	peak
4	7898.049	9.96	36.54	36.49	41.60	51.61	74.00	-22.39	peak
5	11180.000	11.82	37.85	35.62	38.58	52.63	74.00	-21.37	peak
6	pp16770.000	15.70	42.75	36.64	31.31	53.12	74.00	-20.88	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

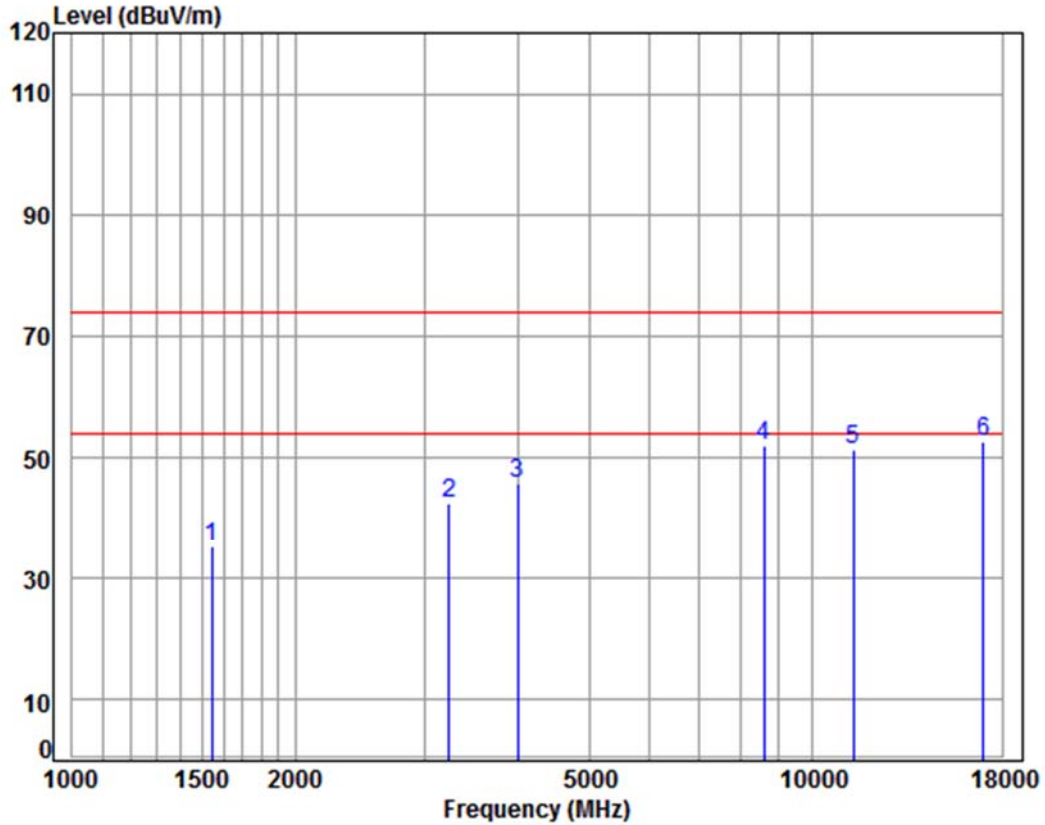


Condition: 3m VERTICAL
 Job No : 09260RG
 Mode : 5670 TX RSE
 : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1542.733	5.42	26.00	38.04	42.01	35.39	74.00	-38.61	Peak
2	3233.260	6.21	31.74	37.93	42.60	42.62	74.00	-31.38	peak
3	3992.781	6.97	33.58	38.00	43.18	45.73	74.00	-28.27	peak
4	8588.607	10.29	36.11	35.80	41.26	51.86	74.00	-22.14	Peak
5	11340.000	11.98	37.97	35.82	37.14	51.27	74.00	-22.73	peak
6	pp17010.000	16.69	42.81	36.29	29.27	52.48	74.00	-21.52	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

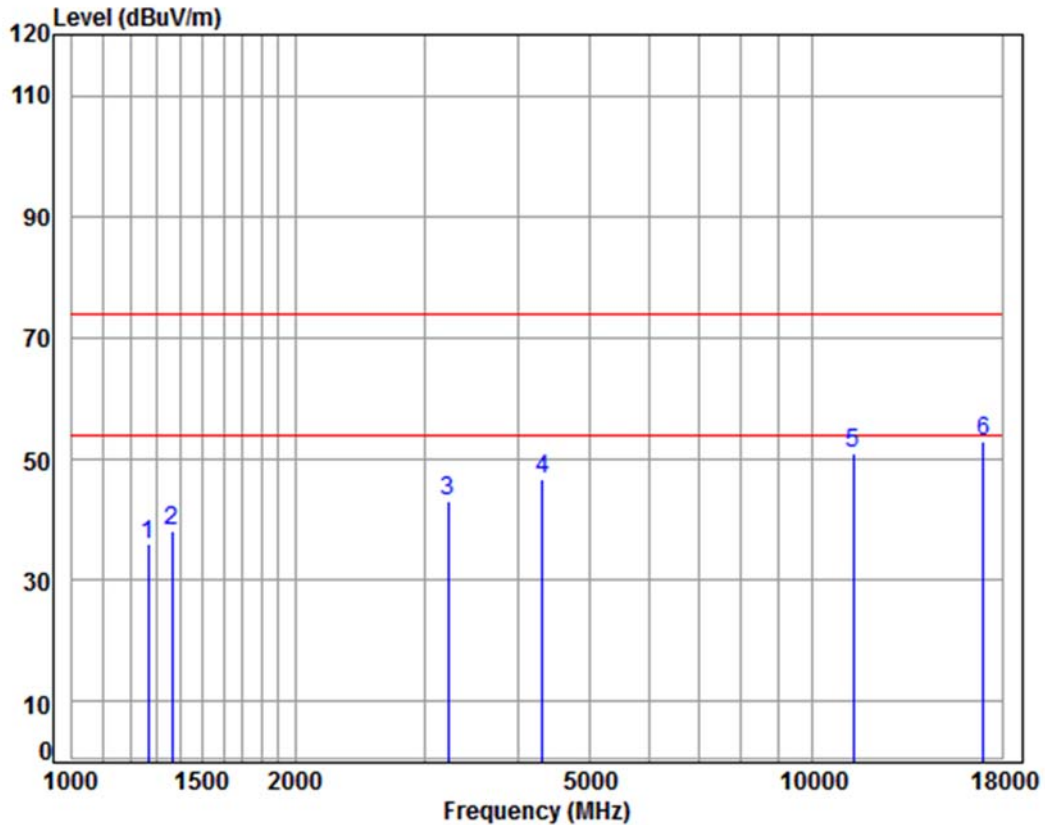


Condition: 3m HORIZONTAL
 Job No : 09260RG
 Mode : 5670 TX RSE
 : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	44.43	35.84	74.00	-38.16	peak
2	1366.374	5.04	25.25	38.05	45.93	38.17	74.00	-35.83	peak
3	3214.623	6.20	31.70	37.92	43.25	43.23	74.00	-30.77	peak
4	4316.859	7.36	33.60	38.17	43.87	46.66	74.00	-27.34	peak
5	11340.000	11.98	37.97	35.82	36.94	51.07	74.00	-22.93	peak
6	pp17010.000	16.69	42.81	36.29	29.75	52.96	74.00	-21.04	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

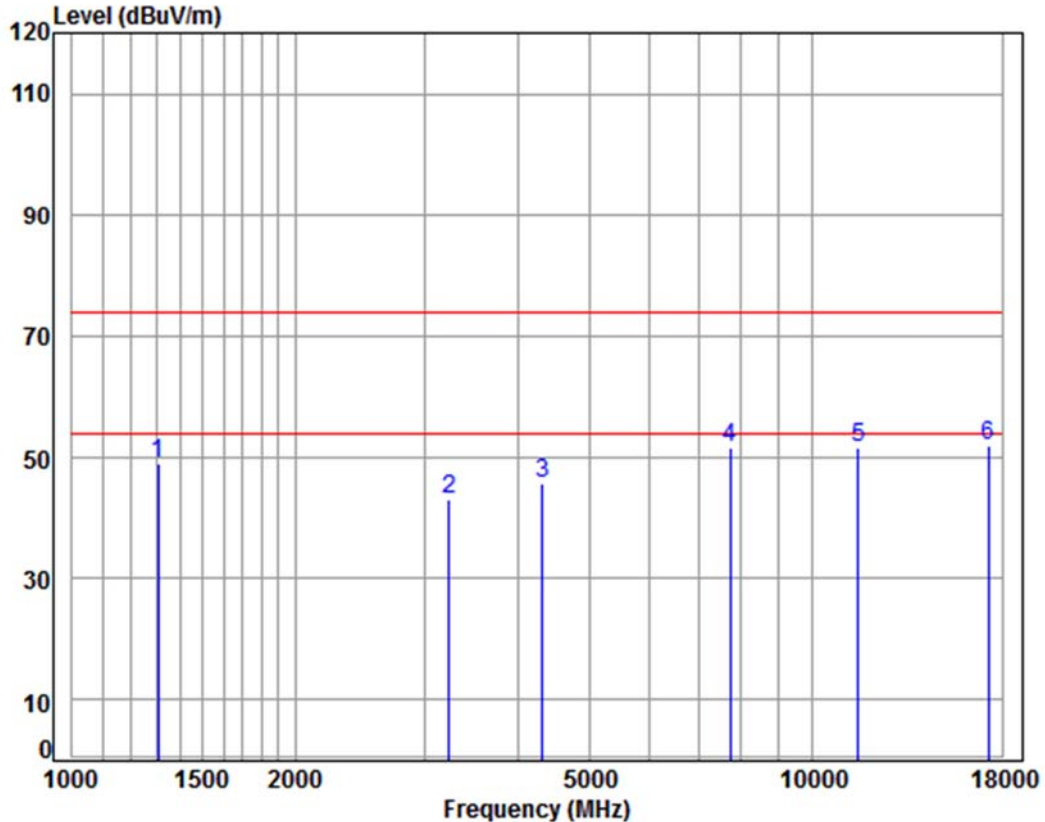

Condition: 3m VERTICAL

Job No : 09260RG


Mode : 5755 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1308.399	4.83	24.99	38.06	57.36	49.12	74.00	-24.88	Peak
2	3233.260	6.21	31.74	37.93	43.16	43.18	74.00	-30.82	peak
3	4316.859	7.36	33.60	38.17	43.04	45.83	74.00	-28.17	peak
4	7739.857	9.98	36.45	36.62	41.90	51.71	74.00	-22.29	Peak
5	11510.000	12.14	38.11	36.03	37.43	51.65	74.00	-22.35	peak
6	pp17265.000	16.12	43.12	36.16	28.89	51.97	74.00	-22.03	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

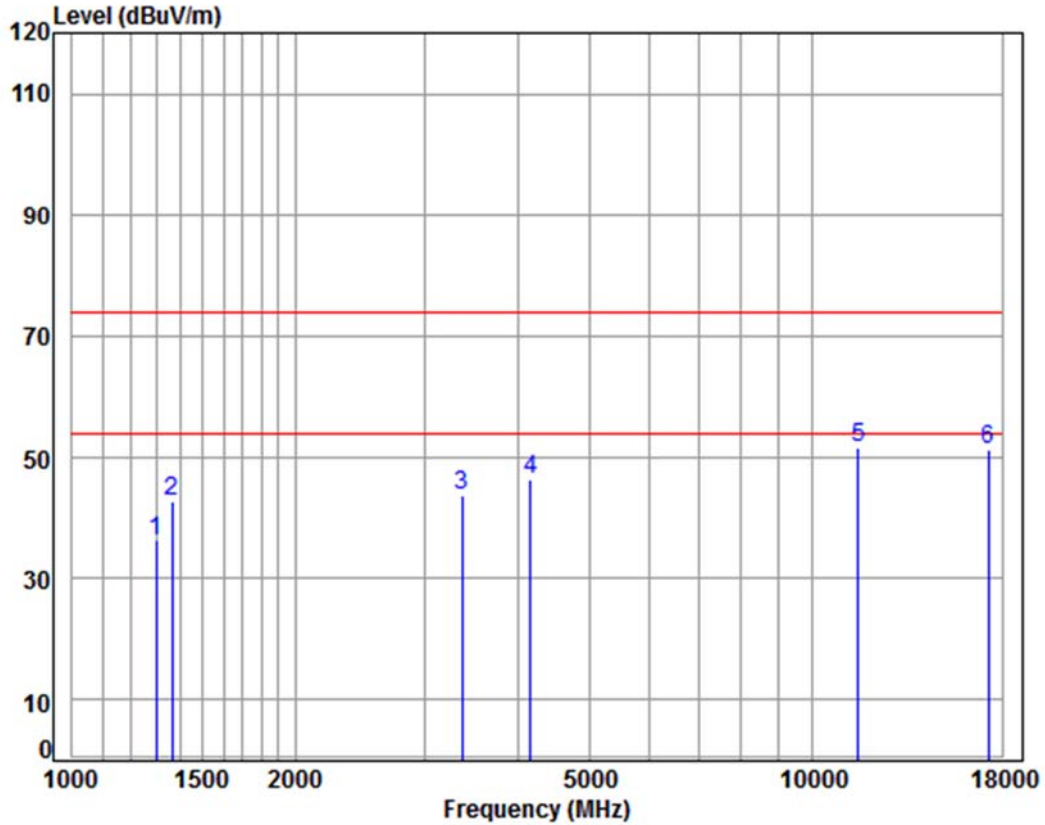


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5755 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	44.62	36.29	74.00	-37.71	peak
2	1366.374	5.04	25.25	38.05	50.59	42.83	74.00	-31.17	peak
3	3357.061	6.33	31.96	37.94	43.43	43.78	74.00	-30.22	peak
4	4157.664	7.17	33.60	38.09	43.83	46.51	74.00	-27.49	peak
5	pp11510.000	12.14	38.11	36.03	37.39	51.61	74.00	-22.39	peak
6	17265.000	16.12	43.12	36.16	28.35	51.43	74.00	-22.57	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

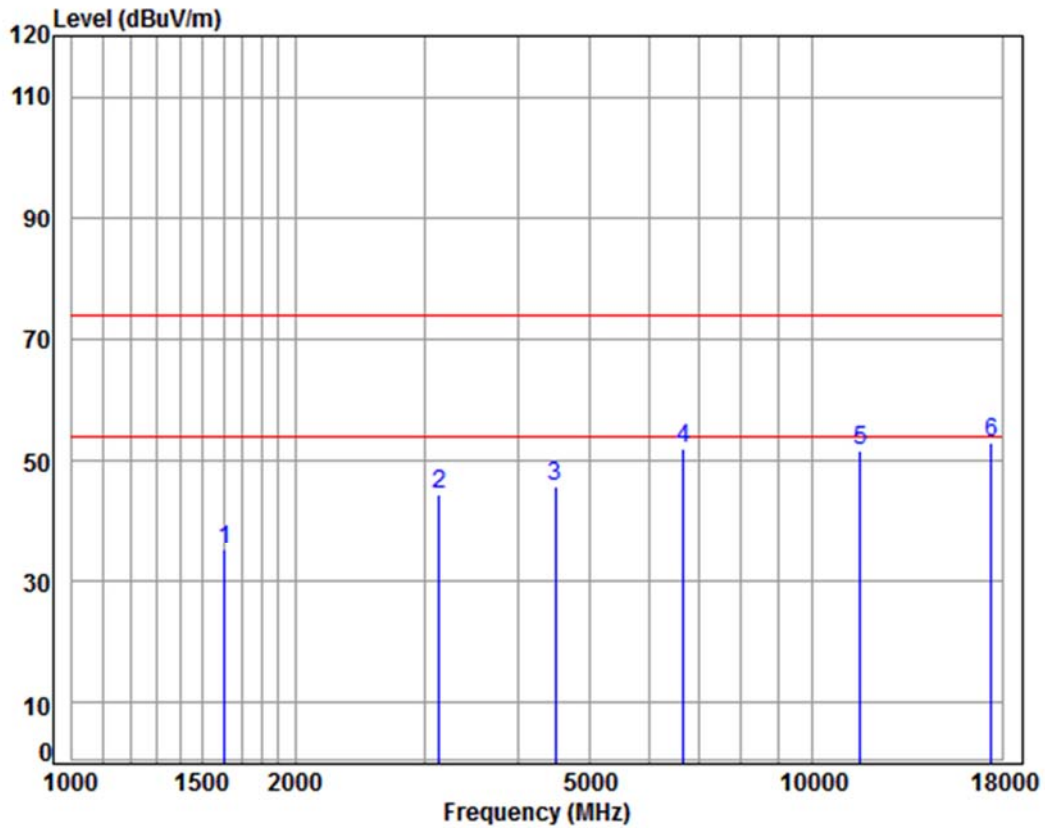


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5795 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1606.441	5.34	26.28	38.03	41.74	35.33	74.00	-38.67	Peak
2	3132.079	6.11	31.55	37.91	44.56	44.31	74.00	-29.69	peak
3	4495.125	7.55	33.60	38.26	42.74	45.63	74.00	-28.37	peak
4	6679.040	11.02	35.61	37.60	42.83	51.86	74.00	-22.14	Peak
5	11590.000	12.17	38.19	36.12	37.26	51.50	74.00	-22.50	peak
6	pp17385.000	15.85	43.26	36.10	29.96	52.97	74.00	-21.03	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

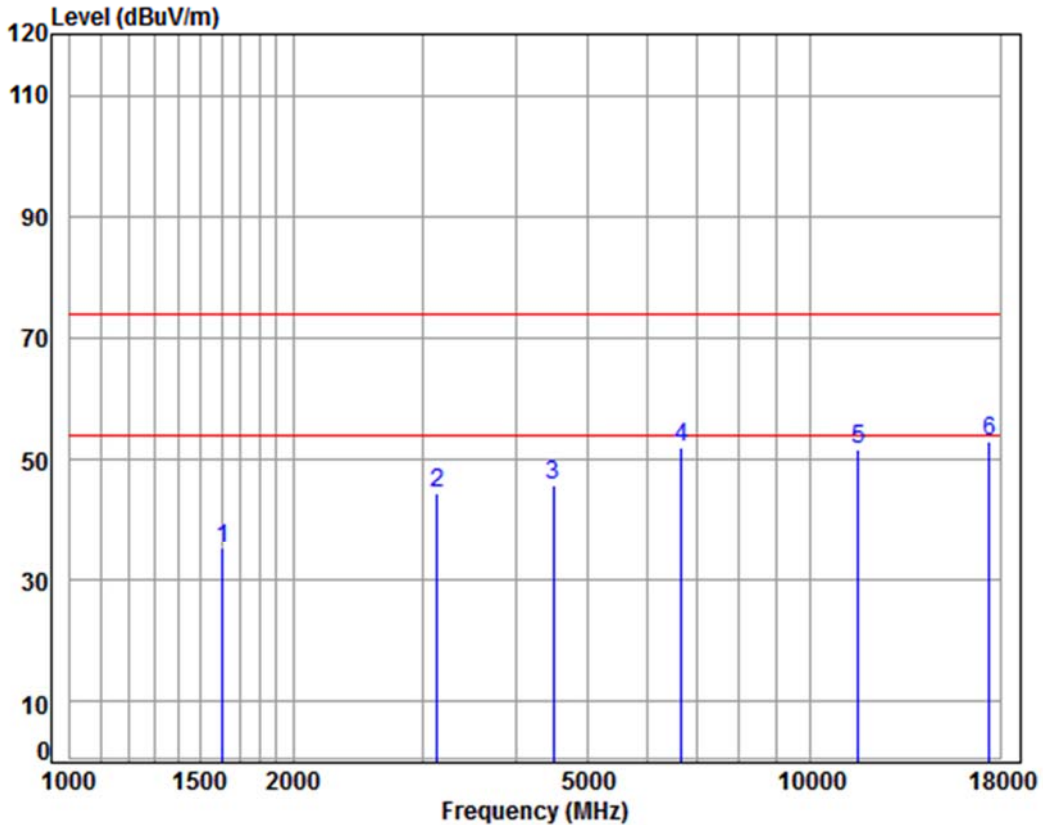


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5795 TX RSE
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1606.441	5.34	26.28	38.03	41.74	35.33	74.00	-38.67	Peak
2	3132.079	6.11	31.55	37.91	44.56	44.31	74.00	-29.69	peak
3	4495.125	7.55	33.60	38.26	42.74	45.63	74.00	-28.37	peak
4	6679.040	11.02	35.61	37.60	42.83	51.86	74.00	-22.14	Peak
5	11590.000	12.17	38.19	36.12	37.26	51.50	74.00	-22.50	peak
6	pp17385.000	15.85	43.26	36.10	29.96	52.97	74.00	-21.03	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

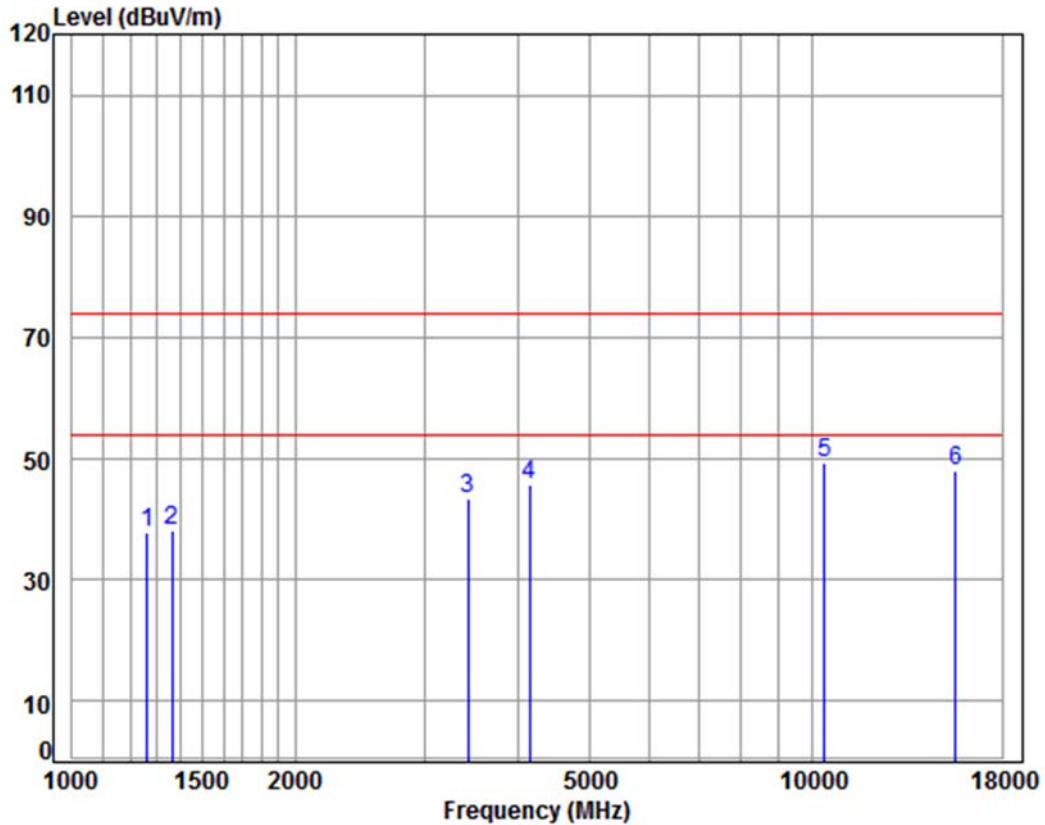


Condition: 3m VERTICAL
 Job No : 09260RG
 Mode : 5190 TX RSE
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	46.66	38.04	74.00	-35.96	peak
2	1366.374	5.04	25.25	38.05	45.99	38.23	74.00	-35.77	peak
3	3425.675	6.39	32.07	37.95	43.04	43.55	74.00	-30.45	peak
4	4145.664	7.16	33.60	38.08	43.21	45.89	74.00	-28.11	peak
5	pp10380.000	11.21	37.22	35.10	36.00	49.33	74.00	-24.67	peak
6	15570.000	14.35	41.37	38.26	30.64	48.10	74.00	-25.90	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

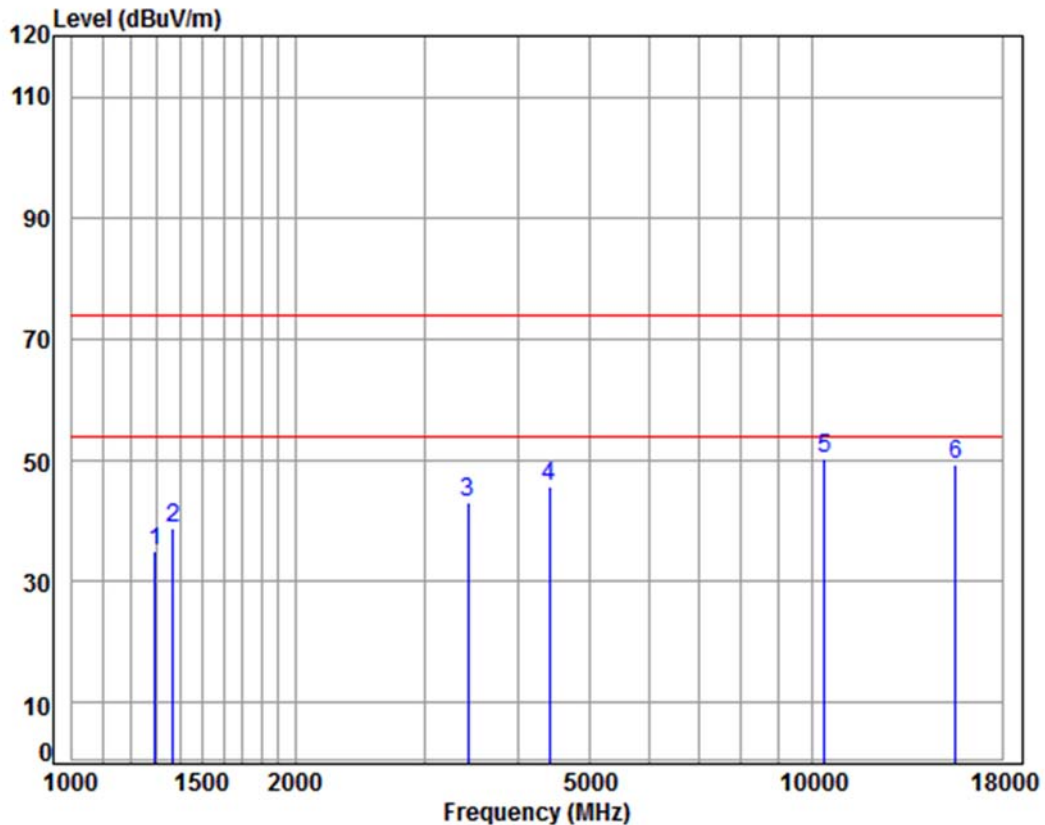


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5190 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	43.49	35.12	74.00	-38.88	peak
2	1370.328	5.05	25.26	38.05	46.59	38.85	74.00	-35.15	peak
3	3425.675	6.39	32.07	37.95	42.71	43.22	74.00	-30.78	peak
4	4405.090	7.46	33.60	38.22	42.87	45.71	74.00	-28.29	peak
5	pp10380.000	11.21	37.22	35.10	37.11	50.44	74.00	-23.56	peak
6	15570.000	14.35	41.37	38.26	31.92	49.38	74.00	-24.62	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

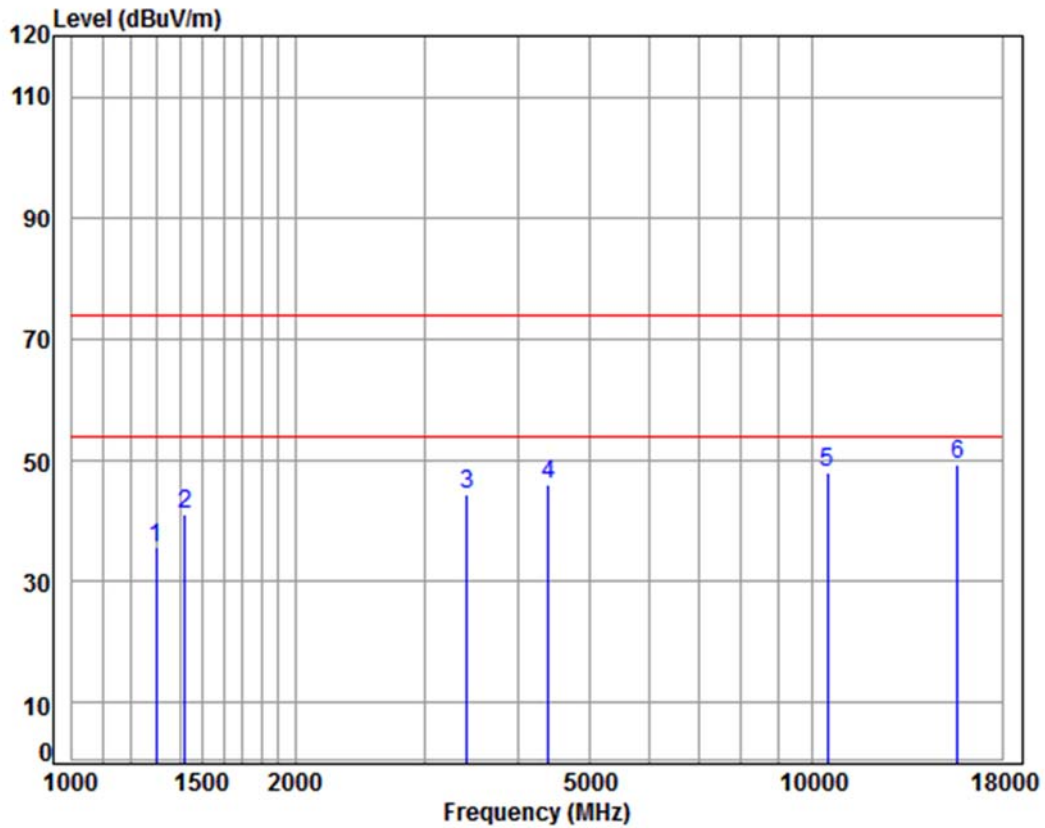


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5230 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.93	35.60	74.00	-38.40	peak
2	1418.692	5.21	25.47	38.05	48.59	41.22	74.00	-32.78	peak
3	3415.787	6.38	32.06	37.95	44.00	44.49	74.00	-29.51	peak
4	4392.376	7.44	33.60	38.21	43.38	46.21	74.00	-27.79	peak
5	10460.000	11.26	37.14	35.14	34.91	48.17	74.00	-25.83	peak
6	pp15690.000	14.53	41.32	38.13	31.58	49.30	74.00	-24.70	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

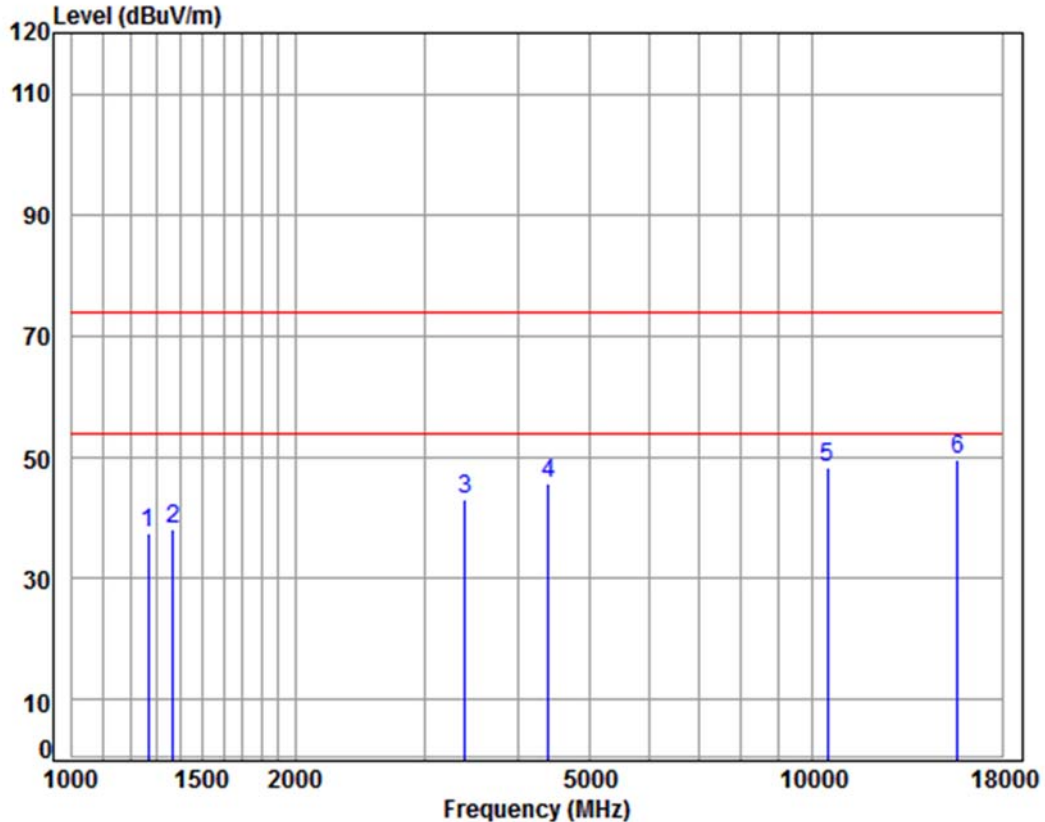


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5230 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	46.17	37.58	74.00	-36.42	peak
2	1370.328	5.05	25.26	38.05	46.11	38.37	74.00	-35.63	peak
3	3396.098	6.37	32.02	37.94	42.56	43.01	74.00	-30.99	peak
4	4392.376	7.44	33.60	38.21	42.87	45.70	74.00	-28.30	peak
5	10460.000	11.26	37.14	35.14	35.15	48.41	74.00	-25.59	peak
6	pp15690.000	14.53	41.32	38.13	31.94	49.66	74.00	-24.34	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

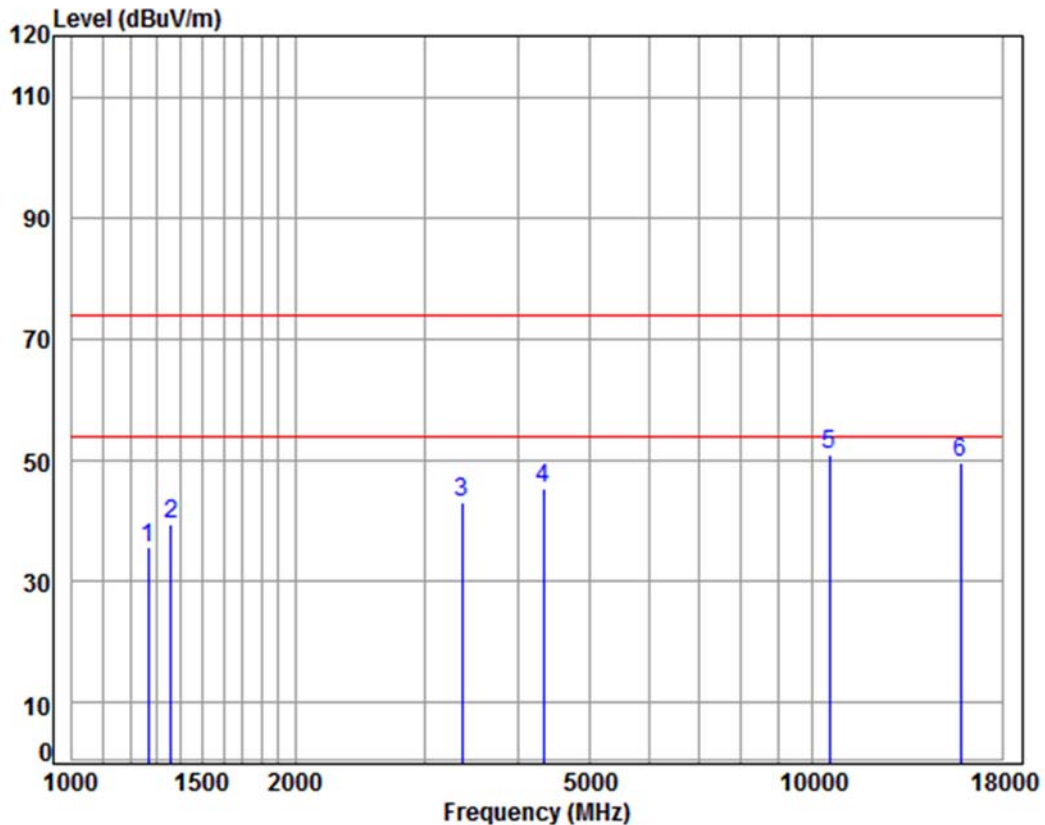


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5270 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	44.33	35.74	74.00	-38.26	peak
2	1362.430	5.02	25.23	38.06	47.46	39.65	74.00	-34.35	peak
3	3357.061	6.33	31.96	37.94	42.70	43.05	74.00	-30.95	peak
4	4329.354	7.37	33.60	38.18	42.71	45.50	74.00	-28.50	peak
5	pp10540.000	11.32	37.15	35.18	37.88	51.17	74.00	-22.83	peak
6	15810.000	14.71	41.28	38.00	31.79	49.78	74.00	-24.22	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

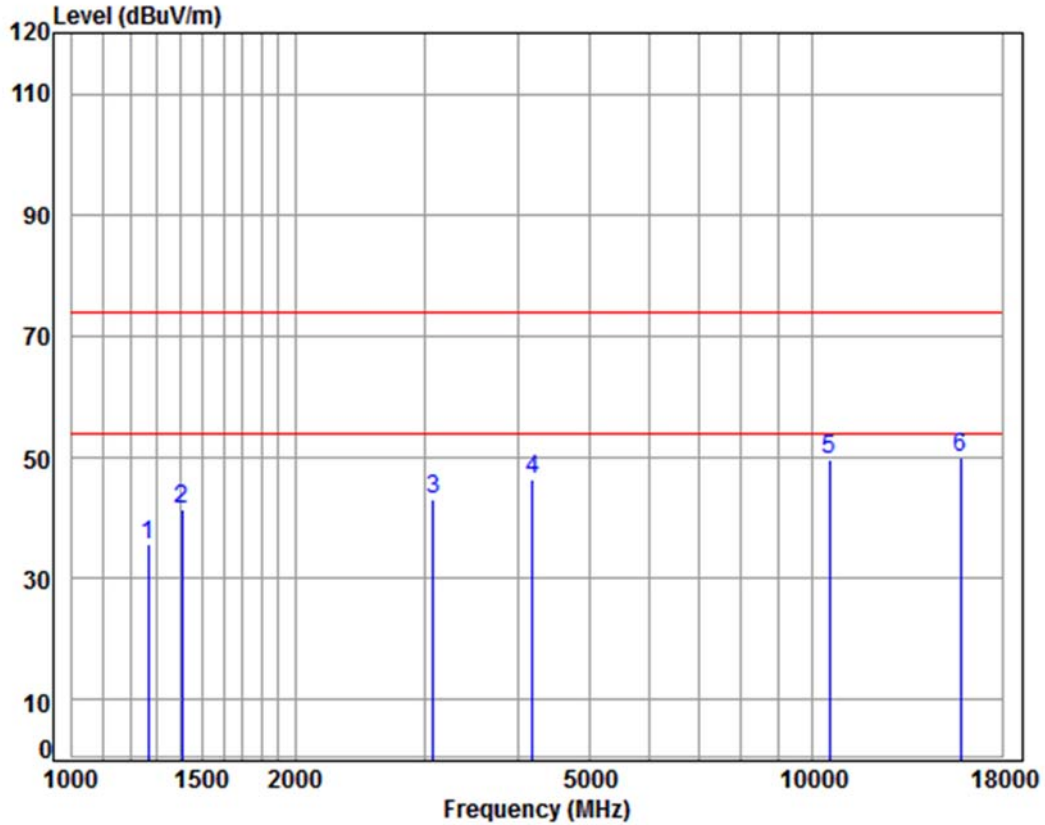


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5270 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	44.24	35.65	74.00	-38.35	peak
2	1406.443	5.17	25.42	38.05	49.13	41.67	74.00	-32.33	peak
3	3069.345	6.05	31.43	37.91	43.75	43.32	74.00	-30.68	peak
4	4181.768	7.20	33.60	38.10	43.73	46.43	74.00	-27.57	peak
5	10540.000	11.32	37.15	35.18	36.35	49.64	74.00	-24.36	peak
6	pp15810.000	14.71	41.28	38.00	31.96	49.95	74.00	-24.05	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

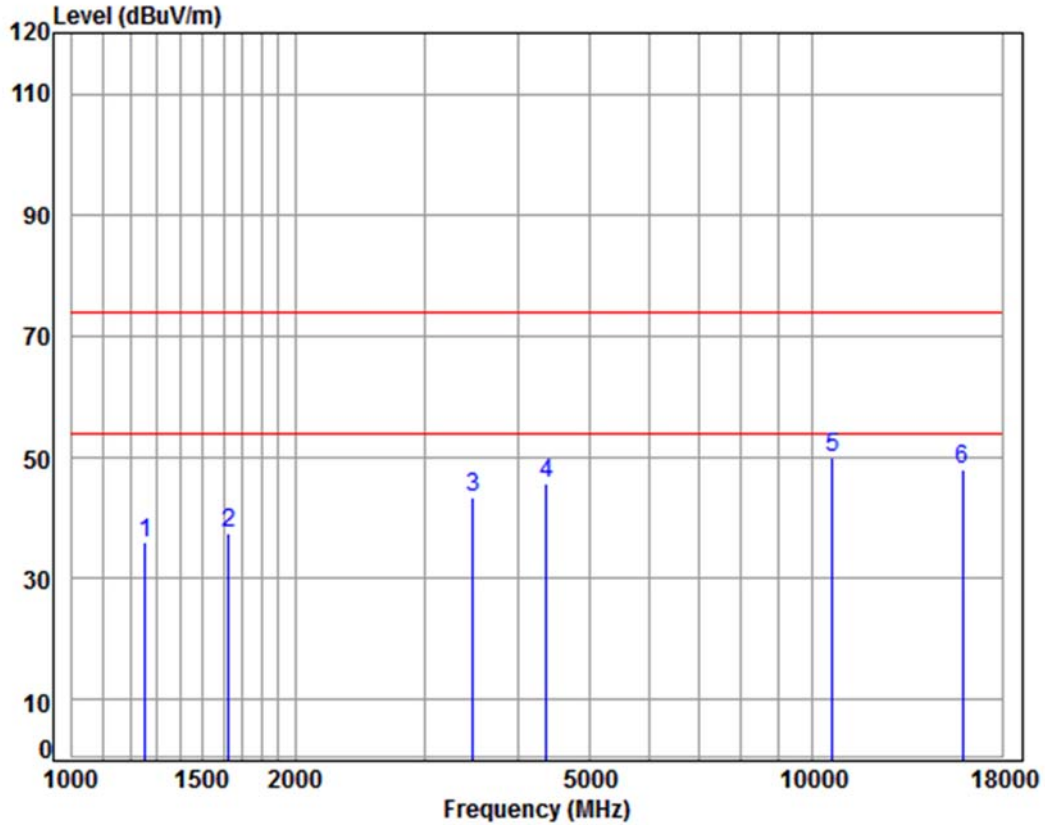


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5310 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.75	38.07	44.50	35.82	74.00	-38.18	peak
2	1625.121	5.32	26.36	38.03	43.79	37.44	74.00	-36.56	peak
3	3475.541	6.44	32.16	37.95	42.90	43.55	74.00	-30.45	peak
4	4367.058	7.41	33.60	38.20	42.93	45.74	74.00	-28.26	peak
5	pp10620.000	11.37	37.25	35.22	36.47	49.87	74.00	-24.13	peak
6	15930.000	14.89	41.23	37.87	29.86	48.11	74.00	-25.89	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

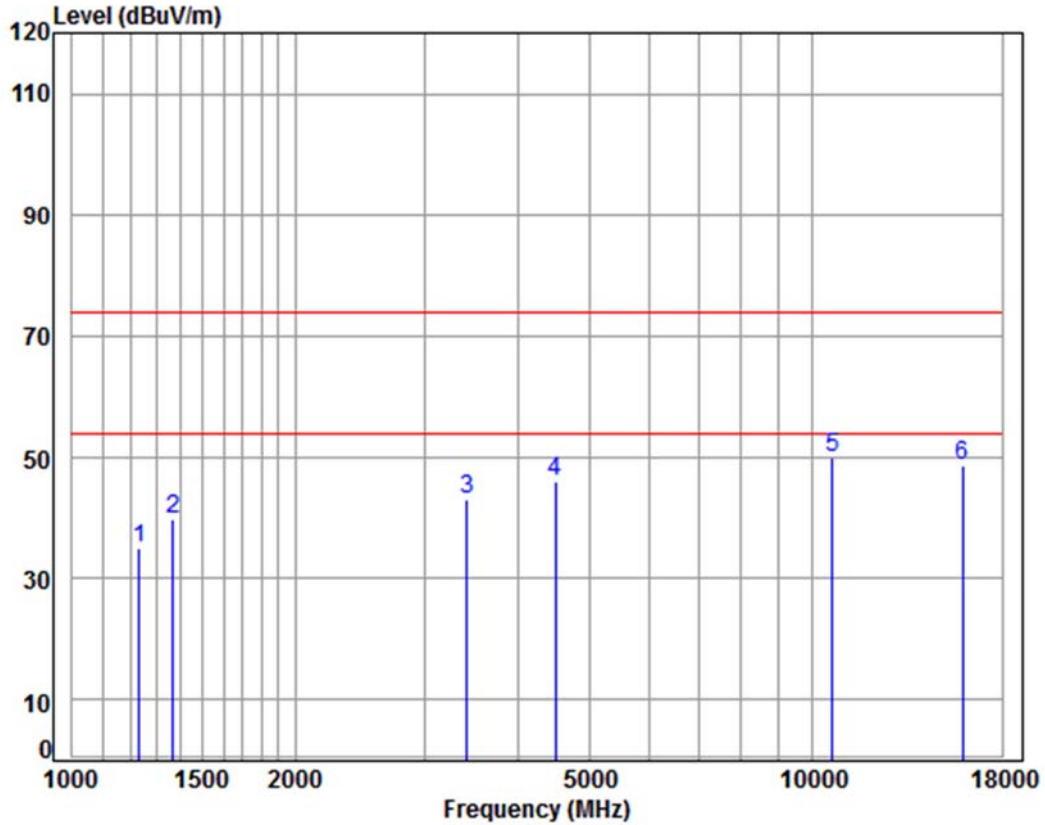


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5310 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	4.54	24.63	38.07	44.04	35.14	74.00	-38.86	peak
2	1370.328	5.05	25.26	38.05	47.61	39.87	74.00	-34.13	peak
3	3415.787	6.38	32.06	37.95	42.79	43.28	74.00	-30.72	peak
4	4495.125	7.55	33.60	38.26	43.13	46.02	74.00	-27.98	peak
5	pp10620.000	11.37	37.25	35.22	36.59	49.99	74.00	-24.01	peak
6	15930.000	14.89	41.23	37.87	30.55	48.80	74.00	-25.20	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

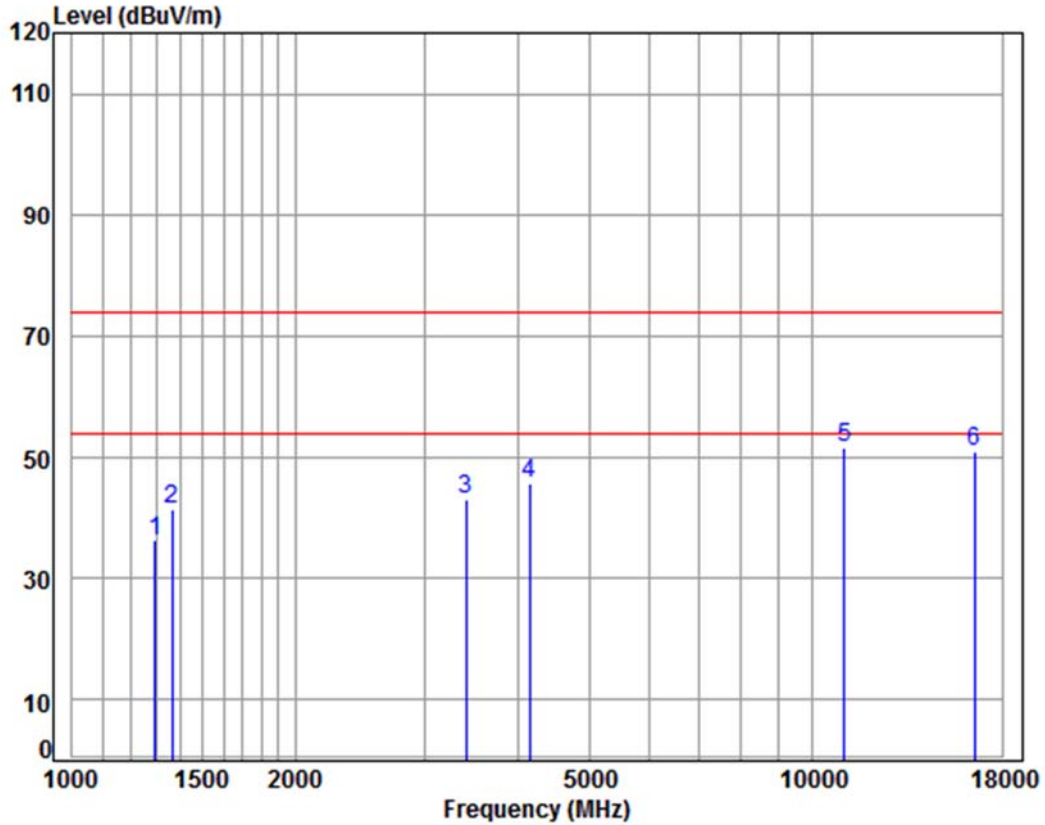


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5510 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	44.74	36.37	74.00	-37.63	peak
2	1366.374	5.04	25.25	38.05	49.20	41.44	74.00	-32.56	peak
3	3405.929	6.38	32.04	37.94	42.69	43.17	74.00	-30.83	peak
4	4145.664	7.16	33.60	38.08	43.15	45.83	74.00	-28.17	peak
5	pp11020.000	11.65	37.72	35.43	37.69	51.63	74.00	-22.37	peak
6	16530.000	14.63	42.71	36.99	30.53	50.88	74.00	-23.12	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

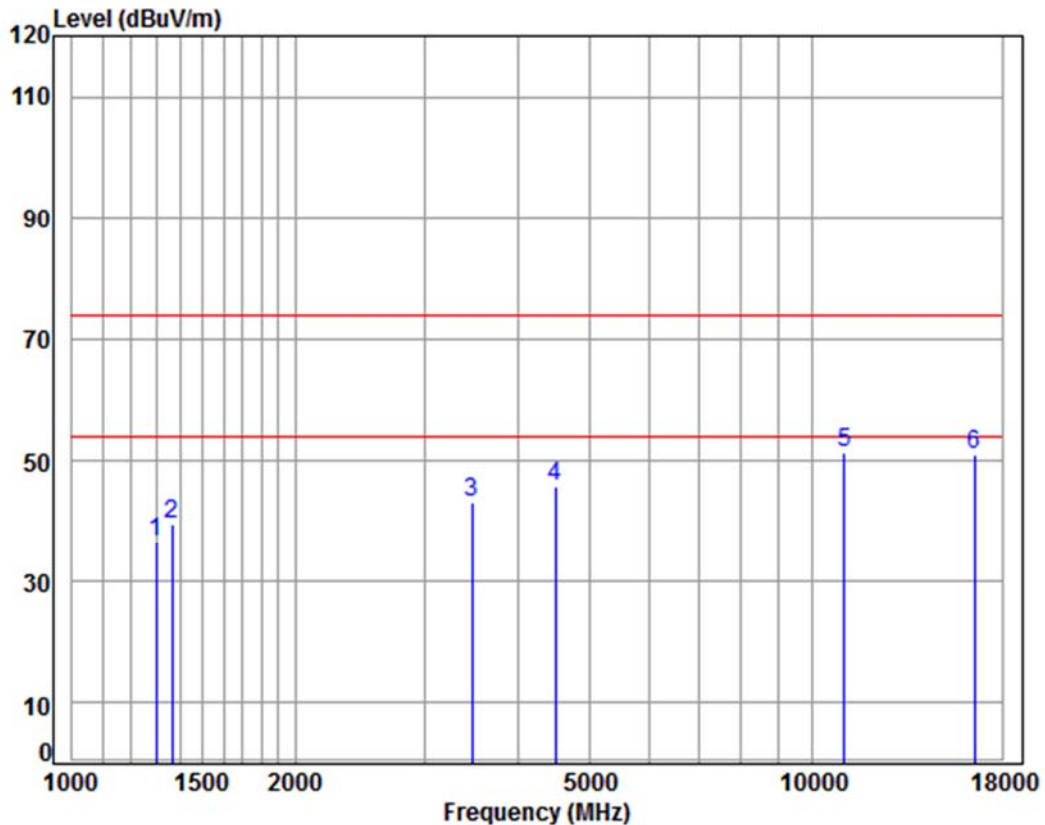

Condition: 3m HORIZONTAL

Job No : 09260RG


Mode : 5510 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	24.96	38.06	45.03	36.73	74.00	-37.27	peak
2	1366.374	5.04	25.25	38.05	47.30	39.54	74.00	-34.46	peak
3	3465.510	6.43	32.14	37.95	42.70	43.32	74.00	-30.68	peak
4	4495.125	7.55	33.60	38.26	42.92	45.81	74.00	-28.19	peak
5	pp11020.000	11.65	37.72	35.43	37.45	51.39	74.00	-22.61	peak
6	16530.000	14.63	42.71	36.99	30.78	51.13	74.00	-22.87	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5590	Peak	Vertical
------------	----------------	-----------------	------	------	----------

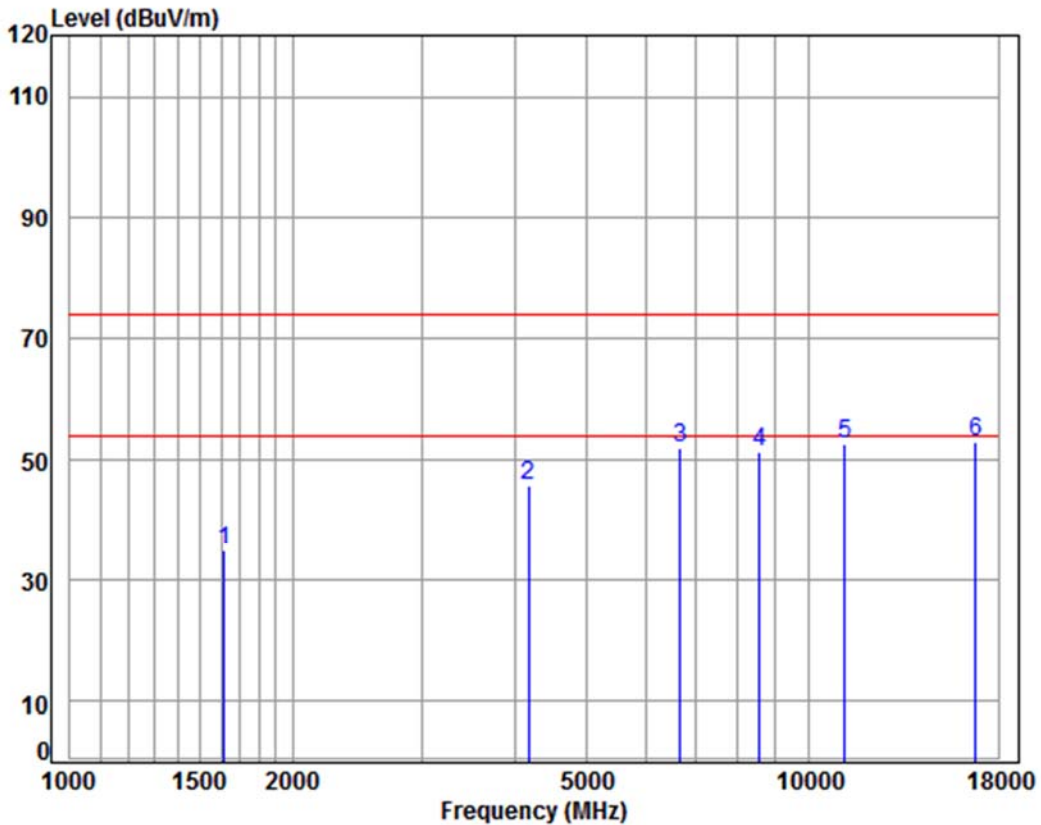


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5590 TX SE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1615.754	5.33	26.32	38.03	41.49	35.11	74.00	-38.89	Peak
2	4169.698	7.18	33.60	38.09	43.11	45.80	74.00	-28.20	peak
3	6679.040	11.02	35.61	37.60	43.03	52.06	74.00	-21.94	Peak
4	8563.818	10.29	36.08	35.82	40.75	51.30	74.00	-22.70	peak
5	11180.000	11.82	37.85	35.62	38.59	52.64	74.00	-21.36	peak
6	pp16770.000	15.70	42.75	36.64	31.24	53.05	74.00	-20.95	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5590	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

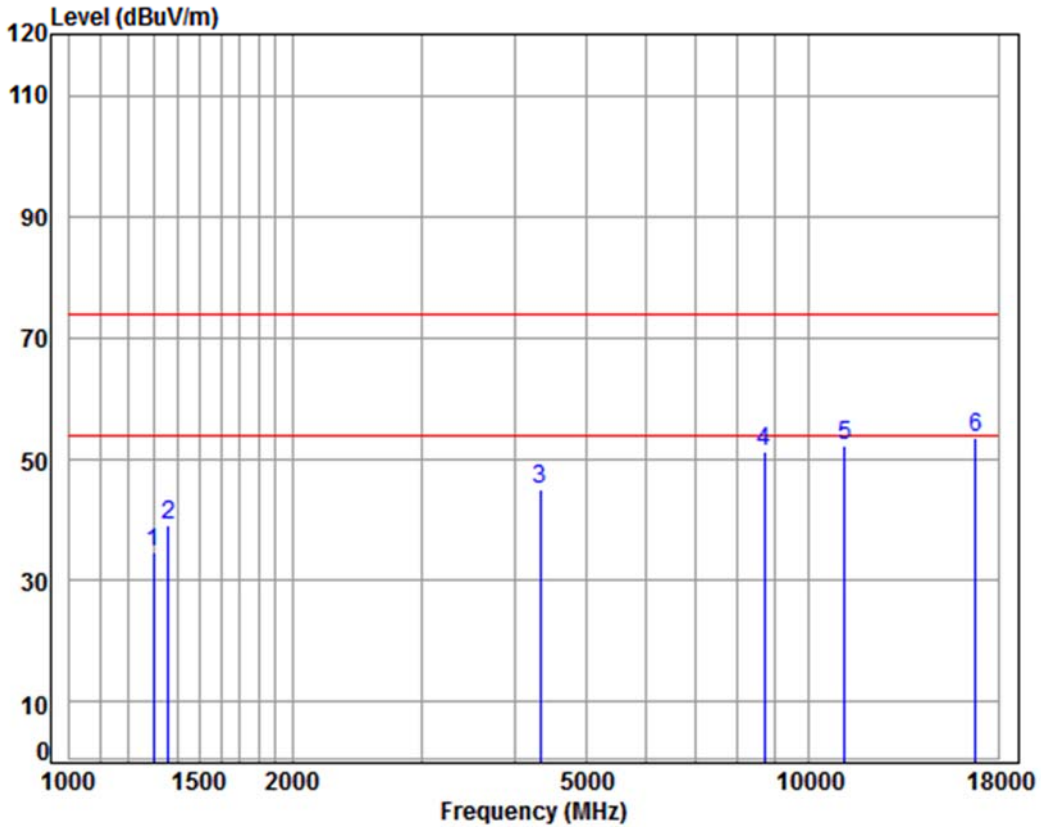


Condition: 3m HORIZONTAL
 Job No : 09260RG
 Mode : 5590 TX SE
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.06	34.73	74.00	-39.27	peak
2	1362.430	5.02	25.23	38.06	46.99	39.18	74.00	-34.82	peak
3	4329.354	7.37	33.60	38.18	42.48	45.27	74.00	-28.73	peak
4	8688.480	10.32	36.23	35.70	40.58	51.43	74.00	-22.57	peak
5	11180.000	11.82	37.85	35.62	38.29	52.34	74.00	-21.66	peak
6	pp16770.000	15.70	42.75	36.64	31.70	53.51	74.00	-20.49	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	----------------	-----------------	------	------	----------

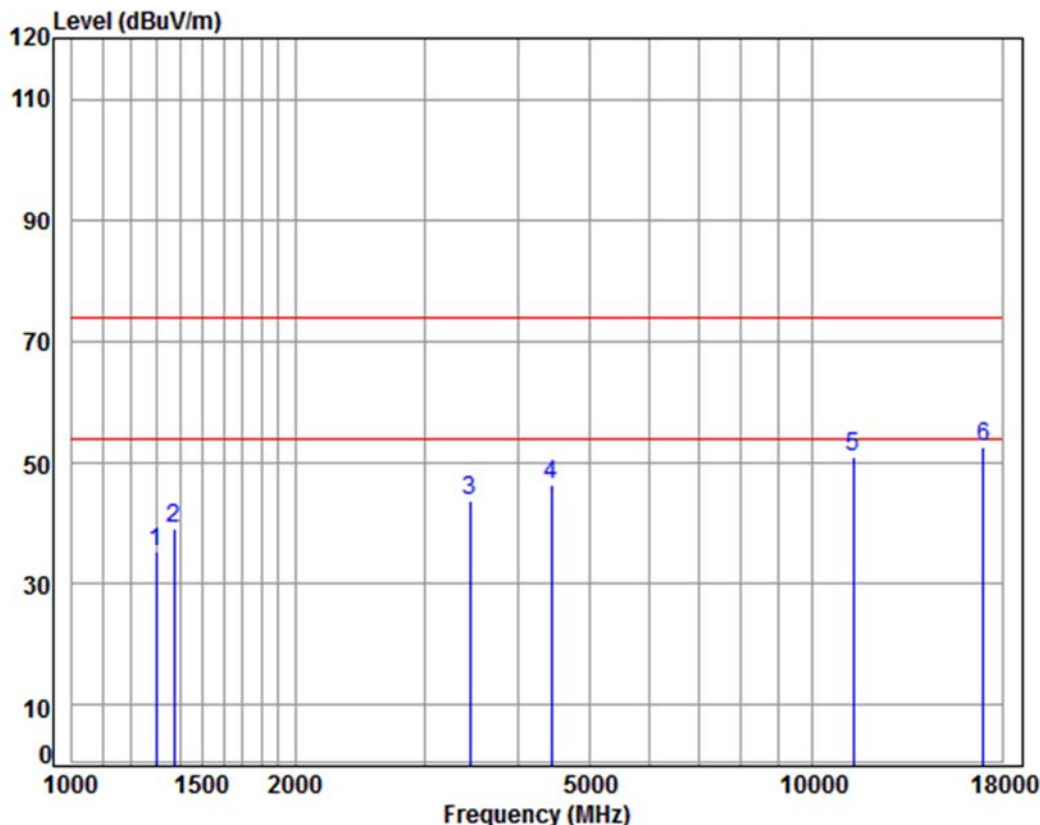


Condition: 3m VERTICAL
 Job No : 09260RG
 Mode : 5670 TX RSE
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.67	35.34	74.00	-38.66	peak
2	1374.295	5.06	25.28	38.05	47.06	39.35	74.00	-34.65	peak
3	3445.535	6.41	32.11	37.95	43.20	43.77	74.00	-30.23	peak
4	4443.453	7.50	33.60	38.24	43.63	46.49	74.00	-27.51	peak
5	11340.000	11.98	37.97	35.82	36.93	51.06	74.00	-22.94	peak
6	pp17010.000	16.69	42.81	36.29	29.34	52.55	74.00	-21.45	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

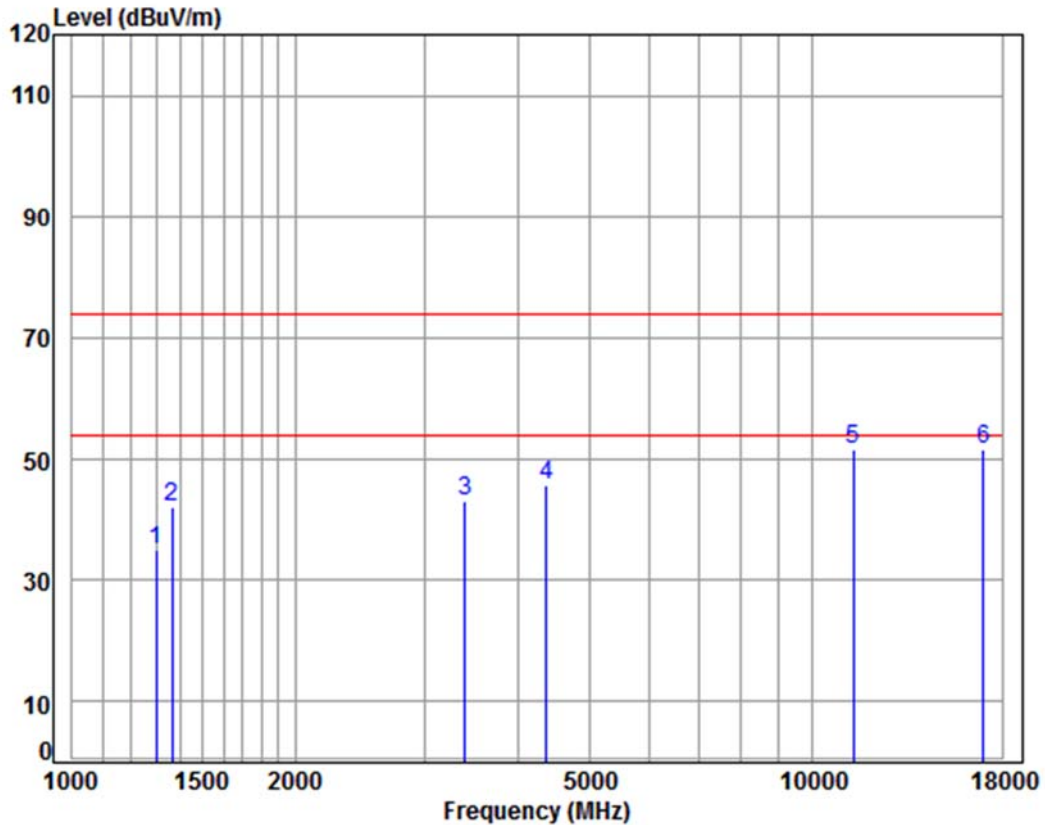


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5670 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	24.96	38.06	43.34	35.04	74.00	-38.96	peak
2	1366.374	5.04	25.25	38.05	50.05	42.29	74.00	-31.71	peak
3	3396.098	6.37	32.02	37.94	42.80	43.25	74.00	-30.75	peak
4	4367.058	7.41	33.60	38.20	43.01	45.82	74.00	-28.18	peak
5	pp11340.000	11.98	37.97	35.82	37.47	51.60	74.00	-22.40	peak
6	17010.000	16.69	42.81	36.29	28.39	51.60	74.00	-22.40	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	----------------	-----------------	------	------	----------

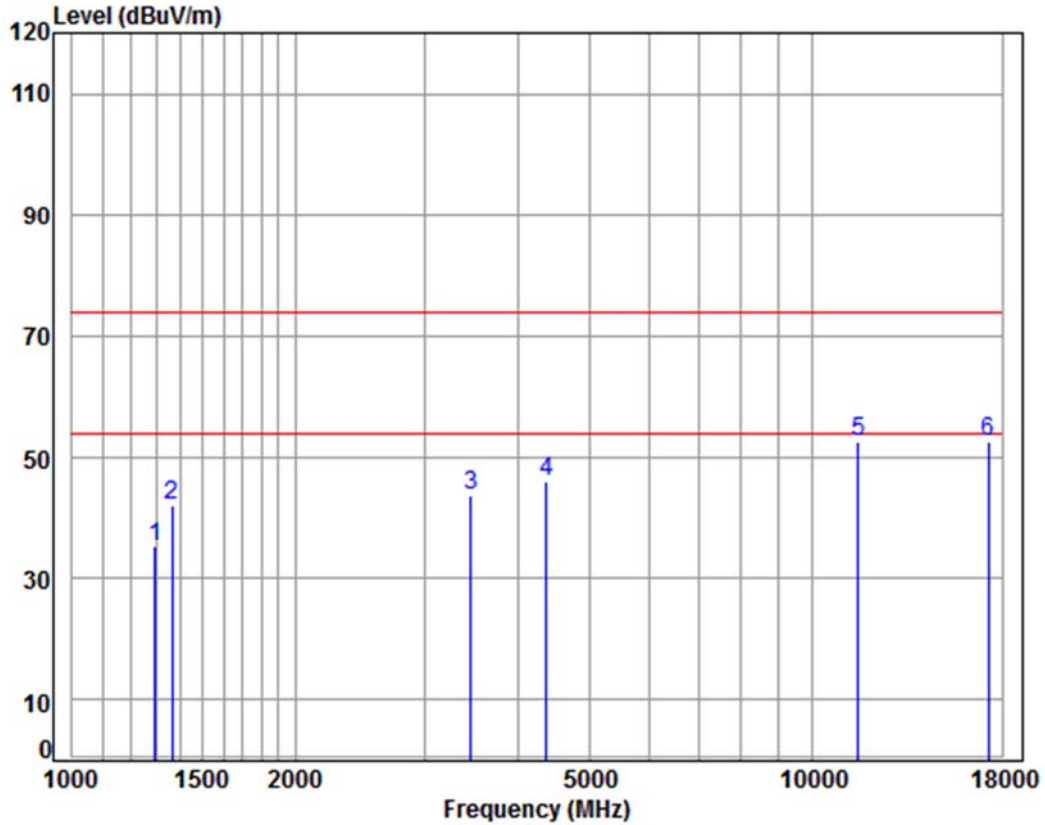


Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5755 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	43.78	35.41	74.00	-38.59	peak
2	1366.374	5.04	25.25	38.05	50.08	42.32	74.00	-31.68	peak
3	3455.508	6.42	32.13	37.95	43.29	43.89	74.00	-30.11	peak
4	4367.058	7.41	33.60	38.20	43.41	46.22	74.00	-27.78	peak
5	pp11510.000	12.14	38.11	36.03	38.30	52.52	74.00	-21.48	peak
6	17265.000	16.12	43.12	36.16	29.41	52.49	74.00	-21.51	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

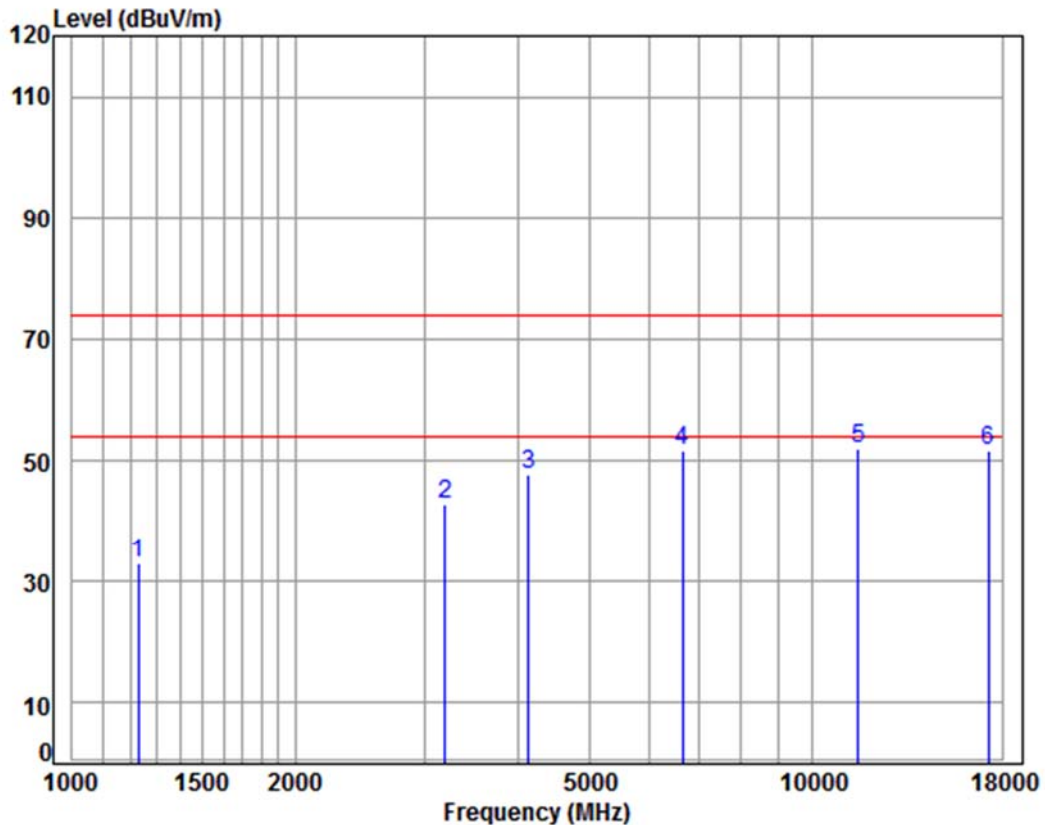

Condition: 3m HORIZONTAL

Job No : 09260RG


Mode : 5755 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	4.53	24.61	38.07	41.85	32.92	74.00	-41.08	Peak
2	3186.869	6.17	31.65	37.92	43.06	42.96	74.00	-31.04	peak
3	4133.699	7.14	33.60	38.07	45.05	47.72	74.00	-26.28	peak
4	6659.763	11.08	35.56	37.62	42.55	51.57	74.00	-22.43	Peak
5	pp11510.000	12.14	38.11	36.03	37.89	52.11	74.00	-21.89	peak
6	17265.000	16.12	43.12	36.16	28.64	51.72	74.00	-22.28	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	----------------	-----------------	------	------	----------

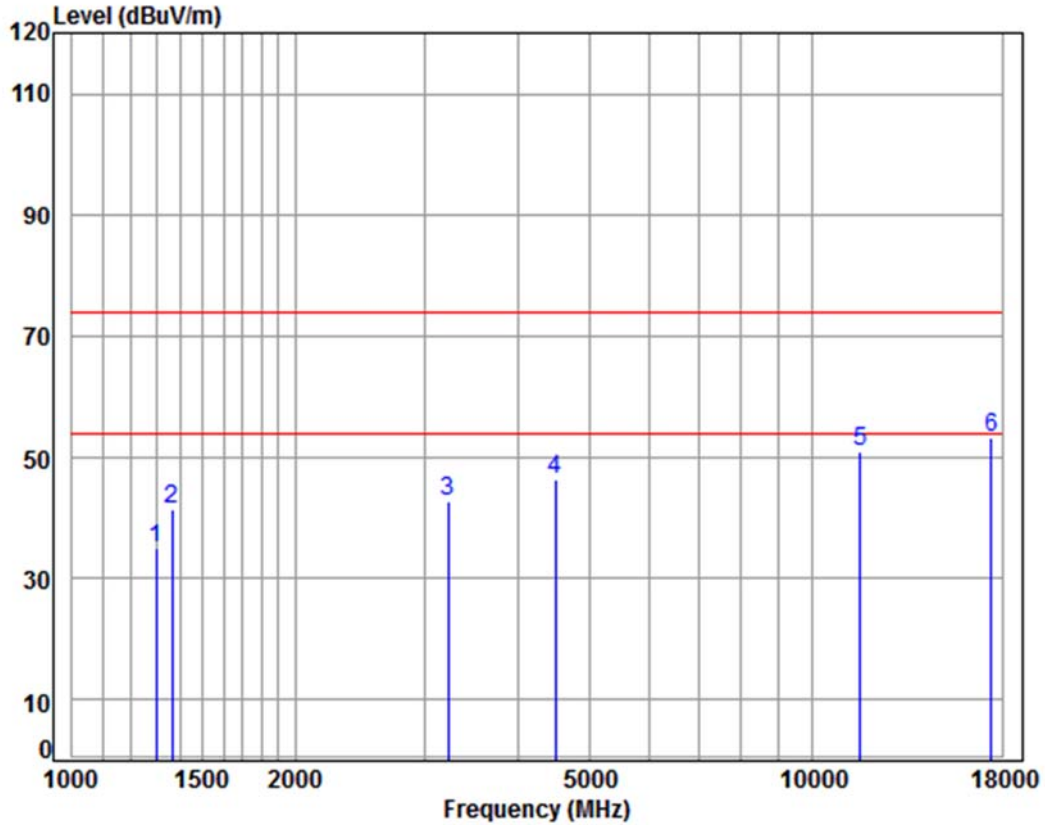


Condition: 3m VERTICAL
 Job No : 09260RG
 Mode : 5795 TX RSE
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.43	35.10	74.00	-38.90	peak
2	1366.374	5.04	25.25	38.05	49.43	41.67	74.00	-32.33	peak
3	3214.623	6.20	31.70	37.92	43.00	42.98	74.00	-31.02	peak
4	4495.125	7.55	33.60	38.26	43.57	46.46	74.00	-27.54	peak
5	11590.000	12.17	38.19	36.12	36.67	50.91	74.00	-23.09	peak
6	pp17385.000	15.85	43.26	36.10	30.43	53.44	74.00	-20.56	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

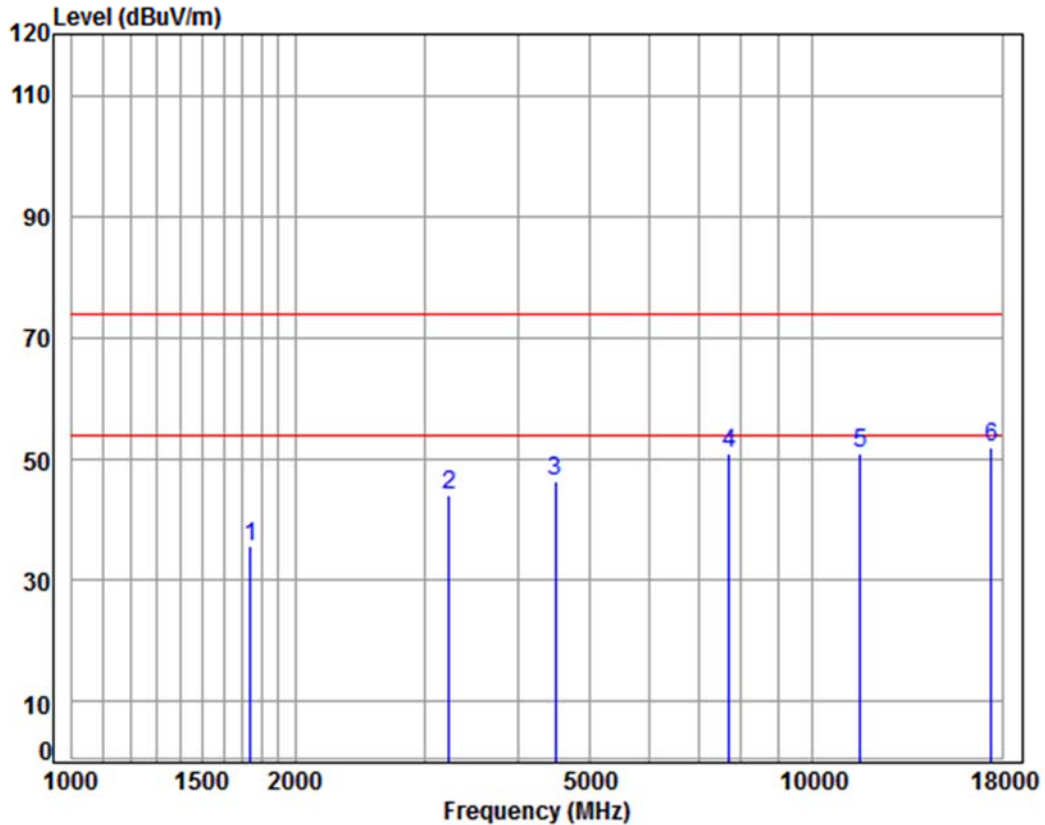


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5795 TX RSE
: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1741.856	5.18	26.84	38.02	41.54	35.54	74.00	-38.46	Peak
2	3233.260	6.21	31.74	37.93	44.09	44.11	74.00	-29.89	peak
3	4495.125	7.55	33.60	38.26	43.45	46.34	74.00	-27.66	peak
4	7717.518	9.98	36.43	36.64	41.38	51.15	74.00	-22.85	Peak
5	11590.000	12.17	38.19	36.12	36.76	51.00	74.00	-23.00	peak
6	pp17385.000	15.85	43.26	36.10	29.11	52.12	74.00	-21.88	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Vertical
------------	----------------	-----------------	------	------	----------

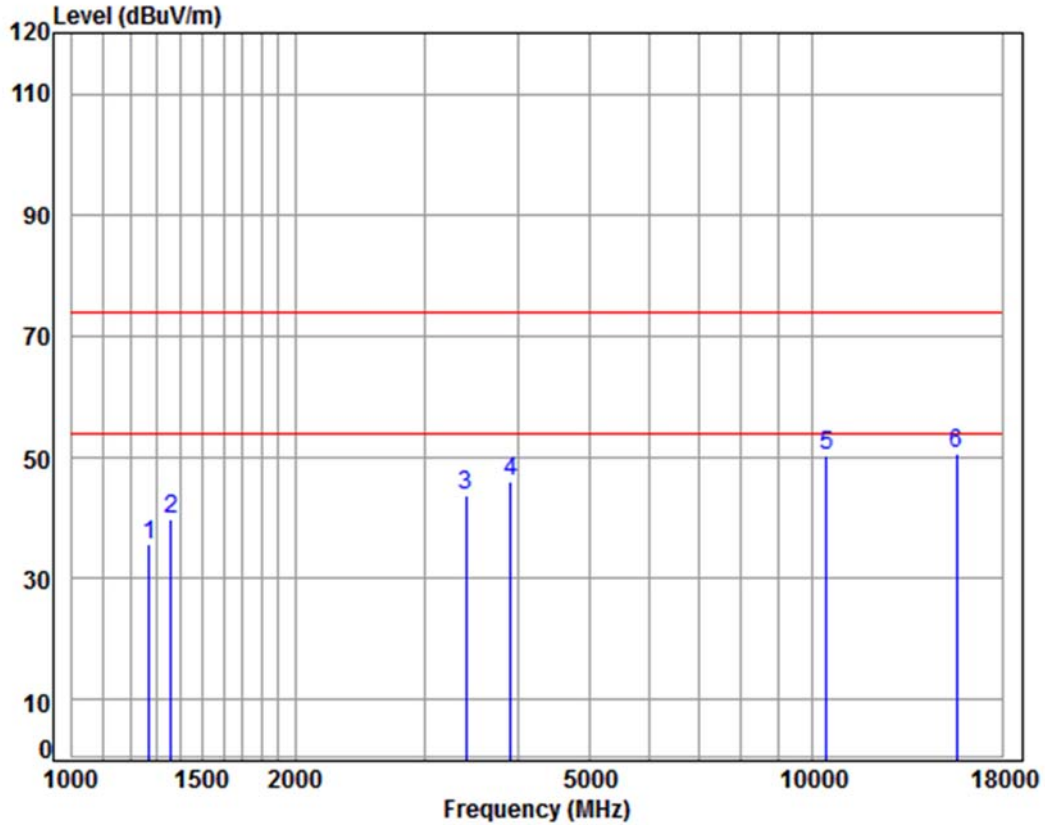


Condition: 3m VERTICAL
 Job No : 09260RG
 Mode : 5210 TX RSE
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	38.07	44.10	35.54	74.00	-38.46	peak
2	1362.430	5.02	25.23	38.06	47.64	39.83	74.00	-34.17	peak
3	3405.929	6.38	32.04	37.94	43.36	43.84	74.00	-30.16	peak
4	3912.809	6.89	33.37	37.99	43.70	45.97	74.00	-28.03	peak
5	10420.000	11.24	37.18	35.12	37.06	50.36	74.00	-23.64	peak
6	pp15630.000	14.44	41.35	38.20	33.06	50.65	74.00	-23.35	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

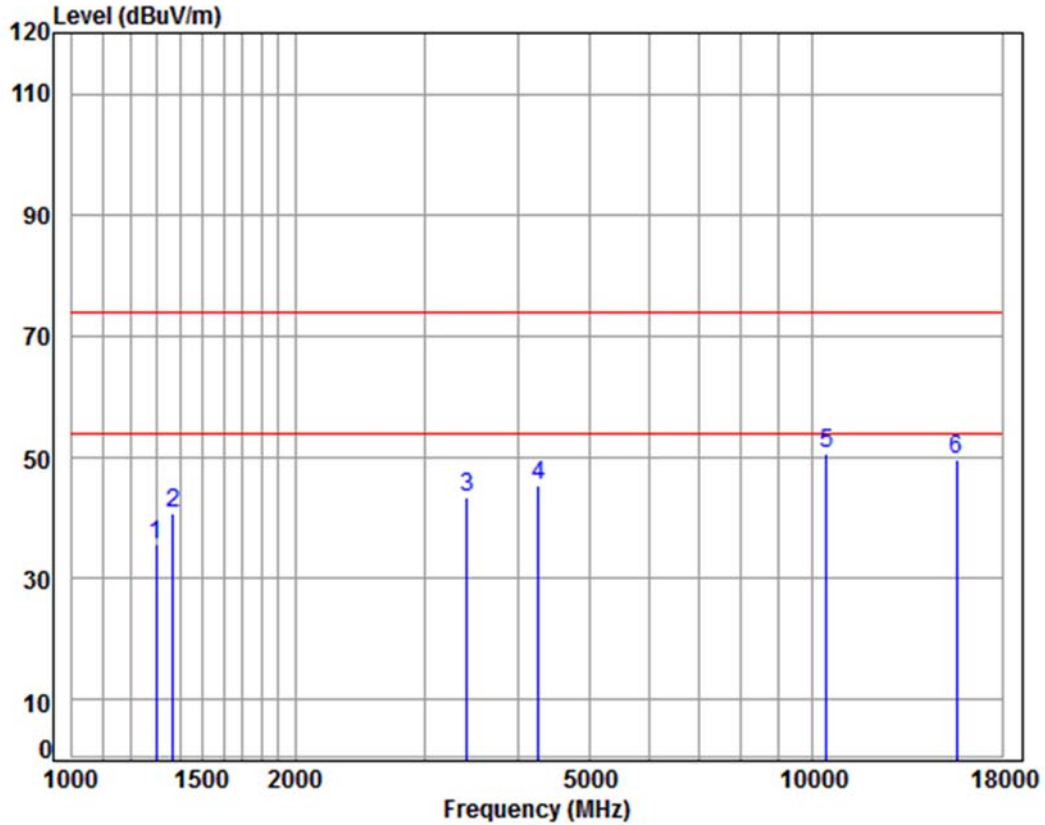


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5210 TX RSE
: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.92	35.59	74.00	-38.41	peak
2	1370.328	5.05	25.26	38.05	48.76	41.02	74.00	-32.98	peak
3	3415.787	6.38	32.06	37.95	42.84	43.33	74.00	-30.67	peak
4	4267.237	7.30	33.60	38.14	42.75	45.51	74.00	-28.49	peak
5	pp10420.000	11.24	37.18	35.12	37.29	50.59	74.00	-23.41	peak
6	15630.000	14.44	41.35	38.20	32.24	49.83	74.00	-24.17	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Vertical
------------	----------------	-----------------	------	------	----------

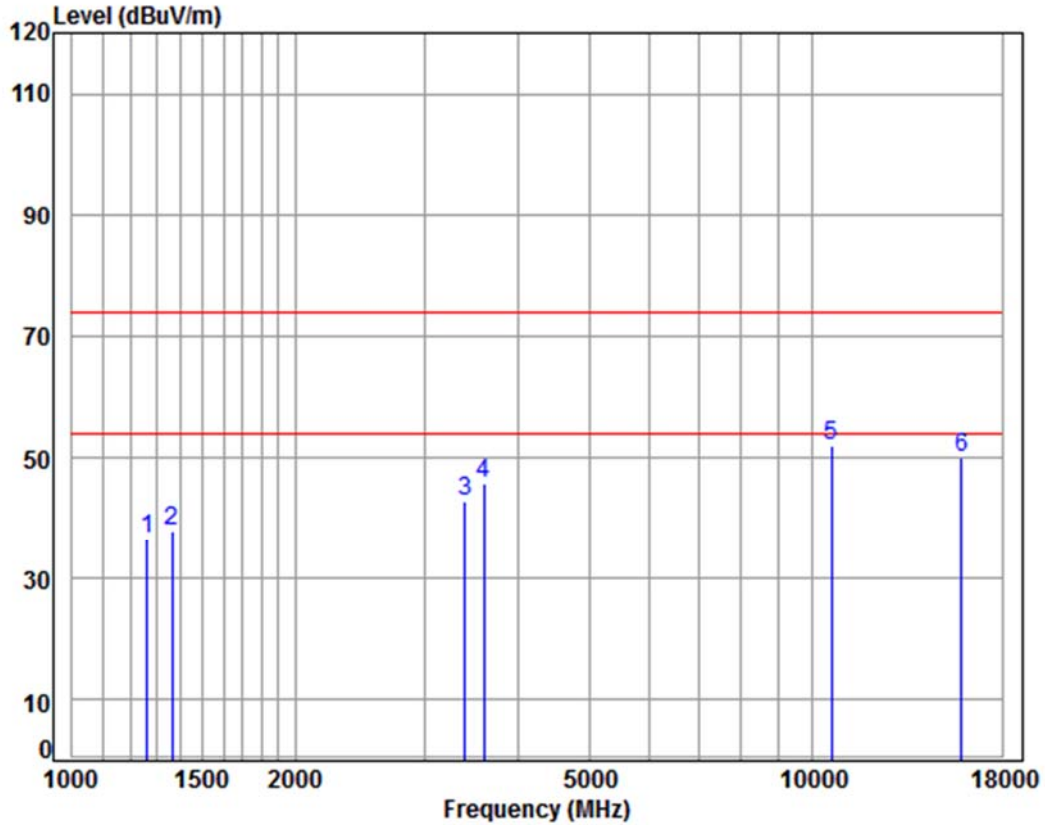


Condition: 3m VERTICAL
 Job No : 09260RG
 Mode : 5290 TX RSE
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	45.28	36.66	74.00	-37.34	peak
2	1366.374	5.04	25.25	38.05	45.61	37.85	74.00	-36.15	peak
3	3396.098	6.37	32.02	37.94	42.50	42.95	74.00	-31.05	peak
4	3598.203	6.57	32.49	37.96	44.59	45.69	74.00	-28.31	peak
5	pp10580.000	11.35	37.20	35.20	38.60	51.95	74.00	-22.05	peak
6	15870.000	14.80	41.25	37.94	32.04	50.15	74.00	-23.85	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

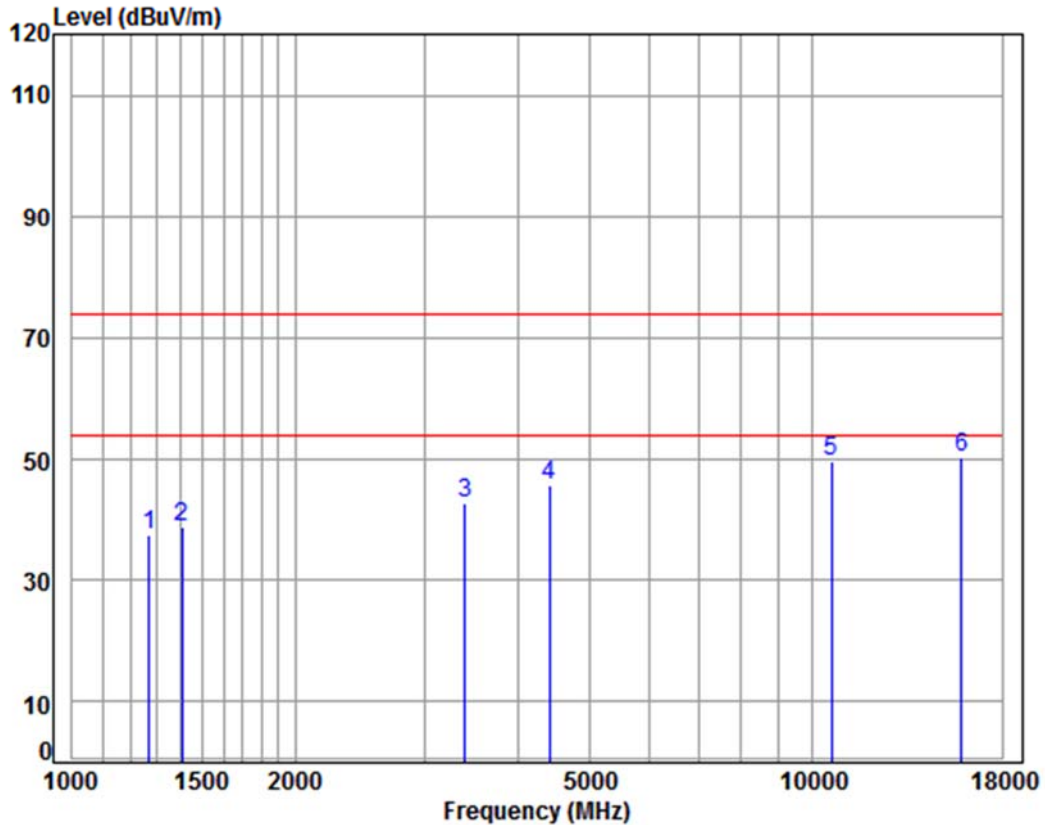


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5290 TX RSE
: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	38.07	46.21	37.65	74.00	-36.35	peak
2	1406.443	5.17	25.42	38.05	46.21	38.75	74.00	-35.25	peak
3	3396.098	6.37	32.02	37.94	42.53	42.98	74.00	-31.02	peak
4	4405.090	7.46	33.60	38.22	42.99	45.83	74.00	-28.17	peak
5	10580.000	11.35	37.20	35.20	36.35	49.70	74.00	-24.30	peak
6	pp15870.000	14.80	41.25	37.94	32.26	50.37	74.00	-23.63	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Vertical
------------	----------------	-----------------	------	------	----------

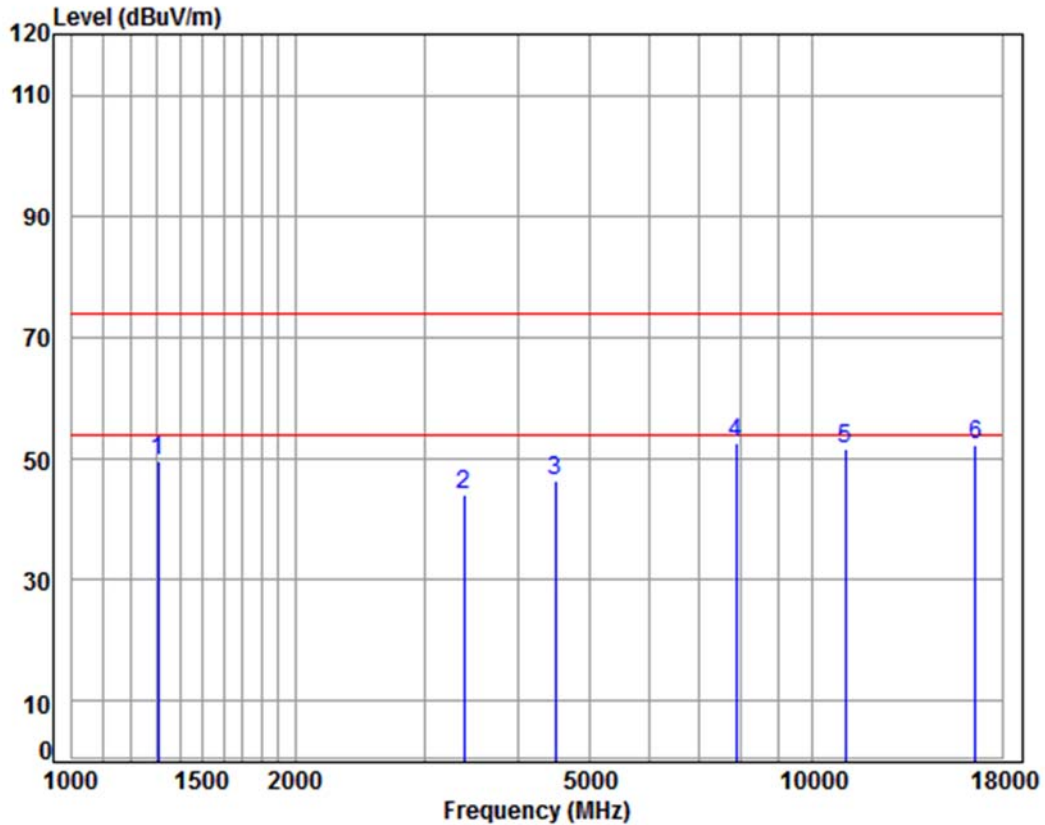


Condition: 3m HORIZONTAL
 Job No : 09260RG
 Mode : 5530 TX RSE
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1308.399	4.83	24.99	38.06	57.91	49.67	74.00	-24.33	Peak
2	3386.297	6.36	32.01	37.94	43.63	44.06	74.00	-29.94	peak
3	4495.125	7.55	33.60	38.26	43.52	46.41	74.00	-27.59	peak
4	pp 7875.254	9.96	36.53	36.51	42.63	52.61	74.00	-21.39	Peak
5	11060.000	11.69	37.75	35.48	37.59	51.55	74.00	-22.45	peak
6	16590.000	14.90	42.72	36.90	31.56	52.28	74.00	-21.72	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

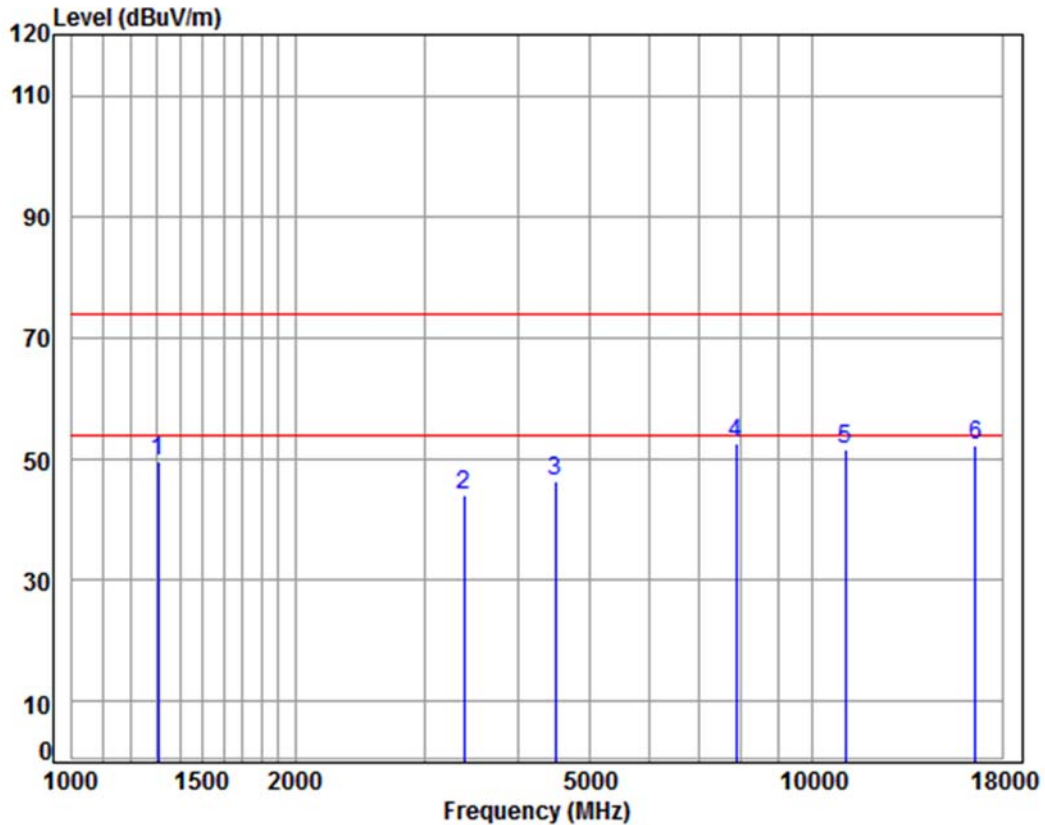


Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5530 TX RSE
: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1308.399	4.83	24.99	38.06	57.91	49.67	74.00	-24.33	Peak
2	3386.297	6.36	32.01	37.94	43.63	44.06	74.00	-29.94	peak
3	4495.125	7.55	33.60	38.26	43.52	46.41	74.00	-27.59	peak
4	pp 7875.254	9.96	36.53	36.51	42.63	52.61	74.00	-21.39	Peak
5	11060.000	11.69	37.75	35.48	37.59	51.55	74.00	-22.45	peak
6	16590.000	14.90	42.72	36.90	31.56	52.28	74.00	-21.72	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Vertical
------------	----------------	-----------------	------	------	----------

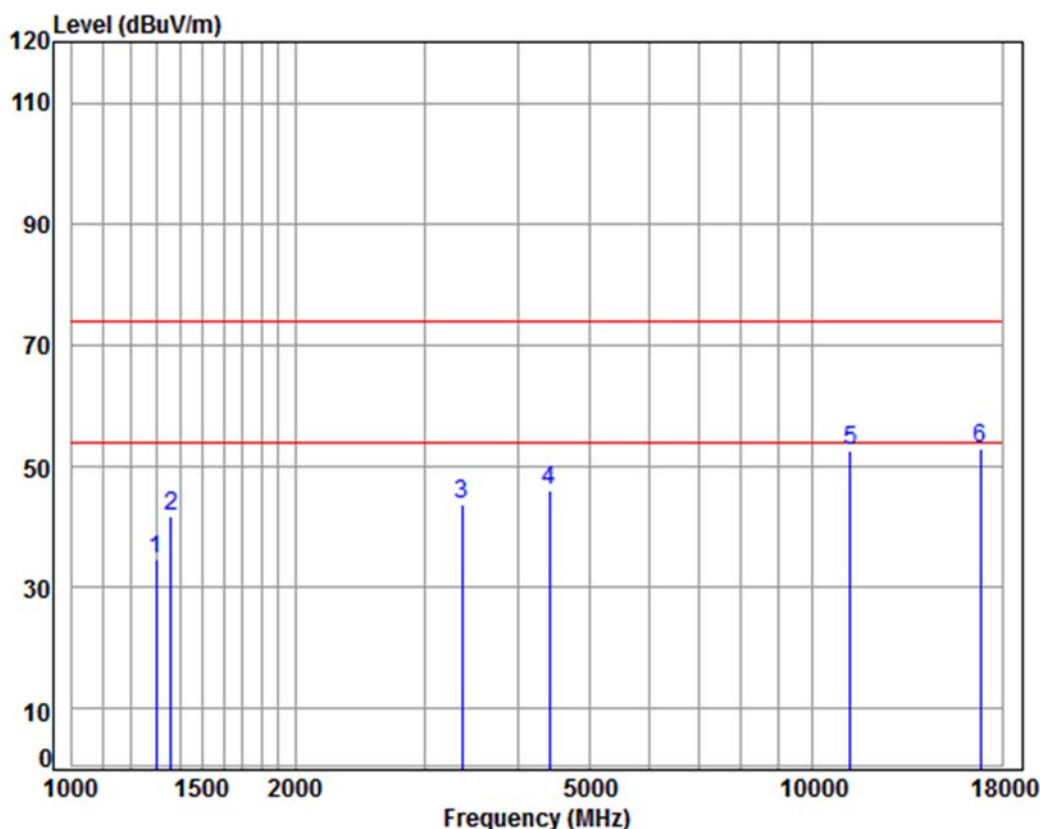

Condition: 3m VERTICAL

Job No : 09260RG


Mode : 5610 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.07	34.74	74.00	-39.26	peak
2	1362.430	5.02	25.23	38.06	49.78	41.97	74.00	-32.03	peak
3	3357.061	6.33	31.96	37.94	43.60	43.95	74.00	-30.05	peak
4	4405.090	7.46	33.60	38.22	43.36	46.20	74.00	-27.80	peak
5	11220.000	11.86	37.88	35.67	38.51	52.58	74.00	-21.42	peak
6	pp16830.000	15.97	42.77	36.55	30.92	53.11	74.00	-20.89	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

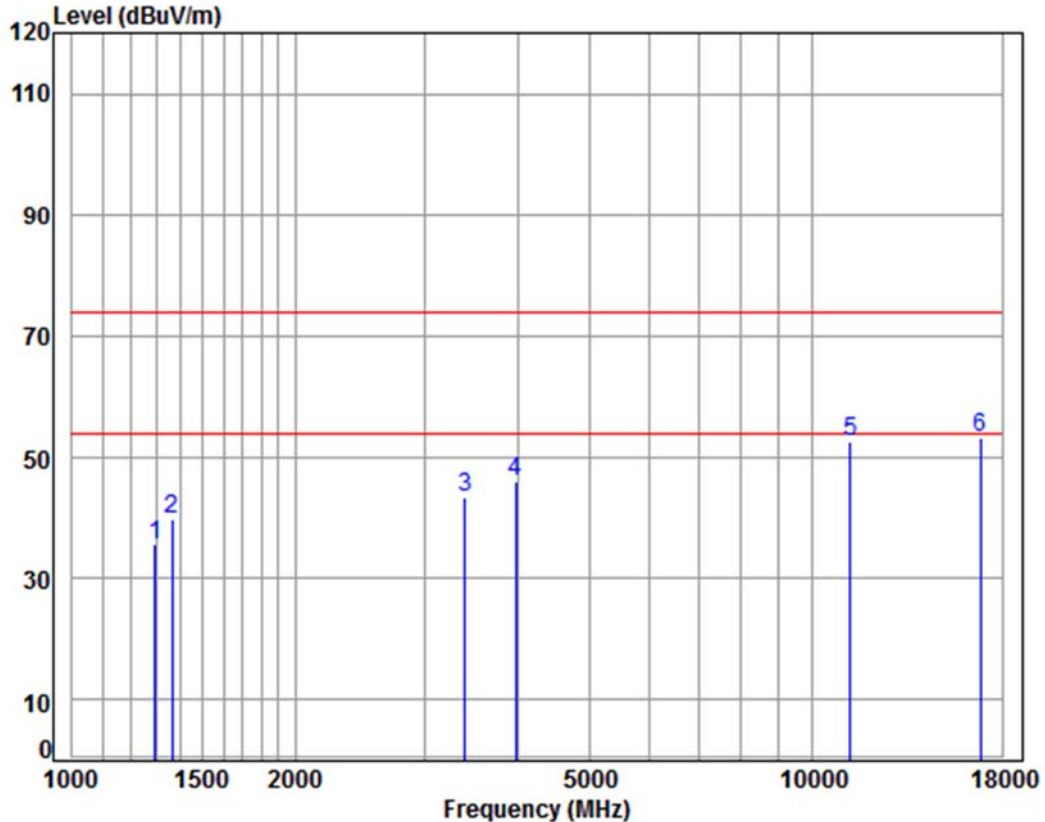

Condition: 3m HORIZONTAL

Job No : 09260RG


Mode : 5610 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	44.15	35.78	74.00	-38.22	peak
2	1366.374	5.04	25.25	38.05	47.78	40.02	74.00	-33.98	peak
3	3396.098	6.37	32.02	37.94	42.93	43.38	74.00	-30.62	peak
4	3969.767	6.95	33.52	38.00	43.58	46.05	74.00	-27.95	peak
5	11220.000	11.86	37.88	35.67	38.49	52.56	74.00	-21.44	peak
6	pp16830.000	15.97	42.77	36.55	31.07	53.26	74.00	-20.74	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Vertical
------------	----------------	-----------------	------	------	----------

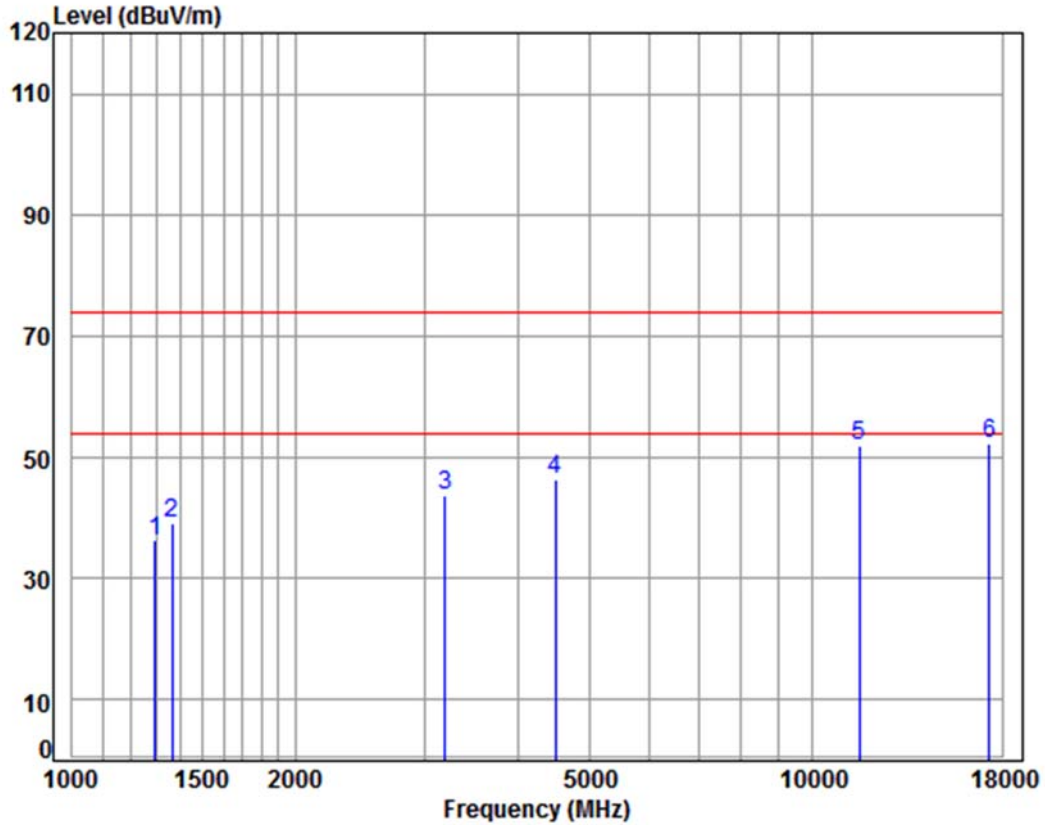


Condition: 3m VERTICAL
 Job No : 09260RG
 Mode : 5775 TX RSE
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	44.69	36.32	74.00	-37.68	peak
2	1366.374	5.04	25.25	38.05	46.96	39.20	74.00	-34.80	peak
3	3186.869	6.17	31.65	37.92	43.98	43.88	74.00	-30.12	peak
4	4495.125	7.55	33.60	38.26	43.68	46.57	74.00	-27.43	peak
5	11550.000	12.16	38.15	36.07	37.81	52.05	74.00	-21.95	peak
6	pp17325.000	15.98	43.19	36.13	29.38	52.42	74.00	-21.58	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

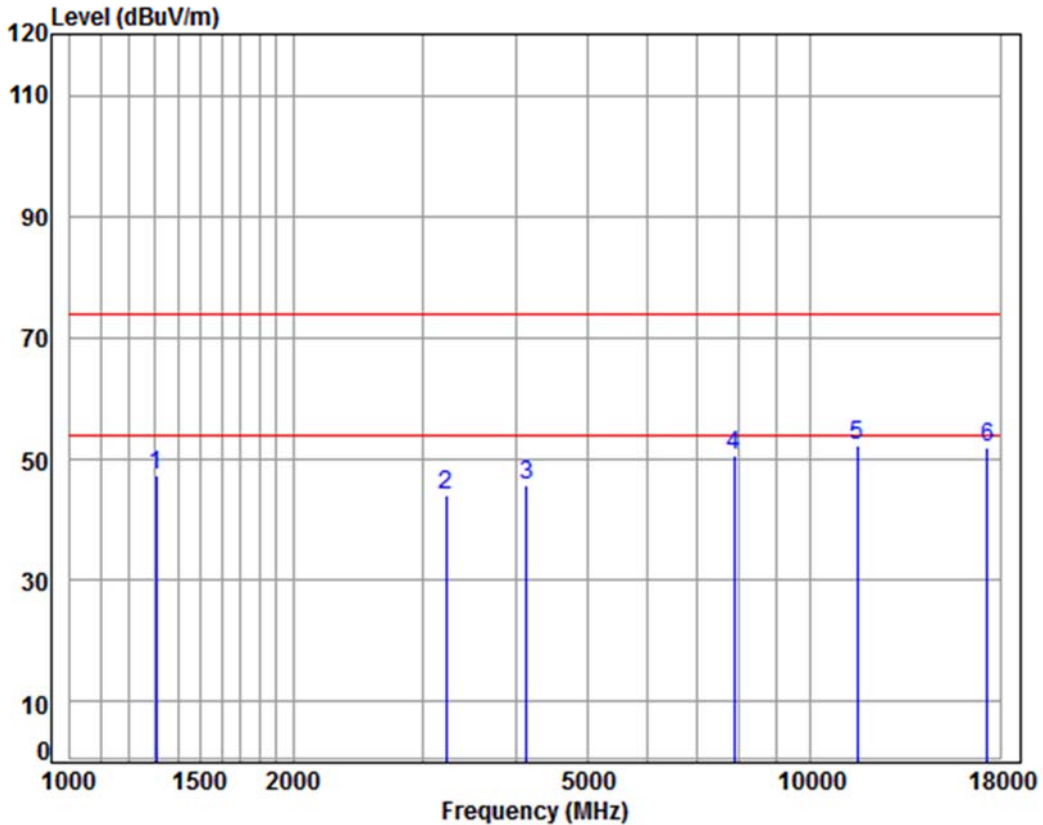

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5775 TX RSE
: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1308.399	4.83	24.99	38.06	55.69	47.45	74.00	-26.55	Peak
2	3214.623	6.20	31.70	37.92	44.13	44.11	74.00	-29.89	peak
3	4133.699	7.14	33.60	38.07	43.01	45.68	74.00	-28.32	peak
4	7875.254	9.96	36.53	36.51	40.80	50.78	74.00	-23.22	Peak
5	pp11550.000	12.16	38.15	36.07	38.16	52.40	74.00	-21.60	peak
6	17325.000	15.98	43.19	36.13	29.11	52.15	74.00	-21.85	peak



Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.