




中国认可
国际互认
检测
TESTING
CNAS L0310



EMC Test Report

Product Name: GPON Terminal

Product Model: EchoLife HG8245Q2

Report Number: SYBH(E)02860267EB

FCC ID: QISHG8245Q2

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd.)

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice


1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements.
 - The recognition number for the test site located in Shenzhen is 97456
 - The recognition number for the test site located in Shanghai is 684868.
 - The recognition number for the test site located in Chengdu is 216797.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements.
 - The recognition number for the test site located in Shenzhen is 6369A-1;
 - The recognition number for the test site located in Dongguan is 21741;
 - The recognition numbers for the test site located in Shanghai is 6369D, which contains 6369D-1 (3m chamber) and 6369D-2 (10m chamber).
 - The recognition number for the test site located in Chengdu is 6369E-1.
5. The laboratory has been listed by VCCI to perform electromagnetic emission measurements.
 - The recognition numbers for the test site located in Shenzhen are R-3892, G-415, C-4361, and T-1348.
 - The recognition numbers for the test site located in Dongguan are R-4344, G-946, C-4836 and T-2334.
6. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named as “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”; the both names have coexisted since 2009.
7. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. The test report is only valid for the test samples.
10. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.




Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Product Name: GPON Terminal
Product Model: EchoLife HG8245Q2

Date of Receipt Sample: 2017-02-07
Start Date of Test: 2017-02-08
End Date of Test: 2017-02-10

Test Result: Pass

Approved by Senior Engineer:	2017-02-13	Ren Huasheng	
	Date	Name	Signature

Prepared by:	2017-02-12	Wang Ying	
	Date	Name	Signature



Modification Record

No.	Last Report No.	Modification Description
1	N/A	First report

Content

1	General Information	6
1.1	Applied Standard	6
1.2	Test Location	6
1.3	Test Environment Condition	6
2	Summary of Test Results	7
3	Equipment Specification	8
3.1	General Description	8
3.2	Specification.....	8
3.3	Board and Subassembly.....	9
4	System Configuration during EMC Test	10
4.1	Ports and Cables	10
4.2	Auxiliary Equipment	10
4.3	Test Configurations.....	10
4.4	Test Conditions and Connections.....	11
5	Details of Test Items	12
5.1	Radiated Emission 30 MHz to 40 GHz	12
5.2	Conducted Disturbance 0.15 MHz to 30 MHz	14
6	Main Test Instruments	15
7	System Measurement Uncertainty	16
8	Graph and Data of Emission Test	17
8.1	Radiated Disturbance	17
8.2	Conducted Disturbance	21
9	Photographs of Test Set-up.....	22
9.1	Radiated Emission.....	22
9.2	Conducted Emission.....	24
	Appendix: Abbreviation	25



1 General Information

1.1 Applied Standard

Applied Product Standard: FCC CFR47 Part 15 Subpart B:2015
ICES-003 Issue 6:2016

Test Method: ANSI C63.4:2014

1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies
Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Test Environment Condition

Ambient Temperature: 20-25°C
Relative Humidity: 45-55%
Atmospheric Pressure: 101kPa



2 Summary of Test Results

Table 1 Test summary

EUT Classification: Class B Digital Device				
Test Items	Test Configuration	Limit	Test Result	Location
<u>Radiated Emissions</u> Enclosure Port	TC1	Class B	Pass	Location1
<u>Conducted Emissions</u> AC Power Port	TC1	Class B	Pass	Location1

Note:
1, Measurement taken is within the uncertainty of measurement system.
2, TC is short for test configuration

3 Equipment Specification

3.1 General Description

The EchoLife HG8245Q2 GPON terminal (hereinafter referred to as HG8245Q2) is an indoor optical network terminal (ONT) designed for home users and small office. You can use the HG8245Q2 to enjoy the high-speed data service, quality voice service, superior video service, and secure and reliable wireless access service.

Four 10/100/1000 Base-T Ethernet ports that can function as the service ports for service terminals such as PC, set top box (STB), and video phone.

Two TEL ports that provide superior and cost-effective voice over IP (VoIP), fax over IP (FoIP), and modem over IP (MoIP) services.

Two WLAN port to support a secure and reliable high-speed wireless network.

One USB port that can be attached with USB disks to provide convenient home network attached storage and file sharing services.

Products may have different colors, antennas and silkscreens. The following shows an example.

3.2 Specification

Table 2 Main equipment specification

Rated Input Voltage	Adapter: ~ 100 V to 150 V (50/60 Hz)
Rated Power (W)	≤24 W
Dimensions (W x D x H)	266 mm (W) x 176 mm (D) x 82 mm (H)
Weight (kg)	0.5 kg
Frequency of the Internal Source (Hz)	25MHz; 40MHz; 125MHz; 480MHz; 1.244GHz; 2.488GHz; 5.8GHz



Figure 1. EUT Appearance



Figure 2. EUT Appearance of HW-120200U8W(HuntKey)

3.3 Board and Subassembly

Table 3 Board list

Board	
Board Name	Description
HG8245QA	PON, GE, USB, POTS, WIFI

Table 4 Subassembly list

Subassembly			
Subassembly Name	Model	Manufacturer	Description
Adapter	HW-120200U8W	HuntKey	Input voltage : ~ 100V-150V, 50/60Hz, 0.8A Output voltage : --- 12 V 2A



4 System Configuration during EMC Test

The Equipment under Test (EUT) was functioning correctly during all tests. The EUT was installed within the test site and was configured to simulate a typical configuration.

4.1 Ports and Cables

Table 5 Ports and cables

Port	Quantity	Length (m)	Connector	Type of Cable
AC Power Port	1	1.5	NA	Unshielded
POTS	2	5	RJ11	UTP-CAT3
GE	4	10	RJ45	UTP-CAT5
PON	1	10	SC	Fiber

4.2 Auxiliary Equipment

Table 6 Auxiliary equipment

Name	Model	Manufacturer	S/N	Calibration Date	Cal Interval (month)
TELEPHONE	TCL 37	TCL	N/A	N/A	N/A
Data network analyzer	Smartbits600	Spirent	SZ0500038070	2016-04-28	12
PC	Lenovo M4000	LEGEND	N/A	N/A	N/A
OLT	MA5603T	Huawei	N/A	N/A	N/A
USB memorizer	N/A	Kingston	N/A	N/A	N/A
Notebook PC	HP 2540p	HP	3105033009	N/A	N/A

4.3 Test Configurations

The equipment under test (EUT) was connected to ancillary devices in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment). There was one test configuration. TC1 was shown in the following table and figure:

Table 7 Test configuration

Configuration No.	Configuration Description
EchoLife HG8245Q2	HW-120200U8W, HuntKey

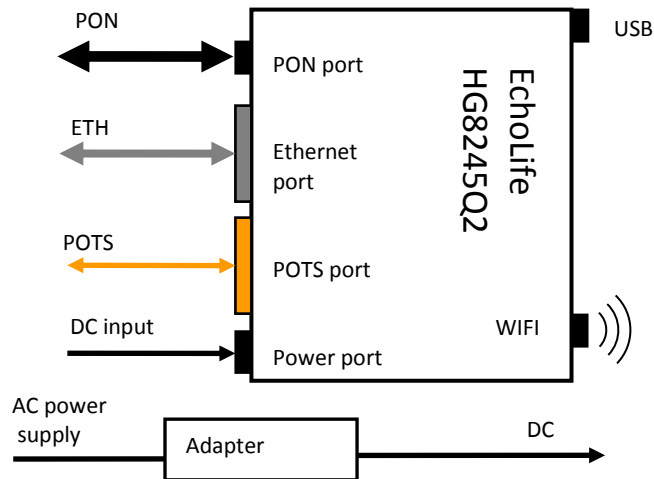


Figure 3. : Test configuration1 (TC1)

4.4 Test Conditions and Connections

The Ethernet ports of HG8245Q2 should connect to the Smartbits600. The data flow rates of each Ethernet port is nearly 1000M when the Ethernet port is GE. Data transmission is normal at the Ethernet port with no packet loss or error codes.

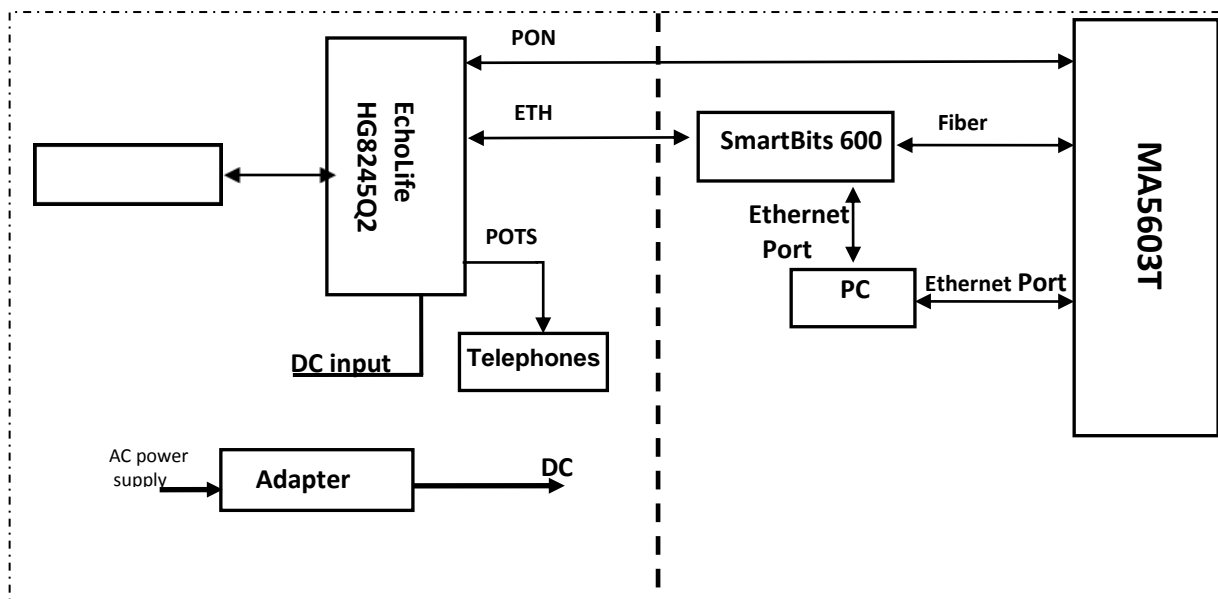


Figure 4. Test connection of TC1

5 Details of Test Items

5.1 Radiated Emission 30 MHz to 40 GHz

5.1.1 Test Procedure

The test site semi-anechoic chamber for 30MHz to 1GHz test has met the requirement of NSA tolerance 4 dB according to the standard ANSI C63.4. The test distance was 3m. The set-up and test methods were according to ANSI C63.4.

The test site full-anechoic chamber for above 1GHz test has met the requirement of S_{VSWR} tolerance 6 dB in accordance with the standard ANSI C63.4. The test distance was 3 m or 1m for above 1GHz.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 40 GHz by using test script of software; the emissions were measured using Quasi-Peak Detector for 30 MHz to 1 GHz, Average and Peak detector for above 1 GHz. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1 m to 4 m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

The test set-up is shown in diagram as below:

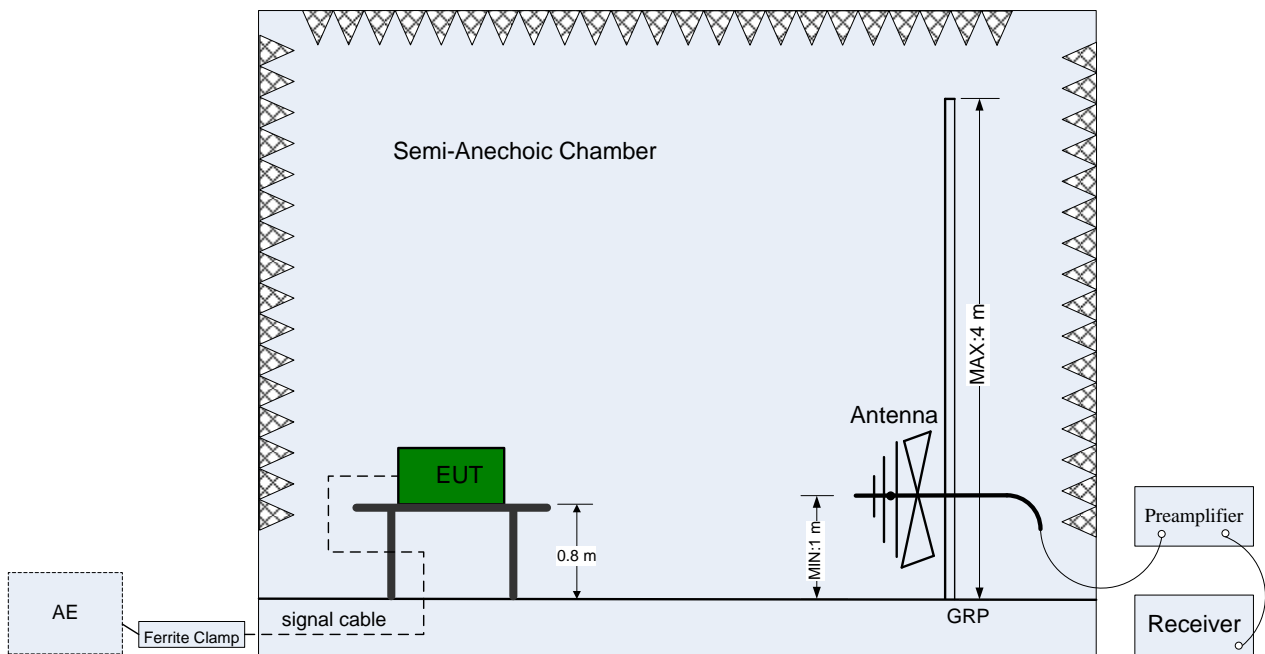


Figure 5. Test set-up of radiated disturbance (30 MHz-1 GHz)

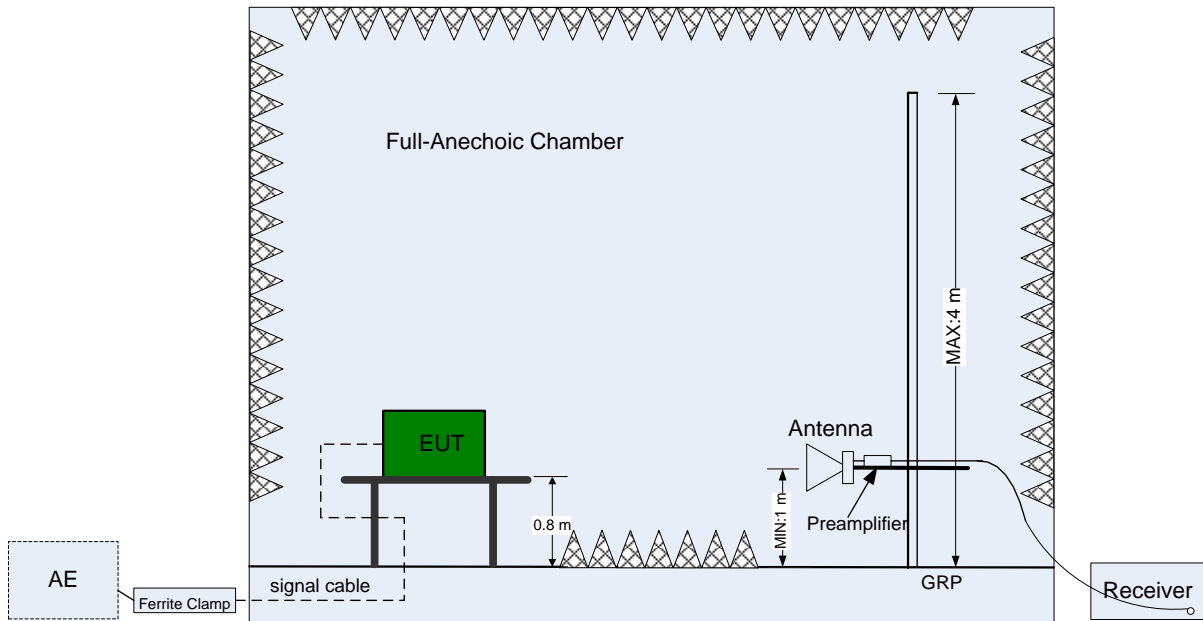


Figure 6. Test set-up of radiated disturbance (above 1 GHz)

5.1.2 Test Results

The EUT has met the requirements for radiated emission of enclosure port.
For the test data, see section 8.1.

Table 8 Test limits for 30MHz to 1GHz at a measuring distance of 3m

Frequency range	30 MHz to 1 GHz	
Measuring distance	3 m	
Classification	Class B	
Limits(Class B)	30 MHz to 88 MHz	40.0 dB μ V/m
	88 MHz to 216 MHz	43.5 dB μ V/m
	216 MHz to 960 MHz	46.0 dB μ V/m
	960 MHz to 1 GHz	53.9 dB μ V/m

Table 9 Test limits for 1GHz-26.5GHz at a measuring distance of 3m

Frequency range	1 GHz to 26.5 GHz	
Measuring distance	3 m	
Classification	Class B	
Limits(Class B)	AV Detector	PK Detector
	53.9 dB μ V/m	73.9 dB μ V/m

Table 10 Test limits for 26.5GHz-40GHz at a measuring distance of 1m

Frequency range	26.5 GHz to 40 GHz	
Measuring distance	1 m	
Classification	Class B	
Limits(Class B)	AV Detector	PK Detector
	63.4 dB μ V/m	83.4 dB μ V/m

Note: The highest frequency of the internal sources of the EUT is 5.8 GHz, the measurement was made up to 40 GHz.

5.2 Conducted Disturbance 0.15 MHz to 30 MHz

5.2.1 Test Procedure

The EUT was configured as described in section 4. The mains cable of the EUT must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

The test set-up is shown in diagram as below:

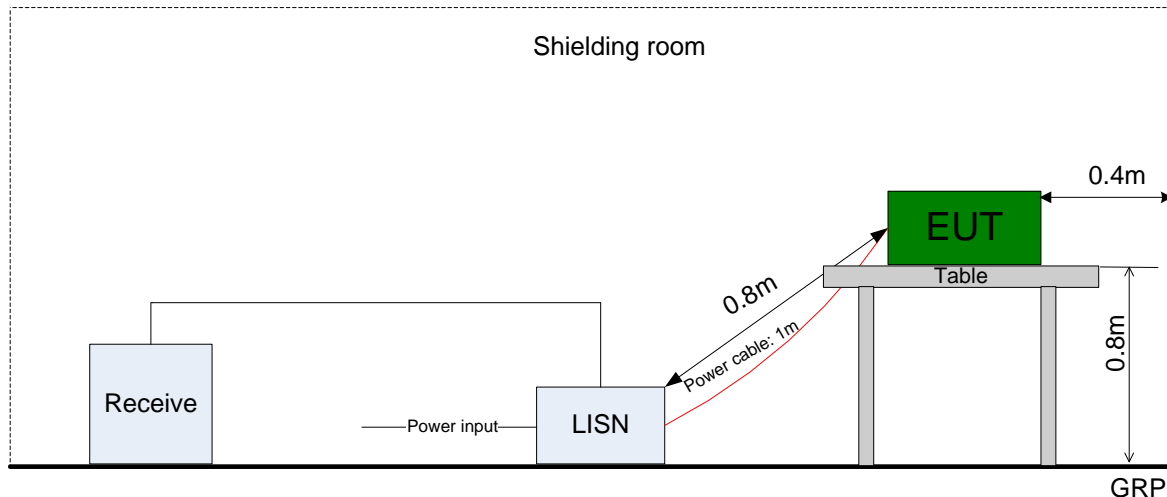


Figure 7. Test set-up of conducted disturbance for AC power port

5.2.2 Test Results

The EUT has met the requirements of FCC Part15 and ICES 003 for Conducted Disturbance of AC Power Port

For the test data, see section 8.2

Table 11 Limits of AC power port

Frequency range	150 kHz to 30 MHz	
Classification	Class B	
Limit(Class B)	Voltage limits (dB μ V)	
	QP	AV
0.15 to 0.5 MHz	66 to 56	56 to 46
0.5 to 5 MHz	56	46
5 to 30 MHz	60	50

**6 Main Test Instruments**

Table 12 Main test instrument

Test Item	Test Instrument	Model	Manufacturer	Calibration Date	Calibration Interval (Month)
Radiated emission (3m chamber)	EMI test receiver	ESU40 (100144)	R&S	2016-06-24	12
	Bilog antenna	CBL 6112B (2941)	Schaffner	2016-08-24	24
	Horn antenna	HF906 (359287/006)	R&S	2016-08-20	24
	Horn antenna (18 to 26.5GHz)	3160-9 (053215-21876)	ETS-LINDGREN	2016-03-26	24
	Horn antenna (26.5 to 40GHz)	3116 (00031542)	ETS-LINDGREN	2015-03-31	24
	Chamber _NSA	3m chamber	Albatross	2015-03-27	24
	Chamber _S _{VSWR}	3m chamber	Albatross	2015-08-25	24
Conducted emission	EMI test receiver	ESCI (100929)	R&S	2016-05-19	12
	Artificial mains network	ENV4200 (100046)	R&S	2016-03-16	12
Software Information					
Test Item		Software Name	Manufacturer	Version	
Radiated emission (3m chamber)		ES-K1	R&S	V1.7.1	
Conducted emission		ES-K1	R&S	V1.7.1	

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Table 13 System measurement uncertainty

Items		Extended Uncertainty
Radiated emission (3m chamber)	Field strength (dB μ V/m)	U=4.15 dB; k=2 (30 MHz-1 GHz)
		U=3.64 dB; k=2 (1 GHz-18 GHz)
		U=3.26 dB; k=2 (18 GHz-26.5 GHz)
		U=3.83 dB; k=2 (26.5 GHz-40 GHz)
Conducted Emission	Disturbance Voltage (dB μ V)	U=3.3 dB; k=2




8 Graph and Data of Emission Test

8.1 Radiated Disturbance

8.1.1 Radiated Disturbance of TC1

Graph of Test result (30 MHz-1 GHz)

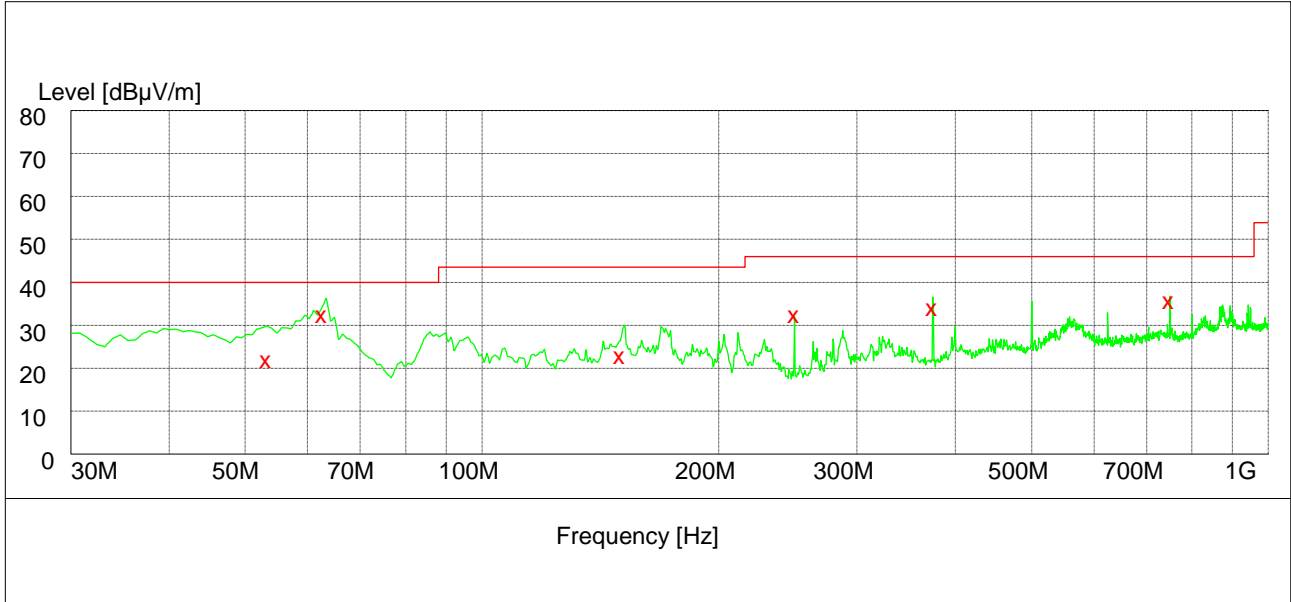

Measurement Result: QP Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
53.340000	23.50	-17.3	40.0	16.5	100.0	255.00	VERTICAL
62.880000	34.00	-15.6	40.0	6.0	200.0	0.00	VERTICAL
150.360000	24.60	-11.4	43.5	18.9	171.0	206.00	HORIZONTAL
250.020000	33.90	-9.0	46.0	12.1	100.0	131.00	HORIZONTAL
375.000000	35.60	-5.3	46.0	10.4	100.0	200.00	HORIZONTAL
750.000000	37.40	1.3	46.0	8.6	100.0	163.00	HORIZONTAL

Note:


Margin=Limit-Level

Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is used to calculate by software which is not shown in the sheet.



Graph of Test result (1 GHz-18GHz)

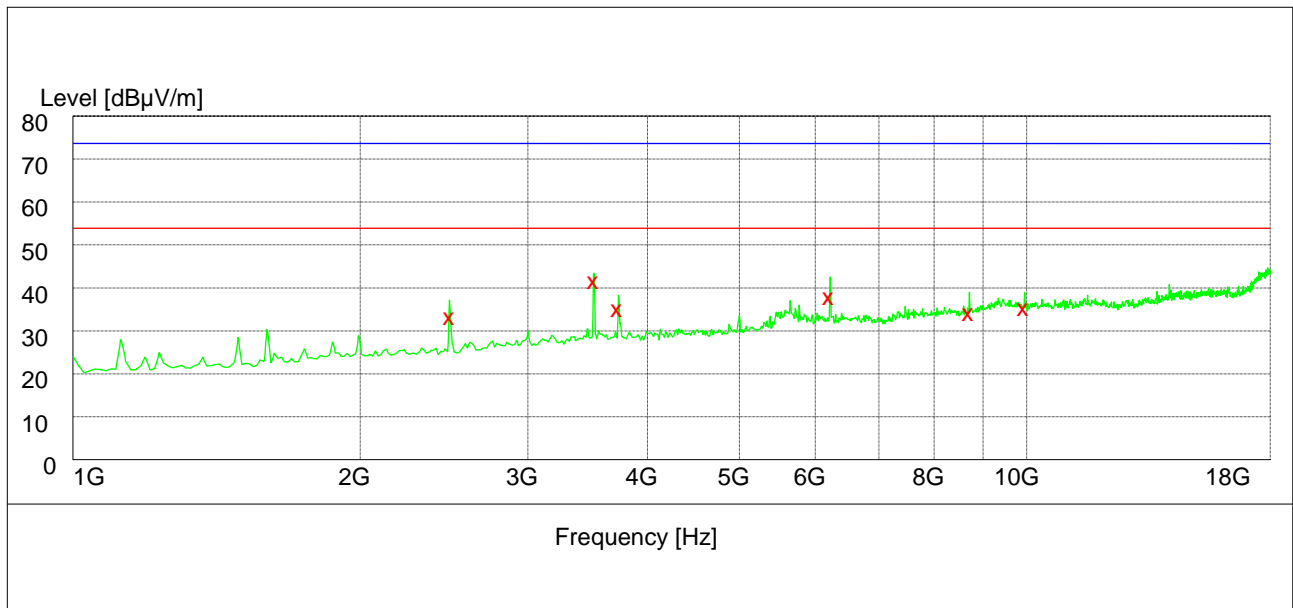

Measurement Result: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
2488.500000	34.80	-4.9	53.9	19.1	200.0	129.00	HORIZONTAL
3526.500000	43.20	-0.8	53.9	10.7	151.0	158.00	HORIZONTAL
3732.500000	36.70	-0.7	53.9	17.2	173.0	237.00	HORIZONTAL
6220.500000	39.40	5.7	53.9	14.5	187.0	172.00	VERTICAL
8709.000000	35.80	9.6	53.9	18.1	120.0	200.00	VERTICAL
9953.500000	36.90	11.8	53.9	17.0	101.0	158.00	VERTICAL

Note:


Margin=Limit-Level

Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is used to calculate by software which is not shown in the sheet.



Graph of Test result (18 GHz-26.5GHz)

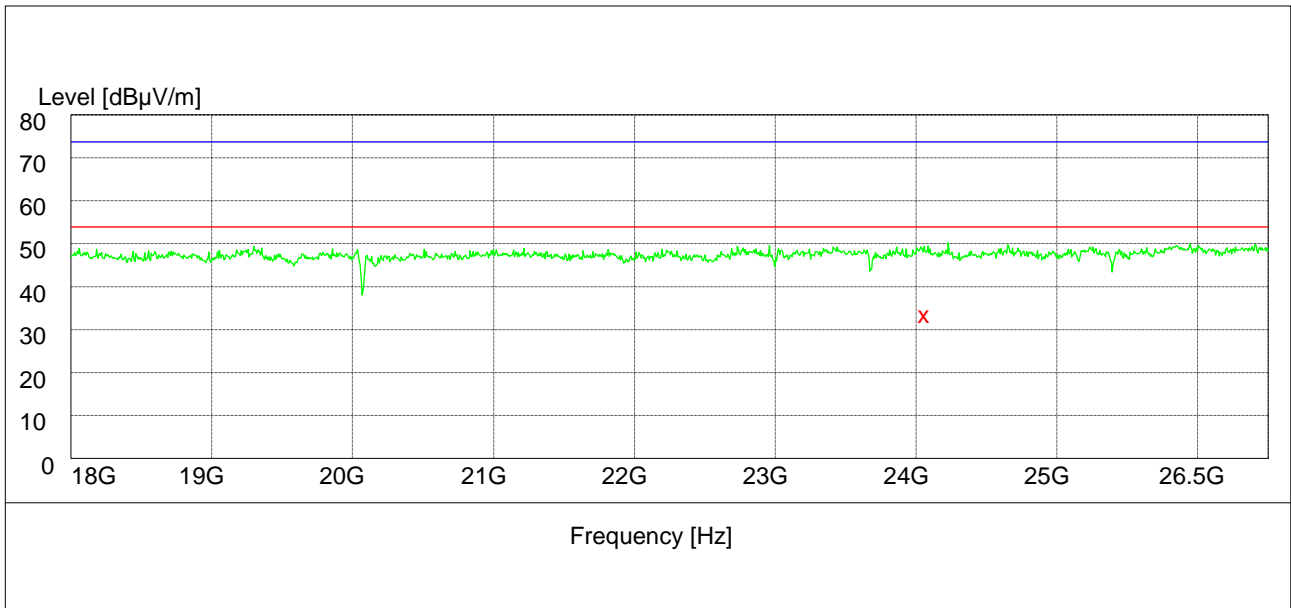

Measurement Result: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
24069.00000	35.00	2.0	53.9	18.9	170.0	45.00	HORIZONTAL

Note:


Margin=Limit-Level

Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is used to calculate by software which is not shown in the sheet.



Graph of Test result (26.5 GHz-40GHz)

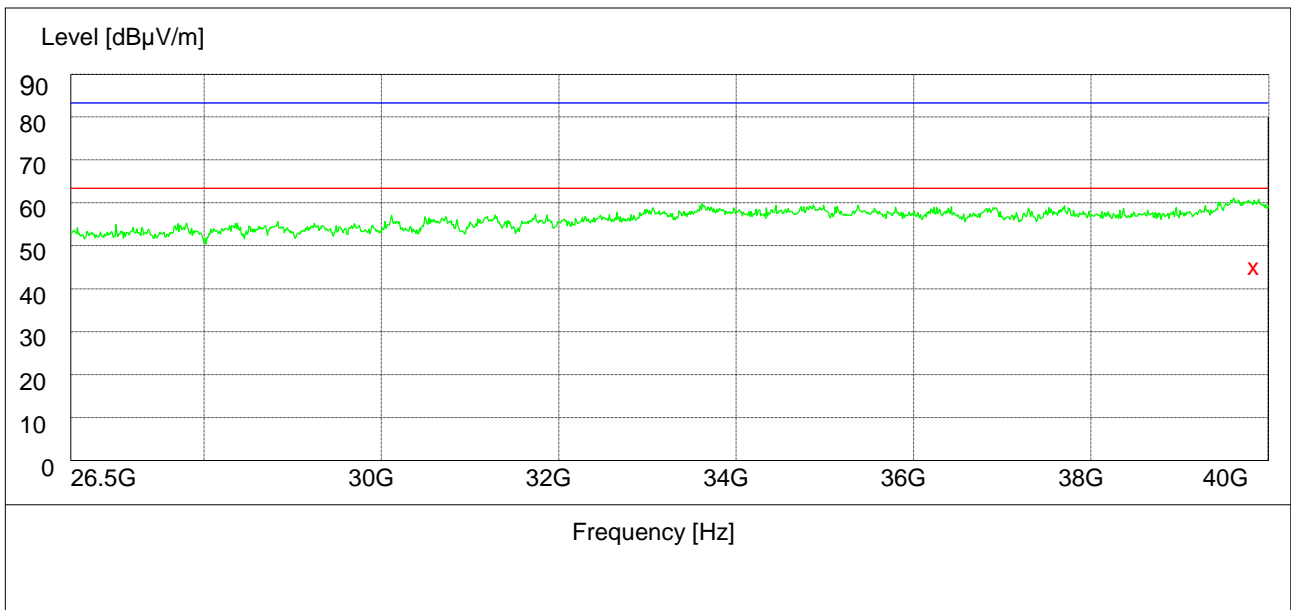

Measurement Result: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
39858.00000	46.60	14.2	63.4	16.8	200.0	104.00	HORIZONTAL

Note:

Margin=Limit-Level


Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is used to calculate by software which is not shown in the sheet.



8.2 Conducted Disturbance

8.2.1 AC Power Port Test Data

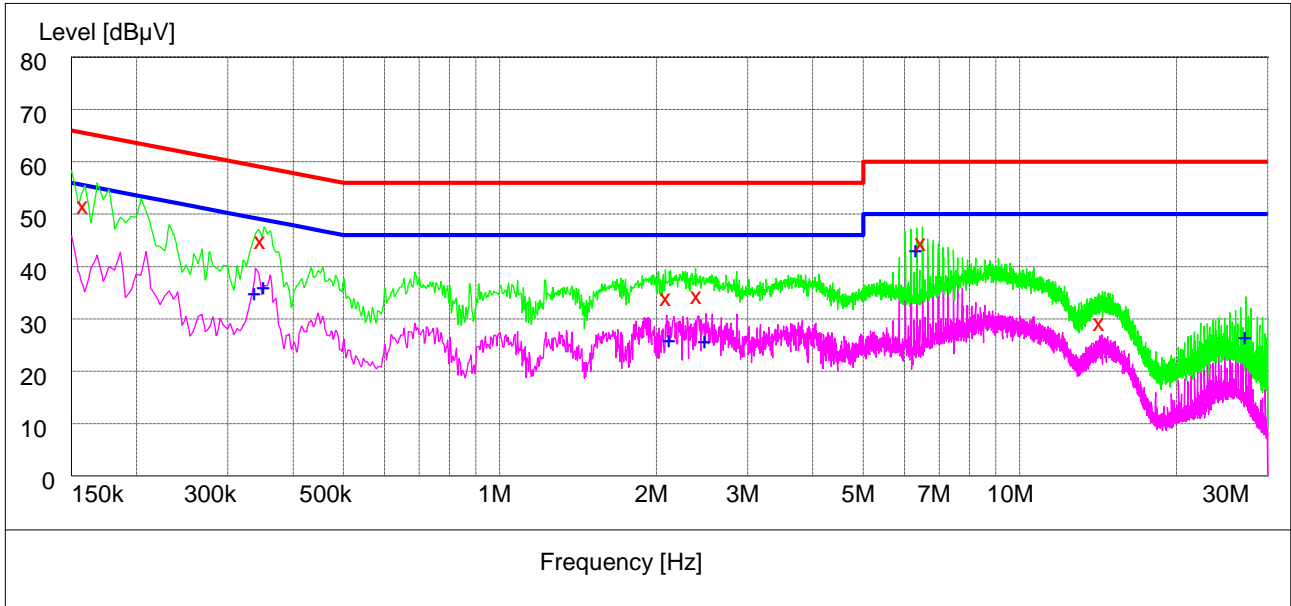

Measurement Result: QP Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.159000	52.50	9.9	66	13.0	L3	FLO
0.348000	45.80	10.1	59	13.2	N	FLO
2.098500	35.00	10.2	56	21.0	L3	FLO
2.409000	35.40	10.3	56	20.6	N	FLO
6.499500	45.50	10.6	60	14.5	N	FLO
14.329500	30.30	10.7	60	29.7	N	FLO

Measurement Result: AV Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.339000	36.00	10.1	49	13.2	L3	FLO
0.352500	37.10	10.1	49	11.8	N	FLO
2.125500	27.10	10.2	46	18.9	L3	FLO
2.490000	26.70	10.3	46	19.3	L3	FLO
6.342000	44.10	10.6	50	5.9	L3	FLO
27.208500	27.50	11.0	50	22.5	N	FLO

Note:

Margin=Limit-Level

Level= Reading level+ Transd (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.




9 Photographs of Test Set-up


9.1 Radiated Emission




Radiated emission for 30 MHz-1 GHz

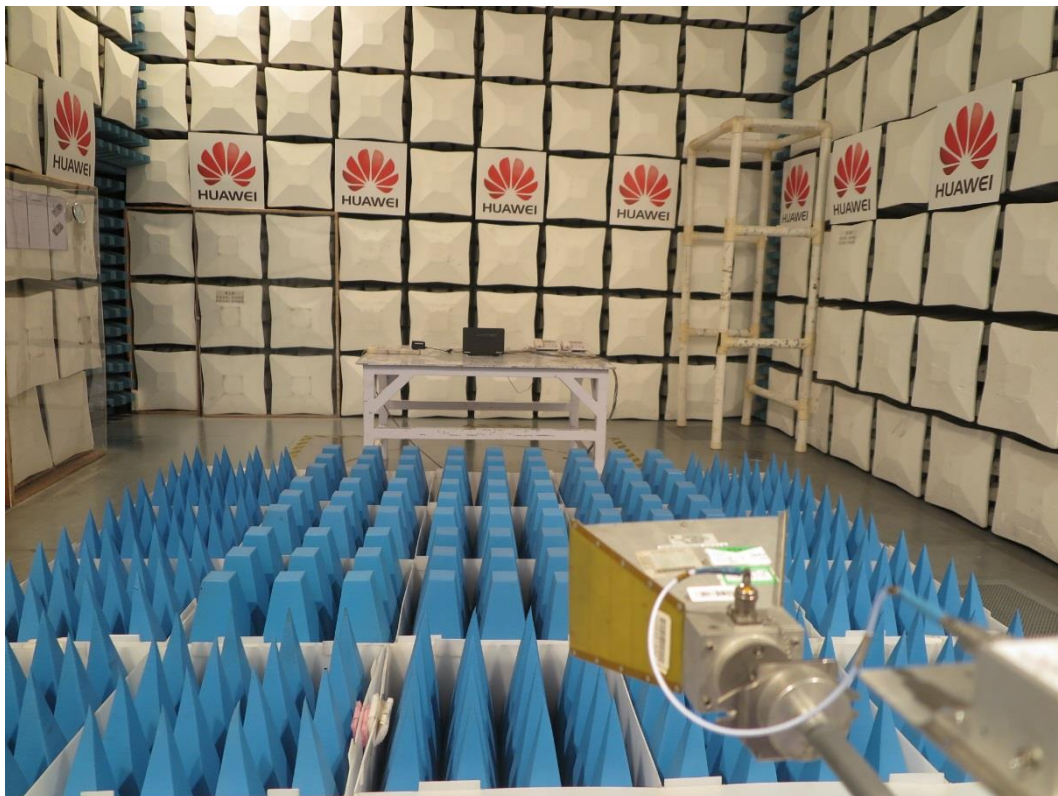

Radiated emission for 1GHz to 18GHz

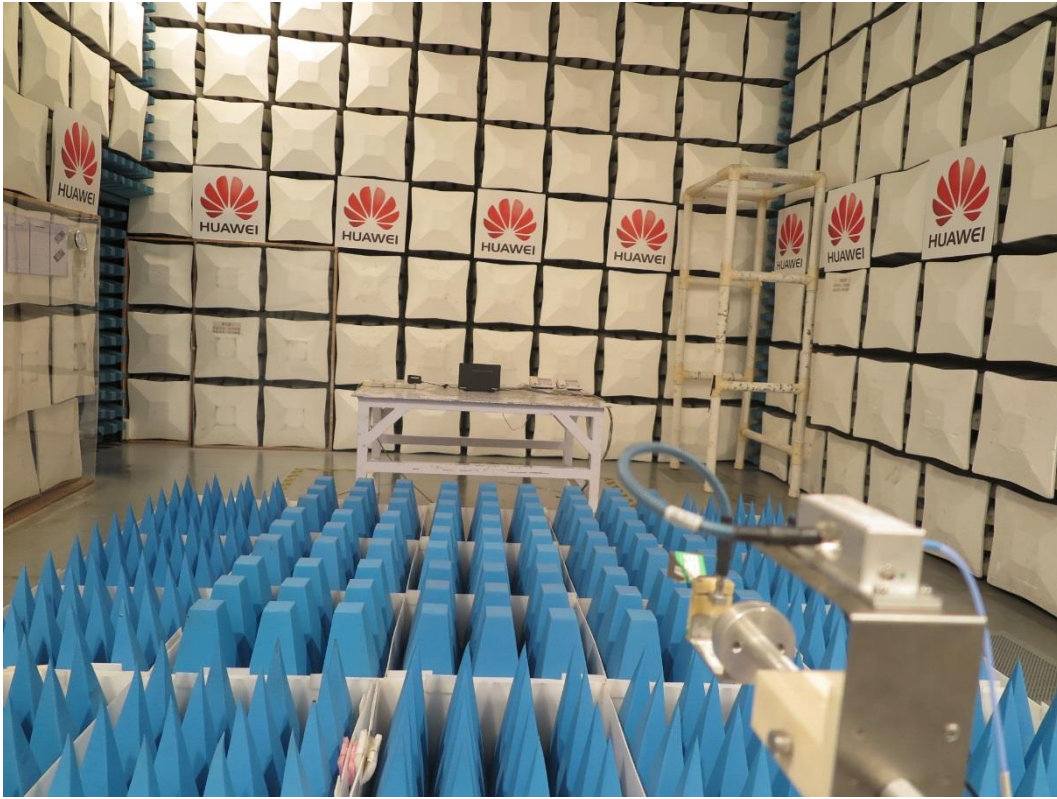

Radiated emission for 18GHz to 26.5GHz

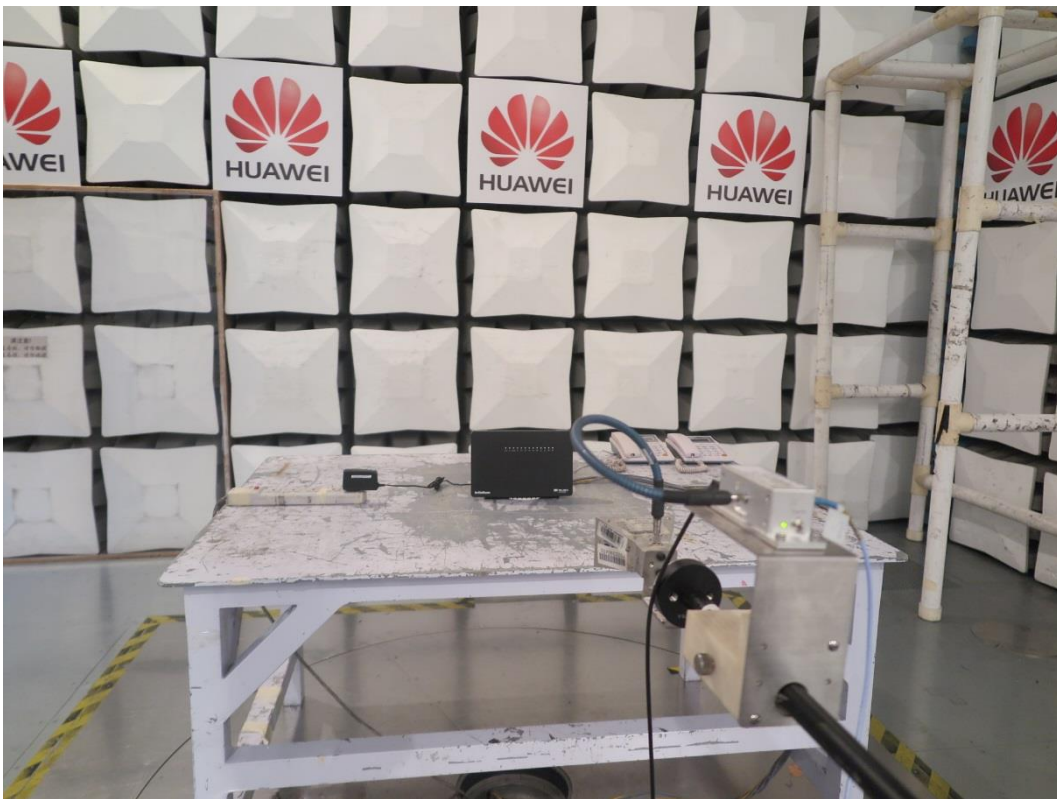

Radiated emission for 26.5GHz to 40GHz

9.2 Conducted Emission



Conducted emissions of AC power port

**Appendix: Abbreviation**

Table 14 Abbreviation

Abbreviation	Full Name
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
EUT	Equipment Under Test
AE	Auxiliary Equipment
AC	Alternate Current
DC	Direct Current
NSA	Normalized Site Attenuation
S_{VSWR}	Site Voltage Standing Wave Ratio
LISN	Line Impedance Stabilization Network
TC	Test configuration
N/A	Not Applicable

END