

FCC Test Report

FCC ID: QISHZ-W19

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1603C029
Equipment : HUAWEI MateBook
Model Name : HZ-W19
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Mar. 02, 2016
Date of Test : Mar. 02, 2016 ~ Mar. 18, 2016
Issued Date : Mar. 21, 2016
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS (30 TO 1000 MHZ)	19
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	19
5 . MEASUREMENT INSTRUMENTS LIST	20
6 . EUT TEST PHOTO	21
ATTACHMENT A - CONDUCTED EMISSION	28
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	43
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	62

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1603C029	Original Issue.	Mar. 21, 2016

1. CERTIFICATION

Equipment : HUAWEI MateBook
Brand Name : HUAWEI
Model Name : HZ-W19
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : FUTAIHUA INDUSTRY (SHENZHEN) Co., LTD
Address : Building 4,6,7,13 (Section I), Foxconn Guan Lan Technology Park B District,
Da ShuiKeng Community, Guan Lan Town, Baoan, Shenzhen 518110,P.R.
China
Date of Test : Mar. 02, 2016 ~ Mar. 18, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1603C029) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cisp} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MateBook
Brand Name	HUAWEI
Model Name	HZ-W19
Model Difference	N/A
Power Source	#1 DC Voltage supplied from adapter. Brand/Model: HUAWEI / HW-59C200UHPQ1 #2 Supplied from battery.
Power Rating	#1 I/P:100-240V~50/60Hz 1.0A O/P: 5V---2A OR 9V---2A OR 12V---2A #2 DC 7.60V/4300mAh/32.7Wh
HW Version	S1
SW Version	HZ-09C001B002

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

Item	Mfr/Brand	Model.
USB-C Data Charger Cable	HUAWEI	N/A
USB-C to Micro-USB Cable	HUAWEI	N/A
Micro-USB to USB-A Adaptor	HUAWEI	N/A
Battery	Sunwoda Electronic Co., LTD	HB25B7N4EBC
	SCUD (FUJIAN) Electronics Co., Ltd	HB25B7N4EBC
	Harbin Coslight Power Co., Ltd.	HB25B7N4EBC
Portfolio Keyboard(Optional)	HUAWEI	AF20
MatePen(Optional)	HUAWEI	AF61

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
1	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)
2	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)
3	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)
4	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)
5	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)
6	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)
7	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)
8	BT+WIFI(2.4G)+Type C R/W+earphone+Battery(SUNWODA)
9	BT+WIFI(2.4G)+Charge to pen+earphone+Battery(SUNWODA)


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
1	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)
2	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)
3	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)
4	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)
5	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)
6	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)
7	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


For Radiated Test	
Final Test Mode	Description
1	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)
2	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)
3	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)
4	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)
5	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)
6	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)
7	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)
8	BT+WIFI(2.4G)+Type C R/W+earphone+Battery(SUNWODA)
9	BT+WIFI(2.4G)+Charge to pen+earphone+Battery(SUNWODA)

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Mode 1~ Mode 7

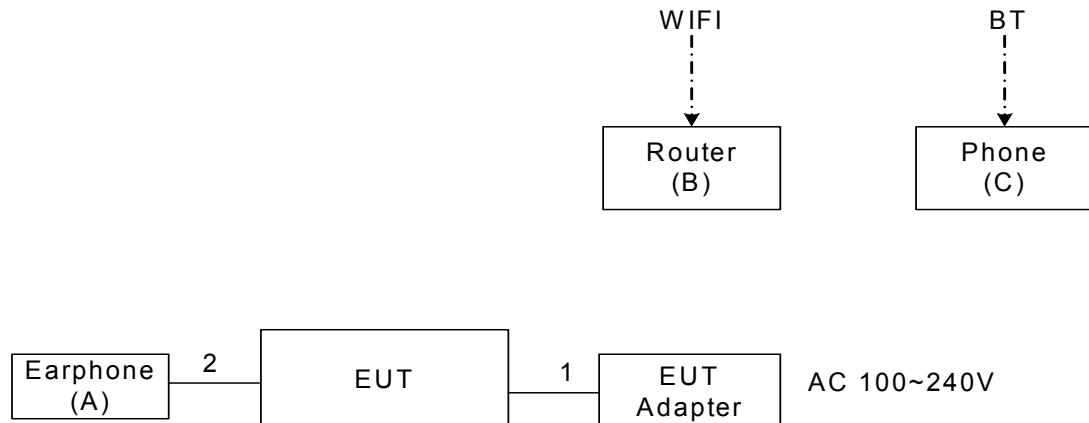

Mode 8

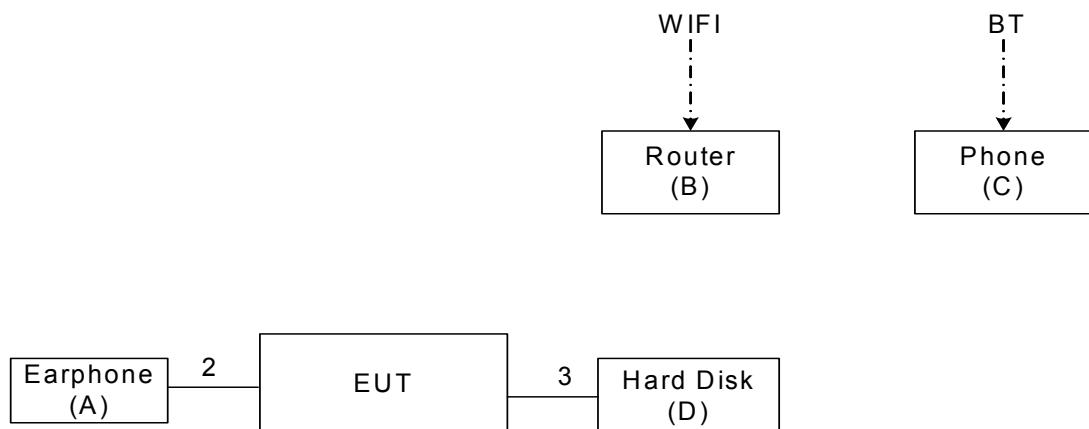

Mode 9

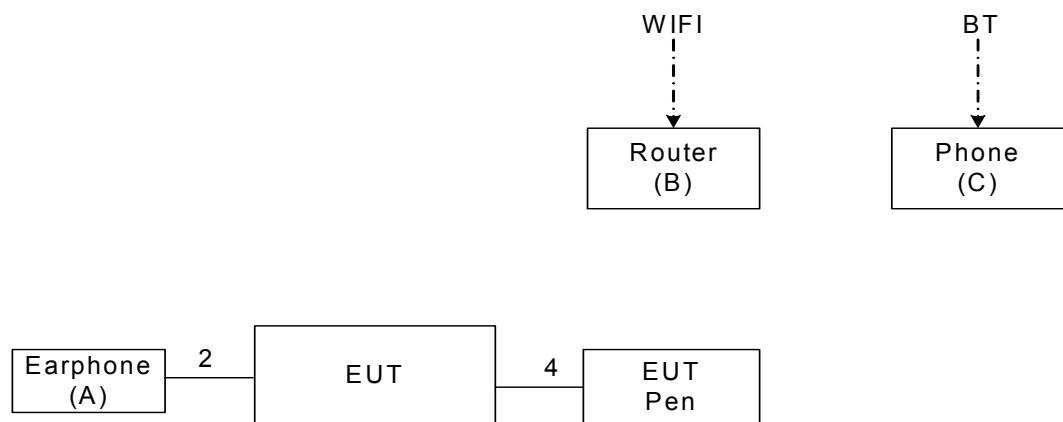

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Earphone	Apple	A1446	BCG-A1446A	DCYJF3MPF0GV
B	wireless router	TP-LINK	TL-WR1041N	DOC	1142123O01143
C	mobile phone	Apple	A1332	BCG-E2380A	6Q10855UA4S
D	USB3.0 hard disk	TOSHIBA	HDDR500E03X	DOC	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.4m	Type C Cable
2	NO	NO	1.5m	Audio Cable
3	YES	NO	1.5m	Type C to USB Cable
4	YES	NO	0.1m	Type C to USB Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUNCY (Hz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79 00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

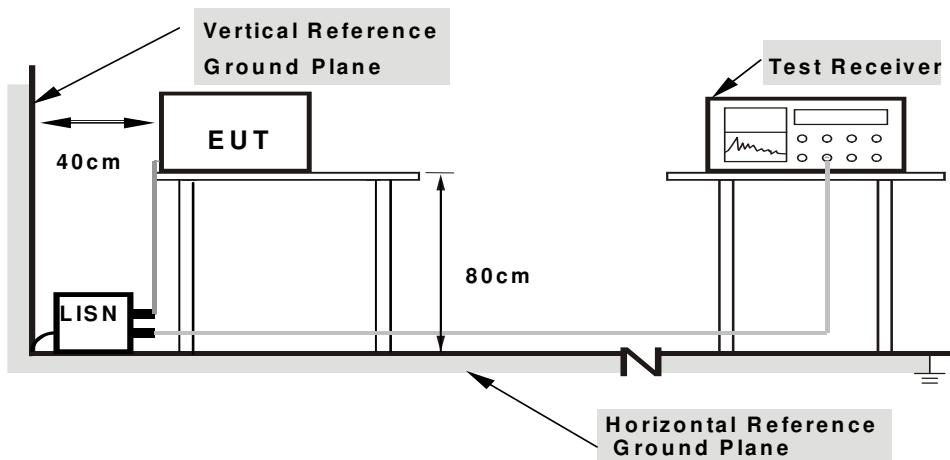

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25°C Relative Humidity: 53%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of «Note». If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- j. For measurement of frequency 1GHz -40GHz, the EUT was set 3 meters away from the receiver antenna.
Emission level (dBuV/m)=20log Emission level (uV/m).
The limits above 18GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m
Distance extrapolation factor = $20 \log (3m/1m)$ dB ;
Limit line = specific limits (dBuV) + 9.5 dB.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

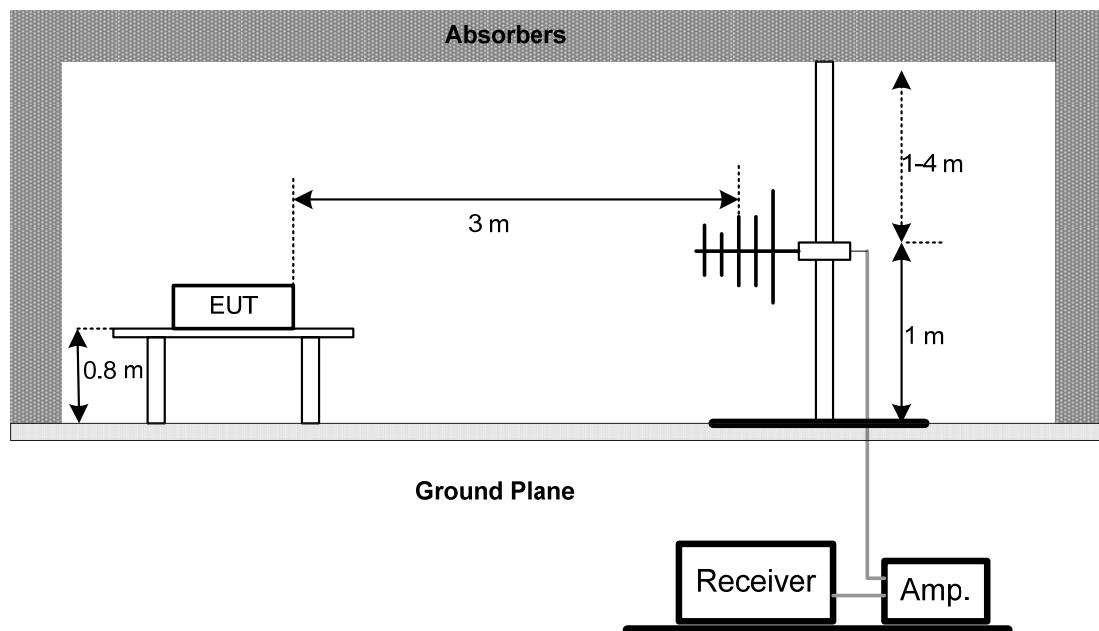

(B) Radiated Emission Test Set-Up Frequency 1 GHz-18GHz

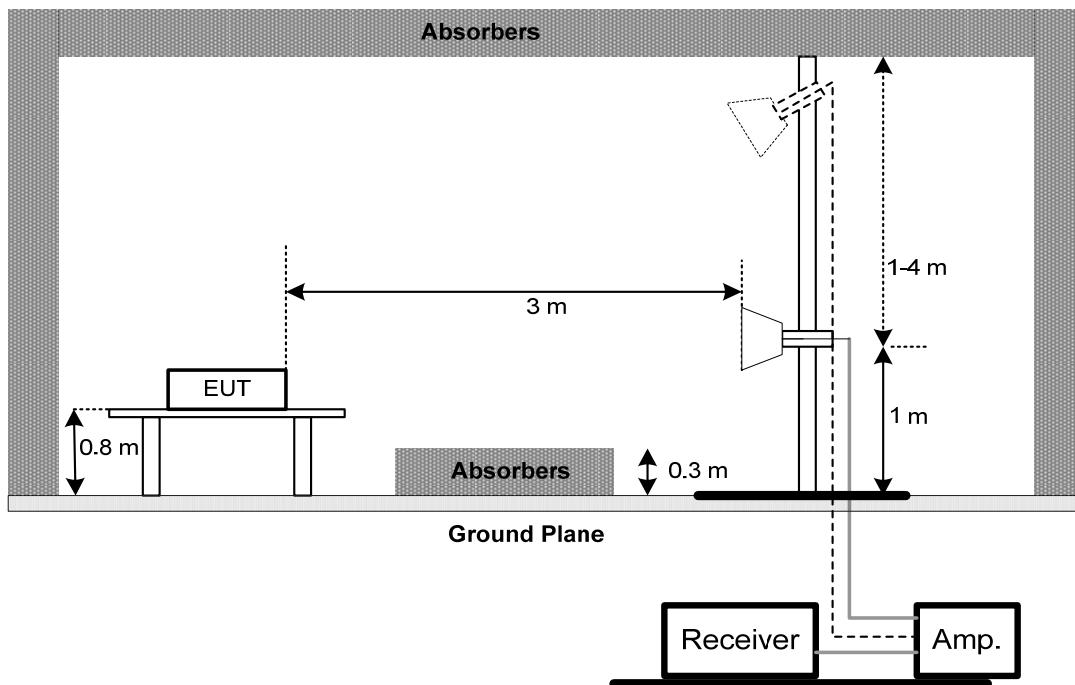

(C) Radiated Emission Test Set-Up Frequency 18 GHz-40GHz

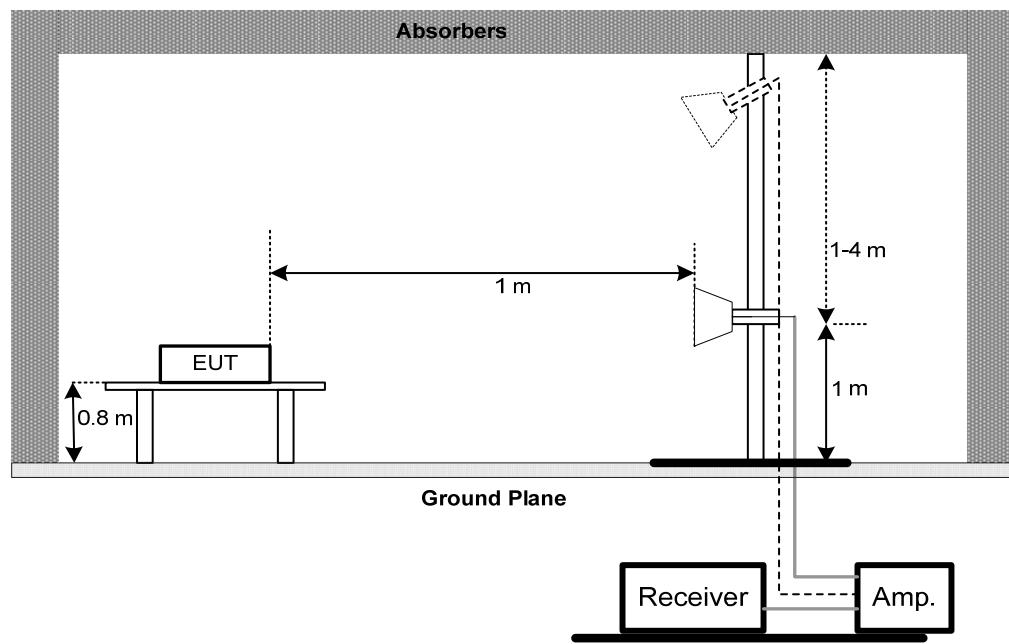

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 21°C Relative Humidity: 51%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C.

Temperature: 21°C Relative Humidity: 51%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016
2	LISN	R&S	ENV216	101447	Mar. 28, 2016
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 12, 2017
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Controller	CT	SC100	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	Antenna	ETS	3115	00075789	Mar. 28, 2016
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 28, 2016
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
13	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016


Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.



6. EUT TEST PHOTO



Conducted emission test photos


Mode 1~7


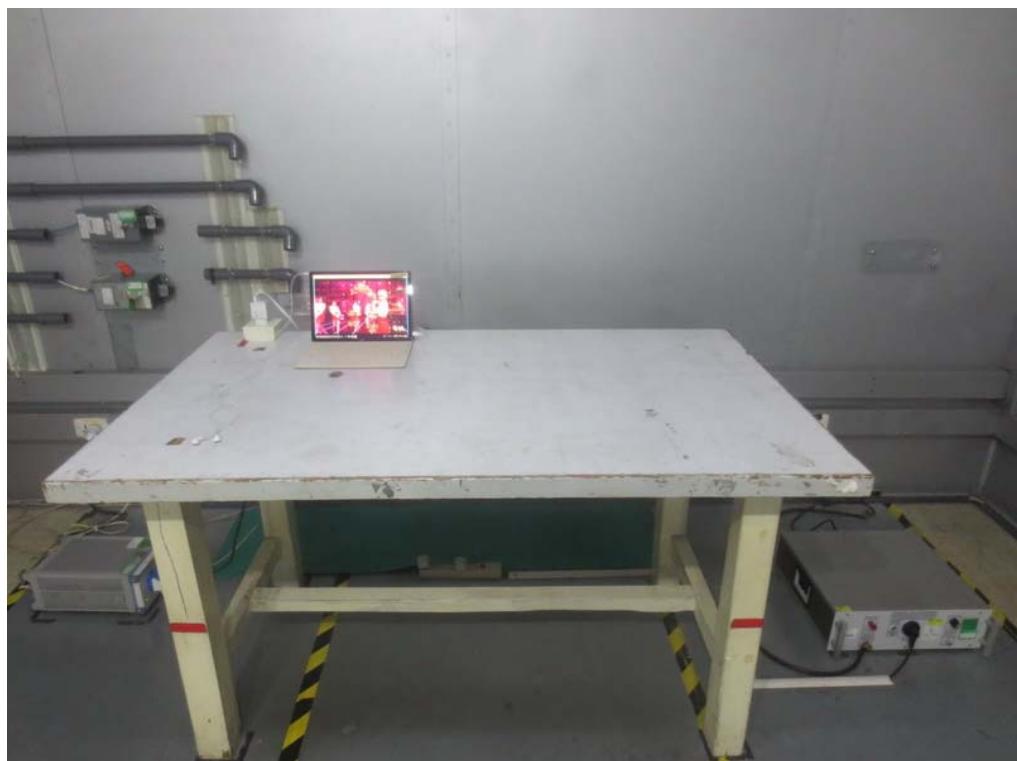


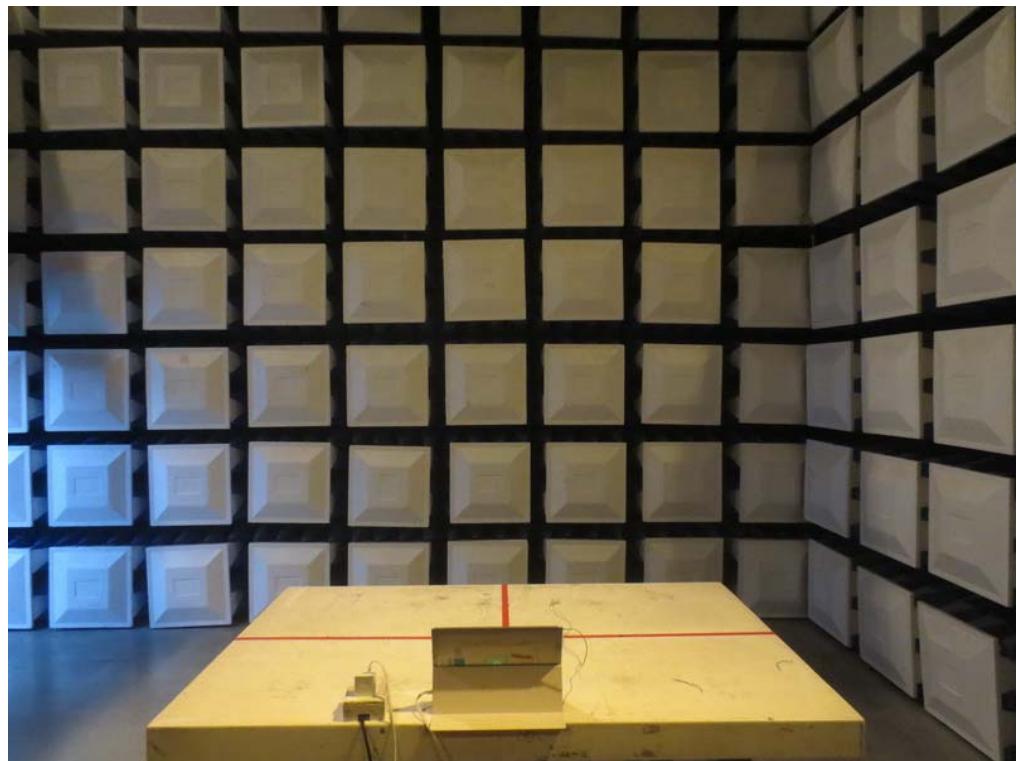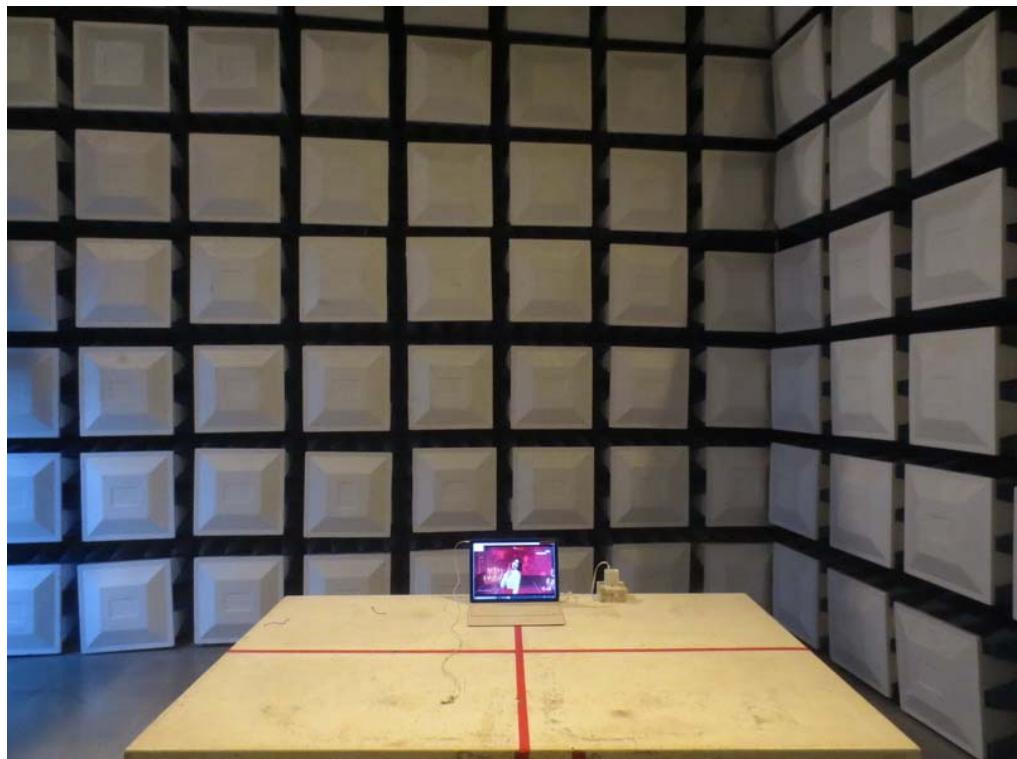
Radiated emission below 1 GHz test photos**Mode 1 ~ Mode 7**

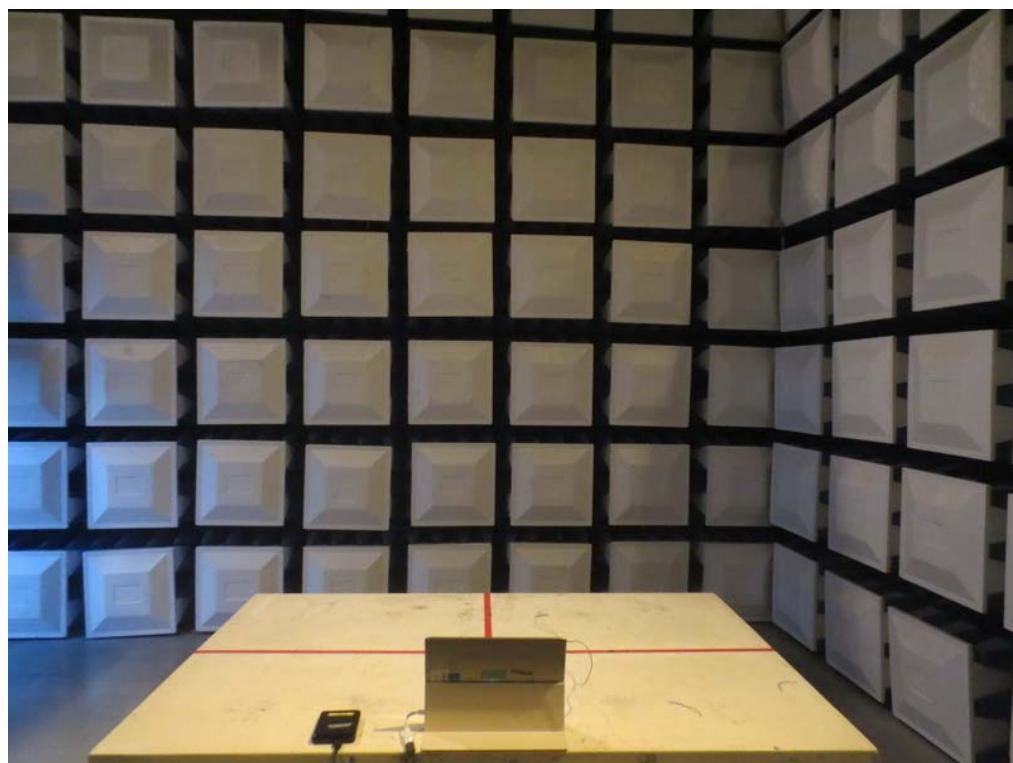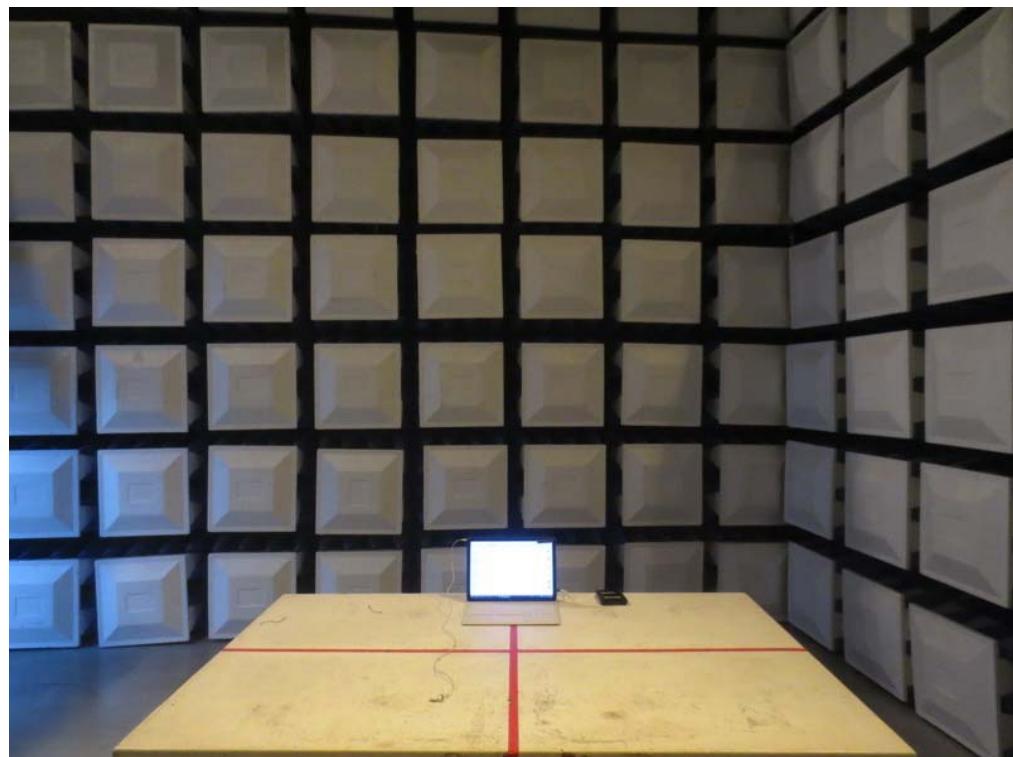Radiated emission below 1 GHz test photos**Mode 8**

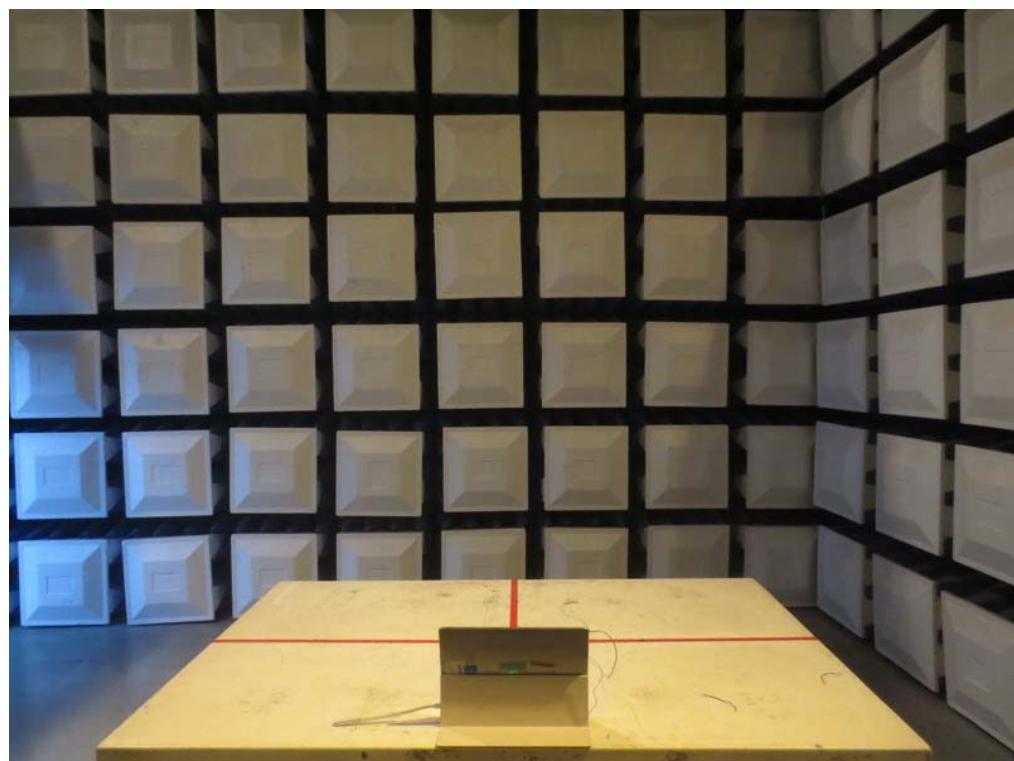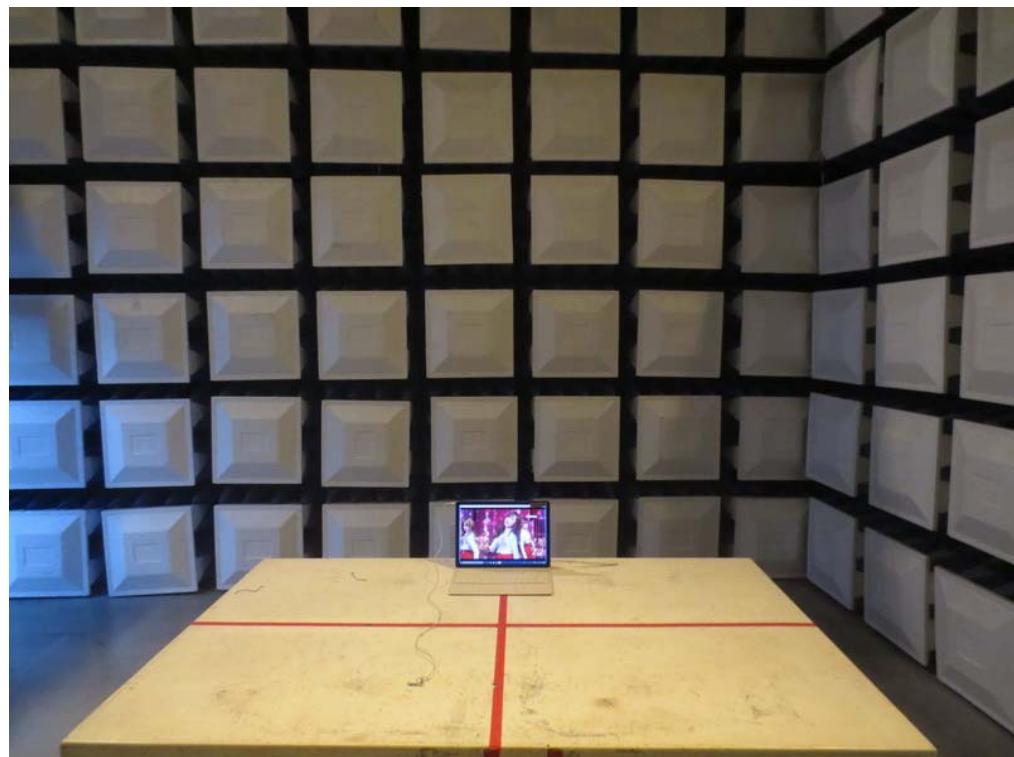Radiated emission below 1 GHz test photos**Mode 9**

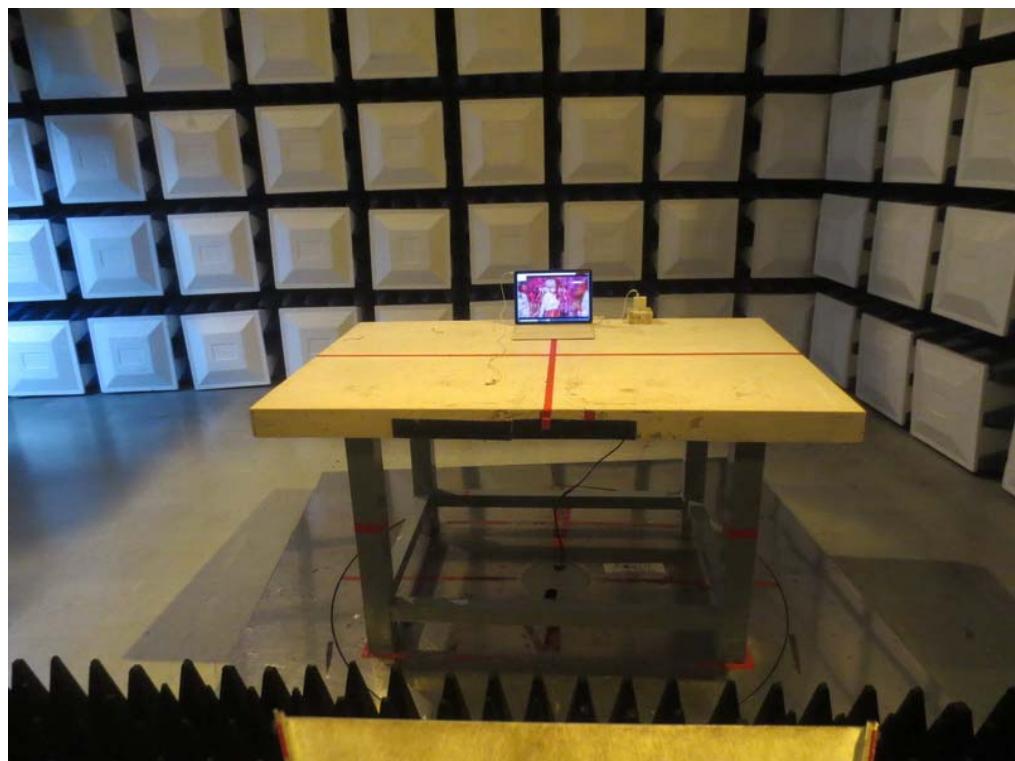Radiated emission above 1 GHz test photos**Mode 1 ~ Mode 7**

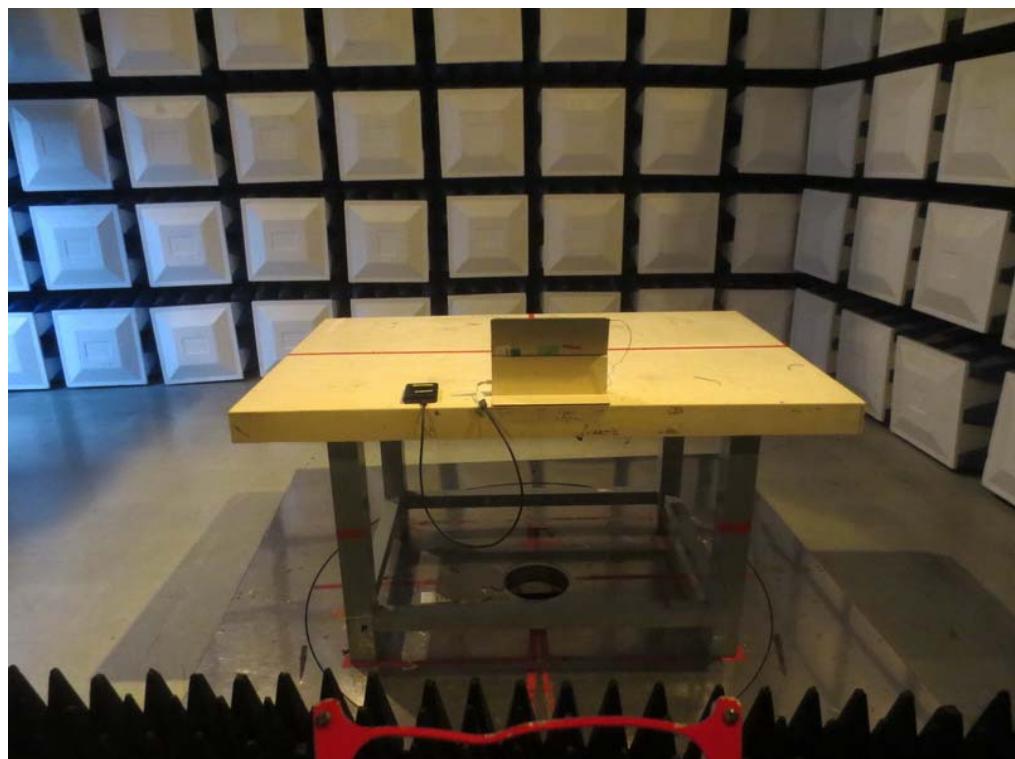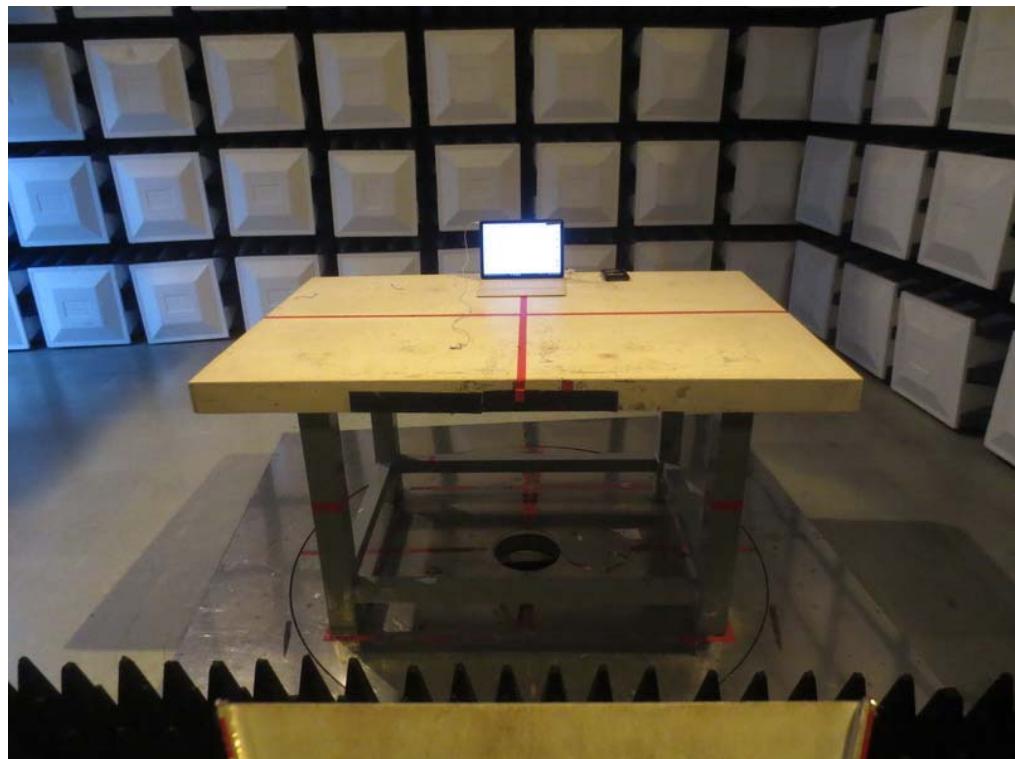
Radiated emission above 1 GHz test photos**Mode 8**

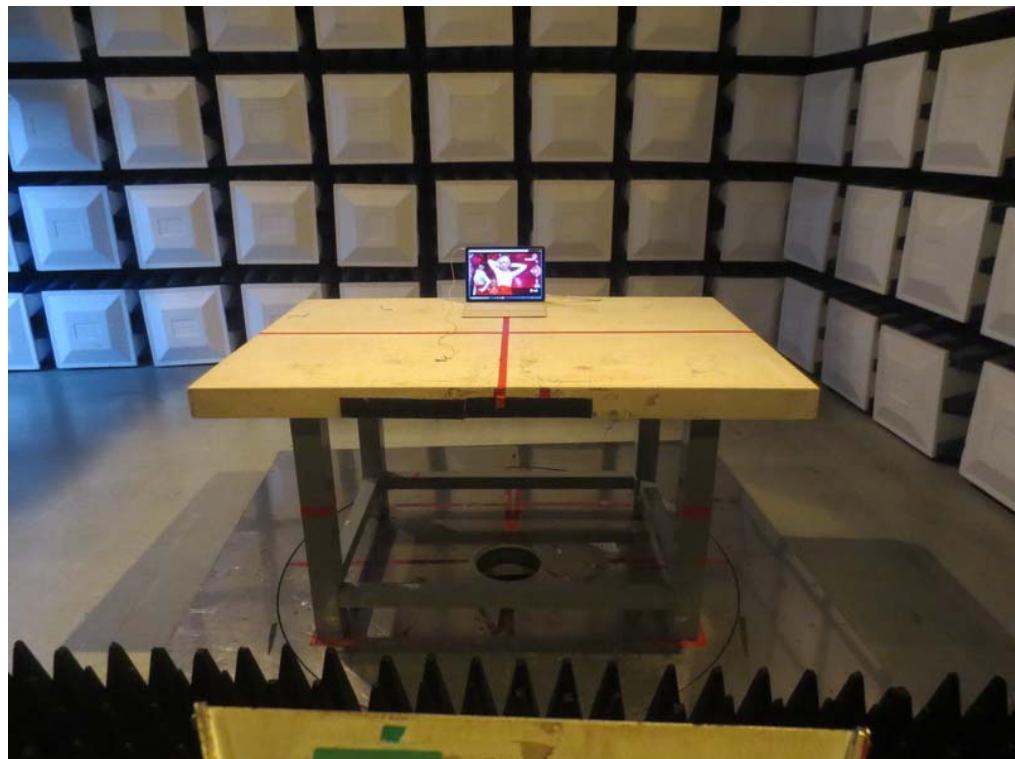Radiated emission above 1 GHz test photos**Mode 9**

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Phase: Line

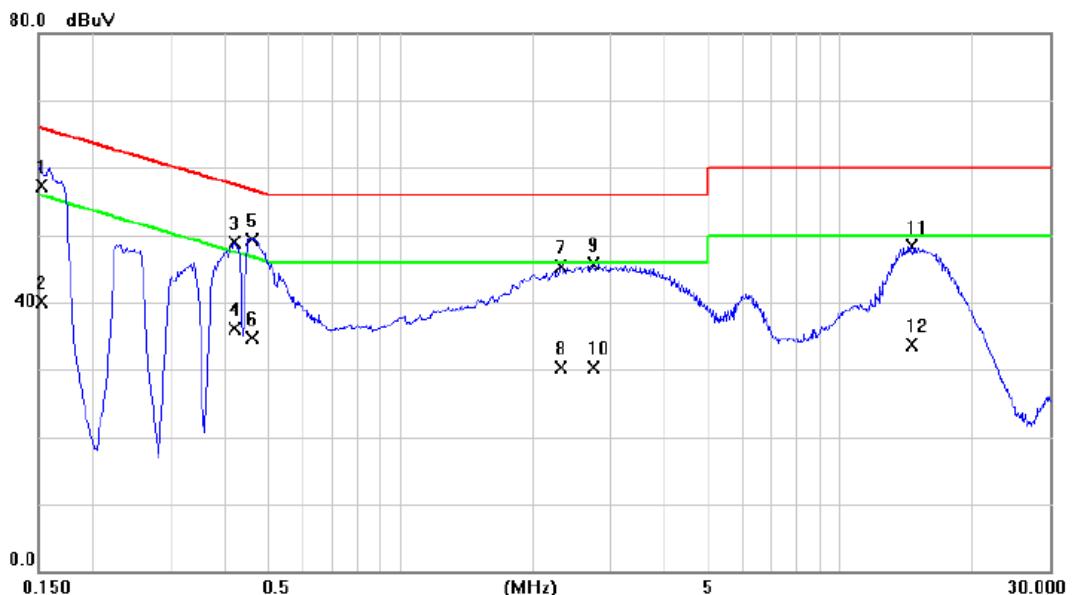

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	47.69	9.67	57.36	65.88	-8.52	QP	
2		0.1522	30.50	9.67	40.17	55.88	-15.71	AVG	
3		0.4200	39.07	9.81	48.88	57.45	-8.57	QP	
4		0.4200	26.30	9.81	36.11	47.45	-11.34	AVG	
5	*	0.4582	39.54	9.82	49.36	56.73	-7.37	QP	
6		0.4582	24.80	9.82	34.62	46.73	-12.11	AVG	
7		2.3168	35.36	9.92	45.28	56.00	-10.72	QP	
8		2.3168	20.30	9.92	30.22	46.00	-15.78	AVG	
9		2.7443	35.81	9.88	45.69	56.00	-10.31	QP	
10		2.7443	20.50	9.88	30.38	46.00	-15.62	AVG	
11		14.4983	38.08	10.26	48.34	60.00	-11.66	QP	
12		14.4983	23.40	10.26	33.66	50.00	-16.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Phase: Neutral

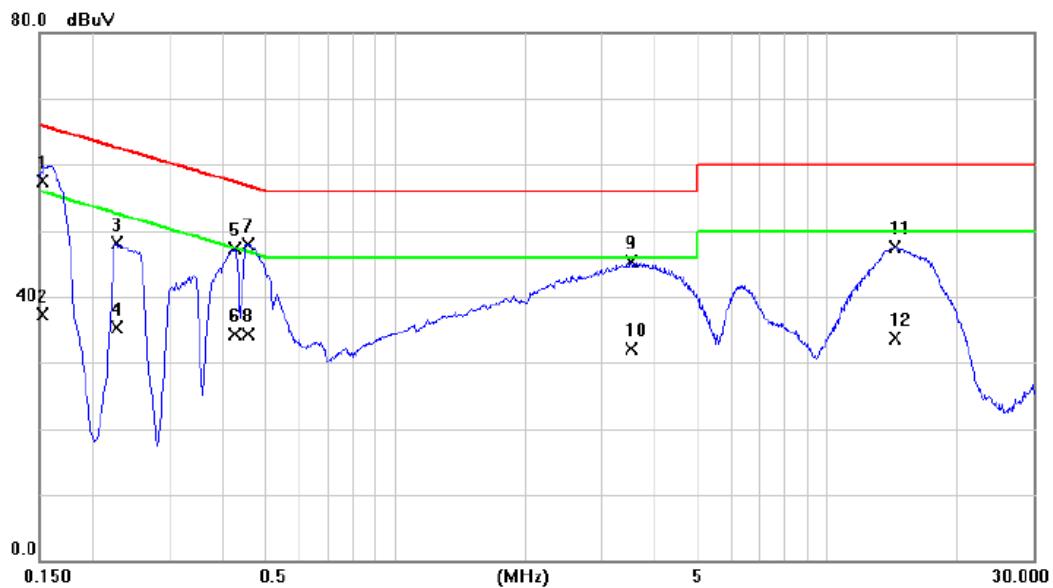

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1522	47.98	9.59	57.57	65.88	-8.31	QP	
2		0.1522	27.80	9.59	37.39	55.88	-18.49	AVG	
3		0.2265	38.51	9.62	48.13	62.58	-14.45	QP	
4		0.2265	25.70	9.62	35.32	52.58	-17.26	AVG	
5		0.4267	37.60	9.64	47.24	57.32	-10.08	QP	
6		0.4267	24.60	9.64	34.24	47.32	-13.08	AVG	
7		0.4560	38.32	9.64	47.96	56.77	-8.81	QP	
8		0.4560	24.60	9.64	34.24	46.77	-12.53	AVG	
9		3.5183	35.49	9.89	45.38	56.00	-10.62	QP	
10		3.5183	22.20	9.89	32.09	46.00	-13.91	AVG	
11		14.3408	37.28	10.24	47.52	60.00	-12.48	QP	
12		14.3408	23.50	10.24	33.74	50.00	-16.26	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)


Phase: Line

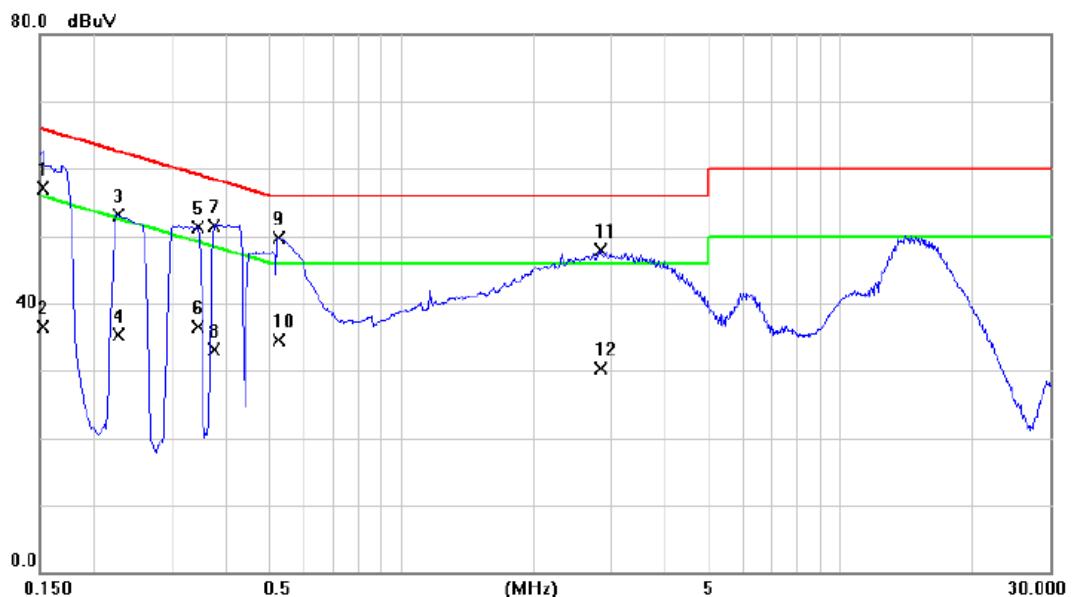

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dB	Detector	
1		0.1522	47.50	9.67	57.17	65.88	-8.71	QP
2		0.1522	26.80	9.67	36.47	55.88	-19.41	AVG
3		0.2265	43.34	9.72	53.06	62.58	-9.52	QP
4		0.2265	25.50	9.72	35.22	52.58	-17.36	AVG
5		0.3435	41.54	9.78	51.32	59.12	-7.80	QP
6		0.3435	26.70	9.78	36.48	49.12	-12.64	AVG
7		0.3750	41.73	9.80	51.53	58.39	-6.86	QP
8		0.3750	23.30	9.80	33.10	48.39	-15.29	AVG
9	*	0.5257	39.97	9.83	49.80	56.00	-6.20	QP
10		0.5257	24.70	9.83	34.53	46.00	-11.47	AVG
11		2.8343	37.98	9.86	47.84	56.00	-8.16	QP
12		2.8343	20.40	9.86	30.26	46.00	-15.74	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)


Phase: Neutral

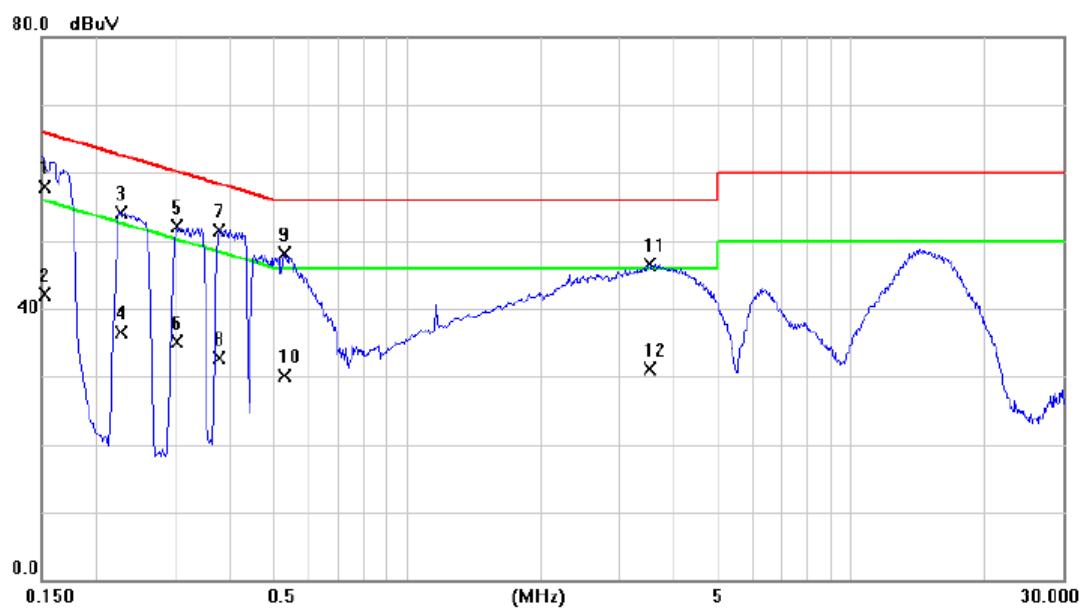

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	48.40	9.59	57.99	65.88	-7.89	QP	
2		0.1522	32.50	9.59	42.09	55.88	-13.79	AVG	
3		0.2265	44.58	9.62	54.20	62.58	-8.38	QP	
4		0.2265	26.80	9.62	36.42	52.58	-16.16	AVG	
5		0.3030	42.40	9.63	52.03	60.16	-8.13	QP	
6		0.3030	25.50	9.63	35.13	50.16	-15.03	AVG	
7 *		0.3772	41.87	9.63	51.50	58.34	-6.84	QP	
8		0.3772	23.10	9.63	32.73	48.34	-15.61	AVG	
9		0.5302	38.41	9.66	48.07	56.00	-7.93	QP	
10		0.5302	20.50	9.66	30.16	46.00	-15.84	AVG	
11		3.5205	36.64	9.89	46.53	56.00	-9.47	QP	
12		3.5205	21.20	9.89	31.09	46.00	-14.91	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)


Phase: Line

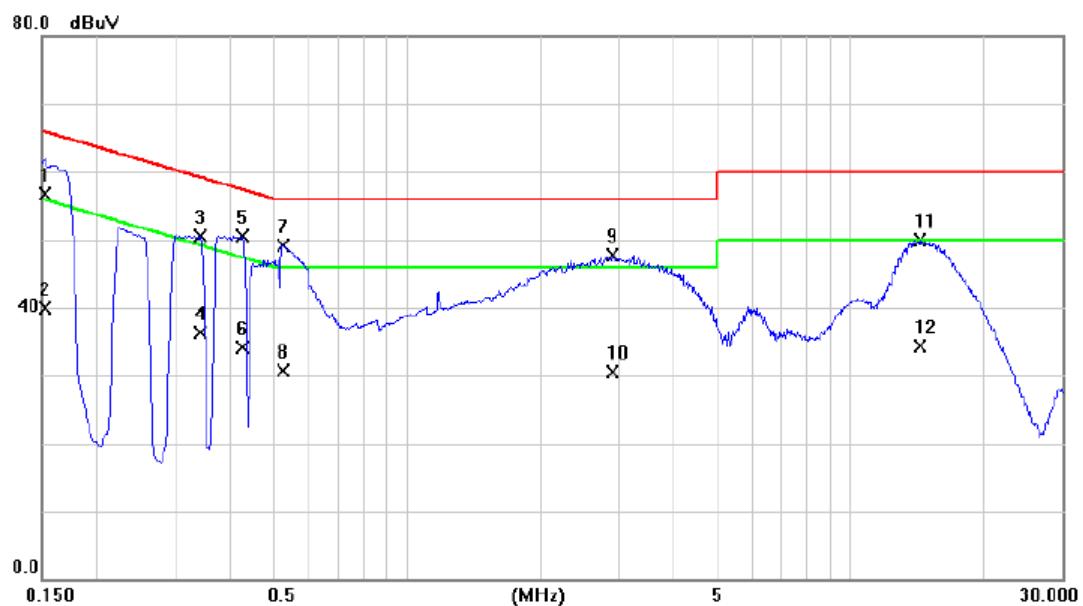

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	46.98	9.67	56.65	65.88	-9.23	QP	
2		0.1522	30.20	9.67	39.87	55.88	-16.01	AVG	
3		0.3412	40.81	9.78	50.59	59.17	-8.58	QP	
4		0.3412	26.50	9.78	36.28	49.17	-12.89	AVG	
5		0.4267	40.66	9.81	50.47	57.32	-6.85	QP	
6		0.4267	24.20	9.81	34.01	47.32	-13.31	AVG	
7	*	0.5257	39.36	9.83	49.19	56.00	-6.81	QP	
8		0.5257	20.80	9.83	30.63	46.00	-15.37	AVG	
9		2.9018	37.81	9.84	47.65	56.00	-8.35	QP	
10		2.9018	20.70	9.84	30.54	46.00	-15.46	AVG	
11		14.3723	39.67	10.25	49.92	60.00	-10.08	QP	
12		14.3723	24.00	10.25	34.25	50.00	-15.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)


Phase: Neutral

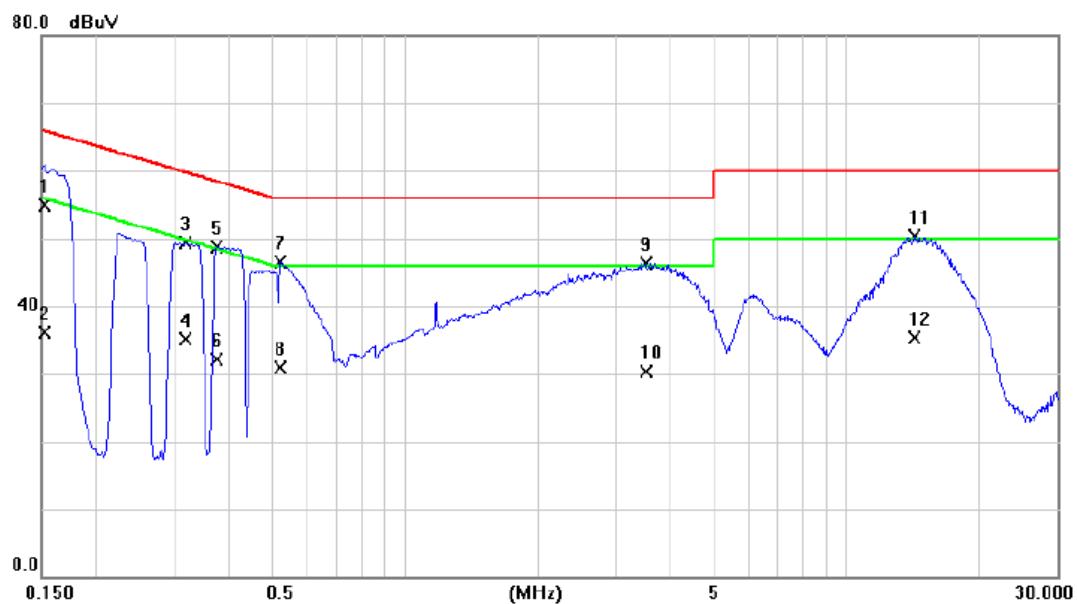

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Comment
		dBuV	dB	dBuV	dB	Detector	
1	0.1522	45.26	9.59	54.85	65.88	-11.03	QP
2	0.1522	26.50	9.59	36.09	55.88	-19.79	AVG
3	0.3187	39.71	9.63	49.34	59.74	-10.40	QP
4	0.3187	25.40	9.63	35.03	49.74	-14.71	AVG
5	0.3750	39.05	9.64	48.69	58.39	-9.70	QP
6	0.3750	22.50	9.64	32.14	48.39	-16.25	AVG
7 *	0.5235	36.92	9.65	46.57	56.00	-9.43	QP
8	0.5235	21.30	9.65	30.95	46.00	-15.05	AVG
9	3.5070	36.44	9.89	46.33	56.00	-9.67	QP
10	3.5070	20.50	9.89	30.39	46.00	-15.61	AVG
11	14.1968	40.01	10.23	50.24	60.00	-9.76	QP
12	14.1968	25.10	10.23	35.33	50.00	-14.67	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)


Phase: Line

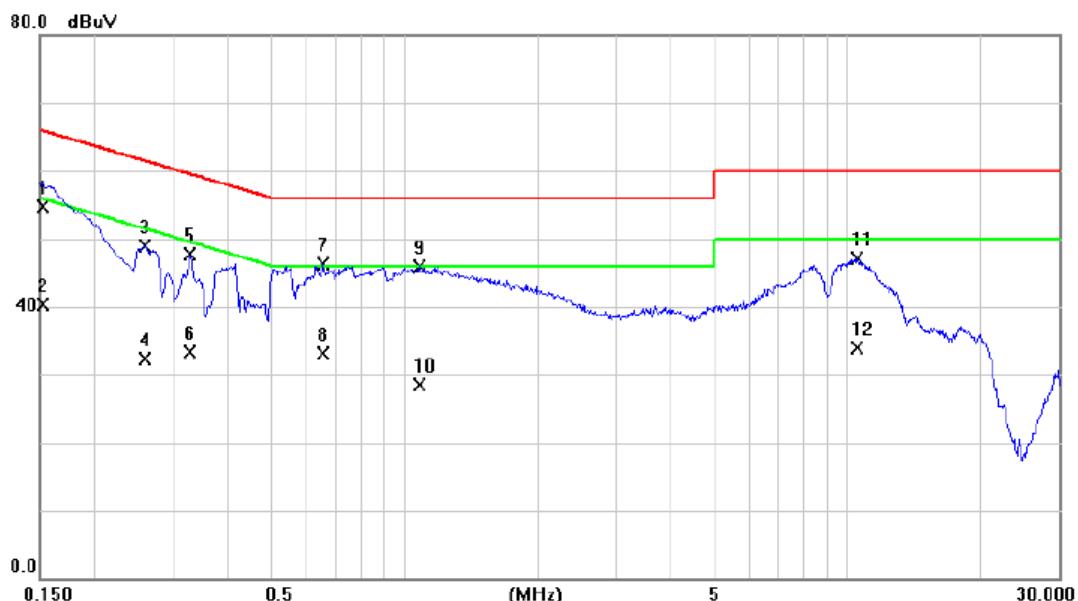

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		dBuV	dB	dBuV	dB			
1	0.1522	45.12	9.65	54.77	65.88	-11.11	QP	
2	0.1522	30.60	9.65	40.25	55.88	-15.63	AVG	
3	0.2602	39.14	9.72	48.86	61.43	-12.57	QP	
4	0.2602	22.50	9.72	32.22	51.43	-19.21	AVG	
5	0.3277	37.90	9.75	47.65	59.51	-11.86	QP	
6	0.3277	23.50	9.75	33.25	49.51	-16.26	AVG	
7 *	0.6561	36.42	9.85	46.27	56.00	-9.73	QP	
8	0.6561	23.30	9.85	33.15	46.00	-12.85	AVG	
9	1.0814	36.09	9.91	46.00	56.00	-10.00	QP	
10	1.0814	18.60	9.91	28.51	46.00	-17.49	AVG	
11	10.5225	37.20	9.84	47.04	60.00	-12.96	QP	
12	10.5225	24.00	9.84	33.84	50.00	-16.16	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)


Phase: Neutral

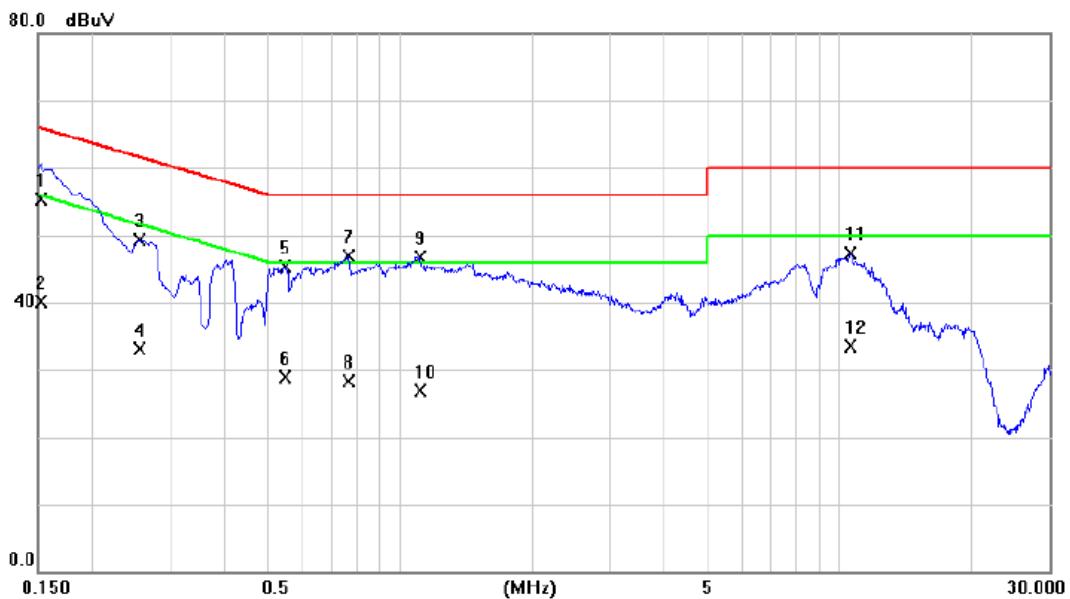

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1522	45.69	9.57	55.26	65.88	-10.62	QP	
2		0.1522	30.50	9.57	40.07	55.88	-15.81	AVG	
3		0.2558	39.74	9.60	49.34	61.57	-12.23	QP	
4		0.2558	23.50	9.60	33.10	51.57	-18.47	AVG	
5		0.5482	35.68	9.63	45.31	56.00	-10.69	QP	
6		0.5482	19.20	9.63	28.83	46.00	-17.17	AVG	
7 *		0.7665	37.18	9.66	46.84	56.00	-9.16	QP	
8		0.7665	18.70	9.66	28.36	46.00	-17.64	AVG	
9		1.1152	37.05	9.71	46.76	56.00	-9.24	QP	
10		1.1152	17.20	9.71	26.91	46.00	-19.09	AVG	
11		10.6148	37.41	9.83	47.24	60.00	-12.76	QP	
12		10.6148	23.60	9.83	33.43	50.00	-16.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Phase: Line

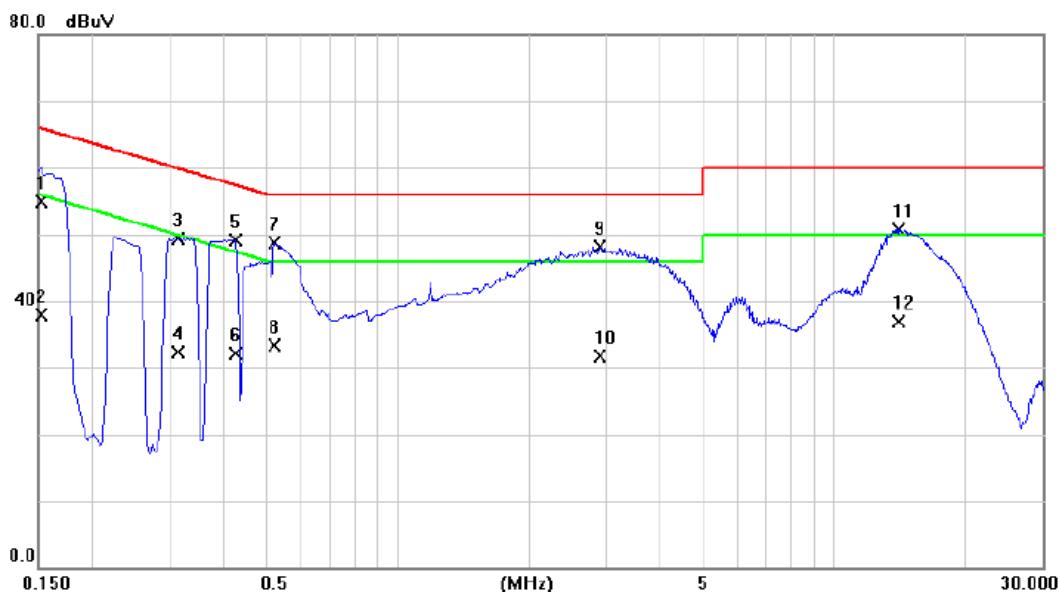

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure-ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1522	45.23	9.67	54.90	65.88	-10.98	QP	
2	0.1522	28.20	9.67	37.87	55.88	-18.01	AVG	
3	0.3141	39.59	9.77	49.36	59.86	-10.50	QP	
4	0.3141	22.50	9.77	32.27	49.86	-17.59	AVG	
5	0.4245	39.33	9.81	49.14	57.36	-8.22	QP	
6	0.4245	22.30	9.81	32.11	47.36	-15.25	AVG	
7 *	0.5212	38.93	9.82	48.75	56.00	-7.25	QP	
8	0.5212	23.50	9.82	33.32	46.00	-12.68	AVG	
9	2.8950	38.27	9.84	48.11	56.00	-7.89	QP	
10	2.8950	21.80	9.84	31.64	46.00	-14.36	AVG	
11	14.0640	40.56	10.24	50.80	60.00	-9.20	QP	
12	14.0640	26.70	10.24	36.94	50.00	-13.06	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Phase: Neutral

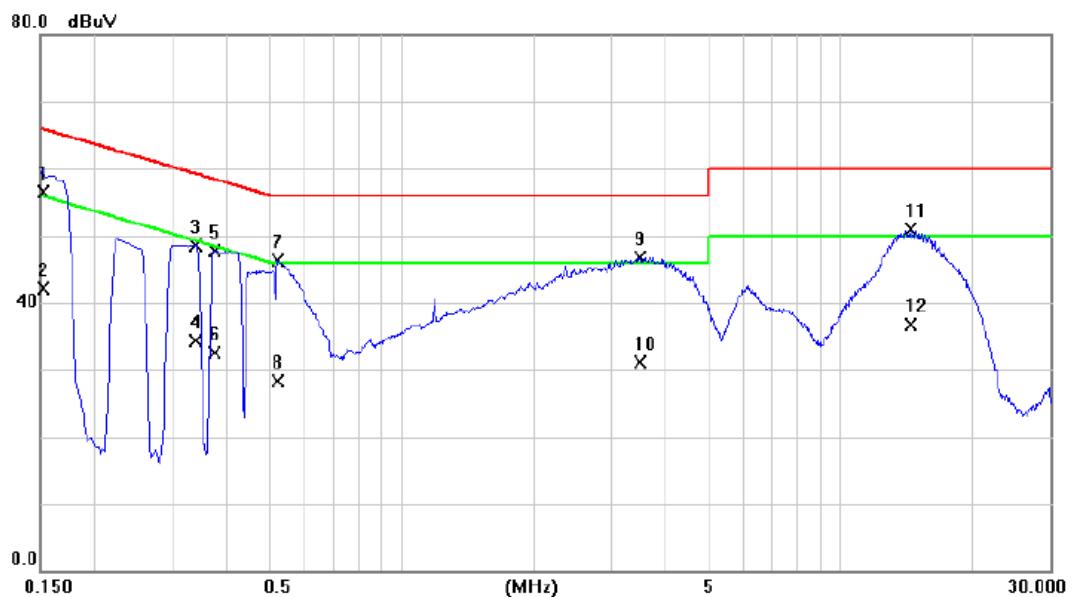

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1522	46.97	9.59	56.56	65.88	-9.32	QP	
2		0.1522	32.50	9.59	42.09	55.88	-13.79	AVG	
3		0.3390	38.97	9.63	48.60	59.23	-10.63	QP	
4		0.3390	24.60	9.63	34.23	49.23	-15.00	AVG	
5		0.3750	38.07	9.64	47.71	58.39	-10.68	QP	
6		0.3750	22.80	9.64	32.44	48.39	-15.95	AVG	
7		0.5212	36.71	9.65	46.36	56.00	-9.64	QP	
8		0.5212	18.60	9.65	28.25	46.00	-17.75	AVG	
9		3.4890	36.88	9.88	46.76	56.00	-9.24	QP	
10		3.4890	21.20	9.88	31.08	46.00	-14.92	AVG	
11	*	14.4330	40.57	10.25	50.82	60.00	-9.18	QP	
12		14.4330	26.50	10.25	36.75	50.00	-13.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)


Phase: Line

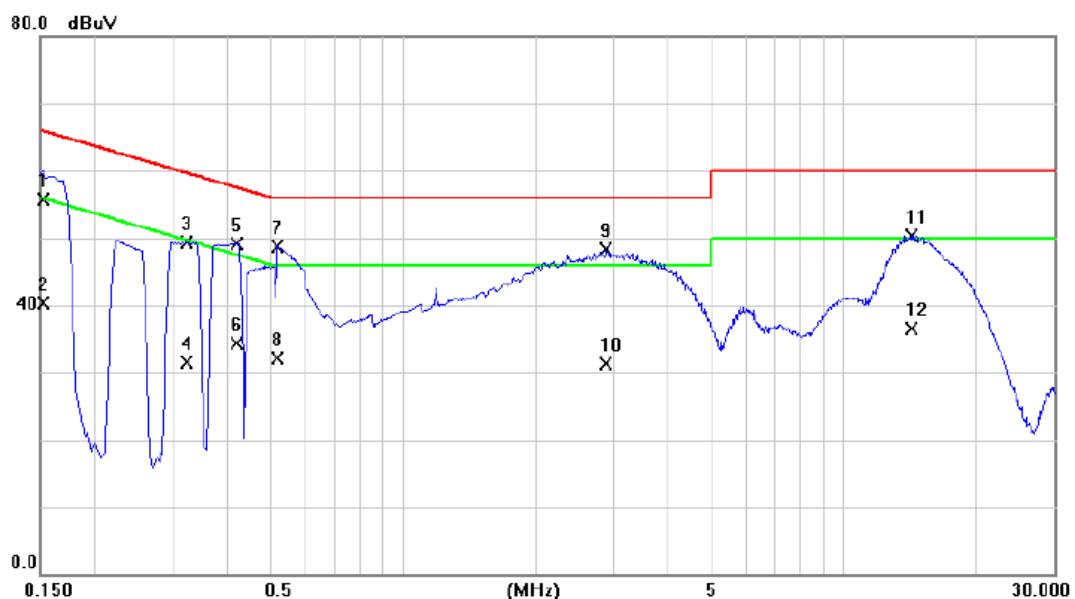

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	46.12	9.67	55.79	65.88	-10.09	QP	
2		0.1522	30.60	9.67	40.27	55.88	-15.61	AVG	
3		0.3232	39.59	9.77	49.36	59.62	-10.26	QP	
4		0.3232	21.80	9.77	31.57	49.62	-18.05	AVG	
5		0.4200	39.30	9.81	49.11	57.45	-8.34	QP	
6		0.4200	24.50	9.81	34.31	47.45	-13.14	AVG	
7 *		0.5190	38.80	9.82	48.62	56.00	-7.38	QP	
8		0.5190	22.20	9.82	32.02	46.00	-13.98	AVG	
9		2.8905	38.36	9.85	48.21	56.00	-7.79	QP	
10		2.8905	21.50	9.85	31.35	46.00	-14.65	AVG	
11		14.2080	40.15	10.24	50.39	60.00	-9.61	QP	
12		14.2080	26.30	10.24	36.54	50.00	-13.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)


Phase: Neutral

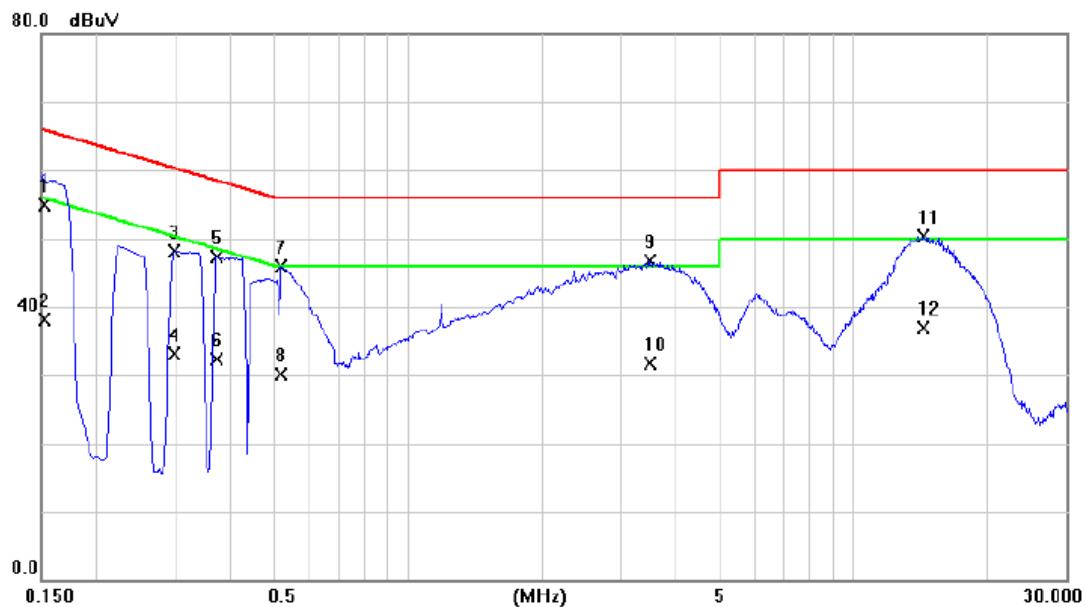

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	45.28	9.59	54.87	65.88	-11.01	QP	
2		0.1522	28.60	9.59	38.19	55.88	-17.69	AVG	
3		0.2985	38.54	9.63	48.17	60.28	-12.11	QP	
4		0.2985	23.50	9.63	33.13	50.28	-17.15	AVG	
5		0.3727	37.61	9.64	47.25	58.44	-11.19	QP	
6		0.3727	22.60	9.64	32.24	48.44	-16.20	AVG	
7		0.5190	36.25	9.65	45.90	56.00	-10.10	QP	
8		0.5190	20.50	9.65	30.15	46.00	-15.85	AVG	
9	*	3.4868	36.81	9.88	46.69	56.00	-9.31	QP	
10		3.4868	21.80	9.88	31.68	46.00	-14.32	AVG	
11		14.3543	40.16	10.24	50.40	60.00	-9.60	QP	
12		14.3543	26.70	10.24	36.94	50.00	-13.06	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Phase: Line

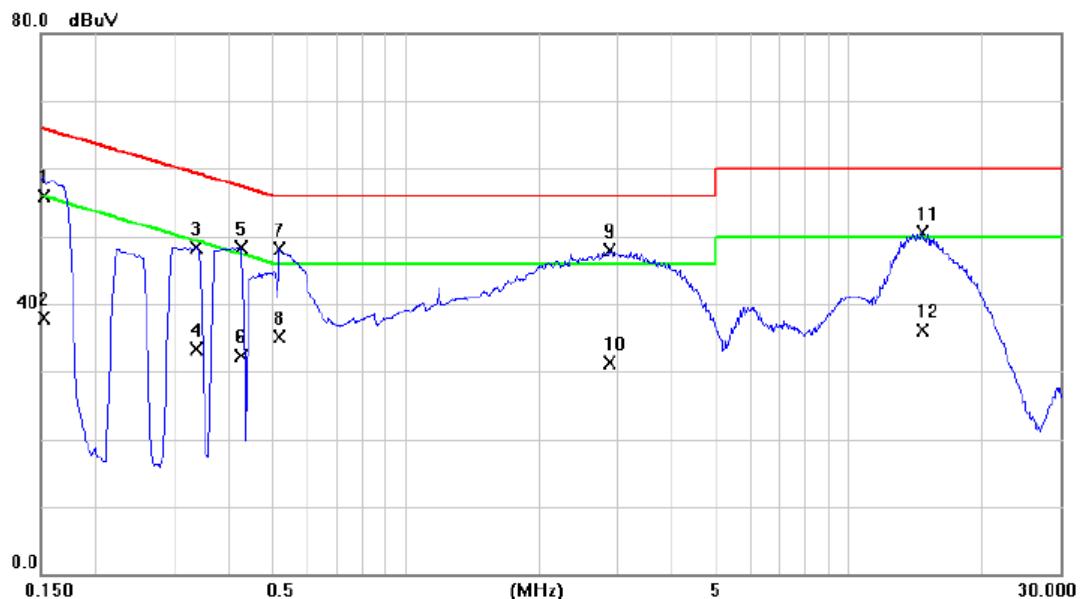

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment	
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1522	46.15	9.67	55.82	65.88	-10.06	QP	
2		0.1522	28.20	9.67	37.87	55.88	-18.01	AVG	
3		0.3367	38.60	9.77	48.37	59.28	-10.91	QP	
4		0.3367	23.60	9.77	33.37	49.28	-15.91	AVG	
5		0.4245	38.53	9.81	48.34	57.36	-9.02	QP	
6		0.4245	22.50	9.81	32.31	47.36	-15.05	AVG	
7 *		0.5190	38.26	9.82	48.08	56.00	-7.92	QP	
8		0.5190	25.20	9.82	35.02	46.00	-10.98	AVG	
9		2.8928	38.12	9.84	47.96	56.00	-8.04	QP	
10		2.8928	21.40	9.84	31.24	46.00	-14.76	AVG	
11		14.6085	40.17	10.26	50.43	60.00	-9.57	QP	
12		14.6085	25.80	10.26	36.06	50.00	-13.94	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Phase: Neutral

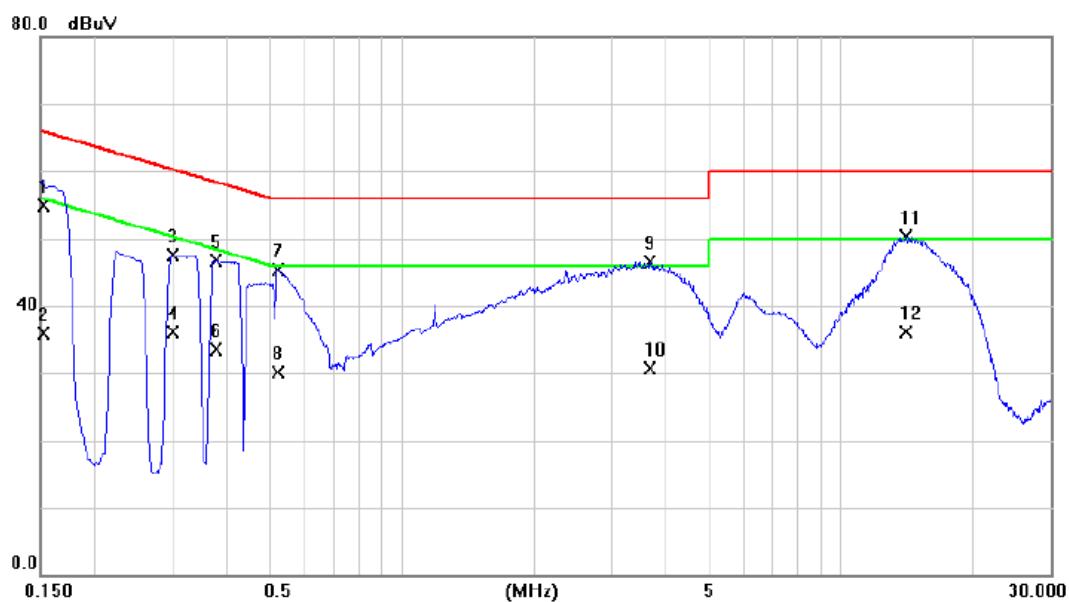

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1522	45.32	9.59	54.91	65.88	-10.97	QP	
2		0.1522	26.40	9.59	35.99	55.88	-19.89	AVG	
3		0.3007	37.96	9.63	47.59	60.22	-12.63	QP	
4		0.3007	26.50	9.63	36.13	50.22	-14.09	AVG	
5		0.3772	37.05	9.63	46.68	58.34	-11.66	QP	
6		0.3772	23.80	9.63	33.43	48.34	-14.91	AVG	
7		0.5235	35.71	9.65	45.36	56.00	-10.64	QP	
8		0.5235	20.50	9.65	30.15	46.00	-15.85	AVG	
9	*	3.6578	36.63	9.91	46.54	56.00	-9.46	QP	
10		3.6578	20.80	9.91	30.71	46.00	-15.29	AVG	
11		14.0370	40.15	10.22	50.37	60.00	-9.63	QP	
12		14.0370	25.80	10.22	36.02	50.00	-13.98	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)


Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)

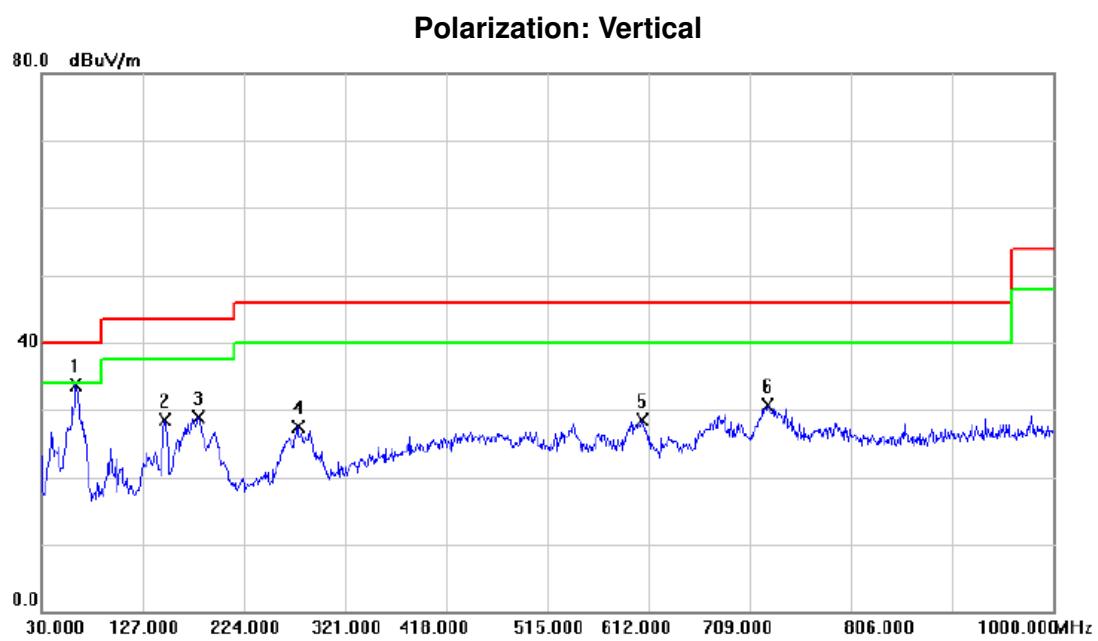

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	63.4650	53.54	-19.89	33.65	40.00	-6.35	QP	
2		147.8550	45.99	-17.58	28.41	43.50	-15.09	QP	
3		180.3500	44.49	-15.68	28.81	43.50	-14.69	QP	
4		275.8950	39.43	-11.95	27.48	46.00	-18.52	QP	
5		606.6650	32.37	-3.85	28.52	46.00	-17.48	QP	
6		725.9750	32.22	-1.60	30.62	46.00	-15.38	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

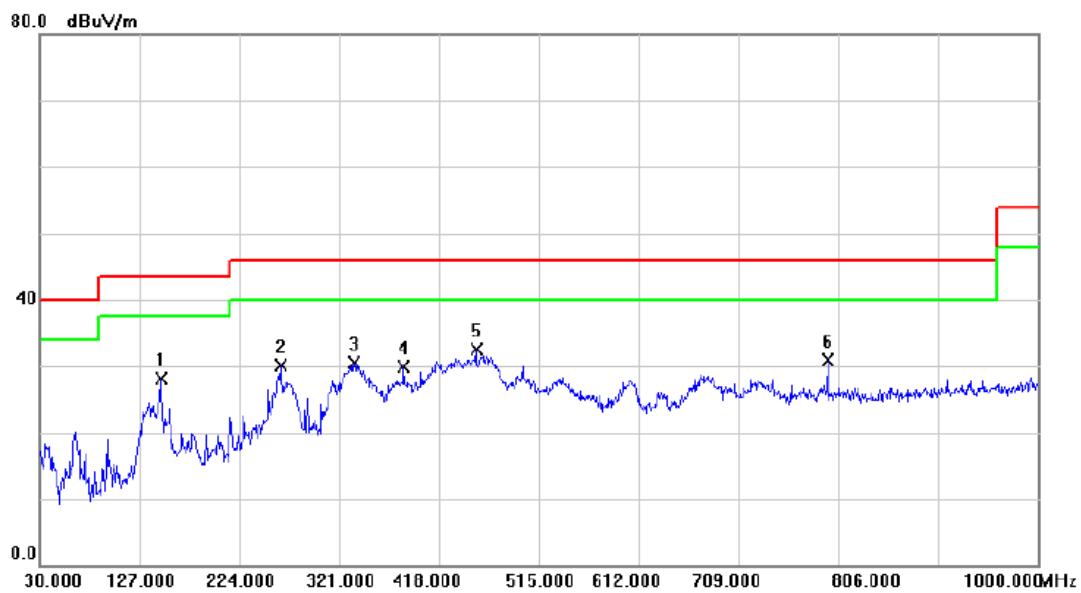

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		147.8550	45.60	-17.58	28.02	43.50	-15.48	QP	
2		264.2550	42.25	-12.21	30.04	46.00	-15.96	QP	
3		336.0350	40.29	-9.69	30.60	46.00	-15.40	QP	
4		384.0500	37.80	-7.99	29.81	46.00	-16.19	QP	
5	*	454.3750	39.36	-6.94	32.42	46.00	-13.58	QP	
6		795.8150	32.05	-1.07	30.98	46.00	-15.02	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)


Polarization: Vertical

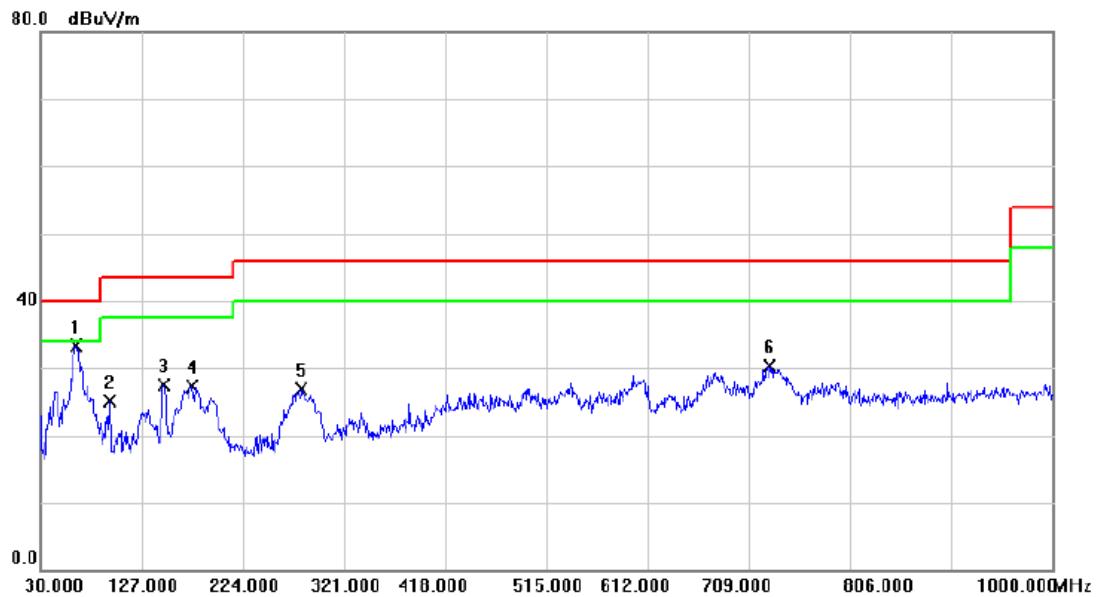

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level dBuV	Factor dB	ment dBuV/m				
1	*	64.4350	53.21	-19.96	33.25	40.00	-6.75	QP	
2		95.9600	43.75	-18.74	25.01	43.50	-18.49	QP	
3		148.8250	45.00	-17.43	27.57	43.50	-15.93	QP	
4		175.9850	43.27	-15.92	27.35	43.50	-16.15	QP	
5		280.7450	38.73	-11.87	26.86	46.00	-19.14	QP	
6		728.8850	31.96	-1.57	30.39	46.00	-15.61	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)

Polarization: Horizontal

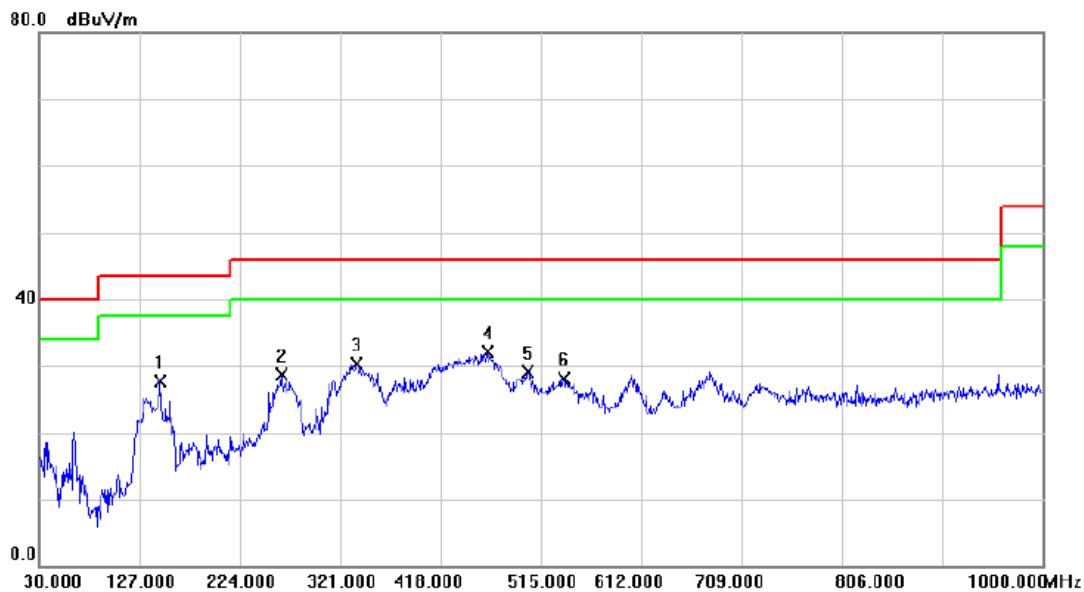

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
1		147.3700	45.37	-17.64	27.73	43.50	-15.77	QP
2		264.2550	40.82	-12.21	28.61	46.00	-17.39	QP
3		336.5200	39.96	-9.66	30.30	46.00	-15.70	QP
4	*	464.0750	38.53	-6.46	32.07	46.00	-13.93	QP
5		502.8750	34.95	-5.93	29.02	46.00	-16.98	QP
6		537.3100	33.21	-5.12	28.09	46.00	-17.91	QP

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)


Polarization: Vertical



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	63.4650	54.18	-19.89	34.29	40.00	-5.71	QP	
2		148.8250	43.16	-17.43	25.73	43.50	-17.77	QP	
3		174.5300	43.28	-16.01	27.27	43.50	-16.23	QP	
4		285.1100	38.88	-11.80	27.08	46.00	-18.92	QP	
5		359.8000	35.34	-8.52	26.82	46.00	-19.18	QP	
6		607.6350	33.14	-3.81	29.33	46.00	-16.67	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)


Polarization: Horizontal

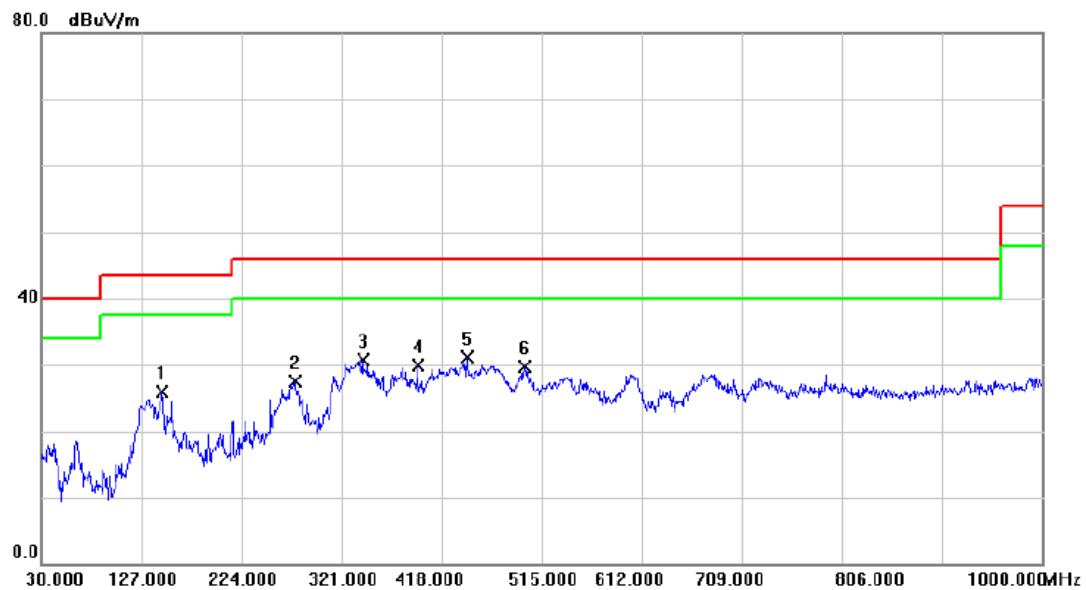

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin	Detector	Comment
1		147.3700	43.60	-17.64	25.96	43.50	-17.54	QP	
2		275.8950	39.42	-11.95	27.47	46.00	-18.53	QP	
3		341.8550	40.09	-9.37	30.72	46.00	-15.28	QP	
4		395.2050	38.05	-8.14	29.91	46.00	-16.09	QP	
5	*	442.7350	38.40	-7.39	31.01	46.00	-14.99	QP	
6		498.5100	35.62	-6.01	29.61	46.00	-16.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)

Polarization: Vertical

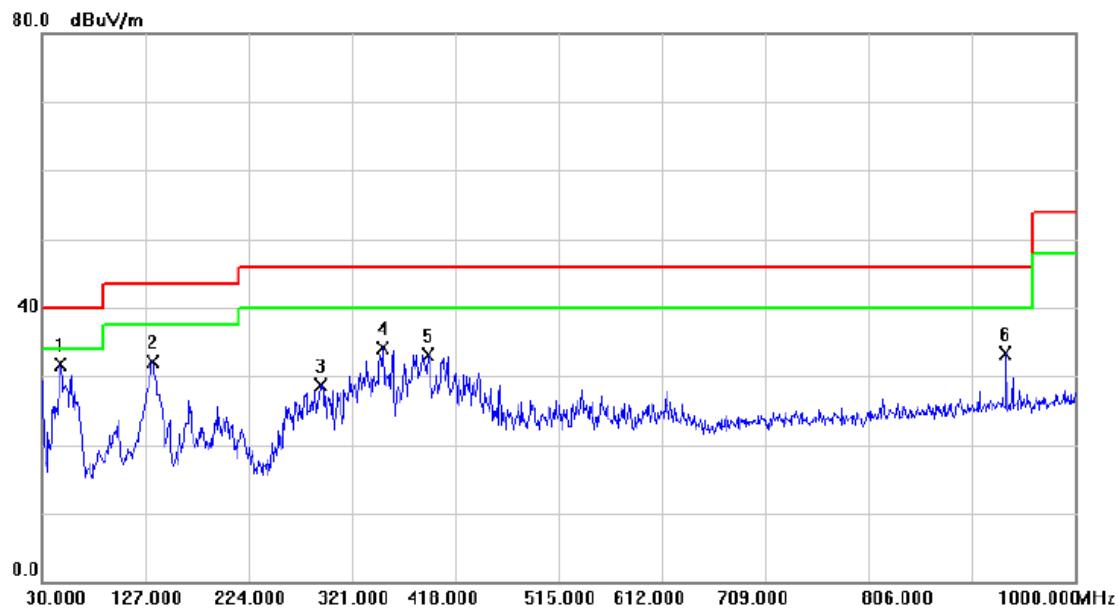

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	47.9450	49.61	-17.92	31.69	40.00	-8.31	QP	
2		134.2750	51.31	-19.13	32.18	43.50	-11.32	QP	
3		292.3850	40.37	-11.67	28.70	46.00	-17.30	QP	
4		349.6150	42.98	-8.96	34.02	46.00	-11.98	QP	
5		392.2950	41.29	-8.10	33.19	46.00	-12.81	QP	
6		935.0100	31.90	1.36	33.26	46.00	-12.74	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)


Polarization: Horizontal



No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		68.3150	40.65	-20.24	20.41	40.00	-19.59	QP	
2		137.6700	48.36	-18.84	29.52	43.50	-13.98	QP	
3		216.2400	38.50	-14.50	24.00	46.00	-22.00	QP	
4		292.8700	42.58	-11.67	30.91	46.00	-15.09	QP	
5	*	382.1100	44.62	-7.97	36.65	46.00	-9.35	QP	
6		768.6550	26.93	-1.12	25.81	46.00	-20.19	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

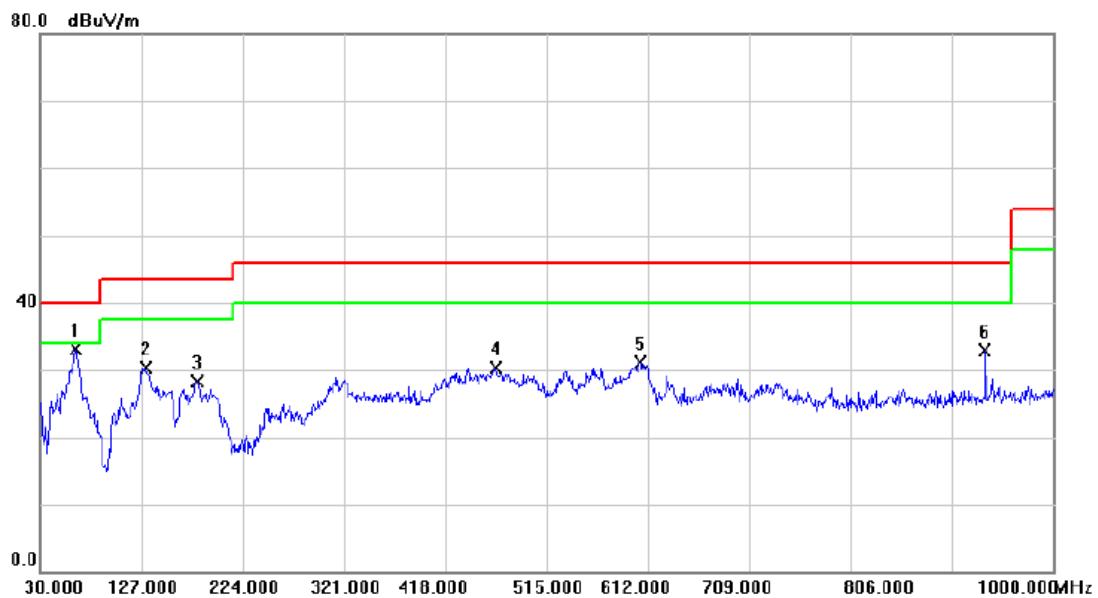

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	64.4350	52.99	-19.96	33.03	40.00	-6.97	QP	
2		131.8500	49.67	-19.33	30.34	43.50	-13.16	QP	
3		180.8350	43.97	-15.67	28.30	43.50	-15.20	QP	
4		466.9850	36.61	-6.32	30.29	46.00	-15.71	QP	
5		604.2400	35.09	-3.91	31.18	46.00	-14.82	QP	
6		935.0100	31.52	1.36	32.88	46.00	-13.12	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)

Polarization: Horizontal

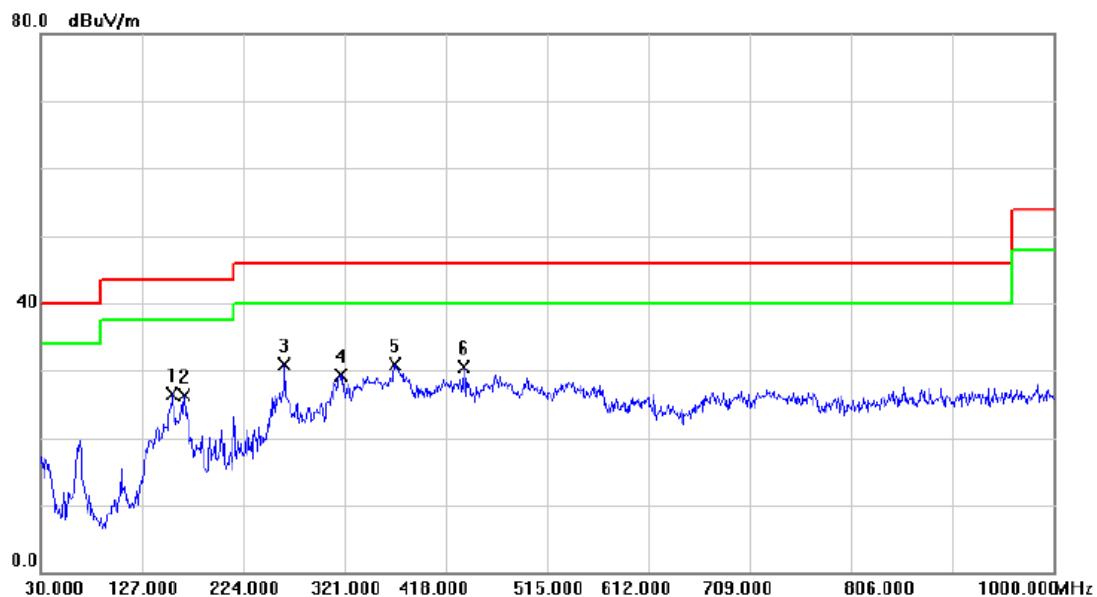

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		156.1000	43.18	-16.72	26.46	43.50	-17.04	QP	
2		168.2250	42.64	-16.30	26.34	43.50	-17.16	QP	
3	*	263.7700	43.18	-12.23	30.95	46.00	-15.05	QP	
4		317.6050	39.93	-10.64	29.29	46.00	-16.71	QP	
5		369.9850	39.02	-8.09	30.93	46.00	-15.07	QP	
6		435.9450	38.08	-7.62	30.46	46.00	-15.54	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)

Polarization: Vertical



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment	
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	64.4350	53.59	-19.96	33.63	40.00	-6.37	QP	
2		136.2150	46.94	-18.95	27.99	43.50	-15.51	QP	
3		195.8700	44.45	-15.59	28.86	43.50	-14.64	QP	
4		330.7000	40.90	-9.98	30.92	46.00	-15.08	QP	
5		444.6750	37.41	-7.33	30.08	46.00	-15.92	QP	
6		935.0100	30.95	1.36	32.31	46.00	-13.69	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)

Polarization: Horizontal



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		156.1000	43.44	-16.72	26.72	43.50	-16.78	QP	
2	*	168.2250	43.86	-16.30	27.56	43.50	-15.94	QP	
3		263.7700	40.82	-12.23	28.59	46.00	-17.41	QP	
4		367.5600	37.24	-8.19	29.05	46.00	-16.95	QP	
5		449.5250	36.75	-7.17	29.58	46.00	-16.42	QP	
6		534.4000	33.11	-5.16	27.95	46.00	-18.05	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)

Polarization: Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.1250	49.80	-16.22	33.58	40.00	-6.42	QP	
2		127.4850	46.62	-19.48	27.14	43.50	-16.36	QP	
3		165.8000	44.98	-16.32	28.66	43.50	-14.84	QP	
4		180.3500	43.98	-15.68	28.30	43.50	-15.20	QP	
5		697.3600	32.93	-2.13	30.80	46.00	-15.20	QP	
6		935.0100	31.61	1.36	32.97	46.00	-13.03	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal



No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level dBuV	Factor dB	ment dBuV/m				
1		150.7650	41.35	-17.20	24.15	43.50	-19.35	QP	
2		341.8550	38.72	-9.37	29.35	46.00	-16.65	QP	
3	*	433.5200	38.70	-7.70	31.00	46.00	-15.00	QP	
4		607.6350	31.12	-3.81	27.31	46.00	-18.69	QP	
5		675.0500	30.52	-2.66	27.86	46.00	-18.14	QP	
6		727.9150	29.87	-1.58	28.29	46.00	-17.71	QP	

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Type C R/W+earphone+Battery(SUNWODA)


Polarization: Vertical

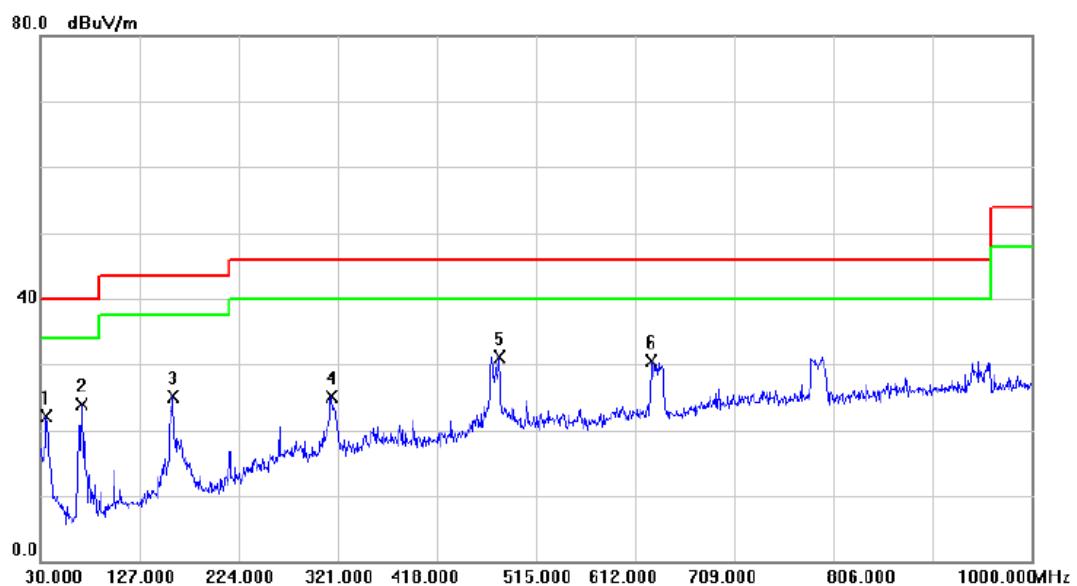

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		36.3050	35.57	-13.50	22.07	40.00	-17.93	QP	
2		70.7400	44.36	-20.39	23.97	40.00	-16.03	QP	
3		159.9800	41.56	-16.37	25.19	43.50	-18.31	QP	
4		315.1800	35.83	-10.77	25.06	46.00	-20.94	QP	
5	*	479.1100	37.04	-5.95	31.09	46.00	-14.91	QP	
6		628.4900	33.91	-3.34	30.57	46.00	-15.43	QP	

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Type C R/W+earphone+Battery(SUNWODA)


Polarization: Horizontal

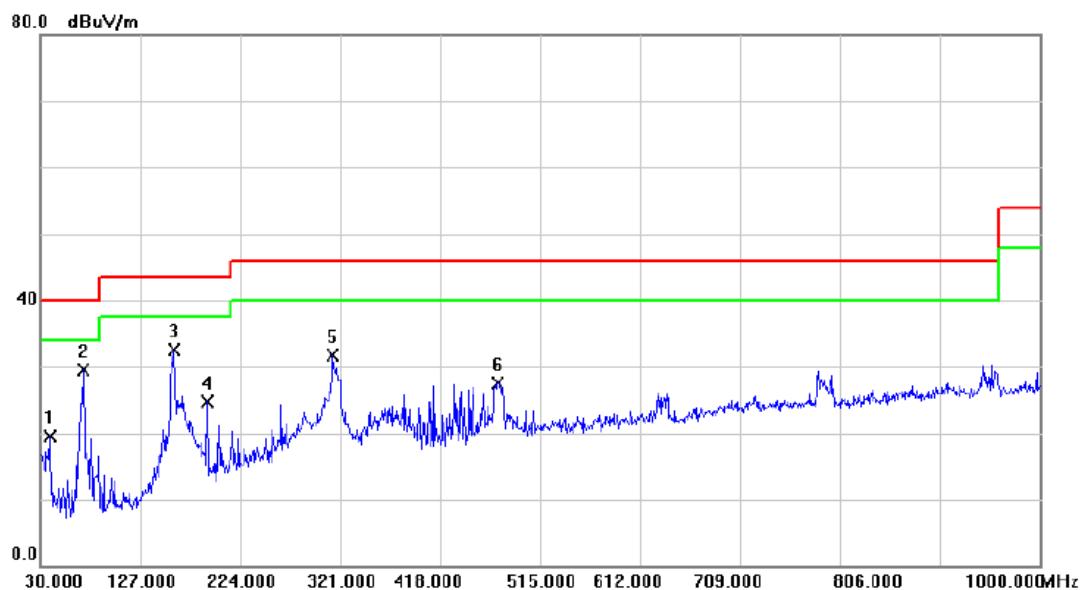

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		39.2150	34.73	-15.18	19.55	40.00	-20.45	QP	
2	*	71.7100	49.93	-20.42	29.51	40.00	-10.49	QP	
3		159.9800	48.81	-16.37	32.44	43.50	-11.06	QP	
4		191.9900	40.23	-15.54	24.69	43.50	-18.81	QP	
5		314.2100	42.42	-10.81	31.61	46.00	-14.39	QP	
6		474.2600	33.57	-5.98	27.59	46.00	-18.41	QP	

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Charge to pen+earphone+Battery(SUNWODA)


Polarization: Vertical

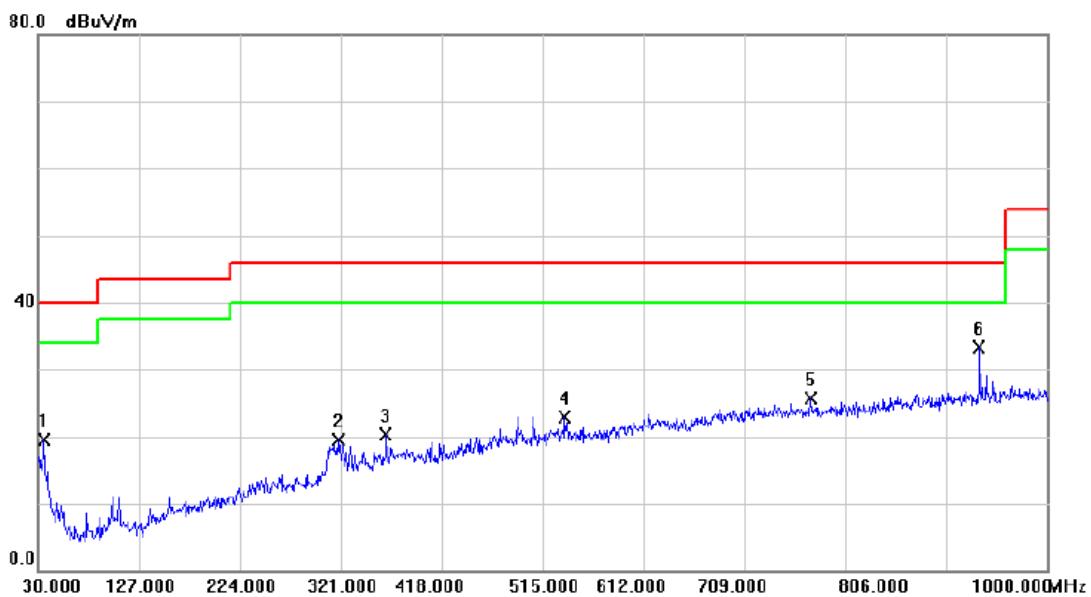

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		35.8200	32.78	-13.21	19.57	40.00	-20.43	QP	
2		318.5750	30.08	-10.60	19.48	46.00	-26.52	QP	
3		364.6500	28.64	-8.31	20.33	46.00	-25.67	QP	
4		536.8250	28.06	-5.13	22.93	46.00	-23.07	QP	
5		773.0200	26.73	-1.04	25.69	46.00	-20.31	QP	
6	*	935.0100	31.91	1.36	33.27	46.00	-12.73	QP	

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Charge to pen+earphone+Battery(SUNWODA)

Polarization: Horizontal

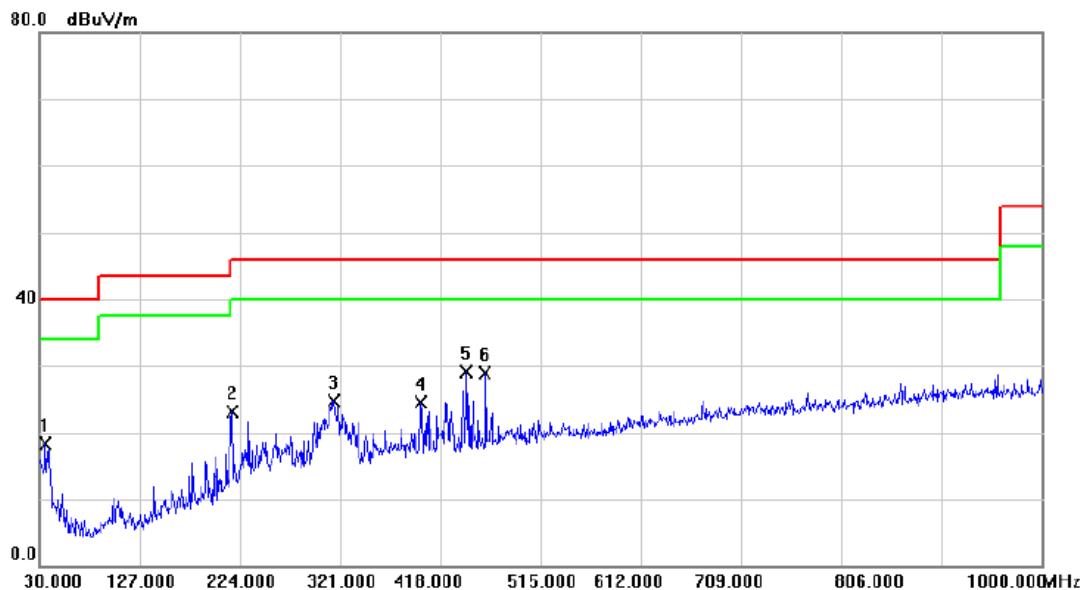


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.3050	31.77	-13.50	18.27	40.00	-21.73	QP	
2		216.2400	37.68	-14.50	23.18	46.00	-22.82	QP	
3		315.6650	35.48	-10.75	24.73	46.00	-21.27	QP	
4		399.5700	32.73	-8.19	24.54	46.00	-21.46	QP	
5	*	443.2200	36.44	-7.38	29.06	46.00	-16.94	QP	
6		461.6500	35.44	-6.58	28.86	46.00	-17.14	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

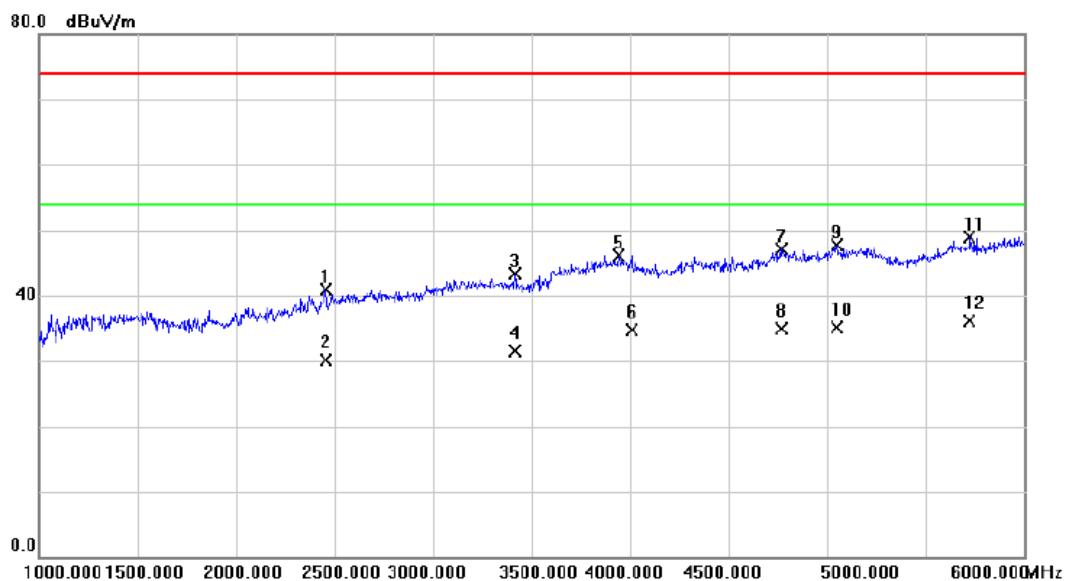

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2457.500	41.39	-0.57	40.82	74.00	-33.18	peak	
2		2457.500	30.69	-0.57	30.12	54.00	-23.88	AVG	
3		3415.000	40.57	2.68	43.25	74.00	-30.75	peak	
4		3415.000	28.84	2.68	31.52	54.00	-22.48	AVG	
5		3942.500	41.46	4.70	46.16	74.00	-27.84	peak	
6		4007.500	29.69	4.93	34.62	54.00	-19.38	AVG	
7		4767.500	40.58	6.53	47.11	74.00	-26.89	peak	
8		4767.500	28.32	6.53	34.85	54.00	-19.15	AVG	
9		5050.000	40.39	7.36	47.75	74.00	-26.25	peak	
10		5050.000	27.76	7.36	35.12	54.00	-18.88	AVG	
11		5725.000	40.06	8.90	48.96	74.00	-25.04	peak	
12	*	5725.000	27.22	8.90	36.12	54.00	-17.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

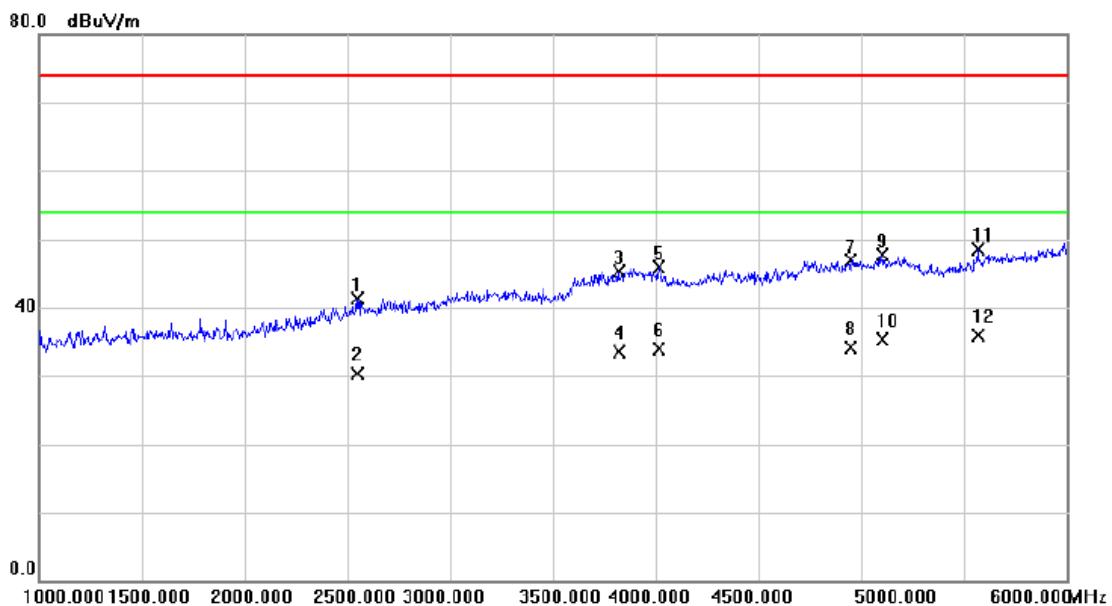

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2547.500	41.51	-0.16	41.35	74.00	-32.65	peak	
2		2547.500	30.41	-0.16	30.25	54.00	-23.75	AVG	
3		3822.500	41.06	4.21	45.27	74.00	-28.73	peak	
4		3822.500	29.26	4.21	33.47	54.00	-20.53	AVG	
5		4017.500	40.87	4.94	45.81	74.00	-28.19	peak	
6		4017.500	28.95	4.94	33.89	54.00	-20.11	AVG	
7		4952.500	39.74	7.14	46.88	74.00	-27.12	peak	
8		4952.500	26.97	7.14	34.11	54.00	-19.89	AVG	
9		5105.000	40.32	7.44	47.76	74.00	-26.24	peak	
10		5105.000	27.78	7.44	35.22	54.00	-18.78	AVG	
11		5567.500	40.17	8.27	48.44	74.00	-25.56	peak	
12	*	5567.500	27.60	8.27	35.87	54.00	-18.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

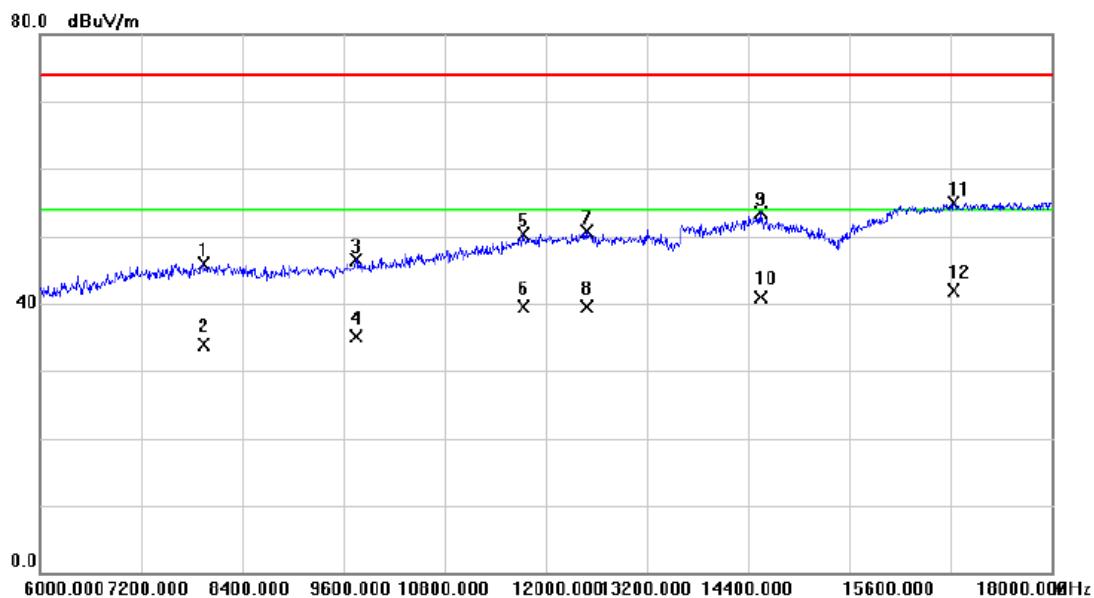

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7950.000	31.59	14.41	46.00	74.00	-28.00		peak
2		7950.000	19.58	14.41	33.99	54.00	-20.01		AVG
3		9750.000	31.12	15.41	46.53	74.00	-27.47		peak
4		9750.000	19.71	15.41	35.12	54.00	-18.88		AVG
5		11730.00	30.17	20.09	50.26	74.00	-23.74		peak
6		11730.00	19.36	20.09	39.45	54.00	-14.55		AVG
7		12480.00	29.79	20.90	50.69	74.00	-23.31		peak
8		12480.00	18.54	20.90	39.44	54.00	-14.56		AVG
9		14544.00	30.16	23.40	53.56	74.00	-20.44		peak
10		14544.00	17.46	23.40	40.86	54.00	-13.14		AVG
11		16842.00	29.59	25.23	54.82	74.00	-19.18		peak
12	*	16842.00	16.73	25.23	41.96	54.00	-12.04		AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

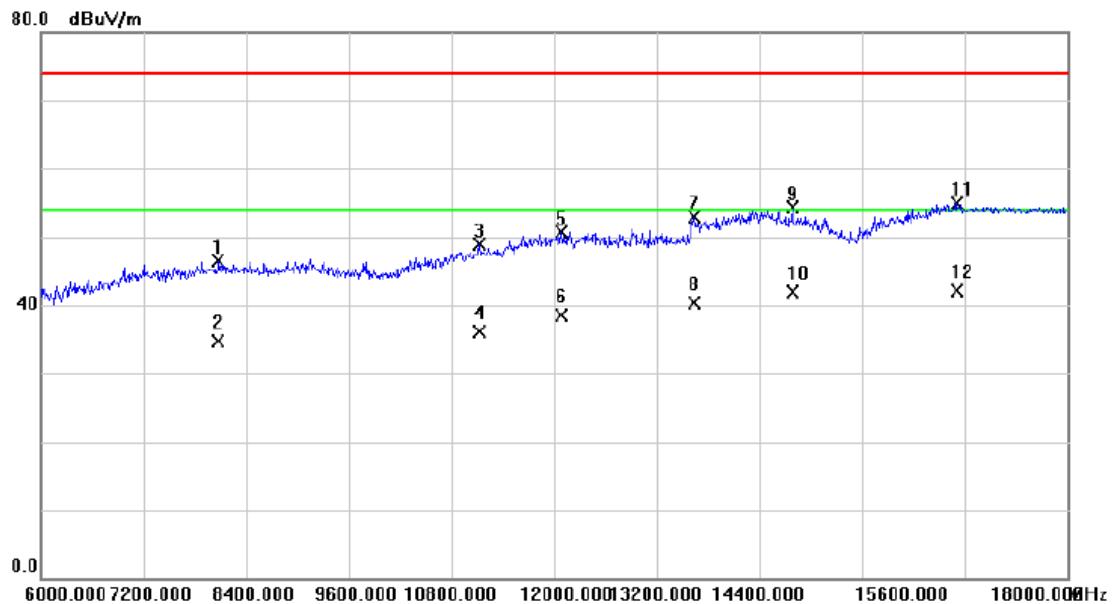

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		8076.000	32.09	14.47	46.56	74.00	-27.44		peak
2		8076.000	20.16	14.47	34.63	54.00	-19.37		AVG
3		11124.00	30.51	18.33	48.84	74.00	-25.16		peak
4		11124.00	17.77	18.33	36.10	54.00	-17.90		AVG
5		12090.00	29.82	20.84	50.66	74.00	-23.34		peak
6		12090.00	17.61	20.84	38.45	54.00	-15.55		AVG
7		13632.00	31.09	21.90	52.99	74.00	-21.01		peak
8		13632.00	18.35	21.90	40.25	54.00	-13.75		AVG
9		14784.00	31.19	23.15	54.34	74.00	-19.66		peak
10		14784.00	18.81	23.15	41.96	54.00	-12.04		AVG
11		16704.00	29.95	24.93	54.88	74.00	-19.12		peak
12	*	16704.00	17.08	24.93	42.01	54.00	-11.99		AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)


Polarization: Vertical

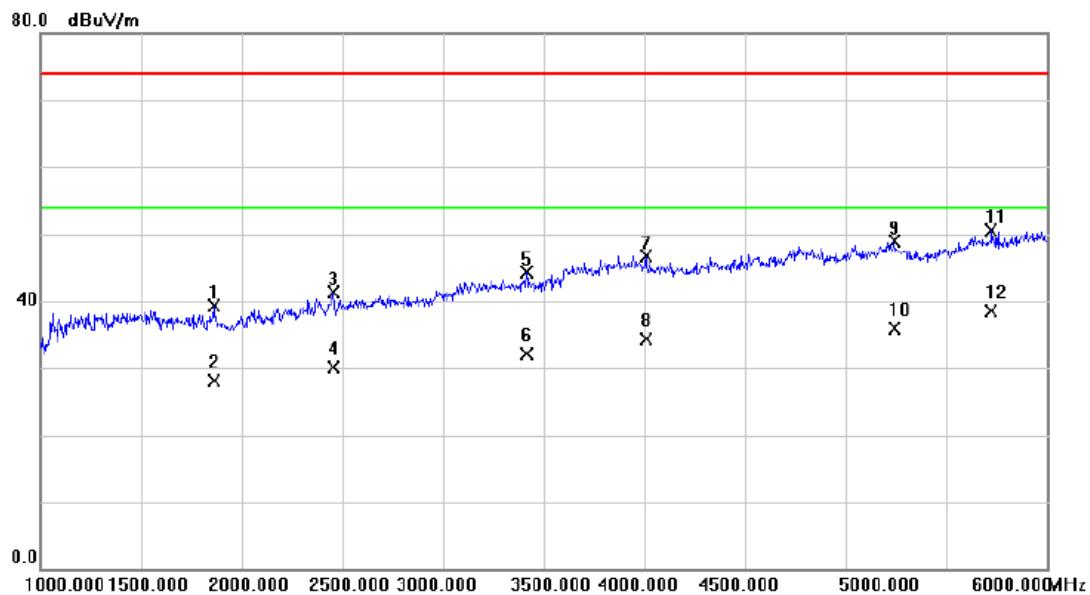

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Margin	Comment
			Level dBuV	Factor dB	ment dBuV/m			
1		1862.500	42.54	-3.26	39.28	74.00	-34.72	peak
2		1862.500	31.38	-3.26	28.12	54.00	-25.88	AVG
3		2457.500	41.89	-0.57	41.32	74.00	-32.68	peak
4		2457.500	30.58	-0.57	30.01	54.00	-23.99	AVG
5		3415.000	41.57	2.68	44.25	74.00	-29.75	peak
6		3415.000	29.42	2.68	32.10	54.00	-21.90	AVG
7		4007.500	41.75	4.93	46.68	74.00	-27.32	peak
8		4007.500	29.32	4.93	34.25	54.00	-19.75	AVG
9		5240.000	41.18	7.64	48.82	74.00	-25.18	peak
10		5240.000	28.32	7.64	35.96	54.00	-18.04	AVG
11		5725.000	41.56	8.90	50.46	74.00	-23.54	peak
12	*	5725.000	29.55	8.90	38.45	54.00	-15.55	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)


Polarization: Horizontal

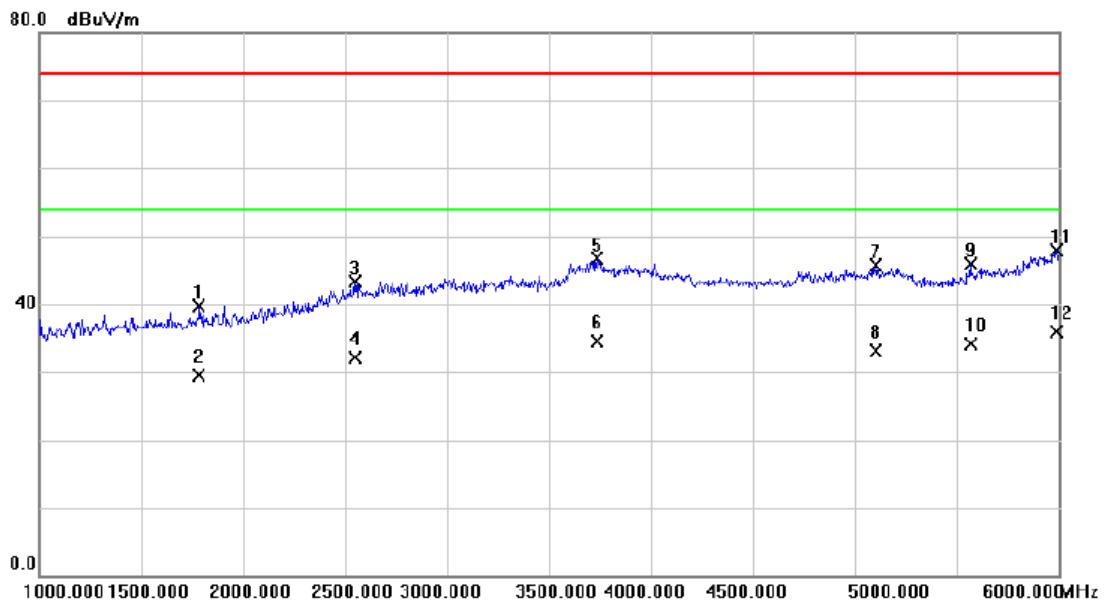

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		1785.000	43.08	-3.36	39.72	74.00	-34.28	peak
2		1785.000	32.81	-3.36	29.45	54.00	-24.55	AVG
3		2547.500	43.51	-0.16	43.35	74.00	-30.65	peak
4		2547.500	32.28	-0.16	32.12	54.00	-21.88	AVG
5		3735.000	42.83	3.87	46.70	74.00	-27.30	peak
6		3735.000	30.65	3.87	34.52	54.00	-19.48	AVG
7		5105.000	38.32	7.44	45.76	74.00	-28.24	peak
8		5105.000	25.68	7.44	33.12	54.00	-20.88	AVG
9		5567.500	37.67	8.27	45.94	74.00	-28.06	peak
10		5567.500	25.93	8.27	34.20	54.00	-19.80	AVG
11		5992.500	37.83	9.98	47.81	74.00	-26.19	peak
12	*	5992.500	25.99	9.98	35.97	54.00	-18.03	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)


Polarization: Vertical

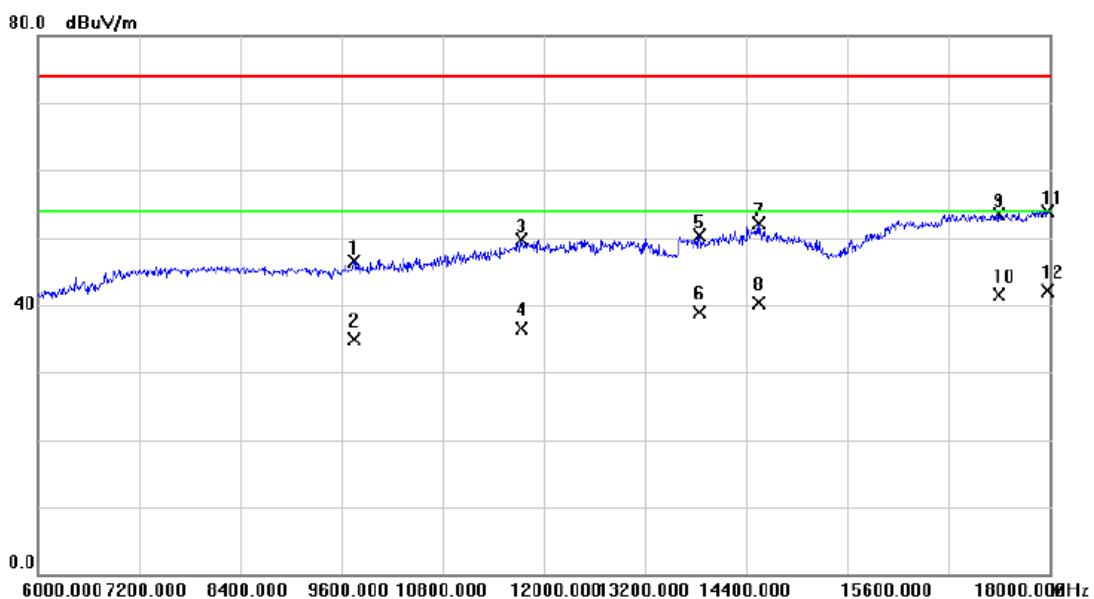

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		9750.000	31.12	15.41	46.53	74.00	-27.47	peak	
2		9750.000	19.44	15.41	34.85	54.00	-19.15	AVG	
3		11730.00	29.67	20.09	49.76	74.00	-24.24	peak	
4		11730.00	16.36	20.09	36.45	54.00	-17.55	AVG	
5		13848.00	27.99	22.27	50.26	74.00	-23.74	peak	
6		13848.00	16.72	22.27	38.99	54.00	-15.01	AVG	
7		14544.00	28.66	23.40	52.06	74.00	-21.94	peak	
8		14544.00	16.85	23.40	40.25	54.00	-13.75	AVG	
9		17394.00	25.88	27.56	53.44	74.00	-20.56	peak	
10		17394.00	13.91	27.56	41.47	54.00	-12.53	AVG	
11		17970.00	22.60	31.39	53.99	74.00	-20.01	peak	
12	*	17970.00	10.62	31.39	42.01	54.00	-11.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(COSLIGHT)


Polarization: Horizontal

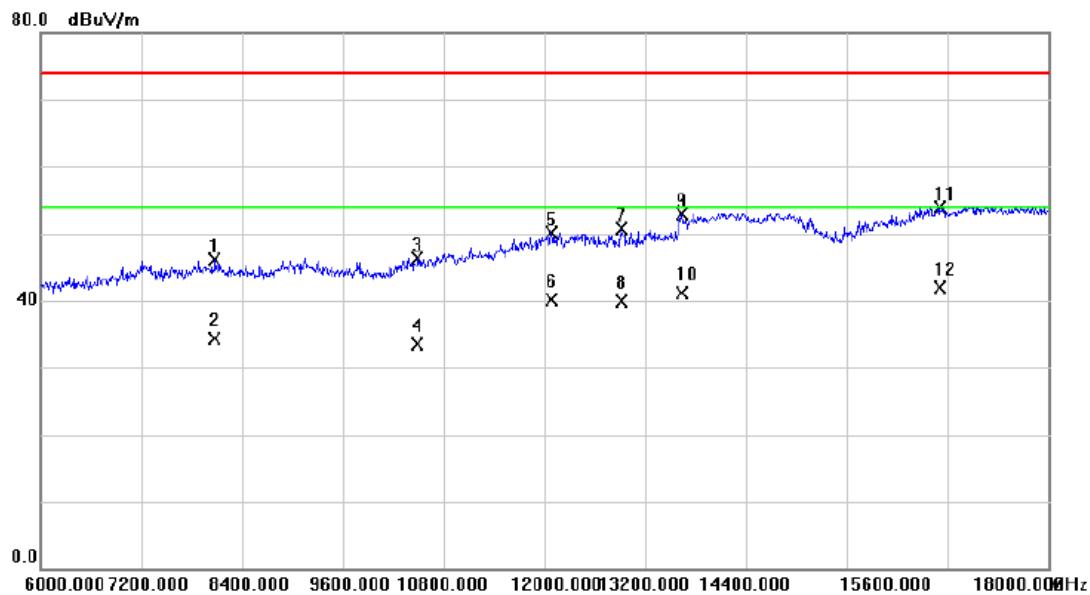

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		8076.000	31.59	14.47	46.06	74.00	-27.94	peak	
2		8076.000	19.76	14.47	34.23	54.00	-19.77	AVG	
3		10488.00	29.77	16.63	46.40	74.00	-27.60	peak	
4		10488.00	16.92	16.63	33.55	54.00	-20.45	AVG	
5		12090.00	29.32	20.84	50.16	74.00	-23.84	peak	
6		12090.00	19.28	20.84	40.12	54.00	-13.88	AVG	
7		12912.00	29.16	21.45	50.61	74.00	-23.39	peak	
8		12912.00	18.44	21.45	39.89	54.00	-14.11	AVG	
9		13632.00	31.09	21.90	52.99	74.00	-21.01	peak	
10		13632.00	19.12	21.90	41.02	54.00	-12.98	AVG	
11		16704.00	28.95	24.93	53.88	74.00	-20.12	peak	
12	*	16704.00	16.92	24.93	41.85	54.00	-12.15	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)


Polarization: Vertical

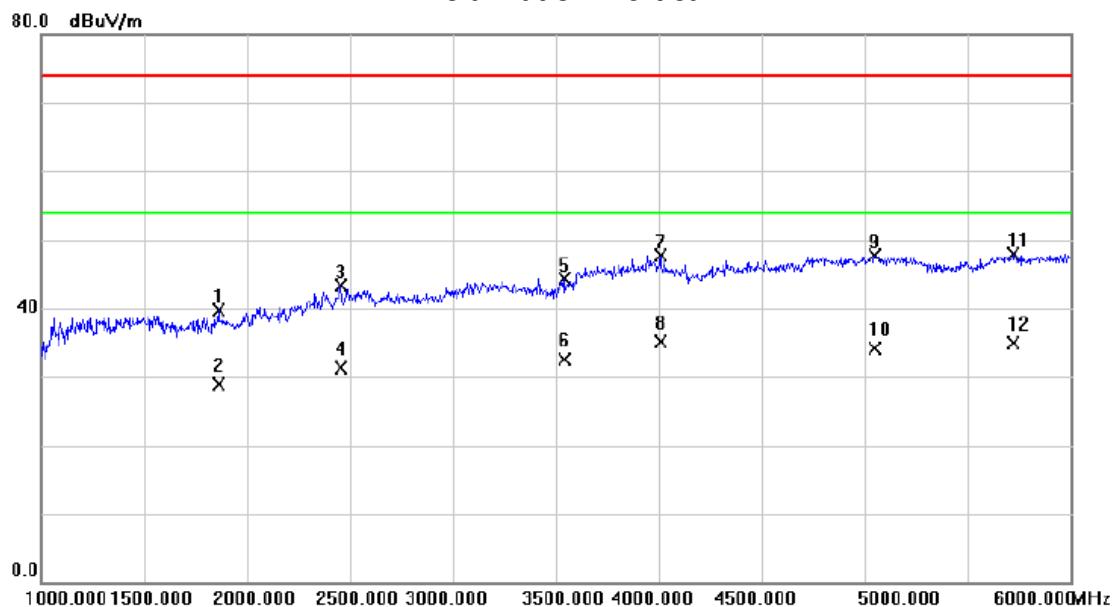

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		1862.500	43.04	-3.26	39.78	74.00	-34.22	peak	
2		1862.500	32.20	-3.26	28.94	54.00	-25.06	AVG	
3		2457.500	43.89	-0.57	43.32	74.00	-30.68	peak	
4		2457.500	31.79	-0.57	31.22	54.00	-22.78	AVG	
5		3540.000	41.24	3.10	44.34	74.00	-29.66	peak	
6		3540.000	29.45	3.10	32.55	54.00	-21.45	AVG	
7		4007.500	42.75	4.93	47.68	74.00	-26.32	peak	
8	*	4007.500	30.19	4.93	35.12	54.00	-18.88	AVG	
9		5050.000	40.39	7.36	47.75	74.00	-26.25	peak	
10		5050.000	26.76	7.36	34.12	54.00	-19.88	AVG	
11		5725.000	39.06	8.90	47.96	74.00	-26.04	peak	
12		5725.000	26.09	8.90	34.99	54.00	-19.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)


Polarization: Horizontal

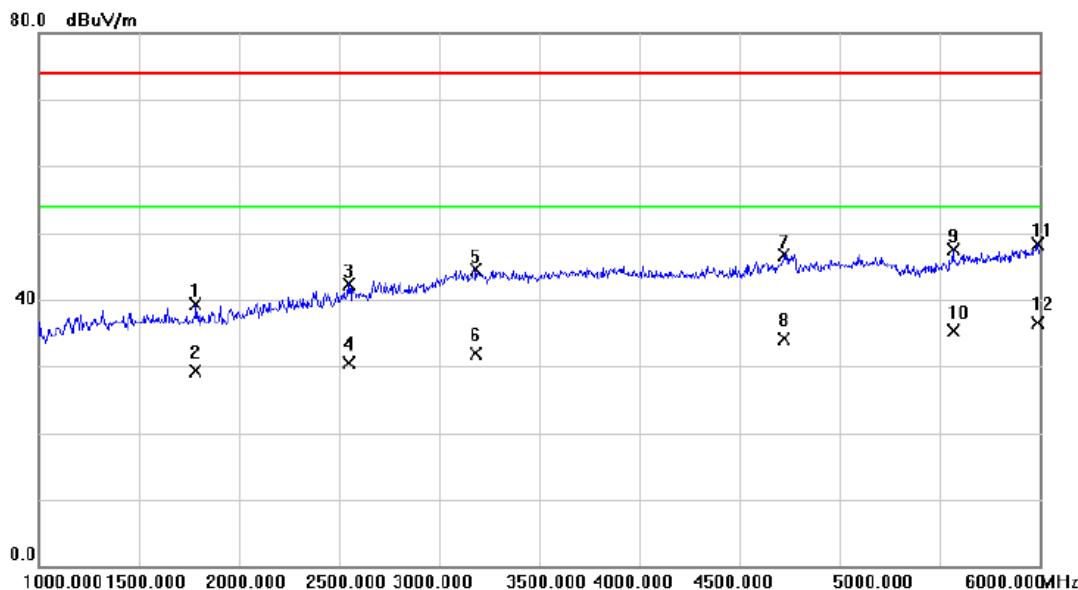

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		1785.000	42.58	-3.36	39.22	74.00	-34.78	peak
2		1785.000	32.61	-3.36	29.25	54.00	-24.75	AVG
3		2547.500	42.51	-0.16	42.35	74.00	-31.65	peak
4		2547.500	30.61	-0.16	30.45	54.00	-23.55	AVG
5		3185.000	42.52	2.01	44.53	74.00	-29.47	peak
6		3185.000	29.86	2.01	31.87	54.00	-22.13	AVG
7		4725.000	40.41	6.39	46.80	74.00	-27.20	peak
8		4725.000	27.81	6.39	34.20	54.00	-19.80	AVG
9		5567.500	39.17	8.27	47.44	74.00	-26.56	peak
10		5567.500	27.05	8.27	35.32	54.00	-18.68	AVG
11		5992.500	38.33	9.98	48.31	74.00	-25.69	peak
12	*	5992.500	26.47	9.98	36.45	54.00	-17.55	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)


Polarization: Vertical

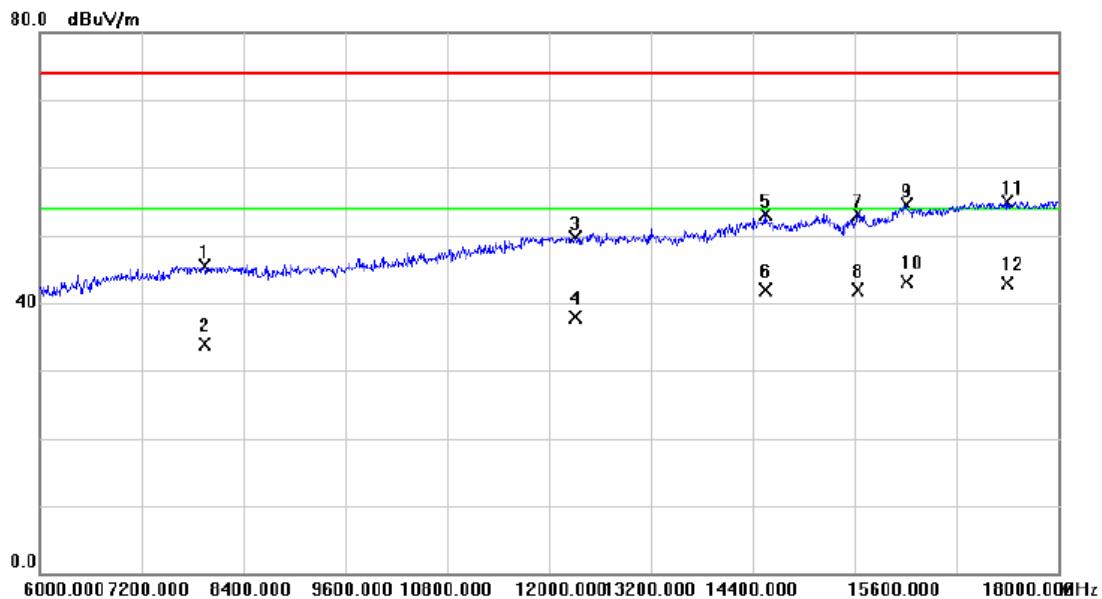

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7950.000	31.09	14.41	45.50	74.00	-28.50	peak	
2		7950.000	19.43	14.41	33.84	54.00	-20.16	AVG	
3		12312.00	28.92	20.87	49.79	74.00	-24.21	peak	
4		12312.00	17.08	20.87	37.95	54.00	-16.05	AVG	
5		14544.00	29.66	23.40	53.06	74.00	-20.94	peak	
6		14544.00	18.55	23.40	41.95	54.00	-12.05	AVG	
7		15642.00	31.82	21.38	53.20	74.00	-20.80	peak	
8		15642.00	20.47	21.38	41.85	54.00	-12.15	AVG	
9		16212.00	30.81	23.68	54.49	74.00	-19.51	peak	
10	*	16212.00	19.42	23.68	43.10	54.00	-10.90	AVG	
11		17394.00	27.38	27.56	54.94	74.00	-19.06	peak	
12		17394.00	15.43	27.56	42.99	54.00	-11.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(SALCOMP)+Battery(SCUD)


Polarization: Horizontal

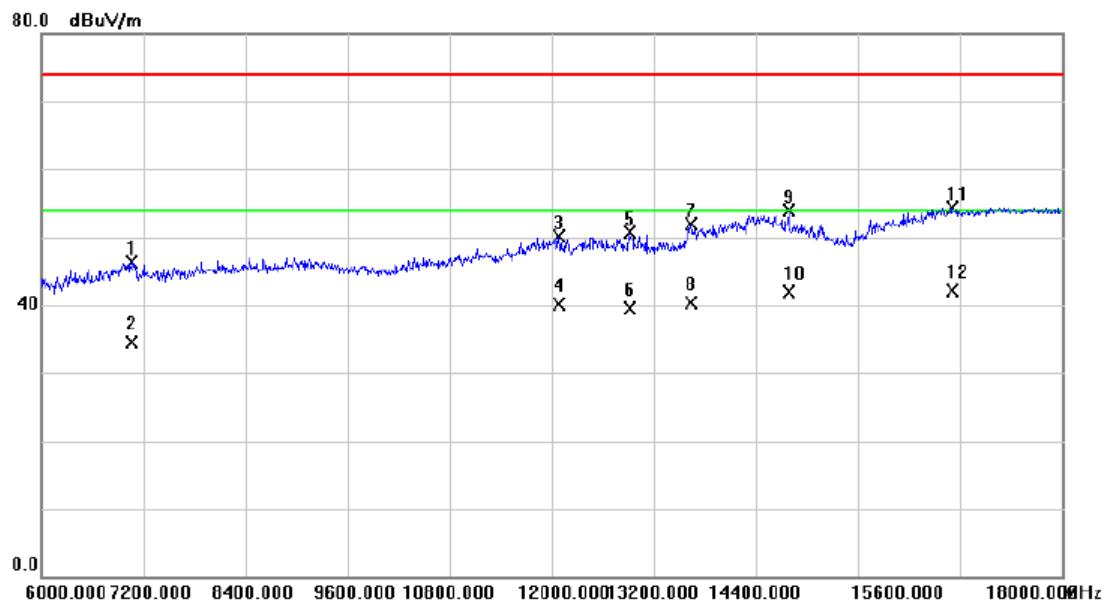

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		7068.000	32.98	13.23	46.21	74.00	-27.79	peak	
2		7068.000	21.33	13.23	34.56	54.00	-19.44	AVG	
3		12090.00	29.32	20.84	50.16	74.00	-23.84	peak	
4		12090.00	19.30	20.84	40.14	54.00	-13.86	AVG	
5		12912.00	29.16	21.45	50.61	74.00	-23.39	peak	
6		12912.00	18.00	21.45	39.45	54.00	-14.55	AVG	
7		13632.00	30.09	21.90	51.99	74.00	-22.01	peak	
8		13632.00	18.42	21.90	40.32	54.00	-13.68	AVG	
9		14784.00	30.69	23.15	53.84	74.00	-20.16	peak	
10		14784.00	18.73	23.15	41.88	54.00	-12.12	AVG	
11		16704.00	29.45	24.93	54.38	74.00	-19.62	peak	
12	*	16704.00	17.22	24.93	42.15	54.00	-11.85	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)


Polarization: Vertical

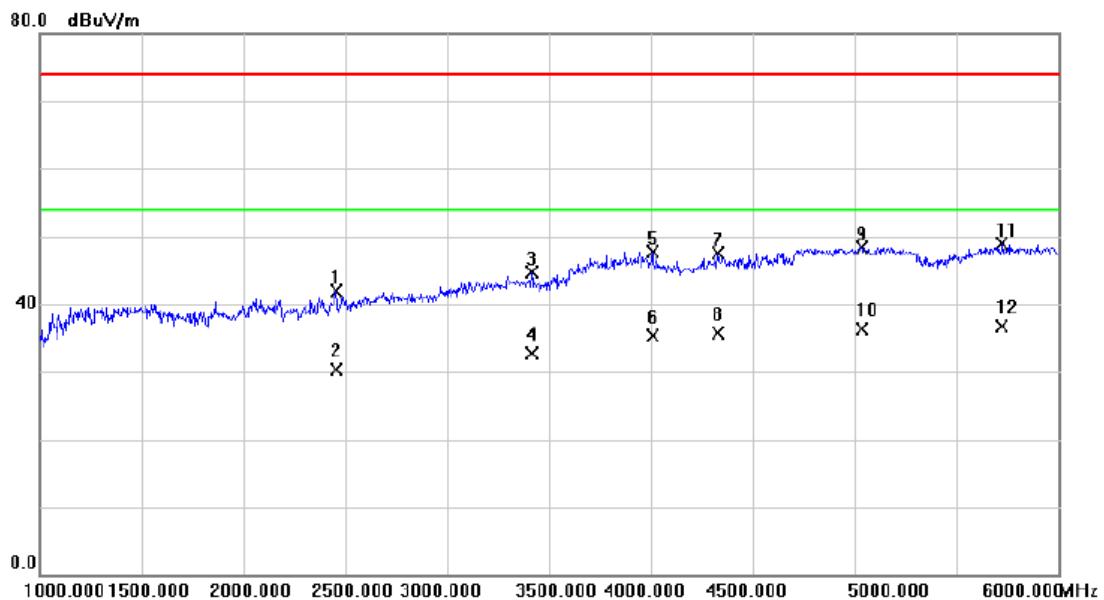

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2457.500	42.39	-0.57	41.82	74.00	-32.18	peak	
2		2457.500	30.82	-0.57	30.25	54.00	-23.75	AVG	
3		3415.000	42.07	2.68	44.75	74.00	-29.25	peak	
4		3415.000	30.09	2.68	32.77	54.00	-21.23	AVG	
5		4007.500	42.75	4.93	47.68	74.00	-26.32	peak	
6		4007.500	30.39	4.93	35.32	54.00	-18.68	AVG	
7		4330.000	42.01	5.41	47.42	74.00	-26.58	peak	
8		4330.000	30.36	5.41	35.77	54.00	-18.23	AVG	
9		5035.000	41.03	7.34	48.37	74.00	-25.63	peak	
10		5035.000	28.89	7.34	36.23	54.00	-17.77	AVG	
11		5725.000	40.06	8.90	48.96	74.00	-25.04	peak	
12	*	5725.000	27.88	8.90	36.78	54.00	-17.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)


Polarization: Horizontal

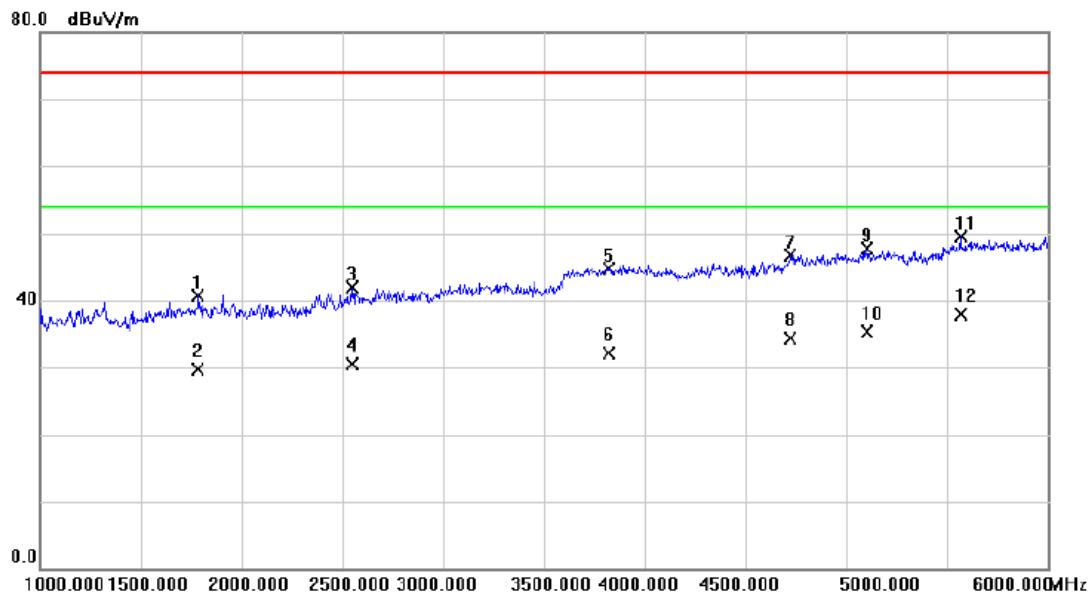

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1785.000	44.08	-3.36	40.72	74.00	-33.28	peak	
2		1785.000	32.99	-3.36	29.63	54.00	-24.37	AVG	
3		2547.500	42.01	-0.16	41.85	74.00	-32.15	peak	
4		2547.500	30.61	-0.16	30.45	54.00	-23.55	AVG	
5		3822.500	40.56	4.21	44.77	74.00	-29.23	peak	
6		3822.500	27.91	4.21	32.12	54.00	-21.88	AVG	
7		4725.000	40.41	6.39	46.80	74.00	-27.20	peak	
8		4725.000	27.86	6.39	34.25	54.00	-19.75	AVG	
9		5105.000	40.32	7.44	47.76	74.00	-26.24	peak	
10		5105.000	27.93	7.44	35.37	54.00	-18.63	AVG	
11		5567.500	41.17	8.27	49.44	74.00	-24.56	peak	
12	*	5567.500	29.57	8.27	37.84	54.00	-16.16	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)


Polarization: Vertical

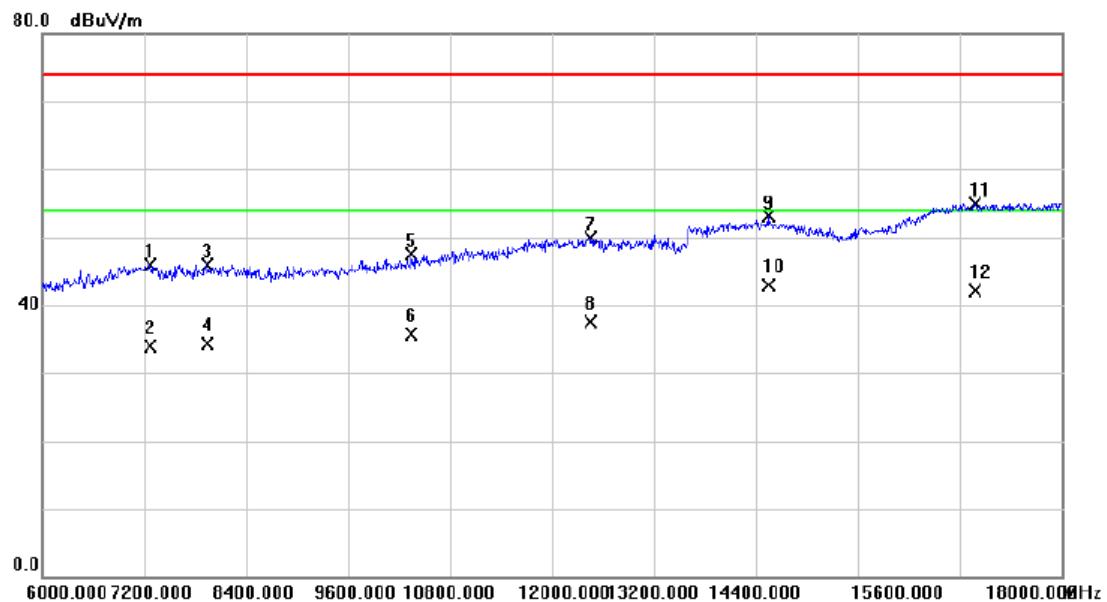

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7272.000	32.31	13.50	45.81	74.00	-28.19	peak	
2		7272.000	20.34	13.50	33.84	54.00	-20.16	AVG	
3		7950.000	31.59	14.41	46.00	74.00	-28.00	peak	
4		7950.000	19.80	14.41	34.21	54.00	-19.79	AVG	
5		10350.00	31.12	16.29	47.41	74.00	-26.59	peak	
6		10350.00	19.33	16.29	35.62	54.00	-18.38	AVG	
7		12450.00	29.09	20.90	49.99	74.00	-24.01	peak	
8		12450.00	16.62	20.90	37.52	54.00	-16.48	AVG	
9		14544.00	29.66	23.40	53.06	74.00	-20.94	peak	
10	*	14544.00	19.48	23.40	42.88	54.00	-11.12	AVG	
11		16986.00	29.33	25.52	54.85	74.00	-19.15	peak	
12		16986.00	16.58	25.52	42.10	54.00	-11.90	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+earphone+Adapter(BYD)+Battery(SUNWODA)


Polarization: Horizontal

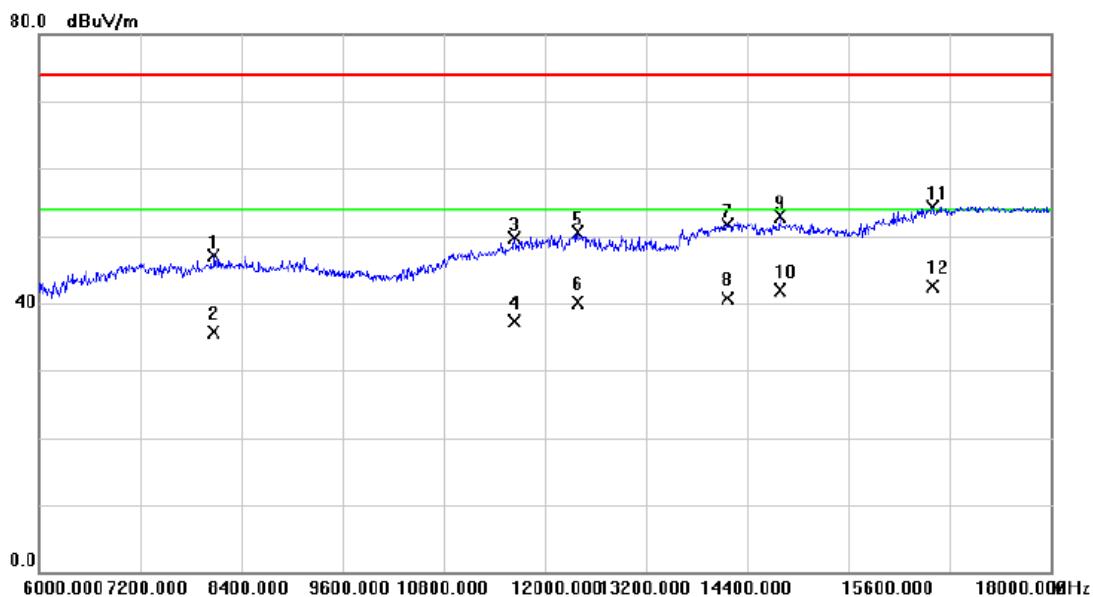

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		8076.000	32.59	14.47	47.06	74.00	-26.94	peak	
2		8076.000	21.17	14.47	35.64	54.00	-18.36	AVG	
3		11646.00	29.77	19.86	49.63	74.00	-24.37	peak	
4		11646.00	17.35	19.86	37.21	54.00	-16.79	AVG	
5		12384.00	29.57	20.88	50.45	74.00	-23.55	peak	
6		12384.00	19.24	20.88	40.12	54.00	-13.88	AVG	
7		14172.00	28.90	22.84	51.74	74.00	-22.26	peak	
8		14172.00	17.86	22.84	40.70	54.00	-13.30	AVG	
9		14784.00	29.69	23.15	52.84	74.00	-21.16	peak	
10		14784.00	18.72	23.15	41.87	54.00	-12.13	AVG	
11		16602.00	29.57	24.71	54.28	74.00	-19.72	peak	
12	*	16602.00	17.85	24.71	42.56	54.00	-11.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

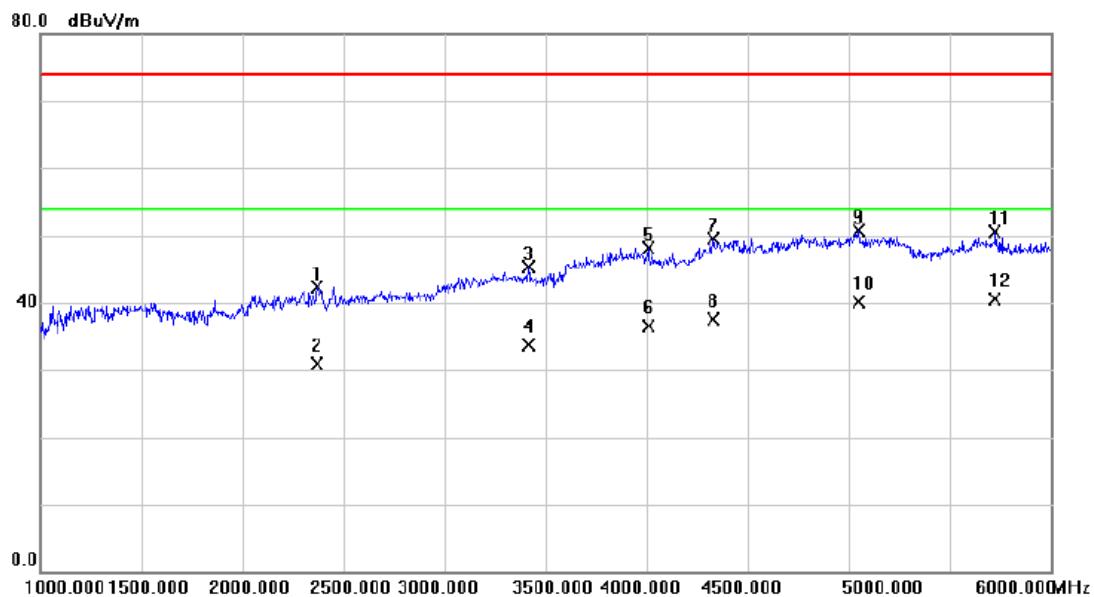

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2370.000	43.41	-1.04	42.37	74.00	-31.63	peak	
2		2370.000	31.89	-1.04	30.85	54.00	-23.15	AVG	
3		3415.000	42.57	2.68	45.25	74.00	-28.75	peak	
4		3415.000	31.06	2.68	33.74	54.00	-20.26	AVG	
5		4007.500	43.25	4.93	48.18	74.00	-25.82	peak	
6		4007.500	31.52	4.93	36.45	54.00	-17.55	AVG	
7		4330.000	44.01	5.41	49.42	74.00	-24.58	peak	
8		4330.000	32.11	5.41	37.52	54.00	-16.48	AVG	
9		5050.000	43.39	7.36	50.75	74.00	-23.25	peak	
10		5050.000	32.76	7.36	40.12	54.00	-13.88	AVG	
11		5725.000	41.56	8.90	50.46	74.00	-23.54	peak	
12	*	5725.000	31.55	8.90	40.45	54.00	-13.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

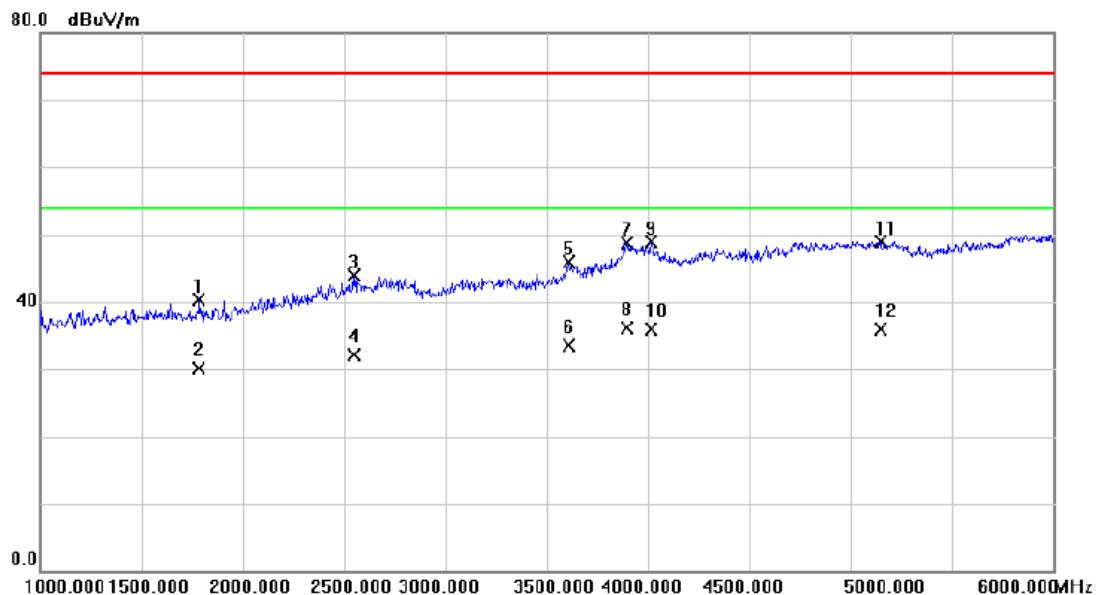

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1785.000	43.58	-3.36	40.22	74.00	-33.78	peak	
2		1785.000	33.48	-3.36	30.12	54.00	-23.88	AVG	
3		2547.500	44.01	-0.16	43.85	74.00	-30.15	peak	
4		2547.500	32.28	-0.16	32.12	54.00	-21.88	AVG	
5		3612.500	42.44	3.38	45.82	74.00	-28.18	peak	
6		3612.500	30.16	3.38	33.54	54.00	-20.46	AVG	
7		3895.000	44.23	4.49	48.72	74.00	-25.28	peak	
8	*	3895.000	31.63	4.49	36.12	54.00	-17.88	AVG	
9		4017.500	43.87	4.94	48.81	74.00	-25.19	peak	
10		4017.500	30.95	4.94	35.89	54.00	-18.11	AVG	
11		5147.500	41.40	7.50	48.90	74.00	-25.10	peak	
12		5147.500	28.44	7.50	35.94	54.00	-18.06	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

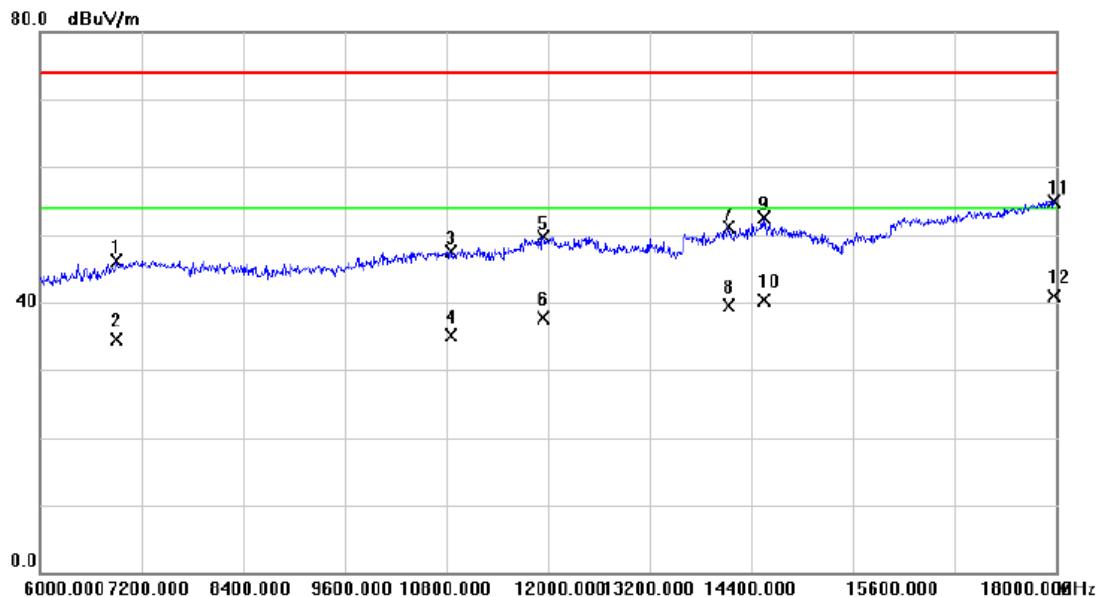

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		6906.000	33.29	12.76	46.05	74.00	-27.95	peak
2		6906.000	21.76	12.76	34.52	54.00	-19.48	AVG
3		10848.00	29.88	17.57	47.45	74.00	-26.55	peak
4		10848.00	17.55	17.57	35.12	54.00	-18.88	AVG
5		11940.00	29.06	20.66	49.72	74.00	-24.28	peak
6		11940.00	16.99	20.66	37.65	54.00	-16.35	AVG
7		14142.00	28.29	22.79	51.08	74.00	-22.92	peak
8		14142.00	16.79	22.79	39.58	54.00	-14.42	AVG
9		14544.00	29.16	23.40	52.56	74.00	-21.44	peak
10		14544.00	16.85	23.40	40.25	54.00	-13.75	AVG
11		17970.00	23.60	31.39	54.99	74.00	-19.01	peak
12	*	17970.00	9.58	31.39	40.97	54.00	-13.03	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

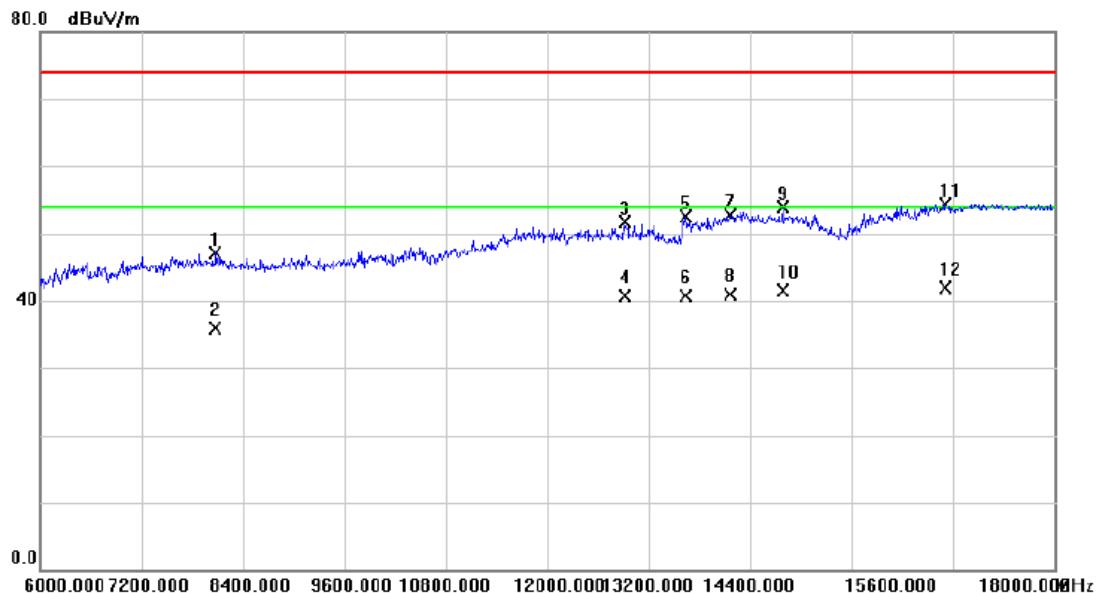

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		8076.000	32.59	14.47	47.06	74.00	-26.94	peak
2		8076.000	21.44	14.47	35.91	54.00	-18.09	AVG
3		12912.00	30.16	21.45	51.61	74.00	-22.39	peak
4		12912.00	19.20	21.45	40.65	54.00	-13.35	AVG
5		13632.00	30.59	21.90	52.49	74.00	-21.51	peak
6		13632.00	18.80	21.90	40.70	54.00	-13.30	AVG
7		14172.00	29.90	22.84	52.74	74.00	-21.26	peak
8		14172.00	18.10	22.84	40.94	54.00	-13.06	AVG
9		14784.00	30.69	23.15	53.84	74.00	-20.16	peak
10		14784.00	18.42	23.15	41.57	54.00	-12.43	AVG
11		16704.00	29.45	24.93	54.38	74.00	-19.62	peak
12	*	16704.00	17.03	24.93	41.96	54.00	-12.04	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

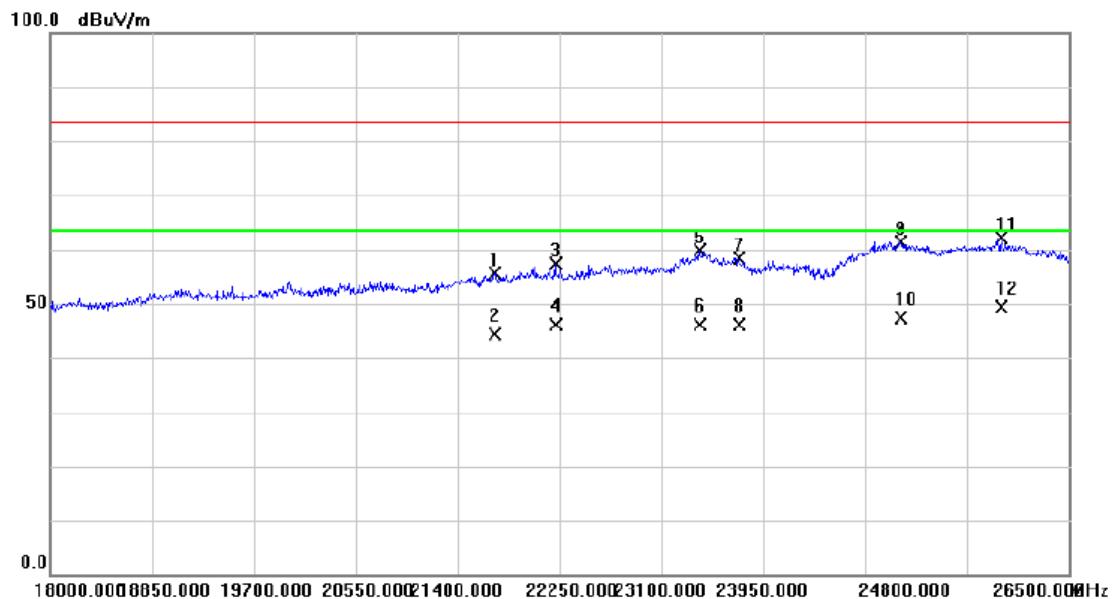

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		21706.00	34.11	21.51	55.62	83.50	-27.88	peak	
2		21706.00	22.78	21.51	44.29	63.50	-19.21	AVG	
3		22220.25	35.69	21.65	57.34	83.50	-26.16	peak	
4		22220.25	24.54	21.65	46.19	63.50	-17.31	AVG	
5		23418.75	37.20	22.61	59.81	83.50	-23.69	peak	
6		23418.75	23.47	22.61	46.08	63.50	-17.42	AVG	
7		23746.00	35.84	22.63	58.47	83.50	-25.03	peak	
8		23746.00	23.45	22.63	46.08	63.50	-17.42	AVG	
9		25101.75	38.36	23.10	61.46	83.50	-22.04	peak	
10		25101.75	24.32	23.10	47.42	63.50	-16.08	AVG	
11		25943.25	39.21	23.03	62.24	83.50	-21.26	peak	
12	*	25943.25	26.34	23.03	49.37	63.50	-14.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

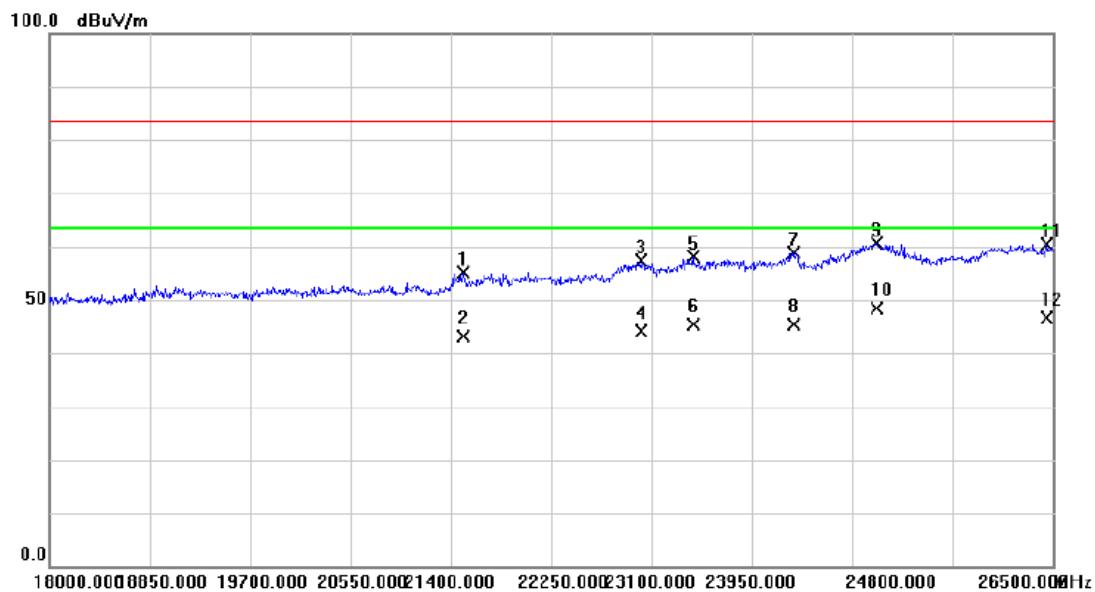

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		21502.00	33.57	21.46	55.03	83.50	-28.47	peak
2		21502.00	21.56	21.46	43.02	63.50	-20.48	AVG
3		23010.75	35.00	22.29	57.29	83.50	-26.21	peak
4		23010.75	21.87	22.29	44.16	63.50	-19.34	AVG
5		23452.75	35.56	22.64	58.20	83.50	-25.30	peak
6		23452.75	22.78	22.64	45.42	63.50	-18.08	AVG
7		24302.75	36.13	22.68	58.81	83.50	-24.69	peak
8		24302.75	22.63	22.68	45.31	63.50	-18.19	AVG
9		25004.00	37.40	23.11	60.51	83.50	-22.99	peak
10	*	25004.00	25.25	23.11	48.36	63.50	-15.14	AVG
11		26453.25	37.07	23.22	60.29	83.50	-23.21	peak
12		26453.25	23.48	23.22	46.70	63.50	-16.80	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

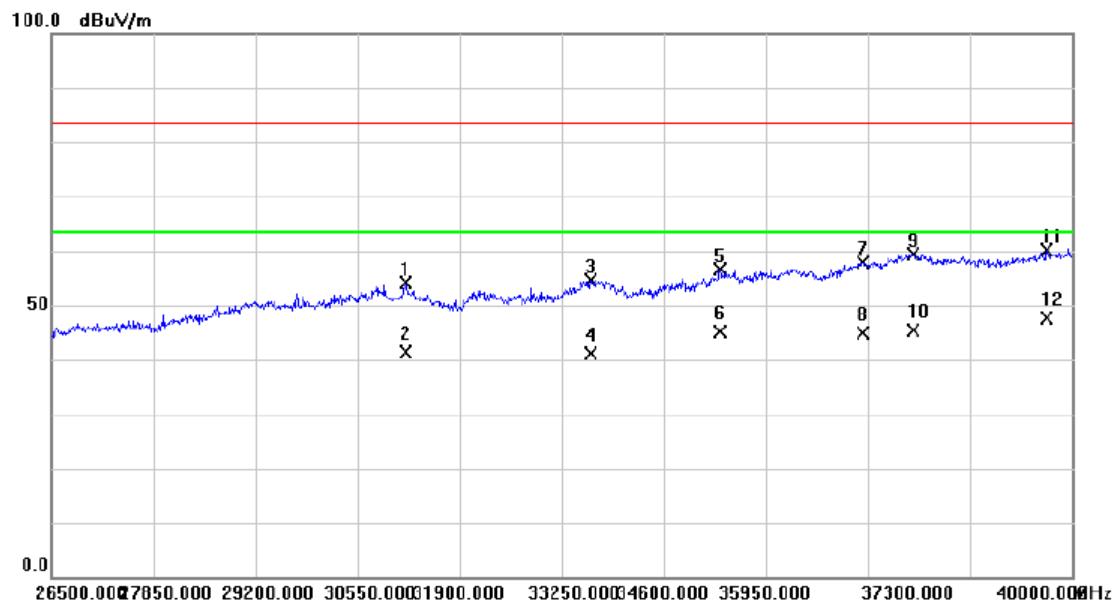

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		31184.50	45.29	8.75	54.04	83.50	-29.46	peak
2		31184.50	32.54	8.75	41.29	63.50	-22.21	AVG
3		33634.75	45.27	9.43	54.70	83.50	-28.80	peak
4		33634.75	31.78	9.43	41.21	63.50	-22.29	AVG
5		35342.50	46.52	10.16	56.68	83.50	-26.82	peak
6		35342.50	34.87	10.16	45.03	63.50	-18.47	AVG
7		37239.25	46.66	11.31	57.97	83.50	-25.53	peak
8		37239.25	33.54	11.31	44.85	63.50	-18.65	AVG
9		37894.00	46.98	12.51	59.49	83.50	-24.01	peak
10		37894.00	32.87	12.51	45.38	63.50	-18.12	AVG
11		39669.25	43.66	16.38	60.04	83.50	-23.46	peak
12	*	39669.25	31.17	16.38	47.55	63.50	-15.95	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(5G)+Playing+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

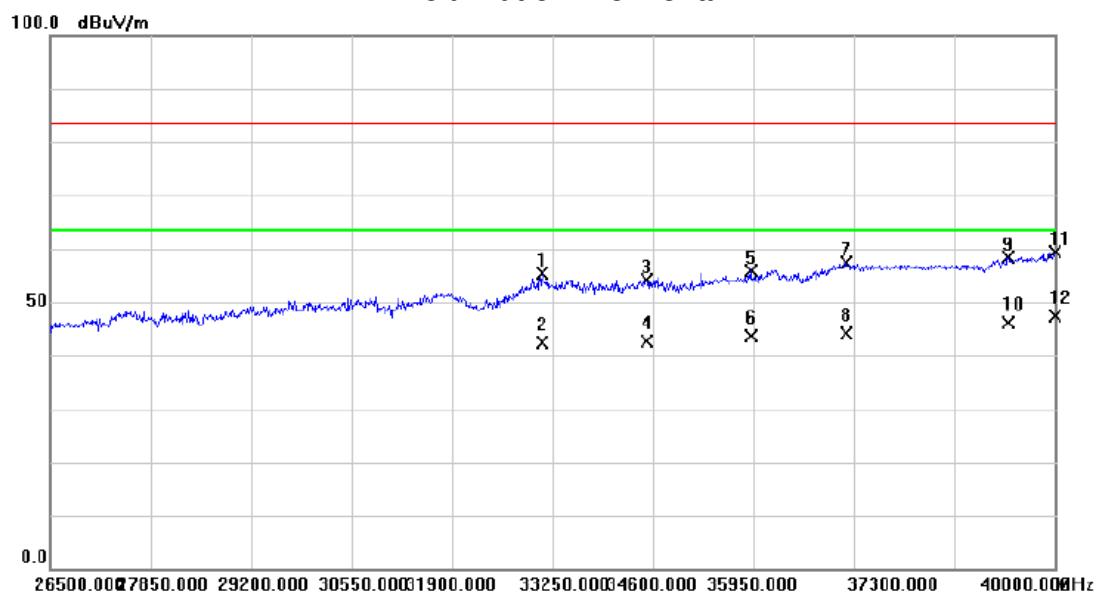

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		33115.00	46.16	9.21	55.37	83.50	-28.13	peak	
2		33115.00	33.12	9.21	42.33	63.50	-21.17	AVG	
3		34525.75	44.38	9.65	54.03	83.50	-29.47	peak	
4		34525.75	32.87	9.65	42.52	63.50	-20.98	AVG	
5		35916.25	45.88	10.11	55.99	83.50	-27.51	peak	
6		35916.25	33.47	10.11	43.58	63.50	-19.92	AVG	
7		37198.75	46.10	11.27	57.37	83.50	-26.13	peak	
8		37198.75	32.82	11.27	44.09	63.50	-19.41	AVG	
9		39379.00	42.86	15.57	58.43	83.50	-25.07	peak	
10		39379.00	30.45	15.57	46.02	63.50	-17.48	AVG	
11		40000.00	42.32	17.14	59.46	83.50	-24.04	peak	
12	*	40000.00	30.12	17.14	47.26	63.50	-16.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

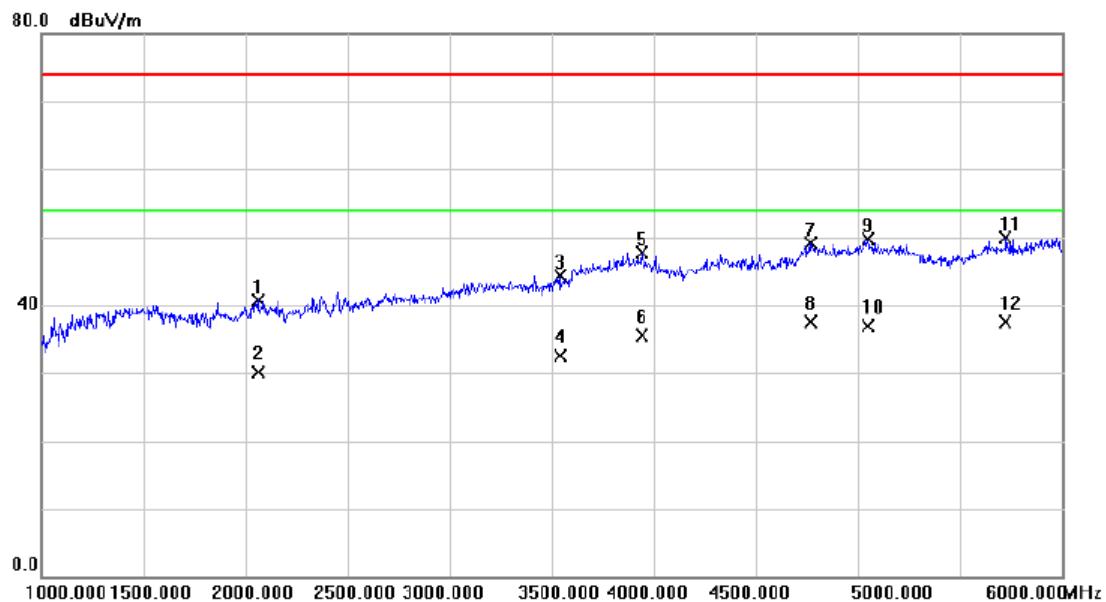

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit dB	Margin	Detector	Comment
			dBuV	dB	dBuV/m				
1		2060.000	43.42	-2.74	40.68	74.00	-33.32	peak	
2		2060.000	32.86	-2.74	30.12	54.00	-23.88	AVG	
3		3540.000	41.24	3.10	44.34	74.00	-29.66	peak	
4		3540.000	29.35	3.10	32.45	54.00	-21.55	AVG	
5		3942.500	42.96	4.70	47.66	74.00	-26.34	peak	
6		3942.500	30.75	4.70	35.45	54.00	-18.55	AVG	
7		4767.500	42.58	6.53	49.11	74.00	-24.89	peak	
8	*	4767.500	31.01	6.53	37.54	54.00	-16.46	AVG	
9		5050.000	42.39	7.36	49.75	74.00	-24.25	peak	
10		5050.000	29.63	7.36	36.99	54.00	-17.01	AVG	
11		5725.000	41.06	8.90	49.96	74.00	-24.04	peak	
12		5725.000	28.55	8.90	37.45	54.00	-16.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

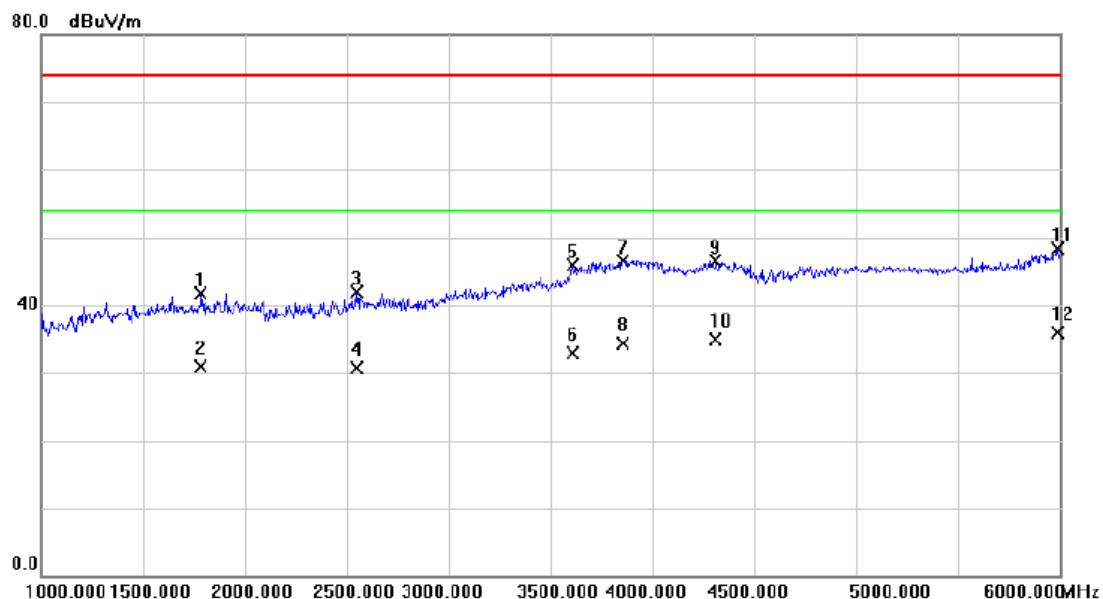

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1785.000	45.08	-3.36	41.72	74.00	-32.28	peak	
2		1785.000	34.21	-3.36	30.85	54.00	-23.15	AVG	
3		2547.500	42.01	-0.16	41.85	74.00	-32.15	peak	
4		2547.500	30.90	-0.16	30.74	54.00	-23.26	AVG	
5		3612.500	42.44	3.38	45.82	74.00	-28.18	peak	
6		3612.500	29.58	3.38	32.96	54.00	-21.04	AVG	
7		3855.000	42.24	4.35	46.59	74.00	-27.41	peak	
8		3855.000	29.90	4.35	34.25	54.00	-19.75	AVG	
9		4312.500	41.13	5.38	46.51	74.00	-27.49	peak	
10		4312.500	29.51	5.38	34.89	54.00	-19.11	AVG	
11		5992.500	38.33	9.98	48.31	74.00	-25.69	peak	
12	*	5992.500	25.92	9.98	35.90	54.00	-18.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

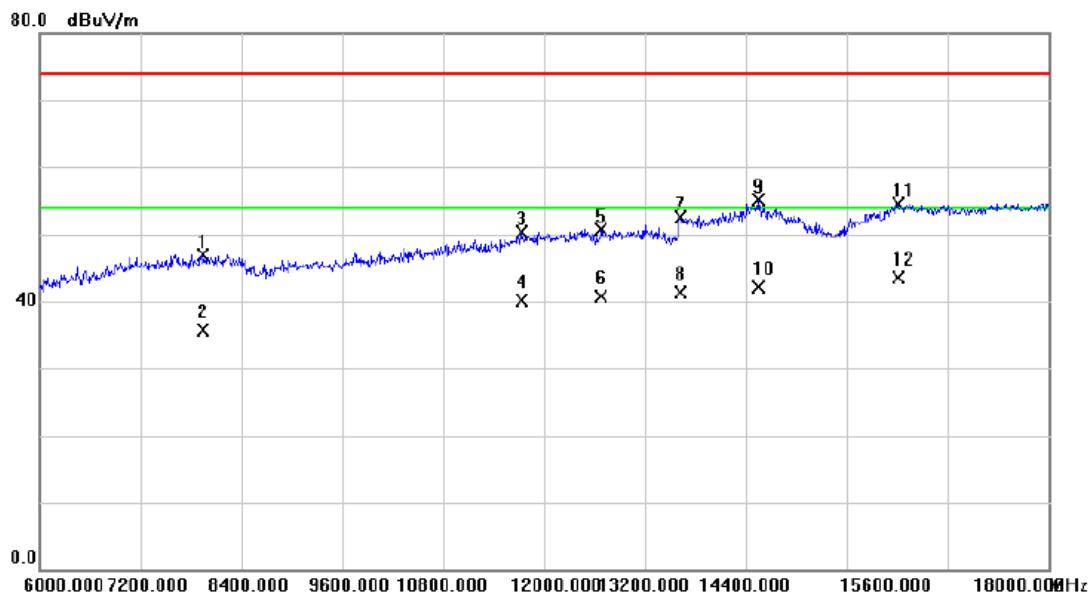

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7950.000	32.59	14.41	47.00	74.00	-27.00	peak	
2		7950.000	21.33	14.41	35.74	54.00	-18.26	AVG	
3		11730.00	30.17	20.09	50.26	74.00	-23.74	peak	
4		11730.00	20.03	20.09	40.12	54.00	-13.88	AVG	
5		12684.00	29.59	21.15	50.74	74.00	-23.26	peak	
6		12684.00	19.51	21.15	40.66	54.00	-13.34	AVG	
7		13620.00	30.62	21.88	52.50	74.00	-21.50	peak	
8		13620.00	19.44	21.88	41.32	54.00	-12.68	AVG	
9		14544.00	31.66	23.40	55.06	74.00	-18.94	peak	
10		14544.00	18.72	23.40	42.12	54.00	-11.88	AVG	
11		16212.00	30.81	23.68	54.49	74.00	-19.51	peak	
12	*	16212.00	19.91	23.68	43.59	54.00	-10.41	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Playing+speaker+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

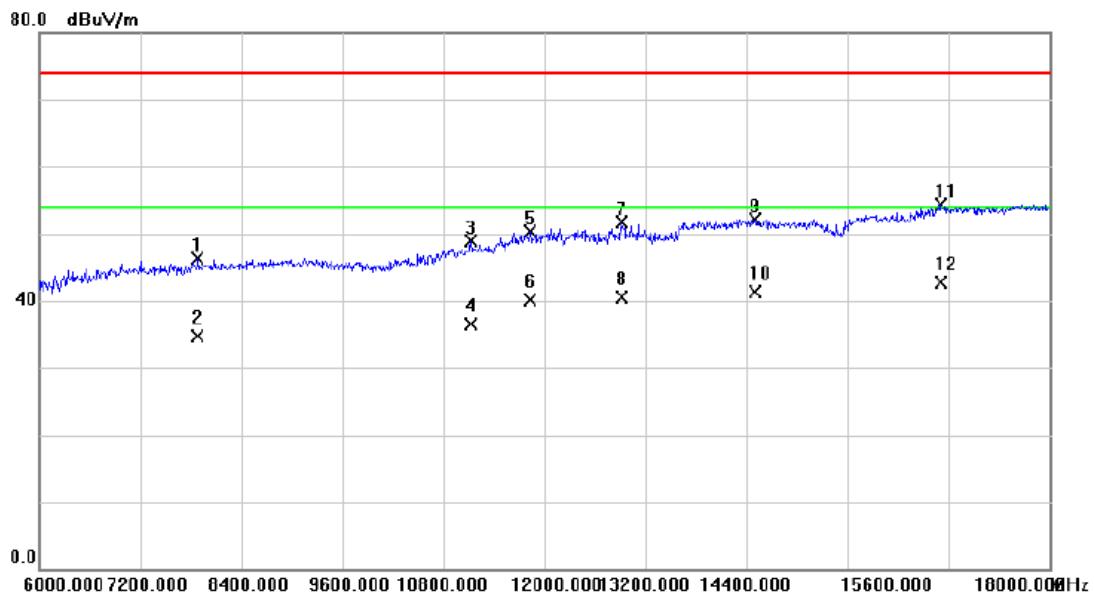

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7884.000	31.99	14.32	46.31	74.00	-27.69	peak	
2		7884.000	20.31	14.32	34.63	54.00	-19.37	AVG	
3		11124.00	30.51	18.33	48.84	74.00	-25.16	peak	
4		11124.00	18.12	18.33	36.45	54.00	-17.55	AVG	
5		11832.00	29.96	20.36	50.32	74.00	-23.68	peak	
6		11832.00	19.76	20.36	40.12	54.00	-13.88	AVG	
7		12912.00	30.16	21.45	51.61	74.00	-22.39	peak	
8		12912.00	19.07	21.45	40.52	54.00	-13.48	AVG	
9		14508.00	28.76	23.43	52.19	74.00	-21.81	peak	
10		14508.00	17.80	23.43	41.23	54.00	-12.77	AVG	
11		16704.00	29.45	24.93	54.38	74.00	-19.62	peak	
12	*	16704.00	17.84	24.93	42.77	54.00	-11.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

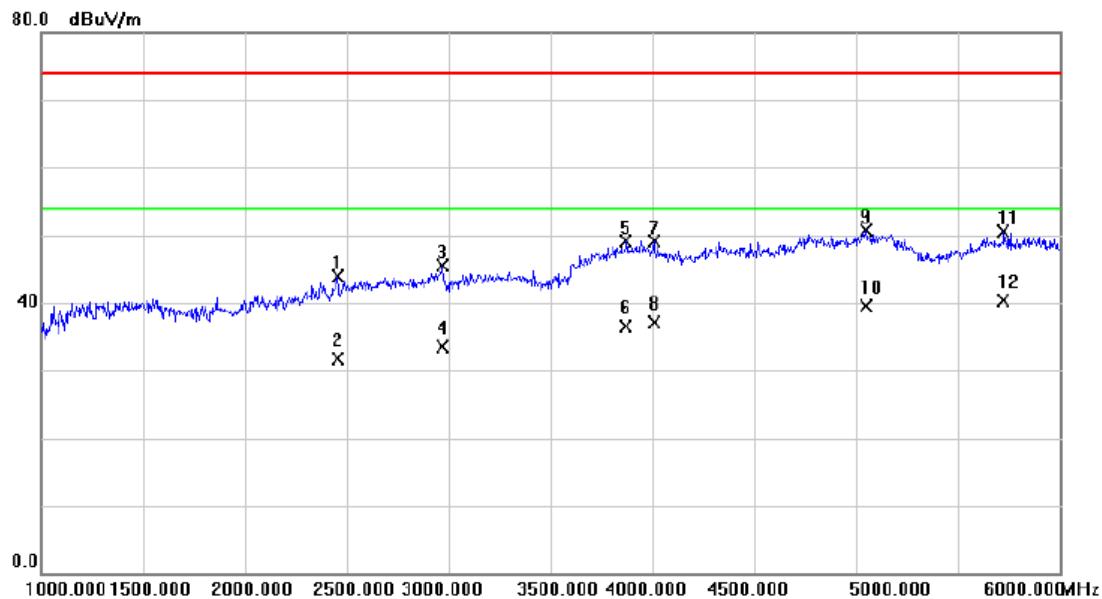

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2457.500	44.39	-0.57	43.82	74.00	-30.18	peak	
2		2457.500	32.27	-0.57	31.70	54.00	-22.30	AVG	
3		2970.000	44.07	1.36	45.43	74.00	-28.57	peak	
4		2970.000	32.16	1.36	33.52	54.00	-20.48	AVG	
5		3872.500	44.73	4.41	49.14	74.00	-24.86	peak	
6		3872.500	32.11	4.41	36.52	54.00	-17.48	AVG	
7		4007.500	44.25	4.93	49.18	74.00	-24.82	peak	
8		4007.500	32.27	4.93	37.20	54.00	-16.80	AVG	
9		5050.000	43.39	7.36	50.75	74.00	-23.25	peak	
10		5050.000	32.09	7.36	39.45	54.00	-14.55	AVG	
11		5725.000	41.56	8.90	50.46	74.00	-23.54	peak	
12	*	5725.000	31.31	8.90	40.21	54.00	-13.79	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

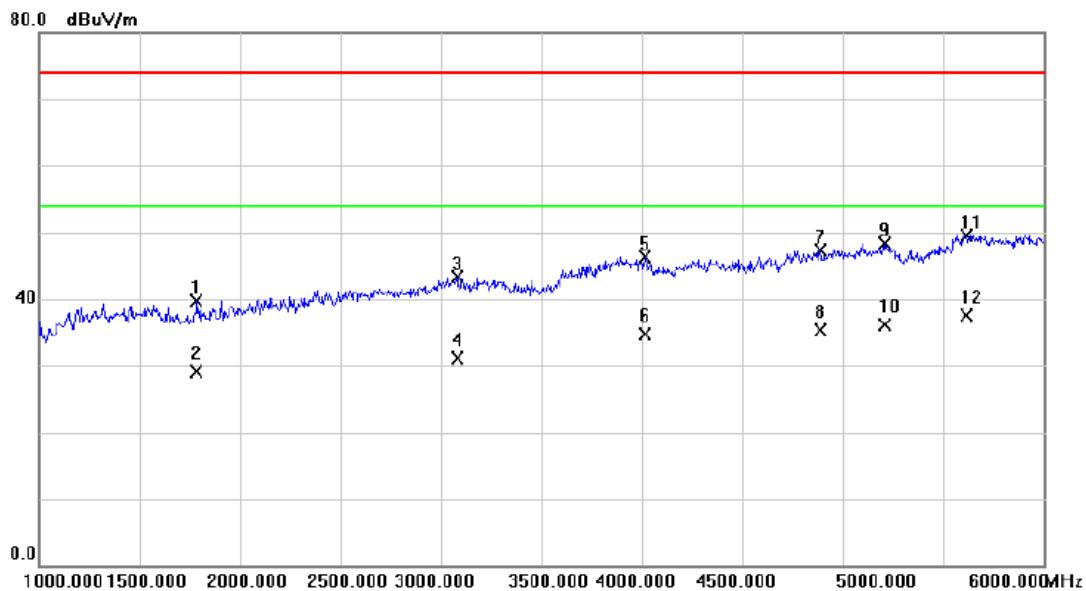

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		1785.000	43.08	-3.36	39.72	74.00	-34.28	peak
2		1785.000	32.48	-3.36	29.12	54.00	-24.88	AVG
3		3082.500	41.64	1.71	43.35	74.00	-30.65	peak
4		3082.500	29.49	1.71	31.20	54.00	-22.80	AVG
5		4017.500	41.37	4.94	46.31	74.00	-27.69	peak
6		4017.500	29.71	4.94	34.65	54.00	-19.35	AVG
7		4892.500	40.31	6.93	47.24	74.00	-26.76	peak
8		4892.500	28.30	6.93	35.23	54.00	-18.77	AVG
9		5207.500	40.70	7.58	48.28	74.00	-25.72	peak
10		5207.500	28.54	7.58	36.12	54.00	-17.88	AVG
11		5615.000	41.02	8.46	49.48	74.00	-24.52	peak
12	*	5615.000	29.06	8.46	37.52	54.00	-16.48	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Vertical

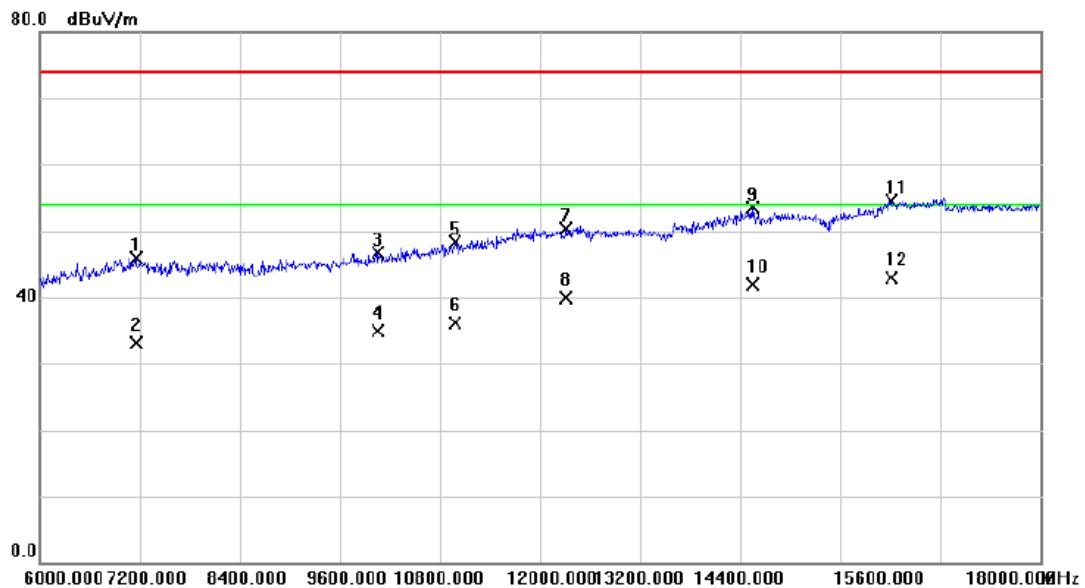

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7152.000	32.60	13.34	45.94	74.00	-28.06	peak	
2		7152.000	19.78	13.34	33.12	54.00	-20.88	AVG	
3		10050.00	31.27	15.52	46.79	74.00	-27.21	peak	
4		10050.00	19.32	15.52	34.84	54.00	-19.16	AVG	
5		10980.00	30.49	17.91	48.40	74.00	-25.60	peak	
6		10980.00	18.23	17.91	36.14	54.00	-17.86	AVG	
7		12312.00	29.42	20.87	50.29	74.00	-23.71	peak	
8		12312.00	19.00	20.87	39.87	54.00	-14.13	AVG	
9		14544.00	30.16	23.40	53.56	74.00	-20.44	peak	
10		14544.00	18.59	23.40	41.99	54.00	-12.01	AVG	
11		16212.00	30.81	23.68	54.49	74.00	-19.51	peak	
12	*	16212.00	19.20	23.68	42.88	54.00	-11.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	BT+WIFI(2.4G)+Gamera on+earphone+Adapter(SALCOMP)+Battery(SUNWODA)


Polarization: Horizontal

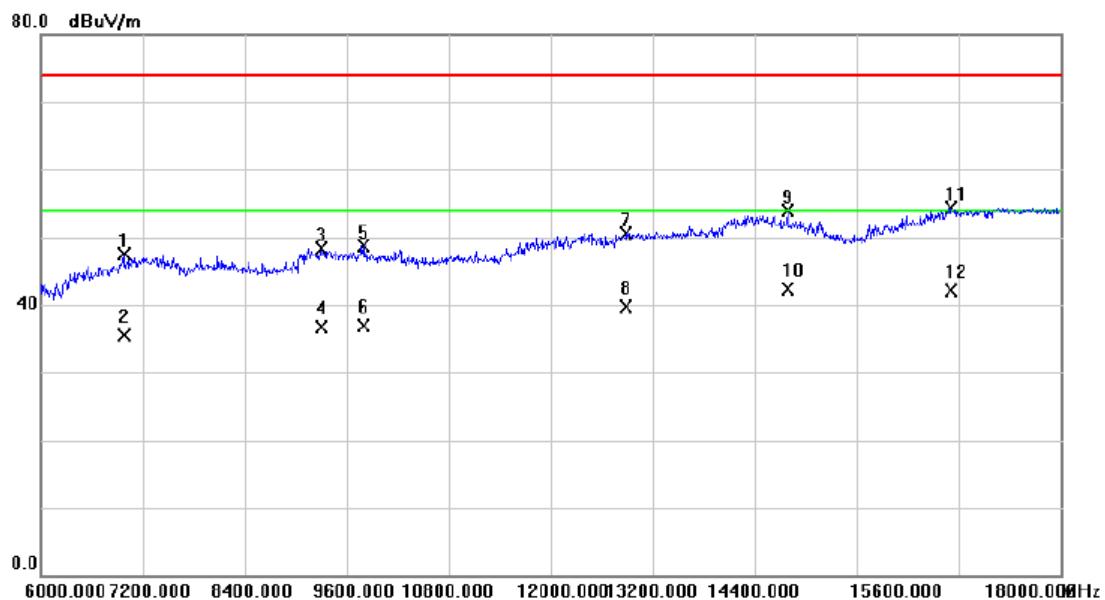

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		6978.000	34.35	13.06	47.41	74.00	-26.59	peak	
2		6978.000	22.40	13.06	35.46	54.00	-18.54	AVG	
3		9300.000	32.98	15.38	48.36	74.00	-25.64	peak	
4		9300.000	21.27	15.38	36.65	54.00	-17.35	AVG	
5		9792.000	33.32	15.40	48.72	74.00	-25.28	peak	
6		9792.000	21.51	15.40	36.91	54.00	-17.09	AVG	
7		12888.00	29.17	21.42	50.59	74.00	-23.41	peak	
8		12888.00	18.22	21.42	39.64	54.00	-14.36	AVG	
9		14784.00	30.69	23.15	53.84	74.00	-20.16	peak	
10	*	14784.00	19.16	23.15	42.31	54.00	-11.69	AVG	
11		16704.00	29.45	24.93	54.38	74.00	-19.62	peak	
12		16704.00	17.22	24.93	42.15	54.00	-11.85	AVG	

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Type C R/W+earphone+Battery(SUNWODA)


Polarization: Vertical

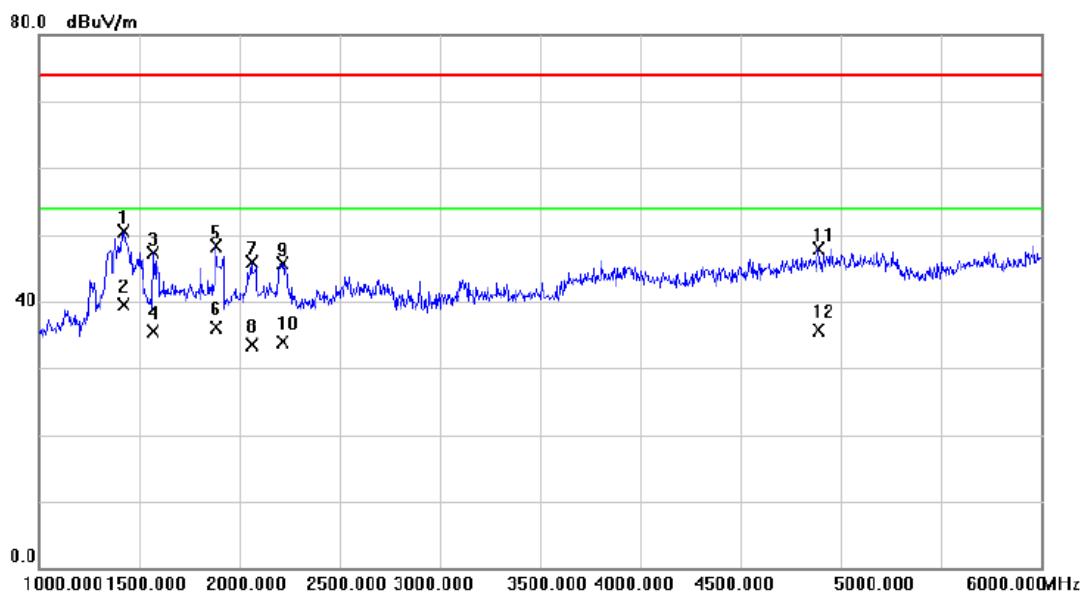

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1425.000	54.58	-4.00	50.58	74.00	-23.42	peak	
2	*	1425.000	43.45	-4.00	39.45	54.00	-14.55	AVG	
3		1570.000	51.05	-3.67	47.38	74.00	-26.62	peak	
4		1570.000	39.12	-3.67	35.45	54.00	-18.55	AVG	
5		1885.000	51.55	-3.22	48.33	74.00	-25.67	peak	
6		1885.000	39.34	-3.22	36.12	54.00	-17.88	AVG	
7		2060.000	48.71	-2.74	45.97	74.00	-28.03	peak	
8		2060.000	36.19	-2.74	33.45	54.00	-20.55	AVG	
9		2215.000	47.66	-1.89	45.77	74.00	-28.23	peak	
10		2215.000	35.76	-1.89	33.87	54.00	-20.13	AVG	
11		4890.000	41.06	6.93	47.99	74.00	-26.01	peak	
12		4890.000	28.85	6.93	35.78	54.00	-18.22	AVG	

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Type C R/W+earphone+Battery(SUNWODA)


Polarization: Horizontal

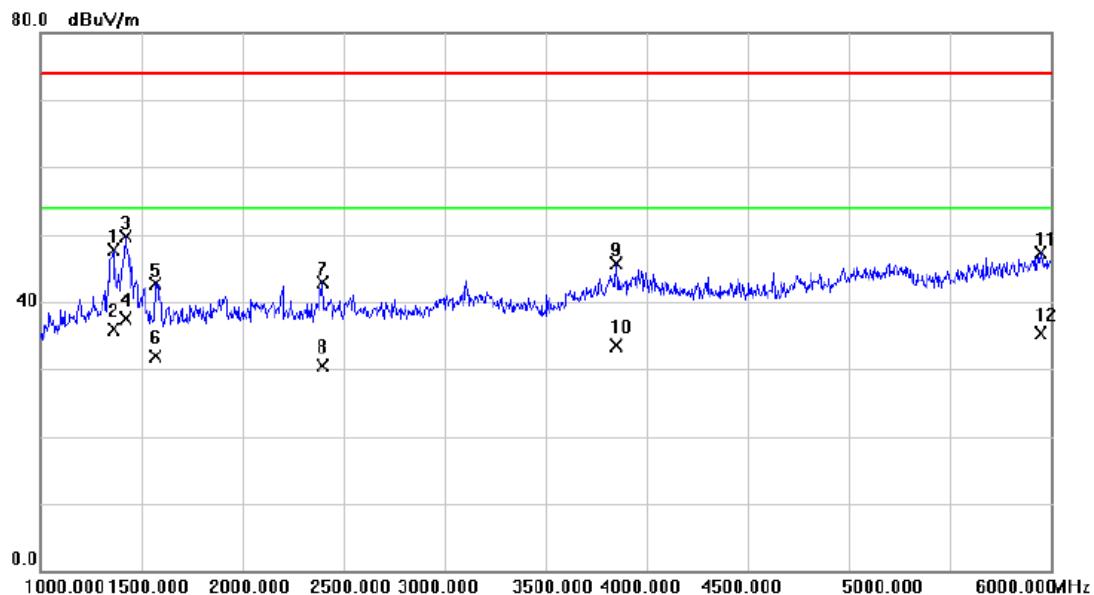

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
1		1360.000	51.84	-4.21	47.63	74.00	-26.37	peak
2		1360.000	40.20	-4.21	35.99	54.00	-18.01	AVG
3		1420.000	53.69	-4.02	49.67	74.00	-24.33	peak
4	*	1420.000	41.56	-4.02	37.54	54.00	-16.46	AVG
5		1570.000	46.40	-3.67	42.73	74.00	-31.27	peak
6		1570.000	35.61	-3.67	31.94	54.00	-22.06	AVG
7		2395.000	43.83	-0.91	42.92	74.00	-31.08	peak
8		2395.000	31.37	-0.91	30.46	54.00	-23.54	AVG
9		3850.000	41.41	4.32	45.73	74.00	-28.27	peak
10		3850.000	29.13	4.32	33.45	54.00	-20.55	AVG
11		5950.000	37.54	9.80	47.34	74.00	-26.66	peak
12		5950.000	25.57	9.80	35.37	54.00	-18.63	AVG

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Type C R/W+earphone+Battery(SUNWODA)


Polarization: Vertical

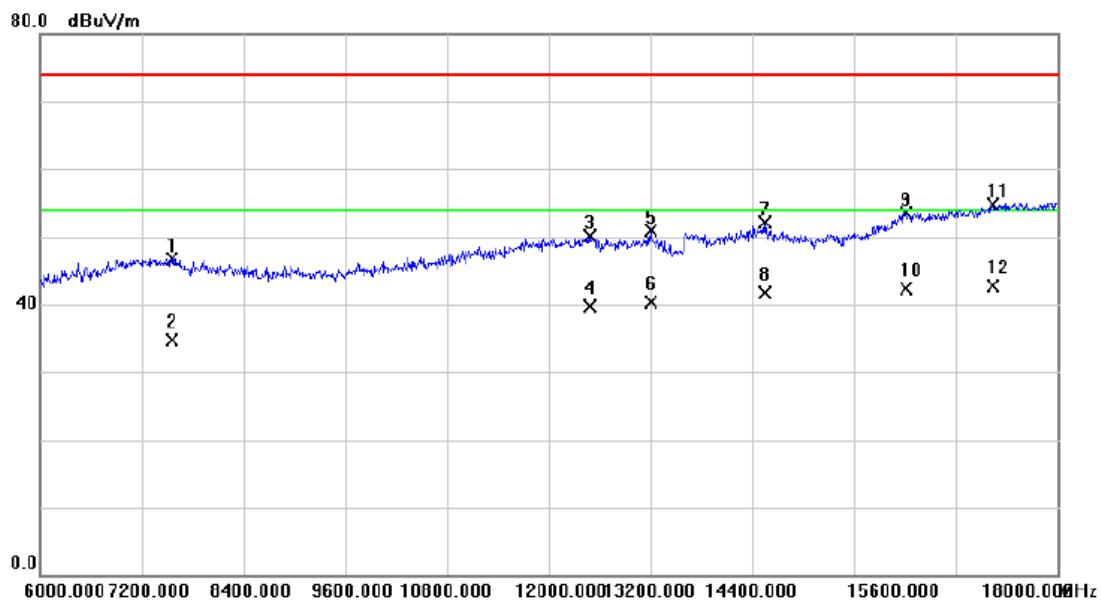

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		7566.000	32.87	13.88	46.75	74.00	-27.25	peak
2		7566.000	20.74	13.88	34.62	54.00	-19.38	AVG
3		12480.00	29.29	20.90	50.19	74.00	-23.81	peak
4		12480.00	18.75	20.90	39.65	54.00	-14.35	AVG
5		13200.00	29.21	21.61	50.82	74.00	-23.18	peak
6		13200.00	18.60	21.61	40.21	54.00	-13.79	AVG
7		14544.00	28.66	23.40	52.06	74.00	-21.94	peak
8		14544.00	18.22	23.40	41.62	54.00	-12.38	AVG
9		16212.00	29.81	23.68	53.49	74.00	-20.51	peak
10		16212.00	18.53	23.68	42.21	54.00	-11.79	AVG
11		17238.00	27.84	26.77	54.61	74.00	-19.39	peak
12	*	17238.00	16.00	26.77	42.77	54.00	-11.23	AVG

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Type C R/W+earphone+Battery(SUNWODA)


Polarization: Horizontal

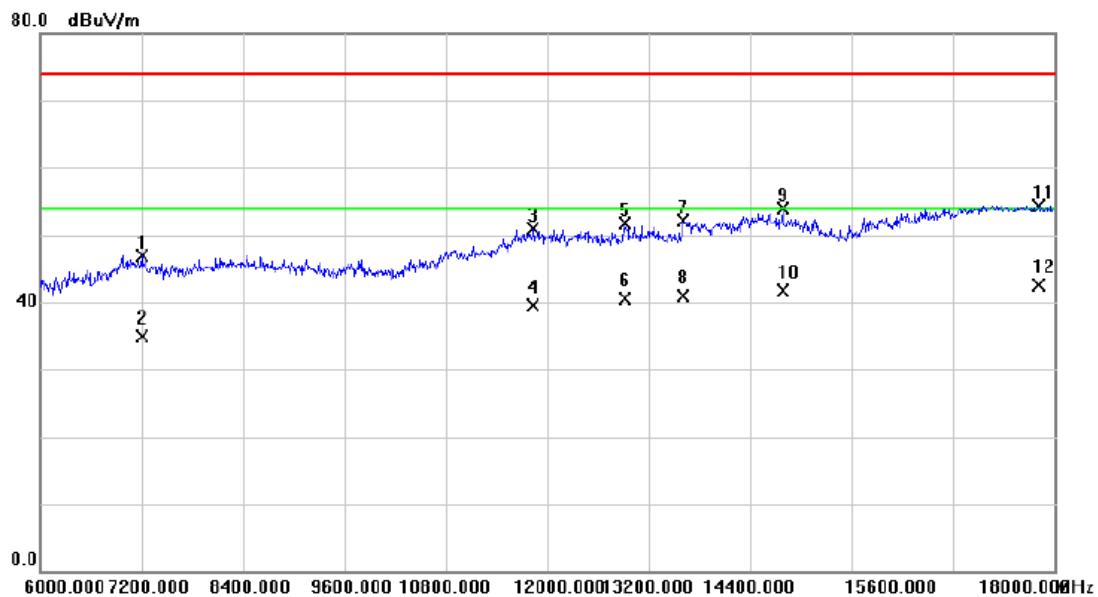

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		7206.000	33.51	13.41	46.92	74.00	-27.08	peak
2		7206.000	21.44	13.41	34.85	54.00	-19.15	AVG
3		11832.00	30.46	20.36	50.82	74.00	-23.18	peak
4		11832.00	19.09	20.36	39.45	54.00	-14.55	AVG
5		12912.00	30.16	21.45	51.61	74.00	-22.39	peak
6		12912.00	19.10	21.45	40.55	54.00	-13.45	AVG
7		13614.00	30.17	21.86	52.03	74.00	-21.97	peak
8		13614.00	19.08	21.86	40.94	54.00	-13.06	AVG
9		14784.00	30.69	23.15	53.84	74.00	-20.16	peak
10		14784.00	18.63	23.15	41.78	54.00	-12.22	AVG
11		17814.00	24.07	30.30	54.37	74.00	-19.63	peak
12 *		17814.00	12.16	30.30	42.46	54.00	-11.54	AVG

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Charge to pen+earphone+Battery(SUNWODA)


Polarization: Vertical

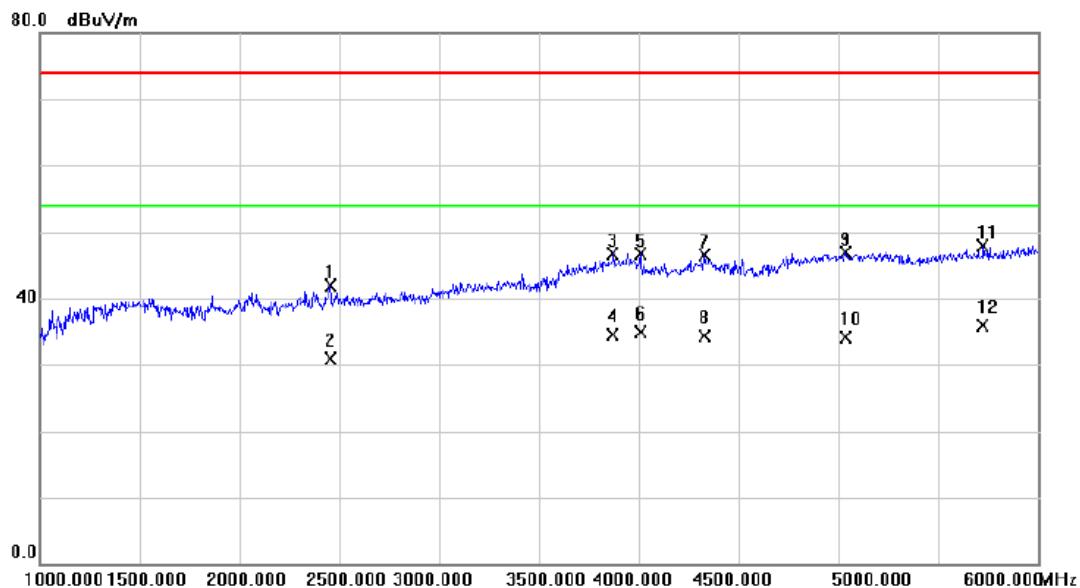

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	2457.500	42.39	-0.57	41.82	74.00	-32.18	peak	
2	2457.500	31.52	-0.57	30.95	54.00	-23.05	AVG	
3	3872.500	42.23	4.41	46.64	74.00	-27.36	peak	
4	3872.500	30.11	4.41	34.52	54.00	-19.48	AVG	
5	4007.500	41.75	4.93	46.68	74.00	-27.32	peak	
6	4007.500	29.88	4.93	34.81	54.00	-19.19	AVG	
7	4330.000	41.01	5.41	46.42	74.00	-27.58	peak	
8	4330.000	28.91	5.41	34.32	54.00	-19.68	AVG	
9	5035.000	39.53	7.34	46.87	74.00	-27.13	peak	
10	5035.000	26.83	7.34	34.17	54.00	-19.83	AVG	
11	5725.000	39.06	8.90	47.96	74.00	-26.04	peak	
12 *	5725.000	27.07	8.90	35.97	54.00	-18.03	AVG	

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Charge to pen+earphone+Battery(SUNWODA)


Polarization: Horizontal

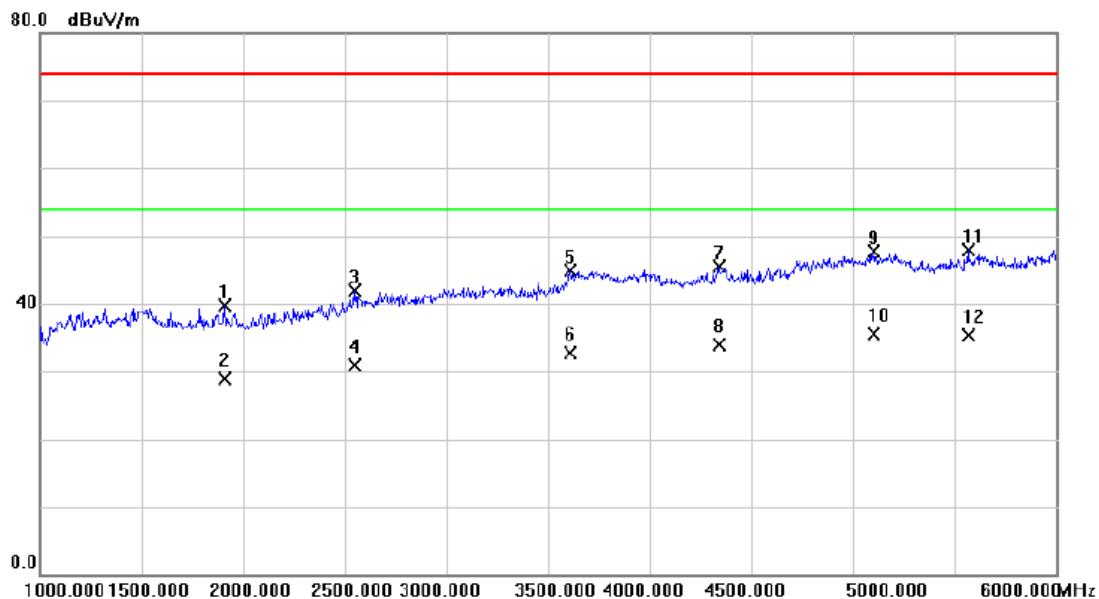

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		1907.500	42.88	-3.19	39.69	74.00	-34.31	peak
2		1907.500	32.14	-3.19	28.95	54.00	-25.05	AVG
3		2547.500	42.01	-0.16	41.85	74.00	-32.15	peak
4		2547.500	31.00	-0.16	30.84	54.00	-23.16	AVG
5		3612.500	41.44	3.38	44.82	74.00	-29.18	peak
6		3612.500	29.23	3.38	32.61	54.00	-21.39	AVG
7		4342.500	40.01	5.42	45.43	74.00	-28.57	peak
8		4342.500	28.45	5.42	33.87	54.00	-20.13	AVG
9		5105.000	40.32	7.44	47.76	74.00	-26.24	peak
10	*	5105.000	28.16	7.44	35.60	54.00	-18.40	AVG
11		5567.500	39.67	8.27	47.94	74.00	-26.06	peak
12		5567.500	26.96	8.27	35.23	54.00	-18.77	AVG

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Charge to pen+earphone+Battery(SUNWODA)


Polarization: Vertical

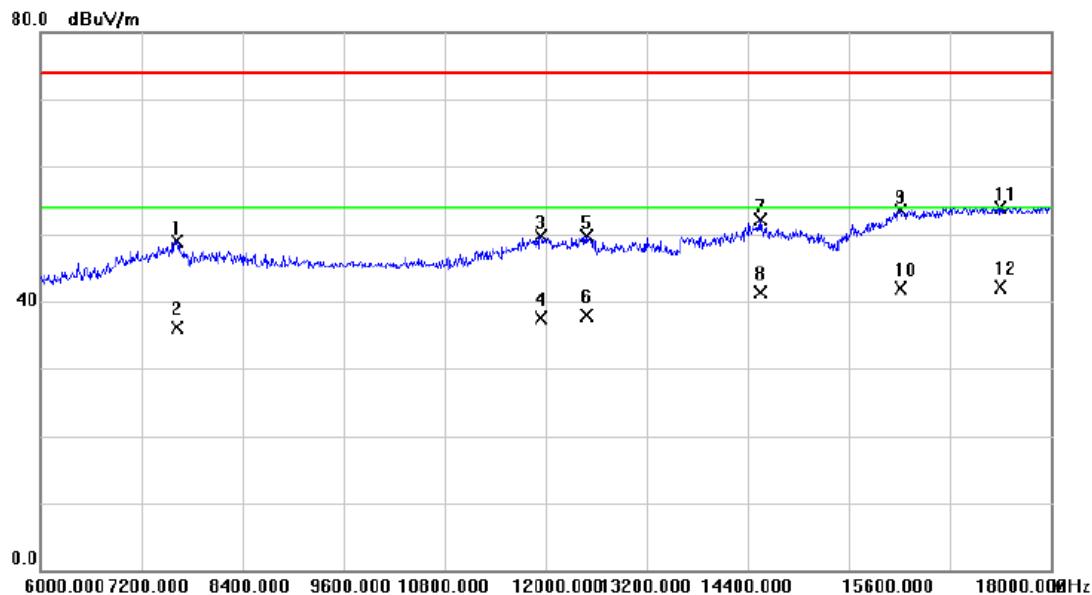

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7626.000	34.98	13.96	48.94	74.00	-25.06	peak	
2		7626.000	22.16	13.96	36.12	54.00	-17.88	AVG	
3		11940.00	29.06	20.66	49.72	74.00	-24.28	peak	
4		11940.00	16.86	20.66	37.52	54.00	-16.48	AVG	
5		12480.00	28.79	20.90	49.69	74.00	-24.31	peak	
6		12480.00	16.92	20.90	37.82	54.00	-16.18	AVG	
7		14544.00	28.66	23.40	52.06	74.00	-21.94	peak	
8		14544.00	17.92	23.40	41.32	54.00	-12.68	AVG	
9		16212.00	29.81	23.68	53.49	74.00	-20.51	peak	
10		16212.00	18.29	23.68	41.97	54.00	-12.03	AVG	
11		17394.00	26.38	27.56	53.94	74.00	-20.06	peak	
12	*	17394.00	14.45	27.56	42.01	54.00	-11.99	AVG	

Test Voltage:	DC 7.6V
Test Mode:	BT+WIFI(2.4G)+Charge to pen+earphone+Battery(SUNWODA)

Polarization: Horizontal

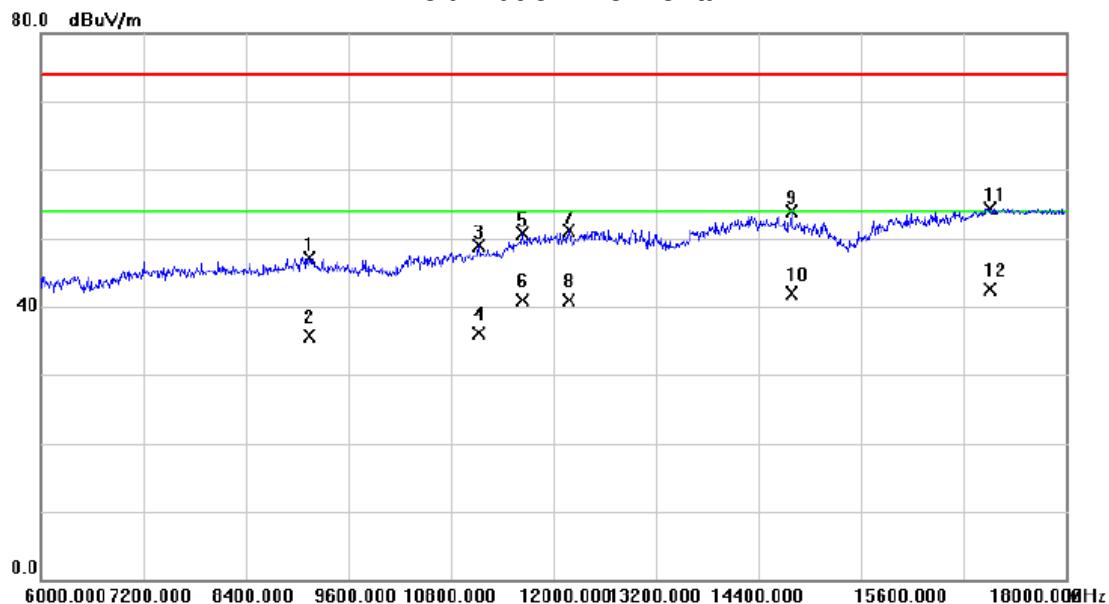

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin	Detector	Comment
1		9144.000	31.76	15.36	47.12	74.00	-26.88	peak	
2		9144.000	20.26	15.36	35.62	54.00	-18.38	AVG	
3		11124.00	30.51	18.33	48.84	74.00	-25.16	peak	
4		11124.00	17.79	18.33	36.12	54.00	-17.88	AVG	
5		11646.00	30.77	19.86	50.63	74.00	-23.37	peak	
6		11646.00	20.99	19.86	40.85	54.00	-13.15	AVG	
7		12186.00	30.28	20.85	51.13	74.00	-22.87	peak	
8		12186.00	20.00	20.85	40.85	54.00	-13.15	AVG	
9		14784.00	30.69	23.15	53.84	74.00	-20.16	peak	
10		14784.00	18.81	23.15	41.96	54.00	-12.04	AVG	
11		17106.00	28.28	26.10	54.38	74.00	-19.62	peak	
12	*	17106.00	16.46	26.10	42.56	54.00	-11.44	AVG	