

FCC Radio Test Report

FCC ID: QISHZ-W19

This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change

Project No. : 1603C029
Equipment : HUAWEI MateBook
Model Name : HZ-W19
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Mar. 02, 2016
Date of Test : Mar. 02, 2016 ~ Mar. 31, 2016
Issued Date : Apr. 01, 2016
Tested by : BTL Inc.

Testing Engineer

: Shawn Xiao
(Shawn Xiao)

Technical Manager

: David Mao
(David Mao)

Authorized Signatory

: Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	14
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	16
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
3.5 DESCRIPTION OF SUPPORT UNITS	18
4 . EMC EMISSION TEST	19
4.1 CONDUCTED EMISSION MEASUREMENT	19
4.1.1 POWER LINE CONDUCTED EMISSION	19
4.1.2 TEST PROCEDURE	19
4.1.3 DEVIATION FROM TEST STANDARD	19
4.1.4 TEST SETUP	20
4.1.5 EUT OPERATING CONDITIONS	20
4.1.6 EUT TEST CONDITIONS	20
4.1.7 TEST RESULTS	20
4.2 RADIATED EMISSION MEASUREMENT	21
4.2.1 RADIATED EMISSION LIMITS	21
4.2.2 TEST PROCEDURE	22
4.2.3 DEVIATION FROM TEST STANDARD	22
4.2.4 TEST SETUP	22
4.2.5 EUT OPERATING CONDITIONS	24
4.2.6 EUT TEST CONDITIONS	24
4.2.7 TEST RESULTS (9K TO 30MHz)	25
4.2.8 TEST RESULTS (30 TO 1000 MHz)	25
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	25
5 . SPECTRUM BANDWIDTH	26
5.1 APPLIED PROCEDURES / LIMIT	26
5.1.1 TEST PROCEDURE	26
5.1.2 DEVIATION FROM STANDARD	26
5.1.3 TEST SETUP	26
5.1.4 EUT OPERATION CONDITIONS	26
5.1.5 EUT TEST CONDITIONS	27
5.1.6 TEST RESULTS	27
6 . MAXIMUM CONDUCTED OUTPUT POWER	28

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	28
6.1.1 TEST PROCEDURE	28
6.1.2 DEVIATION FROM STANDARD	29
6.1.3 TEST SETUP	29
6.1.4 EUT OPERATION CONDITIONS	29
6.1.5 EUT TEST CONDITIONS	29
6.1.6 TEST RESULTS	29
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	30
7.1 APPLIED PROCEDURES / LIMIT	30
7.1.1 TEST PROCEDURE	30
7.1.2 DEVIATION FROM STANDARD	30
7.1.3 TEST SETUP	30
7.1.4 EUT OPERATION CONDITIONS	30
7.1.5 EUT TEST CONDITIONS	30
7.1.6 TEST RESULTS	30
8 . POWER SPECTRAL DENSITY TEST	31
8.1 APPLIED PROCEDURES / LIMIT	31
8.1.1 TEST PROCEDURE	31
8.1.1 DEVIATION FROM STANDARD	32
8.1.2 TEST SETUP	32
8.1.3 EUT OPERATION CONDITIONS	32
8.1.4 EUT TEST CONDITIONS	32
8.1.5 TEST RESULTS	32
9 . FREQUENCY STABILITY MEASUREMENT	33
9.1 APPLIED PROCEDURES / LIMIT	33
9.1.1 TEST PROCEDURE	33
9.1.2 DEVIATION FROM STANDARD	33
9.1.3 TEST SETUP	34
9.1.4 EUT OPERATION CONDITIONS	34
9.1.5 EUT TEST CONDITIONS	34
9.1.6 TEST RESULTS	34
10 . MEASUREMENT INSTRUMENTS LIST	35
ATTACHMENT A - CONDUCTED EMISSION	37
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	42
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	51
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	148
ATTACHMENT E - BANDWIDTH	917
ATTACHMENT F - MAXIMUM OUTPUT POWER	963

Table of Contents

Page

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	988
ATTACHMENT H - POWER SPECTRAL DENSITY	1033
ATTACHMENT I - FREQUENCY STABILITY	1136

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-4-1603C029	Original Issue.	Apr. 01, 2016

1. CERTIFICATION

Equipment : HUAWEI MateBook
Brand Name : HUAWEI
Model Name : HZ-W19
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : FUTAIHUA INDUSTRY (SHENZHEN) Co., LTD
Address : Building 4,6,7,13 (Section I), Foxconn Guan Lan Technology Park B District,
Da ShuiKeng Community, Guan Lan Town, Baoan, Shenzhen 518110, P.R.
China
Date of Test : Mar. 02, 2016 ~ Mar. 31, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-4-1603C029) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the 5GHz part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MateBook	
Brand Name	HUAWEI	
Model Name	HZ-W19	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	1300Mbps
	Output Power (Max.)for UNII-1	802.11A: 12.02dBm 802.11N (20M): 12.07dBm 802.11N (40M): 11.95dBm 802.11AC (VHT20MHz): 11.76dBm 802.11AC (VHT40MHz): 11.54dBm 802.11AC (VHT80MHz): 11.97dBm
	Output Power (Max.)for UNII-2A	802.11a: 11.99dBm 802.11N (20M): 12.25dBm 802.11N (40M): 11.90dBm 802.11AC (VHT20MHz): 11.96dBm 802.11AC (VHT40MHz): 11.50dBm 802.11AC (VHT80MHz): 11.70dBm
	Output Power (Max.)for UNII-2C	802.11a: 9.98dBm 802.11N (20M): 10.06dBm 802.11N (40M): 9.92dBm 802.11AC (VHT20MHz): 9.74dBm 802.11AC (VHT40MHz): 9.51dBm 802.11AC (VHT80MHz): 9.93dBm
	Output Power (Max.)for UNII-3	802.11a: 9.99dBm 802.11N (20M): 9.96dBm 802.11N (40M): 9.88dBm 802.11AC (VHT20MHz): 9.67dBm 802.11AC (VHT40MHz): 9.47dBm 802.11AC (VHT80MHz): 9.88dBm

Power Source	#1 DC Voltage supplied from adapter. Brand/Model: HUAWEI / HW-59C200UHPQ1 #2 Supplied from battery.
Power Rating	#1 1) I/P:100-240V~50/60Hz 1.0A O/P: 5V --- 2A OR 9V --- 2A OR 12V --- 2A #2 DC 7.60V/4300mAh/32.7Wh
HW Version	S1
SW Version	HZ-09C001B002

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT contains following accessory devices

Item	Mfr/Brand	Model.
USB-C Data Charger Cable	HUAWEI	N/A
USB-C to Micro-USB Cable	HUAWEI	N/A
Micro-USB to USB-A Adaptor	HUAWEI	N/A
Battery	Sunwoda Electronic Co., LTD	HB25B7N4EBC
	SCUD (FUJIAN) Electronics Co., Ltd	HB25B7N4EBC
	Harbin Coslight Power Co., Ltd.	HB25B7N4EBC
Portfolio Keyboard(Optional)	HUAWEI	AF20
MatePen(Optional)	HUAWEI	AF61

3. Channel List:

802.11A 802.11N 20MHz 802.11AC (VHT20MHz)		802.11N 40MHz 802.11AC (VHT40MHz)		802.11AC (VHT80MHz)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

802.11A 802.11N 20MHz 802.11AC (VHT20MHz)		802.11N 40MHz 802.11AC (VHT40MHz)		802.11AC (VHT80MHz)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

802.11A 802.11N 20MHz 802.11AC (VHT20MHz)		802.11N 40MHz 802.11AC (VHT40MHz)		802.11AC (VHT80MHz)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

802.11A 802.11N 20MHz 802.11AC (VHT20MHz)		802.11N 40MHz 802.11AC (VHT40MHz)		802.11AC (VHT80MHz)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

4. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	1.5
2	N/A	N/A	Internal	N/A	1.5

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R).

5.

Operating Mode TX Mode	1TX	2TX
802.11A	V (ANT 1 or ANT 2)	-
802.11N (20MHz)	V (ANT 1 or ANT 2)	V (ANT 1 + ANT 2)
802.11N (40MHz)	V (ANT 1 or ANT 2)	V (ANT 1 + ANT 2)
802.11AC (VHT20MHz)	V (ANT 1 or ANT 2)	V (ANT 1 + ANT 2)
802.11AC (VHT40MHz)	V (ANT 1 or ANT 2)	V (ANT 1 + ANT 2)
802.11AC (VHT80MHz)	V (ANT 1 or ANT 2)	V (ANT 1 + ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC(VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC(VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC(VHT80) Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC(VHT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC(VHT40) Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC(VHT80) Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 16	TX AC(VHT20) Mode / CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC(VHT40) Mode / CH102, CH110, CH134 (UNII-2C)
Mode 18	TX AC(VHT80) Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC(VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC(VHT40) Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC(VHT80) Mode / CH155 (UNII-3)
Mode 25	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 25	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC(VHT20) Mode / CH36, CH48 (UNII-1)
Mode 5	TX AC(VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC(VHT80) Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH64 (UNII-2A)
Mode 8	TX N20 Mode / CH52, CH64 (UNII-2A)
Mode 9	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC(VHT20) Mode / CH52, CH64 (UNII-2A)
Mode 11	TX AC(VHT40) Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC(VHT80) Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH140 (UNII-2C)
Mode 14	TX N20 Mode / CH100, CH140 (UNII-2C)
Mode 15	TX N40 Mode / CH102, CH134 (UNII-2C)
Mode 16	TX AC(VHT20) Mode / CH100, CH140 (UNII-2C)
Mode 17	TX AC(VHT40) Mode / CH102, CH134 (UNII-2C)
Mode 18	TX AC(VHT80) Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149, CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149, CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151, CH159 (UNII-3)
Mode 22	TX AC(VHT20) Mode / CH149, CH165 (UNII-3)
Mode 23	TX AC(VHT40) Mode / CH151, CH159 (UNII-3)
Mode 24	TX AC(VHT80) Mode / CH155 (UNII-3)

Note:

- (1) For 1TX radiated below 1GHz test, the 802.11A mode is found to be the worst case and recorded.
 For 2TX radiated below 1GHz test, the 802.11N20 mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

UNII-1			
Test Software Version	MTOOL		
Frequency (MHz)	5180	5200	5240
A Mode	45	45	42
N20 Mode	26	25	25
Frequency (MHz)	5190	5230	
N40 Mode	22	21	

UNII-2A			
Test Software Version	MTOOL		
Frequency (MHz)	5260	5300	5320
A Mode	41	38	37
N20 Mode	29	27	27
Frequency (MHz)	5270	5310	
N40 Mode	27	25	

UNII-2C			
Test Software Version	MTOOL		
Frequency (MHz)	5500	5580	5700
A Mode	33	35	34
N20 Mode	24	26	24
Frequency (MHz)	5510	5550	5670
N40 Mode	21	23	22

UNII-3			
Test Software Version	MTOOL		
Frequency (MHz)	5745	5785	5825
A Mode	36	35	35
N20 Mode	25	24	24
Frequency (MHz)	5755	5795	
N40 Mode	23	23	


UNII-1			
Test Software Version	MTOOL		
Frequency (MHz)	5180	5200	5240
AC(VHT20) Mode	25	24	24
Frequency (MHz)	5190	5230	
AC(VHT40) Mode	22	21	
Frequency (MHz)	5210		
AC(VHT80) Mode	25		

UNII-2A			
Test Software Version	MTOOL		
Frequency (MHz)	5260	5300	5320
AC(VHT20) Mode	28	26	26
Frequency (MHz)	5270	5310	
AC(VHT40) Mode	27	25	
Frequency (MHz)	5290		
AC(VHT80) Mode	27		

UNII-2C			
Test Software Version	MTOOL		
Frequency (MHz)	5500	5580	5700
AC(VHT20) Mode	23	25	23
Frequency (MHz)	5510	5550	5670
AC(VHT40) Mode	21	23	22
Frequency (MHz)	5530	5610	
AC(VHT80) Mode	24	24	

UNII-3			
Test Software Version	MTOOL		
Frequency (MHz)	5745	5785	5825
AC(VHT20) Mode	24	23	23
Frequency (MHz)	5755	5795	
AC(VHT40) Mode	23	23	
Frequency (MHz)	5775		
AC(VHT80) Mode	25		

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

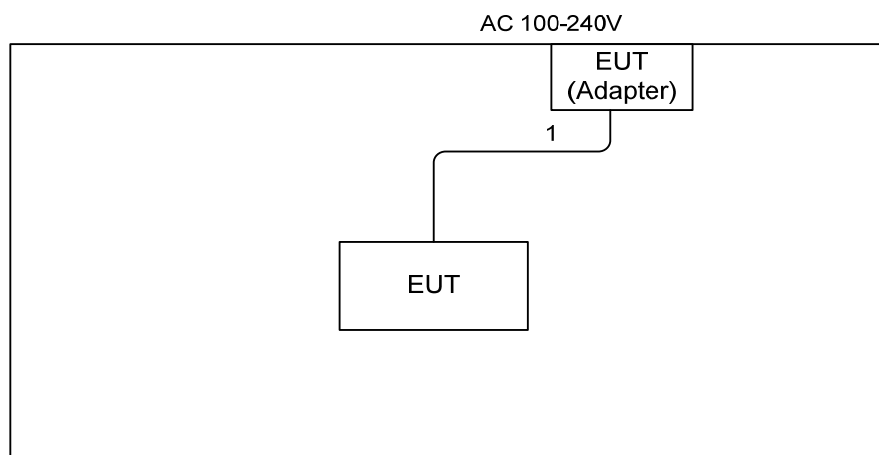

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.4m	Type C Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

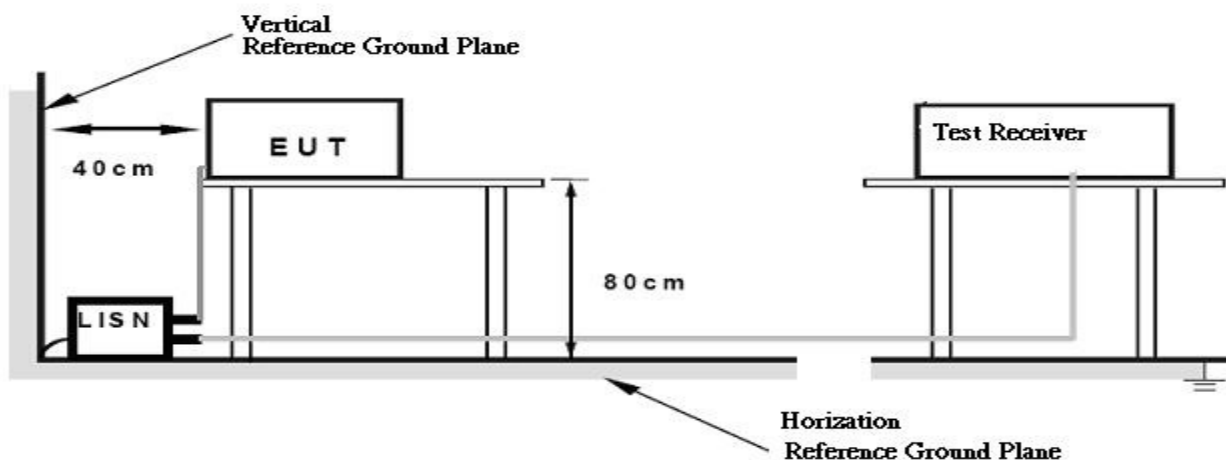

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (beyond 10MHz of the band edge)	68.3
	-17 (within 10 MHz of band edge)	78.3

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3m or 1.5 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1GHz

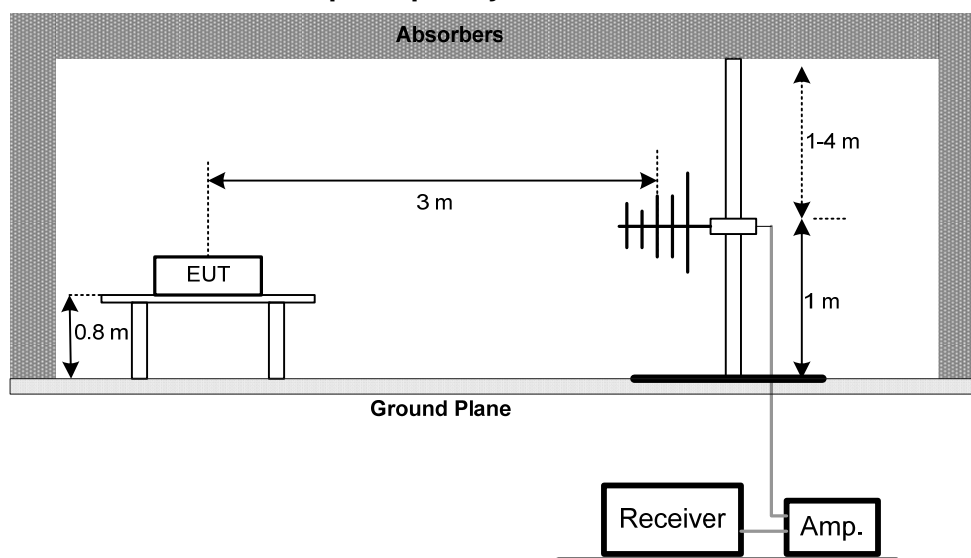


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz
Band edge

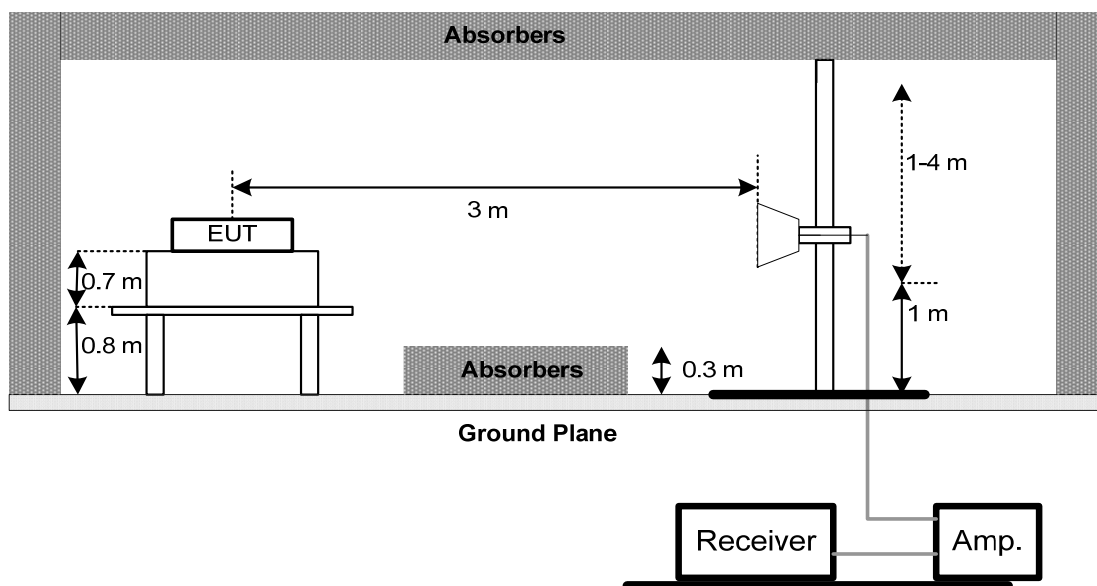

Harmonic

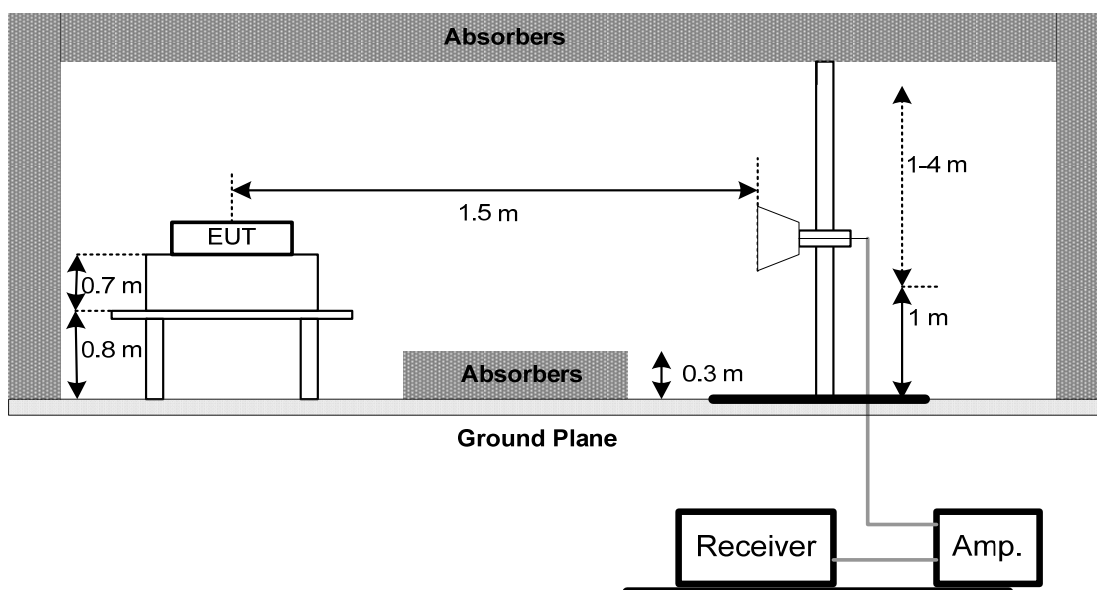

(C) Radiated emissions below 30MHz

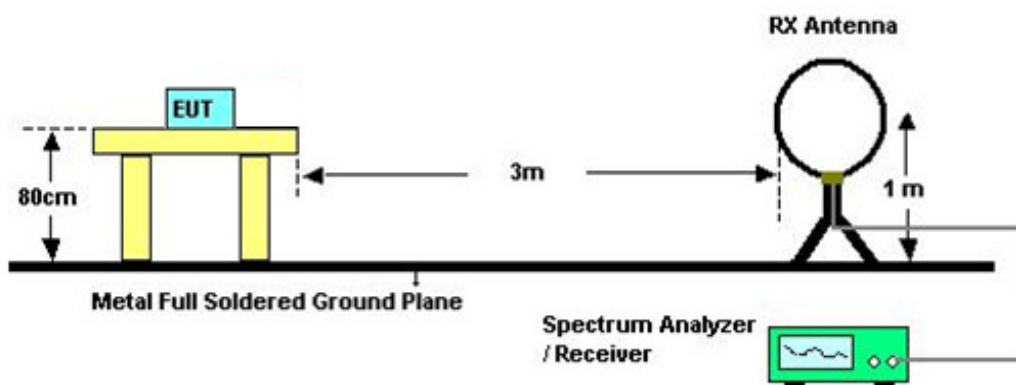

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 56% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30 TO 1000 MHz)

Please refer to the Attachment C.

Remark:

- (1) Measuring frequency range from 30MHz to 1000MHz ◦
- (2) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (5) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (6) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	26 dB Bandwidth	5150-5250	PASS
	26 dB Bandwidth	5250-5350	PASS
	26 dB Bandwidth	5470-5725	PASS
	Minimum 500kHz 6dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 56% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Conducted Output Power	Fixed:1 Watt (30dBm) Mobile and portable: 250mW (24dBm)	5150-5250	PASS
	250mW (24dBm)	5250-5350	PASS
	250mW (24dBm)	5470-5725	PASS
	1 Watt (30dBm)	5725-5850	PASS
Note: The maximum e.i.r.p at anyelevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)			

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	$\geq$ 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 56% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27dBm/MHz	5150-5250	PASS
	-27dBm/MHz	5250-5350	PASS
	-27dBm/MHz	5470-5725	PASS
	Below -17dBm/MHz within 10MHz of band edge, below -27dBm/MHz beyond 10MHz of the band edge	5725-5850	PASS

7.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
RBW	1000kHz
VBW	1000kHz
Trace	Max Hold
Sweep Time	Auto

c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 56% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250	PASS
	11dBm/MHz	5250-5350	PASS
	11dBm/MHz	5470-5725	PASS
	30dBm/500kHz	5725-5850	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

8.1.1 DEVIATION FROM STANDARD

No deviation.

8.1.2 TEST SETUP



8.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.4 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 56% Test Voltage: AC 120V/60Hz

8.1.5 TEST RESULTS

Please refer to the Attachment H.

9. FREQUENCY STABILITY MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	Specified in the user's manual	5150-5250	PASS
		5250-5350	PASS
		5470-5725	PASS
		5725-5850	PASS

9.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is 0°C~35°C.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP

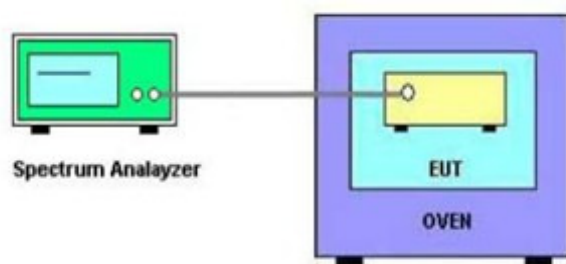

9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

9.1.6 TEST RESULTS

Please refer to the Attachment I.

10. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Controller	CT	SC100	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz – 26.5GHz)	C-68	Jun. 28, 2016
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 27, 2017
12	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
13	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	power Meter	ANRITSU	ML2495A	1128009	Mar. 27, 2017
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 27, 2017

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016


Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016
2	Const Temp. & Humidity Chamber	Giant Force	ITH-225-20-S	IAB0309-001	Dec. 04 2016

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode(Adapter: BYD)


Line

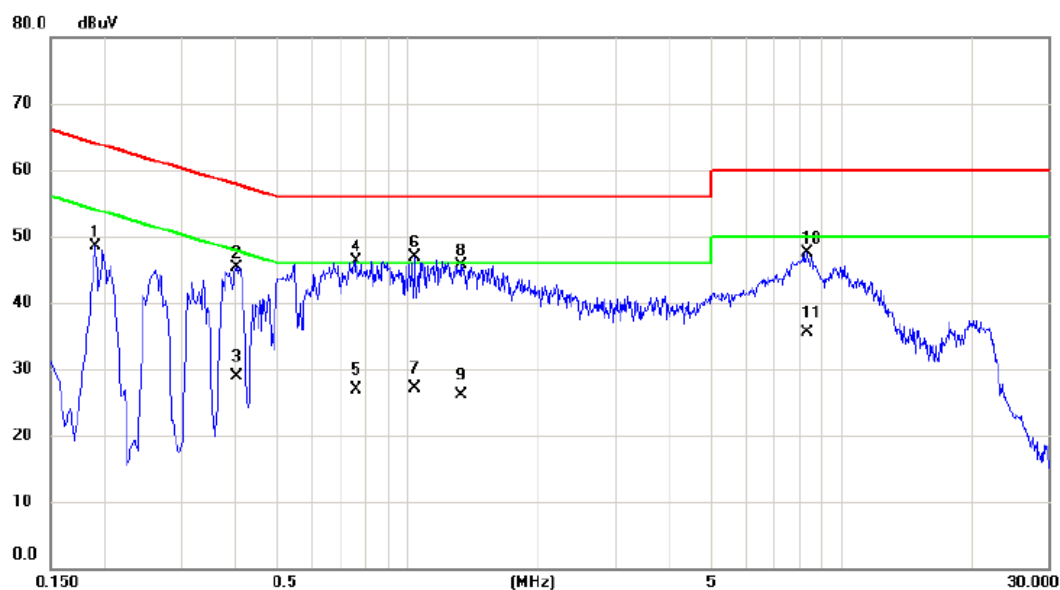

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1900	39.06	9.48	48.54	64.04	-15.50	peak	
2	0.4020	35.72	9.52	45.24	57.81	-12.57	peak	
3	0.4020	19.46	9.52	28.98	47.81	-18.83	AVG	
4	0.7580	36.81	9.56	46.37	56.00	-9.63	peak	
5	0.7580	17.35	9.56	26.91	46.00	-19.09	AVG	
6 *	1.0340	37.29	9.58	46.87	56.00	-9.13	peak	
7	1.0340	17.47	9.58	27.05	46.00	-18.95	AVG	
8	1.3260	36.12	9.63	45.75	56.00	-10.25	peak	
9	1.3260	16.55	9.63	26.18	46.00	-19.82	AVG	
10	8.3300	37.60	9.85	47.45	60.00	-12.55	peak	
11	8.3300	25.66	9.85	35.51	50.00	-14.49	AVG	

Test Mode: TX Mode(Adapter: BYD)


Neutral

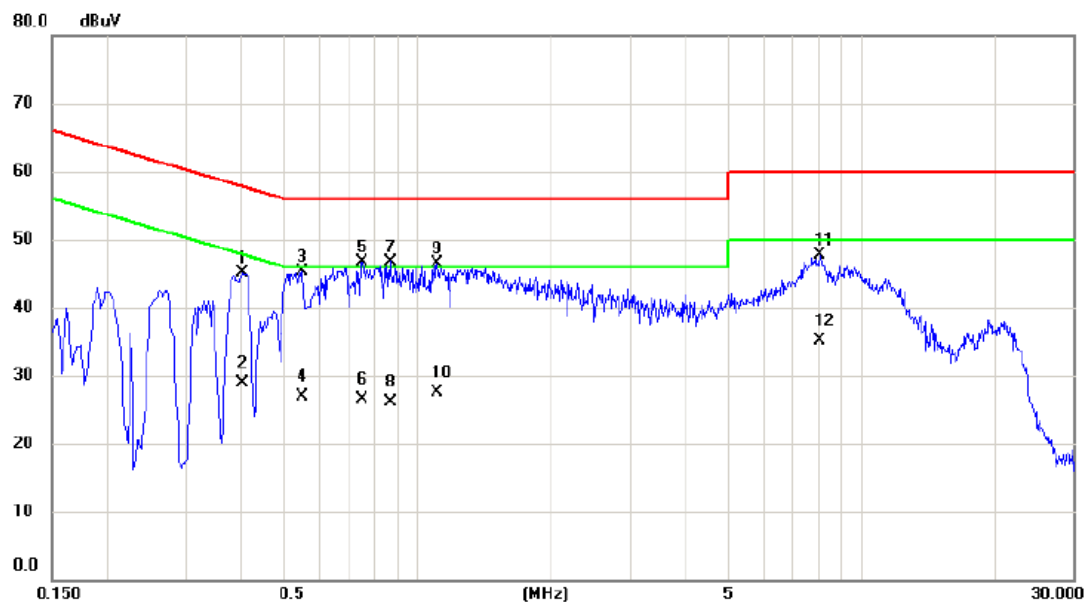

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4020	35.44	9.67	45.11	57.81	-12.70	peak	
2		0.4020	19.27	9.67	28.94	47.81	-18.87	AVG	
3		0.5500	35.61	9.69	45.30	56.00	-10.70	peak	
4		0.5500	17.21	9.69	26.90	46.00	-19.10	AVG	
5		0.7500	36.97	9.76	46.73	56.00	-9.27	peak	
6		0.7500	16.83	9.76	26.59	46.00	-19.41	AVG	
7	*	0.8700	37.03	9.77	46.80	56.00	-9.20	peak	
8		0.8700	16.34	9.77	26.11	46.00	-19.89	AVG	
9		1.1060	36.65	9.80	46.45	56.00	-9.55	peak	
10		1.1060	17.65	9.80	27.45	46.00	-18.55	AVG	
11		8.0500	37.82	9.91	47.73	60.00	-12.27	peak	
12		8.0500	25.10	9.91	35.01	50.00	-14.99	AVG	

Test Mode: TX Mode(Adapter: SALCOMP)


Line

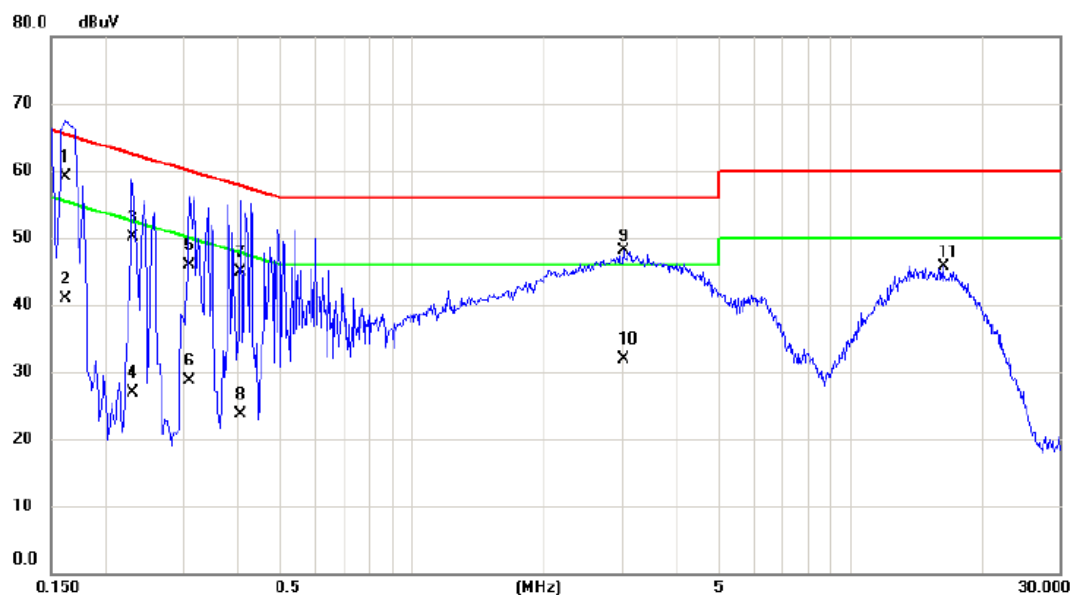

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1620	49.61	9.46	59.07	65.36	-6.29	QP	
2		0.1620	31.53	9.46	40.99	55.36	-14.37	AVG	
3		0.2300	40.54	9.50	50.04	62.45	-12.41	QP	
4		0.2300	17.50	9.50	27.00	52.45	-25.45	AVG	
5		0.3100	36.33	9.51	45.84	59.97	-14.13	QP	
6		0.3100	19.18	9.51	28.69	49.97	-21.28	AVG	
7		0.4060	35.37	9.52	44.89	57.73	-12.84	QP	
8		0.4060	14.15	9.52	23.67	47.73	-24.06	AVG	
9		3.0380	38.25	9.80	48.05	56.00	-7.95	peak	
10		3.0380	22.15	9.80	31.95	46.00	-14.05	AVG	
11		16.2620	35.84	9.93	45.77	60.00	-14.23	peak	

Test Mode: TX Mode(Adapter: SALCOMP)

Neutral

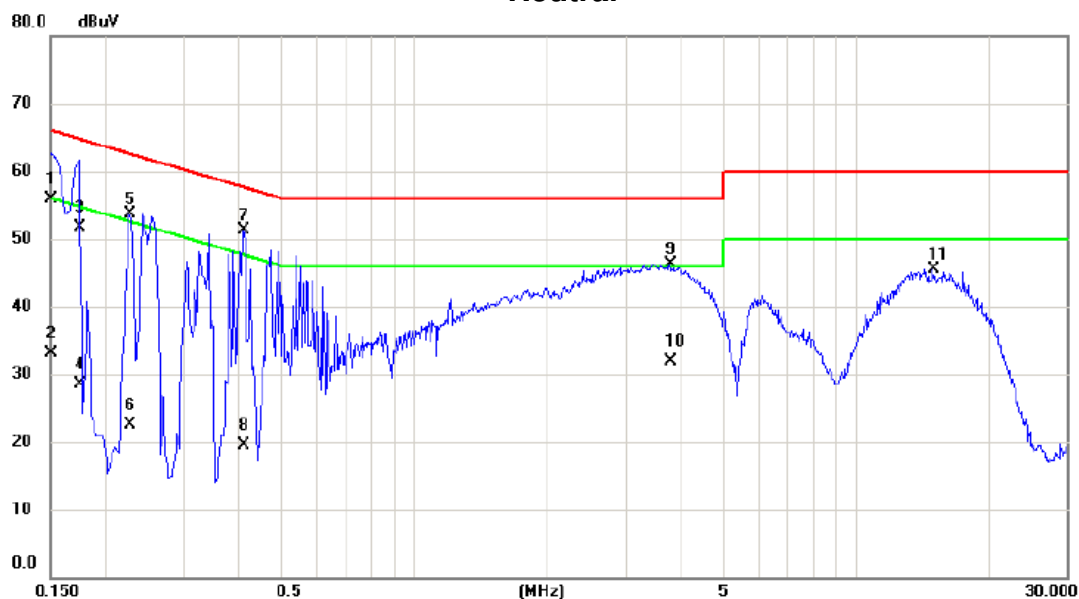


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	46.34	9.47	55.81	66.00	-10.19	QP	
2		0.1500	23.66	9.47	33.13	56.00	-22.87	AVG	
3		0.1740	42.19	9.46	51.65	64.77	-13.12	QP	
4		0.1740	18.97	9.46	28.43	54.77	-26.34	AVG	
5		0.2260	44.24	9.50	53.74	62.60	-8.86	peak	
6		0.2260	13.00	9.50	22.50	52.60	-30.10	AVG	
7	*	0.4100	41.85	9.52	51.37	57.65	-6.28	peak	
8		0.4100	10.04	9.52	19.56	47.65	-28.09	AVG	
9		3.7940	36.43	9.87	46.30	56.00	-9.70	peak	
10		3.7940	21.94	9.87	31.81	46.00	-14.19	AVG	
11		14.9820	35.64	9.92	45.56	60.00	-14.44	peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode(Adapter: BYD)


Ant 0°

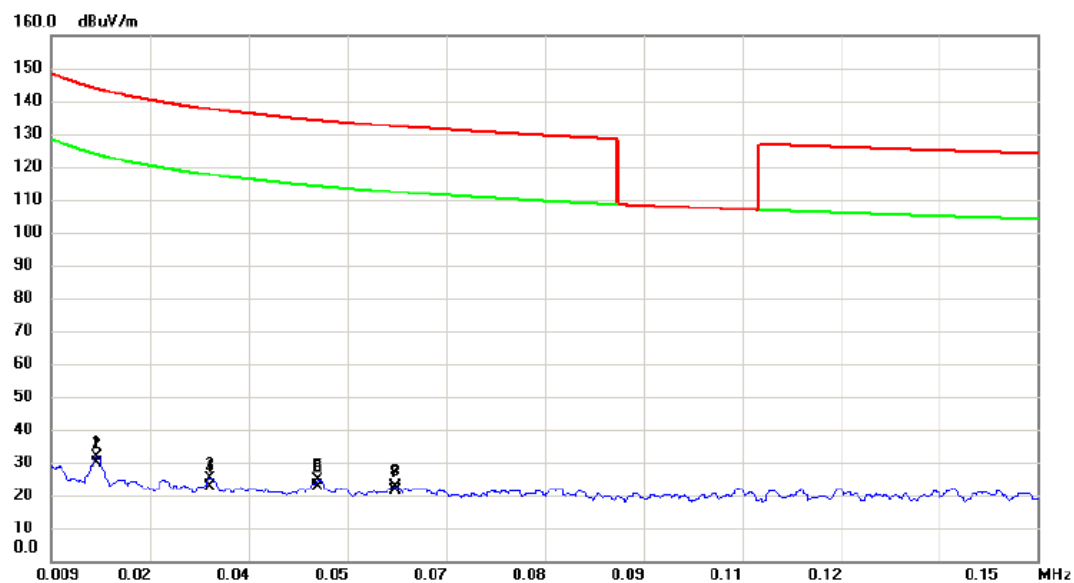

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0155	10.26	21.40	31.66	143.80	-112.14	peak	
2		0.0155	8.60	21.40	30.00	123.80	-93.80	AVG	
3		0.0316	3.70	21.44	25.14	137.61	-112.47	peak	
4		0.0316	1.30	21.44	22.74	117.61	-94.87	AVG	
5		0.0471	3.08	21.59	24.67	134.14	-109.47	peak	
6		0.0471	1.20	21.59	22.79	114.14	-91.35	AVG	
7		0.0582	1.30	21.43	22.73	132.31	-109.58	peak	
8	*	0.0582	0.11	21.43	21.54	112.31	-90.77	AVG	

Test Mode: TX Mode(Adapter: BYD)


Ant 0°

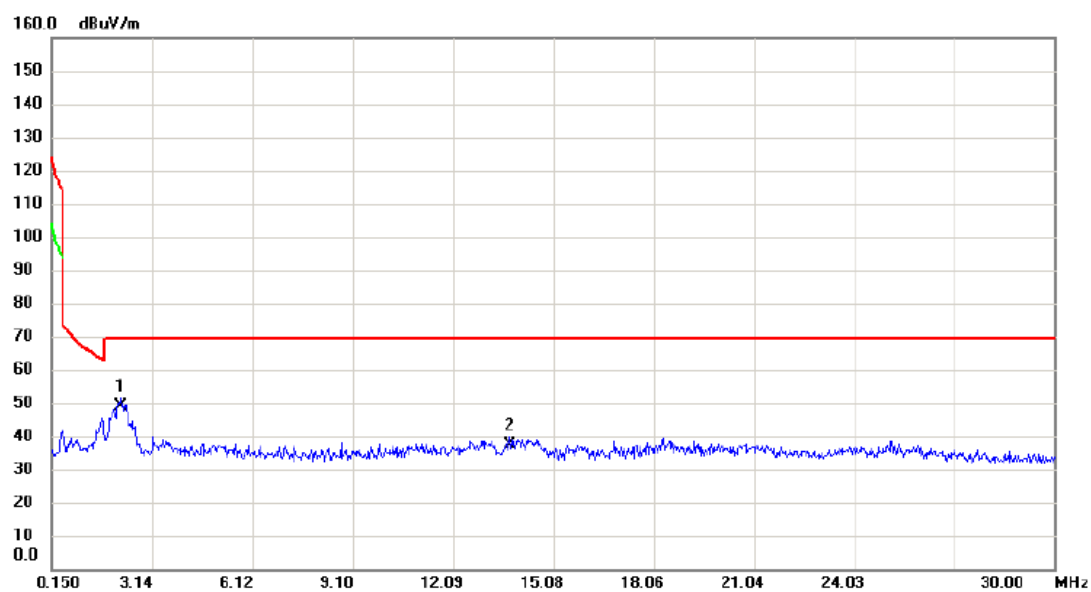

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2.2096	27.26	21.71	48.97	69.54	-20.57	QP	
2		13.7913	15.20	22.34	37.54	69.54	-32.00	QP	

Test Mode:	TX Mode(Adapter: BYD)
------------	-----------------------

Ant 90°

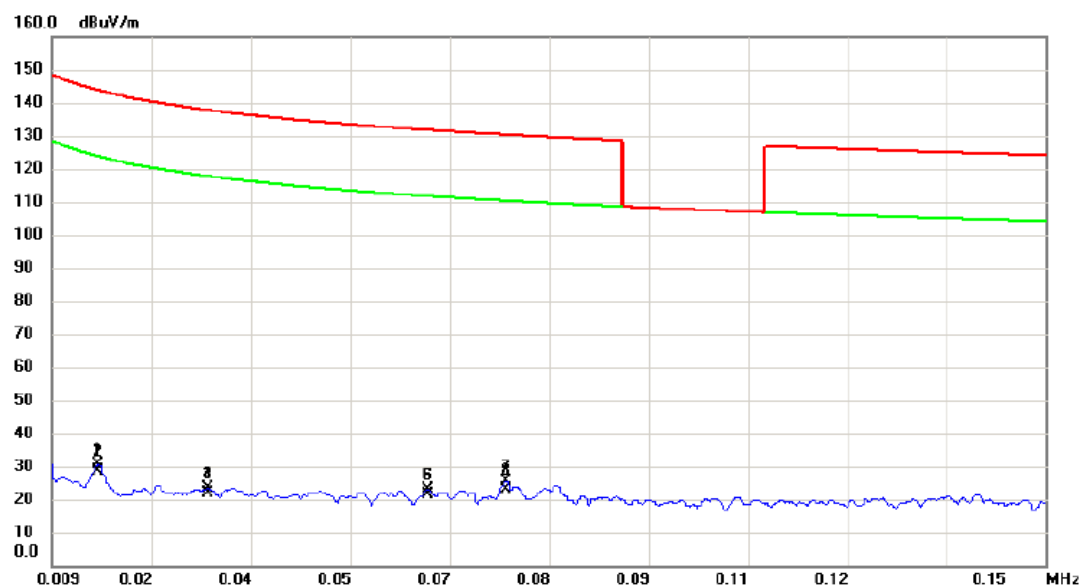

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0154	9.02	21.40	30.42	143.85	-113.43	peak	
2		0.0154	7.10	21.40	28.50	123.85	-95.35	AVG	
3		0.0310	2.00	21.43	23.43	137.78	-114.35	peak	
4		0.0310	0.25	21.43	21.68	117.78	-96.10	AVG	
5		0.0623	1.63	21.33	22.96	131.72	-108.76	peak	
6		0.0623	0.20	21.33	21.53	111.72	-90.19	AVG	
7		0.0734	4.47	21.07	25.54	130.29	-104.75	peak	
8	*	0.0734	2.10	21.07	23.17	110.29	-87.12	AVG	

Test Mode:	TX Mode(Adapter: BYD)
------------	-----------------------


Ant 90°



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		2.2991	35.10	21.76	56.86	69.54	-12.68	QP	
2	*	5.1350	37.56	21.66	59.22	69.54	-10.32	QP	

Test Mode: TX Mode(Adapter: SALCOMP)


Ant 0°

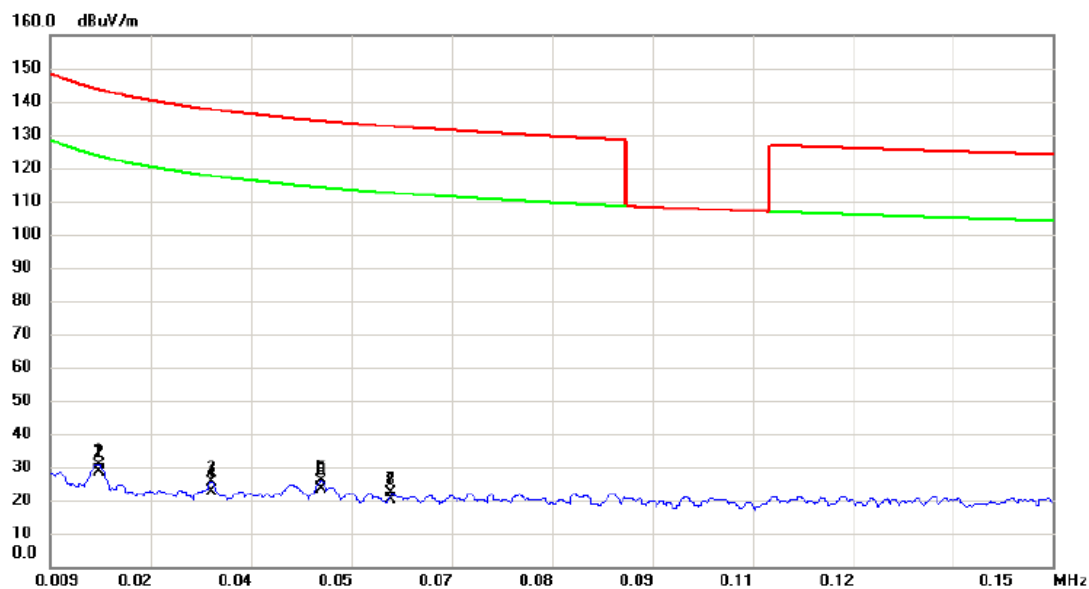

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0158	9.39	21.40	30.79	143.63	-112.84	peak	
2	0.0158	7.20	21.40	28.60	123.63	-95.03	AVG	
3	0.0316	3.90	21.44	25.34	137.61	-112.27	peak	
4	0.0316	1.10	21.44	22.54	117.61	-95.07	AVG	
5	0.0471	4.09	21.59	25.68	134.14	-108.46	peak	
6 *	0.0471	2.01	21.59	23.60	114.14	-90.54	AVG	
7	0.0568	0.61	21.47	22.08	132.52	-110.44	peak	
8	0.0568	-1.14	21.47	20.33	112.52	-92.19	AVG	

Test Mode:	TX Mode(Adapter: SALCOMP)
------------	---------------------------


Ant 0°

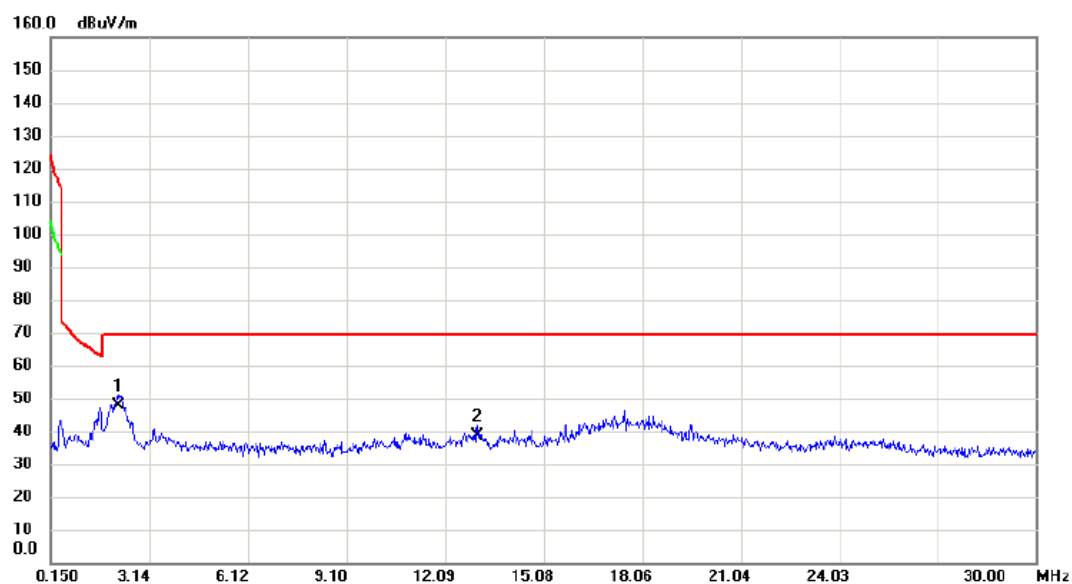

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2.1798	26.10	21.70	47.80	69.54	-21.74	QP	
2		13.0750	16.32	22.18	38.50	69.54	-31.04	QP	

Test Mode: TX Mode(Adapter: SALCOMP)


Ant 90°

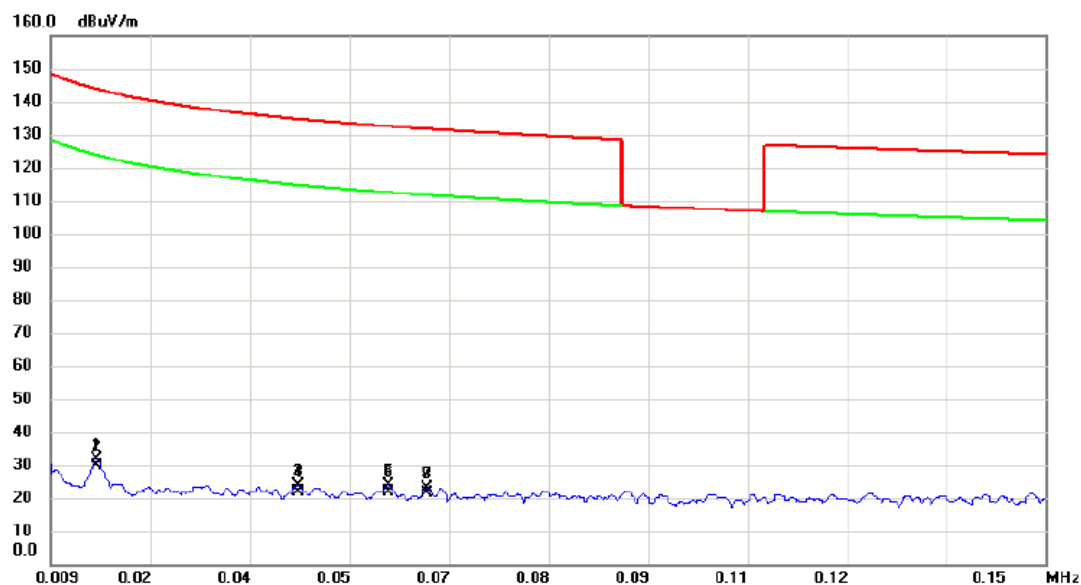

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0154	10.26	21.40	31.66	143.85	-112.19	peak	
2		0.0154	8.42	21.40	29.82	123.85	-94.03	AVG	
3		0.0440	2.24	21.56	23.80	134.74	-110.94	peak	
4		0.0440	0.28	21.56	21.84	114.74	-92.90	AVG	
5		0.0568	2.40	21.47	23.87	132.52	-108.65	peak	
6		0.0568	0.30	21.47	21.77	112.52	-90.75	AVG	
7		0.0623	1.56	21.33	22.89	131.72	-108.83	peak	
8	*	0.0623	0.14	21.33	21.47	111.72	-90.25	AVG	

Test Mode:	TX Mode(Adapter: SALCOMP)
------------	---------------------------

Ant 90°

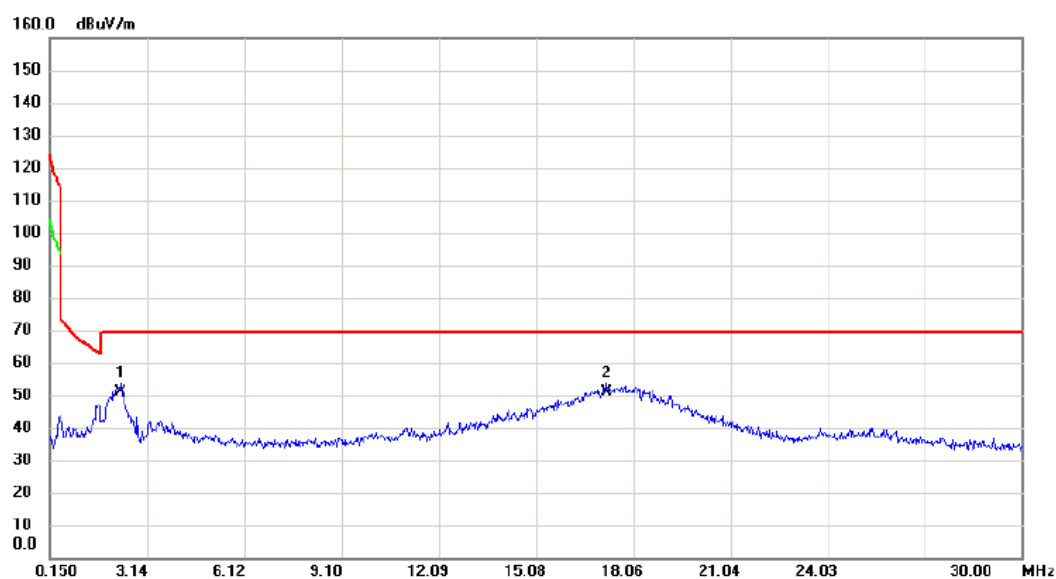


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2.3290	29.36	21.77	51.13	69.54	-18.41	QP	
2		17.2540	28.45	22.52	50.97	69.54	-18.57	QP	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

ANT 1

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: BYD)

Vertical

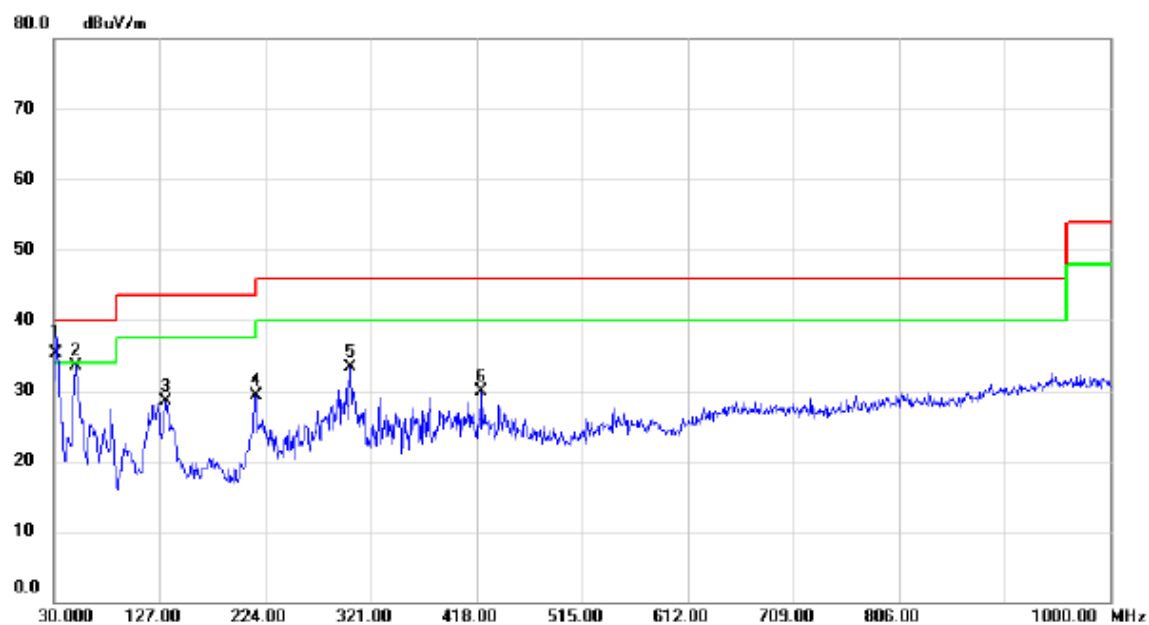

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.24	-13.89	35.35	40.00	-4.65	QP	
2		50.3700	46.03	-12.48	33.55	40.00	-6.45	peak	
3		132.8200	39.94	-11.53	28.41	43.50	-15.09	peak	
4		215.2700	42.93	-13.55	29.38	43.50	-14.12	peak	
5		301.6000	42.91	-9.59	33.32	46.00	-12.68	peak	
6		422.8500	36.48	-6.64	29.84	46.00	-16.16	peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		107.6000	40.57	-14.01	26.56	43.50	-16.94	peak	
2		254.0700	41.22	-12.65	28.57	46.00	-17.43	peak	
3	*	300.6300	47.50	-9.59	37.91	46.00	-8.09	peak	
4		312.2700	46.91	-9.67	37.24	46.00	-8.76	peak	
5		392.7800	44.41	-7.65	36.76	46.00	-9.24	peak	
6		411.2100	41.87	-6.95	34.92	46.00	-11.08	peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: BYD)

Vertical

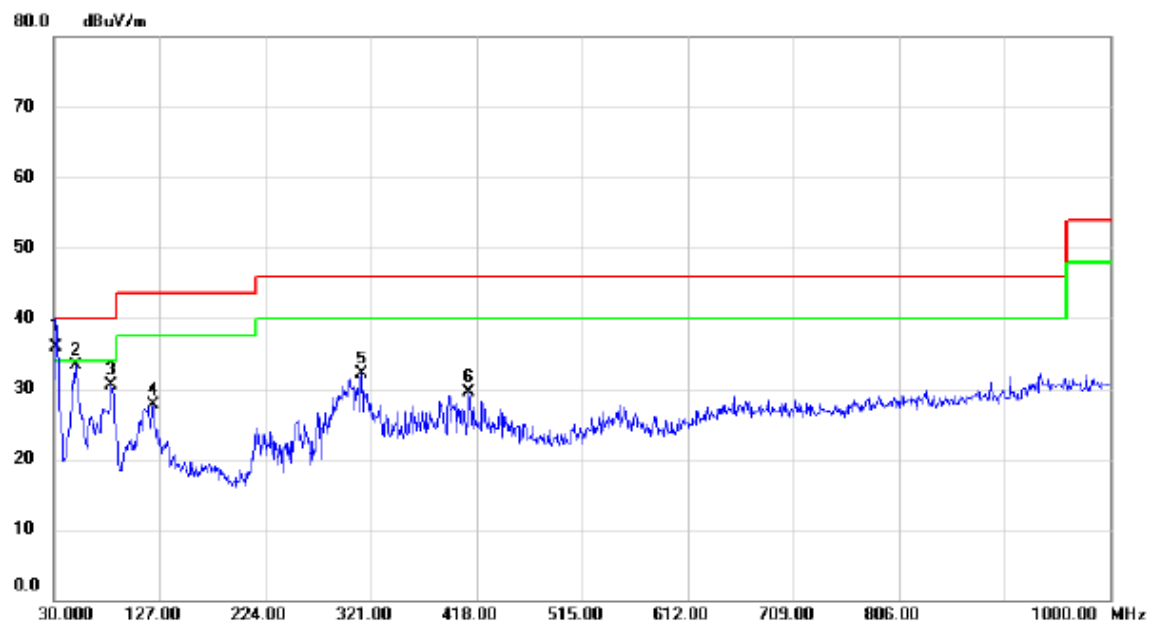

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.78	-13.89	35.89	40.00	-4.11	QP	
2		49.4000	45.73	-12.43	33.30	40.00	-6.70	peak	
3		82.3800	46.25	-15.80	30.45	40.00	-9.55	peak	
4		121.1800	40.19	-12.43	27.76	43.50	-15.74	peak	
5		312.2700	41.81	-9.67	32.14	46.00	-13.86	peak	
6		411.2100	36.46	-6.95	29.51	46.00	-16.49	peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: BYD)

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	40.63	-13.01	27.62	43.50	-15.88	peak	
2		293.8400	45.64	-9.72	35.92	46.00	-10.08	peak	
3		312.2700	46.57	-9.67	36.90	46.00	-9.10	peak	
4	*	392.7800	44.82	-7.65	37.17	46.00	-8.83	peak	
5		411.2100	40.54	-6.95	33.59	46.00	-12.41	peak	
6		422.8500	39.28	-6.64	32.64	46.00	-13.36	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: BYD)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.89	-13.89	36.00	40.00	-4.00	QP	
2		48.4300	45.84	-12.39	33.45	40.00	-6.55	peak	
3		82.3800	46.02	-15.80	30.22	40.00	-9.78	peak	
4		120.2100	40.51	-12.54	27.97	43.50	-15.53	peak	
5		304.5100	40.77	-9.61	31.16	46.00	-14.84	peak	
6		392.7800	37.72	-7.65	30.07	46.00	-15.93	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	41.26	-13.01	28.25	43.50	-15.25	peak	
2		259.8900	44.60	-12.63	31.97	46.00	-14.03	peak	
3	*	295.7800	46.48	-9.68	36.80	46.00	-9.20	peak	
4		312.2700	44.44	-9.67	34.77	46.00	-11.23	peak	
5		392.7800	44.42	-7.65	36.77	46.00	-9.23	peak	
6		422.8500	39.72	-6.64	33.08	46.00	-12.92	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: BYD)


Vertical

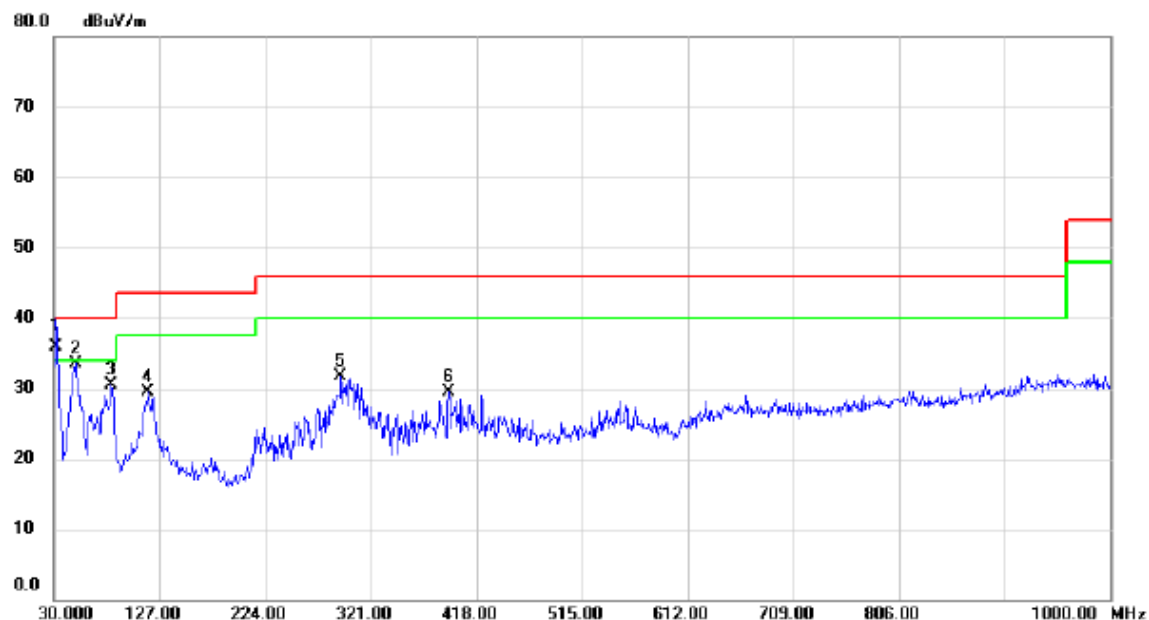

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.78	-13.89	35.89	40.00	-4.11	QP	
2		49.4000	45.97	-12.43	33.54	40.00	-6.46	peak	
3		82.3800	46.33	-15.80	30.53	40.00	-9.47	peak	
4		116.3300	42.51	-13.01	29.50	43.50	-14.00	peak	
5		293.8400	41.38	-9.72	31.66	46.00	-14.34	peak	
6		392.7800	37.18	-7.65	29.53	46.00	-16.47	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: BYD)


Horizontal

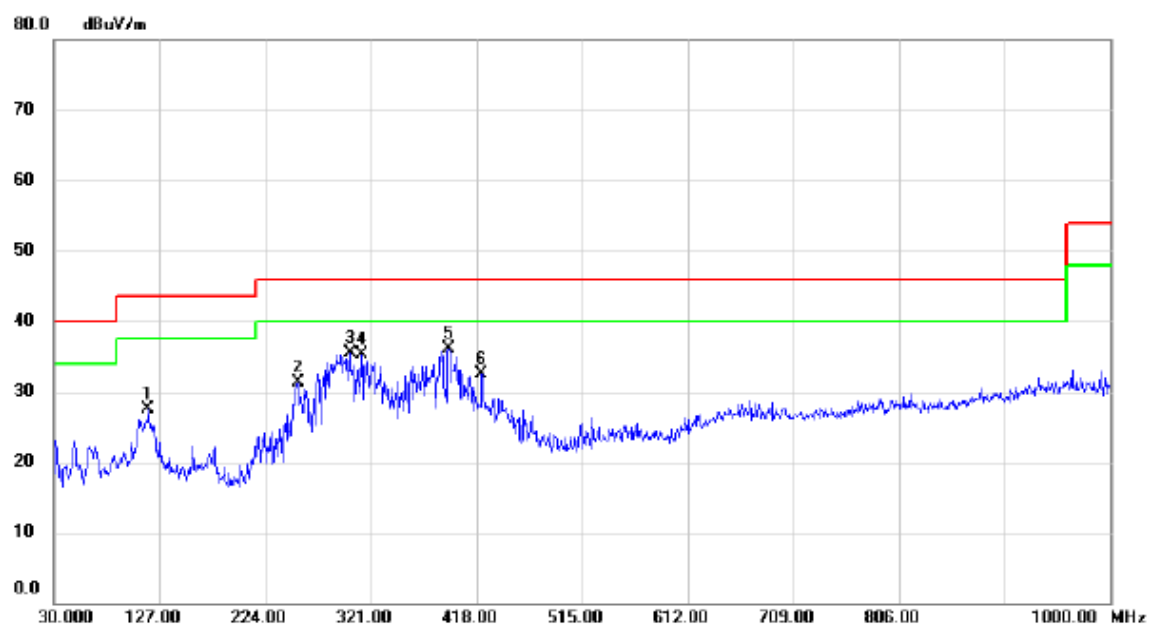

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	40.45	-13.01	27.44	43.50	-16.06	peak	
2		254.0700	43.99	-12.65	31.34	46.00	-14.66	peak	
3		301.6000	45.17	-9.59	35.58	46.00	-10.42	peak	
4		312.2700	44.98	-9.67	35.31	46.00	-10.69	peak	
5	*	392.7800	43.75	-7.65	36.10	46.00	-9.90	peak	
6		422.8500	39.09	-6.64	32.45	46.00	-13.55	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: BYD)

Vertical

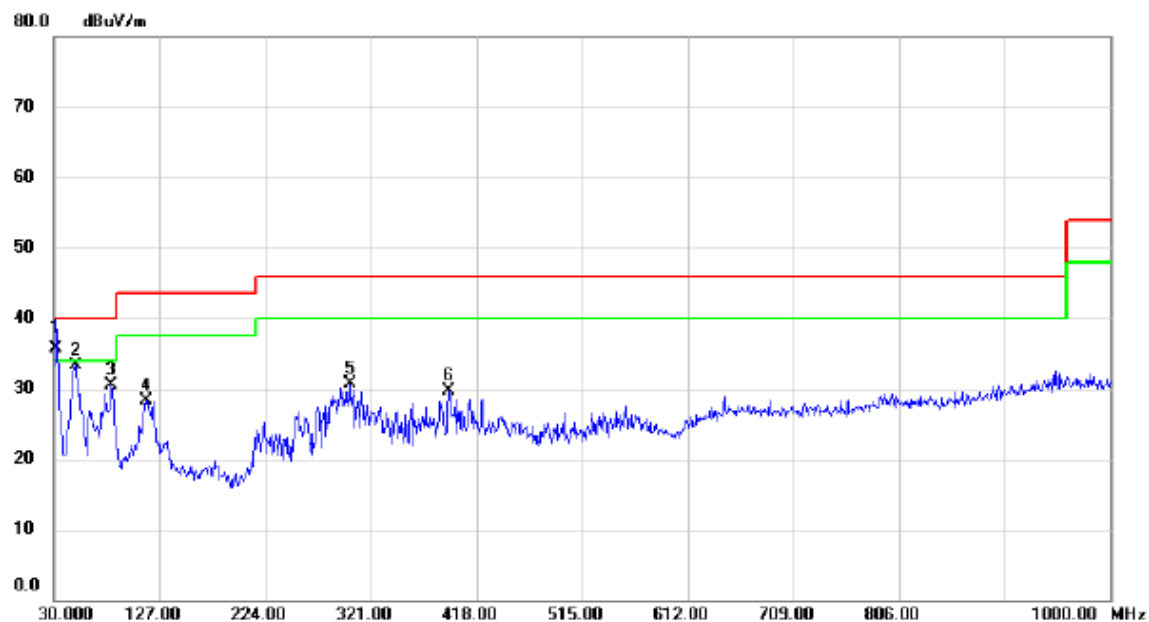

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.69	-13.89	35.80	40.00	-4.20	QP	
2		49.4000	45.72	-12.43	33.29	40.00	-6.71	peak	
3		82.3800	46.35	-15.80	30.55	40.00	-9.45	peak	
4		114.3900	41.47	-13.25	28.22	43.50	-15.28	peak	
5		301.6000	40.20	-9.59	30.61	46.00	-15.39	peak	
6		392.7800	37.31	-7.65	29.66	46.00	-16.34	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: BYD)

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	41.32	-13.01	28.31	43.50	-15.19	peak	
2		261.8300	43.85	-12.47	31.38	46.00	-14.62	peak	
3	*	295.7800	45.94	-9.68	36.26	46.00	-9.74	peak	
4		358.8300	43.35	-9.45	33.90	46.00	-12.10	peak	
5		392.7800	43.20	-7.65	35.55	46.00	-10.45	peak	
6		422.8500	39.41	-6.64	32.77	46.00	-13.23	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: BYD)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.50	-13.89	35.61	40.00	-4.39	QP	
2	!	49.4000	46.48	-12.43	34.05	40.00	-5.95	peak	
3		82.3800	46.05	-15.80	30.25	40.00	-9.75	peak	
4		116.3300	42.86	-13.01	29.85	43.50	-13.65	peak	
5		272.5000	39.39	-11.60	27.79	46.00	-18.21	peak	
6		293.8400	40.66	-9.72	30.94	46.00	-15.06	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: BYD)

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	40.85	-13.01	27.84	43.50	-15.66	peak	
2		252.1300	42.29	-12.66	29.63	46.00	-16.37	peak	
3		295.7800	43.83	-9.68	34.15	46.00	-11.85	peak	
4	*	392.7800	42.78	-7.65	35.13	46.00	-10.87	peak	
5		411.2100	39.89	-6.95	32.94	46.00	-13.06	peak	
6		423.8200	39.24	-6.62	32.62	46.00	-13.38	peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: BYD)


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.85	-13.89	35.96	40.00	-4.04	QP	
2		49.4000	46.13	-12.43	33.70	40.00	-6.30	peak	
3		121.1800	40.99	-12.43	28.56	43.50	-14.94	peak	
4		286.0800	38.80	-10.31	28.49	46.00	-17.51	peak	
5		317.1200	38.50	-9.70	28.80	46.00	-17.20	peak	
6		398.6000	36.84	-7.34	29.50	46.00	-16.50	peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: BYD)


Horizontal

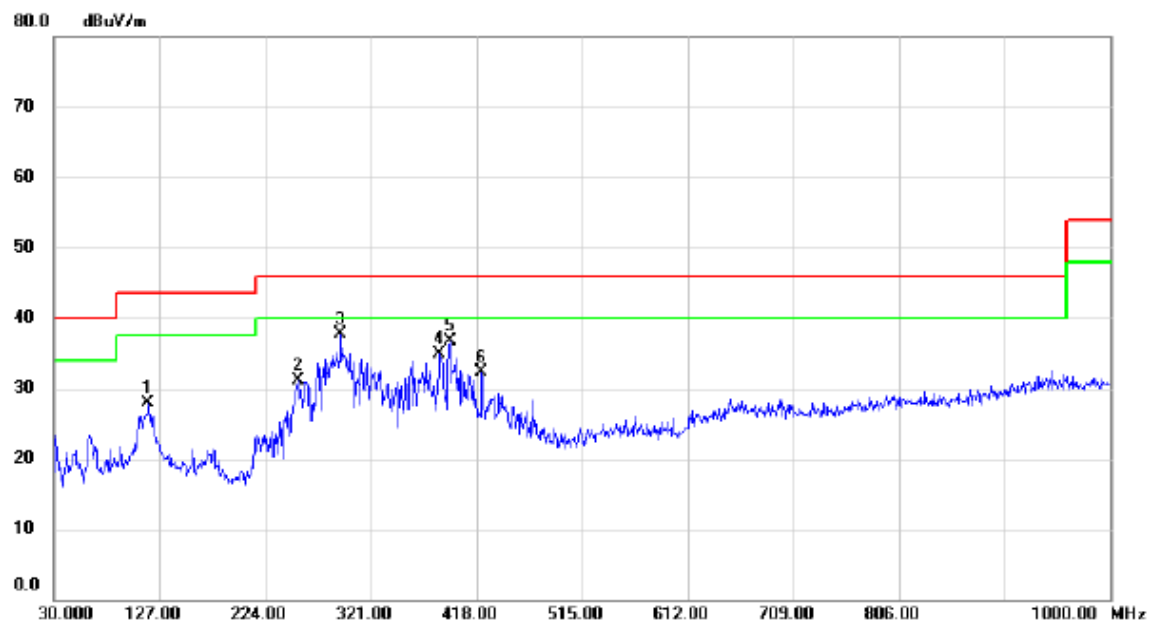

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		116.3300	40.95	-13.01	27.94	43.50	-15.56	peak	
2		254.0700	43.78	-12.65	31.13	46.00	-14.87	peak	
3	*	293.8400	47.34	-9.72	37.62	46.00	-8.38	peak	
4		384.0500	43.00	-8.12	34.88	46.00	-11.12	peak	
5		393.7500	44.37	-7.60	36.77	46.00	-9.23	peak	
6		422.8500	38.89	-6.64	32.25	46.00	-13.75	peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: BYD)

Vertical

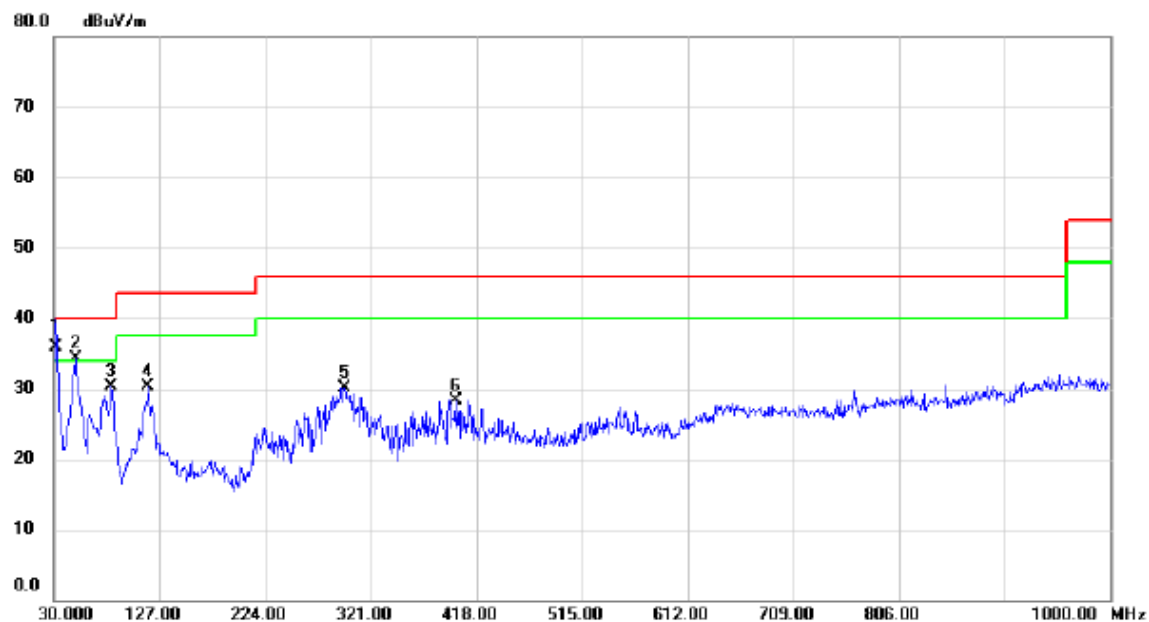

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.84	-13.89	35.95	40.00	-4.05	QP	
2	!	49.4000	46.70	-12.43	34.27	40.00	-5.73	peak	
3		82.3800	46.07	-15.80	30.27	40.00	-9.73	peak	
4		116.3300	43.22	-13.01	30.21	43.50	-13.29	peak	
5		296.7500	39.86	-9.66	30.20	46.00	-15.80	peak	
6		398.6000	35.68	-7.34	28.34	46.00	-17.66	peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	40.44	-13.01	27.43	43.50	-16.07	peak	
2		254.0700	43.20	-12.65	30.55	46.00	-15.45	peak	
3		286.0800	44.18	-10.31	33.87	46.00	-12.13	peak	
4		358.8300	41.57	-9.45	32.12	46.00	-13.88	peak	
5	*	392.7800	42.41	-7.65	34.76	46.00	-11.24	peak	
6		422.8500	39.42	-6.64	32.78	46.00	-13.22	peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: SALCOMP)

Vertical

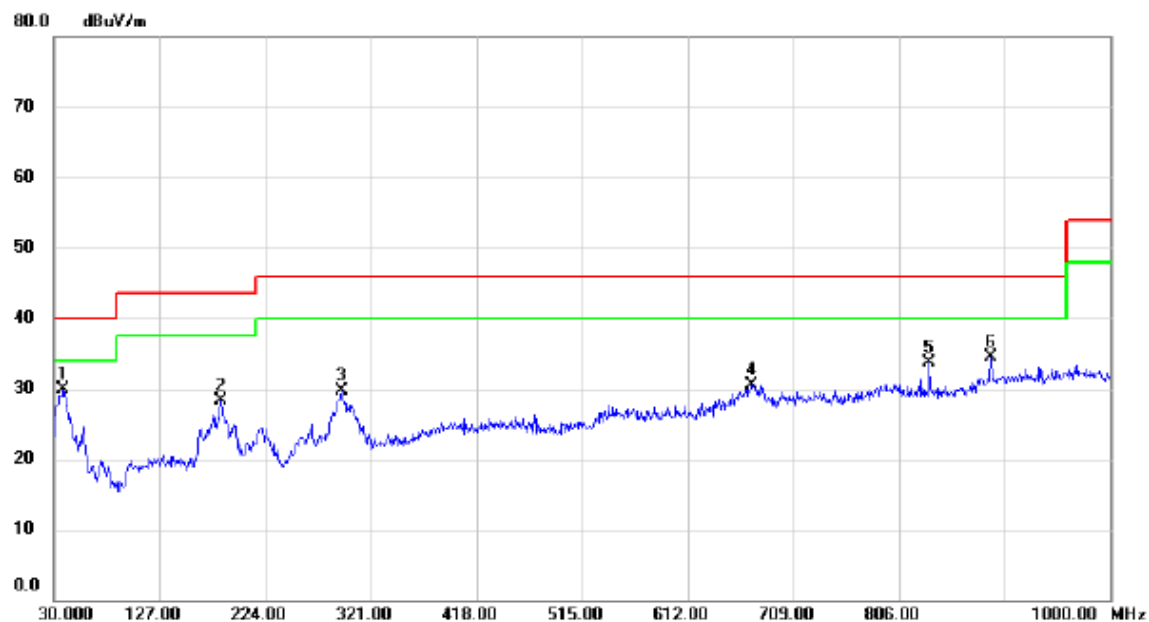

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	42.82	-12.83	29.99	40.00	-10.01	peak	
2		183.2600	40.24	-11.96	28.28	43.50	-15.22	peak	
3		294.8100	39.44	-9.70	29.74	46.00	-16.26	peak	
4		671.1700	32.13	-1.58	30.55	46.00	-15.45	peak	
5		834.1300	33.48	0.14	33.62	46.00	-12.38	peak	
6		890.3900	33.13	1.38	34.51	46.00	-11.49	peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: SALCOMP)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		81.4100	38.85	-15.76	23.09	40.00	-16.91	peak	
2		176.4700	43.48	-11.35	32.13	43.50	-11.37	peak	
3		295.7800	44.36	-9.68	34.68	46.00	-11.32	peak	
4		397.6300	40.15	-7.39	32.76	46.00	-13.24	peak	
5		672.1400	31.76	-1.57	30.19	46.00	-15.81	peak	
6	*	826.3700	37.66	0.14	37.80	46.00	-8.20	peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: SALCOMP)

Vertical

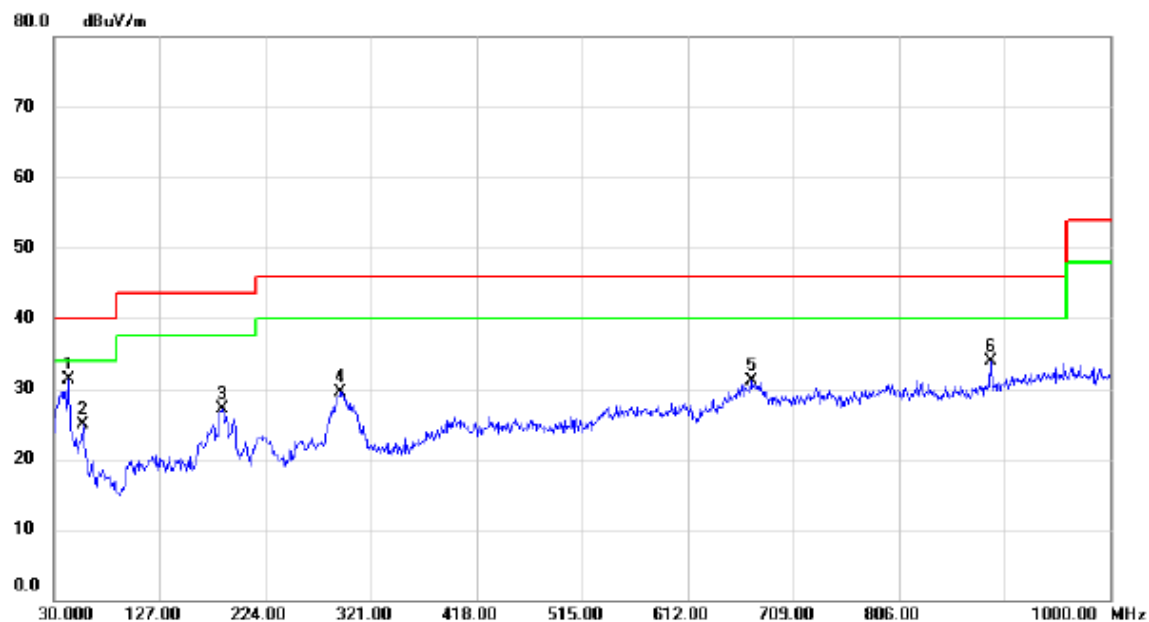

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	43.5800	43.33	-12.04	31.29	40.00	-8.71	peak	
2		56.1900	37.80	-12.93	24.87	40.00	-15.13	peak	
3		184.2300	39.22	-12.12	27.10	43.50	-16.40	peak	
4		293.8400	39.32	-9.72	29.60	46.00	-16.40	peak	
5		671.1700	32.62	-1.58	31.04	46.00	-14.96	peak	
6		890.3900	32.44	1.38	33.82	46.00	-12.18	peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: SALCOMP)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		85.2900	40.20	-15.88	24.32	40.00	-15.68	peak	
2		182.2900	44.12	-11.82	32.30	43.50	-11.20	peak	
3	*	291.9000	44.94	-9.77	35.17	46.00	-10.83	peak	
4		399.5700	39.54	-7.28	32.26	46.00	-13.74	peak	
5		661.4700	32.17	-1.60	30.57	46.00	-15.43	peak	
6		826.3700	33.96	0.14	34.10	46.00	-11.90	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: SALCOMP)


Vertical

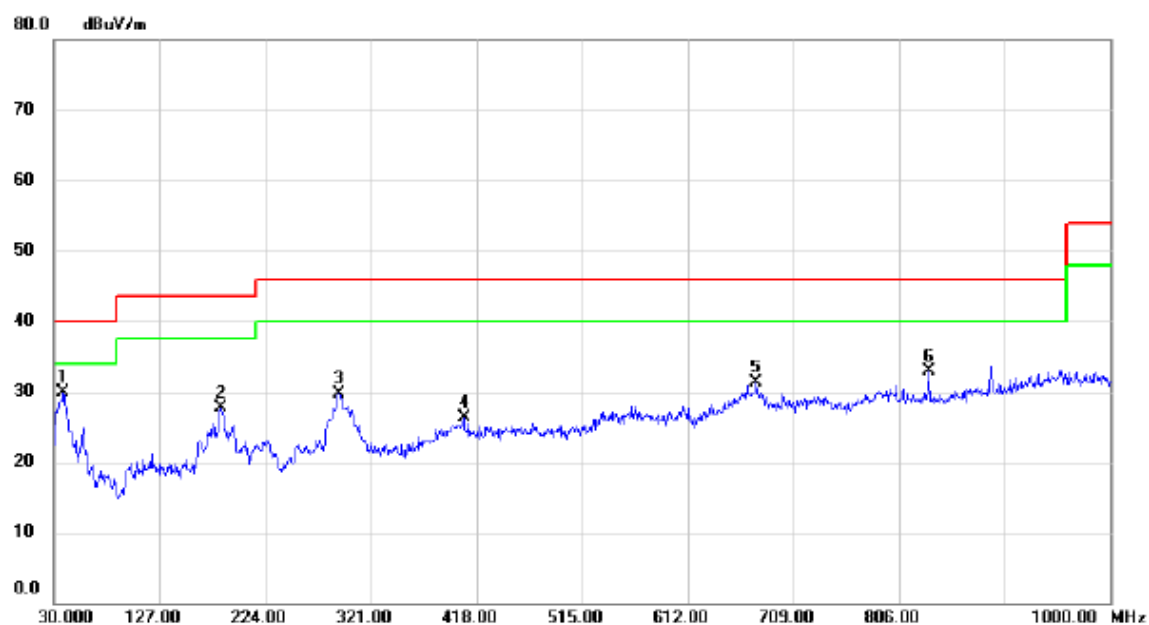

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	42.72	-12.83	29.89	40.00	-10.11	peak	
2		183.2600	39.63	-11.96	27.67	43.50	-15.83	peak	
3		291.9000	39.47	-9.77	29.70	46.00	-16.30	peak	
4		406.3600	33.43	-7.09	26.34	46.00	-19.66	peak	
5		675.0500	32.86	-1.56	31.30	46.00	-14.70	peak	
6		833.1600	32.77	0.13	32.90	46.00	-13.10	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: SALCOMP)

Horizontal

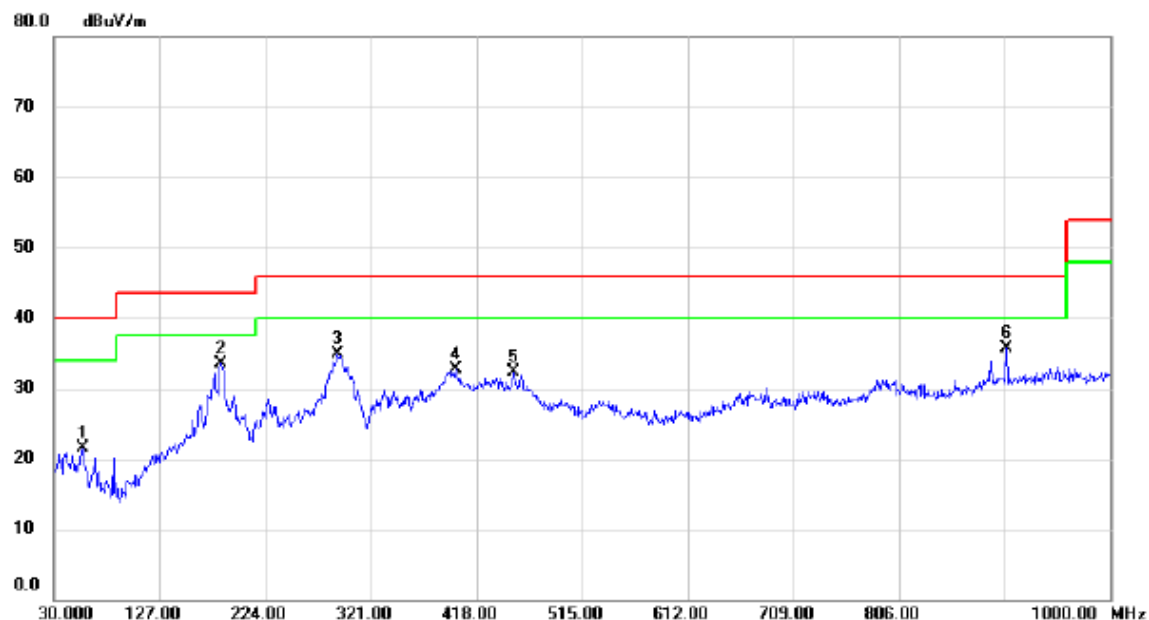

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	34.46	-12.93	21.53	40.00	-18.47	peak	
2	*	183.2600	45.41	-11.96	33.45	43.50	-10.05	peak	
3		290.9300	44.77	-9.80	34.97	46.00	-11.03	peak	
4		398.6000	40.07	-7.34	32.73	46.00	-13.27	peak	
5		451.9500	38.33	-5.95	32.38	46.00	-13.62	peak	
6		904.9400	33.82	1.81	35.63	46.00	-10.37	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: SALCOMP)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	43.16	-12.83	30.33	40.00	-9.67	peak	
2		183.2600	39.78	-11.96	27.82	43.50	-15.68	peak	
3		291.9000	39.47	-9.77	29.70	46.00	-16.30	peak	
4		406.3600	33.43	-7.09	26.34	46.00	-19.66	peak	
5		675.0500	32.86	-1.56	31.30	46.00	-14.70	peak	
6		890.3900	34.76	1.38	36.14	46.00	-9.86	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: SALCOMP)

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		81.4100	38.85	-15.76	23.09	40.00	-16.91	peak	
2		176.4700	43.48	-11.35	32.13	43.50	-11.37	peak	
3		295.7800	44.36	-9.68	34.68	46.00	-11.32	peak	
4		397.6300	40.15	-7.39	32.76	46.00	-13.24	peak	
5		672.1400	31.76	-1.57	30.19	46.00	-15.81	peak	
6	*	826.3700	37.66	0.14	37.80	46.00	-8.20	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: SALCOMP)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	42.46	-12.96	29.50	40.00	-10.50	peak	
2		176.4700	37.16	-11.35	25.81	43.50	-17.69	peak	
3		288.9900	38.42	-9.94	28.48	46.00	-17.52	peak	
4		411.2100	33.64	-6.95	26.69	46.00	-19.31	peak	
5		673.1100	31.66	-1.56	30.10	46.00	-15.90	peak	
6		833.1600	34.37	0.13	34.50	46.00	-11.50	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: SALCOMP)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	34.55	-12.67	21.88	40.00	-18.12	peak	
2		81.4100	38.85	-15.76	23.09	40.00	-16.91	peak	
3		176.4700	43.48	-11.35	32.13	43.50	-11.37	peak	
4	*	295.7800	44.36	-9.68	34.68	46.00	-11.32	peak	
5		397.6300	40.15	-7.39	32.76	46.00	-13.24	peak	
6		826.3700	32.16	0.14	32.30	46.00	-13.70	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: SALCOMP)

Vertical

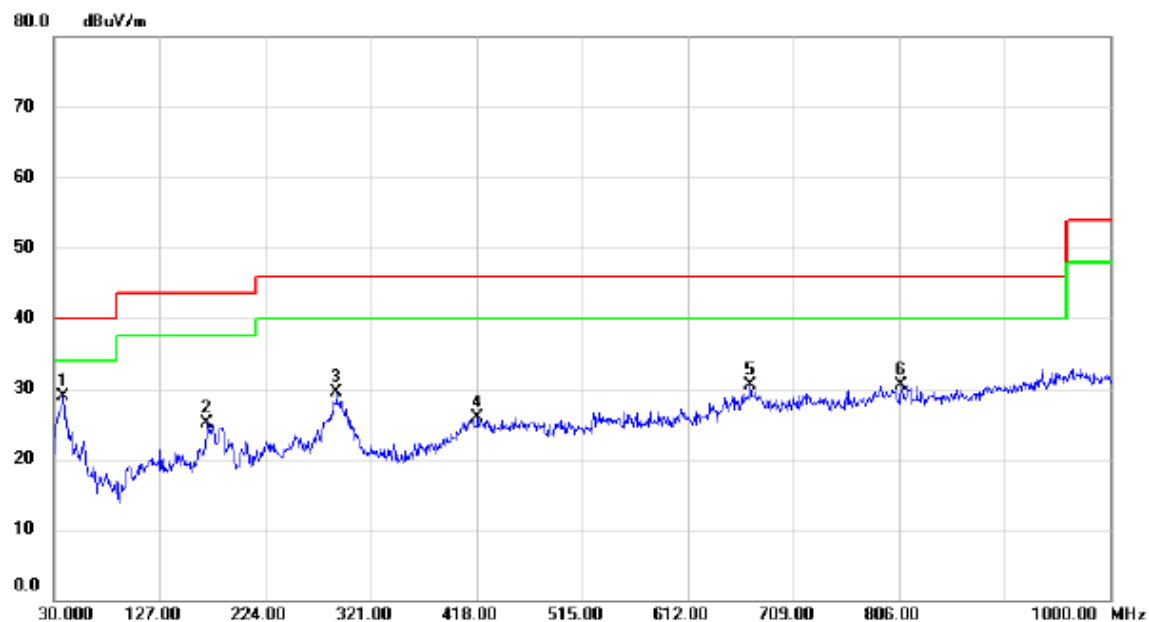

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	41.64	-12.83	28.81	40.00	-11.19	peak	
2		170.6500	36.22	-11.15	25.07	43.50	-18.43	peak	
3		289.9600	39.36	-9.82	29.54	46.00	-16.46	peak	
4		418.9700	32.63	-6.74	25.89	46.00	-20.11	peak	
5		669.2300	32.03	-1.57	30.46	46.00	-15.54	peak	
6		807.9400	30.39	0.15	30.54	46.00	-15.46	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: SALCOMP)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	35.29	-12.93	22.36	40.00	-17.64	peak	
2	*	182.2900	45.90	-11.82	34.08	43.50	-9.42	peak	
3		290.9300	44.26	-9.80	34.46	46.00	-11.54	peak	
4		392.7800	35.44	-7.65	27.79	46.00	-18.21	peak	
5		670.2000	34.82	-1.57	33.25	46.00	-12.75	peak	
6		907.8500	33.46	1.88	35.34	46.00	-10.66	peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: SALCOMP)


Vertical

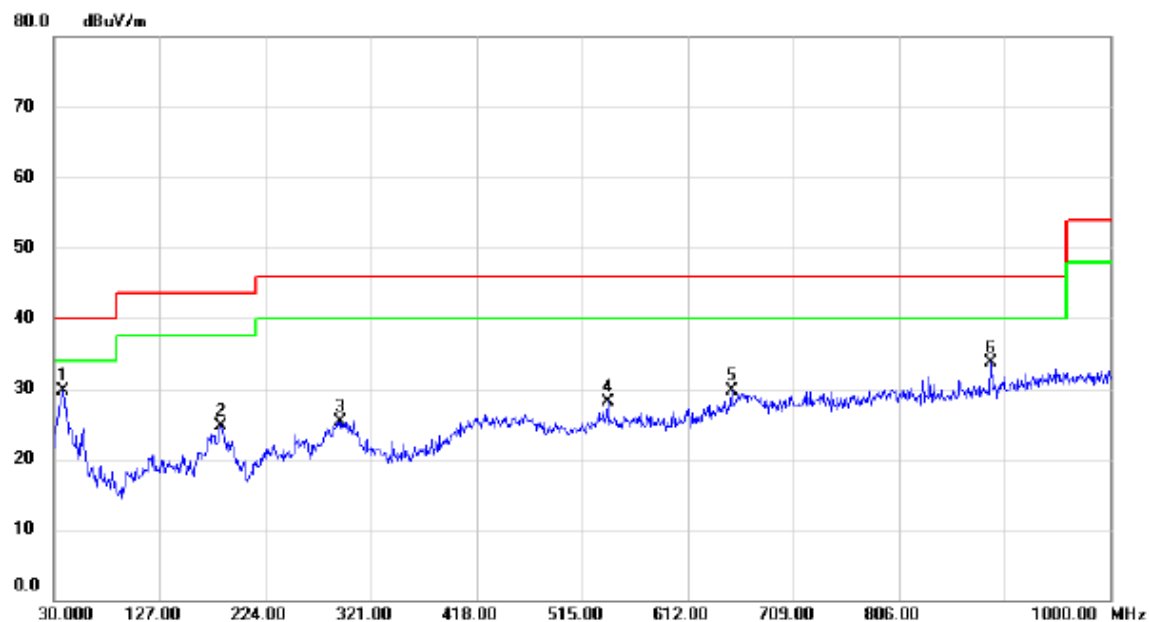

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	42.63	-12.96	29.67	40.00	-10.33	peak	
2		183.2600	36.60	-11.96	24.64	43.50	-18.86	peak	
3		293.8400	35.02	-9.72	25.30	46.00	-20.70	peak	
4		538.2800	33.43	-5.27	28.16	46.00	-17.84	peak	
5		652.7400	31.43	-1.63	29.80	46.00	-16.20	peak	
6		890.3900	32.25	1.38	33.63	46.00	-12.37	peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: SALCOMP)


Horizontal

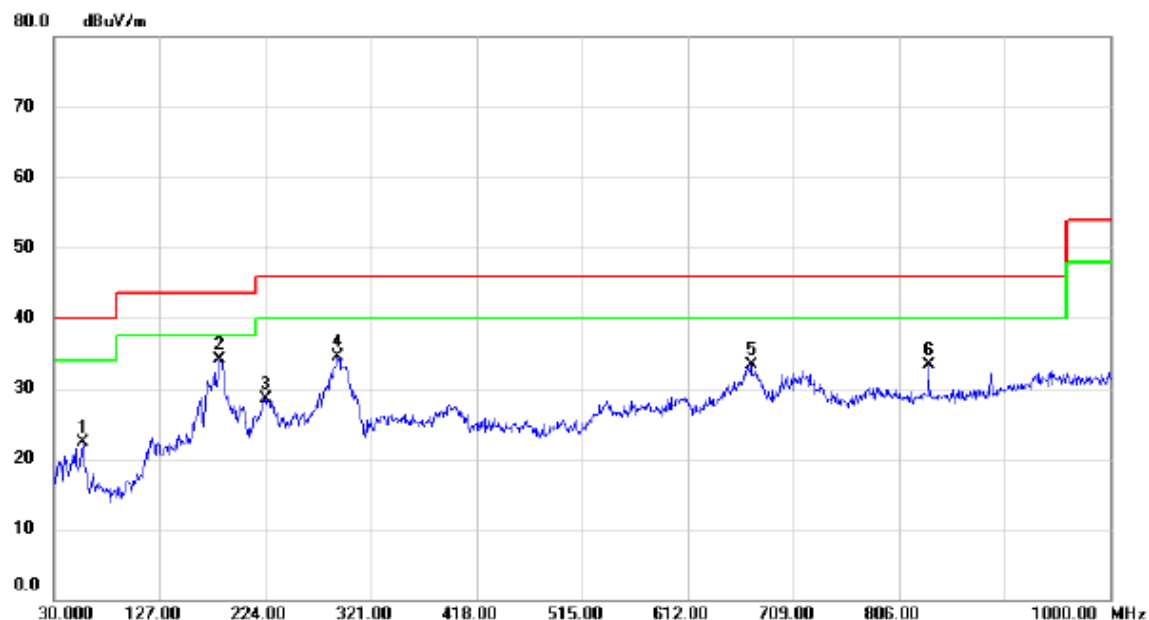

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	35.29	-12.93	22.36	40.00	-17.64	peak	
2	*	182.2900	45.90	-11.82	34.08	43.50	-9.42	peak	
3		224.9700	41.57	-13.08	28.49	46.00	-17.51	peak	
4		290.9300	44.26	-9.80	34.46	46.00	-11.54	peak	
5		670.2000	34.82	-1.57	33.25	46.00	-12.75	peak	
6		833.1600	33.12	0.13	33.25	46.00	-12.75	peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: SALCOMP)


Vertical

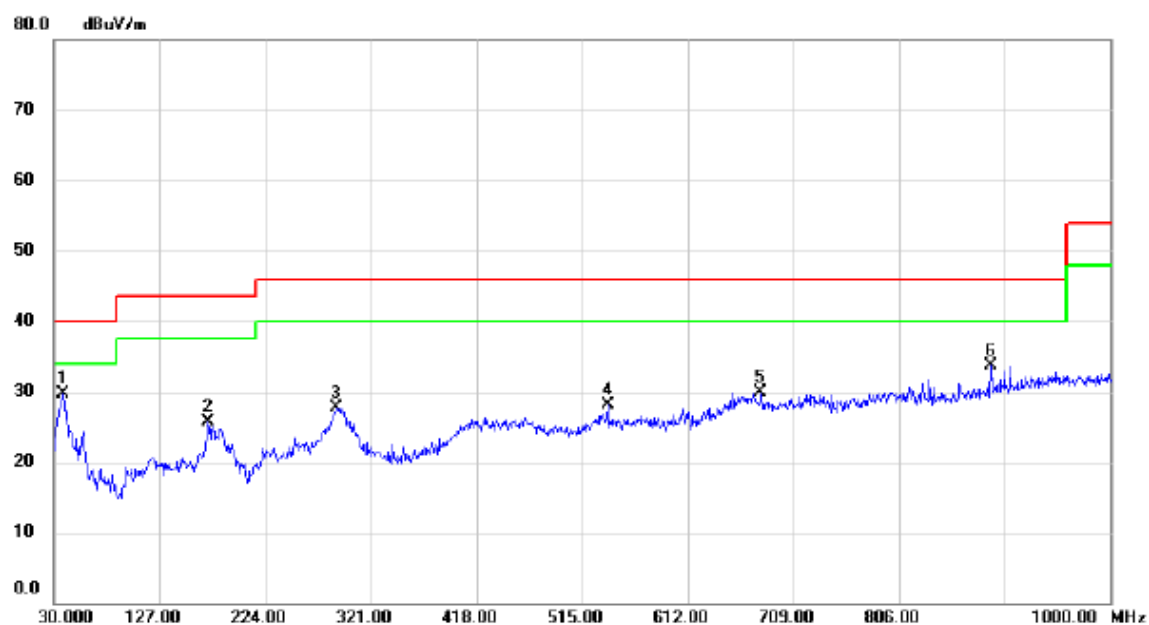

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	42.63	-12.96	29.67	40.00	-10.33	peak	
2		171.6200	36.82	-11.17	25.65	43.50	-17.85	peak	
3		289.9600	37.57	-9.82	27.75	46.00	-18.25	peak	
4		538.2800	33.43	-5.27	28.16	46.00	-17.84	peak	
5		678.9300	31.54	-1.54	30.00	46.00	-16.00	peak	
6		890.3900	32.37	1.38	33.75	46.00	-12.25	peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: SALCOMP)

Horizontal

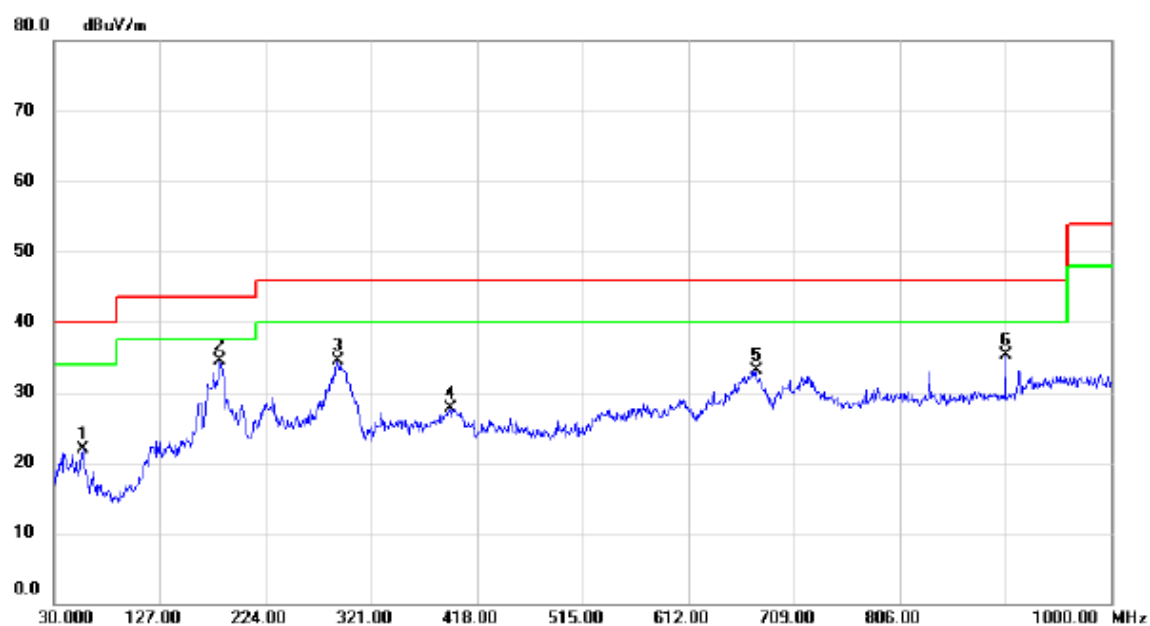


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		56.1900	34.89	-12.93	21.96	40.00	-18.04	peak	
2	*	182.2900	46.35	-11.82	34.53	43.50	-8.97	peak	
3		290.9300	44.25	-9.80	34.45	46.00	-11.55	peak	
4		393.7500	35.39	-7.60	27.79	46.00	-18.21	peak	
5		674.0800	34.70	-1.55	33.15	46.00	-12.85	peak	
6		903.0000	33.65	1.75	35.40	46.00	-10.60	peak	

ANT 2

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: BYD)

Vertical

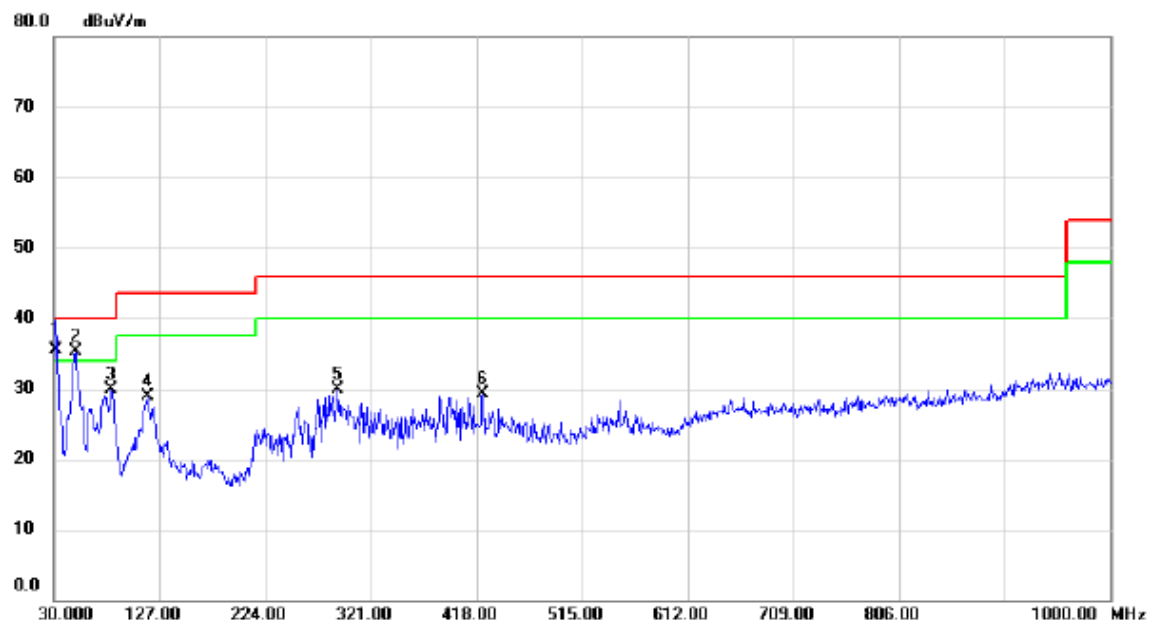

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.36	-13.89	35.47	40.00	-4.53	QP	
2	!	49.4000	47.68	-12.43	35.25	40.00	-4.75	peak	
3		82.3800	45.73	-15.80	29.93	40.00	-10.07	peak	
4		116.3300	41.95	-13.01	28.94	43.50	-14.56	peak	
5		290.9300	39.79	-9.80	29.99	46.00	-16.01	peak	
6		423.8200	35.98	-6.62	29.36	46.00	-16.64	peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	41.27	-13.01	28.26	43.50	-15.24	peak	
2		259.8900	43.33	-12.63	30.70	46.00	-15.30	peak	
3		285.1100	44.98	-10.43	34.55	46.00	-11.45	peak	
4	*	312.2700	45.17	-9.67	35.50	46.00	-10.50	peak	
5		358.8300	43.24	-9.45	33.79	46.00	-12.21	peak	
6		384.0500	43.30	-8.12	35.18	46.00	-10.82	peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: BYD)


Vertical

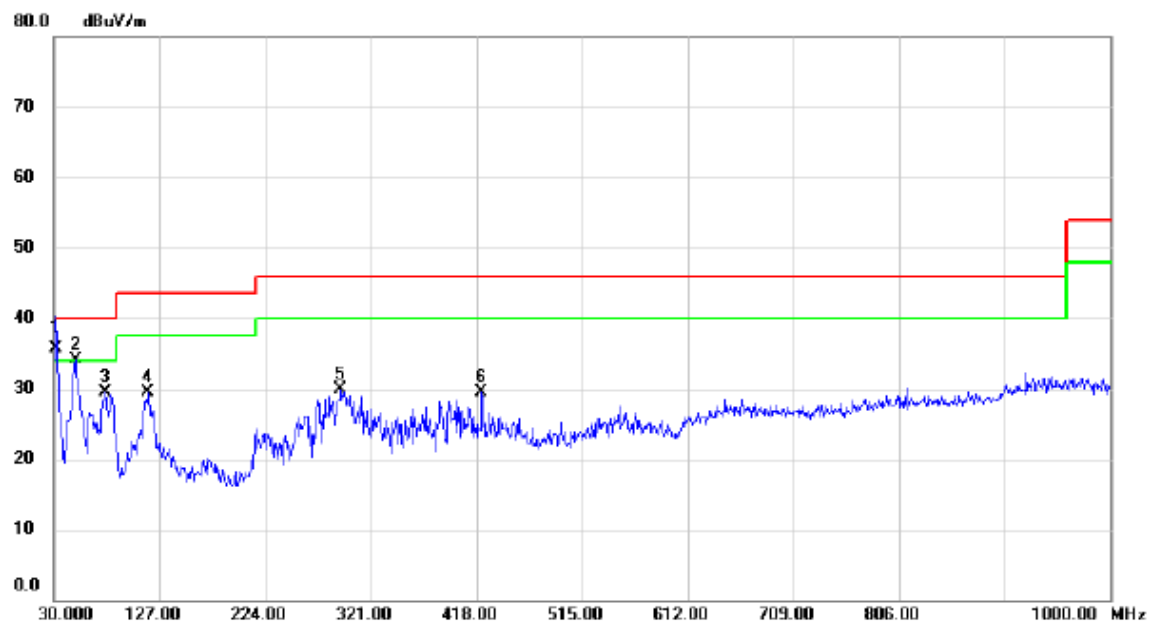

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.62	-13.89	35.73	40.00	-4.27	QP	
2	!	49.4000	46.62	-12.43	34.19	40.00	-5.81	peak	
3		77.5300	44.95	-15.47	29.48	40.00	-10.52	peak	
4		116.3300	42.46	-13.01	29.45	43.50	-14.05	peak	
5		293.8400	39.69	-9.72	29.97	46.00	-16.03	peak	
6		422.8500	36.10	-6.64	29.46	46.00	-16.54	peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: BYD)


Horizontal

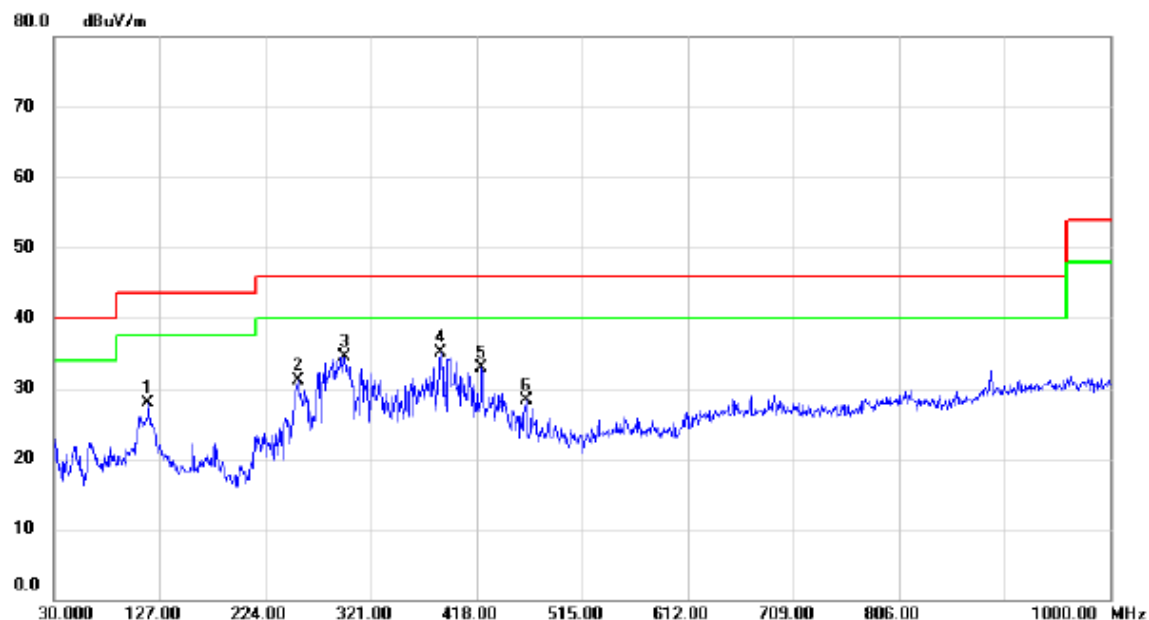

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		116.3300	40.88	-13.01	27.87	43.50	-15.63	peak	
2		254.0700	43.74	-12.65	31.09	46.00	-14.91	peak	
3		296.7500	44.13	-9.66	34.47	46.00	-11.53	peak	
4	*	385.0200	43.07	-8.06	35.01	46.00	-10.99	peak	
5		422.8500	39.59	-6.64	32.95	46.00	-13.05	peak	
6		463.5900	34.51	-6.29	28.22	46.00	-17.78	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: BYD)

Vertical

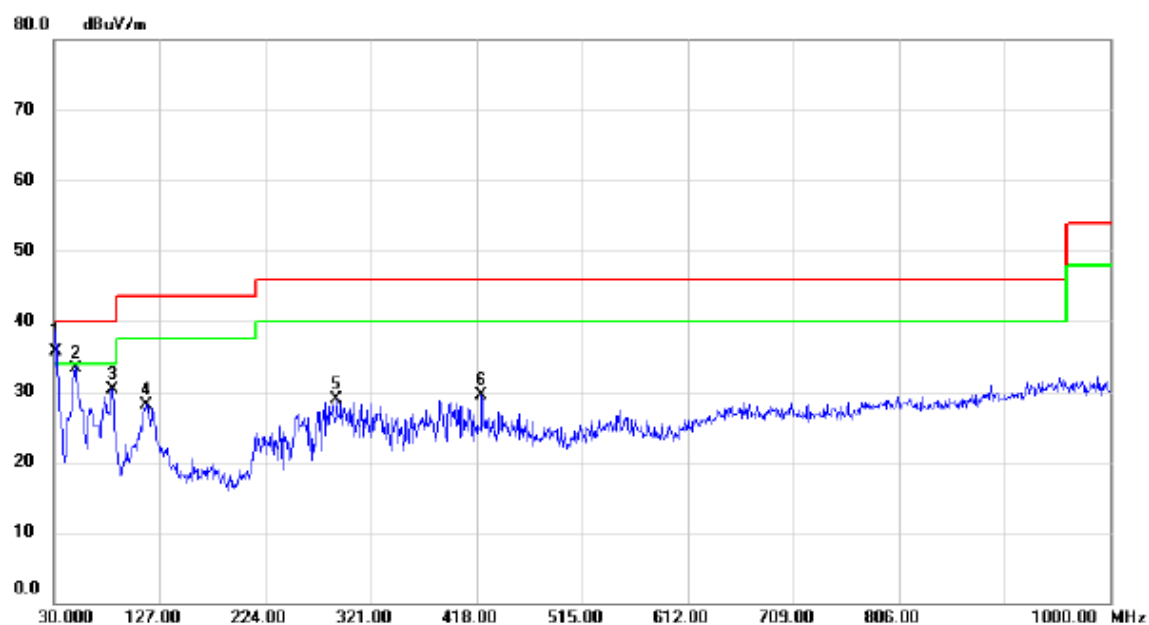

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.66	-13.89	35.77	40.00	-4.23	QP	
2		50.3700	45.74	-12.48	33.26	40.00	-6.74	peak	
3		83.3500	46.15	-15.81	30.34	40.00	-9.66	peak	
4		114.3900	41.34	-13.25	28.09	43.50	-15.41	peak	
5		289.9600	38.81	-9.82	28.99	46.00	-17.01	peak	
6		422.8500	36.14	-6.64	29.50	46.00	-16.50	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	41.33	-13.01	28.32	43.50	-15.18	peak	
2		254.0700	43.83	-12.65	31.18	46.00	-14.82	peak	
3		278.3200	46.40	-11.19	35.21	46.00	-10.79	peak	
4		293.8400	44.74	-9.72	35.02	46.00	-10.98	peak	
5	*	393.7500	43.43	-7.60	35.83	46.00	-10.17	peak	
6		422.8500	39.34	-6.64	32.70	46.00	-13.30	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: BYD)


Vertical

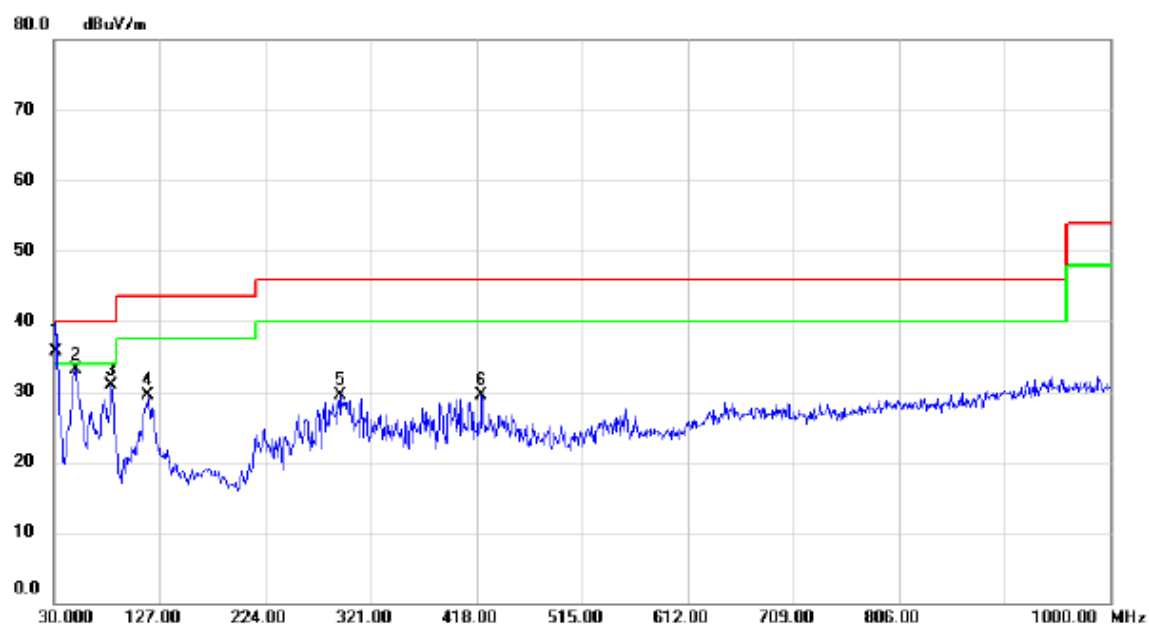

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.60	-13.89	35.71	40.00	-4.29	QP	
2		49.4000	45.50	-12.43	33.07	40.00	-6.93	peak	
3		82.3800	46.80	-15.80	31.00	40.00	-9.00	peak	
4		116.3300	42.55	-13.01	29.54	43.50	-13.96	peak	
5		293.8400	39.32	-9.72	29.60	46.00	-16.40	peak	
6		422.8500	36.15	-6.64	29.51	46.00	-16.49	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: BYD)


Horizontal

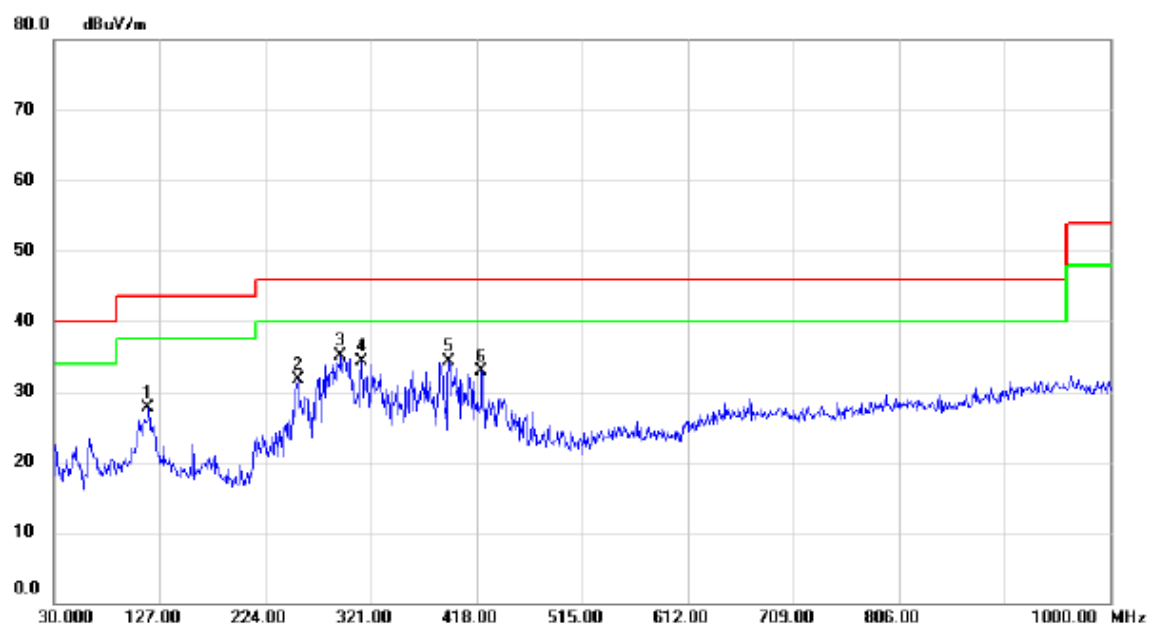

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	40.81	-13.01	27.80	43.50	-15.70	peak	
2		254.0700	44.38	-12.65	31.73	46.00	-14.27	peak	
3	*	293.8400	44.79	-9.72	35.07	46.00	-10.93	peak	
4		312.2700	44.03	-9.67	34.36	46.00	-11.64	peak	
5		392.7800	41.99	-7.65	34.34	46.00	-11.66	peak	
6		422.8500	39.46	-6.64	32.82	46.00	-13.18	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: BYD)


Vertical

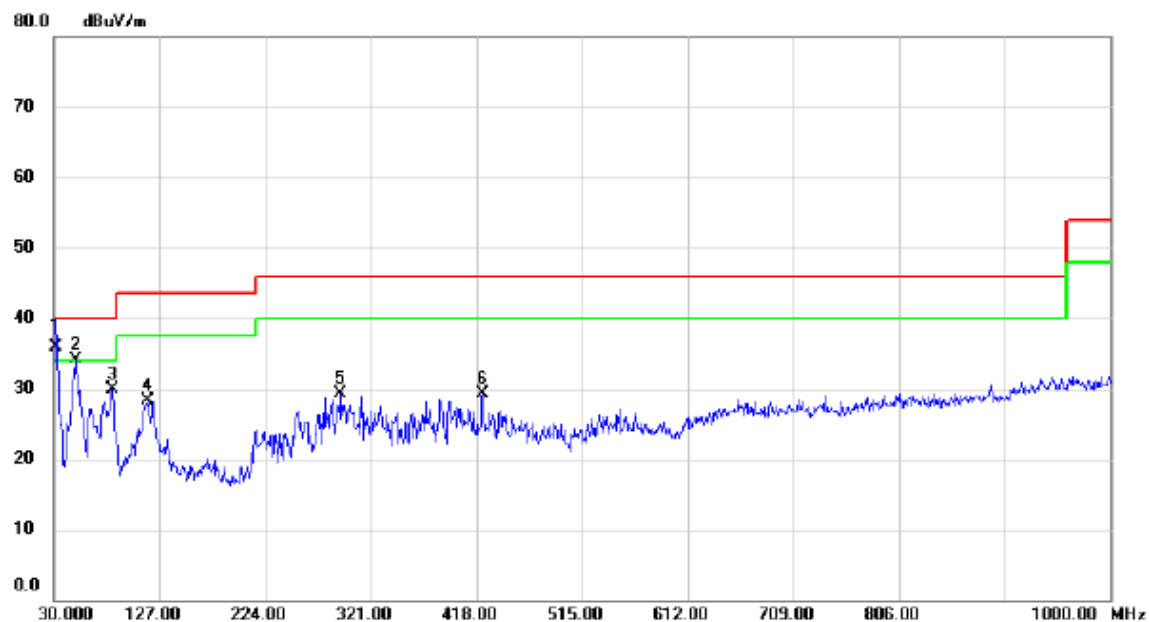

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.75	-13.89	35.86	40.00	-4.14	QP	
2	!	50.3700	46.52	-12.48	34.04	40.00	-5.96	peak	
3		83.3500	45.77	-15.81	29.96	40.00	-10.04	peak	
4		116.3300	41.29	-13.01	28.28	43.50	-15.22	peak	
5		293.8400	39.09	-9.72	29.37	46.00	-16.63	peak	
6		423.8200	35.95	-6.62	29.33	46.00	-16.67	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: BYD)

Horizontal

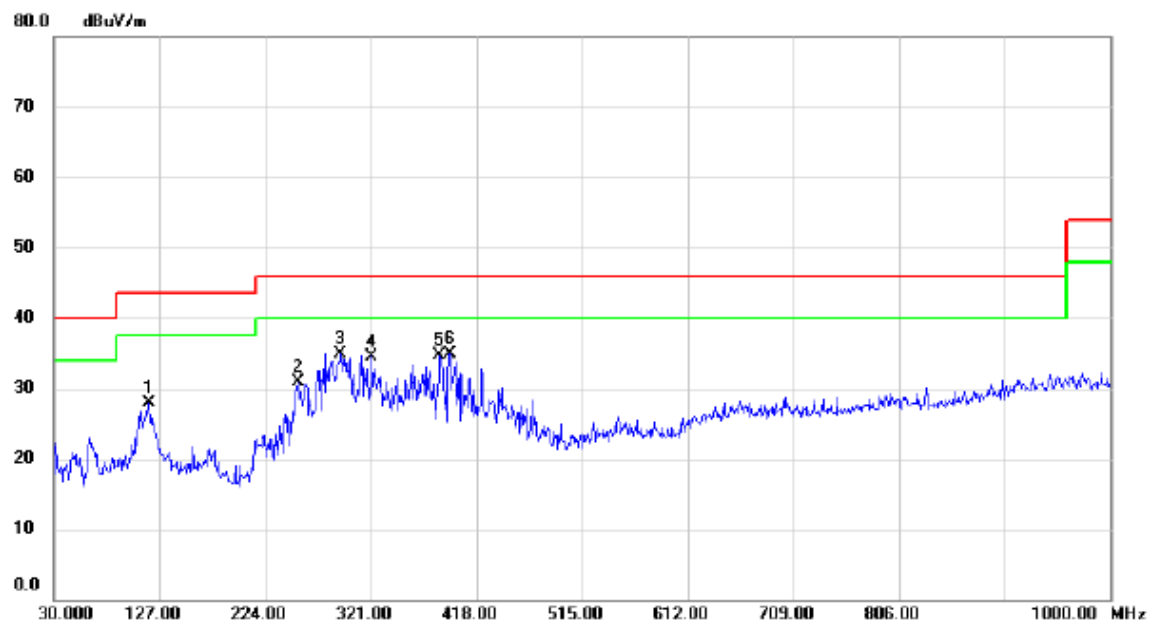

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		117.3000	40.75	-12.89	27.86	43.50	-15.64	peak	
2		254.0700	43.62	-12.65	30.97	46.00	-15.03	peak	
3	*	293.8400	44.66	-9.72	34.94	46.00	-11.06	peak	
4		321.9700	44.32	-9.72	34.60	46.00	-11.40	peak	
5		384.0500	42.92	-8.12	34.80	46.00	-11.20	peak	
6		393.7500	42.48	-7.60	34.88	46.00	-11.12	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: BYD)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.9700	49.88	-13.99	35.89	40.00	-4.11	QP	
2		48.4300	45.77	-12.39	33.38	40.00	-6.62	peak	
3		82.3800	45.96	-15.80	30.16	40.00	-9.84	peak	
4		116.3300	42.87	-13.01	29.86	43.50	-13.64	peak	
5		293.8400	39.61	-9.72	29.89	46.00	-16.11	peak	
6		423.8200	35.53	-6.62	28.91	46.00	-17.09	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	41.15	-13.01	28.14	43.50	-15.36	peak	
2		254.0700	44.15	-12.65	31.50	46.00	-14.50	peak	
3	*	293.8400	44.97	-9.72	35.25	46.00	-10.75	peak	
4		312.2700	43.55	-9.67	33.88	46.00	-12.12	peak	
5		393.7500	41.94	-7.60	34.34	46.00	-11.66	peak	
6		422.8500	40.12	-6.64	33.48	46.00	-12.52	peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: BYD)


Vertical

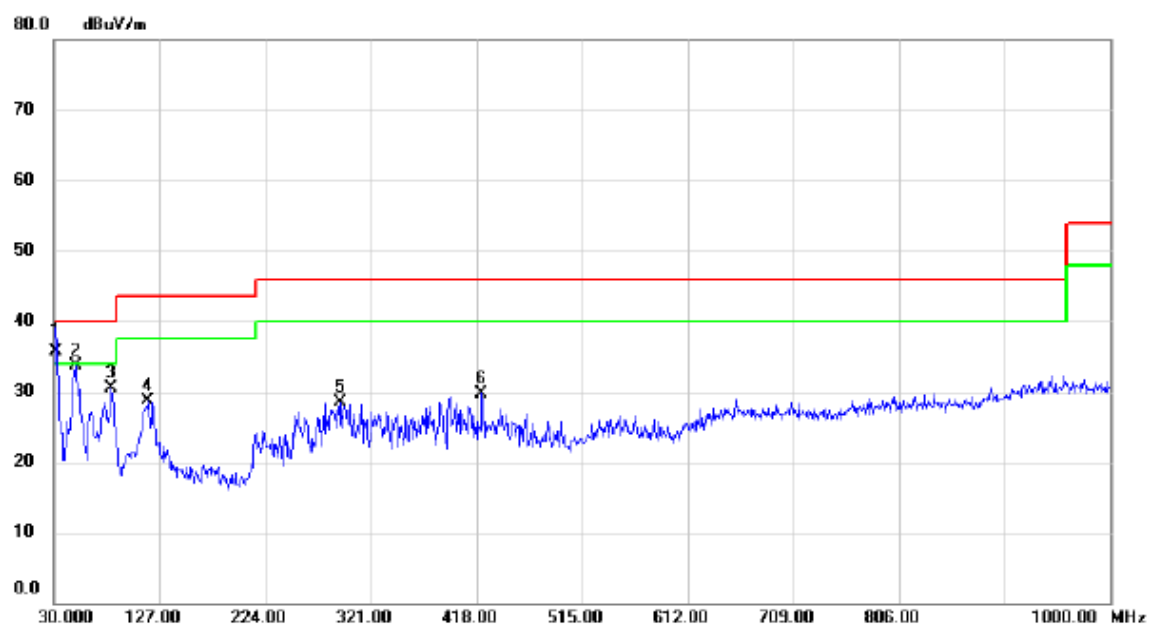

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.56	-13.89	35.67	40.00	-4.33	QP	
2		49.4000	46.06	-12.43	33.63	40.00	-6.37	peak	
3		82.3800	46.38	-15.80	30.58	40.00	-9.42	peak	
4		116.3300	41.69	-13.01	28.68	43.50	-14.82	peak	
5		293.8400	38.26	-9.72	28.54	46.00	-17.46	peak	
6		422.8500	36.44	-6.64	29.80	46.00	-16.20	peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: BYD)


Horizontal

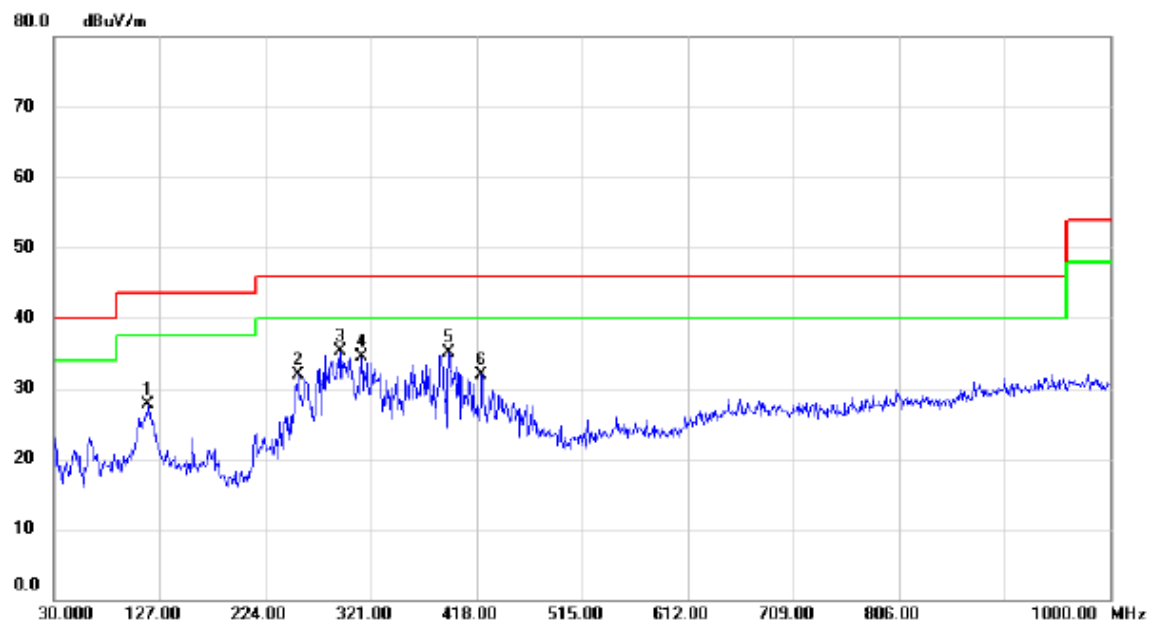

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		116.3300	40.80	-13.01	27.79	43.50	-15.71	peak	
2		254.0700	44.47	-12.65	31.82	46.00	-14.18	peak	
3	*	293.8400	45.03	-9.72	35.31	46.00	-10.69	peak	
4		312.2700	44.09	-9.67	34.42	46.00	-11.58	peak	
5		392.7800	42.84	-7.65	35.19	46.00	-10.81	peak	
6		422.8500	38.59	-6.64	31.95	46.00	-14.05	peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: BYD)

Vertical

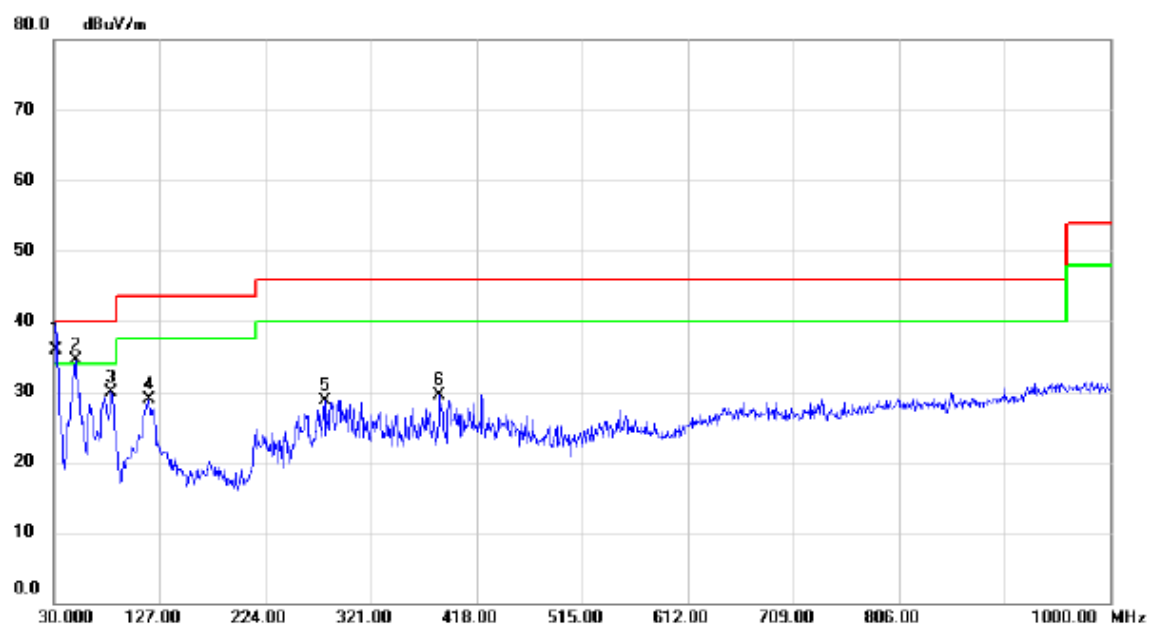

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.81	-13.89	35.92	40.00	-4.08	QP	
2	!	49.4000	47.02	-12.43	34.59	40.00	-5.41	peak	
3		82.3800	45.80	-15.80	30.00	40.00	-10.00	peak	
4		117.3000	41.77	-12.89	28.88	43.50	-14.62	peak	
5		278.3200	39.90	-11.19	28.71	46.00	-17.29	peak	
6		384.0500	37.71	-8.12	29.59	46.00	-16.41	peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		117.3000	40.88	-12.89	27.99	43.50	-15.51	peak	
2		254.0700	43.85	-12.65	31.20	46.00	-14.80	peak	
3	*	293.8400	44.38	-9.72	34.66	46.00	-11.34	peak	
4		312.2700	43.03	-9.67	33.36	46.00	-12.64	peak	
5		392.7800	41.59	-7.65	33.94	46.00	-12.06	peak	
6		423.8200	38.90	-6.62	32.28	46.00	-13.72	peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: SALCOMP)


Vertical

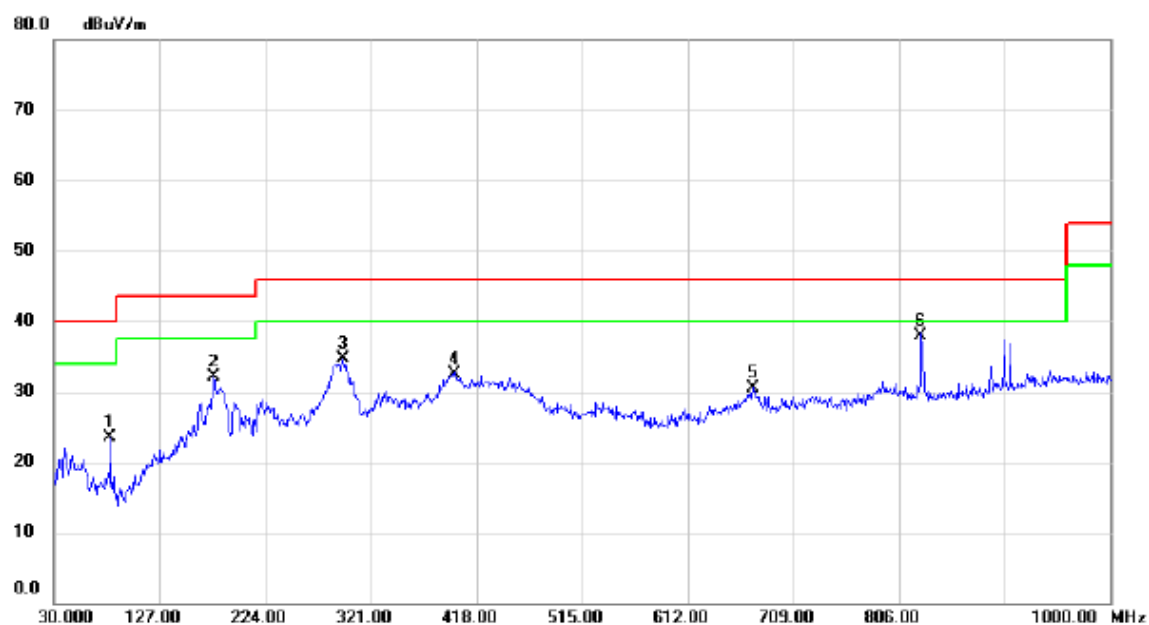

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		81.4100	39.27	-15.76	23.51	40.00	-16.49	peak	
2		176.4700	43.44	-11.35	32.09	43.50	-11.41	peak	
3		295.7800	44.29	-9.68	34.61	46.00	-11.39	peak	
4		397.6300	39.89	-7.39	32.50	46.00	-13.50	peak	
5		672.1400	32.02	-1.57	30.45	46.00	-15.55	peak	
6	*	826.3700	37.86	0.14	38.00	46.00	-8.00	peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: SALCOMP)


Horizontal

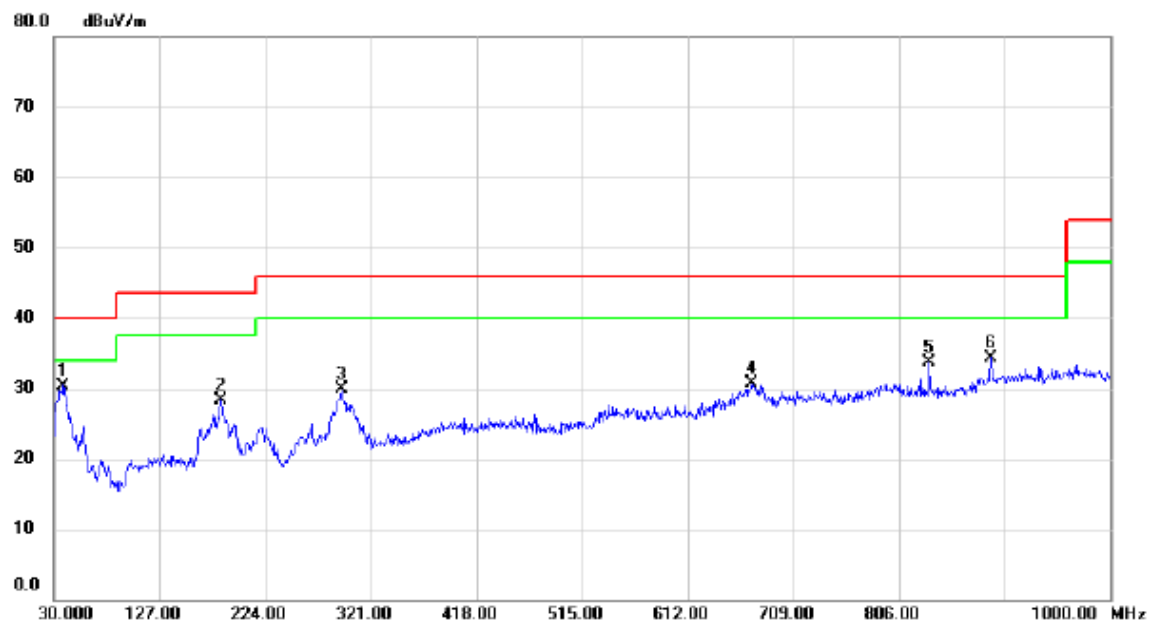

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	38.7300	43.09	-12.83	30.26	40.00	-9.74	peak	
2		183.2600	40.26	-11.96	28.30	43.50	-15.20	peak	
3		294.8100	39.56	-9.70	29.86	46.00	-16.14	peak	
4		671.1700	32.21	-1.58	30.63	46.00	-15.37	peak	
5		834.1300	33.54	0.14	33.68	46.00	-12.32	peak	
6		890.3900	32.98	1.38	34.36	46.00	-11.64	peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: SALCOMP)


Vertical

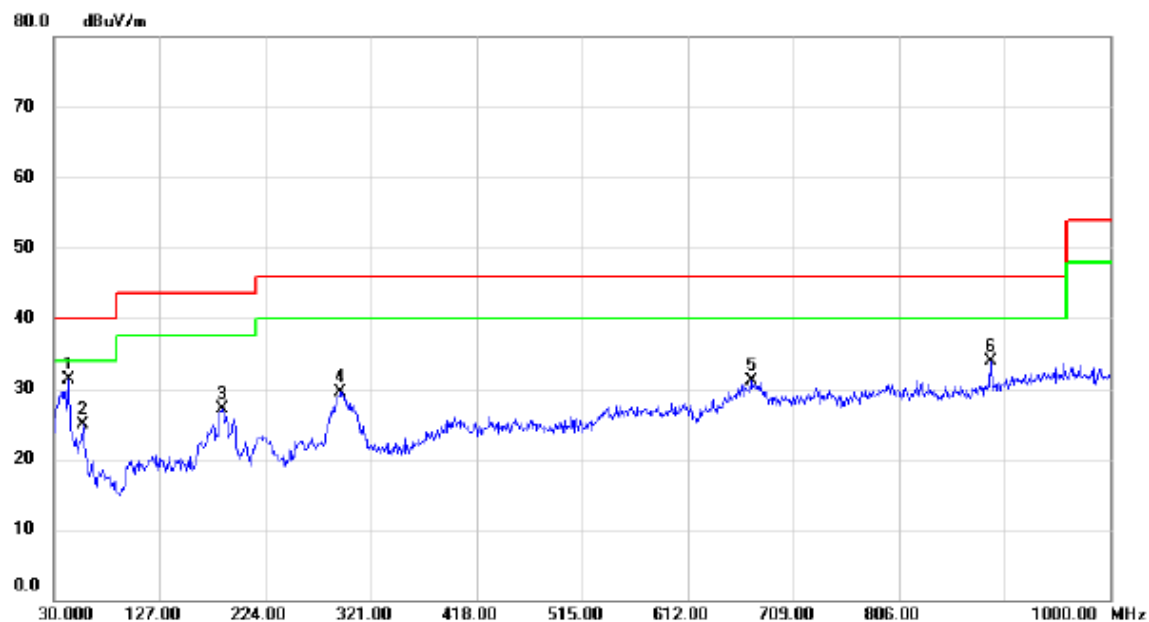

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	43.5800	43.33	-12.04	31.29	40.00	-8.71	peak	
2		56.1900	37.80	-12.93	24.87	40.00	-15.13	peak	
3		184.2300	39.22	-12.12	27.10	43.50	-16.40	peak	
4		293.8400	39.32	-9.72	29.60	46.00	-16.40	peak	
5		671.1700	32.62	-1.58	31.04	46.00	-14.96	peak	
6		890.3900	32.44	1.38	33.82	46.00	-12.18	peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: SALCOMP)


Horizontal

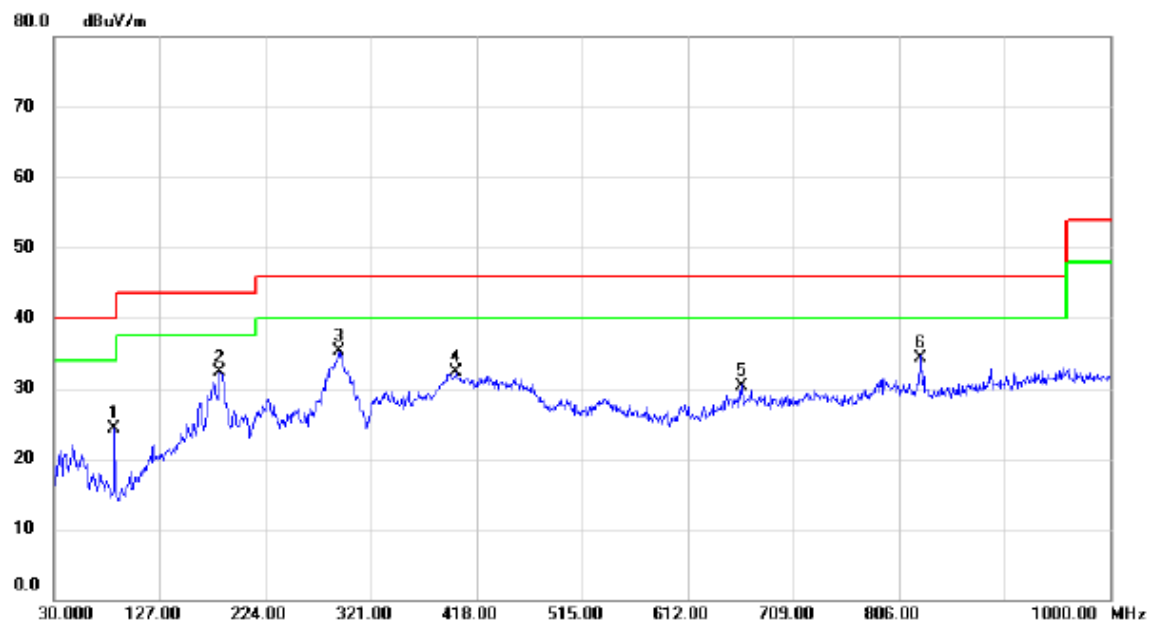

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		85.2900	40.21	-15.88	24.33	40.00	-15.67	peak	
2		182.2900	44.06	-11.82	32.24	43.50	-11.26	peak	
3	*	291.9000	45.11	-9.77	35.34	46.00	-10.66	peak	
4		399.5700	39.64	-7.28	32.36	46.00	-13.64	peak	
5		661.4700	31.94	-1.60	30.34	46.00	-15.66	peak	
6		826.3700	34.07	0.14	34.21	46.00	-11.79	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: SALCOMP)


Vertical

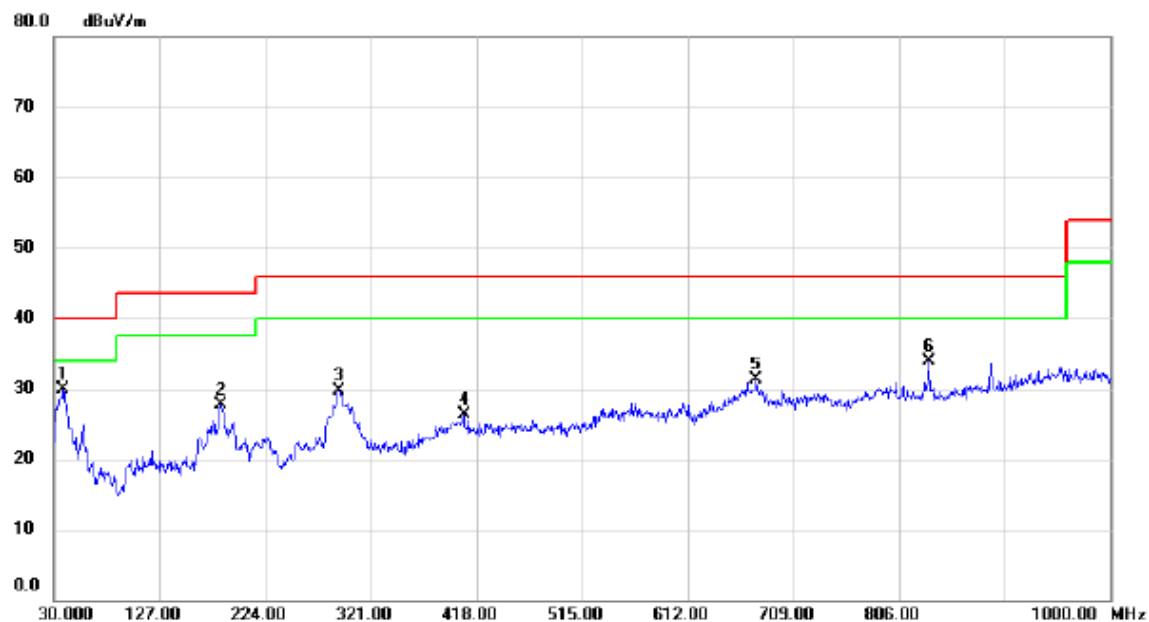

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	42.83	-12.83	30.00	40.00	-10.00	peak	
2		183.2600	39.71	-11.96	27.75	43.50	-15.75	peak	
3		291.9000	39.52	-9.77	29.75	46.00	-16.25	peak	
4		406.3600	33.39	-7.09	26.30	46.00	-19.70	peak	
5		675.0500	32.92	-1.56	31.36	46.00	-14.64	peak	
6		833.1600	33.81	0.13	33.94	46.00	-12.06	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: SALCOMP)


Horizontal

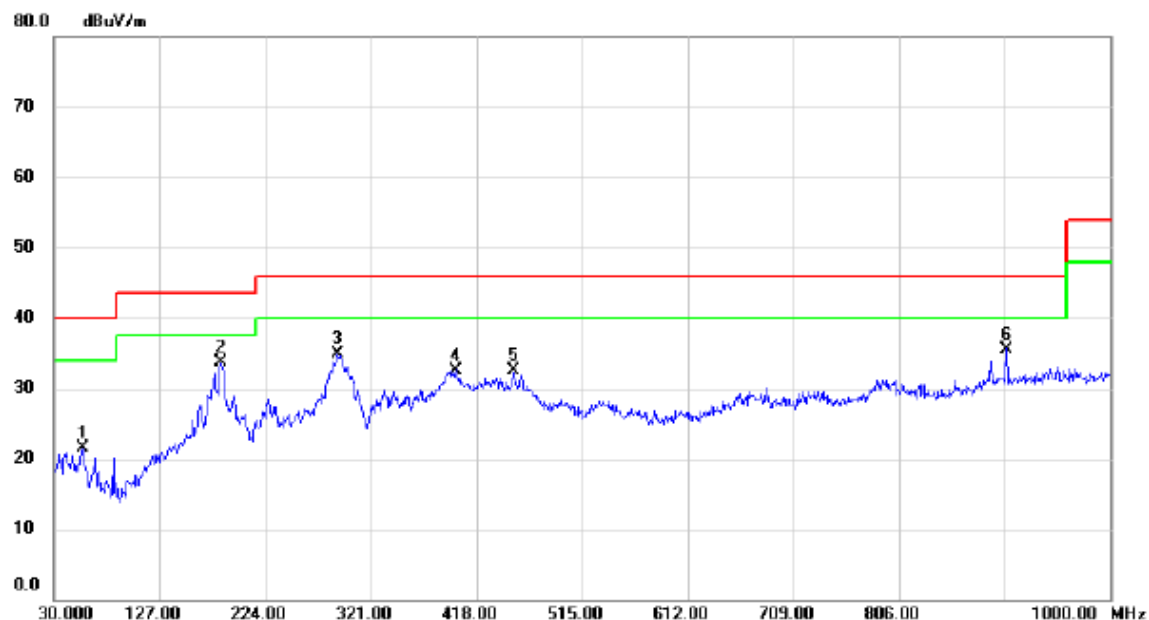

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	34.52	-12.93	21.59	40.00	-18.41	peak	
2	*	183.2600	45.67	-11.96	33.71	43.50	-9.79	peak	
3		290.9300	44.77	-9.80	34.97	46.00	-11.03	peak	
4		398.6000	39.89	-7.34	32.55	46.00	-13.45	peak	
5		451.9500	38.44	-5.95	32.49	46.00	-13.51	peak	
6		904.9400	33.72	1.81	35.53	46.00	-10.47	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: SALCOMP)

Vertical

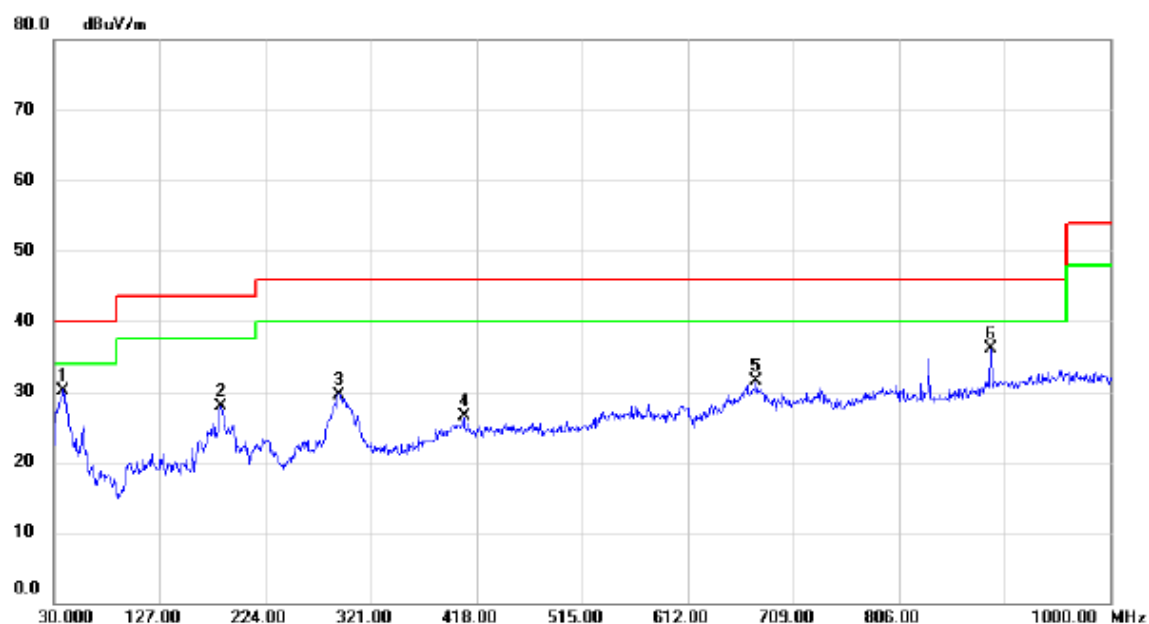

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	43.01	-12.83	30.18	40.00	-9.82	peak	
2		183.2600	39.86	-11.96	27.90	43.50	-15.60	peak	
3		291.9000	39.35	-9.77	29.58	46.00	-16.42	peak	
4		406.3600	33.57	-7.09	26.48	46.00	-19.52	peak	
5		675.0500	32.99	-1.56	31.43	46.00	-14.57	peak	
6		890.3900	34.67	1.38	36.05	46.00	-9.95	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: SALCOMP)

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		81.4100	38.89	-15.76	23.13	40.00	-16.87	peak	
2		176.4700	43.59	-11.35	32.24	43.50	-11.26	peak	
3		295.7800	44.29	-9.68	34.61	46.00	-11.39	peak	
4		397.6300	40.19	-7.39	32.80	46.00	-13.20	peak	
5		672.1400	31.82	-1.57	30.25	46.00	-15.75	peak	
6	*	826.3700	37.63	0.14	37.77	46.00	-8.23	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: SALCOMP)


Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	37.7600	42.51	-12.96	29.55	40.00	-10.45	peak	
2		176.4700	37.19	-11.35	25.84	43.50	-17.66	peak	
3		288.9900	38.24	-9.94	28.30	46.00	-17.70	peak	
4		411.2100	33.57	-6.95	26.62	46.00	-19.38	peak	
5		673.1100	31.52	-1.56	29.96	46.00	-16.04	peak	
6		833.1600	34.43	0.13	34.56	46.00	-11.44	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: SALCOMP)


Horizontal

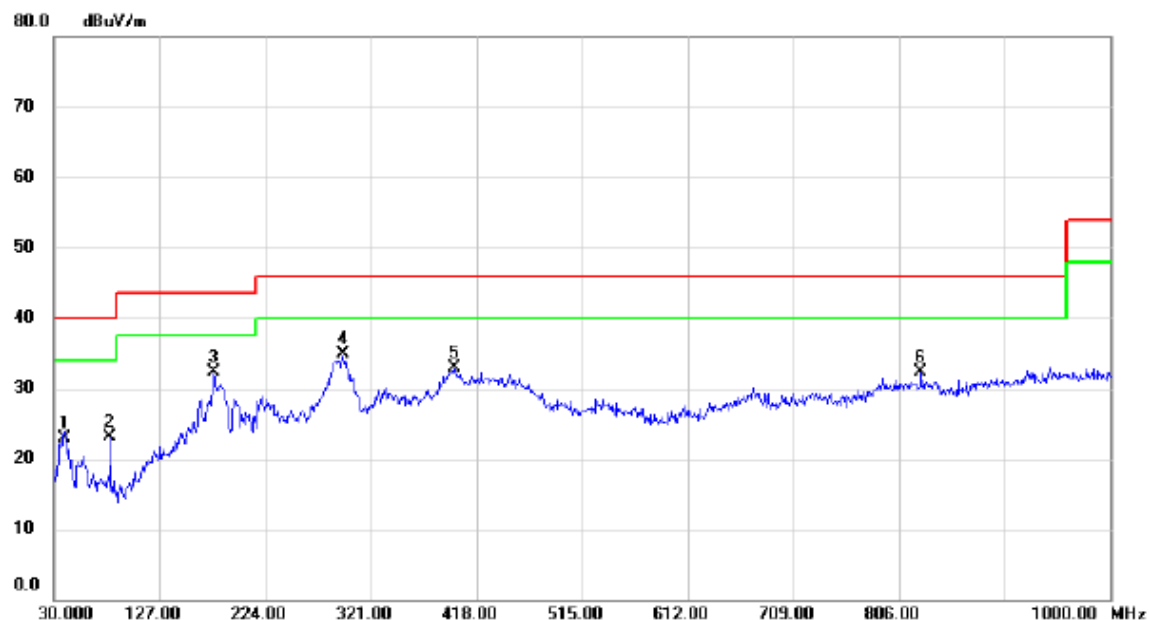

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	35.64	-12.67	22.97	40.00	-17.03	peak	
2		81.4100	38.92	-15.76	23.16	40.00	-16.84	peak	
3		176.4700	43.57	-11.35	32.22	43.50	-11.28	peak	
4	*	295.7800	44.61	-9.68	34.93	46.00	-11.07	peak	
5		397.6300	40.24	-7.39	32.85	46.00	-13.15	peak	
6		826.3700	32.09	0.14	32.23	46.00	-13.77	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: SALCOMP)

Vertical

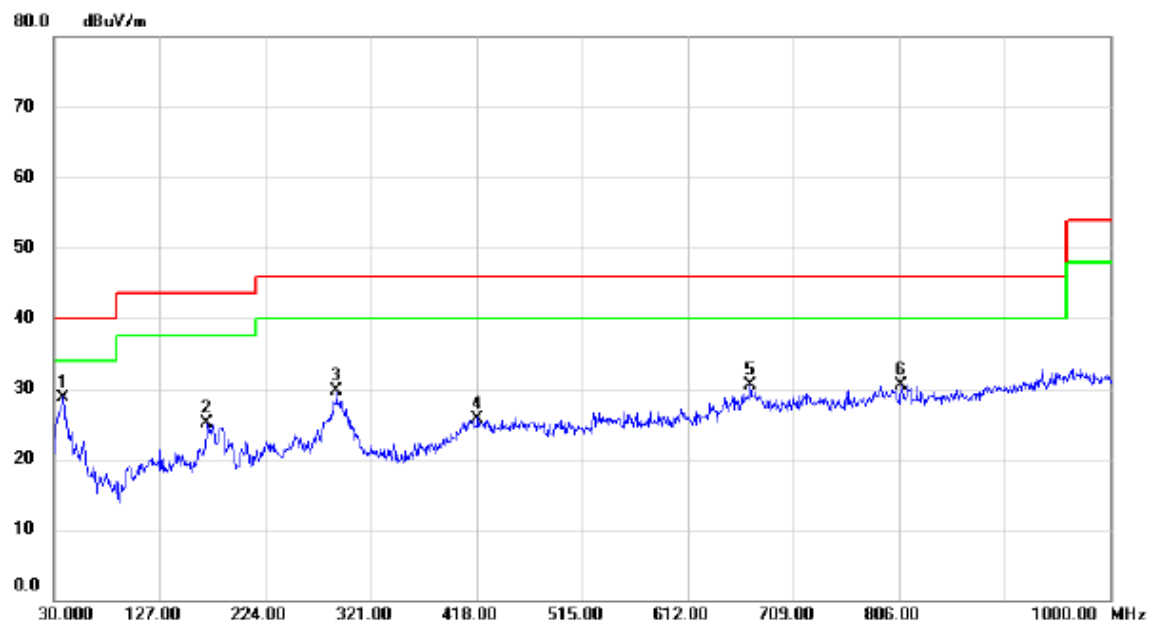

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	41.59	-12.83	28.76	40.00	-11.24	peak	
2		170.6500	36.29	-11.15	25.14	43.50	-18.36	peak	
3		289.9600	39.61	-9.82	29.79	46.00	-16.21	peak	
4		418.9700	32.51	-6.74	25.77	46.00	-20.23	peak	
5		669.2300	32.12	-1.57	30.55	46.00	-15.45	peak	
6		807.9400	30.45	0.15	30.60	46.00	-15.40	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: SALCOMP)

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	35.37	-12.93	22.44	40.00	-17.56	peak	
2	*	182.2900	46.03	-11.82	34.21	43.50	-9.29	peak	
3		290.9300	44.32	-9.80	34.52	46.00	-11.48	peak	
4		392.7800	35.39	-7.65	27.74	46.00	-18.26	peak	
5		670.2000	34.67	-1.57	33.10	46.00	-12.90	peak	
6		907.8500	33.52	1.88	35.40	46.00	-10.60	peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: SALCOMP)


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	42.73	-12.96	29.77	40.00	-10.23	peak	
2		183.2600	36.79	-11.96	24.83	43.50	-18.67	peak	
3		293.8400	34.92	-9.72	25.20	46.00	-20.80	peak	
4		538.2800	33.51	-5.27	28.24	46.00	-17.76	peak	
5		652.7400	31.44	-1.63	29.81	46.00	-16.19	peak	
6		890.3900	32.57	1.38	33.95	46.00	-12.05	peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: SALCOMP)

Horizontal

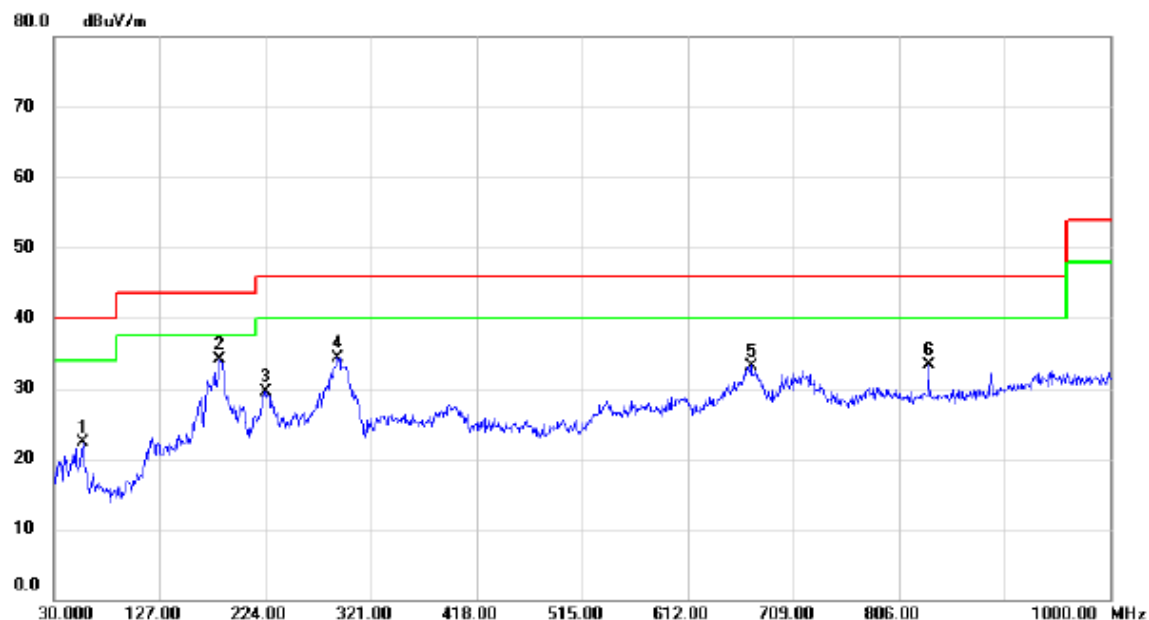

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	35.31	-12.93	22.38	40.00	-17.62	peak	
2	*	182.2900	45.87	-11.82	34.05	43.50	-9.45	peak	
3		224.9700	42.63	-13.08	29.55	46.00	-16.45	peak	
4		290.9300	44.18	-9.80	34.38	46.00	-11.62	peak	
5		670.2000	34.61	-1.57	33.04	46.00	-12.96	peak	
6		833.1600	33.15	0.13	33.28	46.00	-12.72	peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: SALCOMP)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	42.61	-12.96	29.65	40.00	-10.35	peak	
2		171.6200	36.89	-11.17	25.72	43.50	-17.78	peak	
3		289.9600	37.64	-9.82	27.82	46.00	-18.18	peak	
4		538.2800	34.51	-5.27	29.24	46.00	-16.76	peak	
5		678.9300	32.47	-1.54	30.93	46.00	-15.07	peak	
6		890.3900	33.74	1.38	35.12	46.00	-10.88	peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: SALCOMP)

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	35.01	-12.93	22.08	40.00	-17.92	peak	
2	*	182.2900	46.44	-11.82	34.62	43.50	-8.88	peak	
3		290.9300	44.31	-9.80	34.51	46.00	-11.49	peak	
4		393.7500	35.35	-7.60	27.75	46.00	-18.25	peak	
5		674.0800	34.78	-1.55	33.23	46.00	-12.77	peak	
6		903.0000	33.64	1.75	35.39	46.00	-10.61	peak	

ANT 1+ANT 2

Test Mode: UNII-1/TX N-20M Mode 5180MHz(Adapter: BYD)

Vertical

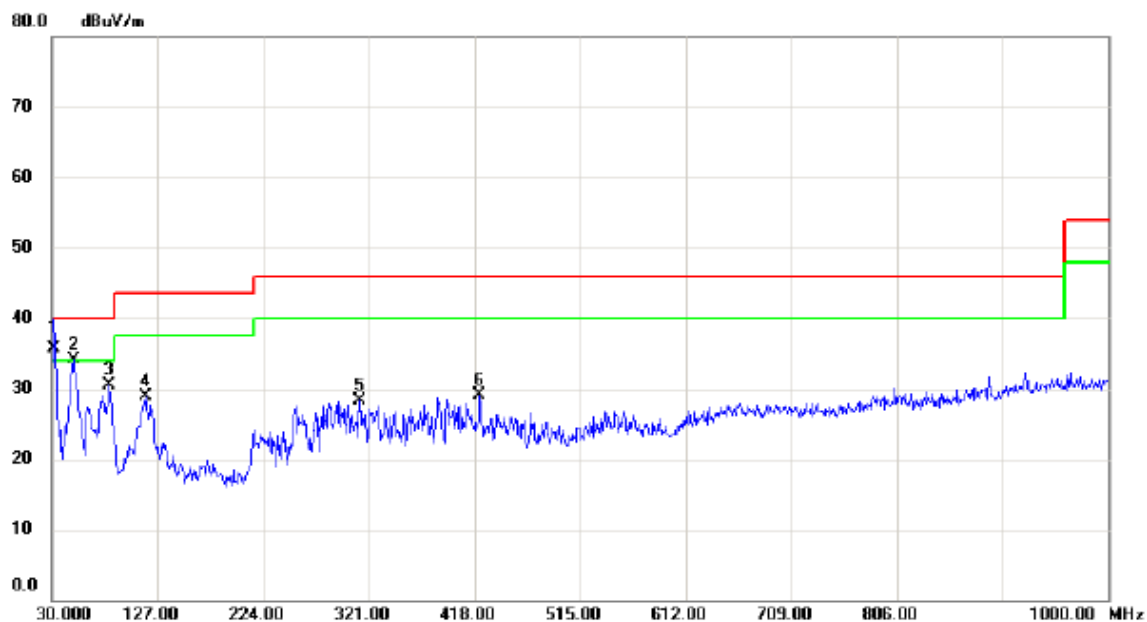

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.68	-13.89	35.79	40.00	-4.21	QP	
2	!	49.4000	46.58	-12.43	34.15	40.00	-5.85	peak	
3		82.3800	46.23	-15.80	30.43	40.00	-9.57	peak	
4		116.3300	41.97	-13.01	28.96	43.50	-14.54	peak	
5		312.2700	37.92	-9.67	28.25	46.00	-17.75	peak	
6		422.8500	35.75	-6.64	29.11	46.00	-16.89	peak	

Test Mode: UNII-1/TX N-20M Mode 5180MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		117.3000	40.18	-12.89	27.29	43.50	-16.21	peak	
2		261.8300	43.58	-12.47	31.11	46.00	-14.89	peak	
3	*	293.8400	44.97	-9.72	35.25	46.00	-10.75	peak	
4		301.6000	43.84	-9.59	34.25	46.00	-11.75	peak	
5		384.0500	43.17	-8.12	35.05	46.00	-10.95	peak	
6		398.6000	40.83	-7.34	33.49	46.00	-12.51	peak	

Test Mode: UNII-1/TX N-20M Mode 5240MHz(Adapter: BYD)


Vertical

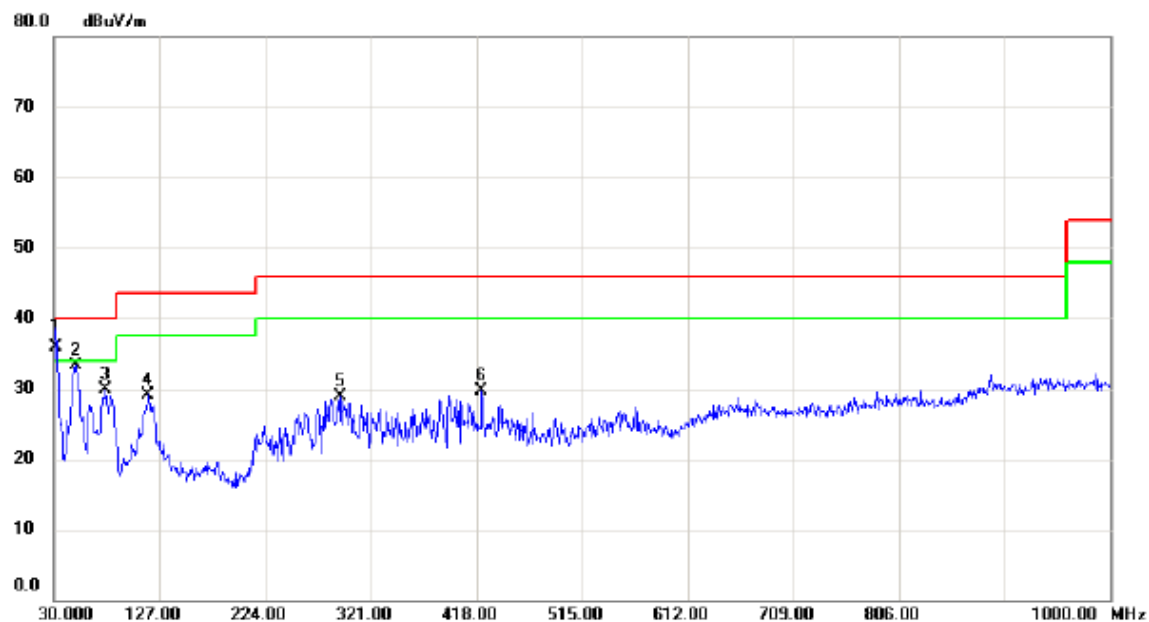

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.75	-13.89	35.86	40.00	-4.14	QP	
2		49.4000	45.74	-12.43	33.31	40.00	-6.69	peak	
3		77.5300	45.28	-15.47	29.81	40.00	-10.19	peak	
4		116.3300	42.21	-13.01	29.20	43.50	-14.30	peak	
5		293.8400	38.71	-9.72	28.99	46.00	-17.01	peak	
6		422.8500	36.34	-6.64	29.70	46.00	-16.30	peak	

Test Mode: UNII-1/TX N-20M Mode 5240MHz(Adapter: BYD)


Horizontal

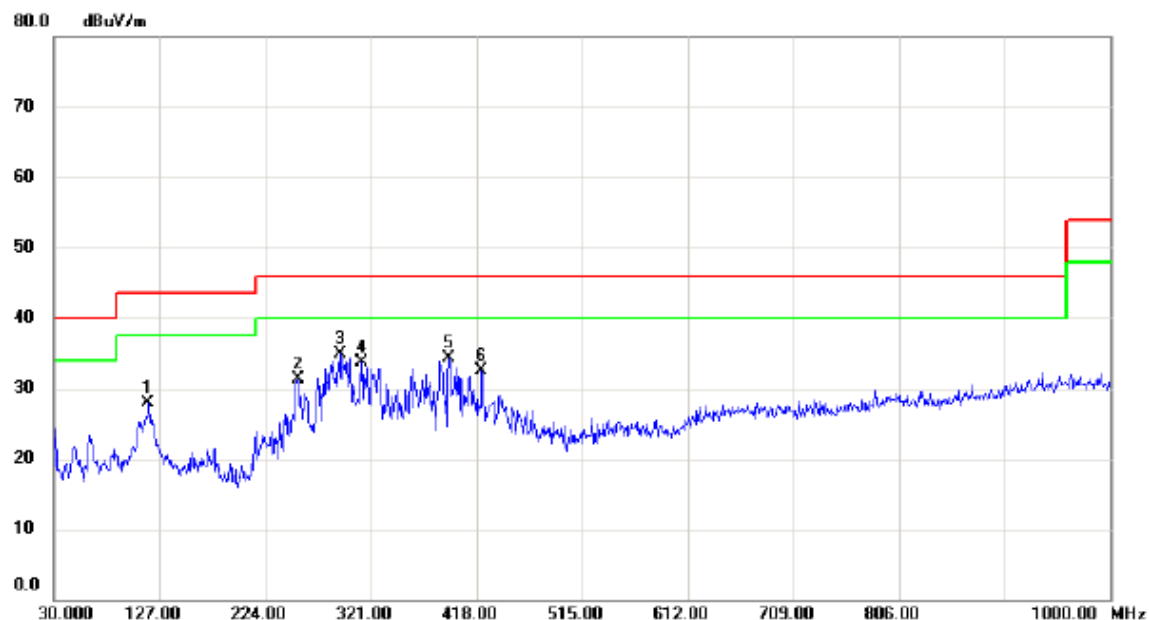

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		116.3300	40.98	-13.01	27.97	43.50	-15.53	peak	
2		254.0700	43.88	-12.65	31.23	46.00	-14.77	peak	
3	*	293.8400	44.62	-9.72	34.90	46.00	-11.10	peak	
4		312.2700	43.38	-9.67	33.71	46.00	-12.29	peak	
5		392.7800	42.03	-7.65	34.38	46.00	-11.62	peak	
6		422.8500	39.23	-6.64	32.59	46.00	-13.41	peak	

Test Mode: UNII-2A/TX N-20M Mode 5260MHz(Adapter: BYD)


Vertical

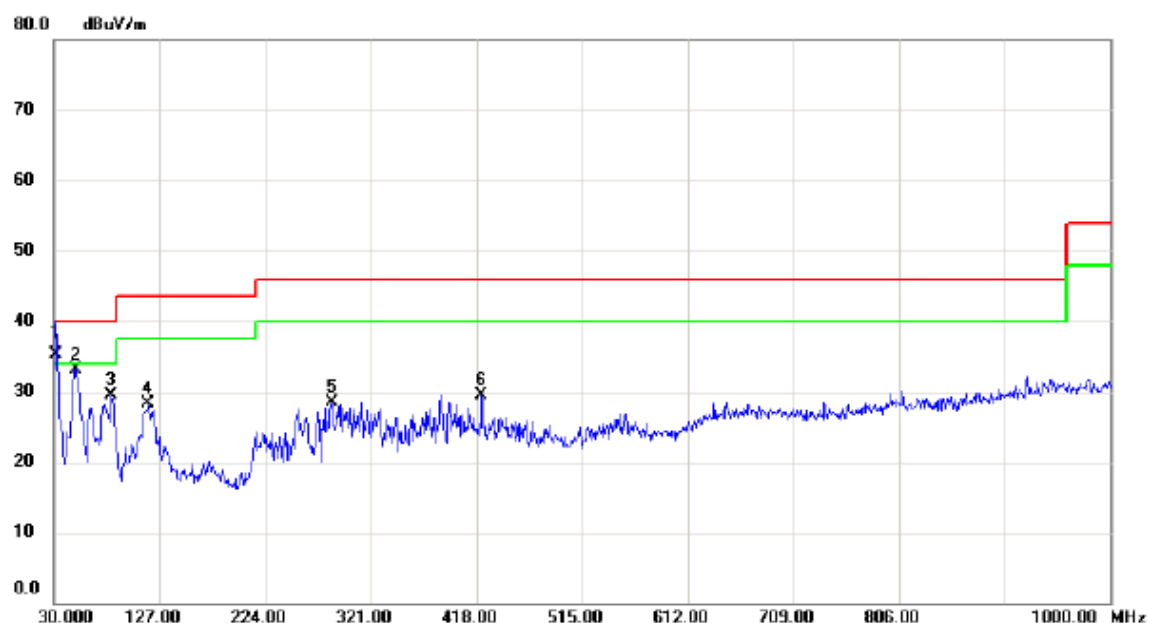

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.16	-13.89	35.27	40.00	-4.73	QP	
2		49.4000	45.63	-12.43	33.20	40.00	-6.80	peak	
3		82.3800	45.32	-15.80	29.52	40.00	-10.48	peak	
4		116.3300	41.32	-13.01	28.31	43.50	-15.19	peak	
5		285.1100	38.89	-10.43	28.46	46.00	-17.54	peak	
6		422.8500	36.23	-6.64	29.59	46.00	-16.41	peak	

Test Mode: UNII-2A/TX N-20M Mode 5260MHz(Adapter: BYD)


Horizontal

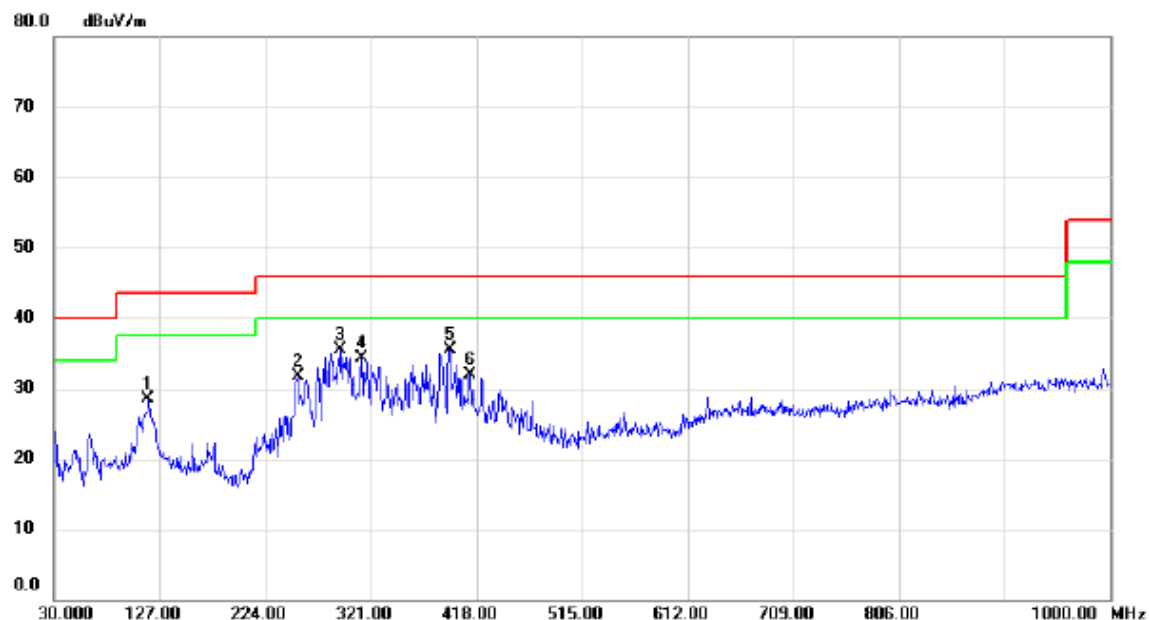

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		116.3300	41.53	-13.01	28.52	43.50	-14.98	peak	
2		254.0700	44.29	-12.65	31.64	46.00	-14.36	peak	
3		293.8400	45.16	-9.72	35.44	46.00	-10.56	peak	
4		312.2700	43.89	-9.67	34.22	46.00	-11.78	peak	
5	*	393.7500	43.06	-7.60	35.46	46.00	-10.54	peak	
6		412.1800	38.78	-6.92	31.86	46.00	-14.14	peak	

Test Mode: UNII-2A/TX N-20M Mode 5320MHz(Adapter: BYD)

Vertical

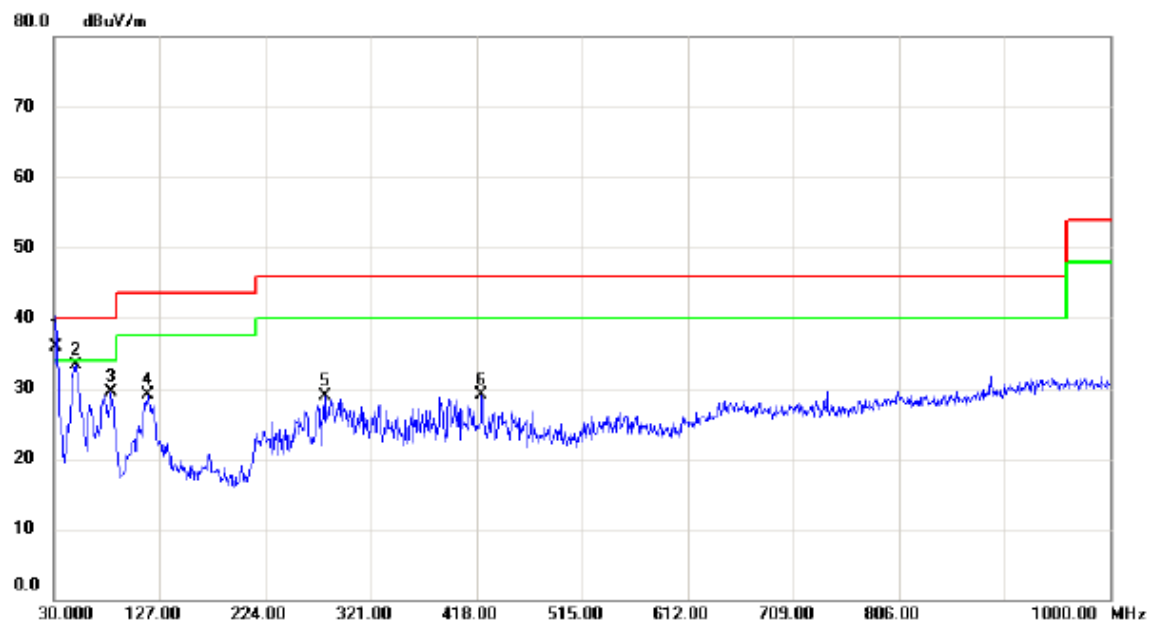

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.82	-13.89	35.93	40.00	-4.07	QP	
2		50.3700	45.70	-12.48	33.22	40.00	-6.78	peak	
3		82.3800	45.25	-15.80	29.45	40.00	-10.55	peak	
4		116.3300	42.15	-13.01	29.14	43.50	-14.36	peak	
5		278.3200	40.12	-11.19	28.93	46.00	-17.07	peak	
6		422.8500	35.70	-6.64	29.06	46.00	-16.94	peak	

Test Mode: UNII-2A/TX N-20M Mode 5320MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	41.16	-13.01	28.15	43.50	-15.35	peak	
2		254.0700	44.57	-12.65	31.92	46.00	-14.08	peak	
3	*	293.8400	45.13	-9.72	35.41	46.00	-10.59	peak	
4		312.2700	43.41	-9.67	33.74	46.00	-12.26	peak	
5		384.0500	42.71	-8.12	34.59	46.00	-11.41	peak	
6		422.8500	39.34	-6.64	32.70	46.00	-13.30	peak	

Test Mode: UNII-2C/TX N-20M Mode 5500MHz(Adapter: BYD)


Vertical

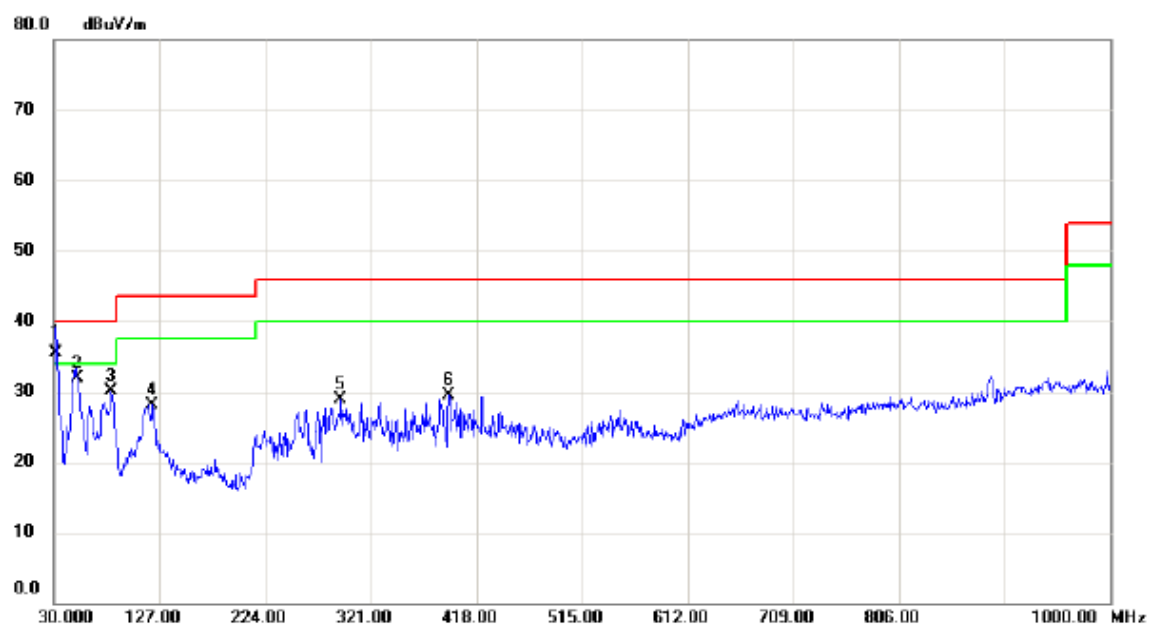

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.38	-13.89	35.49	40.00	-4.51	QP	
2		51.3400	44.49	-12.52	31.97	40.00	-8.03	peak	
3		82.3800	45.96	-15.80	30.16	40.00	-9.84	peak	
4		120.2100	40.66	-12.54	28.12	43.50	-15.38	peak	
5		293.8400	38.54	-9.72	28.82	46.00	-17.18	peak	
6		392.7800	37.08	-7.65	29.43	46.00	-16.57	peak	

Test Mode: UNII-2C/TX N-20M Mode 5500MHz(Adapter: BYD)


Horizontal

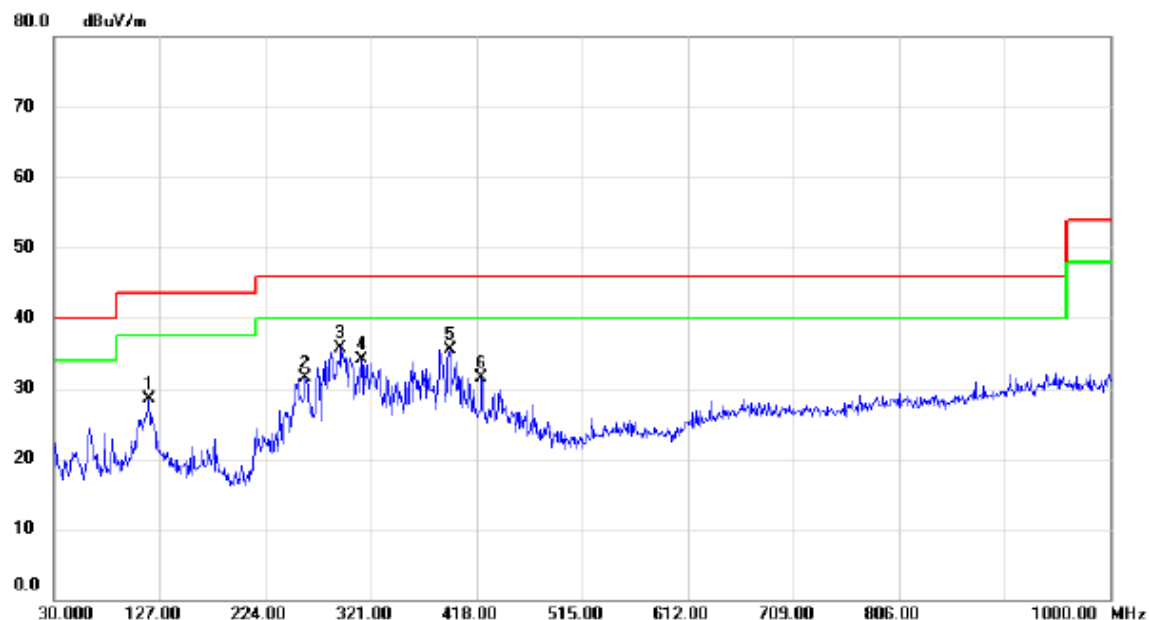

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		117.3000	41.37	-12.89	28.48	43.50	-15.02	peak	
2		260.8600	44.07	-12.56	31.51	46.00	-14.49	peak	
3	*	293.8400	45.34	-9.72	35.62	46.00	-10.38	peak	
4		312.2700	43.77	-9.67	34.10	46.00	-11.90	peak	
5		393.7500	43.09	-7.60	35.49	46.00	-10.51	peak	
6		422.8500	38.19	-6.64	31.55	46.00	-14.45	peak	

Test Mode: UNII-2C/TX N-20M Mode 5700MHz(Adapter: BYD)

Vertical

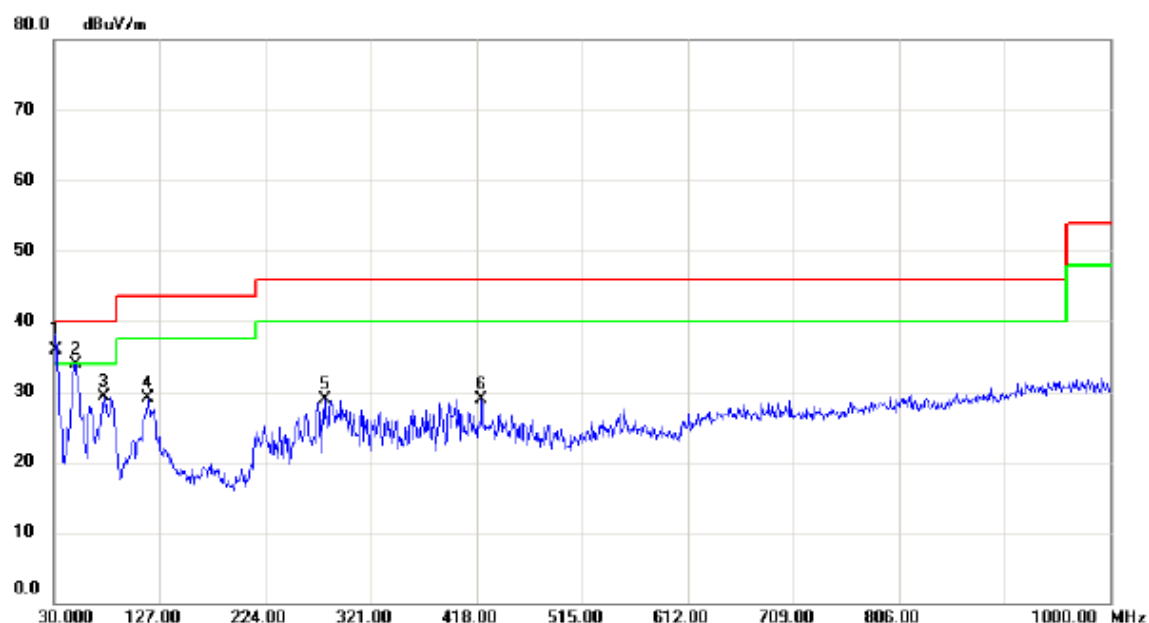

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.82	-13.89	35.93	40.00	-4.07	QP	
2		49.4000	46.33	-12.43	33.90	40.00	-6.10	peak	
3		75.5900	44.64	-15.31	29.33	40.00	-10.67	peak	
4		116.3300	42.09	-13.01	29.08	43.50	-14.42	peak	
5		278.3200	40.10	-11.19	28.91	46.00	-17.09	peak	
6		422.8500	35.63	-6.64	28.99	46.00	-17.01	peak	

Test Mode: UNII-2C/TX N-20M Mode 5700MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	41.08	-13.01	28.07	43.50	-15.43	peak	
2		254.0700	44.31	-12.65	31.66	46.00	-14.34	peak	
3	*	301.6000	45.91	-9.59	36.32	46.00	-9.68	peak	
4		321.0000	45.69	-9.72	35.97	46.00	-10.03	peak	
5		393.7500	42.59	-7.60	34.99	46.00	-11.01	peak	
6		412.1800	40.17	-6.92	33.25	46.00	-12.75	peak	

Test Mode: UNII-3/TX N-20M Mode 5745MHz(Adapter: BYD)


Vertical

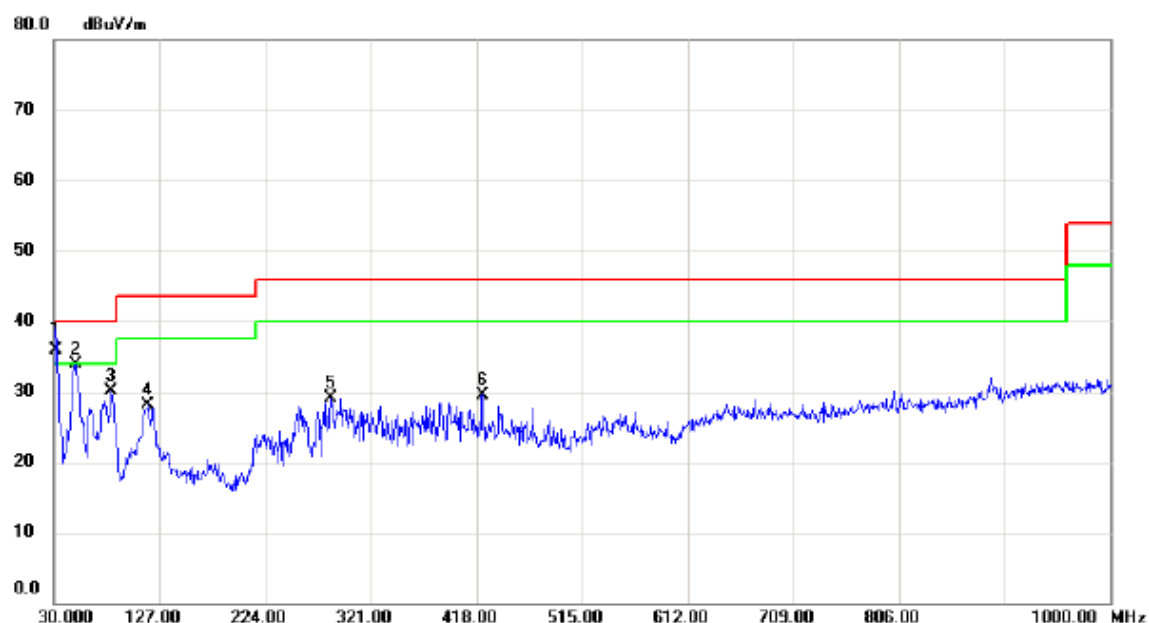

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.85	-13.89	35.96	40.00	-4.04	QP	
2		49.4000	46.37	-12.43	33.94	40.00	-6.06	peak	
3		82.3800	45.90	-15.80	30.10	40.00	-9.90	peak	
4		116.3300	41.21	-13.01	28.20	43.50	-15.30	peak	
5		284.1400	39.72	-10.54	29.18	46.00	-16.82	peak	
6		423.8200	36.22	-6.62	29.60	46.00	-16.40	peak	

Test Mode: UNII-3/TX N-20M Mode 5745MHz(Adapter: BYD)


Horizontal

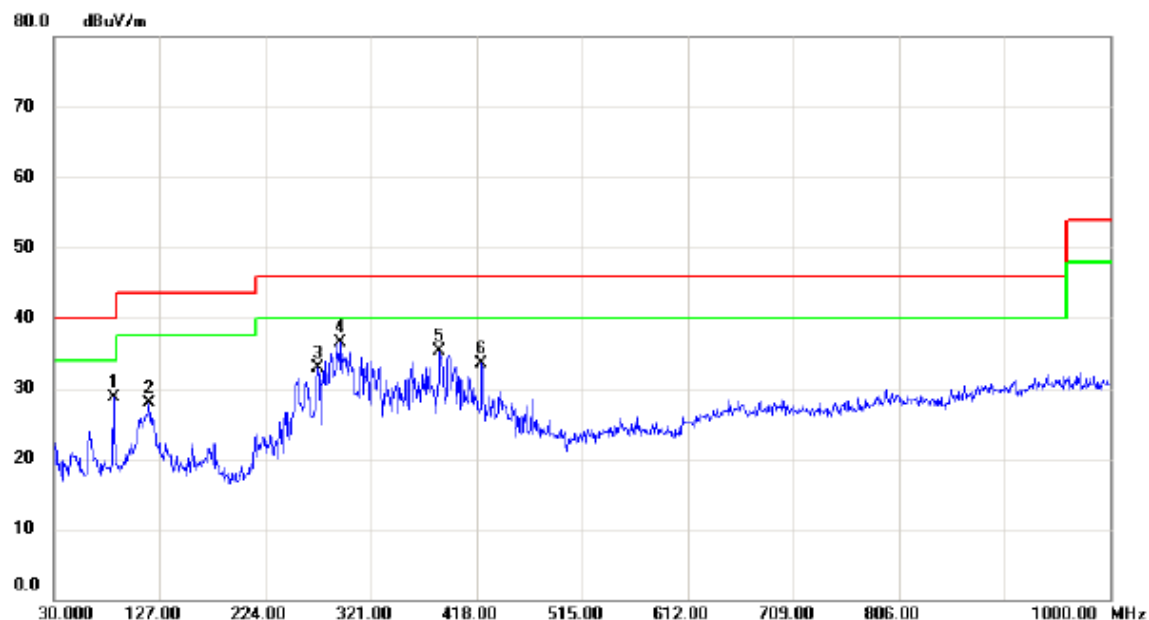

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		84.3200	44.55	-15.84	28.71	40.00	-11.29	peak	
2		117.3000	40.73	-12.89	27.84	43.50	-15.66	peak	
3		272.5000	44.52	-11.60	32.92	46.00	-13.08	peak	
4	*	293.8400	46.27	-9.72	36.55	46.00	-9.45	peak	
5		384.0500	43.37	-8.12	35.25	46.00	-10.75	peak	
6		422.8500	40.06	-6.64	33.42	46.00	-12.58	peak	

Test Mode: UNII-3/TX N-20M Mode 5825MHz(Adapter: BYD)

Vertical

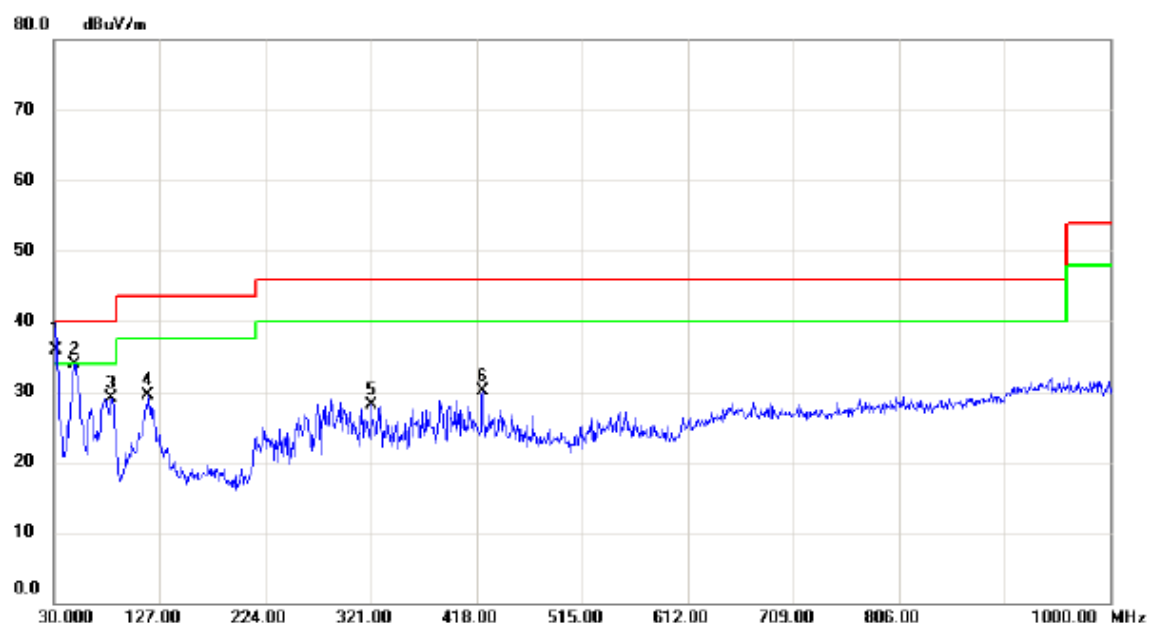

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.81	-13.89	35.92	40.00	-4.08	QP	
2		48.4300	46.29	-12.39	33.90	40.00	-6.10	peak	
3		82.3800	44.88	-15.80	29.08	40.00	-10.92	peak	
4		116.3300	42.42	-13.01	29.41	43.50	-14.09	peak	
5		321.0000	37.74	-9.72	28.02	46.00	-17.98	peak	
6		423.8200	36.78	-6.62	30.16	46.00	-15.84	peak	

Test Mode: UNII-3/TX N-20M Mode 5825MHz(Adapter: BYD)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		116.3300	40.88	-13.01	27.87	43.50	-15.63	peak	
2		272.5000	43.72	-11.60	32.12	46.00	-13.88	peak	
3	*	293.8400	45.29	-9.72	35.57	46.00	-10.43	peak	
4		328.7600	43.94	-9.78	34.16	46.00	-11.84	peak	
5		358.8300	43.58	-9.45	34.13	46.00	-11.87	peak	
6		384.0500	43.09	-8.12	34.97	46.00	-11.03	peak	

Test Mode: UNII-1/TX N-20M Mode 5180MHz(Adapter: SALCOMP)


Vertical

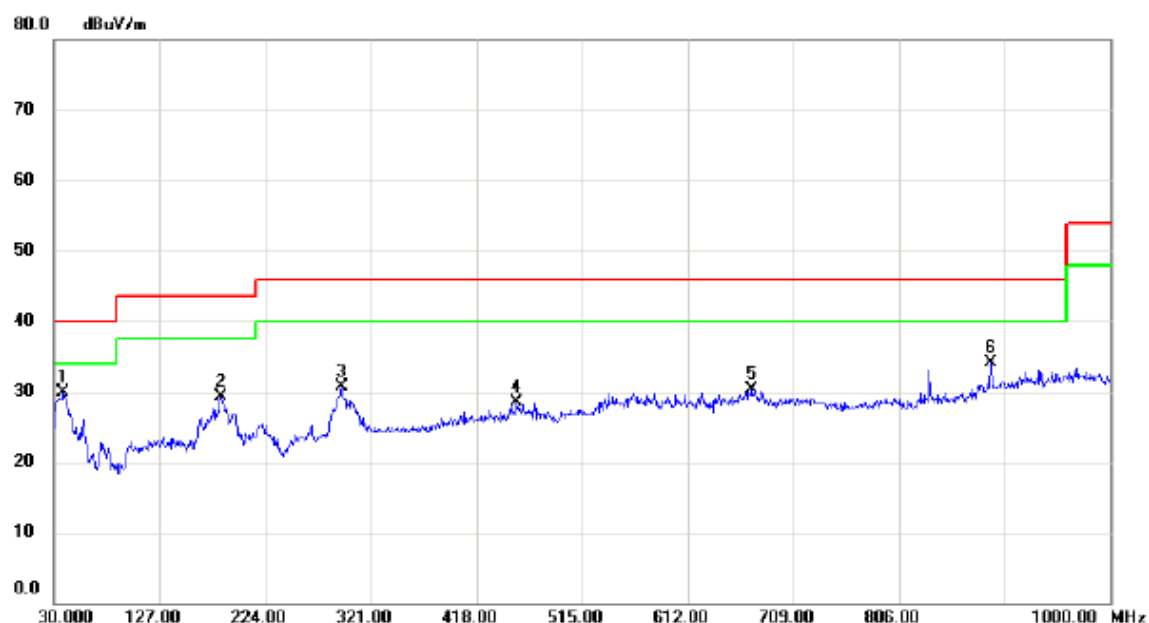

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	42.82	-12.83	29.99	40.00	-10.01	peak	
2		183.2600	41.24	-11.96	29.28	43.50	-14.22	peak	
3		294.8100	40.44	-9.70	30.74	46.00	-15.26	peak	
4		454.8600	34.63	-6.04	28.59	46.00	-17.41	peak	
5		670.2000	31.80	-1.57	30.23	46.00	-15.77	peak	
6		890.3900	32.63	1.38	34.01	46.00	-11.99	peak	

Test Mode: UNII-1/TX N-20M Mode 5180MHz(Adapter: SALCOMP)

Horizontal

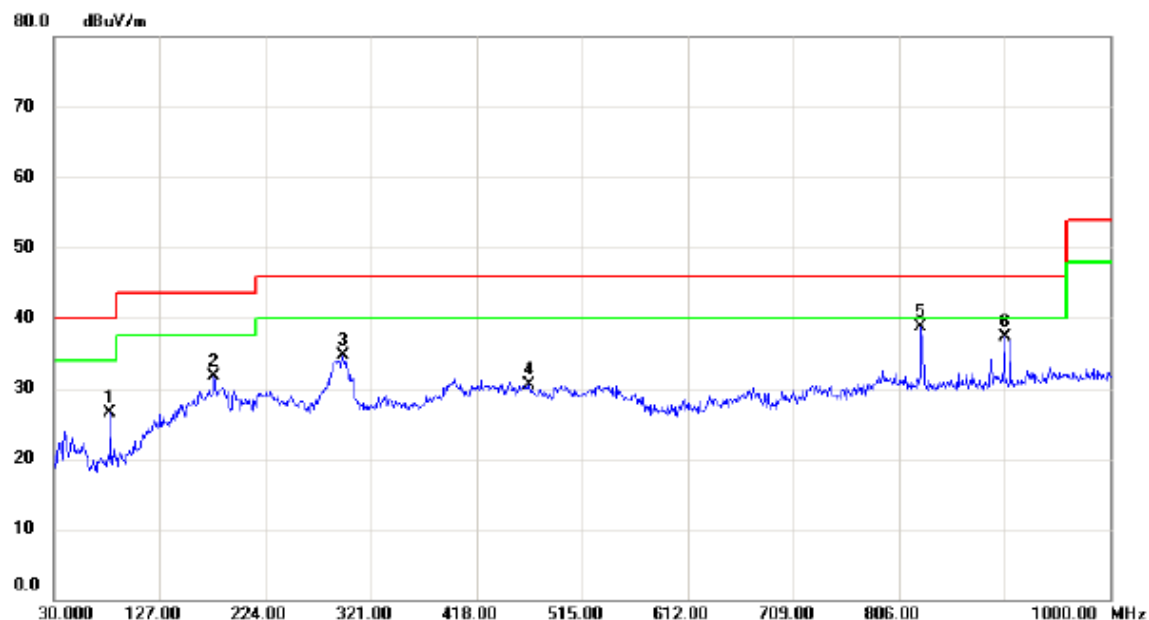

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		81.4100	42.35	-15.76	26.59	40.00	-13.41	peak	
2		176.4700	42.98	-11.35	31.63	43.50	-11.87	peak	
3		295.7800	44.36	-9.68	34.68	46.00	-11.32	peak	
4		466.5000	36.82	-6.39	30.43	46.00	-15.57	peak	
5	*	826.3700	38.66	0.14	38.80	46.00	-7.20	peak	
6		903.0000	35.56	1.75	37.31	46.00	-8.69	peak	

Test Mode: UNII-1/TX N-20M Mode 5240MHz(Adapter: SALCOMP)


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	43.5800	42.83	-12.04	30.79	40.00	-9.21	peak	
2		184.2300	38.22	-12.12	26.10	43.50	-17.40	peak	
3		293.8400	38.82	-9.72	29.10	46.00	-16.90	peak	
4		408.3000	34.14	-7.04	27.10	46.00	-18.90	peak	
5		671.1700	32.62	-1.58	31.04	46.00	-14.96	peak	
6		890.3900	32.94	1.38	34.32	46.00	-11.68	peak	

Test Mode: UNII-1/TX N-20M Mode 5240MHz(Adapter: SALCOMP)

Horizontal

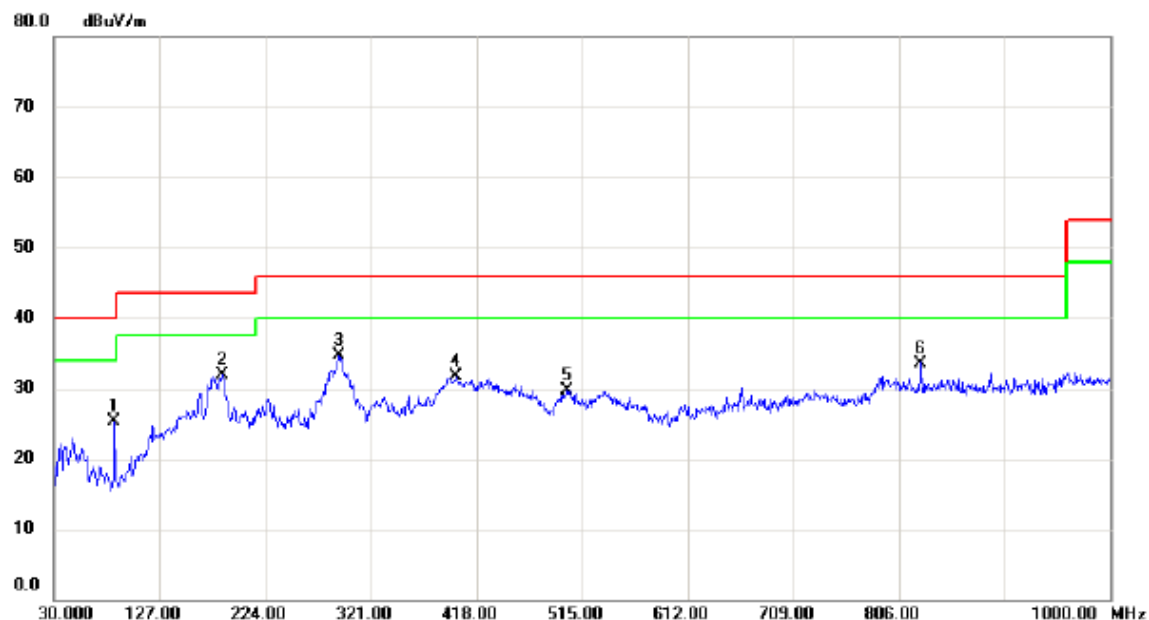

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		85.2900	41.20	-15.88	25.32	40.00	-14.68	peak	
2		184.2300	44.05	-12.12	31.93	43.50	-11.57	peak	
3	*	291.9000	44.44	-9.77	34.67	46.00	-11.33	peak	
4		399.5700	39.04	-7.28	31.76	46.00	-14.24	peak	
5		501.4200	37.09	-7.32	29.77	46.00	-16.23	peak	
6		826.3700	33.46	0.14	33.60	46.00	-12.40	peak	

Test Mode: UNII-2A/TX N-20M Mode 5260MHz(Adapter: SALCOMP)

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	43.72	-12.83	30.89	40.00	-9.11	peak	
2		183.2600	39.63	-11.96	27.67	43.50	-15.83	peak	
3		291.9000	38.47	-9.77	28.70	46.00	-17.30	peak	
4		406.3600	32.93	-7.09	25.84	46.00	-20.16	peak	
5		675.0500	33.86	-1.56	32.30	46.00	-13.70	peak	
6		833.1600	33.77	0.13	33.90	46.00	-12.10	peak	

Test Mode: UNII-2A/TX N-20M Mode 5260MHz(Adapter: SALCOMP)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		55.2200	35.10	-12.84	22.26	40.00	-17.74	peak	
2		183.2600	44.91	-11.96	32.95	43.50	-10.55	peak	
3		290.9300	45.77	-9.80	35.97	46.00	-10.03	peak	
4		398.6000	41.07	-7.34	33.73	46.00	-12.27	peak	
5		683.7800	33.09	-1.52	31.57	46.00	-14.43	peak	
6	*	904.9400	35.32	1.81	37.13	46.00	-8.87	peak	

Test Mode: UNII-2A/TX N-20M Mode 5320MHz(Adapter: SALCOMP)

Vertical

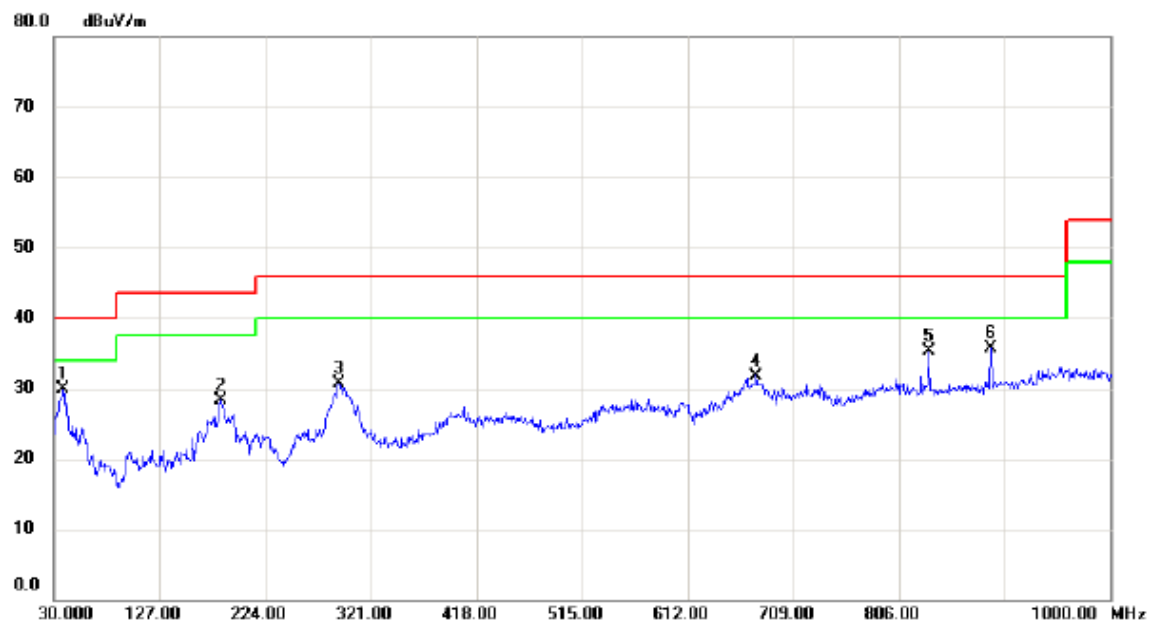

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	42.66	-12.83	29.83	40.00	-10.17	peak	
2		183.2600	40.28	-11.96	28.32	43.50	-15.18	peak	
3		291.9000	40.47	-9.77	30.70	46.00	-15.30	peak	
4		675.0500	33.36	-1.56	31.80	46.00	-14.20	peak	
5		833.1600	35.10	0.13	35.23	46.00	-10.77	peak	
6		890.3900	34.26	1.38	35.64	46.00	-10.36	peak	

Test Mode: UNII-2A/TX N-20M Mode 5320MHz(Adapter: SALCOMP)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		81.4100	39.85	-15.76	24.09	40.00	-15.91	peak	
2		176.4700	42.98	-11.35	31.63	43.50	-11.87	peak	
3		295.7800	43.86	-9.68	34.18	46.00	-11.82	peak	
4		397.6300	39.65	-7.39	32.26	46.00	-13.74	peak	
5		672.1400	31.76	-1.57	30.19	46.00	-15.81	peak	
6	*	826.3700	38.16	0.14	38.30	46.00	-7.70	peak	

Test Mode: UNII-2C/TX N-20M Mode 5500MHz(Adapter: SALCOMP)


Vertical

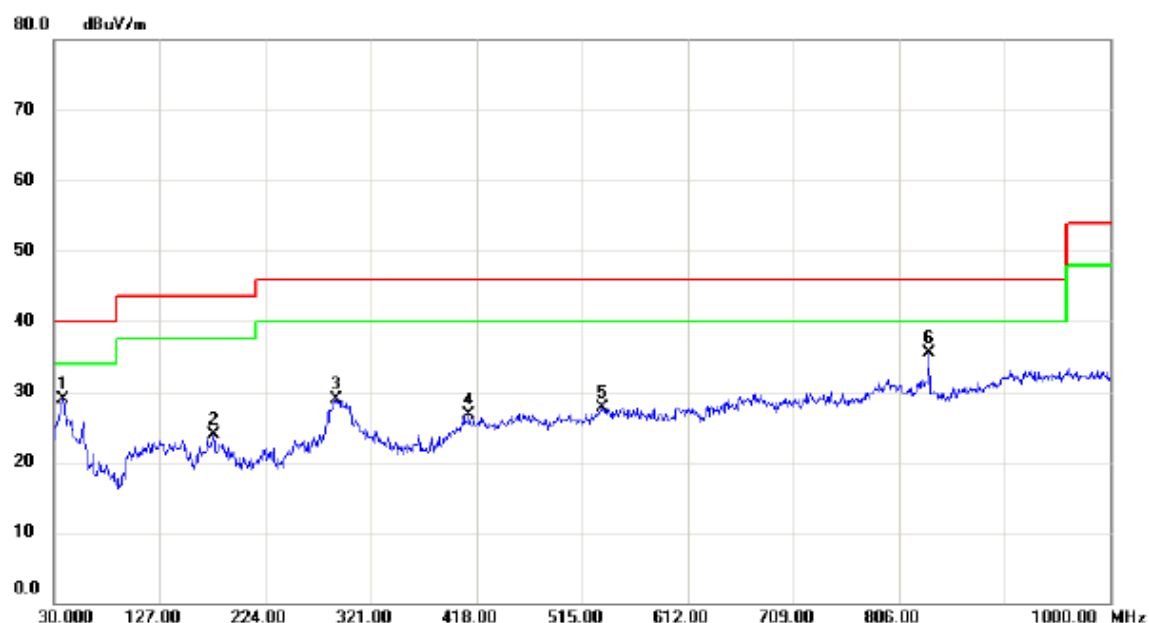

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	41.96	-12.96	29.00	40.00	-11.00	peak	
2		176.4700	35.16	-11.35	23.81	43.50	-19.69	peak	
3		288.9900	38.92	-9.94	28.98	46.00	-17.02	peak	
4		411.2100	33.64	-6.95	26.69	46.00	-19.31	peak	
5		533.4300	33.25	-5.53	27.72	46.00	-18.28	peak	
6	*	833.1600	35.37	0.13	35.50	46.00	-10.50	peak	

Test Mode: UNII-2C/TX N-20M Mode 5500MHz(Adapter: SALCOMP)


Horizontal

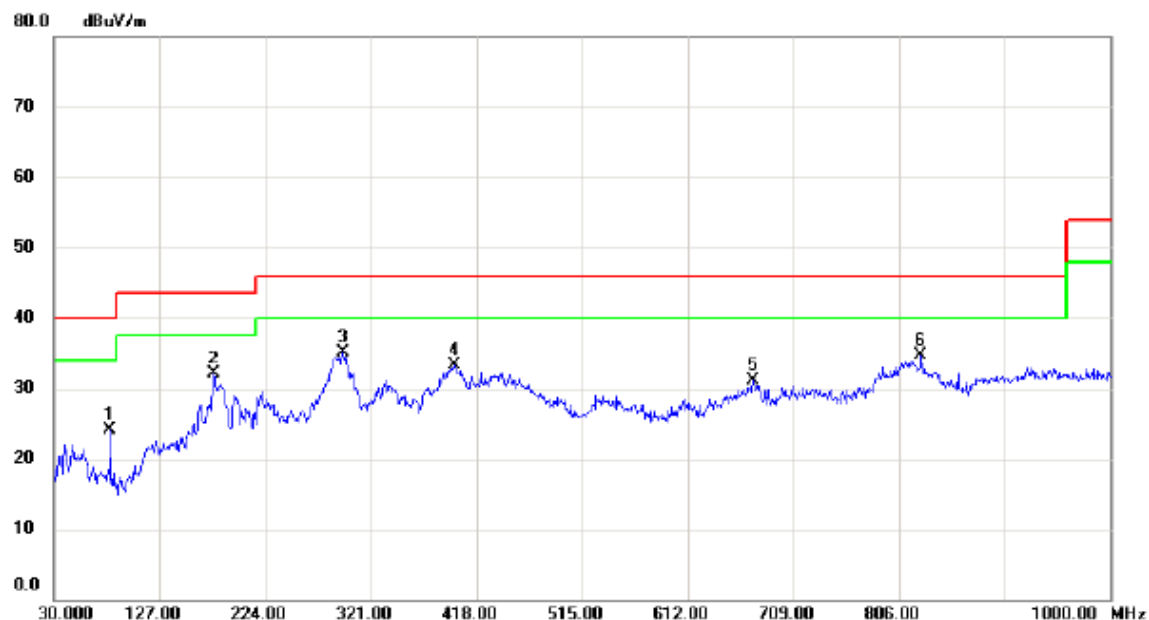

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		81.4100	39.85	-15.76	24.09	40.00	-15.91	peak	
2		176.4700	43.48	-11.35	32.13	43.50	-11.37	peak	
3	*	295.7800	44.86	-9.68	35.18	46.00	-10.82	peak	
4		397.6300	40.65	-7.39	33.26	46.00	-12.74	peak	
5		672.1400	32.76	-1.57	31.19	46.00	-14.81	peak	
6		826.3700	34.66	0.14	34.80	46.00	-11.20	peak	

Test Mode: UNII-2C/TX N-20M Mode 5700MHz(Adapter: SALCOMP)

Vertical

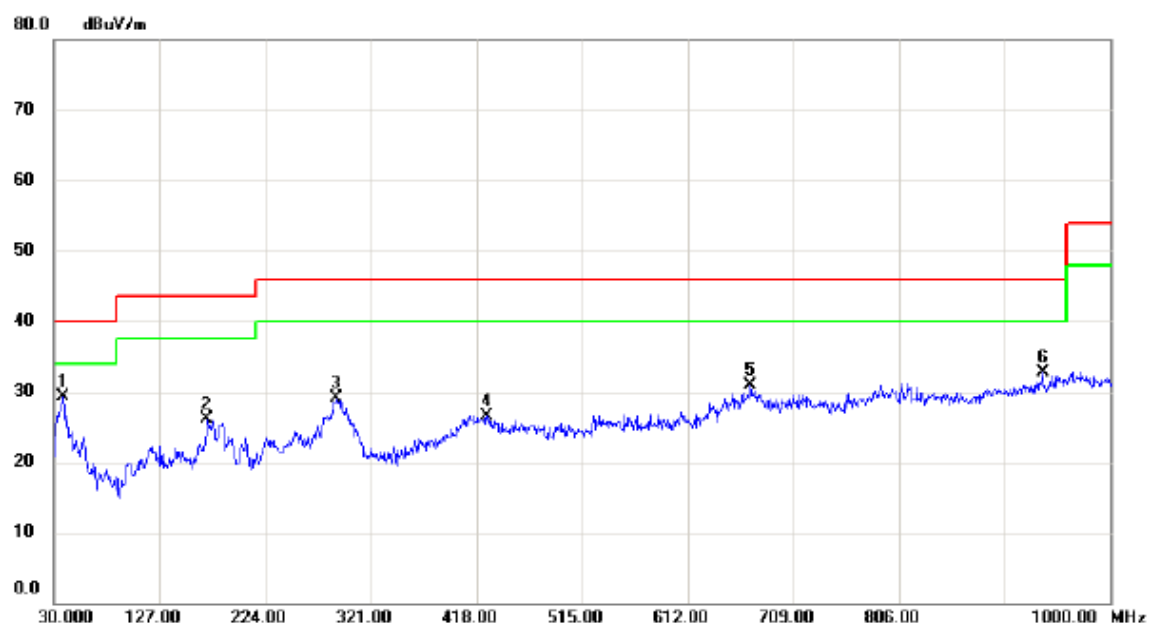

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	42.14	-12.83	29.31	40.00	-10.69	peak	
2		170.6500	37.22	-11.15	26.07	43.50	-17.43	peak	
3		289.9600	38.86	-9.82	29.04	46.00	-16.96	peak	
4		427.7000	33.02	-6.50	26.52	46.00	-19.48	peak	
5		669.2300	32.53	-1.57	30.96	46.00	-15.04	peak	
6		937.9200	30.04	2.73	32.77	46.00	-13.23	peak	

Test Mode: UNII-2C/TX N-20M Mode 5700MHz(Adapter: SALCOMP)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	36.29	-12.93	23.36	40.00	-16.64	peak	
2	*	182.2900	45.40	-11.82	33.58	43.50	-9.92	peak	
3		290.9300	43.76	-9.80	33.96	46.00	-12.04	peak	
4		392.7800	35.44	-7.65	27.79	46.00	-18.21	peak	
5		670.2000	34.82	-1.57	33.25	46.00	-12.75	peak	
6		907.8500	33.96	1.88	35.84	46.00	-10.16	peak	

Test Mode: UNII-3/TX N-20M Mode 5745MHz(Adapter: SALCOMP)


Vertical

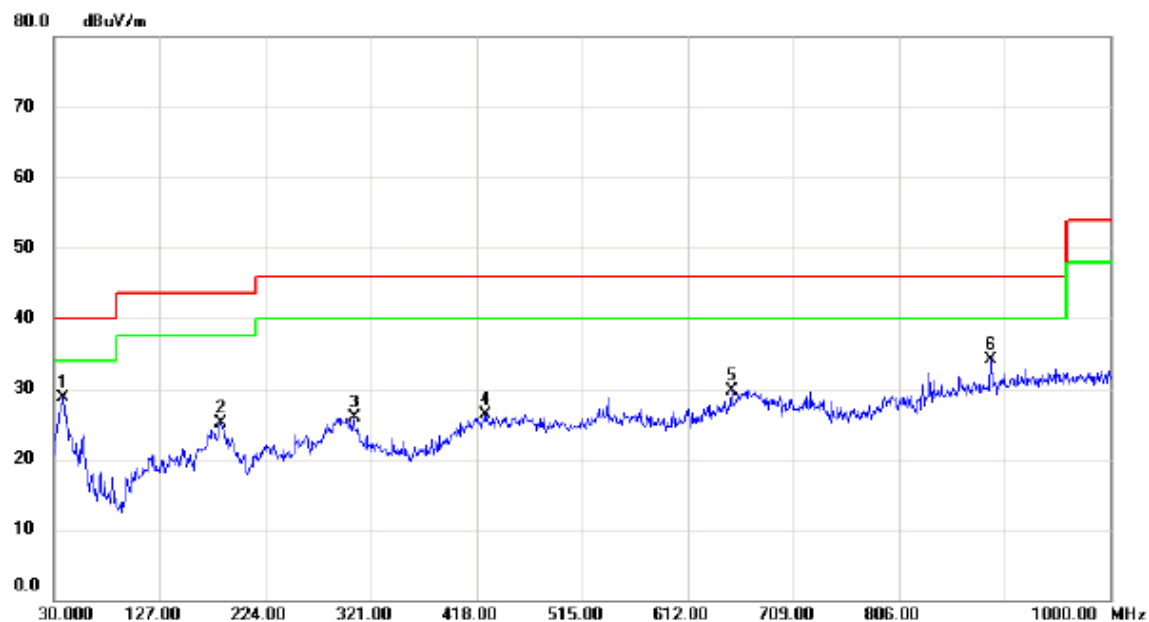

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	41.63	-12.96	28.67	40.00	-11.33	peak	
2		183.2600	37.10	-11.96	25.14	43.50	-18.36	peak	
3		305.4800	35.56	-9.63	25.93	46.00	-20.07	peak	
4		426.7300	32.80	-6.53	26.27	46.00	-19.73	peak	
5		652.7400	31.43	-1.63	29.80	46.00	-16.20	peak	
6		890.3900	32.75	1.38	34.13	46.00	-11.87	peak	

Test Mode: UNII-3/TX N-20M Mode 5745MHz(Adapter: SALCOMP)

Horizontal

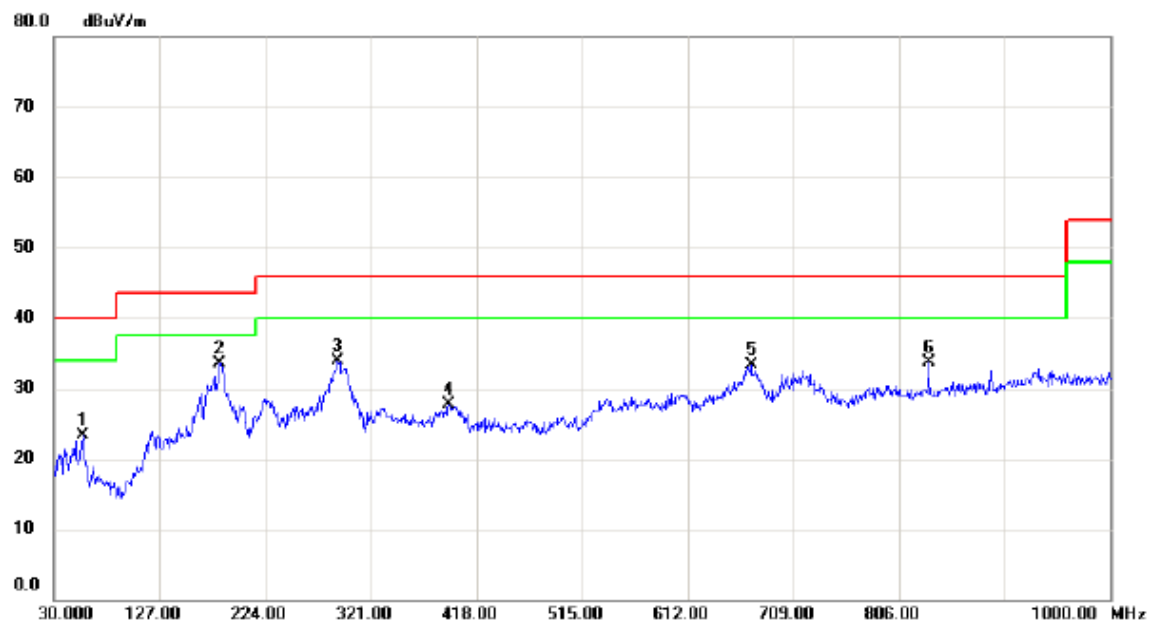

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	36.29	-12.93	23.36	40.00	-16.64	peak	
2	*	182.2900	45.40	-11.82	33.58	43.50	-9.92	peak	
3		290.9300	43.76	-9.80	33.96	46.00	-12.04	peak	
4		392.7800	35.44	-7.65	27.79	46.00	-18.21	peak	
5		670.2000	34.82	-1.57	33.25	46.00	-12.75	peak	
6		833.1600	33.62	0.13	33.75	46.00	-12.25	peak	

Test Mode: UNII-3/TX N-20M Mode 5825MHz(Adapter: SALCOMP)


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	43.13	-12.96	30.17	40.00	-9.83	peak	
2		171.6200	37.82	-11.17	26.65	43.50	-16.85	peak	
3		289.9600	36.57	-9.82	26.75	46.00	-19.25	peak	
4		462.6200	32.50	-6.27	26.23	46.00	-19.77	peak	
5		678.9300	32.04	-1.54	30.50	46.00	-15.50	peak	
6		890.3900	32.87	1.38	34.25	46.00	-11.75	peak	

Test Mode: UNII-3/TX N-20M Mode 5825MHz(Adapter: SALCOMP)

Horizontal

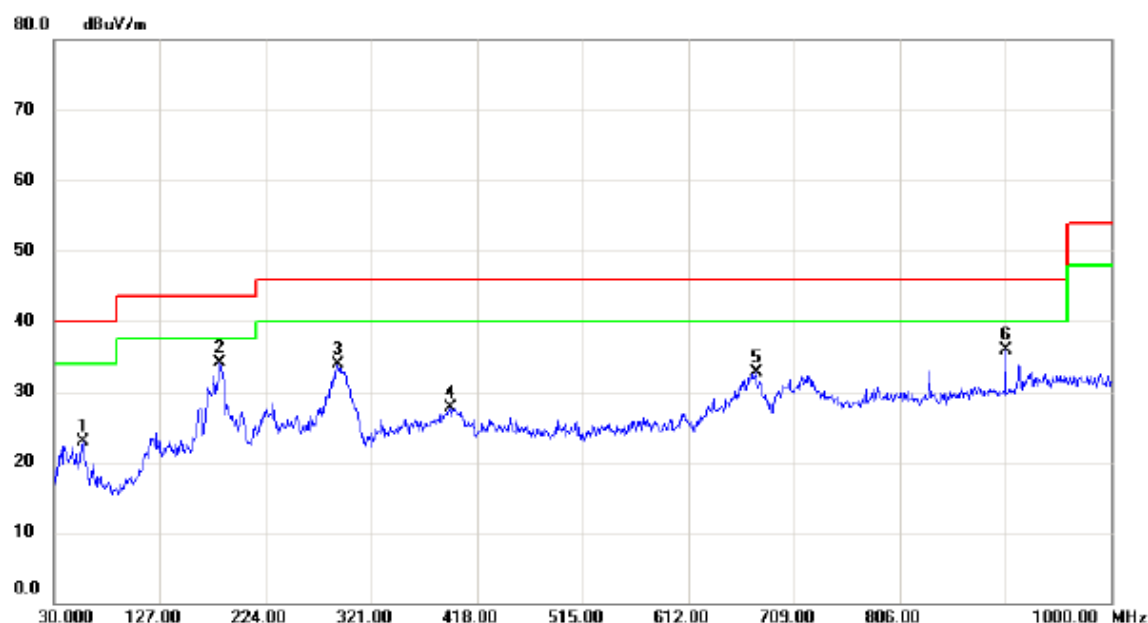


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	35.89	-12.93	22.96	40.00	-17.04	peak	
2	*	182.2900	45.85	-11.82	34.03	43.50	-9.47	peak	
3		290.9300	43.75	-9.80	33.95	46.00	-12.05	peak	
4		393.7500	35.39	-7.60	27.79	46.00	-18.21	peak	
5		674.0800	34.20	-1.55	32.65	46.00	-13.35	peak	
6		903.0000	34.15	1.75	35.90	46.00	-10.10	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

ANT 1

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

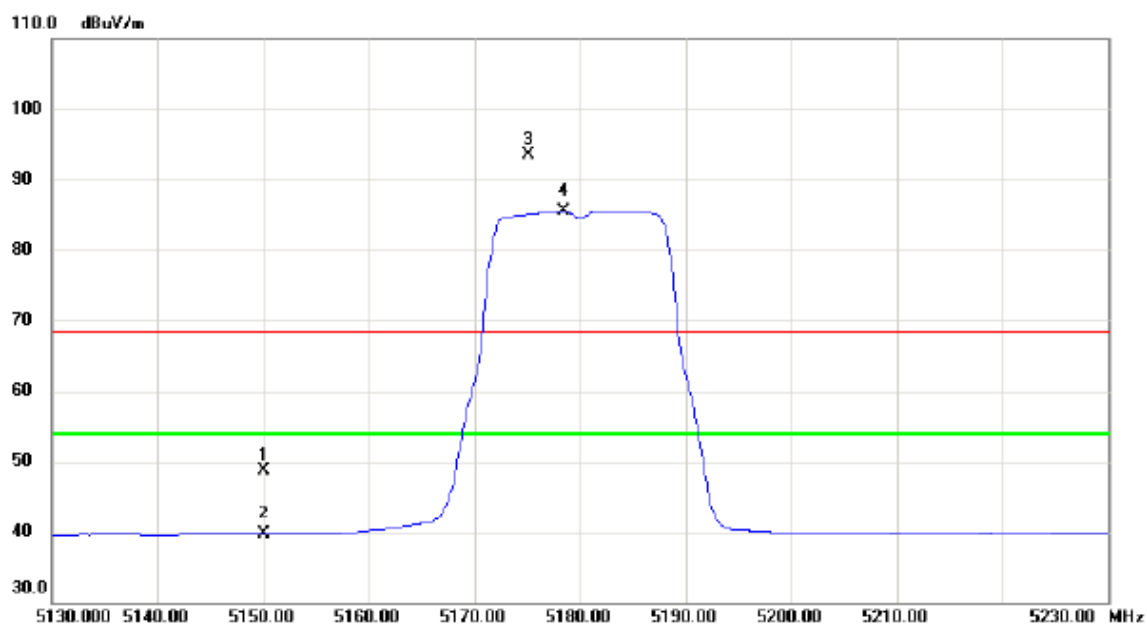


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.42	40.22	48.64	68.30	-19.66	peak	
2		5150.000	-0.55	40.22	39.67	54.00	-14.33	AVG	
3	X	5175.200	53.23	40.27	93.50	68.30	25.20	peak	No Limit
4	*	5178.500	45.17	40.28	85.45	54.00	31.45	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

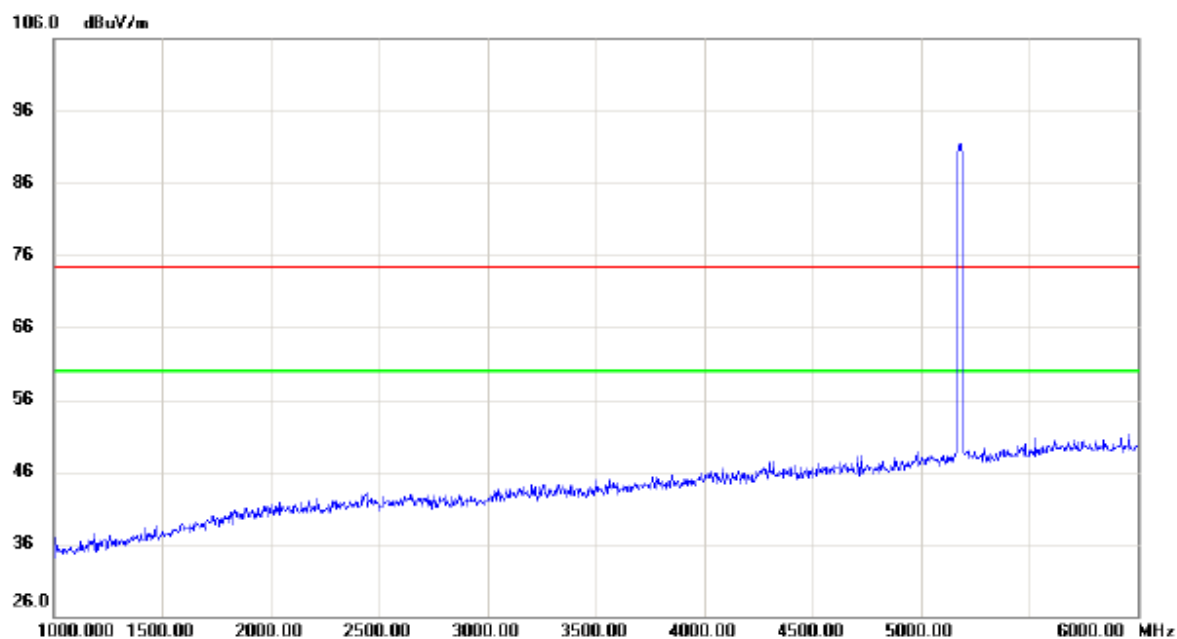


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

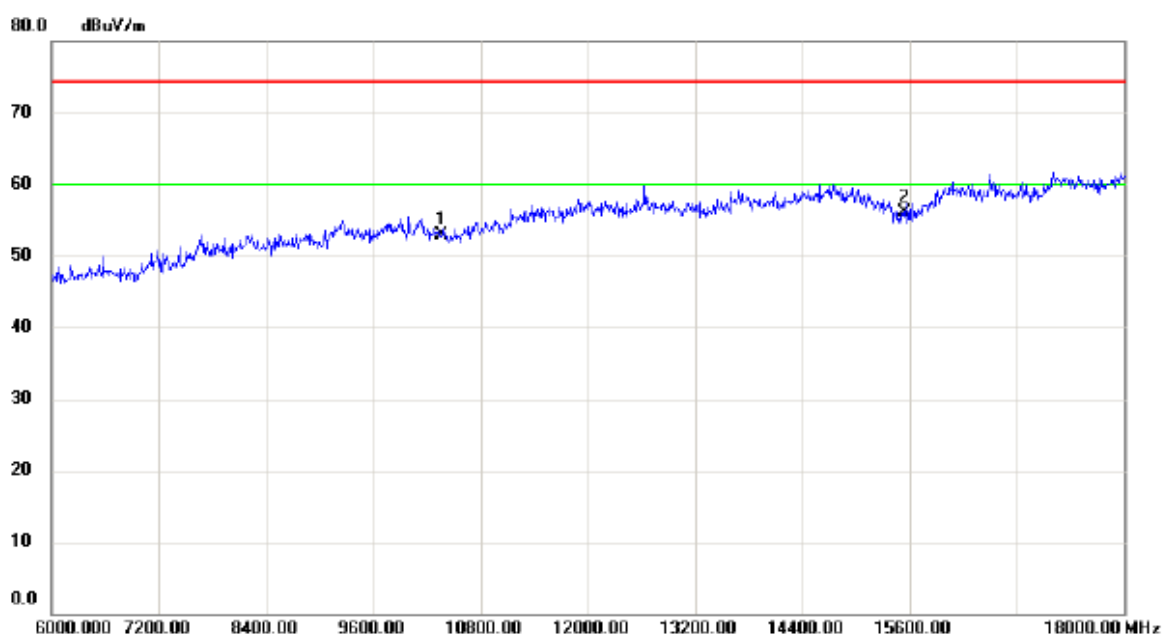


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	39.07	13.85	52.92	74.30	-21.38	peak	
2	*	15540.00	39.35	16.85	56.20	74.30	-18.10	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

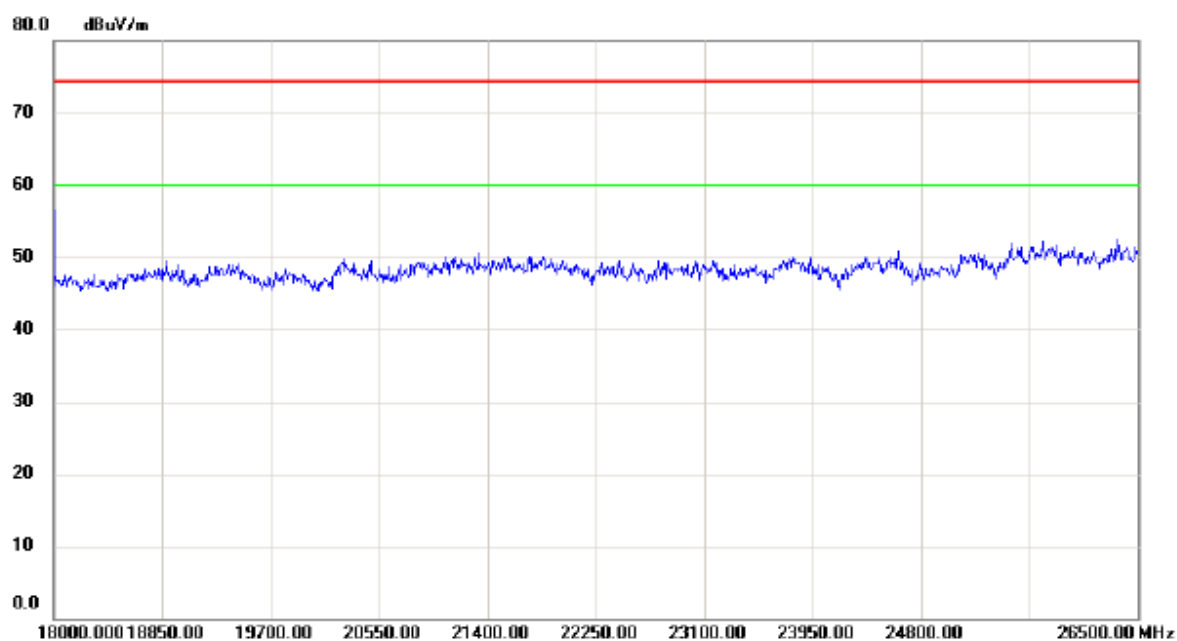


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

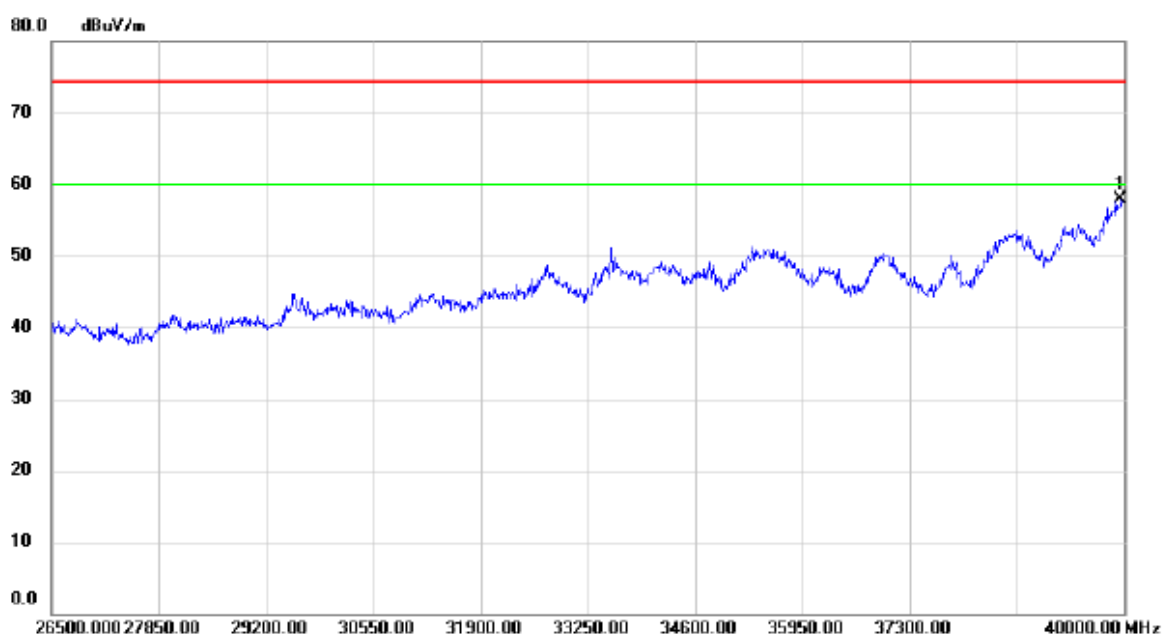

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	40.43	17.50	57.93	74.30	-16.37	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

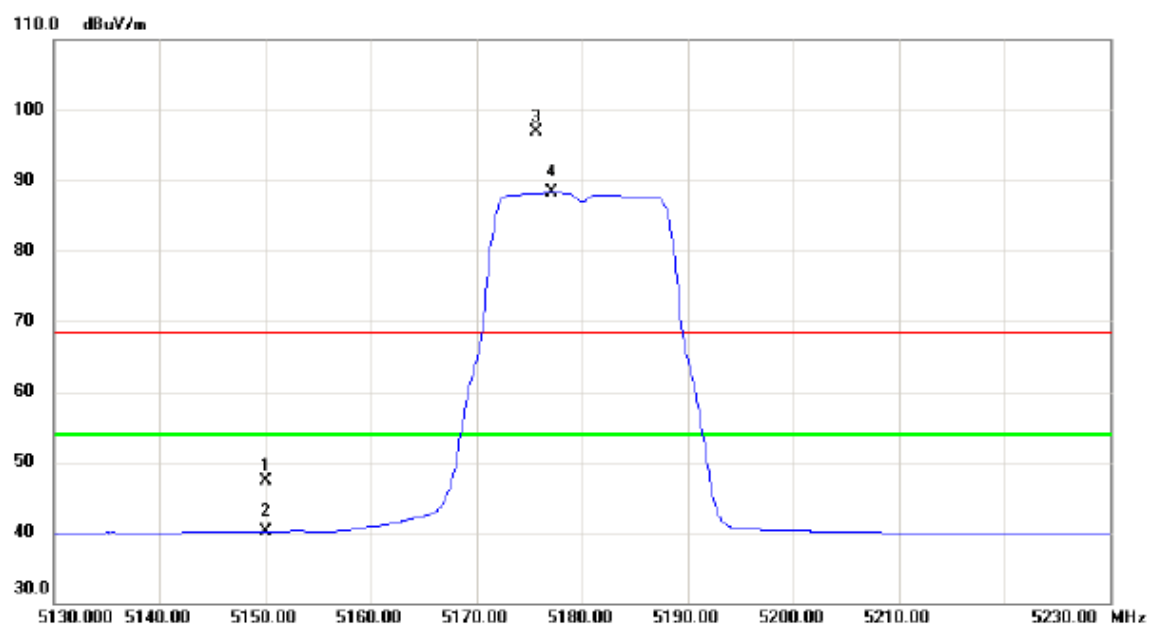


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	7.16	40.22	47.38	68.30	-20.92	peak	
2		5150.000	-0.09	40.22	40.13	54.00	-13.87	AVG	
3	X	5175.600	56.70	40.27	96.97	68.30	28.67	peak	No Limit
4	*	5177.100	47.98	40.28	88.26	54.00	34.26	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

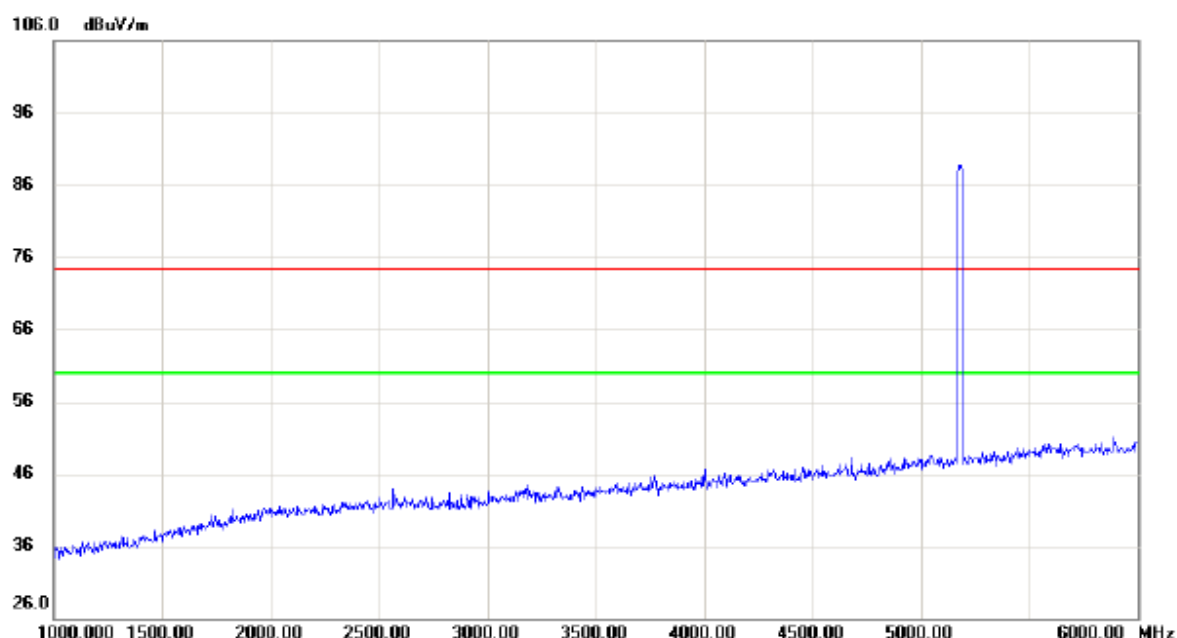


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

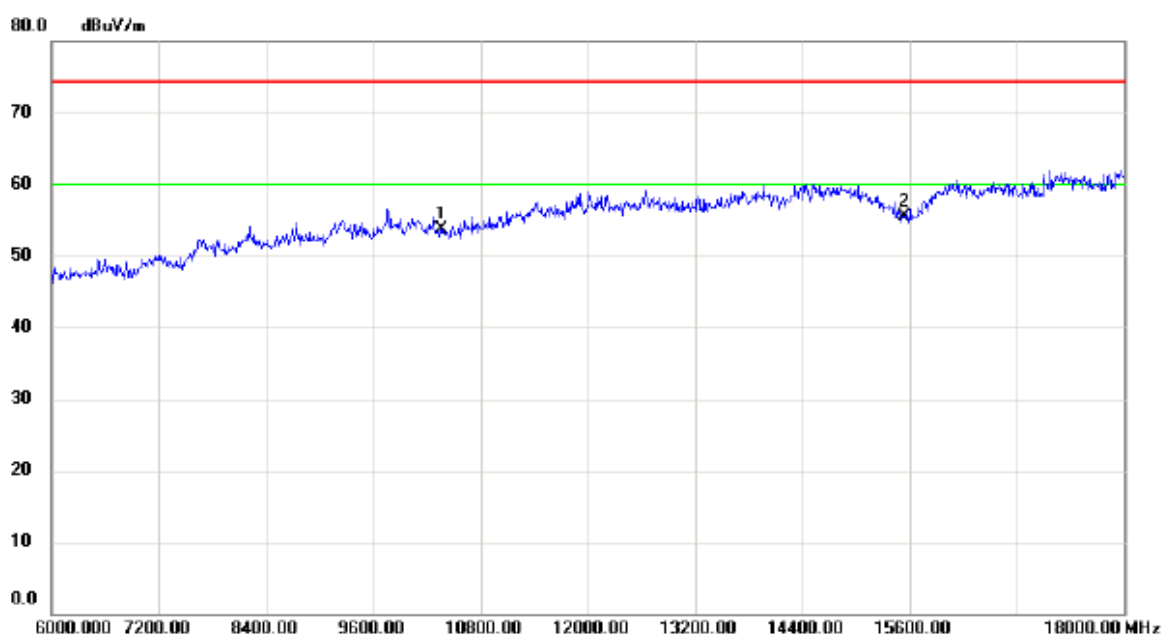


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	39.80	13.85	53.65	74.30	-20.65	peak	
2	*	15540.00	38.70	16.85	55.55	74.30	-18.75	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

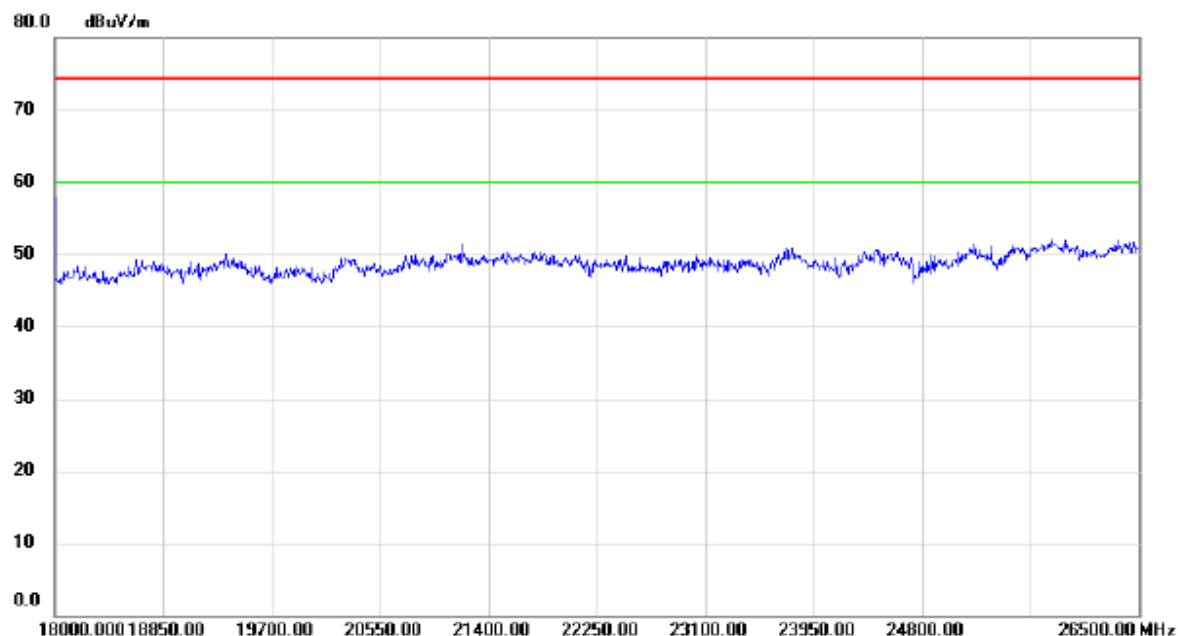


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

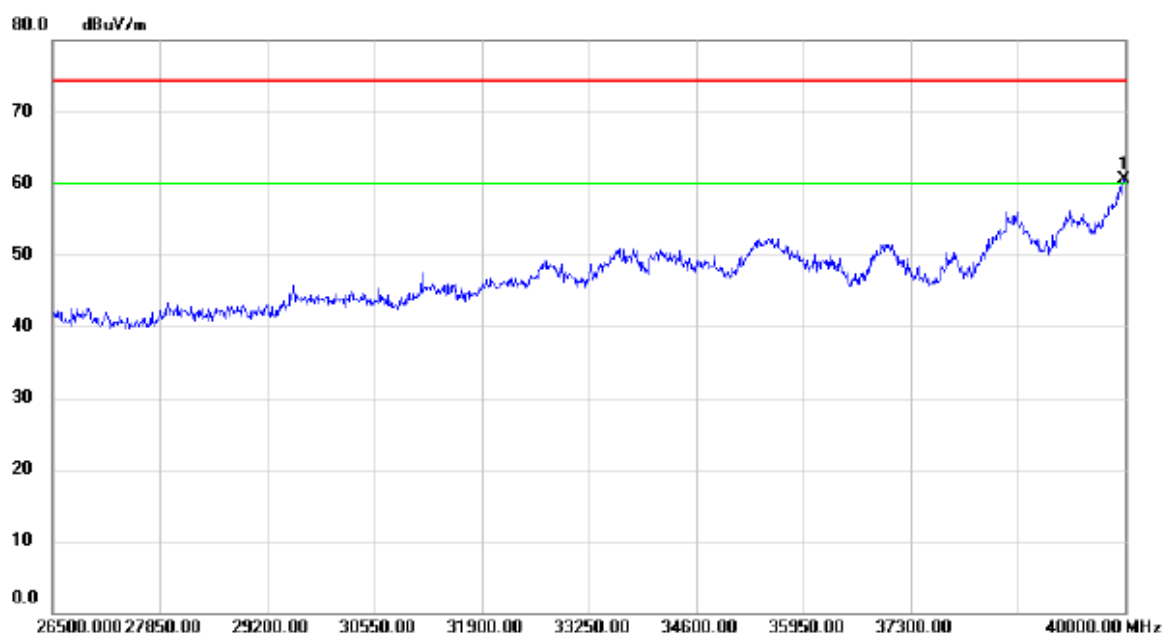

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	42.91	17.56	60.47	74.30	-13.83	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

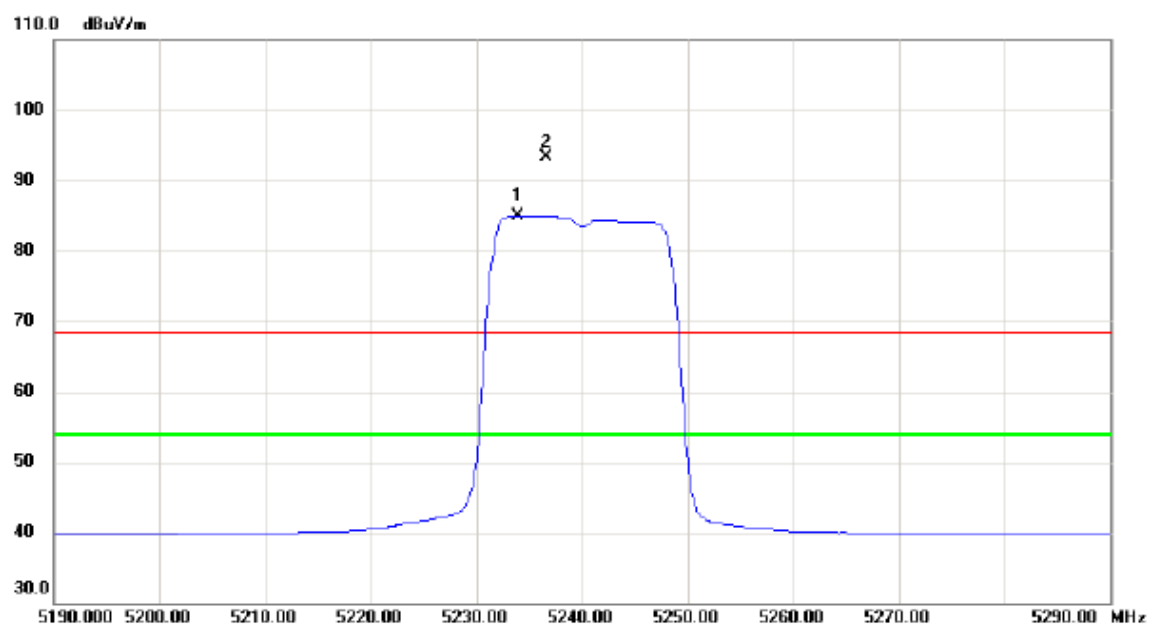


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5233.900	44.52	40.39	84.91	54.00	30.91	AVG	No Limit
2	X	5236.600	52.87	40.40	93.27	68.30	24.97	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

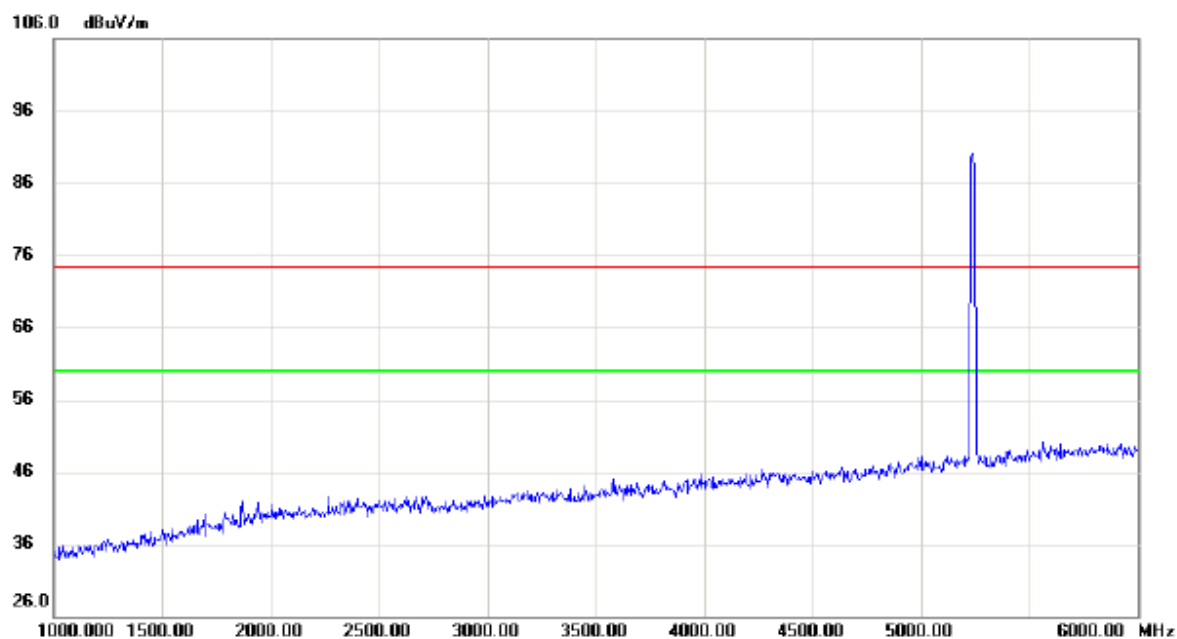


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

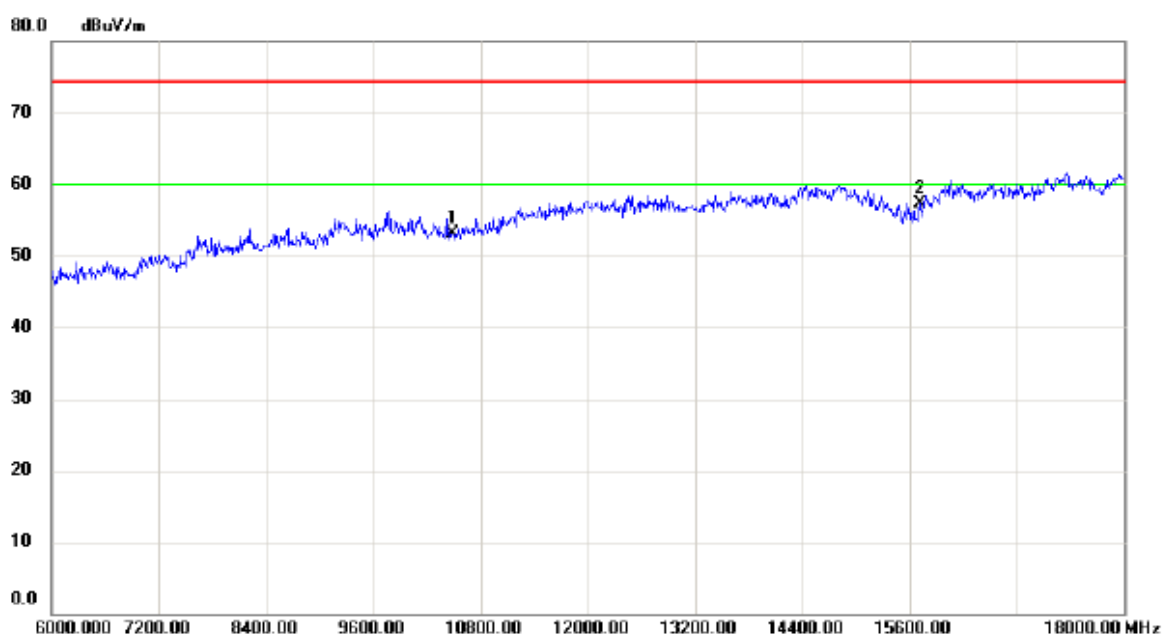


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	39.37	13.69	53.06	74.30	-21.24	peak	
2	*	15720.00	39.43	17.78	57.21	74.30	-17.09	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

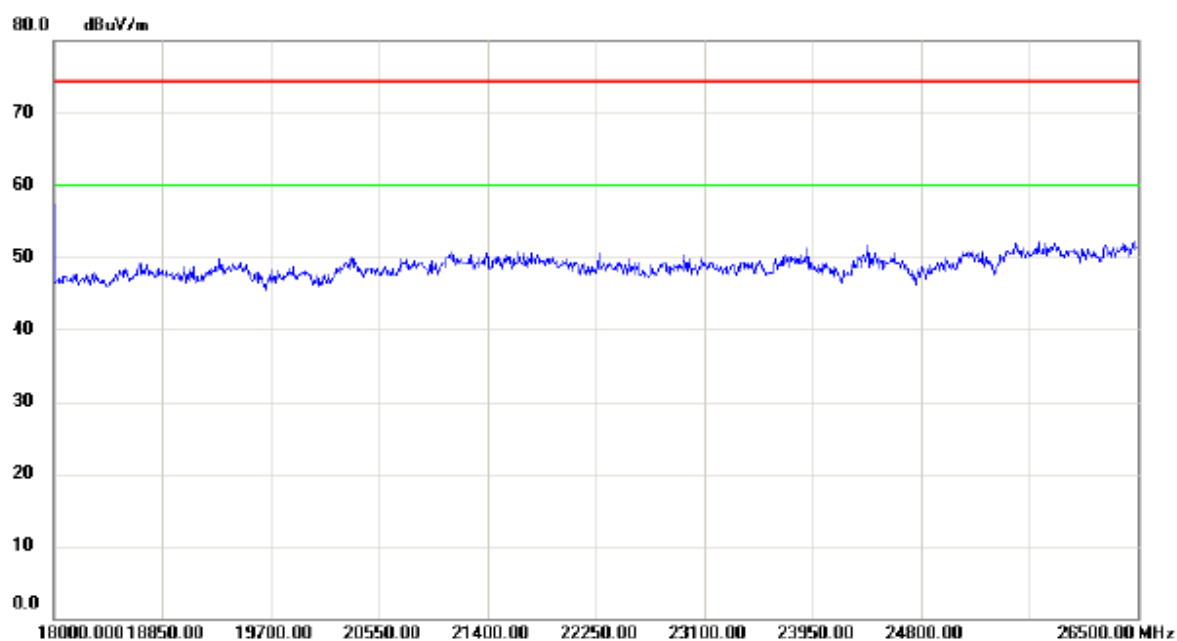


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

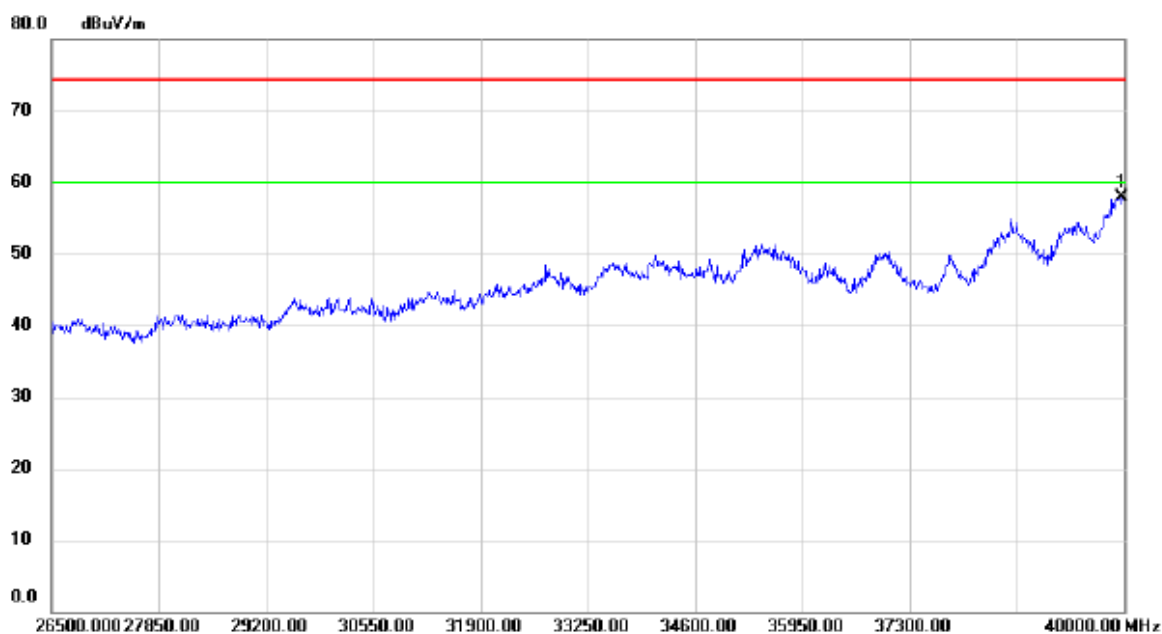

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39973.00	40.30	17.54	57.84	74.30	-16.46	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

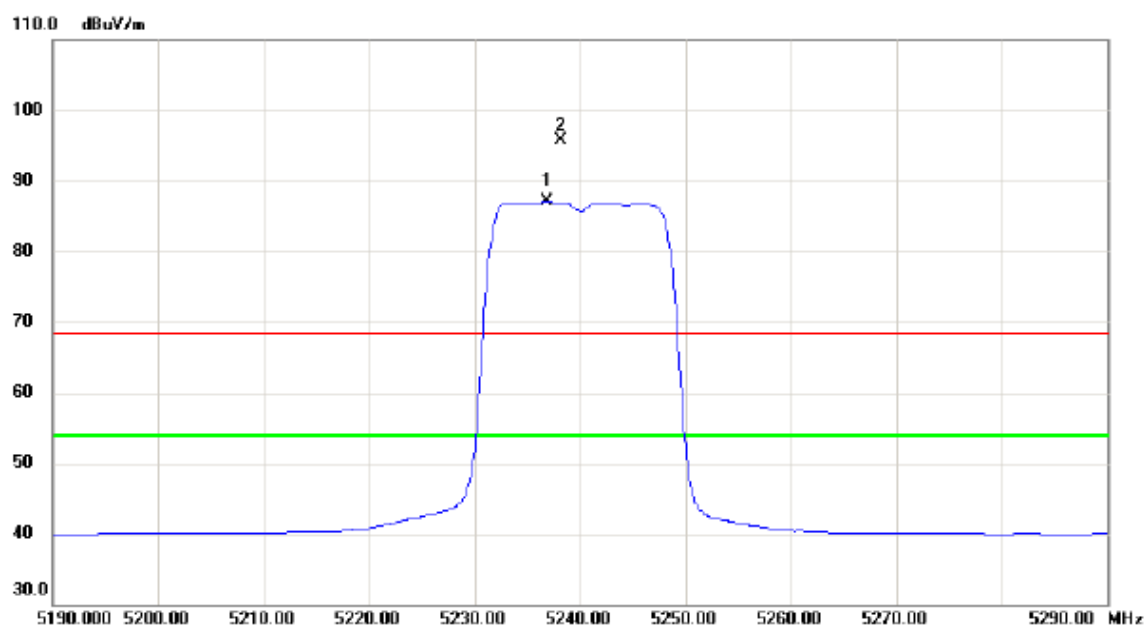


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5236.900	46.64	40.40	87.04	54.00	33.04	AVG	No Limit
2	X	5238.200	55.30	40.40	95.70	68.30	27.40	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

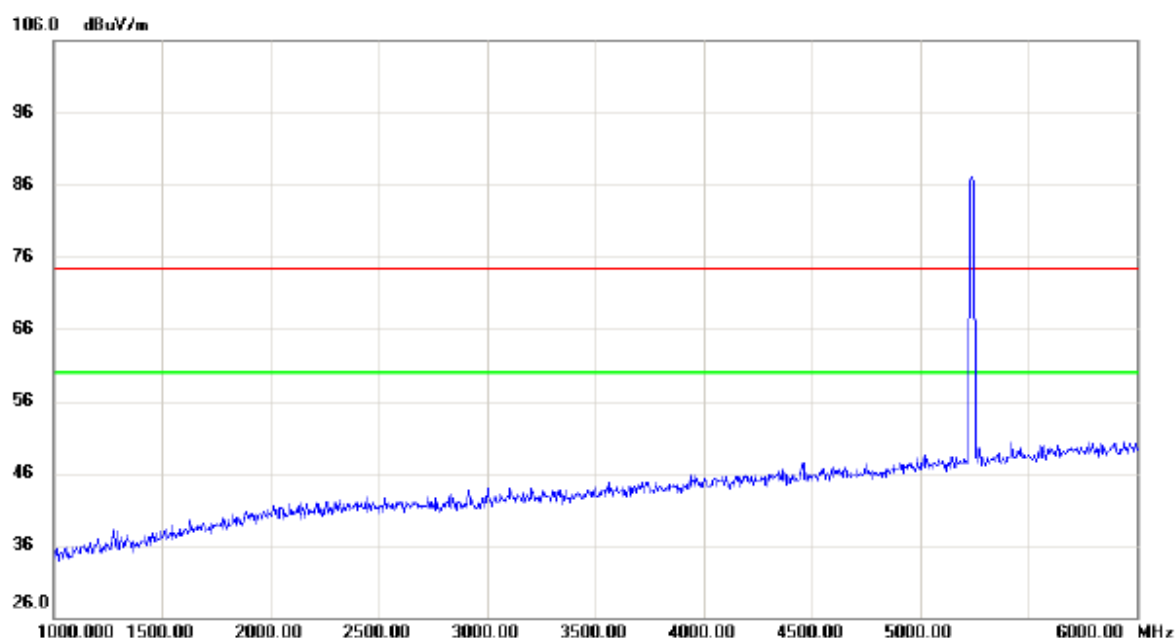


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

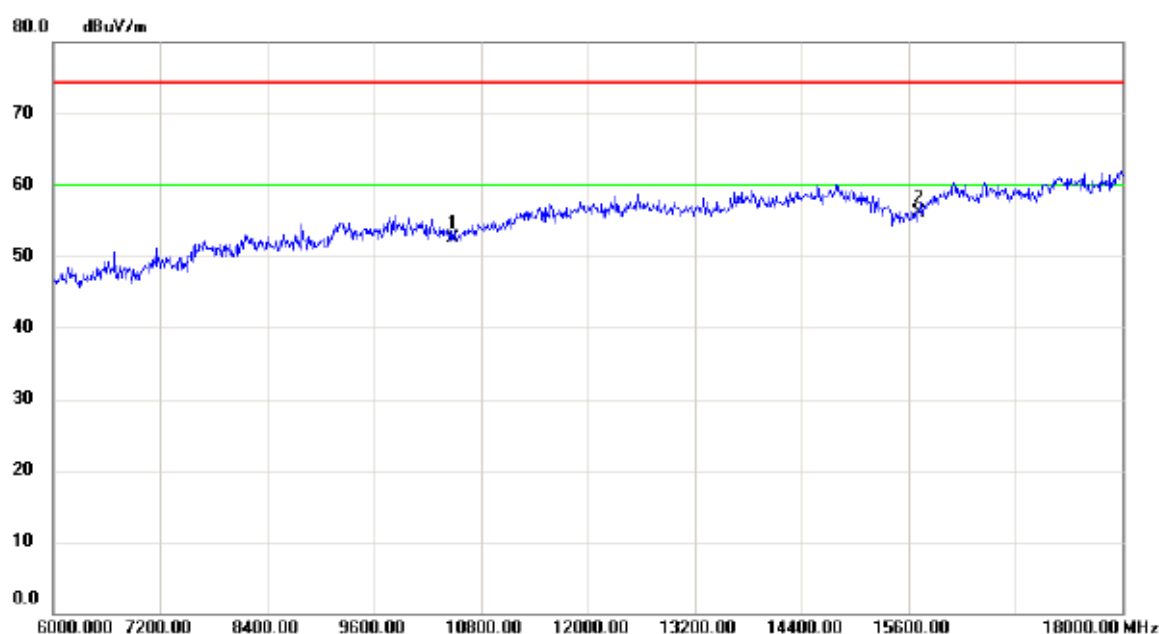


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	38.75	13.69	52.44	74.30	-21.86	peak	
2	*	15720.00	38.39	17.78	56.17	74.30	-18.13	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

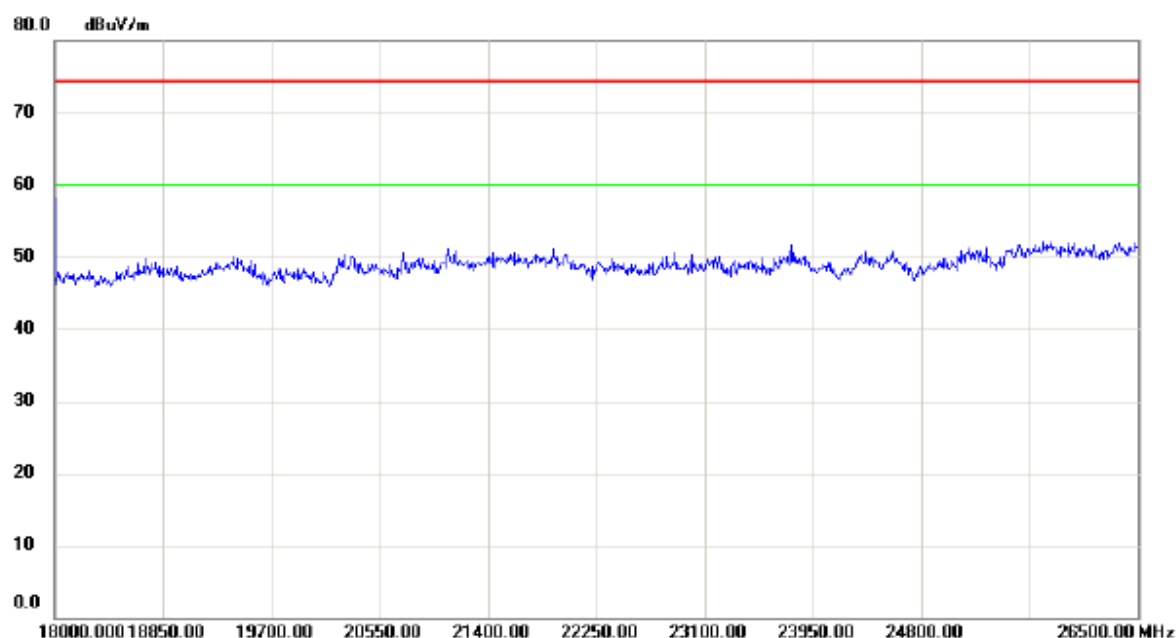


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

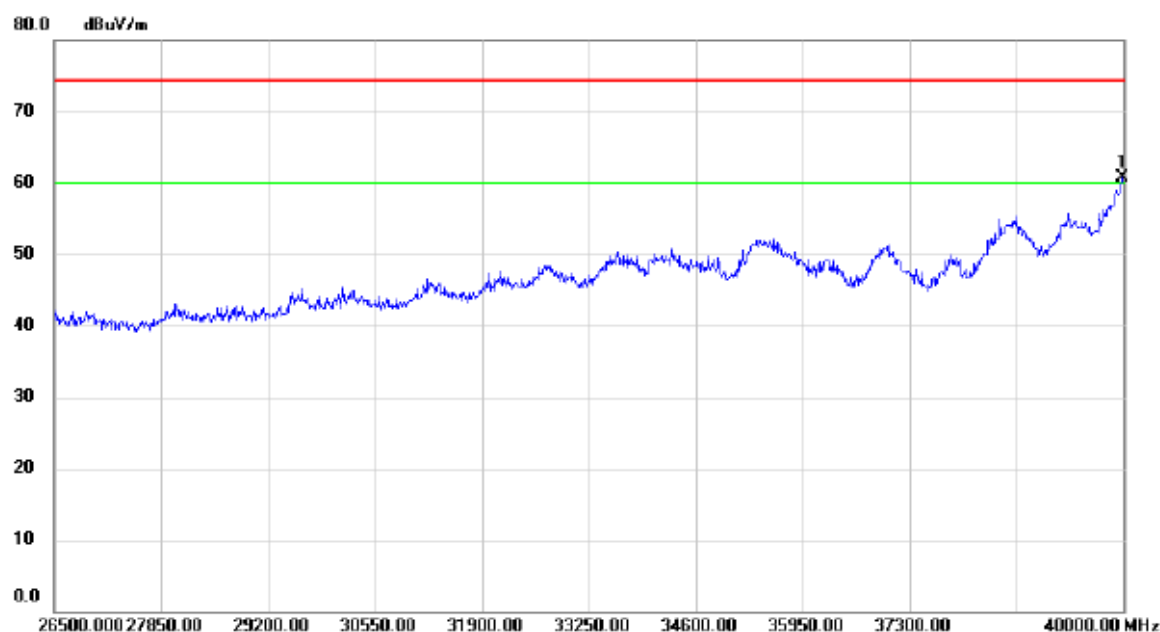

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	43.19	17.56	60.75	74.30	-13.55	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

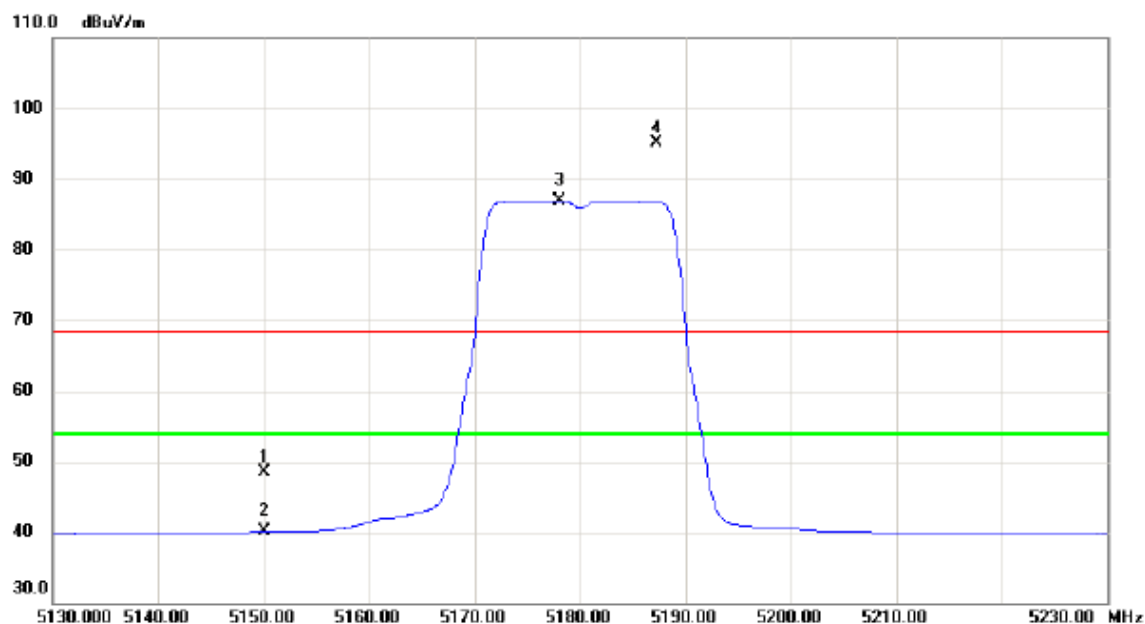


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.22	40.22	48.44	68.30	-19.86	peak	
2		5150.000	-0.17	40.22	40.05	54.00	-13.95	AVG	
3	*	5178.100	46.59	40.28	86.87	54.00	32.87	AVG	No Limit
4	X	5187.300	54.75	40.30	95.05	68.30	26.75	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

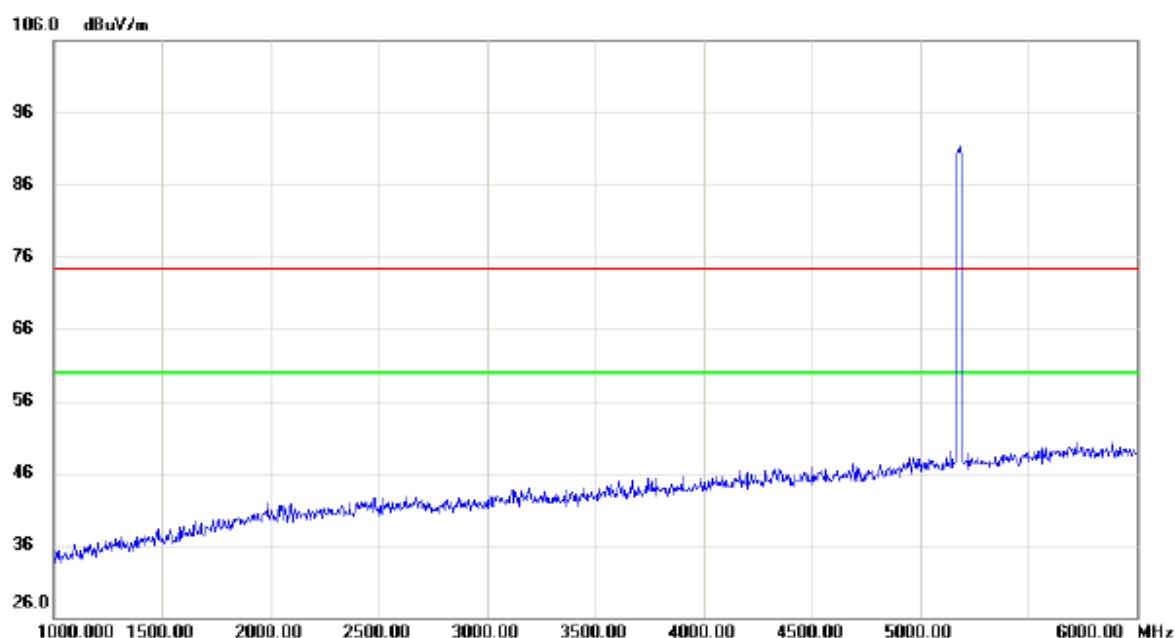


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

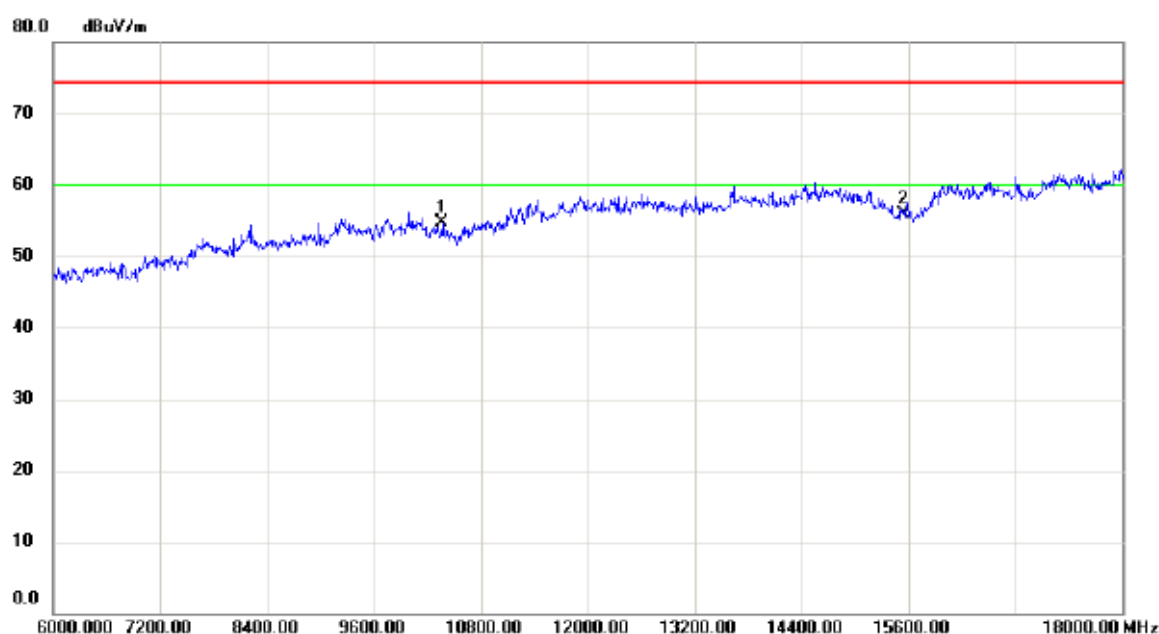


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	40.91	13.85	54.76	74.30	-19.54	peak	
2	*	15540.00	39.11	16.85	55.96	74.30	-18.34	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

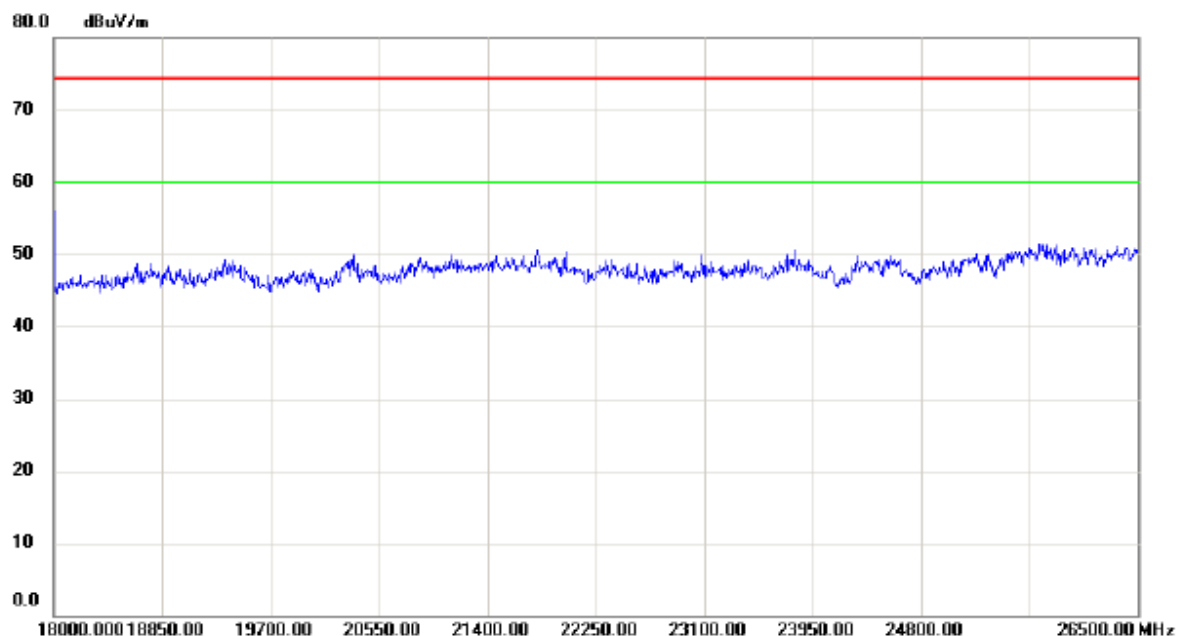


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

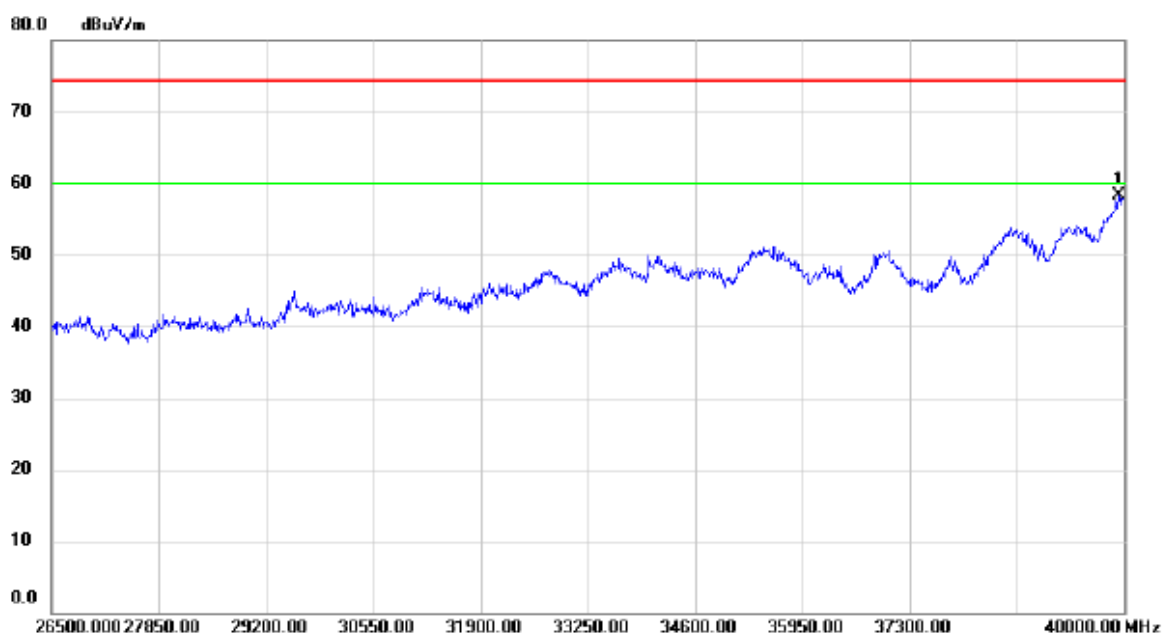

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	40.80	17.43	58.23	74.30	-16.07	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

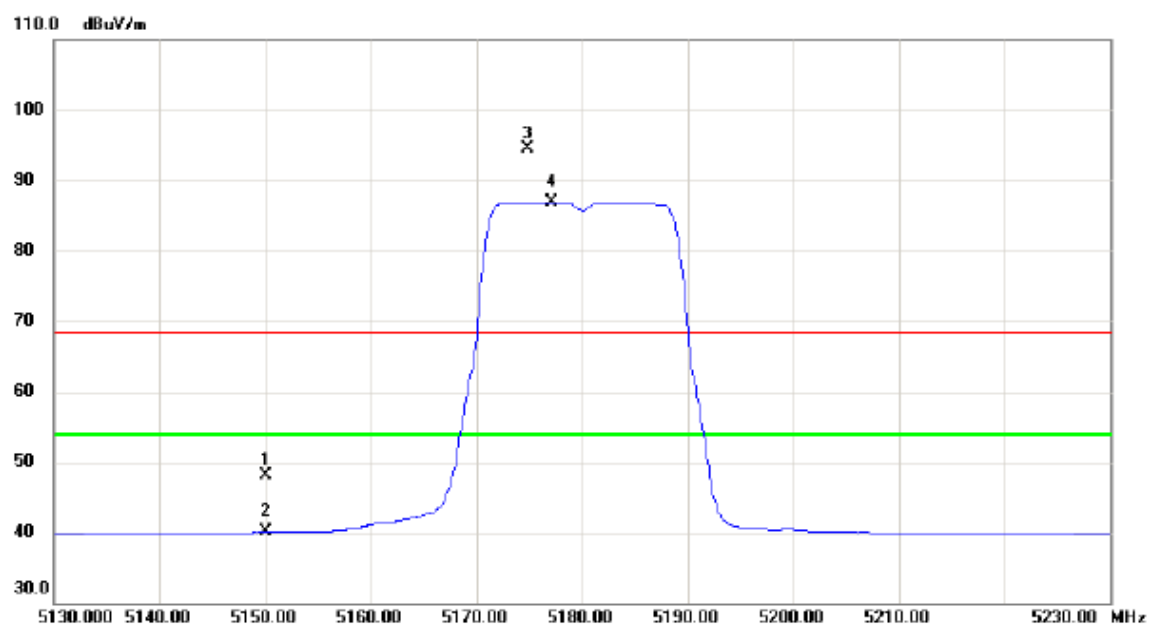


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	7.86	40.22	48.08	68.30	-20.22	peak	
2		5150.000	-0.20	40.22	40.02	54.00	-13.98	AVG	
3	X	5174.900	54.31	40.27	94.58	68.30	26.28	peak	No Limit
4	*	5177.100	46.58	40.28	86.86	54.00	32.86	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

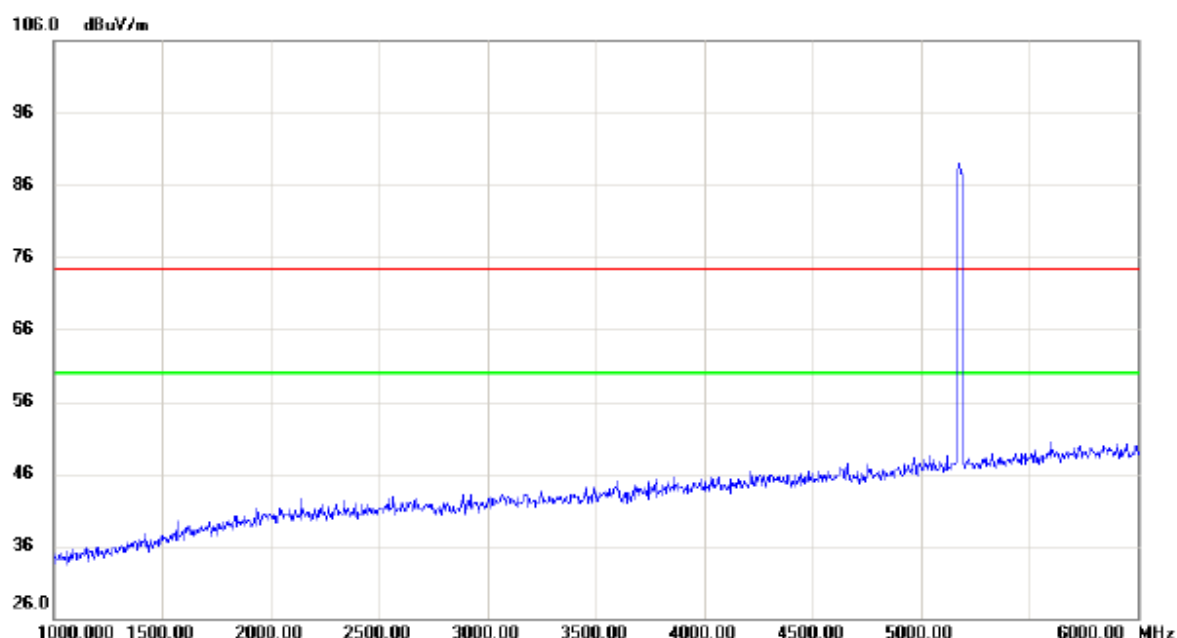


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

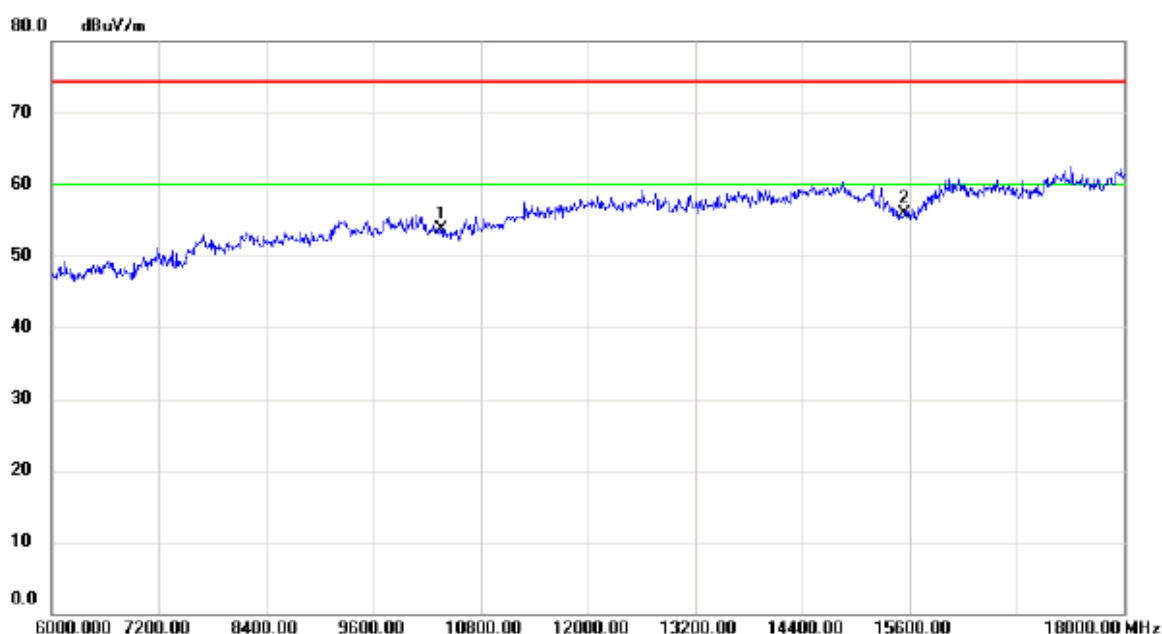


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	39.80	13.85	53.65	74.30	-20.65	peak	
2	*	15540.00	38.99	16.85	55.84	74.30	-18.46	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

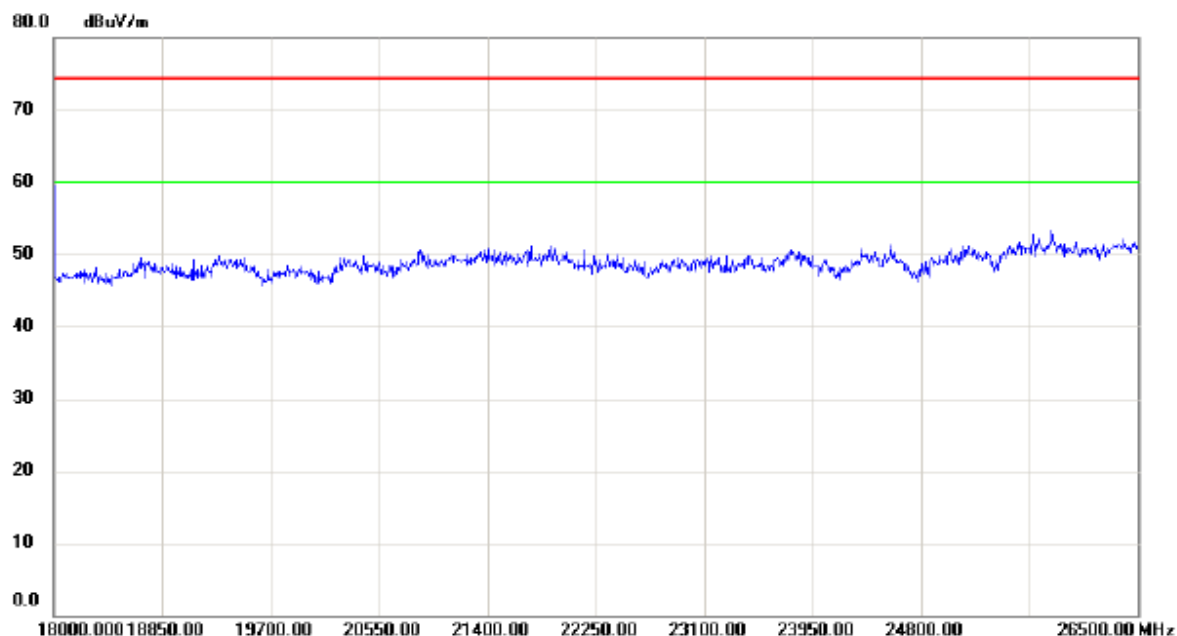


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

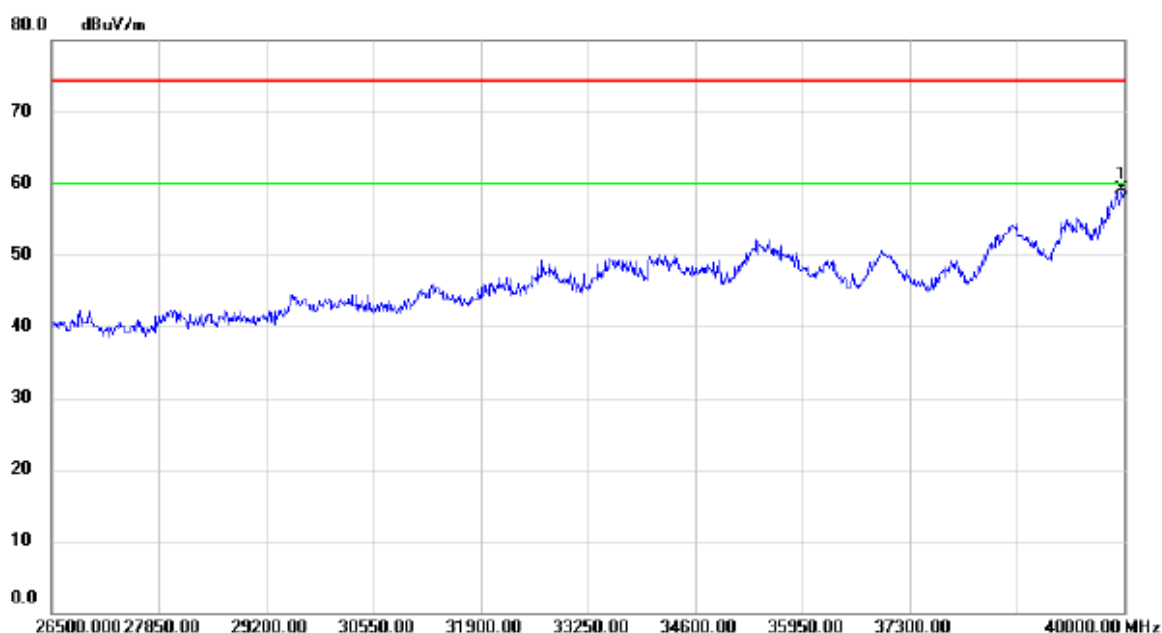

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39973.00	41.49	17.54	59.03	74.30	-15.27	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

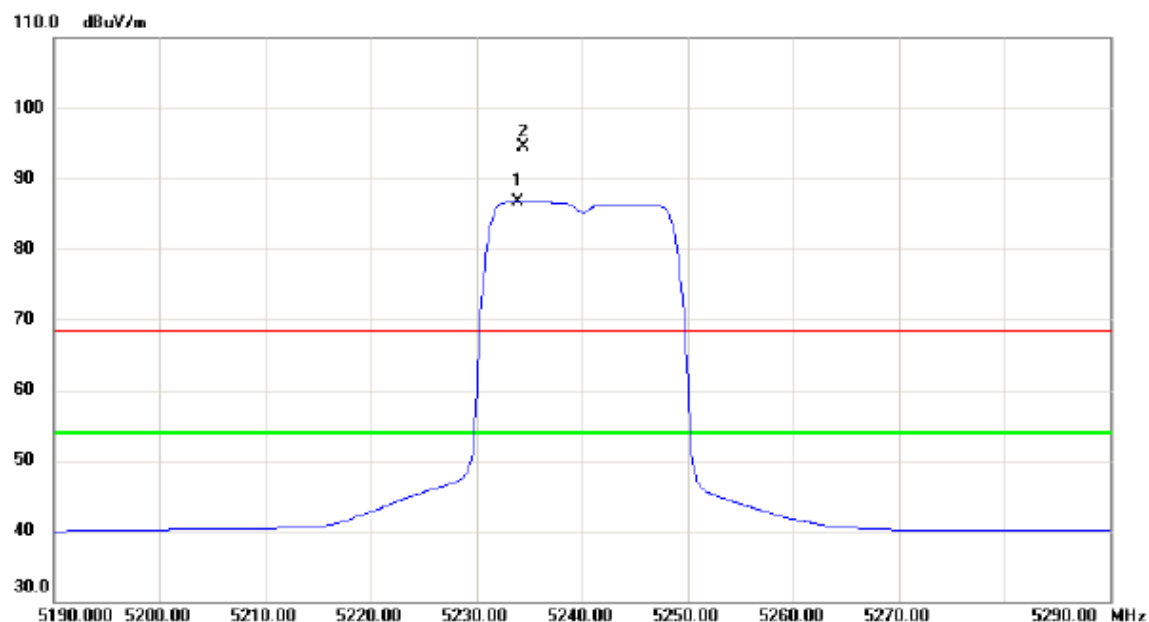


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5233.900	46.35	40.39	86.74	54.00	32.74	AVG	No Limit
2	X	5234.500	54.08	40.39	94.47	68.30	26.17	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

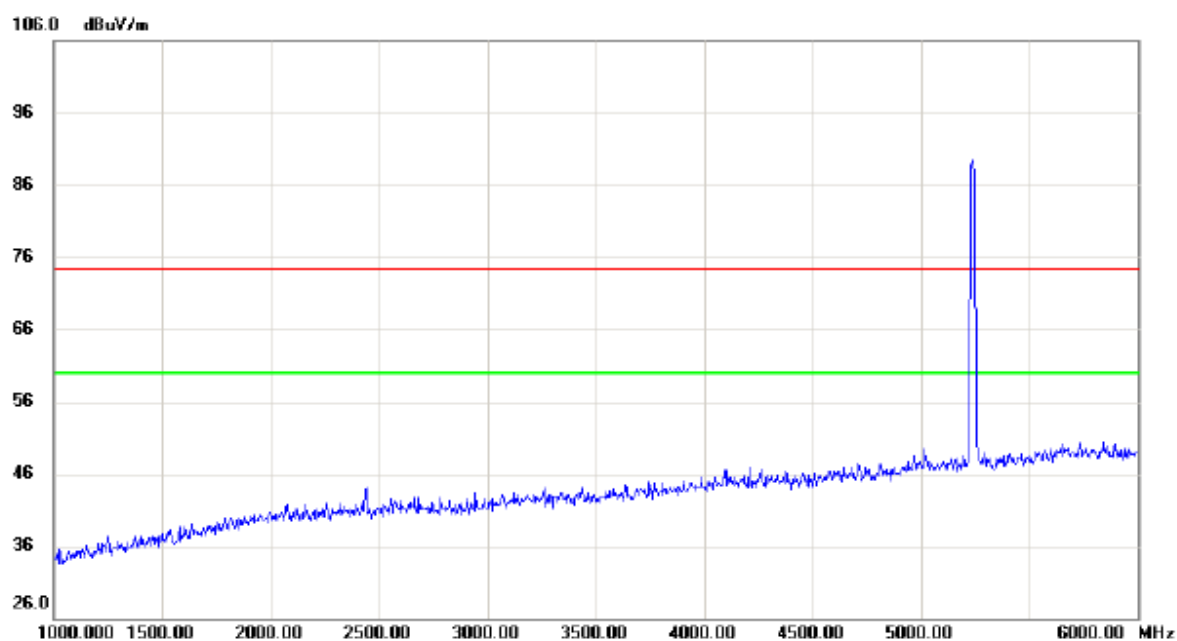


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

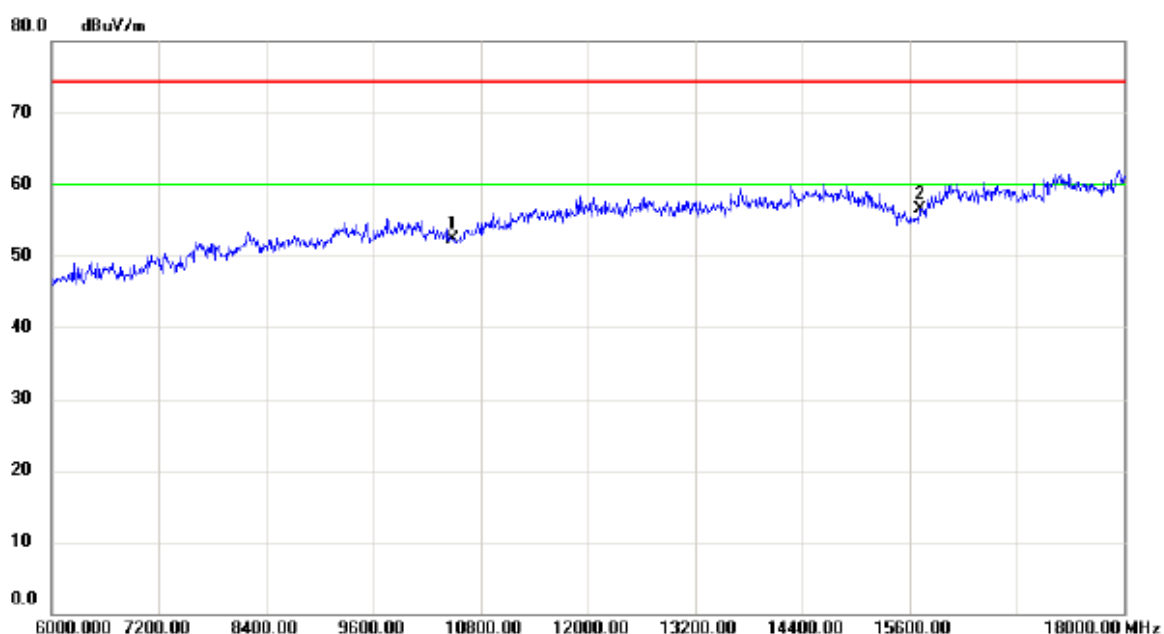


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	38.57	13.69	52.26	74.30	-22.04	peak	
2	*	15720.00	38.70	17.78	56.48	74.30	-17.82	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

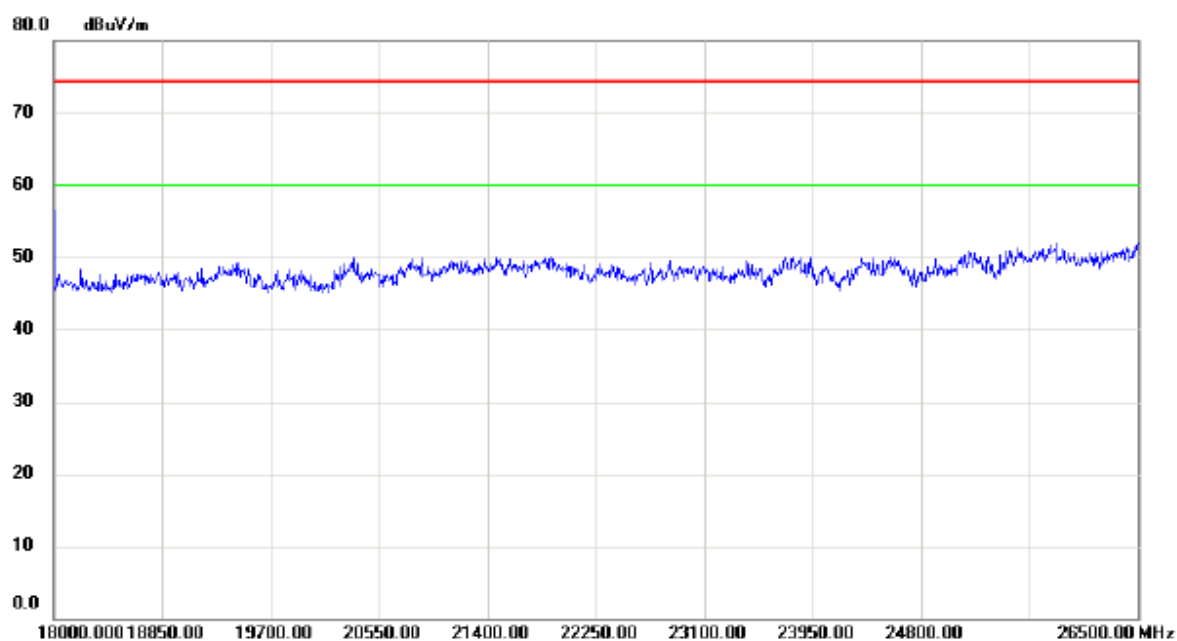


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

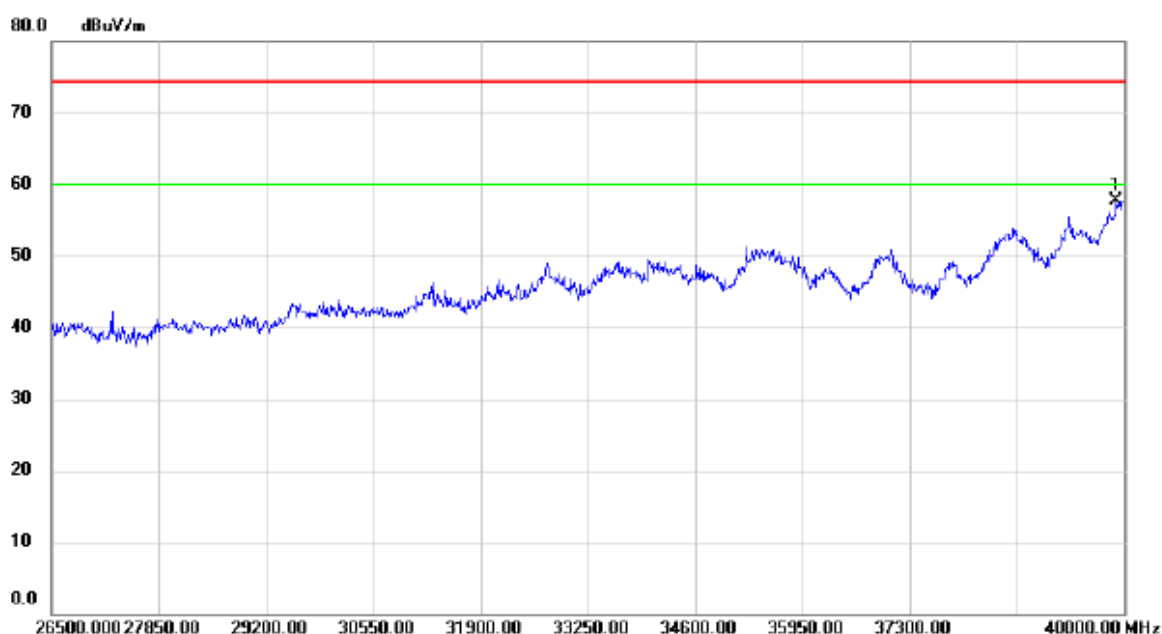

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39905.50	40.42	17.37	57.79	74.30	-16.51	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

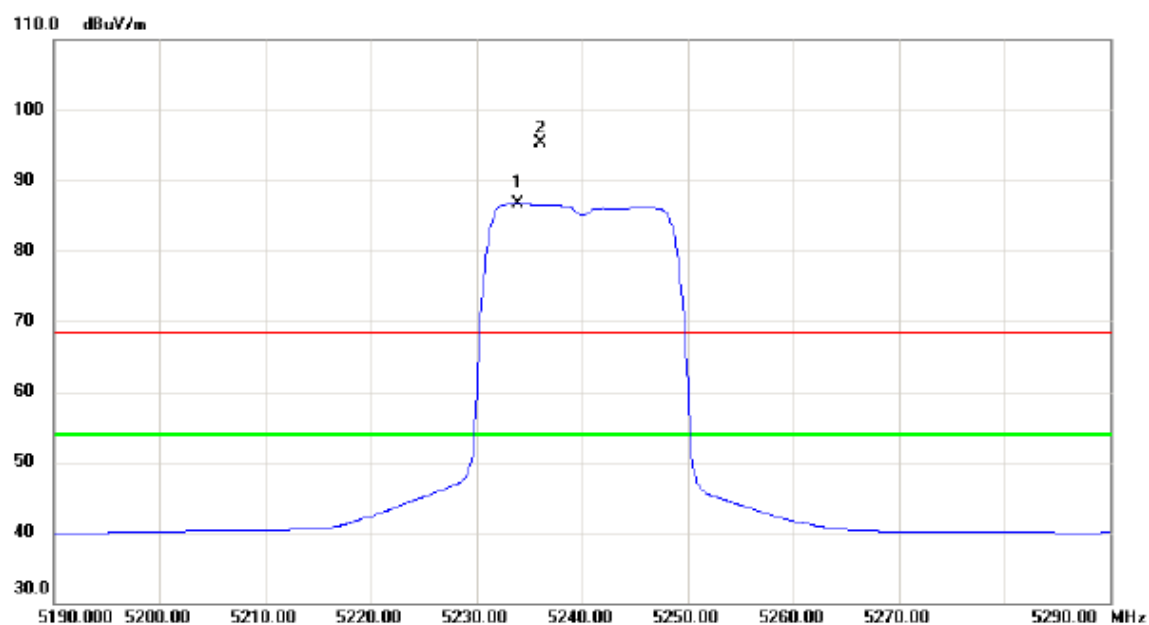


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5233.900	46.33	40.39	86.72	54.00	32.72	AVG	No Limit
2	X	5236.000	54.85	40.40	95.25	68.30	26.95	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

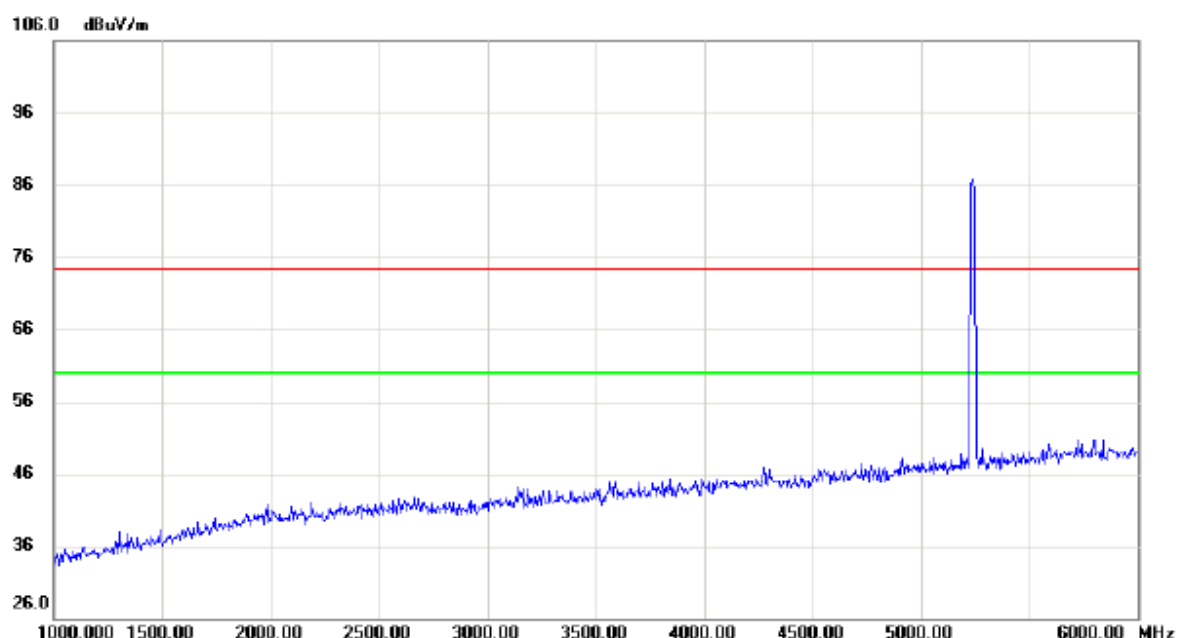


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

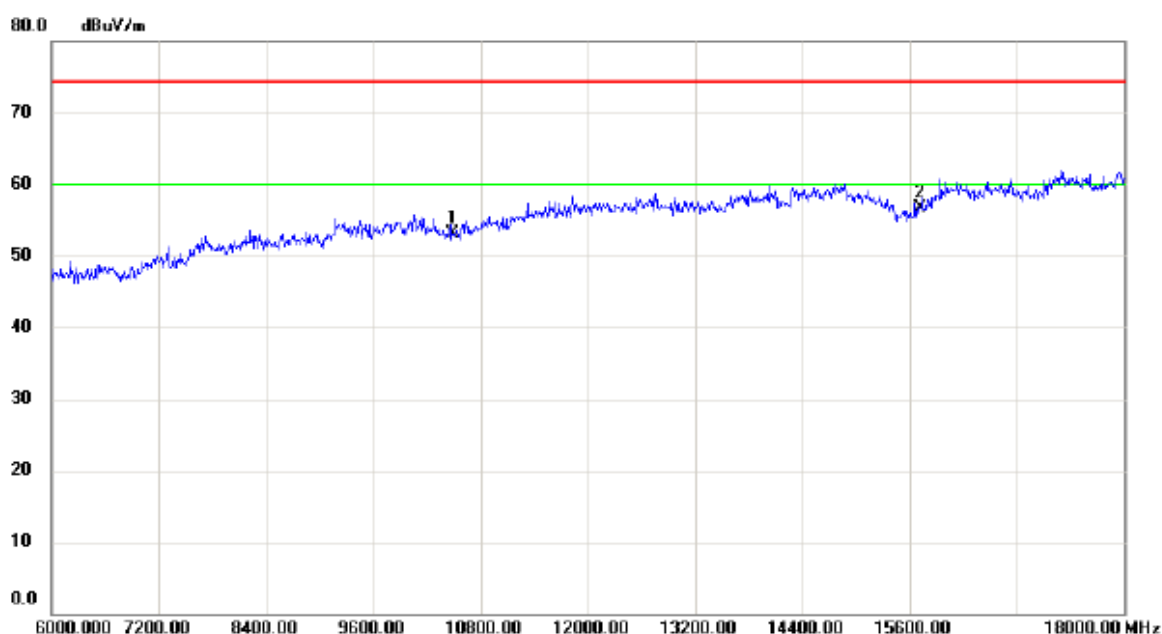


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	39.33	13.69	53.02	74.30	-21.28	peak	
2	*	15720.00	38.98	17.78	56.76	74.30	-17.54	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

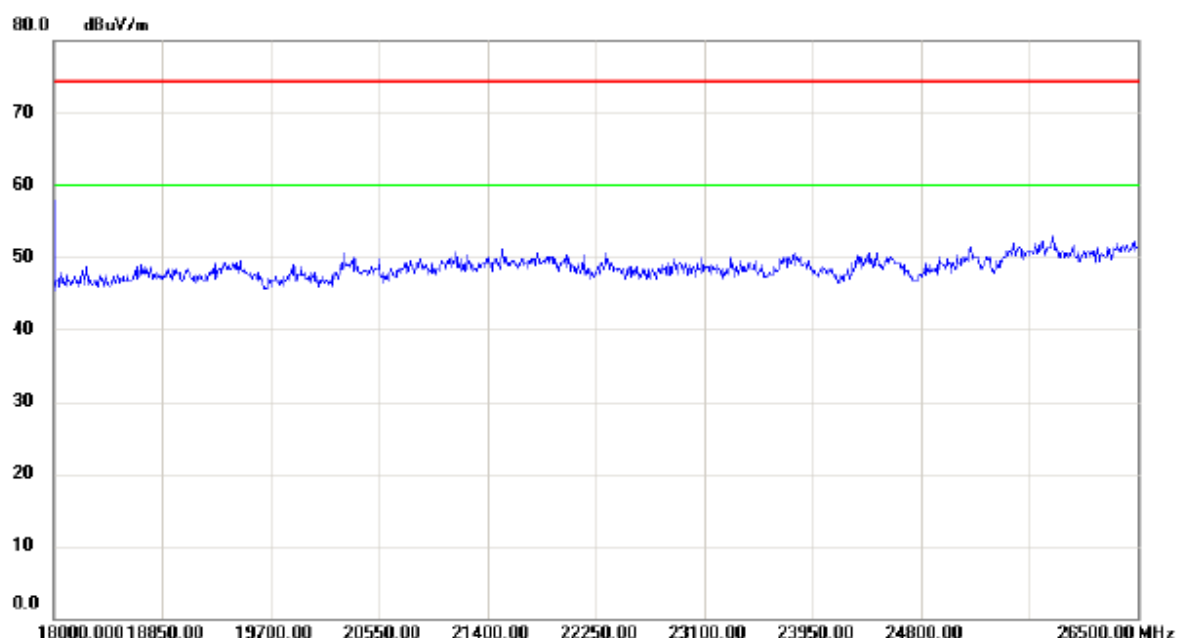


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

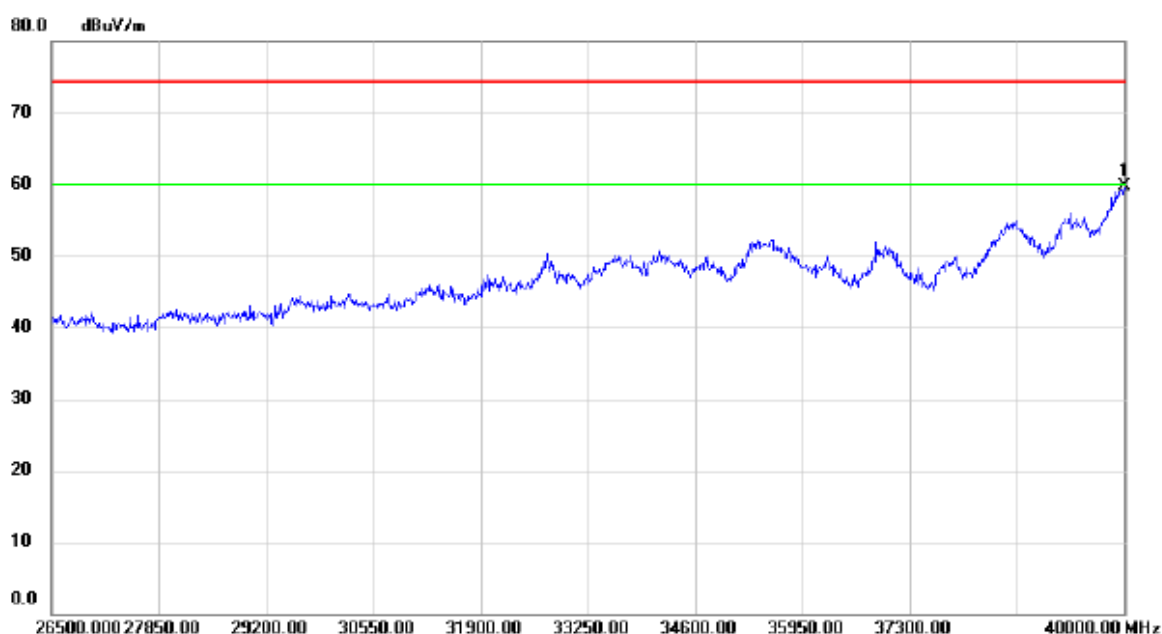

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	42.04	17.60	59.64	74.30	-14.66	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

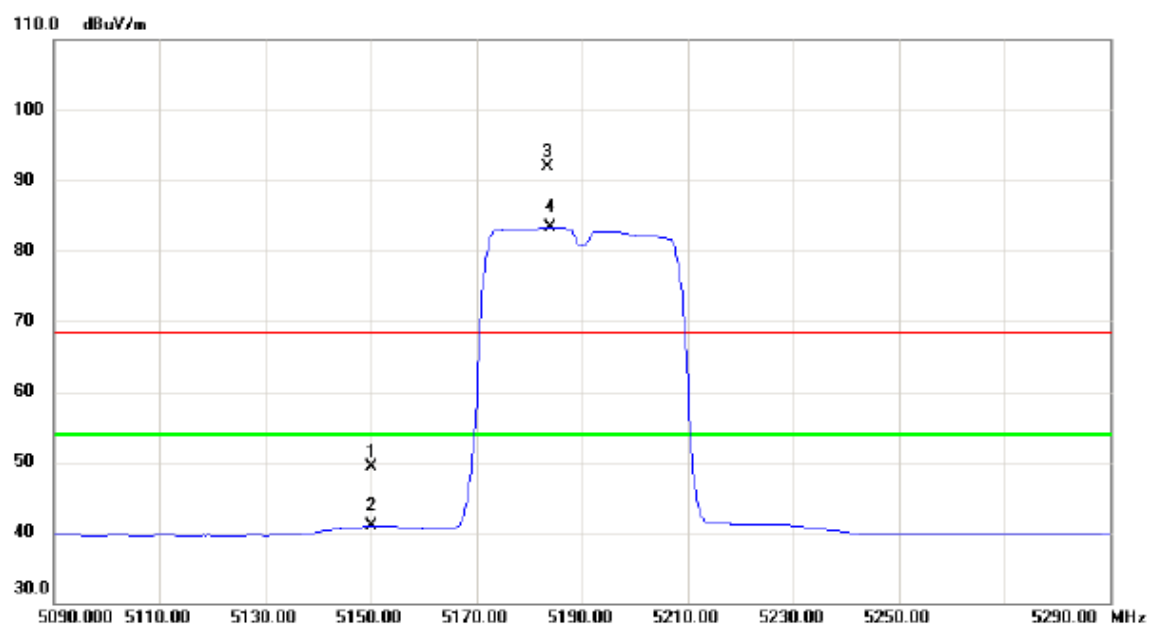


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.13	40.22	49.35	68.30	-18.95	peak	
2		5150.000	0.67	40.22	40.89	54.00	-13.11	AVG	
3	X	5183.400	51.61	40.29	91.90	68.30	23.60	peak	No Limit
4	*	5184.000	43.05	40.29	83.34	54.00	29.34	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

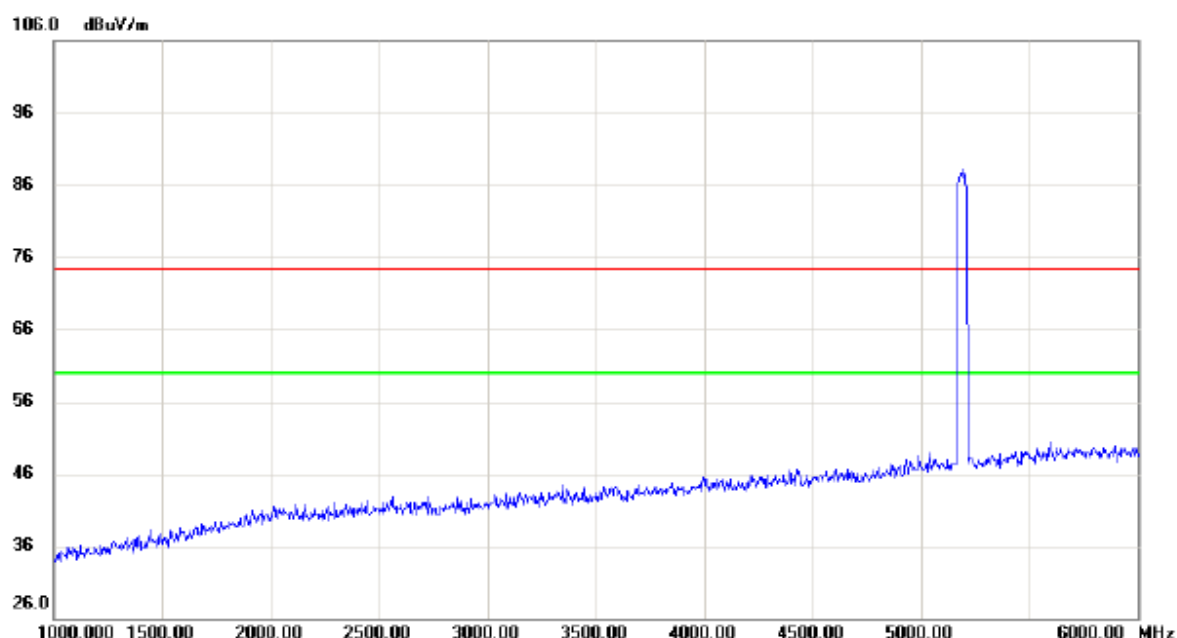


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

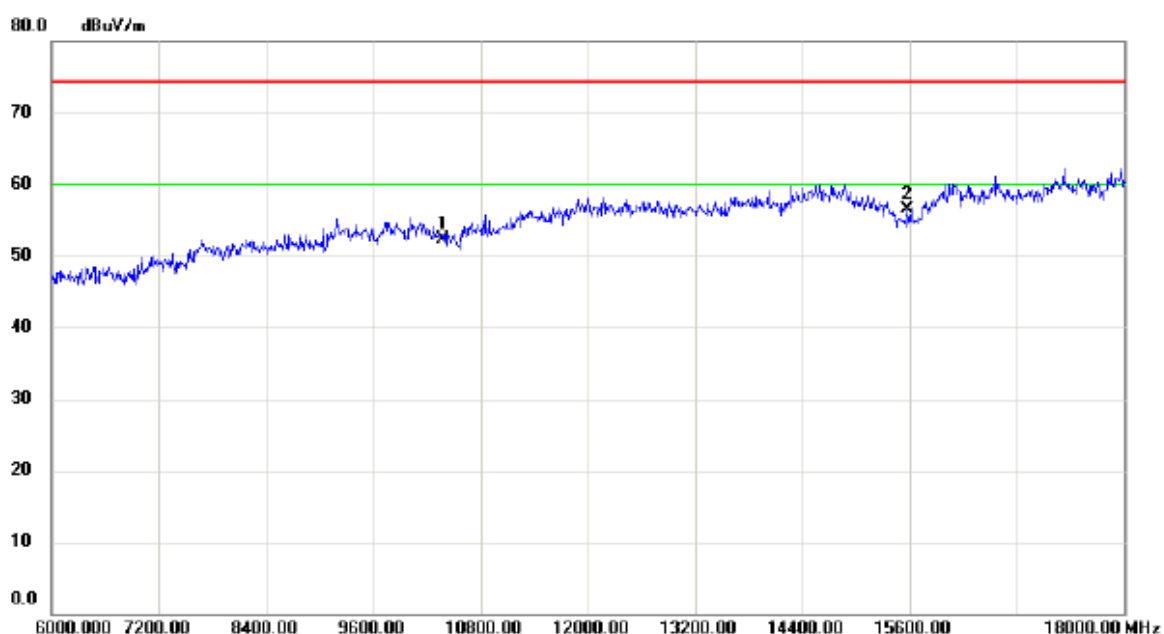


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10380.00	38.38	13.83	52.21	74.30	-22.09	peak	
2	*	15570.00	39.56	17.00	56.56	74.30	-17.74	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

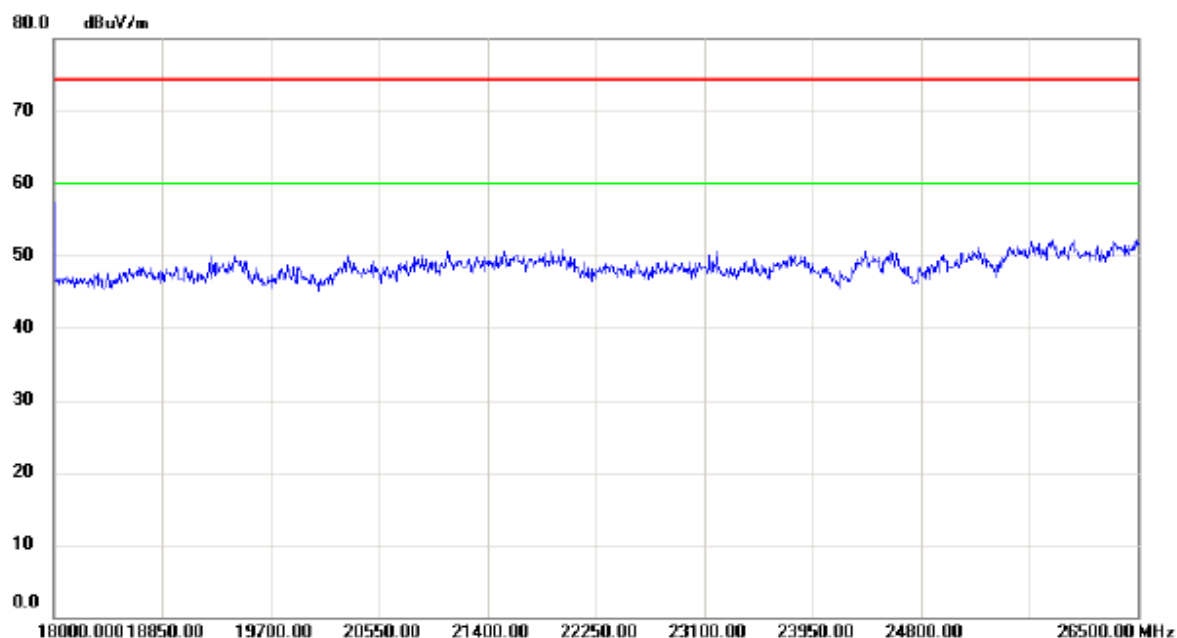


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

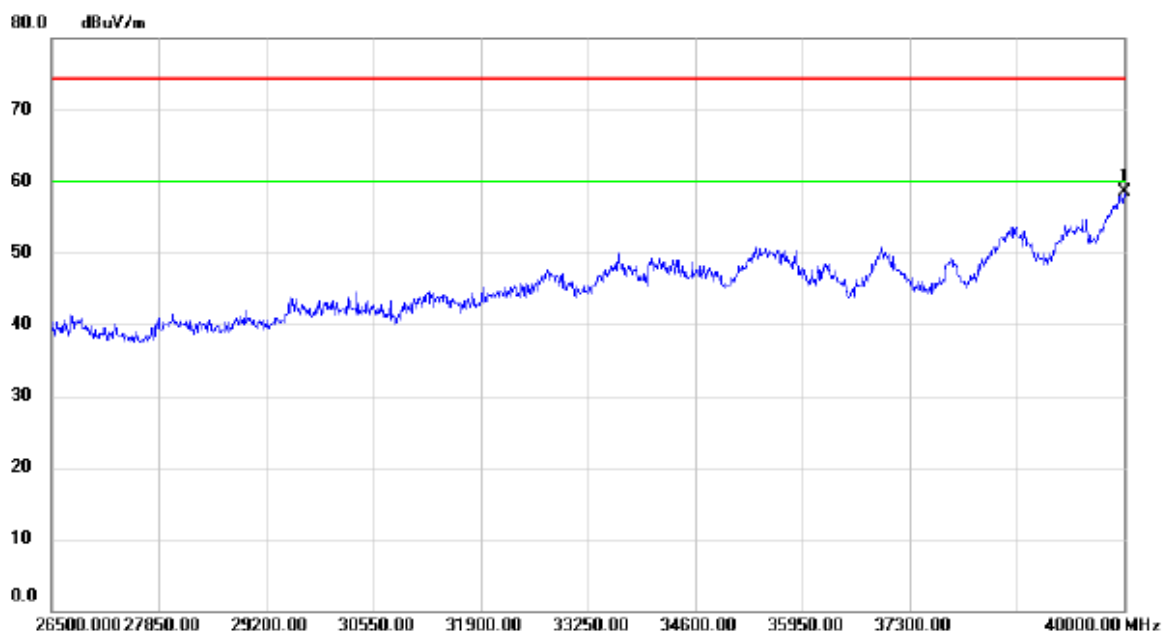

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	40.82	17.60	58.42	74.30	-15.88	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

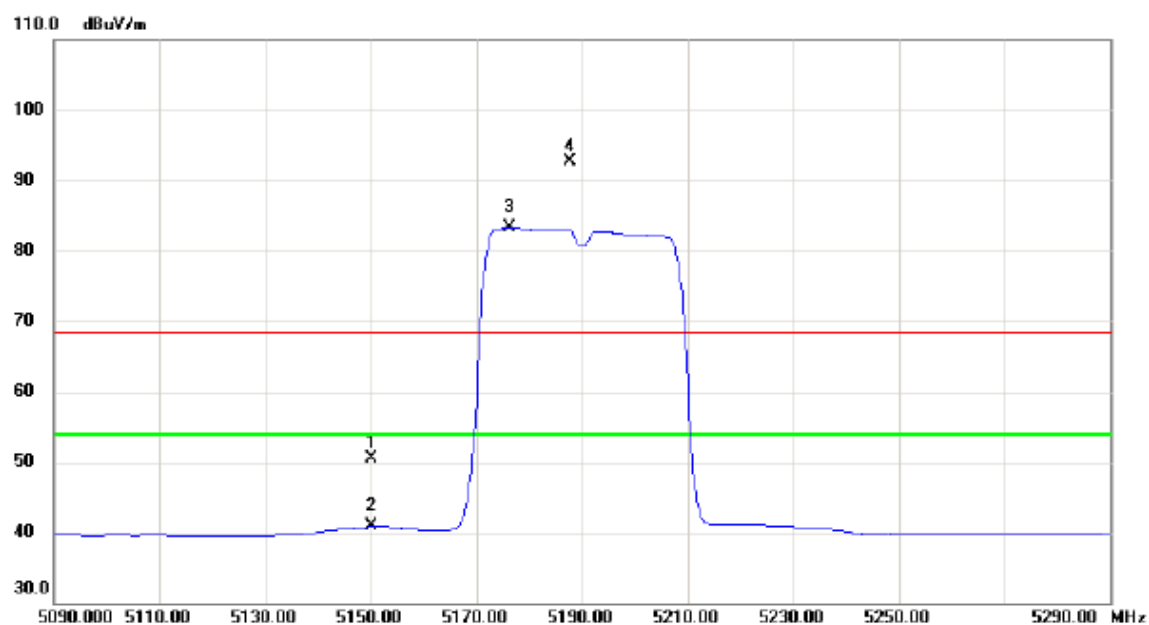


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	10.36	40.22	50.58	68.30	-17.72	peak	
2		5150.000	0.63	40.22	40.85	54.00	-13.15	AVG	
3	*	5176.400	43.03	40.27	83.30	54.00	29.30	AVG	No Limit
4	X	5187.600	52.39	40.30	92.69	68.30	24.39	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

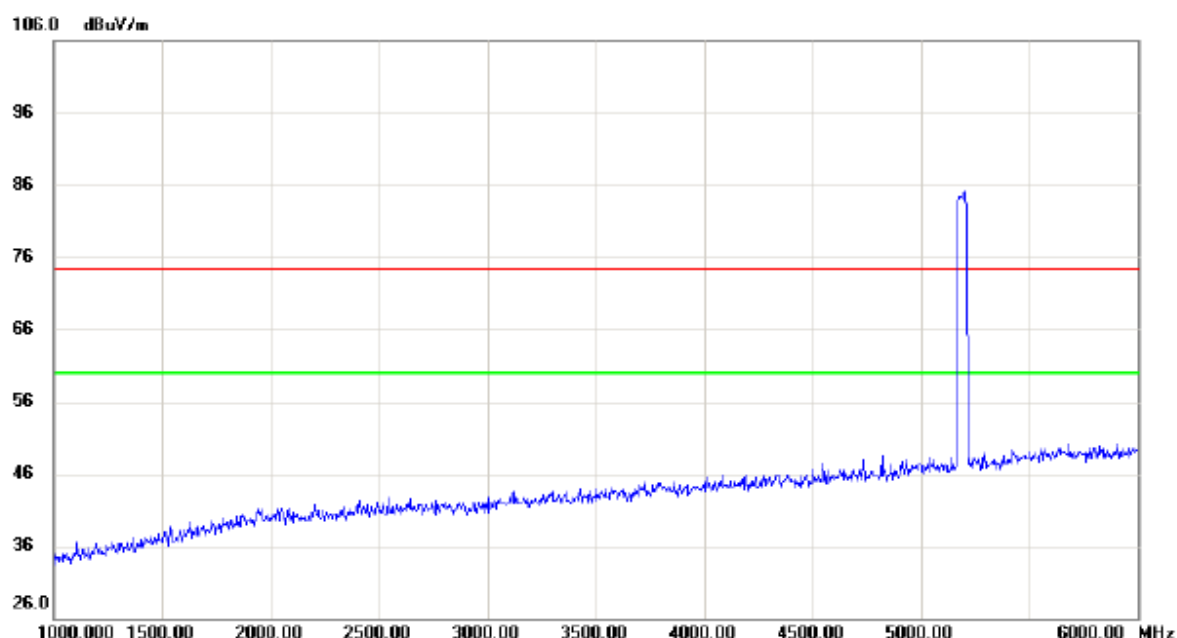


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

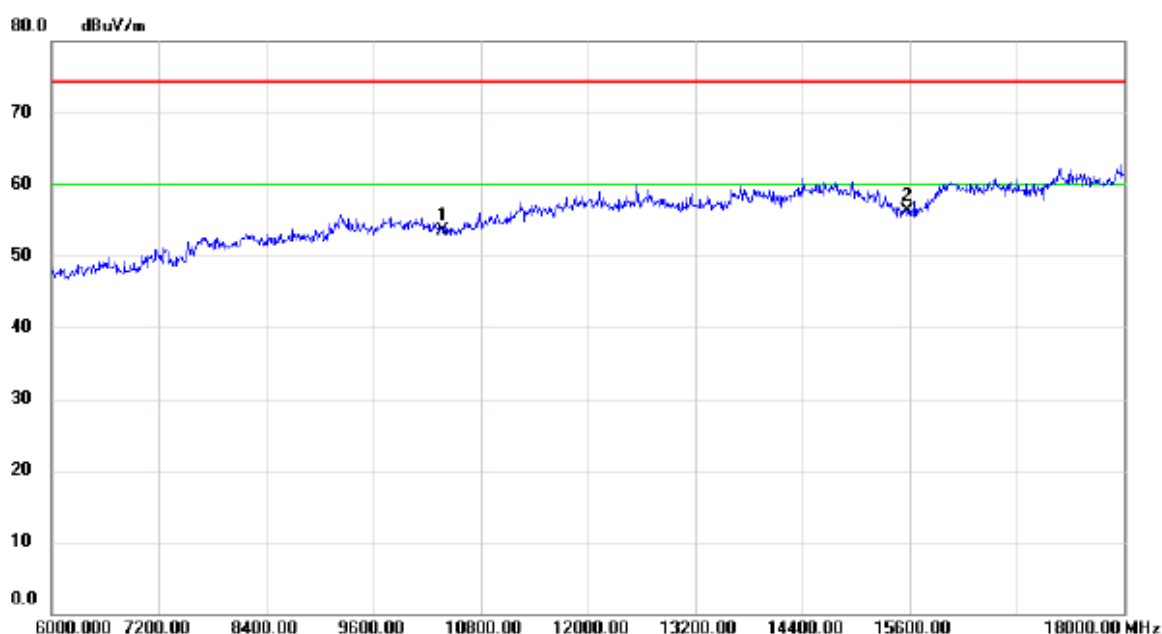


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10380.00	39.74	13.83	53.57	74.30	-20.73	peak	
2	*	15570.00	39.30	17.00	56.30	74.30	-18.00	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

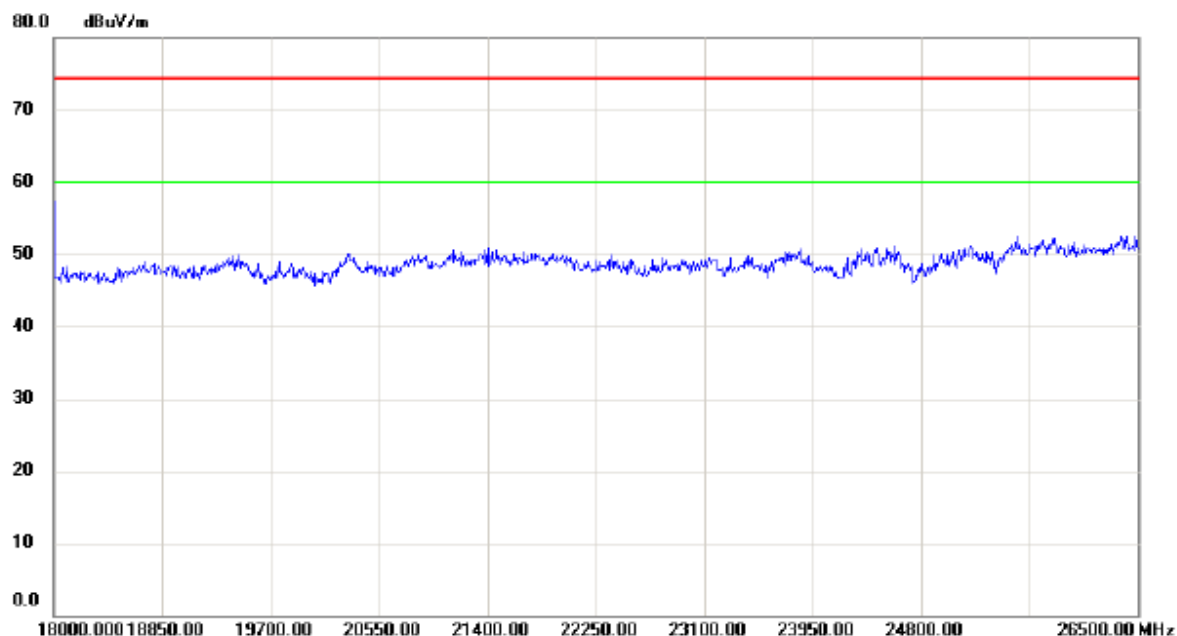


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

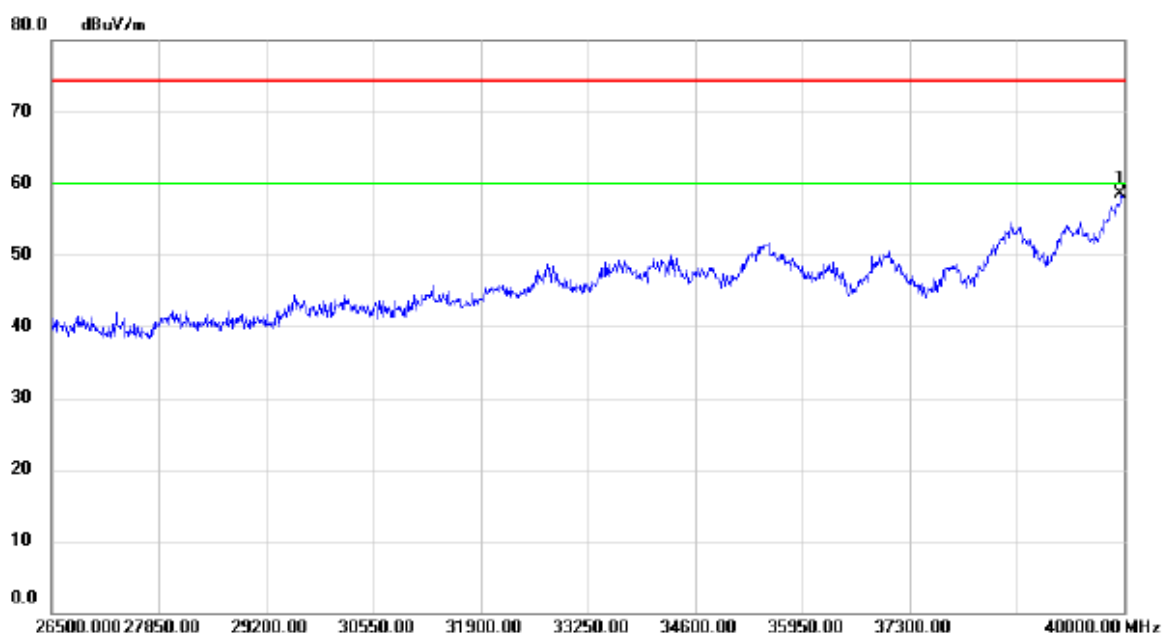

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	41.04	17.50	58.54	74.30	-15.76	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

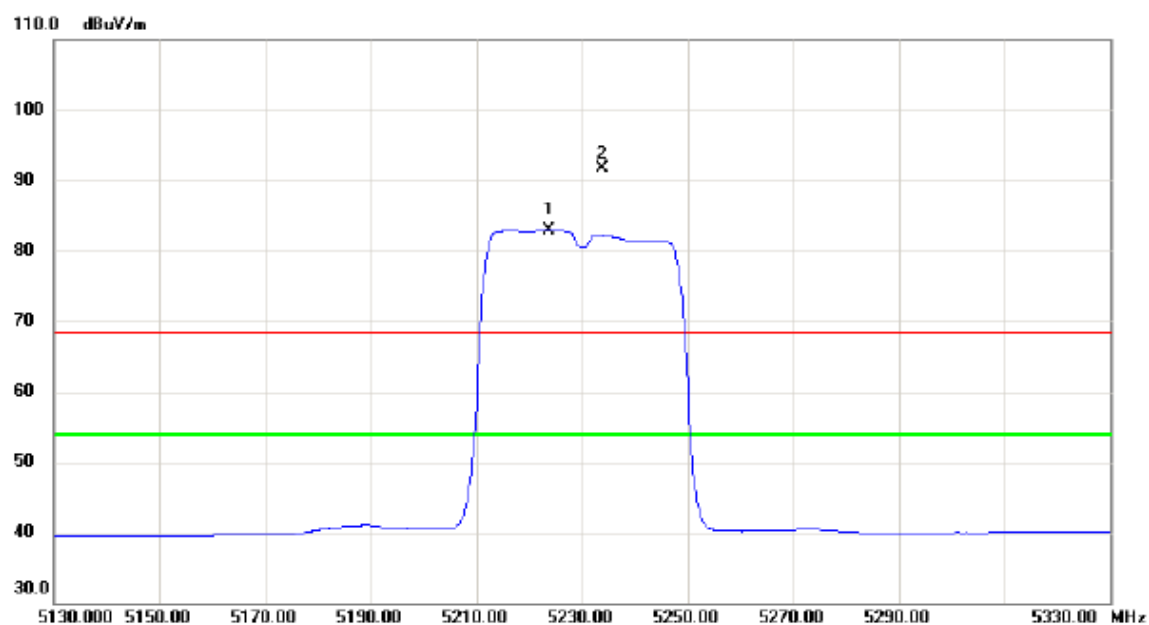


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5223.800	42.53	40.38	82.91	54.00	28.91	AVG	No Limit
2	X	5233.800	51.37	40.39	91.76	68.30	23.46	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

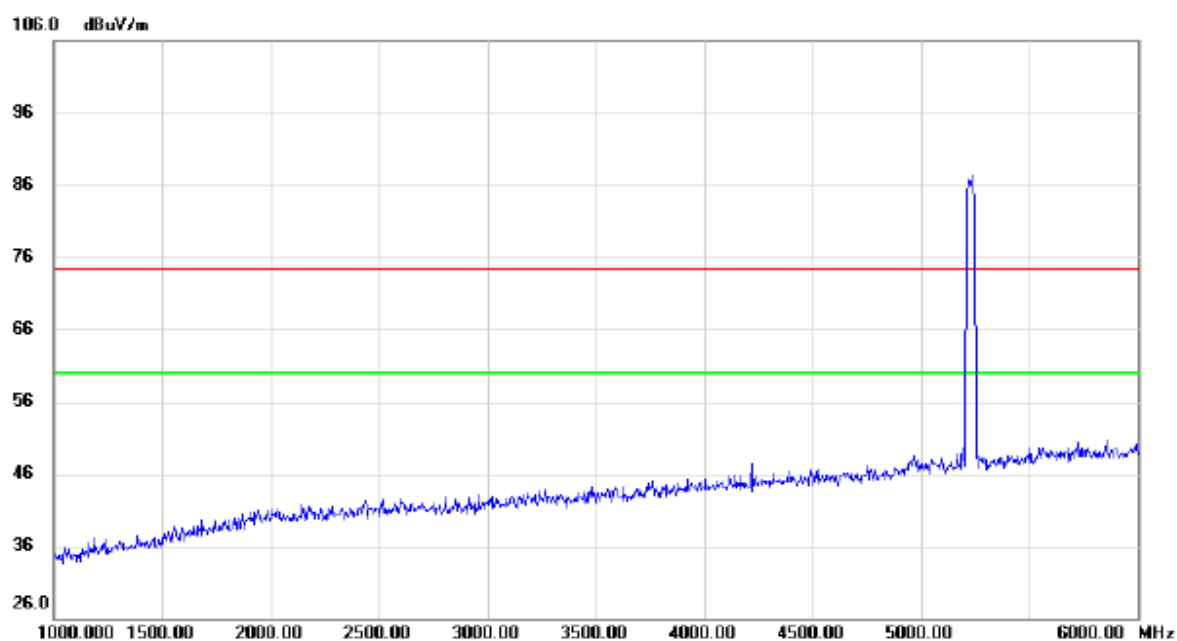


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

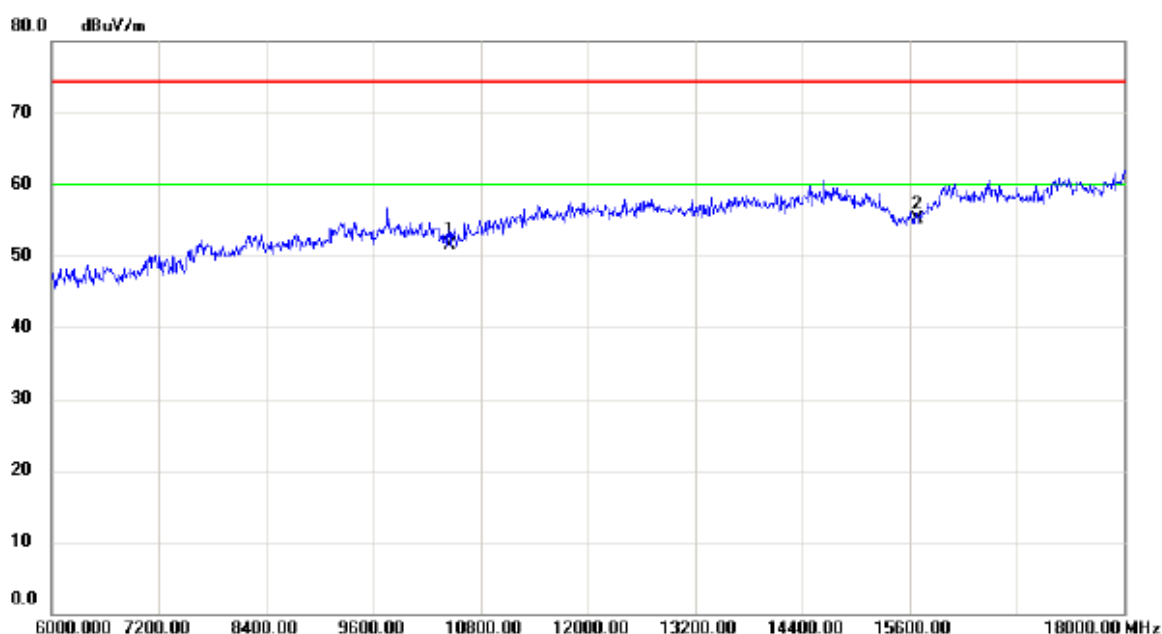


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10460.00	37.88	13.71	51.59	74.30	-22.71	peak	
2	*	15690.00	37.50	17.63	55.13	74.30	-19.17	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

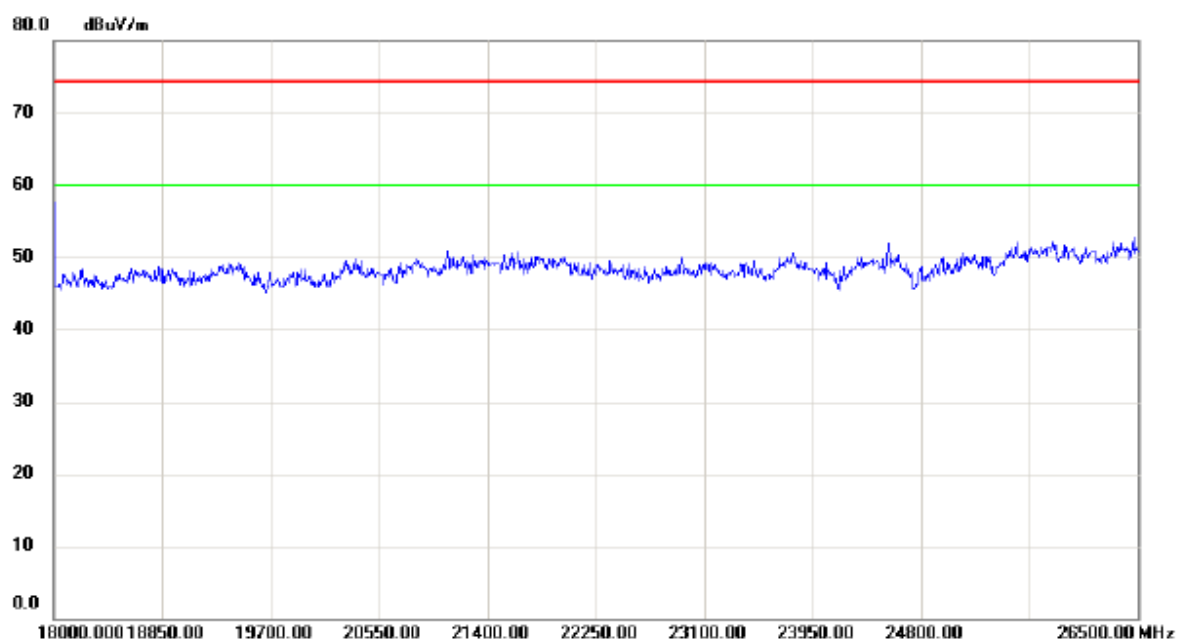


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

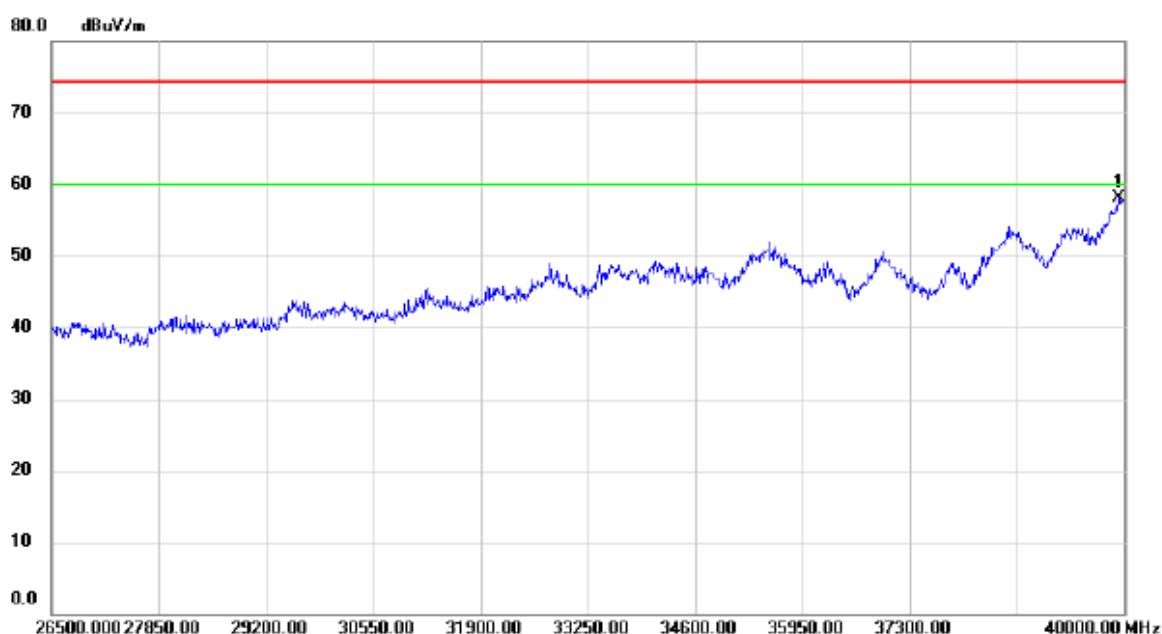

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	40.73	17.43	58.16	74.30	-16.14	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

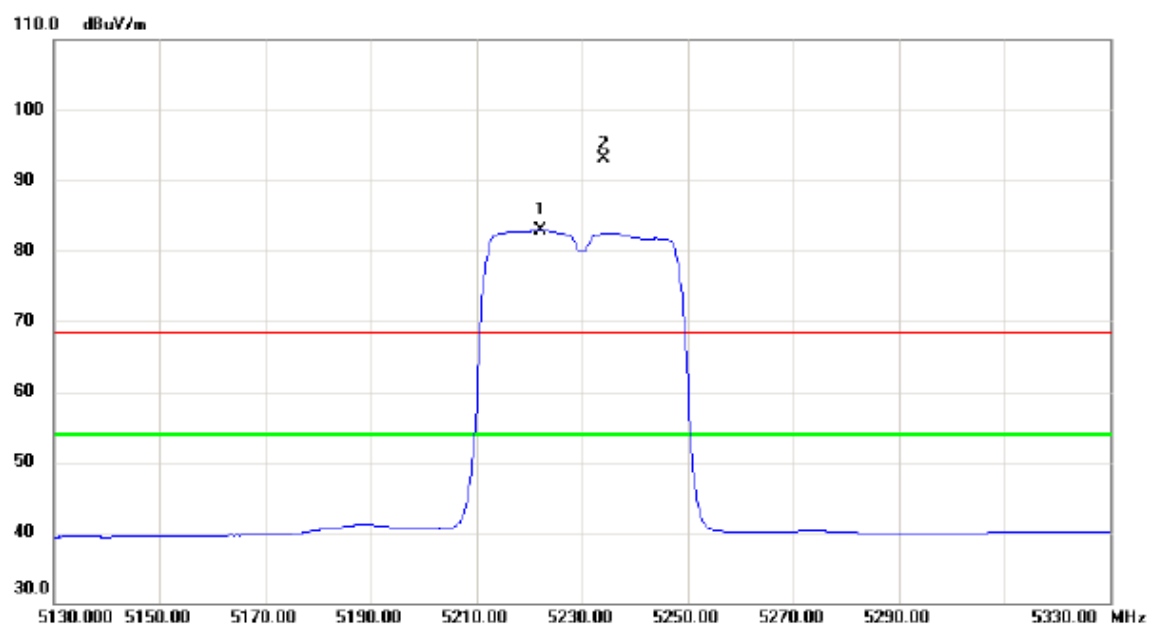


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5222.200	42.49	40.37	82.86	54.00	28.86	AVG	No Limit
2	X	5234.000	52.80	40.39	93.19	68.30	24.89	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

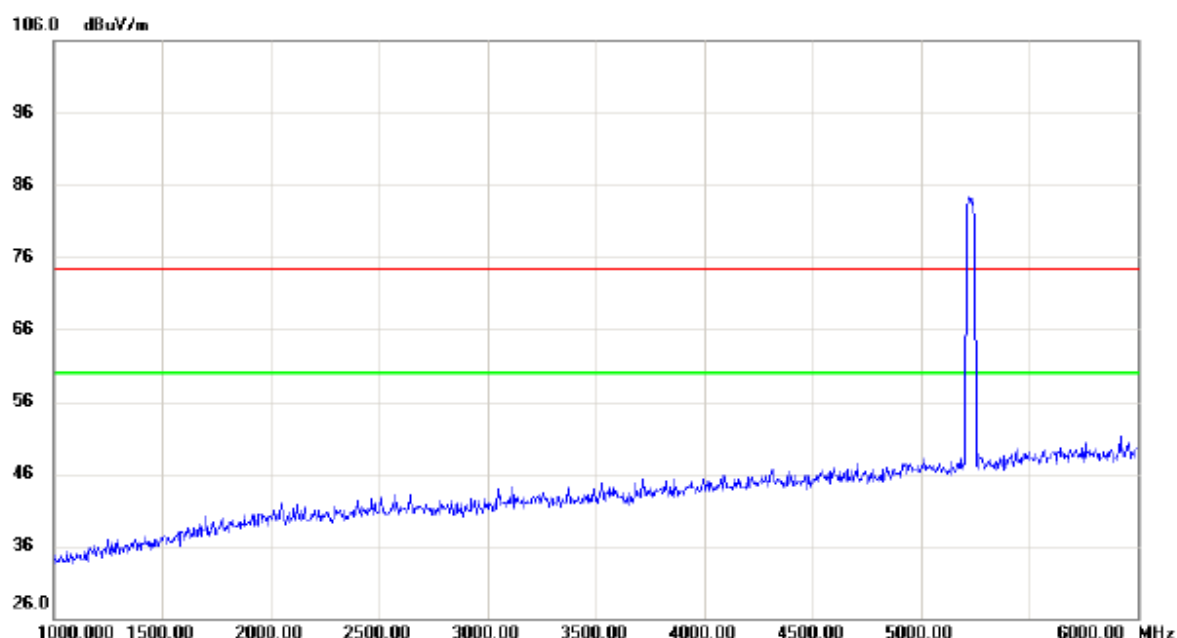


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

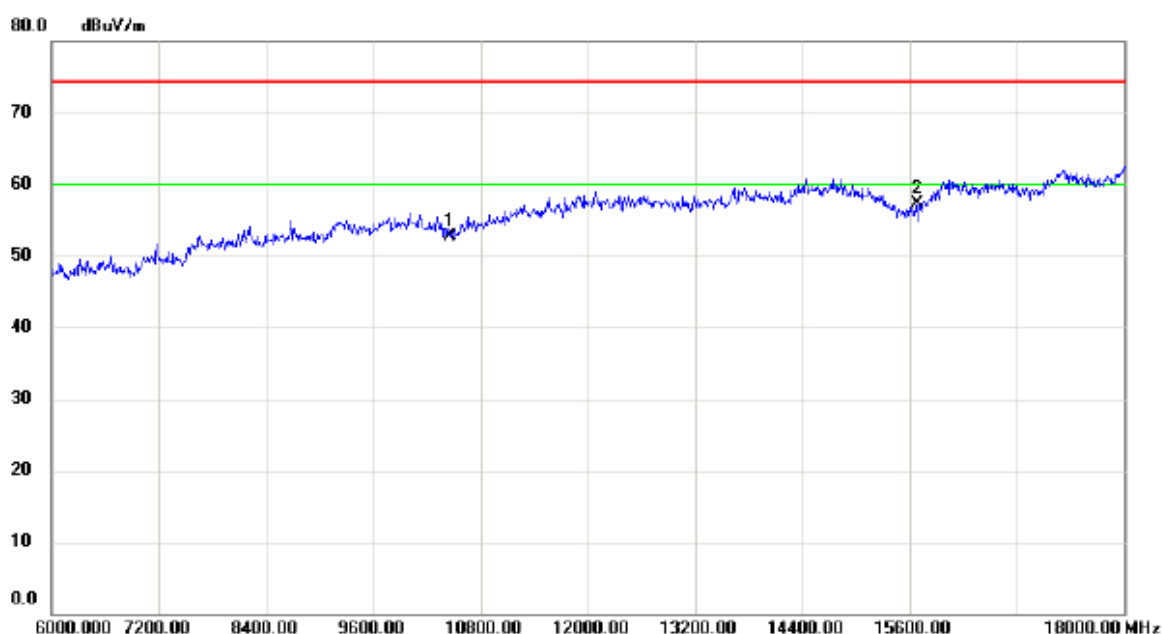


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10460.00	39.04	13.71	52.75	74.30	-21.55	peak	
2	*	15690.00	39.61	17.63	57.24	74.30	-17.06	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

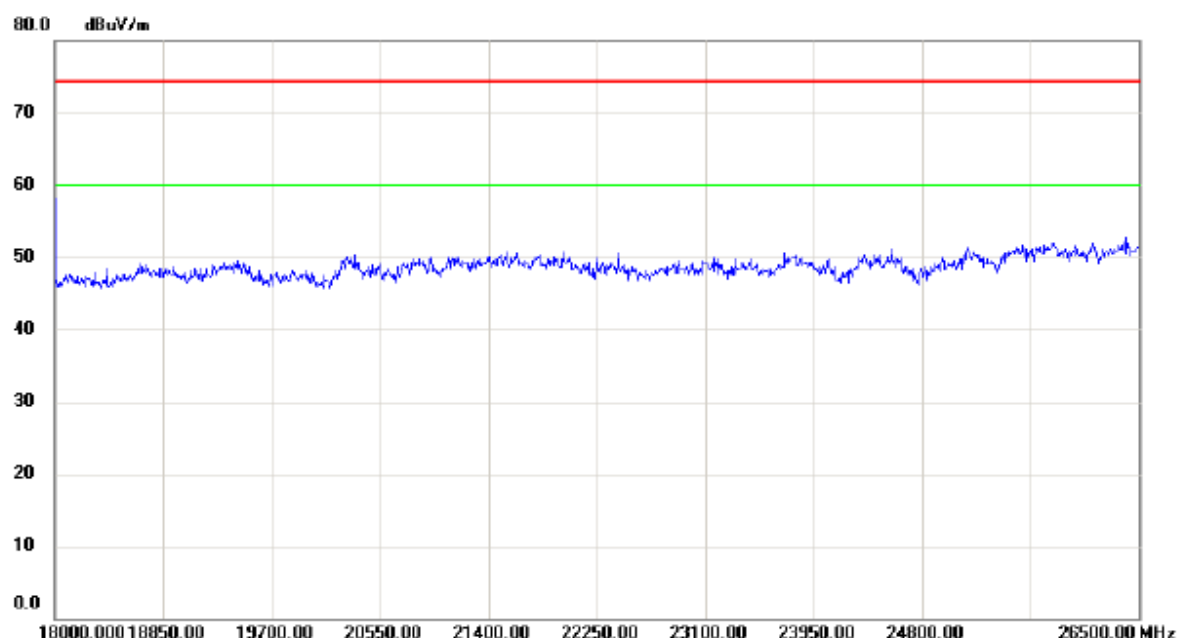


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

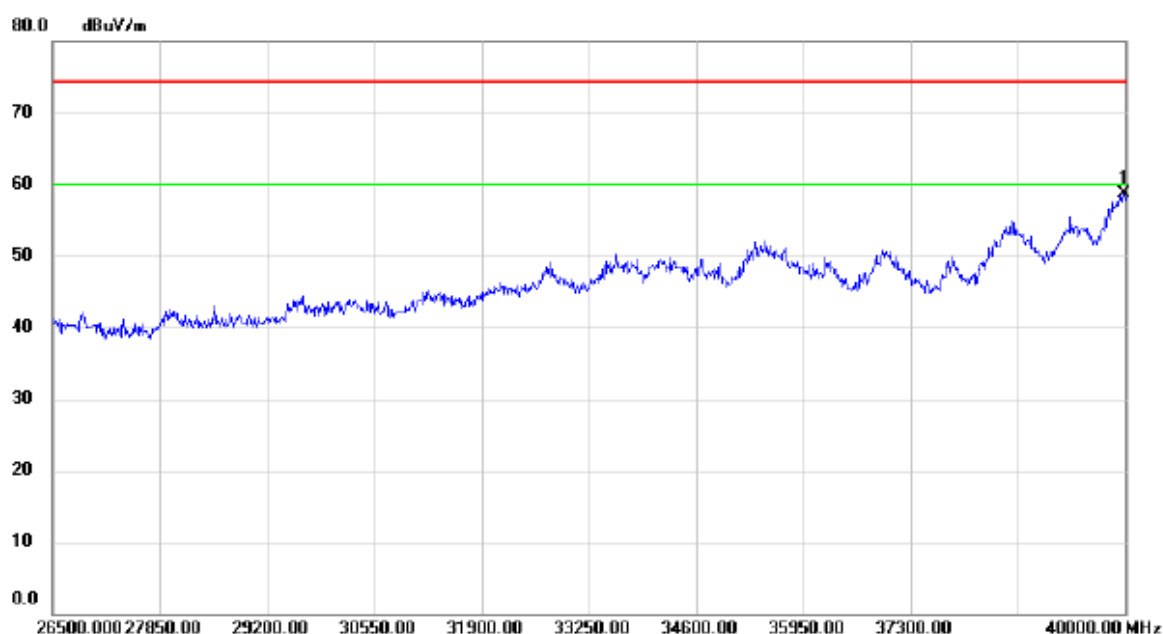

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	41.23	17.56	58.79	74.30	-15.51	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5180MHz


Vertical

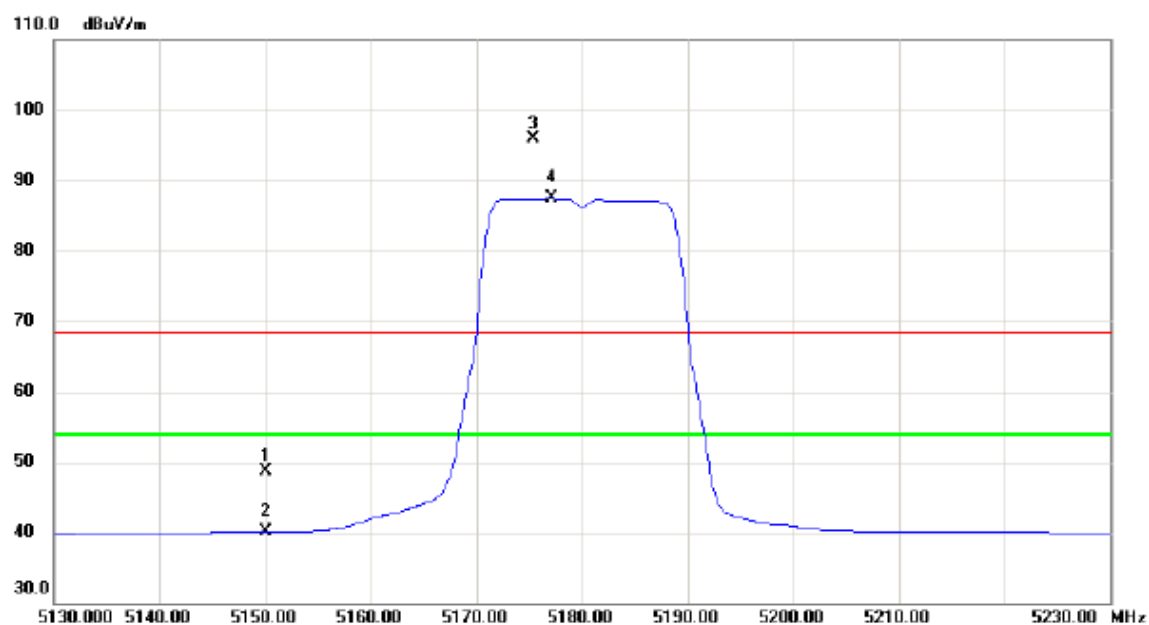


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.46	40.22	48.68	68.30	-19.62	peak	
2		5150.000	-0.13	40.22	40.09	54.00	-13.91	AVG	
3	X	5175.400	55.60	40.27	95.87	68.30	27.57	peak	No Limit
4	*	5177.100	47.13	40.28	87.41	54.00	33.41	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5180MHz

Vertical

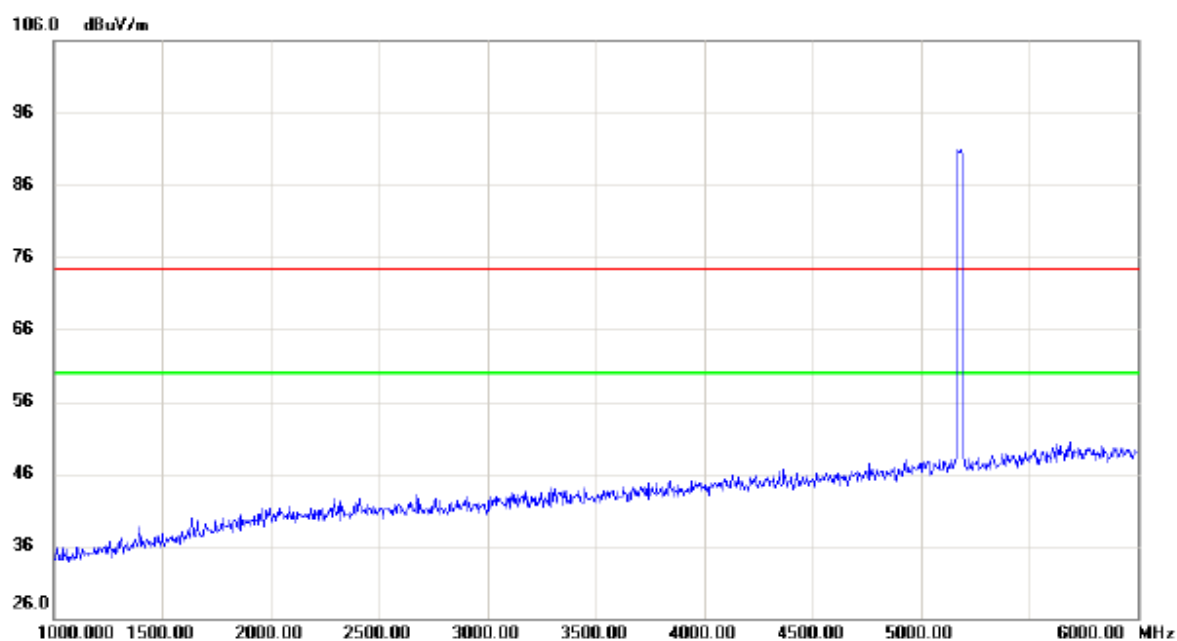


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

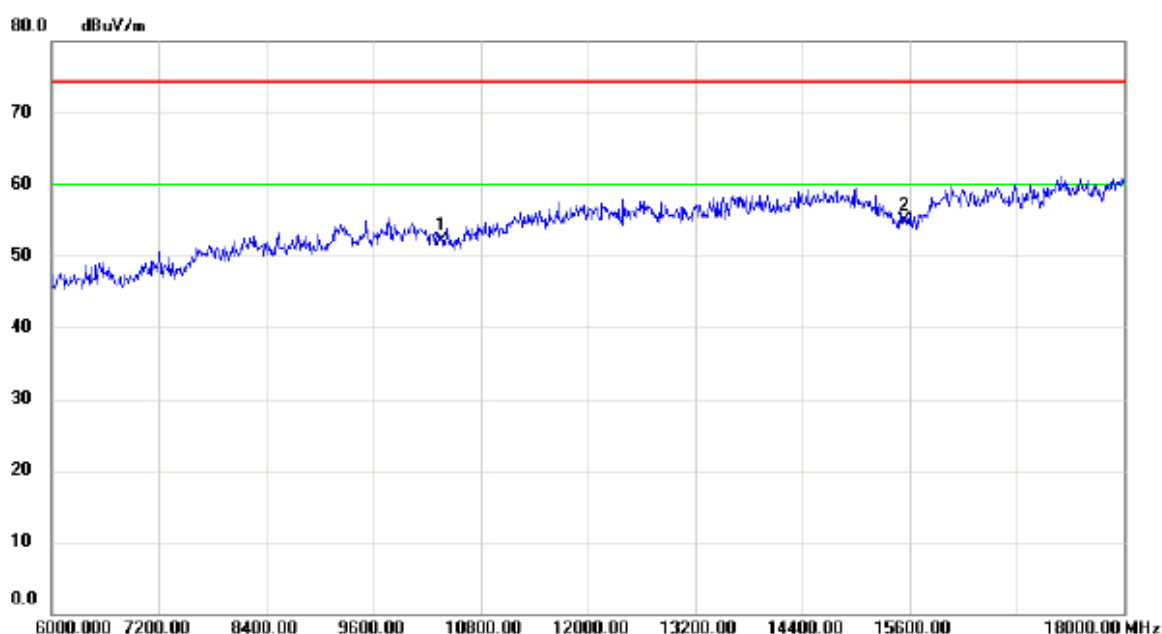


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	38.32	13.85	52.17	74.30	-22.13	peak	
2	*	15540.00	38.02	16.85	54.87	74.30	-19.43	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5180MHz

Vertical

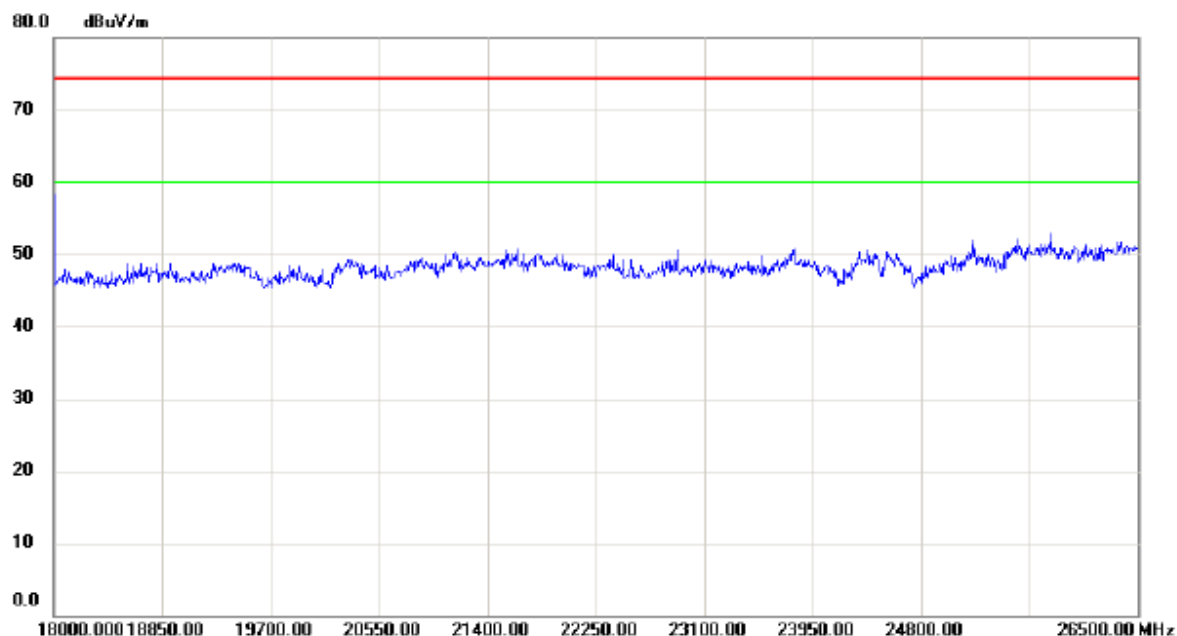


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

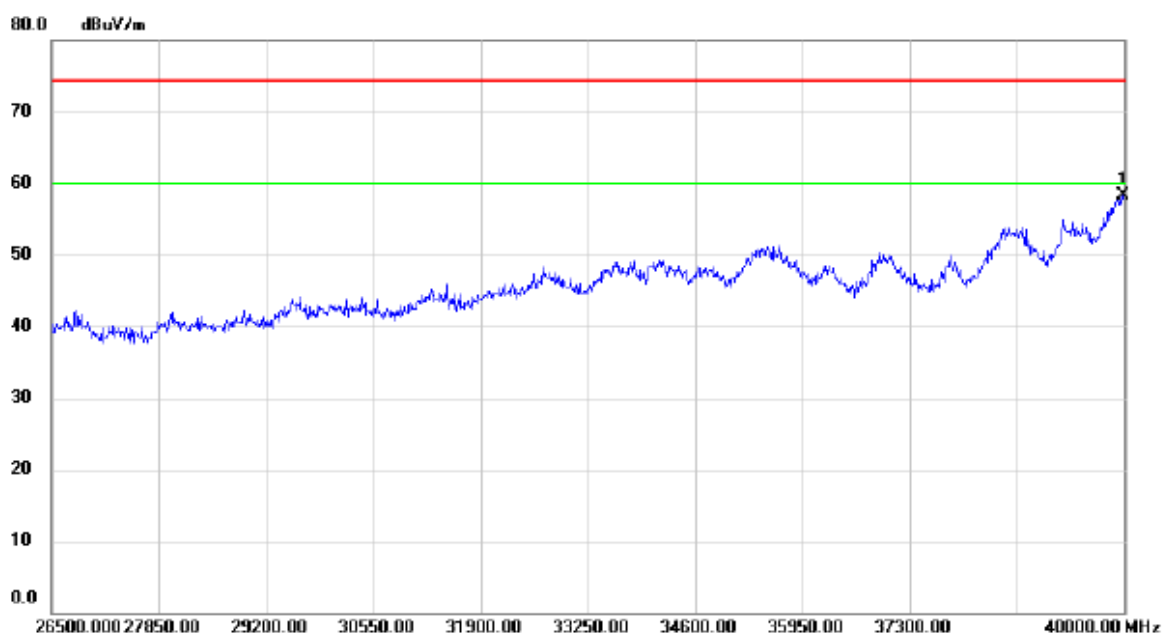

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	40.75	17.56	58.31	74.30	-15.99	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5180MHz


Horizontal

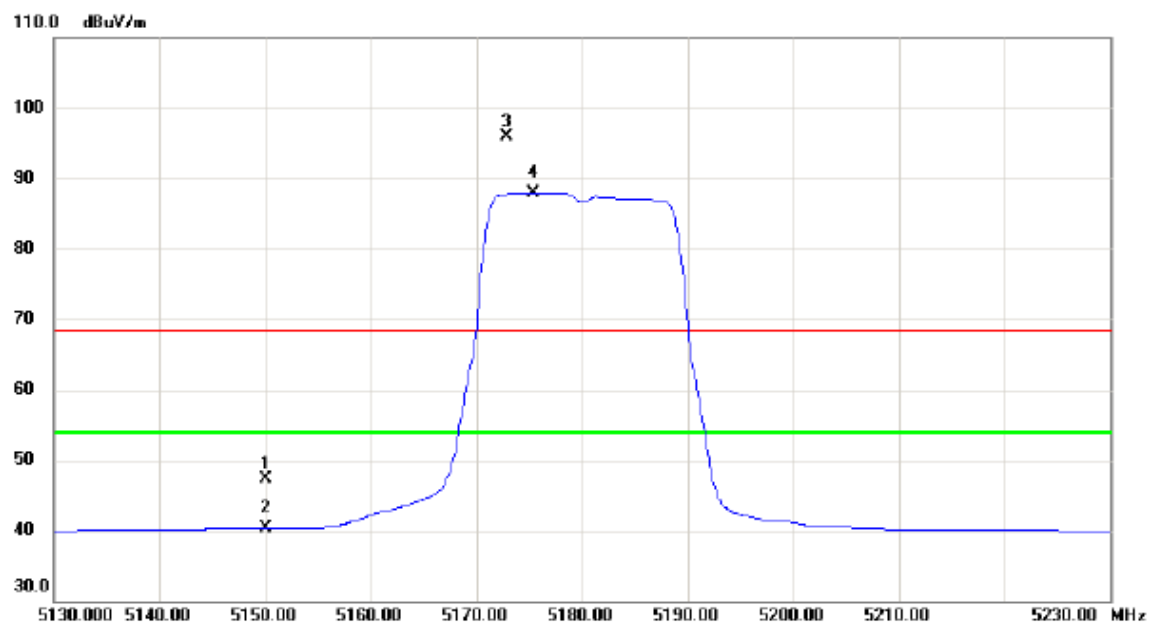


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	7.18	40.22	47.40	68.30	-20.90	peak	
2		5150.000	0.06	40.22	40.28	54.00	-13.72	AVG	
3	X	5172.900	55.60	40.26	95.86	68.30	27.56	peak	No Limit
4	*	5175.400	47.73	40.27	88.00	54.00	34.00	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5180MHz

Horizontal

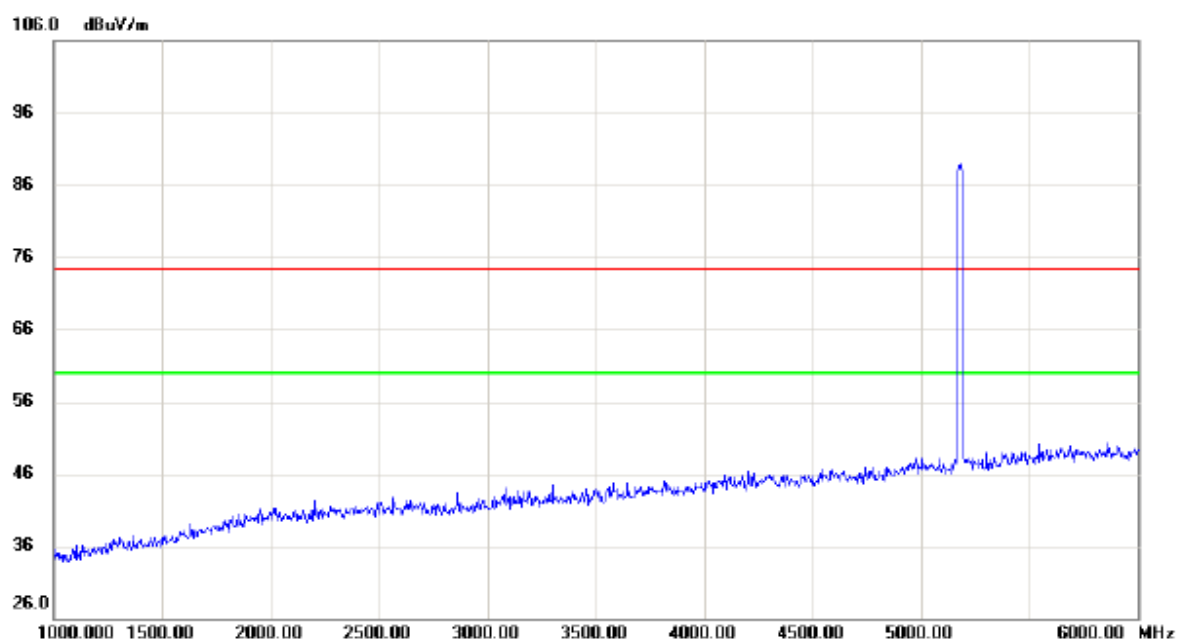


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

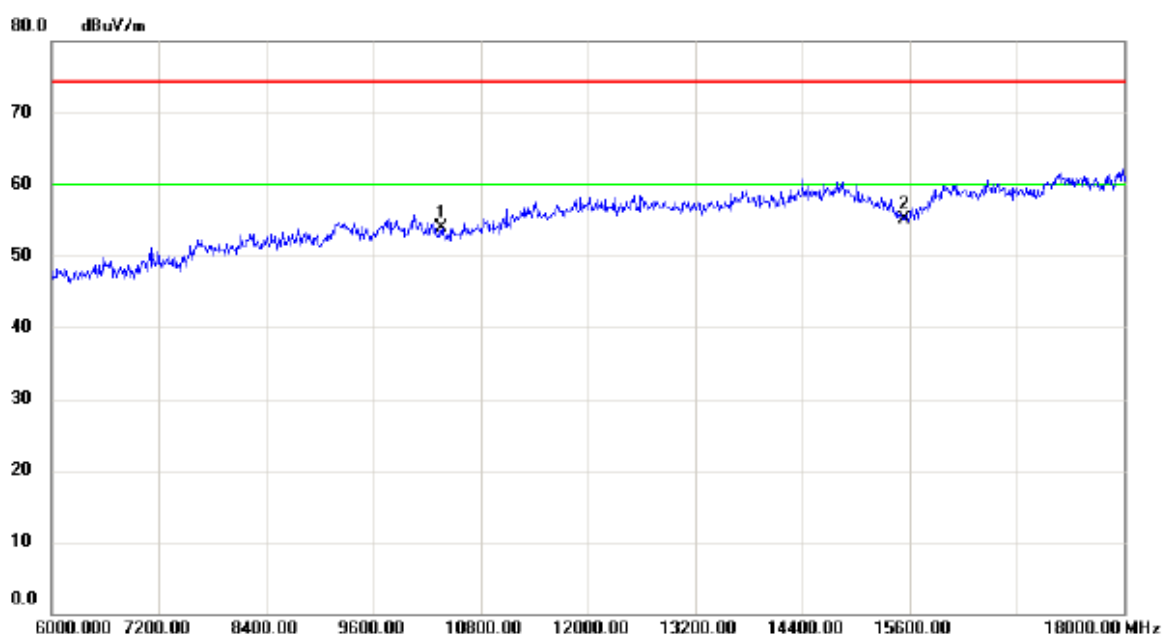


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	40.14	13.85	53.99	74.30	-20.31	peak	
2	*	15540.00	38.28	16.85	55.13	74.30	-19.17	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5180MHz

Horizontal

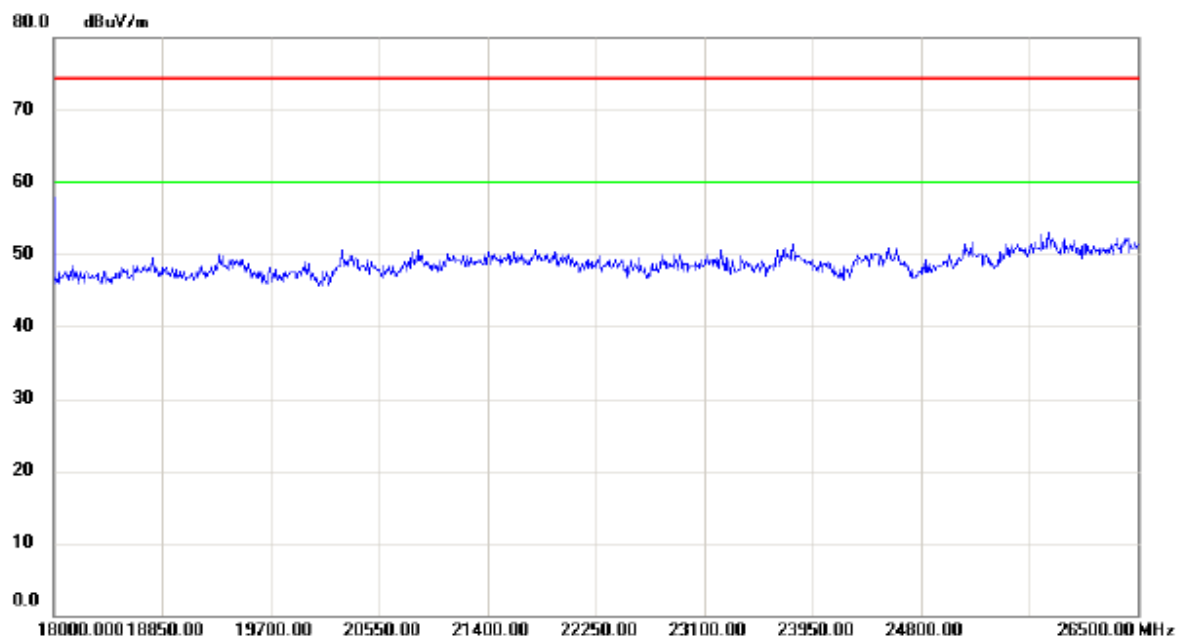


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

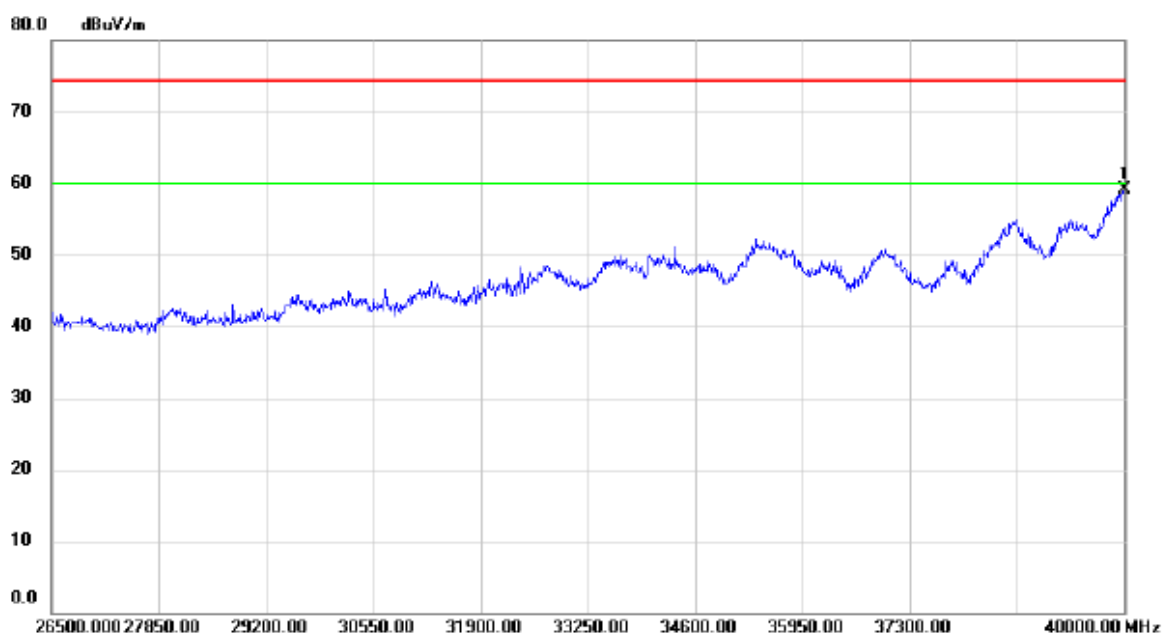

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	41.57	17.60	59.17	74.30	-15.13	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5240MHz


Vertical

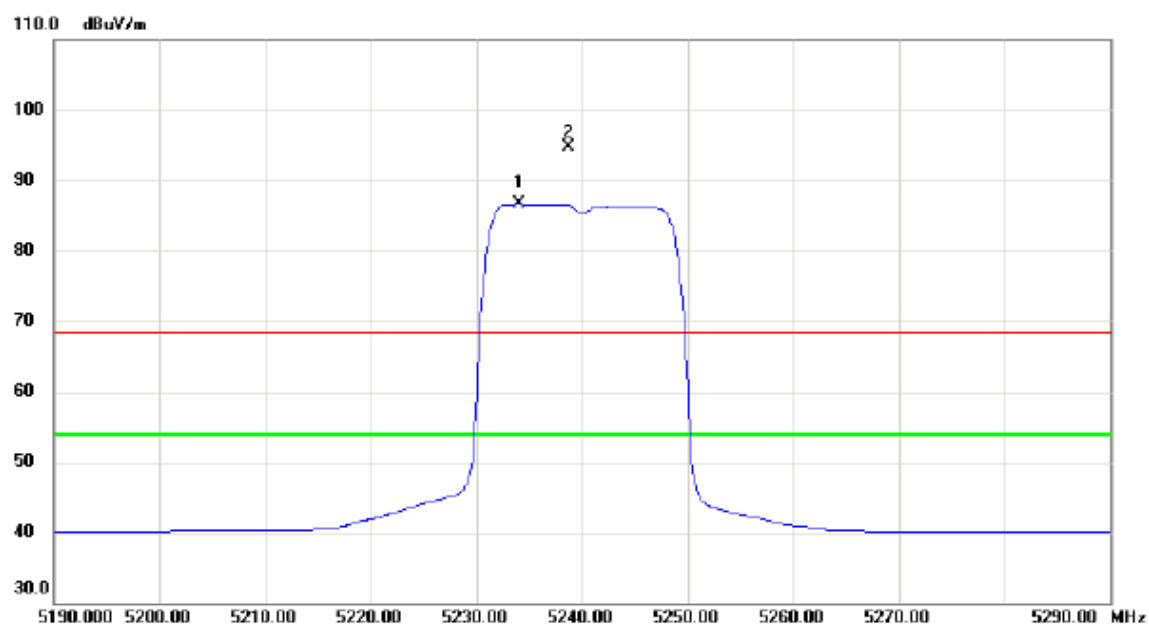


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5234.000	46.22	40.39	86.61	54.00	32.61	AVG	No Limit
2	X	5238.700	54.36	40.40	94.76	68.30	26.46	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5240MHz

Vertical

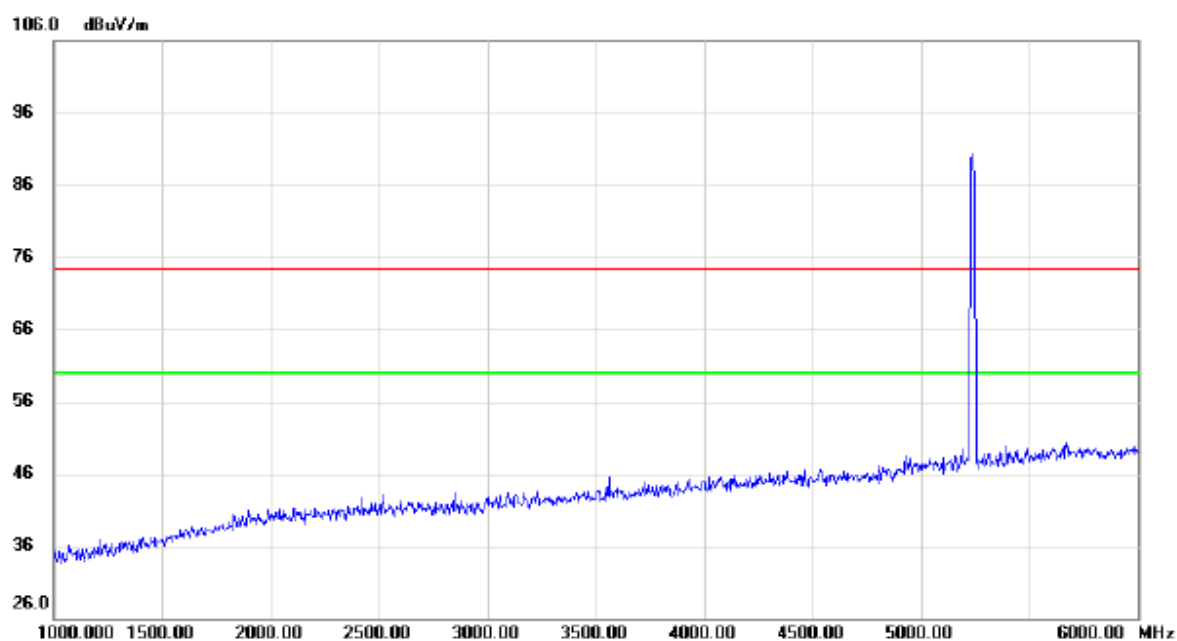


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

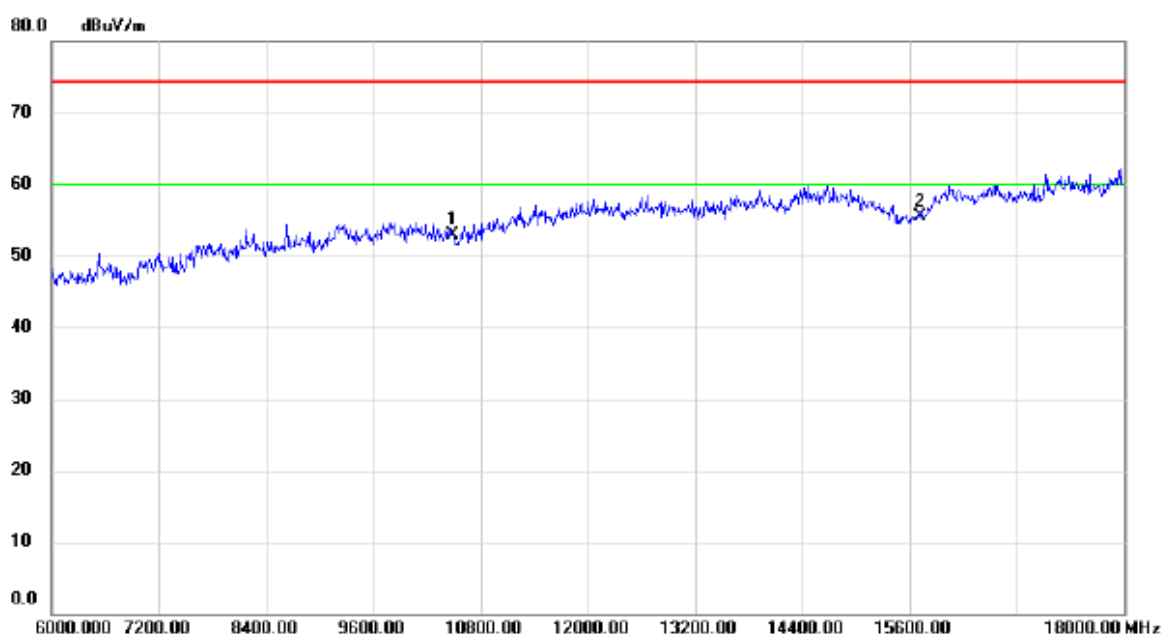


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	39.14	13.69	52.83	74.30	-21.47	peak	
2	*	15720.00	37.73	17.78	55.51	74.30	-18.79	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5240MHz

Vertical

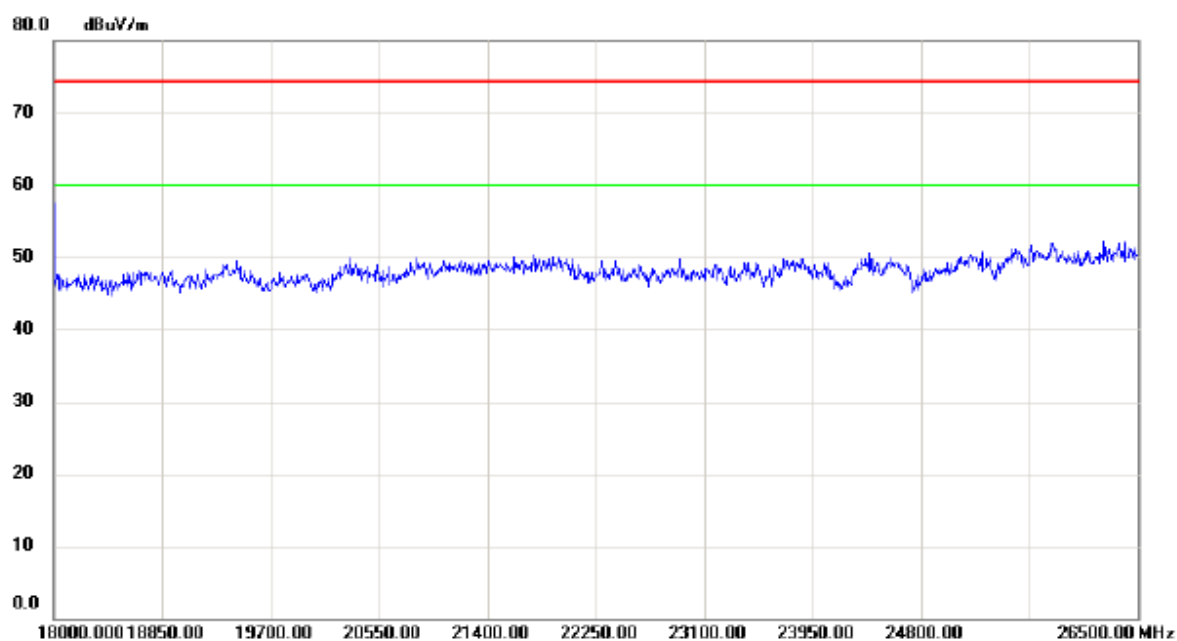


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

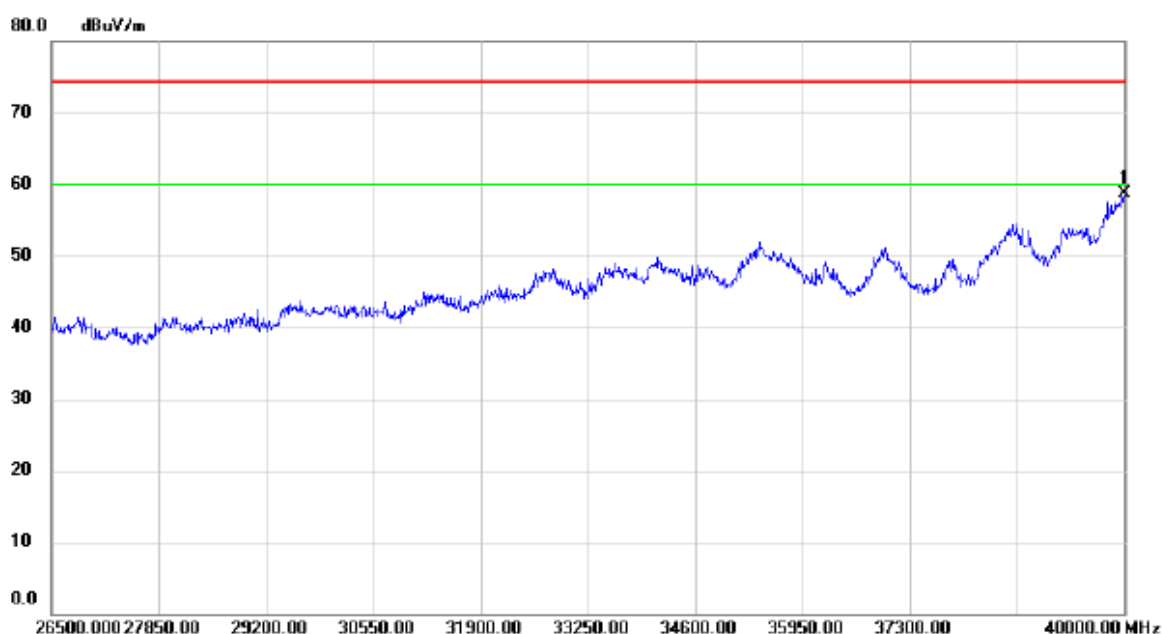

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	41.14	17.60	58.74	74.30	-15.56	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5240MHz


Horizontal

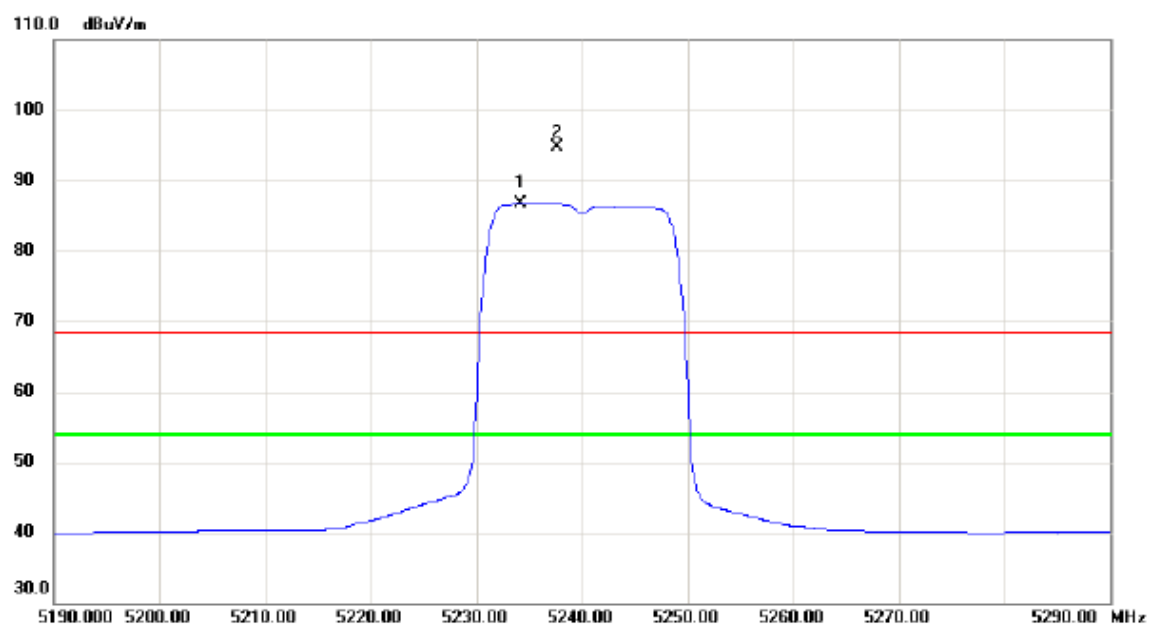


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5234.200	46.26	40.39	86.65	54.00	32.65	AVG	No Limit
2	X	5237.600	54.37	40.40	94.77	68.30	26.47	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5240MHz

Horizontal

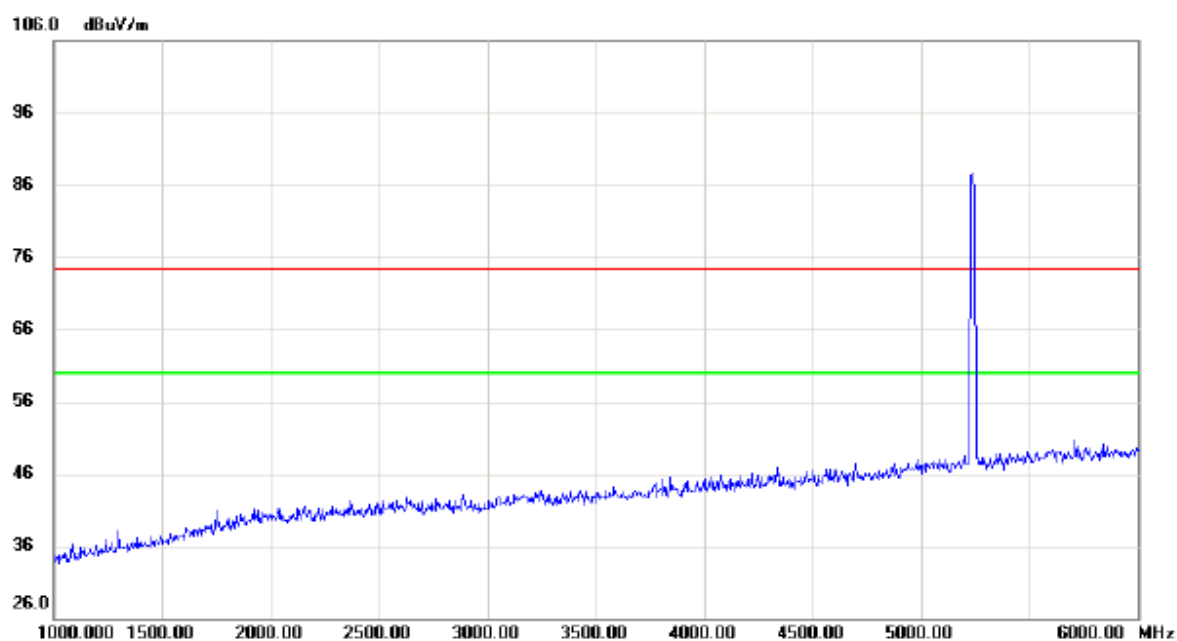


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

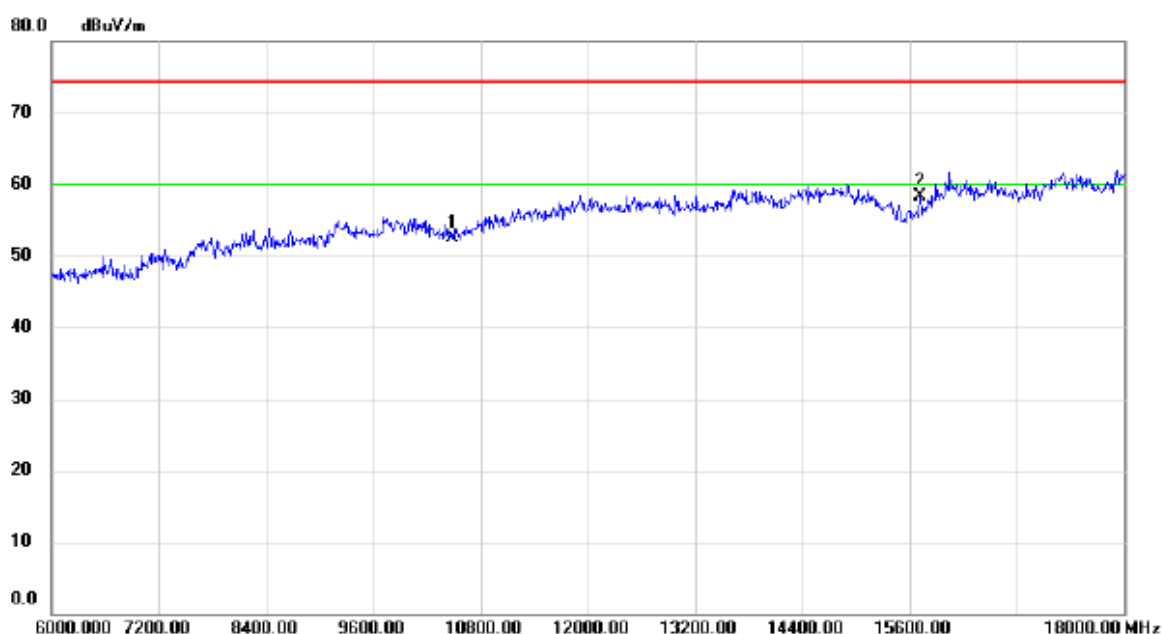


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	38.82	13.69	52.51	74.30	-21.79	peak	
2	*	15720.00	40.58	17.78	58.36	74.30	-15.94	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT20) Mode 5240MHz

Horizontal

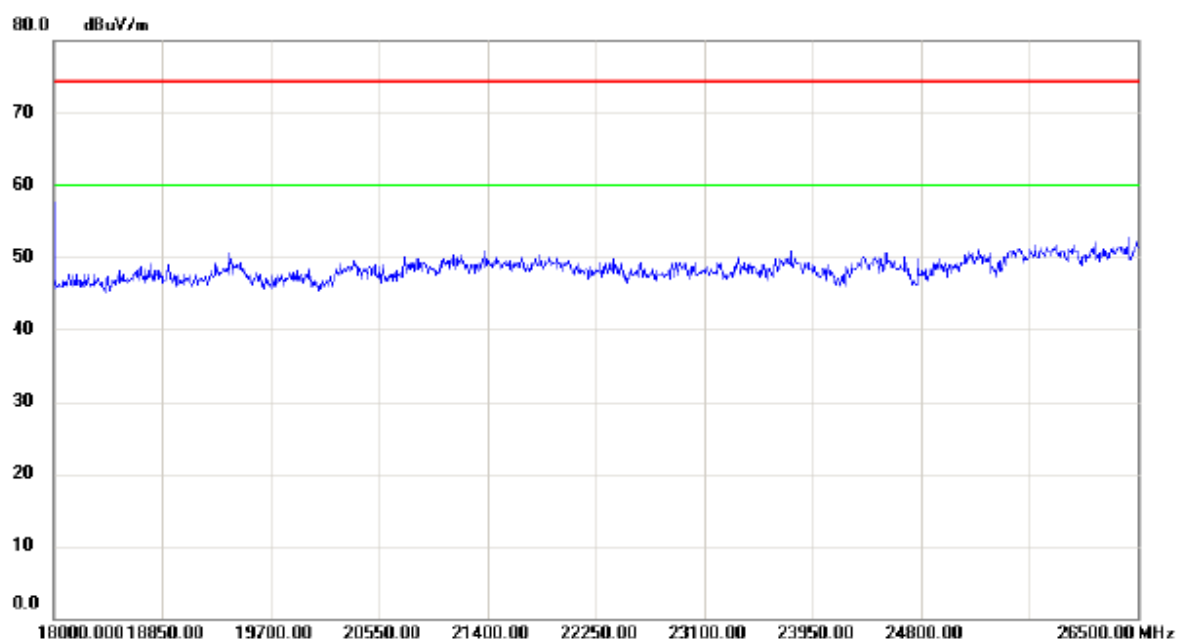


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

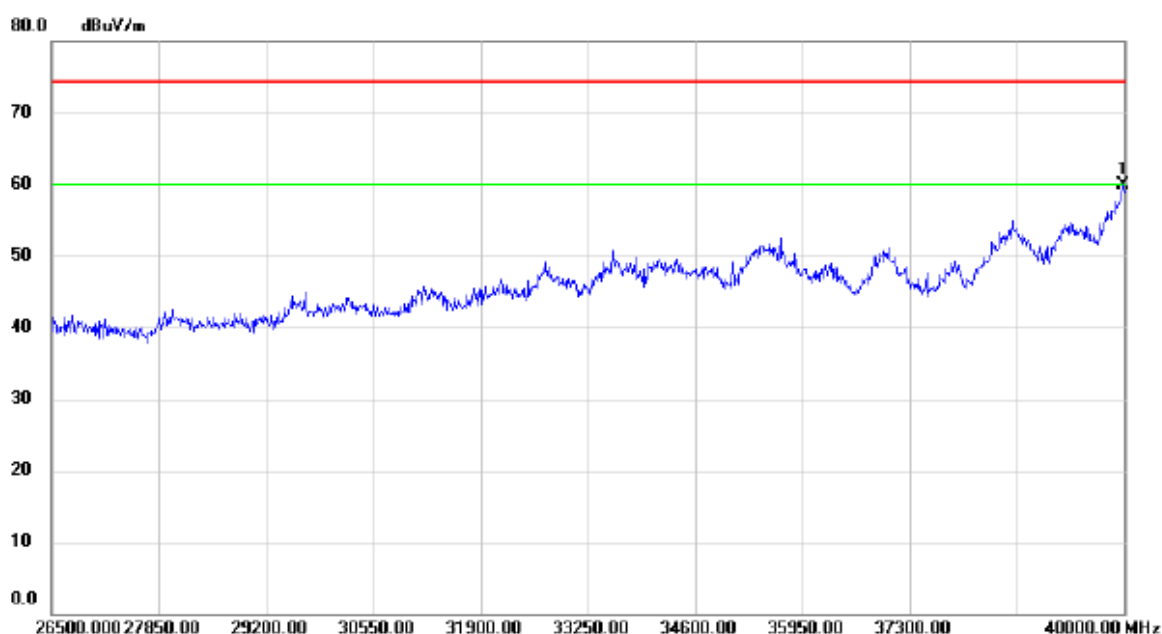

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	42.34	17.56	59.90	74.30	-14.40	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5190MHz


Vertical

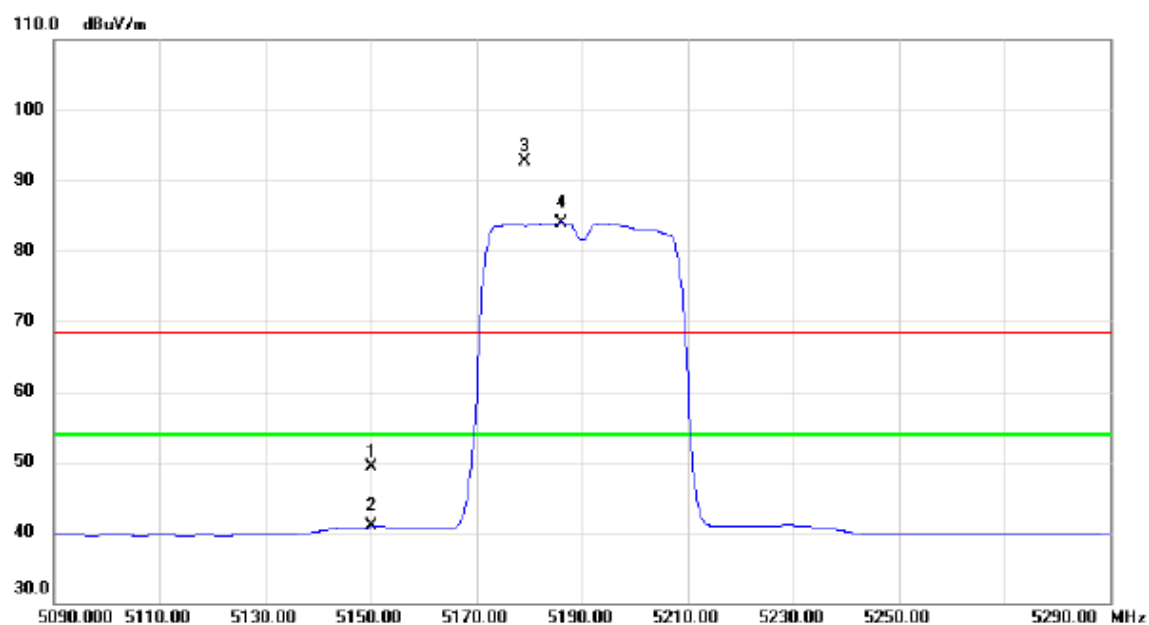


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.12	40.22	49.34	68.30	-18.96	peak	
2		5150.000	0.59	40.22	40.81	54.00	-13.19	AVG	
3	X	5179.200	52.35	40.28	92.63	68.30	24.33	peak	No Limit
4	*	5186.200	43.70	40.30	84.00	54.00	30.00	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5190MHz

Vertical

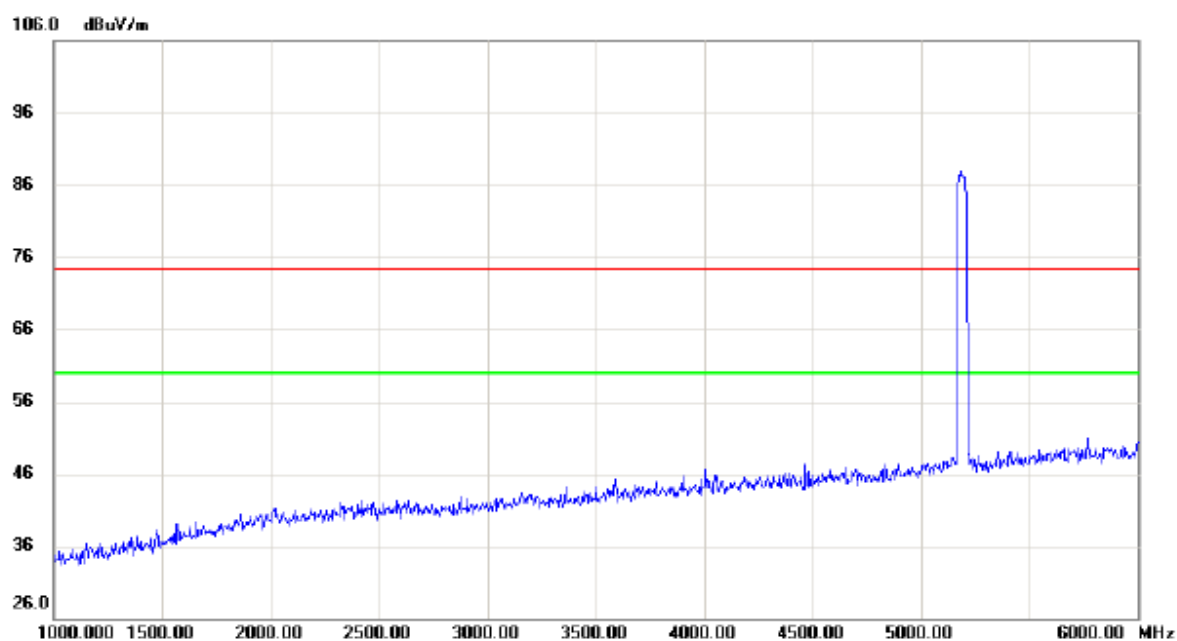


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

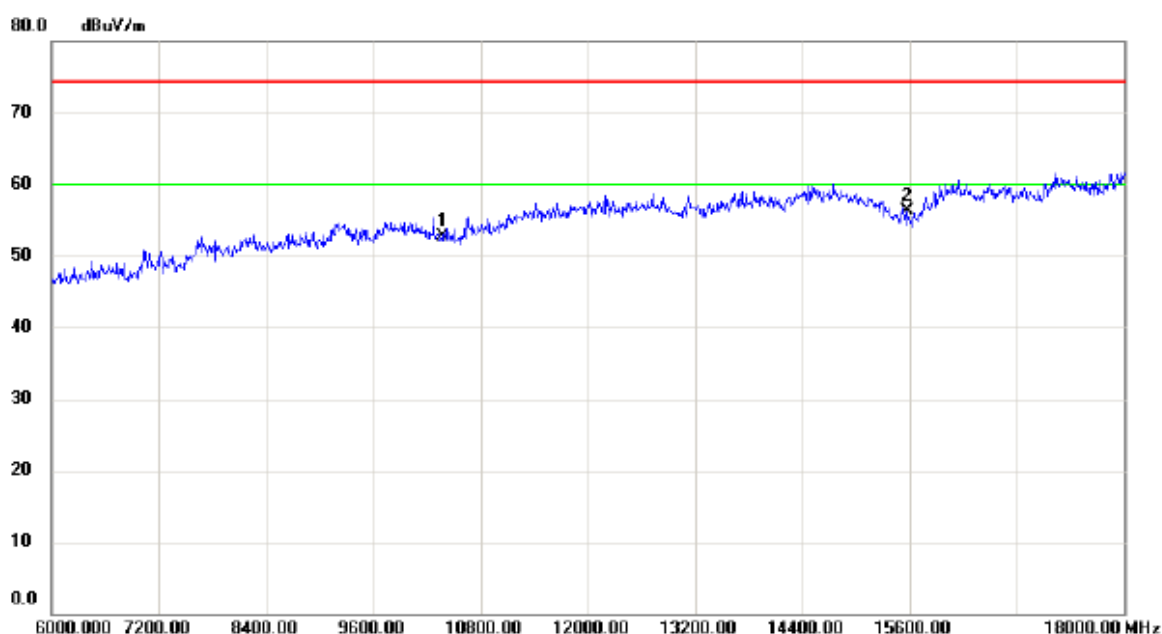


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10380.00	38.97	13.83	52.80	74.30	-21.50	peak	
2	*	15570.00	39.34	17.00	56.34	74.30	-17.96	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5190MHz

Vertical

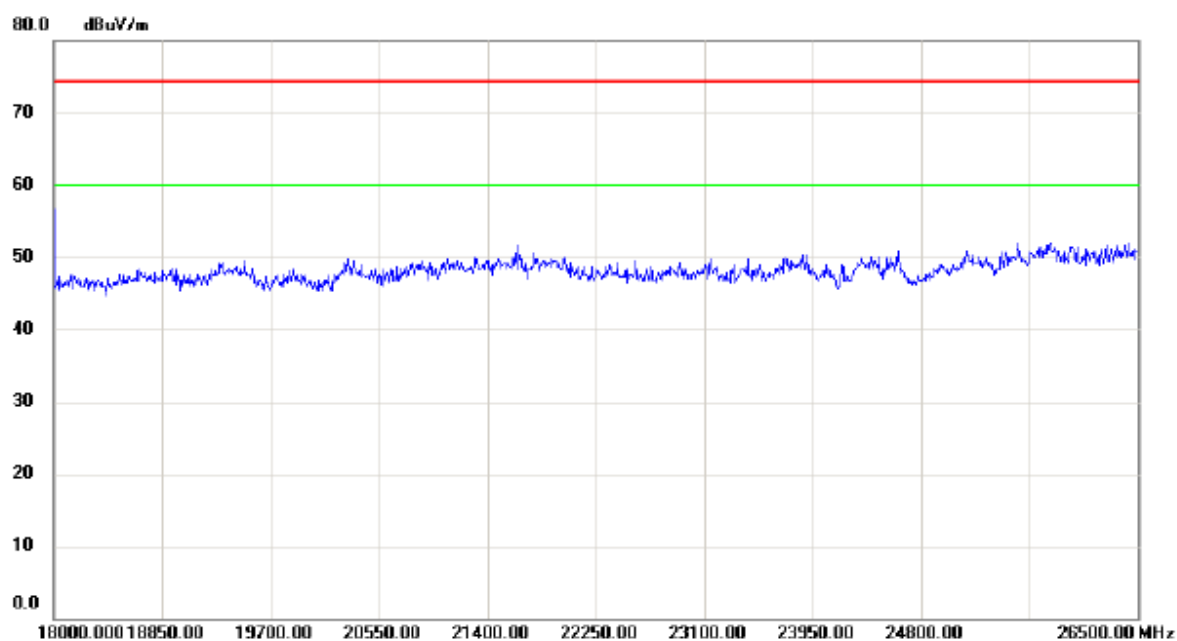


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

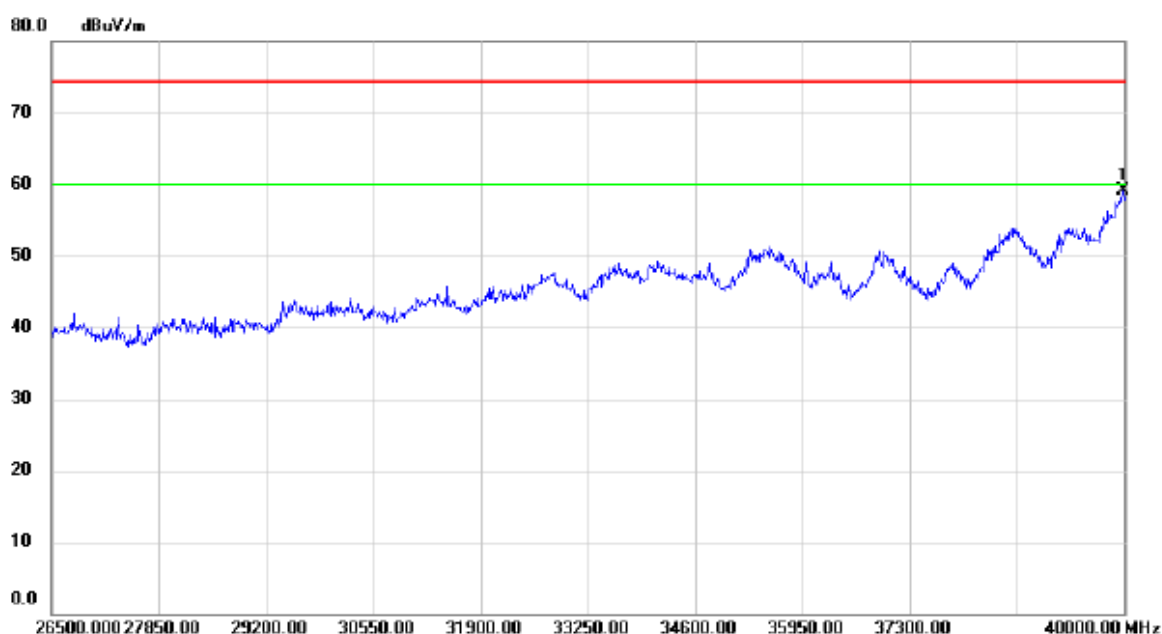

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	41.52	17.56	59.08	74.30	-15.22	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5190MHz


Horizontal

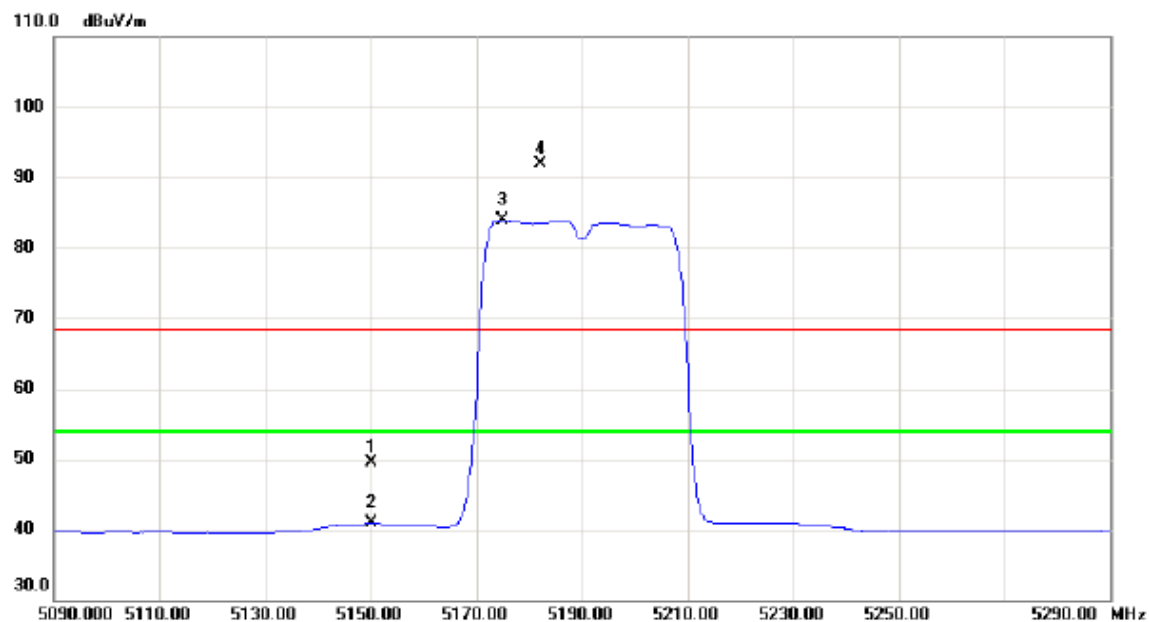


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.25	40.22	49.47	68.30	-18.83	peak	
2		5150.000	0.61	40.22	40.83	54.00	-13.17	AVG	
3	*	5175.000	43.57	40.27	83.84	54.00	29.84	AVG	No Limit
4	X	5182.000	51.68	40.29	91.97	68.30	23.67	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5190MHz

Horizontal

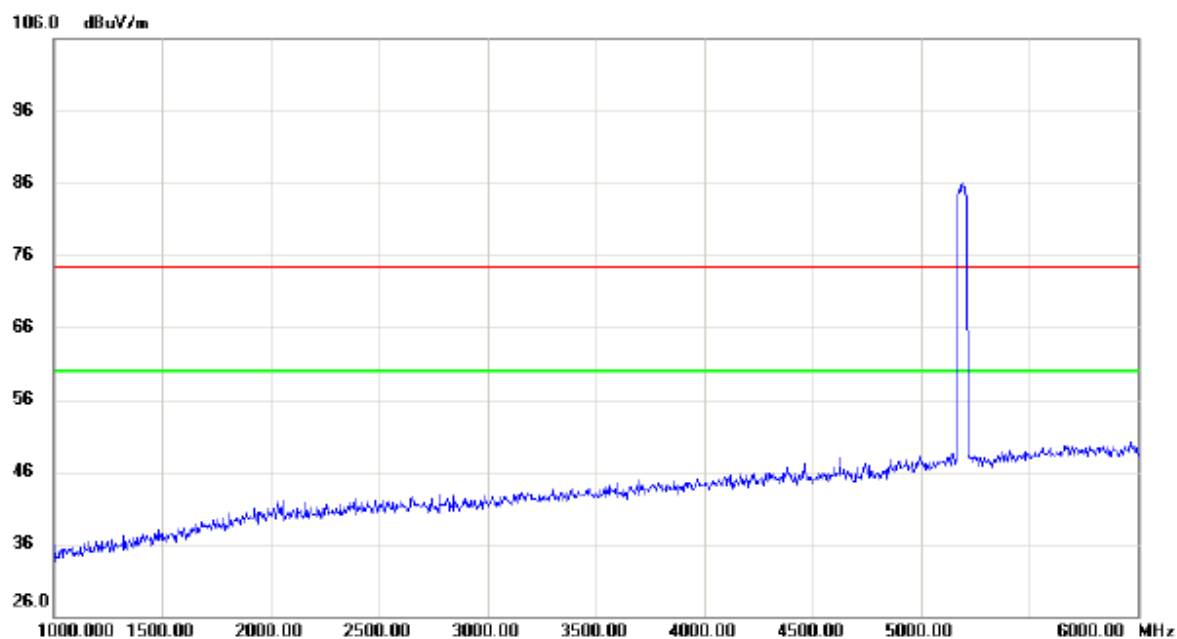


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

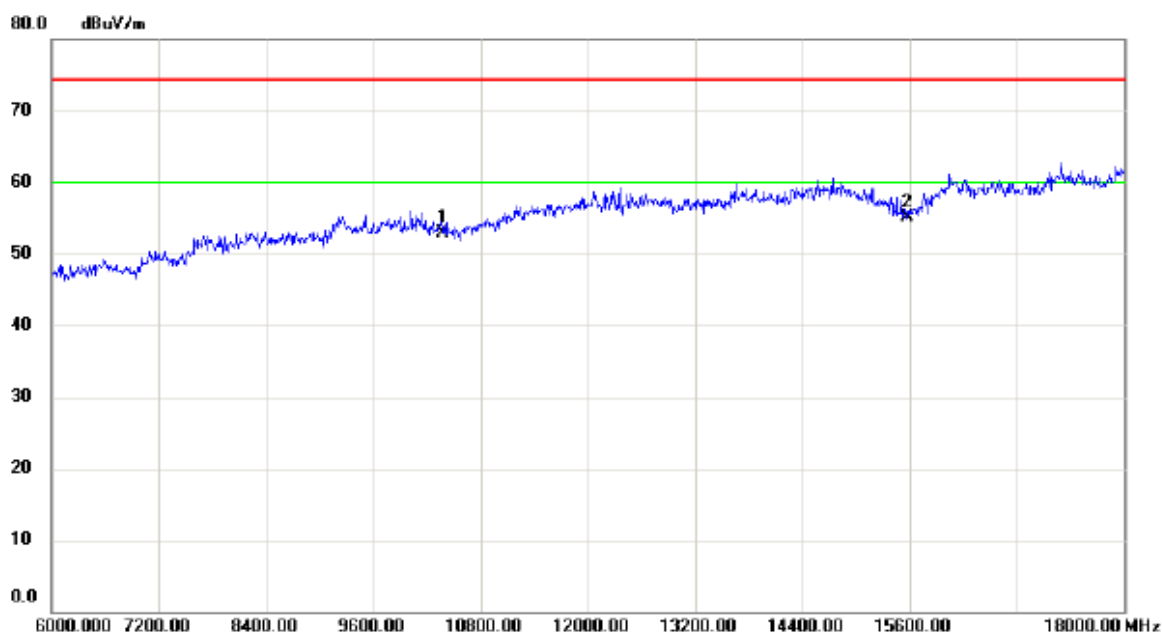


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10380.00	39.08	13.83	52.91	74.30	-21.39	peak	
2	*	15570.00	38.12	17.00	55.12	74.30	-19.18	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5190MHz

Horizontal

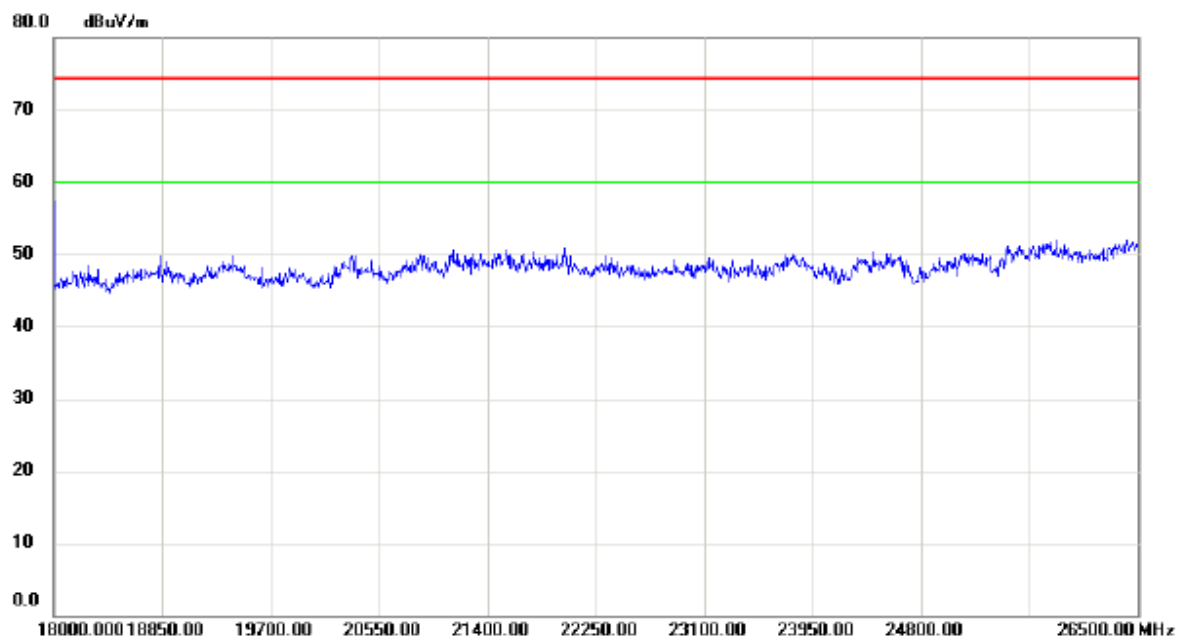


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

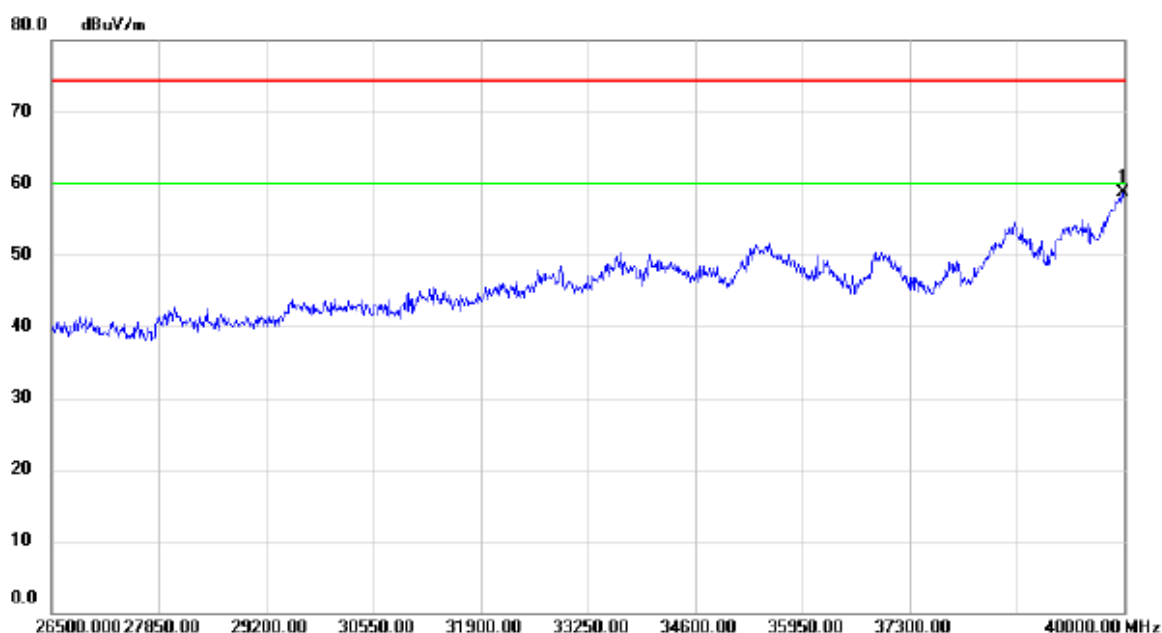

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	41.22	17.56	58.78	74.30	-15.52	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5230MHz


Vertical

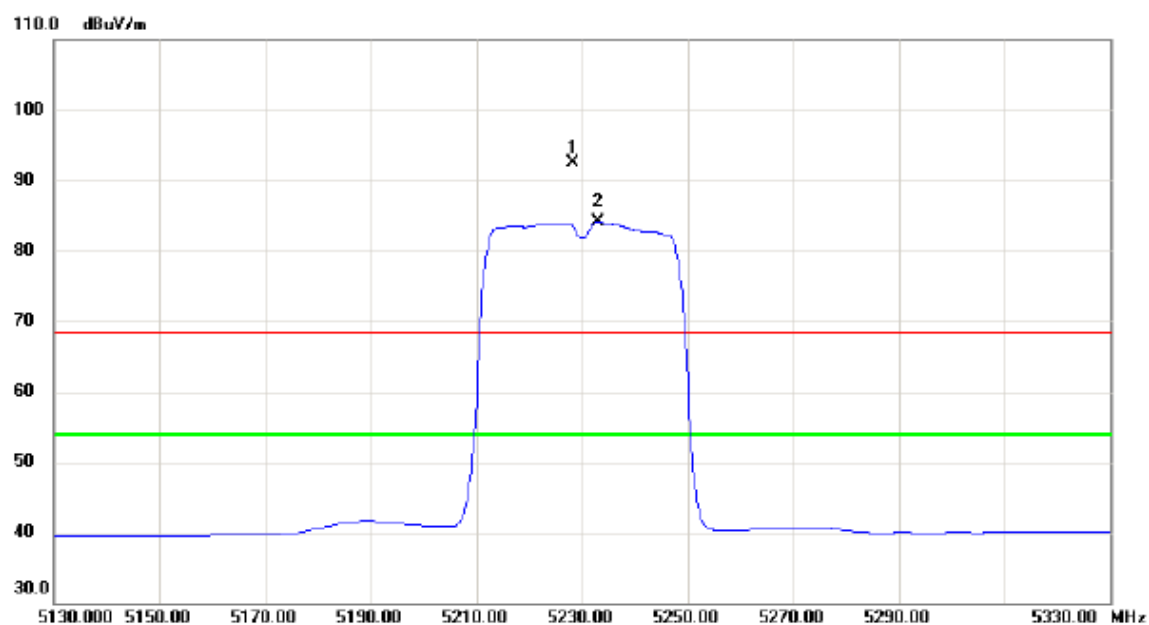


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5228.200	52.10	40.39	92.49	68.30	24.19	peak	No Limit
2	*	5233.000	43.63	40.39	84.02	54.00	30.02	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5230MHz

Vertical

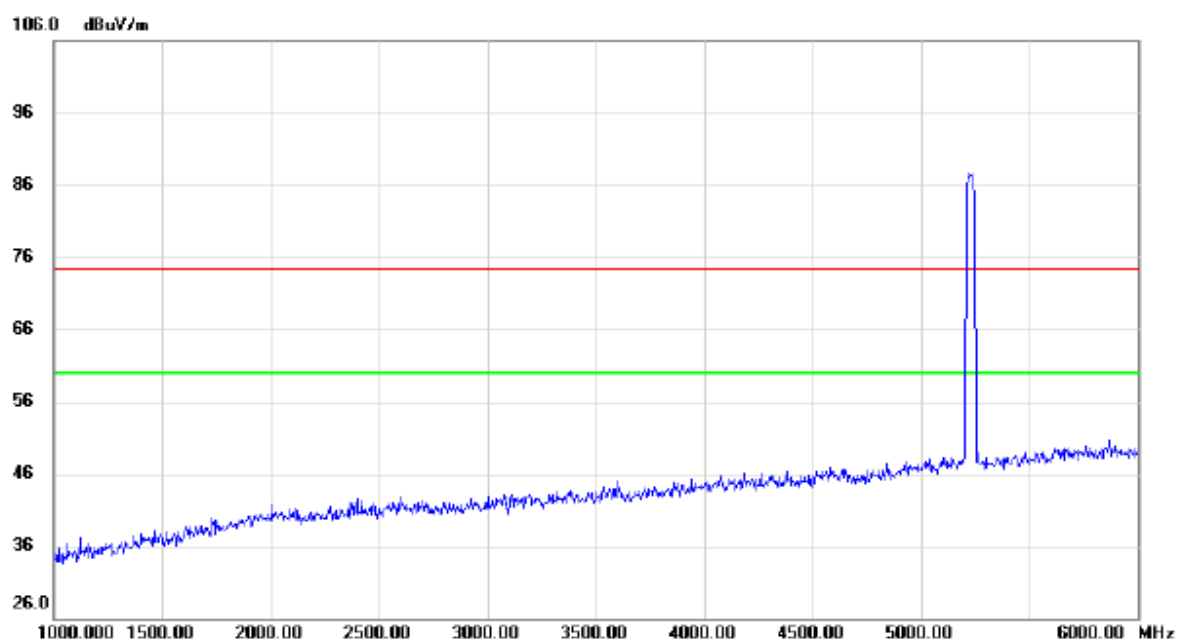


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

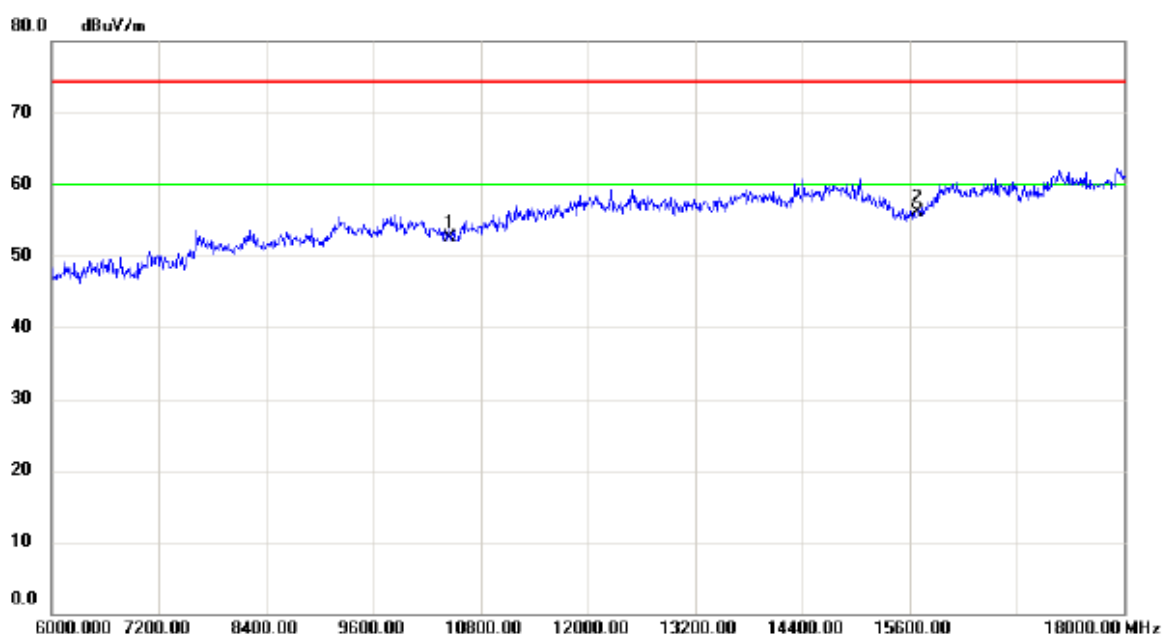


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10460.00	38.78	13.71	52.49	74.30	-21.81	peak	
2	*	15690.00	38.40	17.63	56.03	74.30	-18.27	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5230MHz

Vertical

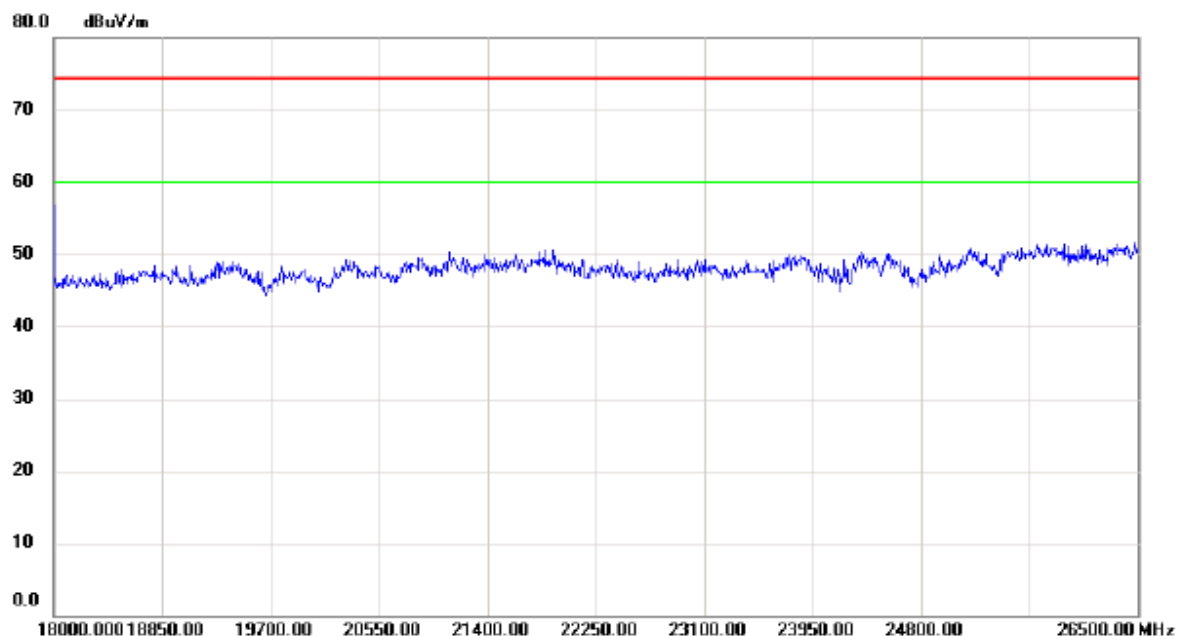


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

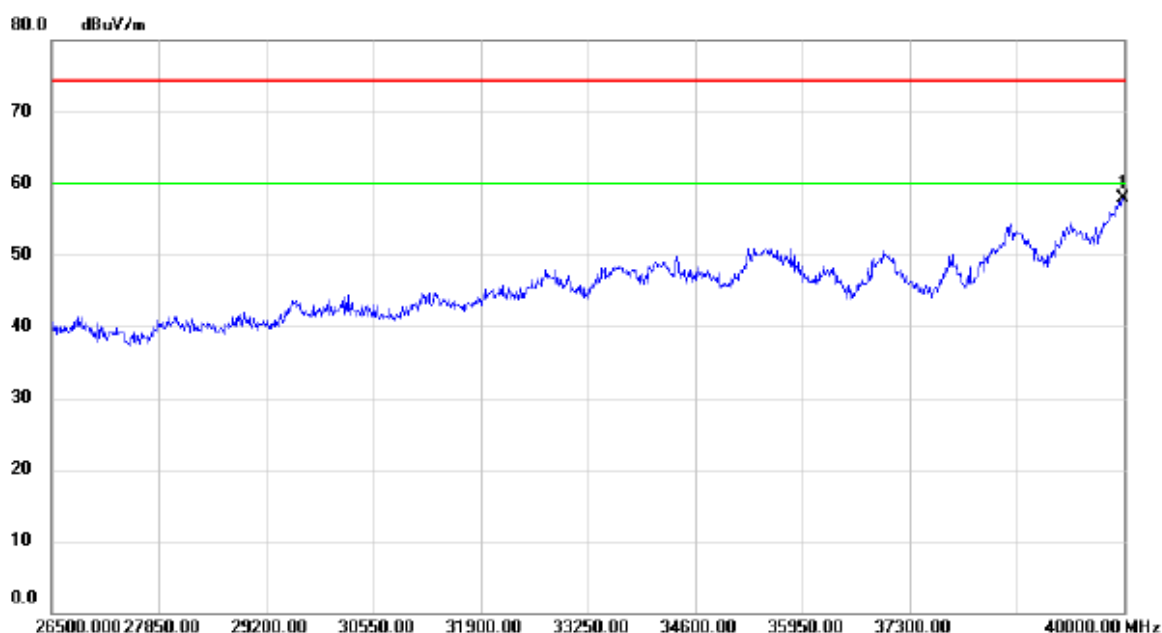

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	40.40	17.56	57.96	74.30	-16.34	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5230MHz


Horizontal

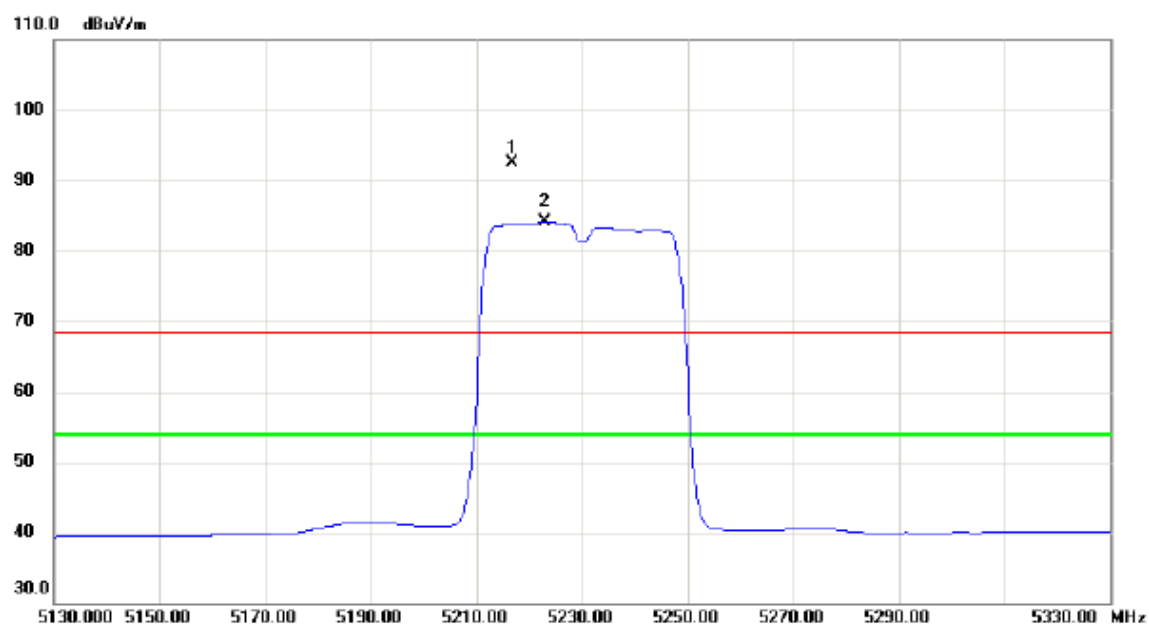


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5216.800	52.24	40.36	92.60	68.30	24.30	peak	No Limit
2	*	5223.000	43.70	40.38	84.08	54.00	30.08	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5230MHz

Horizontal

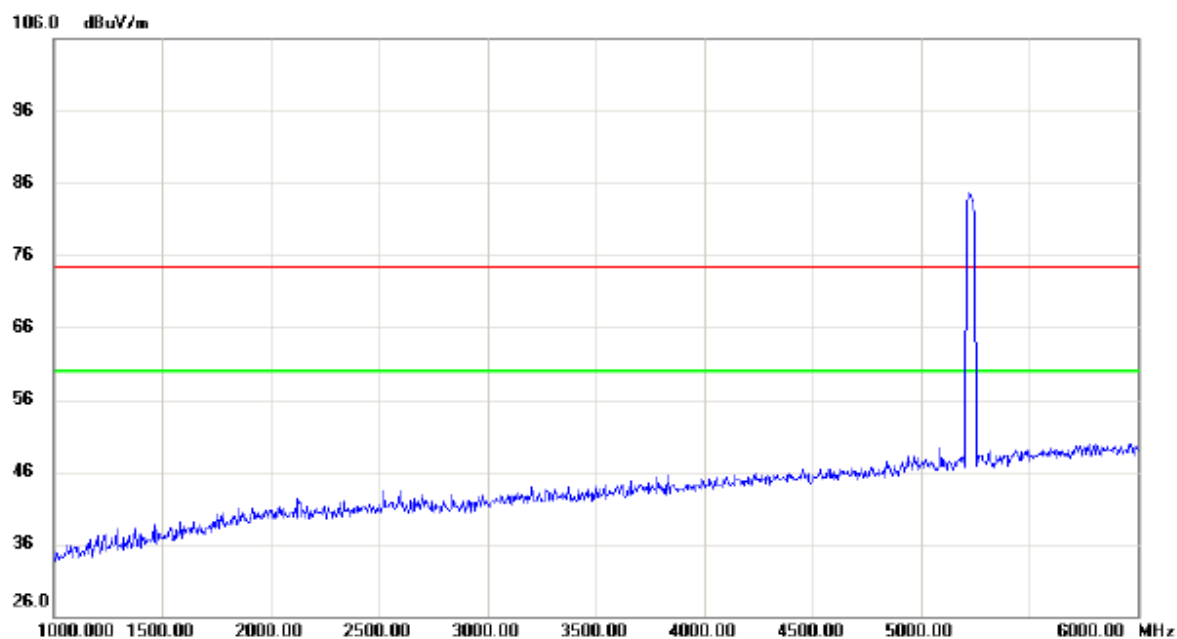


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

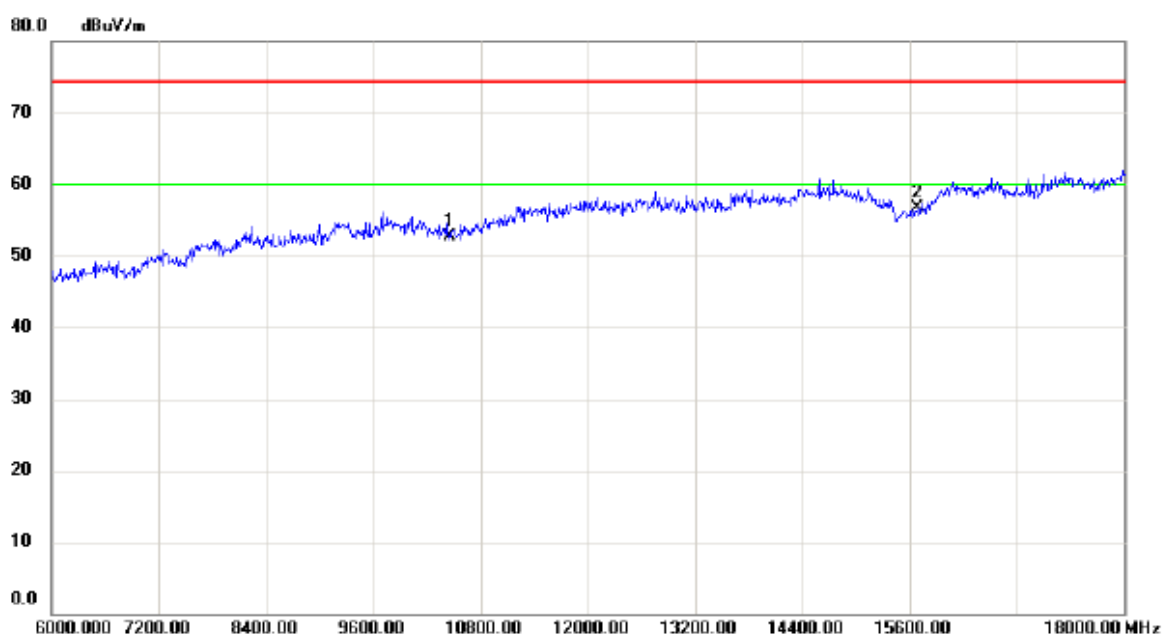


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10460.00	38.95	13.71	52.66	74.30	-21.64	peak	
2	*	15690.00	39.00	17.63	56.63	74.30	-17.67	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT40) Mode 5230MHz

Horizontal

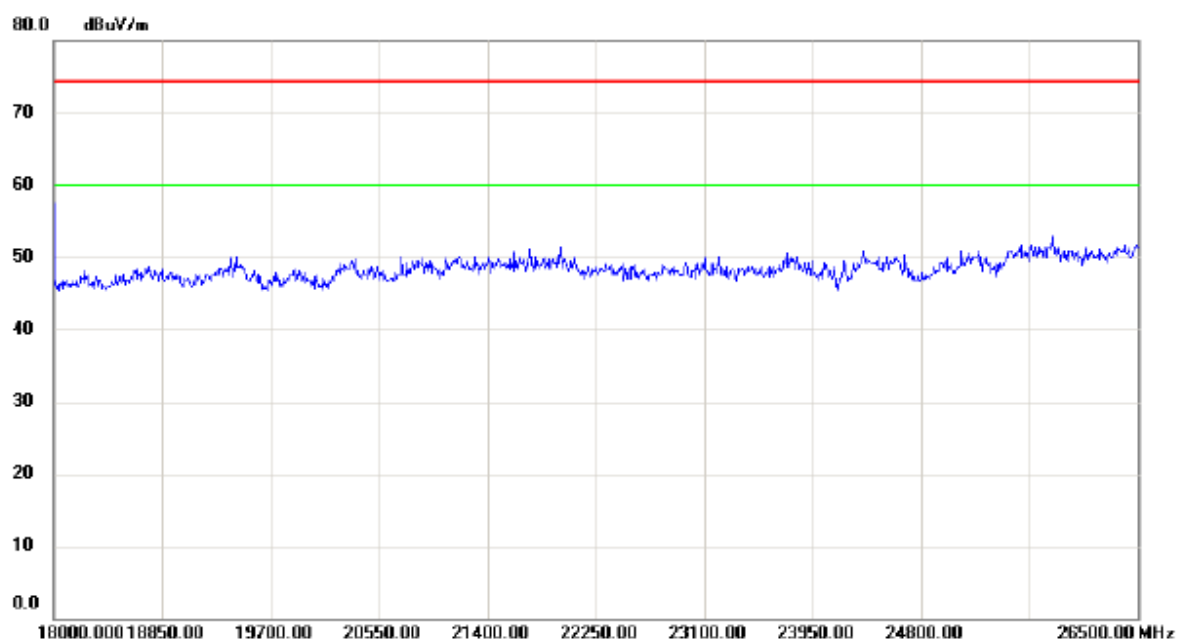


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

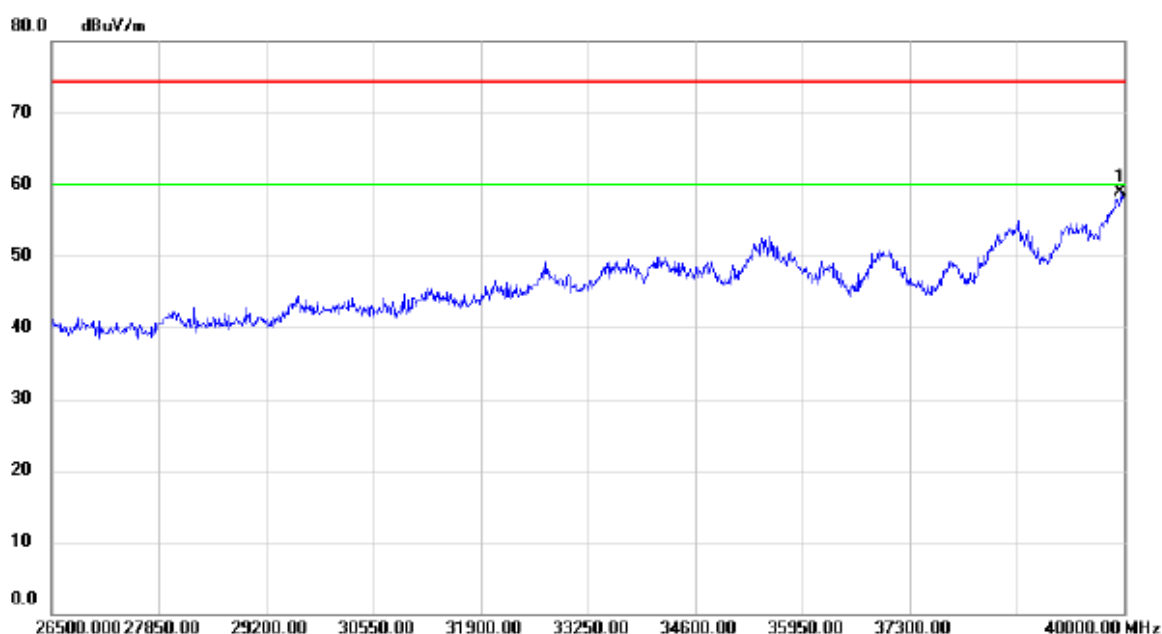

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	41.47	17.50	58.97	74.30	-15.33	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT80) Mode 5210MHz


Vertical

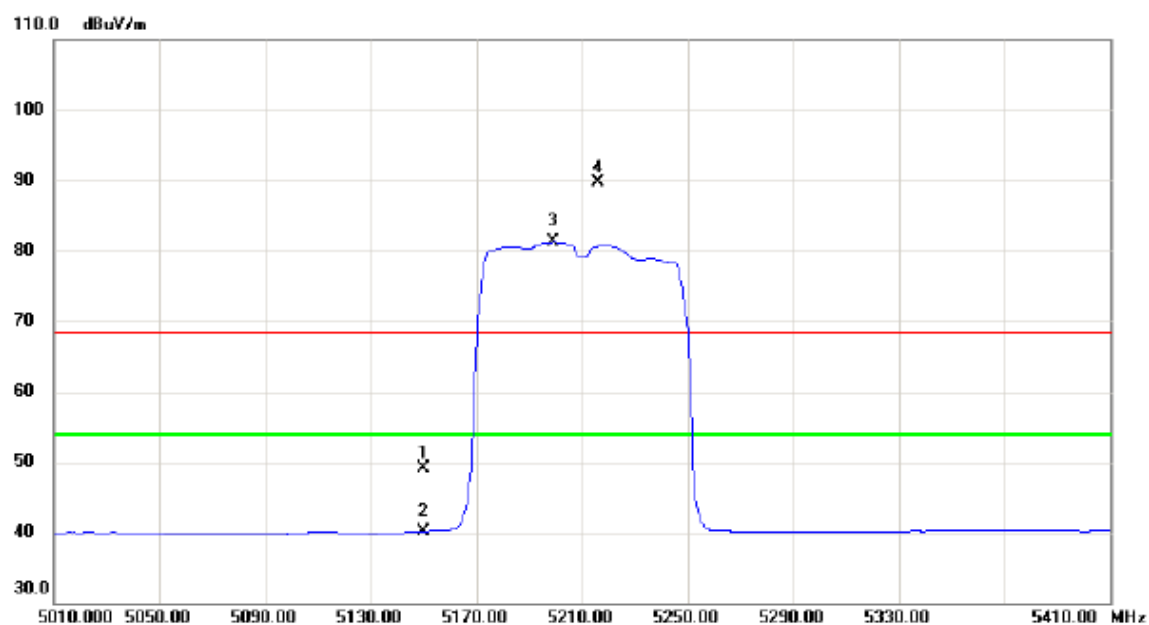


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.92	40.22	49.14	68.30	-19.16	peak	
2		5150.000	-0.06	40.22	40.16	54.00	-13.84	AVG	
3	*	5199.200	40.89	40.32	81.21	54.00	27.21	AVG	No Limit
4	X	5216.400	49.37	40.36	89.73	68.30	21.43	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT80) Mode 5210MHz

Vertical

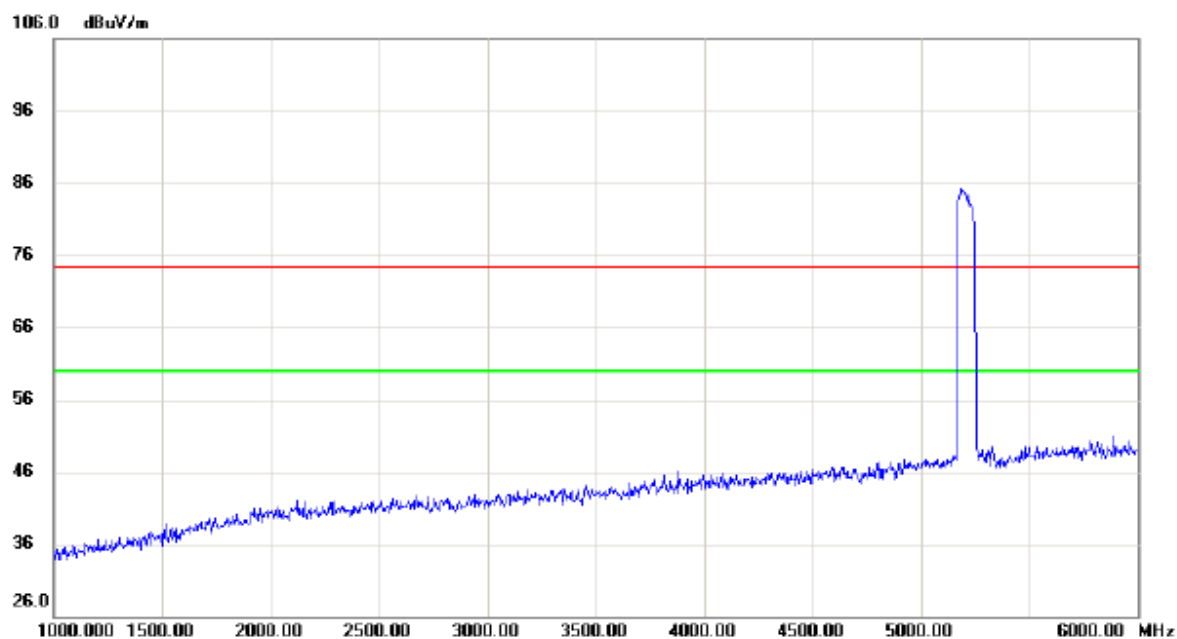


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

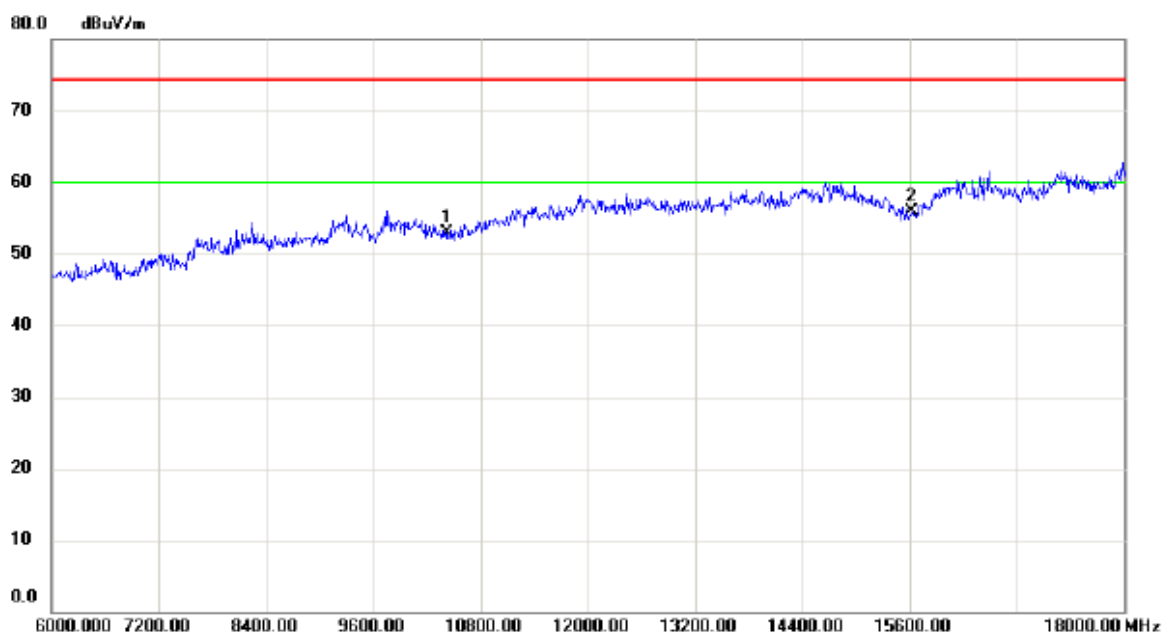


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10420.00	39.14	13.77	52.91	74.30	-21.39	peak	
2	*	15630.00	38.63	17.32	55.95	74.30	-18.35	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT80) Mode 5210MHz

Vertical

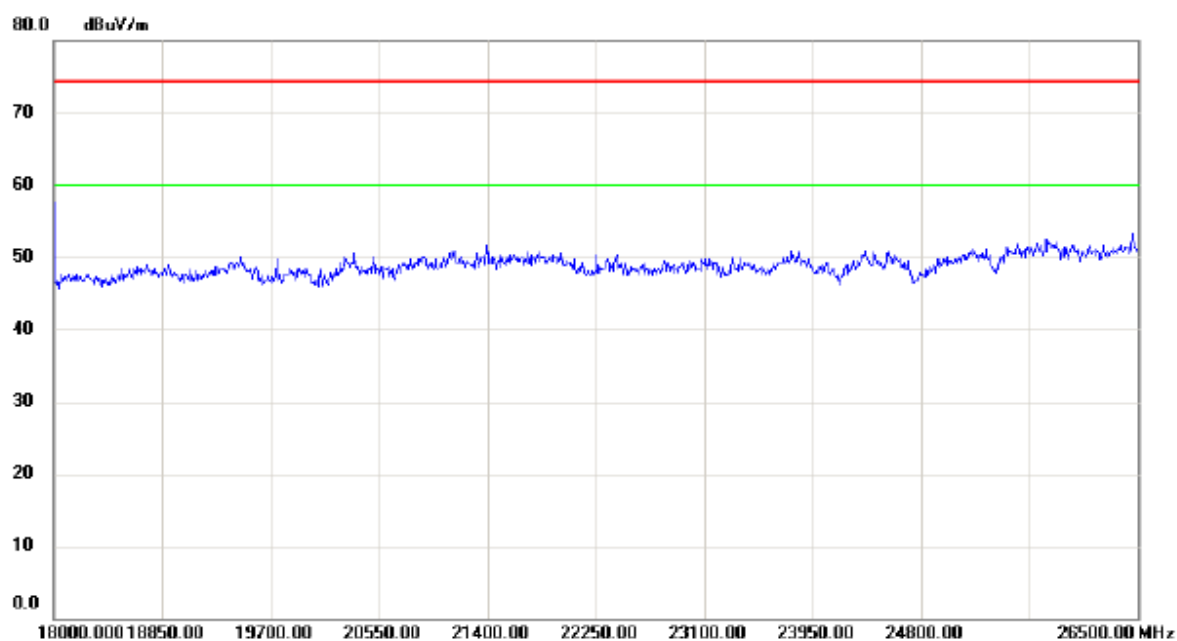


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

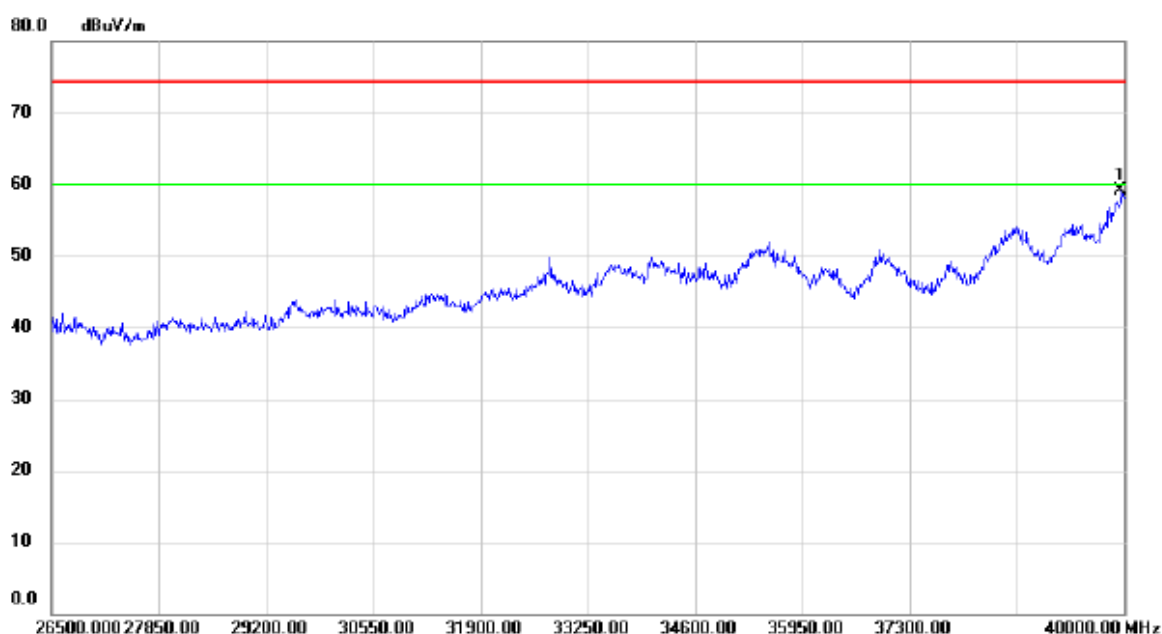

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	41.68	17.50	59.18	74.30	-15.12	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT80) Mode 5210MHz


Horizontal

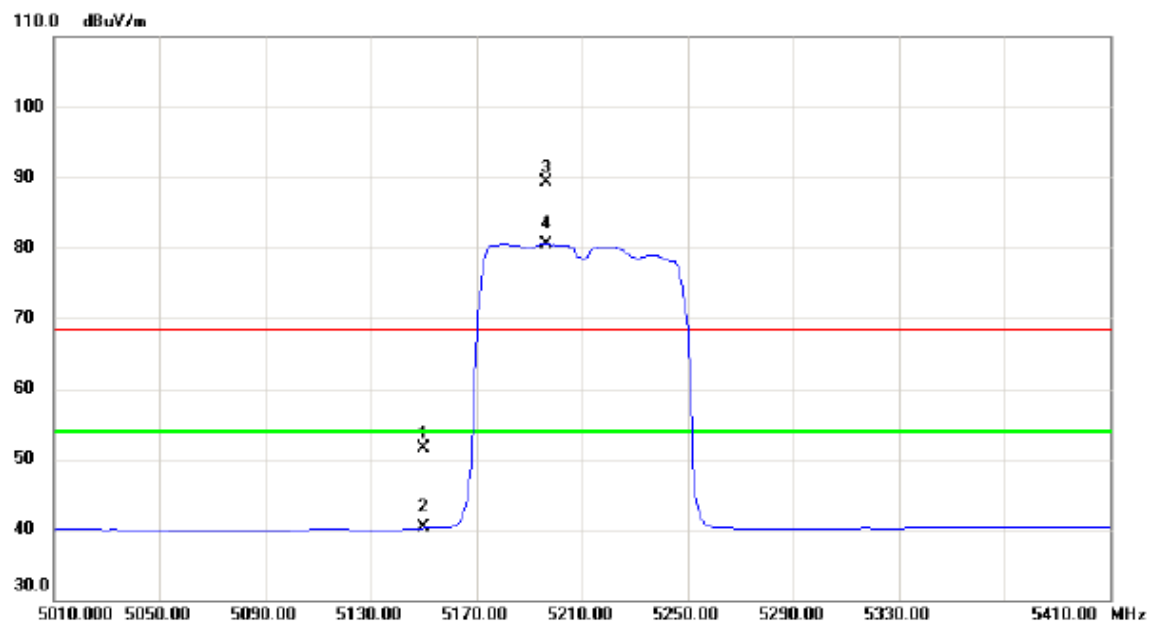


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	11.32	40.22	51.54	68.30	-16.76	peak	
2		5150.000	-0.02	40.22	40.20	54.00	-13.80	AVG	
3	X	5196.400	49.03	40.32	89.35	68.30	21.05	peak	No Limit
4	*	5196.400	40.17	40.32	80.49	54.00	26.49	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT80) Mode 5210MHz

Horizontal

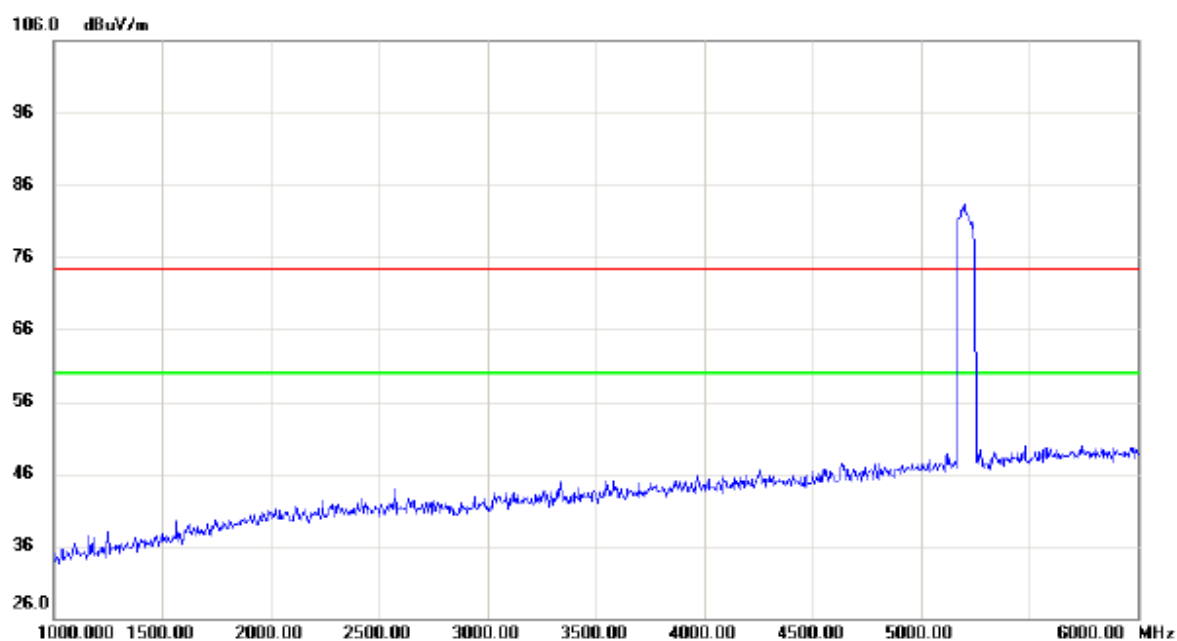


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

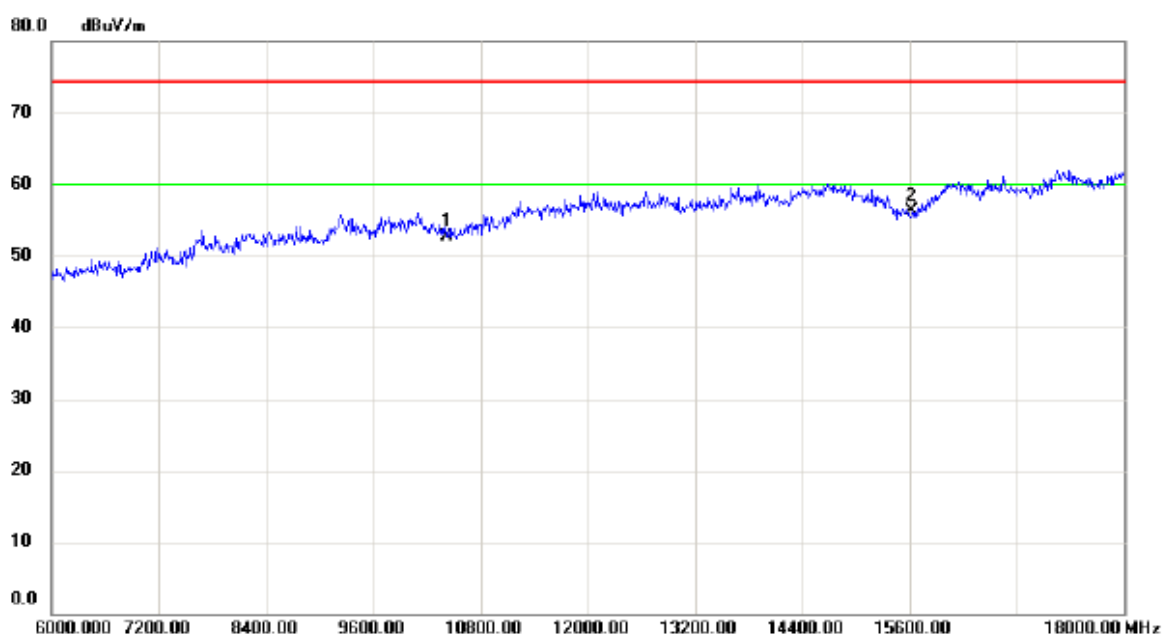


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10420.00	38.85	13.77	52.62	74.30	-21.68	peak	
2	*	15630.00	39.00	17.32	56.32	74.30	-17.98	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC(VHT80) Mode 5210MHz

Horizontal

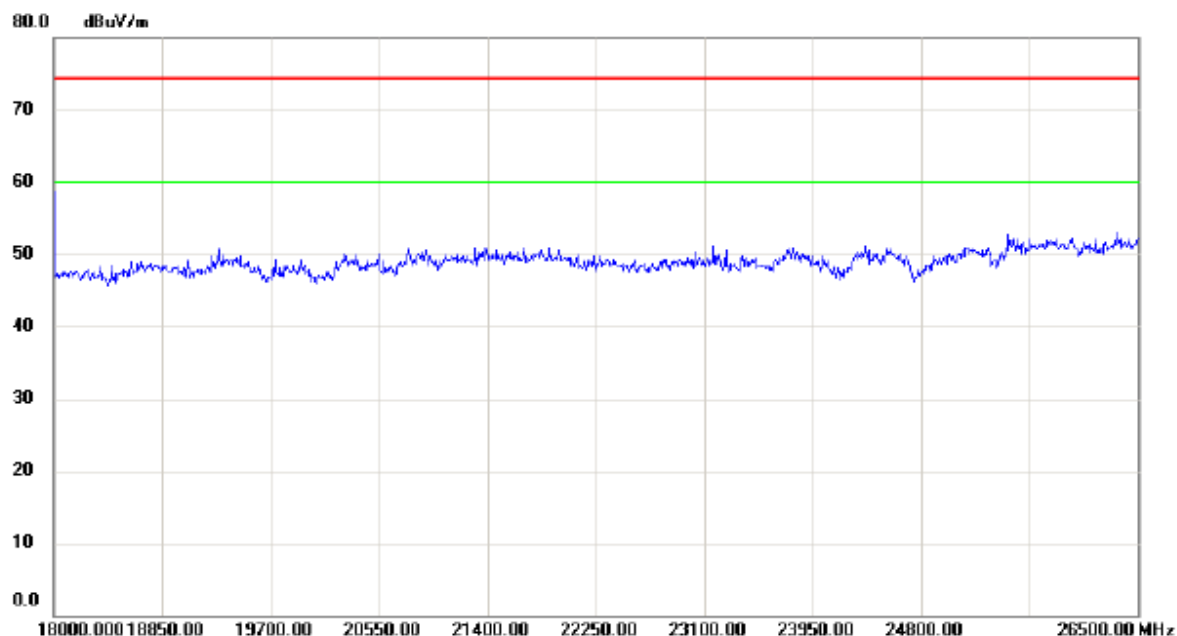


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

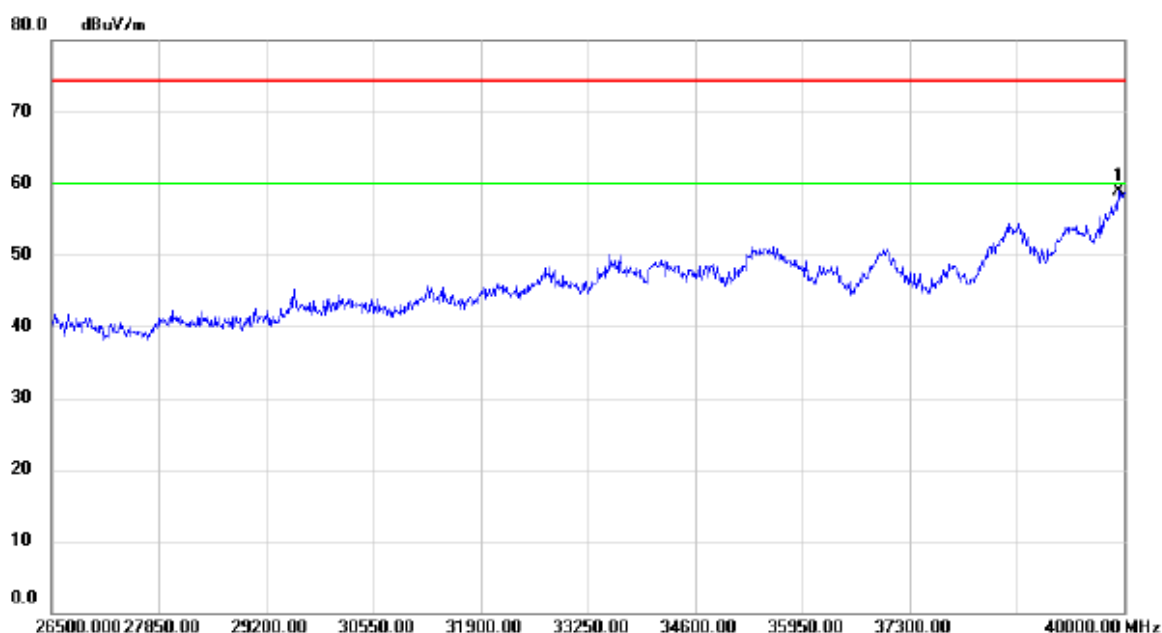

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	41.48	17.43	58.91	74.30	-15.39	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

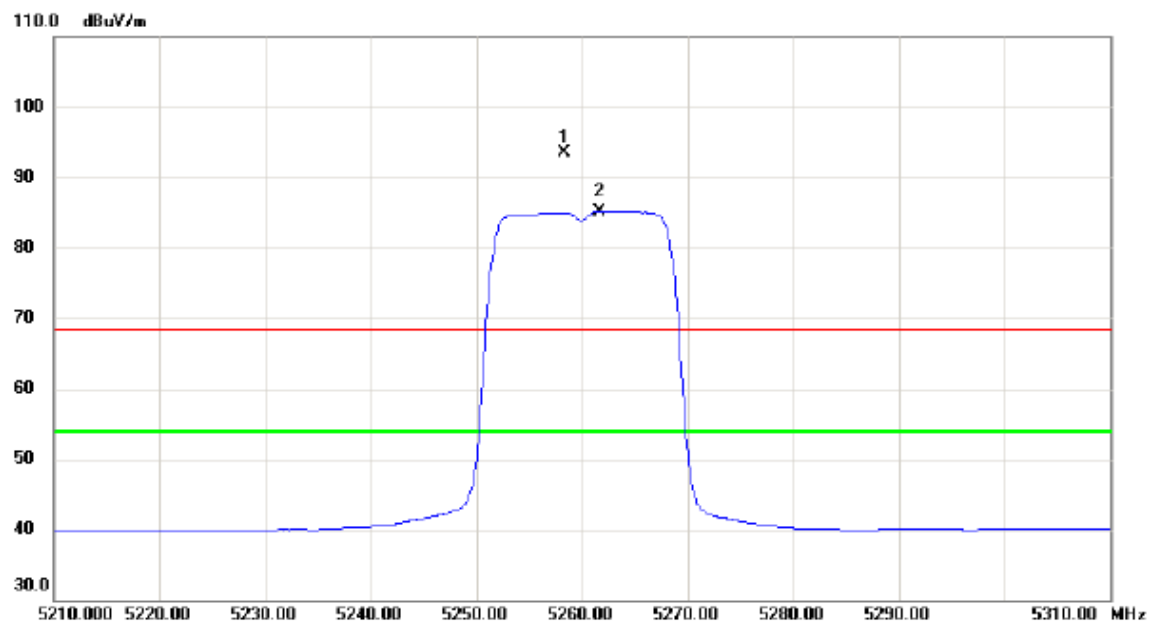


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5258.300	52.98	40.45	93.43	68.30	25.13	peak	No Limit
2	*	5261.600	44.69	40.46	85.15	54.00	31.15	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

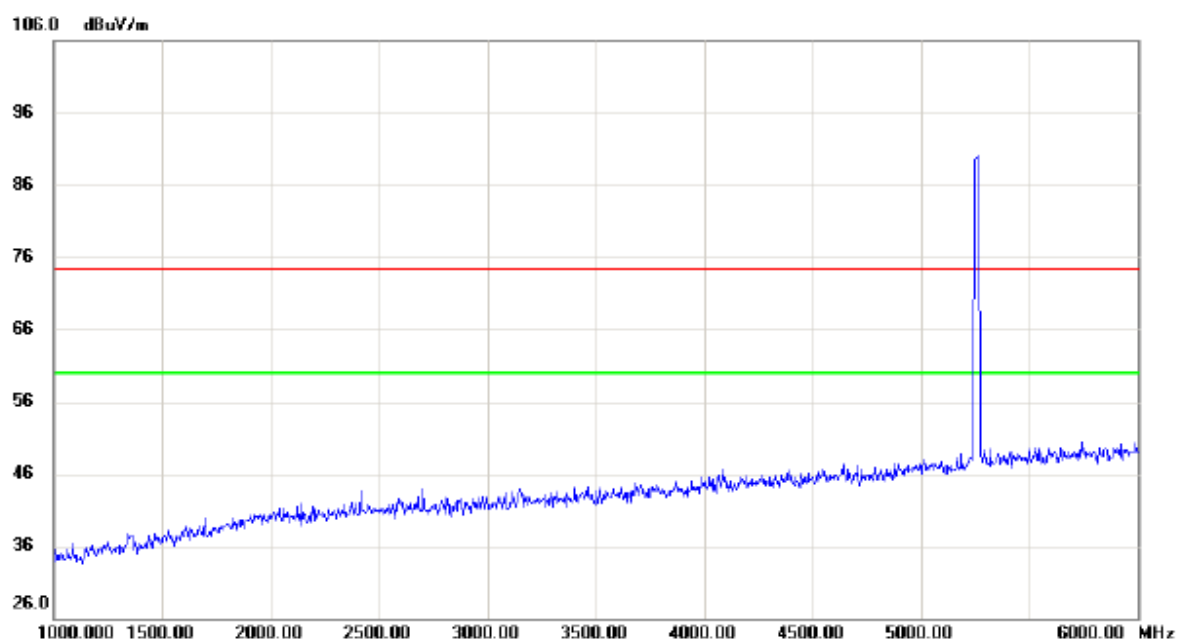


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

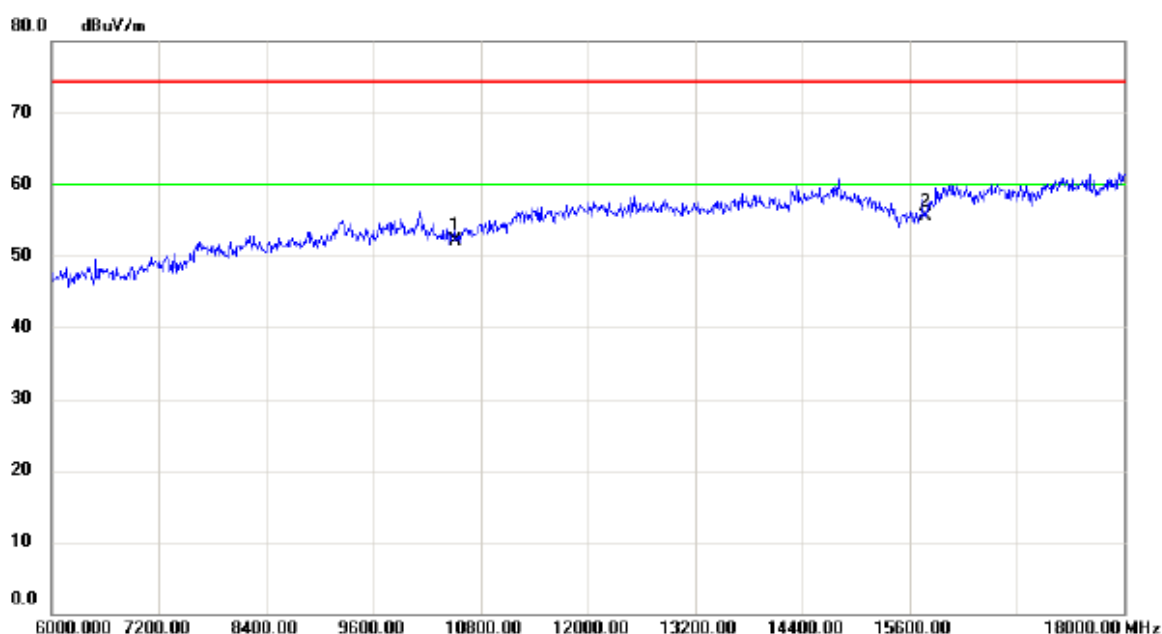


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10520.00	38.43	13.75	52.18	74.30	-22.12	peak	
2	*	15780.00	37.33	18.10	55.43	74.30	-18.87	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

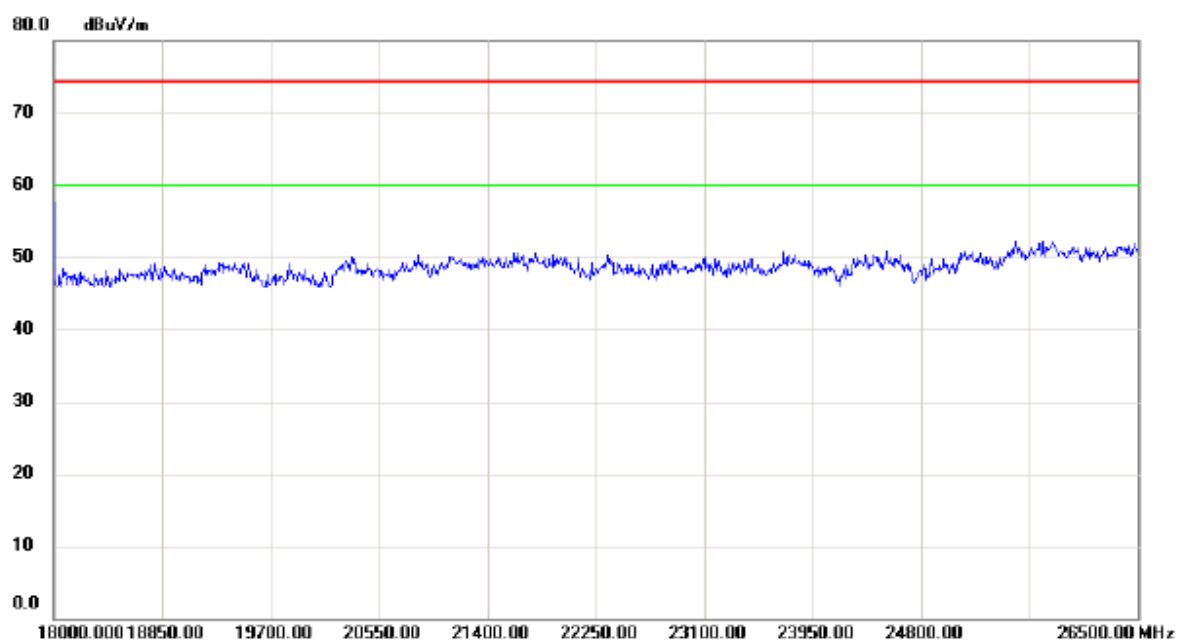


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

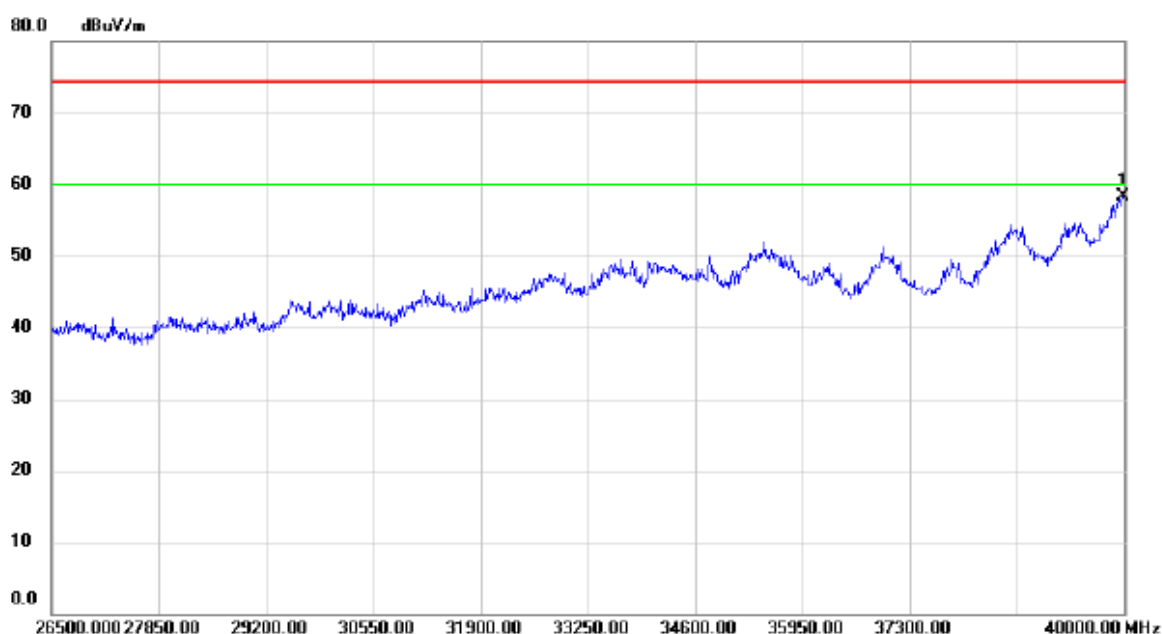

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	40.79	17.56	58.35	74.30	-15.95	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

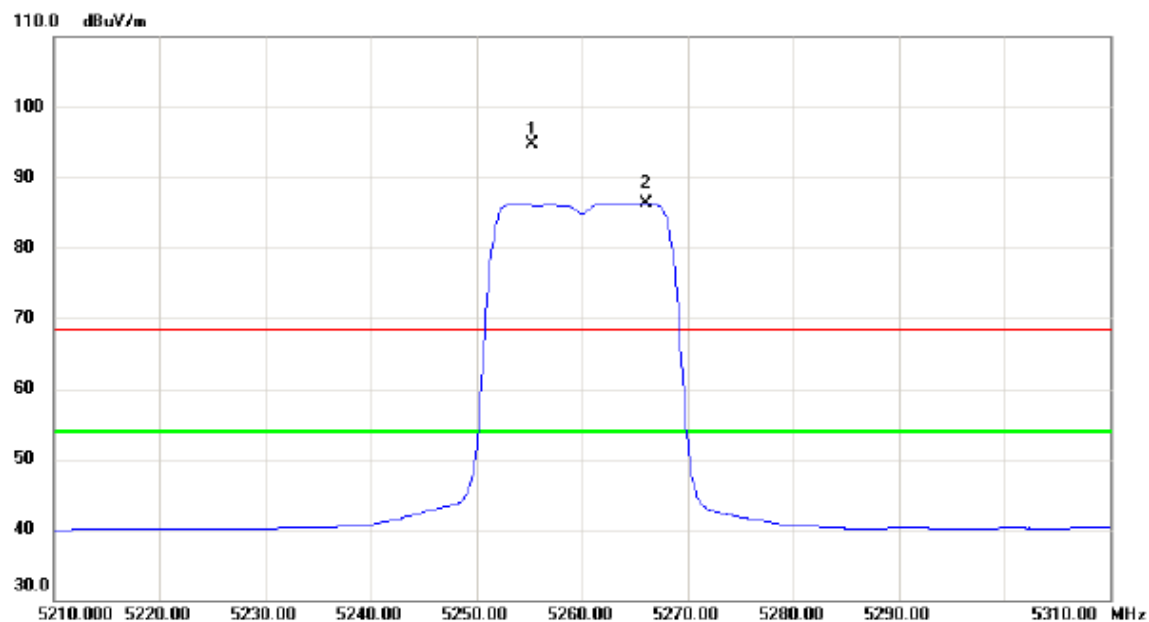


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5255.300	54.32	40.44	94.76	68.30	26.46	peak	No Limit
2	*	5266.100	45.78	40.47	86.25	54.00	32.25	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

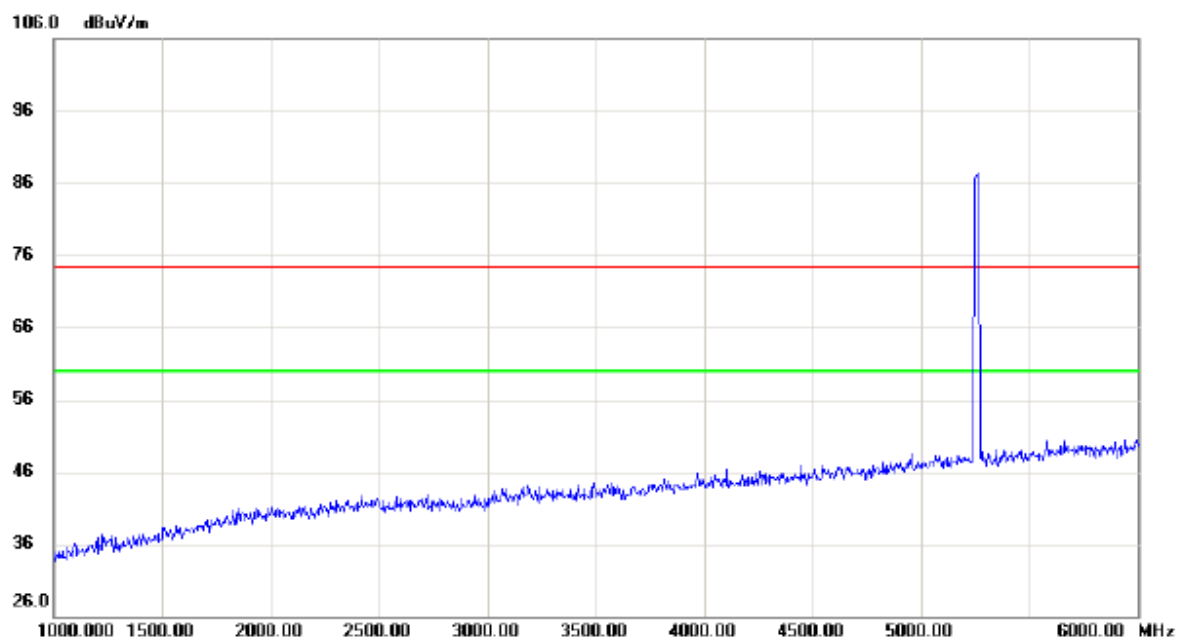


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

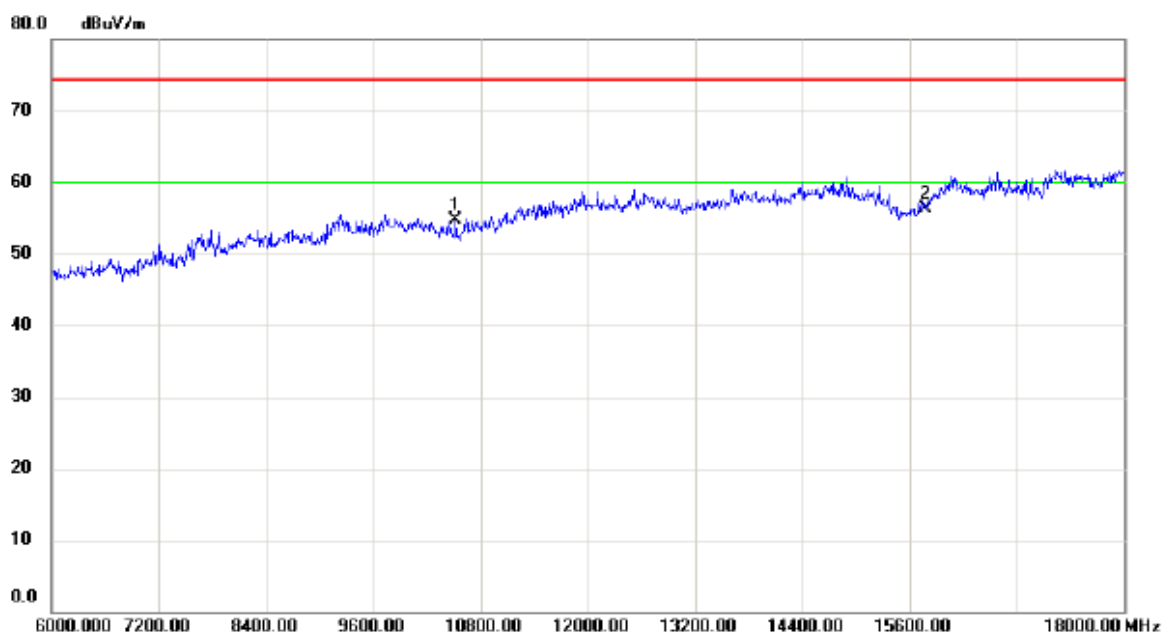


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10520.00	40.91	13.75	54.66	74.30	-19.64	peak	
2	*	15780.00	38.21	18.10	56.31	74.30	-17.99	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

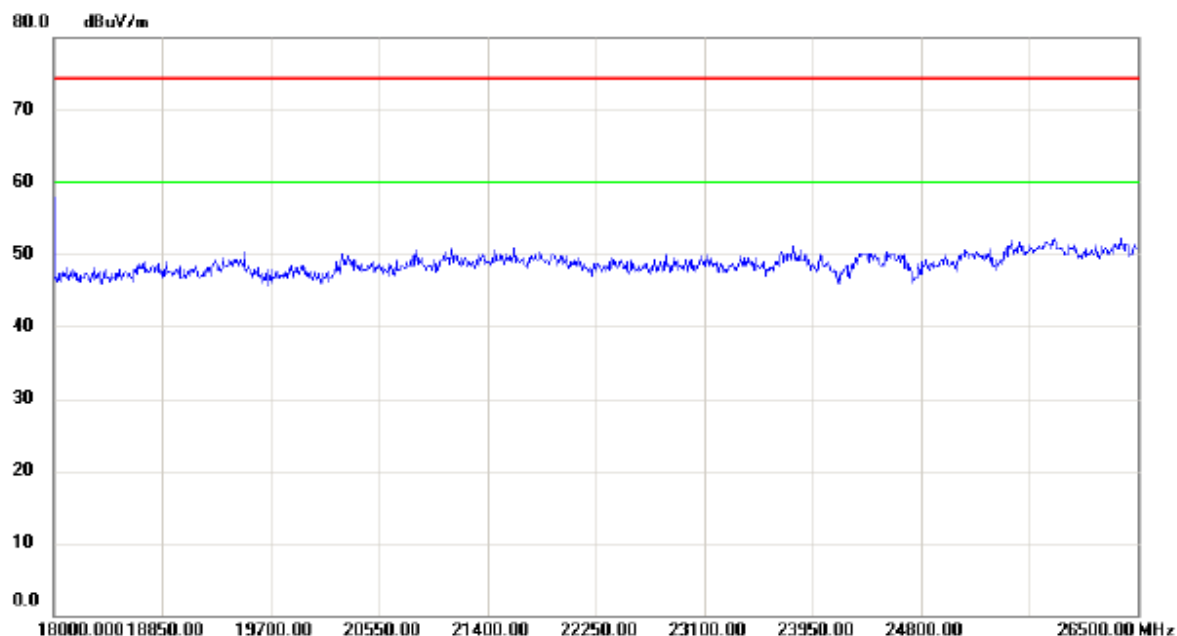


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

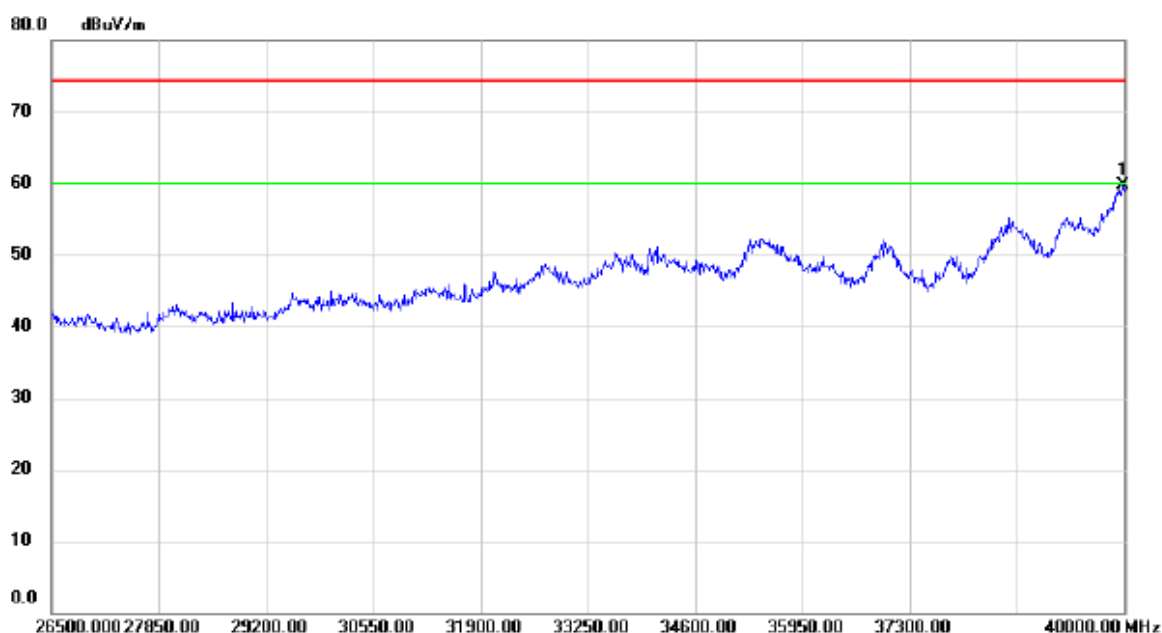

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	42.11	17.56	59.67	74.30	-14.63	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

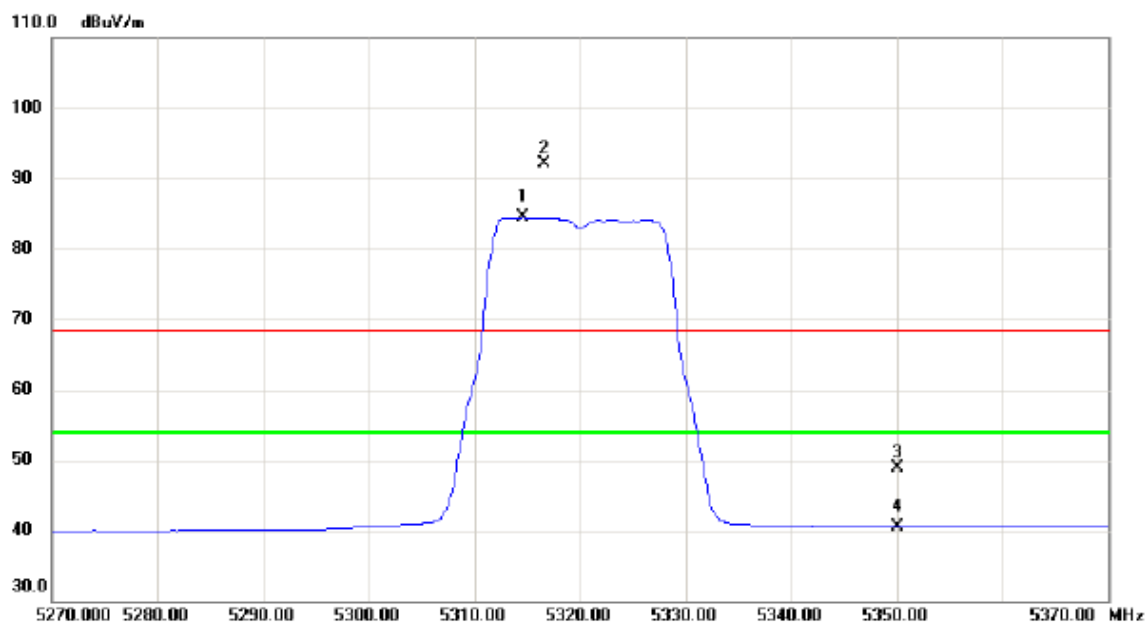


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5314.600	43.84	40.57	84.41	54.00	30.41	AVG	No Limit
2	X	5316.600	51.62	40.57	92.19	68.30	23.89	peak	No Limit
3		5350.000	8.33	40.64	48.97	68.30	-19.33	peak	
4		5350.000	-0.13	40.64	40.51	54.00	-13.49	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

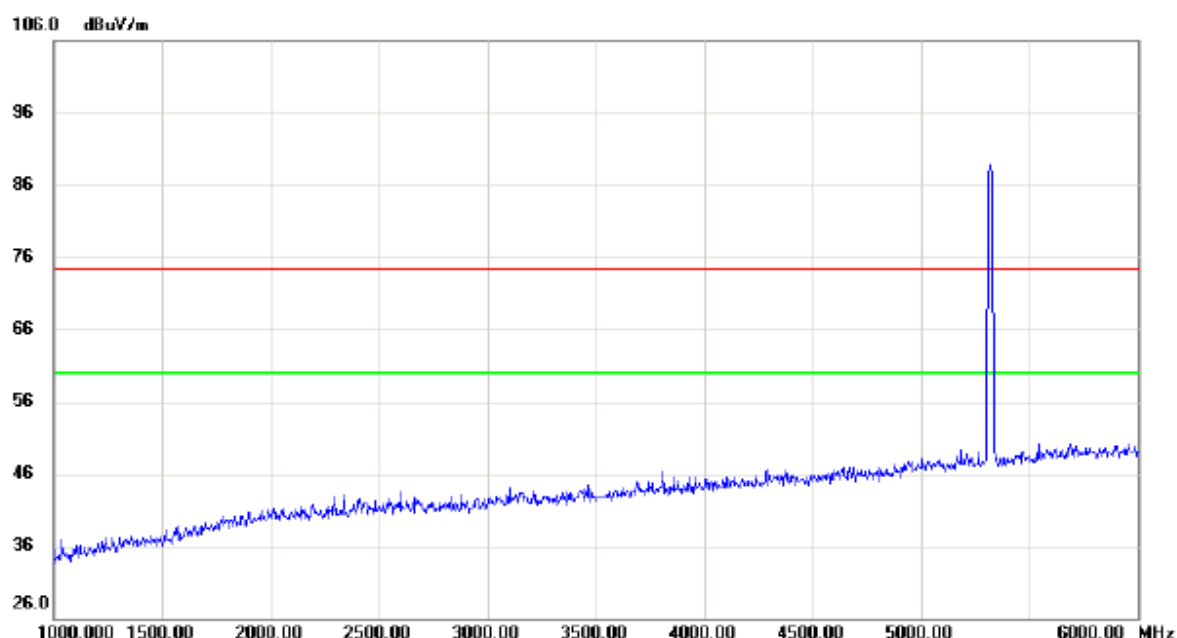


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

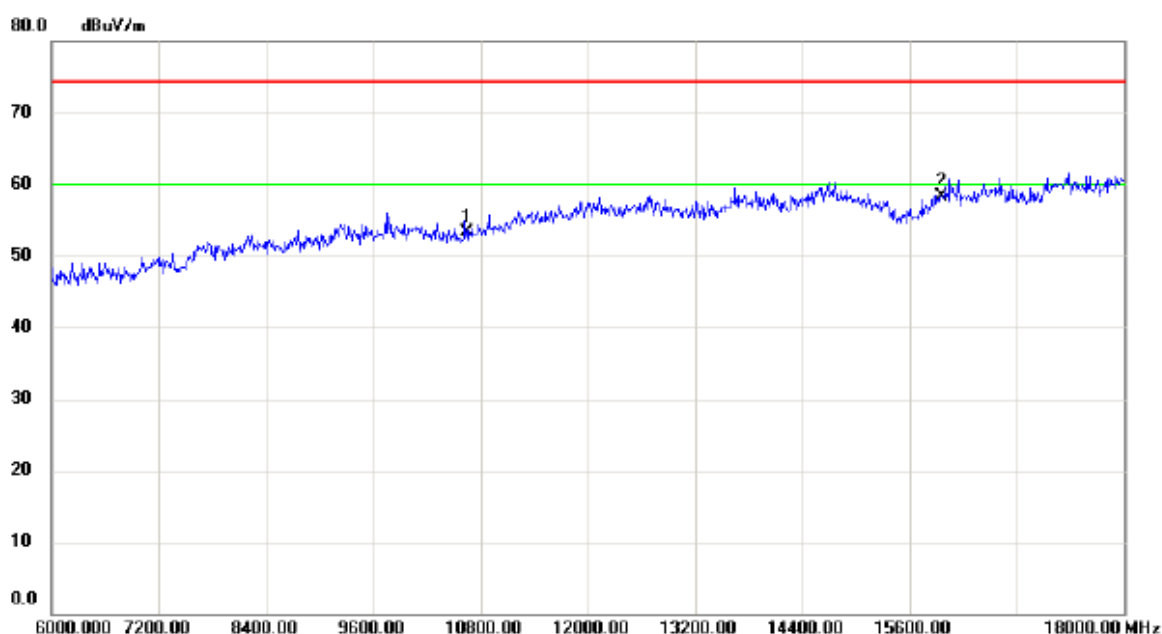


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	39.10	14.25	53.35	74.30	-20.95	peak	
2	*	15960.00	39.20	19.04	58.24	74.30	-16.06	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

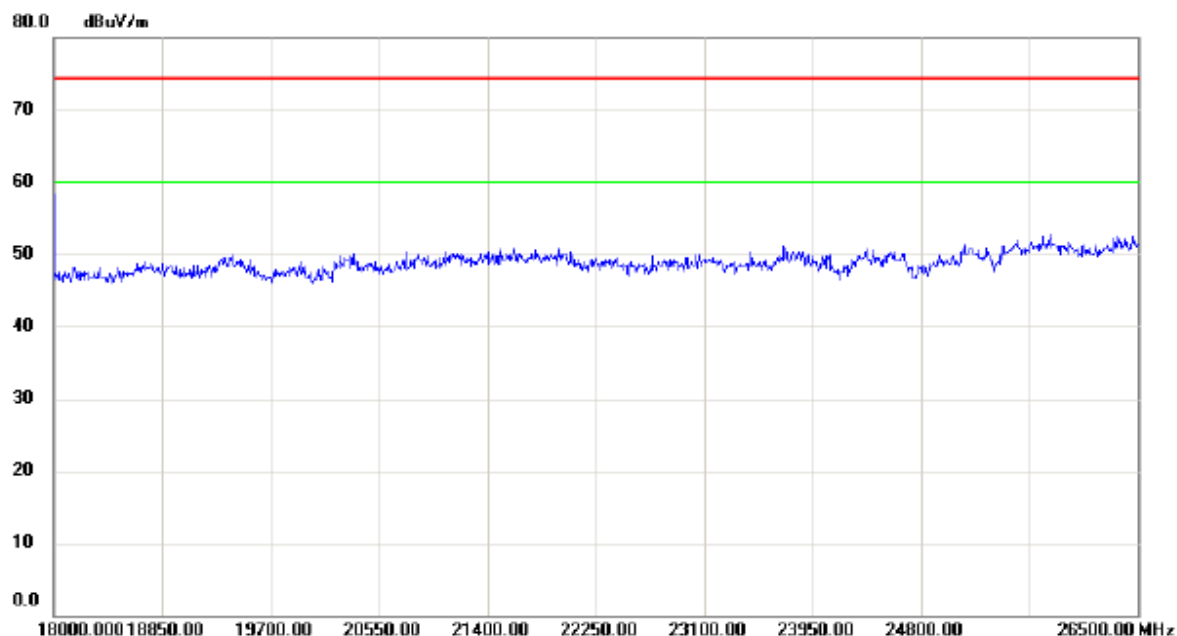


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

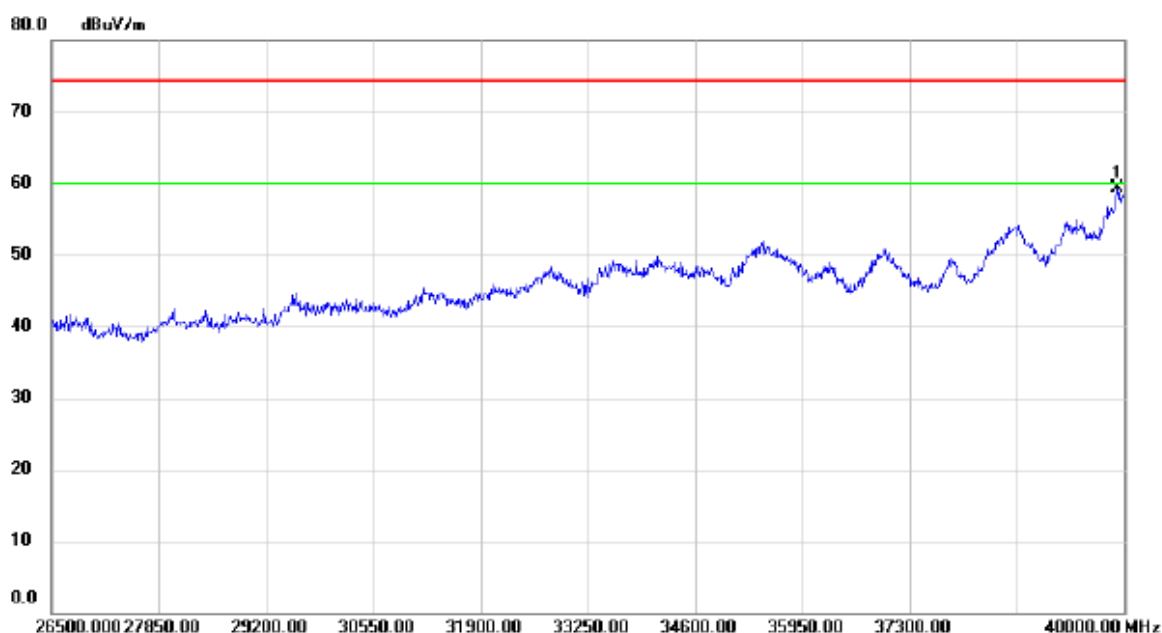

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39919.00	41.87	17.40	59.27	74.30	-15.03	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

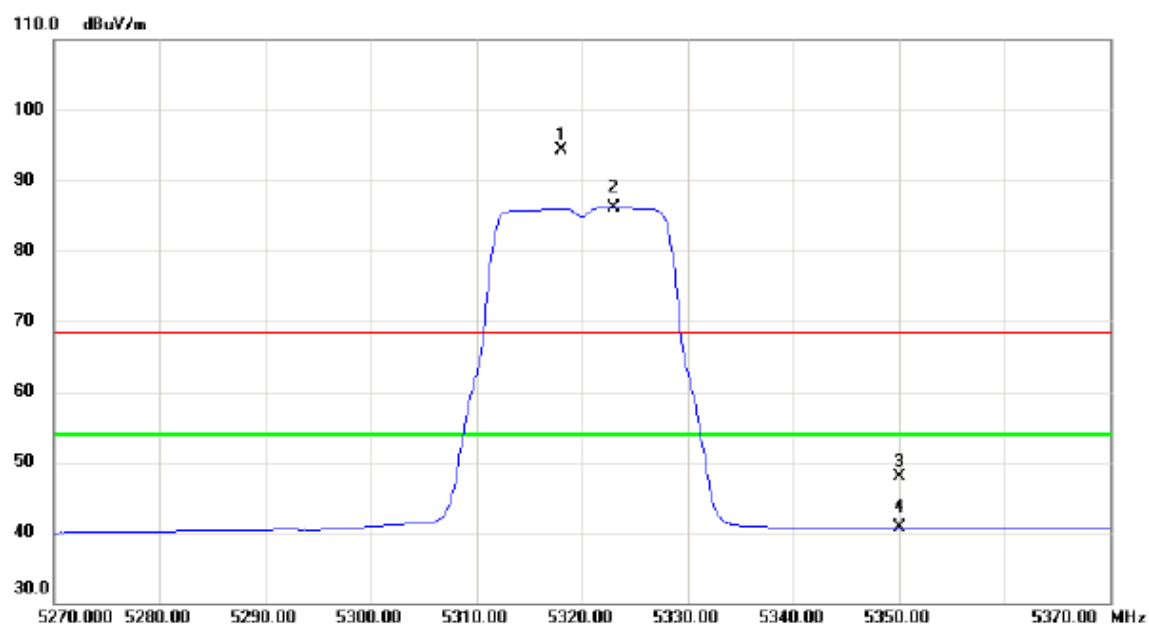


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5318.000	53.64	40.57	94.21	68.30	25.91	peak	No Limit
2	*	5323.000	45.48	40.59	86.07	54.00	32.07	AVG	No Limit
3		5350.000	7.30	40.64	47.94	68.30	-20.36	peak	
4		5350.000	-0.04	40.64	40.60	54.00	-13.40	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

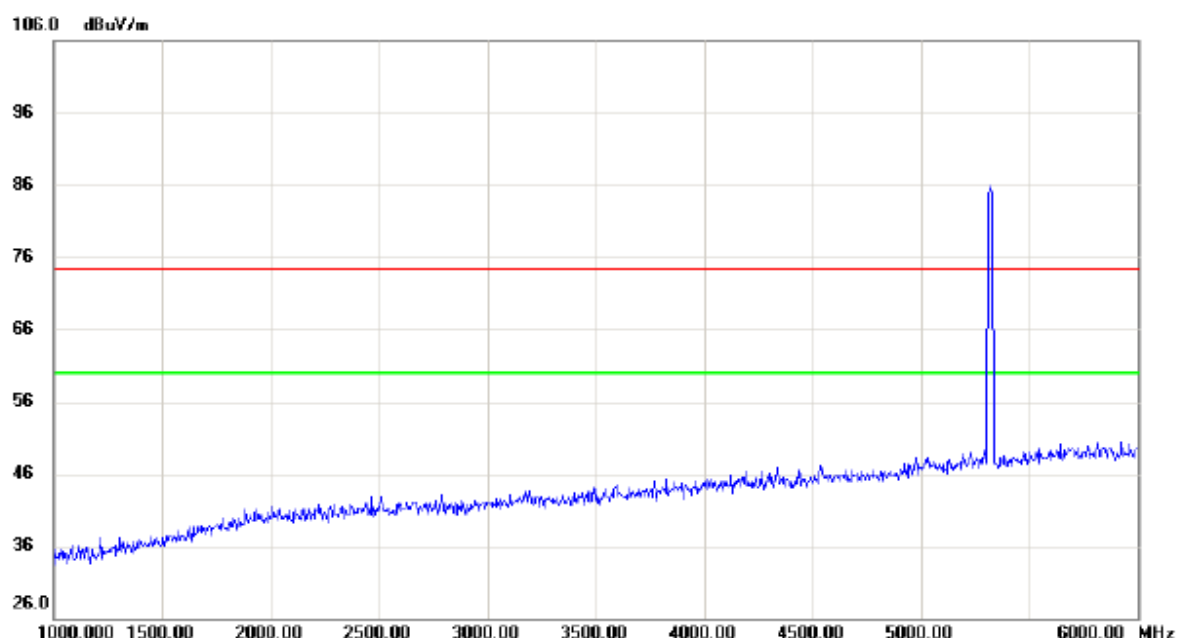


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

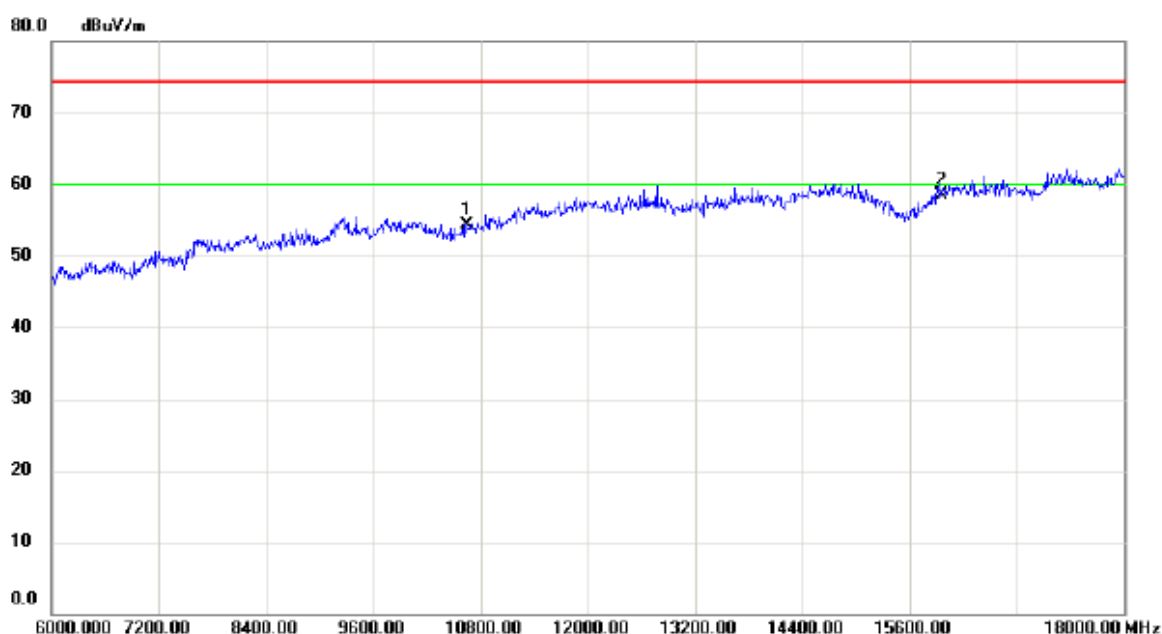


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	40.12	14.25	54.37	74.30	-19.93	peak	
2	*	15960.00	39.54	19.04	58.58	74.30	-15.72	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

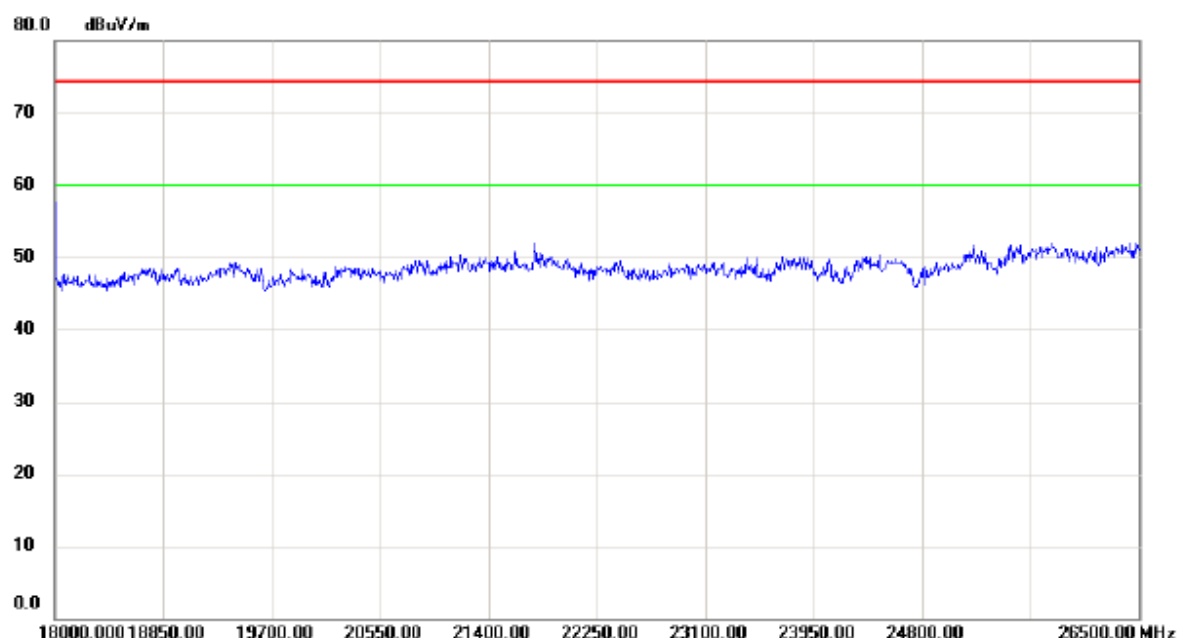


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

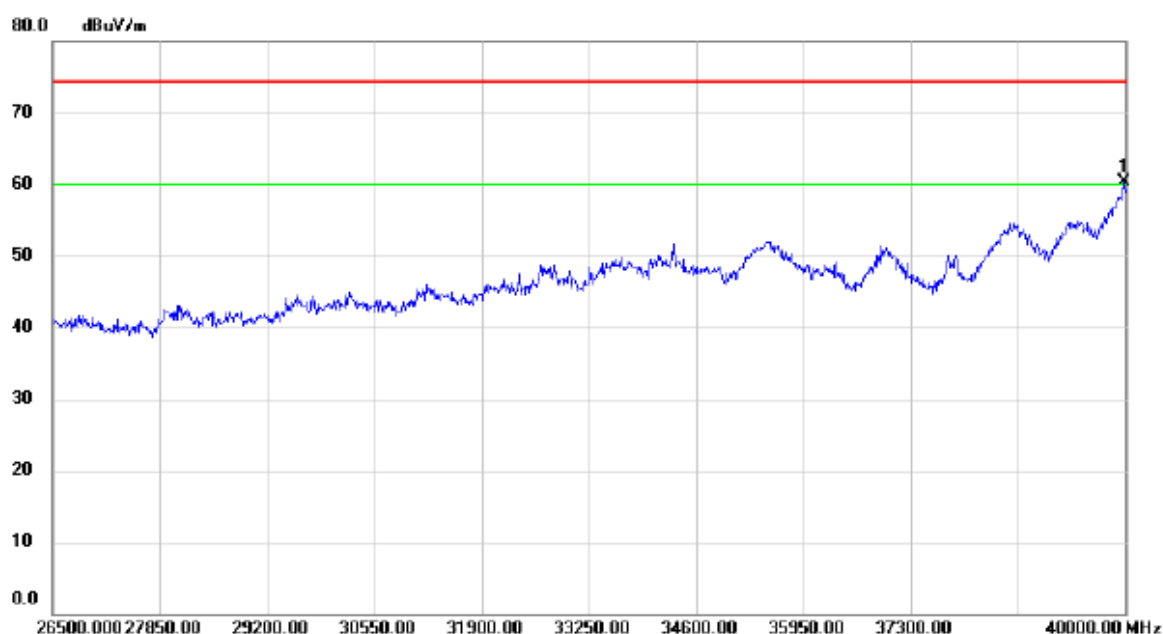

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	42.72	17.56	60.28	74.30	-14.02	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

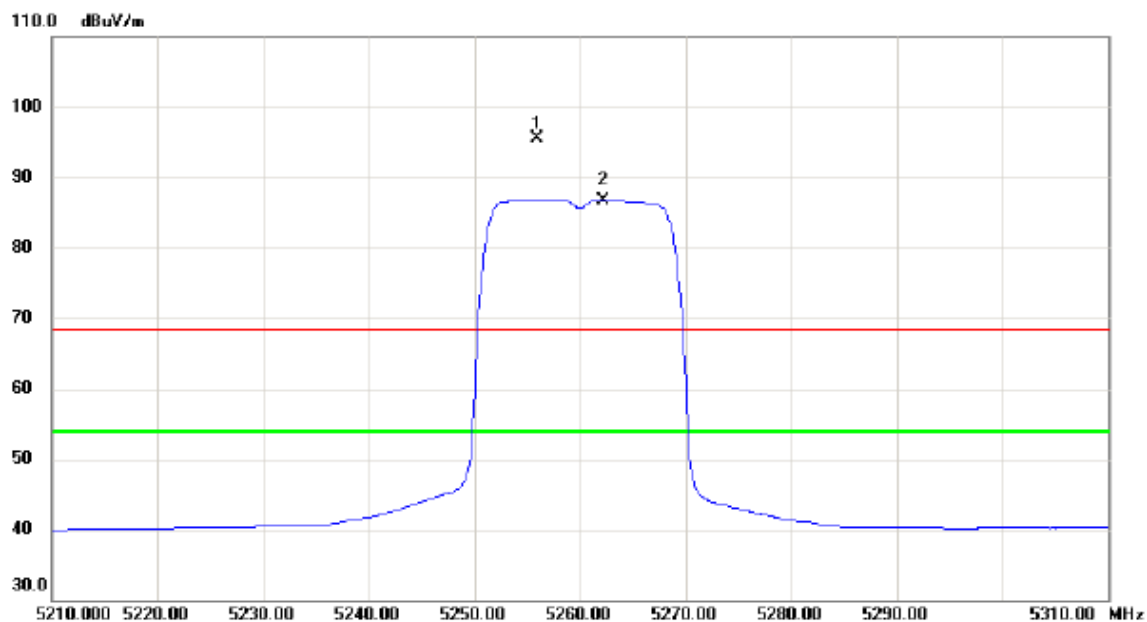


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5255.900	55.07	40.44	95.51	68.30	27.21	peak	No Limit
2	*	5262.200	46.30	40.46	86.76	54.00	32.76	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

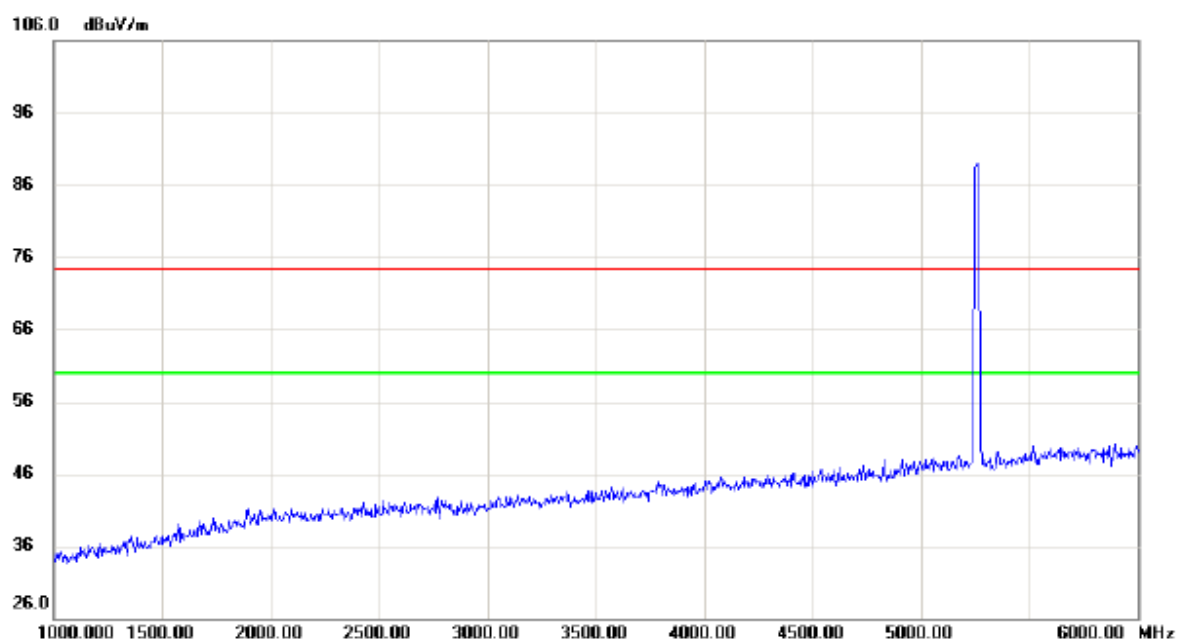


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

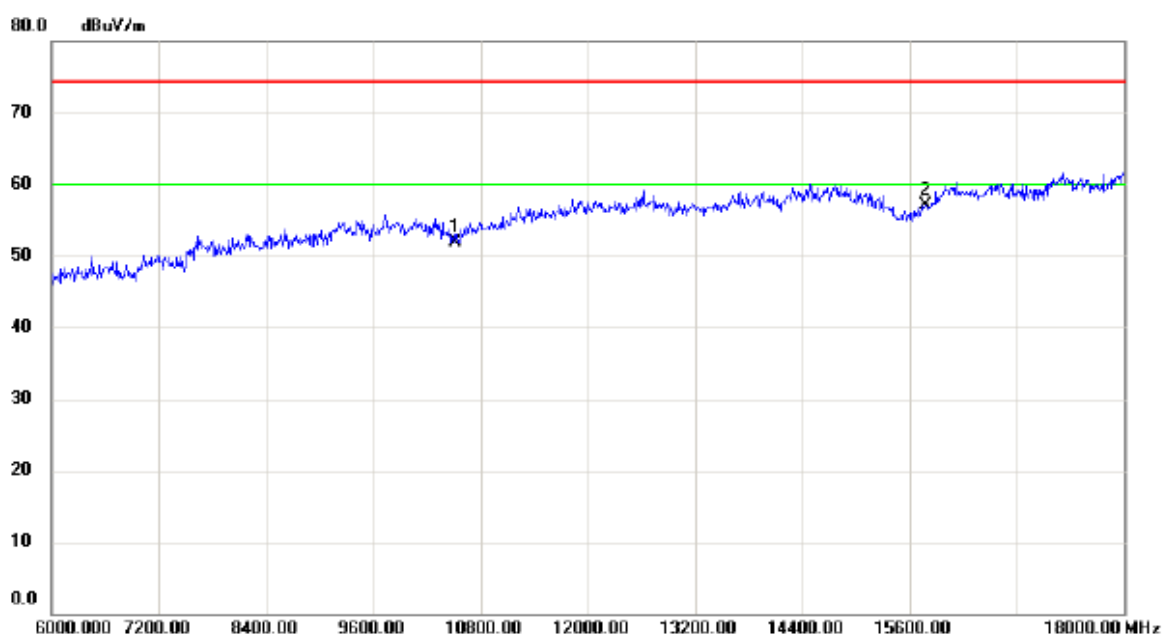


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10520.00	38.06	13.75	51.81	74.30	-22.49	peak	
2	*	15780.00	39.06	18.10	57.16	74.30	-17.14	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

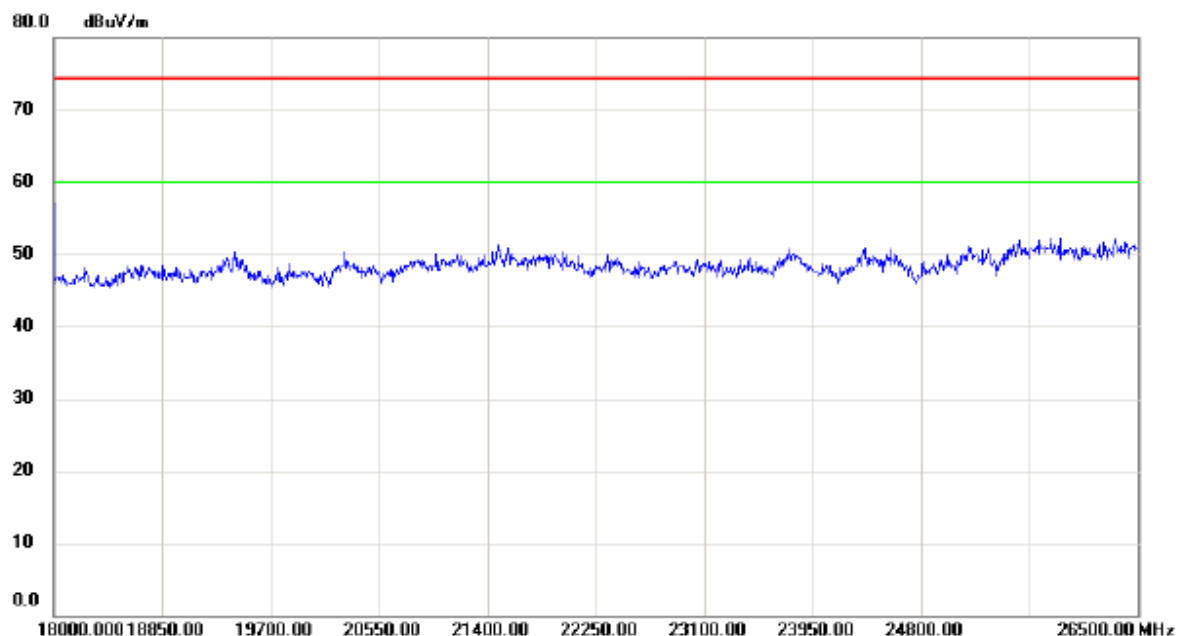


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

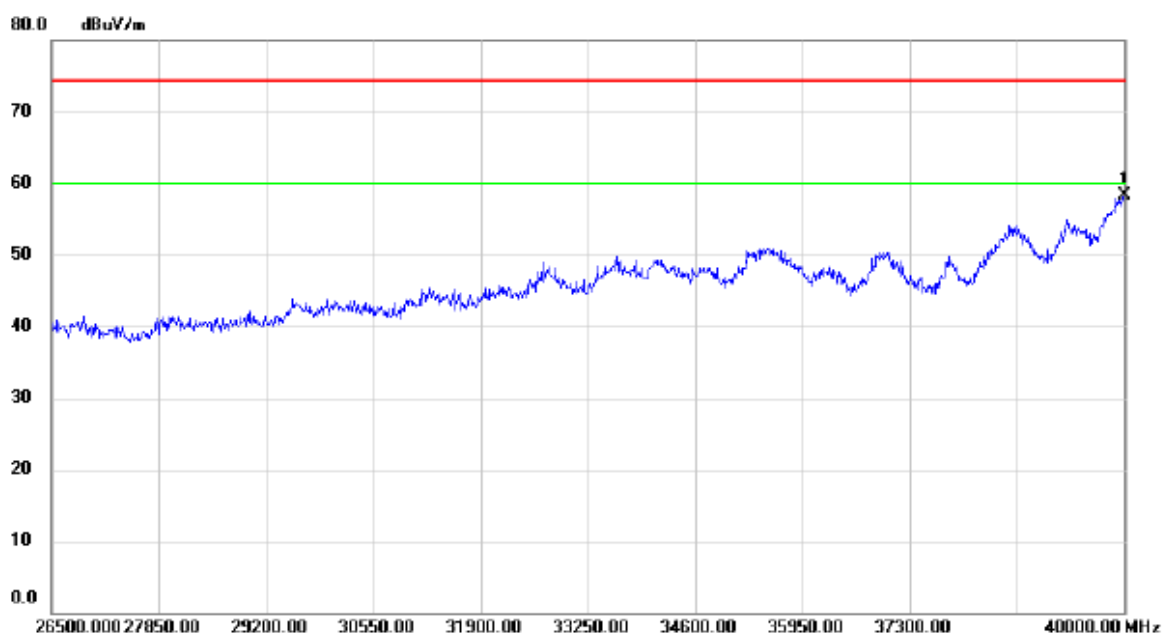

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	40.79	17.60	58.39	74.30	-15.91	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

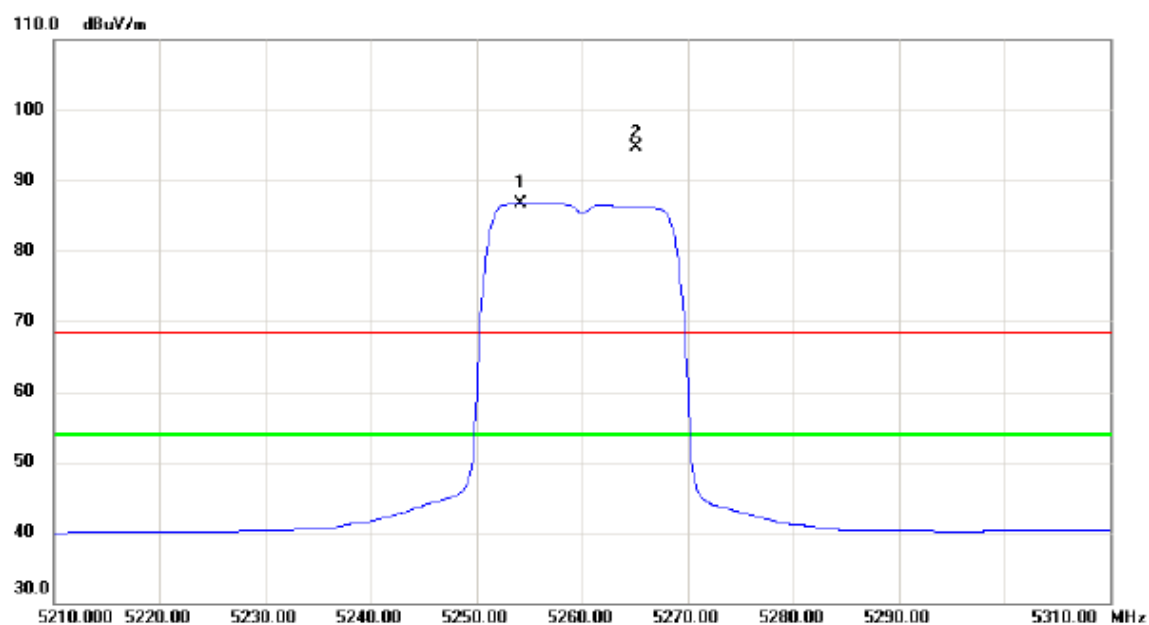

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5254.200	46.30	40.44	86.74	54.00	32.74	AVG	No Limit
2	X	5265.100	54.16	40.47	94.63	68.30	26.33	peak	No Limit