



# Partial FCC RF Test Report

**APPLICANT** : Huawei Technologies Co.,Ltd.  
**EQUIPMENT** : Smart Phone  
**BRAND NAME** : honor  
**MODEL NAME** : JAT-L41  
**FCC ID** : QISJAT-L41  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DSS) Spread Spectrum Transmitter

This is a partial report. The product was received on Jan. 14, 2019 and testing was completed on Jan. 28, 2019. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

**Sporton International (Shenzhen) Inc.**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City,  
Guangdong Province 518055, China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Accessories List..... 6

    1.6 Modification of EUT ..... 7

    1.7 Testing Location ..... 8

    1.8 Applicable Standards..... 9

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 10**

    2.1 Carrier Frequency Channel ..... 10

    2.2 Test Mode..... 11

    2.3 Connection Diagram of Test System..... 12

    2.4 Support Unit used in test configuration and system ..... 12

    2.5 EUT Operation Test Setup ..... 12

**3 TEST RESULT ..... 13**

    3.1 Output Power Measurement..... 13

    3.2 Radiated Band Edges and Spurious Emission Measurement ..... 15

    3.3 AC Conducted Emission Measurement..... 19

    3.4 Antenna Requirements ..... 21

**4 LIST OF MEASURING EQUIPMENT ..... 22**

**5 UNCERTAINTY OF EVALUATION..... 23**

**APPENDIX A. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX B. RADIATED SPURIOUS EMISSION**

**APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Partial FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)(1)	Peak Output Power	$\leq 125$ mW	Pass	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.96 dB at 43.58 MHz
3.3	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.70 dB at 0.59 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Huawei Technologies Co.,Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

## 1.2 Manufacturer

**Huawei Technologies Co.,Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	honor
Model Name	JAT-L41
FCC ID	QISJAT-L41
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+/DC-HSDPA/LTE WLAN 2.4GHz 802.11b/g/n (HT20/HT40) Bluetooth BR/EDR/LE
IMEI Code	Conducted: N/A AC Conducted Emission: 867638040015223/867638040016809 Radiated Emission: N/A
HW Version	HL1JATM
SW Version	9.0.1.108(C900E70R1P8)
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 10.22 dBm (0.0105 W) Bluetooth EDR (2Mbps) : 9.47 dBm (0.0089 W) Bluetooth EDR (3Mbps) : 9.61 dBm (0.0091 W)
Antenna Type / Gain	Internal Antenna with gain -0.87 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK



### 1.5 Accessories List

Specification of Accessory				
AC Adapter 1	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100B01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	Dongguan Phitek Electronics Co., Ltd		
AC Adapter 2	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100B01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD		
AC Adapter 3	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100B01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO., LTD.		
AC Adapter 4	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100E01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	Dongguan Phitek Electronics Co., Ltd.		
AC Adapter 5	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100E01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD		
AC Adapter 6	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100E01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO., LTD.		
AC Adapter 7	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100A01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	Dongguan Phitek Electronics Co., Ltd.		
AC Adapter 8	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100A01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD		
AC Adapter 9	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100A01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO., LTD.		
AC Adapter 10	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100U01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	Dongguan Phitek Electronics Co., Ltd.		
AC Adapter 11	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100U01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD		
AC Adapter 12	Brand Name	Huawei Technologies Co., Ltd.	Model Name	HW-050100U01
	Power Rating	I/P: 100 - 240 Vac; O/P: 5Vdc, 1.0A		
	Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO., LTD.		



<b>Battery 1</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	HB405979ECW
	<b>Power Rating</b>	3.82Vdc, 2920mAh	<b>Manufacturer</b>	Sunwoda
<b>Battery 2</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	HB405979ECW
	<b>Power Rating</b>	3.82Vdc, 2920mAh	<b>Manufacturer</b>	SCUD
<b>Battery 3</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	HB405979ECW
	<b>Power Rating</b>	3.82Vdc, 2920mAh	<b>Manufacturer</b>	Desay
<b>USB Cable 1</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	L99U2013-CS-H
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		
<b>USB Cable 2</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	203-0786-0
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		
<b>USB Cable 3</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	130-26654
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		
<b>USB Cable 4</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	WA0007
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		
<b>USB Cable 5</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	L99U2017-CS-H
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		
<b>USB Cable 6</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	203-1583-0
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		
<b>USB Cable 7</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	130-26669
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		
<b>USB Cable 8</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	WA0001
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		
<b>USB Cable 9</b>	<b>Brand Name</b>	Huawei Technologies Co., Ltd.	<b>Model Name</b>	CUBB01M-HC304-DH
	<b>Signal Line</b>	1.0 meter, non-shielded cable, without ferrite core		

## 1.6 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

<b>Test Site</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-KS	CN5013	630927

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

<b>Test Site</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City, Guangdong Province 518055, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ	CN5018	337463

<b>Test Site</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District, Shenzhen City, Guangdong Province 518055, China TEL: +86-755- 3320-2398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN5019	577730



## **1.8 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-




## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal planes, X, Y, Z. The worst case (X Plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Radiated Test Cases	<b>Bluetooth BR 1Mbps GFSK</b>
	Mode 1: CH00_2402 MHz
	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz
AC Conducted Emission	Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN Link + USB Cable 1(Charging from Adapter 1) + Battery 1 + Earphone + SIM 1
<b>Remark:</b>	
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.	
2. For Radiated Test Cases, The tests were performed with Adapter 4, USB Cable 9 and Earphone.	

## 2.3 Connection Diagram of Test System

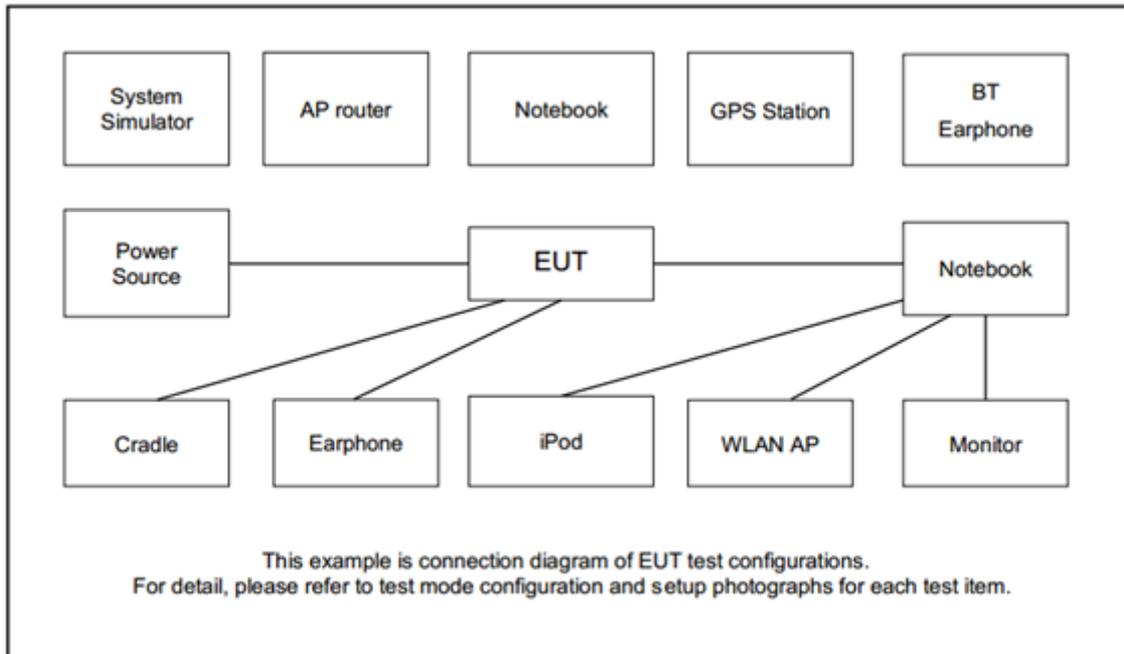

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	BT Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
4.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
6.	Earphone	Apple	MC690ZP/A	N/A	Shielded, 1.0m	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

### 3 Test Result

#### 3.1 Output Power Measurement

##### 3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

##### 3.1.4 Test Setup

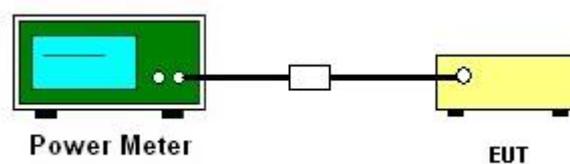



3.1.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	21~25°C
Test Engineer :	Silent Hai	Relative Humidity :	49~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	9.71	20.97	Pass
39	2441	10.16	20.97	Pass
78	2480	10.22	20.97	Pass

Test Mode :	2Mbps	Temperature :	21~25°C
Test Engineer :	Silent Hai	Relative Humidity :	49~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	9.04	20.97	Pass
39	2441	9.47	20.97	Pass
78	2480	9.38	20.97	Pass

Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Silent Hai	Relative Humidity :	49~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	9.18	20.97	Pass
39	2441	9.61	20.97	Pass
78	2480	9.60	20.97	Pass



### 3.2 Radiated Band Edges and Spurious Emission Measurement

#### 3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.2.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.2.4 Test Setup


For radiated emissions below 30MHz

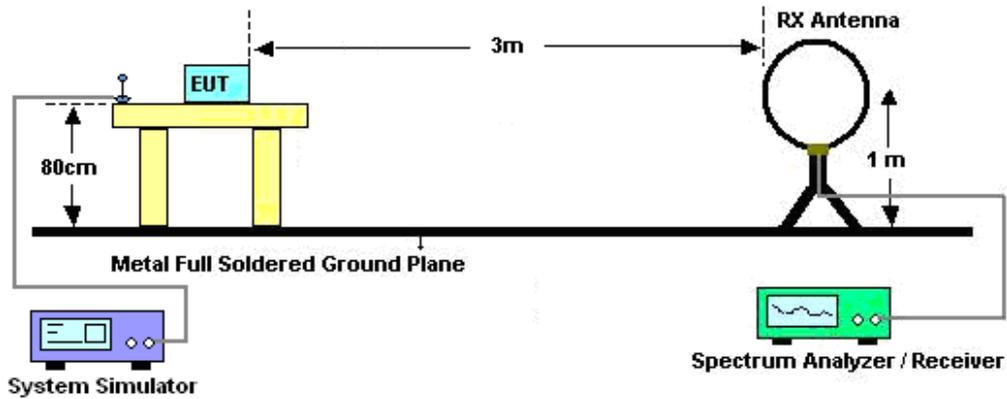

For radiated emissions from 30MHz to 1GHz

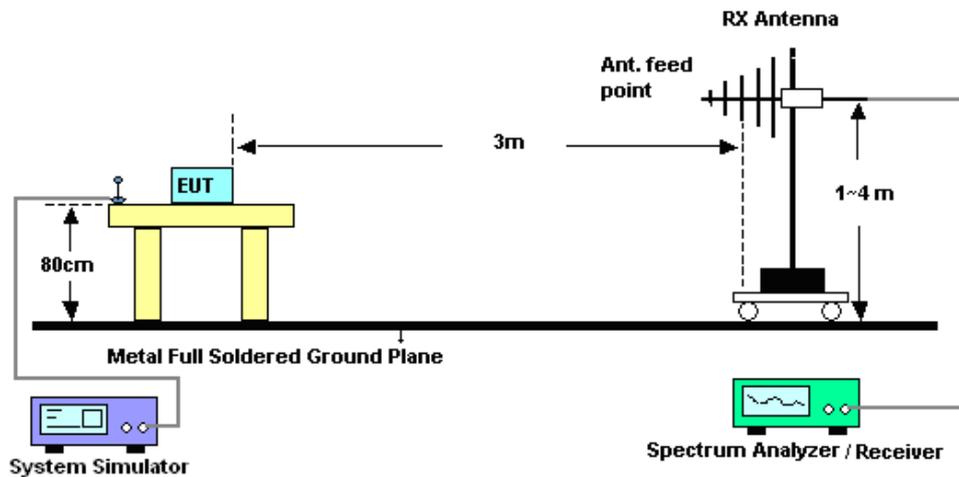

For radiated emissions above 1GHz

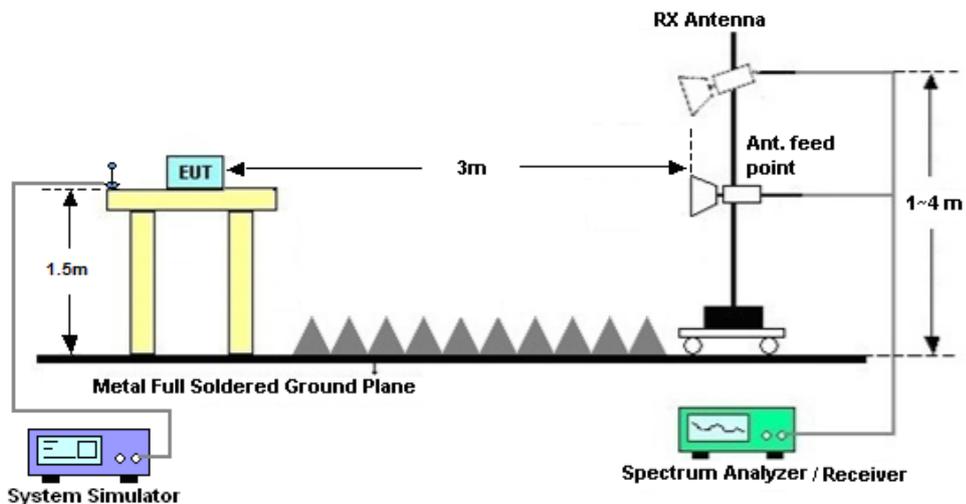



### **3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.2.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix B and C.

### **3.2.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix B and C.

### **3.2.8 Duty cycle correction factor for average measurement**

Please refer to Appendix D.

### 3.3 AC Conducted Emission Measurement

#### 3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.3.4 Test Setup

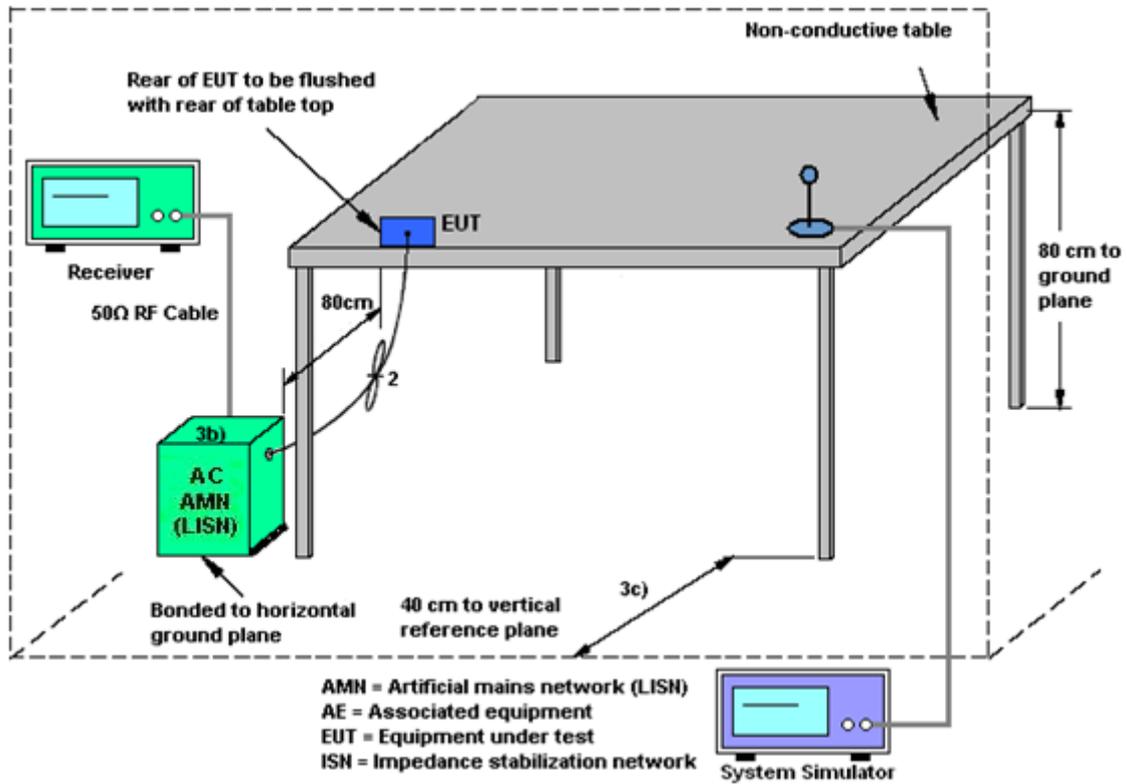

### 3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



## **3.4 Antenna Requirements**

### **3.4.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.4.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.4.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Jan. 21, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Jan. 21, 2019	Jan. 13, 2020	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Aug. 30, 2018	Jan. 11, 2019~Jan. 28, 2019	Aug. 29, 2019	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2018	Jan. 11, 2019~Jan. 28, 2019	May 29, 2020	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jun. 05, 2018	Jan. 11, 2019~Jan. 28, 2019	Jun. 04, 2019	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	119436	1GHz~18GHz	Jun. 28, 2018	Jan. 11, 2019~Jan. 28, 2019	Jun. 27, 2019	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Mar. 30, 2018	Jan. 11, 2019~Jan. 28, 2019	Mar. 29, 2019	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 20, 2018	Jan. 11, 2019~Jan. 28, 2019	Apr. 19, 2019	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1707137	1GHz~18GHz	Oct. 19, 2018	Jan. 11, 2019~Jan. 28, 2019	Oct. 18, 2019	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270104	0.5GHz~26.5GHz	Dec. 26, 2018	Jan. 11, 2019~Jan. 28, 2019	Dec. 25, 2019	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 17, 2018	Jan. 11, 2019~Jan. 28, 2019	Jul. 16, 2019	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jan. 11, 2019~Jan. 28, 2019	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 11, 2019~Jan. 28, 2019	NCR	Radiation (03CH01-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jan. 11, 2019~Jan. 28, 2019	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 23, 2018	Jan. 25, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 18, 2018	Jan. 25, 2019	Oct. 17, 2019	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 23, 2018	Jan. 25, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 18, 2018	Jan. 25, 2019	Jul. 17, 2019	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.6dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------


### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------



## Appendix A. AC Conducted Emission Test Results

Test Engineer :	Zhang Xu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line

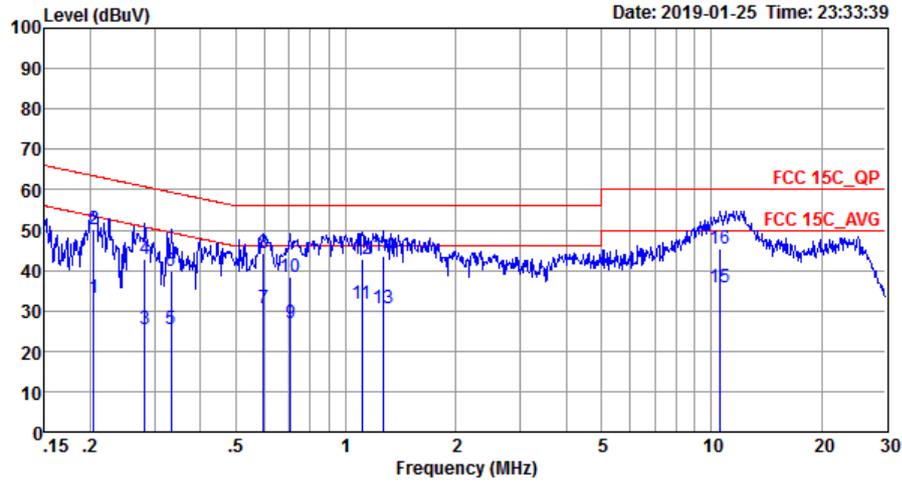


Site : C001-SZ  
 Condition: FCC 15C\_QP LISN\_20180719\_L LINE

IMEI : 867638040015223/867638040016809

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20	33.10	-20.35	53.45	23.00	0.03	10.07	Average
2	0.20	50.10	-13.35	63.45	40.00	0.03	10.07	QP
3	0.28	25.61	-25.15	50.76	15.50	0.03	10.08	Average
4	0.28	42.71	-18.05	60.76	32.60	0.03	10.08	QP
5	0.33	25.41	-23.99	49.40	15.30	0.03	10.08	Average
6	0.33	39.91	-19.49	59.40	29.80	0.03	10.08	QP
7	0.59	30.70	-15.30	46.00	20.60	0.02	10.08	Average
8 *	0.59	44.30	-11.70	56.00	34.20	0.02	10.08	QP
9	0.70	26.80	-19.20	46.00	16.70	0.02	10.08	Average
10	0.70	38.20	-17.80	56.00	28.10	0.02	10.08	QP
11	1.11	31.67	-14.33	46.00	21.50	0.08	10.09	Average
12	1.11	42.67	-13.33	56.00	32.50	0.08	10.09	QP
13	1.26	30.78	-15.22	46.00	20.60	0.08	10.10	Average
14	1.26	43.38	-12.62	56.00	33.20	0.08	10.10	QP
15	10.51	35.83	-14.17	50.00	25.10	0.38	10.35	Average
16	10.51	45.53	-14.47	60.00	34.80	0.38	10.35	QP



Test Engineer :	Zhang Xu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

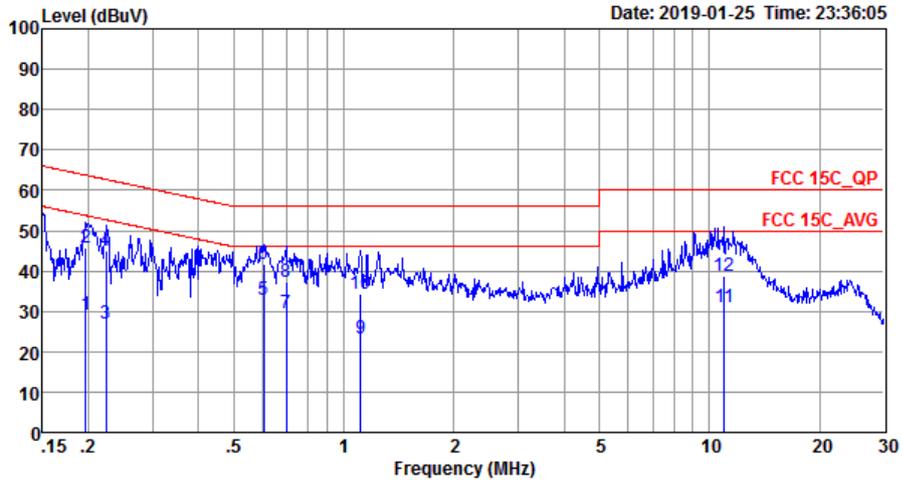

Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20180719\_N NEUTRAL

IMEI : 867638040015223/867638040016809

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20	29.10	-24.66	53.76	19.00	0.03	10.07	Average
2	0.20	45.60	-18.16	63.76	35.50	0.03	10.07	QP
3	0.22	27.00	-25.70	52.70	16.90	0.03	10.07	Average
4	0.22	44.90	-17.80	62.70	34.80	0.03	10.07	QP
5 *	0.60	33.00	-13.00	46.00	22.90	0.02	10.08	Average
6	0.60	41.60	-14.40	56.00	31.50	0.02	10.08	QP
7	0.70	29.40	-16.60	46.00	19.30	0.02	10.08	Average
8	0.70	37.20	-18.80	56.00	27.10	0.02	10.08	QP
9	1.11	23.34	-22.66	46.00	13.20	0.05	10.09	Average
10	1.11	34.44	-21.56	56.00	24.30	0.05	10.09	QP
11	10.96	31.15	-18.85	50.00	20.60	0.20	10.35	Average
12	10.96	38.65	-21.35	60.00	28.10	0.20	10.35	QP



## Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH00 2402MHz		2377.94	44.83	-29.17	74	39.58	31.52	6.73	33	304	95	P	H
		2377.94	20.04	-33.96	54	-	-	-	-	-	-	A	H
	*	2402	101.11	-	-	95.8	31.5	6.81	33	304	95	P	H
	*	2402	76.32	-	-	-	-	-	-	-	-	A	H
		2389.49	44.85	-29.15	74	39.54	31.5	6.81	33	306	93	P	V
		2389.49	20.06	-33.94	54	-	-	-	-	-	-	A	V
	*	2402	100.82	-	-	95.51	31.5	6.81	33	306	93	P	V
	*	2402	76.03	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2369.5	44.72	-29.28	74	39.47	31.52	6.73	33	321	111	P	H
		2369.5	19.93	-34.07	54	-	-	-	-	-	-	A	H
	*	2441	98.97	-	-	93.4	31.71	6.86	33	321	111	P	H
	*	2441	74.18	-	-	-	-	-	-	-	-	A	H
		2496.29	44.97	-29.03	74	39.13	31.93	6.91	33	321	111	P	H
		2496.29	20.18	-33.82	54	-	-	-	-	-	-	A	H
		2351.16	45.55	-28.45	74	40.27	31.55	6.73	33	313	59	P	V
		2351.16	20.76	-33.24	54	-	-	-	-	-	-	A	V
	*	2441	100.76	-	-	95.19	31.71	6.86	33	313	59	P	V
	*	2441	75.97	-	-	-	-	-	-	-	-	A	V
		2483.76	44.49	-29.51	74	38.72	31.86	6.91	33	313	59	P	V
		2483.76	19.7	-34.3	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	99.19	-	-	93.42	31.86	6.91	33	296	66	P	H
	*	2480	74.4	-	-	-	-	-	-	-	-	A	H
		2499.64	44.43	-29.57	74	38.59	31.93	6.91	33	296	66	P	H
		2499.64	19.64	-34.36	54	-	-	-	-	-	-	A	H
	*	2480	98.35	-	-	92.58	31.86	6.91	33	329	77	P	V
	*	2480	73.56	-	-	-	-	-	-	-	-	A	V
		2490.24	45.32	-28.68	74	39.48	31.93	6.91	33	329	77	P	V
		2490.24	20.53	-33.47	54	-	-	-	-	-	-	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4804	44.94	-29.06	74	57.74	33.78	10.89	57.47	151	219	P	H
		4804	20.15	-33.85	54	-	-	-	-	-	-	A	H
		4804	44.2	-29.8	74	57	33.78	10.89	57.47	151	219	P	V
		4804	19.41	-34.59	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	44.87	-29.13	74	57.69	33.75	10.95	57.52	150	258	P	H
		4882	20.08	-33.92	54	-	-	-	-	-	-	A	H
		7323	47.76	-26.24	74	57.91	35.49	13.29	58.93	152	309	P	H
		7323	22.97	-31.03	54	-	-	-	-	-	-	A	H
		4882	44.34	-29.66	74	57.16	33.75	10.95	57.52	150	258	P	V
		4882	19.55	-34.45	54	-	-	-	-	-	-	A	V
		7323	47	-27	74	57.15	35.49	13.29	58.93	152	309	P	V
BT CH 78 2480MHz		4960	44.31	-29.69	74	57.15	33.72	11.02	57.58	118	289	P	H
		4960	19.52	-34.48	54	-	-	-	-	-	-	A	H
		7440	47.3	-26.7	74	57.51	35.71	13.06	58.98	158	273	P	H
		7440	22.51	-31.49	54	-	-	-	-	-	-	A	H
		4960	44.4	-29.6	74	57.24	33.72	11.02	57.58	118	289	P	V
		4960	19.61	-34.39	54	-	-	-	-	-	-	A	V
		7440	47.02	-26.98	74	57.23	35.71	13.06	58.98	158	273	P	V
		7440	22.23	-31.77	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BT LF		30.97	27.16	-12.84	40	34.39	23.82	0.25	31.3	136	148	P	H
		60.07	20.24	-19.76	40	38.85	12.5	0.49	31.6	-	-	P	H
		95.96	20.84	-22.66	43.5	35.74	15.9	0.8	31.6	-	-	P	H
		152.22	26.49	-17.01	43.5	40.03	16.53	1.32	31.39	-	-	P	H
		399.57	25.34	-20.66	46	32.74	21.6	2.39	31.39	-	-	P	H
		541.19	28.04	-17.96	46	32.65	23.85	2.82	31.28	-	-	P	H
		30	30.38	-9.62	40	37.05	24.4	0.23	31.3	-	-	P	V
		43.58	32.04	-7.96	40	46.16	16.96	0.42	31.5	184	194	P	V
		58.13	27.84	-12.16	40	46.13	12.82	0.49	31.6	-	-	P	V
		95.96	22.93	-20.57	43.5	37.83	15.9	0.8	31.6	-	-	P	V
		234.67	23.85	-22.15	46	36.84	16.8	1.79	31.58	-	-	P	V
		528.58	27.88	-18.12	46	32.65	23.71	2.78	31.26	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- 1. Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- 2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- 1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- 2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- 1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- 2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix C. Radiated Spurious Emission Plots

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 83CH01-S2 Condition : PEAK_74 3m HP_ANT(3117)_119456 HORIZONTAL</p>	<p>Site : 83CH01-S2 Condition : PEAK_74 3m HP_ANT(3117)_119456 HORIZONTAL</p>



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	<p>Site Condition : 03CH01-S2 : PEAK_B0_74 3m HF_ANT(3117)_119436 VERTICAL</p>	<p>Site Condition : 03CH01-S2 : PEAK_74 3m HF_ANT(3117)_119436 VERTICAL</p>



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak		
Peak		



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	<p>Site : 83CM1-SZ Condition : PEAK_BE_74 3m HF_ANT(3117)_119436 VERTICAL</p>	<p>Site : 83CM1-SZ Condition : PEAK_74 3m HF_ANT(3117)_119436 VERTICAL</p>
Peak	<p>Site : 83CM1-SZ Condition : PEAK_BE_74 3m HF_ANT(3117)_119436 VERTICAL</p>	



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH01-S2 Condition : PEAK_BE_74 3m HF_ANT(3117)_119436 HORIZONTAL</p>	<p>Site : 03CH01-S2 Condition : PEAK_74 3m HF_ANT(3117)_119436 HORIZONTAL</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH01-S2 Condition : PEAK_BE_74 3m HF_ANT(3117)_119436 VERTICAL</p>	<p>Site : 03CH01-S2 Condition : PEAK_74 3m HF_ANT(3117)_119436 VERTICAL</p>



2.4GHz 2400~2483.5MHz  
BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 83CH01-S2 Condition : PEAK_74 3m HF_ANT(3117)_119436 HORIZONTAL</p>	<p>Site : 83CH01-S2 Condition : PEAK_74 3m HF_ANT(3117)_119436 VERTICAL</p>

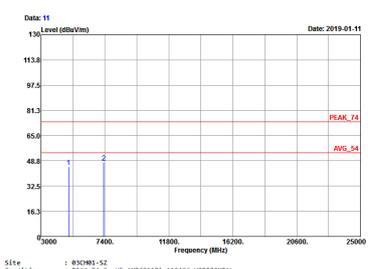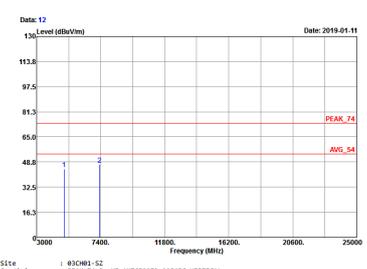

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH39 2441MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	 <p>Site : 03CH01-SZ Condition : PEAK_24 3m HF_ANT(3117)_119436 HORIZONTAL</p>	 <p>Site : 03CH01-SZ Condition : PEAK_24 3m HF_ANT(3117)_119436 VERTICAL</p>



<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH78 2480MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	<p>Site : 03CH01-S2 Condition : PEAK_74 3m HF_ANT(3117)_119436 HORIZONTAL</p>	<p>Site : 03CH01-S2 Condition : PEAK_74 3m HF_ANT(3117)_119436 VERTICAL</p>




Emission below 1GHz

2.4GHz BT (LF)


BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CM1-SZ Condition : FCC CLASS-B 3m LF_ANT(35488)_6 HORIZONTAL</p>	<p>Site : 03CM1-SZ Condition : FCC CLASS-B 3m LF_ANT(35488)_6 VERTICAL</p>

## Appendix D. Duty Cycle Plots

### DH5 on time (One Pulse) Plot on Channel 39

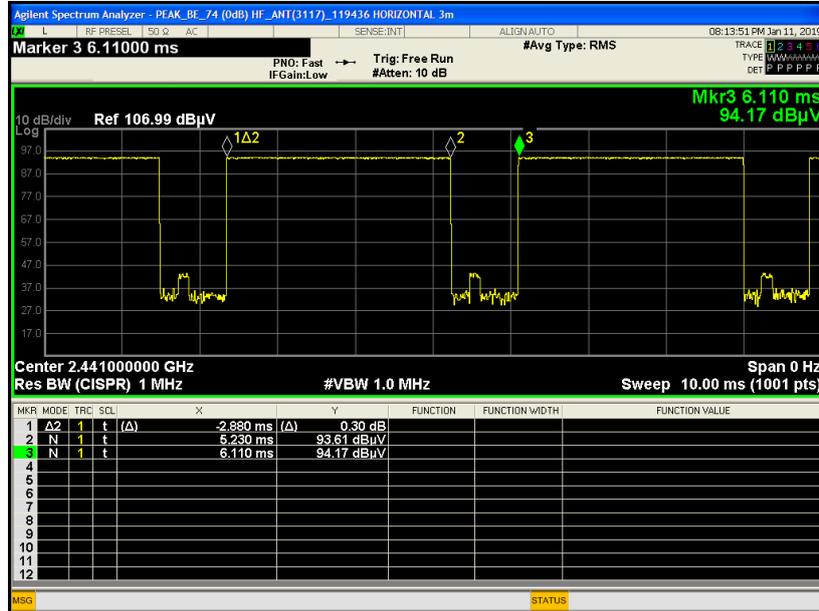

### DH5 on time (Count Pulses) Plot on Channel 39

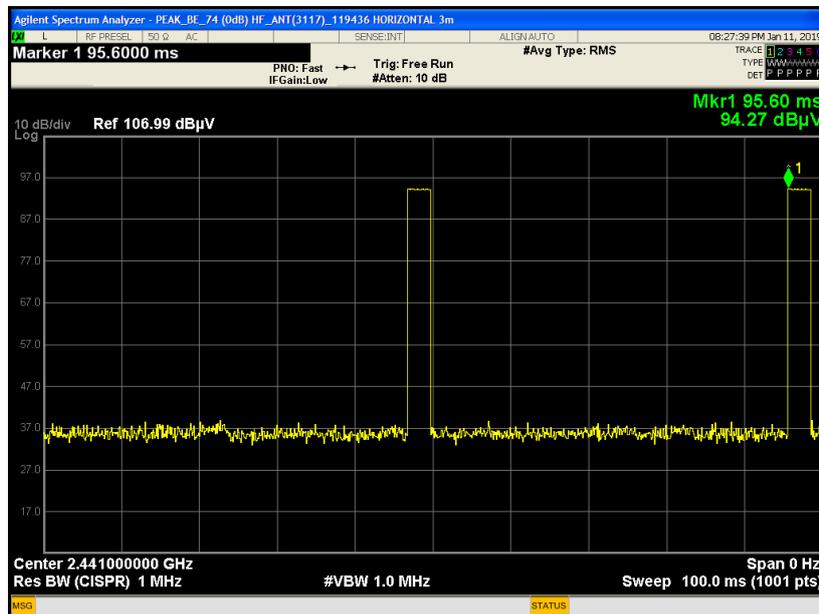

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.