

FCC/ISED

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**HUAWEI MateBook**

ISSUED TO  
Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China



Tested by:



Approved by:

Report No.: BL-SZ18C0049-602  
EUT Name: HUAWEI MateBook  
Model Name: KLV-W29 (refer section 2.4)  
Brand Name: HUAWEI  
Test Standard: 47 CFR Part 15 Subpart C  
RSS-Gen (Issue 5, April 2018)  
RSS-247 (Issue 2, February 2017)  
FCC ID: QISKLV-WX9  
ISED Number: 6369A-KLWVWX9  
Test Conclusion: Pass  
Test Date: Nov. 14, 2018 ~ Dec. 21, 2018  
Date of Issue: Jan. 24, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

### Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jan. 22, 2019</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jan. 24, 2019</u>	<u>Updated the test date</u>

## TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	5
1.1	Identification of the Testing Laboratory .....	5
1.2	Identification of the Responsible Testing Location .....	5
1.3	Laboratory Condition .....	5
1.4	Announce .....	5
2	PRODUCT INFORMATION .....	6
2.1	Applicant Information .....	6
2.2	Manufacturer Information.....	6
2.3	Factory Information.....	6
2.4	General Description for Equipment under Test (EUT).....	6
2.5	Differences Description.....	7
2.6	Ancillary Equipment.....	7
2.7	Technical Information .....	9
2.8	Additional Instructions .....	10
3	SUMMARY OF TEST RESULTS .....	11
3.1	Test Standards .....	11
3.2	Verdict .....	12
4	GENERAL TEST CONFIGURATIONS .....	13
4.1	Test Environments.....	13
4.2	Test Equipment List.....	13
4.3	Measurement Uncertainty.....	14
4.4	Description of Test Setup .....	15
4.4.1	For Antenna Port Test .....	15
4.4.2	For AC Power Supply Port Test.....	15
4.4.3	For Radiated Test (Below 30 MHz).....	16
4.4.4	For Radiated Test (30 MHz-1 GHz) .....	16
4.4.5	For Radiated Test (Above 1 GHz) .....	17

4.5	Measurement Results Explanation Example.....	18
4.5.1	For conducted test items: .....	18
4.5.2	For radiated band edges and spurious emission test:.....	18
5	TEST ITEMS .....	19
5.1	Antenna Requirements.....	19
5.1.1	Relevant Standards .....	19
5.1.2	Antenna Anti-Replacement Construction .....	19
5.1.3	Antenna Gain .....	19
5.2	Output Power .....	20
5.2.1	Test Limit.....	20
5.2.2	Test Setup.....	20
5.2.3	Test Procedure.....	20
5.2.4	Test Result .....	21
5.3	Occupied Bandwidth.....	22
5.3.1	Limit.....	22
5.3.2	Test Setup.....	22
5.3.3	Test Procedure.....	22
5.3.4	Test Result .....	22
5.4	Conducted Spurious Emission.....	23
5.4.1	Limit.....	23
5.4.2	Test Setup.....	23
5.4.3	Test Procedure.....	23
5.4.4	Test Result .....	24
5.5	Band Edge (Authorized-band band-edge).....	25
5.5.1	Limit.....	25
5.5.2	Test Setup .....	25
5.5.3	Test Procedure.....	25
5.5.4	Test Result .....	25
5.6	Conducted Emission.....	26
5.6.1	Limit.....	26
5.6.2	Test Setup .....	26
5.6.3	Test Procedure.....	26
5.6.4	Test Result .....	26

5.7	Radiated Spurious Emission.....	27
5.7.1	Limit.....	27
5.7.2	Test Setup .....	27
5.7.3	Test Procedure.....	27
5.7.4	Test Result .....	30
5.8	Band Edge (Restricted-band band-edge) .....	31
5.8.1	Limit.....	31
5.8.2	Test Setup .....	31
5.8.3	Test Procedure.....	31
1.1.1	Test Result .....	31
5.9	Power Spectral density (PSD) .....	32
5.9.1	Limit.....	32
5.9.2	Test Setup .....	32
5.9.3	Test Procedure.....	32
5.9.4	Test Result .....	32
ANNEX A	TEST RESULT .....	33
A.1	Output Power and E.I.R.P .....	33
A.2	Occupied Bandwidth.....	36
A.3	Conducted Spurious Emissions .....	40
A.4	Band Edge (Authorized-band band-edge).....	45
A.5	Conducted Emissions .....	49
A.6	Radiated Spurious Emission.....	53
A.7	Band Edge (Restricted-band band-edge) .....	67
A.8	Power Spectral Density (PSD).....	69
ANNEX B	TEST SETUP PHOTOS .....	71
ANNEX C	EUT EXTERNAL PHOTOS .....	71
ANNEX D	EUT INTERNAL PHOTOS.....	71

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025. The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

### 2.2 Manufacturer Information

Manufacturer	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

### 2.3 Factory Information

Factory	N/A
Address	N/A

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	HUAWEI MateBook
Model Name Under Test	KLV-W29
Series Model Name	KLV-W09, KLV-W19, KLV-WXXXXX (The “X” in model name can be 0 to 9, A to Z, a to z, “-” or blank, only differences are model names for trading purpose)
Description of Model name differentiation	Refer section 2.5
Hardware Version	NB8510_PCB_MB_V5 HF
Software Version	1.5.0.10(C001)
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.5 Differences Description

	KLV-W29 (with GPU version)	KLV-W19 (with GPU version)	KLV-W19 (without GPU version)	KLV-W09 (without GPU version)
PCB layout	The same	The same	The same	The same
Main board	The same	The same	Delete GPU chip and related components	Delete GPU chip and related components
Frequency bands	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT
BT/Wi-Fi antenna	The same	The same	The same	The same
Appearance	The same	The same	The same	The same
Dimension	The same	The same	The same	The same
CPU	Intel core i7, Support Max 4.6GHz	Intel core i5, Support Max 3.9GHz	Intel core i5, Support Max 3.9GHz	Intel core i3, Support Max 3.9GHz
GPU	Support	Support	Not support	Not support
Memory	16G/8G	8G	8G	4G
SSD	512G/256G	512G/256G	512G/256G	256G
Rear camera	Not support	Not support	Not support	Not support
Front camera	The same	The same	The same	The same
Adapter	The same	The same	The same	The same
Battery	The same	The same	The same	The same
Accessories	Docking Station	Docking Station	Docking Station	Docking Station
Note 1: The models KLV-W29, KLV-W19 and KLV-W09 are identical each other, except model name and main board and memory and CPU and GPU and SSD.				
Note 2: Tested on model KLV-W29 to represent the other model and configuration in this report.				

## 2.6 Ancillary Equipment

Ancillary Equipment 1	Rechargeable Li-ion Polymer Battery	
	Brand Name	HUAWEI
	Model No.	HB4593R1ECW
	Serial No.	N/A
	Capacity	7410 mAh
	Rated Voltage	7.6 V
	Limit Charge Voltage	8.7 V
Ancillary Equipment 2	Adapter 1	
	Brand Name	HUAWEI
	Model No.	HW-200325BP0 (UK Plug)
	Serial No.	C978Y9J7F00037

	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V⎓ 2 A / 9 V⎓ 2 A / 12 V⎓ 2 A / 15 V⎓ 3 A / 20 V⎓ 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 3	Adapter 2	
	Brand Name	HUAWEI
	Model No.	HW-200325UP0 (US Plug)
	Serial No.	C976Y1J8P00105
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V⎓ 2 A / 9 V⎓ 2 A / 12 V⎓ 2 A / 15 V⎓ 3 A / 20 V⎓ 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 4	Adapter 3	
	Brand Name	HUAWEI
	Model No.	HW-200325EP0 (EU Plug)
	Serial No.	C974Y1J8W01169
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V⎓ 2 A / 9 V⎓ 2 A / 12 V⎓ 2 A / 15 V⎓ 3 A / 20 V⎓ 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 5	Adapter 4	
	Brand Name	HUAWEI
	Model No.	HW-200325CP0 (GB Plug)
	Serial No.	C973Y1J7800783
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V⎓ 2 A / 9 V⎓ 2 A / 12 V⎓ 2 A / 15 V⎓ 3 A / 20 V⎓ 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 6	Adapter 5	
	Brand Name	HUAWEI
	Model No.	HW-200325AP0 (AU Plug)
	Serial No.	C973Y1J7800783
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V⎓ 2 A / 9 V⎓ 2 A / 12 V⎓ 2 A / 15 V⎓ 3 A / 20 V⎓ 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 7	Docking Station	
	Model No.	AD11
	Serial No.	N/A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 8	USB-C to USB-A	
Ancillary Equipment 9	USB Cable	
	Length (Approx.)	1.8 m
Note: All adapter models only with different plug for marketing purpose. We select HW-200325UP0 (US Plug) during testing.		

## 2.7 Technical Information

Network and Wireless connectivity	Bluetooth 5.0 (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40) and 802.11ac
-----------------------------------	---------------------------------------------------------------------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS
Modulation Type	GFSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	1 Mbps, 2 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	40 (at intervals of 2 MHz)
Tested Channel	0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	1 dBi (In test items related to antenna gain, the final results reflect this figure.)
Antenna System(MIMO Smart Antenna)	N/A

## 2.8 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	DRTU		
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	Power parameter Settings is 0
	CH19	2440	
	CH39	2480	

Run Software

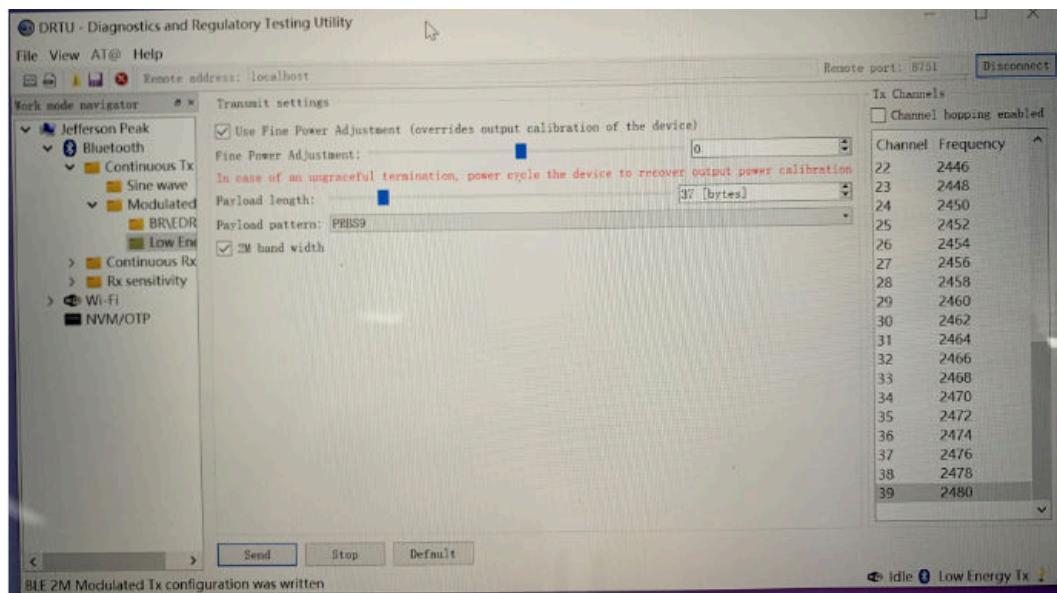

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-17 Edition)	Miscellaneous Wireless Communications Services
2	KDB 558074 D01 15.247 Meas Guidance v05	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules
3	RSS-Gen (Issue 5, April 2018)	General Requirements for Compliance of Radio Apparatus
4	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### 3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	N/A	--	Pass <sup>Note1</sup>
2	Output Power	15.247(b)	RSS-247, 5.4 (4)	Low/Middle/ High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.6; RSS-247, 5.2 (1)	Low/Middle/ High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	Low/Middle/ High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	RSS-247, 5.5;	Low/ High	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/ High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/ High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/ High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (2)	Low/Middle/ High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	N/A	N/A <sup>Note2</sup>

Note <sup>1</sup>: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note <sup>2</sup>: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%					
Atmospheric Pressure	100 kPa to 102 kPa					
Temperature	NT (Normal Temperature)		+22°C to +25°C			
Working Voltage of the EUT	NV (Normal Voltage)		7.6 V			

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.15	2019.06.14
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.15	2019.06.14
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.07	2019.11.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.15	2019.06.14
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.15	2019.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2018.06.14	2019.06.13
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2017.01.06	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2017.08.08	2019.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.15	2019.06.14
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2018.05.21	2019.05.20

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Mouth Simulator	B&K	4227	2423931	2018.11.15	2019.11.14
Sound Calibrator	B&K	4231	2430337	2018.11.15	2019.11.14
Sound Level Meter	B&K	NL-20	00844023	2018.11.15	2019.11.14
Ear Simulator	B&K	4185	2409449	2018.11.15	2019.11.14
Ear Simulator	B&K	4195	2418189	2018.11.15	2019.11.14
Audio analyzer	B&K	UPL 16	100129	2018.11.15	2019.11.14
Software	BALUN	BL410	-	-	-
Cable	ROHDE&SCHWARZ	JUNFLON	APR0914004	-	-

#### 4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


Measurement	Value
Occupied Channel Bandwidth	±4%
RF output power, conducted	±1.4 dB
Power Spectral Density, conducted	±2.5 dB
Unwanted Emissions, conducted	±2.8 dB
All emissions, radiated	±5.4 dB
Temperature	±1°C
Humidity	±4%

## 4.4 Description of Test Setup

### 4.4.1 For Antenna Port Test


Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable loss is 0.5dB, then the conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

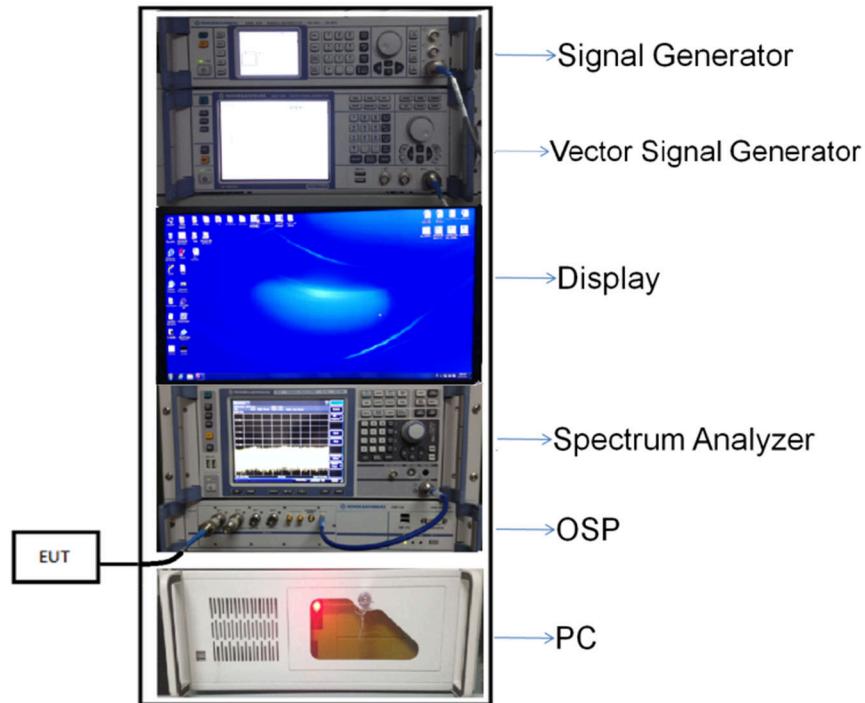


(Diagram 1)

### 4.4.2 For AC Power Supply Port Test

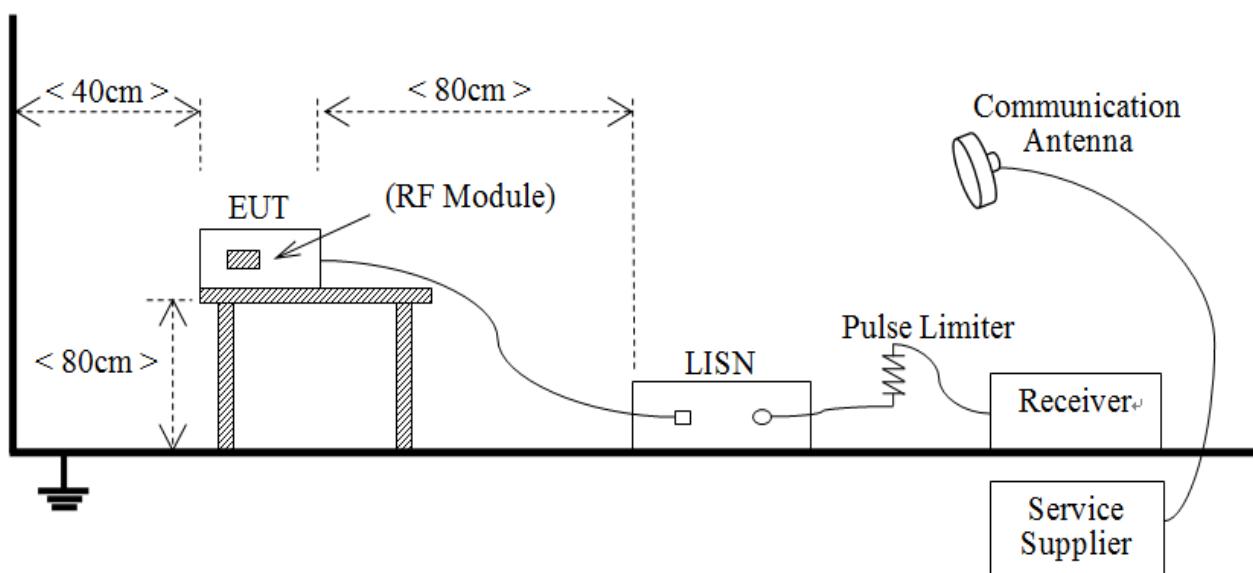


(Diagram 2)

#### 4.4.3 For Radiated Test (Below 30 MHz)

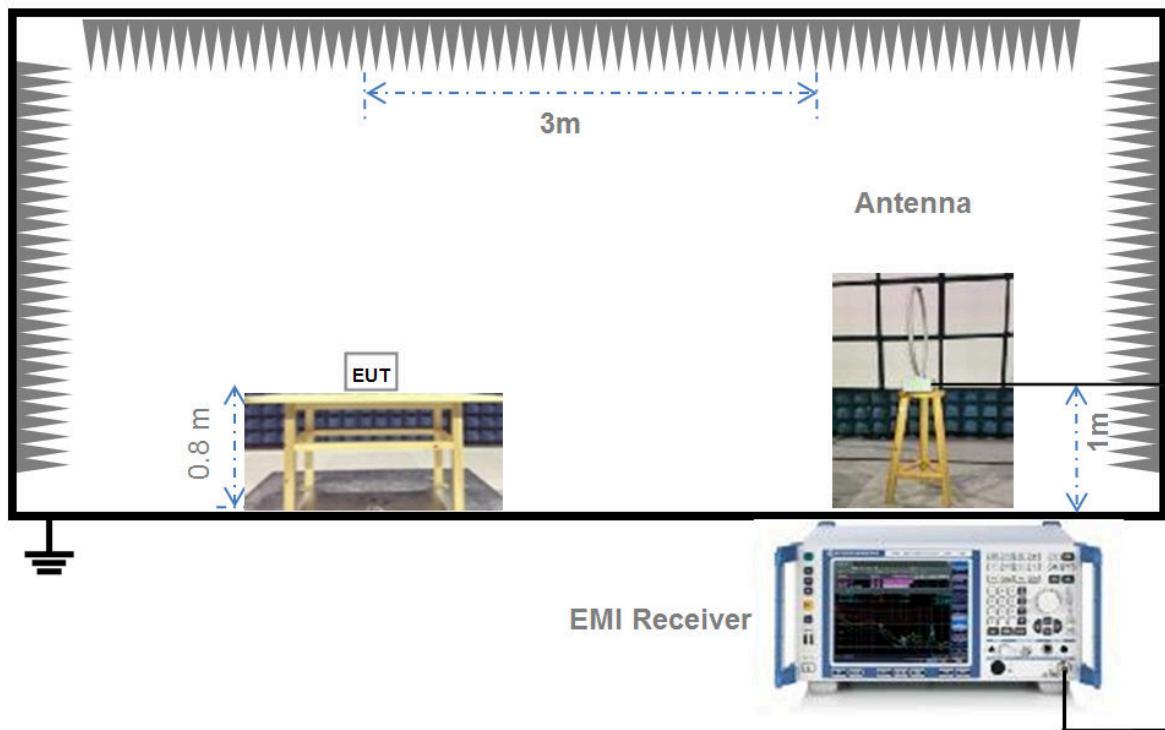


(Diagram 3)

#### 4.4.4 For Radiated Test (30 MHz-1 GHz)

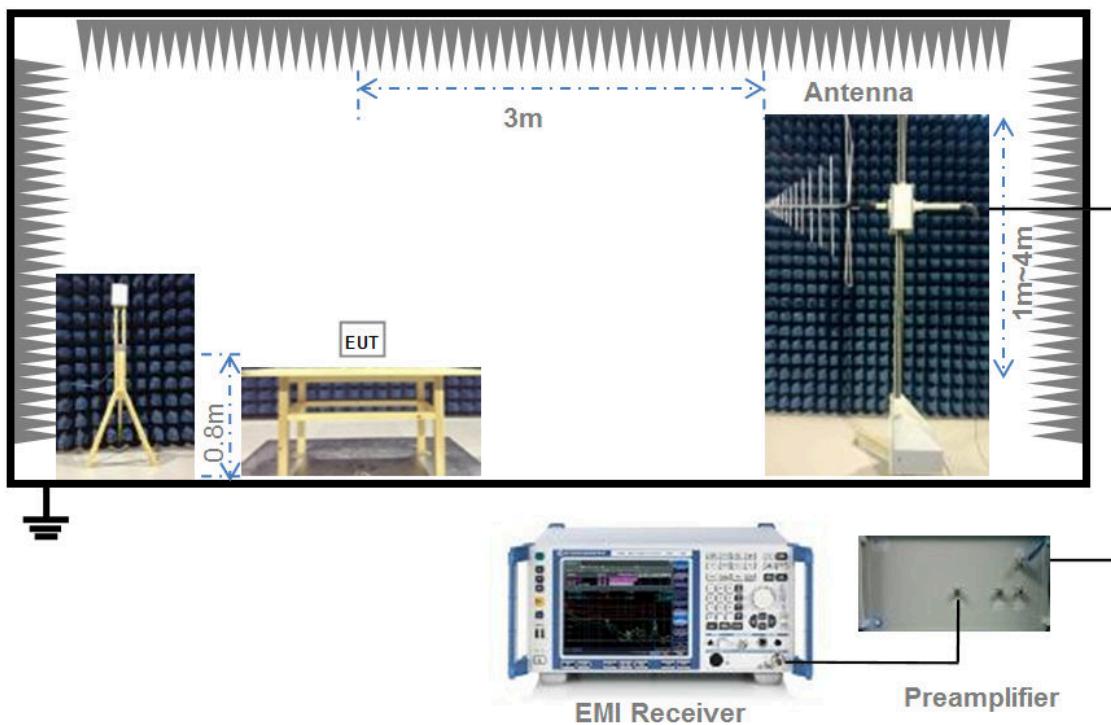

(Diagram 4)

#### 4.4.5 For Radiated Test (Above 1 GHz)

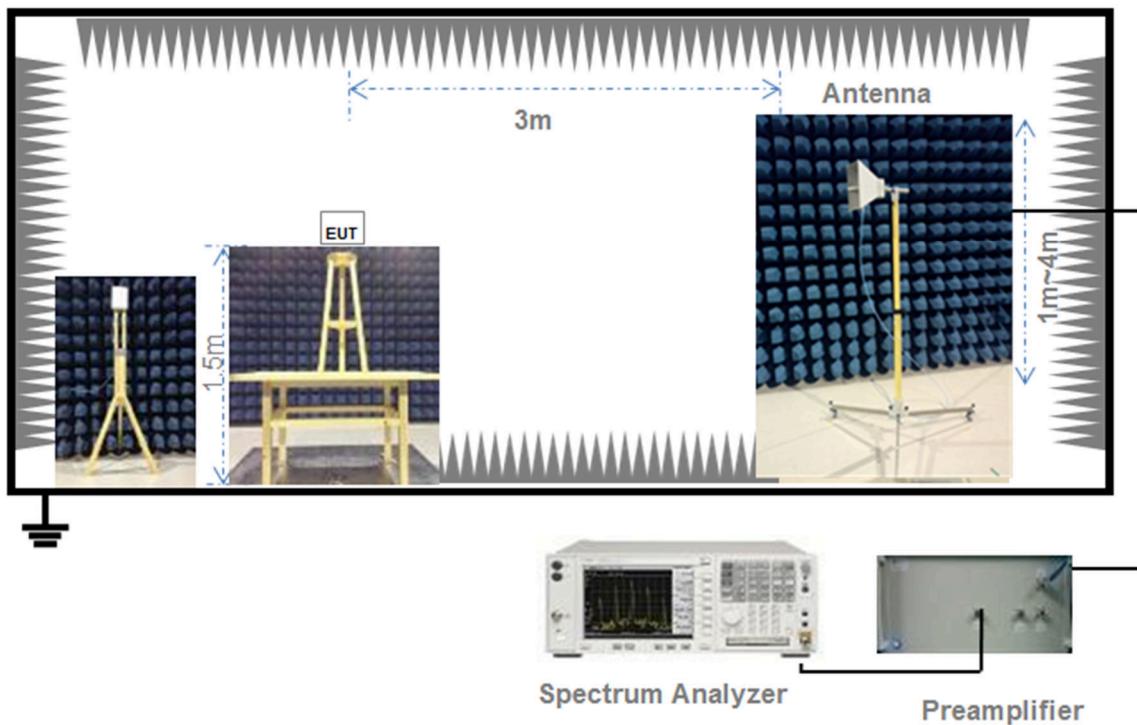

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

$$E = EIRP - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antennas of the product are permanently attached. There are no provisions for connection to an external antenna.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (4)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW  $\geq$  DTS bandwidth.

Set VBW  $\geq$  3 x RBW.

Set span  $\geq$  3 x RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

#### b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.

Set VBW  $\geq$  RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 Occupied Bandwidth

### 5.3.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1); RSS-GEN, 6.6

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW)  $\geq$  3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

#### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Band Edge (Authorized-band band-edge)

### 5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency ( $f_{\text{emission}}$ )  $\pm 0.5$  MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by  $f_{\text{emission}} \pm 0.5$  MHz.

### 5.5.4 Test Result

Please refer to ANNEX A.4.

## 5.6 Conducted Emission

### 5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Radiated Spurious Emission

### 5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) =  $20*\log[\text{Field Strength } (\mu\text{V}/\text{m})]$ .
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu$ V/m@3m (AV) and 74dB $\mu$ V/m@3m (PK).

### 5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq$  30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $>$  1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in  $\text{dB}\mu\text{V/m}$ ,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
  - b) VBW  $\geq$  3 x RBW.
  - c) Detector = Peak.
  - d) Sweep time = auto.
  - e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle  $\geq$  98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq 3 \times$  RBW.
- e) Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
  - i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
    - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
    - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
    - 3) If a specific emission is demonstrated to be continuous ( $\geq$  98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

#### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Band Edge (Restricted-band band-edge)

### 5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

#### 1.1.1 Test Result

Please refer to ANNEX A.7.

## 5.9 Power Spectral density (PSD)

### 5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

Set the VBW  $\geq 3 \text{ RBW}$ .

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.9.4 Test Result

Please refer to ANNEX A.7.

## ANNEX A TEST RESULT

### A.1 Output Power and E.I.R.P

#### 1 Mbps

##### Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict	
	GFSK(BLE)		dBm	mW		
	dBm	mW				
Low	4.12	2.58	30	1000	Pass	
Middle	5.31	3.40			Pass	
High	5.21	3.32			Pass	

##### E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict	
	GFSK(BLE)		dBm	mW		
	dBm	mW				
Low	5.12	3.25	36	4000	Pass	
Middle	6.31	4.28			Pass	
High	6.21	4.18			Pass	

#### 2 Mbps

##### Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict	
	GFSK(BLE)		dBm	mW		
	dBm	mW				
Low	4.14	2.59	30	1000	Pass	
Middle	5.32	3.40			Pass	
High	5.22	3.33			Pass	


##### E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict	
	GFSK(BLE)		dBm	mW		
	dBm	mW				
Low	5.14	3.27	36	4000	Pass	
Middle	6.32	4.29			Pass	
High	6.22	4.19			Pass	

## 1 Mbps


### Test plots

GFSK(BLE) LOW CHANNEL

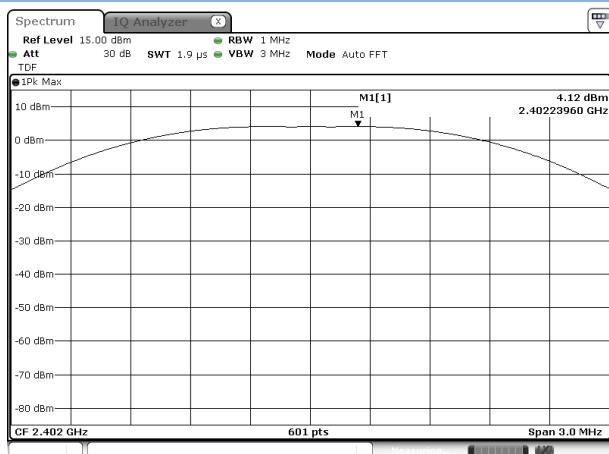


Date: 21-DEC-2018 14:26:16

GFSK(BLE) MIDDLE CHANNEL

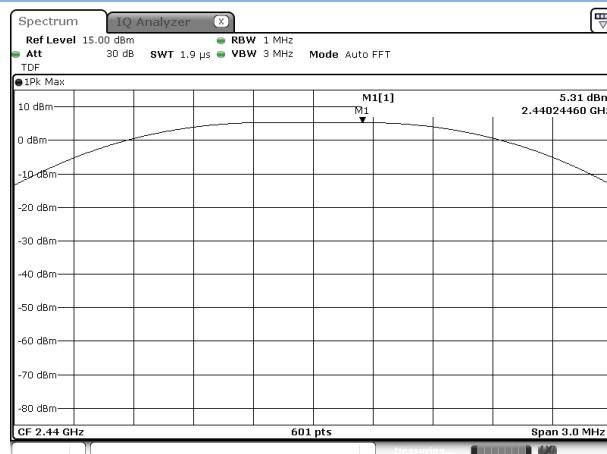

Date: 21-DEC-2018 14:28:02

GFSK(BLE) HIGH CHANNEL

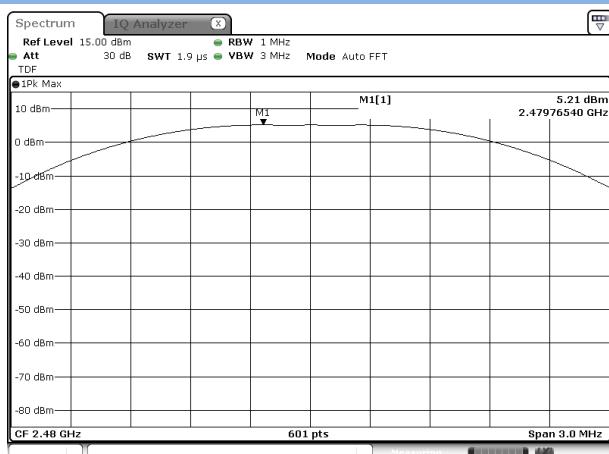


Date: 21-DEC-2018 14:30:22

2 Mbps


### Test plots

#### GFSK(BLE) LOW CHANNEL

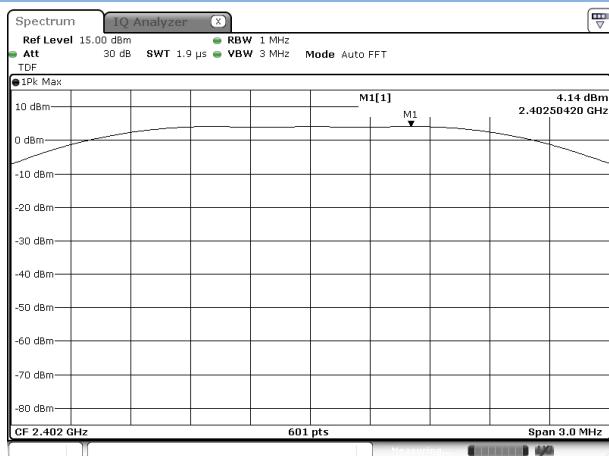


Date: 21.DEC.2018 14:34:13

#### GFSK(BLE) MIDDLE CHANNEL

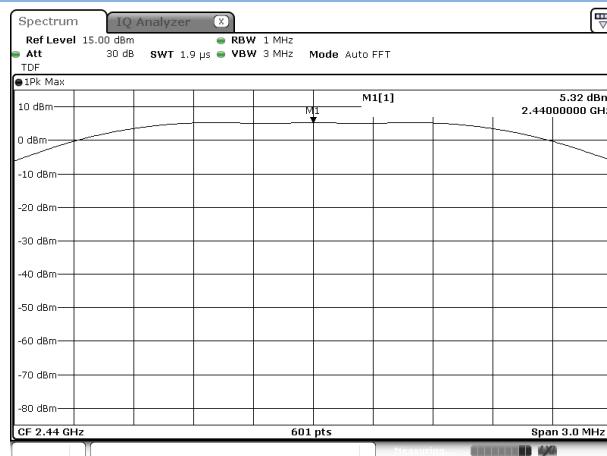

Date: 21.DEC.2018 14:36:17

#### GFSK(BLE) HIGH CHANNEL

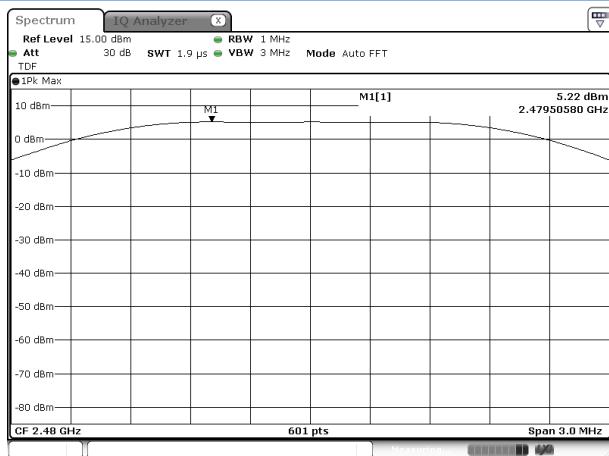

Date: 21.DEC.2018 14:39:19

## A.2 Occupied Bandwidth

### 1 Mbps

#### Test Data

Test Mode	GFSK (BLE)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	643.555	1033.285	≥500
Middle Channel	647.949	1028.944	≥500
High Channel	656.494	1024.602	≥500

### 2 Mbps


#### Test Data

Test Mode	GFSK (BLE)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1139.160	2031.838	≥500
Middle Channel	1130.371	2027.496	≥500
High Channel	1135.010	2023.155	≥500


### 1 Mbps

#### Test plots

#### 6 dB Bandwidth

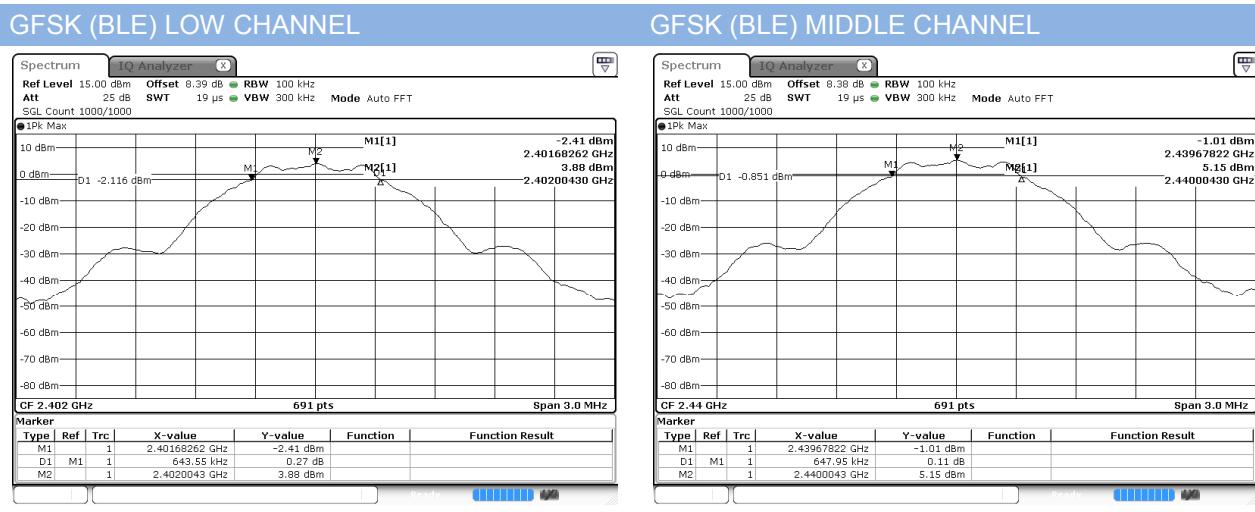


### GFSK (BLE) HIGH CHANNEL

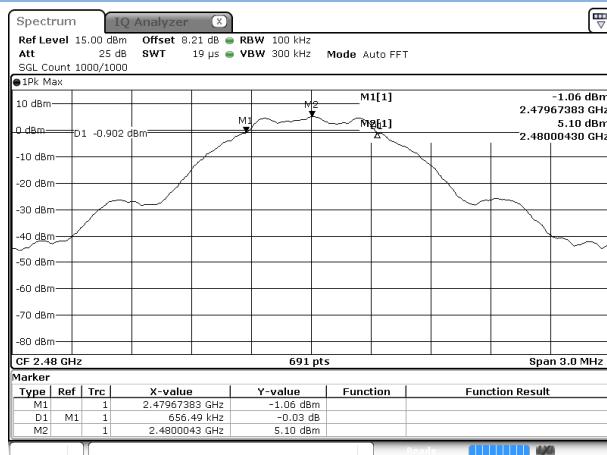


### 99% Bandwidth


#### GFSK (BLE) LOW CHANNEL

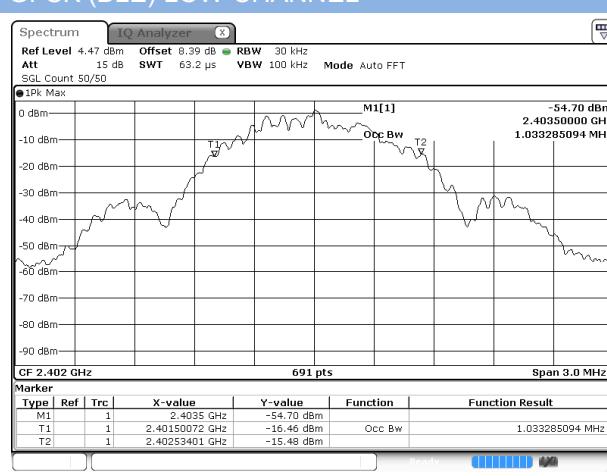

#### GFSK (BLE) MIDDLE CHANNEL

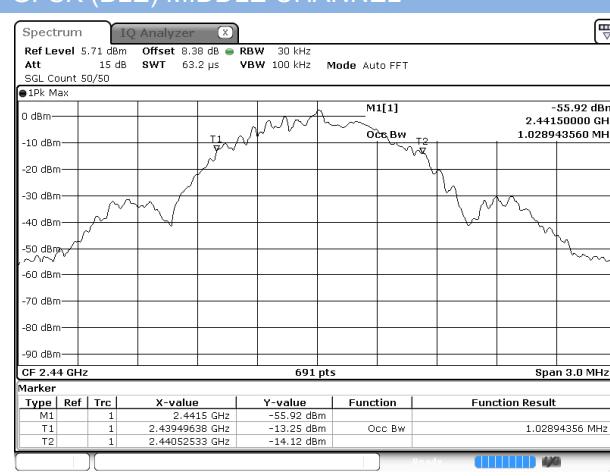

### GFSK (BLE) HIGH CHANNEL

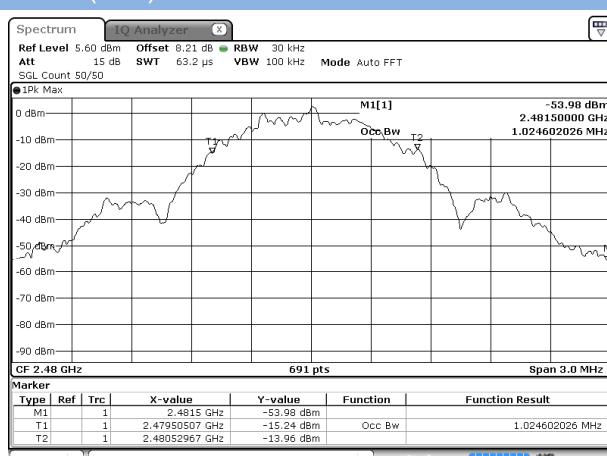


## 2 Mbps


### Test plots

#### 6 dB Bandwidth


##### GFSK (BLE) LOW CHANNEL

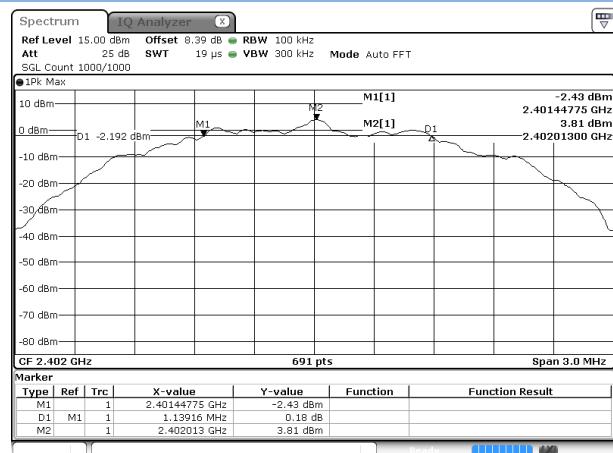

##### GFSK (BLE) MIDDLE CHANNEL

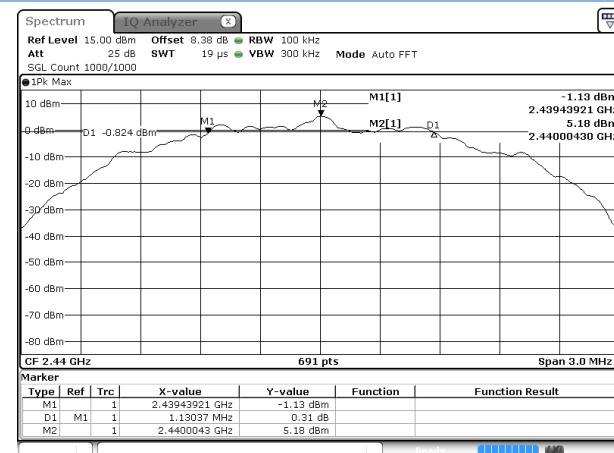


##### GFSK (BLE) HIGH CHANNEL

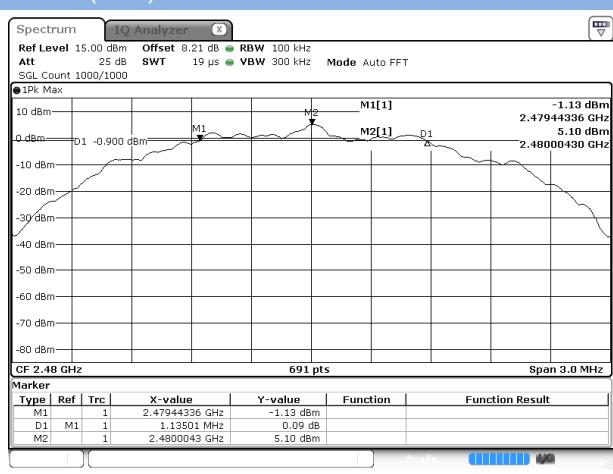


#### 99% Bandwidth


##### GFSK (BLE) LOW CHANNEL

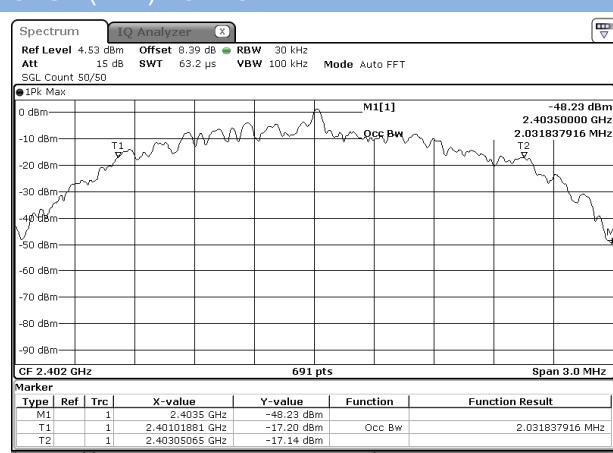

##### GFSK (BLE) MIDDLE CHANNEL

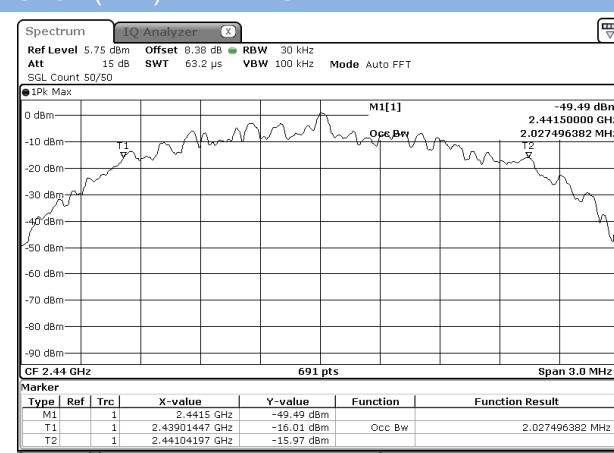

## GFSK (BLE) HIGH CHANNEL

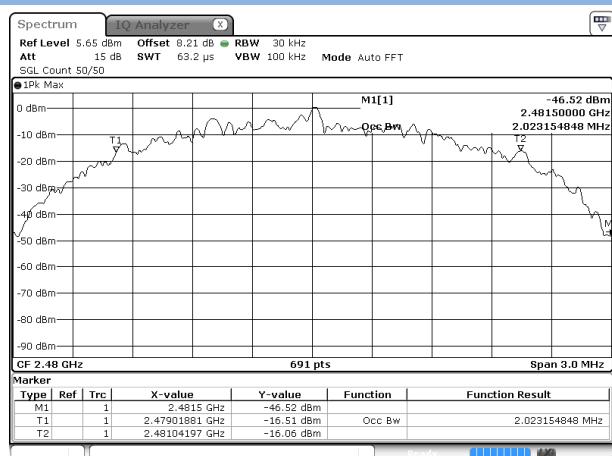

### A.3 Conducted Spurious Emissions

1 Mbps

Test Data

GFSK (BLE)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-40.81	4.03	-15.97	Pass
Middle	-41.08	5.19	-14.81	Pass
High	-41.36	5.14	-14.86	Pass

2 Mbps


Test Data

GFSK (BLE)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-41.25	4.03	-15.97	Pass
Middle	-41.42	5.21	-14.79	Pass
High	-41.07	5.11	-14.89	Pass

1 Mbps


Test Plots

GFSK (BLE) LOW CHANNEL , CARRIER LEVEL

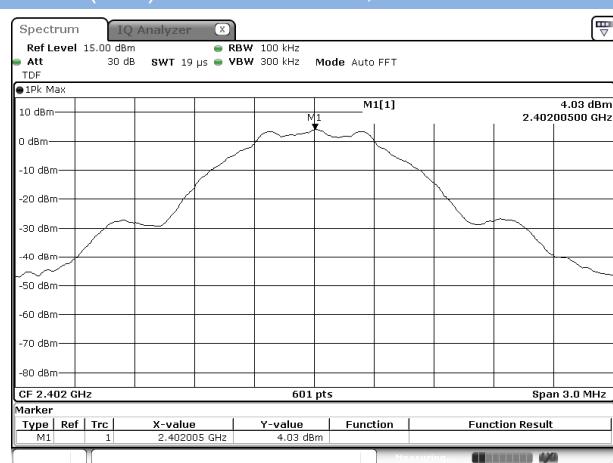


Date: 21-DEC-2018 14:26:40

### GFSK (BLE)LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

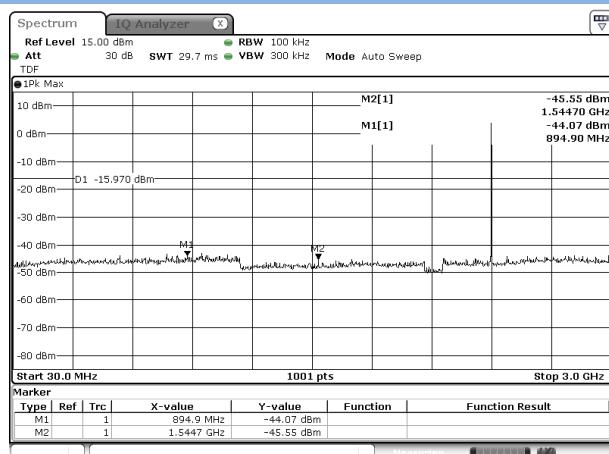


Date: 21 DEC. 2018 14:27:06

### GFSK (BLE)LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

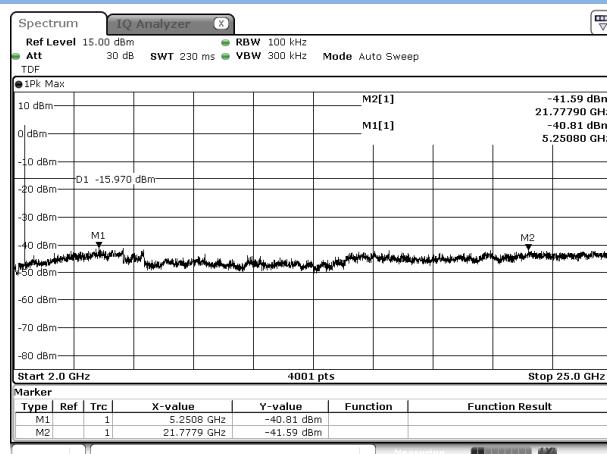


Date: 21 DEC. 2018 14:27:17

### GFSK (BLE)MIDDLE CHANNEL , CARRIER LEVEL

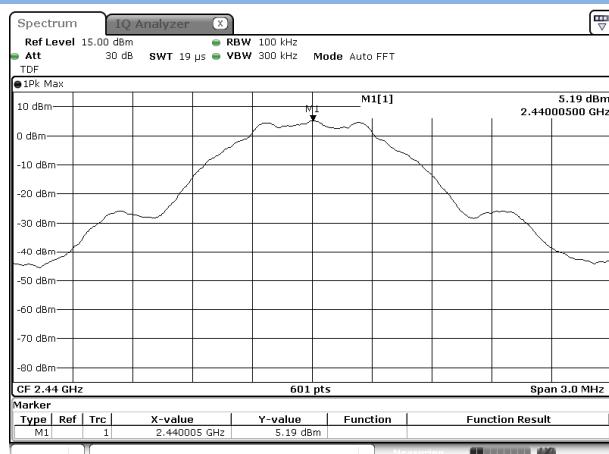


Date: 21 DEC. 2018 14:28:19

### GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

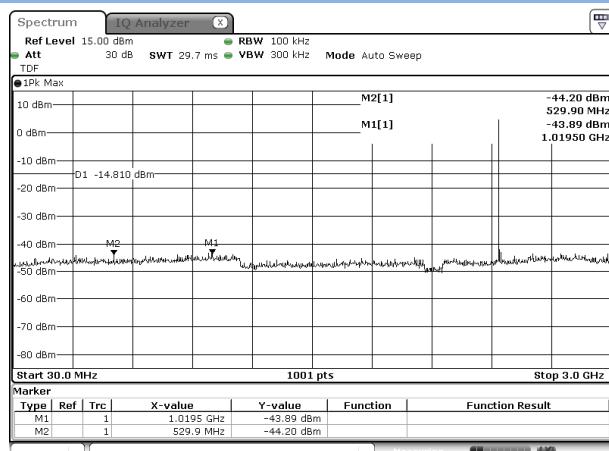


Date: 21 DEC. 2018 14:29:13

### GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

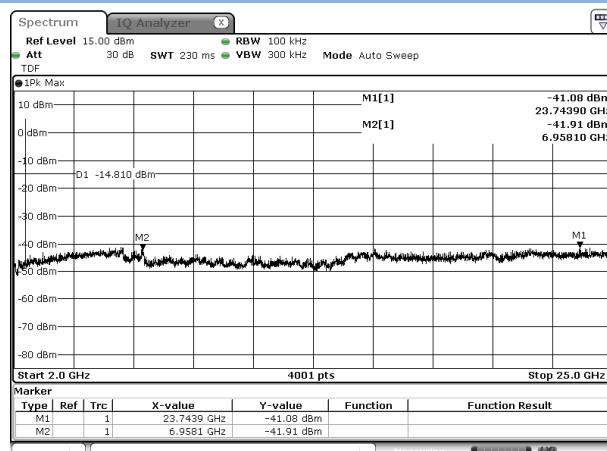


Date: 21 DEC. 2018 14:29:29


### GFSK (BLE)HIGH CHANNEL , CARRIER LEVEL

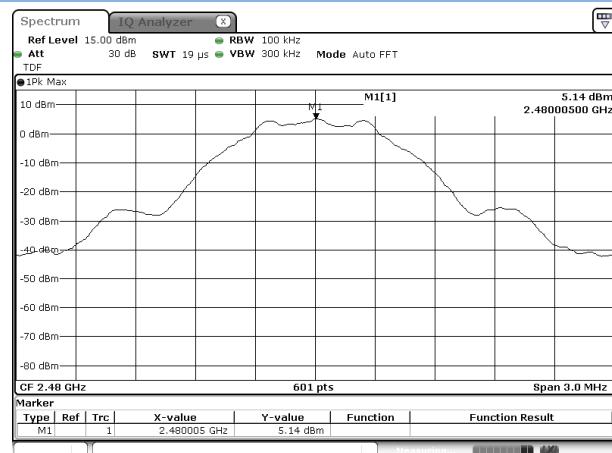

### GFSK (BLE)HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

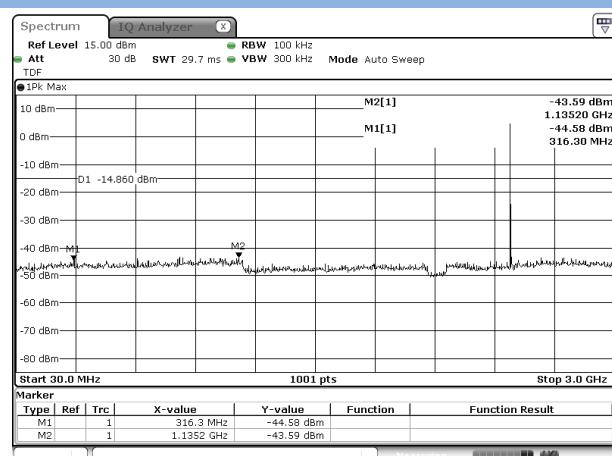


### GFSK (BLE)HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

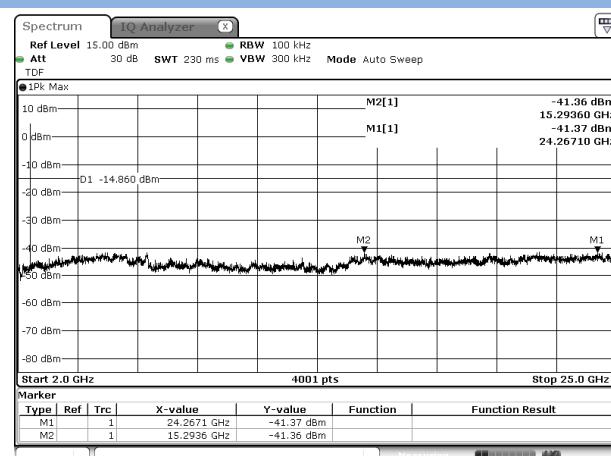


## 2 Mbps

### Test Plots

### GFSK (BLE) LOW CHANNEL , CARRIER LEVEL

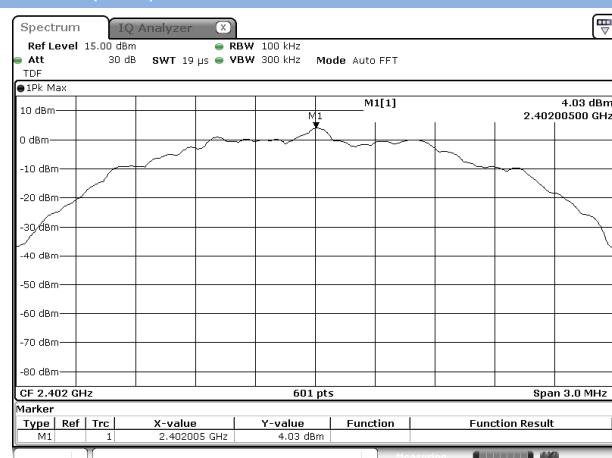


### GFSK (BLE)LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

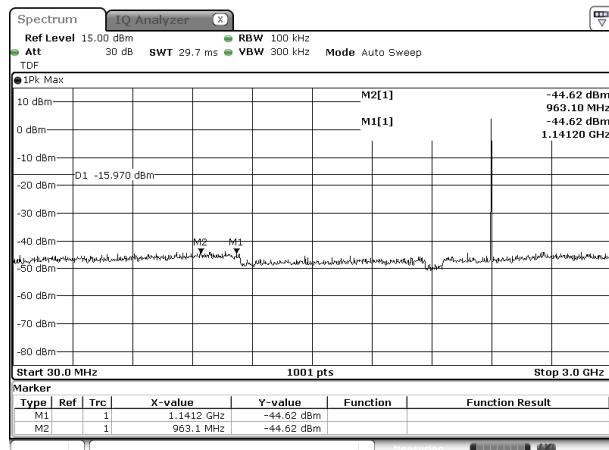


Date: 21 DEC. 2018 14:34:50

### GFSK (BLE)LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

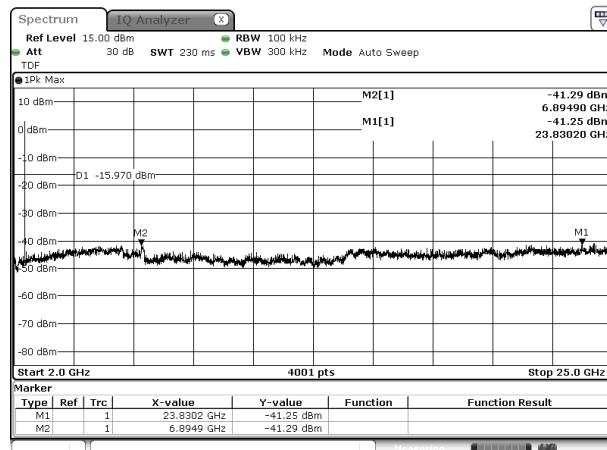


Date: 21 DEC. 2018 14:35:03

### GFSK (BLE)MIDDLE CHANNEL , CARRIER LEVEL

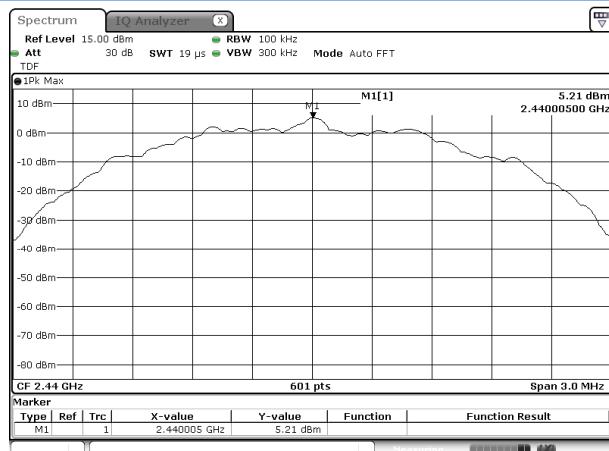


Date: 21 DEC. 2018 14:36:41

### GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

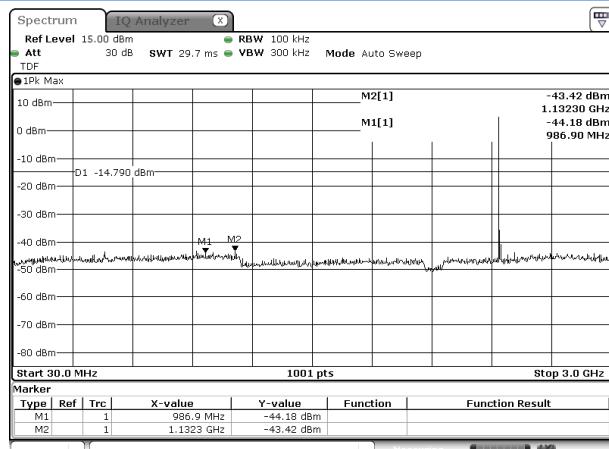


Date: 21 DEC. 2018 14:37:03

### GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

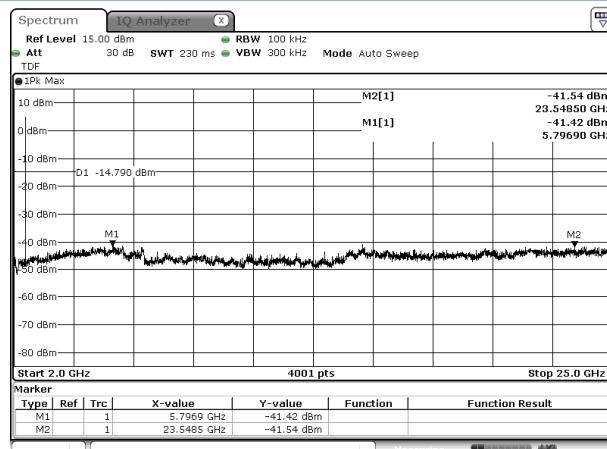


Date: 21 DEC. 2018 14:37:18


### GFSK (BLE)HIGH CHANNEL , CARRIER LEVEL

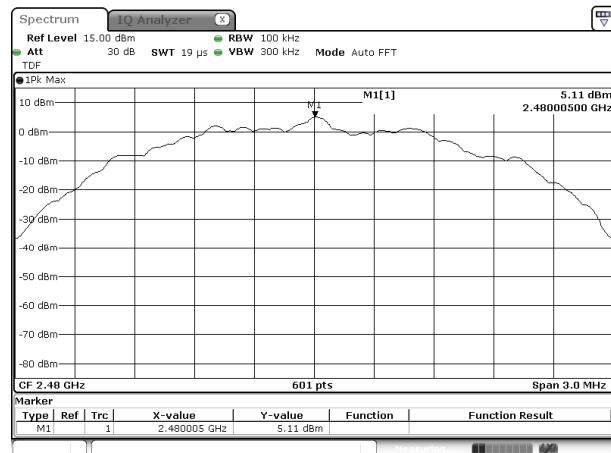

### GFSK (BLE)HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

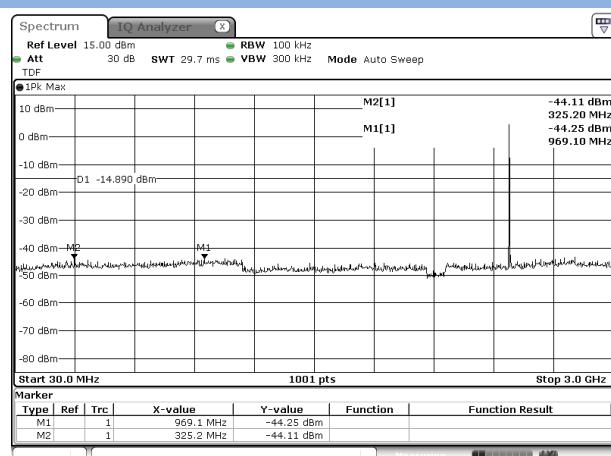

### GFSK (BLE)HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

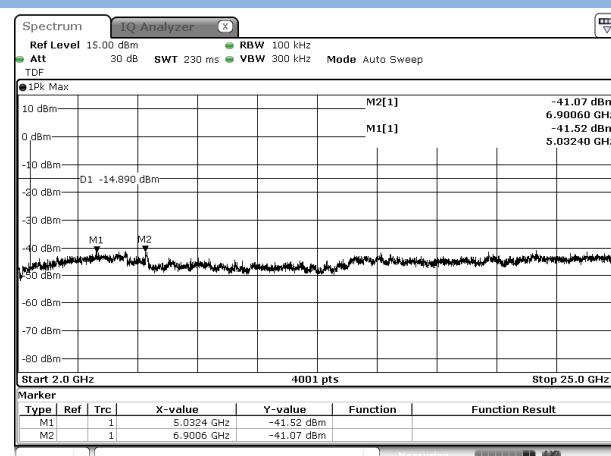

## A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

### 1 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-38.90	4.03	-15.97	Pass
High Channel	-58.13	5.14	-14.86	Pass


### 2 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-22.67	4.03	-15.97	Pass
High Channel	-45.95	5.11	-14.89	Pass


### 1 Mbps

#### Test Plots


##### LOW CHANNEL, Carrier level

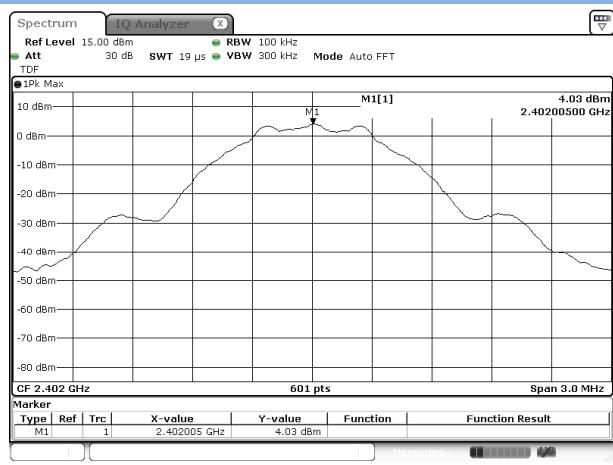


## LOW CHANNEL, Reference level

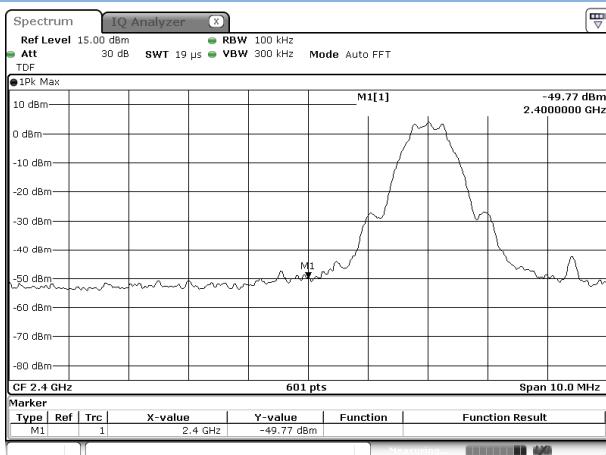


## LOW CHANNEL, Band Edge

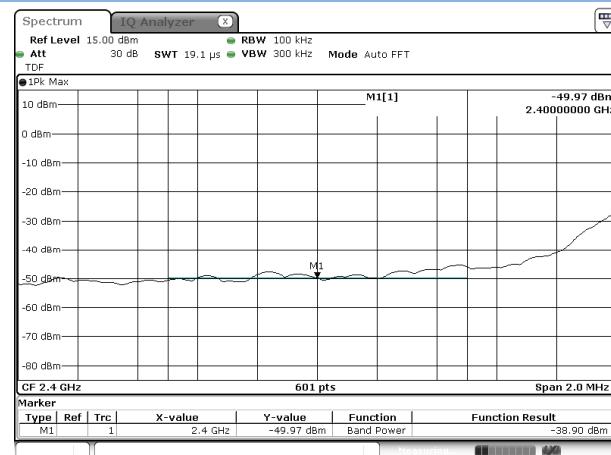


## High CHANNEL, Carrier level

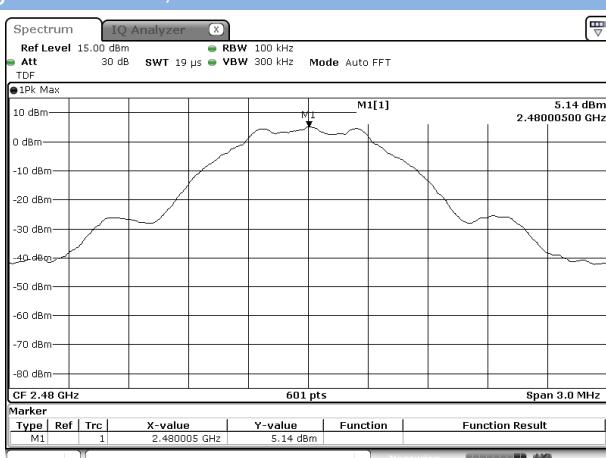

## HIGH CHANNEL, Reference level

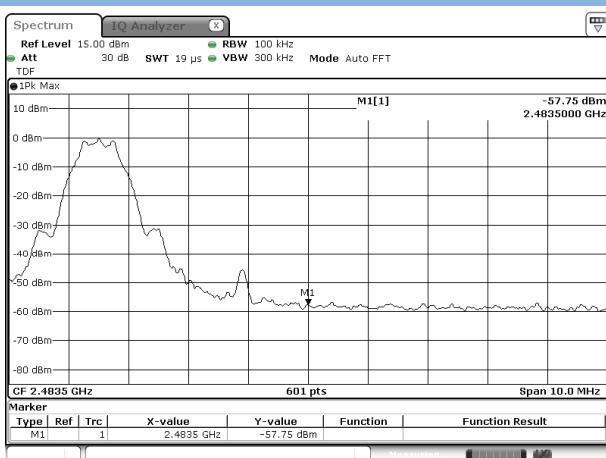


## HIGH CHANNEL, Band Edge

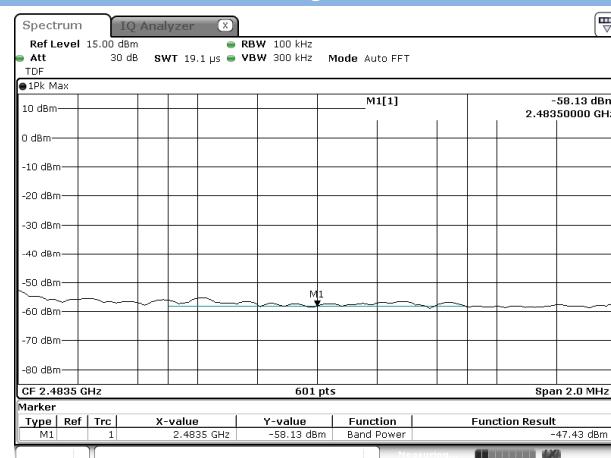


## 2 Mbps

### Test Plots


#### LOW CHANNEL, Carrier level

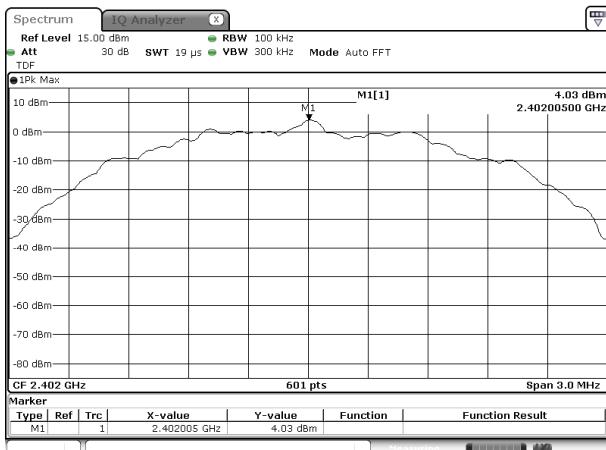


#### LOW CHANNEL, Reference level

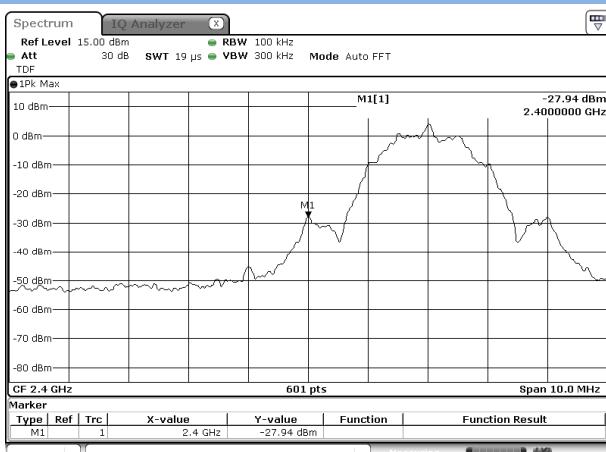


#### LOW CHANNEL, Band Edge

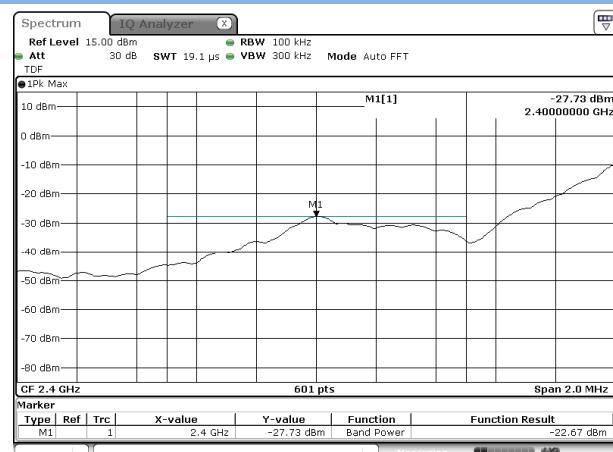


#### High CHANNEL, Carrier level

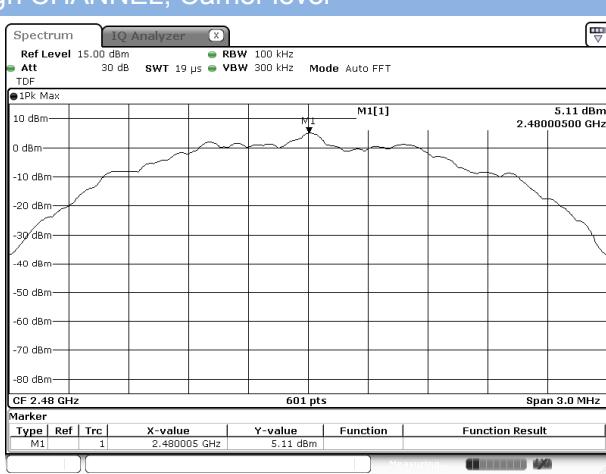

## HIGH CHANNEL, Reference level

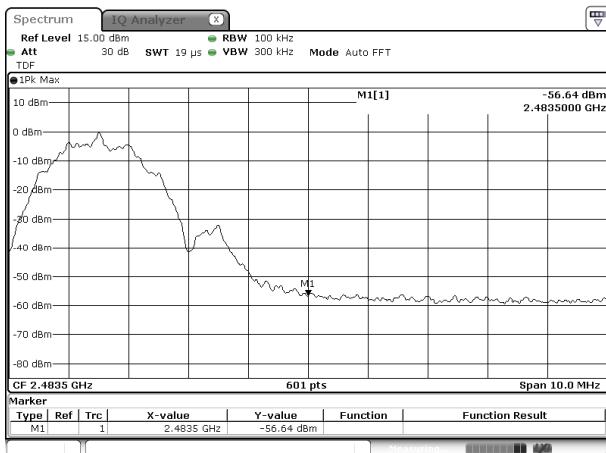

## HIGH CHANNEL, Band Edge

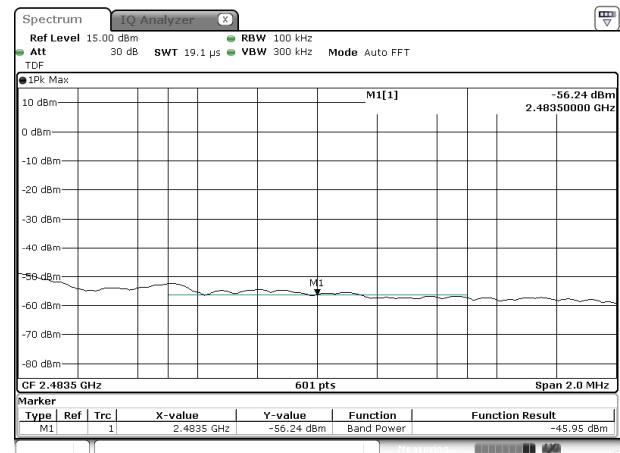

## A.5 Conducted Emissions

Note <sup>1</sup>: The EUT is working in the Normal link mode.


Note <sup>2</sup>: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz ) shown here.

Note <sup>3</sup>: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

### 1 Mbps


#### Test Data and Plots

##### PHASE L

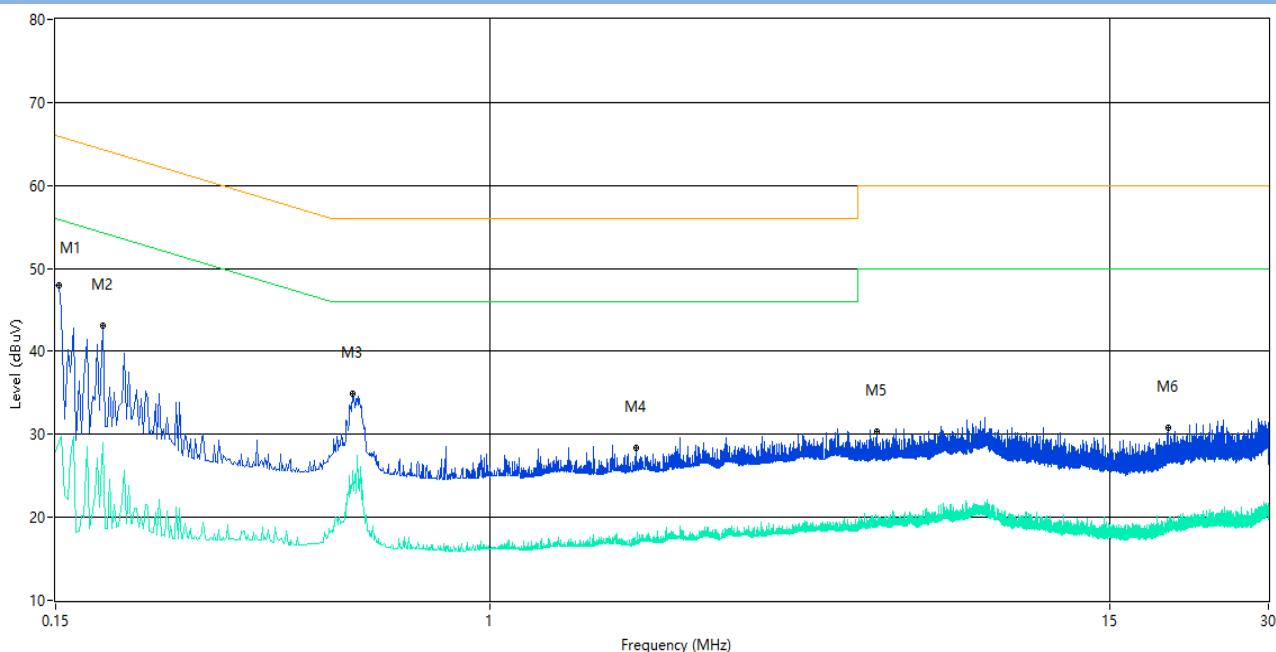

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.152	47.9	10.01	65.9	-18.00	Peak	L Line	Pass
1**	0.152	29.1	10.01	55.9	-26.80	AV	L Line	Pass
2	0.184	43.1	10.01	64.3	-21.20	Peak	L Line	Pass
2**	0.184	29.0	10.01	54.3	-25.30	AV	L Line	Pass
3	0.548	34.9	10.02	56.0	-21.10	Peak	L Line	Pass
3**	0.548	24.0	10.02	46.0	-22.00	AV	L Line	Pass
4	1.894	28.4	10.06	56.0	-27.60	Peak	L Line	Pass
4**	1.894	16.9	10.06	46.0	-29.10	AV	L Line	Pass
5	5.424	30.3	10.11	60.0	-29.70	Peak	L Line	Pass
5**	5.424	19.1	10.11	50.0	-30.90	AV	L Line	Pass
6	19.328	30.8	10.24	60.0	-29.20	Peak	L Line	Pass
6**	19.328	19.2	10.24	50.0	-30.80	AV	L Line	Pass

## PHASE N

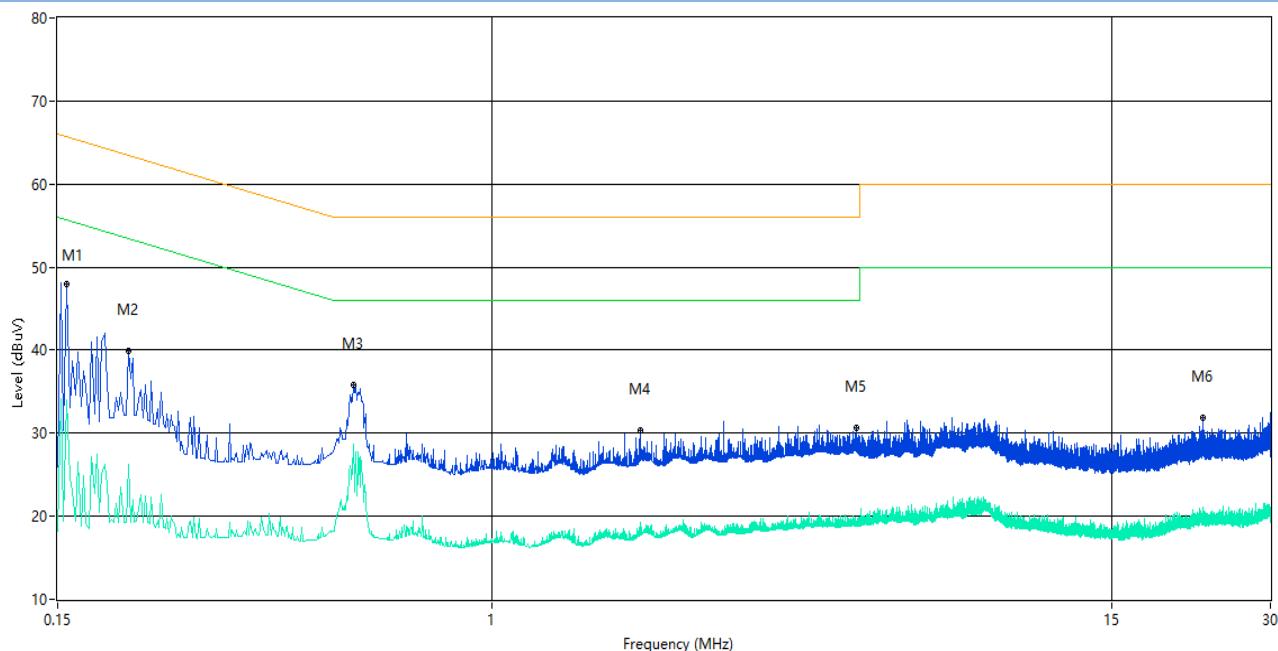


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	47.9	10.01	65.7	-17.80	Peak	N Line	Pass
1**	0.156	34.0	10.01	55.7	-21.70	AV	N Line	Pass
2	0.204	40.0	10.01	63.4	-23.40	Peak	N Line	Pass
2**	0.204	26.2	10.01	53.4	-27.20	AV	N Line	Pass
3	0.546	35.9	10.02	56.0	-20.10	Peak	N Line	Pass
3**	0.546	28.7	10.02	46.0	-17.30	AV	N Line	Pass
4	1.910	30.4	10.06	56.0	-25.60	Peak	N Line	Pass
4**	1.910	19.2	10.06	46.0	-26.80	AV	N Line	Pass
5	4.910	30.7	10.12	56.0	-25.30	Peak	N Line	Pass
5**	4.910	18.8	10.12	46.0	-27.20	AV	N Line	Pass
6	22.290	31.9	10.28	60.0	-28.10	Peak	N Line	Pass
6**	22.290	18.8	10.28	50.0	-31.20	AV	N Line	Pass

2 Mbps


## Test Data and Plots

## PHASE L

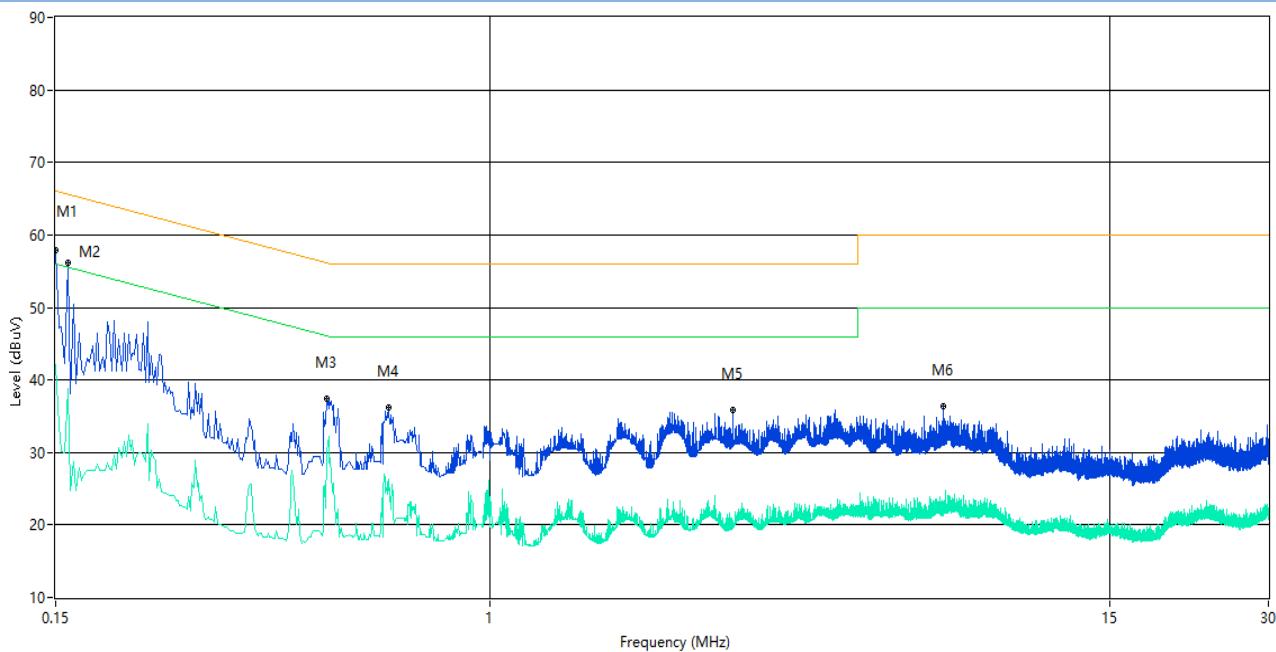

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	57.8	10.01	66.0	-8.20	Peak	L Line	Pass
1**	0.150	42.1	10.01	56.0	-13.90	AV	L Line	Pass
2	0.158	56.2	10.01	65.6	-9.40	Peak	L Line	Pass
2**	0.158	38.7	10.01	55.6	-16.90	AV	L Line	Pass
3	0.490	37.4	10.02	56.2	-18.80	Peak	L Line	Pass
3**	0.490	30.2	10.02	46.2	-16.00	AV	L Line	Pass
4	0.642	36.2	10.02	56.0	-19.80	Peak	L Line	Pass
4**	0.642	24.7	10.02	46.0	-21.30	AV	L Line	Pass
5	2.896	35.9	10.08	56.0	-20.10	Peak	L Line	Pass
5**	2.896	19.8	10.08	46.0	-26.20	AV	L Line	Pass
6	7.246	36.3	10.15	60.0	-23.70	Peak	L Line	Pass
6**	7.246	21.8	10.15	50.0	-28.20	AV	L Line	Pass

## PHASE N

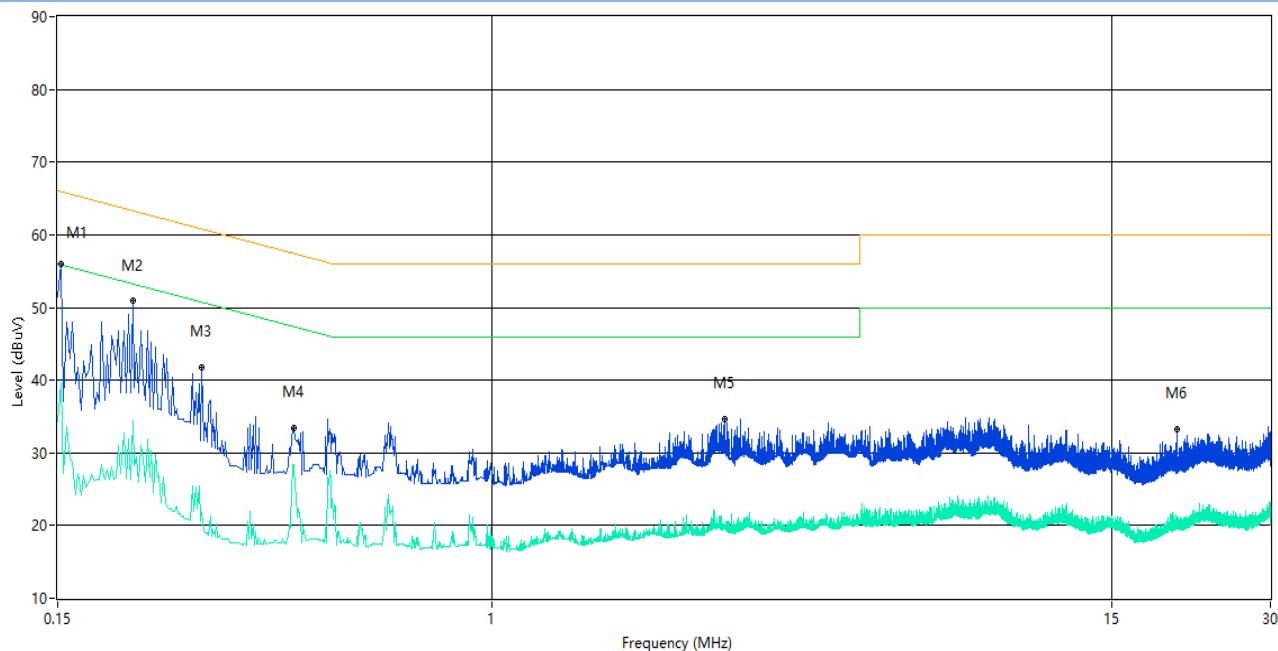

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.152	55.9	10.01	65.9	-10.00	Peak	N Line	Pass
1**	0.152	39.7	10.01	55.9	-16.20	AV	N Line	Pass
2	0.208	50.9	10.02	63.3	-12.40	Peak	N Line	Pass
2**	0.208	34.5	10.02	53.3	-18.80	AV	N Line	Pass
3	0.282	41.7	10.03	60.8	-19.10	Peak	N Line	Pass
3**	0.282	21.8	10.03	50.8	-29.00	AV	N Line	Pass
4	0.422	33.4	10.03	57.4	-24.00	Peak	N Line	Pass
4**	0.422	28.4	10.03	47.4	-19.00	AV	N Line	Pass
5	2.762	34.7	10.08	56.0	-21.30	Peak	N Line	Pass
5**	2.762	19.3	10.08	46.0	-26.70	AV	N Line	Pass
6	19.958	33.3	10.25	60.0	-26.70	Peak	N Line	Pass
6**	19.958	19.4	10.25	50.0	-30.60	AV	N Line	Pass

## A.6 Radiated Spurious Emission

Note <sup>1</sup>: The symbol of “--” in the table which means not application.


Note <sup>2</sup>: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note <sup>3</sup>: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note <sup>4</sup>: The EUT is working in the Normal link mode below 1 GHz.


Note <sup>5</sup>: Results (dB<sub>UV</sub>/m) = Original reading level of Spectrum Analyzer (dB<sub>UV</sub>/m) + Factor (dB)

### Test Data and Plots

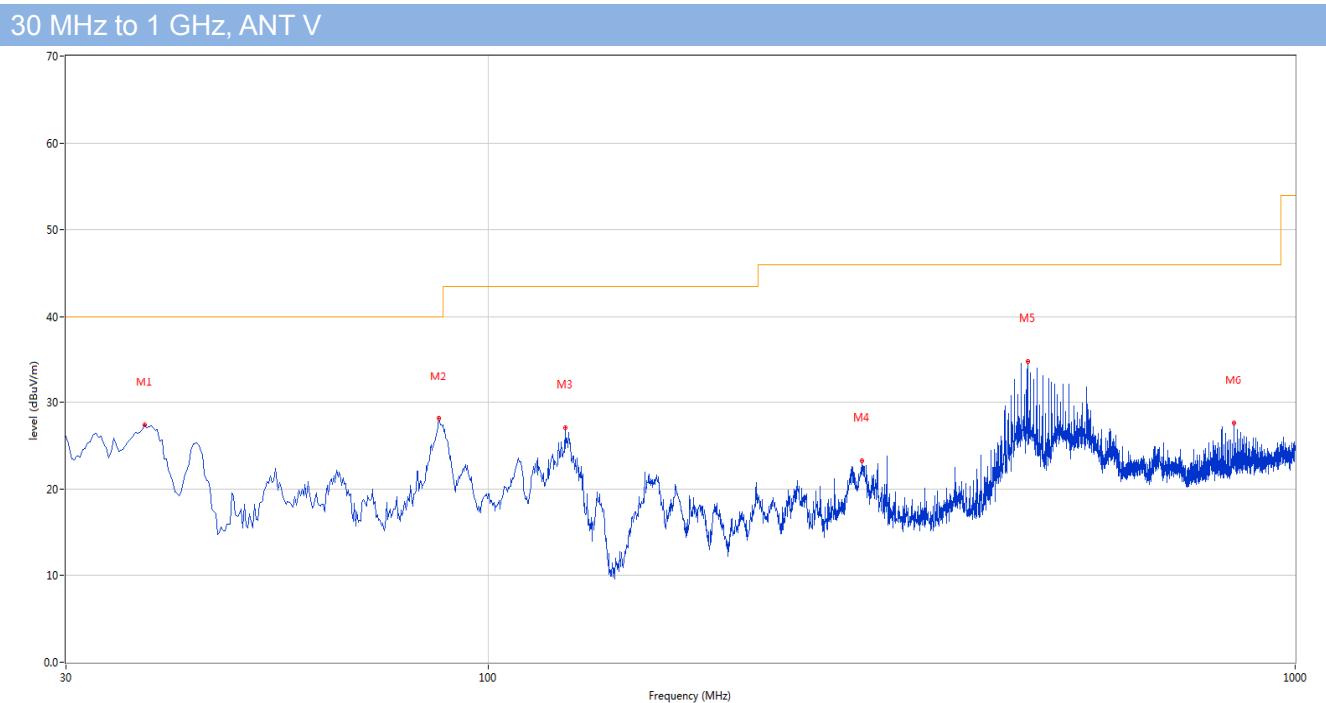

No.	Frequency (MHz)	Results (dB <sub>UV</sub> /m)	Factor (dB)	Limit (dB <sub>UV</sub> /m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	37.517	27.42	-25.11	40.0	-12.58	Peak	0.00	100	V	Pass
2	86.988	28.14	-27.33	40.0	-11.86	Peak	122.70	100	V	Pass
3	124.575	27.12	-26.94	43.5	-16.38	Peak	60.80	100	V	Pass
4	290.445	23.21	-22.14	46.0	-22.79	Peak	81.60	100	V	Pass
5	466.015	34.89	-17.80	46.0	-11.11	Peak	164.80	100	V	Pass
6	839.950	27.66	-11.19	46.0	-18.34	Peak	101.70	100	V	Pass

## 30 MHz to 1 GHz, ANT H

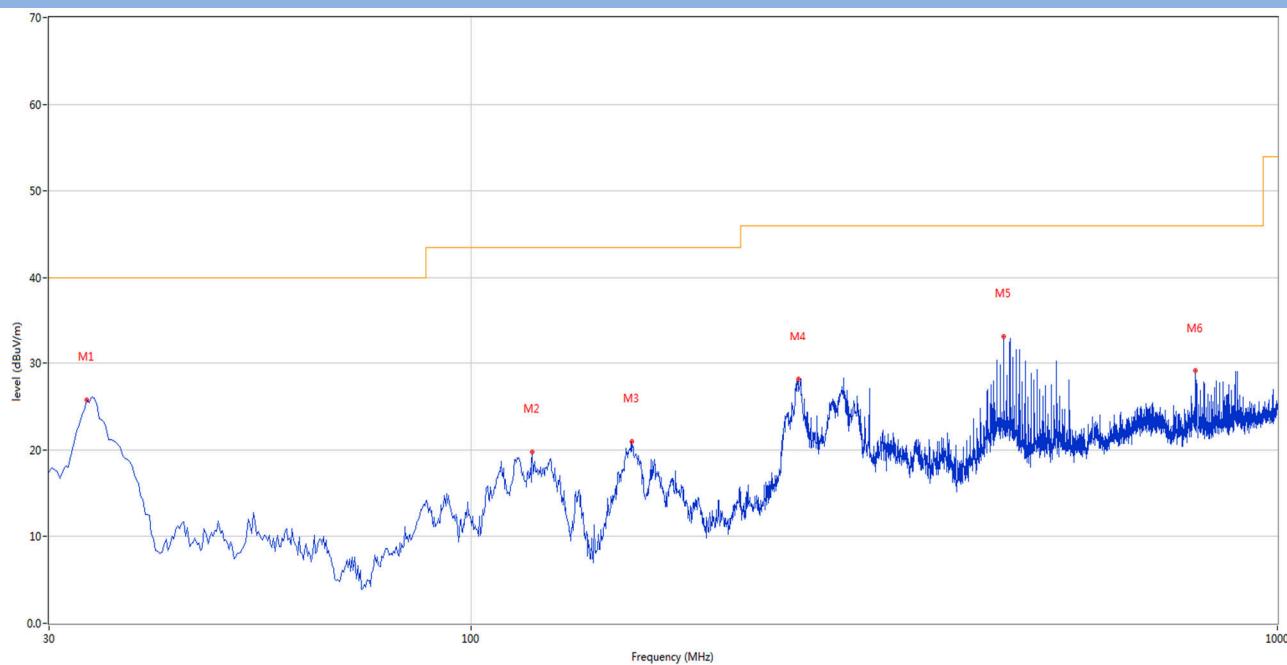


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	33.395	25.73	-26.65	40.0	-14.27	Peak	0.00	200	H	Pass
2	119.240	19.72	-26.36	43.5	-23.78	Peak	360.00	100	H	Pass
3	158.525	21.01	-27.76	43.5	-22.49	Peak	354.50	200	H	Pass
4	254.798	28.21	-23.02	46.0	-17.79	Peak	1.90	100	H	Pass
5	457.527	33.20	-17.99	46.0	-12.80	Peak	106.00	200	H	Pass
6	791.935	29.17	-12.07	46.0	-16.83	Peak	122.80	100	H	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 12.75G is noise only, do not show on the report.

## 1 Mbps


### GFSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT V

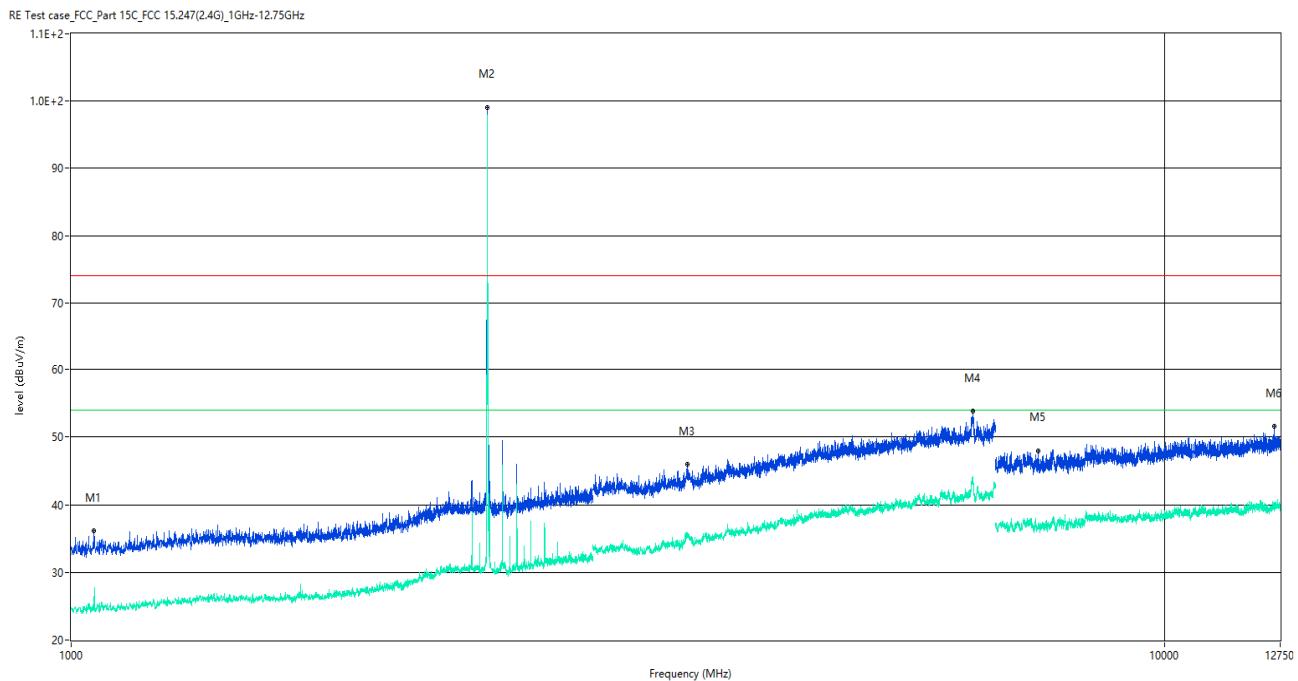

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1046.500	24.43	-18.35	54.0	-29.57	AV	352.00	100	V	Pass
1	1046.500	34.41	-18.35	74.0	-39.59	Peak	352.00	100	V	Pass
2**	2402.000	95.11	-12.20	54.0	41.11	AV	309.00	100	V	N/A
2	2402.000	99.05	-12.20	74.0	25.05	Peak	309.00	100	V	N/A
3**	3660.000	35.33	-6.26	54.0	-18.67	AV	358.00	100	V	Pass
3	3660.000	45.92	-6.26	74.0	-28.08	Peak	358.00	100	V	Pass
4**	6674.000	44.09	1.93	54.0	-9.91	AV	0.00	100	V	Pass
4	6674.000	53.78	1.93	74.0	-20.22	Peak	0.00	100	V	Pass
5**	7662.688	36.79	-2.67	54.0	-17.21	AV	352.00	100	V	Pass
5	7662.688	48.01	-2.67	74.0	-25.99	Peak	352.00	100	V	Pass
6**	12599.063	39.74	2.07	54.0	-14.26	AV	266.00	100	V	Pass
6	12599.063	51.54	2.07	74.0	-22.46	Peak	266.00	100	V	Pass


## GFSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT H

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-12.75GHz

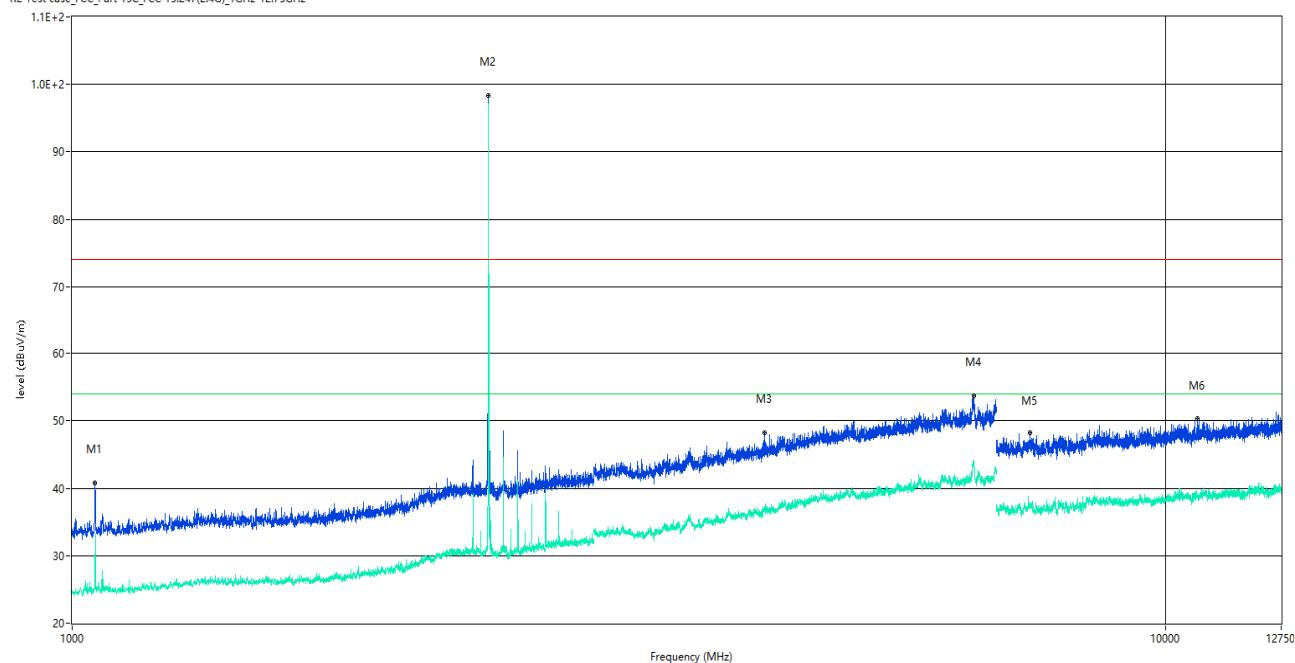


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1039.500	24.72	-18.11	54.0	-29.28	AV	216.00	100	H	Pass
1	1039.500	33.16	-18.11	74.0	-40.84	Peak	216.00	100	H	Pass
2**	2402.000	93.93	-12.20	54.0	39.93	AV	133.00	100	H	N/A
2	2402.000	98.35	-12.20	74.0	24.35	Peak	133.00	100	H	N/A
3**	4293.000	36.72	-4.17	54.0	-17.28	AV	96.00	100	H	Pass
3	4293.000	48.21	-4.17	74.0	-25.79	Peak	96.00	100	H	Pass
4**	6673.000	43.54	1.94	54.0	-10.46	AV	0.00	100	H	Pass
4	6673.000	53.73	1.94	74.0	-20.27	Peak	0.00	100	H	Pass
5**	7507.438	37.41	-2.41	54.0	-16.59	AV	360.00	100	H	Pass
5	7507.438	48.24	-2.41	74.0	-25.76	Peak	360.00	100	H	Pass
6**	10698.687	38.55	-0.29	54.0	-15.45	AV	0.00	100	H	Pass
6	10698.687	50.27	-0.29	74.0	-23.73	Peak	0.00	100	H	Pass

## GFSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT V

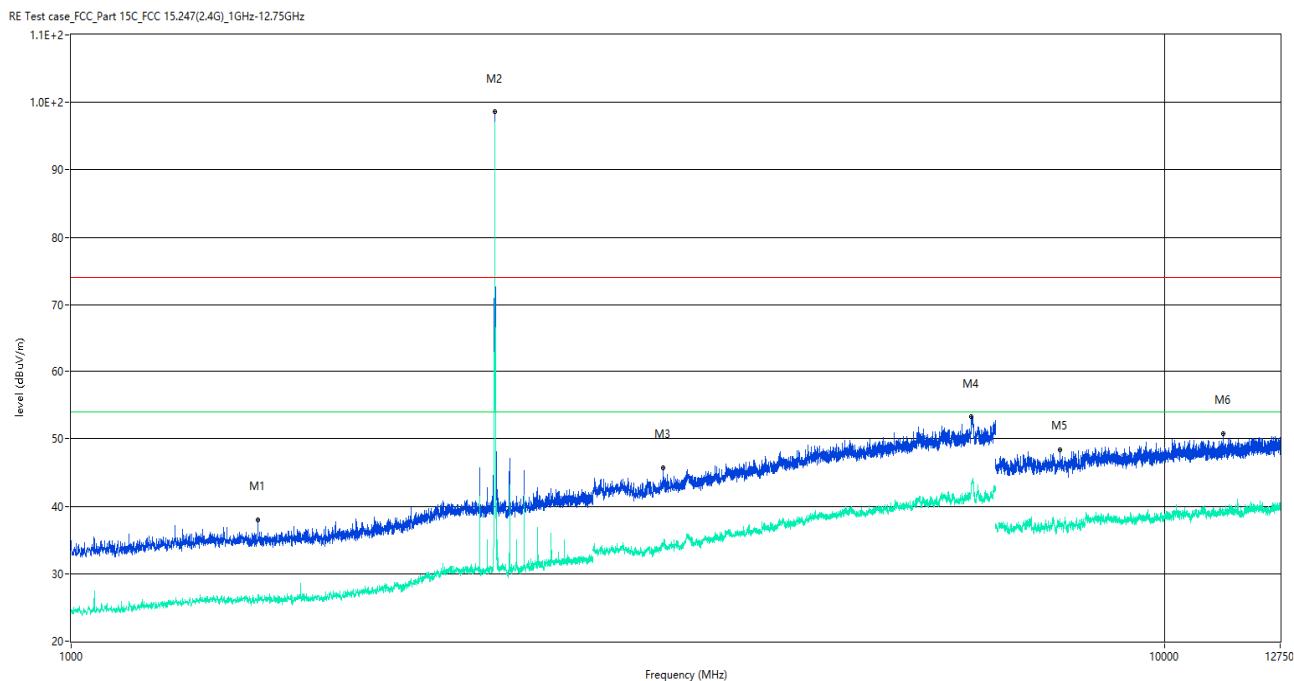

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1482.000	26.10	-17.54	54.0	-27.90	AV	344.00	100	V	Pass
1	1482.000	38.04	-17.54	74.0	-35.96	Peak	344.00	100	V	Pass
2**	2439.500	84.06	-12.81	54.0	30.06	AV	344.00	100	V	N/A
2	2439.500	98.57	-12.81	74.0	24.57	Peak	344.00	100	V	N/A
3**	3480.000	34.54	-6.70	54.0	-19.46	AV	139.00	100	V	Pass
3	3480.000	45.71	-6.70	74.0	-28.29	Peak	139.00	100	V	Pass
4**	6655.000	42.92	1.06	54.0	-11.08	AV	0.00	100	V	Pass
4	6655.000	53.25	1.06	74.0	-20.75	Peak	0.00	100	V	Pass
5**	8019.188	38.10	-1.84	54.0	-15.90	AV	8.00	100	V	Pass
5	8019.188	48.35	-1.84	74.0	-25.65	Peak	8.00	100	V	Pass
6**	11306.750	38.91	0.70	54.0	-15.09	AV	8.00	100	V	Pass
6	11306.750	50.75	0.70	74.0	-23.25	Peak	8.00	100	V	Pass


## GFSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT H

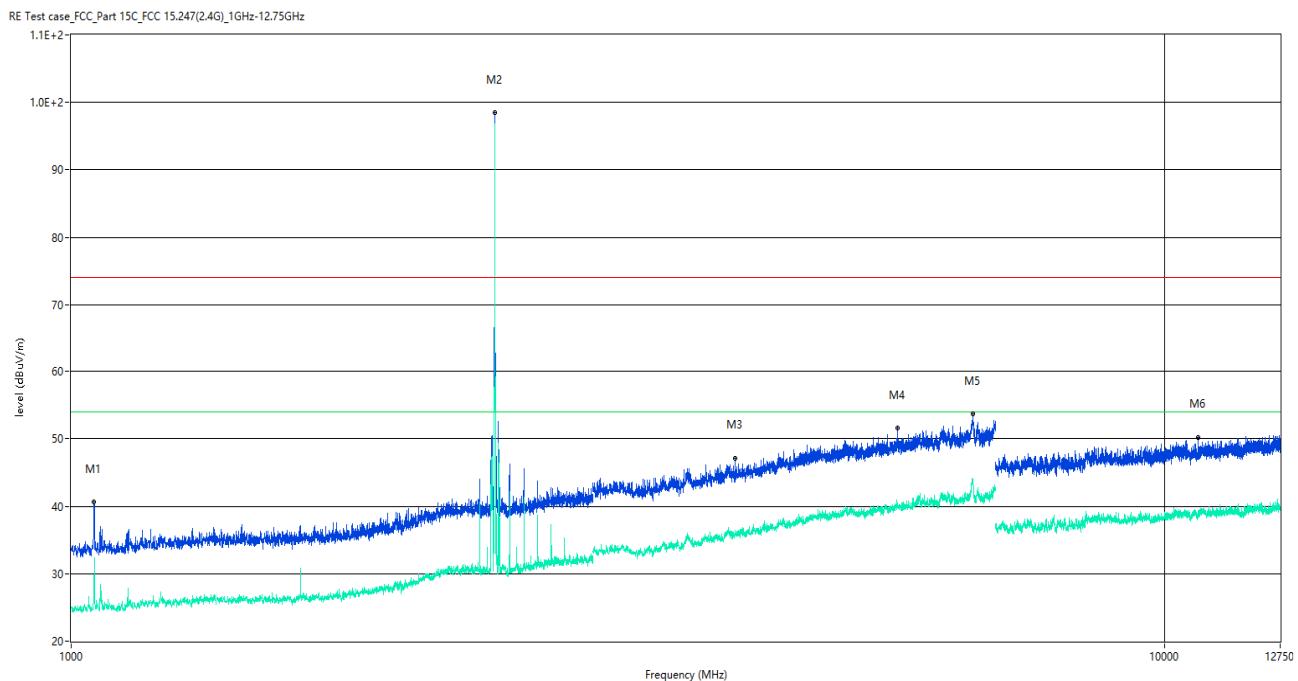

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1048.500	25.77	-18.19	54.0	-28.23	AV	176.00	100	H	Pass
1	1048.500	35.91	-18.19	74.0	-38.09	Peak	176.00	100	H	Pass
2**	2439.500	83.07	-12.81	54.0	29.07	AV	90.00	100	H	N/A
2	2439.500	98.42	-12.81	74.0	24.42	Peak	90.00	100	H	N/A
3**	4048.000	36.24	-5.50	54.0	-17.76	AV	344.00	100	H	Pass
3	4048.000	47.16	-5.50	74.0	-26.84	Peak	344.00	100	H	Pass
4**	5701.000	39.85	-1.76	54.0	-14.15	AV	360.00	100	H	Pass
4	5701.000	51.53	-1.76	74.0	-22.47	Peak	360.00	100	H	Pass
5**	6678.000	43.27	1.62	54.0	-10.73	AV	90.00	100	H	Pass
5	6678.000	53.64	1.62	74.0	-20.36	Peak	90.00	100	H	Pass
6**	10723.125	38.58	-0.26	54.0	-15.42	AV	268.00	100	H	Pass
6	10723.125	50.22	-0.26	74.0	-23.78	Peak	268.00	100	H	Pass


## GFSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT V

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-12.75GHz

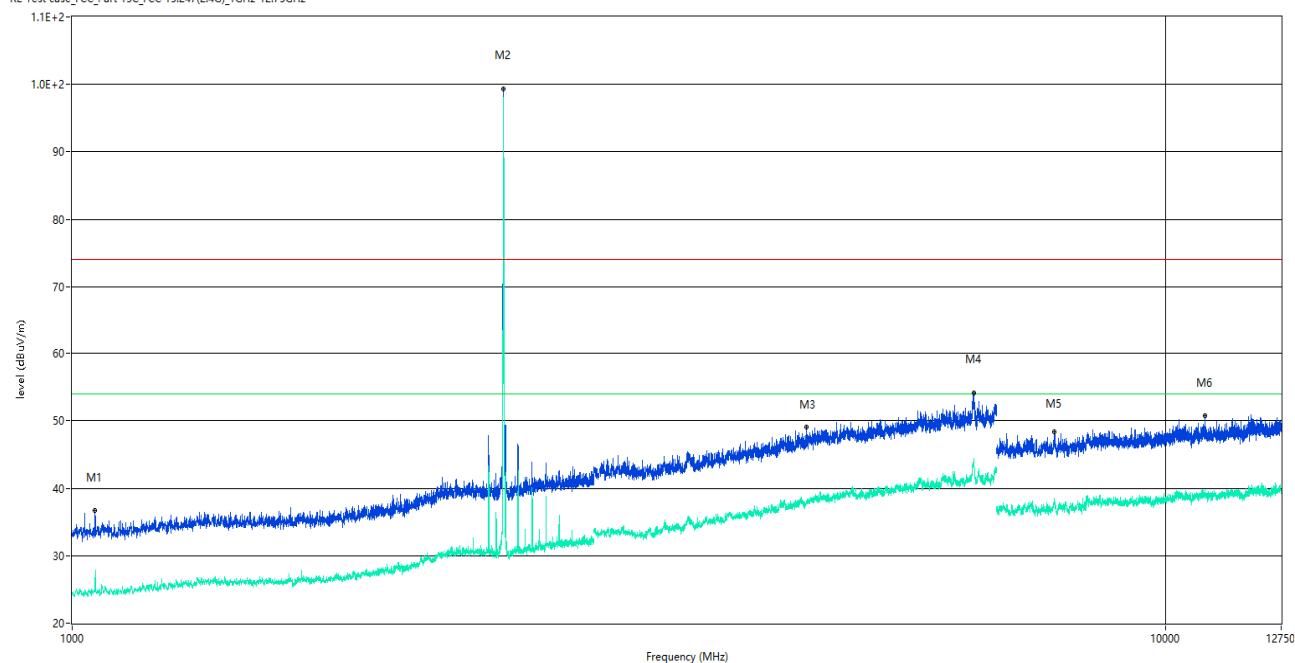

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	25.67	-18.20	54.0	-28.33	AV	0.00	100	V	Pass
1	1049.500	36.67	-18.20	74.0	-37.33	Peak	0.00	100	V	Pass
2**	2480.500	98.00	-11.69	54.0	44.00	AV	308.00	100	V	N/A
2	2480.500	99.40	-11.69	74.0	25.40	Peak	308.00	100	V	N/A
3**	4690.000	37.74	-3.60	54.0	-16.26	AV	0.00	100	V	Pass
3	4690.000	49.11	-3.60	74.0	-24.89	Peak	0.00	100	V	Pass
4**	6679.000	43.95	1.57	54.0	-10.05	AV	0.00	100	V	Pass
4	6679.000	54.12	1.57	74.0	-19.88	Peak	0.00	100	V	Pass
5**	7909.938	38.15	-1.93	54.0	-15.85	AV	182.00	100	V	Pass
5	7909.938	48.33	-1.93	74.0	-25.67	Peak	182.00	100	V	Pass
6**	10862.562	39.46	0.55	54.0	-14.54	AV	310.00	100	V	Pass
6	10862.562	50.70	0.55	74.0	-23.30	Peak	310.00	100	V	Pass

## GFSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT H

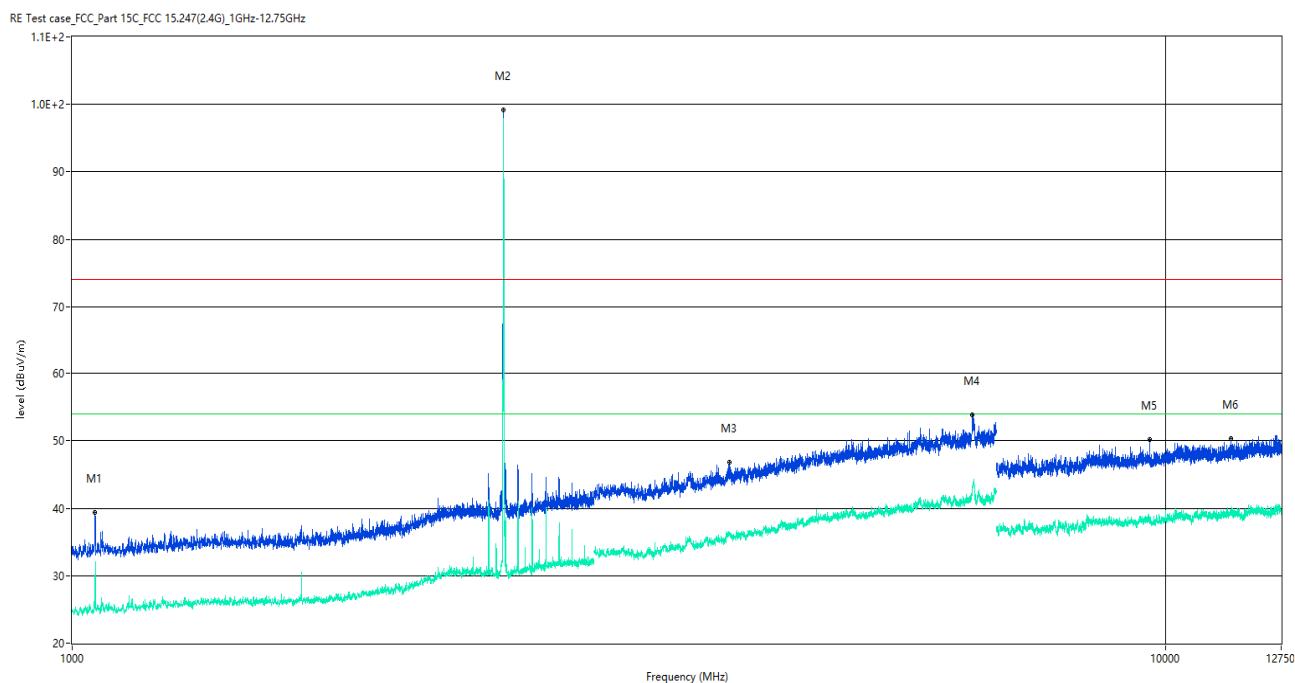


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	28.28	-18.20	54.0	-25.72	AV	217.00	100	H	Pass
1	1049.500	39.44	-18.20	74.0	-34.56	Peak	217.00	100	H	Pass
2**	2480.000	94.60	-11.71	54.0	40.60	AV	133.00	100	H	N/A
2	2480.000	99.19	-11.71	74.0	25.19	Peak	133.00	100	H	N/A
3**	3988.000	36.32	-3.91	54.0	-17.68	AV	0.00	100	H	Pass
3	3988.000	46.88	-3.91	74.0	-27.12	Peak	0.00	100	H	Pass
4**	6656.000	43.13	1.18	54.0	-10.87	AV	225.00	100	H	Pass
4	6656.000	53.84	1.18	74.0	-20.16	Peak	225.00	100	H	Pass
5**	9666.562	38.16	0.28	54.0	-15.84	AV	360.00	100	H	Pass
5	9666.562	50.21	0.28	74.0	-23.79	Peak	360.00	100	H	Pass
6**	11474.938	39.54	0.16	54.0	-14.46	AV	360.00	100	H	Pass
6	11474.938	50.33	0.16	74.0	-23.67	Peak	360.00	100	H	Pass

## 2 Mbps

### GFSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT V


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-12.75GHz

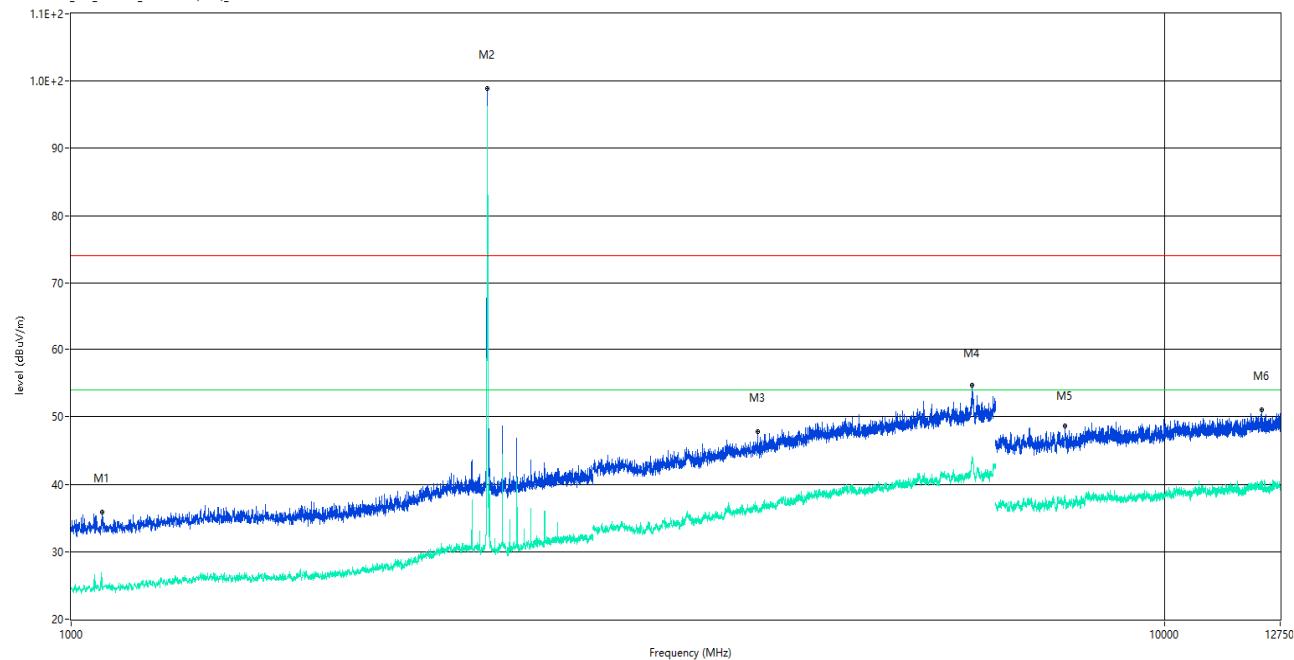

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1066.500	25.58	-18.08	54.0	-28.42	AV	346.00	100	V	Pass
1	1066.500	35.88	-18.08	74.0	-38.12	Peak	346.00	100	V	Pass
2**	2401.500	89.15	-12.23	54.0	35.15	AV	346.00	100	V	N/A
2	2401.500	98.96	-12.23	74.0	24.96	Peak	346.00	100	V	N/A
3**	4246.000	35.85	-5.21	54.0	-18.15	AV	183.00	100	V	Pass
3	4246.000	47.80	-5.21	74.0	-26.20	Peak	183.00	100	V	Pass
4**	6670.000	43.78	2.08	54.0	-10.22	AV	354.00	100	V	Pass
4	6670.000	54.63	2.08	74.0	-19.37	Peak	354.00	100	V	Pass
5**	8109.750	37.26	-1.62	54.0	-16.74	AV	135.00	100	V	Pass
5	8109.750	48.71	-1.62	74.0	-25.29	Peak	135.00	100	V	Pass
6**	12274.187	40.18	1.84	54.0	-13.82	AV	360.00	100	V	Pass
6	12274.187	51.03	1.84	74.0	-22.97	Peak	360.00	100	V	Pass


## GFSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT H

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-12.75GHz

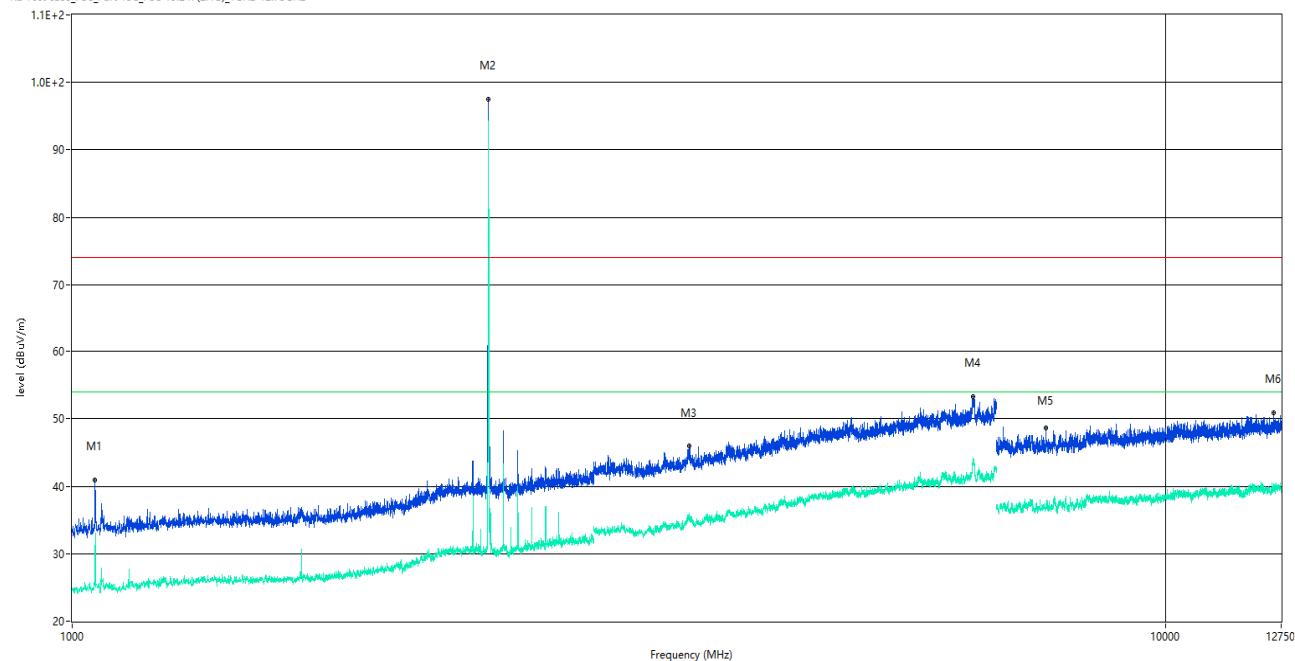


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1048.500	25.69	-18.19	54.0	-28.31	AV	183.00	100	H	Pass
1	1048.500	35.49	-18.19	74.0	-38.51	Peak	183.00	100	H	Pass
2**	2402.500	94.27	-12.17	54.0	40.27	AV	98.00	100	H	N/A
2	2402.500	97.57	-12.17	74.0	23.57	Peak	98.00	100	H	N/A
3**	3666.000	35.42	-5.59	54.0	-18.58	AV	154.00	100	H	Pass
3	3666.000	45.92	-5.59	74.0	-28.08	Peak	154.00	100	H	Pass
4**	6668.000	44.15	1.90	54.0	-9.85	AV	0.00	100	H	Pass
4	6668.000	53.28	1.90	74.0	-20.72	Peak	0.00	100	H	Pass
5**	7771.937	37.17	-2.47	54.0	-16.83	AV	222.00	100	H	Pass
5	7771.937	48.70	-2.47	74.0	-25.30	Peak	222.00	100	H	Pass
6**	12551.625	40.43	1.62	54.0	-13.57	AV	307.00	100	H	Pass
6	12551.625	50.91	1.62	74.0	-23.09	Peak	307.00	100	H	Pass

## GFSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT V

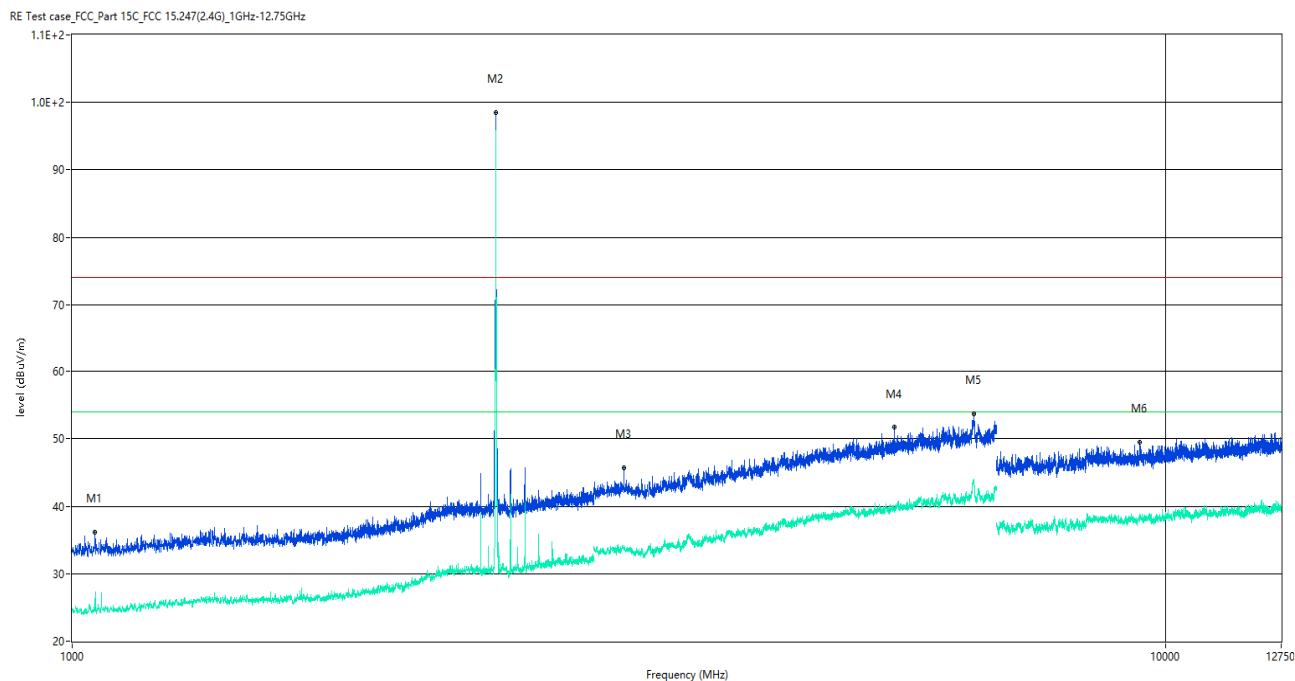

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1046.500	24.83	-18.35	54.0	-29.17	AV	0.00	100	V	Pass
1	1046.500	33.34	-18.35	74.0	-40.66	Peak	0.00	100	V	Pass
2**	2440.000	94.61	-12.82	54.0	40.61	AV	268.00	100	V	N/A
2	2440.000	98.49	-12.82	74.0	24.49	Peak	268.00	100	V	N/A
3**	3194.000	34.15	-6.79	54.0	-19.85	AV	7.00	100	V	Pass
3	3194.000	45.72	-6.79	74.0	-28.28	Peak	7.00	100	V	Pass
4**	5646.000	39.63	-2.19	54.0	-14.37	AV	134.00	100	V	Pass
4	5646.000	51.68	-2.19	74.0	-22.32	Peak	134.00	100	V	Pass
5**	6673.000	43.52	1.94	54.0	-10.48	AV	261.00	100	V	Pass
5	6673.000	53.73	1.94	74.0	-20.27	Peak	261.00	100	V	Pass
6**	9463.875	38.86	-0.17	54.0	-15.14	AV	311.00	100	V	Pass
6	9463.875	49.52	-0.17	74.0	-24.48	Peak	311.00	100	V	Pass


## GFSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT H

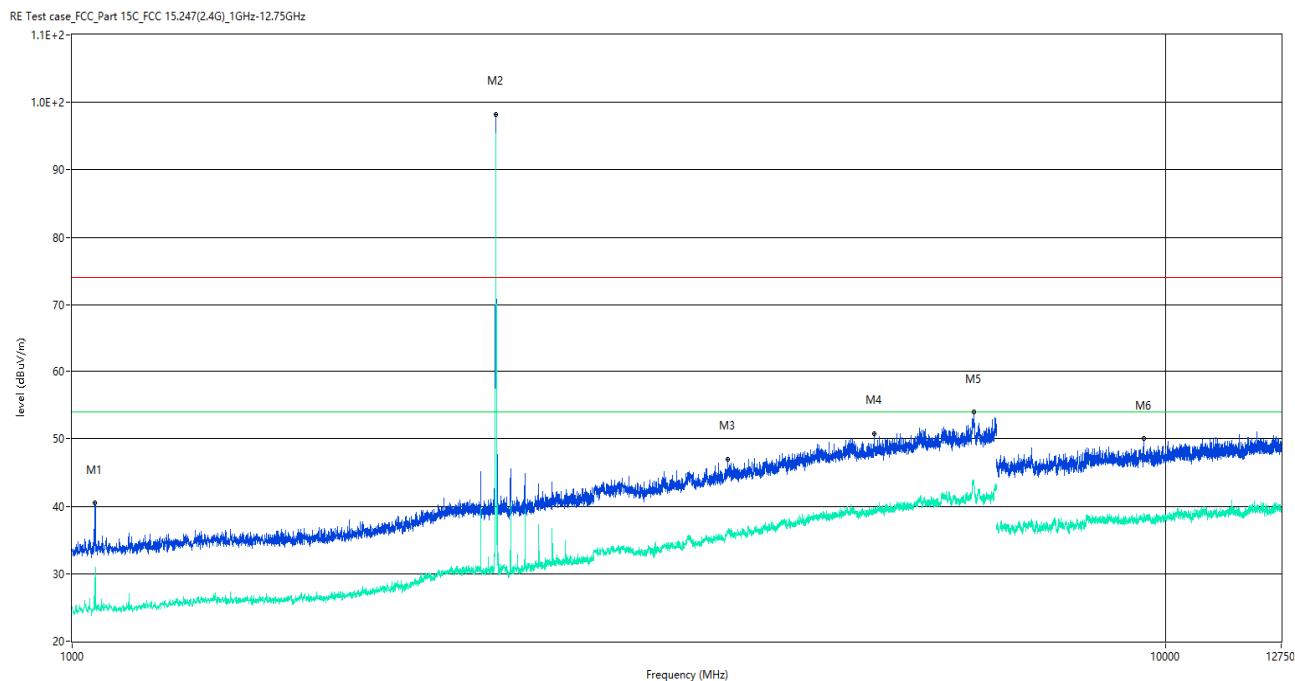

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1039.500	24.73	-18.11	54.0	-29.27	AV	124.00	100	H	Pass
1	1039.500	33.05	-18.11	74.0	-40.95	Peak	124.00	100	H	Pass
2**	2439.500	89.58	-12.81	54.0	35.58	AV	124.00	100	H	N/A
2	2439.500	98.25	-12.81	74.0	24.25	Peak	124.00	100	H	N/A
3**	3979.000	36.48	-4.52	54.0	-17.52	AV	224.00	100	H	Pass
3	3979.000	46.95	-4.52	74.0	-27.05	Peak	224.00	100	H	Pass
4**	5416.000	39.59	-2.22	54.0	-14.41	AV	224.00	100	H	Pass
4	5416.000	50.78	-2.22	74.0	-23.22	Peak	224.00	100	H	Pass
5**	6672.000	43.69	2.00	54.0	-10.31	AV	96.00	100	H	Pass
5	6672.000	53.95	2.00	74.0	-20.05	Peak	96.00	100	H	Pass
6**	9545.813	38.39	-0.14	54.0	-15.61	AV	103.00	100	H	Pass
6	9545.813	49.98	-0.14	74.0	-24.02	Peak	103.00	100	H	Pass


## GFSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT V

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-12.75GHz

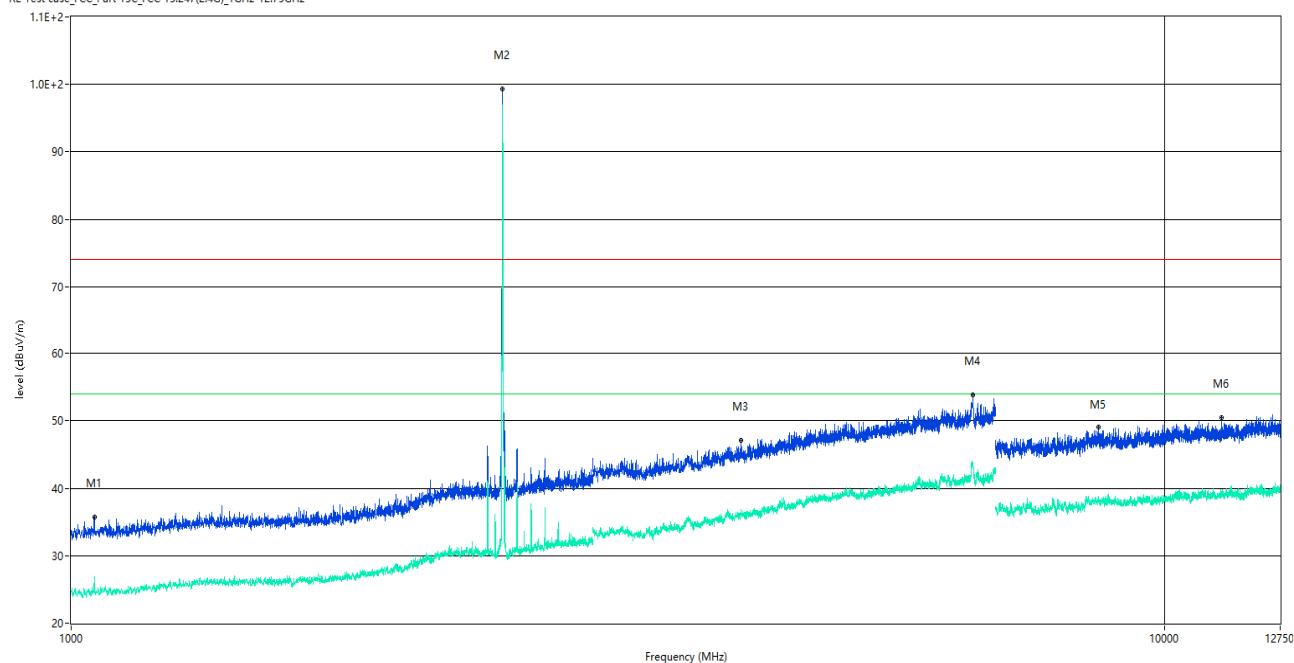

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1050.000	26.95	-18.21	54.0	-27.05	AV	104.00	100	V	Pass
1	1050.000	35.78	-18.21	74.0	-38.22	Peak	104.00	100	V	Pass
2**	2480.500	96.96	-11.69	54.0	42.96	AV	360.00	100	V	N/A
2	2480.500	99.37	-11.69	74.0	25.37	Peak	360.00	100	V	N/A
3**	4094.000	36.24	-5.63	54.0	-17.76	AV	360.00	100	V	Pass
3	4094.000	47.11	-5.63	74.0	-26.89	Peak	360.00	100	V	Pass
4**	6673.000	43.79	1.94	54.0	-10.21	AV	152.00	100	V	Pass
4	6673.000	53.84	1.94	74.0	-20.16	Peak	152.00	100	V	Pass
5**	8697.687	38.79	-1.46	54.0	-15.21	AV	346.00	100	V	Pass
5	8697.687	49.03	-1.46	74.0	-24.97	Peak	346.00	100	V	Pass
6**	11270.813	38.81	0.36	54.0	-15.19	AV	176.00	100	V	Pass
6	11270.813	50.48	0.36	74.0	-23.52	Peak	176.00	100	V	Pass

## GFSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT H

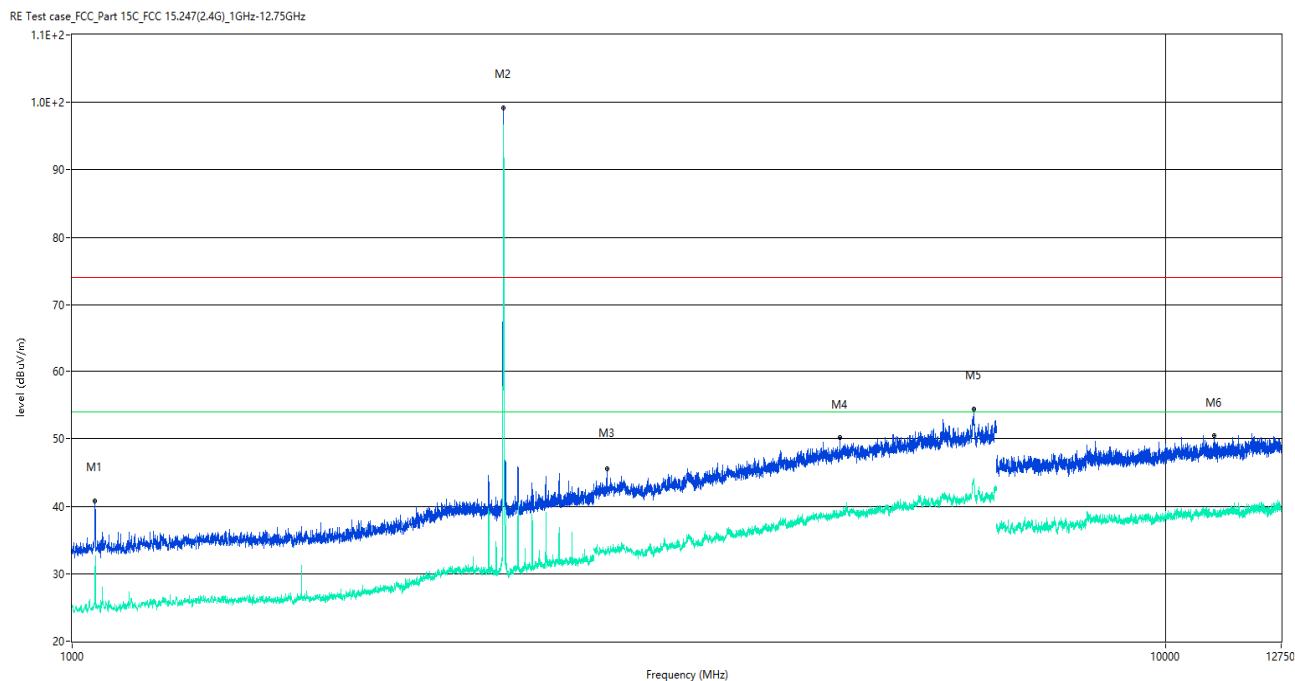

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1045.000	25.22	-18.33	54.0	-28.78	AV	224.00	100	H	Pass
1	1045.000	33.43	-18.33	74.0	-40.57	Peak	224.00	100	H	Pass
2**	2479.500	89.38	-11.74	54.0	35.38	AV	95.00	100	H	N/A
2	2479.500	99.22	-11.74	74.0	25.22	Peak	95.00	100	H	N/A
3**	3082.000	33.63	-8.20	54.0	-20.37	AV	0.00	100	H	Pass
3	3082.000	45.49	-8.20	74.0	-28.51	Peak	0.00	100	H	Pass
4**	5036.000	38.62	-3.17	54.0	-15.38	AV	307.00	100	H	Pass
4	5036.000	50.12	-3.17	74.0	-23.88	Peak	307.00	100	H	Pass
5**	6675.000	43.53	1.88	54.0	-10.47	AV	358.00	100	H	Pass
5	6675.000	54.43	1.88	74.0	-19.57	Peak	358.00	100	H	Pass
6**	11065.250	39.14	-0.50	54.0	-14.86	AV	0.00	100	H	Pass
6	11065.250	50.43	-0.50	74.0	-23.57	Peak	0.00	100	H	Pass

## A.7 Band Edge (Restricted-band band-edge)

Note <sup>1</sup>: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note <sup>2</sup>: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note <sup>3</sup>: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note <sup>4</sup>: The Level (dBuV/m) has been corrected by factor.

### 1 Mbps


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	51.81	31.08	74	22.19	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	54.93	31.09	74	19.071	PEAK	Pass
		2483.5	42.96	31.09	54	11.042	AVERAGE	Pass

### 2 Mbps


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	50.73	31.08	74	23.274	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	50.36	31.09	74	23.636	PEAK	Pass
		2483.5	N/A	N/A	54	N/A	AVERAGE	Pass

### 1 Mbps

#### LOW CHANNEL, PEAK

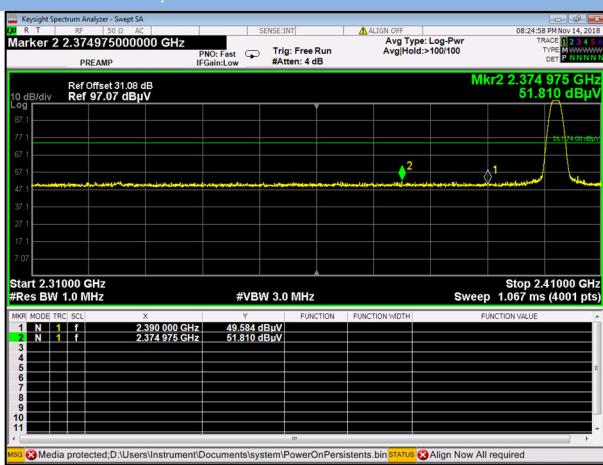

#### HIGH CHANNEL, PEAK

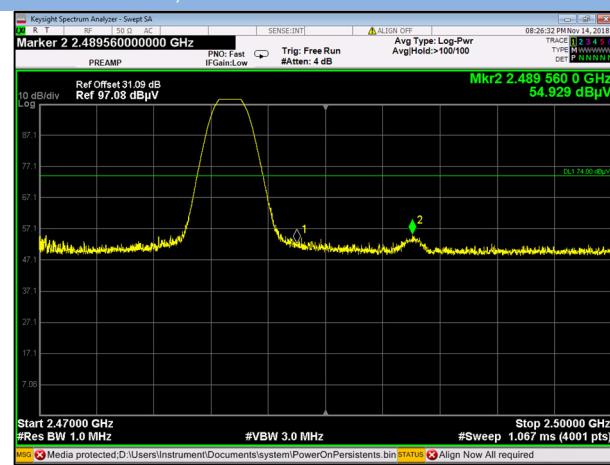


## HIGH CHANNEL, AV




## 2 Mbps

### LOW CHANNEL, PEAK

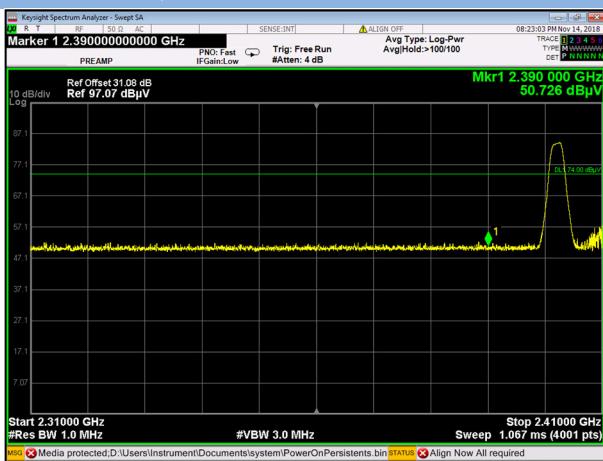

### HIGH CHANNEL, PEAK

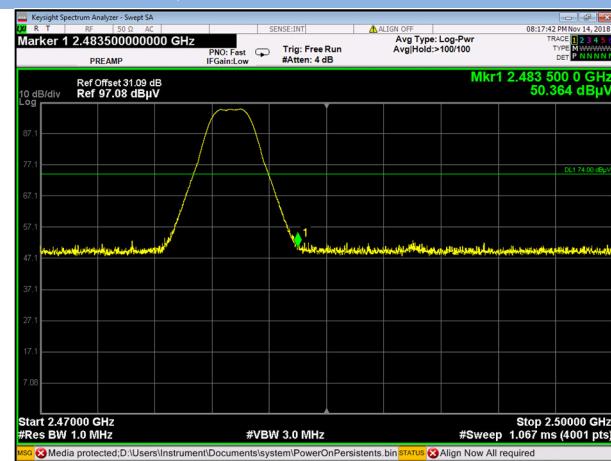

## A.8 Power Spectral Density (PSD)

### Test Data

1 Mbps

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-11.11	8	Pass
Middle Channel	-9.68	8	Pass
High Channel	-9.83	8	Pass


2 Mbps

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-13.91	8	Pass
Middle Channel	-12.86	8	Pass
High Channel	-12.68	8	Pass

1 Mbps


### Test plots

GFSK(BLE) LOW CHANNEL

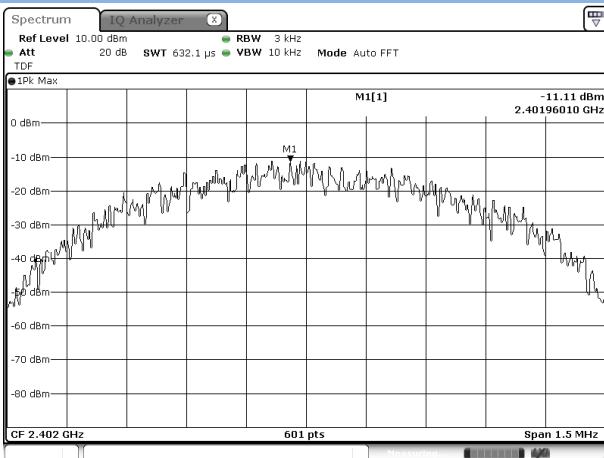


Date: 21 DEC 2018 14:27:43

GFSK(BLE) MIDDLE CHANNEL

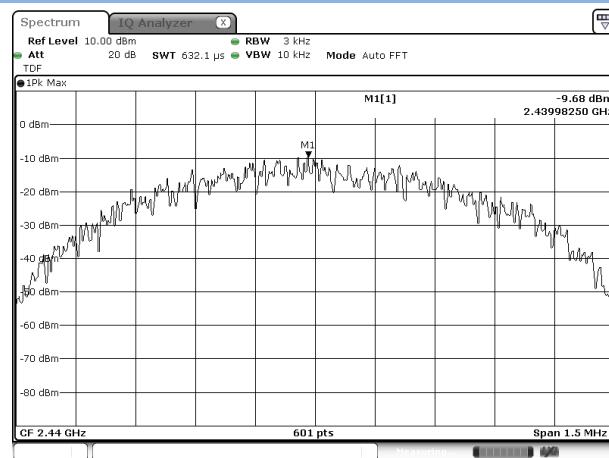

Date: 21 DEC 2018 14:29:43

GFSK(BLE) HIGH CHANNEL

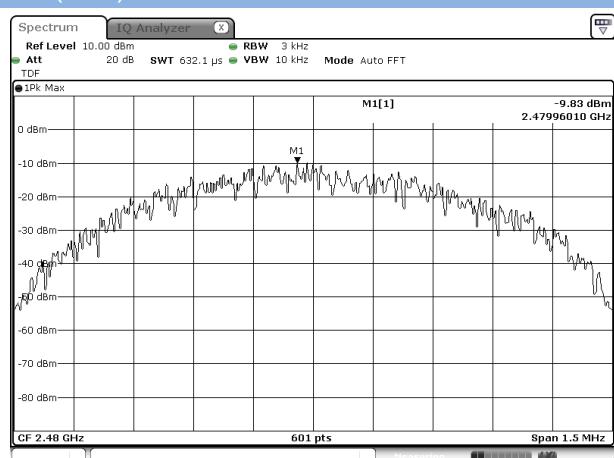


Date: 21 DEC 2018 14:32:08


## 2 Mbps

### Test plots


#### GFSK(BLE) LOW CHANNEL

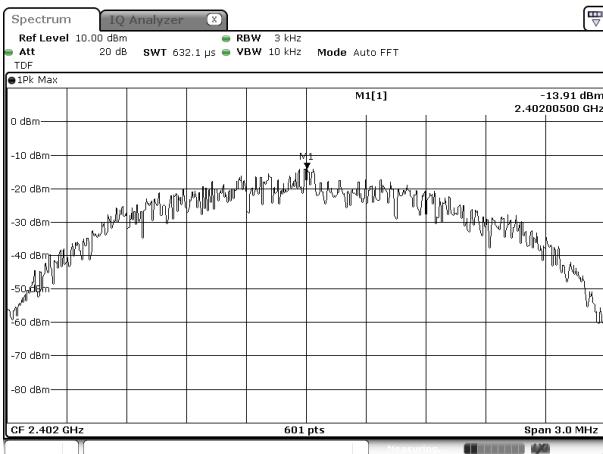

#### GFSK(BLE) MIDDLE CHANNEL

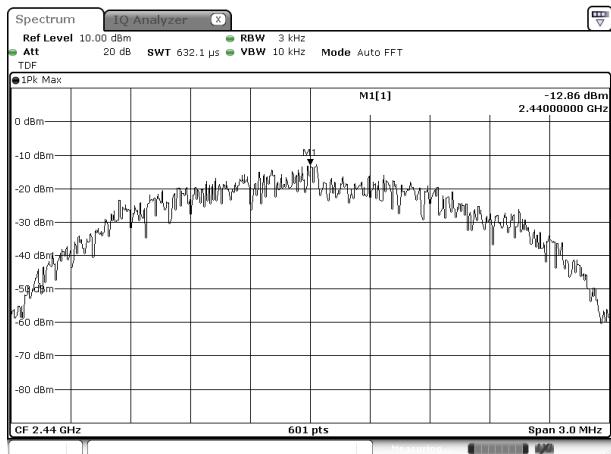

#### GFSK(BLE) HIGH CHANNEL

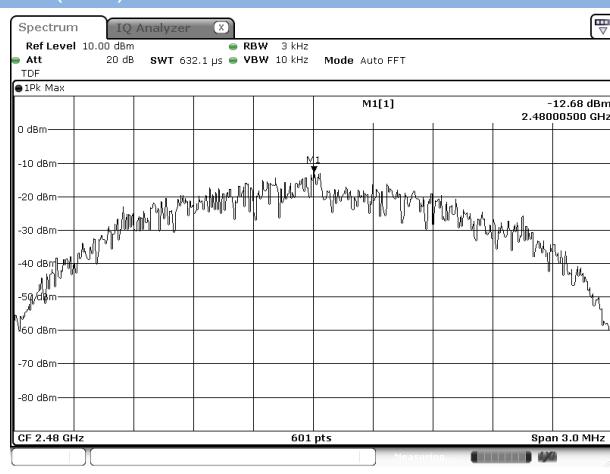

## ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ18C0049-AR.PDF".

## ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ18C0049-AW.PDF".

## ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ18C0049-AI.PDF".

--END OF REPORT--