

FCC/ISED

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.





FOR
HUAWEI MateBook

ISSUED TO
Huawei Technologies Co., Ltd.


Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District, Shenzhen, 518129, China



Tested by: 
Heng Aiping
(Engineer)

Date: 
Jan. 24, 2019

Approved by: 
Wei Yanquan
(Chief Engineer)

Date: 
Jan. 24, 2019

Report No.: BL-SZ18C0049-601
EUT Name: HUAWEI MateBook
Model Name: KLV-W29 (refer section 2.4)
Brand Name: HUAWEI
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen (Issue 5, April 2018)
RSS-247 (Issue 2, February 2017)
FCC ID: QISKLV-WX9
ISED Number: 6369A-KLVWX9
Test conclusion: Pass
Test Date: Nov. 14, 2018 ~ Dec. 21, 2018
Date of Issue: Jan. 24, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jan. 22, 2019</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jan. 24, 2019</u>	<u>Updated the test date</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	6
1.1	Identification of the Testing Laboratory	6
1.2	Identification of the Responsible Testing Location	6
1.3	Laboratory Condition	6
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant Information	7
2.2	Manufacturer Information	7
2.3	Factory Information	7
2.4	General Description for Equipment under Test (EUT)	7
2.5	Differences Description	8
2.6	Ancillary Equipment	8
2.7	Technical Information	10
2.8	Additional Instructions	12
3	SUMMARY OF TEST RESULTS	13
3.1	Test Standards	13
3.2	Verdict	14
4	GENERAL TEST CONFIGURATIONS	15
4.1	Test Environments	15
4.2	Test Equipment List	15
4.3	Measurement Uncertainty	16
4.4	Description of Test Setup	17
4.4.1	For Antenna Port Test	17
4.4.2	For AC Power Supply Port Test	17
4.4.3	For Radiated Test (Below 30 MHz)	18
4.4.4	For Radiated Test (30 MHz-1 GHz)	18
4.4.5	For Radiated Test (Above 1 GHz)	19

4.5	Measurement Results Explanation Example.....	20
4.5.1	For conducted test items:	20
5	TEST ITEMS	21
5.1	Antenna Requirements.....	21
5.1.1	Relevant Standards.....	21
5.1.2	Antenna Anti-Replacement Construction	21
5.1.3	Antenna Gain	21
5.2	Frequency Hopping Systems.....	22
5.2.1	Relevant Standards.....	22
5.2.2	Description of the systems.....	22
5.3	Number of Hopping Frequencies	23
5.3.1	Limit.....	23
5.3.2	Test Setup.....	23
5.3.3	Test Procedure.....	23
5.3.4	Test Result.....	23
5.4	Peak Output Power and E.I.R.P	24
5.4.1	Test Limit.....	24
5.4.2	Test Setup.....	24
5.4.3	Test Procedure.....	24
5.4.4	Test Result.....	24
5.5	Occupied Bandwidth.....	25
5.5.1	Limit.....	25
5.5.2	Test Setup.....	25
5.5.3	Test Procedure.....	25
5.5.4	Test Result.....	25
5.6	Carrier Frequency Separation.....	26
5.6.1	Limit.....	26
5.6.2	Test Setup.....	26
5.6.3	Test Procedure.....	26
5.6.4	Test Result.....	26
5.7	Time of Occupancy (Dwell time).....	27
5.7.1	Limit.....	27
5.7.2	Test Setup.....	27

5.7.3	Test Procedure.....	27
5.7.4	Test Result.....	28
5.8	Conducted Spurious Emission & Authorized-band band-edge.....	29
5.8.1	Limit.....	29
5.8.2	Test Setup.....	29
5.8.3	Test Procedure.....	29
5.8.4	Test Result.....	29
5.9	Conducted Emission.....	30
5.9.1	Limit.....	30
5.9.2	Test Setup.....	30
5.9.3	Test Procedure.....	30
5.9.4	Test Result.....	30
5.10	Radiated Spurious Emission.....	31
5.10.1	Limit.....	31
5.10.2	Test Setup.....	31
5.10.3	Test Procedure.....	31
5.10.4	Test Result.....	32
5.11	Band Edge (Restricted-band band-edge).....	33
5.11.1	Limit.....	33
5.11.2	Test Setup.....	33
5.11.3	Test Procedure.....	33
5.11.4	Test Result.....	33
ANNEX A	TEST RESULT.....	34
A.1	Number of Hopping Frequency.....	34
A.2	Peak Output Power and E.I.R.P.....	35
A.3	20 dB and 99% bandwidth.....	38
A.4	Hopping Frequency Separation.....	41
A.5	Average Time of Occupancy.....	42
A.6	Conducted Spurious Emissions & Authorized-band band-edge.....	45
A.7	Conducted Emissions.....	52
A.8	Radiated Spurious Emission.....	54
A.9	Band Edge (Restricted-band band-edge).....	72
ANNEX B	TEST SETUP PHOTOS.....	75



ANNEX C	EUT EXTERNAL PHOTOS	75
ANNEX D	EUT INTERNAL PHOTOS.....	75

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

2.2 Manufacturer Information

Manufacturer	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	HUAWEI MateBook
Model Name Under Test	KLV-W29
Series Model Name	KLV-W09, KLV-W19, KLV-WXXXXXX (The "X" in model name can be 0 to 9, A to Z, a to z, "-" or blank, only differences are model names for trading purpose)
Description of Model name differentiation	Refer section 2.5
Hardware Version	NB8510_PCB_MB_V5 HF
Software Version	1.5.0.10(C001)
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Differences Description

	KLV-W29 (with GPU version)	KLV-W19 (with GPU version)	KLV-W19 (without GPU version)	KLV-W09 (without GPU version)
PCB layout	The same	The same	The same	The same
Main board	The same	The same	Delete GPU chip and related components	Delete GPU chip and related components
Frequency bands	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT
BT/Wi-Fi antenna	The same	The same	The same	The same
Appearance	The same	The same	The same	The same
Dimension	The same	The same	The same	The same
CPU	Intel core i7, Support Max 4.6GHz	Intel core i5, Support Max 3.9GHz	Intel core i5, Support Max 3.9GHz	Intel core i3, Support Max 3.9GHz
GPU	Support	Support	Not support	Not support
Memory	16G/8G	8G	8G	4G
SSD	512G/256G	512G/256G	512G/256G	256G
Rear camera	Not support	Not support	Not support	Not support
Front camera	The same	The same	The same	The same
Adapter	The same	The same	The same	The same
Battery	The same	The same	The same	The same
Accessories	Docking Station	Docking Station	Docking Station	Docking Station

Note 1: The models KLV-W29, KLV-W19 and KLV-W09 are identical each other, except model name and main board and memory and CPU and GPU and SSD.

Note 2: Tested on model KLV-W29 to represent the other model and configuration in this report.

2.6 Ancillary Equipment

Ancillary Equipment 1	Rechargeable Li-ion Polymer Battery	
	Brand Name	HUAWEI
	Model No.	HB4593R1ECW
	Serial No.	N/A
	Capacity	7410 mAh
	Rated Voltage	7.6 V
	Limit Charge Voltage	8.7 V
Ancillary Equipment 2	Adapter 1	
	Brand Name	HUAWEI
	Model No.	HW-200325BP0 (UK Plug)
	Serial No.	C978Y9J7F00037

	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 3	Adapter 2	
	Brand Name	HUAWEI
	Model No.	HW-200325UP0 (US Plug)
	Serial No.	C976Y1J8P00105
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 4	Adapter 3	
	Brand Name	HUAWEI
	Model No.	HW-200325EP0 (EU Plug)
	Serial No.	C974Y1J8W01169
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 5	Adapter 4	
	Brand Name	HUAWEI
	Model No.	HW-200325CP0 (GB Plug)
	Serial No.	C973Y1J7800783
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 6	Adapter 5	
	Brand Name	HUAWEI
	Model No.	HW-200325AP0 (AU Plug)
	Serial No.	C973Y1J7800783
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 7	Docking Station	
	Model No.	AD11
	Serial No.	N/A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 8	USB-C to USB-A	
Ancillary Equipment 9	USB Cable	
	Length (Approx.)	1.8 m
Note: All adapter models only with different plug for marketing purpose. We select HW-200325UP0 (US Plug) during testing.		

2.7 Technical Information

Network and Wireless connectivity	Bluetooth 5.0 (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40) and 802.11ac 5.8G SRD
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, π/4-DQPSK, 8-DPSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	1 dBi (In test items related to antenna gain, the final results reflect this figure.)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.8 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	DRTU		
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 8
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	Power parameter Settings is 1
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	Power parameter Settings is 1
	CH39	2441	
	CH78	2480	

Run Software:

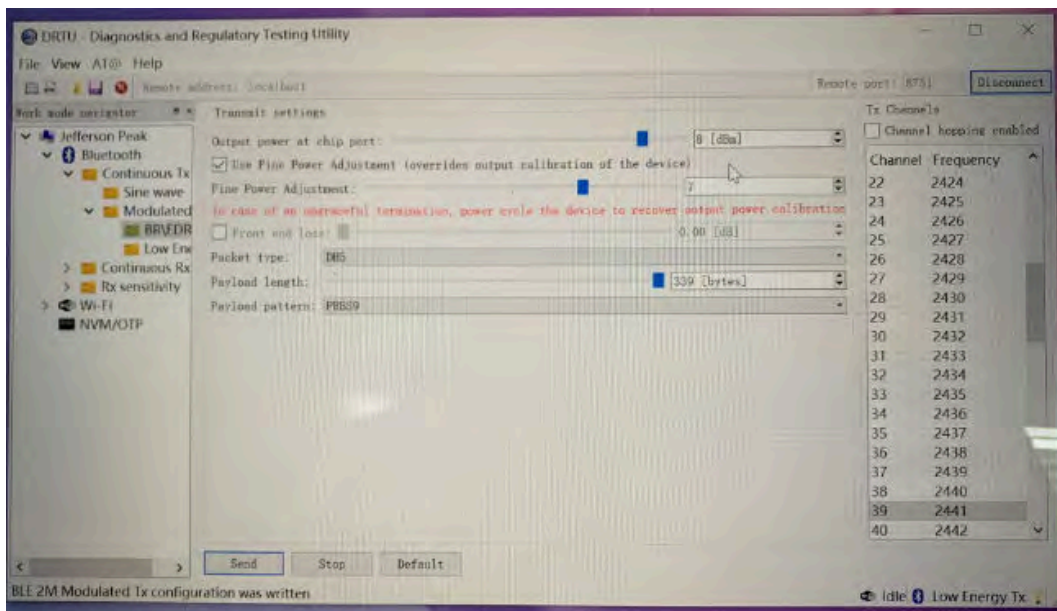

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-17 Edition)	Miscellaneous Wireless Communications Services
2	RSS-Gen (Issue 5, April 2018)	General Requirements for Compliance of Radio Apparatus
3	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSS) and Licence-Exemp Local Area Network (LE-LAN) Devices
4	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
5	KDB 558074 D01 15.247 Meas Guidance v05	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (2)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (1)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (2)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	--	N/A	Note ³

Note¹: Please refer to section 5.1

Note²: Because of the modulation of $\Pi/4$ -DQPSK same as 8-DPSK, and the test results are basically the same with them, so we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item

Note³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	7.6 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.15	2019.06.14
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.15	2019.06.14
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.07	2019.11.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.15	2019.06.14
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.15	2019.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2018.06.14	2019.06.13
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2017.01.06	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2017.08.08	2019.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.15	2019.06.14
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Feld Strength Meter	Narda	EP601	511WX51129	2018.05.21	2019.05.20
Mouth Simulator	B&K	4227	2423931	2018.11.15	2019.11.14
Sound Calibrator	B&K	4231	2430337	2018.11.15	2019.11.14
Sound Level Meter	B&K	NL-20	00844023	2018.11.15	2019.11.14
Ear Simulator	B&K	4185	2409449	2018.11.15	2019.11.14
Ear Simulator	B&K	4195	2418189	2018.11.15	2019.11.14
Audio analyzer	B&K	UPL 16	100129	2018.11.15	2019.11.14
Software	BALUN	BL410	-	-	-
Cable	ROHDE&SCHWARZ	JUNFLON	APR0914004	-	-

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	± 1 °C
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

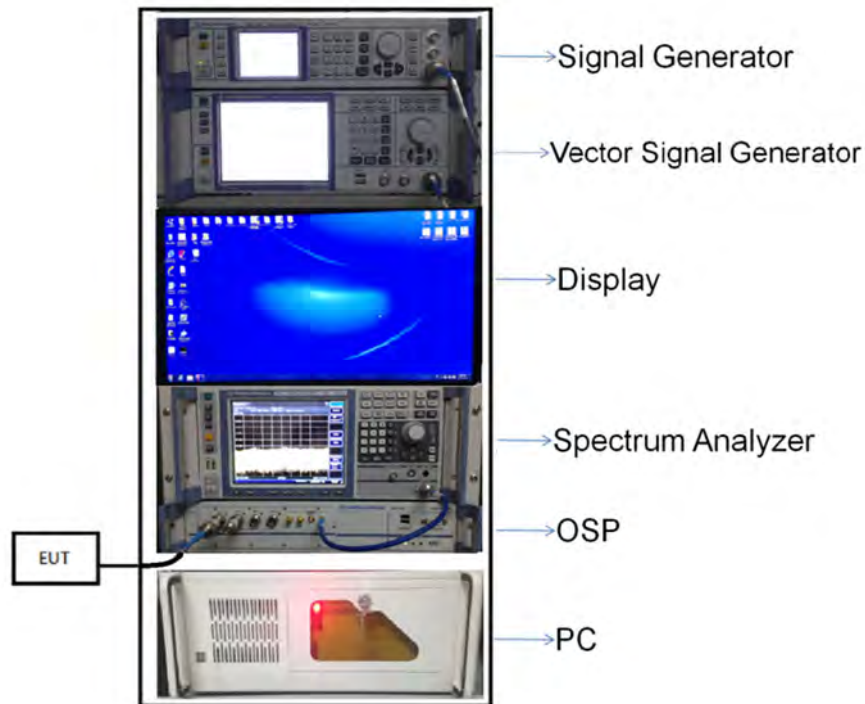


(Diagram 1)

4.4.2 For AC Power Supply Port Test

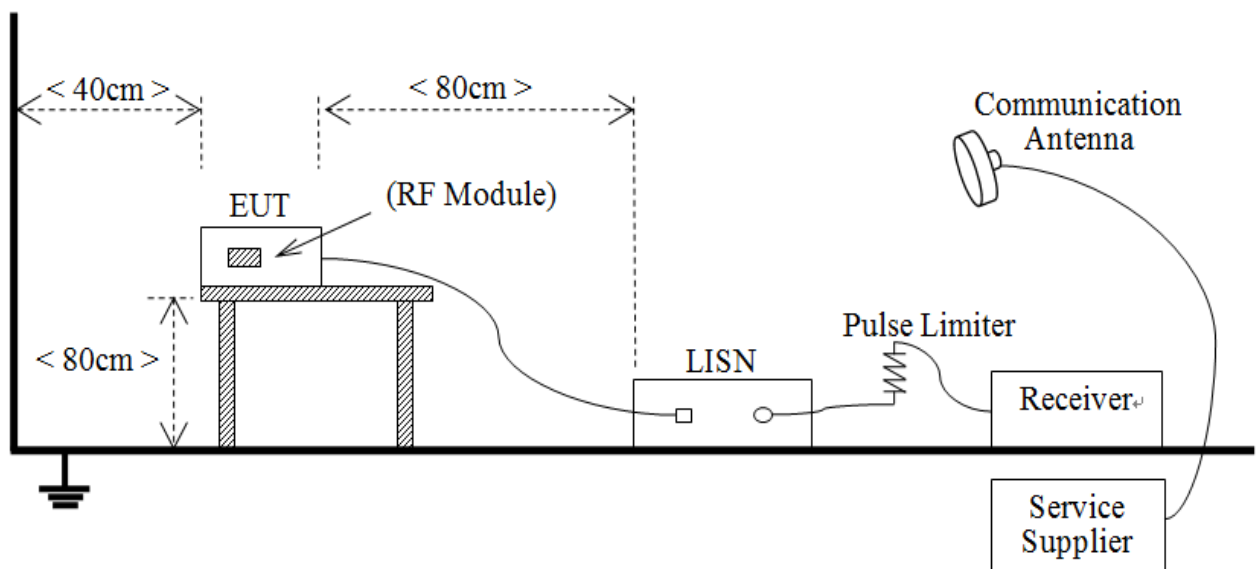


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

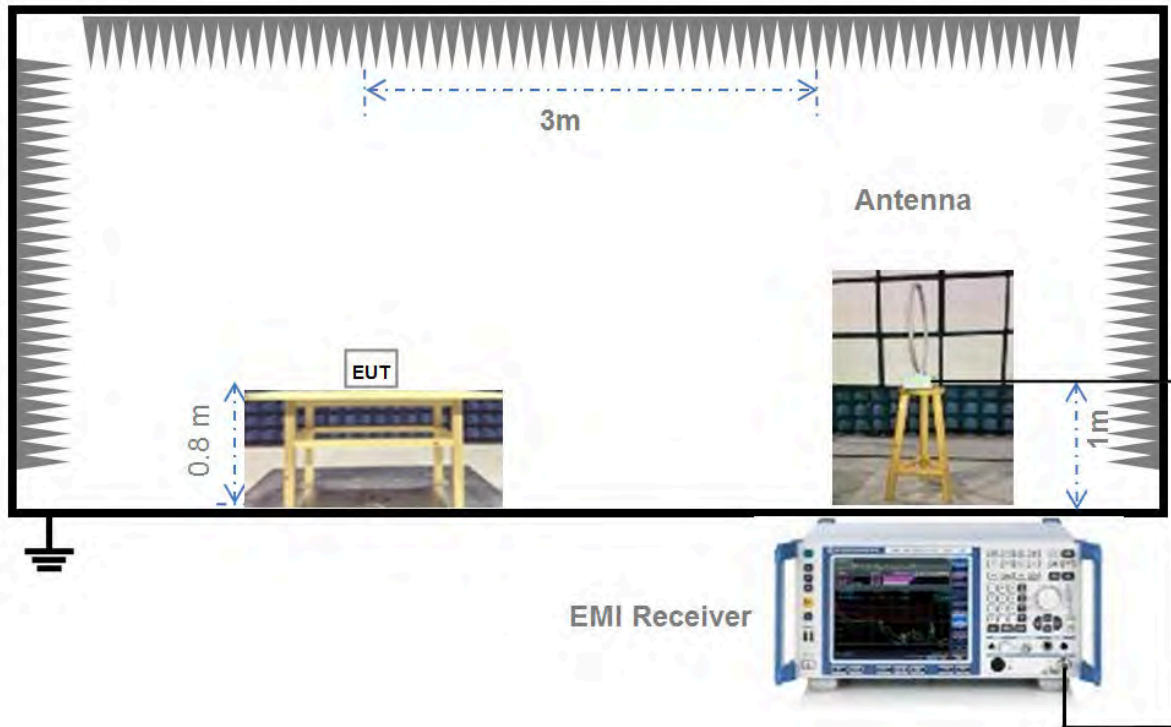


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

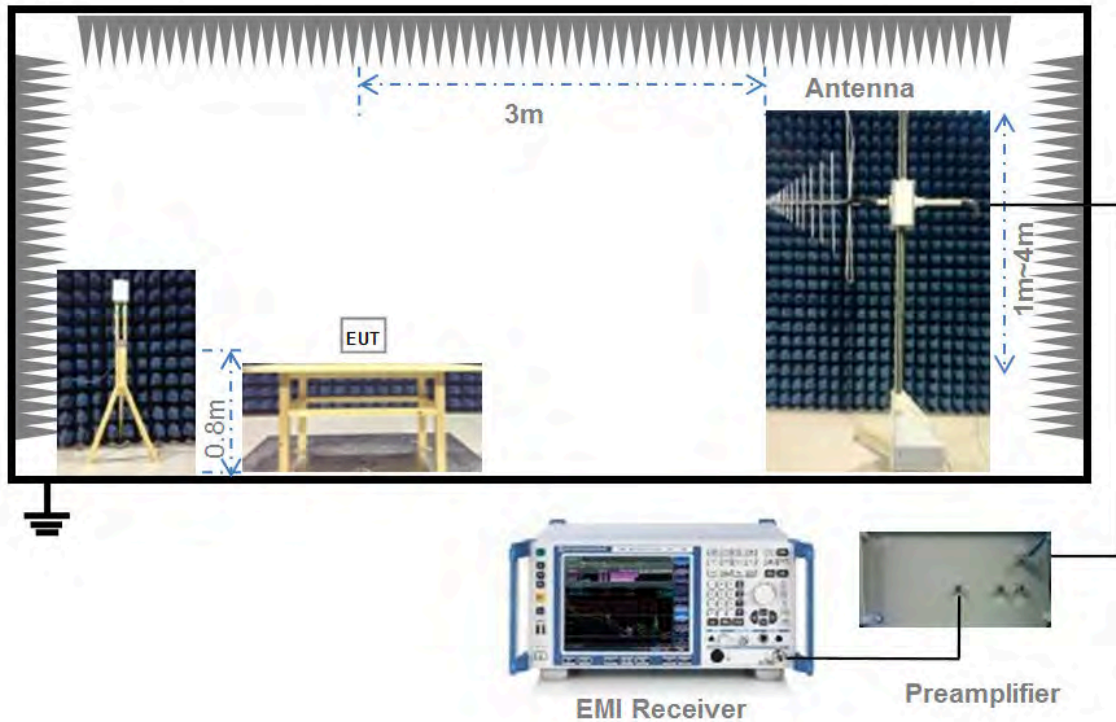

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

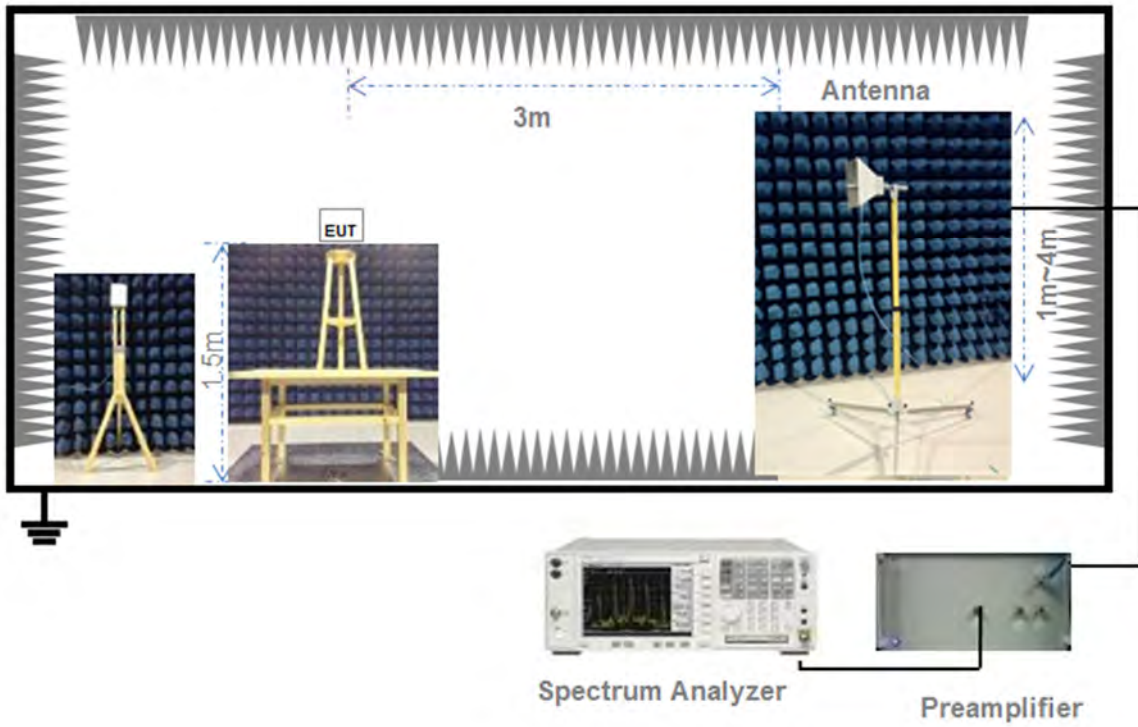

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antennas of the product are permanently attached. There are no provisions for connection to an external antenna.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.


Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

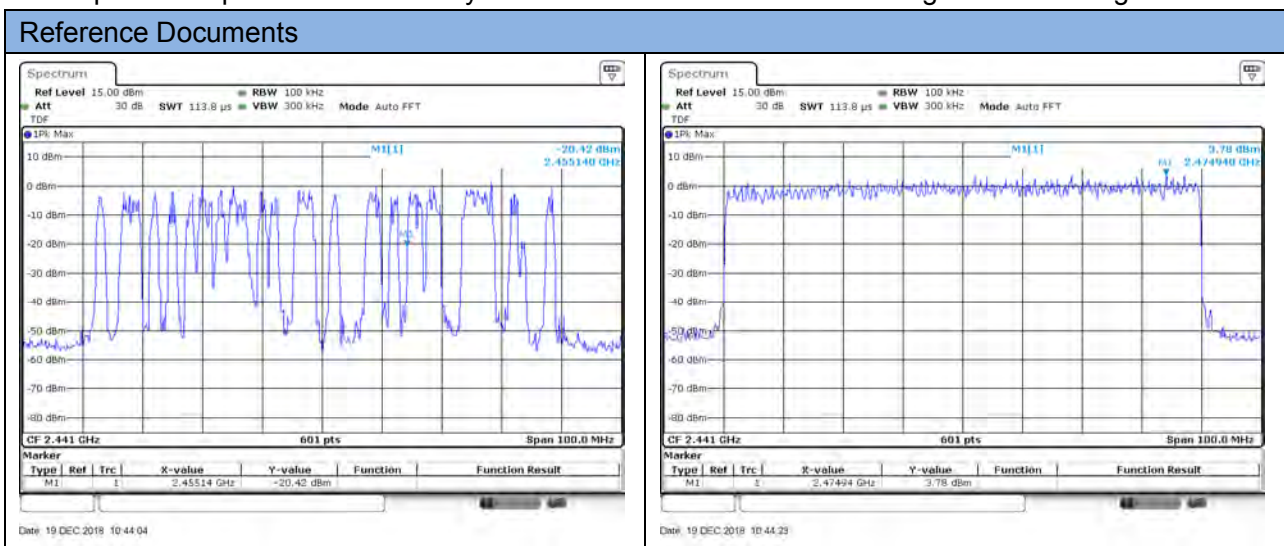

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-

random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.

4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power and E.I.R.P

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

{Period} = 0.4 s * {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBµV/m) = 20*log[Field Strength (µV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test plots


GFSK 2.4 GHz ~ 2.4415 GHz

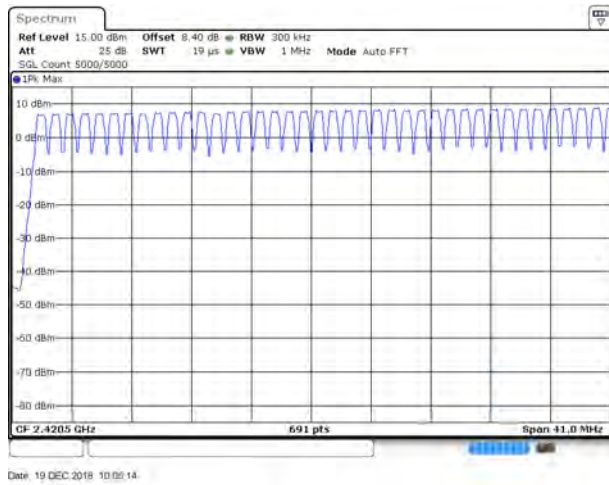


GFSK 2.4415 GHz ~ 2.4835 GHz

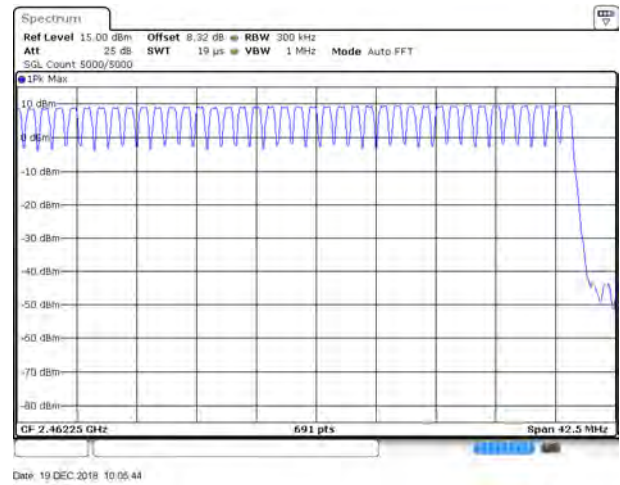

8-DPSK 2.4 GHz ~ 2.4415 GHz

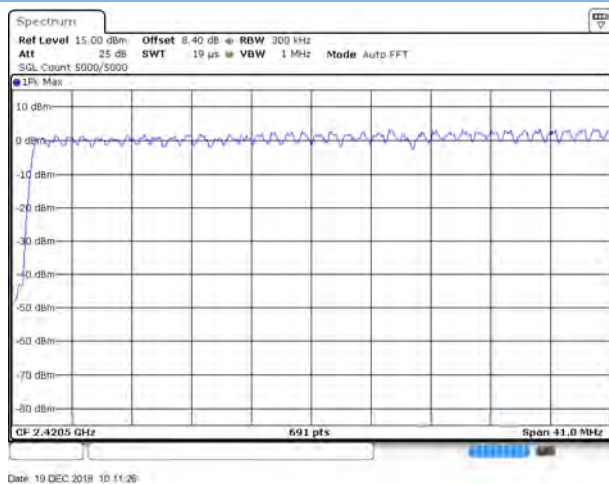

8-DPSK 2.4415 GHz ~ 2.4835 GHz

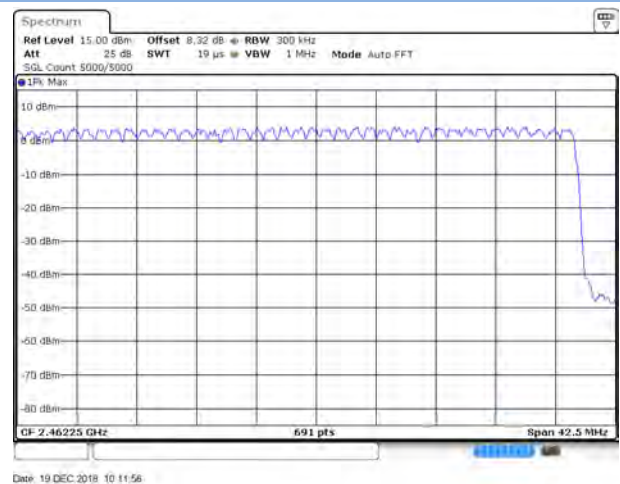

A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	7.19	5.24	30	1000	Pass
Middle	8.82	7.62			Pass
High	9.41	8.73			Pass


Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	4.23	2.65	4.21	2.64	21	125	Pass
Middle	5.30	3.39	5.36	3.44			Pass
High	5.41	3.48	5.39	3.46			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	8.19	6.59	5.23	3.33	5.21	3.32	36	4000	Pass
Middle	9.82	9.59	6.30	4.27	6.36	4.33			Pass
High	10.41	10.99	6.41	4.38	6.39	4.36			Pass


Test plots

GFSK LOW CHANNEL

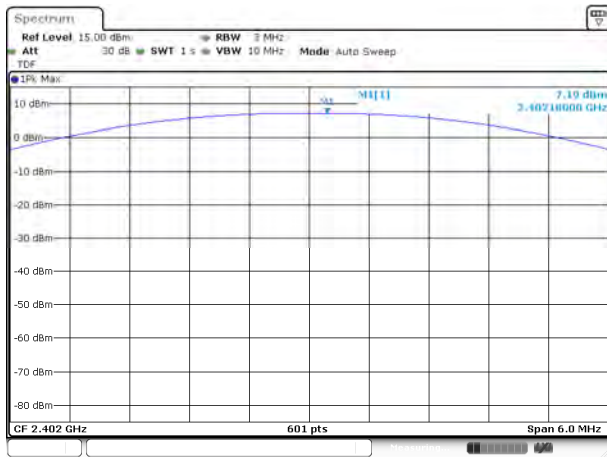


Date: 19 DEC 2018 09:29:51

GFSK MIDDLE CHANNEL

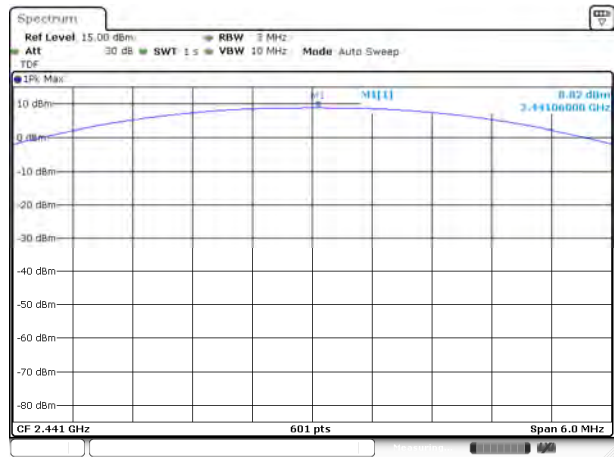


Date: 19 DEC 2018 09:33:57

GFSK HIGH CHANNEL

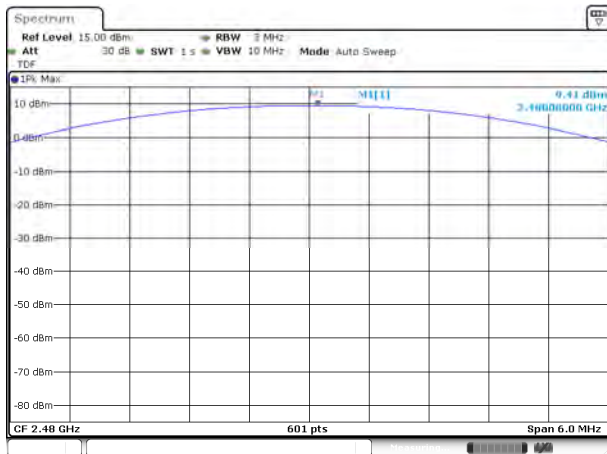


Date: 19 DEC 2018 09:37:10

II/4-DQPSK LOW CHANNEL

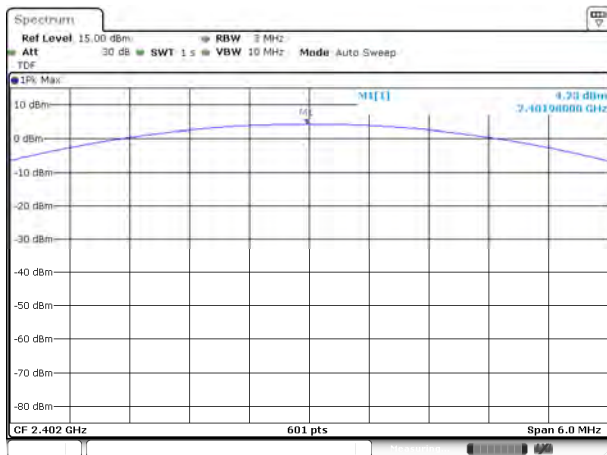


Date: 19 DEC 2018 09:49:48

II/4-DQPSK MIDDLE CHANNEL

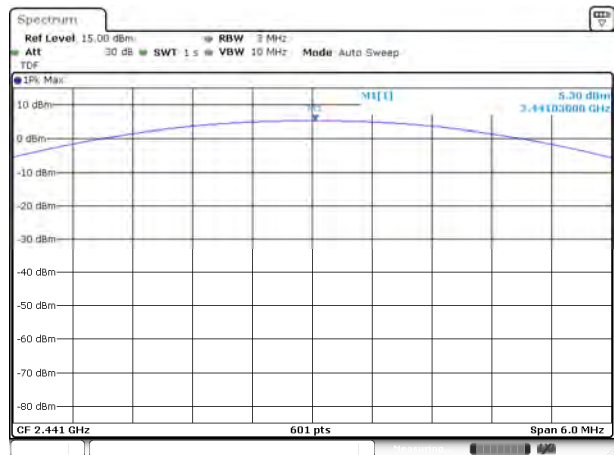


Date: 19 DEC 2018 09:50:05

11/4-DQPSK HIGH CHANNEL

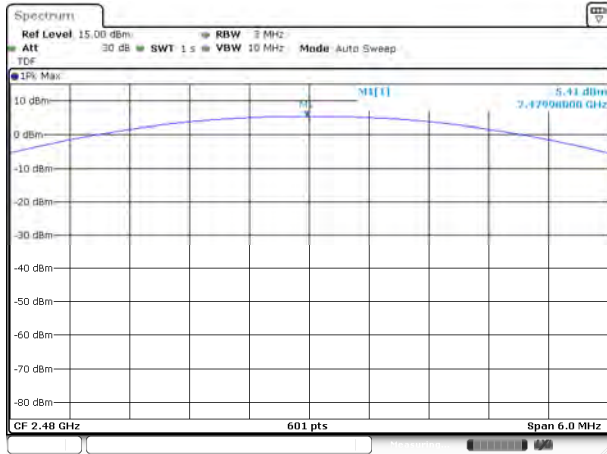


Date: 19 DEC 2018 09:50:29

8-DPSK LOW CHANNEL

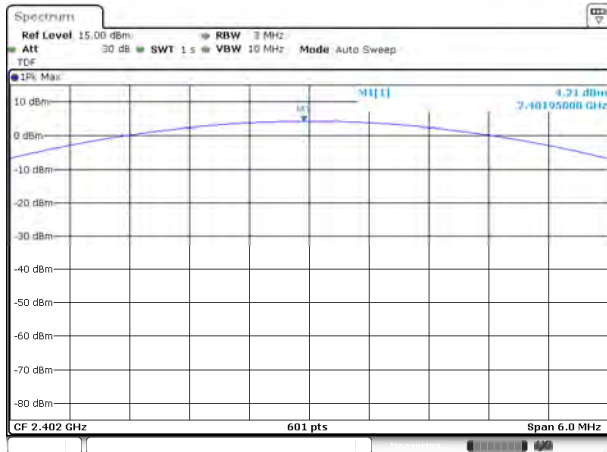


Date: 19 DEC 2018 09:52:13

8-DPSK MIDDLE CHANNEL

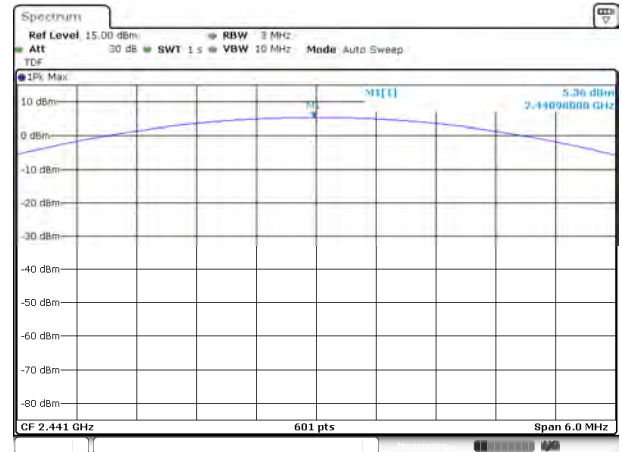

Date: 19 DEC 2018 09:57:17

8-DPSK HIGH CHANNEL

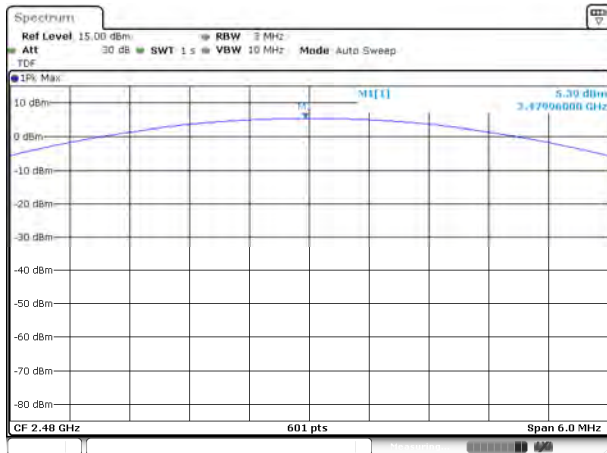

Date: 19 DEC 2018 10:00:44

A.3 20 dB and 99% bandwidth


Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.947998	0.87699
Middle	0.952393	0.87699
High	0.952393	0.87699
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.447754	1.341534
Middle	1.447754	1.341534
High	1.447754	1.341534


Test plots

20 dB Bandwidth


GFSK LOW CHANNEL

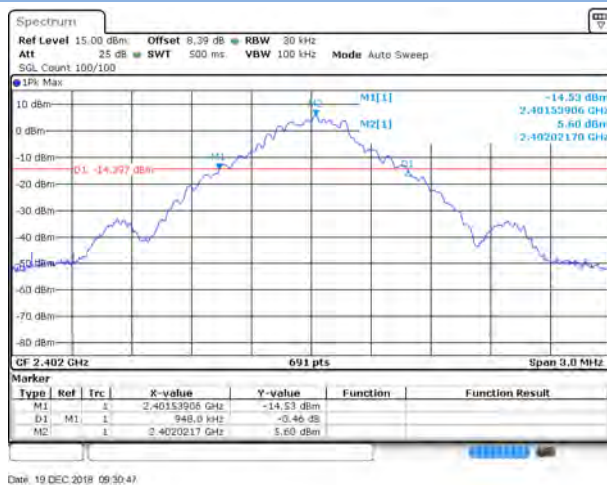


GFSK MIDDLE CHANNEL

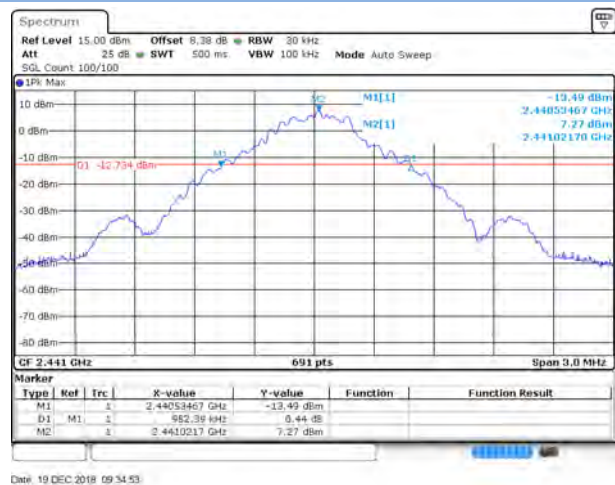

GFSK HIGH CHANNEL

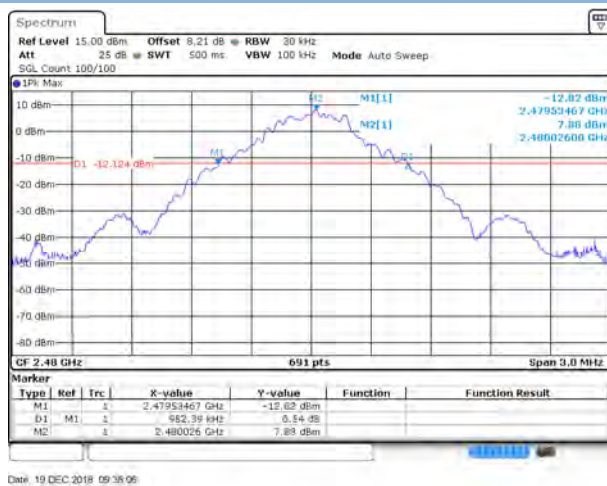

8-DPSK LOW CHANNEL

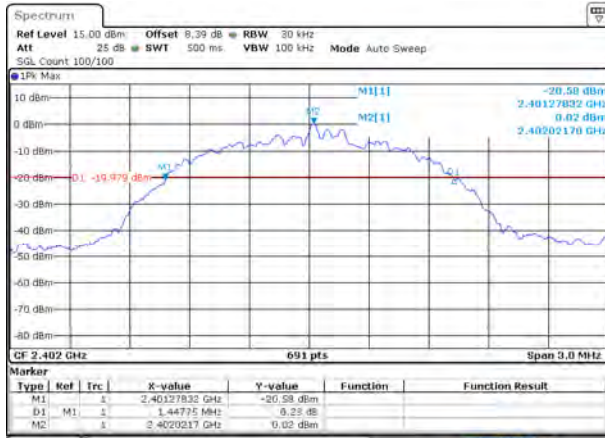


Date: 19 DEC 2018 09:53:09

8-DPSK MIDDLE CHANNEL



Date: 19 DEC 2018 09:55:13

8-DPSK HIGH CHANNEL

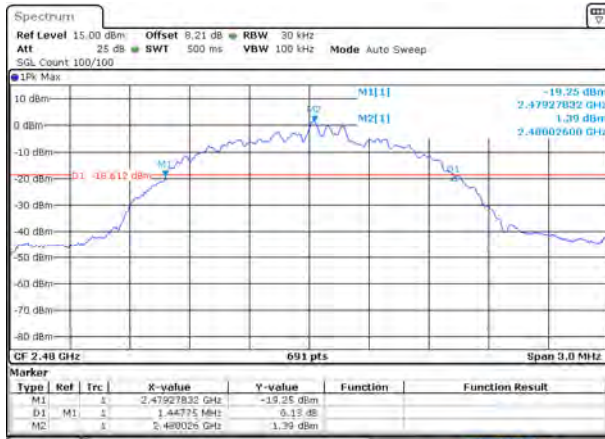

Date: 19 DEC 2018 10:04:40


8-DPSK MIDDLE CHANNEL



Date: 19 DEC 2018 09:35:49


99% Bandwidth

GFSK LOW CHANNEL

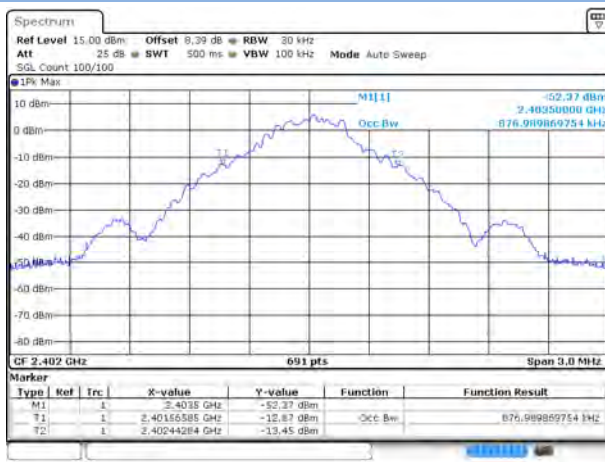


Date: 19 DEC 2018 09:31:44

GFSK MIDDLE CHANNEL

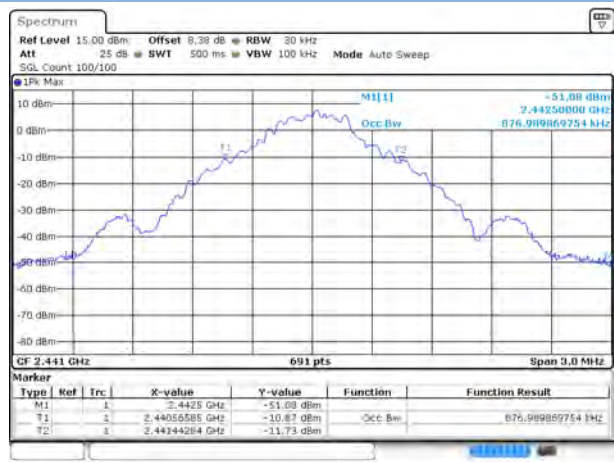


Date: 19 DEC 2018 09:35:49

GFSK HIGH CHANNEL

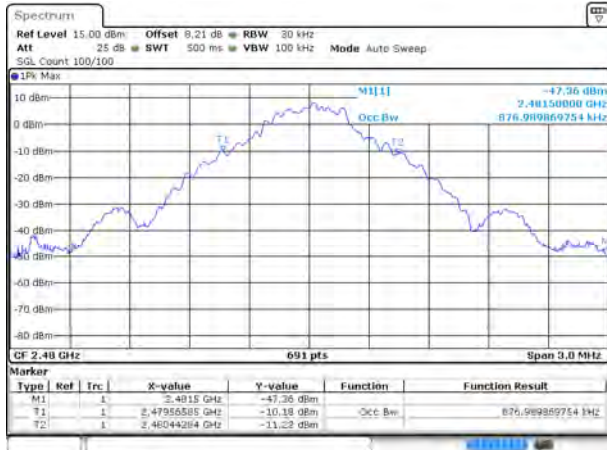


Date: 19 DEC 2018 09:38:03

8-DPSK LOW CHANNEL

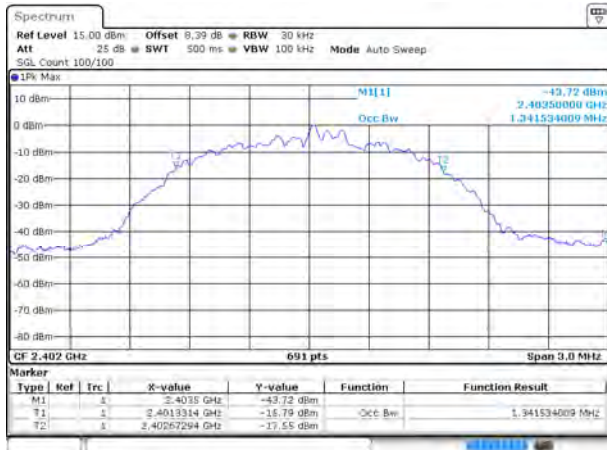


Date: 19 DEC 2018 09:54:06

8-DPSK MIDDLE CHANNEL

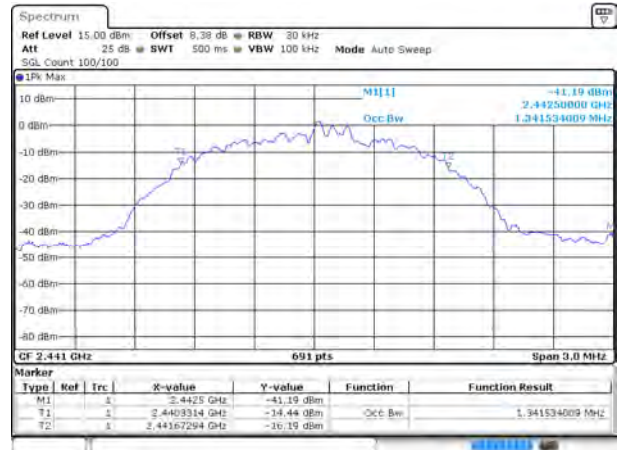

Date: 19 DEC 2018 09:59:10

8-DPSK HIGH CHANNEL

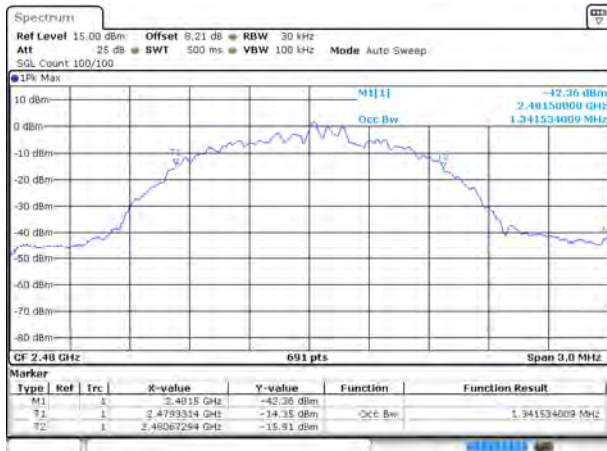

Date: 19 DEC 2018 10:02:56

A.4 Hopping Frequency Separation


Test Data

Note: The systems operate with an output power no greater than 125 mw, The data provided in the section A.2.

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	1.0133	0.952	0.676	Pass
8-DPSK	1.0083	1.448	0.672	Pass


Test Plots

GFSK

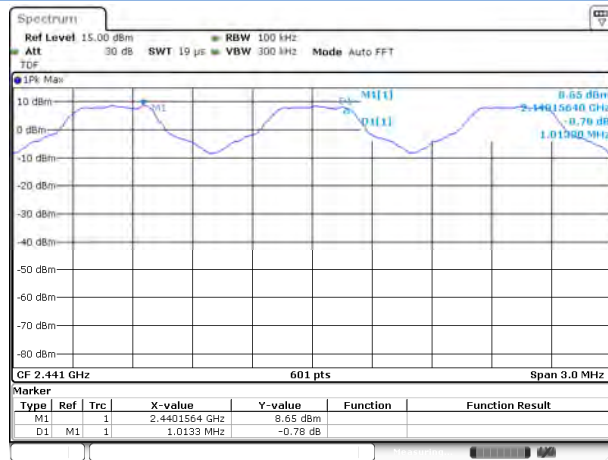

Date: 19 DEC 2018 10:06:28

8-DPSK

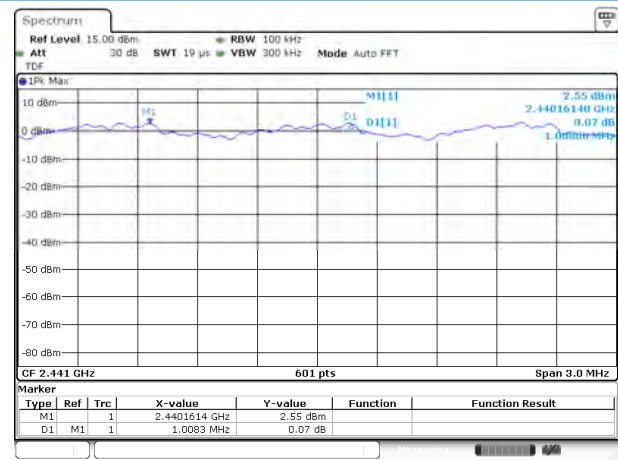

Date: 19 DEC 2018 10:12:54


A.5 Average Time of Occupancy

Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37653	120.490	0.4	Pass
DH 3	1.63817	262.107	0.4	Pass
DH 5	2.88500	307.733	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38975	124.720	0.4	Pass
DH 3	1.62925	260.680	0.4	Pass
DH 5	2.90030	309.365	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37633	60.213	0.4	Pass
DH 3	1.63533	130.826	0.4	Pass
DH 5	2.88130	153.669	0.4	Pass


Test Plots

GFSK DH1

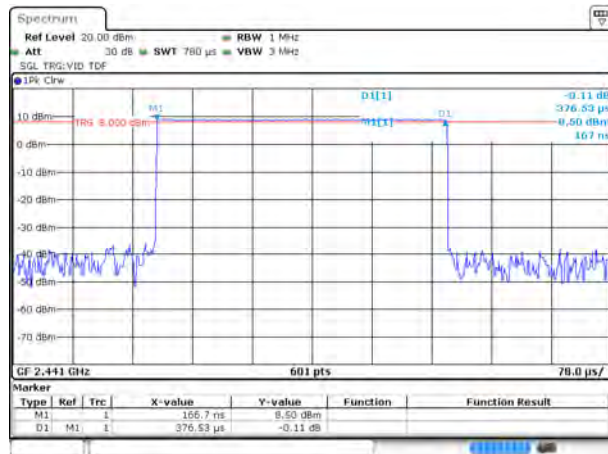


Date: 19 DEC 2018 10:29:24

GFSK DH3

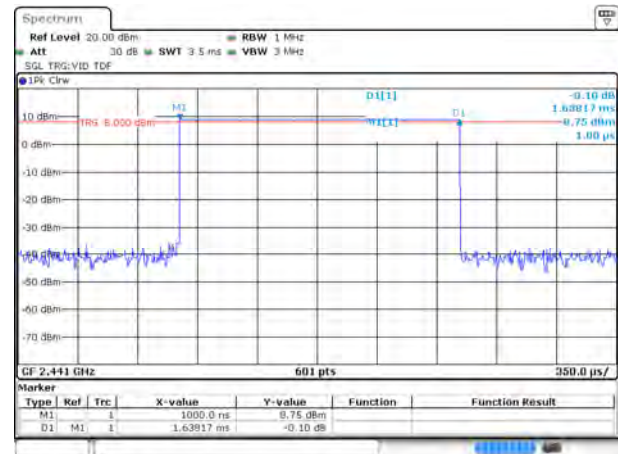


Date: 19 DEC 2018 10:29:58

GFSK DH5

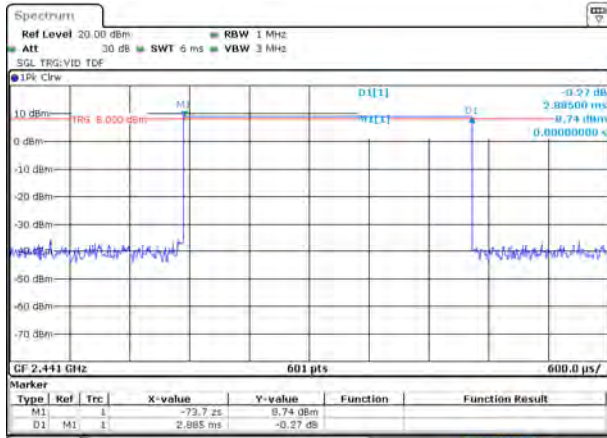


Date: 19 DEC 2018 10:30:21

8-DPSK DH1

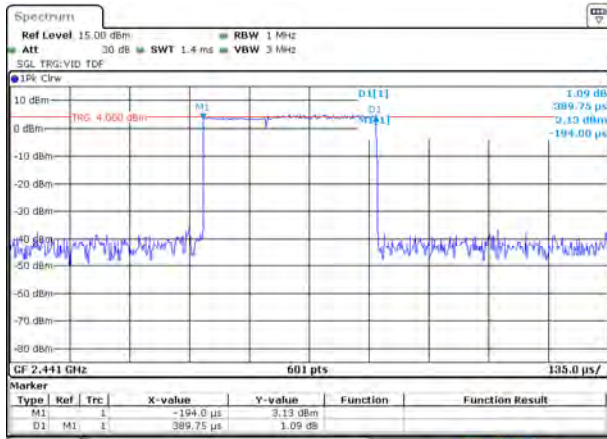


Date: 19 DEC 2018 10:41:42

8-DPSK DH3

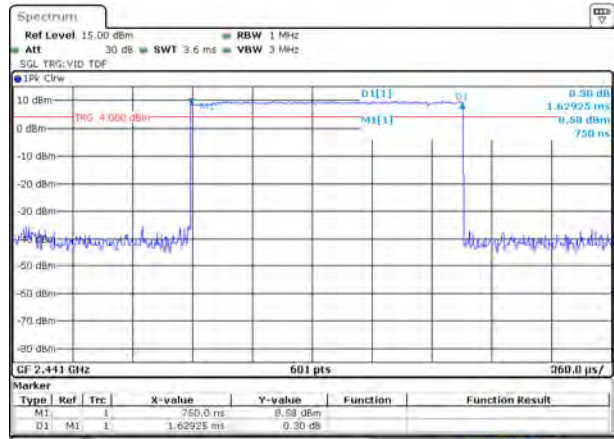


Date: 19 DEC 2018 10:42:05

8-DPSK DH5

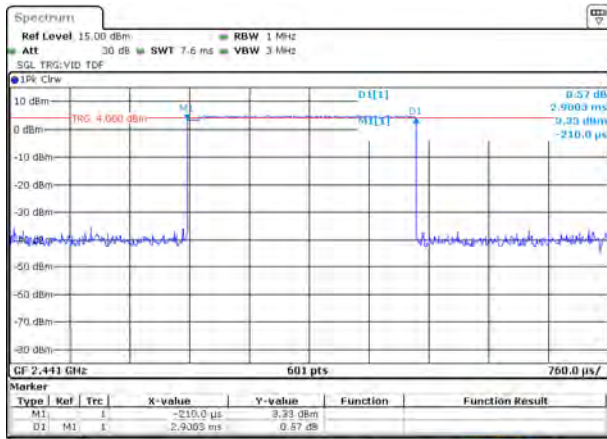


Date: 19 DEC 2018 10:42:35


AFH Mode DH1

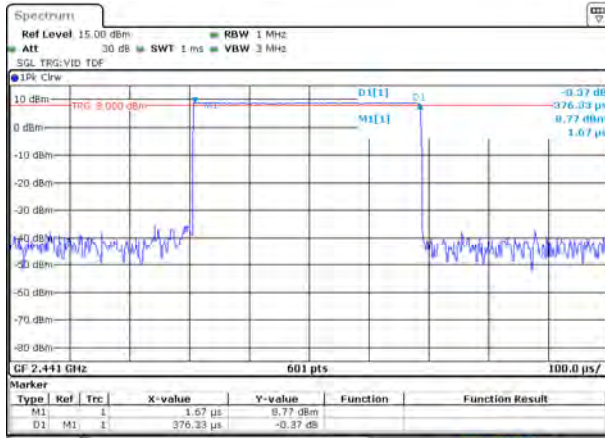

AFH Mode DH3

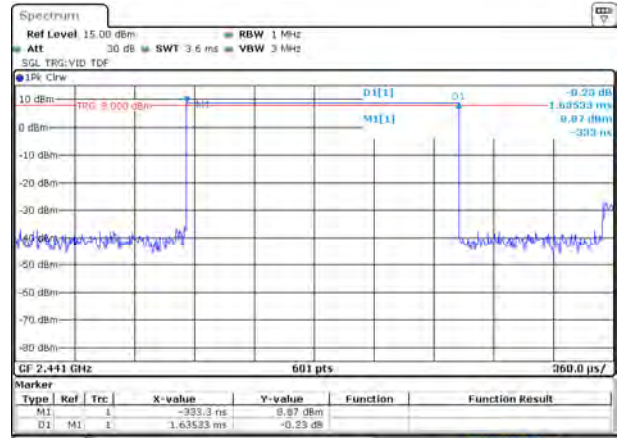

AFH Mode DH5

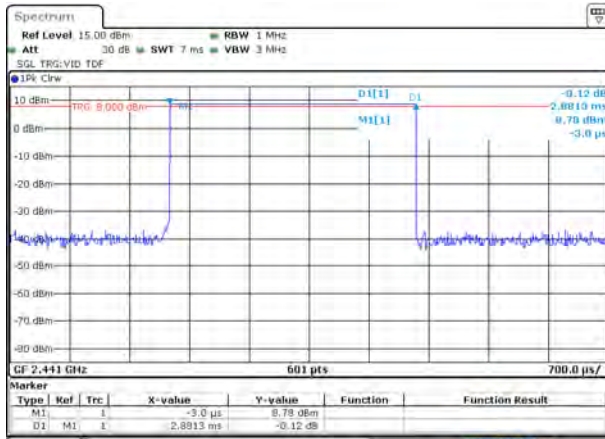

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-40.58	7.14	-12.86	Pass
Middle	-41.19	8.71	-11.29	Pass
High	-41.57	9.27	-10.73	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-41.17	1.48	-18.52	Pass
Middle	-40.80	2.69	-17.31	Pass
High	-41.14	2.72	-17.28	Pass

Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-40.46	8.71	-11.29	Pass
8-DPSK	-40.65	3.16	-16.84	Pass


Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

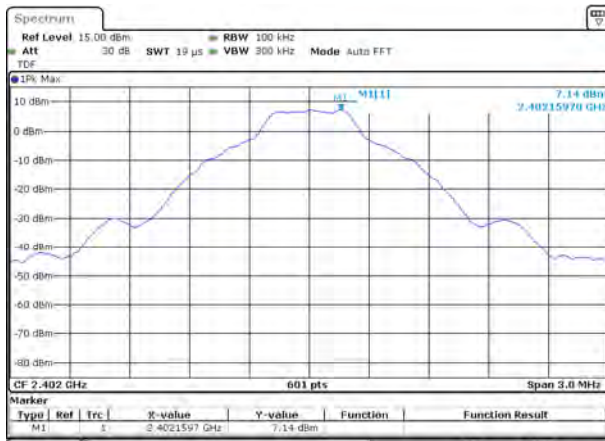


Date: 19 DEC 2018 09:33:12

GFSK LOW CHANNEL, BAND EDGE

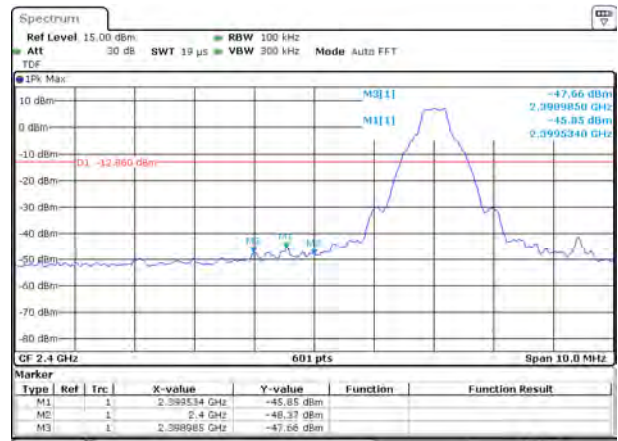


Date: 19 DEC 2018 09:33:27

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

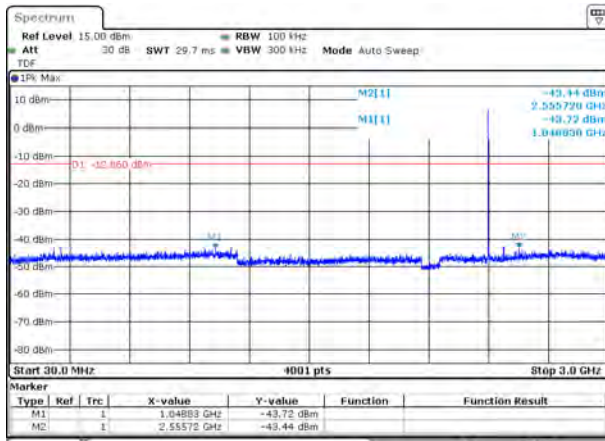


Date: 19 DEC 2018 09:32:46

GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

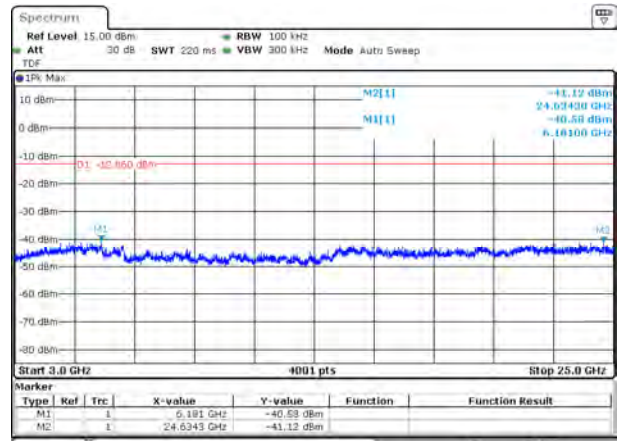


Date: 19 DEC 2018 09:32:59

GFSK MIDDLE CHANNEL, CARRIER LEVEL

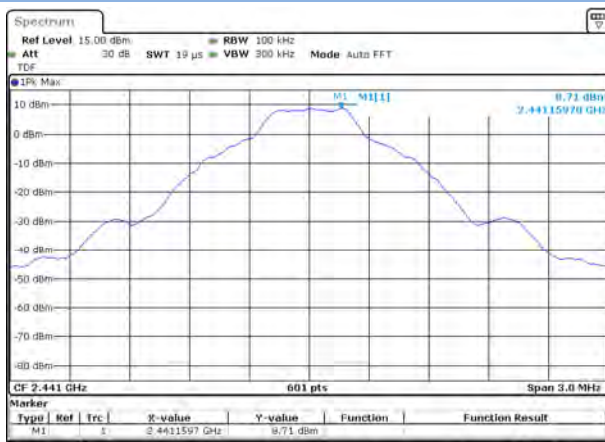


Date: 19 DEC 2018 09:38:09

GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

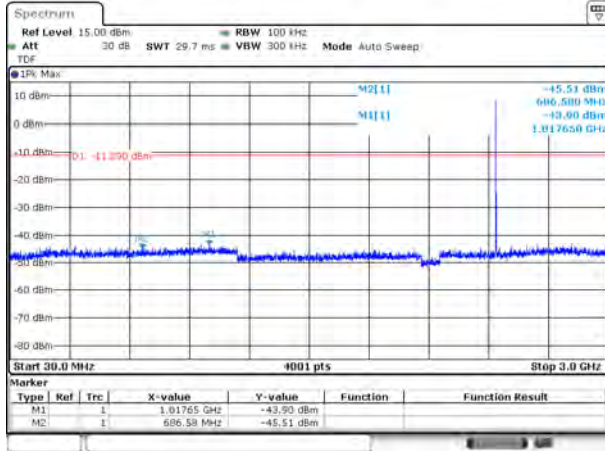


Date: 19 DEC 2018 09:36:24

GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

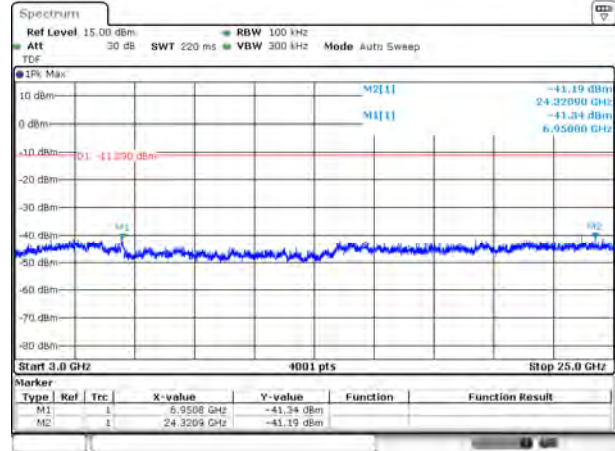


Date: 19 DEC 2018 09:36:34

GFSK HIGH CHANNEL, CARRIER LEVEL

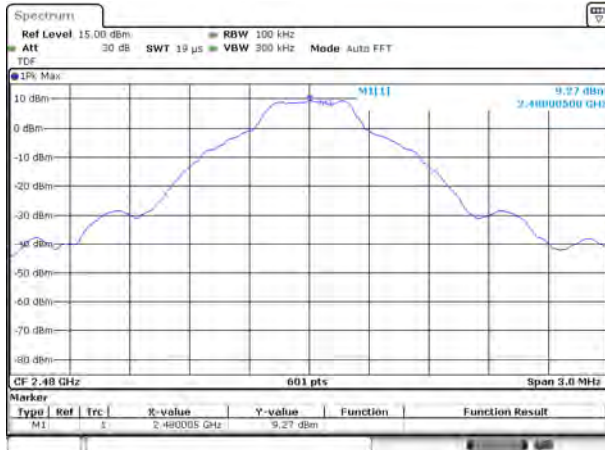


Date: 19 DEC 2018 09:39:57

GFSK HIGH CHANNEL , BAND EDGE

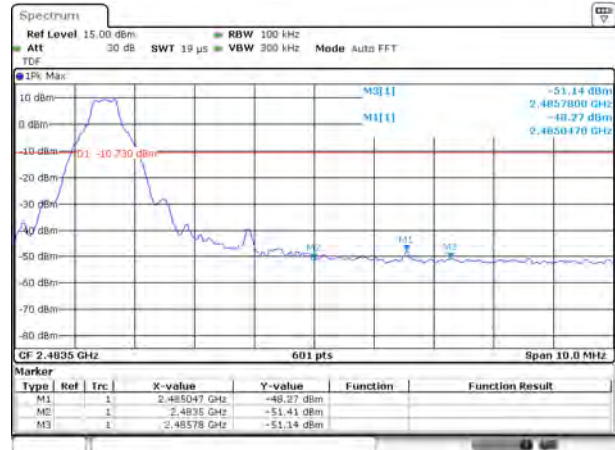


Date: 19 DEC 2018 09:47:49

GFSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

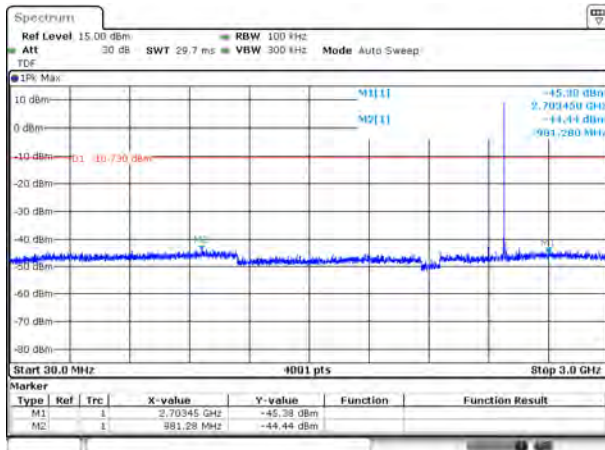


Date: 19 DEC 2018 09:47:17

GFSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

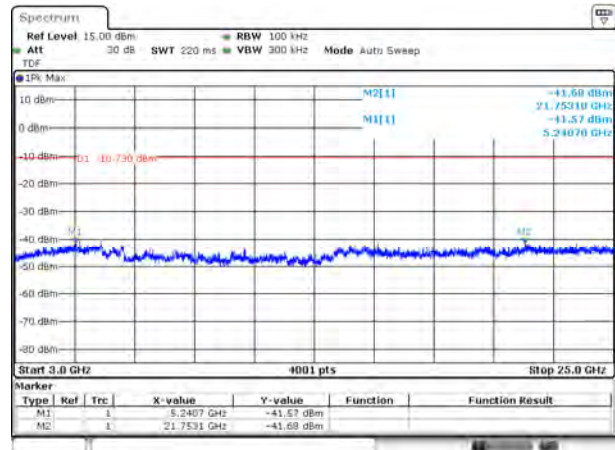


Date: 19 DEC 2018 09:47:26

8-DPSK LOW CHANNEL, CARRIER LEVEL

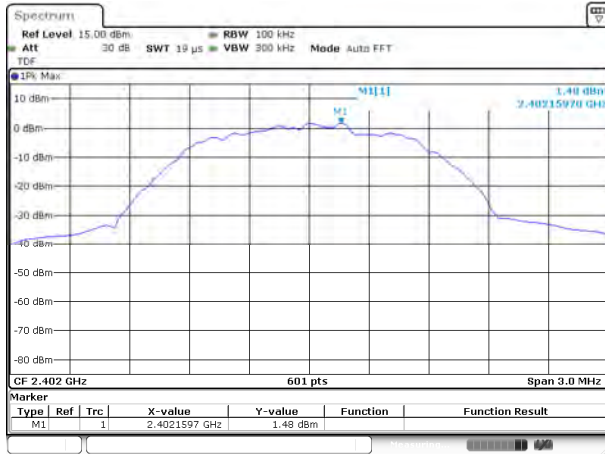


Date: 19 DEC 2018 09:54:31

8-DPSK LOW CHANNEL, BAND EDGE

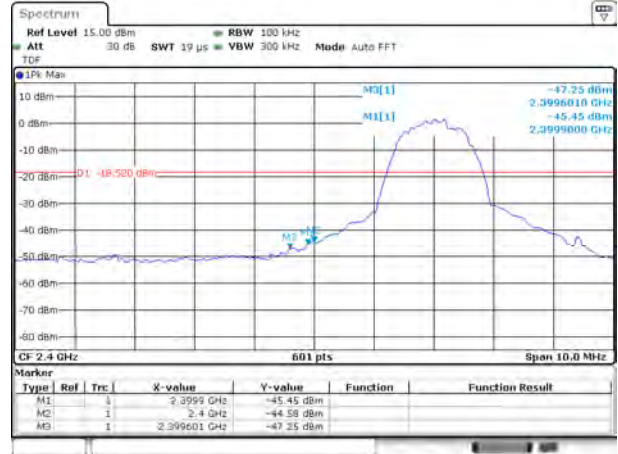


Date: 19 DEC 2018 09:55:21

8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

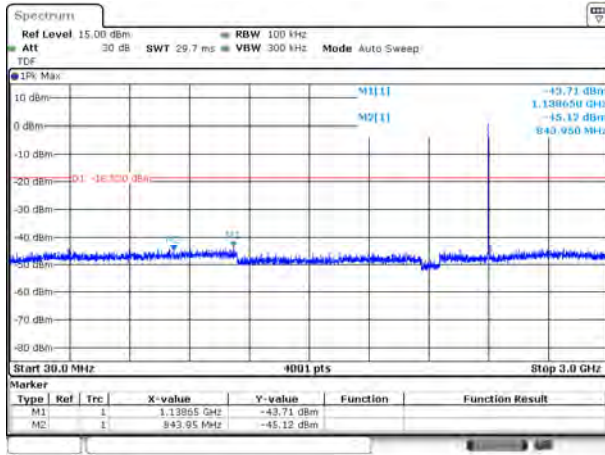


Date: 19 DEC 2018 09:54:49

8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

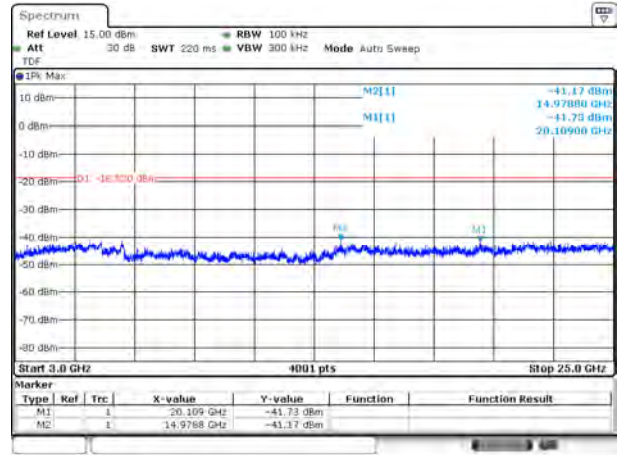


Date: 19 DEC 2018 09:56:00

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

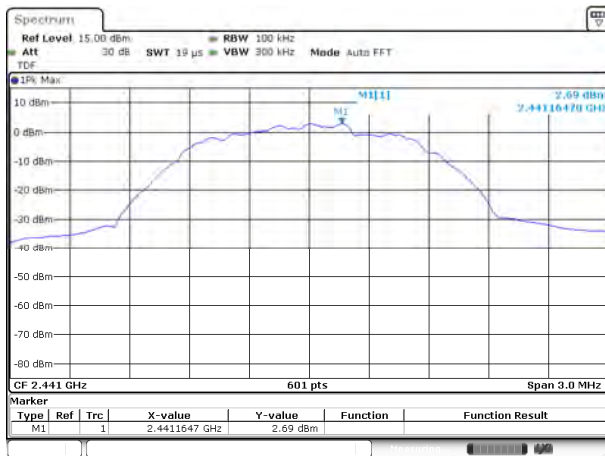


Date: 19 DEC 2018 09:59:44

8-DPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

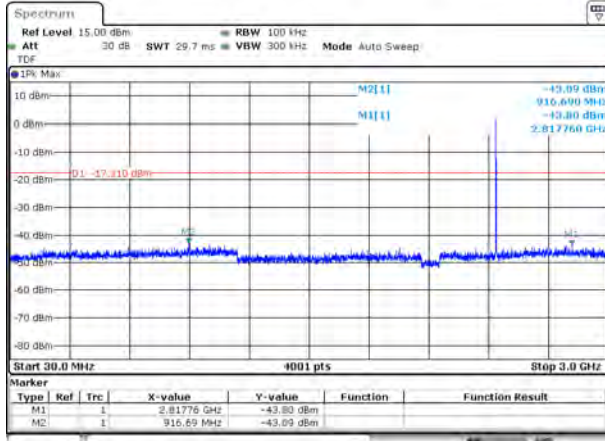


Date: 19 DEC 2018 10:00:03

8-DPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

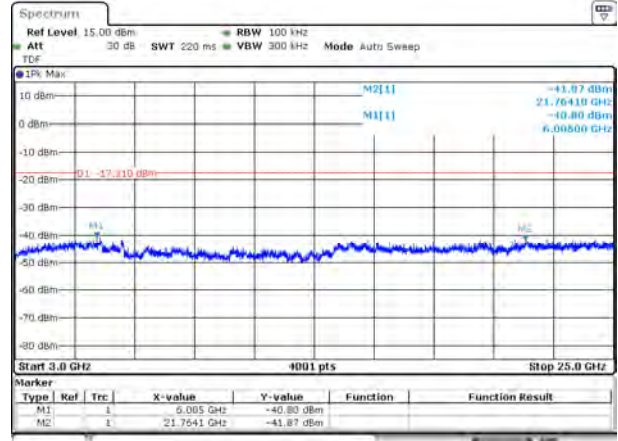


Date: 19 DEC 2018 10:00:13

8-DPSK HIGH CHANNEL , CARRIER LEVEL

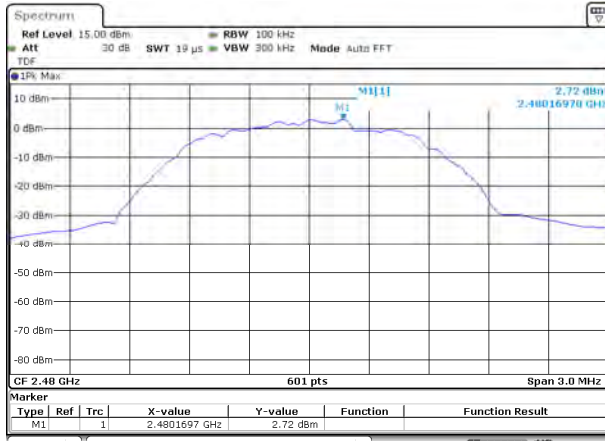


Date: 19 DEC 2018 10:02:53

8-DPSK HIGH CHANNEL , BAND EDGE

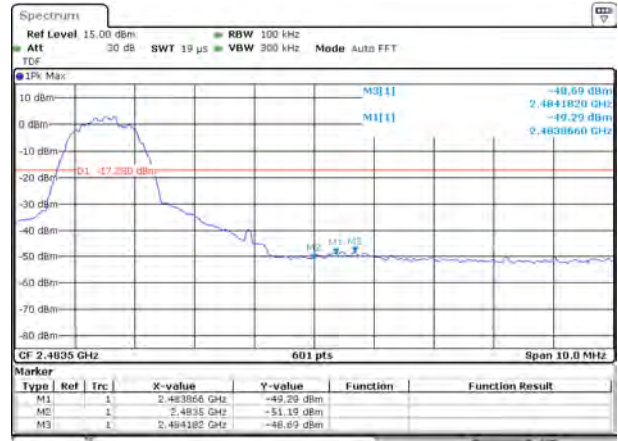


Date: 19 DEC 2018 10:03:47

8-DPSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

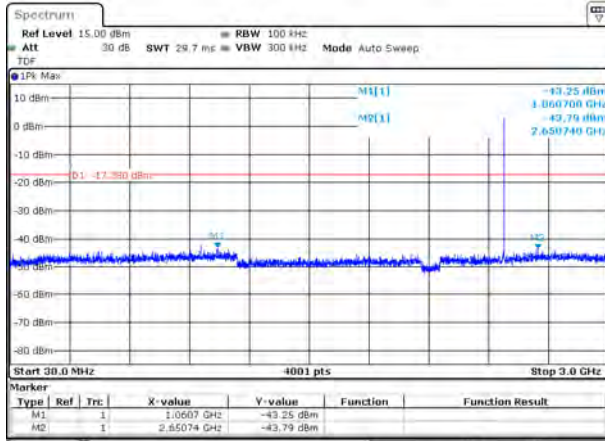


Date: 19 DEC 2018 10:03:10

8-DPSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

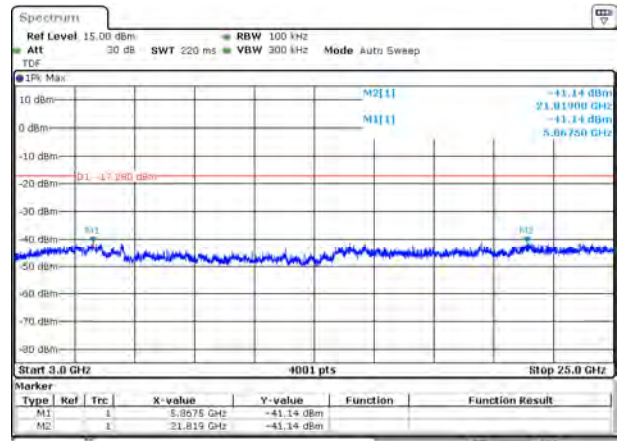


Date: 19 DEC 2018 10:03:24

GFSK HOPPING, CARRIER LEVEL

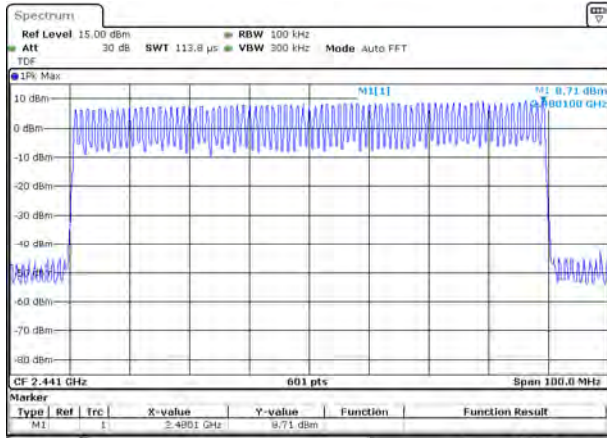


Date: 19 DEC 2018 10:06:53

GFSK HOPPING BAND EDGE (LOW)

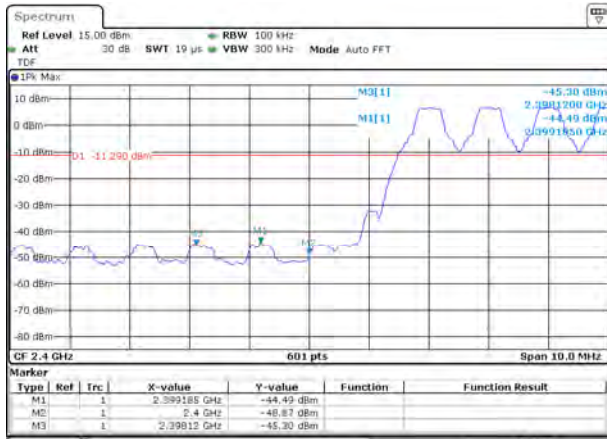


Date: 19 DEC 2018 10:10:19

GFSK HOPPING BAND EDGE (HIGH)

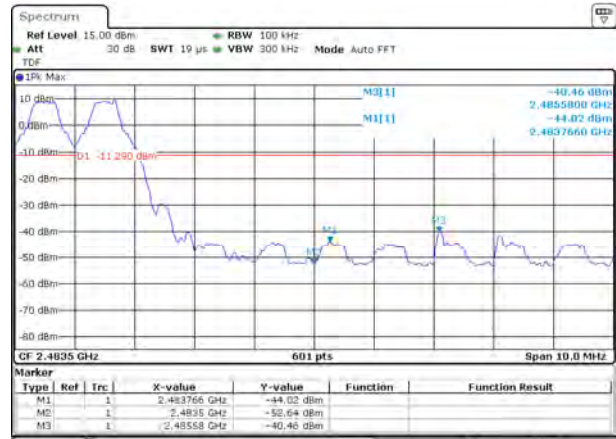


Date: 19 DEC 2018 10:10:37

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

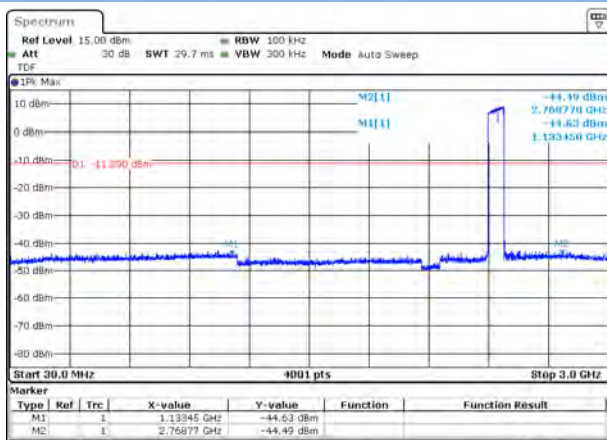


Date: 19 DEC 2018 10:08:37

GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

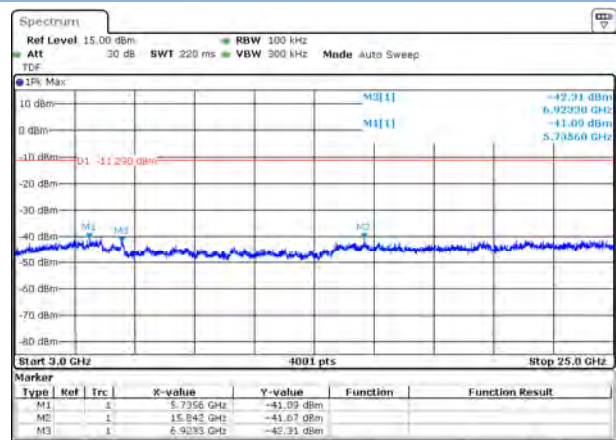


Date: 19 DEC 2018 10:08:57

8-DPSK HOPPING, CARRIER LEVEL

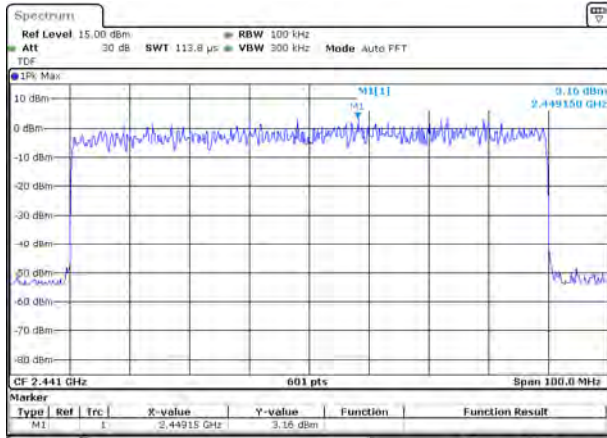


Date: 19 DEC 2018 10:13:04

8-DPSK Hopping BAND EDGE (LOW)

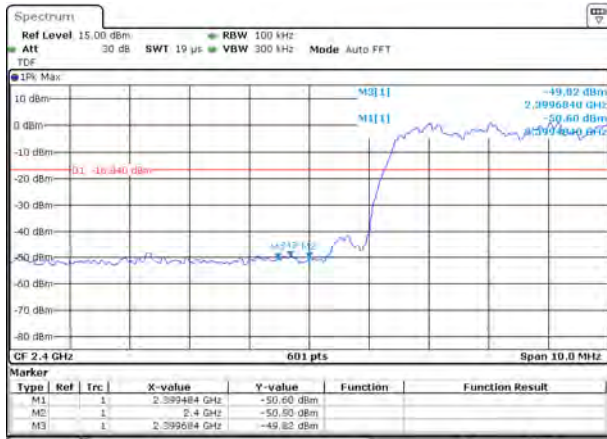


Date: 19 DEC 2018 10:16:42

8-DPSK Hopping BAND EDGE (HIGH)

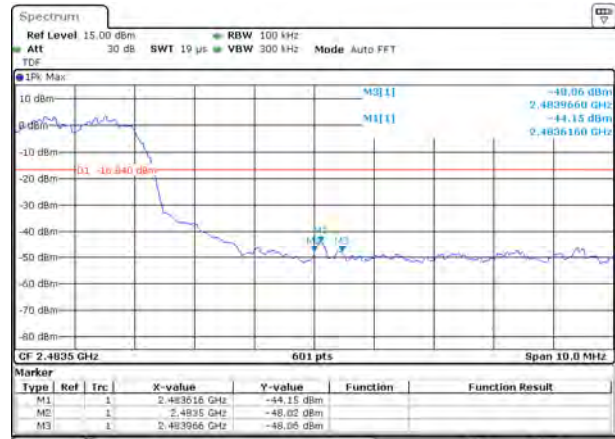


Date: 19 DEC 2018 10:17:01

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

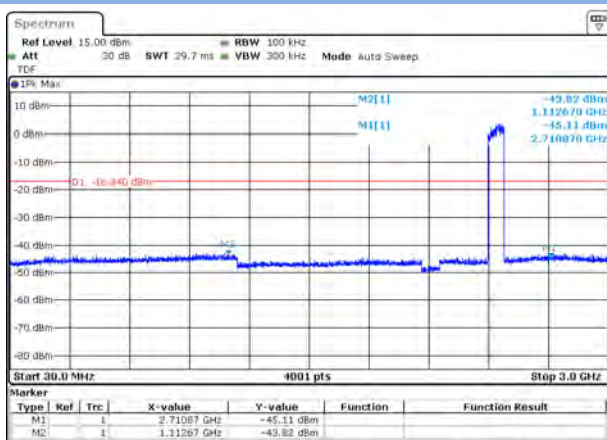

Date: 19 DEC 2018 10:16:04

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

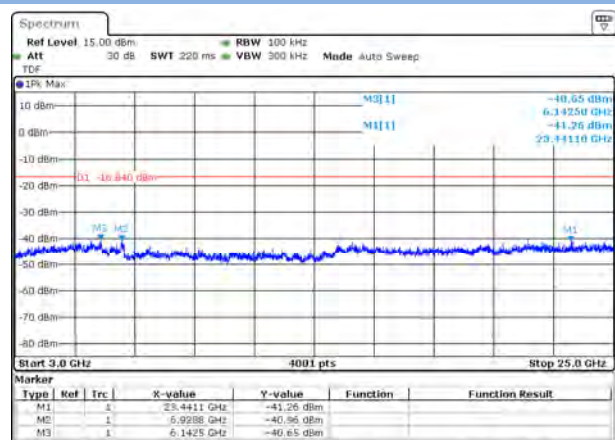

Date: 19 DEC 2018 10:16:19

A.7 Conducted Emissions


Note 1: The EUT is working in the Normal link mode.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note 3: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)


Test Data and Plots

PHASE L

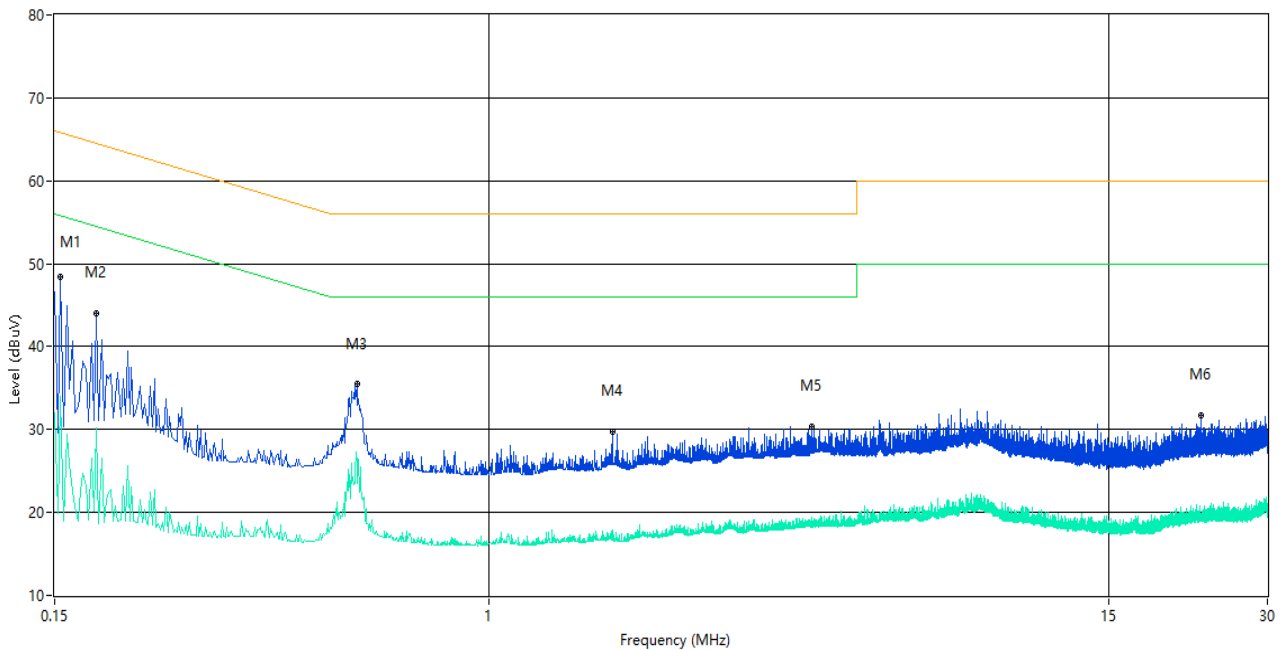

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	48.4	10.01	65.8	-17.40	Peak	L Line	Pass
1**	0.154	34.0	10.01	55.8	-21.80	AV	L Line	Pass
2	0.180	44.0	10.01	64.5	-20.50	Peak	L Line	Pass
2**	0.180	30.1	10.01	54.5	-24.40	AV	L Line	Pass
3	0.562	35.4	10.02	56.0	-20.60	Peak	L Line	Pass
3**	0.562	26.1	10.02	46.0	-19.90	AV	L Line	Pass
4	1.714	29.8	10.07	56.0	-26.20	Peak	L Line	Pass
4**	1.714	17.1	10.07	46.0	-28.90	AV	L Line	Pass
5	4.102	30.4	10.10	56.0	-25.60	Peak	L Line	Pass
5**	4.102	19.5	10.10	46.0	-26.50	AV	L Line	Pass
6	22.438	31.8	10.27	60.0	-28.20	Peak	L Line	Pass
6**	22.438	19.8	10.27	50.0	-30.20	AV	L Line	Pass

PHASE N

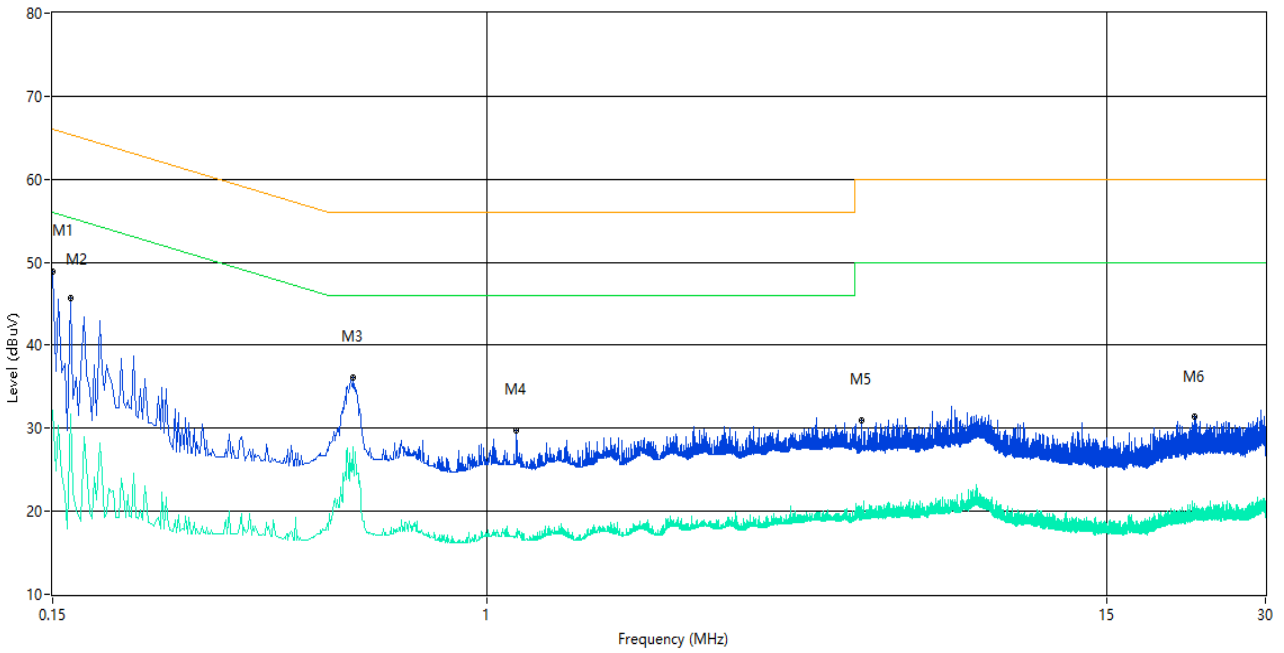

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	48.8	10.01	66.0	-17.20	Peak	N Line	Pass
1**	0.150	32.2	10.01	56.0	-23.80	AV	N Line	Pass
2	0.162	45.7	10.01	65.4	-19.70	Peak	N Line	Pass
2**	0.162	31.7	10.01	55.4	-23.70	AV	N Line	Pass
3	0.558	36.1	10.02	56.0	-19.90	Peak	N Line	Pass
3**	0.558	25.6	10.02	46.0	-20.40	AV	N Line	Pass
4	1.138	29.8	10.04	56.0	-26.20	Peak	N Line	Pass
4**	1.138	17.2	10.04	46.0	-28.80	AV	N Line	Pass
5	5.138	31.0	10.12	60.0	-29.00	Peak	N Line	Pass
5**	5.138	18.7	10.12	50.0	-31.30	AV	N Line	Pass
6	21.968	31.3	10.27	60.0	-28.70	Peak	N Line	Pass
6**	21.968	19.6	10.27	50.0	-30.40	AV	N Line	Pass

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of "--" in the table which means not application.


Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V

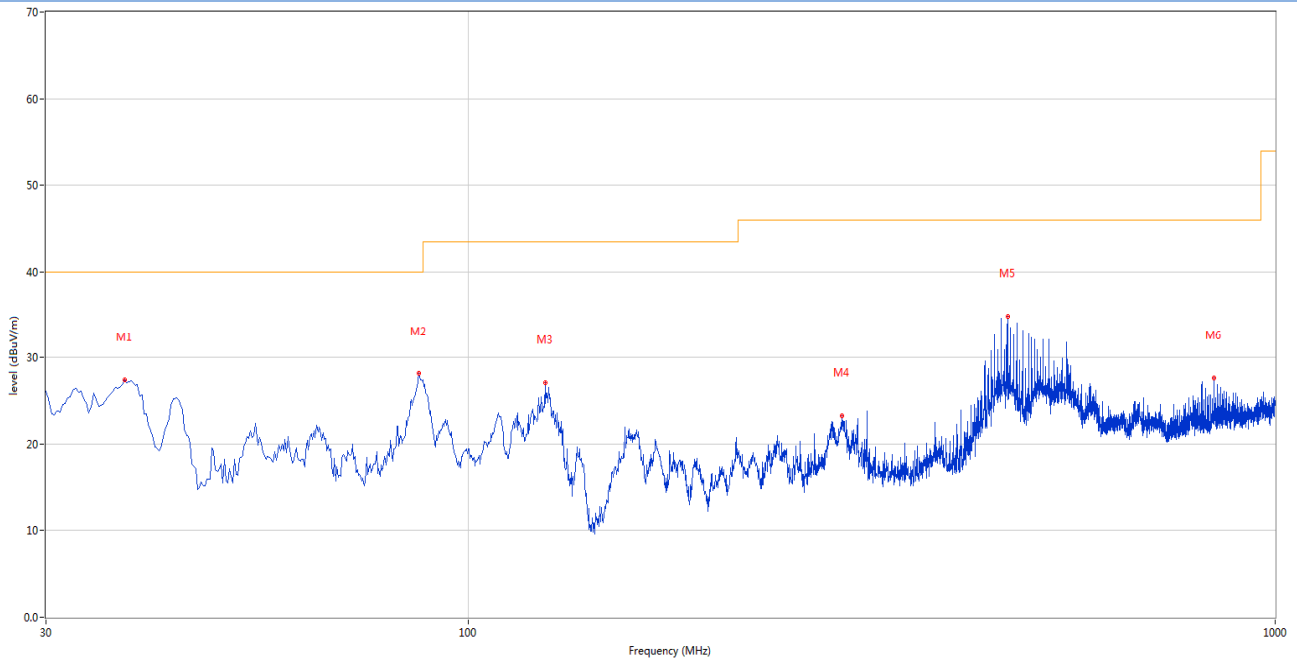

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	37.517	27.42	-25.11	40.0	-12.58	Peak	0.00	100	V	Pass
2	86.988	28.14	-27.33	40.0	-11.86	Peak	122.70	100	V	Pass
3	124.575	27.12	-26.94	43.5	-16.38	Peak	60.80	100	V	Pass
4	290.445	23.21	-22.14	46.0	-22.79	Peak	81.60	100	V	Pass
5	466.015	34.89	-17.80	46.0	-11.11	Peak	164.80	100	V	Pass
6	839.950	27.66	-11.19	46.0	-18.34	Peak	101.70	100	V	Pass

30 MHz to 1 GHz, ANT H

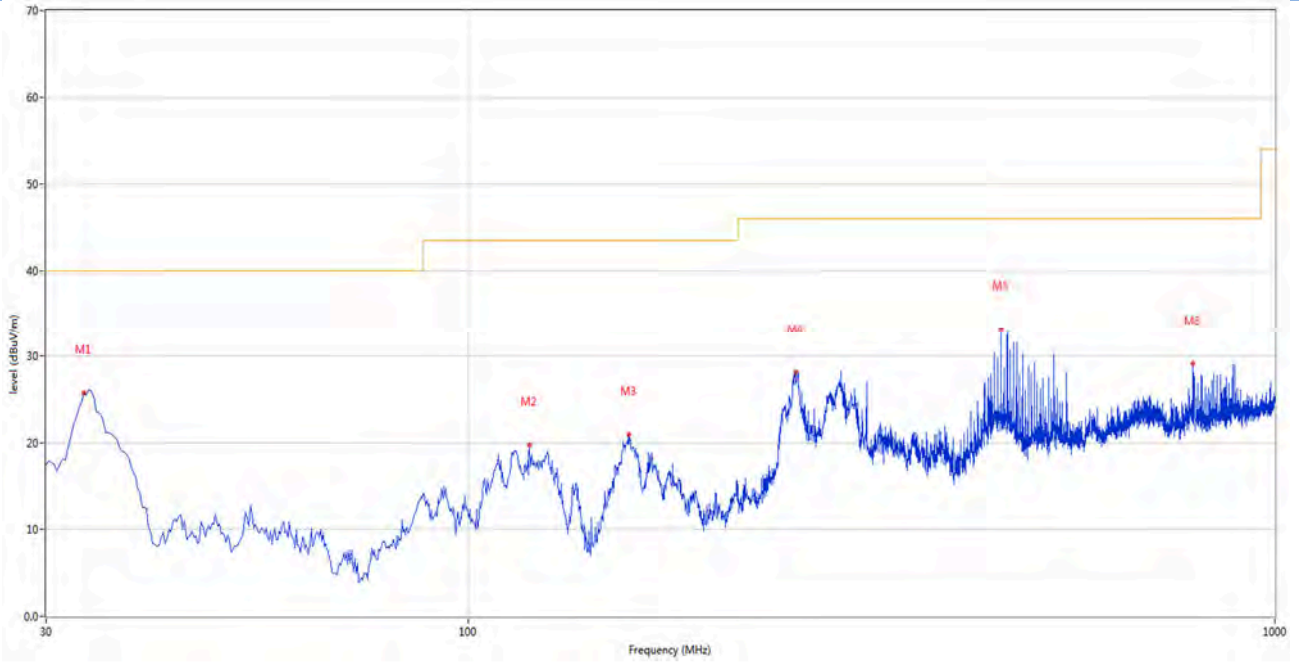

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	33.395	25.73	-26.65	40.0	-14.27	Peak	0.00	200	H	Pass
2	119.240	19.72	-26.36	43.5	-23.78	Peak	360.00	100	H	Pass
3	158.525	21.01	-27.76	43.5	-22.49	Peak	354.50	200	H	Pass
4	254.798	28.21	-23.02	46.0	-17.79	Peak	1.90	100	H	Pass
5	457.527	33.20	-17.99	46.0	-12.80	Peak	106.00	200	H	Pass
6	791.935	29.17	-12.07	46.0	-16.83	Peak	122.80	100	H	Pass


Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 12.75G is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT V


RE Test case FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

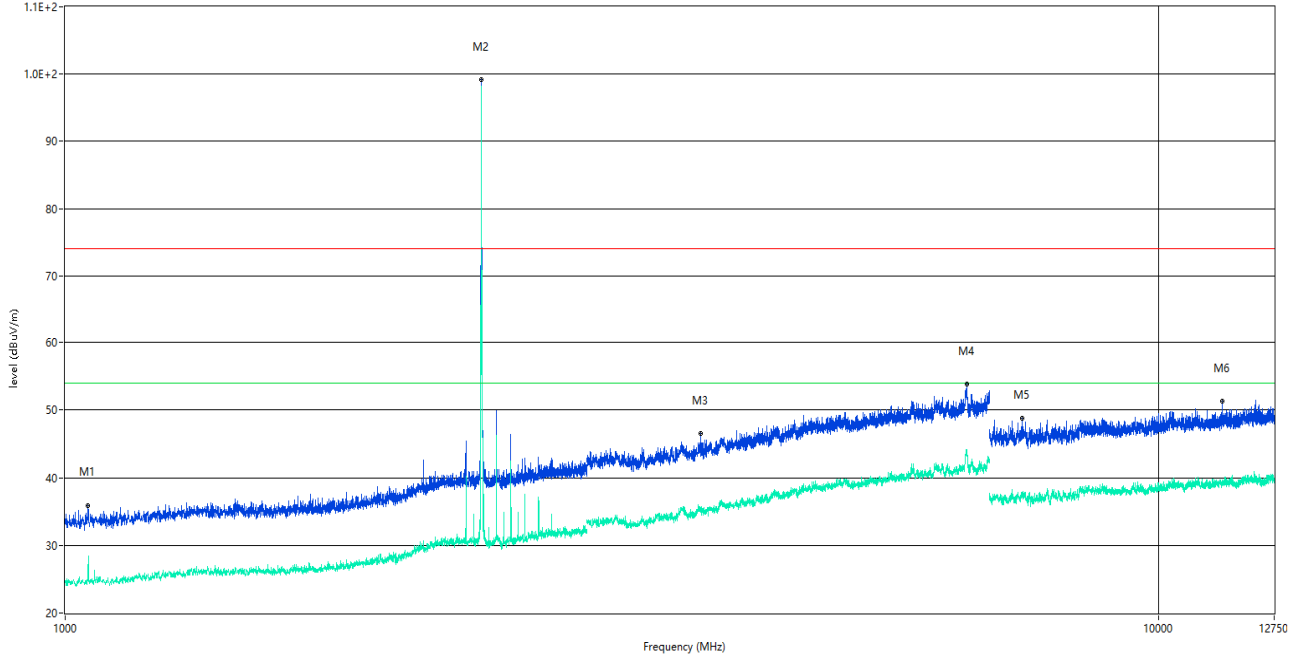

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	25.90	-18.20	54.0	-28.10	AV	82.00	100	V	Pass
1	1049.500	35.86	-18.20	74.0	-38.14	Peak	82.00	100	V	Pass
2**	2402.000	95.02	-12.20	54.0	41.02	AV	334.00	100	V	N/A
2	2402.000	99.16	-12.20	74.0	25.16	Peak	334.00	100	V	N/A
3**	3814.000	35.22	-5.76	54.0	-18.78	AV	53.00	100	V	Pass
3	3814.000	46.48	-5.76	74.0	-27.52	Peak	53.00	100	V	Pass
4**	6675.000	43.51	1.88	54.0	-10.49	AV	0.00	100	V	Pass
4	6675.000	53.81	1.88	74.0	-20.19	Peak	0.00	100	V	Pass
5**	7500.250	37.34	-2.45	54.0	-16.66	AV	0.00	100	V	Pass
5	7500.250	48.81	-2.45	74.0	-25.19	Peak	0.00	100	V	Pass
6**	11437.563	39.23	0.29	54.0	-14.77	AV	257.00	100	V	Pass
6	11437.563	51.27	0.29	74.0	-22.73	Peak	257.00	100	V	Pass

GFSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

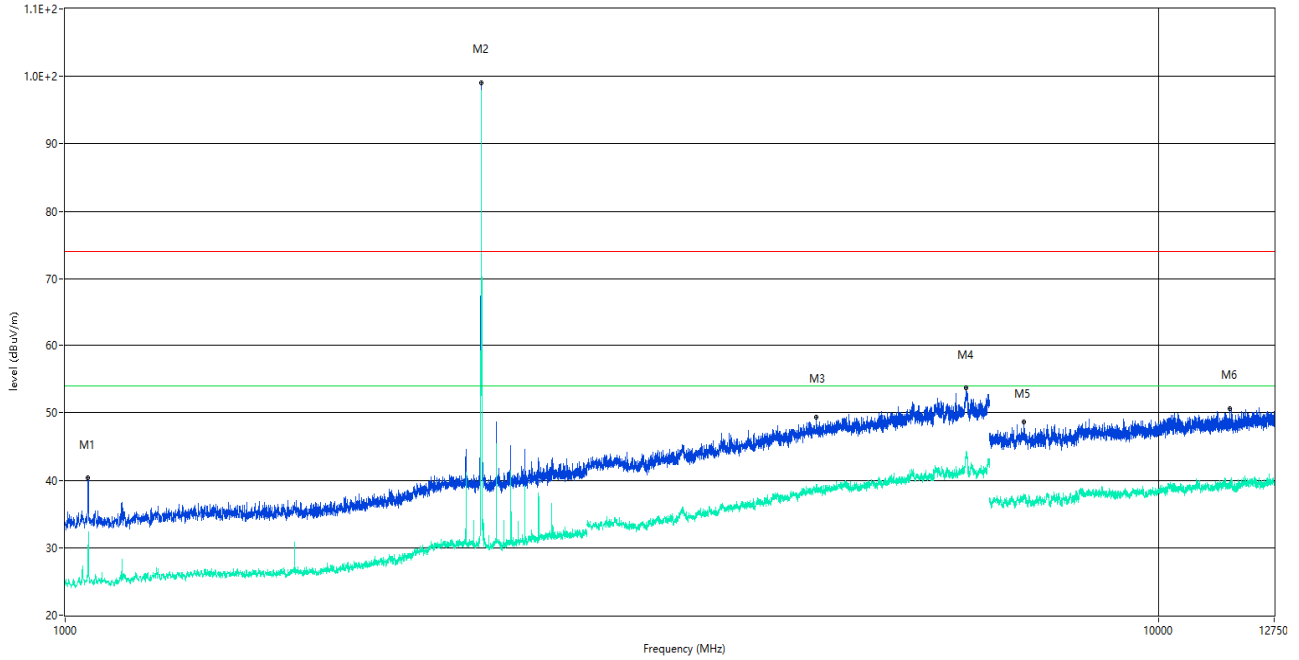

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	28.61	-18.20	54.0	-25.39	AV	214.00	100	H	Pass
1	1049.500	40.34	-18.20	74.0	-33.66	Peak	214.00	100	H	Pass
2**	2402.000	94.58	-12.20	54.0	40.58	AV	129.00	100	H	N/A
2	2402.000	99.06	-12.20	74.0	25.06	Peak	129.00	100	H	N/A
3**	4865.000	38.72	-2.79	54.0	-15.28	AV	152.00	100	H	Pass
3	4865.000	49.35	-2.79	74.0	-24.65	Peak	152.00	100	H	Pass
4**	6663.000	43.43	1.69	54.0	-10.57	AV	49.00	100	H	Pass
4	6663.000	53.66	1.69	74.0	-20.34	Peak	49.00	100	H	Pass
5**	7523.250	37.08	-2.08	54.0	-16.92	AV	360.00	100	H	Pass
5	7523.250	48.60	-2.08	74.0	-25.40	Peak	360.00	100	H	Pass
6**	11620.125	39.19	0.35	54.0	-14.81	AV	5.00	100	H	Pass
6	11620.125	50.61	0.35	74.0	-23.39	Peak	5.00	100	H	Pass

GFSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

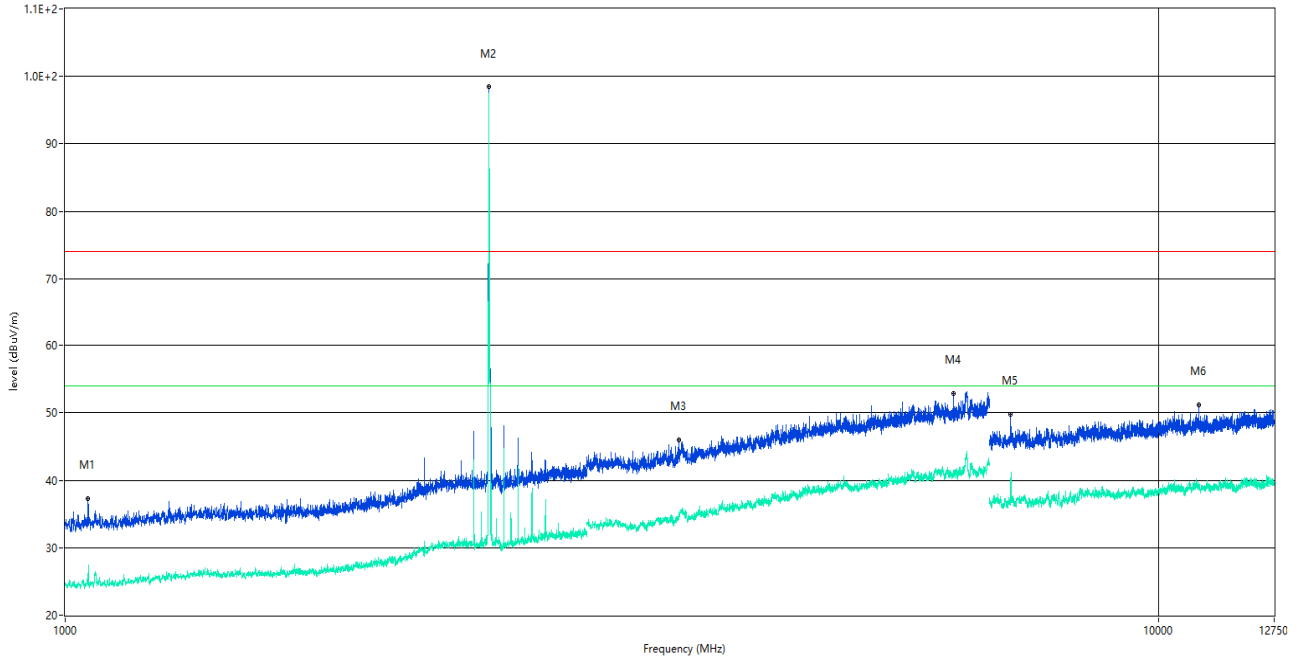

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	25.10	-18.20	54.0	-28.90	AV	91.00	100	V	Pass
1	1049.500	37.26	-18.20	74.0	-36.74	Peak	91.00	100	V	Pass
2**	2441.000	94.17	-12.90	54.0	40.17	AV	301.00	100	V	N/A
2	2441.000	98.46	-12.90	74.0	24.46	Peak	301.00	100	V	N/A
3**	3638.000	35.00	-7.53	54.0	-19.00	AV	0.00	100	V	Pass
3	3638.000	46.03	-7.53	74.0	-27.97	Peak	0.00	100	V	Pass
4**	6492.000	40.81	-1.17	54.0	-13.19	AV	0.00	100	V	Pass
4	6492.000	52.89	-1.17	74.0	-21.11	Peak	0.00	100	V	Pass
5**	7323.438	39.50	-3.01	54.0	-14.50	AV	173.00	100	V	Pass
5	7323.438	49.84	-3.01	74.0	-24.16	Peak	173.00	100	V	Pass
6**	10879.813	39.15	0.34	54.0	-14.85	AV	216.00	100	V	Pass
6	10879.813	51.20	0.34	74.0	-22.80	Peak	216.00	100	V	Pass

FSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

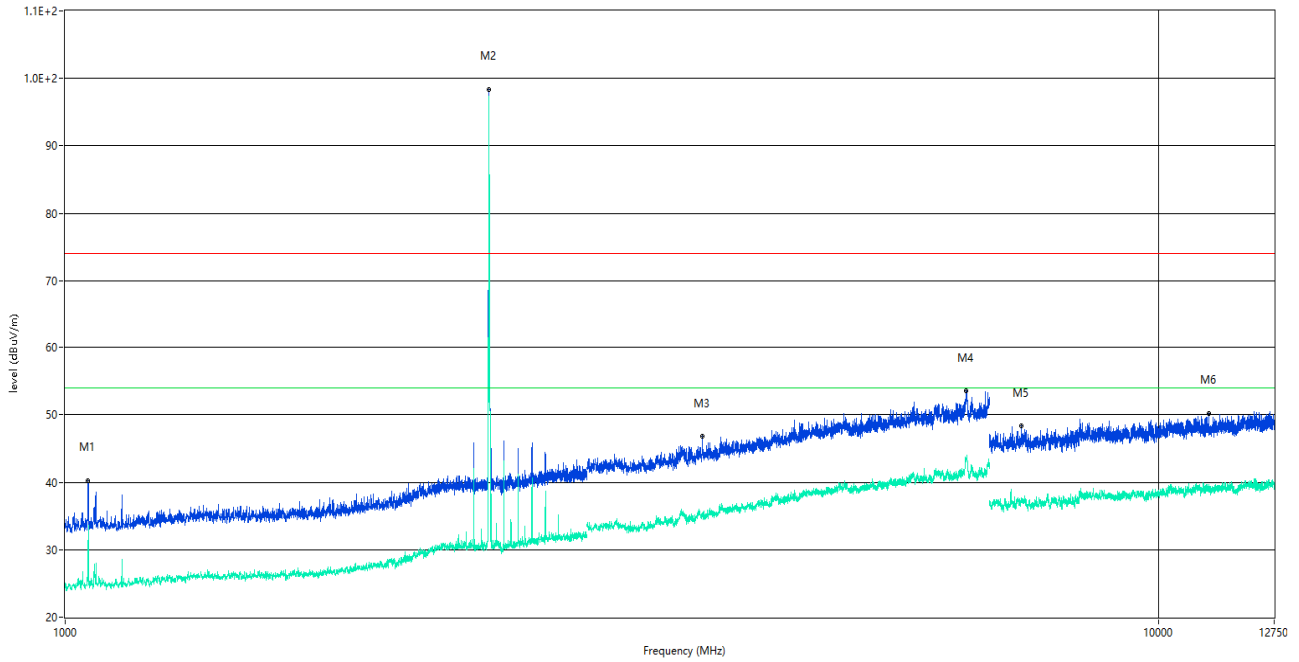

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1045.000	24.78	-18.33	54.0	-29.22	AV	101.00	100	H	Pass
1	1045.000	33.38	-18.33	74.0	-40.62	Peak	101.00	100	H	Pass
2**	2441.000	93.40	-12.90	54.0	39.40	AV	101.00	100	H	N/A
2	2441.000	98.36	-12.90	74.0	24.36	Peak	101.00	100	H	N/A
3**	3826.000	34.94	-6.38	54.0	-19.06	AV	130.00	100	H	Pass
3	3826.000	46.76	-6.38	74.0	-27.24	Peak	130.00	100	H	Pass
4**	6662.000	43.45	1.74	54.0	-10.55	AV	87.00	100	H	Pass
4	6662.000	53.53	1.74	74.0	-20.47	Peak	87.00	100	H	Pass
5**	7493.063	37.29	-2.55	54.0	-16.71	AV	356.00	100	H	Pass
5	7493.063	48.31	-2.55	74.0	-25.69	Peak	356.00	100	H	Pass
6**	11105.500	38.93	-0.56	54.0	-15.07	AV	57.00	100	H	Pass
6	11105.500	50.21	-0.56	74.0	-23.79	Peak	57.00	100	H	Pass

GFSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

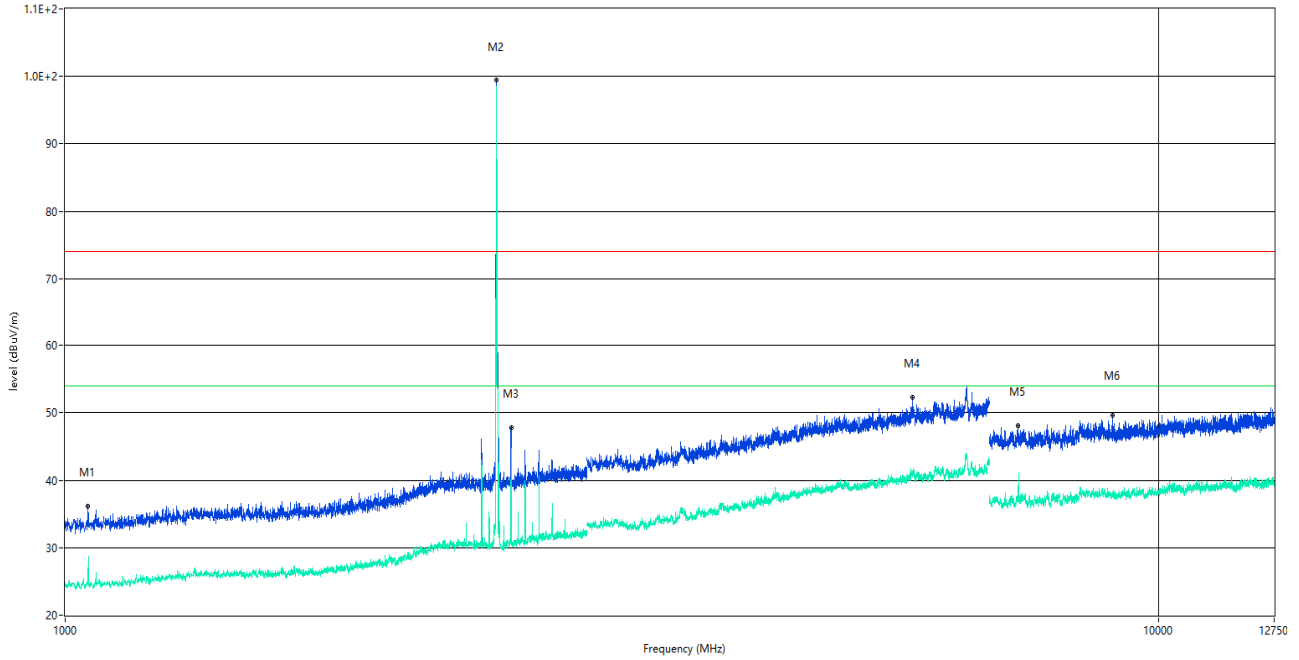

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.000	24.69	-18.20	54.0	-29.31	AV	101.00	100	V	Pass
1	1049.000	36.15	-18.20	74.0	-37.85	Peak	101.00	100	V	Pass
2**	2480.000	94.91	-11.71	54.0	40.91	AV	0.00	100	V	N/A
2	2480.000	99.42	-11.71	74.0	25.42	Peak	0.00	100	V	N/A
3**	2557.000	44.34	-11.69	54.0	-9.66	AV	308.00	100	V	Pass
3	2557.000	47.75	-11.69	74.0	-26.25	Peak	308.00	100	V	Pass
4**	5955.000	41.37	-1.16	54.0	-12.63	AV	360.00	100	V	Pass
4	5955.000	52.31	-1.16	74.0	-21.69	Peak	360.00	100	V	Pass
5**	7439.875	37.50	-2.77	54.0	-16.50	AV	153.00	100	V	Pass
5	7439.875	48.13	-2.77	74.0	-25.87	Peak	153.00	100	V	Pass
6**	9077.188	37.68	-0.92	54.0	-16.32	AV	153.00	100	V	Pass
6	9077.188	49.67	-0.92	74.0	-24.33	Peak	153.00	100	V	Pass

FSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

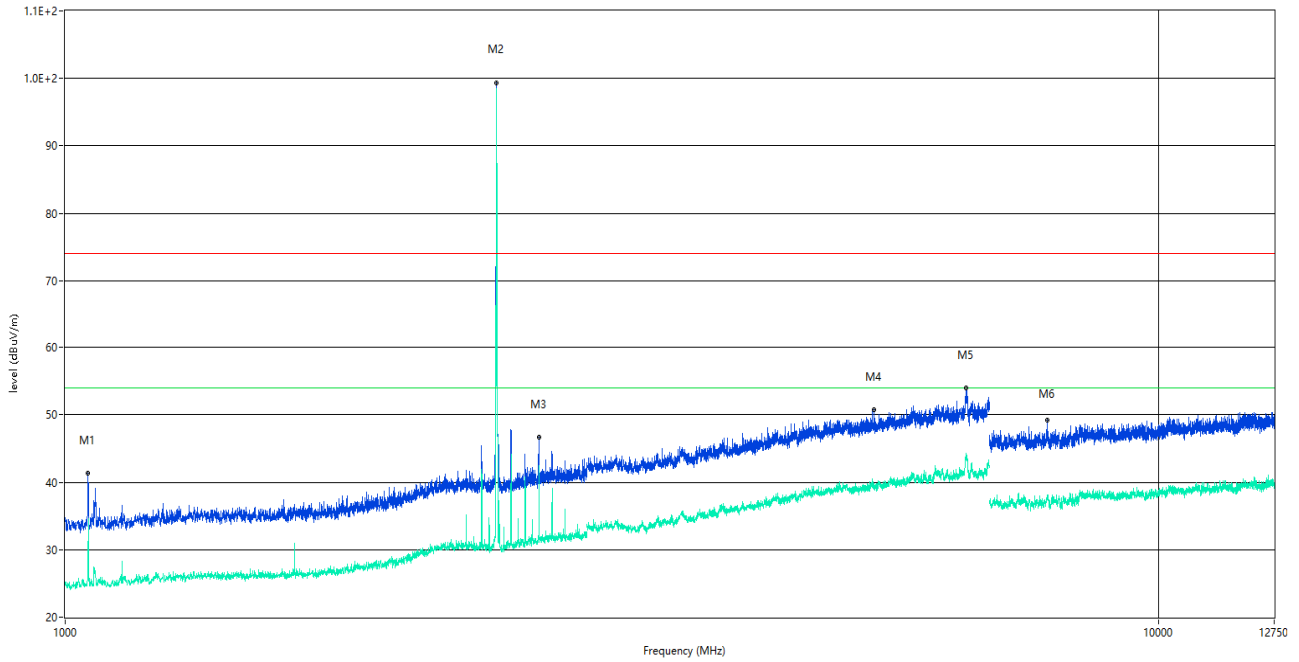

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	28.04	-18.20	54.0	-25.96	AV	215.00	100	H	Pass
1	1049.500	41.29	-18.20	74.0	-32.71	Peak	215.00	100	H	Pass
2**	2480.000	94.67	-11.71	54.0	40.67	AV	131.00	100	H	N/A
2	2480.000	99.39	-11.71	74.0	25.39	Peak	131.00	100	H	N/A
3**	2710.500	40.75	-11.16	54.0	-13.25	AV	257.00	100	H	Pass
3	2710.500	46.64	-11.16	74.0	-27.36	Peak	257.00	100	H	Pass
4**	5486.000	39.16	-2.08	54.0	-14.84	AV	269.00	100	H	Pass
4	5486.000	50.68	-2.08	74.0	-23.32	Peak	269.00	100	H	Pass
5**	6670.000	44.29	2.08	54.0	-9.71	AV	12.00	100	H	Pass
5	6670.000	53.93	2.08	74.0	-20.07	Peak	12.00	100	H	Pass
6**	7904.187	37.83	-2.04	54.0	-16.17	AV	359.00	100	H	Pass
6	7904.187	49.22	-2.04	74.0	-24.78	Peak	359.00	100	H	Pass

8-DPSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

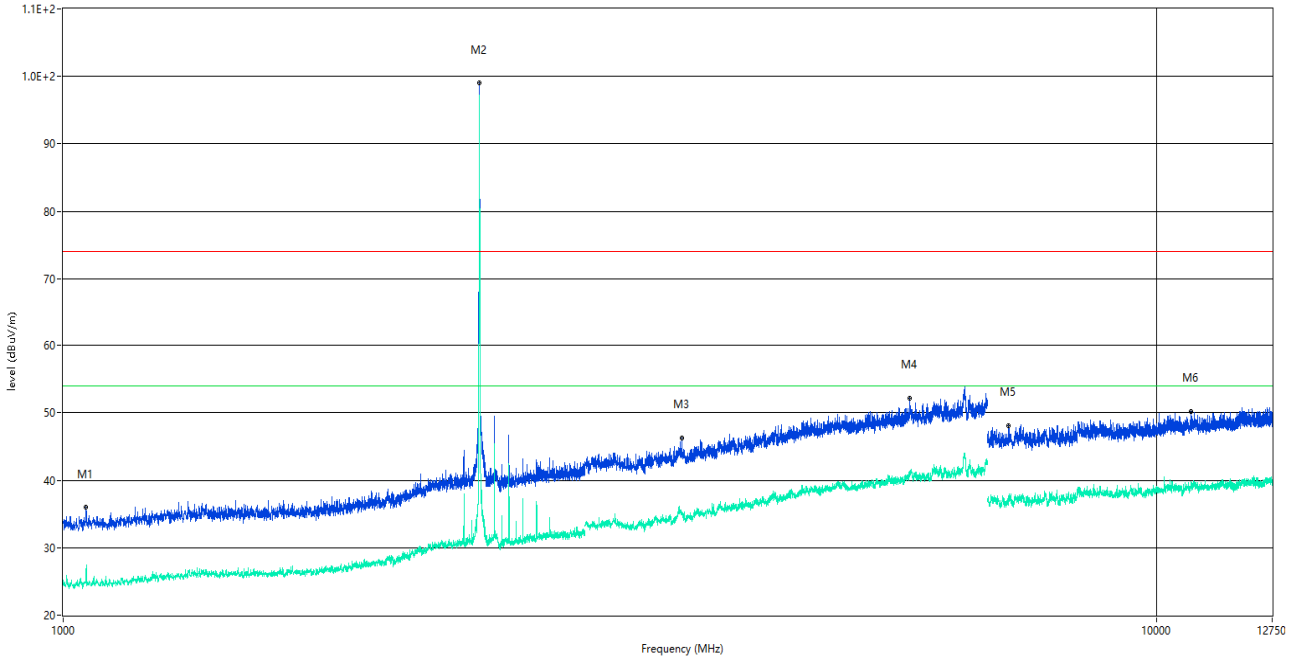

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	26.39	-18.20	54.0	-27.61	AV	0.00	100	V	Pass
1	1049.500	35.96	-18.20	74.0	-38.04	Peak	0.00	100	V	Pass
2**	2402.000	94.42	-12.20	54.0	40.42	AV	359.00	100	V	N/A
2	2402.000	99.02	-12.20	74.0	25.02	Peak	359.00	100	V	N/A
3**	3680.000	35.16	-5.54	54.0	-18.84	AV	101.00	100	V	Pass
3	3680.000	46.29	-5.54	74.0	-27.71	Peak	101.00	100	V	Pass
4**	5945.000	41.11	-1.19	54.0	-12.89	AV	205.00	100	V	Pass
4	5945.000	52.20	-1.19	74.0	-21.80	Peak	205.00	100	V	Pass
5**	7319.125	37.71	-3.18	54.0	-16.29	AV	132.00	100	V	Pass
5	7319.125	48.14	-3.18	74.0	-25.86	Peak	132.00	100	V	Pass
6**	10750.437	39.21	-0.28	54.0	-14.79	AV	344.00	100	V	Pass
6	10750.437	50.25	-0.28	74.0	-23.75	Peak	344.00	100	V	Pass

8-DPSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

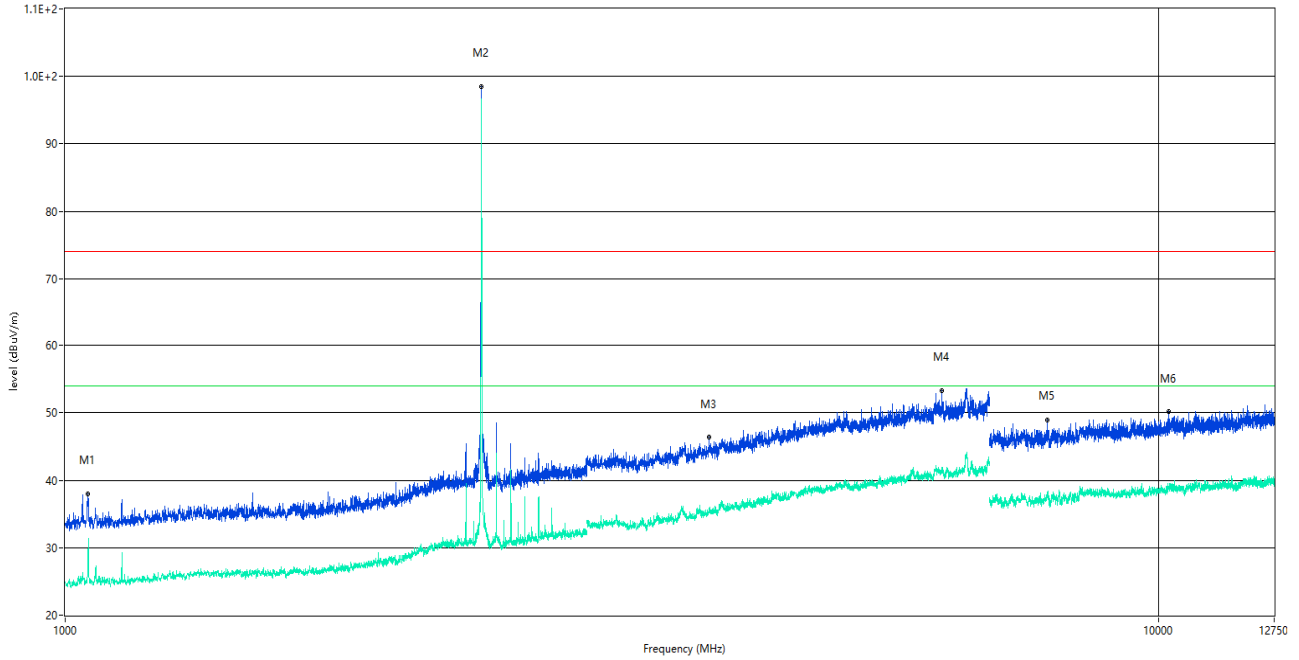

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	28.33	-18.20	54.0	-25.67	AV	182.00	100	H	Pass
1	1049.500	38.02	-18.20	74.0	-35.98	Peak	182.00	100	H	Pass
2**	2402.000	93.89	-12.20	54.0	39.89	AV	96.00	100	H	N/A
2	2402.000	98.55	-12.20	74.0	24.55	Peak	96.00	100	H	N/A
3**	3880.000	35.53	-5.28	54.0	-18.47	AV	359.00	100	H	Pass
3	3880.000	46.33	-5.28	74.0	-27.67	Peak	359.00	100	H	Pass
4**	6333.000	41.41	-0.25	54.0	-12.59	AV	359.00	100	H	Pass
4	6333.000	53.28	-0.25	74.0	-20.72	Peak	359.00	100	H	Pass
5**	7908.500	37.87	-1.94	54.0	-16.13	AV	360.00	100	H	Pass
5	7908.500	48.90	-1.94	74.0	-25.10	Peak	360.00	100	H	Pass
6**	10204.188	39.14	0.77	54.0	-14.86	AV	77.00	100	H	Pass
6	10204.188	50.16	0.77	74.0	-23.84	Peak	77.00	100	H	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

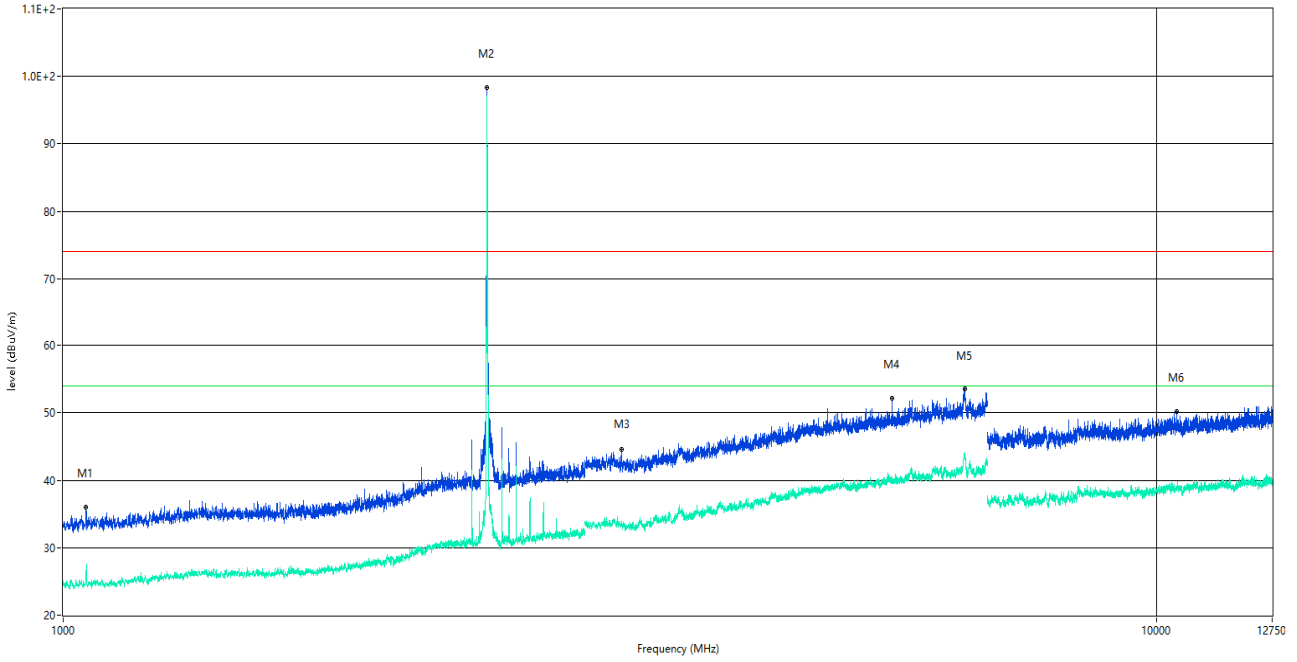

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	25.64	-18.20	54.0	-28.36	AV	0.00	100	V	Pass
1	1049.500	36.04	-18.20	74.0	-37.96	Peak	0.00	100	V	Pass
2**	2441.000	94.20	-12.91	54.0	40.20	AV	312.00	100	V	N/A
2	2441.000	98.37	-12.91	74.0	24.37	Peak	312.00	100	V	N/A
3**	3242.000	33.32	-8.23	54.0	-20.68	AV	103.00	100	V	Pass
3	3242.000	44.56	-8.23	74.0	-29.44	Peak	103.00	100	V	Pass
4**	5727.000	40.17	-1.89	54.0	-13.83	AV	206.00	100	V	Pass
4	5727.000	52.17	-1.89	74.0	-21.83	Peak	206.00	100	V	Pass
5**	6673.000	43.97	1.94	54.0	-10.03	AV	0.00	100	V	Pass
5	6673.000	53.53	1.94	74.0	-20.47	Peak	0.00	100	V	Pass
6**	10435.625	38.85	0.40	54.0	-15.15	AV	11.00	100	V	Pass
6	10435.625	50.21	0.40	74.0	-23.79	Peak	11.00	100	V	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

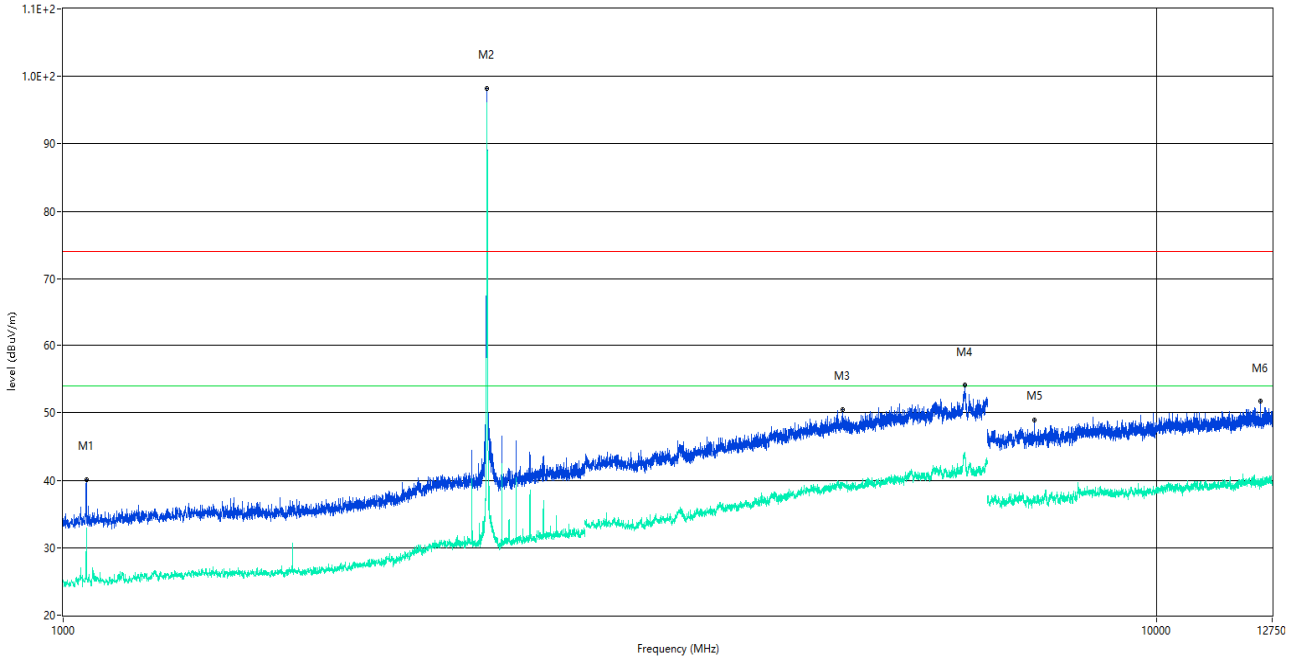

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1045.500	24.96	-18.41	54.0	-29.04	AV	259.00	100	H	Pass
1	1045.500	33.78	-18.41	74.0	-40.22	Peak	259.00	100	H	Pass
2**	2441.000	93.67	-12.91	54.0	39.67	AV	133.00	100	H	N/A
2	2441.000	98.21	-12.91	74.0	24.21	Peak	133.00	100	H	N/A
3**	5165.000	39.66	-2.54	54.0	-14.34	AV	266.00	100	H	Pass
3	5165.000	50.52	-2.54	74.0	-23.48	Peak	266.00	100	H	Pass
4**	6681.000	43.50	1.49	54.0	-10.50	AV	351.00	100	H	Pass
4	6681.000	54.06	1.49	74.0	-19.94	Peak	351.00	100	H	Pass
5**	7731.687	37.53	-2.26	54.0	-16.47	AV	258.00	100	H	Pass
5	7731.687	48.86	-2.26	74.0	-25.14	Peak	258.00	100	H	Pass
6**	12438.062	39.48	1.88	54.0	-14.52	AV	258.00	100	H	Pass
6	12438.062	51.67	1.88	74.0	-22.33	Peak	258.00	100	H	Pass

8-DPSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

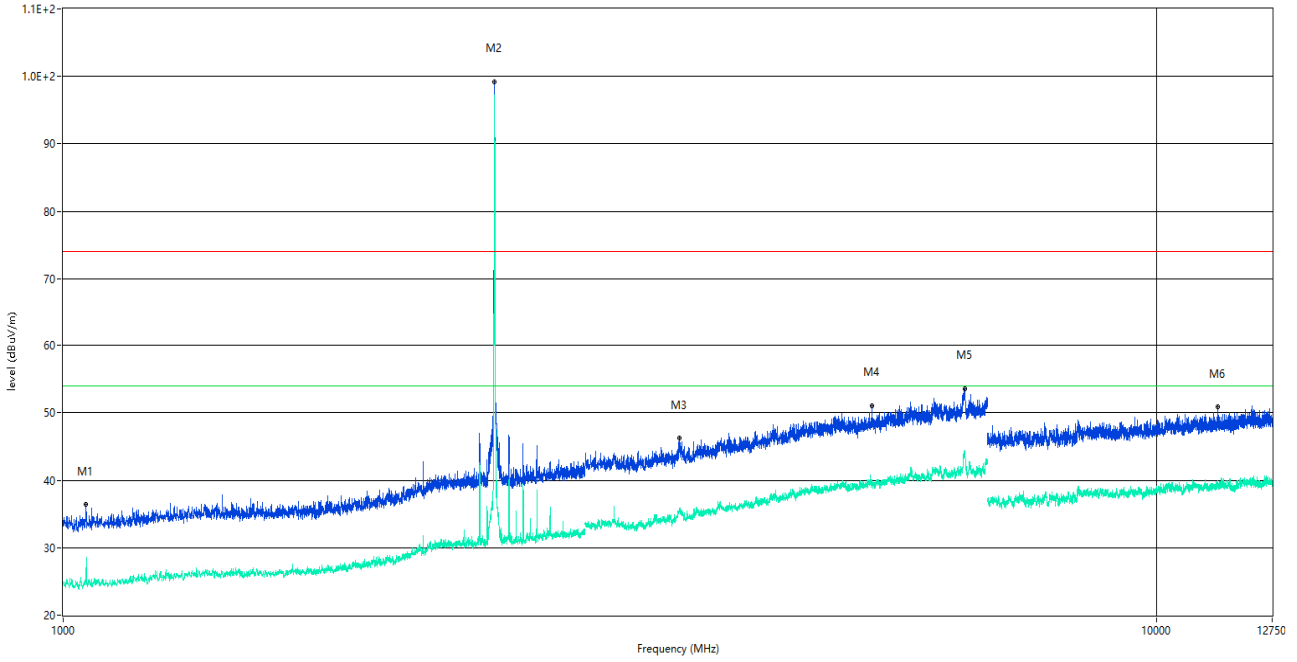

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	25.43	-18.20	54.0	-28.57	AV	51.00	100	V	Pass
1	1049.500	36.37	-18.20	74.0	-37.63	Peak	51.00	100	V	Pass
2**	2480.000	95.06	-11.71	54.0	41.06	AV	304.00	100	V	N/A
2	2480.000	99.25	-11.71	74.0	25.25	Peak	304.00	100	V	N/A
3**	3658.000	35.61	-6.22	54.0	-18.39	AV	53.00	100	V	Pass
3	3658.000	46.21	-6.22	74.0	-27.79	Peak	53.00	100	V	Pass
4**	5492.000	39.44	-2.11	54.0	-14.56	AV	139.00	100	V	Pass
4	5492.000	51.02	-2.11	74.0	-22.98	Peak	139.00	100	V	Pass
5**	6678.000	43.49	1.62	54.0	-10.51	AV	10.00	100	V	Pass
5	6678.000	53.60	1.62	74.0	-20.40	Peak	10.00	100	V	Pass
6**	11372.875	38.90	-0.07	54.0	-15.10	AV	102.00	100	V	Pass
6	11372.875	50.87	-0.07	74.0	-23.13	Peak	102.00	100	V	Pass

8-DPSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT H

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

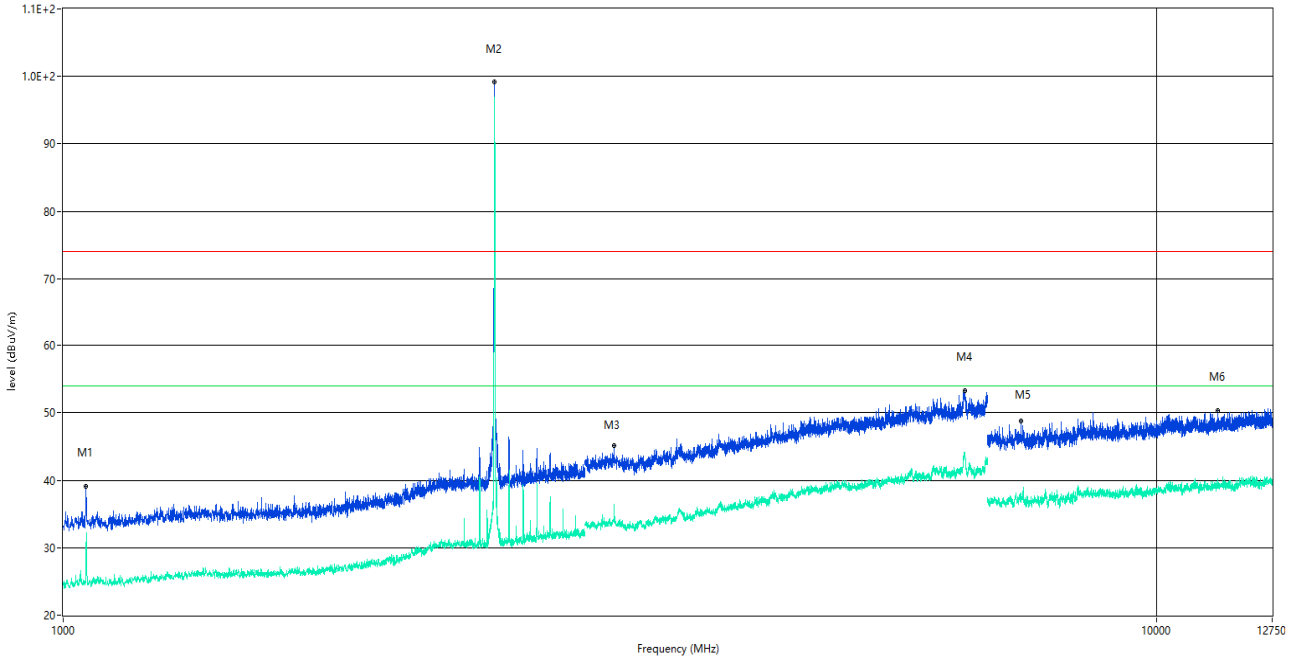


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	29.37	-18.20	54.0	-24.63	AV	49.00	100	H	Pass
1	1049.500	39.15	-18.20	74.0	-34.85	Peak	49.00	100	H	Pass
2**	2480.000	94.82	-11.71	54.0	40.82	AV	101.00	100	H	N/A
2	2480.000	99.14	-11.71	74.0	25.14	Peak	101.00	100	H	N/A
3**	3188.000	33.84	-7.41	54.0	-20.16	AV	132.00	100	H	Pass
3	3188.000	45.18	-7.41	74.0	-28.82	Peak	132.00	100	H	Pass
4**	6671.000	44.00	2.08	54.0	-10.00	AV	359.00	100	H	Pass
4	6671.000	53.30	2.08	74.0	-20.70	Peak	359.00	100	H	Pass
5**	7516.063	38.11	-1.97	54.0	-15.89	AV	54.00	100	H	Pass
5	7516.063	48.79	-1.97	74.0	-25.21	Peak	54.00	100	H	Pass
6**	11375.750	39.39	-0.11	54.0	-14.61	AV	97.00	100	H	Pass
6	11375.750	50.35	-0.11	74.0	-23.65	Peak	97.00	100	H	Pass

Hopping Mode:

GFSK MODE 1 GHz to 12.75 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

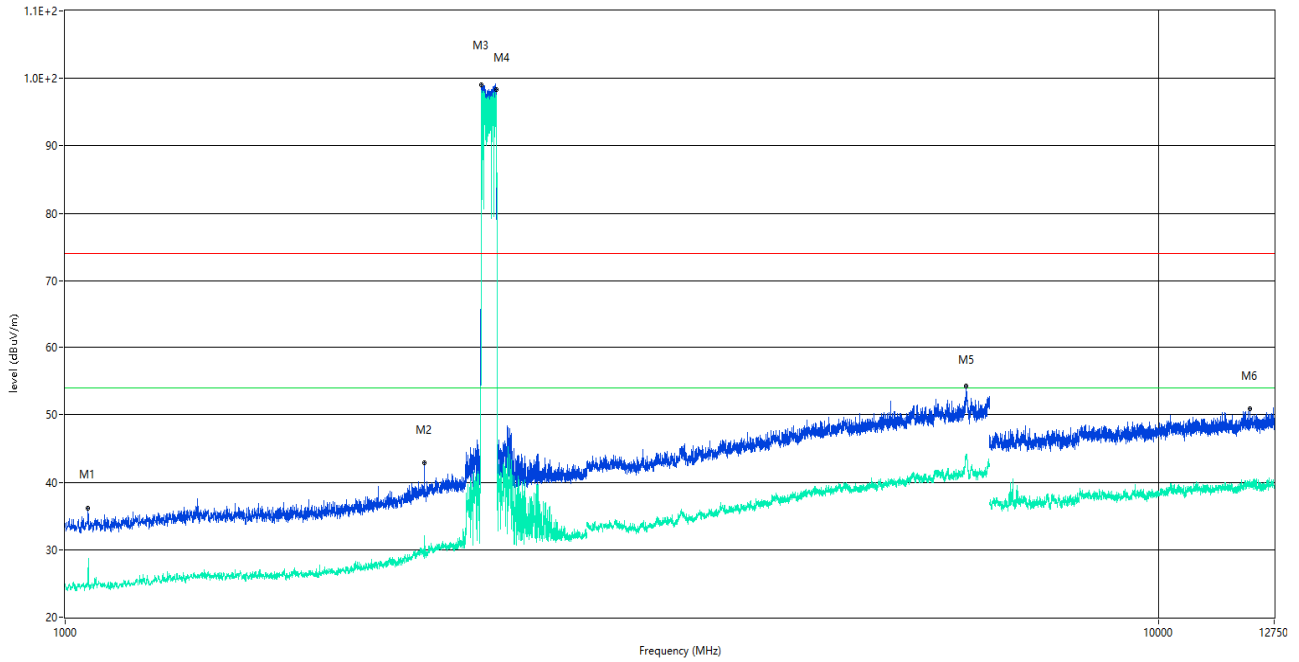

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	25.93	-18.20	54.0	-28.07	AV	359.00	100	V	Pass
1	1049.500	36.18	-18.20	74.0	-37.82	Peak	359.00	100	V	Pass
2**	2131.500	29.95	-14.12	54.0	-24.05	AV	171.00	100	V	Pass
2	2131.500	42.86	-14.12	74.0	-31.14	Peak	171.00	100	V	Pass
3**	2403.000	94.77	-12.14	54.0	40.77	AV	45.00	100	V	N/A
3	2403.000	99.11	-12.14	74.0	25.11	Peak	45.00	100	V	N/A
4**	2480.000	93.75	-11.71	54.0	39.75	AV	360.00	100	V	N/A
4	2480.000	98.41	-11.71	74.0	24.41	Peak	360.00	100	V	N/A
5**	6668.000	43.72	1.90	54.0	-10.28	AV	143.00	100	V	Pass
5	6668.000	54.27	1.90	74.0	-19.73	Peak	143.00	100	V	Pass
6**	12124.687	39.54	0.82	54.0	-14.46	AV	300.00	100	V	Pass
6	12124.687	50.87	0.82	74.0	-23.13	Peak	300.00	100	V	Pass

GFSK MODE 1 GHz to 12.75 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

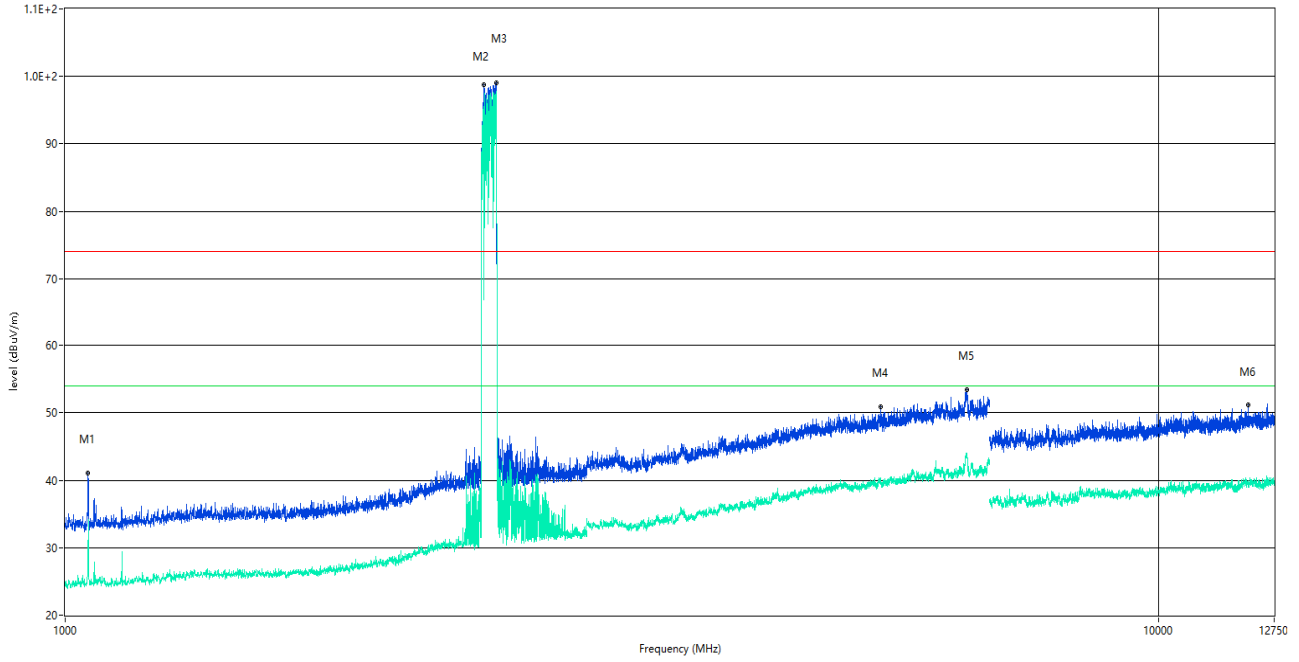

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1034.000	24.27	-18.14	54.0	-29.73	AV	308.00	100	H	Pass
1	1034.000	32.95	-18.14	74.0	-41.05	Peak	308.00	100	H	Pass
2**	2416.000	93.51	-12.50	54.0	39.51	AV	101.00	100	H	N/A
2	2416.000	98.81	-12.50	74.0	24.81	Peak	101.00	100	H	N/A
3**	2477.000	93.91	-11.83	54.0	39.91	AV	101.00	100	H	N/A
3	2477.000	99.10	-11.83	74.0	25.10	Peak	101.00	100	H	N/A
4**	5567.000	39.48	-2.14	54.0	-14.52	AV	81.00	100	H	Pass
4	5567.000	50.93	-2.14	74.0	-23.07	Peak	81.00	100	H	Pass
5**	6678.000	43.87	1.62	54.0	-10.13	AV	292.00	100	H	Pass
5	6678.000	53.47	1.62	74.0	-20.53	Peak	292.00	100	H	Pass
6**	12075.813	39.48	0.92	54.0	-14.52	AV	355.00	100	H	Pass
6	12075.813	51.14	0.92	74.0	-22.86	Peak	355.00	100	H	Pass

8-DPSK MODE 1 GHz to 12.75 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

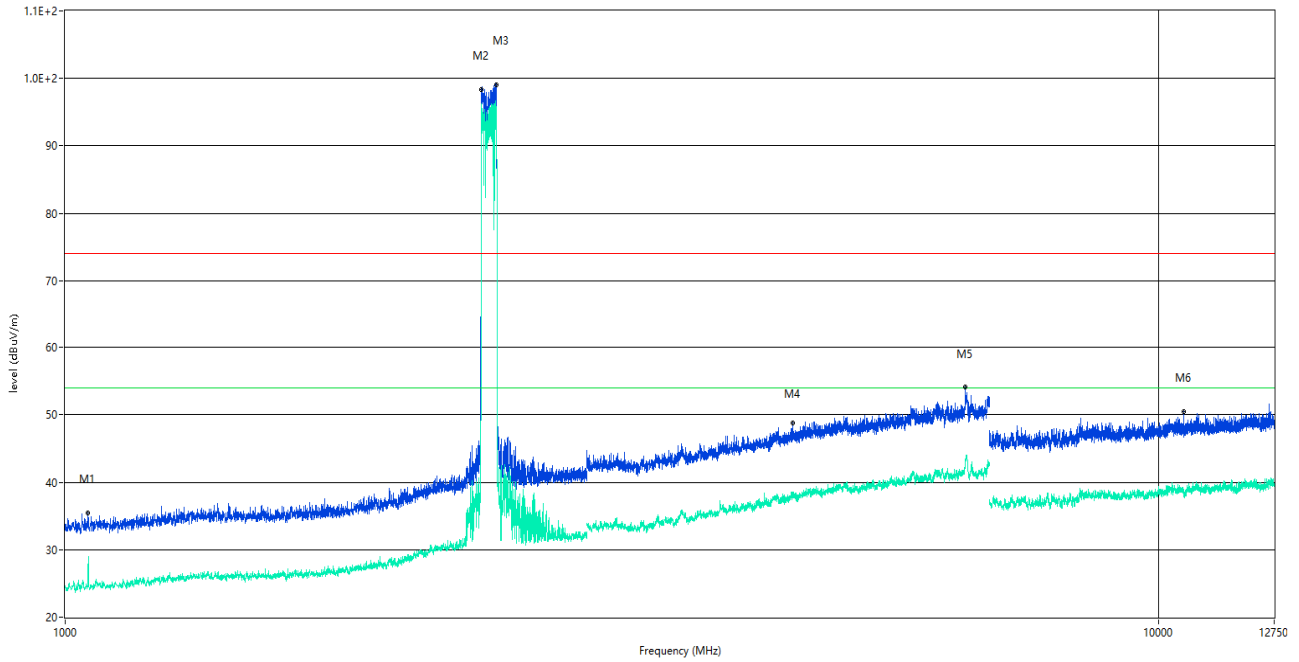

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1049.500	26.77	-18.20	54.0	-27.23	AV	206.00	100	V	Pass
1	1049.500	35.44	-18.20	74.0	-38.56	Peak	206.00	100	V	Pass
2**	2402.000	93.51	-12.20	54.0	39.51	AV	258.00	100	V	N/A
2	2402.000	98.39	-12.20	74.0	24.39	Peak	258.00	100	V	N/A
3**	2479.000	94.73	-11.78	54.0	40.73	AV	258.00	100	V	N/A
3	2479.000	99.06	-11.78	74.0	25.06	Peak	258.00	100	V	N/A
4**	4629.000	37.91	-3.25	54.0	-16.09	AV	360.00	100	V	Pass
4	4629.000	48.73	-3.25	74.0	-25.27	Peak	360.00	100	V	Pass
5**	6657.000	43.04	1.34	54.0	-10.96	AV	208.00	100	V	Pass
5	6657.000	54.06	1.34	74.0	-19.94	Peak	208.00	100	V	Pass
6**	10533.375	38.60	-0.22	54.0	-15.40	AV	139.00	100	V	Pass
6	10533.375	50.48	-0.22	74.0	-23.52	Peak	139.00	100	V	Pass

8-DPSK MODE 1 GHz to 12.75 GHz, ANT H

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

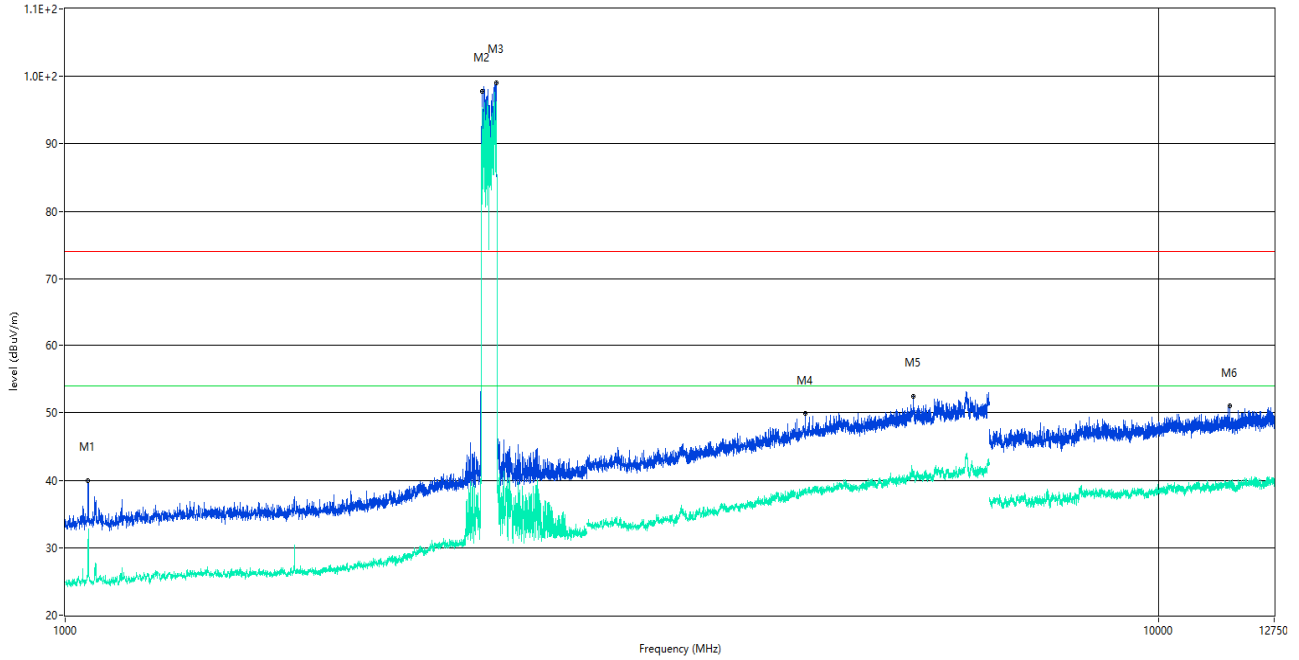

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1045.000	24.83	-18.33	54.0	-29.17	AV	207.00	100	H	Pass
1	1045.000	33.48	-18.33	74.0	-40.52	Peak	207.00	100	H	Pass
2**	2406.000	92.37	-12.38	54.0	38.37	AV	123.00	100	H	N/A
2	2406.000	97.75	-12.38	74.0	23.75	Peak	123.00	100	H	N/A
3**	2477.000	94.34	-11.83	54.0	40.34	AV	123.00	100	H	N/A
3	2477.000	99.08	-11.83	74.0	25.08	Peak	123.00	100	H	N/A
4**	4753.000	38.79	-2.92	54.0	-15.21	AV	360.00	100	H	Pass
4	4753.000	49.85	-2.92	74.0	-24.15	Peak	360.00	100	H	Pass
5**	5965.000	41.23	-0.58	54.0	-12.77	AV	360.00	100	H	Pass
5	5965.000	52.43	-0.58	74.0	-21.57	Peak	360.00	100	H	Pass
6**	11610.063	39.31	0.35	54.0	-14.69	AV	0.00	100	H	Pass
6	11610.063	50.97	0.35	74.0	-23.03	Peak	0.00	100	H	Pass

A.9 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.


Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note⁴: The Level (dBuV/m) has been corrected by factor.

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	49.81	31.08	74	24.19	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	51.92	31.09	74	22.08	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	52.40	31.08	74	21.60	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	57.89	31.09	74	16.11	PEAK	Pass
		2483.50	46.79	31.09	54	7.21	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	49.62	31.08	74	24.38	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	53.07	31.09	74	20.93	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	52.26	31.08	74	21.74	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	55.61	31.09	74	18.39	PEAK	Pass
		2483.50	43.18	31.09	54	10.82	AVERAGE	Pass

Test Plots

GFSK LOW CHANNEL , PEAK

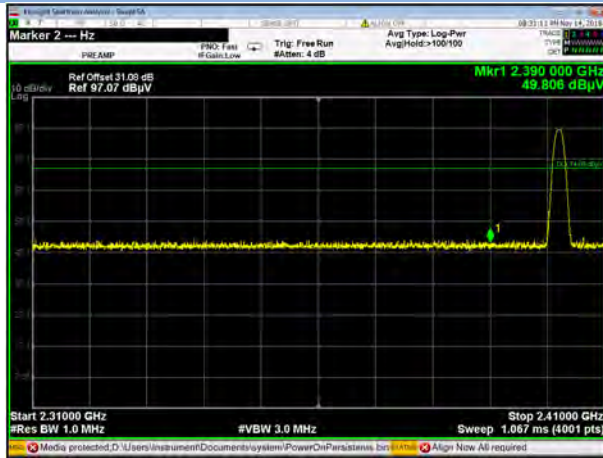


GFSK HIGH CHANNEL , PEAK



8-DPSK LOW CHANNEL , PEAK



8-DPSK HIGH CHANNEL , PEAK

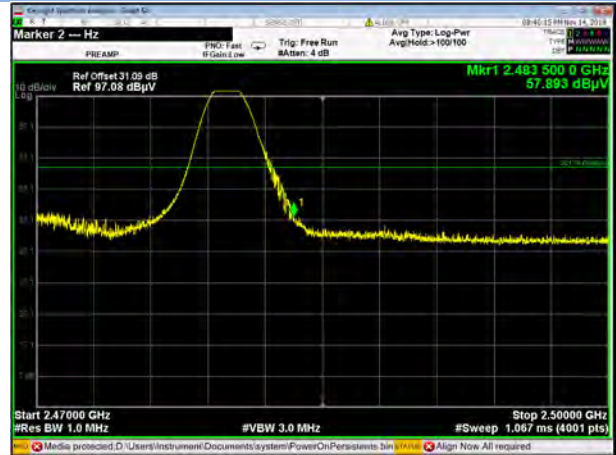


8-DPSK HIGH CHANNEL , AV



Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

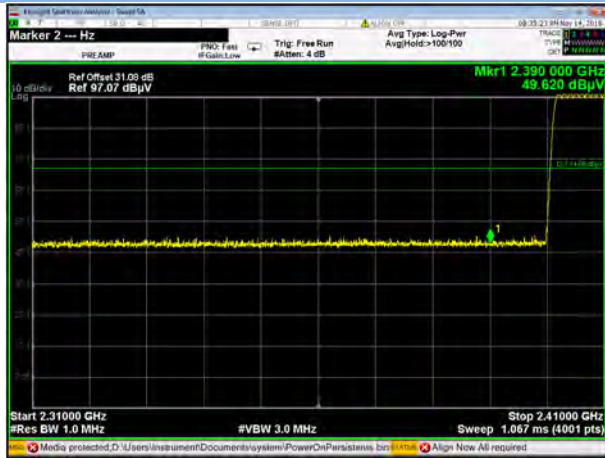

GFSK HIGH FREQUENCY BAND, PEAK



8-DPSK LOW FREQUENCY BAND, PEAK



8-DPSK HIGH FREQUENCY BAND, PEAK



8-DPSK HIGH FREQUENCY BAND, AV



ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ18C0049-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ18C0049-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ18C0049-AI.PDF".

--END OF REPORT--