



# EMC Test Report

**Product Name:** HUAWEI MediaPad T3

**Product Model:** KOB-L09

**Report Number:** SYBH(Z-EMC)20180409017001-2

**FCC ID: QISKOB-L09**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

## Notice

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01
3. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd” , the both names have coexisted since 2009.
5. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
9. Normally, the test report is only responsible for the samples that have undergone the test.
10. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt Test Item:** 2018-4-19  
**Start Date of Test:** 2018-4-24  
**End Date of Test:** 2018-4-26

**Test Result:** Pass

**Approved By  
(Lab Manager)**

2018-05-03  
Date

Roger Zhang  
Name

*Roger Zhang*

Signature

**Operator  
(Test Engineer)**

2018-05-03  
Date

Hu haizhou  
Name

*Hu Haizhou*

Signature



**Modification Record**

No.	Last Report No.	Modification Description
1	V1.0	First report

## TABLE OF CONTENT

1	General Information .....	6
1.1	EUT Description .....	6
1.2	Test Site Information .....	8
1.3	Applied Standards .....	8
2	Summary of Results.....	9
3	System Configuration during EMC Test.....	10
3.1	Test Mode .....	10
3.2	Test System Configuration.....	11
3.3	Cables Used during Test.....	12
3.4	Associated Equipment Used during Test.....	12
4	Electromagnetic Interference (EMI).....	13
4.1	Radiated Disturbance 30MHz to 40GHz .....	13
4.2	Conducted Disturbance 0.15 MHz to 30MHz.....	15
5	Main Test Instruments.....	16
6	System Measurement Uncertainty .....	16
7	Test Data and Graph.....	17
7.1	Radiated Disturbance.....	17
7.2	Conducted Disturbance.....	21



## 1 General Information

### 1.1 EUT Description

EUT Description	
Product Name	HUAWEI MediaPad T3
Model Number	KOB-L09
Input voltage	3.82V
TX Frequency	GSM850: 824 MHz - 849 MHz GSM1900: 1850 MHz -1910 MHz WCDMA850: 824 MHz - 849 MHz WCDMA1900: 1850 MHz - 1910 MHz FDD-LTE band 5: 824 MHz - 849 MHz FDD-LTE band 7: 2500 MHz - 2570 MHz FDD-LTE band 38: 2570 MHz - 2620 MHz FDD-LTE band 41: 2555 MHz - 2655 MHz Bluetooth: 2402MHz - 2480MHz WIFI: 2412MHz - 2462MHz 5150 MHz - 5250 MHz 5250 MHz - 5350 MHz 5470 MHz - 5725 MHz 5725 MHz - 5850 MHz
RX Frequency	GSM850: 869 MHz - 894 MHz GSM1900: 1930 MHz - 1990 MHz WCDMA850: 869 MHz - 894 MHz WCDMA1900: 1930 MHz - 1990 MHz FDD-LTE band 5: 869 MHz - 894 MHz FDD-LTE band 7: 2620 MHz - 2690 MHz FDD-LTE band 38: 2570 MHz - 2620 MHz FDD-LTE band 41: 2555 MHz - 2655 MHz Bluetooth: 2402MHz - 2480MHz WIFI: 2412MHz - 2462MHz 5150 MHz - 5250 MHz 5250 MHz - 5350 MHz 5470 MHz - 5725 MHz 5725 MHz - 5850 MHz GPS: 1575.42MHz
S/N	864004035495644
HW Version	REACH-V2.0
SW Version	KOB-L09C127B252CUSTC127D001
EUT Accessory	
Data cable	Data Cable USB A Male to Micro USB 100cm,White, Manufacturer: Honglin technology Co., Ltd Foxconn Interconnect.,Ltd. Luxshare Precision Industry Co., Ltd

Adapter	Manufacturer:Huawei Technologies Co.,Ltd. Model: HW-050100U01 Input voltage: 100V~240V AC and 50/60 Hz,0.2A SN:H780K5H4E30490 B78047H4101933 P78016GCP50396 DC Output voltage: +5V $\overline{\text{---}}$ 1A
Adapter	Manufacturer:Huawei Technologies Co.,Ltd. Model: HW-050100B01 Input voltage: 100V~240V AC and 50/60 Hz,0.2A SN:H668LJF6502946 B78281G7Y03465 P78211G5J00168 DC Output voltage: +5V $\overline{\text{---}}$ 1A
Li-ion	Manufacturer:Huawei Technologies Co.,Ltd. Battery Model: HB3080G1EBC Rated capacity: 4650 mAh Nominal Voltage: $\overline{\text{---}}$ +3.8V Charging Voltage: $\overline{\text{---}}$ +4.35V SN: 1528SCG221

Remark: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed information.



## 1.2 Test Site Information

Test Site 1:	RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.
Test Site Location:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

## 1.3 Applied Standards

APPLIED STANDARD

47 CFR FCC Part 15 2016, Subpart B



## 2 Summary of Results

Summary of Results				
Test Items	Test Mode	Performance Class & Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> Enclosure Port	Mode2 Mode3 Mode4	CLASS B	Pass	Site1
<u>Conducted Emissions</u> <input type="checkbox"/> DC Power Port <input checked="" type="checkbox"/> AC Power Port <input type="checkbox"/> Telecommunication Ports	Mode1 Mode2 Mode3	CLASS B	Pass	Site1
Note: 1, Measurement taken is within the uncertainty of test system. 2, <input checked="" type="checkbox"/> The item has been tested; <input type="checkbox"/> The item has not been tested.				

During the measurement, the environmental conditions complied with the range listed as below.

Item	Required
Ambient temperature	15°C ~ 35°C
Relative humidity	25% ~ 75%
Atmospheric pressure	86kPa ~ 106kPa



### 3 System Configuration during EMC Test

#### 3.1 Test Mode

The EUT was configured, installed, arranged and operated in a manner consistent with typical application. The following mode(s) were applied during the compliance test.

Test Mode	
Mode 1:	Charging(EUT with adapter) + traffic + (WiFi BT GPS) On
Mode 2:	Charging(EUT with adapter) + Camera On + (WiFi BT GPS) On + Idle
Mode 3:	Charging(EUT with adapter) + Video Playing + Idle
Mode 4:	Data Transmitting (EUT with PC) + Idle

Remark:

- 1) If there is one kind of accessories with different models, each one should be applied throughout the compliance test respectively, however, only the worst case will be recorded in this report.
- 2) If EUT has more than one typical operation, only the worst test mode will be recorded in this report.

Worst Case:

- 1) Radiated Emission  
 30 MHz - 1000 MHz

Mode 2: Charging (EUT with adapter) + Camera On + (WiFi BT GPS) On + Idle This result is the worst case.

- 1 GHz – 18 GHz

Mode 4: Data Transmitting (EUT with PC) This result is the worst case.

- 18 GHz – 40 GHz


Mode 4: Data Transmitting (EUT with PC) This result is the worst case.

- 2) Conducted Emission


Mode 2: Charging (EUT with adapter) + Camera On + (WiFi BT GPS) On + Idle This result is the worst case.


### 3.2 Test System Configuration

Connection Diagram (Mode 1~Mode 2)

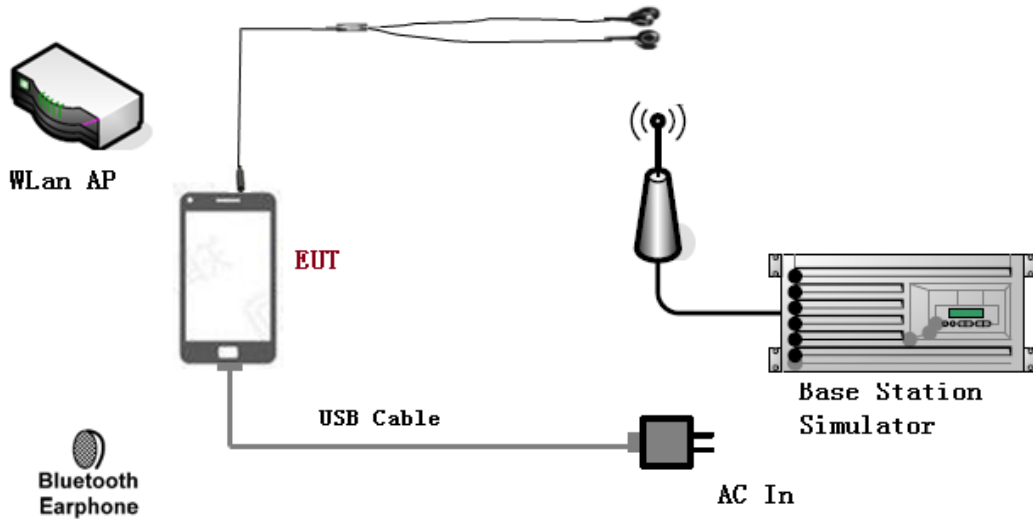

Connection Diagram (Mode3)

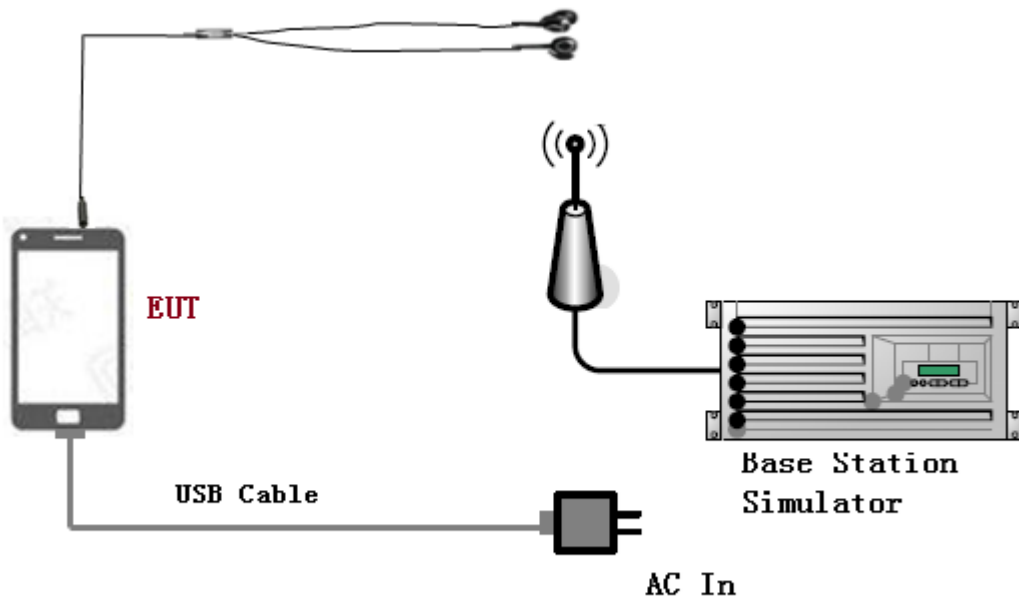

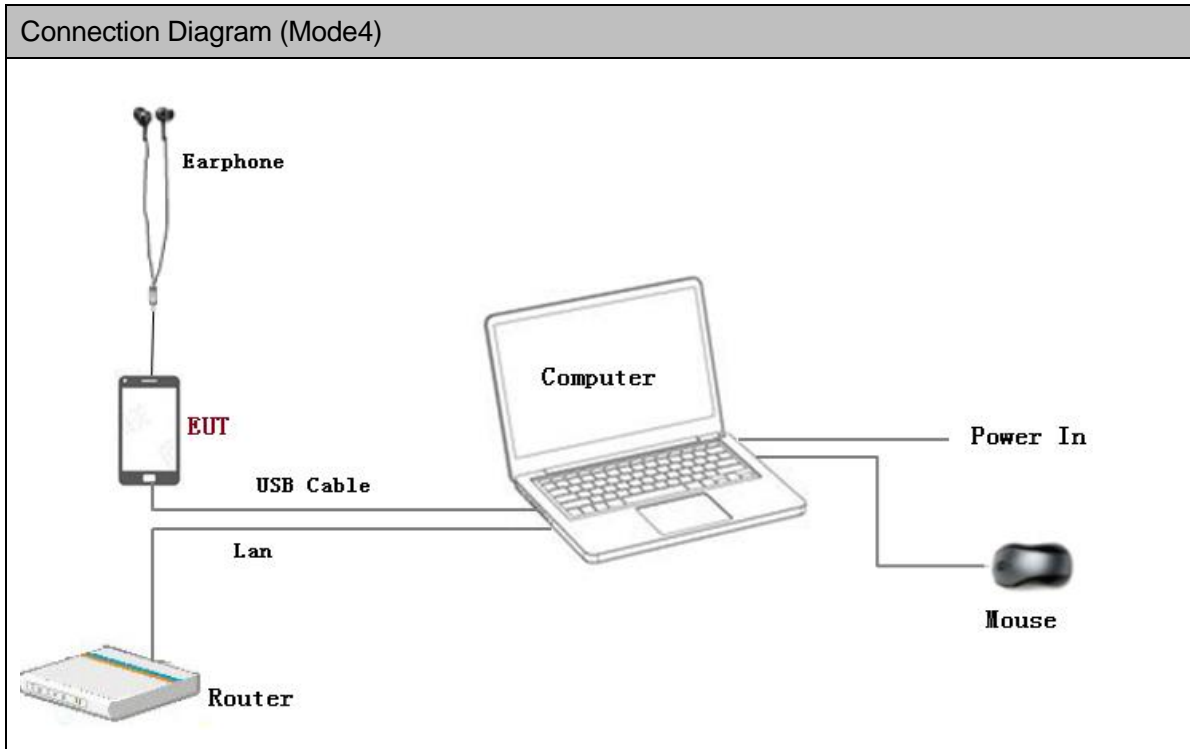

### 3.3 Cables Used during Test

Cable	Quantity	Length	Type of Cable
USB	1	<3m	shielded

### 3.4 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Calibrated Deadline
Macbook-Pro	A1502	Apple	/	/
Mouse	M-U0025-O	Lenovo	HS423HB22TB	/
Earphone	FT00UG	HuaWei	/	/

## 4 Electromagnetic Interference (EMI)

### 4.1 Radiated Disturbance 30MHz to 40GHz

#### 4.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4-2014. The test distance was 3m. The set-up and test methods were according to ANSI C63.4-2014.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 40 GHz by using test script of software; The emissions were measured using Quasi-Peak Detector (30MHz~1GHz) and AV/PK detector (above 1GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m. The azimuth range of turntable was 0° to 360°. The receiving antenna has two polarizations V and H.

Measurement bandwidth (RBW) for 30MHz to 1000 MHz: 120 kHz;

Measurement bandwidth (RBW) for 1000MHz to 40000 MHz: 1MHz;

EUT was configured in idle mode and the test performed at worst emission state.

#### 4.1.2 Test setup

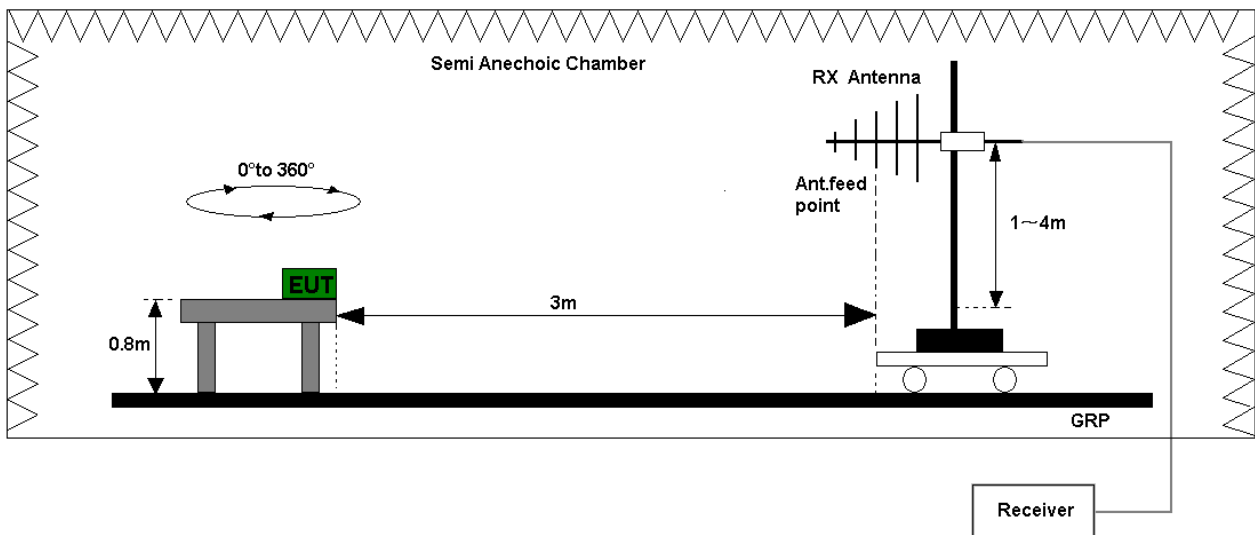


Figure 1. Test set-up of radiated disturbance(30MHz-1GHz)

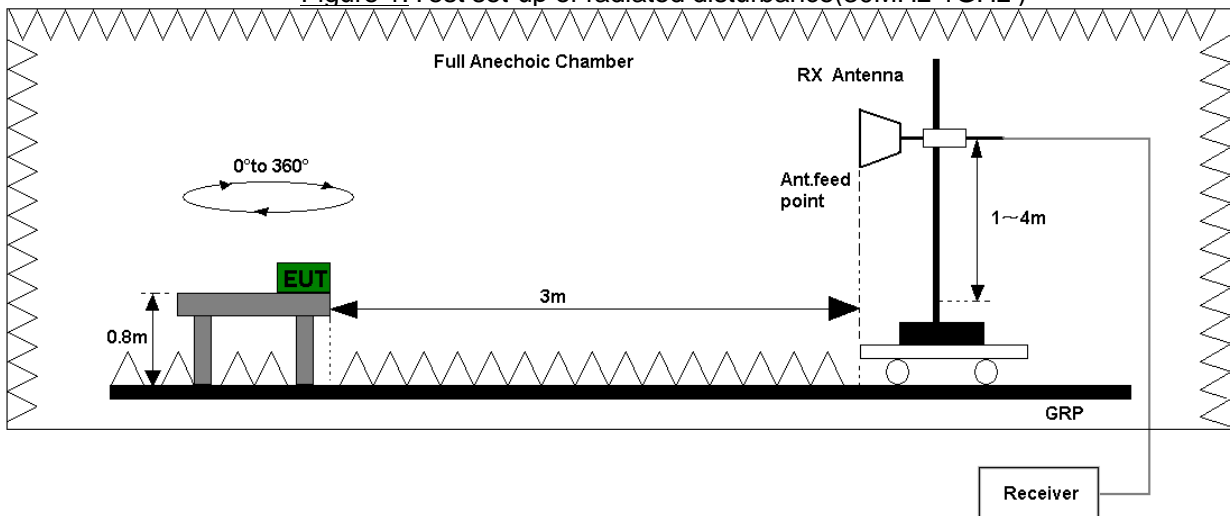


Figure 2. Test set-up of radiated disturbance(above 1GHz)



### 4.1.3 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.  
 Refer to the section 7.1 of this report for test data.

Test Limits (Class B)				
Frequency of Emission (MHz)	Radiated Limit			
	Unit( $\mu$ V/m)		Unit(dB $\mu$ V/m)	
30-88	100		40	
88-216	150		43.5	
216-960	200		46	
Above 960	500		54	
Above 1000	AV	PK	AV	PK
	500	5000	54	74

## 4.2 Conducted Disturbance 0.15 MHz to 30MHz

### 4.2.1 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm away from LISN. The set-up and test methods were according to ANSI C63.4-2014. Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector. EUT was communicated with the simulator through Air interface, the simulator controls the EUT to transmitter the maximum power which defined in specification of product. The EUT operated on the typical channel.

Measurement bandwidth (RBW) for 150 kHz to 30 MHz: 9 kHz;

The EUT was set in the shielded chamber and operated under nominal conditions.

### 4.2.2 Test Setup

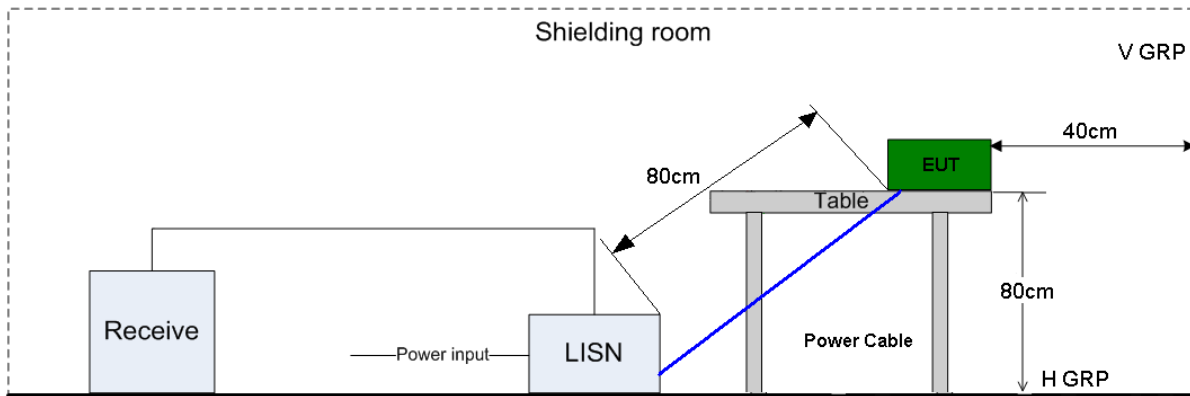


Figure 3. Test Set-up of conducted disturbance

### 4.2.3 Test Results

The EUT has met requirements for Conducted disturbance of power lines.

Refer to the section 7.2 of this report for test data.

Test Limit of AC Power Port		
Frequency range	150kHz ~ 30MHz	
Frequency	Voltage limits	
	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15MHz~0.5MHz	66-56	56-46
0.5MHz-5MHz	56	46
5MHz~30MHz	60	50

## 5 Main Test Instruments

Main Test Equipments						
Test item	Test Instrument	Model	S/N	Manufacturer	Calibrated Deadline	Cal interval
RE	EMI Test receiver	ESU26	100150	R&S	Jan. 20, 2019	12
	Spectrum Analyzer	E4447A	MY52090002	Agilent	Oct. 22, 2019	12
	Broadband Antenna	VULB 9163	9163-491	SCHWARZ BECK	Mar. 28, 2019	24
	Horn Antenna	HF906	100683	R&S	Mar. 28, 2019	24
	Horn antenna (18 to 40GHz)	SAS-574	426	A.H.Systems	Air.09,2019	24
CE	EMI Test receiver	ESU26	101163	R&S	Feb. 20, 2019	12
	Artificial Mains Network	ENV216	100382	R&S	May. 15, 2019	12
Software Information						
Test Item	Software Name	Manufacturer		Version		
RE	EMC32	R&S		V9.25.0		
RE	ES-K1	R&S		V1.7.1		
CE	EMC32	R&S		V9.25.0		

## 6 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty		
Items	Extended Uncertainty	
RE(30MHz-1GHz)	Field strength (dB $\mu$ V/m)	U=4.1dB; k=2
RE(1GHz-18GHz)	Field strength (dB $\mu$ V/m)	U=5.0dB; k=2
RE(18 GHz-26.5GHz)	Field strength (dB $\mu$ V/m)	U=4.82 dB; k=2
RE (26.5 GHz- 40GHz)	Field strength (dB $\mu$ V/m)	U=5.22 dB; k=2
CE	Disturbance Voltage (dB $\mu$ V)	U=2.5dB; k=2




## 7 Test Data and Graph

Only the worst test results were shown

### 7.1 Radiated Disturbance

#### 7.1.1 30MHz~1GHz

**Test Mode2:** Charging(EUT with adapter) + Camera On + (WiFi BT GPS) On + Idle

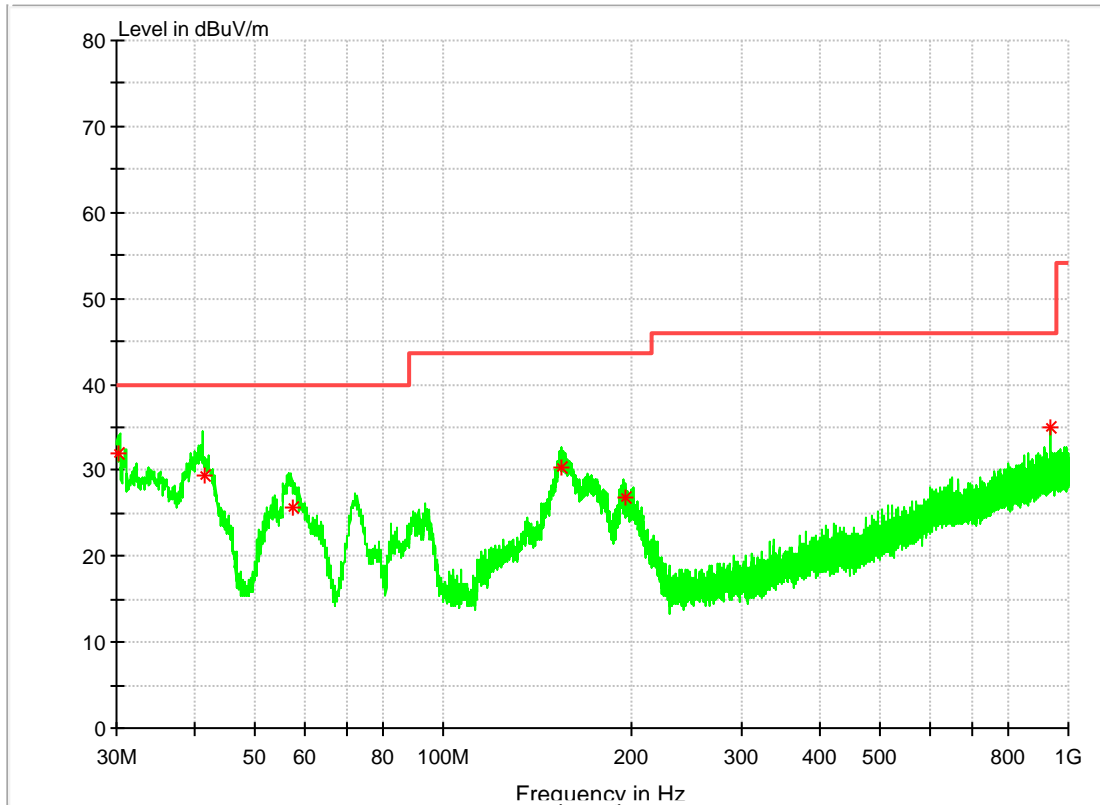

#### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
30.243737	31.90	13.1	40.00	8.10	101.0	1.0	V
41.418460	29.38	14.4	40.00	10.62	101.0	45.0	V
57.587160	25.62	13.9	40.00	14.38	100.0	251.0	V
154.226500	30.33	10.1	43.50	13.17	101.0	112.0	V
195.450920	26.82	12.6	43.50	16.68	101.0	214.0	V
934.449200	34.90	25.7	46.00	11.10	328.0	247.0	V


Note:

Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

### 7.1.2 1GHz~18GHz

#### Test Mode4: Data Transmitting (EUT with PC)

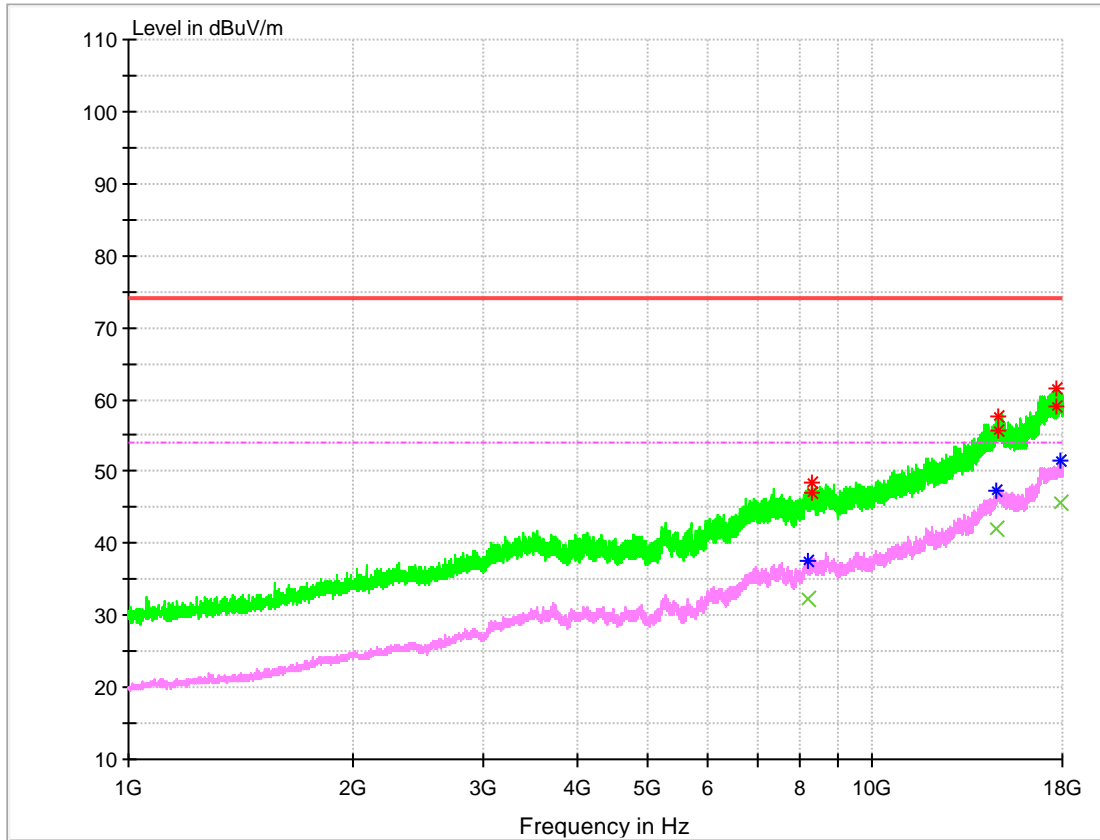

#### MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
8273.478667	46.97	5.7	74.0	27.03	100.0	79.0	H
14751.448000	55.68	17.5	74.0	18.32	188.0	115.0	H
17713.872000	58.90	21.1	74.0	15.10	100.0	338.0	V

#### MEASUREMENT RESULT: AV Detector


Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
8174.000000	32.25	5.5	54.0	21.75	119.0	292.0	V
14706.835333	41.92	17.4	54.0	12.08	100.0	177.0	V
17932.850000	45.58	21.5	54.0	8.42	153.0	285.0	V

**Note:**

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)  
The reading level is calculated by software which is not shown in the sheet.

### 7.1.3 18GHz-26.5GHz


#### Test Mode4: Data Transmitting (EUT with PC)

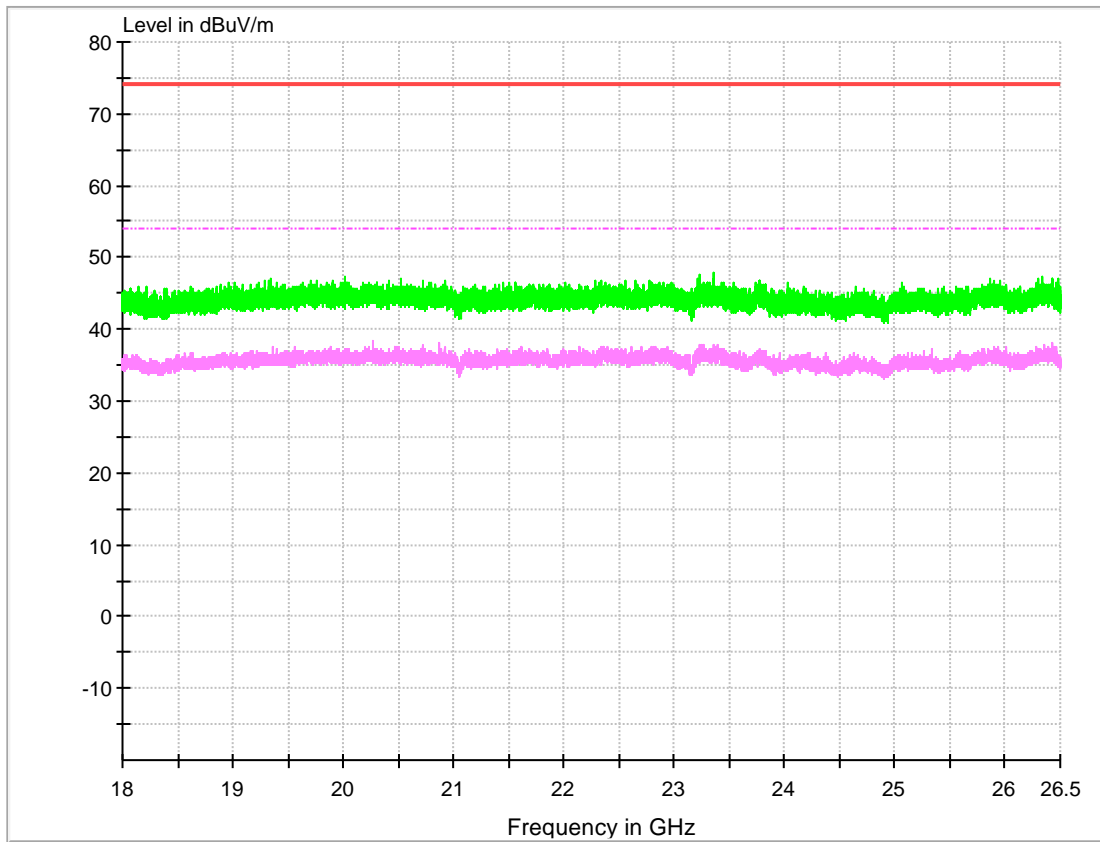

Note:  
No peak found in the Test Range of “18 GHz to 26.5GHz”

### 7.1.4 26.5GHz-40GHz

#### Test Mode4: Data Transmitting (EUT with PC)

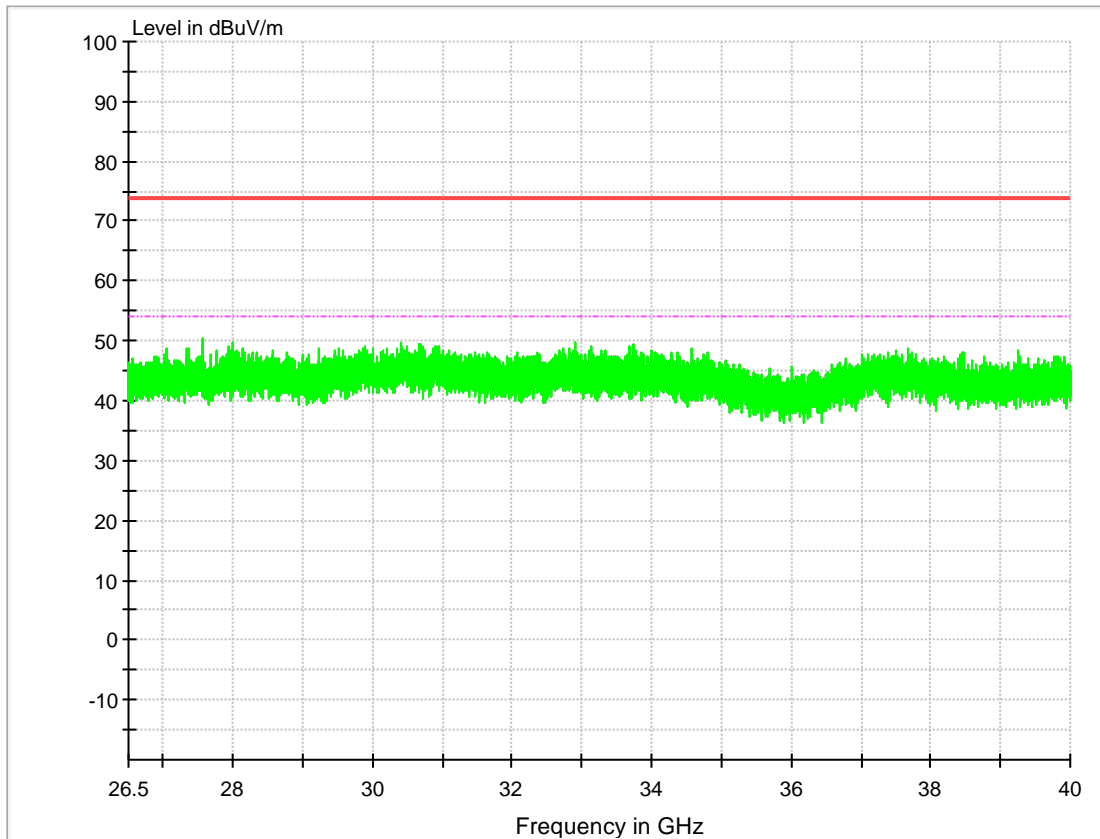


Note:

- 1.The data was measured by Peak detector.
2. No peak found in the Test Range of “26.5 GHz to 40 GHz”

## 7.2 Conducted Disturbance

### 7.2.1 AC Port Test Data

**Test Mode2:** Charging(EUT with adapter) + Camera On + (WiFi BT GPS) On + Idle

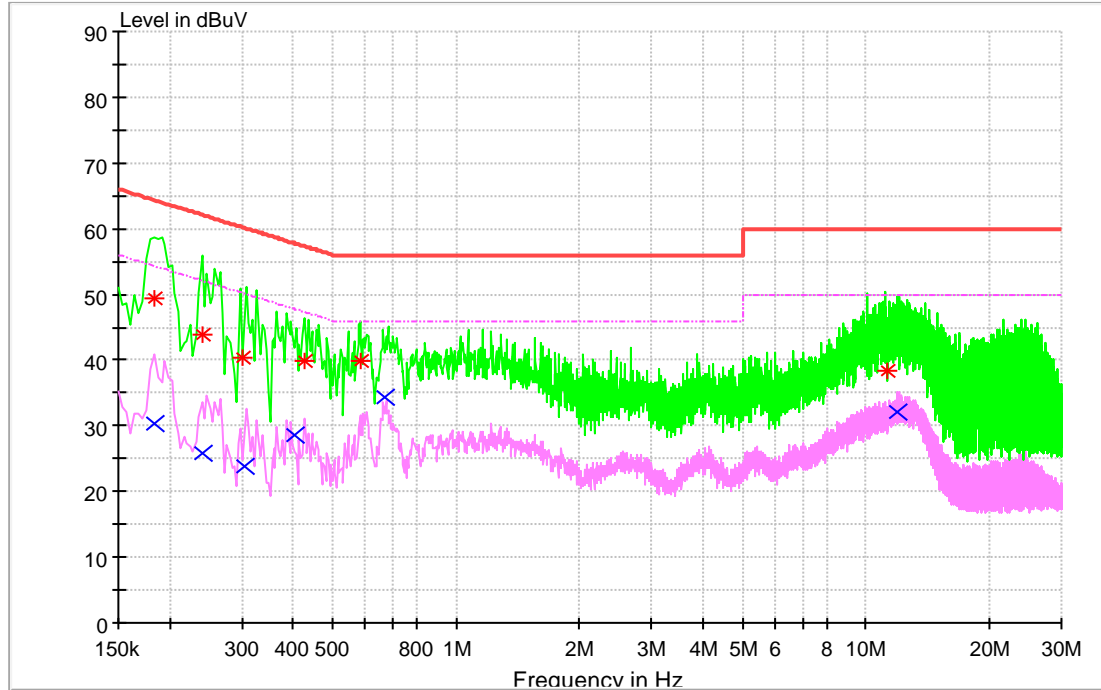

#### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dB $\mu$ V	Line	Transd dB	Margin dB	Limit dB $\mu$ V	PE
0.151275	46.30	N	9.7	19.63	65.93	FLO
0.185461	39.41	L1	9.7	24.83	64.24	FLO
0.548445	41.94	L1	9.7	14.06	56.00	FLO
1.024108	35.15	N	9.7	20.85	56.00	FLO
13.134855	45.17	L1	10.0	14.83	60.00	FLO
17.513683	46.57	N	10.1	13.43	60.00	FLO

#### MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB $\mu$ V	Line	Transd dB	Margin dB	Limit dB $\mu$ V	PE
0.159568	28.79	N	9.7	26.70	55.49	FLO
0.432648	28.81	N	9.7	18.39	47.20	FLO
0.593562	24.92	N	9.7	21.08	46.00	FLO
0.697703	27.93	N	9.7	18.07	46.00	FLO
13.149692	31.97	N	10.1	18.03	50.00	FLO
18.017814	30.25	N	10.1	19.75	50.00	FLO

Note:

Level= Reading level+ Transd (cable loss + correction factor)

The reading level is calculated by software which is not shown in the sheet.

-----**END**-----