



**FCC PART 15C
TEST REPORT
No. B18N00835-WLAN**

for

HUAWEI Technologies Co., Ltd.

HUAWEI MediaPad T3

Model Name: KOB-W09

With

Hardware Version: REACHW-V1.0

Software Version: KOB-W09C331B002-log

FCC ID: QISKOB-W09

Issued Date: 2018-06-20

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen,
Guangdong, P. R. China 518026.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001 Email:yewu@caict.ac.cn www.cszit.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
B18N00835-WLAN	Rev.0	1st edition	2018-06-20

CONTENTS

CONTENTS	3
1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS.....	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT	7
4.2. REFERENCE DOCUMENTS FOR TESTING	7
5. TEST RESULTS	8
5.1. SUMMARY OF TEST RESULTS	8
5.2. TERMS USED IN THE RESULT TABLE	8
5.3. LABORATORY ENVIRONMENT.....	9
6. TEST FACILITIES UTILIZED	10
ANNEX A: MEASUREMENT RESULTS FOR RECEIVER	11
A.1 TRANSMITTER SPURIOUS EMISSION - RADIATED.....	11
ANNEX B: TEST FIGURE LIST.....	14
FIG.1 RADIATED SPURIOUS EMISSION (802.11G, CH11, 9kHz-30MHz)	14
FIG.2 RADIATED SPURIOUS EMISSION (802.11G, CH11, 30MHz-1 GHz).....	14
FIG.3 RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-18 GHz).....	15
FIG.4 RADIATED SPURIOUS EMISSION (802.11G, CH11, 18 GHz-26.5 GHz).....	15
FIG.5 RADIATED EMISSION POWER (802.11G, CH11, 2450GHz~2500GHz).....	16
ANNEX C: PERSONS INVOLVED IN THIS TESTING	17

1. Test Laboratory

1.1. Testing Location

Location: Shenzhen Academy of Information and Communications Technology
Address: Building G, Shenzhen International Innovation Center, No.1006
Shennan Road, Futian District, Shenzhen, Guangdong Province ,China
Postal Code: 518026
Telephone: +86(0)755-33322000
Fax: +86(0)755-33322001


1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2018-06-11
Testing End Date: 2018-06-20

1.4. Signature



Lin Kanfeng
(Prepared this test report)



Tang Weisheng
(Reviewed this test report)



Zhang Bojun
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Huawei Technologies Co., Ltd
Address: Administration Building, Huawei Base, Bantian, Longgang District,
Shenzhen
City: Shenzhen
Postal Code: 518129
Country: China
Telephone: 15602311354
Fax: /

2.2. Manufacturer Information

Company Name: Huawei Technologies Co., Ltd
Address: Administration Building, Huawei Base, Bantian, Longgang District,
Shenzhen
City: Shenzhen
Postal Code: 518129
Country: China
Telephone: 15602311354
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HUAWEI MediaPad T3
Model Name	KOB-W09
Market Name	HUAWEI MediaPad T3
RF Protocol	IEEE 802.11b/g/n20
Operating Frequency	2412MHz~2462MHz
FCC ID	QISKOB-W09
Condition of EUT as received	No obvious damage in appearance

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version	Receive Date
EUT1	/	REACHW-V1.0	KOB-W09C331B002-log	2018-06-11

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	SN
AE1	Charger	/
AE2	Charger	/
AE3	Charger	/

AE1

Model	HW-050100U01
Manufacturer	SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.

AE2

Model	HW-050100U01
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.

AE3

Model	HW-050100U01
Manufacturer	DONGGUAN PHITEK ELECTRONICS CO.,LTD.

*AE ID: is used to identify the test sample in the lab internally.

Note1: According to Huawei Technologies Co., Ltd description that Remove 3 grounding shrapnel of the main board; Remove 5 Common mode Choke and replace them with 0 ohm resistance; Replace one high Q inductor with a laminated inductor and Remove 4 TVS. Else part have no changes C Band edge compliance and Radiated Spurious Emissions test selected worst case needs to been performed. else results are cited from the initial model. The report number for initial model is B17N00263-WLAN-Rev.1

3.4. General Description

The Equipment under Test (EUT) is a model of HUAWEI MediaPad T3 with integrated antenna and inbuilt battery. It supports WLAN 802.11a/b/g/n (11n 20MHz and 40MHz)function.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	Oct,2017
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	Jun,2013

5. Test Results

5.1. Summary of Test Results

No	Test cases	Sub-clause of Part15C	Verdict
1.	Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	P

See **ANNEX A** and **ANNEX B** for details.

5.2. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropic radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

5.3. Laboratory Environment

Semi-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 18000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ±4dB, 3m/10m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Shielded room did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Voltage Standing Wave Ratio (VSWR)	≤6dB, from 1 to 18 GHz, 3m distance

6. Test Facilities Utilized

Radiated emission test system

NO.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Loop Antenna	HLA6120	35779	TESEQ	2019-05-02	3 years
2	BiLog Antenna	VULB9163	9163 329	Schwarzbeck	2020-02-27	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2019-04-05	3 years
4	Test Receiver	ESR7	101676	Rohde & Schwarz	2018-11-29	1 year
5	Spectrum Analyser	FSV40	101192	Rohde & Schwarz	2019-05-22	1 year
6	Chamber	FACT3-2.0	1285	ETS-Lindgren	2019-11-27	3 years
7	Antenna	QSH-SL-18-26-S-20	17013	Q-par	2020-01-15	3 years
8	Antenna	QSH-SL-26-40-K-20	17014	Q-par	2020-01-15	3 years

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

Measurement uncertainty:

Frequency Range	uncertainty (dB)	Note
9kHz-30MHz	1.84	k=2
30MHz-1GHz	4.90	
1GHz-18GHz	5.32	
18GHz-40GHz	4.66	

ANNEX A: MEASUREMENT RESULTS FOR RECEIVER

A.1 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μ V/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

NOTE: The test cases are selected as the worst cases for every conditions.

Measurement Results:

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	11	9 kHz ~30 MHz	Fig.1	P
		30 MHz ~1 GHz	Fig.2	P
		1 GHz ~18 GHz	Fig.3	P
		18 GHz ~26.5 GHz	Fig.4	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.5	P

802.11g CH11 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
13958.000000	57.44	74.00	16.56	V	19.7
14690.500000	58.13	74.00	15.87	H	20.7
14939.000000	57.58	74.00	16.42	H	20.5
15666.000000	58.74	74.00	15.26	V	21.3
16642.500000	58.95	74.00	15.05	V	22.4
17689.000000	58.35	74.00	15.65	V	22.8

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
13947.500000	45.12	54.00	8.88	H	19.7
15565.000000	46.04	54.00	7.96	V	20.9
15649.500000	47.32	54.00	6.68	V	21.3
16021.500000	47.50	54.00	6.50	V	22.7
16647.000000	47.12	54.00	6.88	V	22.4
17690.500000	46.22	54.00	7.78	H	22.8

See ANNEX B for test graphs.

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

ANNEX B: TEST FIGURE LIST

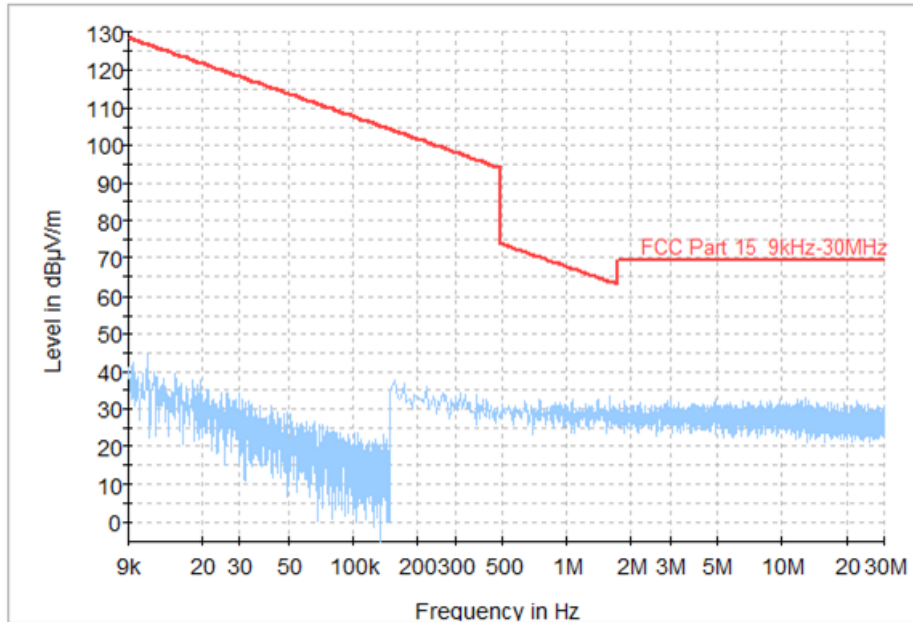


Fig.1 Radiated Spurious Emission (802.11g, Ch11, 9kHz-30MHz)

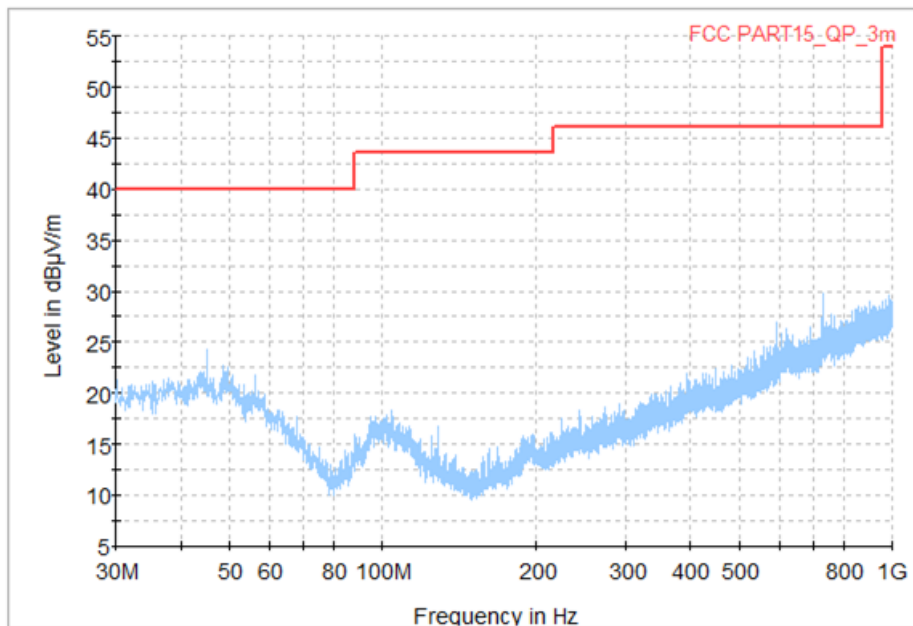


Fig.2 Radiated Spurious Emission (802.11g, Ch11, 30MHz-1 GHz)

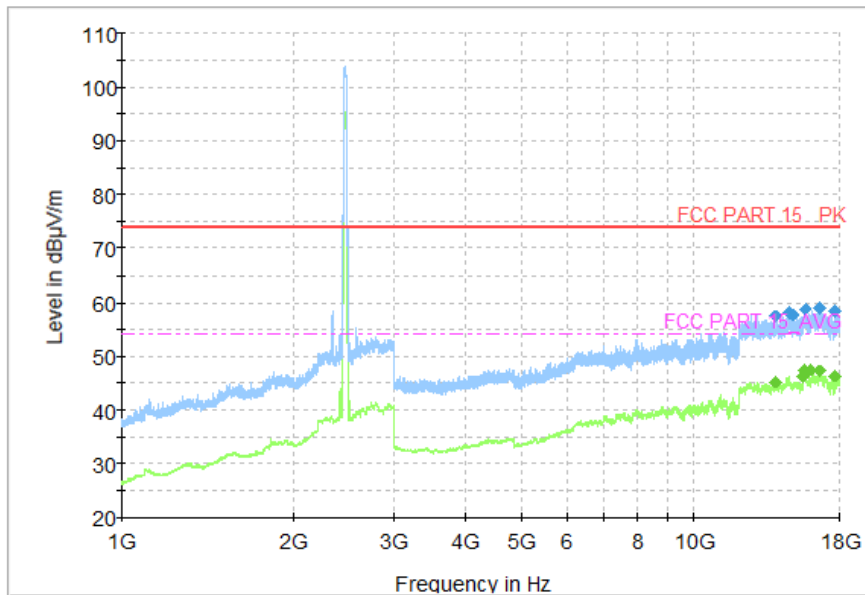


Fig.3 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-18 GHz)

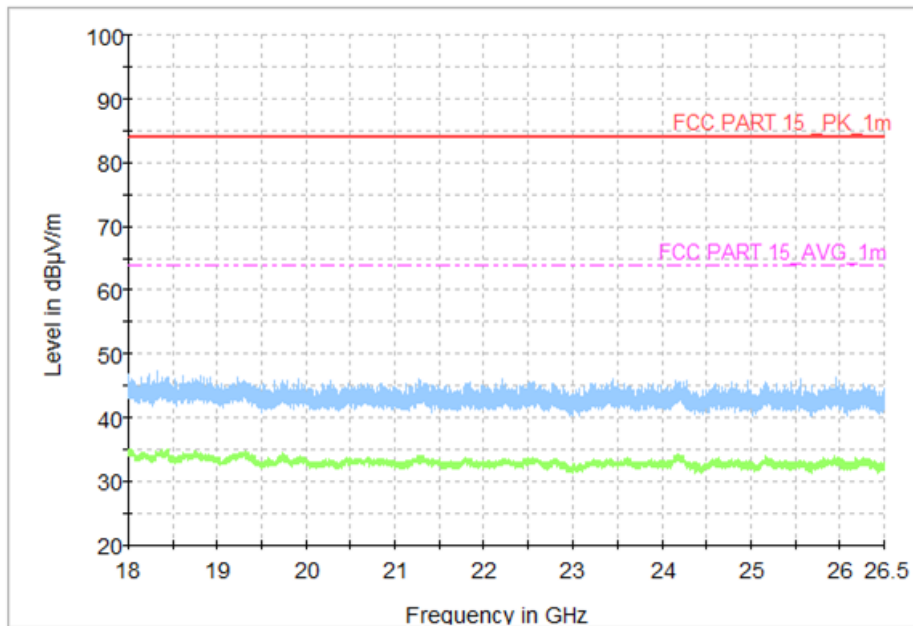


Fig.4 Radiated Spurious Emission (802.11g, Ch11, 18 GHz-26.5 GHz)

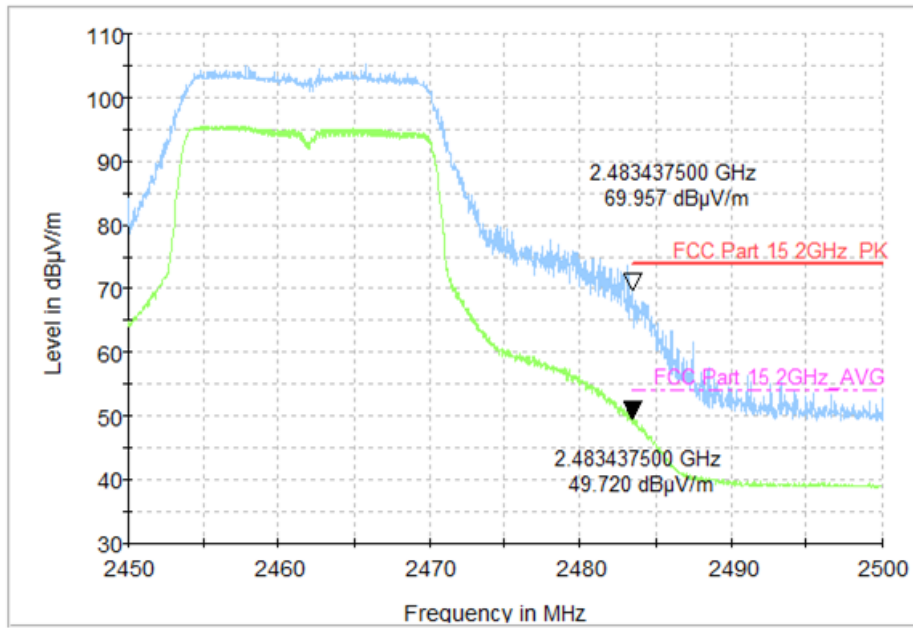


Fig.5 Radiated Emission Power (802.11g, Ch11, 2450GHz~2500GHz)

ANNEX C: Persons involved in this testing

Test Name	Tester
Transmitter Spurious Emission - Radiated	Lin Kanfeng, Tang Weisheng

*****END OF REPORT*****