

FCC Test Report

FCC ID: QIS M2-A01W

Project No. : 1512C216
Equipment : HUAWEI MediaPad M2 10.0
Model Name : M2-A01w
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Dec. 21, 2015
Date of Test : Dec. 21, 2015 ~ Dec. 29, 2015
Issued Date : Dec. 30, 2015
Tested by : BTL Inc.

Testing Engineer : Pike Lee
(Pike Lee)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
6 . EUT TEST PHOTO	19
ATTACHMENT A - CONDUCTED EMISSION	23
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	40
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	57

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1512C216	Original Issue.	Dec. 30, 2015

1. CERTIFICATION

Equipment : HUAWEI MediaPad M2 10.0
Brand Name : HUAWEI
Model Name : M2-A01w
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Dec. 21, 2015 ~ Dec. 29, 2015
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B: 2014
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1512C216) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B: 2014 ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 2480MHz which exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)
C02	CISPR	150 KHz~30MHz	2.59

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
CB08	CISPR	30MHz~200MHz	V	3.22
		30MHz~200MHz	H	3.35
		200MHz~ 1,000MHz	V	3.24
		200MHz~ 1,000MHz	H	3.11
		1,000MHz~18,000MHz	V	4.05
		1,000MHz~18,000MHz	H	3.97
		18,000MHz~40,000MHz	V	4.04
		18,000MHz~40,000MHz	H	4.01

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad M2 10.0
Brand Name	HUAWEI
Model Name	M2-A01w
Model Difference	N/A
Power Source	<p>#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) Phihong Technology Co.,Ltd Model: HW-050200U01</p> <p>#2 Supplied from battery. Manufacturer: (1) Sunwoda Electronic Co., LTD (2) SCUD (FUJIAN) Electronics Co., Ltd (3) Harbin Coslight Power Co., Ltd. Battery Model: HB26A5I0EBC</p>
Power Rating	<p>#1 I/P: 100V~240V AC and 50/60 Hz,0.5A O/P: +5V == 2A</p> <p>#2 DC 3.8V 6660mAh</p>
HW Version	SH1M2A04LM
SW Version	M2-A01wV100R001C001B002

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model
USB Cable	Connrex (Shen Zhen) Industrial, Ltd.	CD-U0405-1042
	Unirise Communication Technology Co.,Ltd.	LSA00714
	SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD	H09-000543
Earphone	GoerTek Inc	HG-04A
	MERRY ELECTRONICS CO., LTD	EMC323-011-01
Battery	Sunwoda Electronic Co., LTD	HB26A5I0EBC
	SCUD (FUJIAN) Electronics Co., Ltd	
	Harbin Coslight Power Co., Ltd.	
M-Pen	HUAWEI	AF60

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+BT+WIFI+GPS+Playing+Earphone
Mode 2	Adapter+BT+WIFI+GPS+Playing+Speaker
Mode 3	Adapter+BT+WIFI+GPS+Camera on
Mode 4	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+BT+WIFI+GPS+Playing+Earphone
Mode 2	Adapter+BT+WIFI+GPS+Playing+Speaker
Mode 3	Adapter+BT+WIFI+GPS+Camera on
Mode 4	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on


For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+BT+WIFI+GPS+Playing+Earphone
Mode 2	Adapter+BT+WIFI+GPS+Playing+Speaker
Mode 3	Adapter+BT+WIFI+GPS+Camera on
Mode 4	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1-3

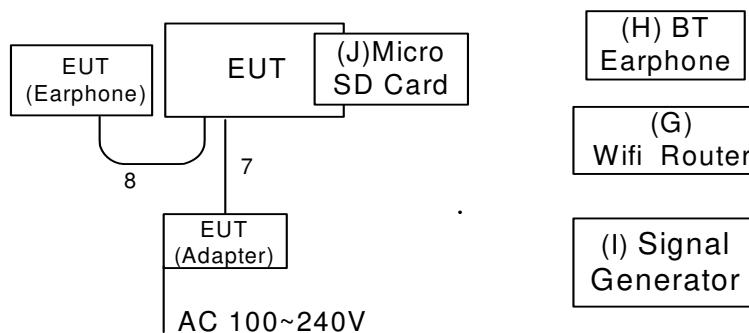

Mode 4

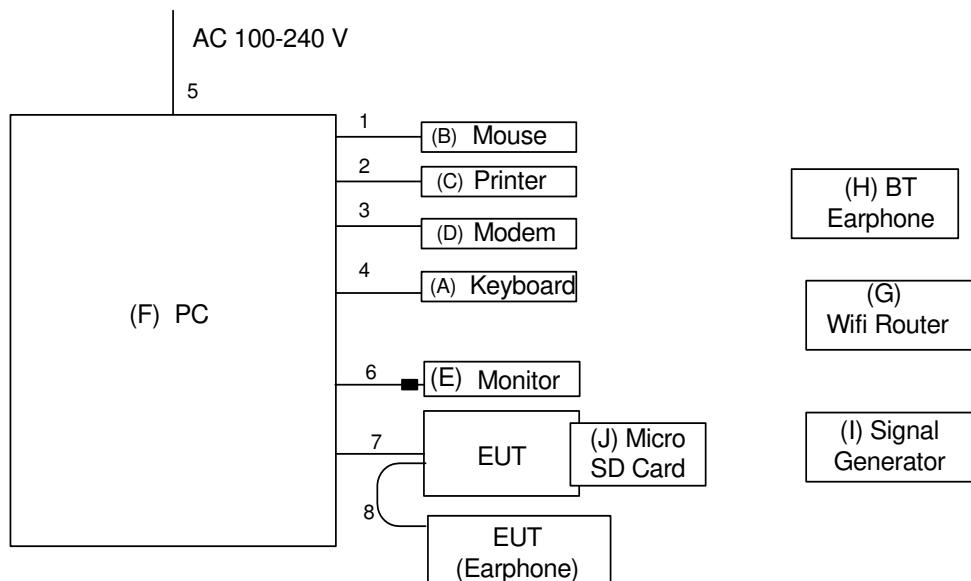

— — — — —
Ground plane
Remote System

■ Ferrite core

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071 T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
F	PC	Dell	DCSM 745	DOC	G7K832X
G	Router	TP-LINK	TL-WR1041N	DOC	N/A
H	BT Earphone	N/A	N/A	DOC	N/A
I	Signal Generator	Agilent	E4438C	N/A	MY49071316
J	Micro SD card	Kingston	N/A	DOC	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Earphone Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

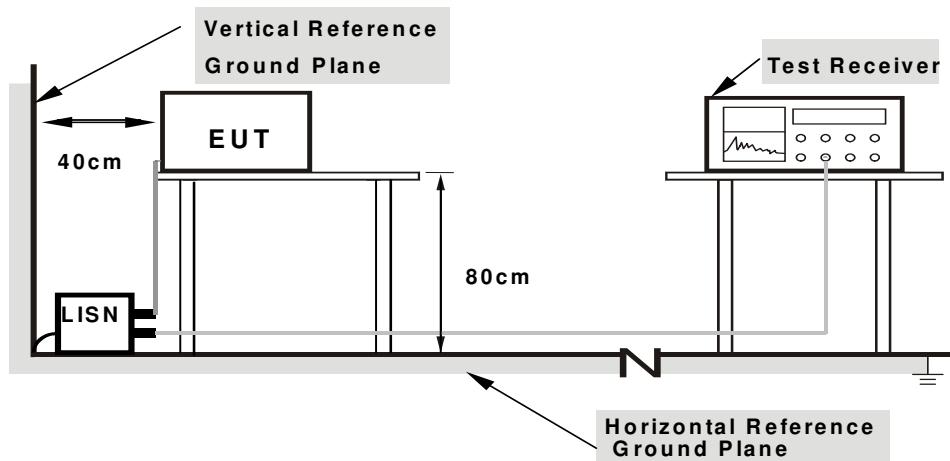

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25°C Relative Humidity: 53%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of **Note**. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B: 2014
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

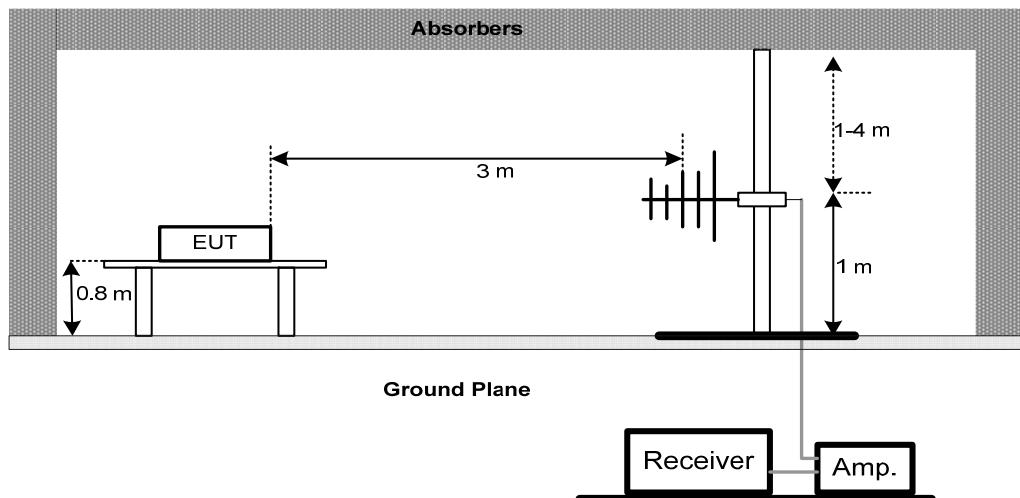

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

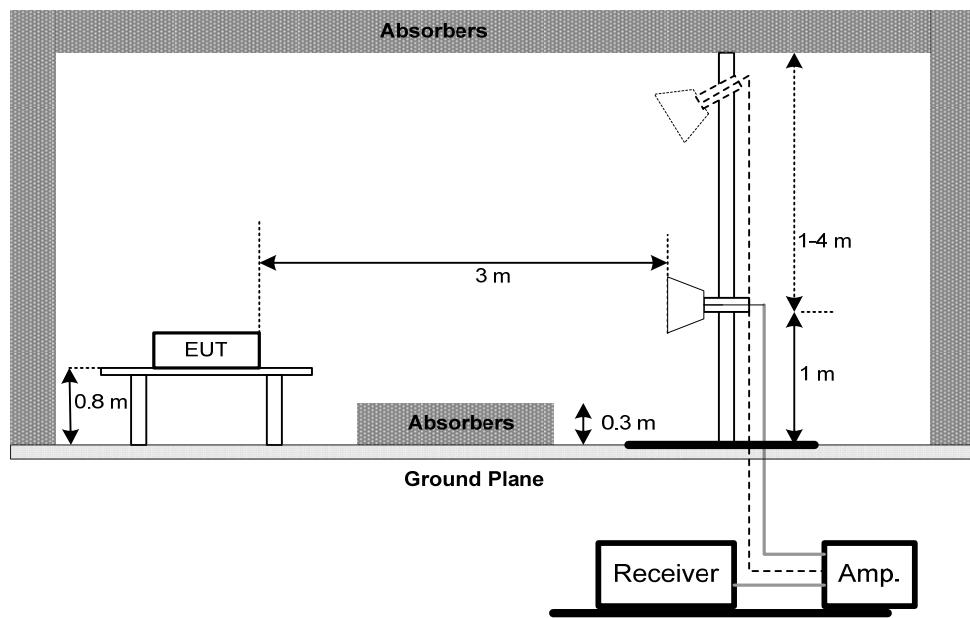

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 21°C Relative Humidity: 51%

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 22°C Relative Humidity: 56%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 21, 2016
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ_EMC (Version NB-03A)	N/A	N/A

Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2016
12	Measurement Software	EZ	EZ_EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.

6. EUT TEST PHOTO

Conducted Measurement Photos Mode 1-3





Conducted Measurement Photos**Mode 4**

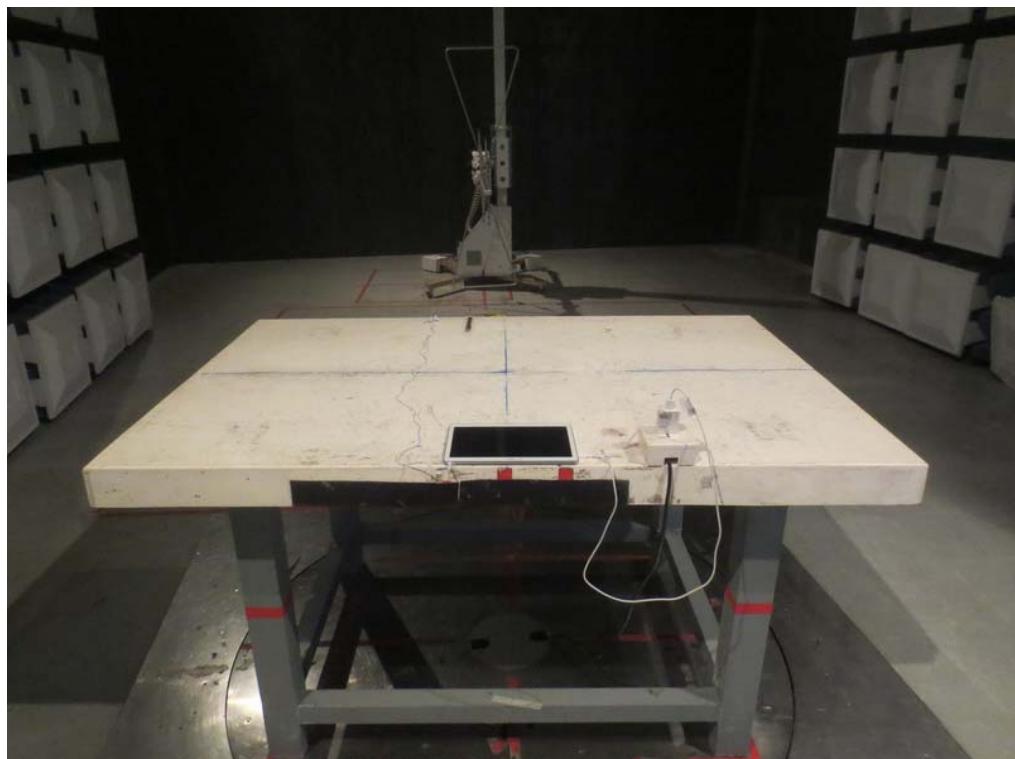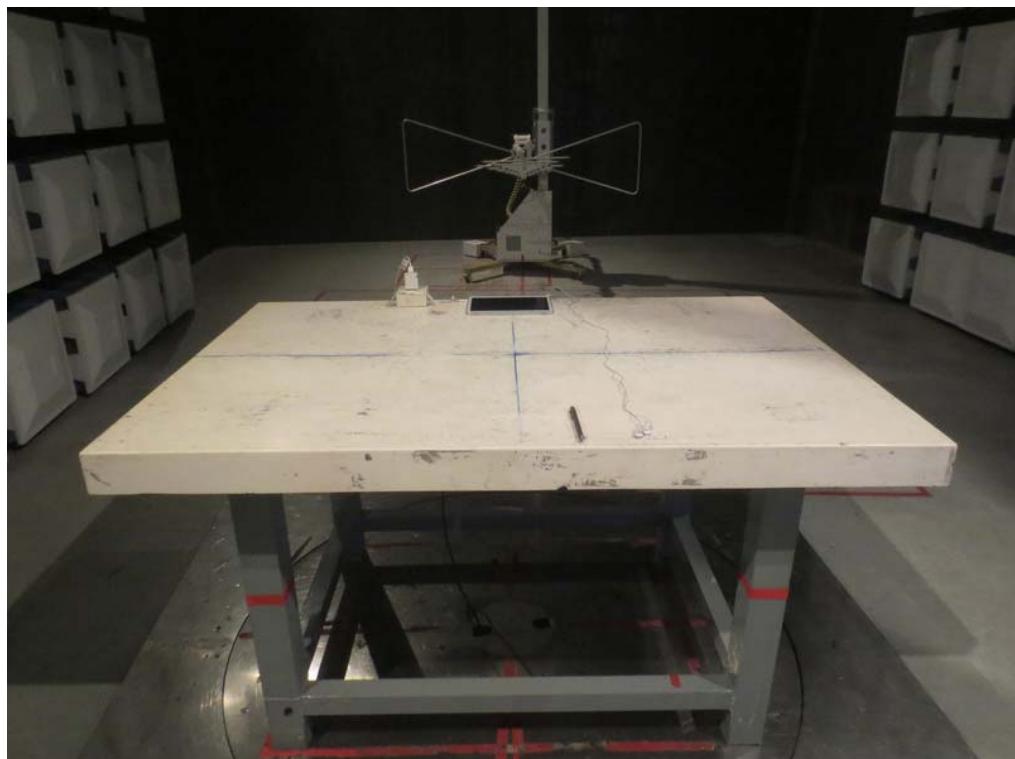Radiated Measurement Photos**Mode 1-3**

Radiated Measurement Photos


Mode 4

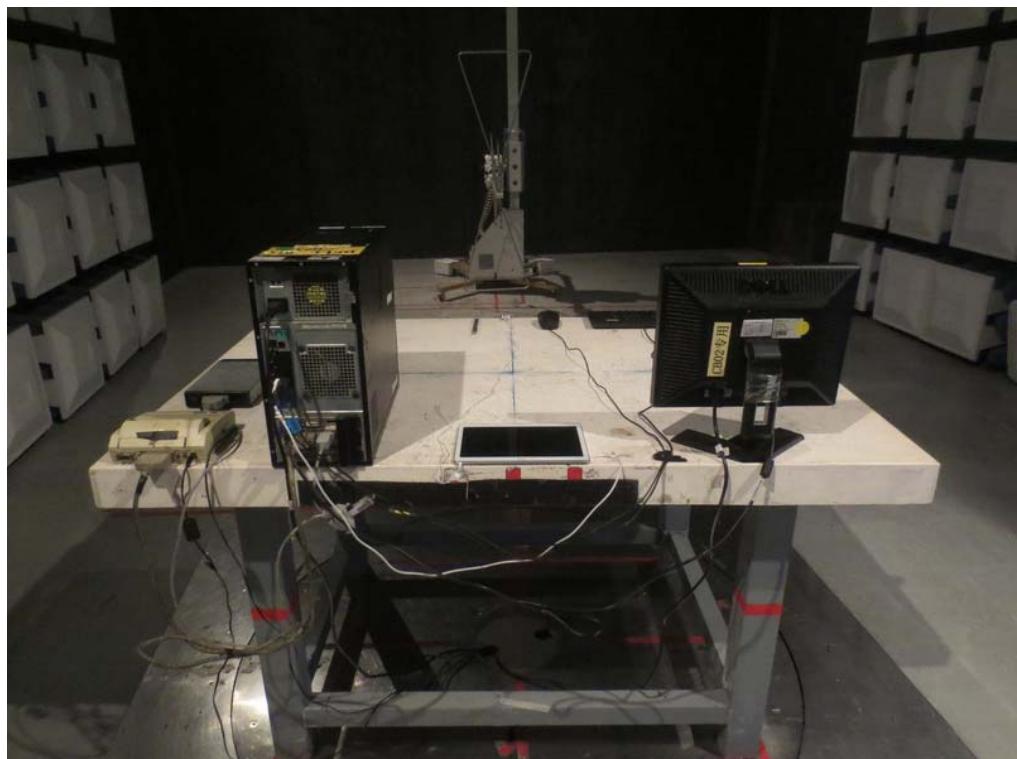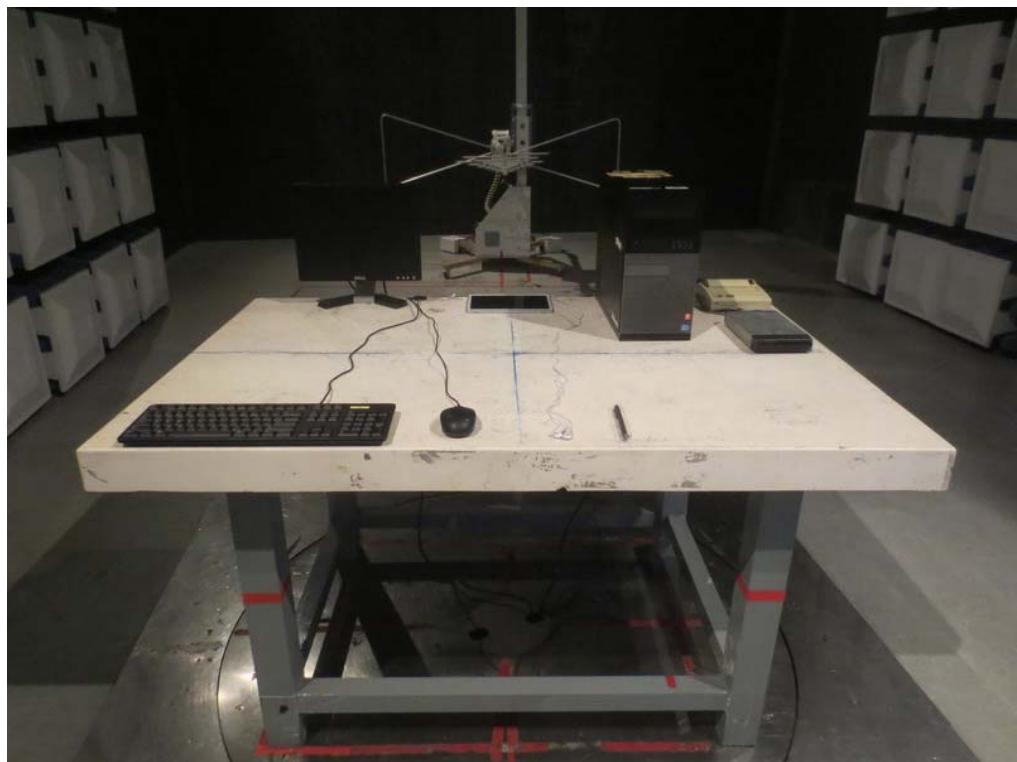

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: PANG NGAI


Line

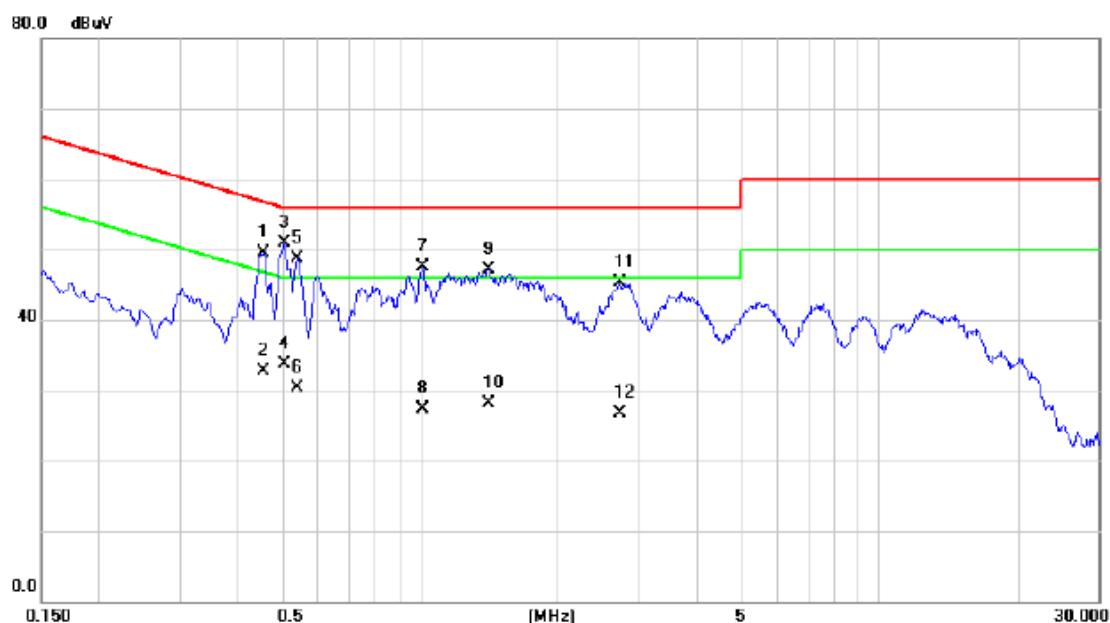

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4582	39.59	9.82	49.41	56.73	-7.32	QP	
2		0.4582	22.90	9.82	32.72	46.73	-14.01	AVG	
3	*	0.5076	41.02	9.82	50.84	56.00	-5.16	QP	
4		0.5076	23.80	9.82	33.62	46.00	-12.38	AVG	
5		0.5415	38.77	9.84	48.61	56.00	-7.39	QP	
6		0.5415	20.50	9.84	30.34	46.00	-15.66	AVG	
7		1.0207	37.45	9.98	47.43	56.00	-8.57	QP	
8		1.0207	17.40	9.98	27.38	46.00	-18.62	AVG	
9		1.4123	37.24	9.95	47.19	56.00	-8.81	QP	
10		1.4123	18.20	9.95	28.15	46.00	-17.85	AVG	
11		2.7218	35.32	9.89	45.21	56.00	-10.79	QP	
12		2.7218	16.90	9.89	26.79	46.00	-19.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: PANG NGAI


Neutral

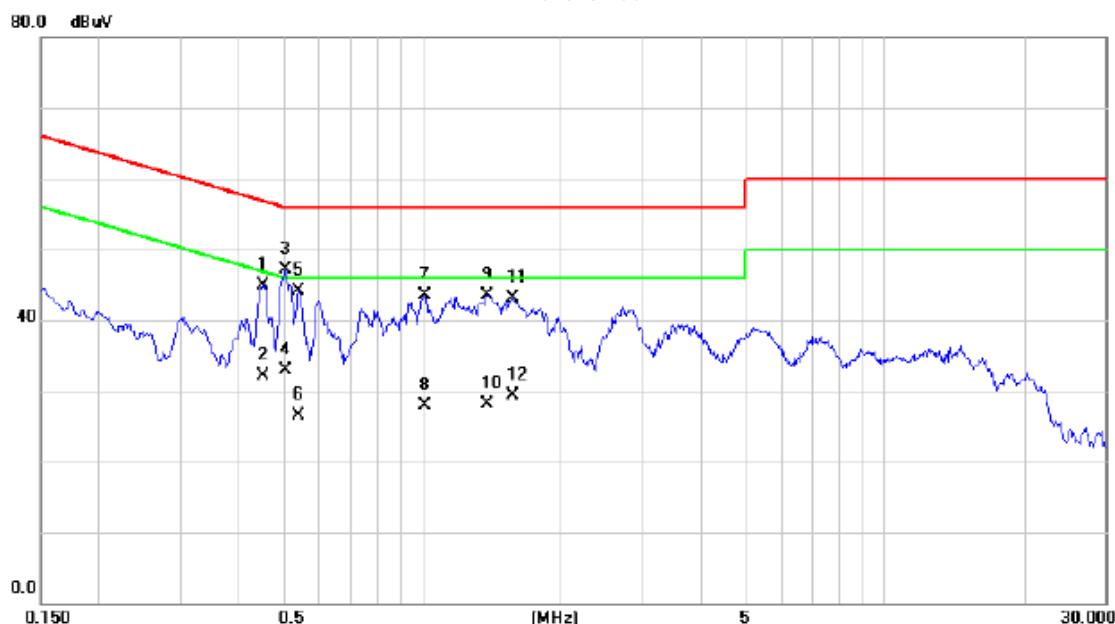

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4560	35.30	9.64	44.94	56.77	-11.83	QP	
2		0.4560	22.50	9.64	32.14	46.77	-14.63	AVG	
3 *		0.5100	37.47	9.65	47.12	56.00	-8.88	QP	
4		0.5100	23.30	9.65	32.95	46.00	-13.05	AVG	
5		0.5415	34.38	9.66	44.04	56.00	-11.96	QP	
6		0.5415	16.80	9.66	26.46	46.00	-19.54	AVG	
7		1.0207	33.70	9.79	43.49	56.00	-12.51	QP	
8		1.0207	18.20	9.79	27.99	46.00	-18.01	AVG	
9		1.3830	33.77	9.82	43.59	56.00	-12.41	QP	
10		1.3830	18.20	9.82	28.02	46.00	-17.98	AVG	
11		1.5698	33.32	9.83	43.15	56.00	-12.85	QP	
12		1.5698	19.50	9.83	29.33	46.00	-16.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Speaker
Note:	Adapter: BYD +USB Cable: PANG NGAI


Line

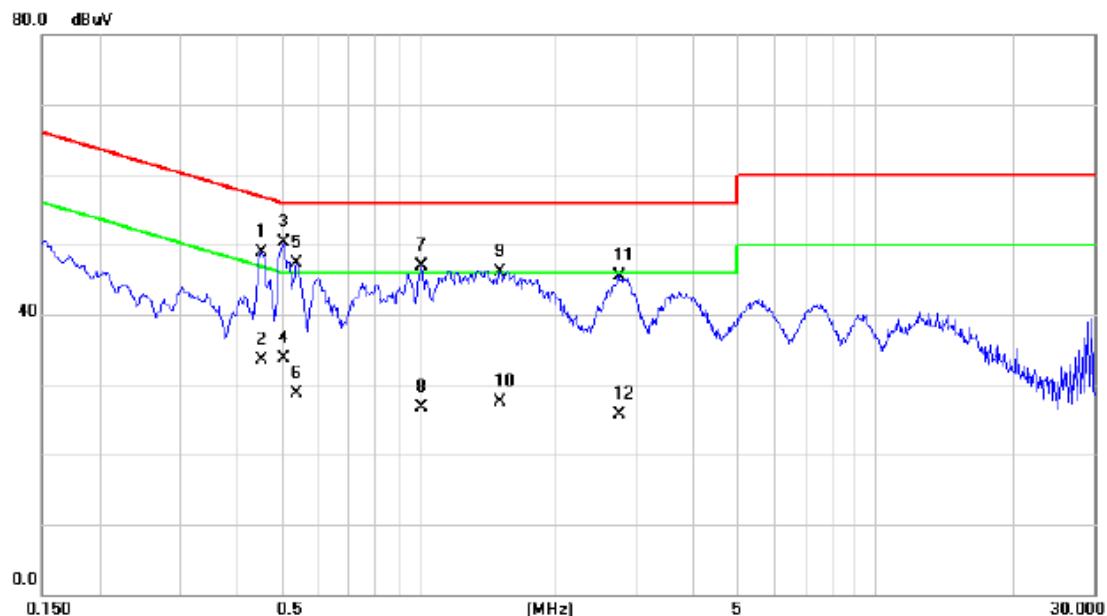

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4537	39.05	9.82	48.87	56.81	-7.94	QP	
2		0.4537	23.60	9.82	33.42	46.81	-13.39	AVG	
3 *		0.5076	40.57	9.82	50.39	56.00	-5.61	QP	
4		0.5076	23.80	9.82	33.62	46.00	-12.38	AVG	
5		0.5415	37.44	9.84	47.28	56.00	-8.72	QP	
6		0.5415	18.90	9.84	28.74	46.00	-17.26	AVG	
7		1.0162	36.85	9.98	46.83	56.00	-9.17	QP	
8		1.0162	16.70	9.98	26.68	46.00	-19.32	AVG	
9		1.5067	36.12	9.92	46.04	56.00	-9.96	QP	
10		1.5067	17.50	9.92	27.42	46.00	-18.58	AVG	
11		2.7375	35.72	9.88	45.60	56.00	-10.40	QP	
12		2.7375	15.80	9.88	25.68	46.00	-20.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Speaker
Note:	Adapter: BYD +USB Cable: PANG NGAI


Neutral

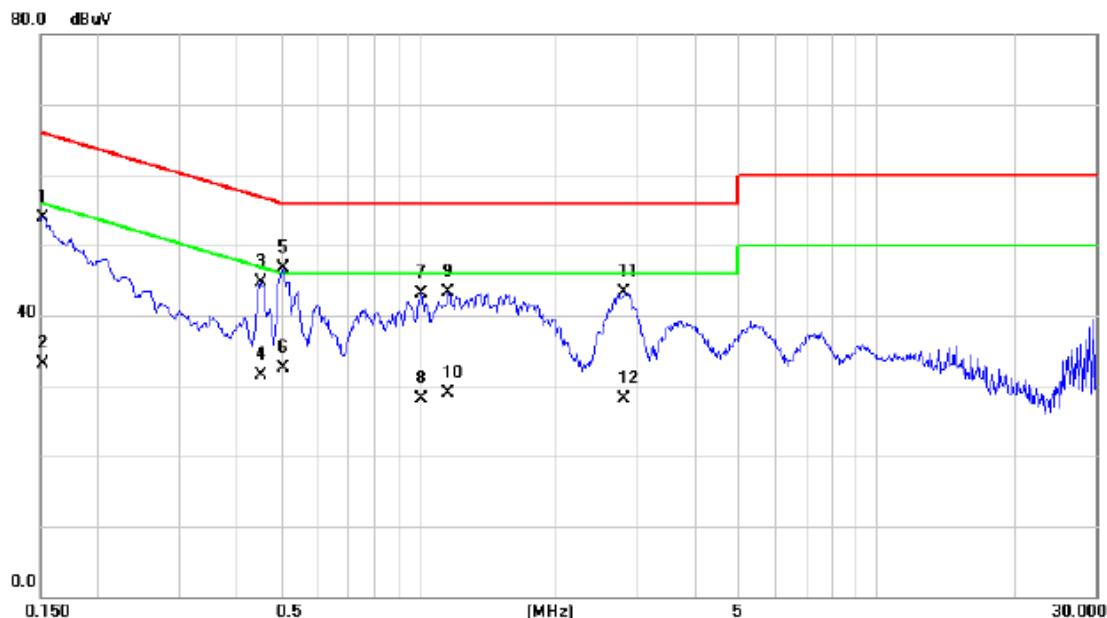

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	44.35	9.59	53.94	65.88	-11.94	QP	
2		0.1522	23.50	9.59	33.09	55.88	-22.79	AVG	
3		0.4537	34.98	9.64	44.62	56.81	-12.19	QP	
4		0.4537	21.90	9.64	31.54	46.81	-15.27	AVG	
5	*	0.5100	37.04	9.65	46.69	56.00	-9.31	QP	
6		0.5100	22.90	9.65	32.55	46.00	-13.45	AVG	
7		1.0207	33.38	9.79	43.17	56.00	-12.83	QP	
8		1.0207	18.40	9.79	28.19	46.00	-17.81	AVG	
9		1.1647	33.49	9.80	43.29	56.00	-12.71	QP	
10		1.1647	19.20	9.80	29.00	46.00	-17.00	AVG	
11		2.8230	33.45	9.83	43.28	56.00	-12.72	QP	
12		2.8230	18.20	9.83	28.03	46.00	-17.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: PANG NGAI


Line

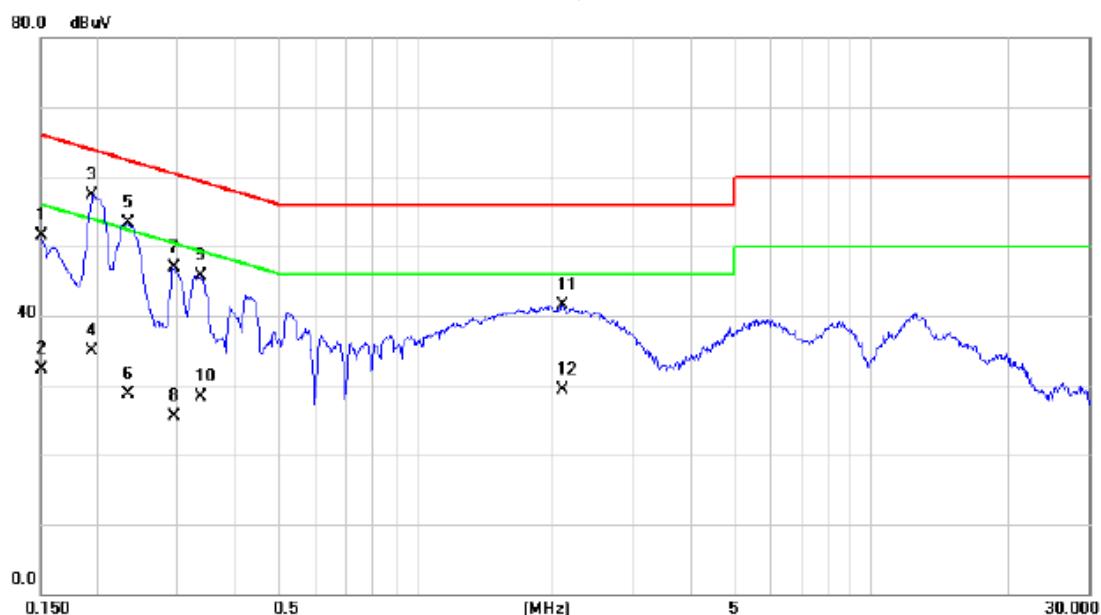

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	41.78	9.68	51.46	66.00	-14.54	QP	
2		0.1500	22.70	9.68	32.38	56.00	-23.62	AVG	
3 *		0.1950	47.61	9.71	57.32	63.82	-6.50	QP	
4		0.1950	25.10	9.71	34.81	53.82	-19.01	AVG	
5		0.2333	43.49	9.72	53.21	62.33	-9.12	QP	
6		0.2333	18.90	9.72	28.62	52.33	-23.71	AVG	
7		0.2940	37.05	9.76	46.81	60.41	-13.60	QP	
8		0.2940	15.70	9.76	25.46	50.41	-24.95	AVG	
9		0.3367	35.91	9.77	45.68	59.28	-13.60	QP	
10		0.3367	18.50	9.77	28.27	49.28	-21.01	AVG	
11		2.1053	31.58	9.88	41.46	56.00	-14.54	QP	
12		2.1053	19.50	9.88	29.38	46.00	-16.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: PANG NGAI


Neutral

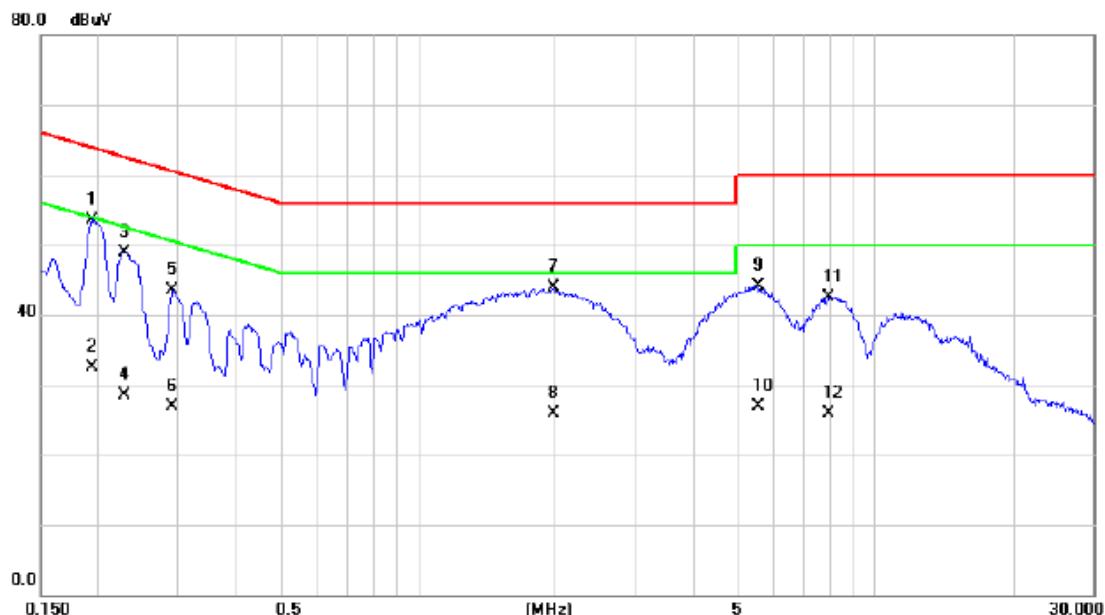

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1950	43.99	9.61	53.60	63.82	-10.22	QP	
2		0.1950	22.80	9.61	32.41	53.82	-21.41	AVG	
3		0.2288	39.33	9.62	48.95	62.49	-13.54	QP	
4		0.2288	18.90	9.62	28.52	52.49	-23.97	AVG	
5		0.2917	33.93	9.63	43.56	60.48	-16.92	QP	
6		0.2917	17.20	9.63	26.83	50.48	-23.65	AVG	
7		1.9905	33.94	9.93	43.87	56.00	-12.13	QP	
8		1.9905	15.90	9.93	25.83	46.00	-20.17	AVG	
9		5.5860	33.90	10.12	44.02	60.00	-15.98	QP	
10		5.5860	16.80	10.12	26.92	50.00	-23.08	AVG	
11		7.9440	32.39	10.11	42.50	60.00	-17.50	QP	
12		7.9440	15.70	10.11	25.81	50.00	-24.19	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: PANG NGAI


Line

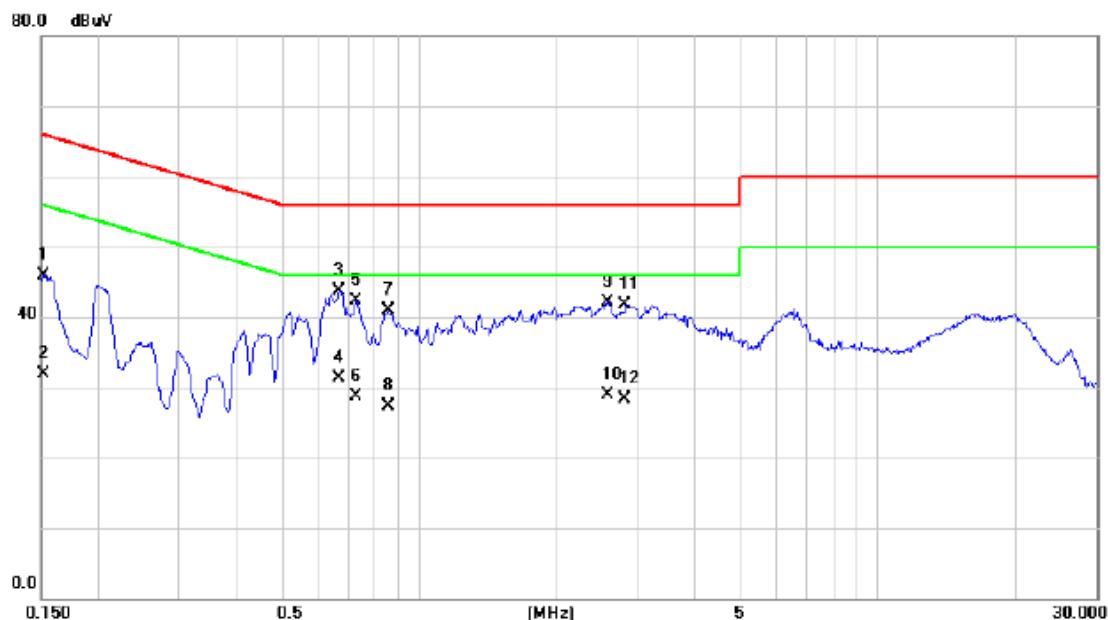

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	36.19	9.67	45.86	65.88	-20.02	QP	
2		0.1522	22.30	9.67	31.97	55.88	-23.91	AVG	
3	*	0.6697	33.85	9.89	43.74	56.00	-12.26	QP	
4		0.6697	21.50	9.89	31.39	46.00	-14.61	AVG	
5		0.7304	32.45	9.91	42.36	56.00	-13.64	QP	
6		0.7304	18.70	9.91	28.61	46.00	-17.39	AVG	
7		0.8565	30.93	9.94	40.87	56.00	-15.13	QP	
8		0.8565	17.40	9.94	27.34	46.00	-18.66	AVG	
9		2.5755	32.15	9.93	42.08	56.00	-13.92	QP	
10		2.5755	18.90	9.93	28.83	46.00	-17.17	AVG	
11		2.8208	31.90	9.87	41.77	56.00	-14.23	QP	
12		2.8208	18.40	9.87	28.27	46.00	-17.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: PANG NGAI


Neutral

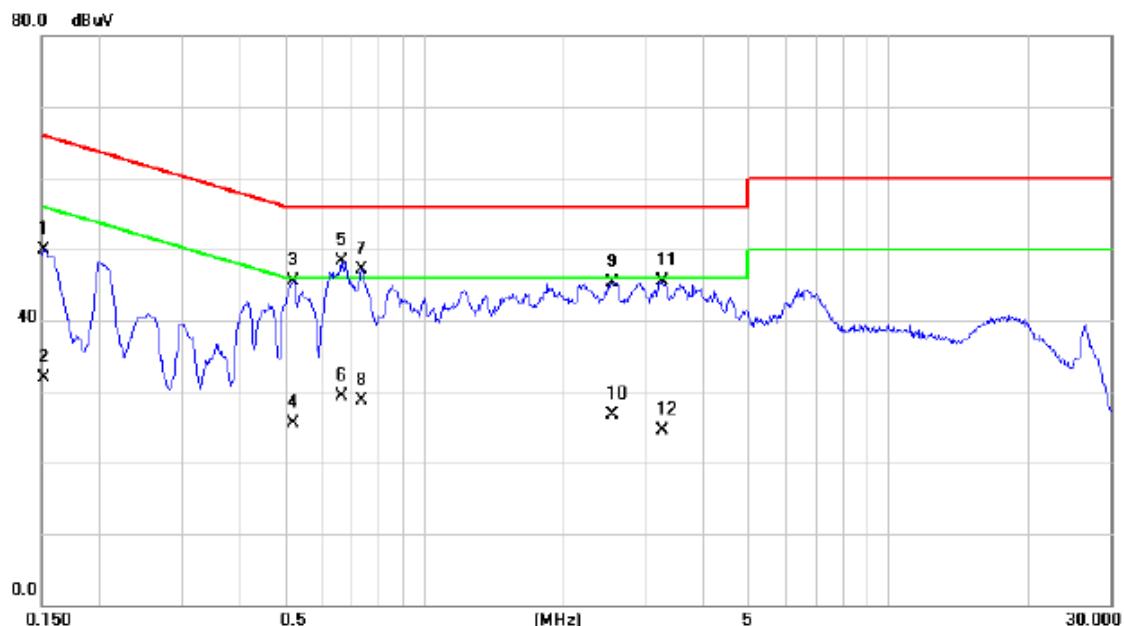

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	40.37	9.59	49.96	65.88	-15.92	QP	
2		0.1522	22.30	9.59	31.89	55.88	-23.99	AVG	
3		0.5235	35.92	9.65	45.57	56.00	-10.43	QP	
4		0.5235	15.90	9.65	25.55	46.00	-20.45	AVG	
5 *		0.6630	38.56	9.69	48.25	56.00	-7.75	QP	
6		0.6630	19.70	9.69	29.39	46.00	-16.61	AVG	
7		0.7350	37.45	9.71	47.16	56.00	-8.84	QP	
8		0.7350	18.90	9.71	28.61	46.00	-17.39	AVG	
9		2.5485	35.45	9.86	45.31	56.00	-10.69	QP	
10		2.5485	16.90	9.86	26.76	46.00	-19.24	AVG	
11		3.2505	35.59	9.84	45.43	56.00	-10.57	QP	
12		3.2505	14.70	9.84	24.54	46.00	-21.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: PANG NGAI


Line

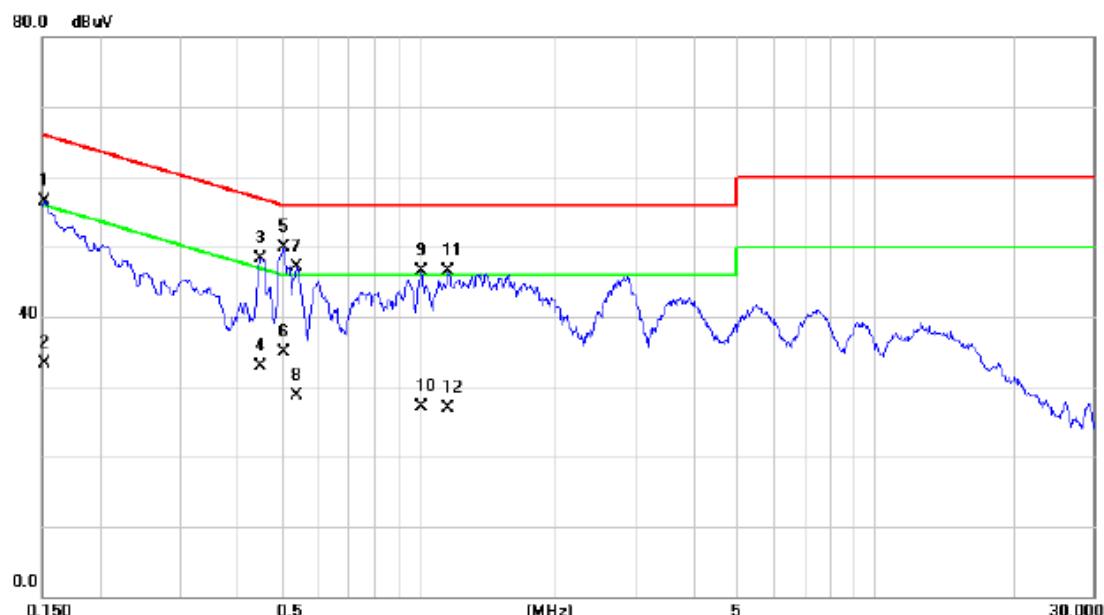

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1		0.1522	46.76	9.67	56.43	65.88	-9.45	QP
2		0.1522	23.60	9.67	33.27	55.88	-22.61	AVG
3		0.4515	38.56	9.82	48.38	56.85	-8.47	QP
4		0.4515	23.10	9.82	32.92	46.85	-13.93	AVG
5	*	0.5076	40.13	9.82	49.95	56.00	-6.05	QP
6		0.5076	25.00	9.82	34.82	46.00	-11.18	AVG
7		0.5415	37.21	9.84	47.05	56.00	-8.95	QP
8		0.5415	18.90	9.84	28.74	46.00	-17.26	AVG
9		1.0184	36.57	9.98	46.55	56.00	-9.45	QP
10		1.0184	17.20	9.98	27.18	46.00	-18.82	AVG
11		1.1647	36.48	10.01	46.49	56.00	-9.51	QP
12		1.1647	16.90	10.01	26.91	46.00	-19.09	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: PANG NGAI


Neutral

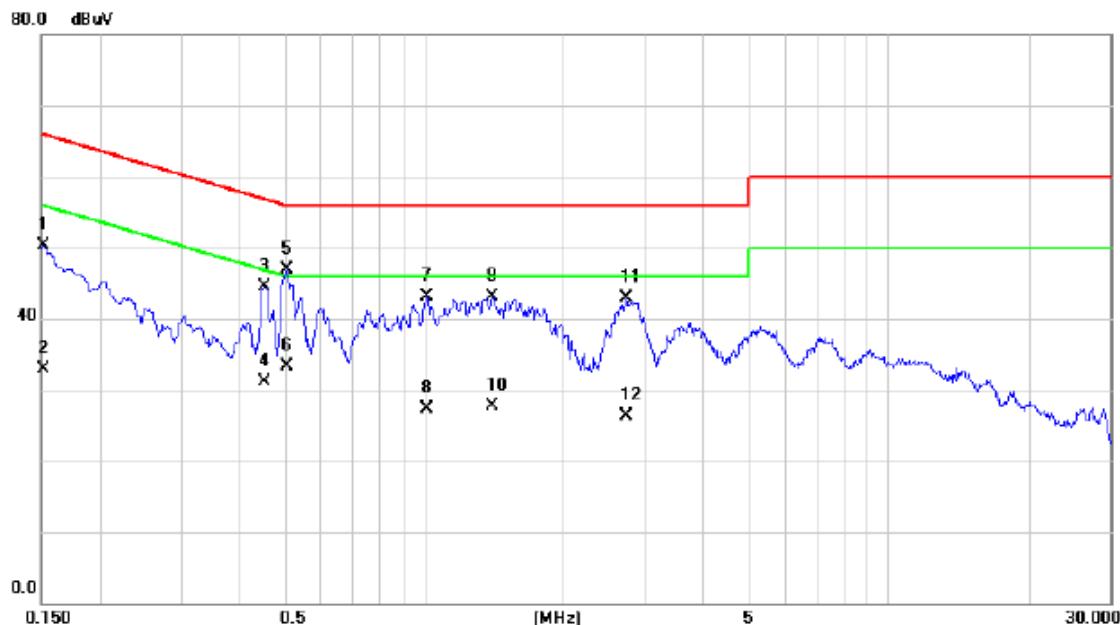

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
			Level	Factor	ment		dB	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV			
1		0.1522	40.62	9.59	50.21	65.88	-15.67	QP	
2		0.1522	23.40	9.59	32.99	55.88	-22.89	AVG	
3		0.4537	34.95	9.64	44.59	56.81	-12.22	QP	
4		0.4537	21.50	9.64	31.14	46.81	-15.67	AVG	
5 *		0.5076	37.17	9.65	46.82	56.00	-9.18	QP	
6		0.5076	23.70	9.65	33.35	46.00	-12.65	AVG	
7		1.0140	33.38	9.79	43.17	56.00	-12.83	QP	
8		1.0140	17.60	9.79	27.39	46.00	-18.61	AVG	
9		1.4100	33.32	9.82	43.14	56.00	-12.86	QP	
10		1.4100	17.80	9.82	27.62	46.00	-18.38	AVG	
11		2.7218	32.99	9.84	42.83	56.00	-13.17	QP	
12		2.7218	16.50	9.84	26.34	46.00	-19.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


Line

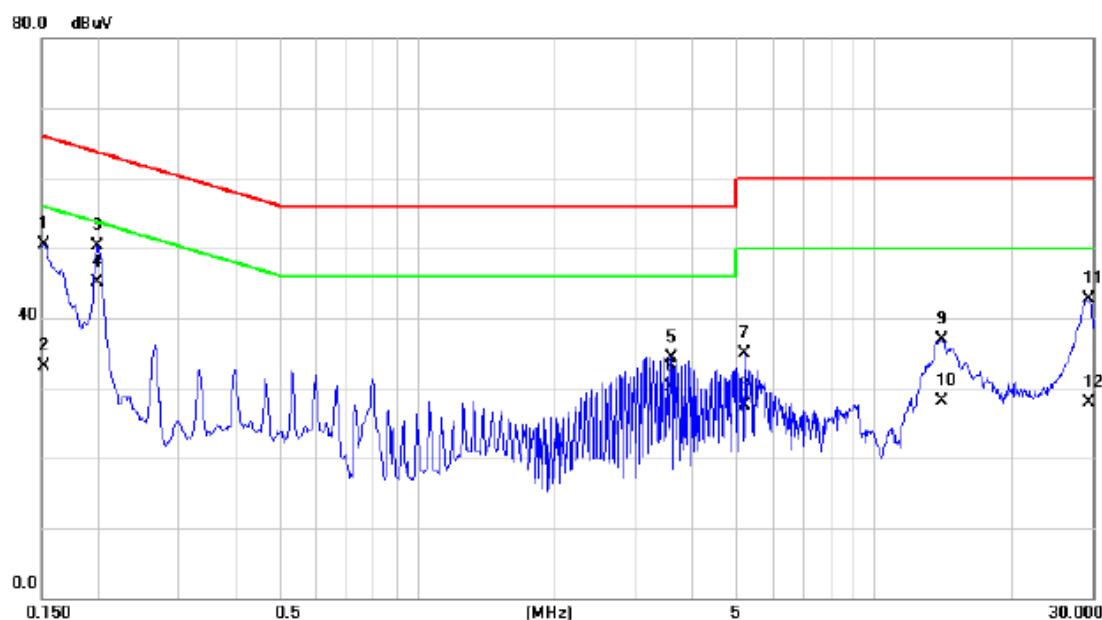

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	40.77	9.67	50.44	65.88	-15.44	QP	
2		0.1522	23.50	9.67	33.17	55.88	-22.71	AVG	
3		0.1995	40.67	9.71	50.38	63.63	-13.25	QP	
4	*	0.1995	35.40	9.71	45.11	53.63	-8.52	AVG	
5		3.5992	24.55	9.85	34.40	56.00	-21.60	QP	
6		3.5993	20.30	9.85	30.15	46.00	-15.85	AVG	
7		5.1765	25.83	9.02	34.85	60.00	-25.15	QP	
8		5.1765	18.50	9.02	27.52	50.00	-22.48	AVG	
9		14.0685	26.69	10.24	36.93	60.00	-23.07	QP	
10		14.0685	17.90	10.24	28.14	50.00	-21.86	AVG	
11		29.5305	32.17	10.56	42.73	60.00	-17.27	QP	
12		29.5305	17.40	10.56	27.96	50.00	-22.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


Neutral

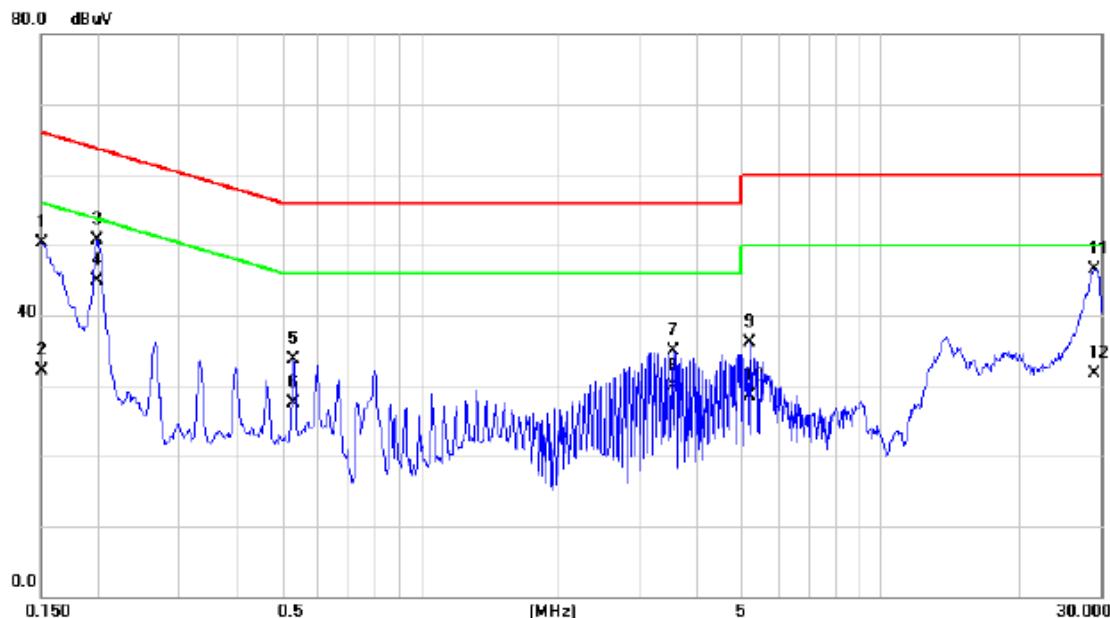

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	40.69	9.60	50.29	66.00	-15.71	QP	
2		0.1500	22.50	9.60	32.10	56.00	-23.90	AVG	
3		0.1995	41.09	9.61	50.70	63.63	-12.93	QP	
4	*	0.1995	35.20	9.61	44.81	53.63	-8.82	AVG	
5		0.5302	24.14	9.66	33.80	56.00	-22.20	QP	
6		0.5302	17.80	9.66	27.46	46.00	-18.54	AVG	
7		3.5362	25.10	9.89	34.99	56.00	-21.01	QP	
8		3.5363	20.10	9.89	29.99	46.00	-16.01	AVG	
9		5.1787	26.10	10.10	36.20	60.00	-23.80	QP	
10		5.1788	18.50	10.10	28.60	50.00	-21.40	AVG	
11		29.1232	35.99	10.53	46.52	60.00	-13.48	QP	
12		29.1233	21.20	10.53	31.73	50.00	-18.27	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Connrex


Line

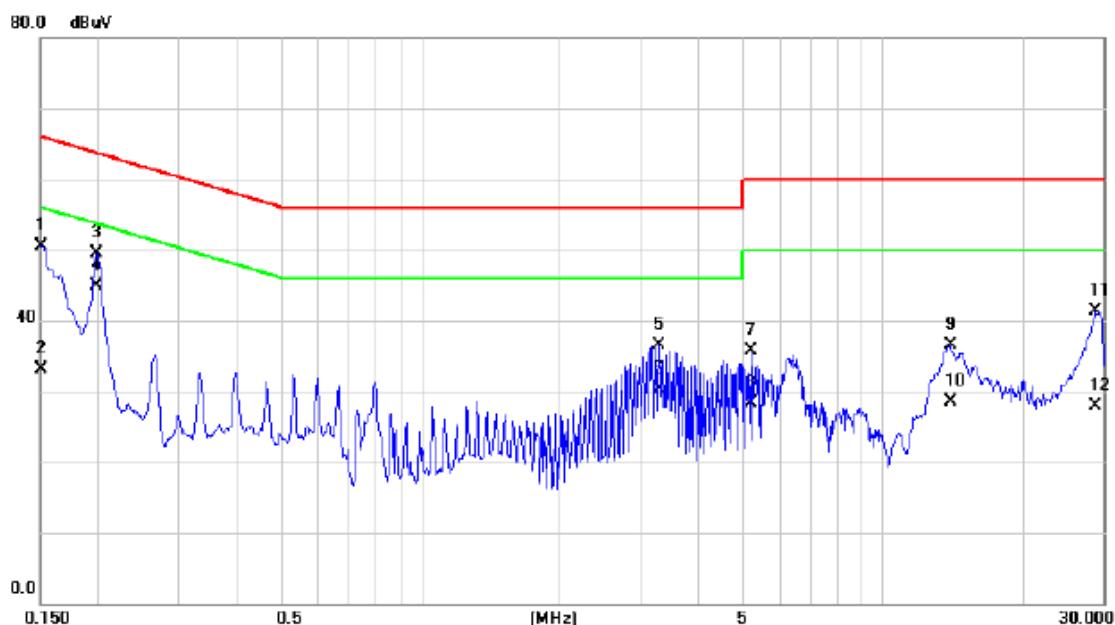

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	40.90	9.68	50.58	66.00	-15.42	QP	
2		0.1500	23.50	9.68	33.18	56.00	-22.82	AVG	
3		0.1995	39.79	9.71	49.50	63.63	-14.13	QP	
4	*	0.1995	35.20	9.71	44.91	53.63	-8.72	AVG	
5		3.2842	26.61	9.83	36.44	56.00	-19.56	QP	
6		3.2843	20.40	9.83	30.23	46.00	-15.77	AVG	
7		5.1765	26.66	9.02	35.68	60.00	-24.32	QP	
8		5.1765	19.20	9.02	28.22	50.00	-21.78	AVG	
9		13.9965	26.24	10.23	36.47	60.00	-23.53	QP	
10		13.9965	18.30	10.23	28.53	50.00	-21.47	AVG	
11		28.9882	30.70	10.54	41.24	60.00	-18.76	QP	
12		28.9883	17.40	10.54	27.94	50.00	-22.06	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Connrex


Neutral

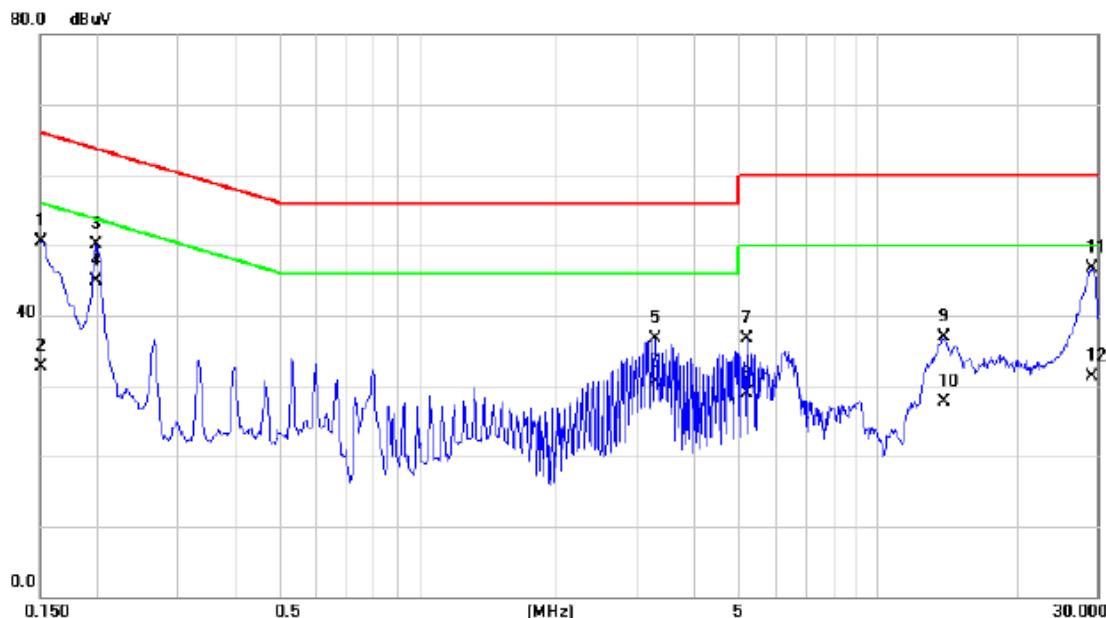

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB			
1		0.1500	40.93	9.60	50.53	66.00	-15.47	QP	
2		0.1500	23.10	9.60	32.70	56.00	-23.30	AVG	
3		0.1995	40.52	9.61	50.13	63.63	-13.50	QP	
4	*	0.1995	35.30	9.61	44.91	53.63	-8.72	AVG	
5		3.2842	26.78	9.84	36.62	56.00	-19.38	QP	
6		3.2843	20.60	9.84	30.44	46.00	-15.56	AVG	
7		5.1787	26.59	10.10	36.69	60.00	-23.31	QP	
8		5.1788	18.90	10.10	29.00	50.00	-21.00	AVG	
9		13.9312	26.75	10.22	36.97	60.00	-23.03	QP	
10		13.9313	17.40	10.22	27.62	50.00	-22.38	AVG	
11		29.3168	36.11	10.53	46.64	60.00	-13.36	QP	
12		29.3168	20.80	10.53	31.33	50.00	-18.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Unirise


Line

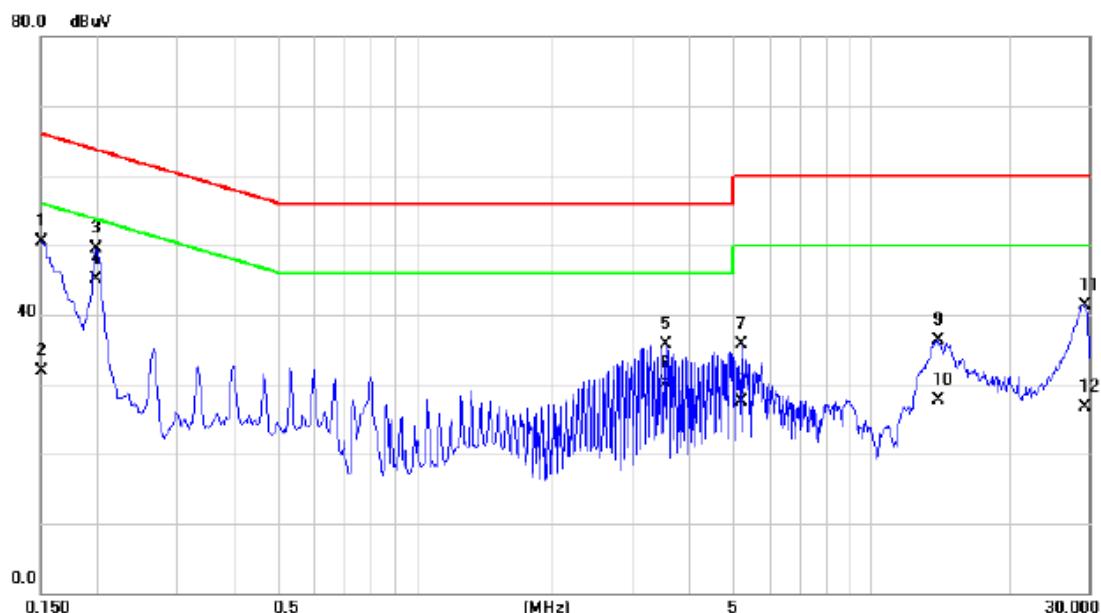

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	40.80	9.68	50.48	66.00	-15.52	QP	
2		0.1500	22.20	9.68	31.88	56.00	-24.12	AVG	
3		0.1995	39.80	9.71	49.51	63.63	-14.12	QP	
4	*	0.1995	35.30	9.71	45.01	53.63	-8.62	AVG	
5		3.5340	25.78	9.85	35.63	56.00	-20.37	QP	
6		3.5340	20.30	9.85	30.15	46.00	-15.85	AVG	
7		5.1788	26.76	9.02	35.78	60.00	-24.22	QP	
8		5.1788	18.50	9.02	27.52	50.00	-22.48	AVG	
9		13.9965	26.16	10.23	36.39	60.00	-23.61	QP	
10		13.9965	17.40	10.23	27.63	50.00	-22.37	AVG	
11		29.5148	30.80	10.56	41.36	60.00	-18.64	QP	
12		29.5148	16.20	10.56	26.76	50.00	-23.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Unirise

Neutral

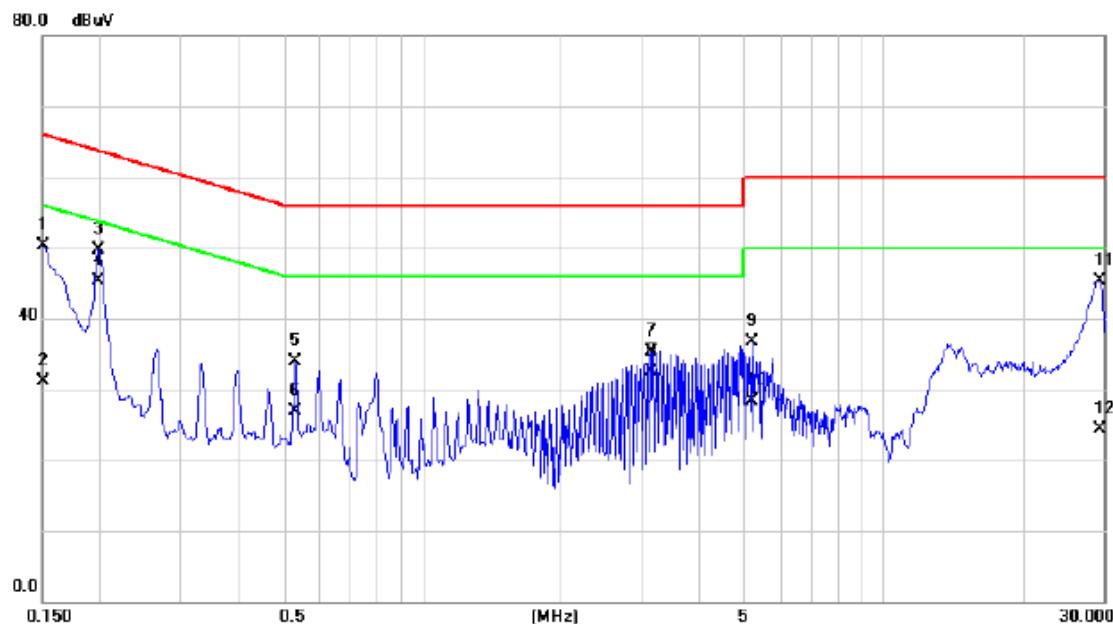

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	40.72	9.60	50.32	66.00	-15.68	QP	
2		0.1500	21.50	9.60	31.10	56.00	-24.90	AVG	
3		0.1995	40.02	9.61	49.63	63.63	-14.00	QP	
4	*	0.1995	35.60	9.61	45.21	53.63	-8.42	AVG	
5		0.5302	24.22	9.66	33.88	56.00	-22.12	QP	
6		0.5302	17.20	9.66	26.86	46.00	-19.14	AVG	
7		3.1560	25.53	9.83	35.36	56.00	-20.64	QP	
8		3.1560	22.70	9.83	32.53	46.00	-13.47	AVG	
9		5.1788	26.65	10.10	36.75	60.00	-23.25	QP	
10		5.1788	18.20	10.10	28.30	50.00	-21.70	AVG	
11		29.4473	34.76	10.55	45.31	60.00	-14.69	QP	
12		29.4473	13.70	10.55	24.25	50.00	-25.75	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Earphone
Note:	Adapter: Phihong +USB Cable: PANG NGAI


Vertical



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	30.9700	39.60	-12.68	26.92	40.00	-13.08	QP	
2		78.5000	47.33	-23.37	23.96	40.00	-16.04	QP	
3		154.1600	47.17	-22.22	24.95	43.50	-18.55	QP	
4		203.6300	42.61	-19.99	22.62	43.50	-20.88	QP	
5		246.3100	40.99	-17.47	23.52	46.00	-22.48	QP	
6		601.3300	29.45	-8.78	20.67	46.00	-25.33	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Earphone
Note:	Adapter: Phihong +USB Cable: PANG NGAI


Horizontal

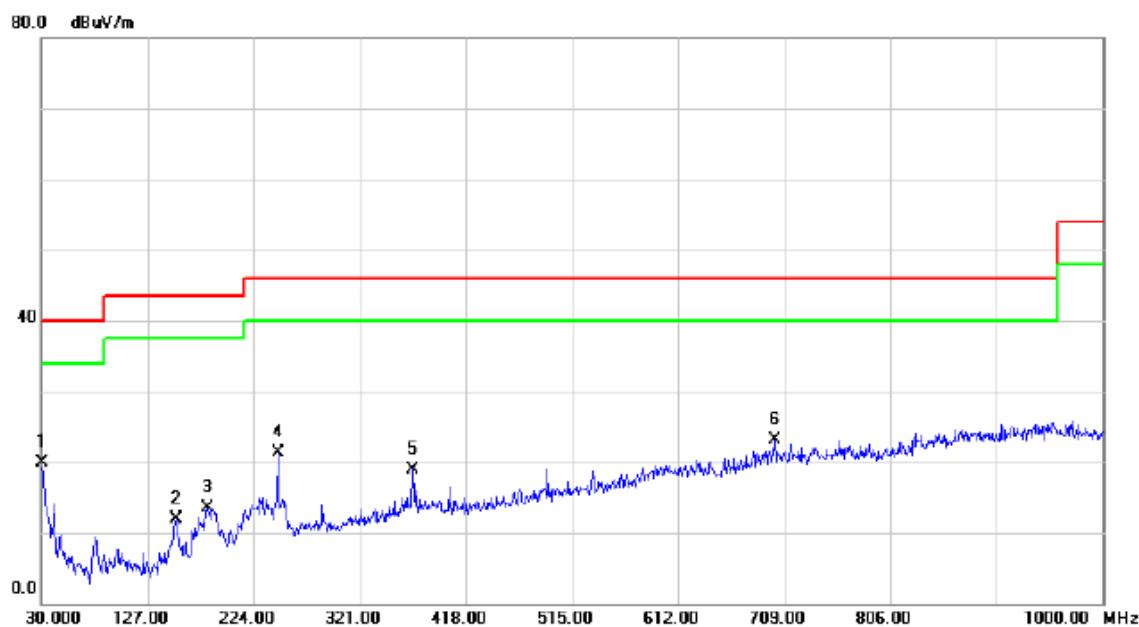

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	30.0000	31.98	-12.04	19.94	40.00	-20.06	QP	
2		153.1900	34.22	-22.22	12.00	43.50	-31.50	QP	
3		181.3200	34.71	-21.28	13.43	43.50	-30.07	QP	
4		246.3100	38.87	-17.47	21.40	46.00	-24.60	QP	
5		369.5000	32.28	-13.28	19.00	46.00	-27.00	QP	
6		700.2700	29.67	-6.66	23.01	46.00	-22.99	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Speaker
Note:	Adapter: Phihong +USB Cable: PANG NGAI


Vertical

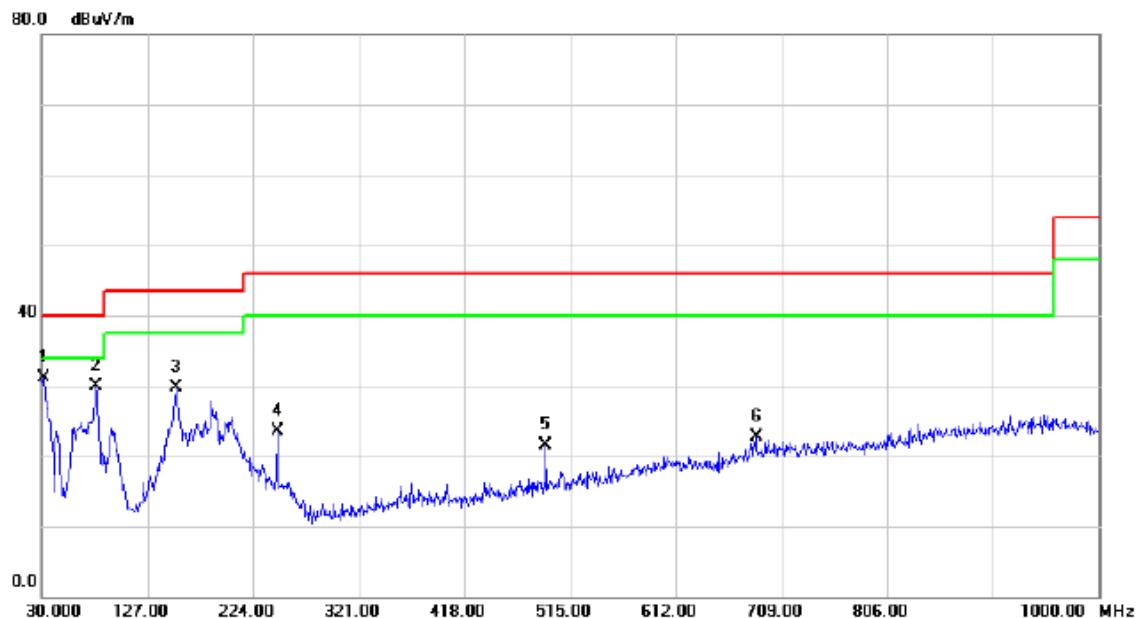

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	31.9400	44.43	-13.32	31.11	40.00	-8.89	QP	
2		79.4700	53.13	-23.29	29.84	40.00	-10.16	QP	
3		153.1900	52.00	-22.22	29.78	43.50	-13.72	QP	
4		246.3100	40.94	-17.47	23.47	46.00	-22.53	QP	
5		492.6900	33.21	-11.73	21.48	46.00	-24.52	QP	
6		685.7200	30.05	-7.26	22.79	46.00	-23.21	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Speaker
Note:	Adapter: Phihong +USB Cable: PANG NGAI


Horizontal

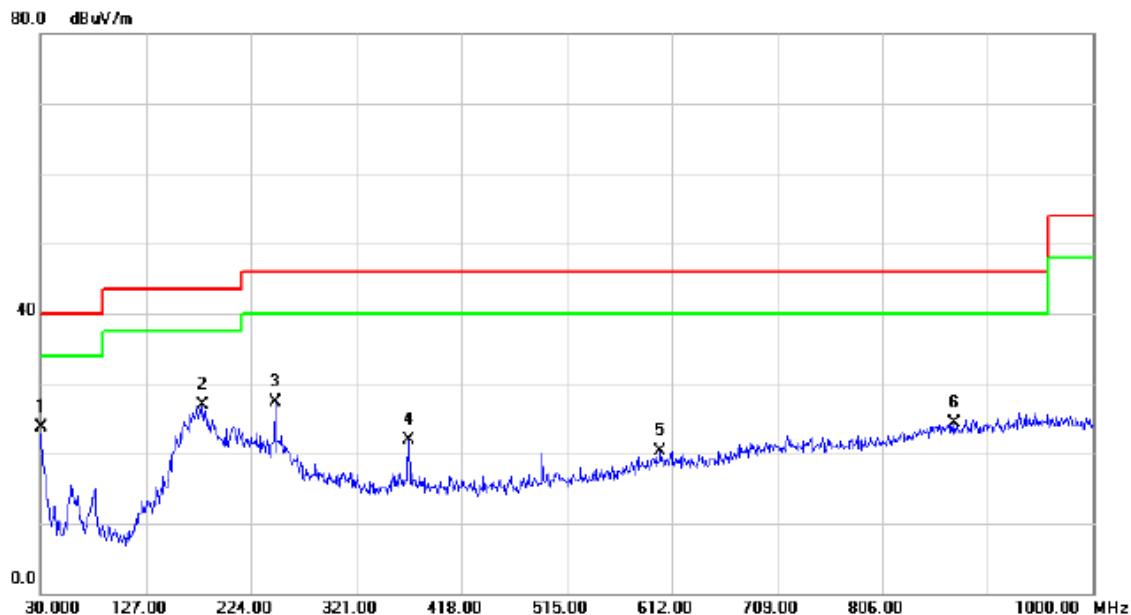

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	30.0000	35.66	-12.04	23.62	40.00	-16.38	QP	
2		179.3800	48.29	-21.31	26.98	43.50	-16.52	QP	
3		246.3100	44.82	-17.47	27.35	46.00	-18.65	QP	
4		369.5000	35.10	-13.28	21.82	46.00	-24.18	QP	
5		601.3300	29.09	-8.78	20.31	46.00	-25.69	QP	
6		871.9600	28.62	-4.25	24.37	46.00	-21.63	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: PANG NGAI

Vertical

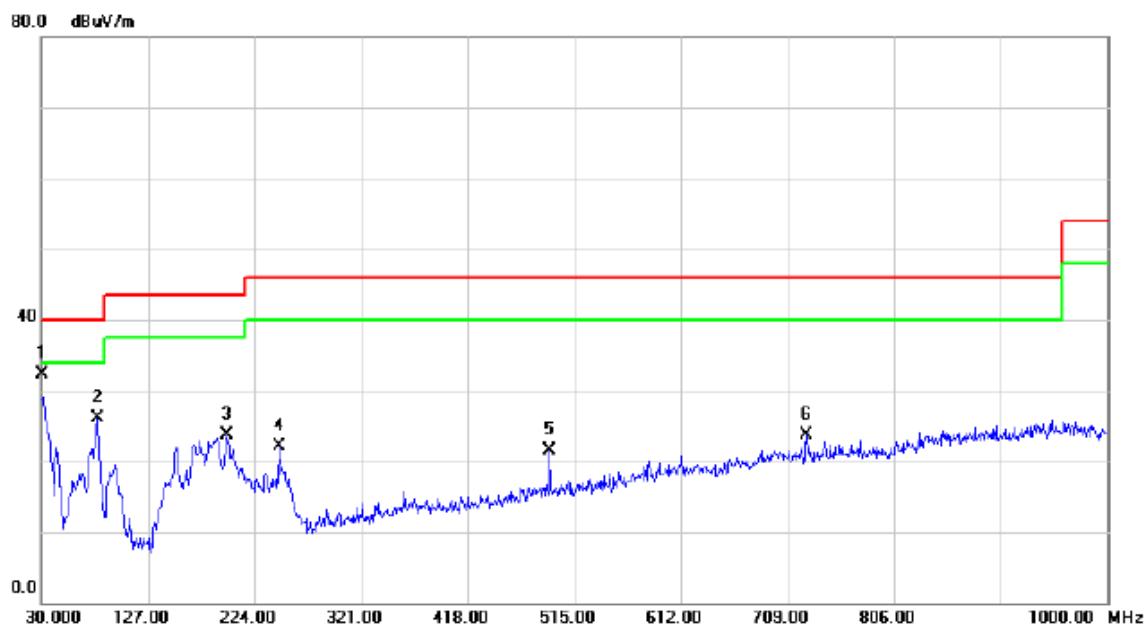

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	*	30.0000	44.32	-12.04	32.28	40.00	-7.72	QP
2		80.4400	49.27	-23.20	26.07	40.00	-13.93	QP
3		198.7800	44.13	-20.43	23.70	43.50	-19.80	QP
4		246.3100	39.56	-17.47	22.09	46.00	-23.91	QP
5		492.6900	33.32	-11.73	21.59	46.00	-24.41	QP
6		726.4600	30.26	-6.63	23.63	46.00	-22.37	QP

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: PANG NGAI


Horizontal



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	30.0000	35.72	-12.04	23.68	40.00	-16.32	QP	
2		80.4400	35.53	-23.20	12.33	40.00	-27.67	QP	
3		152.2200	34.24	-22.22	12.02	43.50	-31.48	QP	
4		246.3100	46.74	-17.47	29.27	46.00	-16.73	QP	
5		595.5100	29.01	-8.93	20.08	46.00	-25.92	QP	
6		859.3500	28.39	-4.34	24.05	46.00	-21.95	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: PANG NGAI


Vertical

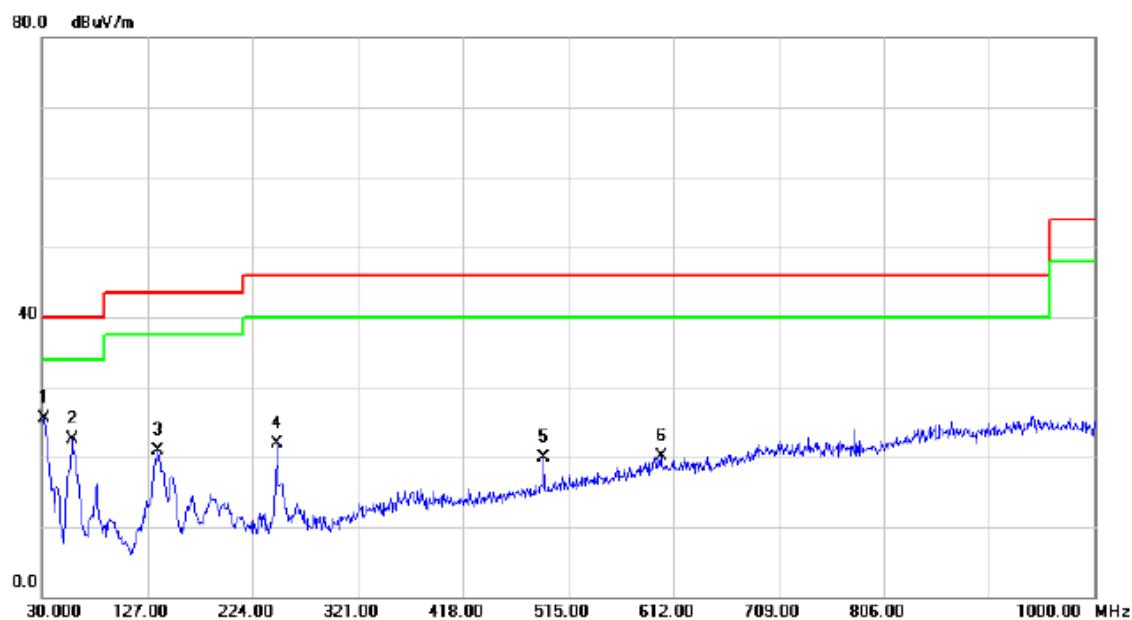

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	31.9400	38.79	-13.32	25.47	40.00	-14.53	QP	
2		57.1600	45.24	-22.78	22.46	40.00	-17.54	QP	
3		136.7000	43.52	-22.69	20.83	43.50	-22.67	QP	
4		246.3100	39.47	-17.47	22.00	46.00	-24.00	QP	
5		492.6900	31.61	-11.73	19.88	46.00	-26.12	QP	
6		600.3600	28.82	-8.78	20.04	46.00	-25.96	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: PANG NGAI


Horizontal

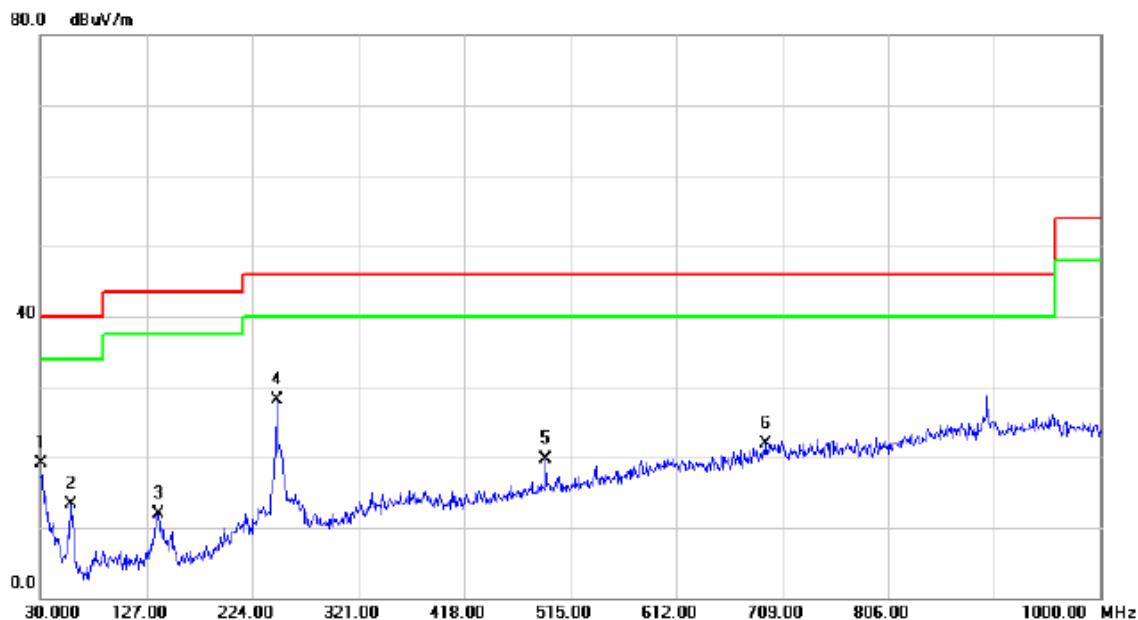

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		30.0000	31.15	-12.04	19.11	40.00	-20.89	QP	
2		57.1600	36.05	-22.78	13.27	40.00	-26.73	QP	
3		137.6700	34.67	-22.69	11.98	43.50	-31.52	QP	
4	*	246.3100	45.52	-17.47	28.05	46.00	-17.95	QP	
5		492.6900	31.48	-11.73	19.75	46.00	-26.25	QP	
6		694.4500	28.72	-6.89	21.83	46.00	-24.17	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: PANG NGAI


Vertical

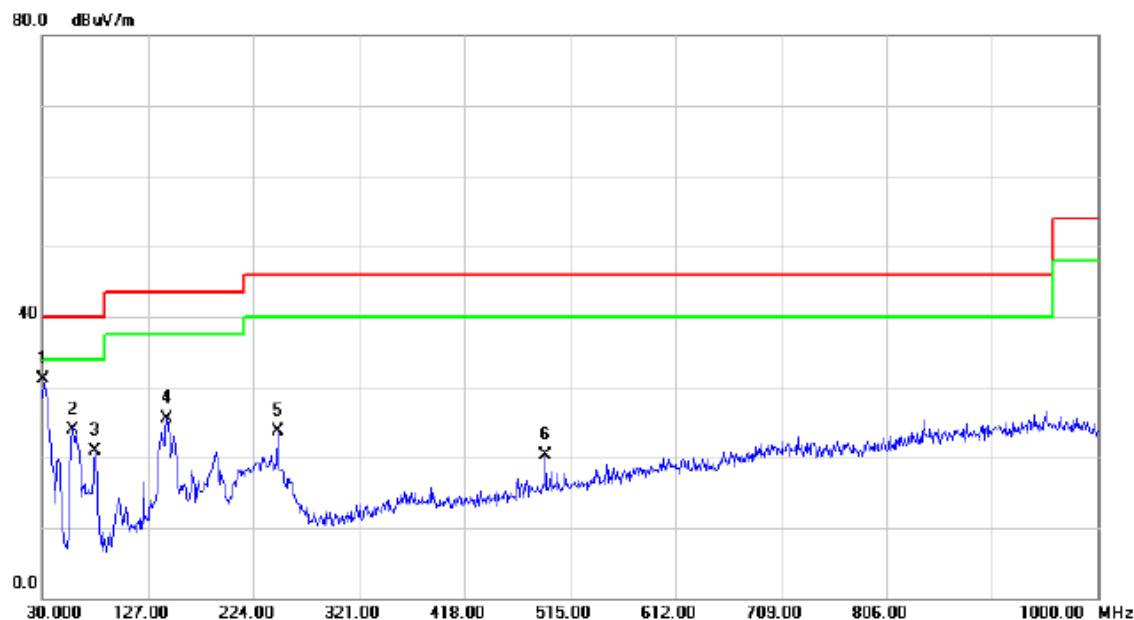

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1	*	30.0000	43.20	-12.04	31.16	40.00	-8.84	QP	
2		58.1300	46.92	-22.94	23.98	40.00	-16.02	QP	
3		78.5000	44.19	-23.37	20.82	40.00	-19.18	QP	
4		144.4600	47.93	-22.48	25.45	43.50	-18.05	QP	
5		246.3100	41.09	-17.47	23.62	46.00	-22.38	QP	
6		492.6900	32.02	-11.73	20.29	46.00	-25.71	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: PANG NGAI


Horizontal

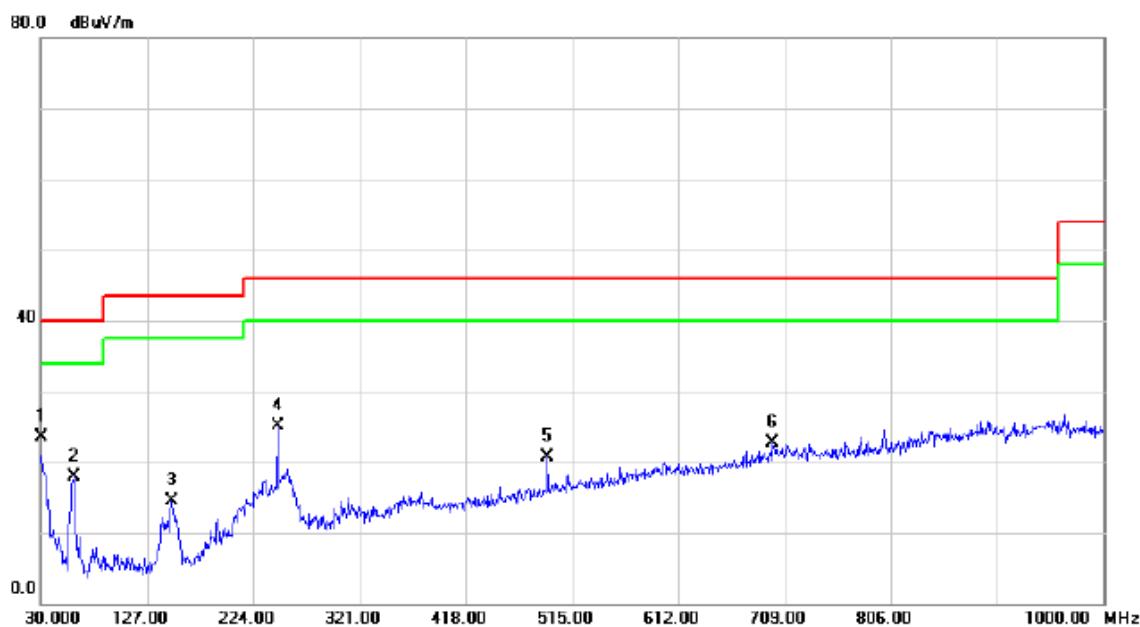

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	30.0000	35.50	-12.04	23.46	40.00	-16.54	QP	
2		60.0700	41.30	-23.39	17.91	40.00	-22.09	QP	
3		149.3100	36.81	-22.26	14.55	43.50	-28.95	QP	
4		246.3100	42.67	-17.47	25.20	46.00	-20.80	QP	
5		492.6900	32.39	-11.73	20.66	46.00	-25.34	QP	
6		698.3300	29.51	-6.74	22.77	46.00	-23.23	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


Vertical

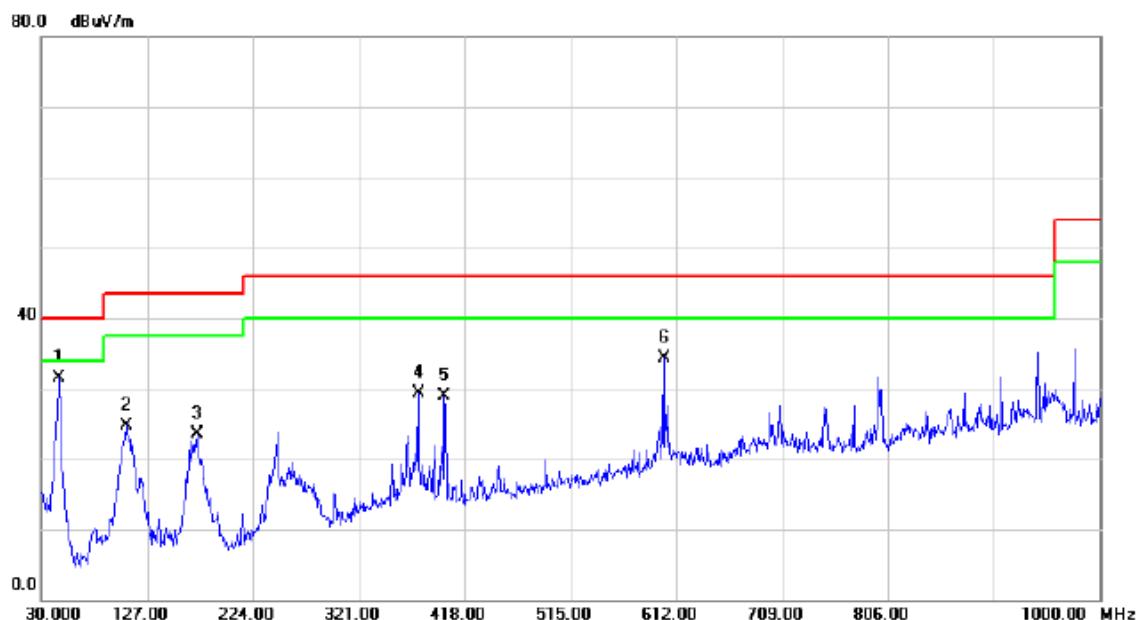

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	46.4900	50.76	-19.16	31.60	40.00	-8.40	QP	
2		107.6000	46.82	-22.15	24.67	43.50	-18.83	QP	
3		172.5900	45.09	-21.63	23.46	43.50	-20.04	QP	
4		375.3200	42.79	-13.43	29.36	46.00	-16.64	QP	
5		399.5700	42.76	-13.76	29.00	46.00	-17.00	QP	
6		600.3600	43.08	-8.78	34.30	46.00	-11.70	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


Horizontal

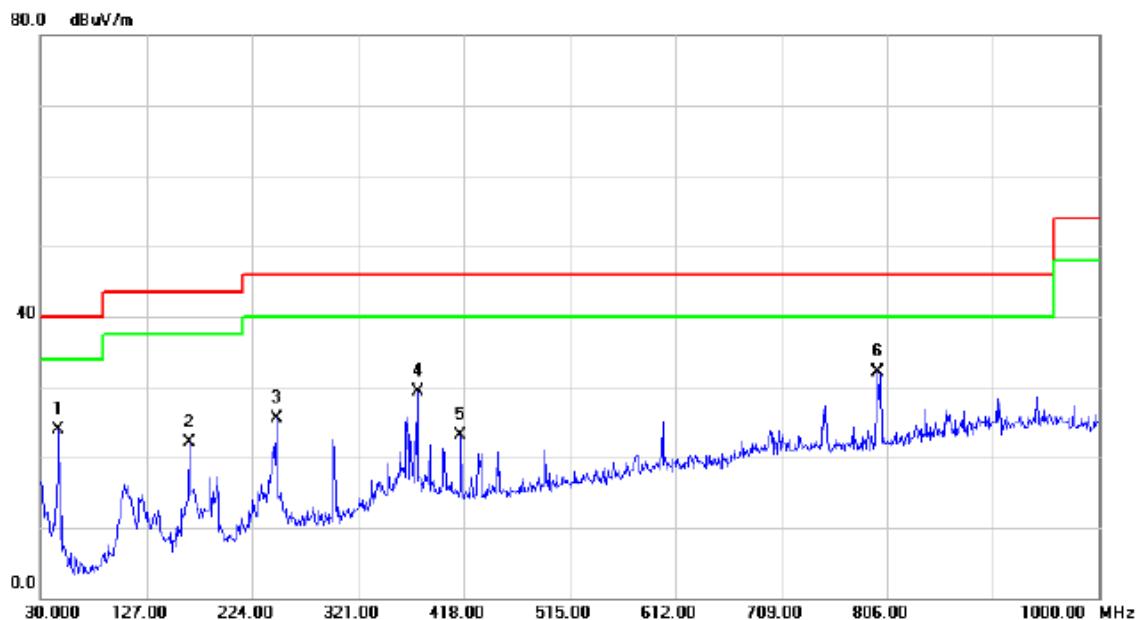

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
MHz		dBuV		dB	dBuV/m	dBuV/m	dB		
1		46.4900	43.03	-19.16	23.87	40.00	-16.13	QP	
2		165.8000	44.11	-21.94	22.17	43.50	-21.33	QP	
3		246.3100	43.06	-17.47	25.59	46.00	-20.41	QP	
4		375.3200	42.80	-13.43	29.37	46.00	-16.63	QP	
5		415.0900	36.58	-13.56	23.02	46.00	-22.98	QP	
6	*	797.2700	38.44	-6.36	32.08	46.00	-13.92	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Connrex


Vertical

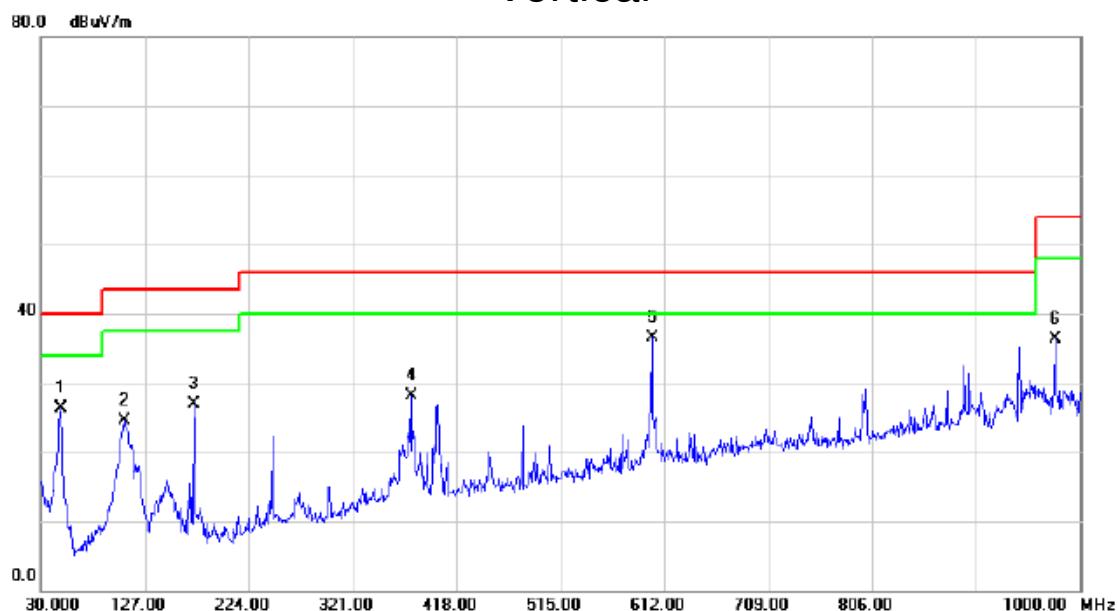

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		48.4300	46.38	-20.10	26.28	40.00	-13.72	QP	
2		107.6000	46.65	-22.15	24.50	43.50	-19.00	QP	
3		172.5900	48.53	-21.63	26.90	43.50	-16.60	QP	
4		375.3200	41.51	-13.43	28.08	46.00	-17.92	QP	
5	*	600.3600	45.31	-8.78	36.53	46.00	-9.47	QP	
6		976.7200	39.34	-3.09	36.25	54.00	-17.75	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Connrex


Horizontal

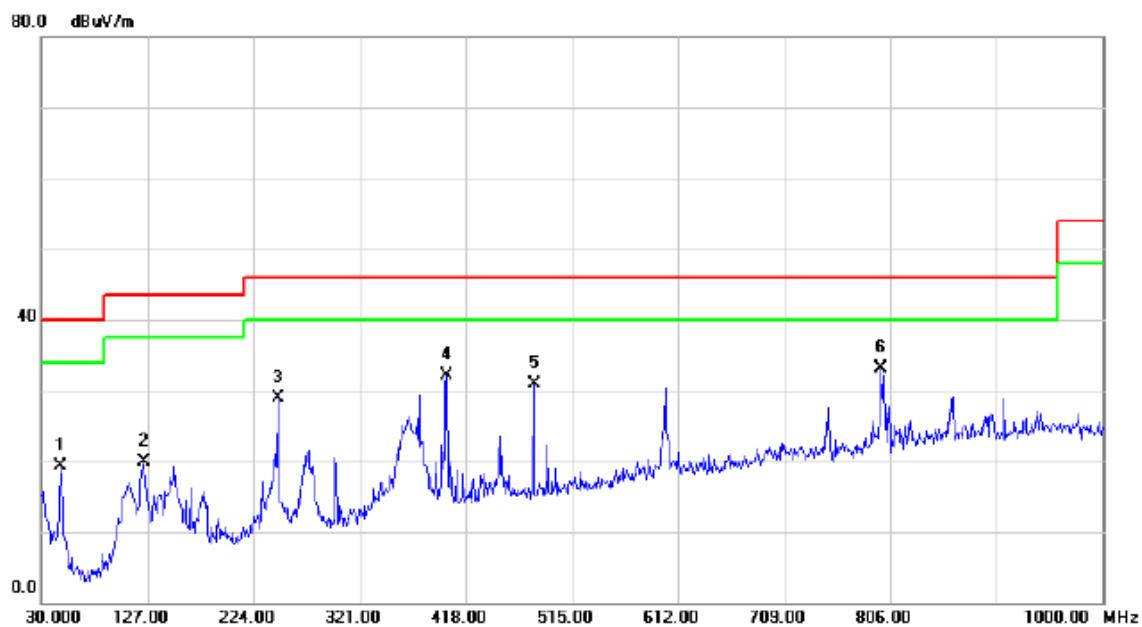

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		47.4600	39.06	-19.69	19.37	40.00	-20.63	QP	
2		123.1200	42.46	-22.63	19.83	43.50	-23.67	QP	
3		246.3100	46.37	-17.47	28.90	46.00	-17.10	QP	
4		400.5400	45.79	-13.76	32.03	46.00	-13.97	QP	
5		480.0800	43.10	-12.12	30.98	46.00	-15.02	QP	
6	*	797.2700	39.38	-6.36	33.02	46.00	-12.98	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Unirise


Vertical

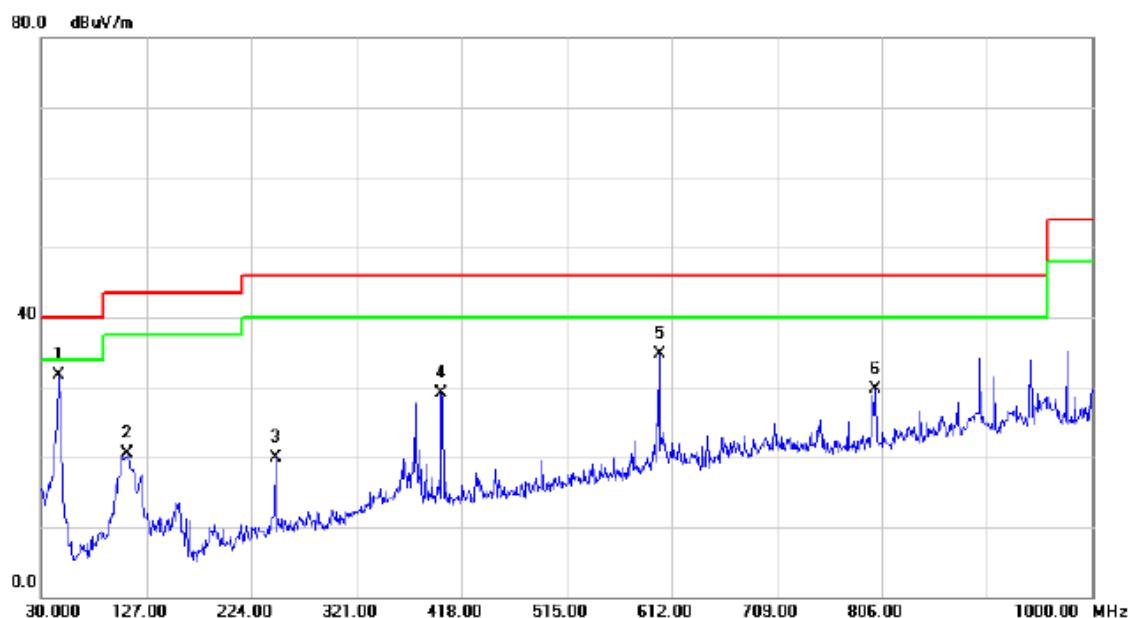

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	45.5200	50.55	-18.79	31.76	40.00	-8.24	QP	
2		109.5400	42.78	-22.32	20.46	43.50	-23.04	QP	
3		246.3100	37.47	-17.47	20.00	46.00	-26.00	QP	
4		399.5700	42.95	-13.76	29.19	46.00	-16.81	QP	
5		600.3600	43.42	-8.78	34.64	46.00	-11.36	QP	
6		800.1800	35.96	-6.34	29.62	46.00	-16.38	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Unirise

Horizontal

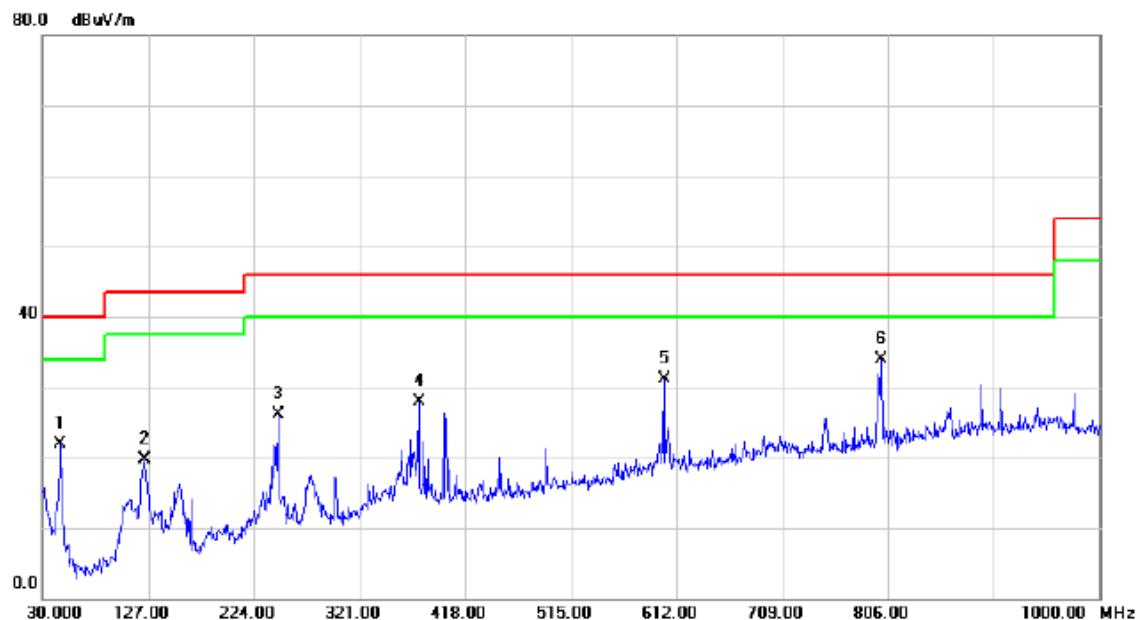


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		46.4900	41.03	-19.16	21.87	40.00	-18.13	QP
2		123.1200	42.28	-22.63	19.65	43.50	-23.85	QP
3		246.3100	43.64	-17.47	26.17	46.00	-19.83	QP
4		375.3200	41.39	-13.43	27.96	46.00	-18.04	QP
5		600.3600	39.86	-8.78	31.08	46.00	-14.92	QP
6	*	800.1800	40.24	-6.34	33.90	46.00	-12.10	QP

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: Unirise


Vertical

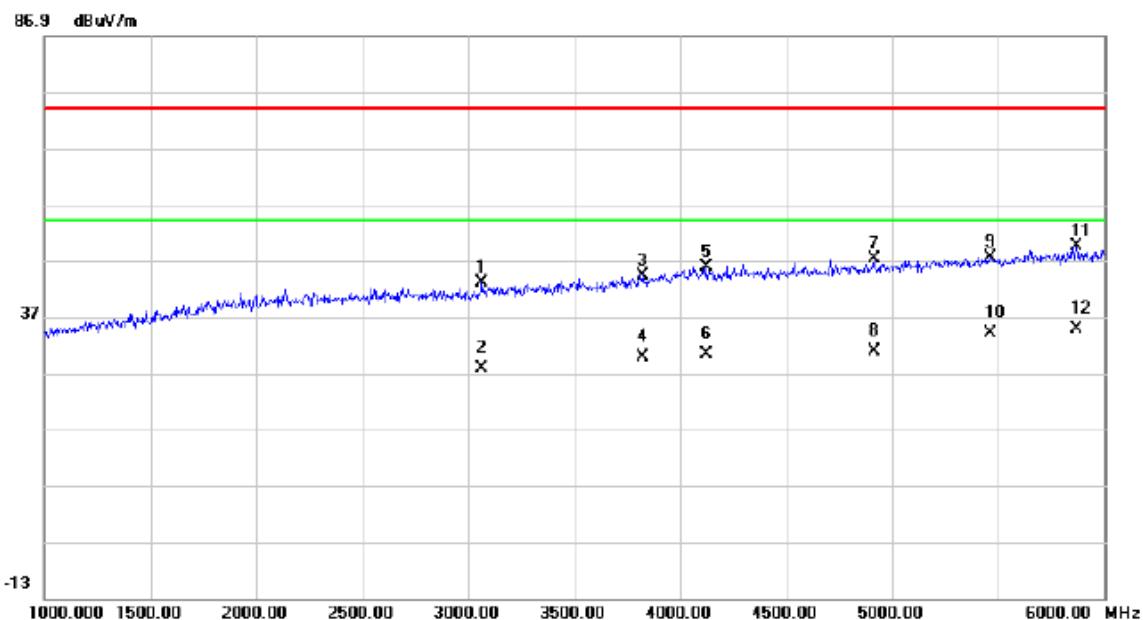

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		3065.000	42.66	0.26	42.92	74.00	-31.08	peak
2		3065.000	27.50	0.26	27.76	54.00	-26.24	AVG
3		3825.000	40.92	3.35	44.27	74.00	-29.73	peak
4		3825.000	26.50	3.35	29.85	54.00	-24.15	AVG
5		4120.000	41.44	4.45	45.89	74.00	-28.11	peak
6		4120.000	25.90	4.45	30.35	54.00	-23.65	AVG
7		4915.000	41.26	6.12	47.38	74.00	-26.62	peak
8		4915.000	24.60	6.12	30.72	54.00	-23.28	AVG
9		5465.000	40.02	7.58	47.60	74.00	-26.40	peak
10		5465.000	26.40	7.58	33.98	54.00	-20.02	AVG
11		5870.000	41.10	8.36	49.46	74.00	-24.54	peak
12	*	5870.000	26.50	8.36	34.86	54.00	-19.14	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: Unirise


Horizontal

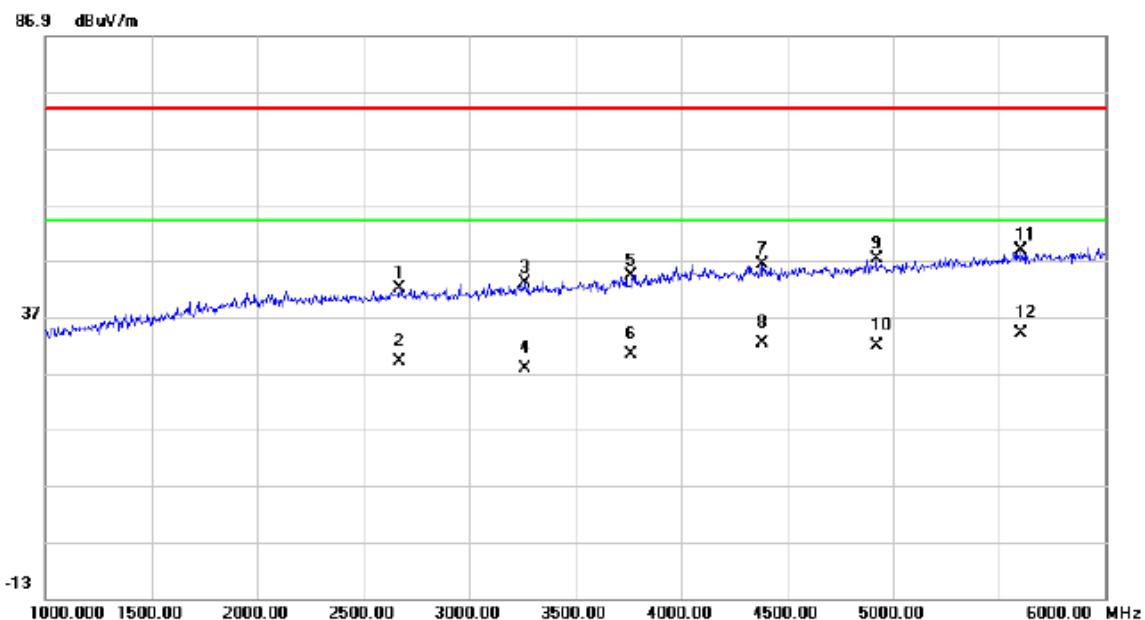

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		2670.000	42.49	-0.41	42.08	74.00	-31.92	peak
2		2670.000	29.50	-0.41	29.09	54.00	-24.91	AVG
3		3260.000	42.10	0.86	42.96	74.00	-31.04	peak
4		3260.000	26.80	0.86	27.66	54.00	-26.34	AVG
5		3765.000	41.36	3.02	44.38	74.00	-29.62	peak
6		3765.000	27.20	3.02	30.22	54.00	-23.78	AVG
7		4385.000	41.45	4.83	46.28	74.00	-27.72	peak
8		4385.000	27.40	4.83	32.23	54.00	-21.77	AVG
9		4920.000	41.06	6.13	47.19	74.00	-26.81	peak
10		4920.000	25.60	6.13	31.73	54.00	-22.27	AVG
11		5605.000	40.88	7.86	48.74	74.00	-25.26	peak
12	*	5605.000	26.10	7.86	33.96	54.00	-20.04	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: Unirise


Vertical

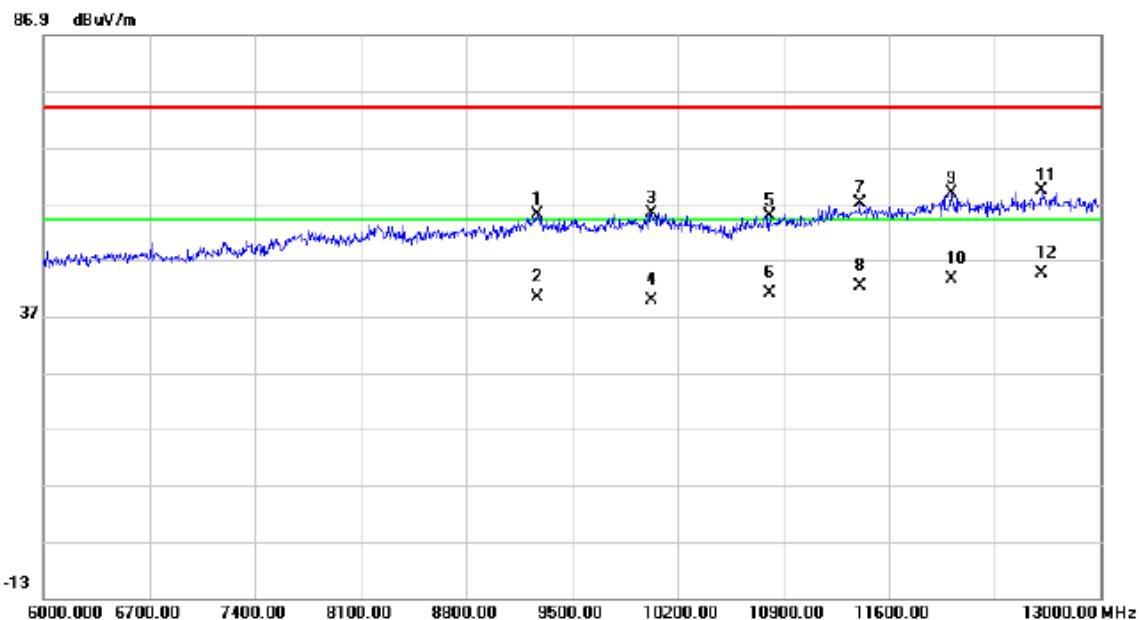

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
MHz		dB _{uV}		dB	dB _{uV/m}	dB _{uV/m}	dB		
1	9269.000	41.60	13.47	55.07	74.00	-18.93	peak		
2	9269.000	26.70	13.47	40.17	54.00	-13.83	AVG		
3	10025.00	40.97	14.32	55.29	74.00	-18.71	peak		
4	10025.00	25.40	14.32	39.72	54.00	-14.28	AVG		
5	10809.00	39.94	14.95	54.89	74.00	-19.11	peak		
6	10809.00	26.10	14.95	41.05	54.00	-12.95	AVG		
7	11404.00	40.30	16.71	57.01	74.00	-16.99	peak		
8	11404.00	25.64	16.71	42.35	54.00	-11.65	AVG		
9	12013.00	40.99	17.74	58.73	74.00	-15.27	peak		
10	12013.00	25.90	17.74	43.64	54.00	-10.36	AVG		
11	12608.00	40.98	18.19	59.17	74.00	-14.83	peak		
12	*	26.30	18.19	44.49	54.00	-9.51	AVG		

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: Unirise


Horizontal

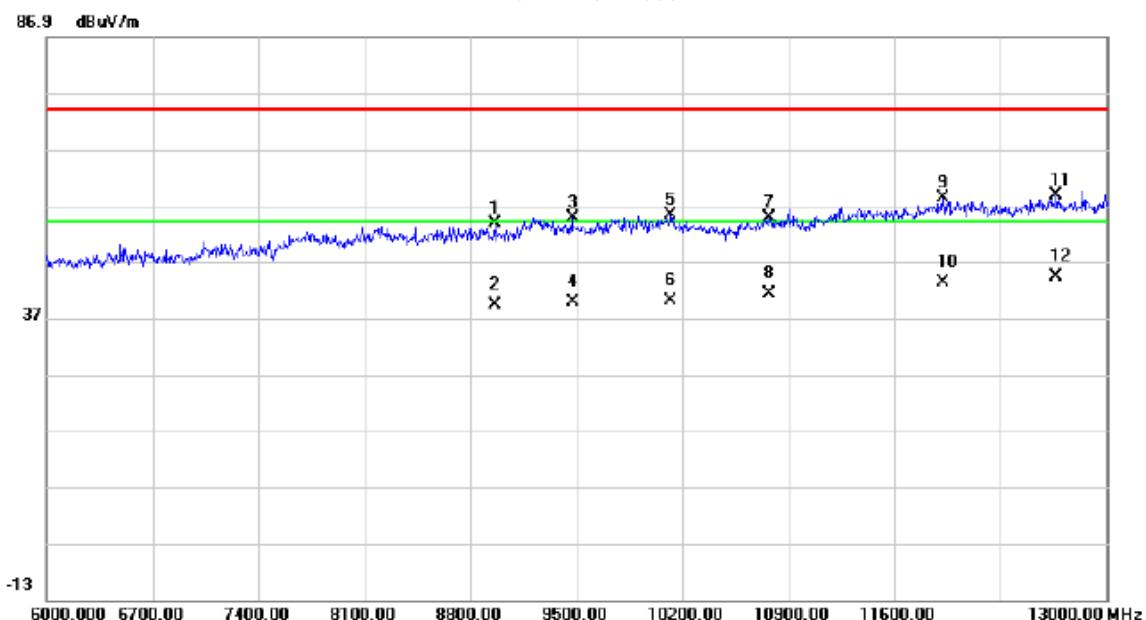

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		8961.000	40.47	13.26	53.73	74.00	-20.27	peak	
2		8961.000	26.10	13.26	39.36	54.00	-14.64	AVG	
3		9472.000	41.18	13.58	54.76	74.00	-19.24	peak	
4		9472.000	26.10	13.58	39.68	54.00	-14.32	AVG	
5		10123.00	40.98	14.18	55.16	74.00	-18.84	peak	
6		10123.00	25.90	14.18	40.08	54.00	-13.92	AVG	
7		10774.00	39.92	14.81	54.73	74.00	-19.27	peak	
8		10774.00	26.40	14.81	41.21	54.00	-12.79	AVG	
9		11922.00	40.59	17.61	58.20	74.00	-15.80	peak	
10		11922.00	25.60	17.61	43.21	54.00	-10.79	AVG	
11		12671.00	40.49	18.30	58.79	74.00	-15.21	peak	
12	*	12671.00	26.10	18.30	44.40	54.00	-9.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Speaker
Note:	Adapter: BYD +USB Cable: Unirise


Vertical

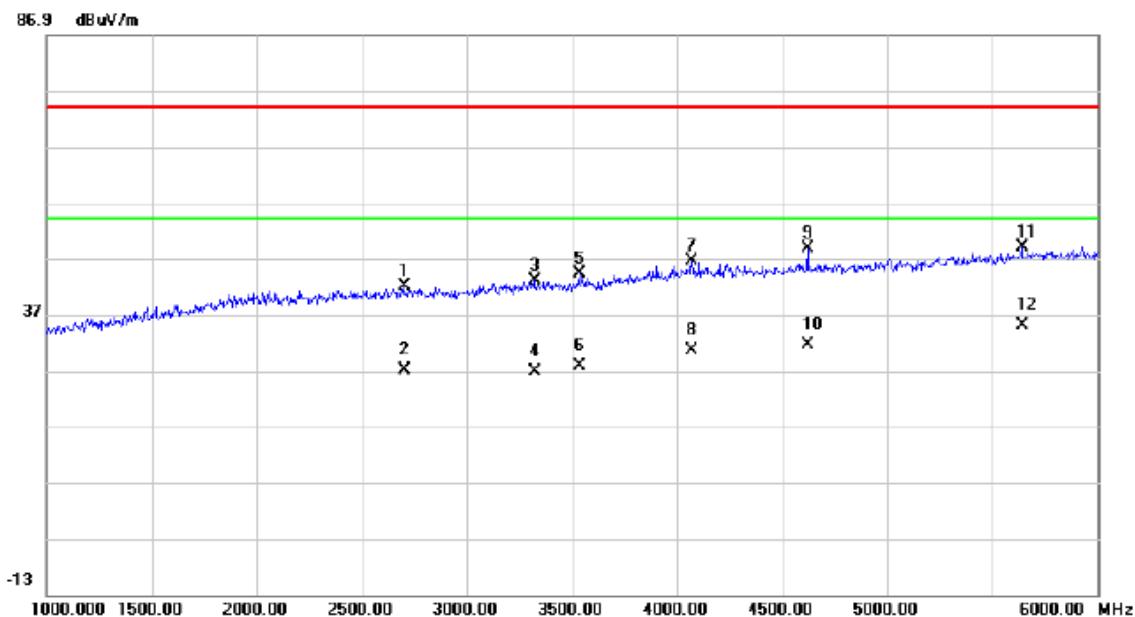

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2700.000	42.44	-0.37	42.07	74.00	-31.93	peak	
2		2700.000	27.50	-0.37	27.13	54.00	-26.87	AVG	
3		3320.000	41.95	1.06	43.01	74.00	-30.99	peak	
4		3320.000	25.60	1.06	26.66	54.00	-27.34	AVG	
5		3535.000	42.38	1.80	44.18	74.00	-29.82	peak	
6		3535.000	25.90	1.80	27.70	54.00	-26.30	AVG	
7		4070.000	42.17	4.38	46.55	74.00	-27.45	peak	
8		4070.000	26.20	4.38	30.58	54.00	-23.42	AVG	
9		4620.000	43.57	5.33	48.90	74.00	-25.10	peak	
10		4620.000	26.30	5.33	31.63	54.00	-22.37	AVG	
11		5640.000	41.03	7.93	48.96	74.00	-25.04	peak	
12	*	5640.000	27.20	7.93	35.13	54.00	-18.87	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Speaker
Note:	Adapter: BYD +USB Cable: Unirise


Horizontal

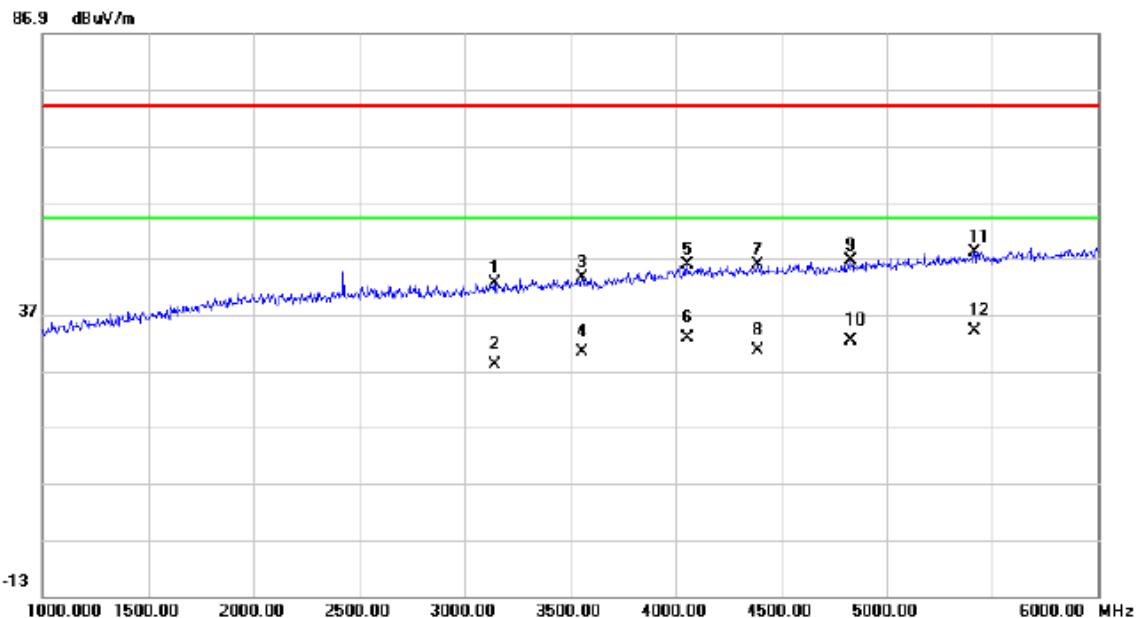

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3140.000	42.11	0.50	42.61	74.00	-31.39	peak	
2		3140.000	27.60	0.50	28.10	54.00	-25.90	AVG	
3		3555.000	41.75	1.90	43.65	74.00	-30.35	peak	
4		3555.000	28.50	1.90	30.40	54.00	-23.60	AVG	
5		4055.000	41.36	4.36	45.72	74.00	-28.28	peak	
6		4055.000	28.30	4.36	32.66	54.00	-21.34	AVG	
7		4390.000	41.02	4.84	45.86	74.00	-28.14	peak	
8		4390.000	25.60	4.84	30.44	54.00	-23.56	AVG	
9		4830.000	40.75	5.88	46.63	74.00	-27.37	peak	
10		4830.000	26.50	5.88	32.38	54.00	-21.62	AVG	
11		5415.000	40.57	7.44	48.01	74.00	-25.99	peak	
12	*	5415.000	26.70	7.44	34.14	54.00	-19.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Speaker
Note:	Adapter: BYD +USB Cable: Unirise


Vertical

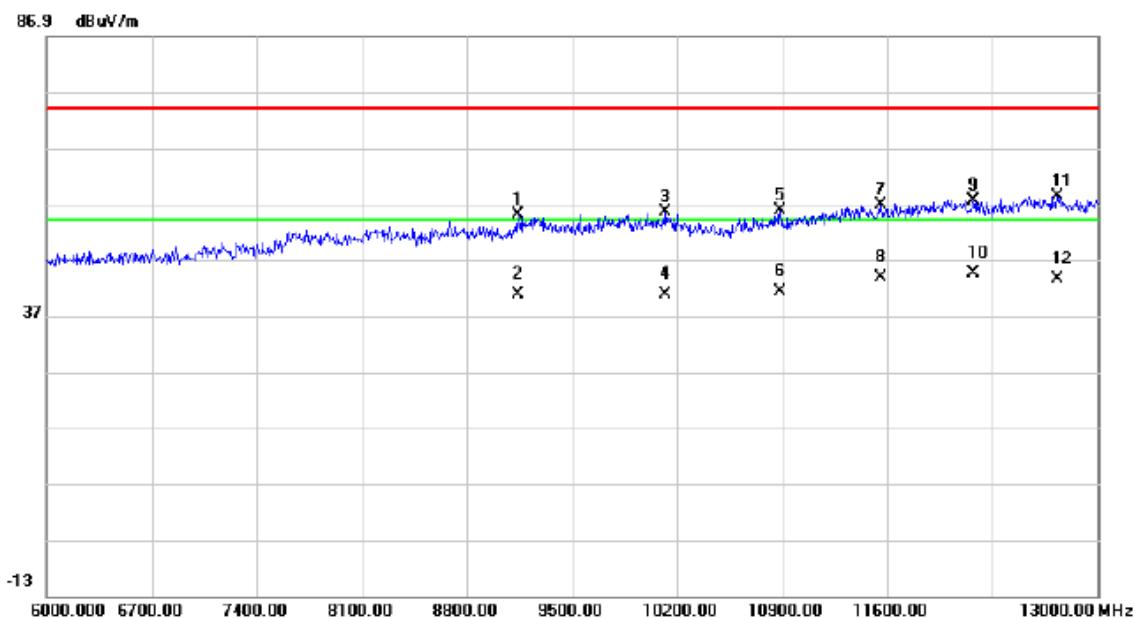

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		9136.000	41.66	13.39	55.05	74.00	-18.95	peak	
2		9136.000	27.50	13.39	40.89	54.00	-13.11	AVG	
3		10123.00	41.43	14.18	55.61	74.00	-18.39	peak	
4		10123.00	26.50	14.18	40.68	54.00	-13.32	AVG	
5		10886.00	40.48	15.28	55.76	74.00	-18.24	peak	
6		10886.00	25.90	15.28	41.18	54.00	-12.82	AVG	
7		11558.00	39.63	17.03	56.66	74.00	-17.34	peak	
8		11558.00	26.70	17.03	43.73	54.00	-10.27	AVG	
9		12174.00	39.74	17.82	57.56	74.00	-16.44	peak	
10	*	12174.00	26.70	17.82	44.52	54.00	-9.48	AVG	
11		12734.00	39.90	18.41	58.31	74.00	-15.69	peak	
12		12734.00	25.10	18.41	43.51	54.00	-10.49	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Playing+Speaker
Note:	Adapter: BYD +USB Cable: Unirise


Horizontal

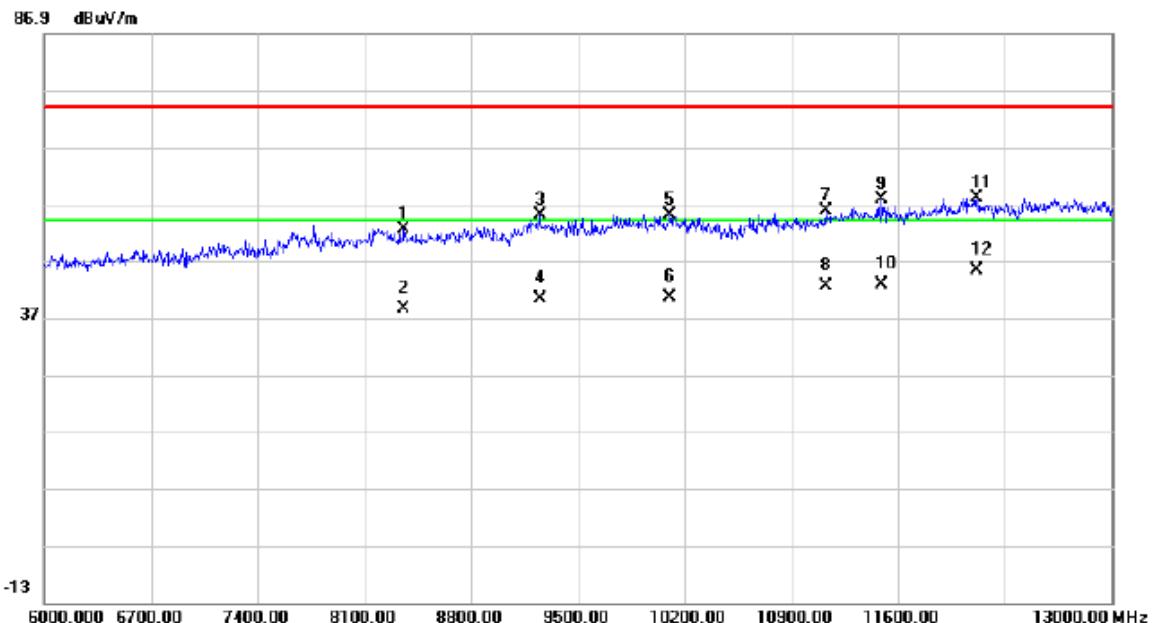

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		8359.000	40.00	12.50	52.50	74.00	-21.50	peak
2		8359.000	26.10	12.50	38.60	54.00	-15.40	AVG
3		9248.000	41.52	13.45	54.97	74.00	-19.03	peak
4		9248.000	26.80	13.45	40.25	54.00	-13.75	AVG
5		10102.00	40.73	14.22	54.95	74.00	-19.05	peak
6		10102.00	26.40	14.22	40.62	54.00	-13.38	AVG
7		11124.00	39.64	16.05	55.69	74.00	-18.31	peak
8		11124.00	26.50	16.05	42.55	54.00	-11.45	AVG
9		11495.00	40.94	16.92	57.86	74.00	-16.14	peak
10		11495.00	25.80	16.92	42.72	54.00	-11.28	AVG
11		12118.00	40.34	17.79	58.13	74.00	-15.87	peak
12	*	12118.00	27.60	17.79	45.39	54.00	-8.61	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Unirise


Vertical

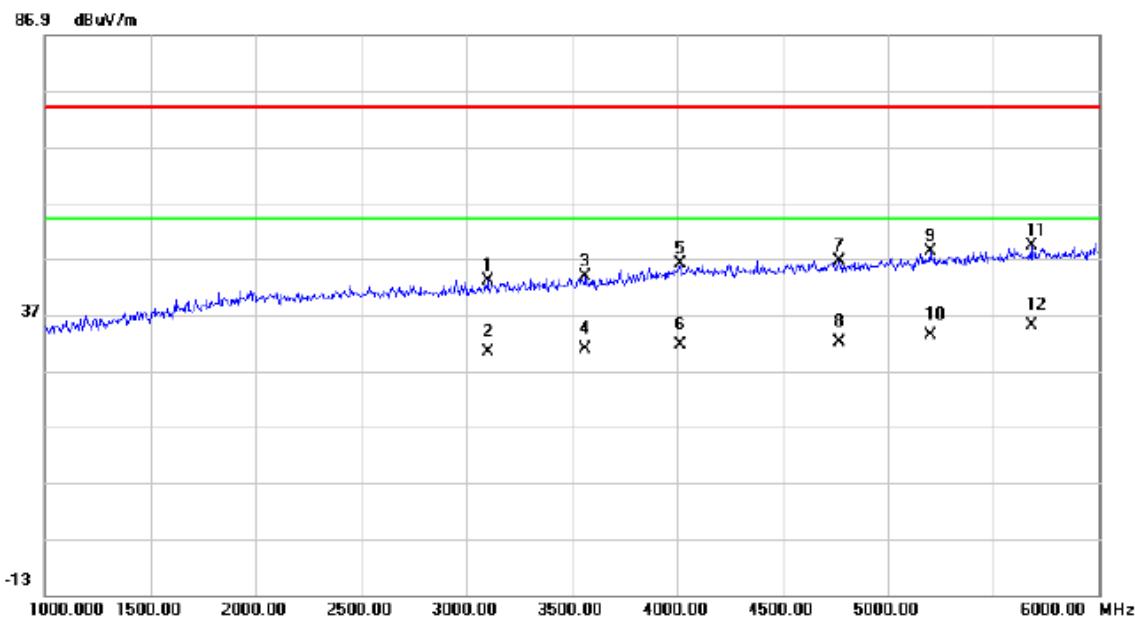

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		3100.000	42.70	0.36	43.06	74.00	-30.94	peak	
2		3100.000	29.90	0.36	30.26	54.00	-23.74	AVG	
3		3565.000	41.94	1.96	43.90	74.00	-30.10	peak	
4		3565.000	28.70	1.96	30.66	54.00	-23.34	AVG	
5		4015.000	41.62	4.30	45.92	74.00	-28.08	peak	
6		4015.000	27.20	4.30	31.50	54.00	-22.50	AVG	
7		4770.000	40.82	5.73	46.55	74.00	-27.45	peak	
8		4770.000	26.30	5.73	32.03	54.00	-21.97	AVG	
9		5200.000	41.52	6.87	48.39	74.00	-25.61	peak	
10		5200.000	26.50	6.87	33.37	54.00	-20.63	AVG	
11		5680.000	41.31	8.01	49.32	74.00	-24.68	peak	
12 *		5680.000	26.90	8.01	34.91	54.00	-19.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Unirise


Horizontal

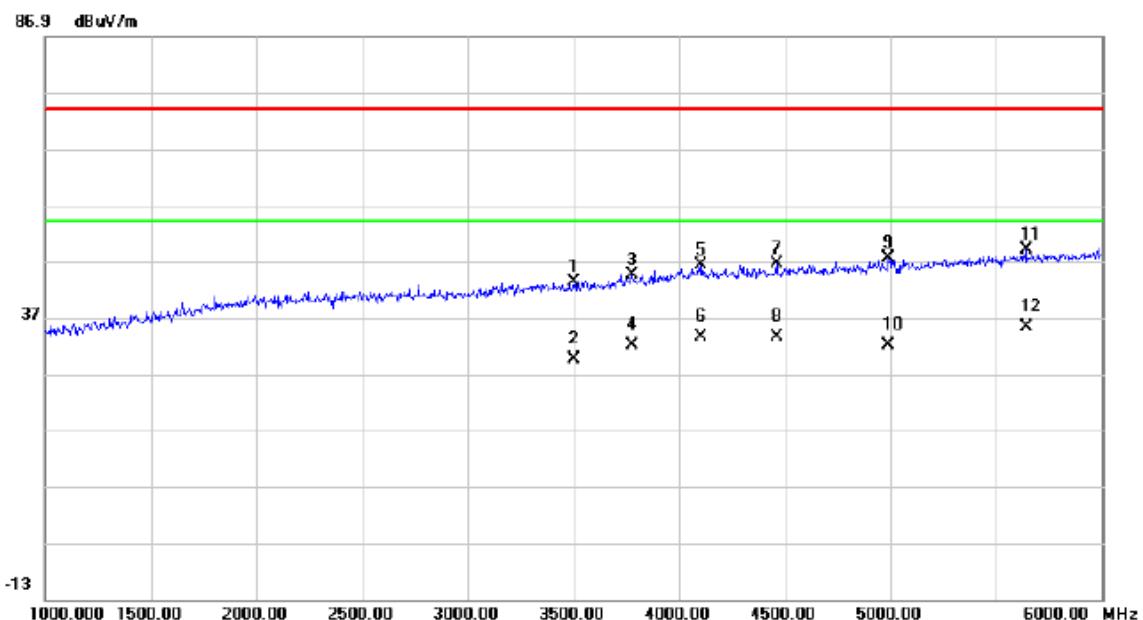

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		3500.000	41.72	1.61	43.33	74.00	-30.67	peak	
2		3500.000	27.90	1.61	29.51	54.00	-24.49	AVG	
3		3775.000	41.48	3.09	44.57	74.00	-29.43	peak	
4		3775.000	28.90	3.09	31.99	54.00	-22.01	AVG	
5		4105.000	41.86	4.43	46.29	74.00	-27.71	peak	
6		4105.000	29.10	4.43	33.53	54.00	-20.47	AVG	
7		4460.000	41.50	4.95	46.45	74.00	-27.55	peak	
8		4460.000	28.50	4.95	33.45	54.00	-20.55	AVG	
9		4990.000	41.20	6.32	47.52	74.00	-26.48	peak	
10		4990.000	25.60	6.32	31.92	54.00	-22.08	AVG	
11		5640.000	41.16	7.93	49.09	74.00	-24.91	peak	
12 *		5640.000	27.40	7.93	35.33	54.00	-18.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Unirise


Vertical

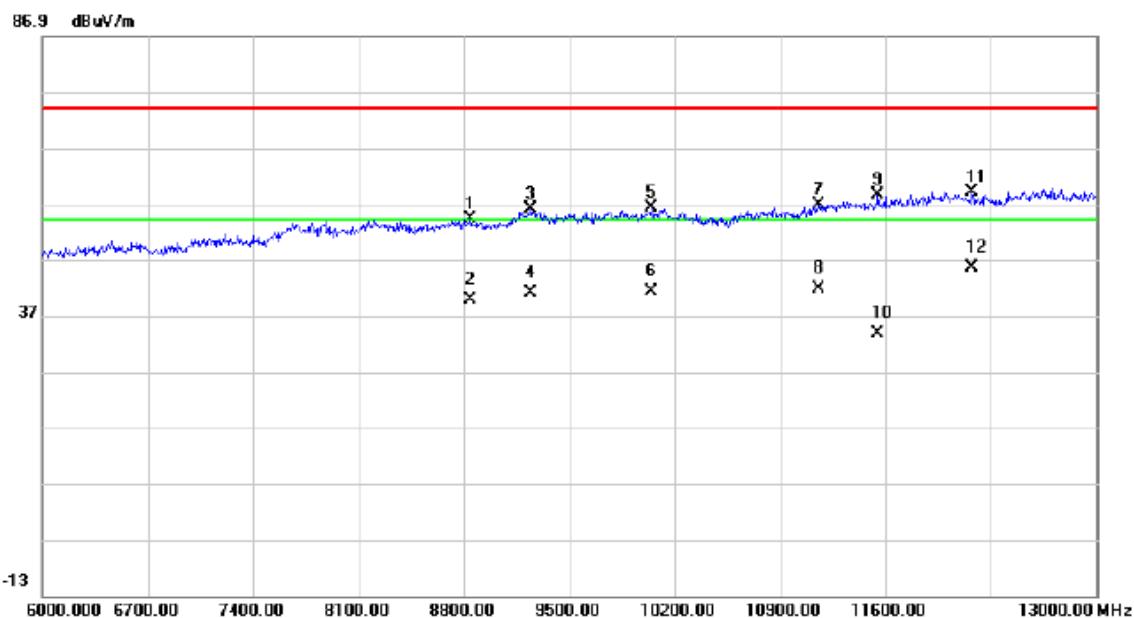

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		8842.000	41.12	13.05	54.17	74.00	-19.83	peak	
2		8842.000	26.70	13.05	39.75	54.00	-14.25	AVG	
3		9241.000	42.62	13.45	56.07	74.00	-17.93	peak	
4		9241.000	27.50	13.45	40.95	54.00	-13.05	AVG	
5		10046.00	41.88	14.29	56.17	74.00	-17.83	peak	
6		10046.00	26.90	14.29	41.19	54.00	-12.81	AVG	
7		11159.00	40.77	16.13	56.90	74.00	-17.10	peak	
8		11159.00	25.60	16.13	41.73	54.00	-12.27	AVG	
9		11551.00	41.47	17.02	58.49	74.00	-15.51	peak	
10		11551.00	16.70	17.02	33.72	54.00	-20.28	AVG	
11		12174.00	41.32	17.82	59.14	74.00	-14.86	peak	
12	*	12174.00	27.80	17.82	45.62	54.00	-8.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Unirise


Horizontal

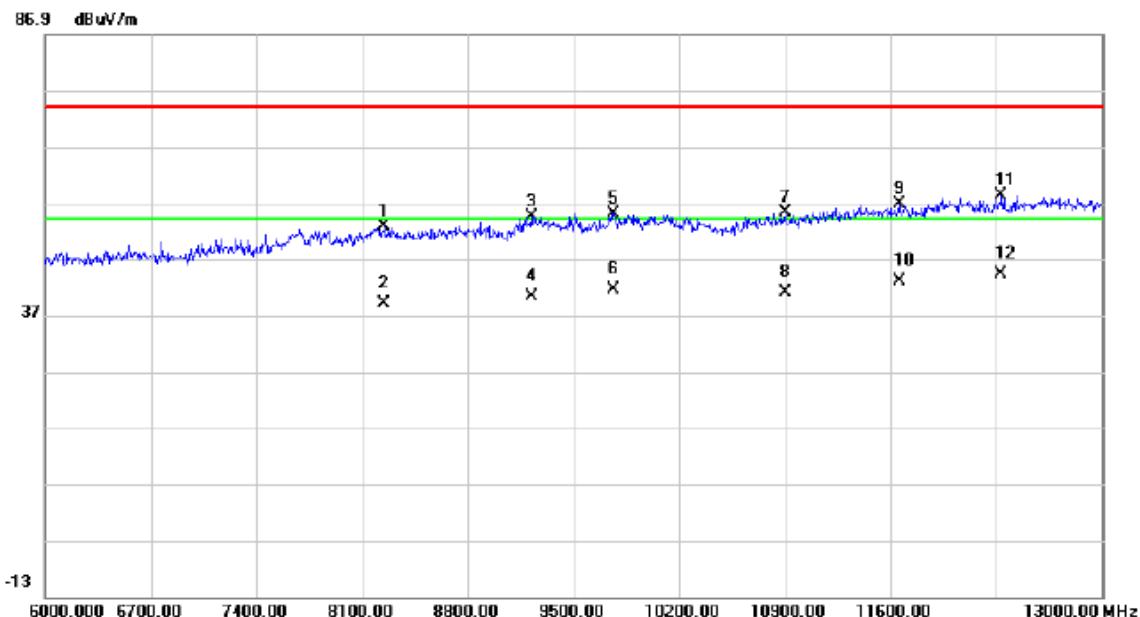

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment	
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		8247.000	40.15	12.56	52.71	74.00	-21.29	peak	
2		8247.000	26.40	12.56	38.96	54.00	-15.04	AVG	
3		9220.000	41.14	13.44	54.58	74.00	-19.42	peak	
4		9220.000	26.90	13.44	40.34	54.00	-13.66	AVG	
5		9766.000	41.10	13.99	55.09	74.00	-18.91	peak	
6		9766.000	27.50	13.99	41.49	54.00	-12.51	AVG	
7		10900.00	39.85	15.34	55.19	74.00	-18.81	peak	
8		10900.00	25.60	15.34	40.94	54.00	-13.06	AVG	
9		11656.00	39.71	17.18	56.89	74.00	-17.11	peak	
10		11656.00	25.90	17.18	43.08	54.00	-10.92	AVG	
11		12335.00	40.32	17.90	58.22	74.00	-15.78	peak	
12	*	12335.00	26.40	17.90	44.30	54.00	-9.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Unirise


Vertical

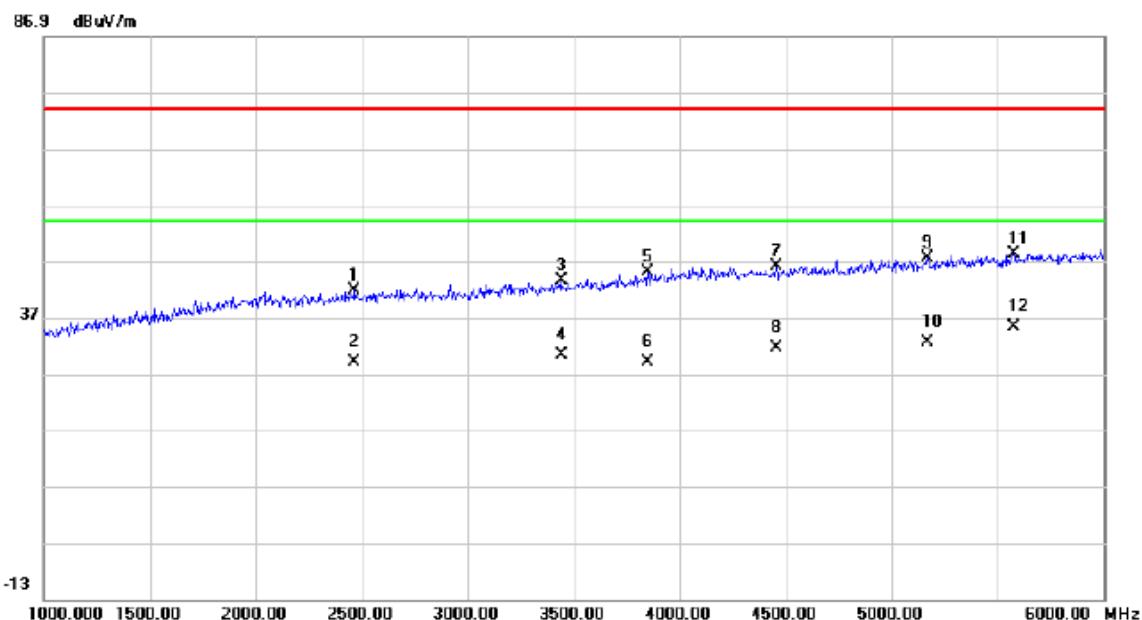

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2465.000	42.44	-0.70	41.74	74.00	-32.26	peak	
2		2465.000	29.80	-0.70	29.10	54.00	-24.90	AVG	
3		3440.000	42.04	1.43	43.47	74.00	-30.53	peak	
4		3440.000	28.90	1.43	30.33	54.00	-23.67	AVG	
5		3850.000	41.44	3.48	44.92	74.00	-29.08	peak	
6		3850.000	25.60	3.48	29.08	54.00	-24.92	AVG	
7		4455.000	41.06	4.94	46.00	74.00	-28.00	peak	
8		4455.000	26.50	4.94	31.44	54.00	-22.56	AVG	
9		5170.000	40.66	6.79	47.45	74.00	-26.55	peak	
10		5170.000	25.80	6.79	32.59	54.00	-21.41	AVG	
11		5575.000	40.48	7.80	48.28	74.00	-25.72	peak	
12	*	5575.000	27.60	7.80	35.40	54.00	-18.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Unirise


Horizontal

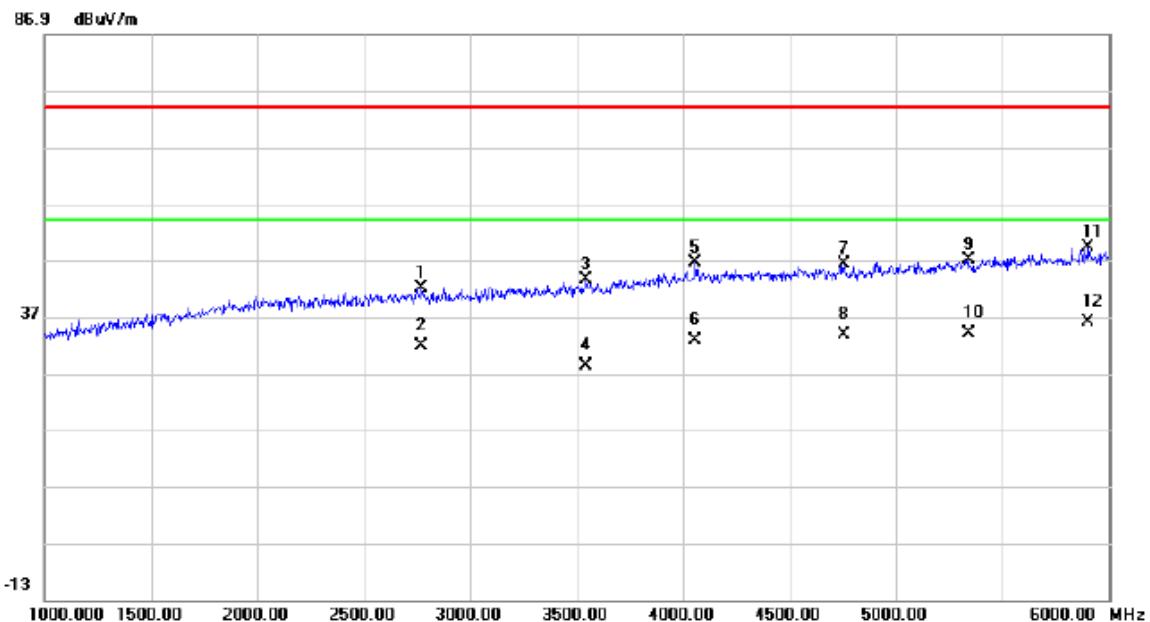

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	2770.000	42.35	-0.28	42.07	74.00	-31.93	peak		
2	2770.000	32.10	-0.28	31.82	54.00	-22.18	AVG		
3	3545.000	41.58	1.86	43.44	74.00	-30.56	peak		
4	3545.000	26.50	1.86	28.36	54.00	-25.64	AVG		
5	4055.000	42.09	4.36	46.45	74.00	-27.55	peak		
6	4055.000	28.50	4.36	32.86	54.00	-21.14	AVG		
7	4755.000	40.52	5.69	46.21	74.00	-27.79	peak		
8	4755.000	28.20	5.69	33.89	54.00	-20.11	AVG		
9	5340.000	39.77	7.24	47.01	74.00	-26.99	peak		
10	5340.000	26.74	7.24	33.98	54.00	-20.02	AVG		
11	5905.000	40.75	8.43	49.18	74.00	-24.82	peak		
12 *	5905.000	27.50	8.43	35.93	54.00	-18.07	AVG		

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Unirise


Vertical

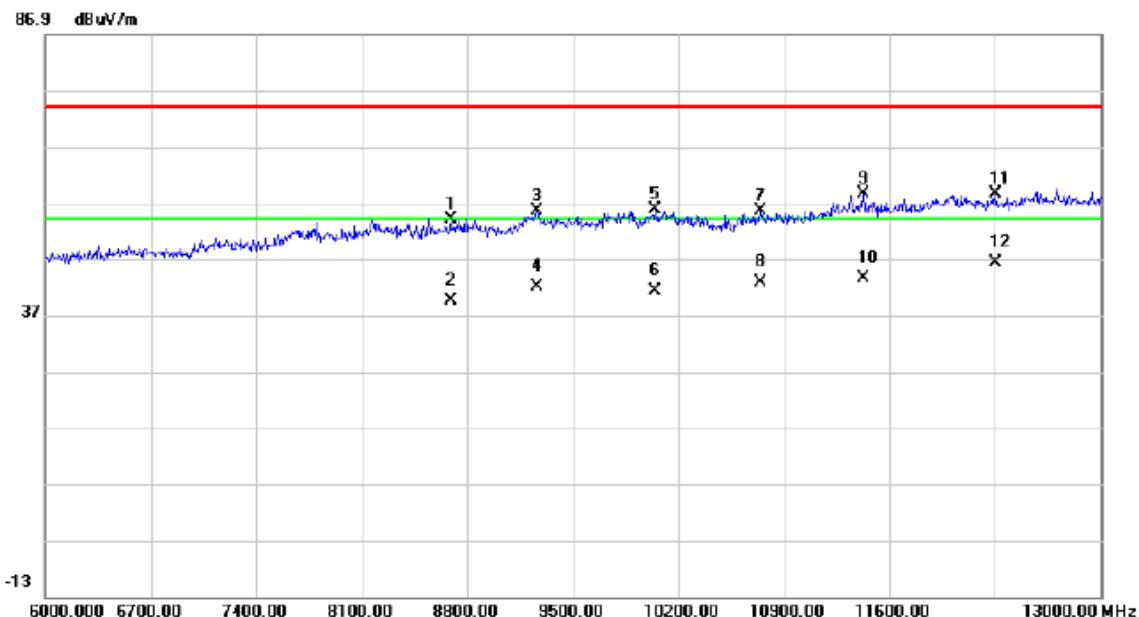

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		8688.000	41.37	12.78	54.15	74.00	-19.85	peak	
2		8688.000	26.70	12.78	39.48	54.00	-14.52	AVG	
3		9262.000	42.14	13.47	55.61	74.00	-18.39	peak	
4		9262.000	28.60	13.47	42.07	54.00	-11.93	AVG	
5		10046.00	41.38	14.29	55.67	74.00	-18.33	peak	
6		10046.00	26.90	14.29	41.19	54.00	-12.81	AVG	
7		10746.00	40.89	14.69	55.58	74.00	-18.42	peak	
8		10746.00	28.20	14.69	42.89	54.00	-11.11	AVG	
9		11425.00	41.86	16.76	58.62	74.00	-15.38	peak	
10		11425.00	26.80	16.76	43.56	54.00	-10.44	AVG	
11		12300.00	40.59	17.88	58.47	74.00	-15.53	peak	
12	*	12300.00	28.30	17.88	46.18	54.00	-7.82	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Unirise


Horizontal

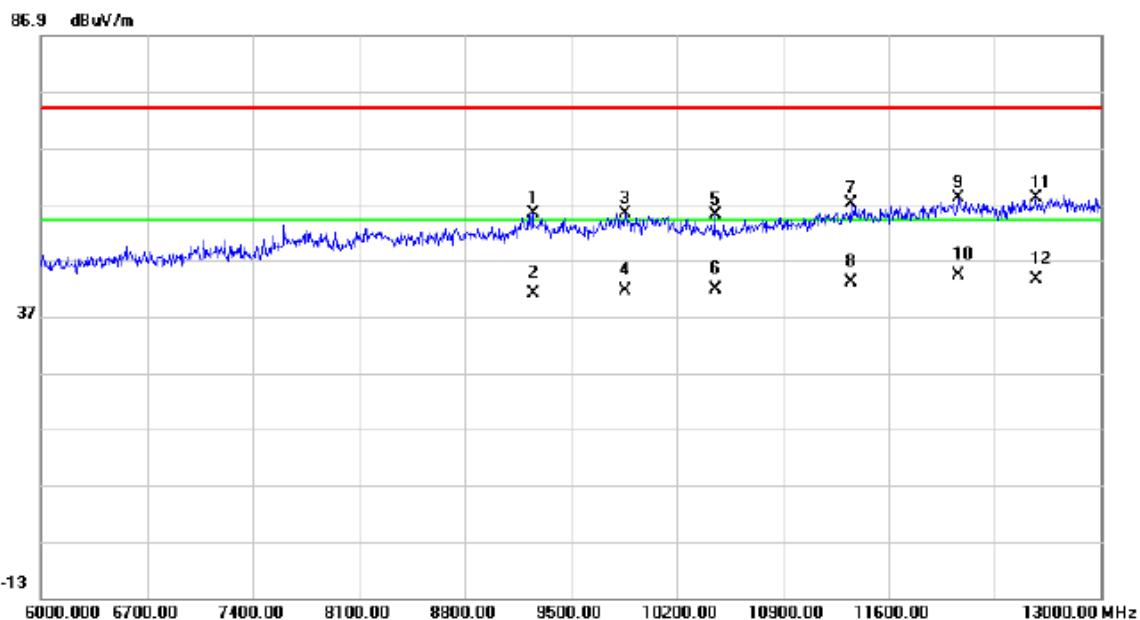

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		9248.000	41.82	13.45	55.27	74.00	-18.73	peak	
2		9248.000	27.60	13.45	41.05	54.00	-12.95	AVG	
3		9857.000	41.14	14.13	55.27	74.00	-18.73	peak	
4		9857.000	27.50	14.13	41.63	54.00	-12.37	AVG	
5		10452.00	41.21	13.74	54.95	74.00	-19.05	peak	
6		10452.00	28.10	13.74	41.84	54.00	-12.16	AVG	
7		11348.00	40.48	16.58	57.06	74.00	-16.94	peak	
8		11348.00	26.40	16.58	42.98	54.00	-11.02	AVG	
9		12062.00	40.15	17.76	57.91	74.00	-16.09	peak	
10	*	12062.00	26.63	17.76	44.39	54.00	-9.61	AVG	
11		12573.00	39.92	18.12	58.04	74.00	-15.96	peak	
12		12573.00	25.50	18.12	43.62	54.00	-10.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Unirise


Vertical

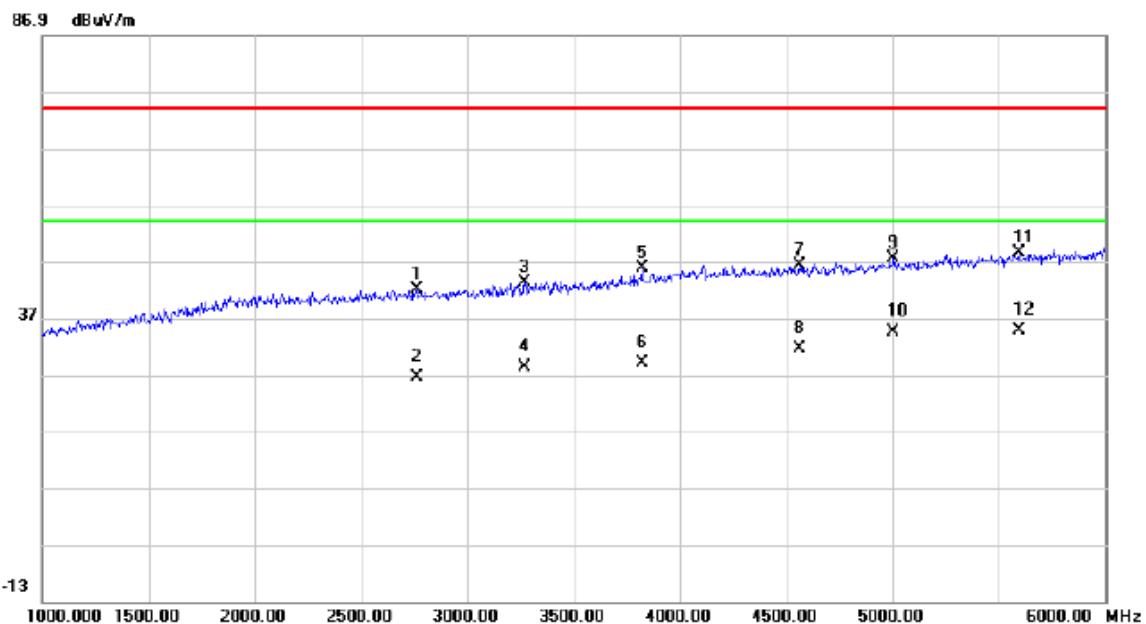

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2760.000	42.35	-0.28	42.07	74.00	-31.93	peak	
2		2760.000	26.90	-0.28	26.62	54.00	-27.38	AVG	
3		3270.000	42.50	0.90	43.40	74.00	-30.60	peak	
4		3270.000	27.50	0.90	28.40	54.00	-25.60	AVG	
5		3820.000	42.53	3.32	45.85	74.00	-28.15	peak	
6		3820.000	25.60	3.32	28.92	54.00	-25.08	AVG	
7		4560.000	41.19	5.16	46.35	74.00	-27.65	peak	
8		4560.000	26.30	5.16	31.46	54.00	-22.54	AVG	
9		5005.000	41.16	6.35	47.51	74.00	-26.49	peak	
10		5005.000	28.20	6.35	34.55	54.00	-19.45	AVG	
11		5595.000	40.58	7.85	48.43	74.00	-25.57	peak	
12	*	5595.000	26.90	7.85	34.75	54.00	-19.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Unirise


Horizontal

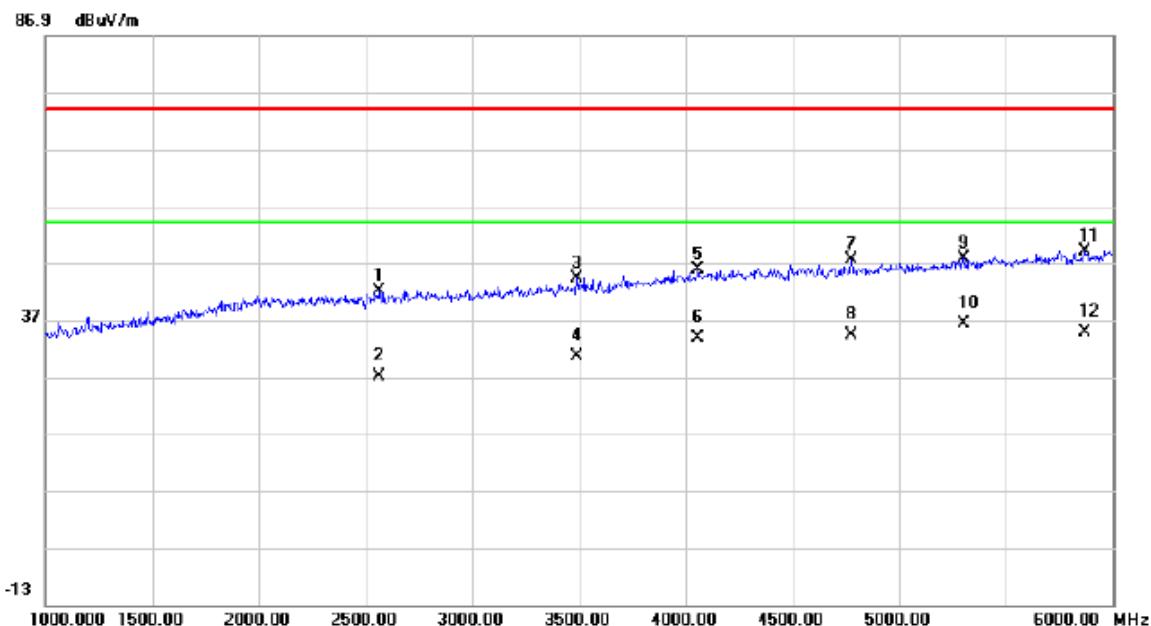

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2560.000	42.65	-0.57	42.08	74.00	-31.92	peak	
2		2560.000	27.60	-0.57	27.03	54.00	-26.97	AVG	
3		3490.000	42.60	1.58	44.18	74.00	-29.82	peak	
4		3490.000	28.96	1.58	30.54	54.00	-23.46	AVG	
5		4055.000	41.31	4.36	45.67	74.00	-28.33	peak	
6		4055.000	29.30	4.36	33.66	54.00	-20.34	AVG	
7		4775.000	41.78	5.74	47.52	74.00	-26.48	peak	
8		4775.000	28.60	5.74	34.34	54.00	-19.66	AVG	
9		5300.000	40.61	7.14	47.75	74.00	-26.25	peak	
10	*	5300.000	29.10	7.14	36.24	54.00	-17.76	AVG	
11		5870.000	40.68	8.36	49.04	74.00	-24.96	peak	
12		5870.000	26.50	8.36	34.86	54.00	-19.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Unirise


Vertical

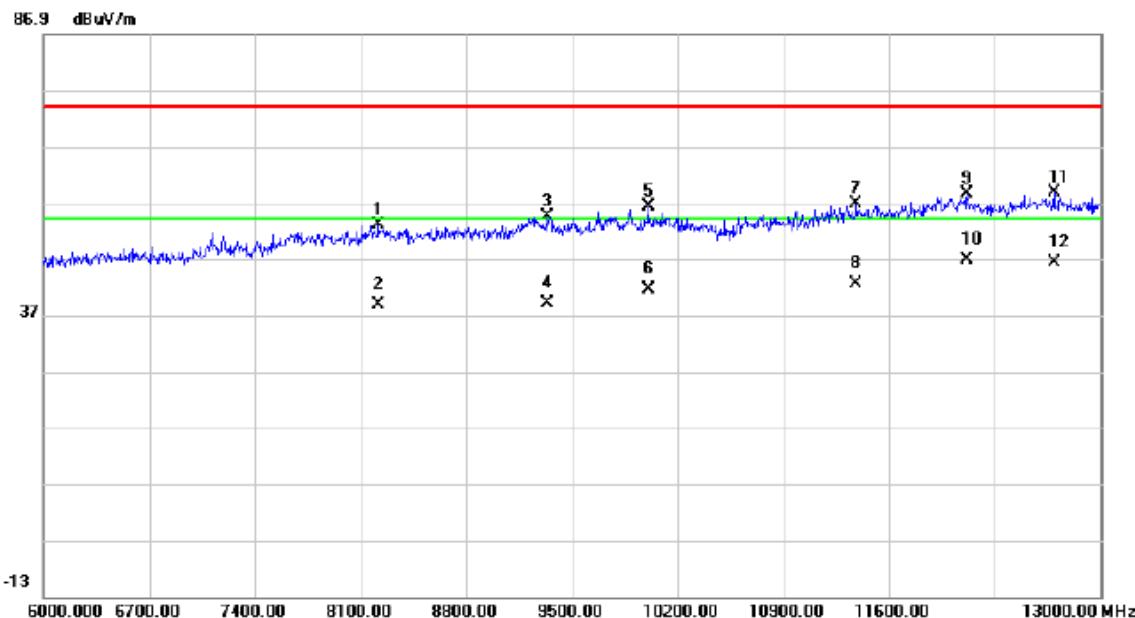

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		8219.000	40.56	12.57	53.13	74.00	-20.87	peak
2		8219.000	26.20	12.57	38.77	54.00	-15.23	AVG
3		9332.000	40.96	13.49	54.45	74.00	-19.55	peak
4		9332.000	25.60	13.49	39.09	54.00	-14.91	AVG
5		10004.00	42.01	14.34	56.35	74.00	-17.65	peak
6		10004.00	27.10	14.34	41.44	54.00	-12.56	AVG
7		11383.00	40.00	16.66	56.66	74.00	-17.34	peak
8		11383.00	25.90	16.66	42.56	54.00	-11.44	AVG
9		12118.00	40.72	17.79	58.51	74.00	-15.49	peak
10	*	12118.00	28.90	17.79	46.69	54.00	-7.31	AVG
11		12692.00	40.38	18.33	58.71	74.00	-15.29	peak
12		12692.00	27.90	18.33	46.23	54.00	-7.77	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Unirise


Horizontal

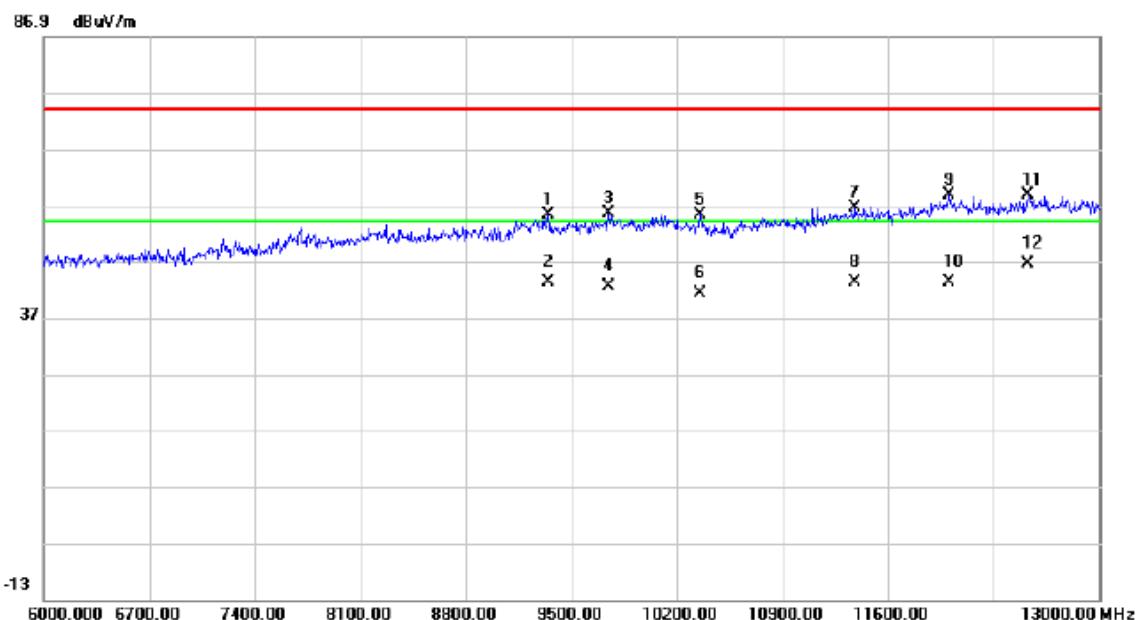

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		9346.000	41.70	13.50	55.20	74.00	-18.80	peak	
2		9346.000	29.80	13.50	43.30	54.00	-10.70	AVG	
3		9745.000	41.58	13.96	55.54	74.00	-18.46	peak	
4		9745.000	28.60	13.96	42.56	54.00	-11.44	AVG	
5		10354.00	41.54	13.86	55.40	74.00	-18.60	peak	
6		10354.00	27.50	13.86	41.36	54.00	-12.64	AVG	
7		11383.00	39.98	16.66	56.64	74.00	-17.36	peak	
8		11383.00	26.50	16.66	43.16	54.00	-10.84	AVG	
9		12006.00	41.04	17.73	58.77	74.00	-15.23	peak	
10		12006.00	25.60	17.73	43.33	54.00	-10.67	AVG	
11		12524.00	40.78	18.03	58.81	74.00	-15.19	peak	
12 *		12524.00	28.40	18.03	46.43	54.00	-7.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Unirise


Vertical

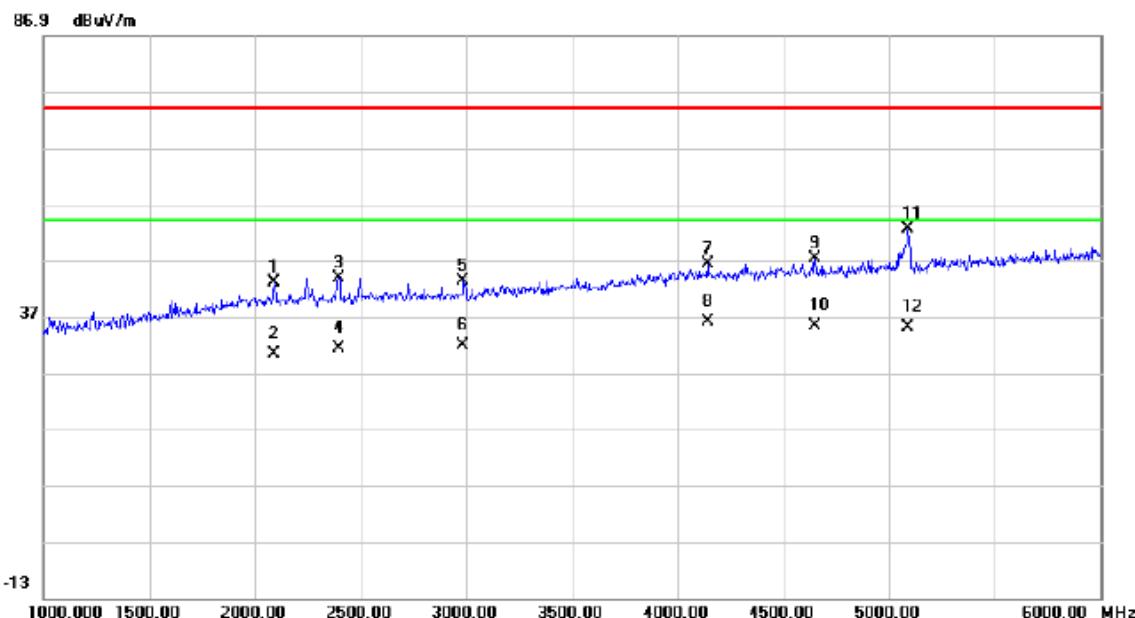

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		2090.000	44.10	-1.13	42.97	74.00	-31.03	peak
2		2090.000	31.50	-1.13	30.37	54.00	-23.63	AVG
3		2395.000	44.65	-0.77	43.88	74.00	-30.12	peak
4		2395.000	32.10	-0.77	31.33	54.00	-22.67	AVG
5		2985.000	43.31	0.03	43.34	74.00	-30.66	peak
6		2985.000	31.80	0.03	31.83	54.00	-22.17	AVG
7		4140.000	41.83	4.48	46.31	74.00	-27.69	peak
8	*	4140.000	31.50	4.48	35.98	54.00	-18.02	AVG
9		4650.000	41.97	5.40	47.37	74.00	-26.63	peak
10		4650.000	29.80	5.40	35.20	54.00	-18.80	AVG
11		5090.000	45.91	6.58	52.49	74.00	-21.51	peak
12		5090.000	28.50	6.58	35.08	54.00	-18.92	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable:


Horizontal

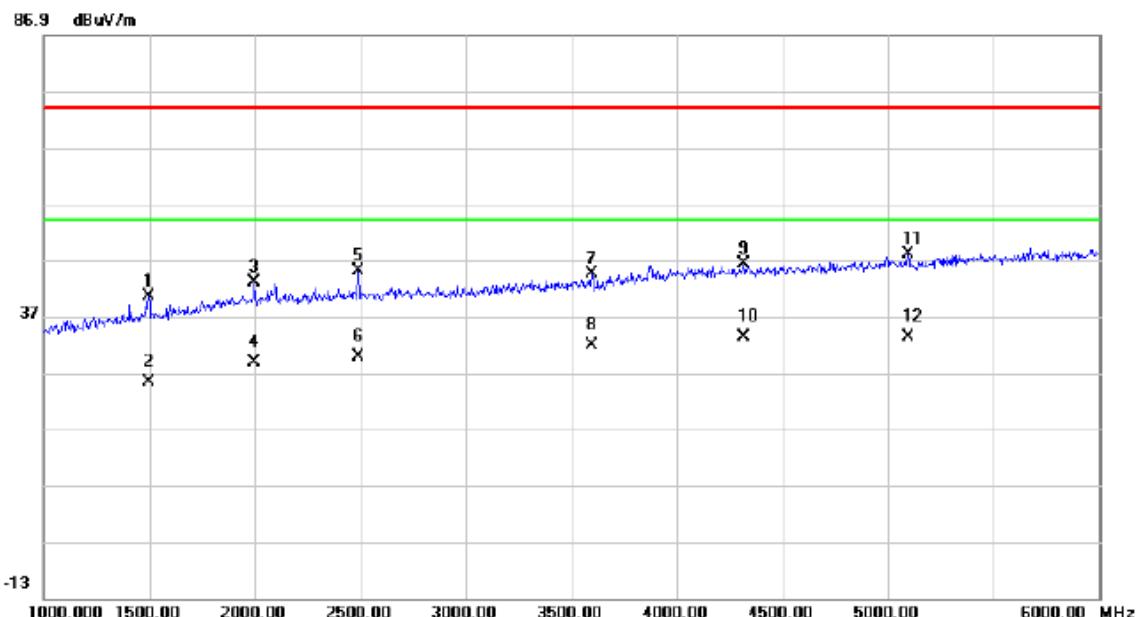

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		1495.000	45.44	-4.81	40.63	74.00	-33.37	peak
2		1495.000	30.20	-4.81	25.39	54.00	-28.61	AVG
3		1995.000	44.23	-1.26	42.97	74.00	-31.03	peak
4		1995.000	30.10	-1.26	28.84	54.00	-25.16	AVG
5		2490.000	45.68	-0.67	45.01	74.00	-28.99	peak
6		2490.000	30.50	-0.67	29.83	54.00	-24.17	AVG
7		3595.000	42.31	2.13	44.44	74.00	-29.56	peak
8		3595.000	29.60	2.13	31.73	54.00	-22.27	AVG
9		4315.000	41.46	4.74	46.20	74.00	-27.80	peak
10	*	4315.000	28.60	4.74	33.34	54.00	-20.66	AVG
11		5095.000	41.42	6.59	48.01	74.00	-25.99	peak
12		5095.000	26.70	6.59	33.29	54.00	-20.71	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Unirise


Vertical

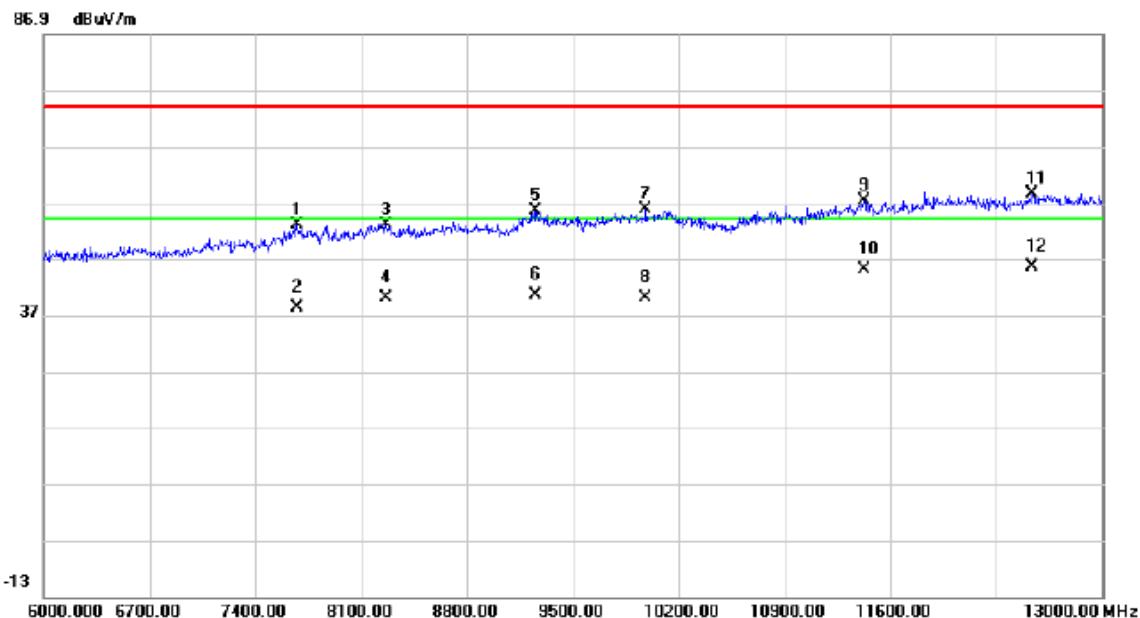

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		7673.000	41.08	11.92	53.00	74.00	-21.00	peak
2		7673.000	26.40	11.92	38.32	54.00	-15.68	AVG
3		8261.000	40.59	12.55	53.14	74.00	-20.86	peak
4		8261.000	27.50	12.55	40.05	54.00	-13.95	AVG
5		9248.000	42.05	13.45	55.50	74.00	-18.50	peak
6		9248.000	27.10	13.45	40.55	54.00	-13.45	AVG
7		9983.000	41.53	14.33	55.86	74.00	-18.14	peak
8		9983.000	25.60	14.33	39.93	54.00	-14.07	AVG
9		11425.00	40.51	16.76	57.27	74.00	-16.73	peak
10		11425.00	28.20	16.76	44.96	54.00	-9.04	AVG
11		12538.00	40.52	18.05	58.57	74.00	-15.43	peak
12	*	12538.00	27.50	18.05	45.55	54.00	-8.45	AVG

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable:


Horizontal

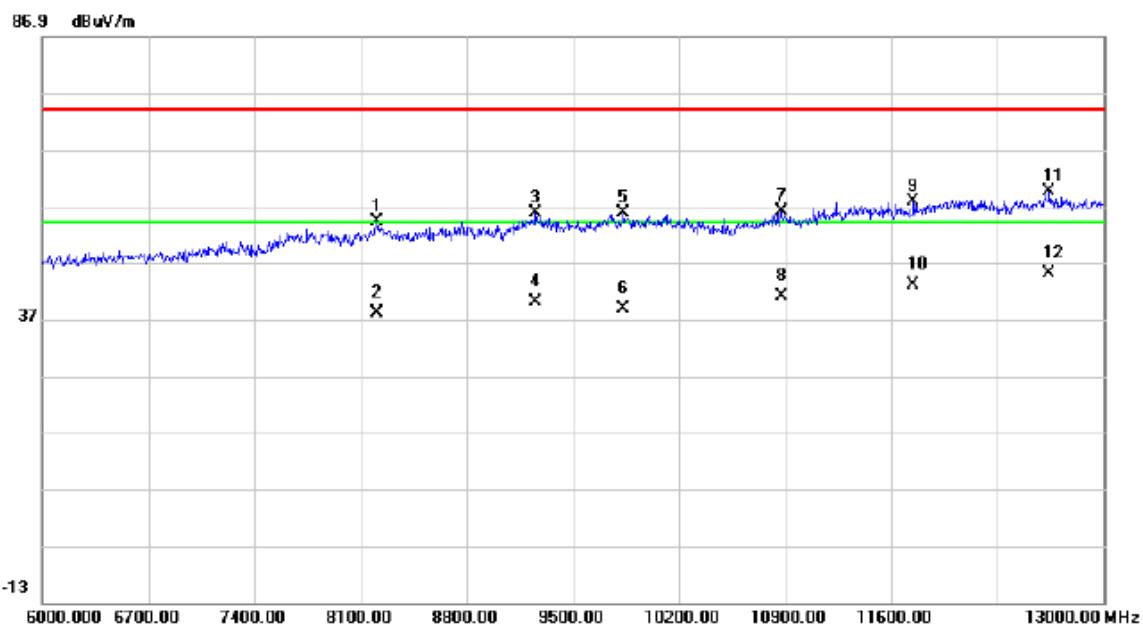

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		8205.000	41.63	12.57	54.20	74.00	-19.80	peak	
2		8205.000	25.40	12.57	37.97	54.00	-16.03	AVG	
3		9255.000	42.27	13.47	55.74	74.00	-18.26	peak	
4		9255.000	26.50	13.47	39.97	54.00	-14.03	AVG	
5		9829.000	41.70	14.09	55.79	74.00	-18.21	peak	
6		9829.000	24.60	14.09	38.69	54.00	-15.31	AVG	
7		10872.00	40.91	15.22	56.13	74.00	-17.87	peak	
8		10872.00	25.70	15.22	40.92	54.00	-13.08	AVG	
9		11747.00	40.52	17.33	57.85	74.00	-16.15	peak	
10		11747.00	25.80	17.33	43.13	54.00	-10.87	AVG	
11		12643.00	41.32	18.24	59.56	74.00	-14.44	peak	
12	*	12643.00	26.80	18.24	45.04	54.00	-8.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Connrex


Vertical

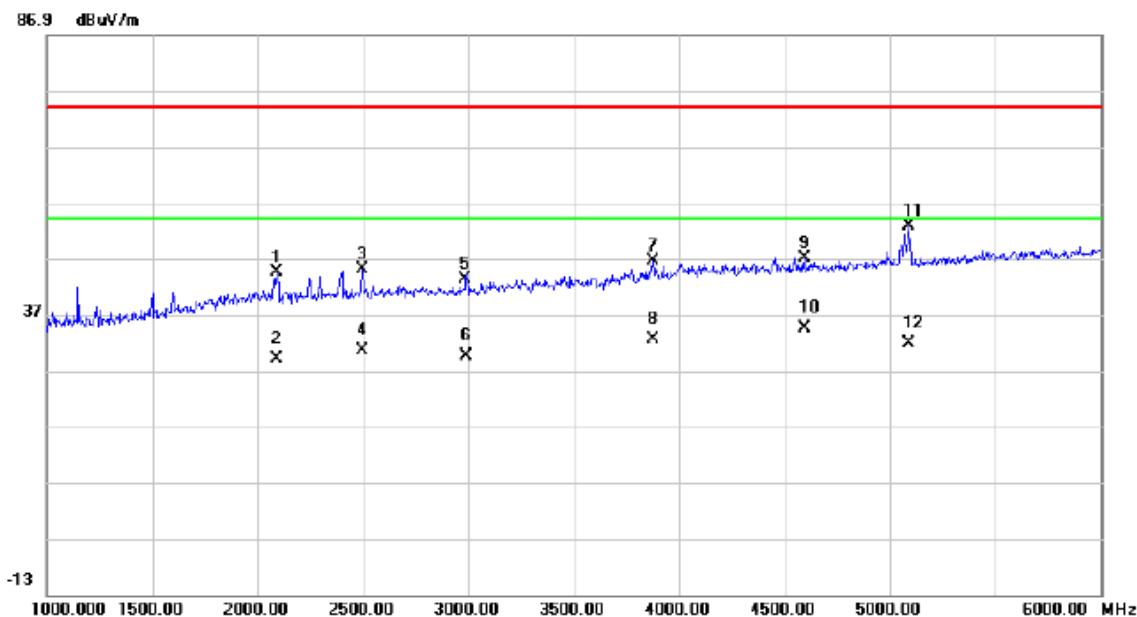

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2090.000	45.73	-1.13	44.60	74.00	-29.40	peak	
2		2090.000	30.10	-1.13	28.97	54.00	-25.03	AVG	
3		2495.000	45.73	-0.65	45.08	74.00	-28.92	peak	
4		2495.000	31.20	-0.65	30.55	54.00	-23.45	AVG	
5		2985.000	43.14	0.03	43.17	74.00	-30.83	peak	
6		2985.000	29.60	0.03	29.63	54.00	-24.37	AVG	
7		3875.000	43.01	3.62	46.63	74.00	-27.37	peak	
8		3875.000	28.90	3.62	32.52	54.00	-21.48	AVG	
9		4595.000	41.85	5.26	47.11	74.00	-26.89	peak	
10	*	4595.000	29.20	5.26	34.46	54.00	-19.54	AVG	
11		5090.000	46.26	6.58	52.84	74.00	-21.16	peak	
12		5090.000	25.30	6.58	31.88	54.00	-22.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Connrex


Horizontal

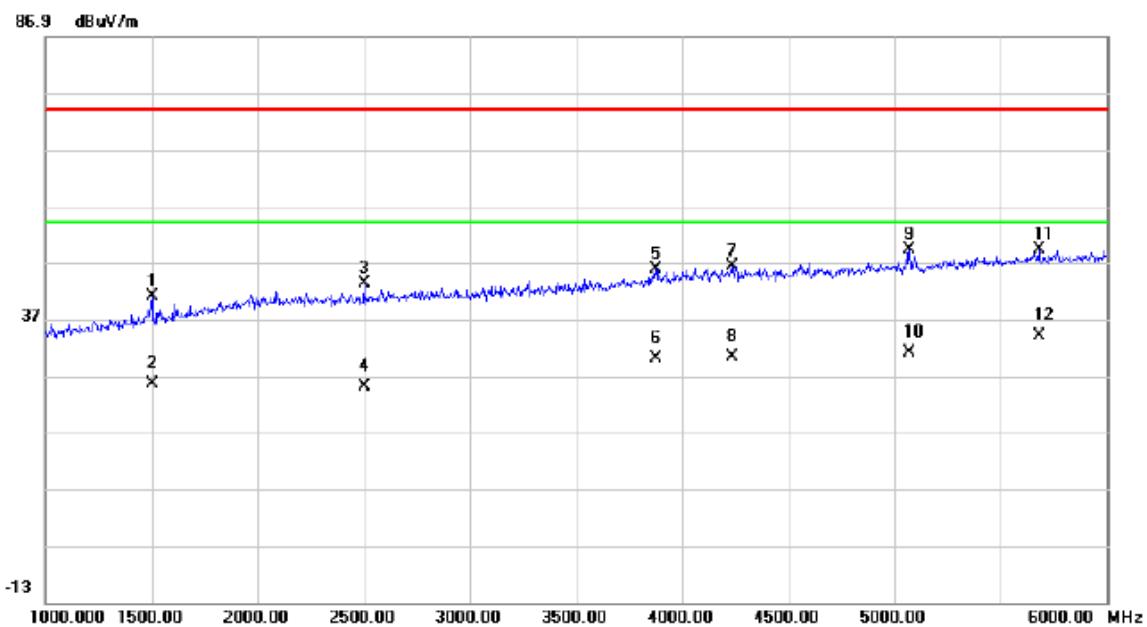

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1500.000	45.80	-4.78	41.02	74.00	-32.98	peak	
2		1500.000	30.40	-4.78	25.62	54.00	-28.38	AVG	
3		2500.000	44.03	-0.65	43.38	74.00	-30.62	peak	
4		2500.000	25.60	-0.65	24.95	54.00	-29.05	AVG	
5		3875.000	42.28	3.62	45.90	74.00	-28.10	peak	
6		3875.000	26.30	3.62	29.92	54.00	-24.08	AVG	
7		4235.000	41.77	4.62	46.39	74.00	-27.61	peak	
8		4235.000	25.60	4.62	30.22	54.00	-23.78	AVG	
9		5070.000	42.85	6.53	49.38	74.00	-24.62	peak	
10		5070.000	24.60	6.53	31.13	54.00	-22.87	AVG	
11		5680.000	41.39	8.01	49.40	74.00	-24.60	peak	
12	*	5680.000	26.10	8.01	34.11	54.00	-19.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Connrex


Vertical

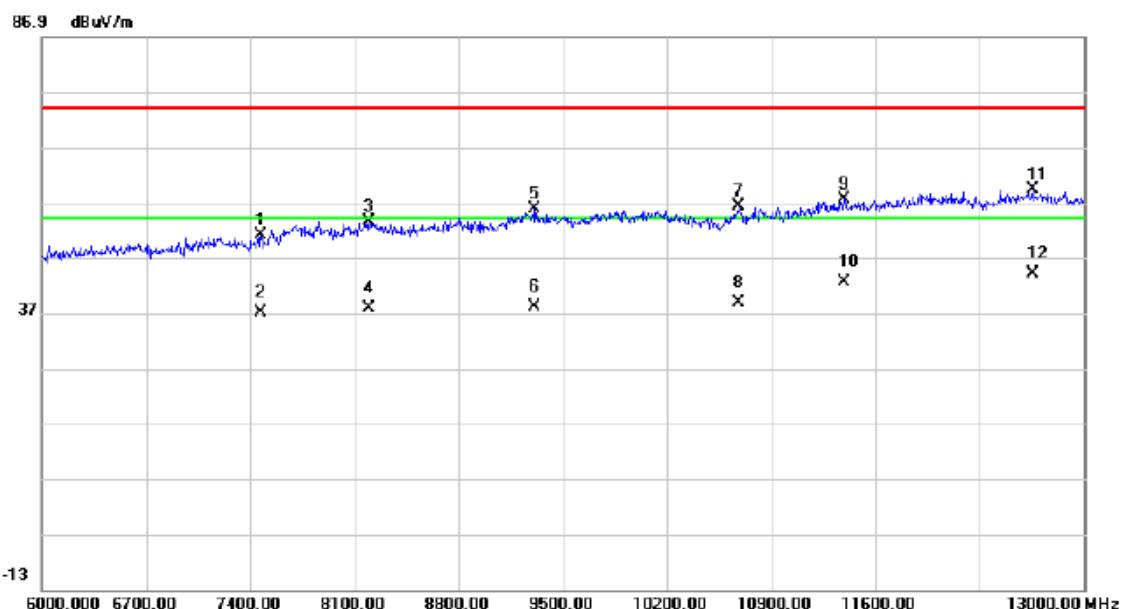

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7470.000	39.59	11.43	51.02	74.00	-22.98	peak	
2		7470.000	25.60	11.43	37.03	54.00	-16.97	AVG	
3		8198.000	40.90	12.58	53.48	74.00	-20.52	peak	
4		8198.000	25.20	12.58	37.78	54.00	-16.22	AVG	
5		9311.000	42.41	13.49	55.90	74.00	-18.10	peak	
6		9311.000	24.60	13.49	38.09	54.00	-15.91	AVG	
7		10676.00	41.76	14.40	56.16	74.00	-17.84	peak	
8		10676.00	24.50	14.40	38.90	54.00	-15.10	AVG	
9		11390.00	40.94	16.68	57.62	74.00	-16.38	peak	
10		11390.00	25.90	16.68	42.58	54.00	-11.42	AVG	
11		12657.00	40.95	18.28	59.23	74.00	-14.77	peak	
12	*	12657.00	25.80	18.28	44.08	54.00	-9.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: Connrex


Horizontal

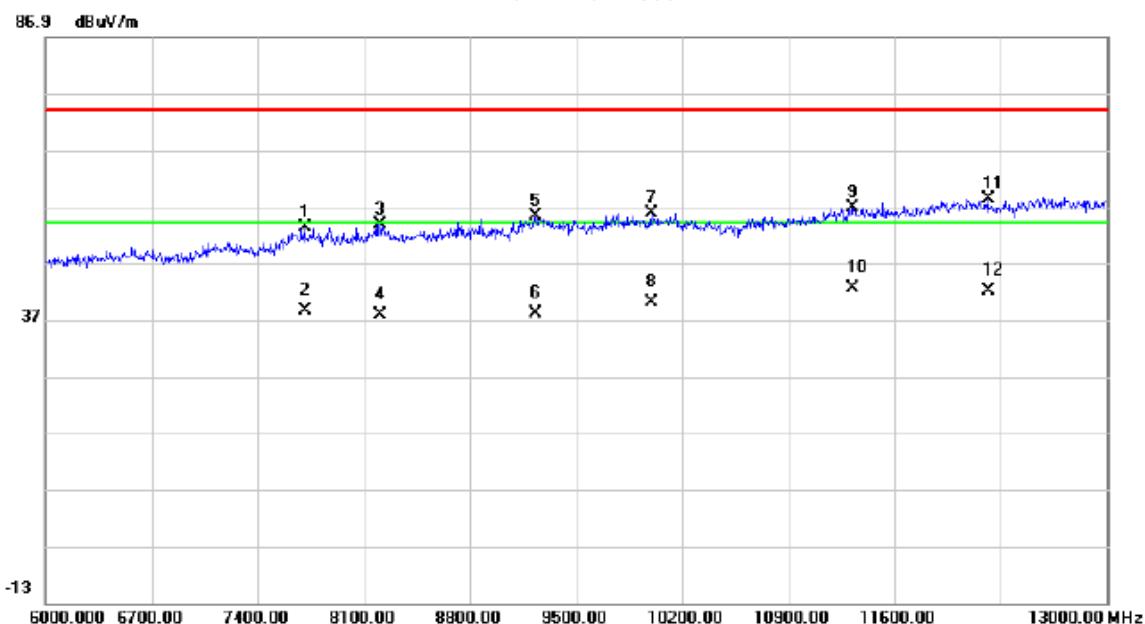

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7708.000	41.34	12.01	53.35	74.00	-20.65	peak	
2		7708.000	26.50	12.01	38.51	54.00	-15.49	AVG	
3		8205.000	41.09	12.57	53.66	74.00	-20.34	peak	
4		8205.000	25.30	12.57	37.87	54.00	-16.13	AVG	
5		9234.000	41.85	13.44	55.29	74.00	-18.71	peak	
6		9234.000	24.50	13.44	37.94	54.00	-16.06	AVG	
7		9997.000	41.48	14.35	55.83	74.00	-18.17	peak	
8		9997.000	25.80	14.35	40.15	54.00	-13.85	AVG	
9		11327.00	40.34	16.53	56.87	74.00	-17.13	peak	
10	*	11327.00	25.90	16.53	42.43	54.00	-11.57	AVG	
11		12216.00	40.44	17.83	58.27	74.00	-15.73	peak	
12		12216.00	24.30	17.83	42.13	54.00	-11.87	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


Vertical

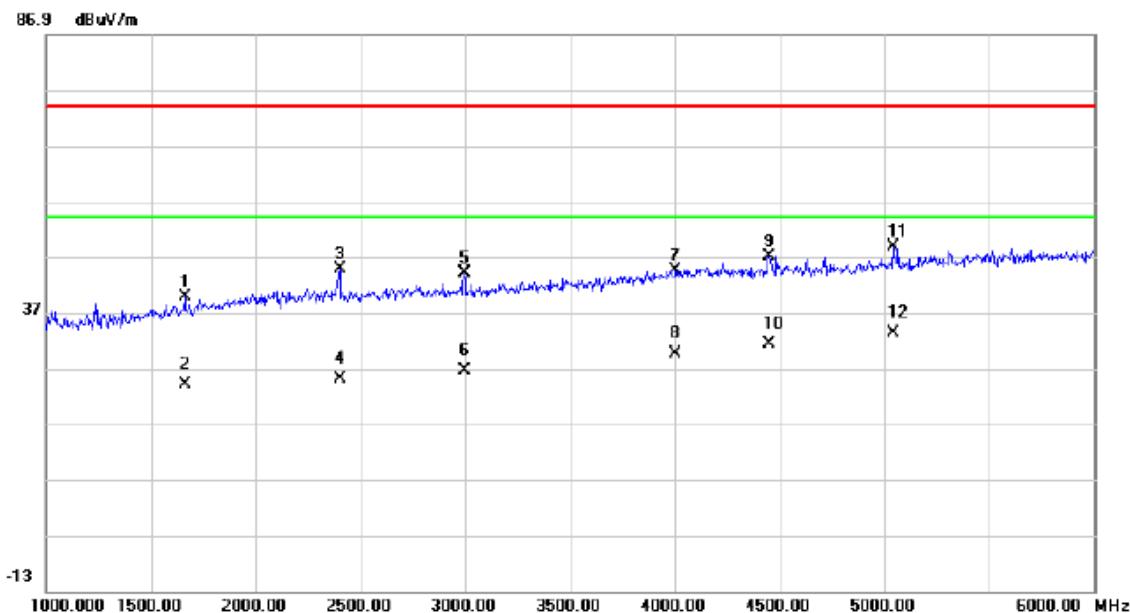

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1660.000	43.37	-3.64	39.73	74.00	-34.27	peak	
2		1660.000	27.60	-3.64	23.96	54.00	-30.04	AVG	
3		2400.000	45.52	-0.77	44.75	74.00	-29.25	peak	
4		2400.000	25.90	-0.77	25.13	54.00	-28.87	AVG	
5		2995.000	43.87	0.04	43.91	74.00	-30.09	peak	
6		2995.000	26.50	0.04	26.54	54.00	-27.46	AVG	
7		4005.000	40.26	4.28	44.54	74.00	-29.46	peak	
8		4005.000	25.20	4.28	29.48	54.00	-24.52	AVG	
9		4450.000	42.12	4.93	47.05	74.00	-26.95	peak	
10		4450.000	26.40	4.93	31.33	54.00	-22.67	AVG	
11		5040.000	42.33	6.45	48.78	74.00	-25.22	peak	
12	*	5040.000	26.80	6.45	33.25	54.00	-20.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


Horizontal

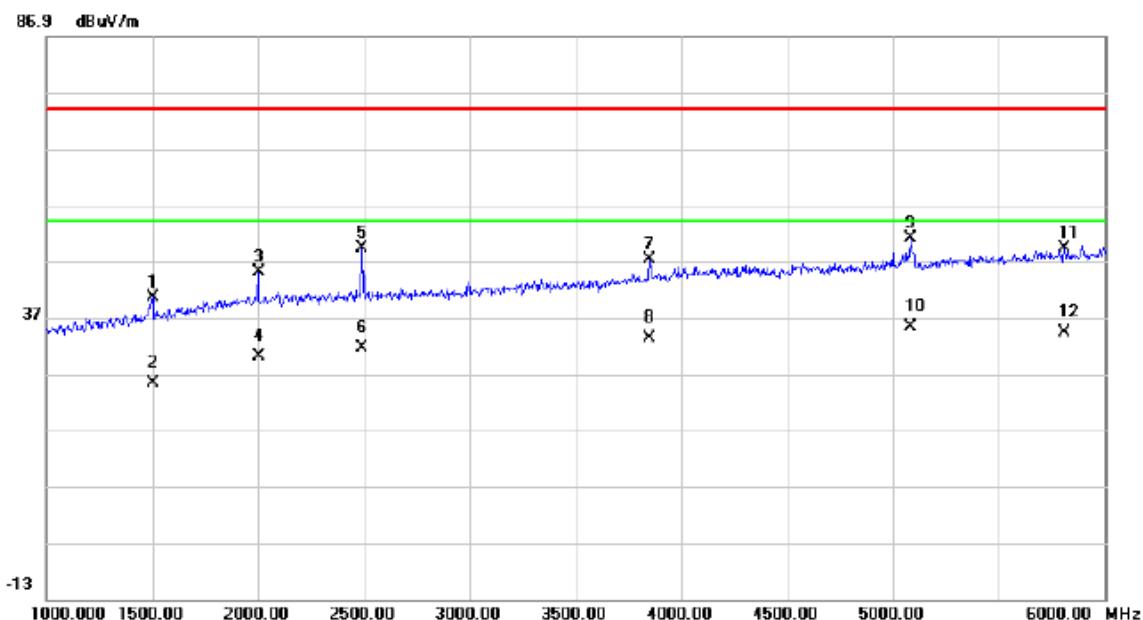

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1500.000	45.20	-4.78	40.42	74.00	-33.58	peak	
2		1500.000	30.10	-4.78	25.32	54.00	-28.68	AVG	
3		2000.000	46.16	-1.23	44.93	74.00	-29.07	peak	
4		2000.000	31.20	-1.23	29.97	54.00	-24.03	AVG	
5		2490.000	49.87	-0.67	49.20	74.00	-24.80	peak	
6		2490.000	32.10	-0.67	31.43	54.00	-22.57	AVG	
7		3850.000	43.68	3.48	47.16	74.00	-26.84	peak	
8		3850.000	29.80	3.48	33.28	54.00	-20.72	AVG	
9		5085.000	44.47	6.57	51.04	74.00	-22.96	peak	
10	*	5085.000	28.70	6.57	35.27	54.00	-18.73	AVG	
11		5810.000	40.92	8.26	49.18	74.00	-24.82	peak	
12		5810.000	25.90	8.26	34.16	54.00	-19.84	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


Vertical

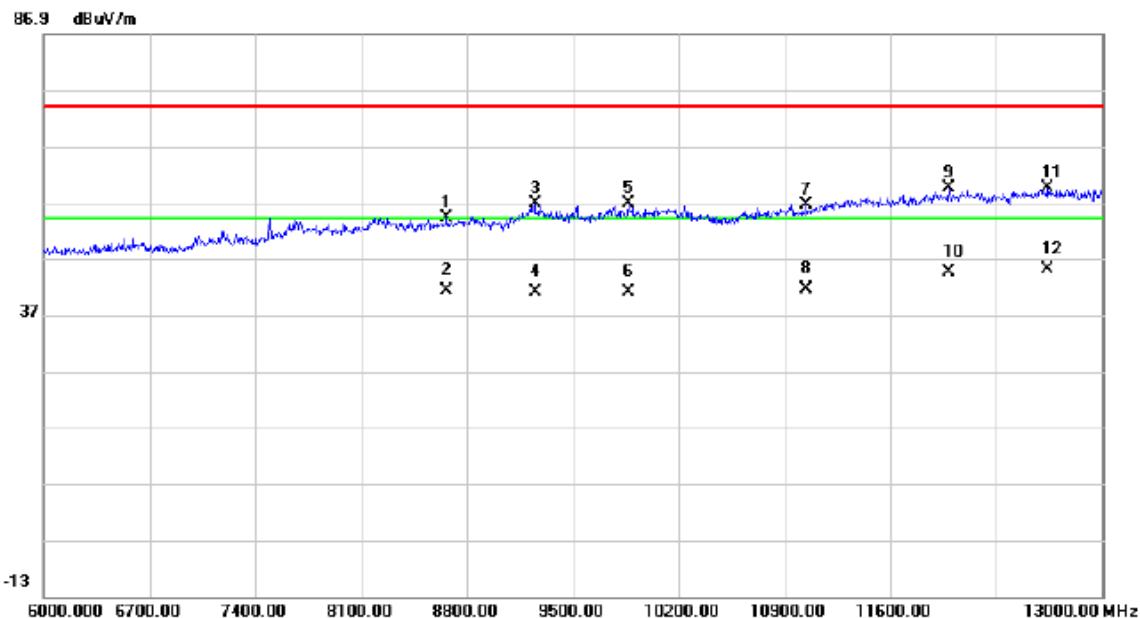

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		8667.000	41.63	12.73	54.36	74.00	-19.64	peak	
2		8667.000	28.60	12.73	41.33	54.00	-12.67	AVG	
3		9248.000	43.35	13.45	56.80	74.00	-17.20	peak	
4		9248.000	27.50	13.45	40.95	54.00	-13.05	AVG	
5		9864.000	42.56	14.14	56.70	74.00	-17.30	peak	
6		9864.000	26.90	14.14	41.04	54.00	-12.96	AVG	
7		11047.00	40.60	15.86	56.46	74.00	-17.54	peak	
8		11047.00	25.60	15.86	41.46	54.00	-12.54	AVG	
9		11985.00	41.73	17.70	59.43	74.00	-14.57	peak	
10		11985.00	26.80	17.70	44.50	54.00	-9.50	AVG	
11		12643.00	41.18	18.24	59.42	74.00	-14.58	peak	
12	*	12643.00	26.90	18.24	45.14	54.00	-8.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI

Horizontal

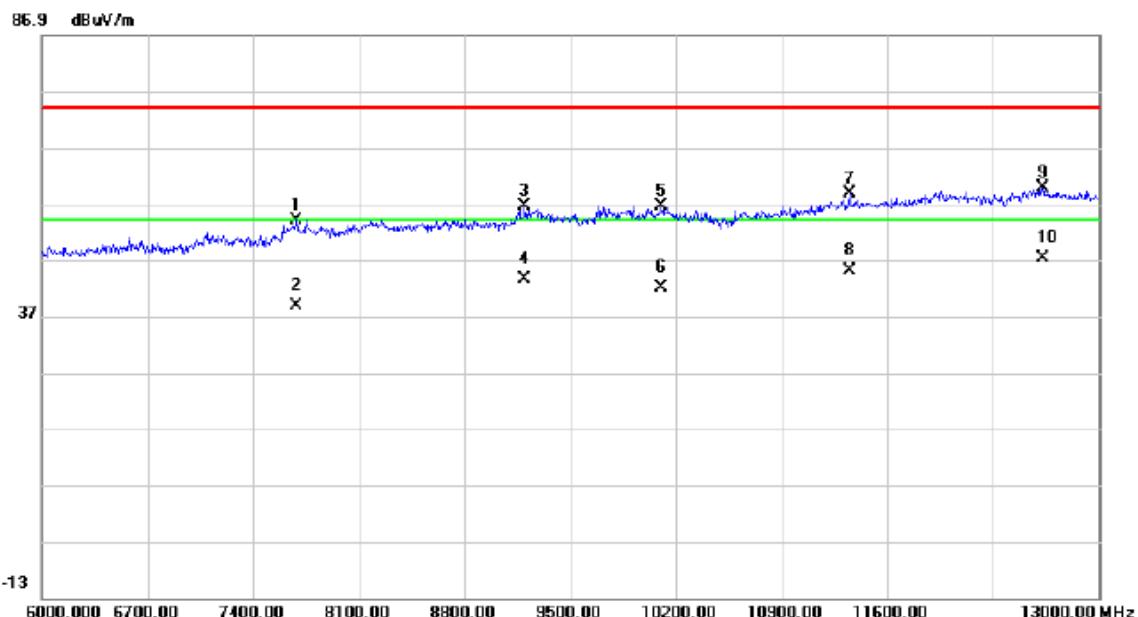

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		7687.000	42.08	11.96	54.04	74.00	-19.96	peak
2		7687.000	26.70	11.96	38.66	54.00	-15.34	AVG
3		9199.000	42.99	13.43	56.42	74.00	-17.58	peak
4		9199.000	30.10	13.43	43.53	54.00	-10.47	AVG
5		10102.00	42.26	14.22	56.48	74.00	-17.52	peak
6		10102.00	27.90	14.22	42.12	54.00	-11.88	AVG
7		11348.00	42.23	16.58	58.81	74.00	-15.19	peak
8		11348.00	28.50	16.58	45.08	54.00	-8.92	AVG
9		12629.00	41.65	18.22	59.87	74.00	-14.13	peak
10	*	12629.00	29.10	18.22	47.32	54.00	-6.68	AVG