



EMC Test Report

Product Name: HUAWEI MateBook

**Product Model: MACH-W29
MACH-W19**

Report Number: SYBH(Z-EMC)20171214032005

FCC ID: QISMACH-WX9

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01
3. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd” , the both names have coexisted since 2009.
5. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
9. Normally, the test report is only responsible for the samples that have undergone the test.
10. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt Test Item: 2018-01-03
Start Date of Test: 2018-01-06
End Date of Test: 2018-01-25

Test Result: Pass

**Approved By
(Lab Manager)**

2018-01-26
Date

Roger Zhang
Name

Roger Zhang

Signature

**Operator
(Test Engineer)**

2018-01-26
Date

Hu Haizhou
Name

Hu Haizhou

Signature



Modification Record

| No. | Last Report No. | Modification Description |
|-----|-----------------|--------------------------|
| 1 | N/A | First report |

TABLE OF CONTENT

| | | |
|-----|--|----|
| 1 | General Information | 6 |
| 1.1 | EUT Description | 6 |
| 1.2 | Differences Description | 7 |
| 1.3 | Test Site Information | 8 |
| 1.4 | Applied Standards | 8 |
| 2 | Summary of Results..... | 9 |
| 3 | System Configuration during EMC Test..... | 10 |
| 3.1 | Test Mode | 10 |
| 3.2 | Test System Configuration..... | 11 |
| 3.3 | Cables Used during Test..... | 12 |
| 3.4 | Associated Equipment Used during Test..... | 12 |
| 4 | Electromagnetic Interference (EMI)..... | 13 |
| 4.1 | Radiated Disturbance 30MHz to 18GHz | 13 |
| 4.2 | Conducted Disturbance 0.15 MHz to 30MHz..... | 15 |
| 5 | Main Test Instruments..... | 16 |
| 6 | System Measurement Uncertainty | 16 |
| 7 | Test Data and Graph..... | 17 |
| 7.1 | Radiated Disturbance | 17 |
| 7.2 | Conducted Disturbance..... | 21 |



1 General Information

1.1 EUT Description

| EUT Description | |
|-----------------|--|
| Product Name | HUAWEI MateBook |
| Model Number | MACH-W29 MACH-W19 |
| Input voltage | 20V |
| TX Frequency | Bluetooth: 2402MHz To 2480MHz WIFI: 2412MHz To 2462MHz 5150MHz To 5350MHz 5470MHz To 5850MHz |
| RX Frequency | Bluetooth: 2402MHz To 2480MHz WIFI: 2412MHz To 2462MHz 5150MHz To 5350MHz 5470MHz To 5850MHz |
| S/N | 5JEBB17C07000094 5JEBB17C07000031 |
| HW Version | SP1MACHW19M |
| SW Version | 1.3.0.15 |
| EUT Accessory | |
| Data cable | Data Cable USB A Male to Micro USB 100cm,White, Shielded Manufacturer:Huawei Technologies Co.,Ltd. |
| Adapter | Manufacturer:Huawei Technologies Co.,Ltd. Adapter Model: HW-200325EP0 SN:C97401HBG00028 Input Voltage :100-240V ~50/60Hz, 1.8A Output Voltage: --- 5V,2A/9V,2A/12V,2A/15V,3A/20V,3.25A |
| Adapter | Manufacturer:Huawei Technologies Co.,Ltd. Adapter Model: HW-200325BP0 SN:C97801HBP00022 Input Voltage :100-240V ~50/60Hz, 1.8A Output Voltage: --- 5V,2A/9V,2A/12V,2A/15V,3A/20V,3.25A |
| Adapter | Manufacturer:Huawei Technologies Co.,Ltd. Adapter Model: HW-200325UP0 SN:C97601HBP00012 Input Voltage :100-240V ~50/60Hz, 1.8A Output Voltage: --- 5V,2A/9V,2A/12V,2A/15V,3A/20V,3.25A |
| Adapter | Manufacturer:Huawei Technologies Co.,Ltd. Adapter Model: HW-200325CP0 SN:C97309HC900285 Input Voltage :100-240V ~50/60Hz, 1.8A Output Voltage: --- 5V,2A/9V,2A/12V,2A/15V,3A/20V,3.25A |
| Adapter | Manufacturer:Huawei Technologies Co.,Ltd. Adapter Model: HW-200325JP0 SN:C97701HBP00038 Input Voltage :100-240V ~50/60Hz, 1.8A Output Voltage: --- 5V,2A/9V,2A/12V,2A/15V,3A/20V,3.25A |



| | |
|---------------------|--|
| Rechargeable Li-ion | Manufacturer:Huawei Technologies Co.,Ltd. Battery Model: HB4593R1ECW Rated capacity: 7410mAh Rated Voltage: 7.6V Limited Charge Voltage: 8.7V SN: 20171214030001 20171214032001 |
| Docking Station | Manufacturer: Huawei Technologies Co.,Ltd. Model: AD11 SN:GLTNR17710001287 |

Remark: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed information.

1.2 Differences Description

| | MACH-W29 (with GPU version) | MACH-W19 (with GPU version) | MACH-W19 (without GPU version) |
|-------------------|--|--|--|
| PCB layout | The same | The same | The same |
| Main board | The same | The same | Delete GPU chip and related components |
| Frequency bands | The same, support Wi-Fi 2.4G&5G support BT 2.4G | The same, support Wi-Fi 2.4G&5G support BT 2.4G | The same, support Wi-Fi 2.4G&5G support BT 2.4G |
| BT/ Wi-Fi antenna | The same | The same | The same |
| Appearance | The same | The same | The same |
| Dimension | The same | The same | The same |
| CPU | Intel core i7, Support max 4.0Hz | Intel core i5, Support max 3.4GHz | Intel core i5, Support max 3.4GHz |
| GPU | Support | Support | Not support |
| Memory | 16/8G | 8G | 8G |
| SSD | 512G/256G | 256G | 256G |
| Rear camera | Not support | Not support | Not support |
| Front camera | The same | The same | The same |
| Adapter | The same | The same | The same |
| Battery | The same | The same | The same |
| Accessories | The same, Docking Station | The same, Docking Station | The same, Docking Station |

MACH-W19 test the worst case of each test item on MACH-W29.

1.3 Test Site Information

| | |
|---------------------|---|
| Test Site 1: | RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD. |
| Test Site Location: | Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C |
| Test Site 2: | RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD. |
| Test Site Location: | No.2 New City Avenue Songshan Lake Sci. &Tech. Industry Park, Dongguan, Guangdong, China |

1.4 Applied Standards

APPLIED STANDARD

47 CFR FCC Part 15 2016, Subpart B

2 Summary of Results

| Summary of Results | | | | |
|--|-----------------|---|--------|----------------|
| Test Items | Test Mode | Performance Class & Required Performance Criteria | Result | Site |
| <u>Radiated Emissions</u> Enclosure Port | Mode1~ Mode5 | CLASS B | Pass | Site1 Site2 |
| <u>Conducted Emissions</u> <input type="checkbox"/> DC Power Port <input checked="" type="checkbox"/> AC Power Port <input type="checkbox"/> Telecommunication Ports | Mode1~ Mode5 | CLASS B | Pass | Site1 |
| Note: 1, Measurement taken is within the uncertainty of test system. 2, <input checked="" type="checkbox"/> The item has been tested; <input type="checkbox"/> The item has not been tested. | | | | |

During the measurement, the environmental conditions complied with the range listed as below.

| Item | Required |
|----------------------|----------------|
| Ambient temperature | 15°C ~ 35°C |
| Relative humidity | 25% ~ 75% |
| Atmospheric pressure | 86kPa ~ 106kPa |

3 System Configuration during EMC Test

3.1 Test Mode

The EUT was configured, installed, arranged and operated in a manner consistent with typical application. The following mode(s) were applied during the compliance test.

| Test Mode | |
|-----------|--|
| Mode 1: | Charging + Video Playing + WIFI + BT ON |
| Mode 2: | Charging + USB + Earphone + Dock (Type C + USB + HDMI Playing) |
| Mode 3: | Charging + USB + Earphone + Dock (Type C + USB + VGA Playing) |
| Mode 4: | Charging + Data Transmitting (Type C+USB) |
| Mode 5: | Charging + Camera |

Remark:

- 1) If there is one kind of accessories with different models, each one should be applied throughout the compliance test respectively, however, only the worst case will be recorded in this report.
- 2) If EUT has more than one typical operation, only the worst test mode will be recorded in this report.

Worst Case:

1) Radiated Emission

Mode 3: Adapter (Model: HW-200325UP0, SN: C97601HBP00012) + Charging + USB + Earphone + Dock (Type C + USB + VGA Playing) This result is the worst case (30MHz-1GHz).


Mode 2: Adapter (Model: HW-200325UP0, SN: C97601HBP00012) + Charging+ USB + Earphone + Dock (Type C + USB + HDMI Playing) This result is the worst case (1GHz-40GHz).

2) Conducted Emission


Mode 3: Adapter (Model: HW-200325UP0, SN: C97601HBP00012) + Charging + USB + Earphone + Dock (Type C + USB + VGA Playing) This result is the worst case.


3.2 Test System Configuration

Connection Diagram (Mode 1&Mode 5)

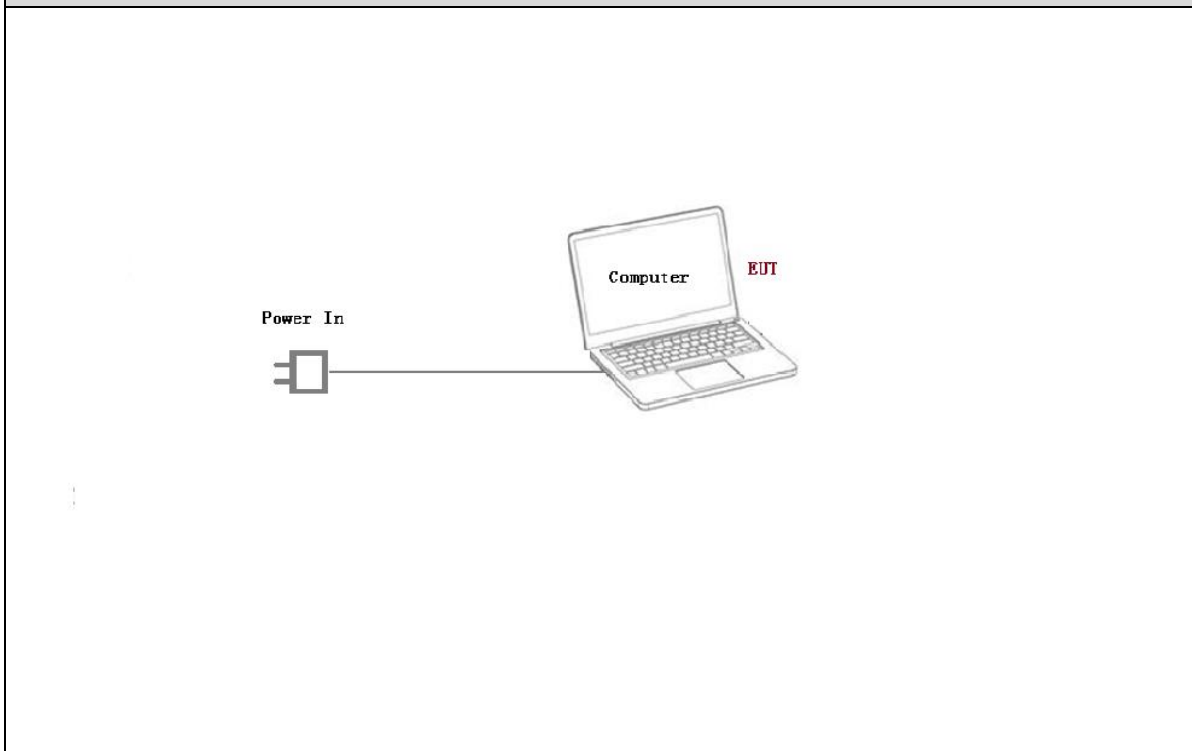

Connection Diagram (Mode 2&Mode 3)

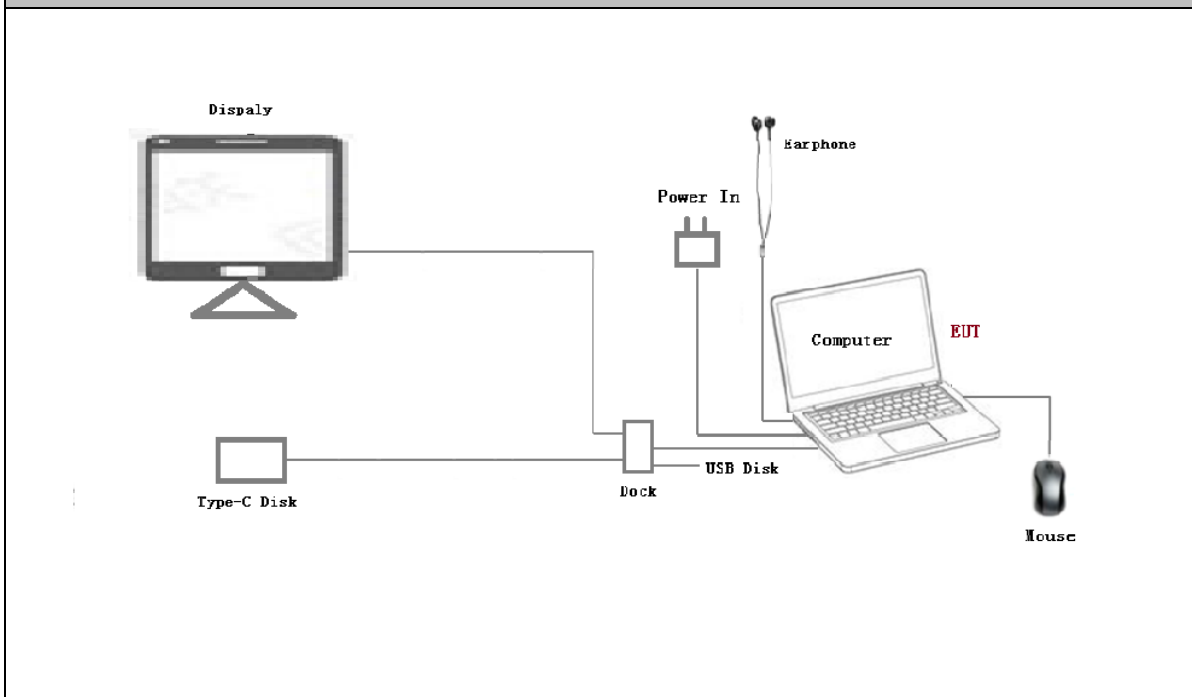

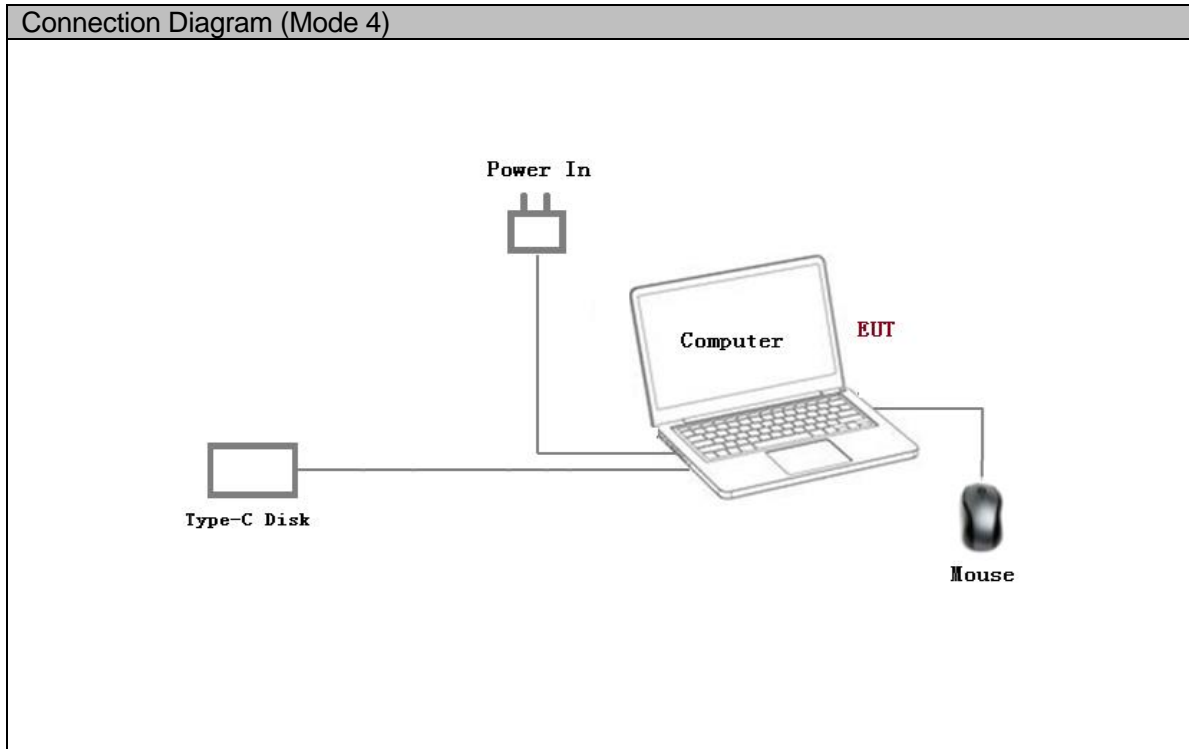

3.3 Cables Used during Test

| Cable | Quantity | Length | Type of Cable |
|-------|----------|--------|---------------|
| USB | 1 | <3m | shielded |

3.4 Associated Equipment Used during Test

| Name | Model | Manufacturer | S/N | Calibrated Deadline | Cal interval |
|-------------|--------------|--------------|-------------|---------------------|--------------|
| Earphone | HA1-3W | HuaWei | 22040300 | / | / |
| Mouse | M-U0025-O | Lenovo | HS423HB22TB | / | / |
| Display | L197wA | Lenovo | / | / | / |
| Display | WP2780-4K-CN | ViewSonic | / | / | / |
| USB Disk | v285w | HP | / | / | / |
| Type-C Disk | Extreme900 | Sandisk | / | / | / |

4 Electromagnetic Interference (EMI)

4.1 Radiated Disturbance 30MHz to 18GHz

4.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4-2014. The test distance was 3m. The set-up and test methods were according to ANSI C63.4-2014.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 18 GHz by using test script of software; The emissions were measured using Quasi-Peak Detector (30MHz~1GHz) and AV/PK detector (above 1GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m. The azimuth range of turntable was 0° to 360°. The receiving antenna has two polarizations V and H.

Measurement bandwidth (RBW) for 30MHz to 1000 MHz: 120 kHz;

Measurement bandwidth (RBW) for 1000MHz to 40000 MHz: 1MHz;

EUT was configured in idle mode and the test performed at worst emission state.

4.1.2 Test setup

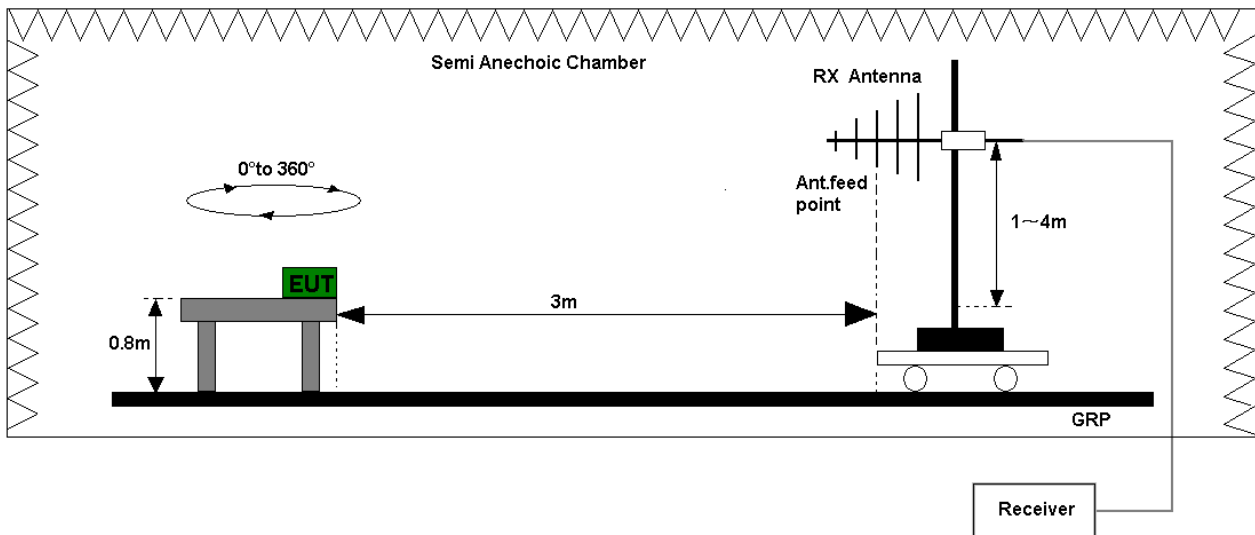


Figure 1. Test set-up of radiated disturbance(30MHz-1GHz)

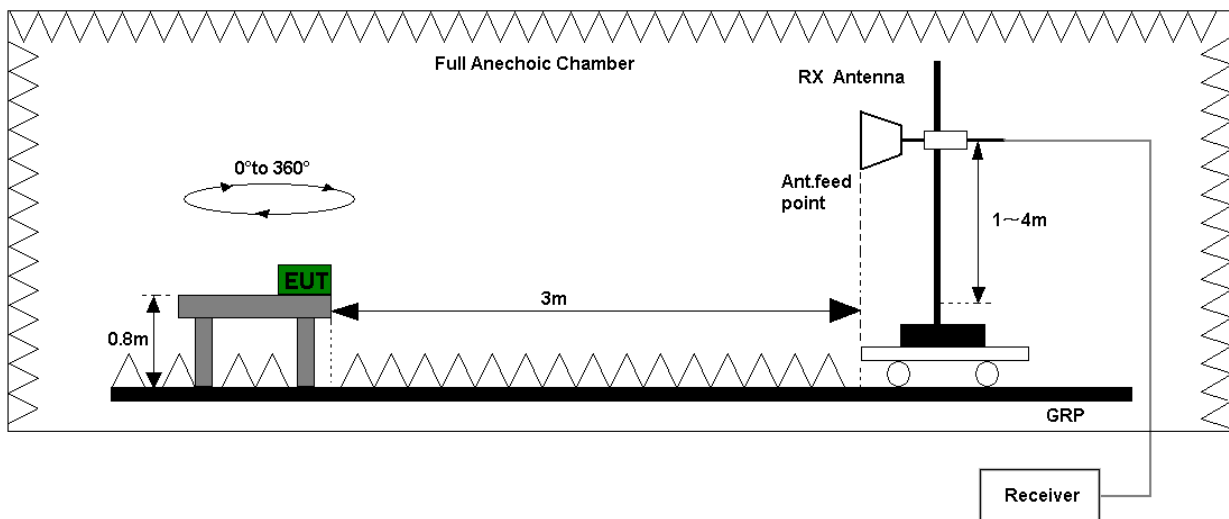


Figure 2. Test set-up of radiated disturbance(above 1GHz)



4.1.3 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.
 Refer to the section 7 of this report for test data.

| Test Limits (Class B) | | | | |
|-----------------------------|------------------|------|--------------------|----|
| Frequency of Emission (MHz) | Radiated Limit | | | |
| | Unit(μ V/m) | | Unit(dB μ V/m) | |
| 30-88 | 100 | | 40 | |
| 88-216 | 150 | | 43.5 | |
| 216-960 | 200 | | 46 | |
| Above 960 | 500 | | 54 | |
| Above 1000 | AV | PK | AV | PK |
| | 500 | 5000 | 54 | 74 |

4.2 Conducted Disturbance 0.15 MHz to 30MHz

4.2.1 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm away from LISN. The set-up and test methods were according to ANSI C63.4-2014. Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector. EUT was communicated with the simulator through Air interface, the simulator controls the EUT to transmitter the maximum power which defined in specification of product. The EUT operated on the typical channel.

Measurement bandwidth (RBW) for 150 kHz to 30 MHz: 9 kHz;

The EUT was set in the shielded chamber and operated under nominal conditions.

4.2.2 Test Setup

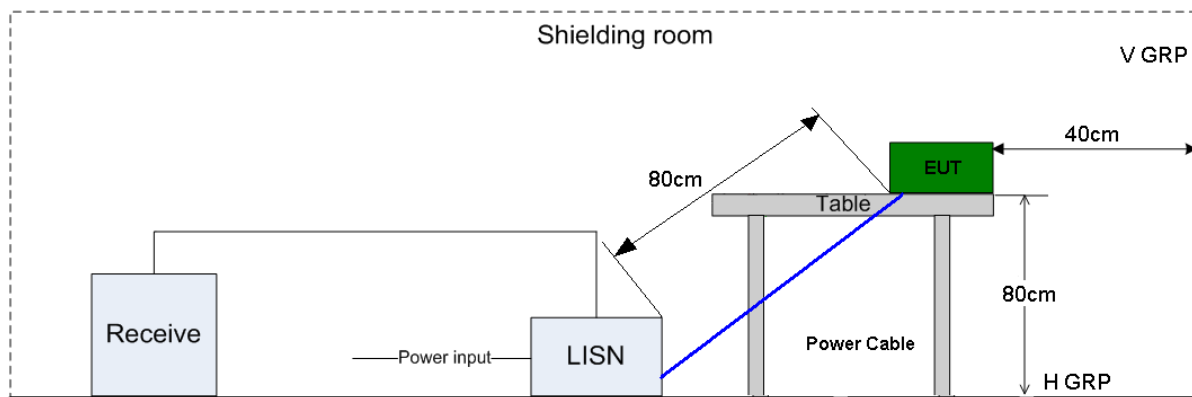


Figure 3. Test Set-up of conducted disturbance

4.2.3 Test Results

The EUT has met requirements for Conducted disturbance of power lines. Refer to the section 7 of this report for test data.

| Test Limit of AC Power Port | | |
|-----------------------------|-----------------|-----------------|
| Frequency range | 150kHz ~ 30MHz | |
| Frequency | Voltage limits | |
| | QP (dB μ V) | AV (dB μ V) |
| 0.15MHz~0.5MHz | 66-56 | 56-46 |
| 0.5MHz-5MHz | 56 | 46 |
| 5MHz~30MHz | 60 | 50 |

5 Main Test Instruments

| Main Test Equipments | | | | | | |
|----------------------|----------------------------|--------------|------------|--------------|---------------------|--------------|
| Test item | Test Instrument | Model | S/N | Manufacturer | Calibrated Deadline | Cal interval |
| RE | EMI Test receiver | ESU26 | 100150 | R&S | Feb. 20, 2019 | 12 |
| | Spectrum Analyzer | E4447A | MY52090002 | Agilent | Oct. 22, 2018 | 12 |
| | Broadband Antenna | VULB 9163 | 9163-491 | SCHWARZBECK | Mar. 28, 2019 | 24 |
| | Horn Antenna | HF906 | 100683 | R&S | Mar. 28, 2019 | 24 |
| | Horn antenna (18 to 40GHz) | SAS-574 | 426 | A.H.Systems | Air.09,2018 | 24 |
| CE | EMI Test receiver | ESU26 | 100150 | R&S | May. 15, 2018 | 12 |
| | Artificial Mains Network | ENV4200 | 100134 | R&S | May. 15, 2018 | 12 |
| Software Information | | | | | | |
| Test Item | Software Name | Manufacturer | | Version | | |
| RE | EMC32 | R&S | | V9.25.0 | | |
| RE | ES-K1 | R&S | | V1.7.1 | | |
| CE | EMC32 | R&S | | V9.25.0 | | |

6 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| System Measurement Uncertainty | | |
|--------------------------------|----------------------------------|---------------|
| Items | Extended Uncertainty | |
| RE(30MHz-1GHz) | Field strength (dB μ V/m) | U=4.1dB; k=2 |
| RE(1GHz-18GHz) | Field strength (dB μ V/m) | U=5.0dB; k=2 |
| RE(18 GHz-26.5GHz) | Field strength (dB μ V/m) | U=5.9 dB; k=2 |
| RE (26.5 GHz- 40GHz) | Field strength (dB μ V/m) | U=5.8 dB; k=2 |
| CE | Disturbance Voltage (dB μ V) | U=2.5dB; k=2 |


7 Test Data and Graph

Only the worst test results were shown

7.1 Radiated Disturbance

7.1.1 30MHz~1GHz

Test Mode3: Charging + USB + Dock (Type C + USB + VGA Playing)

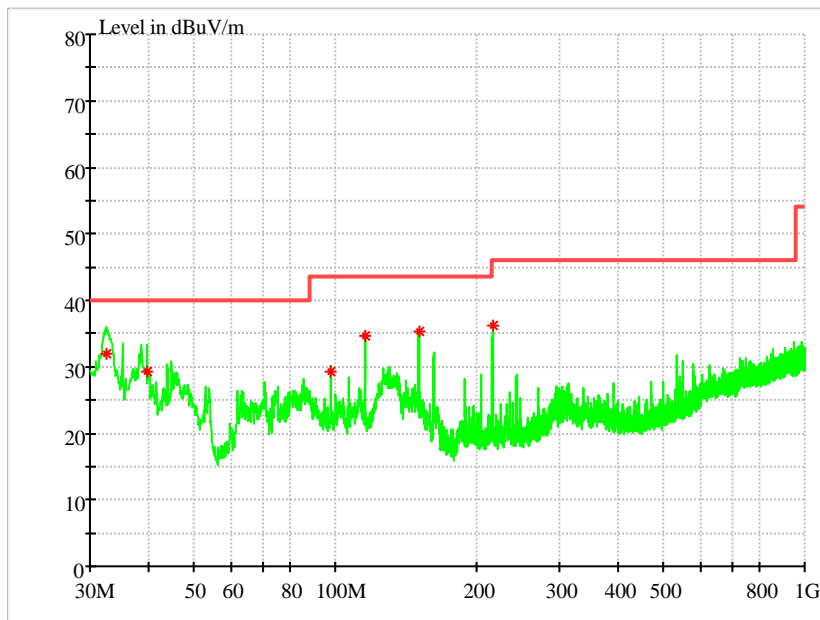

MEASUREMENT RESULT: QP Detector

| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------------|-----------|--------------------|-----------|-----------|-------------|--------------|
| 32.425000 | 31.97 | 14.2 | 40.00 | 8.03 | 100.0 | V | 0.0 |
| 39.700000 | 29.31 | 15.1 | 40.00 | 10.69 | 100.0 | V | 88.0 |
| 97.657500 | 29.25 | 13.4 | 43.50 | 14.25 | 100.0 | V | 181.0 |
| 150.64375 | 35.39 | 11.2 | 43.50 | 8.11 | 100.0 | V | 288.0 |
| 115.60250 | 34.56 | 12.5 | 43.50 | 8.94 | 100.0 | V | 315.0 |
| 216.24000 | 36.20 | 13.3 | 46.00 | 9.80 | 100.0 | H | 349.0 |


Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

7.1.2 1GHz~18GHz

Test Mode2: Charging + USB + Earphone + Dock (Type C + USB + HDMI Playing)

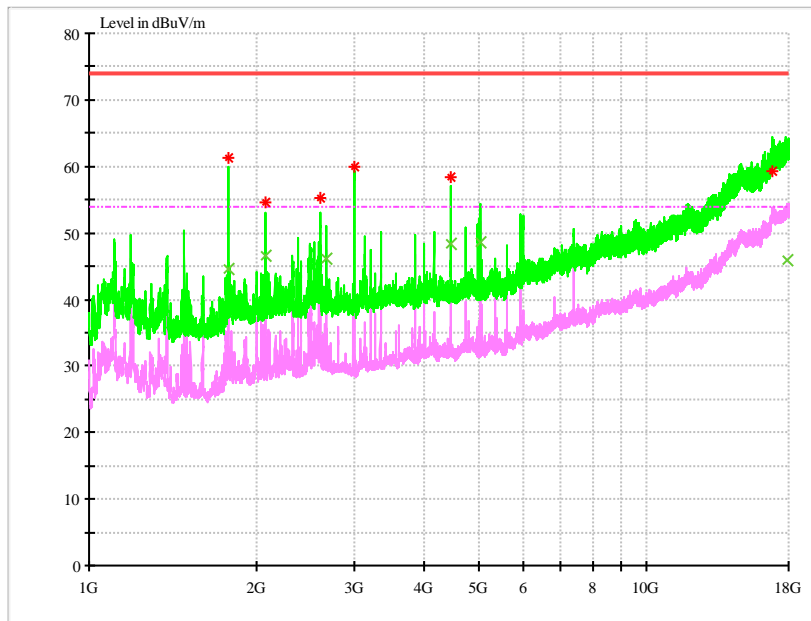

MEASUREMENT RESULT: PK Detector

| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------------|-----------|--------------------|-----------|-----------|-------------|--------------|
| 1780.217333 | 61.36 | -10.7 | 74.00 | 12.64 | 100.0 | 67.0 | V |
| 2076.860667 | 54.70 | -9.1 | 74.00 | 19.30 | 185.0 | 258.0 | V |
| 2599.878667 | 55.20 | -7.0 | 74.00 | 18.80 | 100.0 | 106.0 | V |
| 2986.684000 | 60.02 | -6.1 | 74.00 | 13.98 | 100.0 | 42.0 | H |
| 4450.196666 | 58.46 | -2.0 | 74.00 | 15.54 | 101.0 | 275.0 | V |
| 16876.058000 | 59.33 | 21.0 | 74.00 | 14.67 | 166.0 | 41.0 | V |

MEASUREMENT RESULT: AV Detector


| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------------|-----------|--------------------|-----------|-----------|-------------|--------------|
| 1779.938000 | 44.59 | -10.7 | 54.00 | 9.41 | 100.0 | 67.0 | V |
| 2076.910000 | 46.52 | -9.1 | 54.00 | 7.48 | 147.0 | 258.0 | V |
| 2670.286000 | 46.19 | -6.7 | 54.00 | 7.81 | 100.0 | 26.0 | V |
| 4450.721333 | 48.28 | -2.0 | 54.00 | 5.72 | 100.0 | 277.0 | V |
| 5044.194666 | 48.63 | -1.4 | 54.00 | 5.37 | 100.0 | 262.0 | V |
| 17898.287333 | 45.81 | 21.6 | 54.00 | 8.19 | 190.0 | 160.0 | H |

Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.

7.1.3 18GHz~26.5GHz

Test Mode2: Charging + USB + Earphone + Dock (Type C + USB + HDMI Playing)

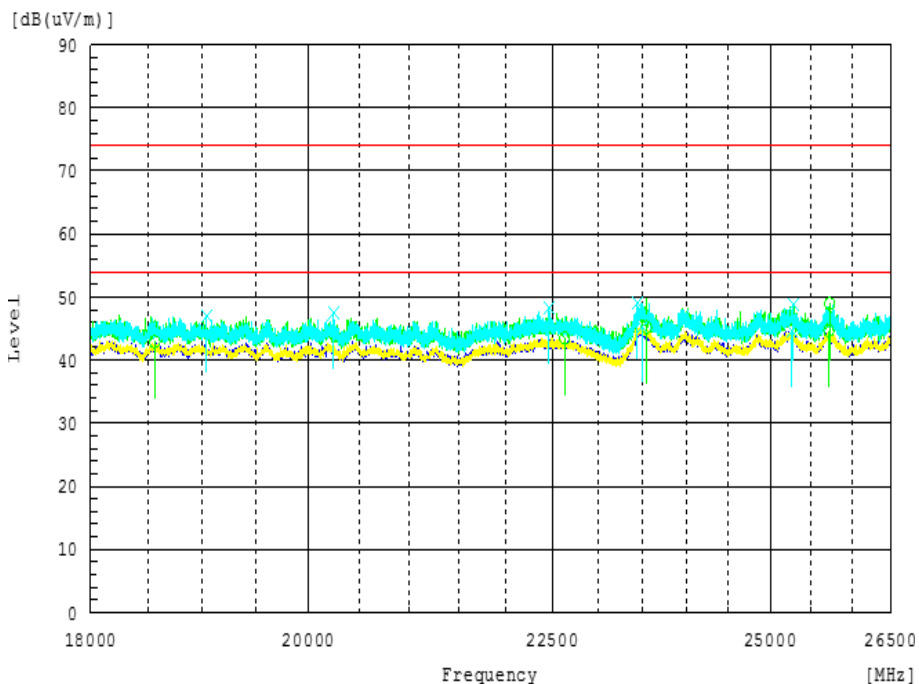

MEASUREMENT RESULT: PK Detector

| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------------|-----------|--------------------|-----------|-----------|-------------|--------------|
| 19032.624 | 47.1 | -15.6 | 74.0 | 26.9 | 100 | 0.0 | V |
| 20237.700 | 47.0 | -16.6 | 74.0 | 27.0 | 100 | 245.0 | V |
| 22461.900 | 48.8 | -13.6 | 74.0 | 25.2 | 100 | 306.0 | V |
| 23443.650 | 49.6 | -12.8 | 74.0 | 24.4 | 100 | 0.0 | V |
| 25272.750 | 48.1 | -11.8 | 74.0 | 25.9 | 100 | 306.0 | V |
| 25725.200 | 49.3 | -11.6 | 74.0 | 24.7 | 100 | 360.0 | H |

MEASUREMENT RESULT: AV Detector


| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------------|-----------|--------------------|-----------|-----------|-------------|--------------|
| 18563.400 | 42.9 | -14.3 | 54.0 | 11.1 | 100 | 0.0 | V |
| 22634.650 | 43.5 | -13.6 | 54.0 | 10.5 | 100 | 357.0 | V |
| 23494.650 | 45.4 | -12.2 | 54.0 | 8.6 | 100 | 334.0 | V |
| 23551.500 | 45.2 | -12.3 | 54.0 | 8.8 | 100 | 191.0 | V |
| 25259.700 | 44.6 | -11.8 | 54.0 | 9.4 | 100 | 115.0 | V |
| 25716.350 | 44.7 | -11.6 | 54.0 | 9.3 | 100 | 0.0 | V |

Note:

Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.

7.1.4 26.5GHz~40GHz

Test Mode2: Charging + USB + Earphone + Dock (Type C + USB + HDMI Playing)

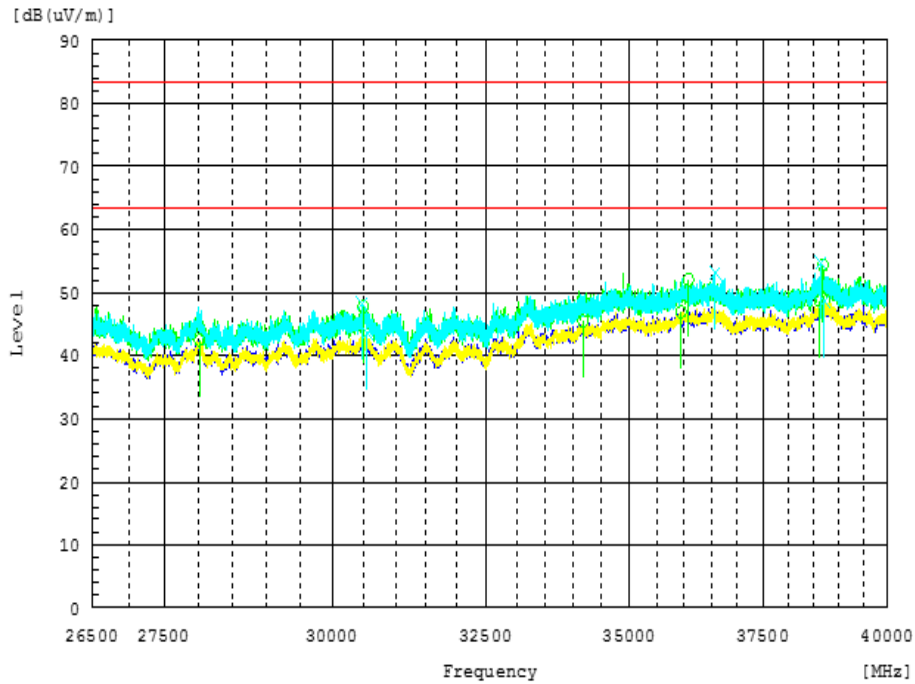

MEASUREMENT RESULT: PK Detector

| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------------|-----------|--------------------|-----------|-----------|-------------|--------------|
| 30466.345 | 47.4 | -5.7 | 84.0 | 36.6 | 100 | 198.0 | V |
| 30491.662 | 47.6 | -5.7 | 84.0 | 36.4 | 100 | 95.0 | V |
| 36074.559 | 52.5 | 3.4 | 84.0 | 31.5 | 100 | 147.0 | V |
| 36579.765 | 53.4 | 3.1 | 84.0 | 30.6 | 100 | 181.0 | V |
| 38641.412 | 54.2 | 1.0 | 84.0 | 29.8 | 100 | 249.0 | V |
| 38684.109 | 53.3 | 1.4 | 84.0 | 30.7 | 100 | 164.0 | V |

MEASUREMENT RESULT: AV Detector

| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------------|-----------|--------------------|-----------|-----------|-------------|--------------|
| 28007.845 | 42.7 | -10.5 | 64.0 | 21.3 | 100 | 44.0 | V |
| 30545.419 | 43.0 | -5.7 | 64.0 | 23.0 | 100 | 147.0 | V |
| 34163.590 | 45.1 | 0.8 | 64.0 | 18.9 | 100 | 232.0 | V |
| 35934.741 | 46.5 | 3.3 | 64.0 | 19.5 | 100 | 266.0 | V |
| 38620.300 | 48.1 | 0.9 | 64.0 | 15.9 | 100 | 358.0 | V |
| 38712.175 | 48.6 | 1.6 | 64.0 | 15.4 | 100 | 147.0 | V |

Note:

Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.


Limit:(PK)=74+20log(D1/D2)=74+20log(3/1)=84

Limit:(AV)=54+20log(D1/D2)=54+20log(3/1)=64

7.2 Conducted Disturbance

7.2.1 AC Port Test Data

Test Mode3: Charging + USB + Earphone + Dock (Type C + USB + VGA Playing)

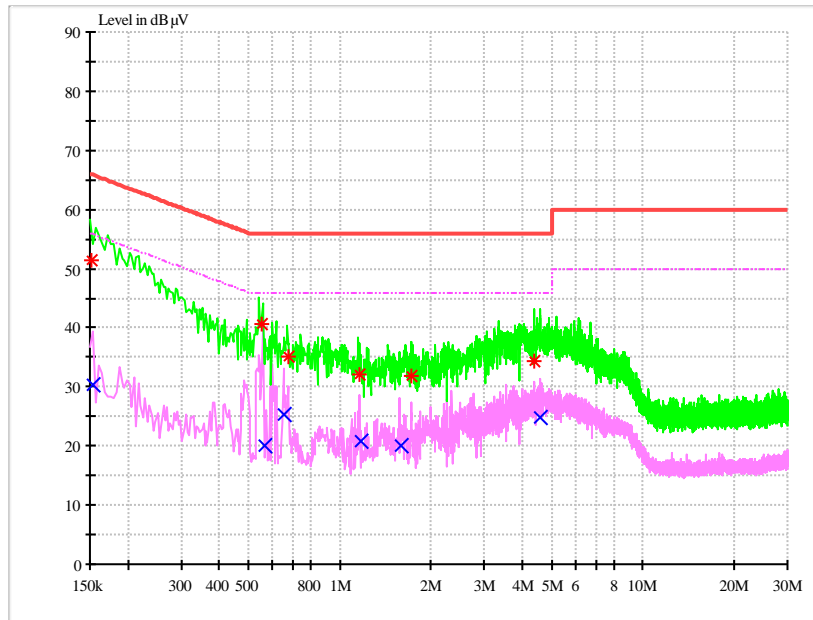

MEASUREMENT RESULT: QP Detector

| Frequency MHz | Level dBµV | Line | Transd dB | Margin dB | Limit dBµV | PE |
|---------------|------------|------|-----------|-----------|------------|-----|
| 0.151853 | 51.38 | N | 9.7 | 14.52 | 65.90 | FLO |
| 0.555679 | 40.62 | N | 9.7 | 15.38 | 56.00 | FLO |
| 0.678369 | 35.18 | N | 9.7 | 20.82 | 56.00 | FLO |
| 1.163507 | 32.17 | N | 9.7 | 23.83 | 56.00 | FLO |
| 1.715400 | 31.71 | N | 9.7 | 24.29 | 56.00 | FLO |
| 4.375100 | 34.46 | N | 9.8 | 21.54 | 56.00 | FLO |

MEASUREMENT RESULT: AV Detector

| Frequency MHz | Level dBµV | Line | Transd dB | Margin dB | Limit dBµV | PE |
|---------------|------------|------|-----------|-----------|------------|-----|
| 0.153988 | 30.36 | L1 | 9.7 | 24.65 | 55.01 | FLO |
| 0.567533 | 20.08 | L1 | 9.7 | 25.92 | 46.00 | FLO |
| 0.656824 | 25.34 | N | 9.7 | 20.66 | 46.00 | FLO |
| 1.176591 | 20.93 | L1 | 9.7 | 25.07 | 46.00 | FLO |
| 1.586413 | 20.16 | N | 9.7 | 25.84 | 46.00 | FLO |
| 4.568338 | 24.73 | N | 9.8 | 21.27 | 46.00 | FLO |

Note:

Level= Reading level+ Transd (cable loss + correction factor)

The reading level is calculated by software which is not shown in the sheet.

-----**END**-----