



Appendix A: 20dB Emission Bandwidth (EBW)



1 Result Table

EUT Conf.	EBW [MHz]	Limit[MHz]	Verdict
TM1_DH5_Ch0	0.94	---	Pass
TM1_DH5_Ch39	0.94	---	Pass
TM1_DH5_Ch78	0.94	---	Pass
TM2_2DH5_Ch0	1.46	---	Pass
TM2_2DH5_Ch39	1.44	---	Pass
TM2_2DH5_Ch78	1.44	---	Pass
TM3_3DH5_Ch0	1.46	---	Pass
TM3_3DH5_Ch39	1.44	---	Pass
TM3_3DH5_Ch78	1.44	---	Pass

2 Test Plot

2.1 TM1_DH5_Ch0





2.2 TM1_DH5_Ch39



2.3 TM1_DH5_Ch78



2.4 TM2_2DH5_Ch0



2.5 TM2_2DH5_Ch39




2.6 TM2_2DH5_Ch78



2.7 TM3_3DH5_Ch0



2.8 TM3_3DH5_Ch39

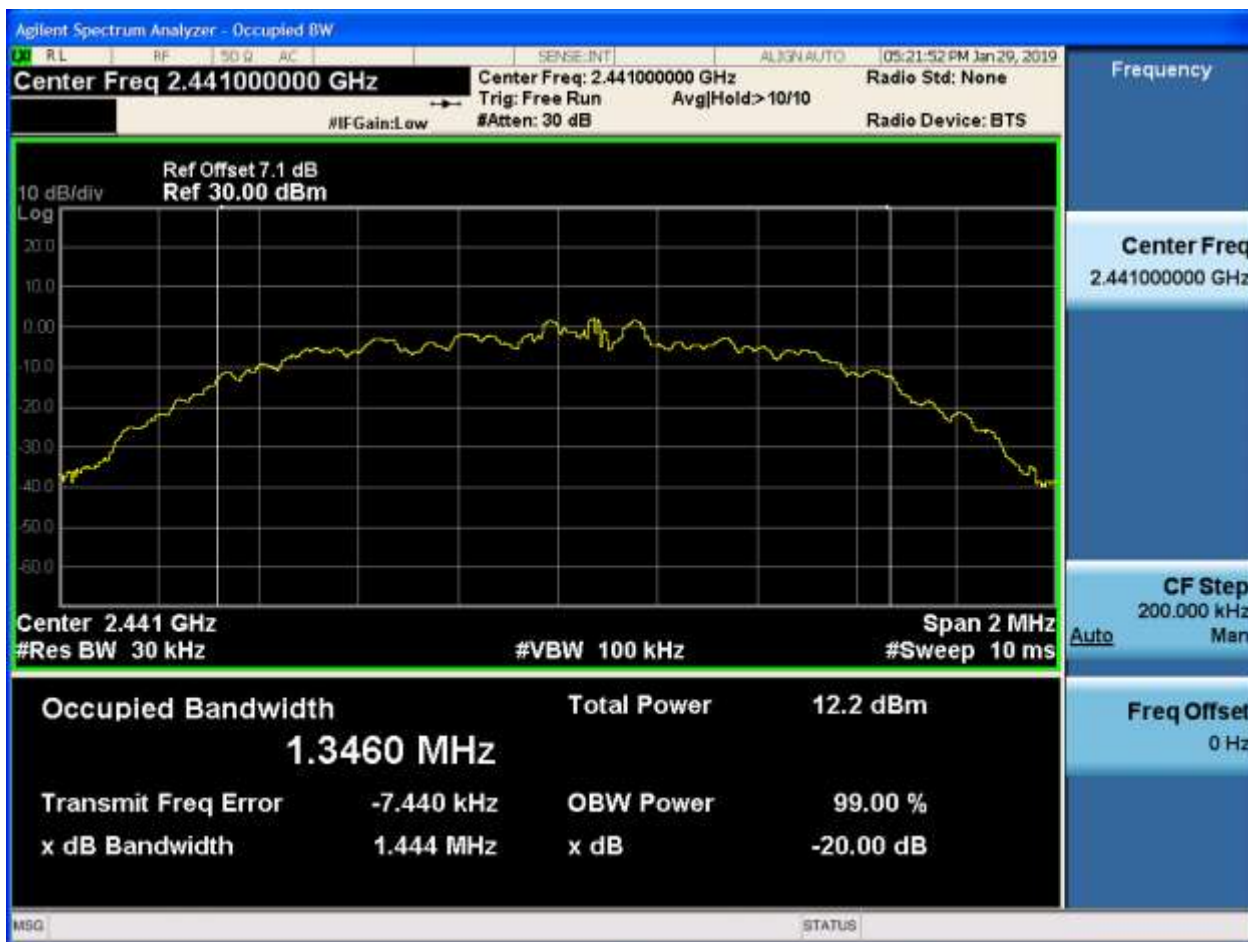



2.9 TM3_3DH5_Ch78





Appendix B: Carrier Frequency Separation




1 Result Table

EUT Conf.	Carrier Frequency Separation [MHz]	Limit[MHz]	Verdict
TM1_DH5_Hop	1.05	≥ 0.627	Pass
TM2_2DH5_Hop	1.15	≥ 0.973	Pass
TM3_3DH5_Hop	1.10	≥ 0.973	Pass


2 Test Plot

2.1 TM1_DH5_Hop

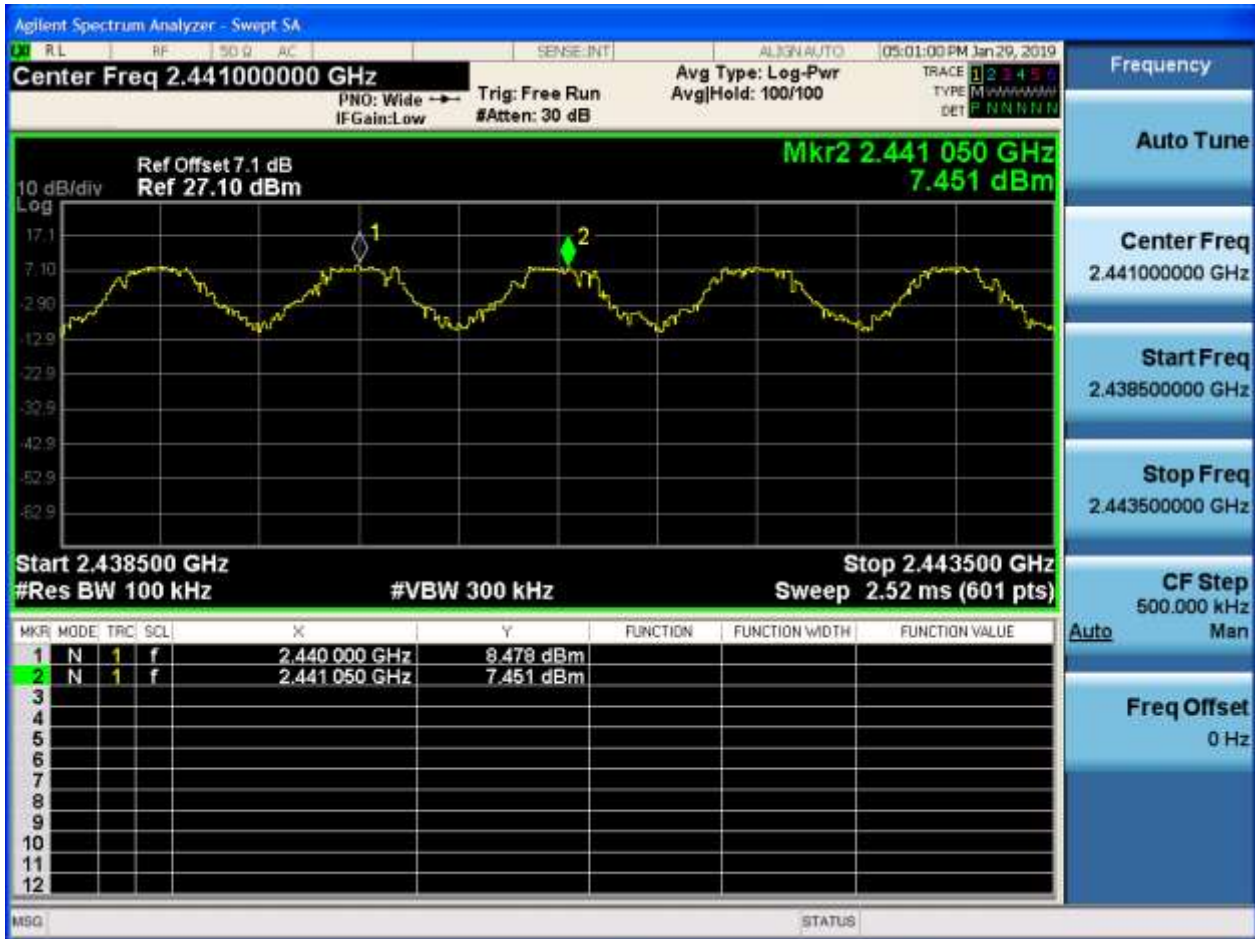




2.2 TM2_2DH5_Hop

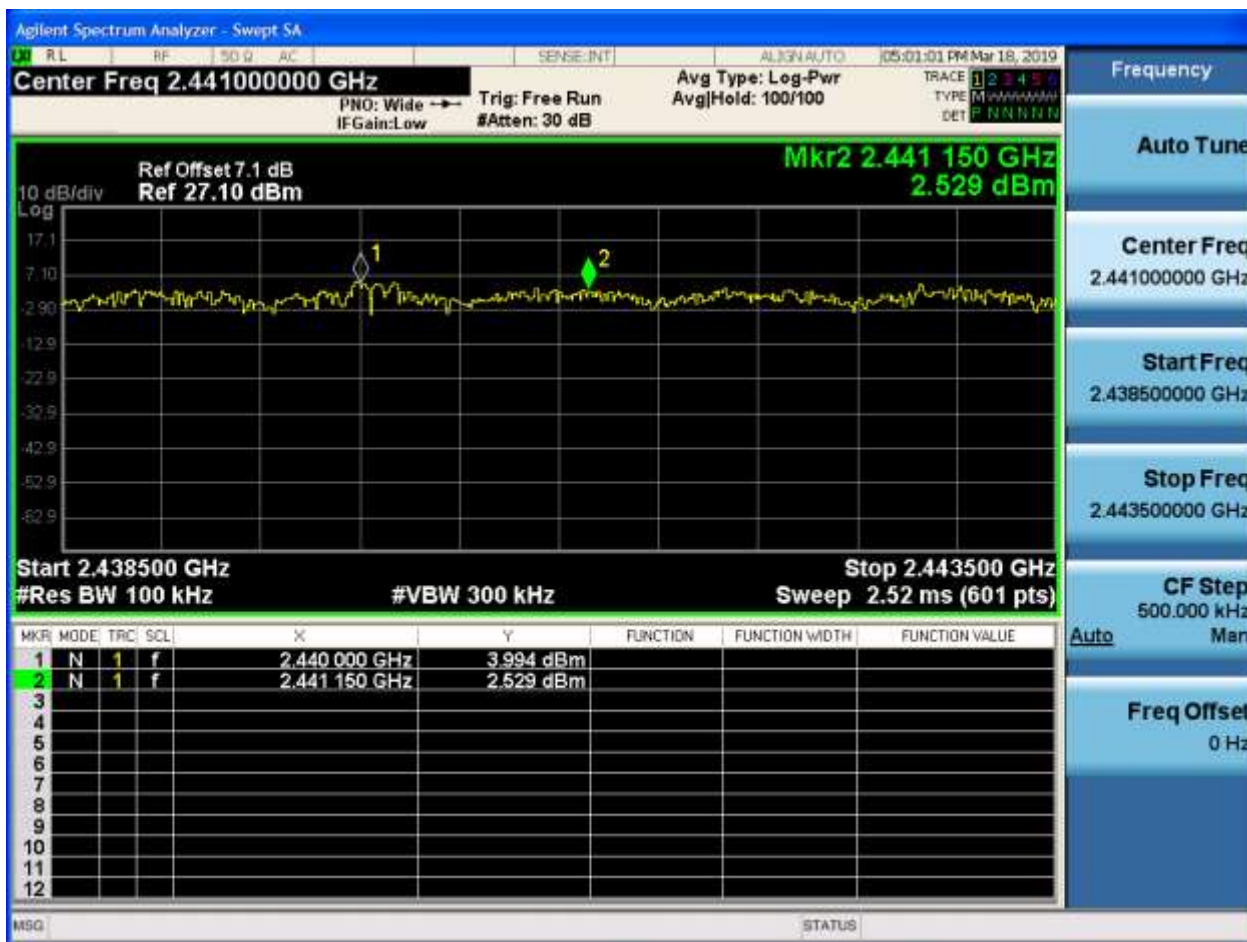

2.3 TM3_3DH5_Hop

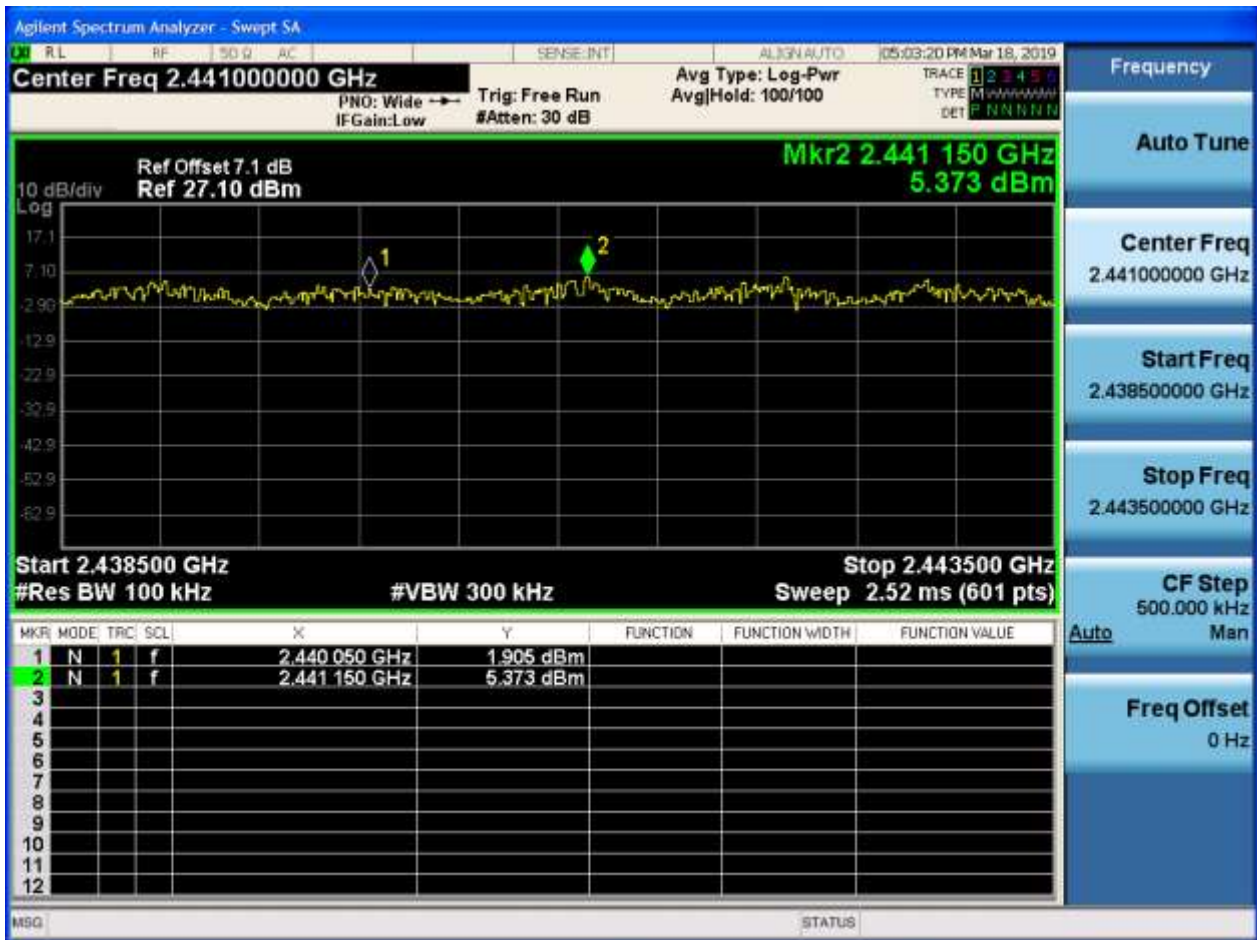



Appendix C: Number of Hopping Channel



1 Result Table

EUT Conf.	Number of Hopping Channel	Limit	Verdict
TM1_DH5_Hop	79	≥ 15	Pass
TM2_2DH5_Hop	79	≥ 15	Pass
TM3_3DH5_Hop	79	≥ 15	Pass

2 Test Plot

2.1 TM1_DH5_Hop




2.2 TM2_2DH5_Hop





2.3 TM3_3DH5_Hop

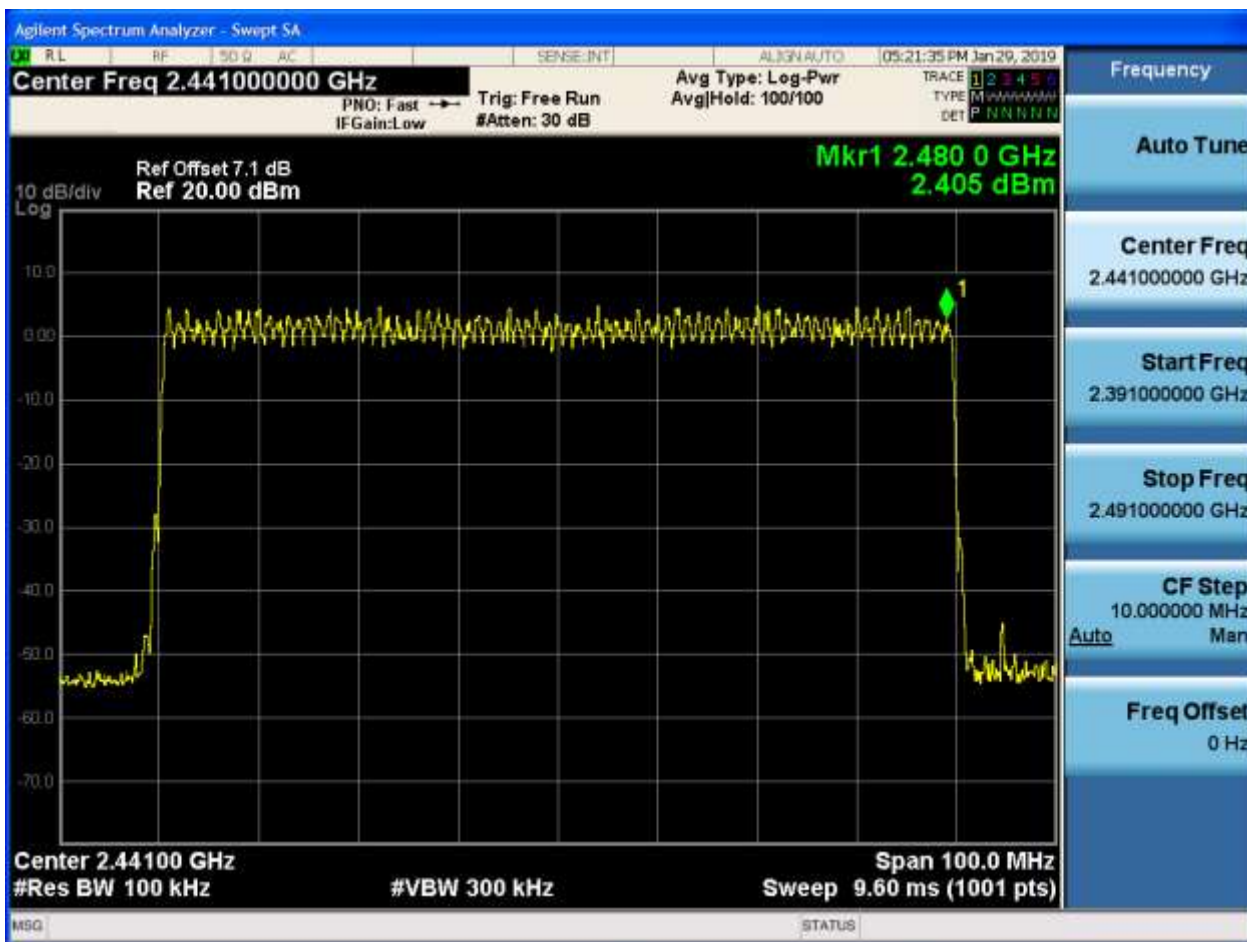



Appendix D: Time of Occupancy (Dwell Time)

1 Result Table

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:


- The duration for dwell time calculation: $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600 / 6 = 266.67 \text{ [ch*hop/s]}$;
- The hops per second on one channel: $266.67 \text{ [ch*hop/s]} / 79 \text{ [ch]} = 3.38 \text{ [hop/s]}$;
- The total hops for all channels within the dwell time calculation duration: $3.38 \text{ [hop/s]} * 31.6 \text{ [s*ch]} = 106.67 \text{ [hop*ch]}$;
- The dwell time for all channels hopping: $106.67 \text{ [hop*ch]} * \text{Burst Width [ms/hop/ch]}$.

EUT Conf.	Burst Width [s/hop/ch]	Total Hops [hop*ch]	Dwell Time [ms]	Verdict
TM1_DH5_Ch39	0.00289	106.67	0.309	Pass
TM2_2DH5_Ch39	0.00289	106.67	0.309	Pass
TM3_3DH5_Ch39	0.00289	106.67	0.309	Pass

2 Test Plot


NOTE: The test plots are only for Burst Width measurements.

2.1 TM1_DH5_Ch39

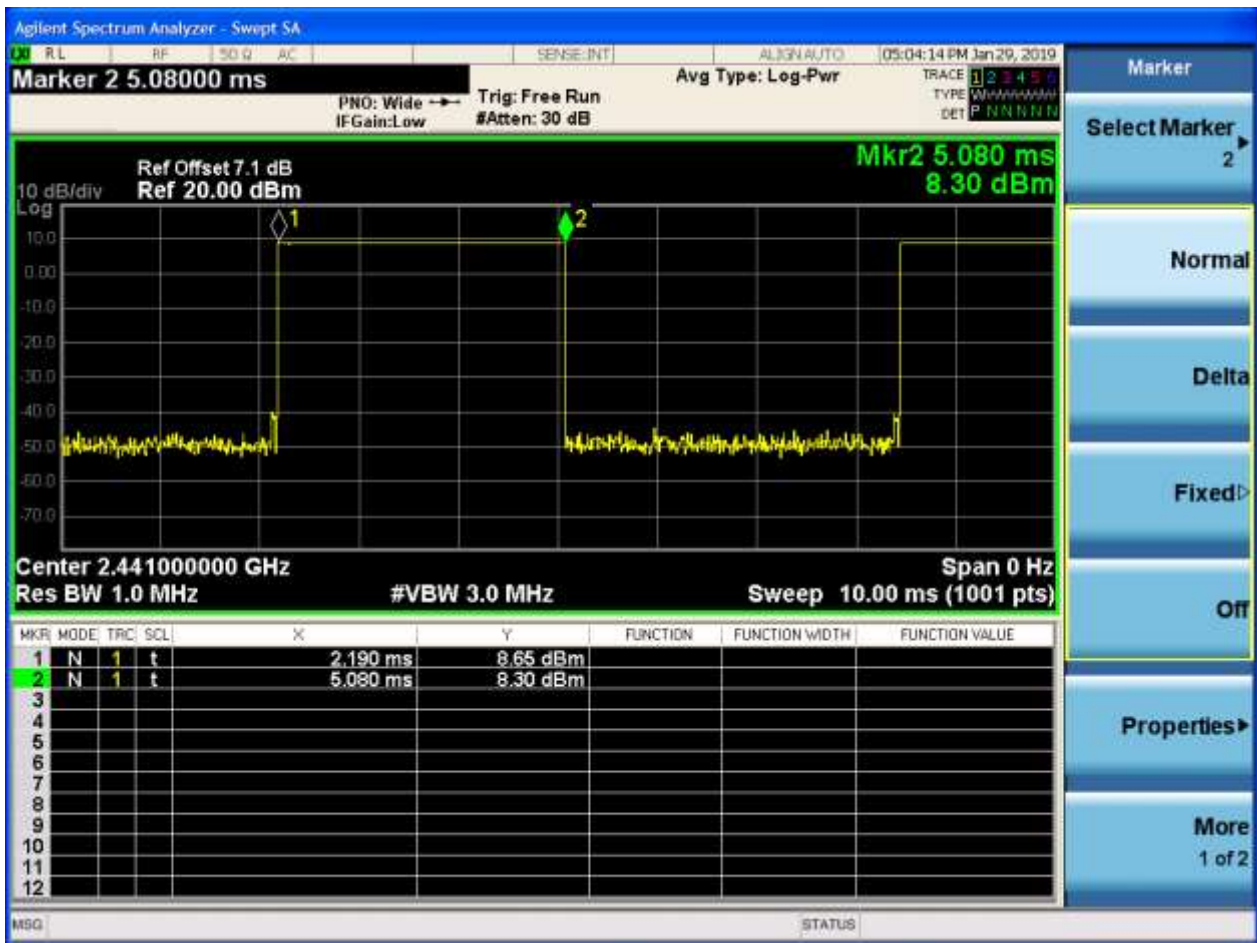




2.2 TM2_2DH5_Ch39

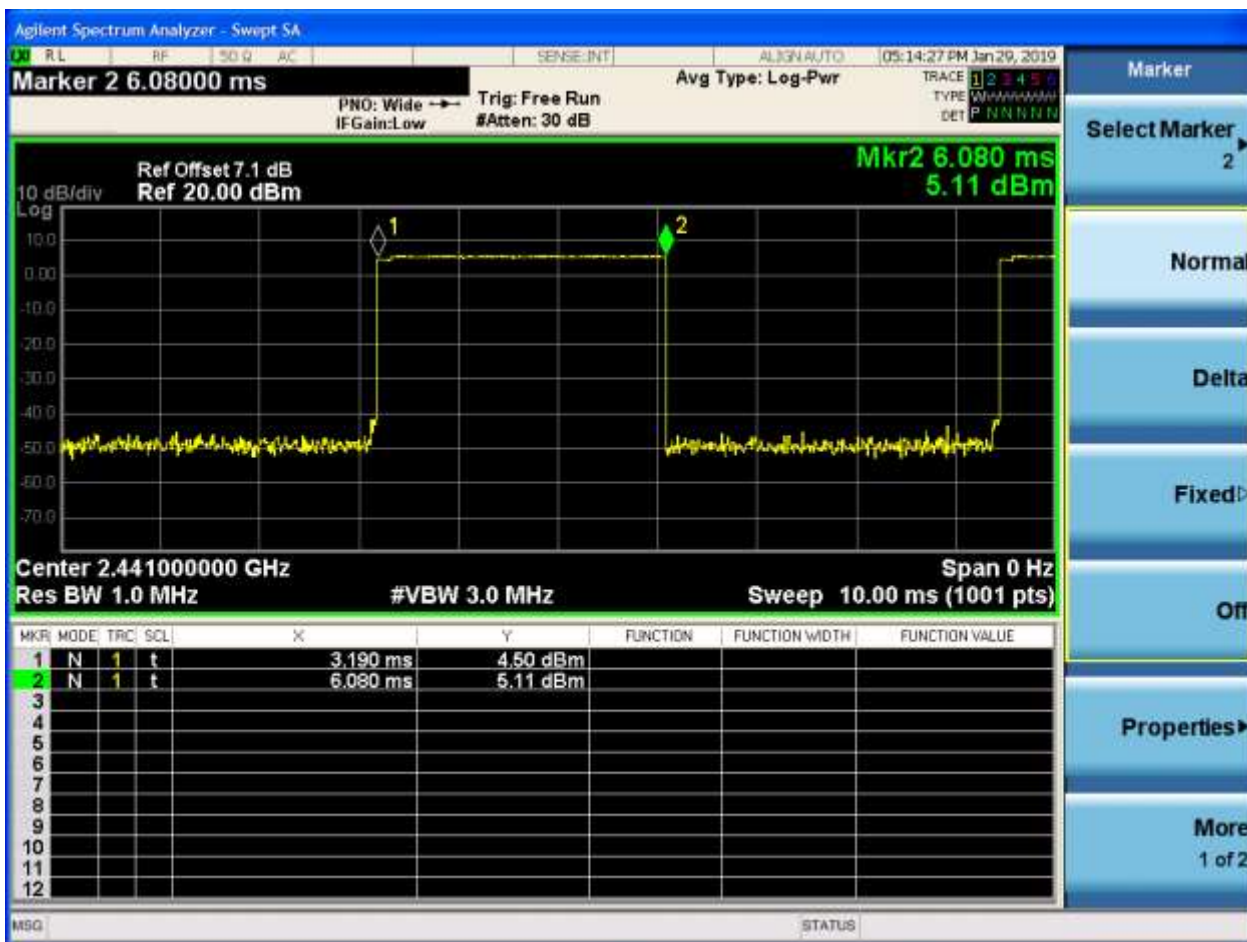

2.3 TM3_3DH5_Ch39

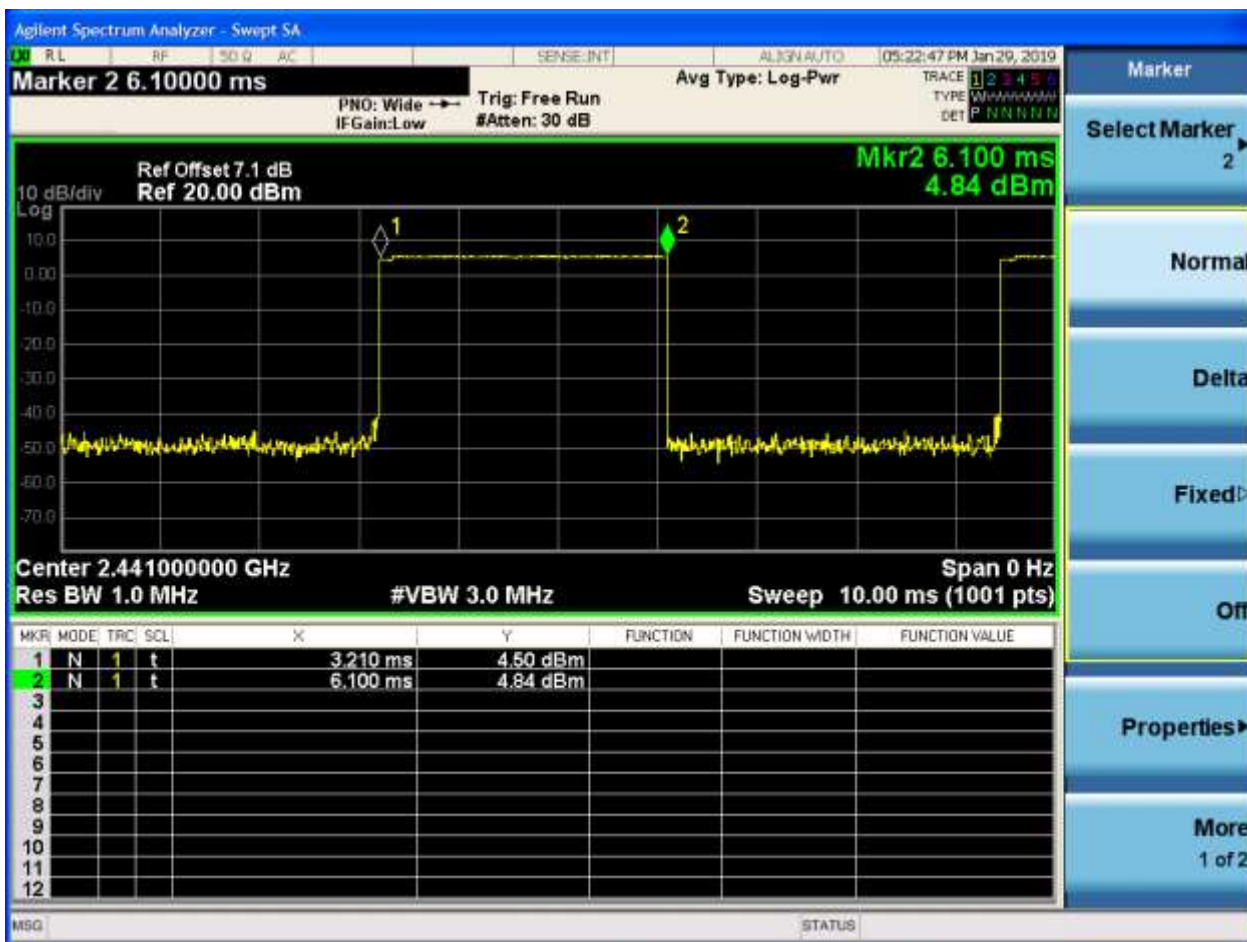



Appendix E: Maximum Peak Conducted Output Power




1 Result Table


EUT Conf.	Max. Peak Power [dBm]	Limit[dBm]	Verdict
TM1_DH5_Ch0	7.758	20.97	Pass
TM1_DH5_Ch39	8.683	20.97	Pass
TM1_DH5_Ch78	10.016	20.97	Pass
TM2_2DH5_Ch0	7.186	20.97	Pass
TM2_2DH5_Ch39	5.921	20.97	Pass
TM2_2DH5_Ch78	6.212	20.97	Pass
TM3_3DH5_Ch0	7.191	20.97	Pass
TM3_3DH5_Ch39	5.92	20.97	Pass
TM3_3DH5_Ch78	6.232	20.97	Pass

2 Test Plot

2.1 TM1_DH5_Ch0

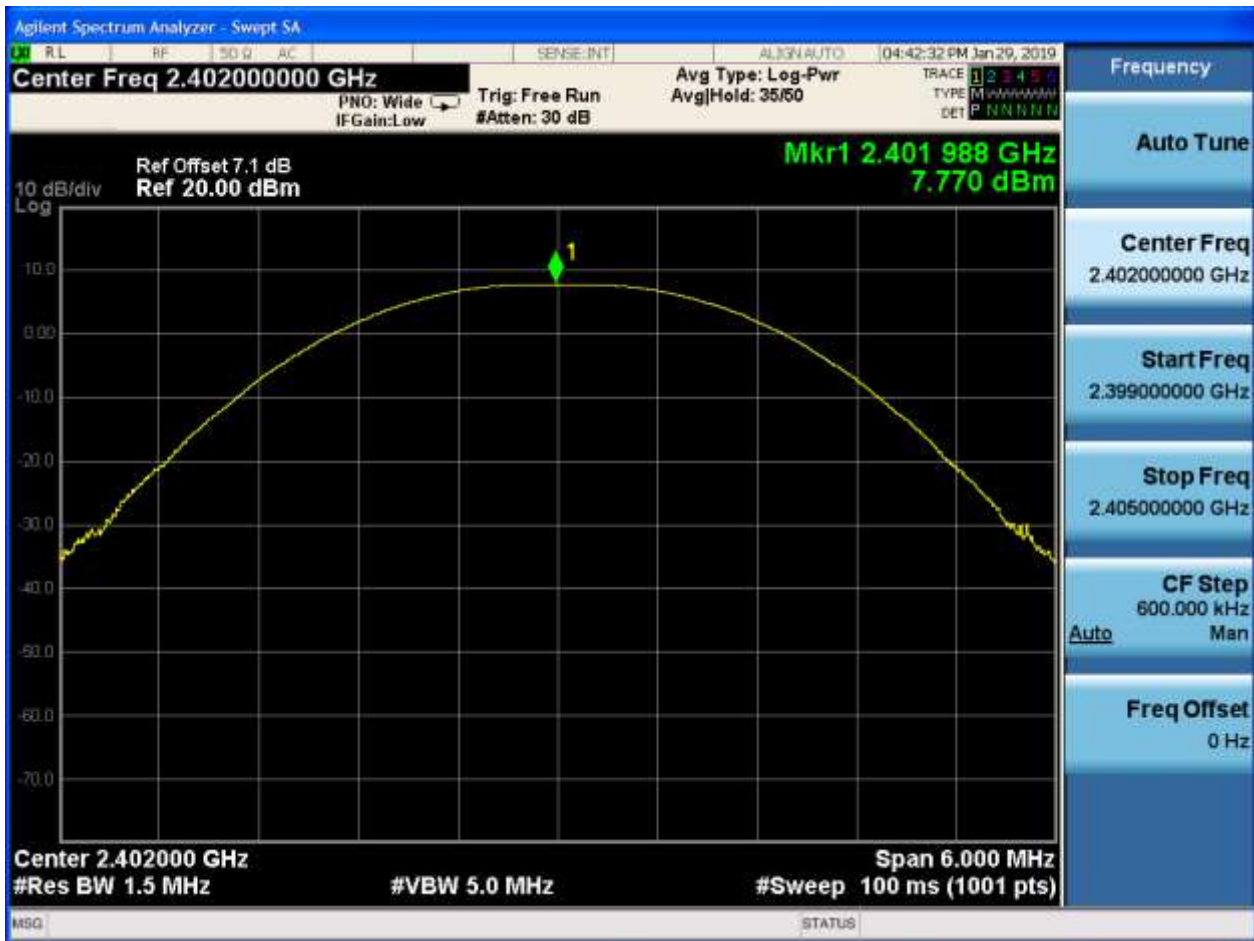

2.2 TM1_DH5_Ch39

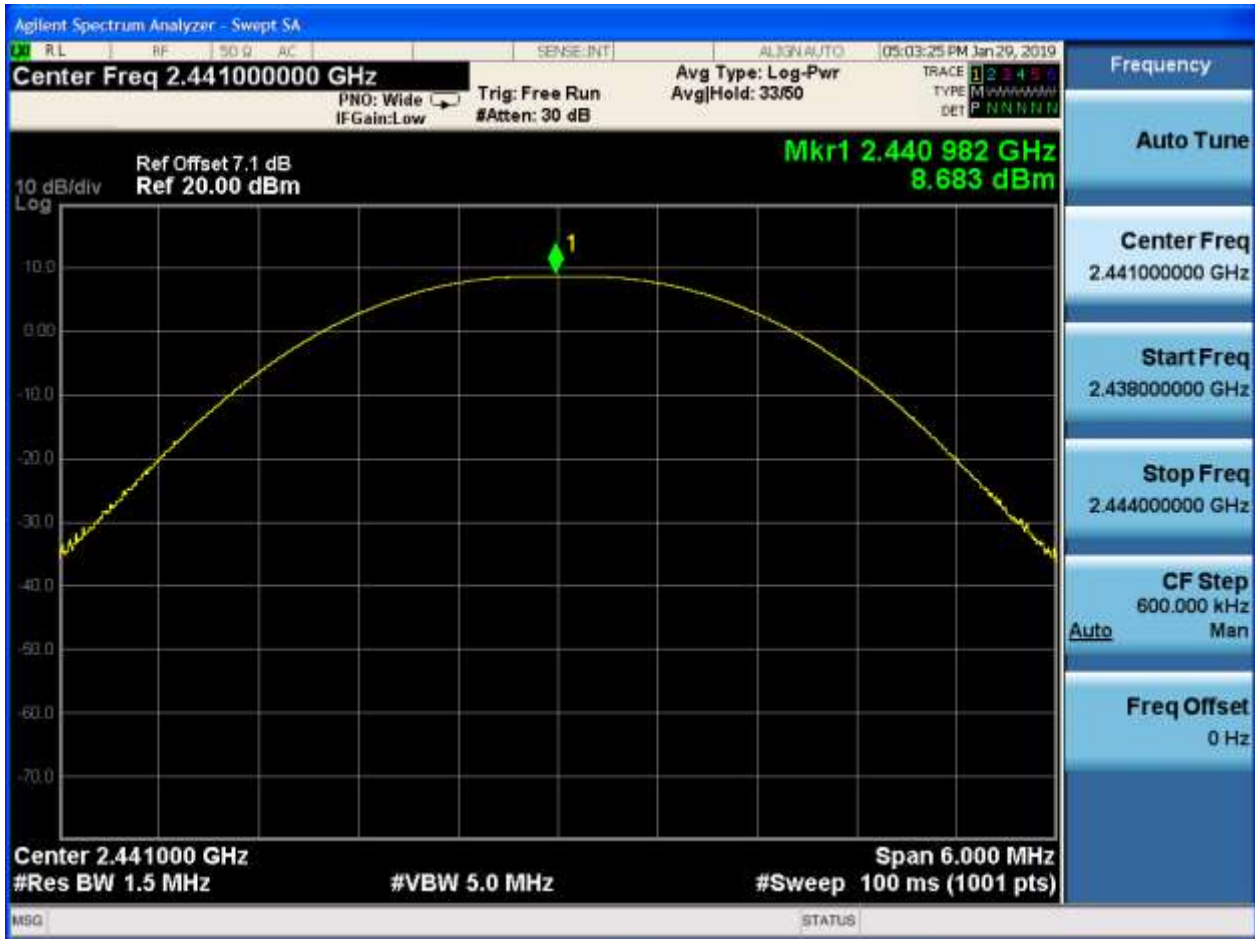

2.3 TM1_DH5_Ch78





2.4 TM2_2DH5_Ch0



2.5 TM2_2DH5_Ch39



2.6 TM2_2DH5_Ch78



2.7 TM3_3DH5_Ch0



2.8 TM3_3DH5_Ch39



2.9 TM3_3DH5_Ch78





Appendix F: Band edge spurious emission


1 Result Table

EUT Conf.	Channel No.	Carrier Frequency [MHz]	Max. Spurious Level [dBm]	Frequency Hopping	Carrier Power [dBm]	Limit [dBm]	Result
TM1_DH5_Ch0	0	2402	-49.255	Off	7.164	-12.836	Pass
	-	-	-55.09	On	7.236	-12.764	Pass
TM1_DH5_Ch78	78	2480	-54.65	Off	8.661	-11.339	Pass
	-	-	-54.081	On	8.585	-11.415	Pass
TM2_2DH5_Ch0	0	2402	-46.533	Off	4.841	-15.159	Pass
	-	-	-50.911	On	3.761	-16.239	Pass
TM2_2DH5_Ch78	78	2480	-53.817	Off	4.783	-15.217	Pass
	-	-	-55.265	On	2.527	-17.473	Pass
TM3_3DH5_Ch0	0	2402	-40.003	Off	4.781	-15.219	Pass
	-	-	-52.907	On	2.752	-17.248	Pass
TM3_3DH5_Ch78	78	2480	-53.112	Off	4.759	-15.241	Pass
	-	-	-54.817	On	2.062	-17.938	Pass

2 Test Plot

2.1 TM1_DH5_Ch0

No hopping

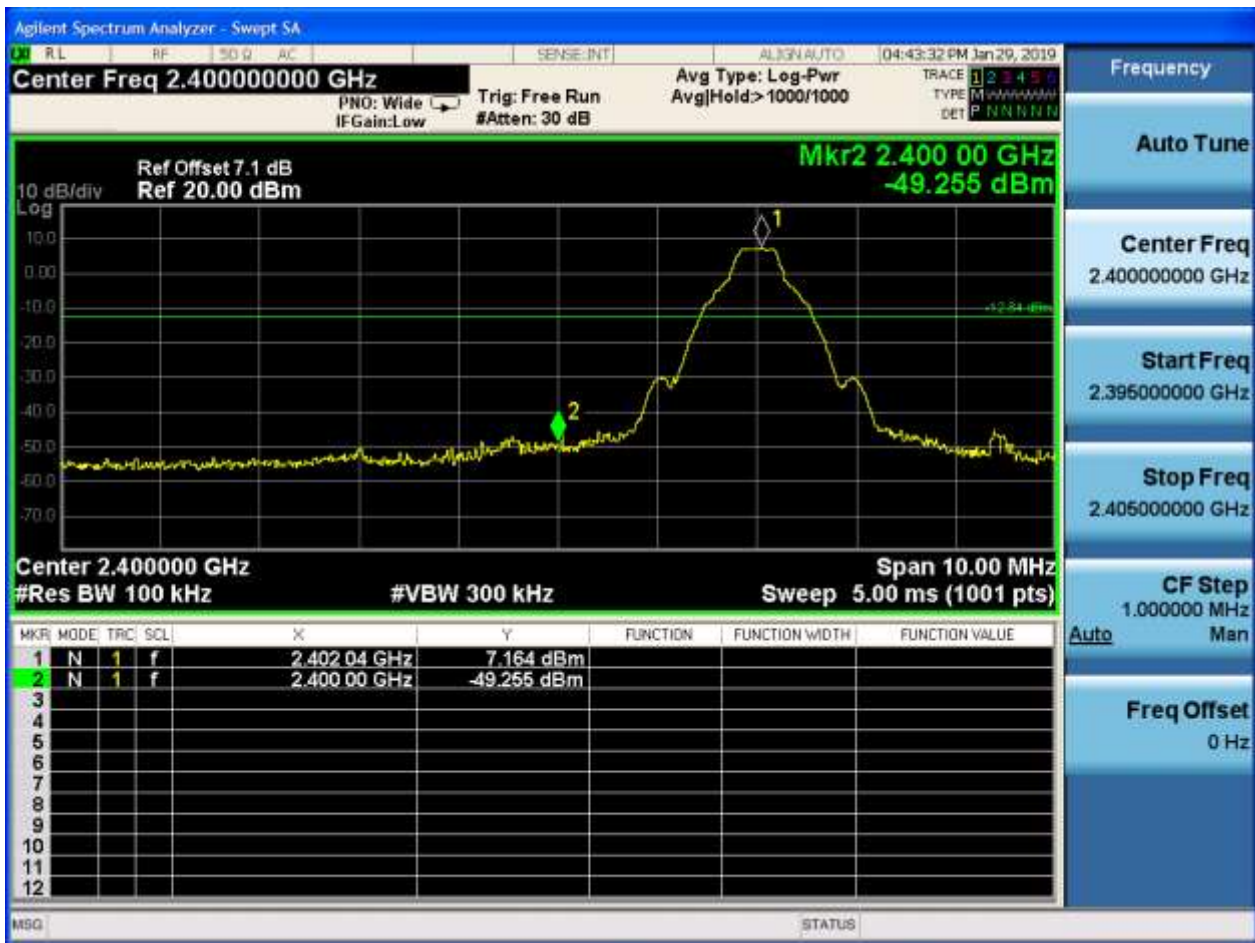


With hopping



2.2 TM1_DH5_Ch78

No hopping

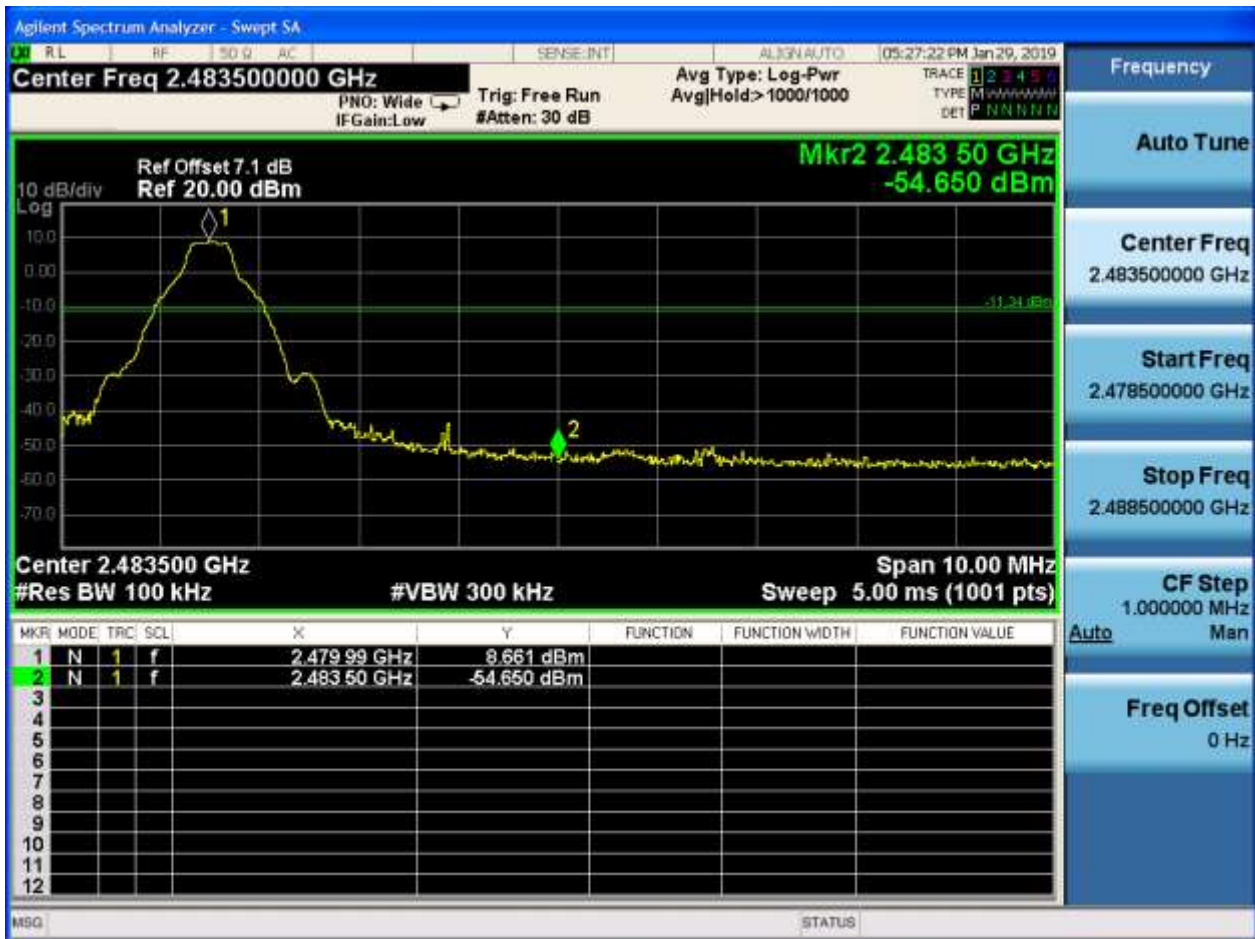

With hopping



2.3 TM2_2DH5_Ch0

No hopping



With hopping



2.4 TM2_2DH5_Ch78

No hopping





With hopping



2.5 TM3_3DH5_Ch0

No hopping



With hopping




2.6 TM3_3DH5_Ch78

No hopping



With hopping

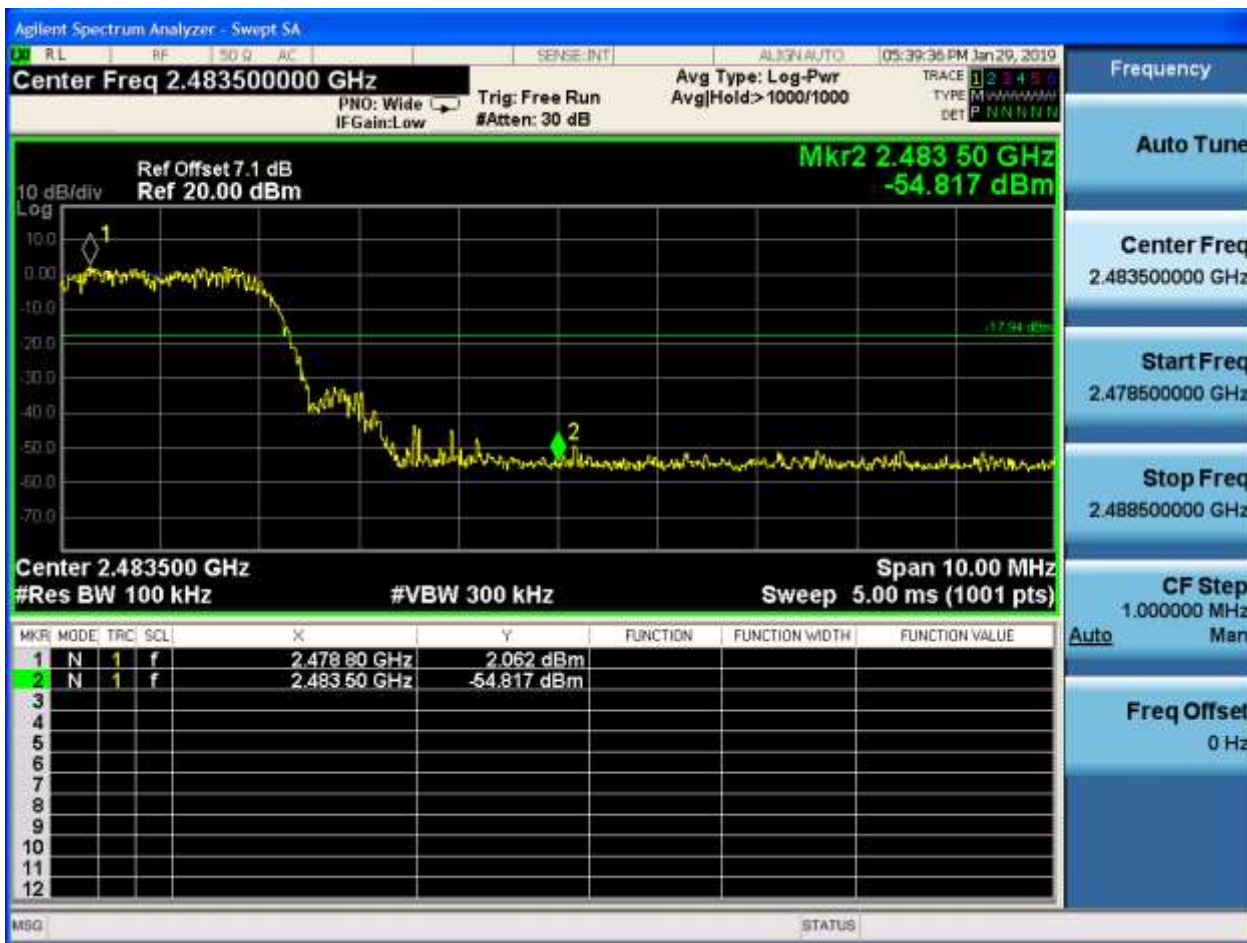



Appendix G: Conducted RF Spurious Emission

1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.

EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	7.737	< Limit	Pass
TM1_DH5_Ch39	8.63	< Limit	Pass
TM1_DH5_Ch78	9.172	< Limit	Pass
TM2_2DH5_Ch0	4.89	< Limit	Pass
TM2_2DH5_Ch39	4.515	< Limit	Pass
TM2_2DH5_Ch78	4.798	< Limit	Pass
TM3_3DH5_Ch0	4.882	< Limit	Pass
TM3_3DH5_Ch39	4.499	< Limit	Pass
TM3_3DH5_Ch78	4.793	< Limit	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

2.1.1 Pref




2.1.2 Puw



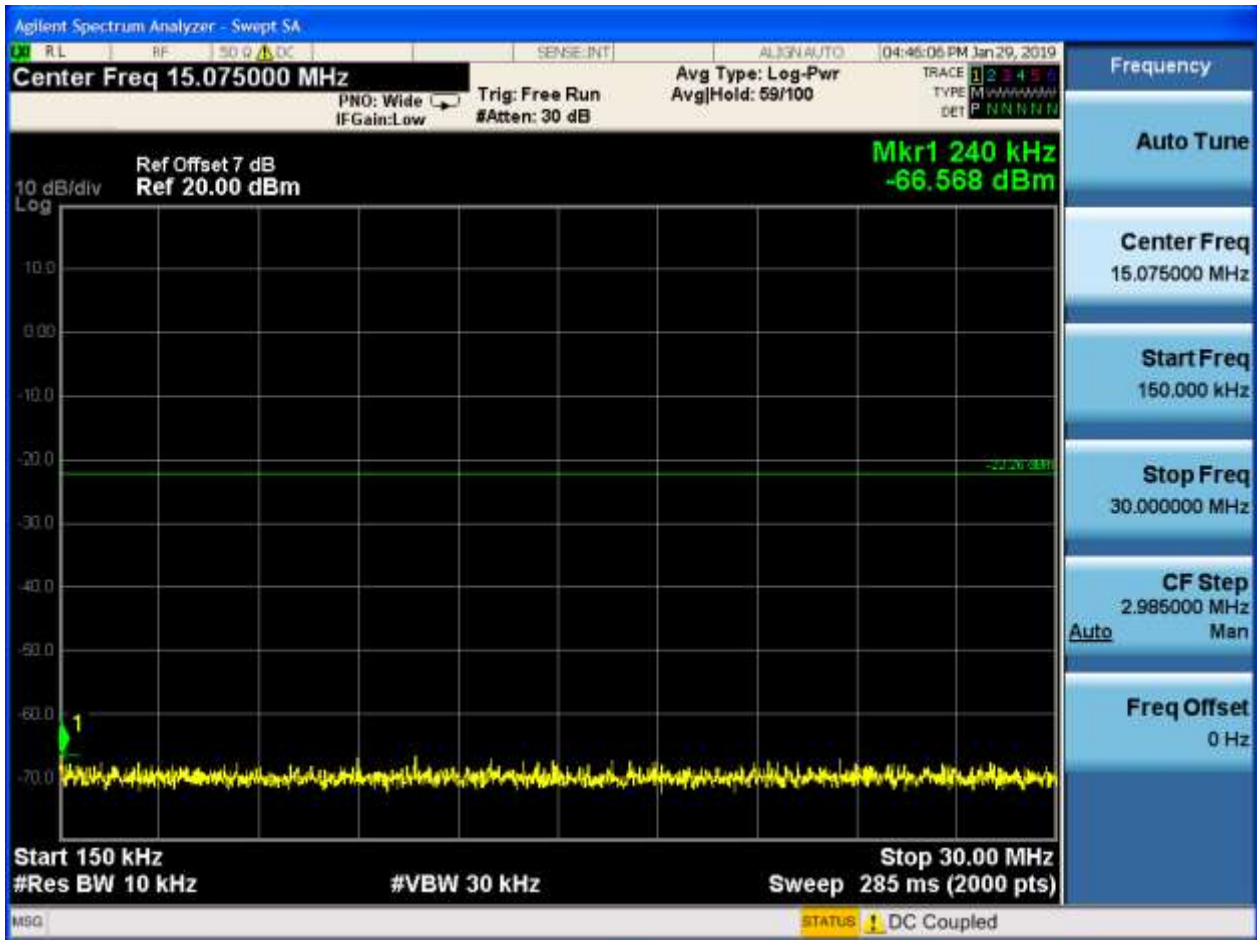



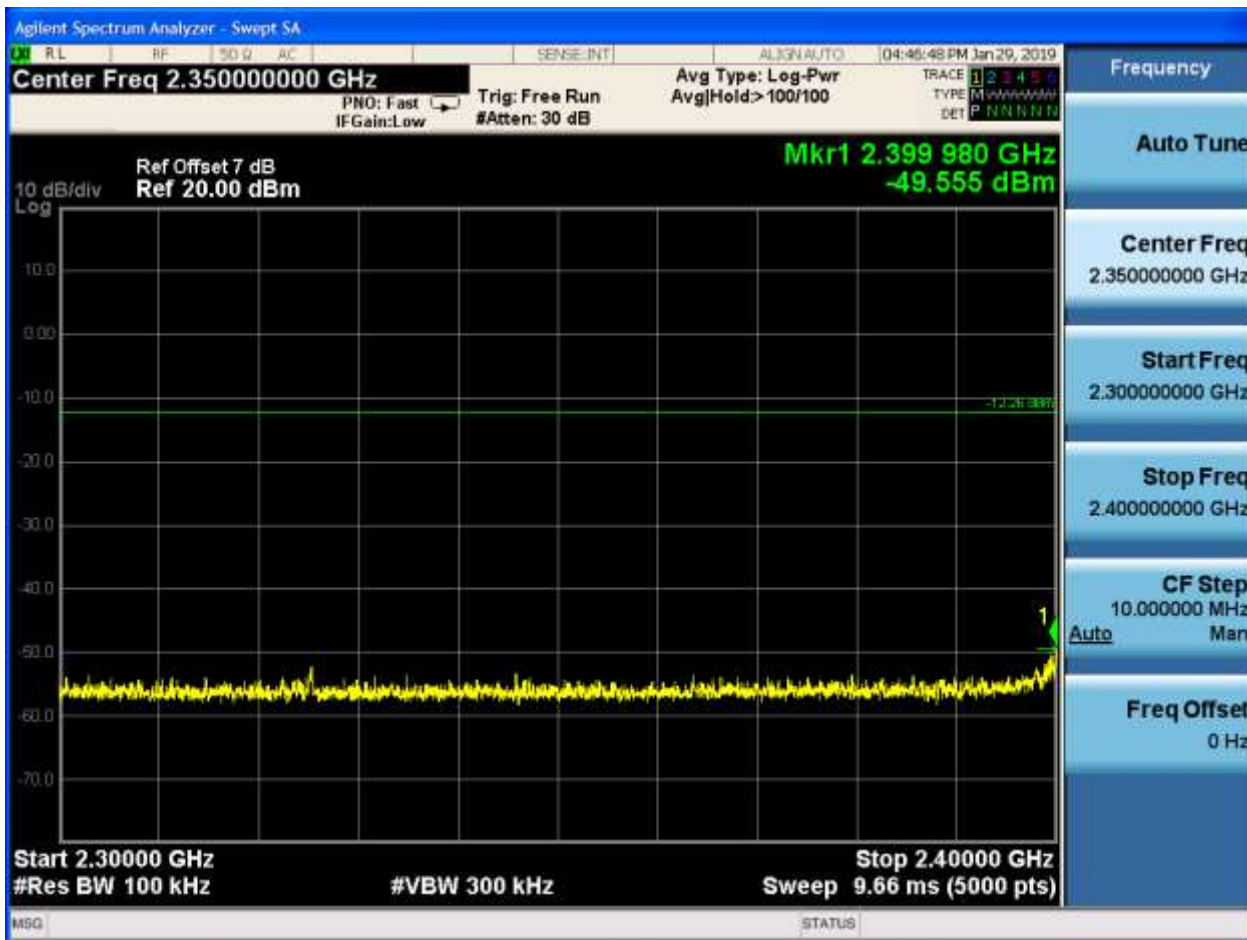







2.2 TM1_DH5_Ch39


2.2.1 Pref








2.2.2 Puw



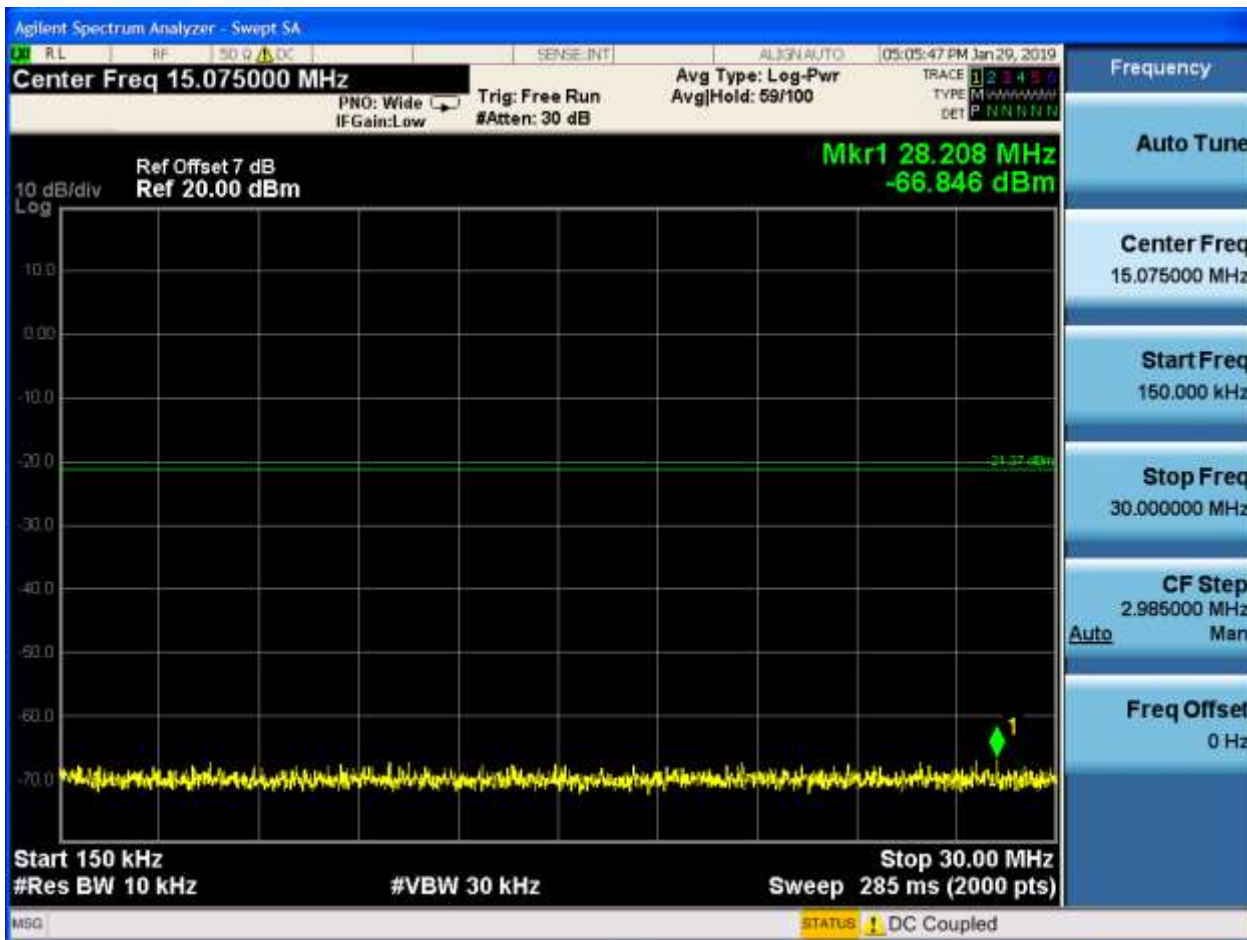

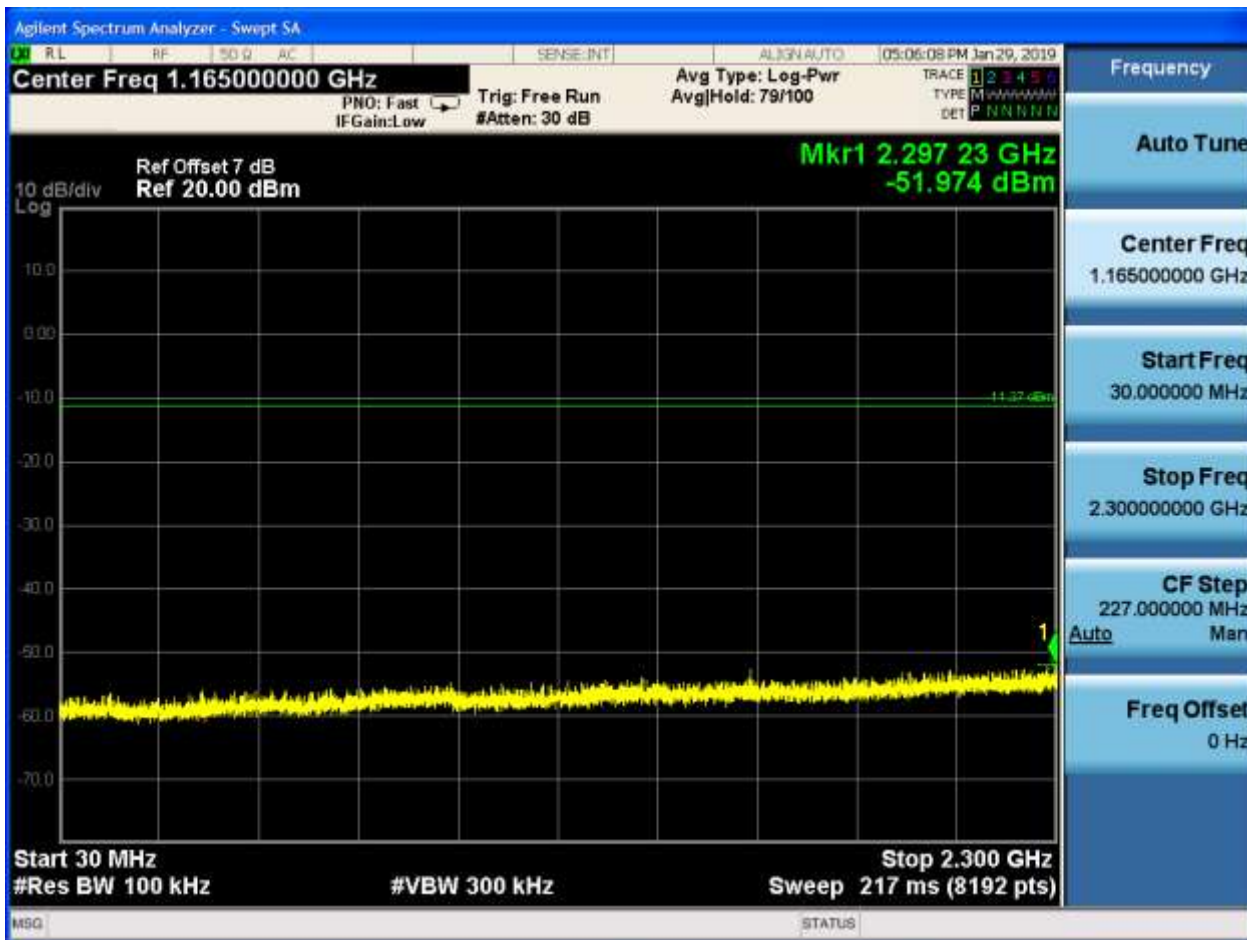

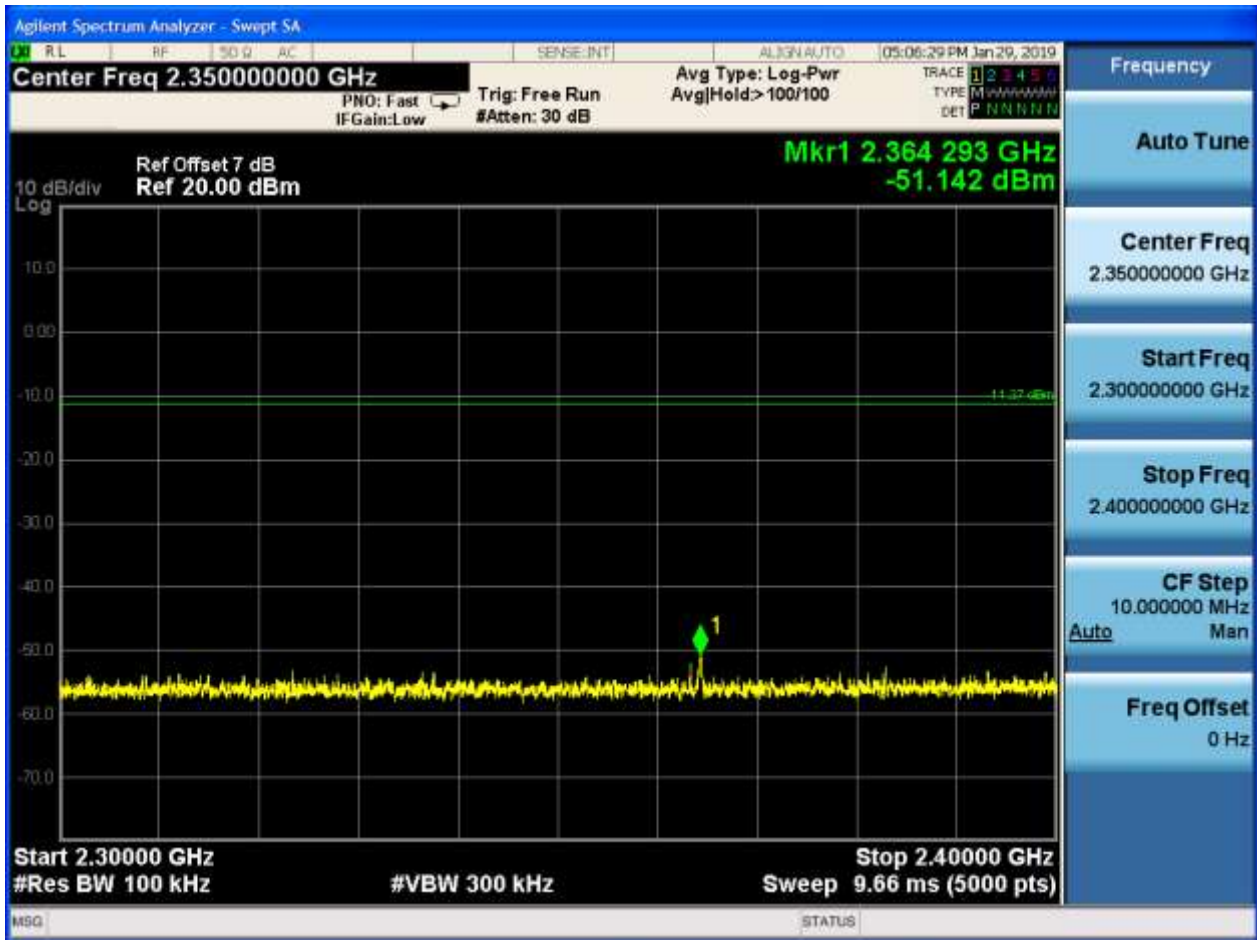

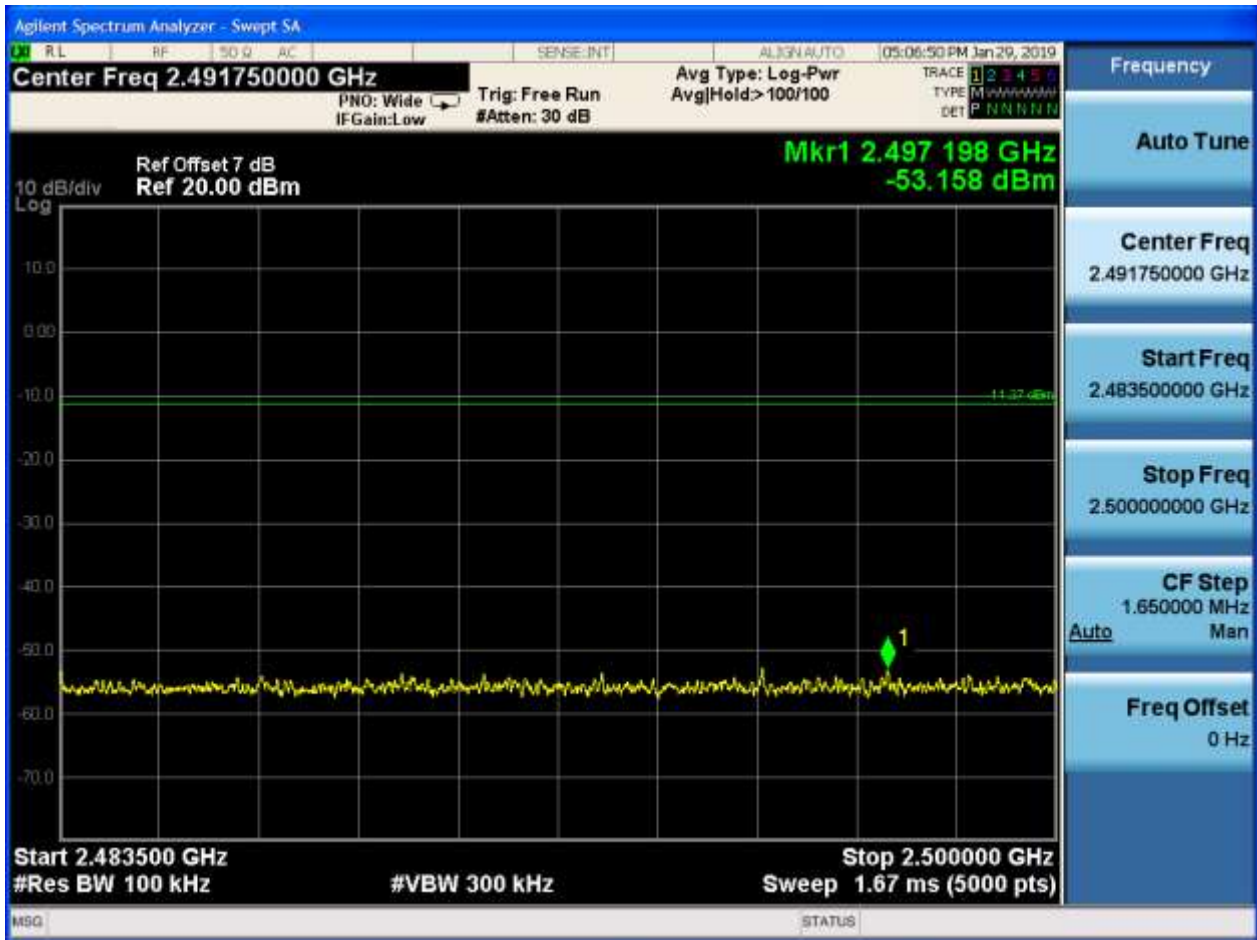



2.3 TM1_DH5_Ch78


2.3.1 Pref








2.3.2 Puw



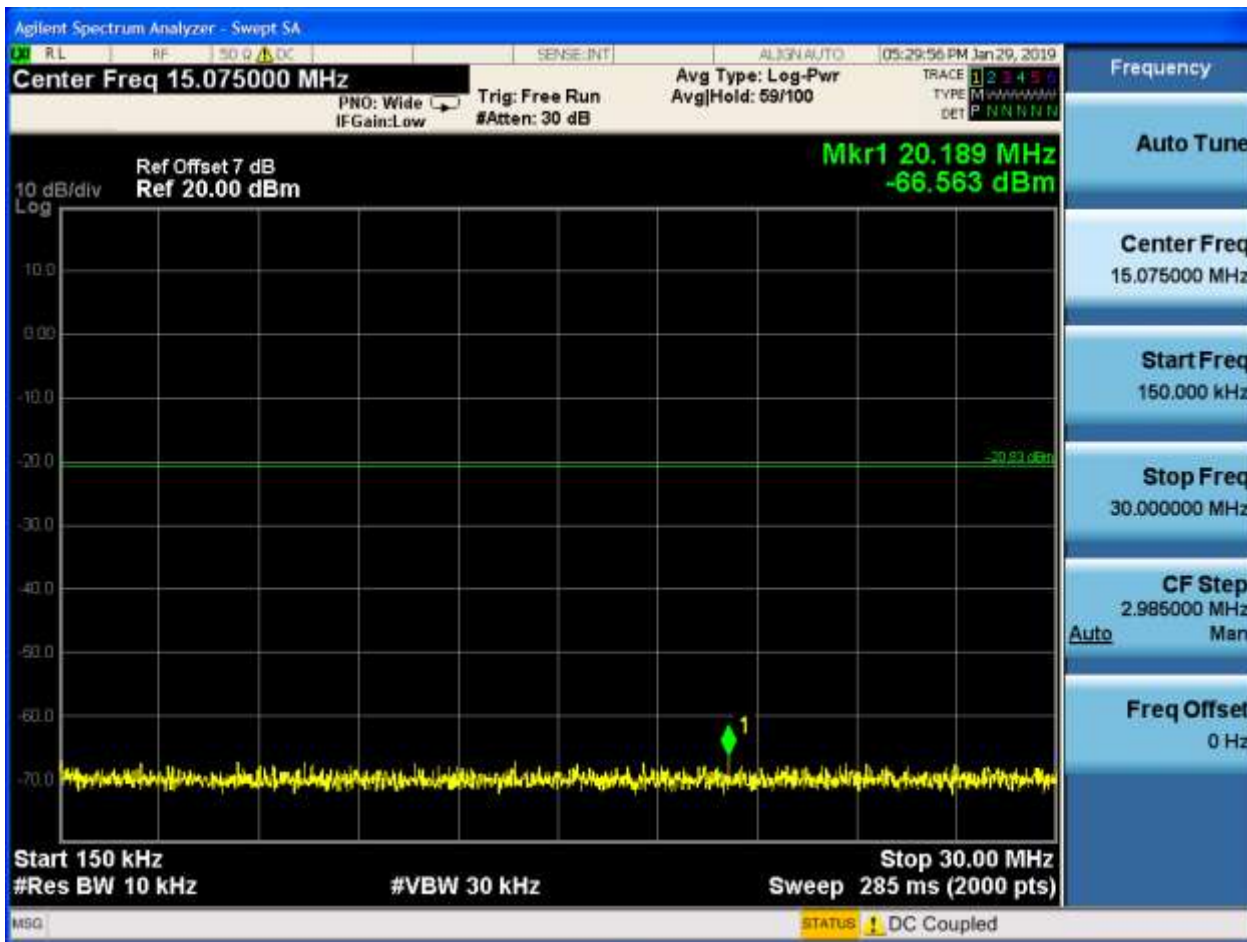

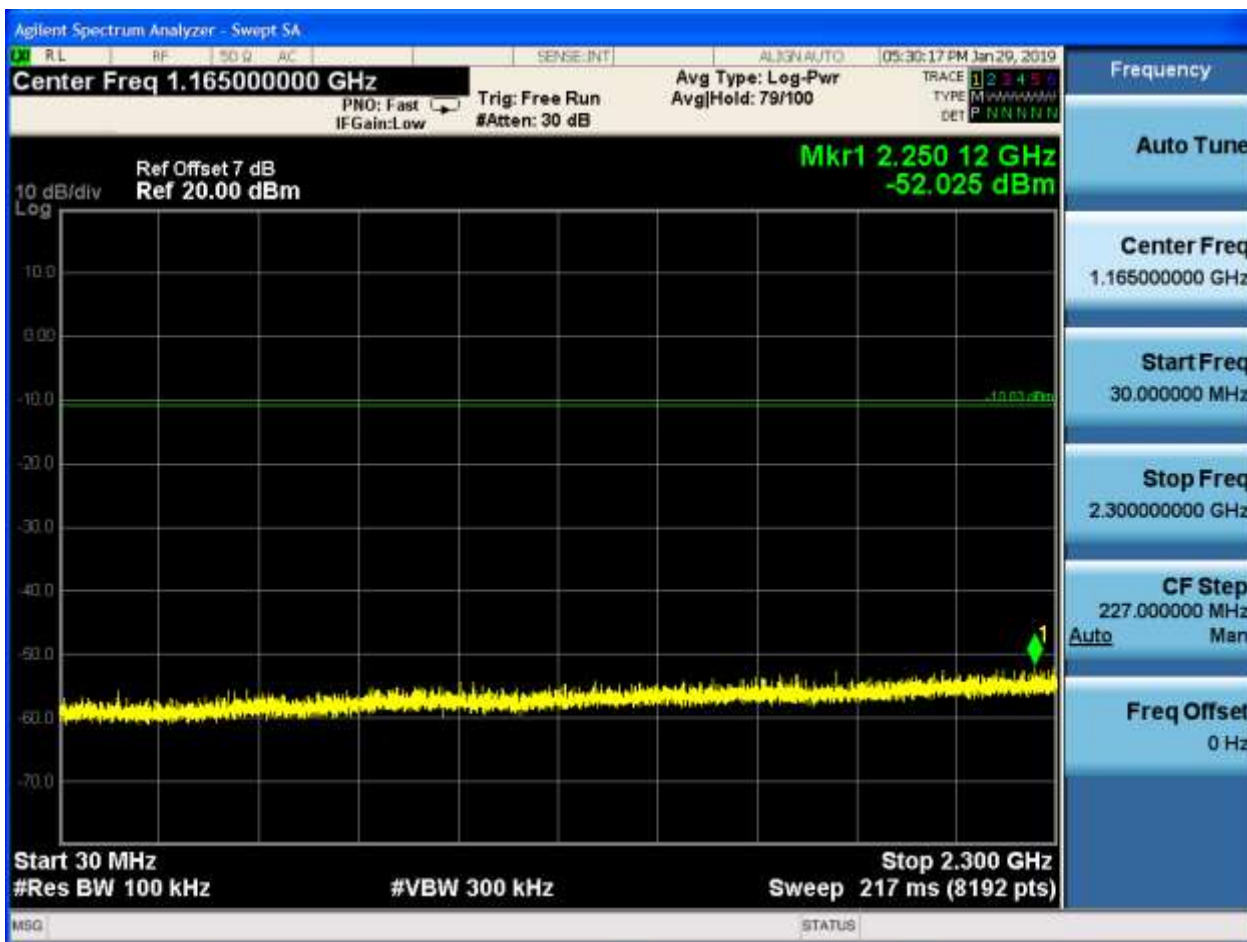

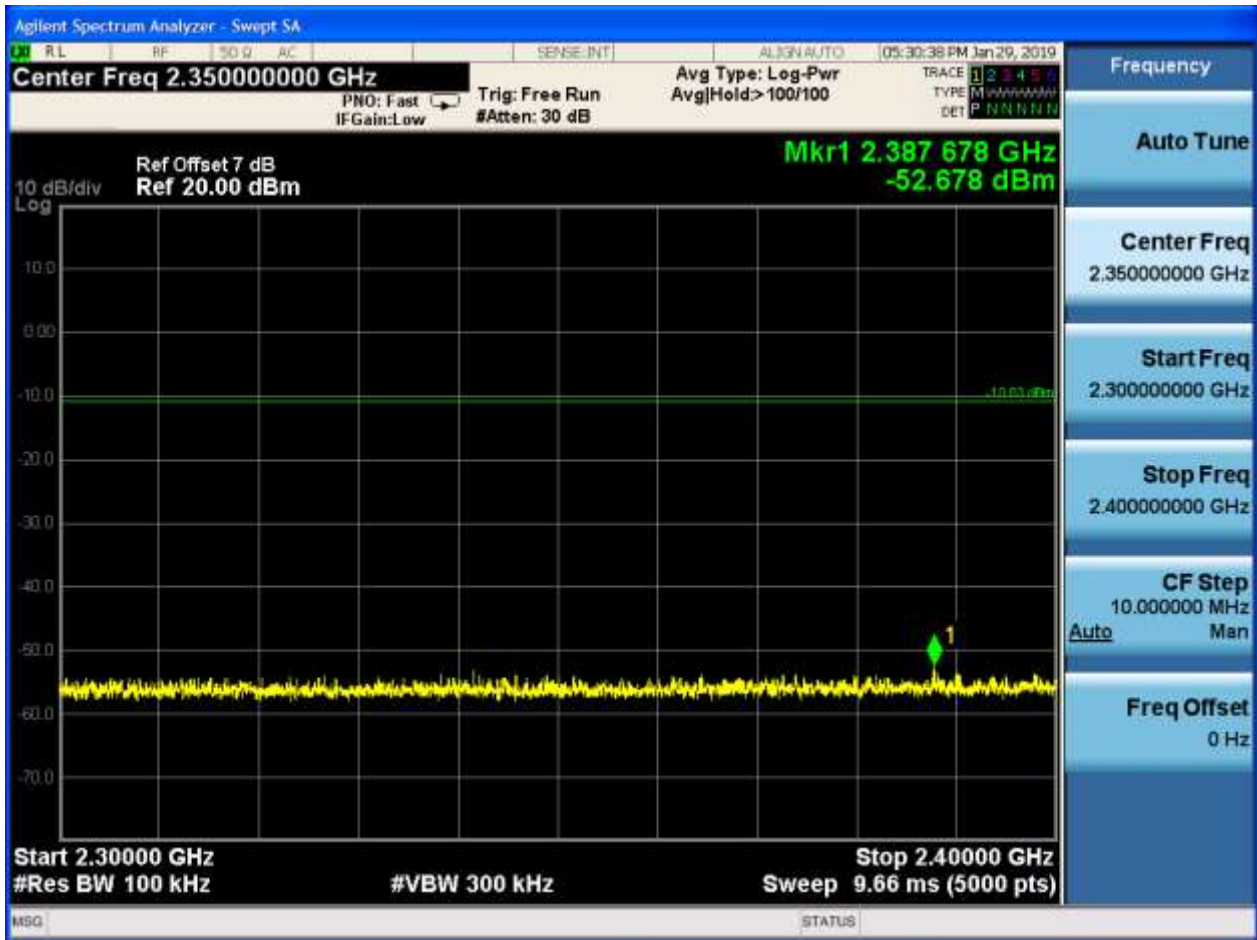

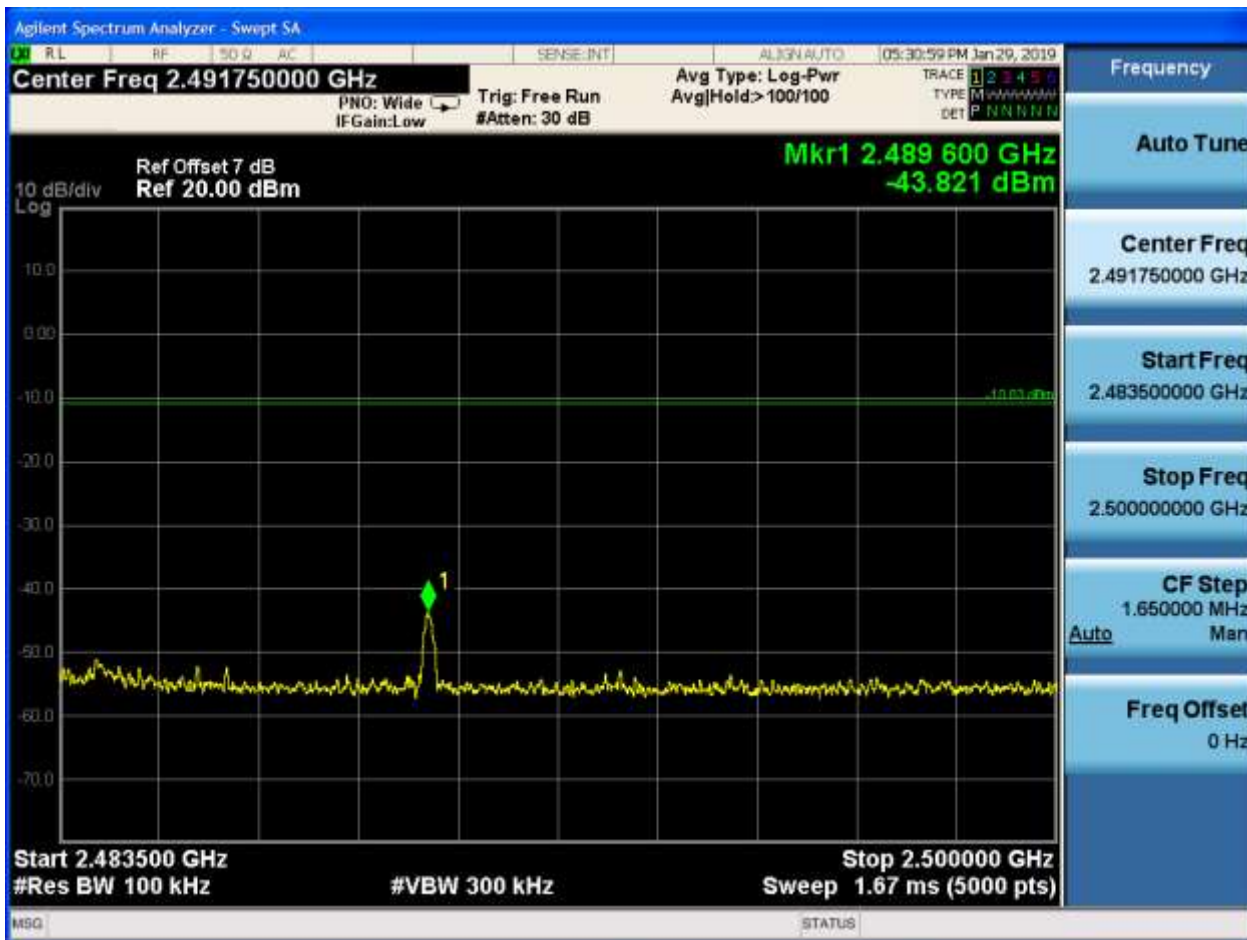






2.4 TM2_2DH5_Ch0


2.4.1 Pref





2.4.2 Puw



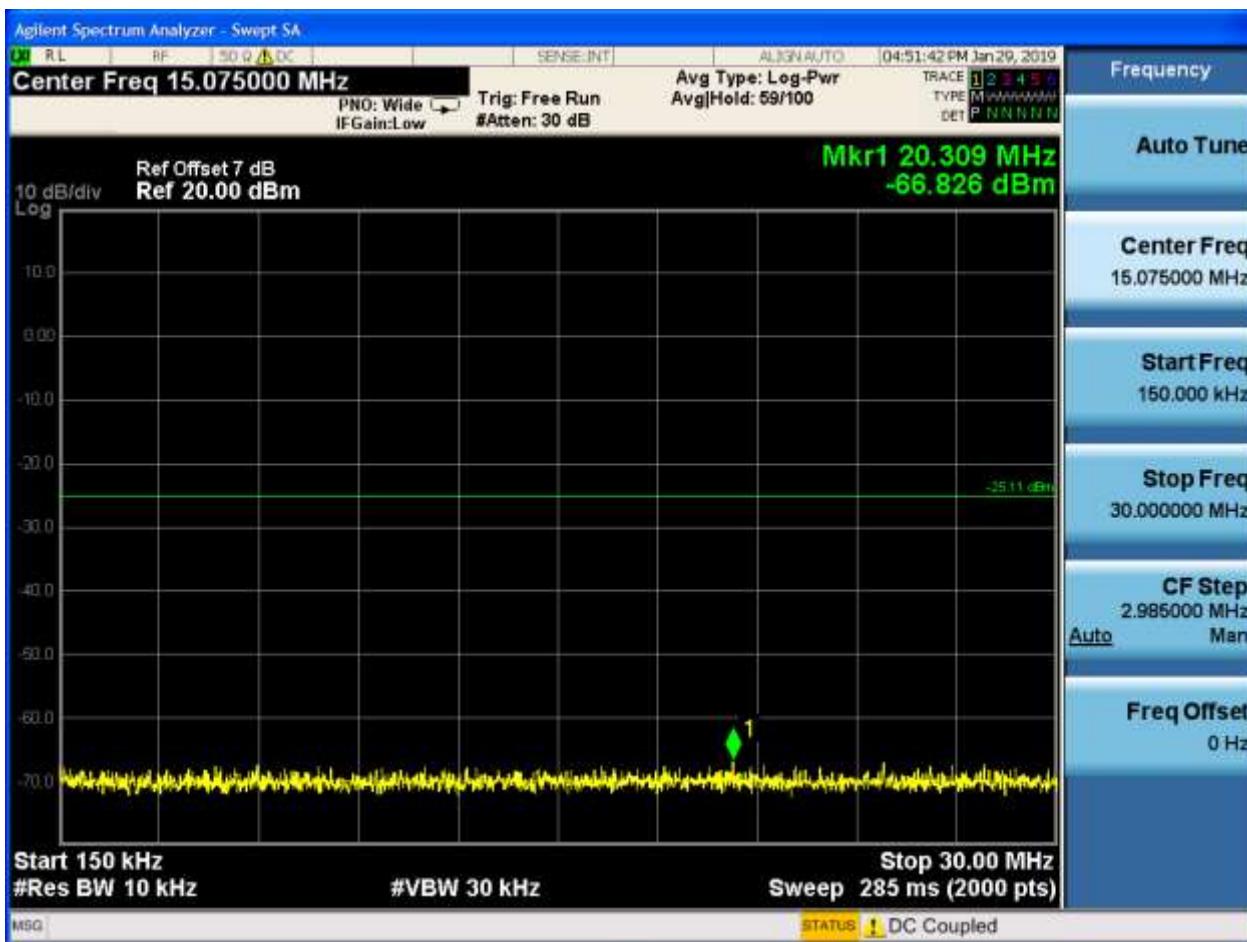

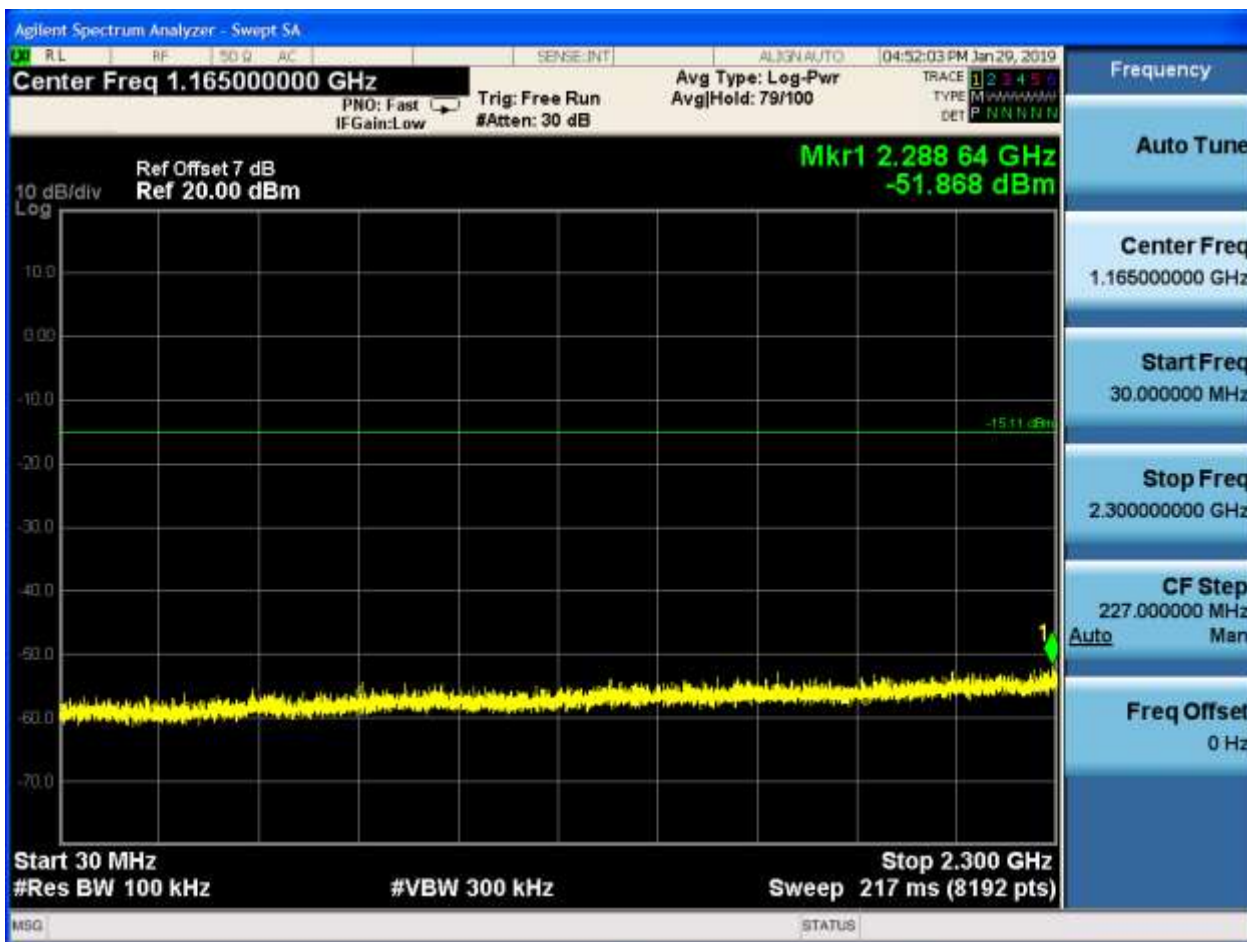

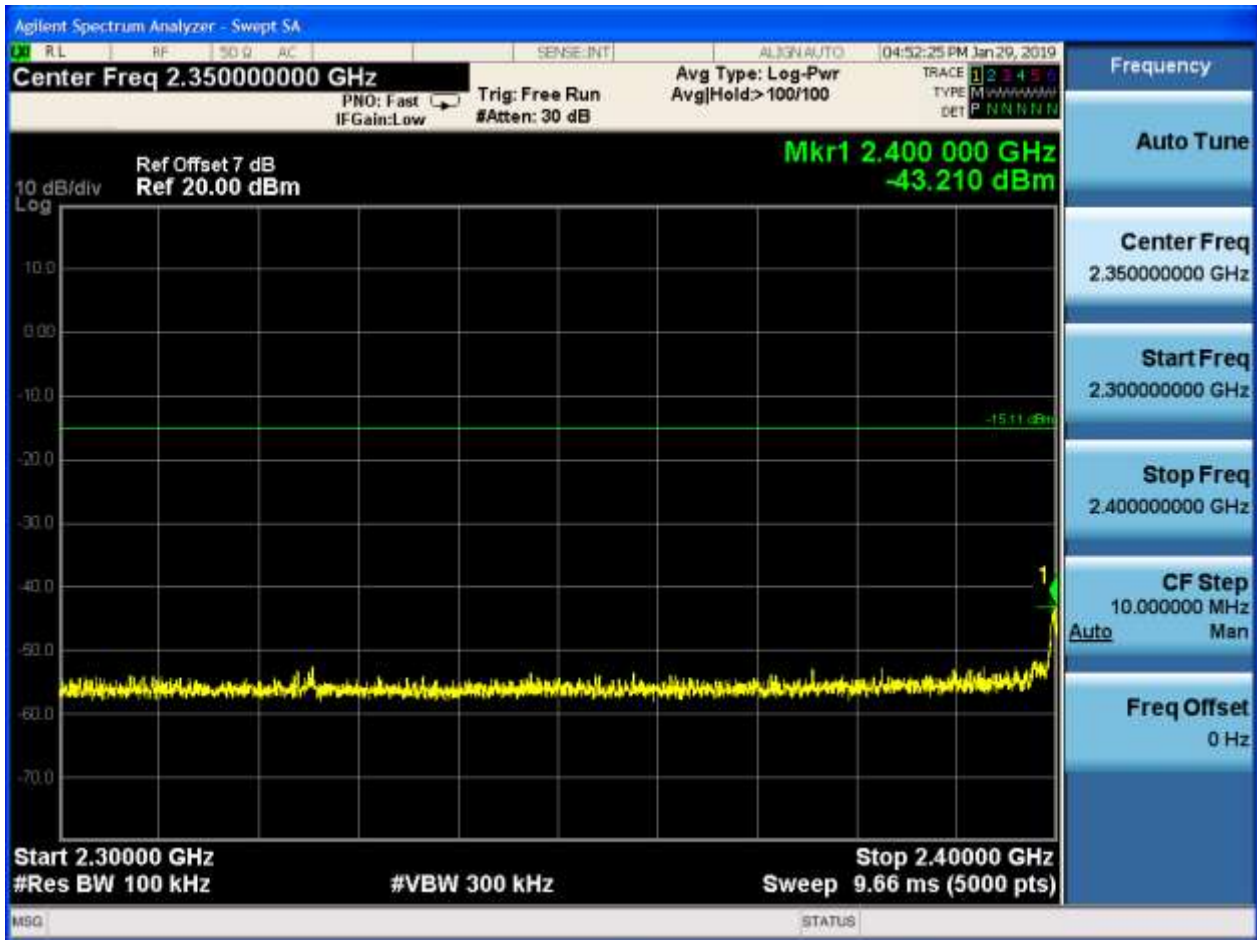

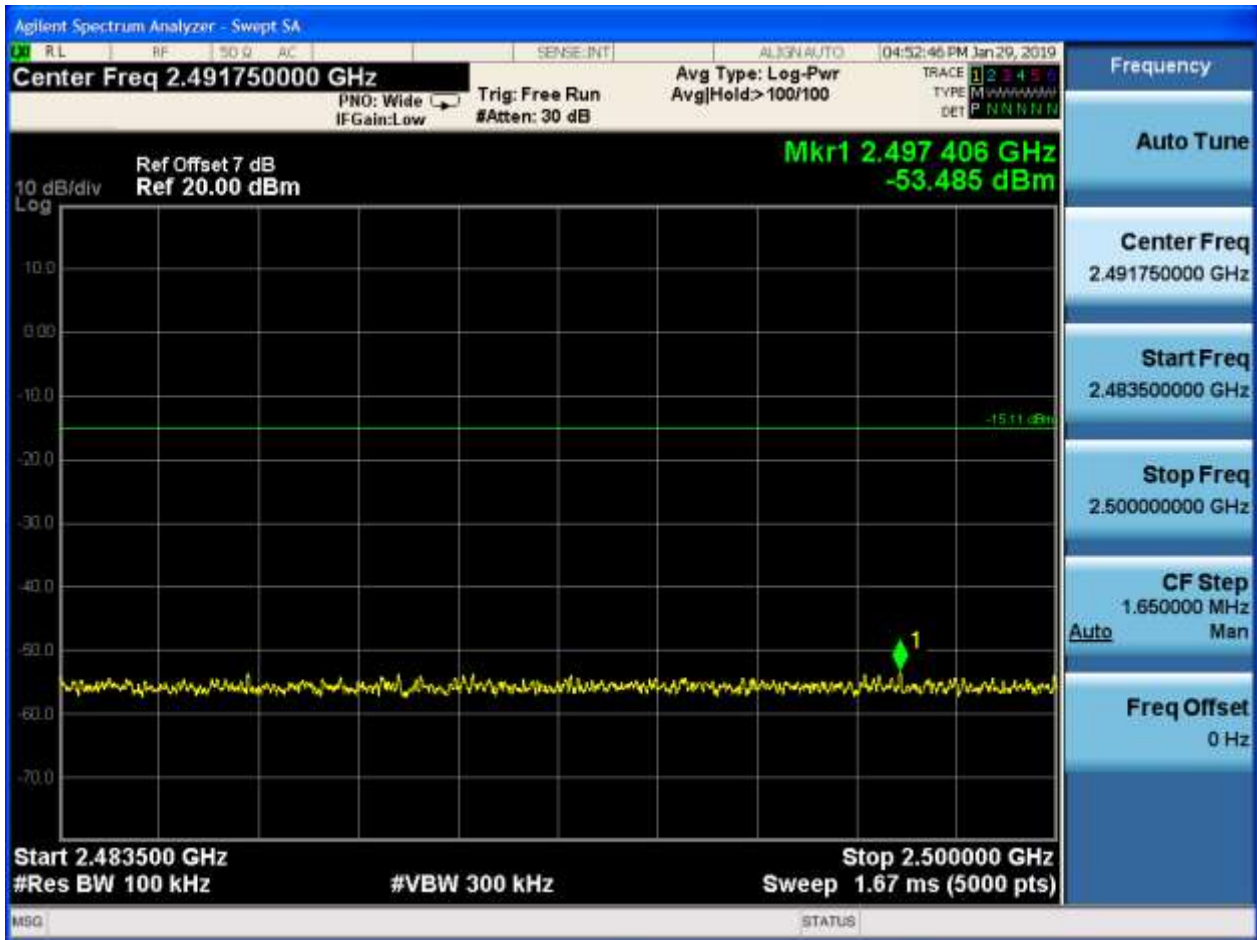




2.5 TM2_2DH5_Ch39


2.5.1 Pref





2.5.2 Puw



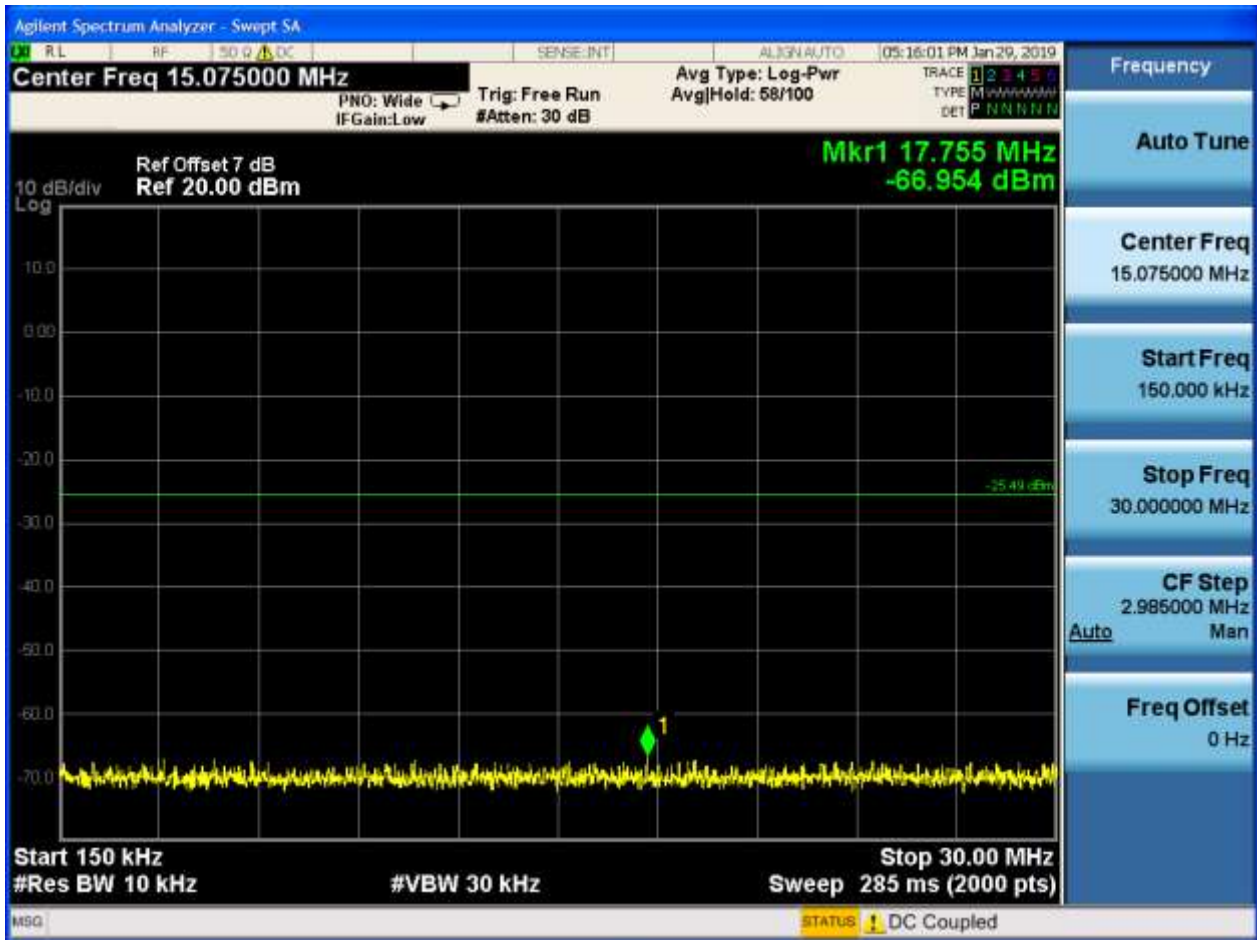

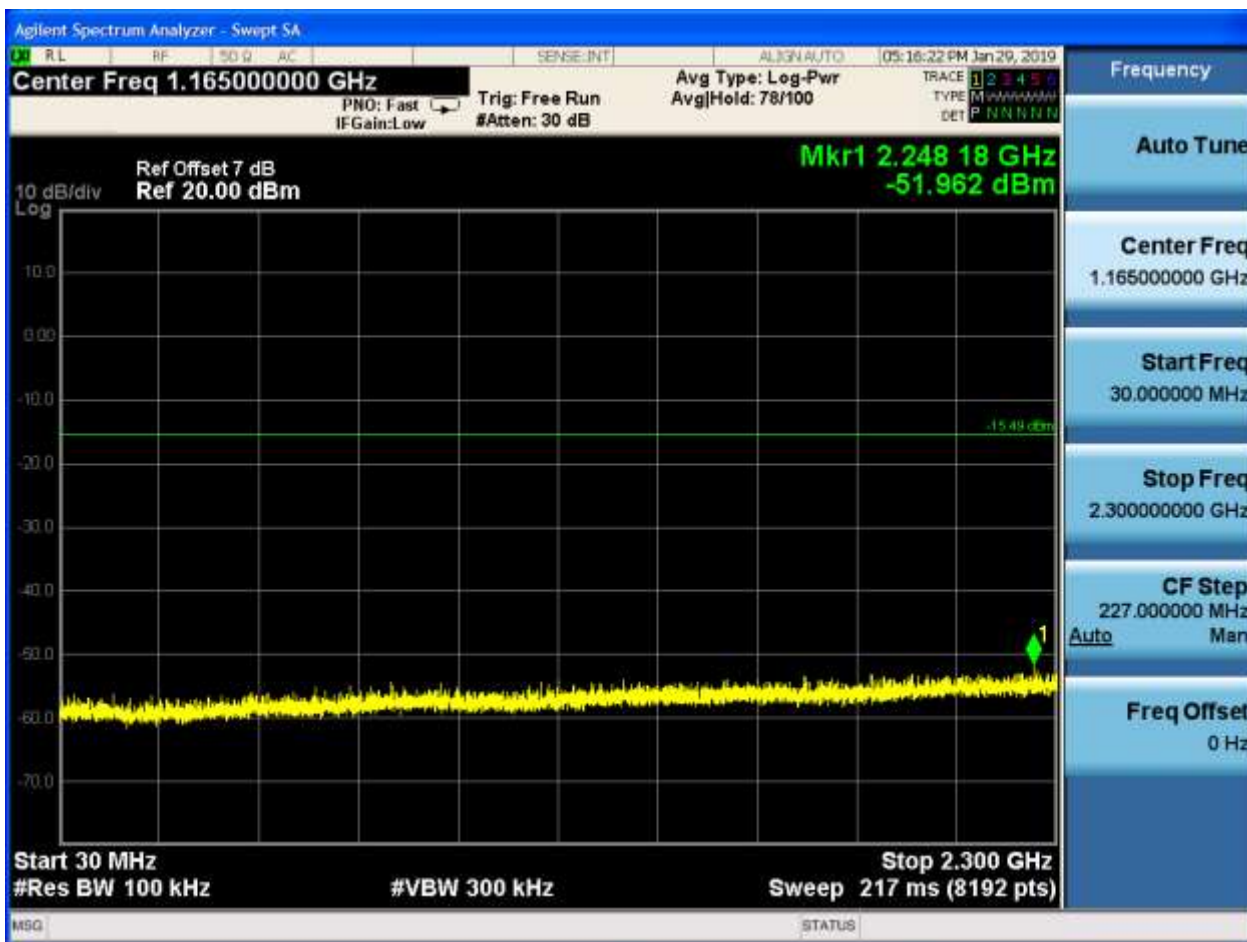

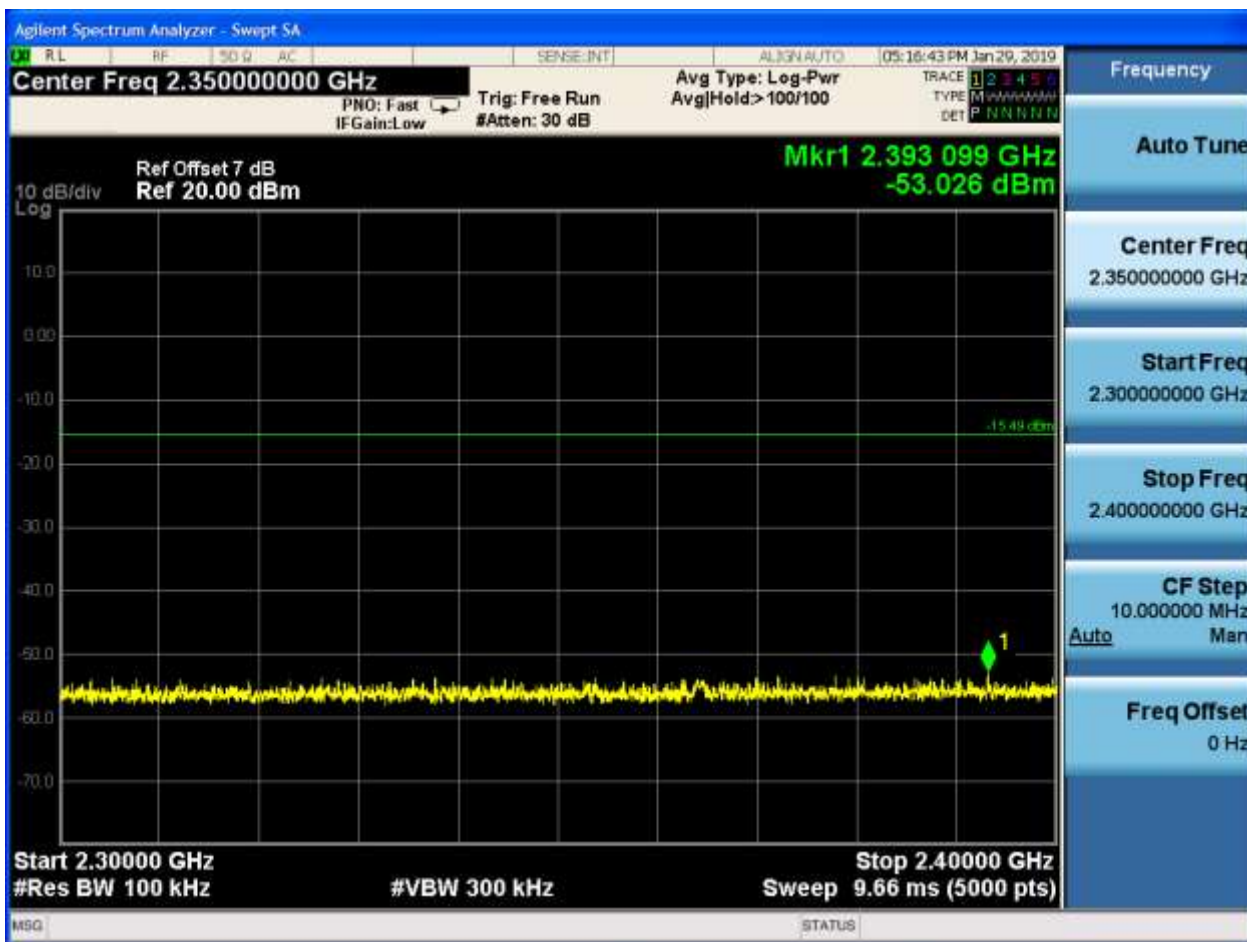

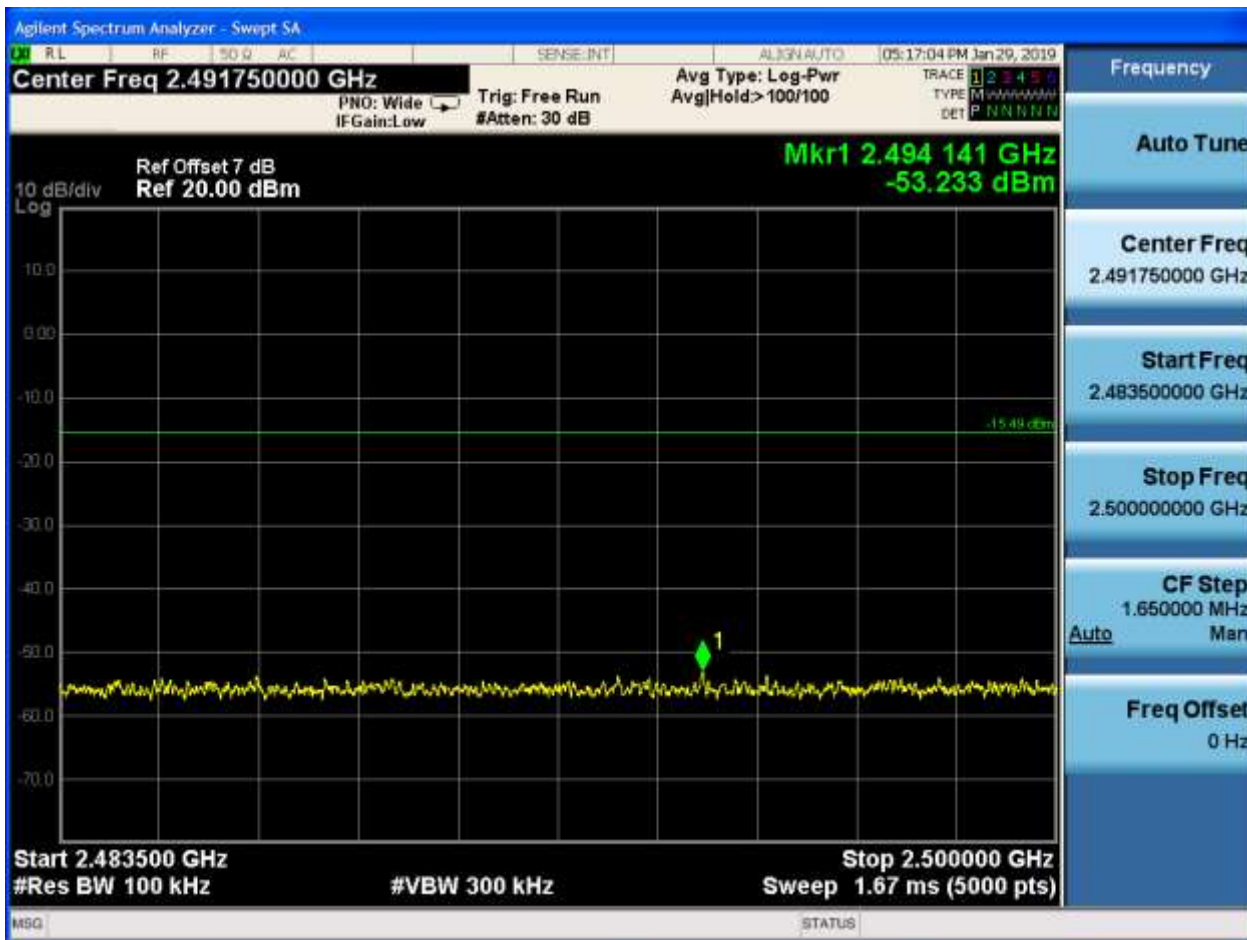





2.6 TM2_2DH5_Ch78


2.6.1 Pref





2.6.2 Puw





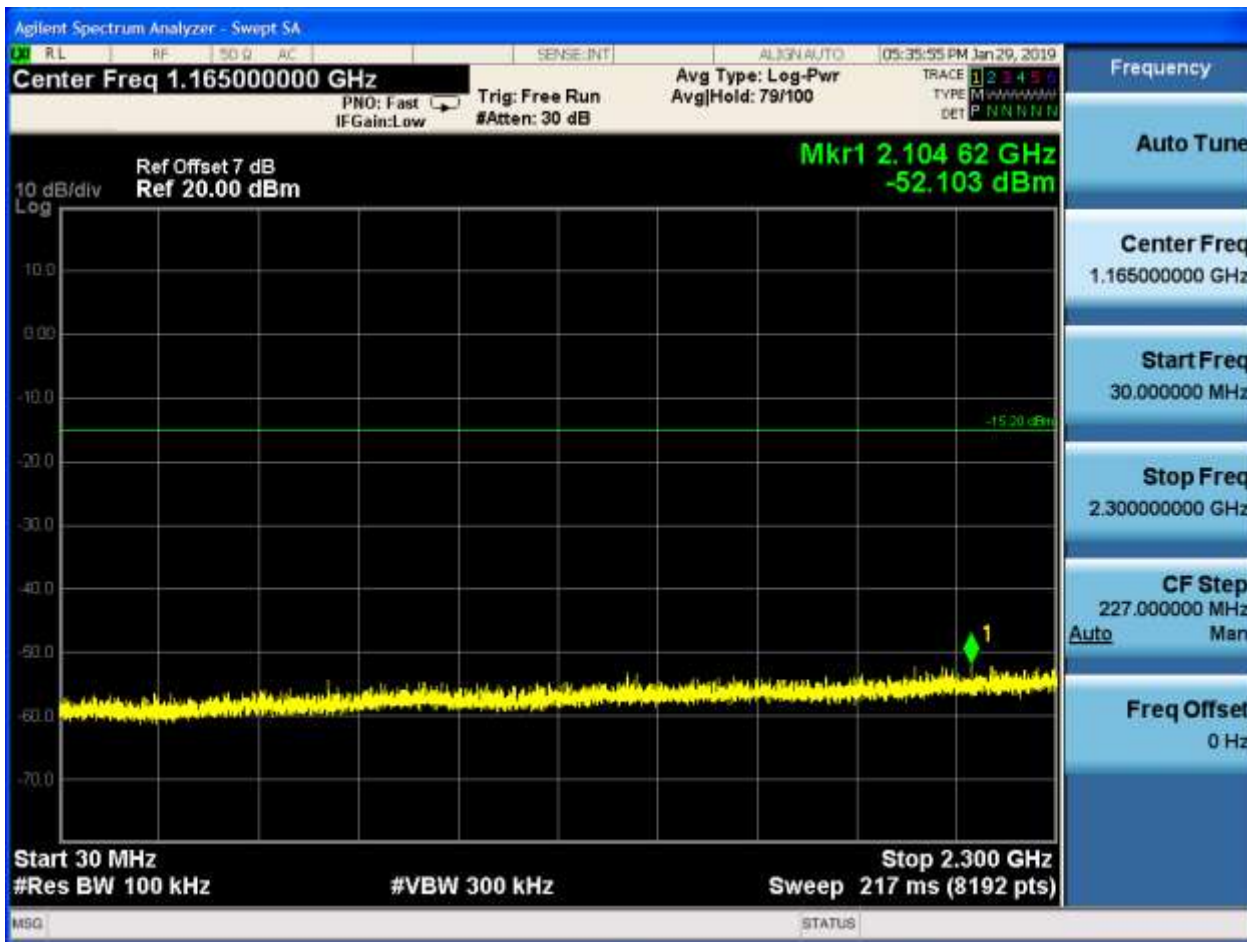

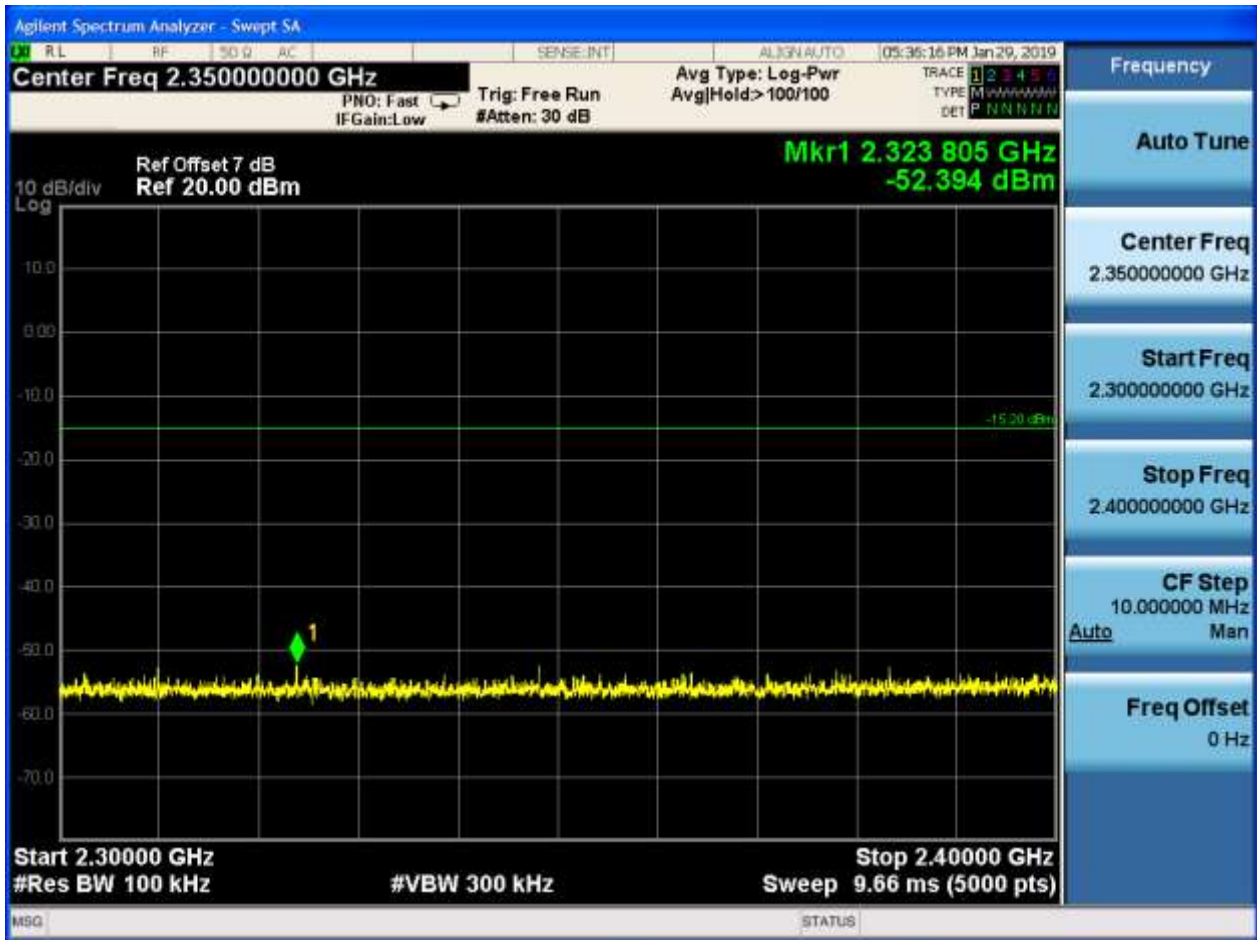

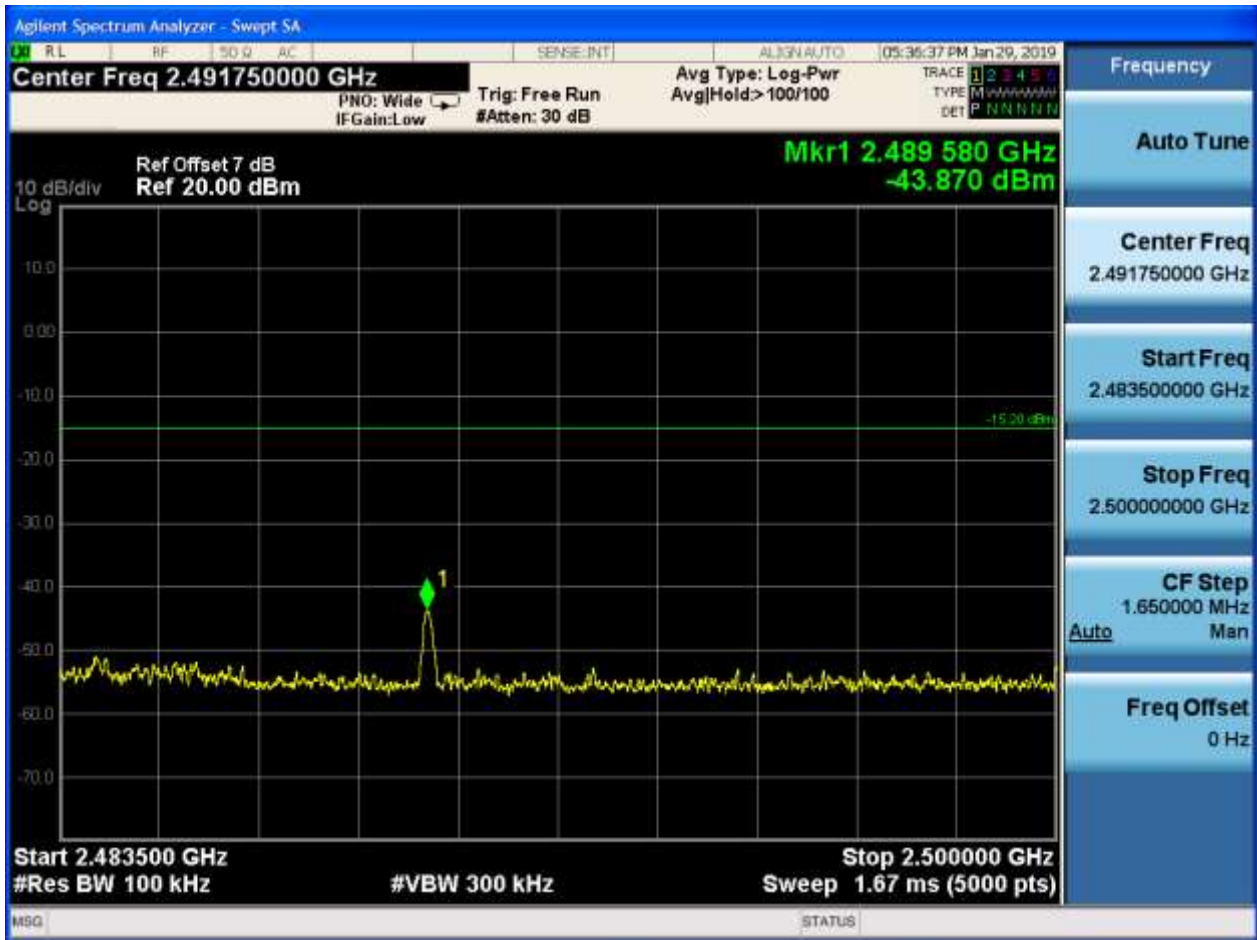






2.7 TM3_3DH5_Ch0

2.7.1 Pref





2.7.2 Puw



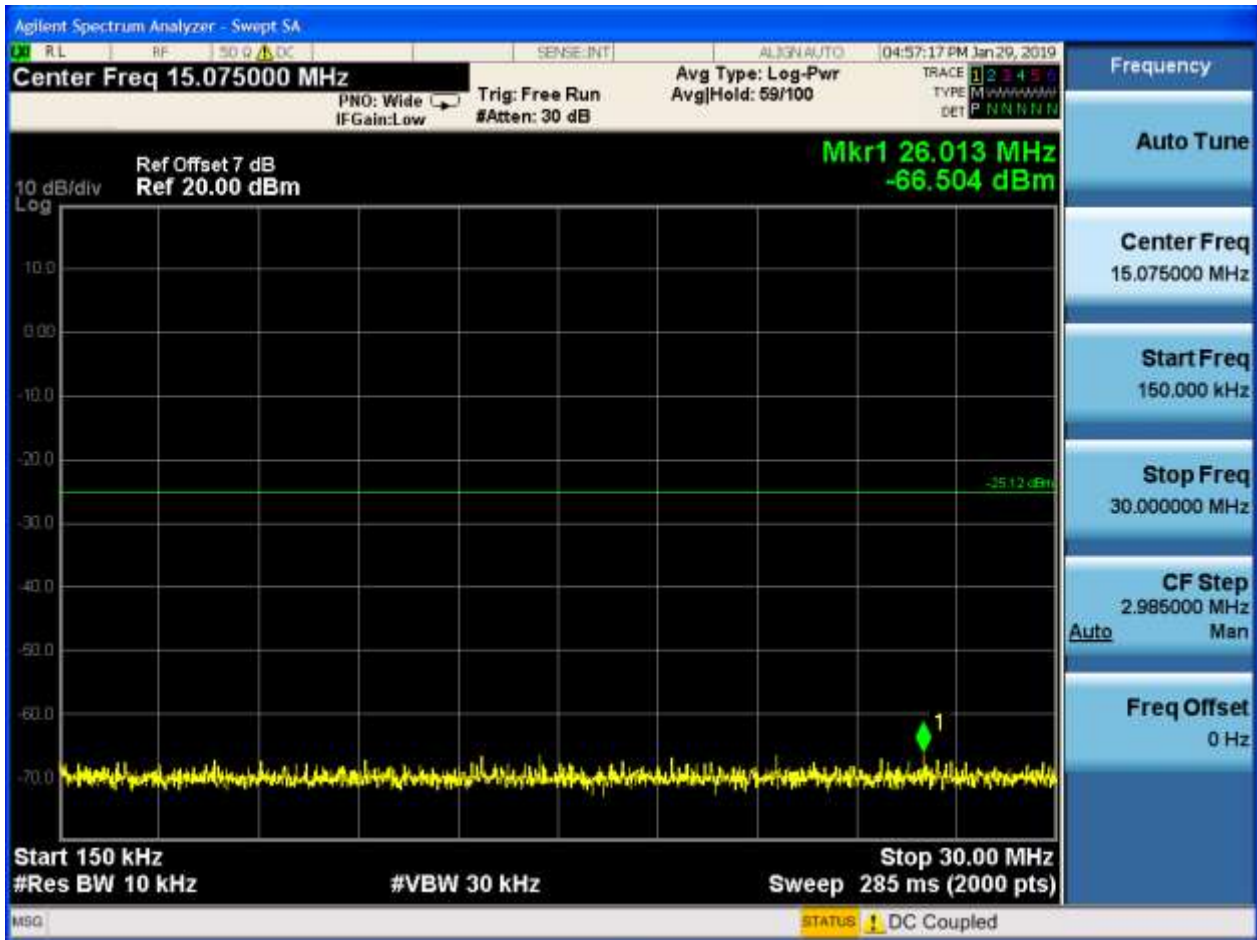



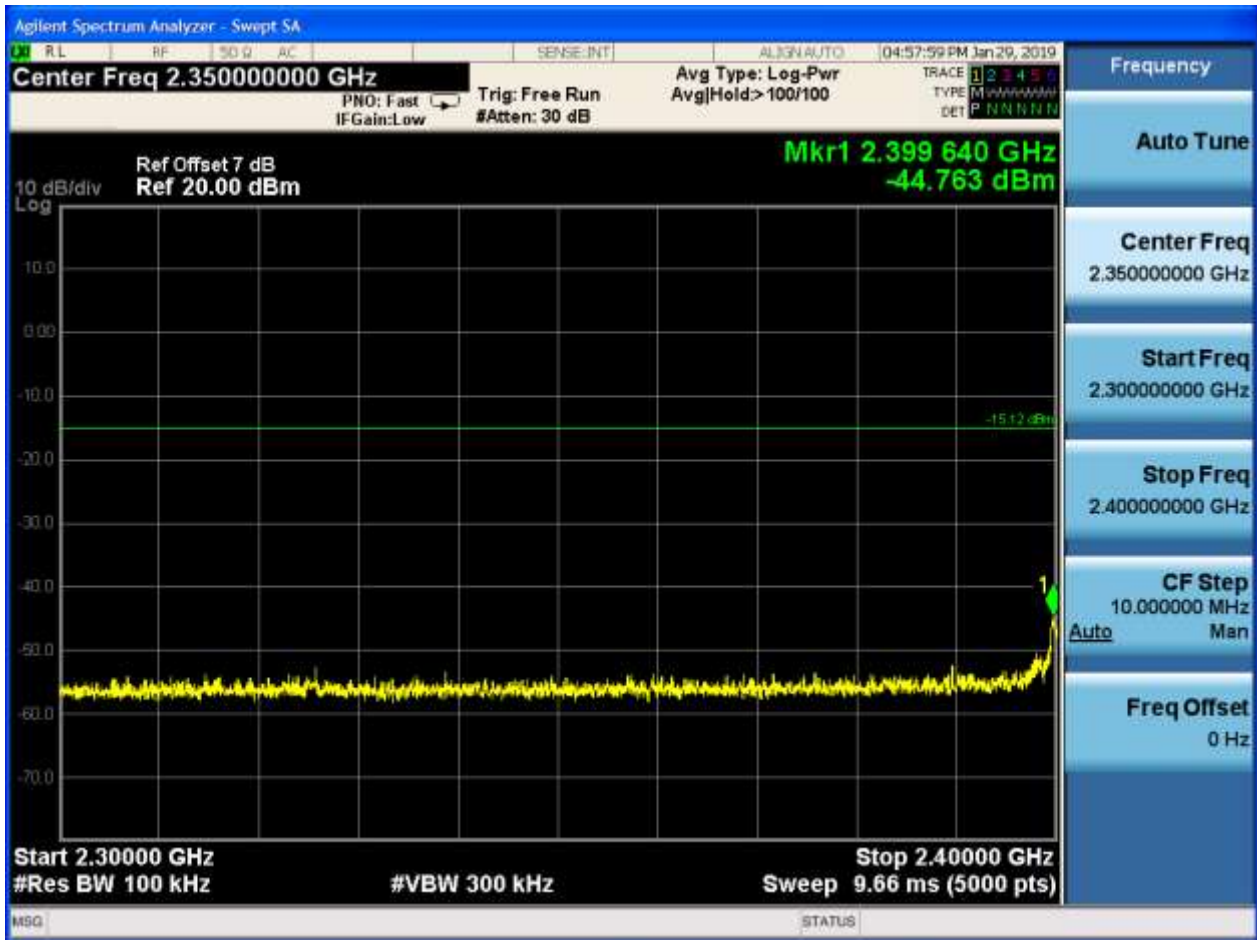

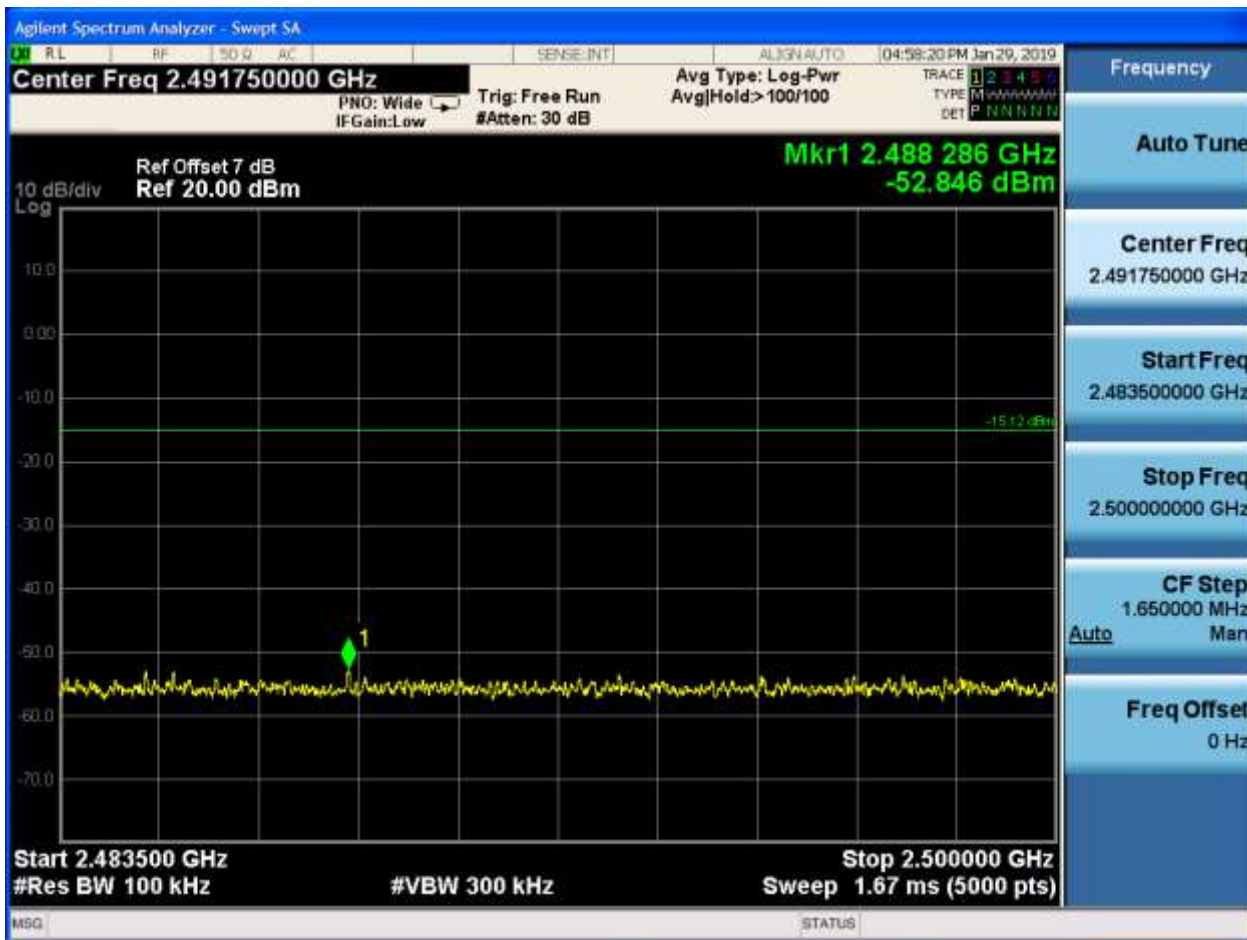





2.8 TM3_3DH5_Ch39

2.8.1 Pref







2.8.2 Puw







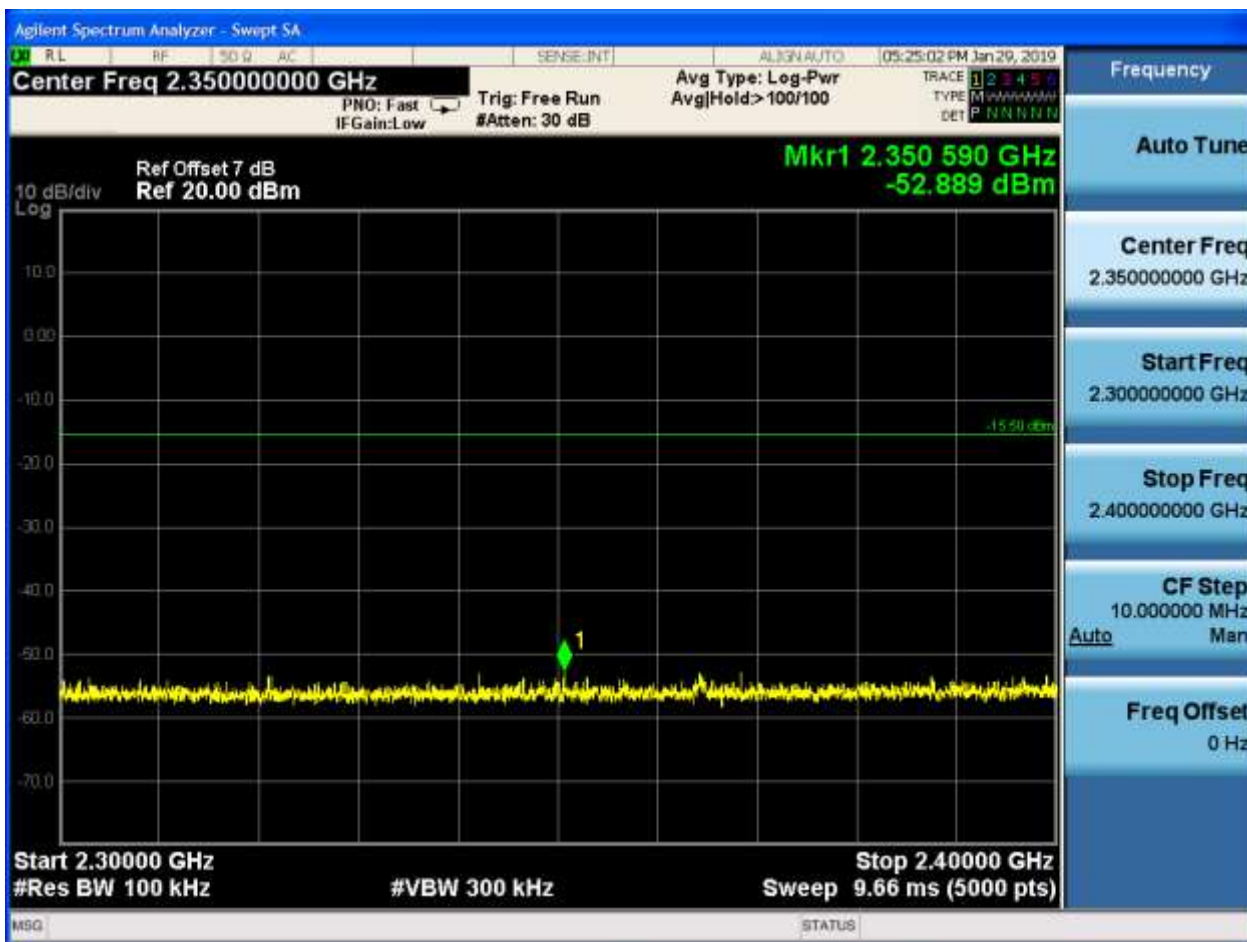

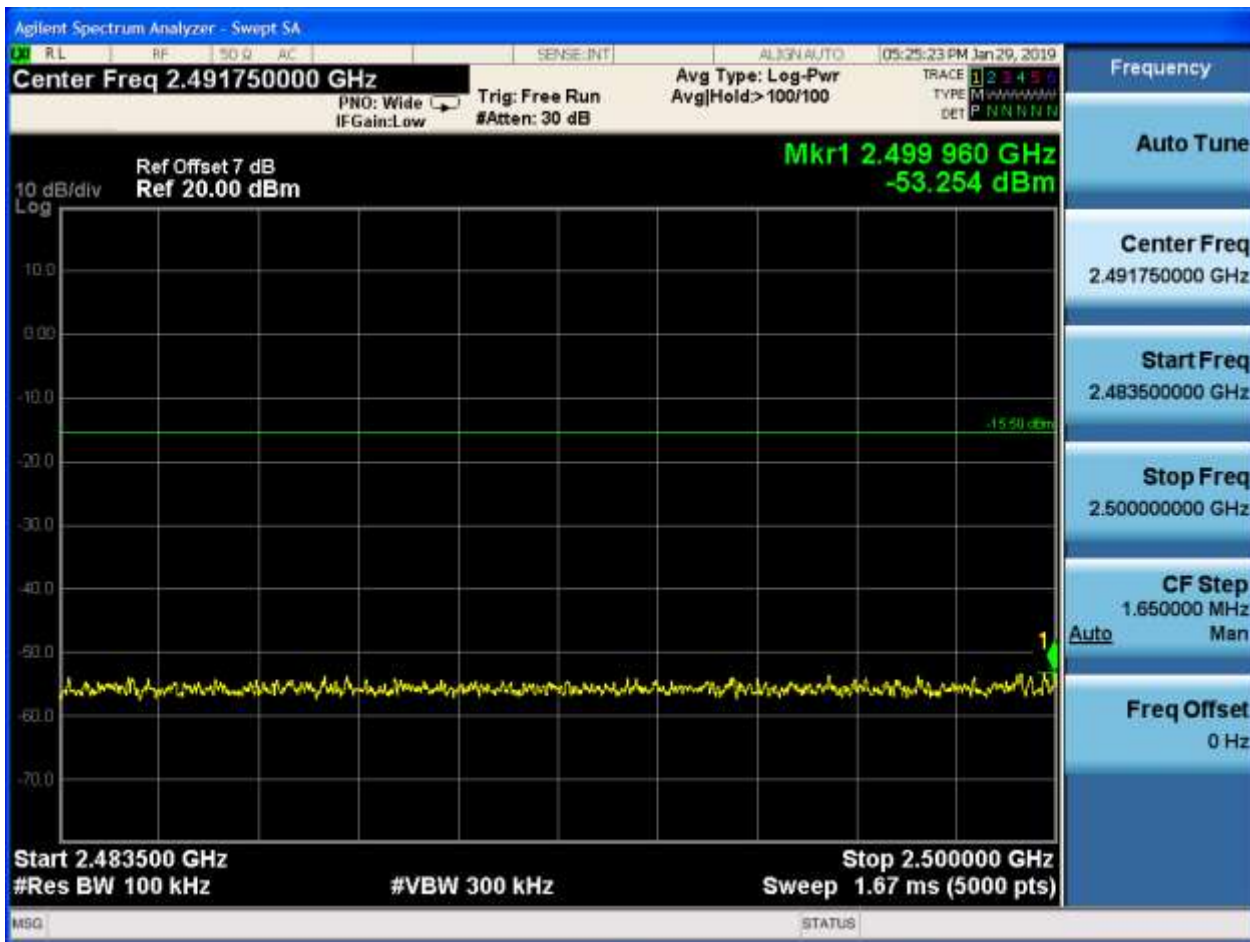





2.9 TM3_3DH5_Ch78

2.9.1 Pref








2.9.2 Puw





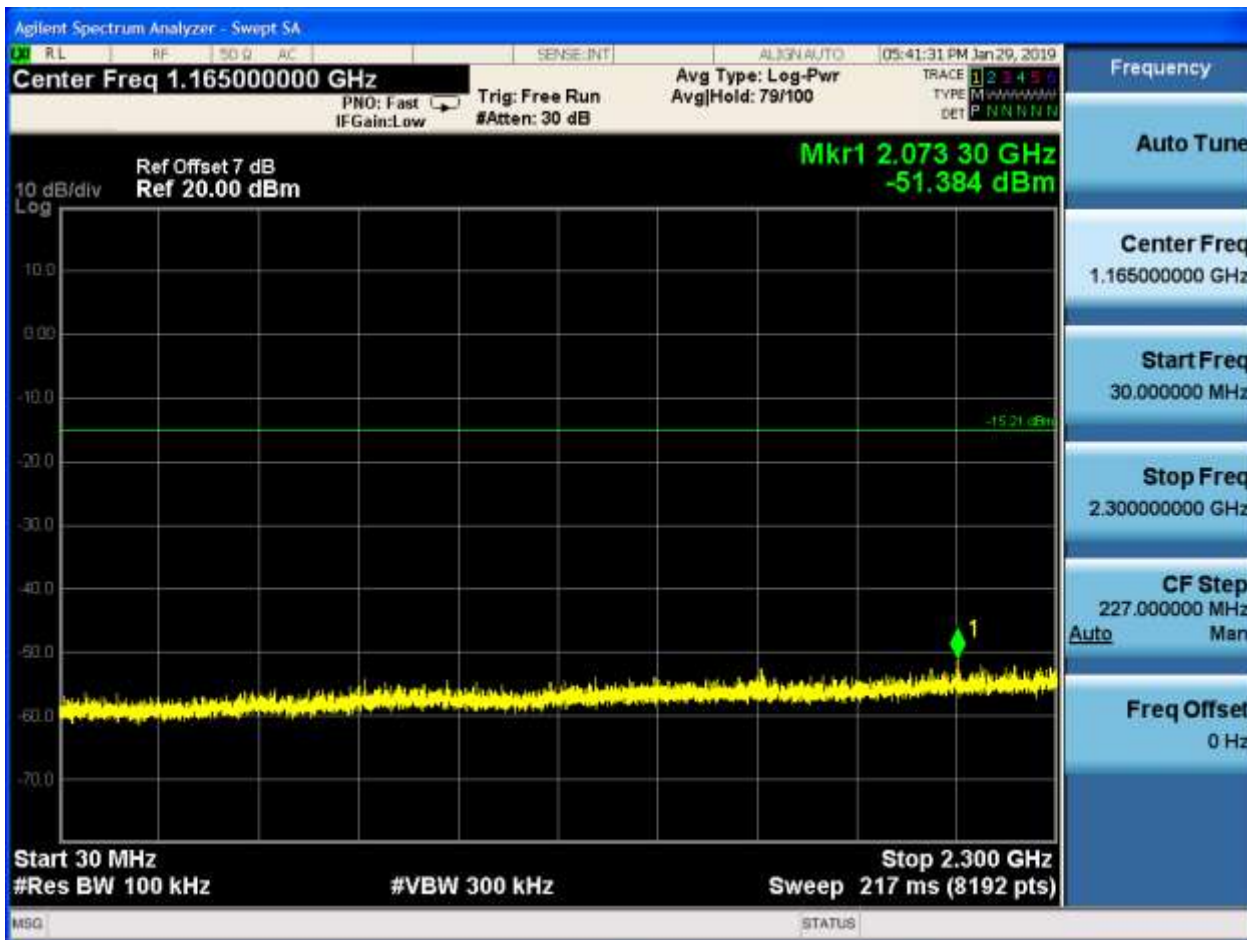

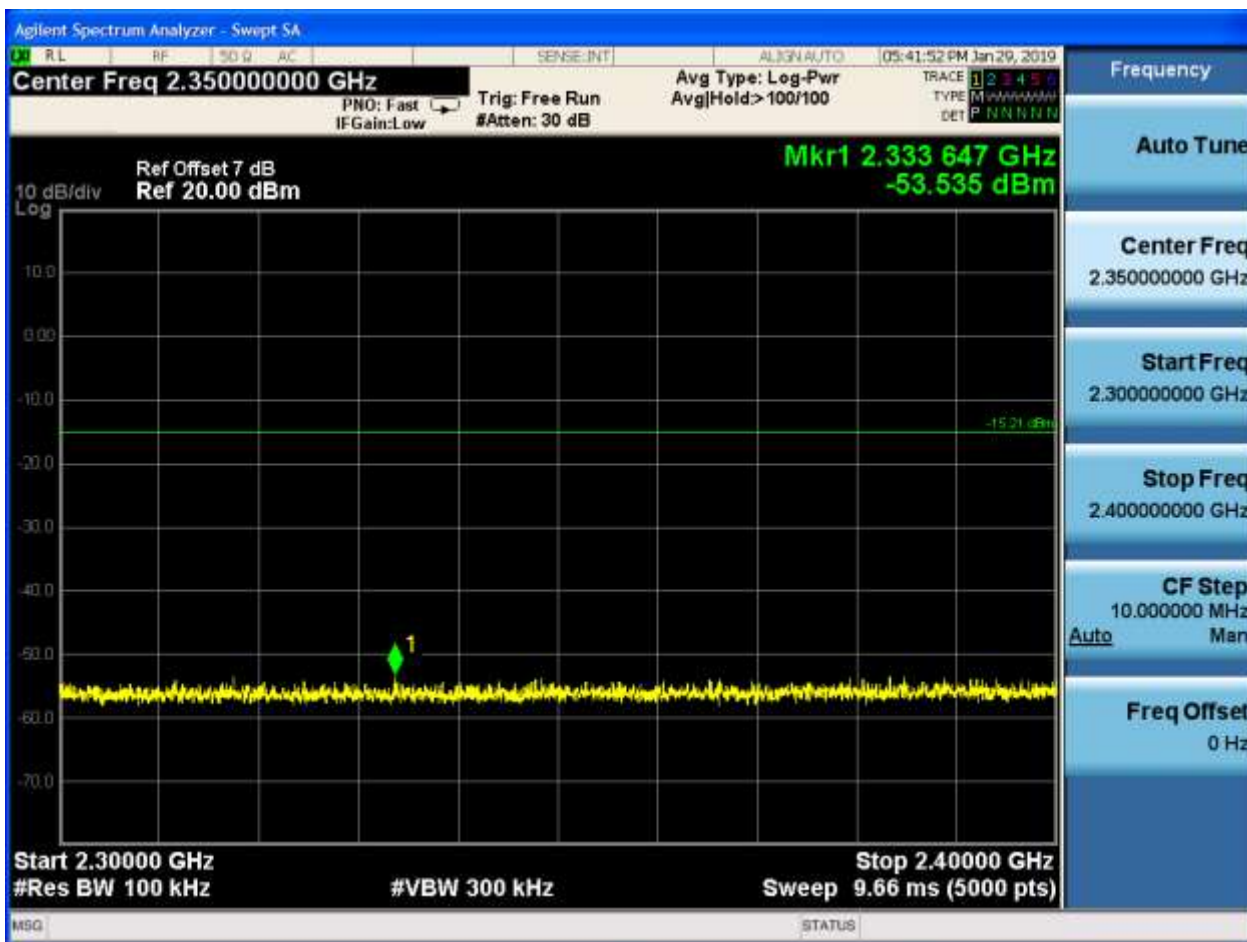

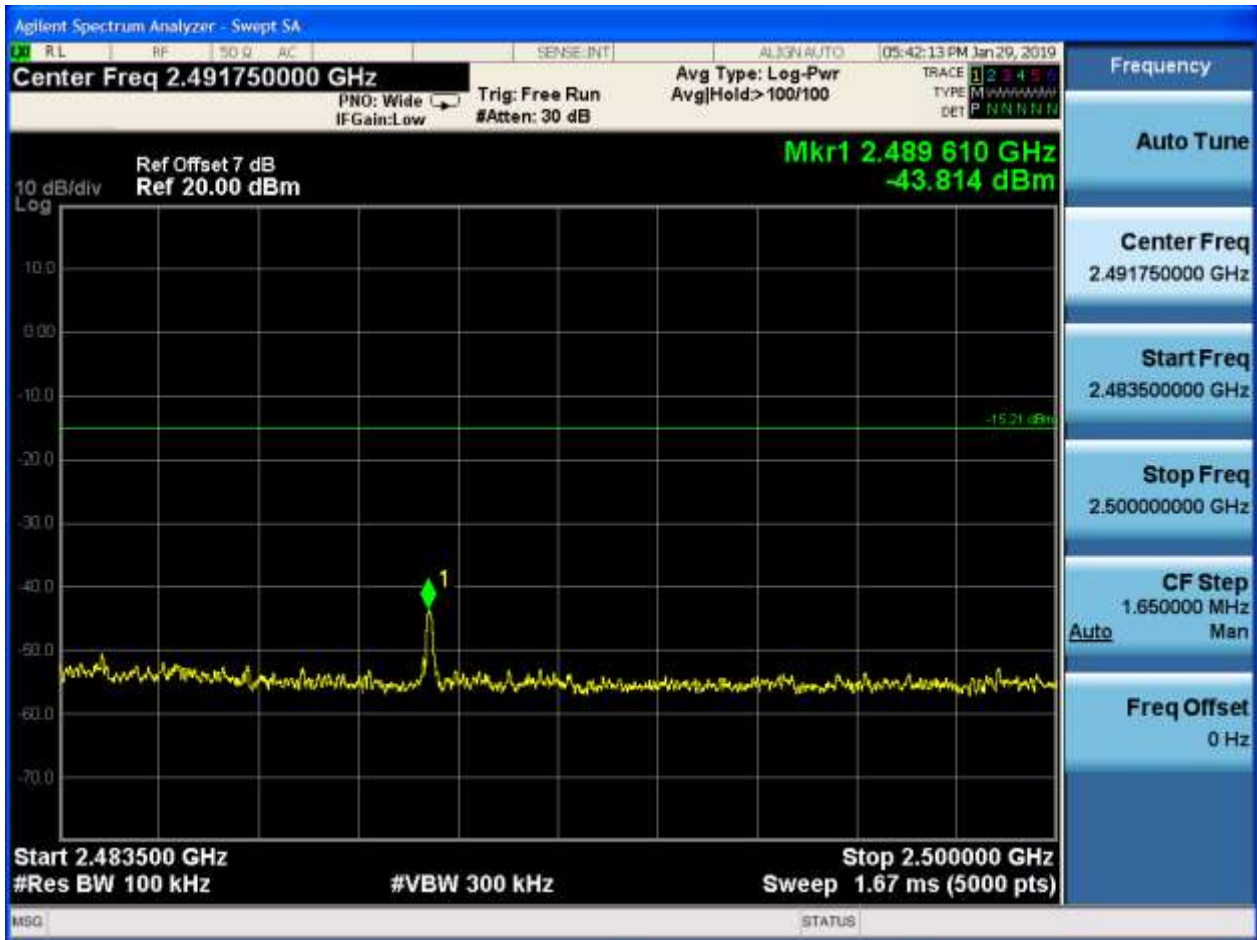





Appendix H: Radiated Emissions in the Restricted Bands

1 Result Table

The whole testing range is from “30 MHz to 26.5 GHz (10th harmonics)” is divided into 5 parts according to the test site settings, which are:

- (Part 1): Test range of “9 KHz to 30 MHz”,
- (Part 2): Test range of “30 Mhz to 1GHz
- (Part 3): Test range of “1 GHz to 3 GHz”.
- (Part 4): Test range of “3 GHz to 18 GHz”,
- (Part 5): Test range of “18 GHz to 26.5 GHz”.

In this Appendix, only the test results and plots under the worst case can be reported. In the result table, the “< Limit” denotes that “Not found obvious spikes or see marked spikes on plots and listed emissions records”.


Test Range	EUT Conf.	Emissions	Verdict
30 MHz to 1 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
1 GHz to 3 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
	TM1_DH5_Ch78 (Worst Conf.)	< Limit	Pass
3 GHz to 18 GHz	TM1_DH5_Ch0 (Worse Conf.)	< Limit	Pass
18 GHz to 26.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass

Note: We tested all modes, but the data presented below is the worst case.

2 Result Plot

Part 1: Testing Range of “9 kHz to 30MHz”


Note 1: The test results and plot for testing range of “9 kHz to 30 MHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

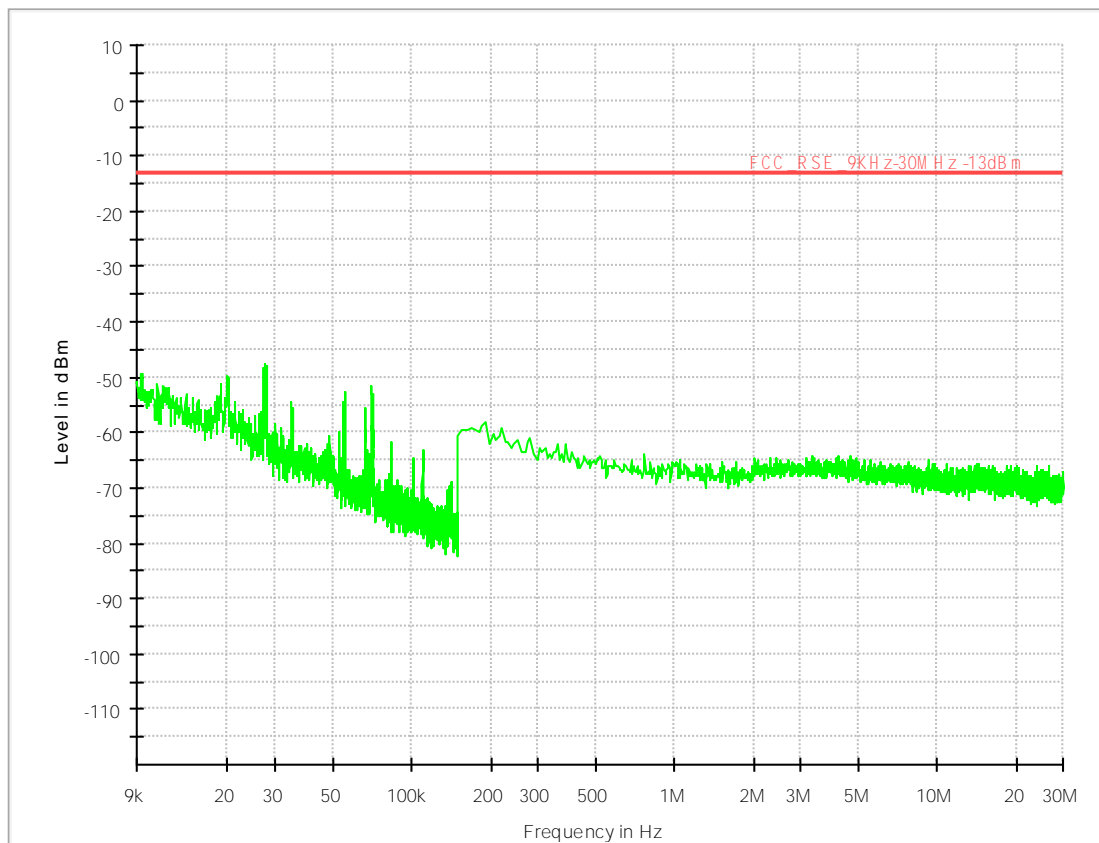

Part 2: Testing Range of “30 MHz to 1 GHz”

- Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

Full Spectrum

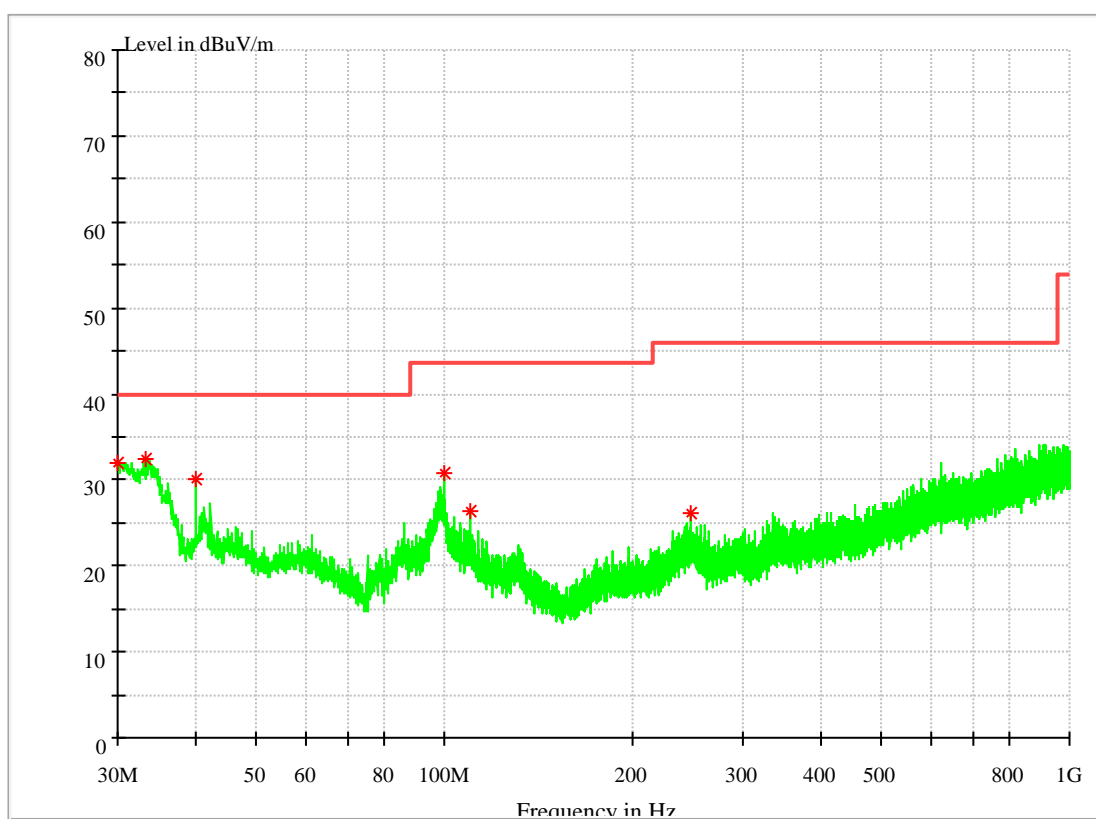

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
30.097000	32.06	40.00	7.94	100.0	V	301.0	12.6
33.249500	32.49	40.00	7.51	100.0	V	135.0	12.9
39.991000	30.20	40.00	9.80	100.0	V	74.0	14.4
99.985500	30.69	43.50	12.81	100.0	V	316.0	14.0
109.976500	26.34	43.50	17.16	100.0	V	104.0	13.0
248.395500	26.14	46.00	19.86	100.0	V	0.0	13.3

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.


2, Margin = Limit - Level

Part 3: Testing Range of “1GHz to 3GHz”


Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.

Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

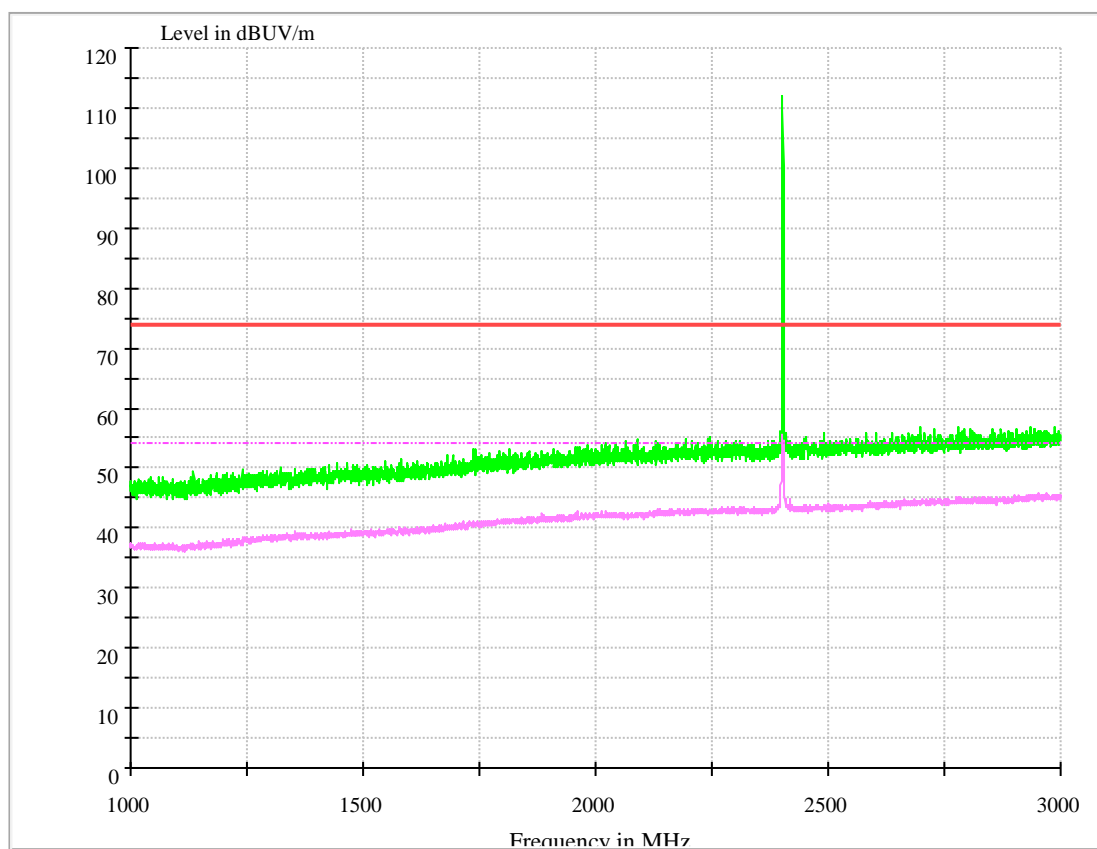

Channel 0

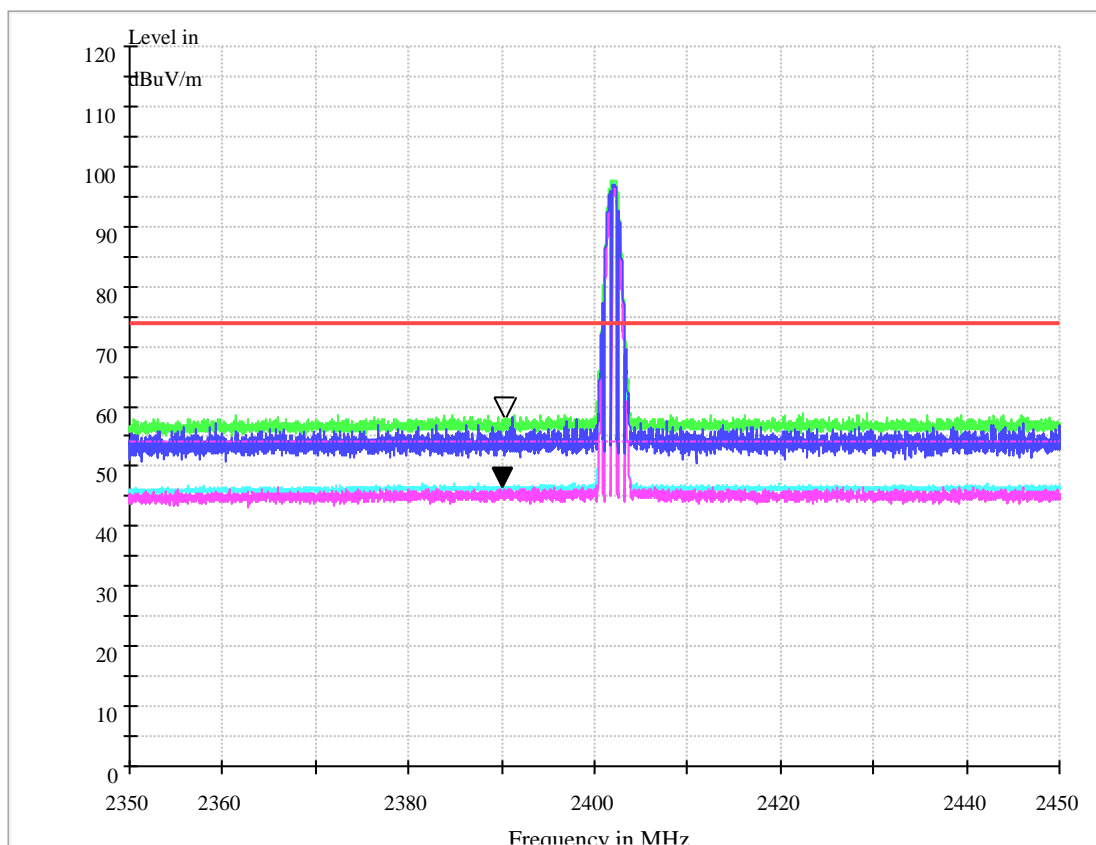

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	46.78	54.00	7.22	150.0	H	326.0	-6.8


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	58.63	74.00	15.37	150.0	H	7.0	-6.8

Note:

- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit – Level

Channel 78

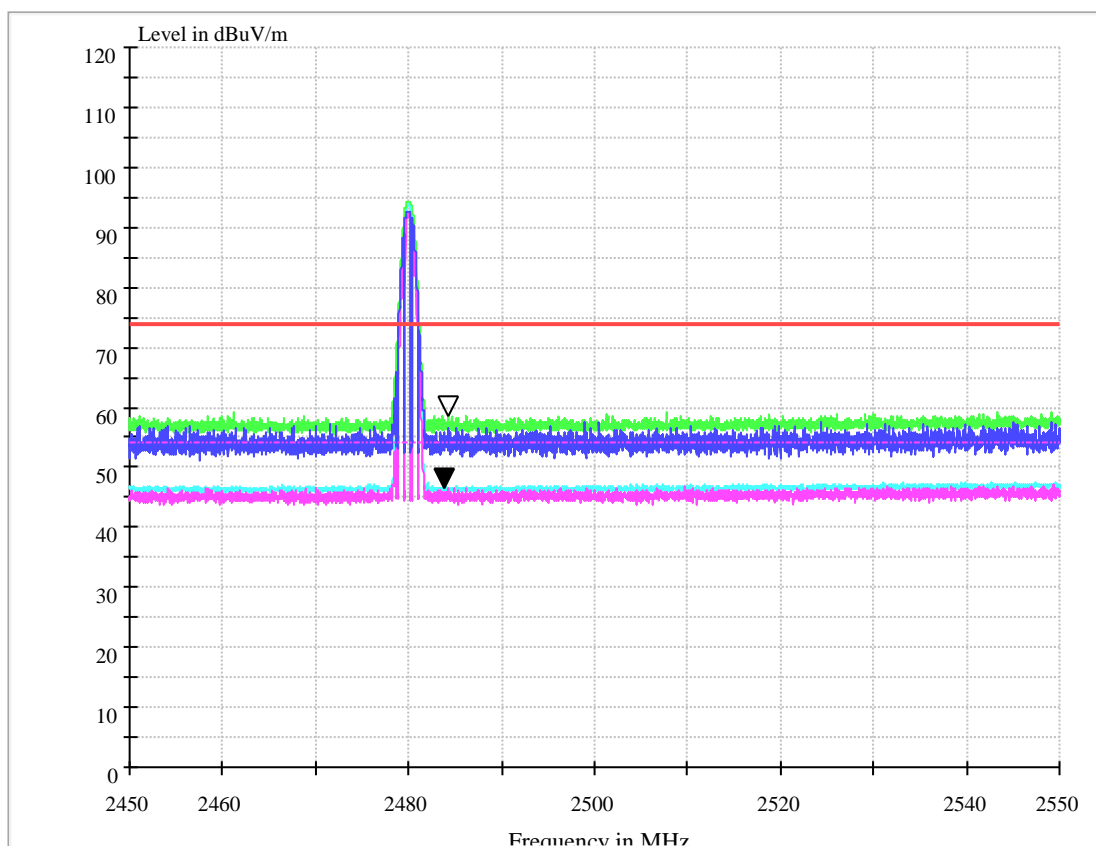

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	46.65	54.00	7.35	150.0	H	327.0	-10.2

MEASUREMENT RESULT: PK Detector


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	58.69	74.00	15.31	150.0	H	9.0	-10.2

Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit - Level

Part 4: Testing Range of “3 GHz to 18 GHz”


- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

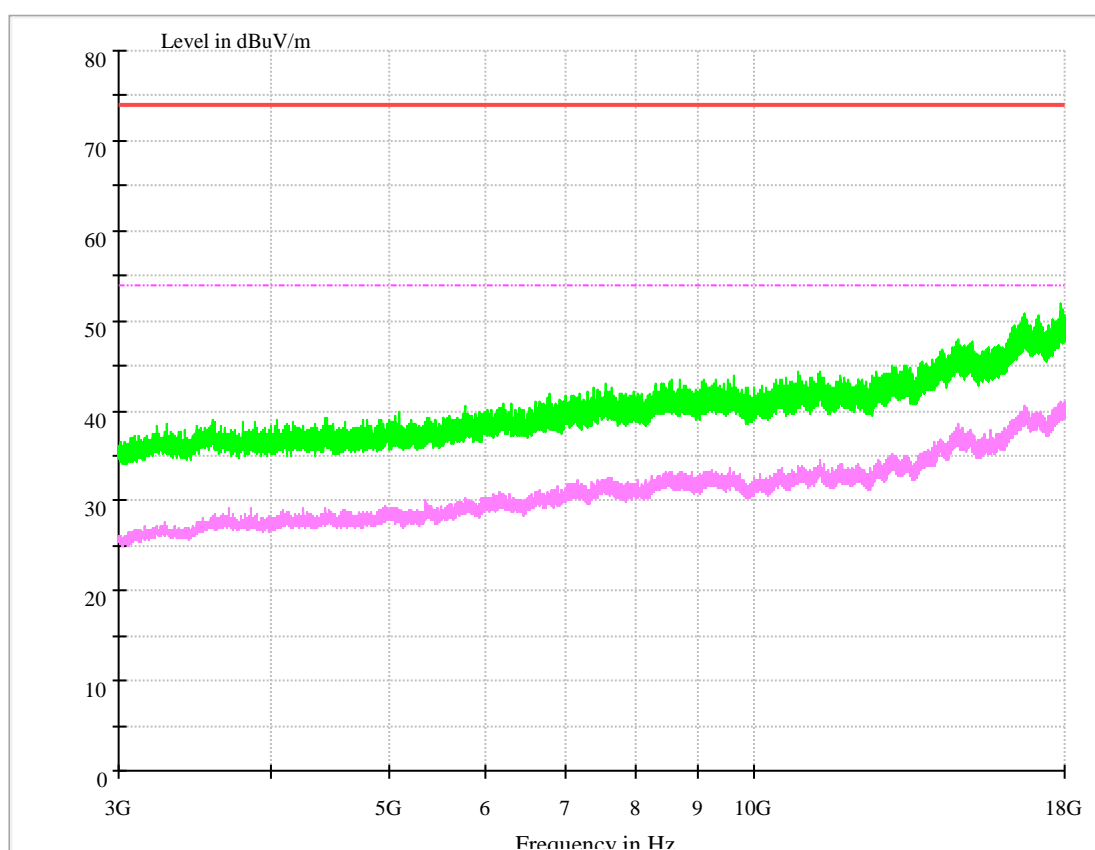

Part 5: Testing Range of “18 GHz to 26.5 GHz”

- Note 1: The test results and plot for testing range of “18 GHz to 26.5 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “18 GHz to 26.5 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.

Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

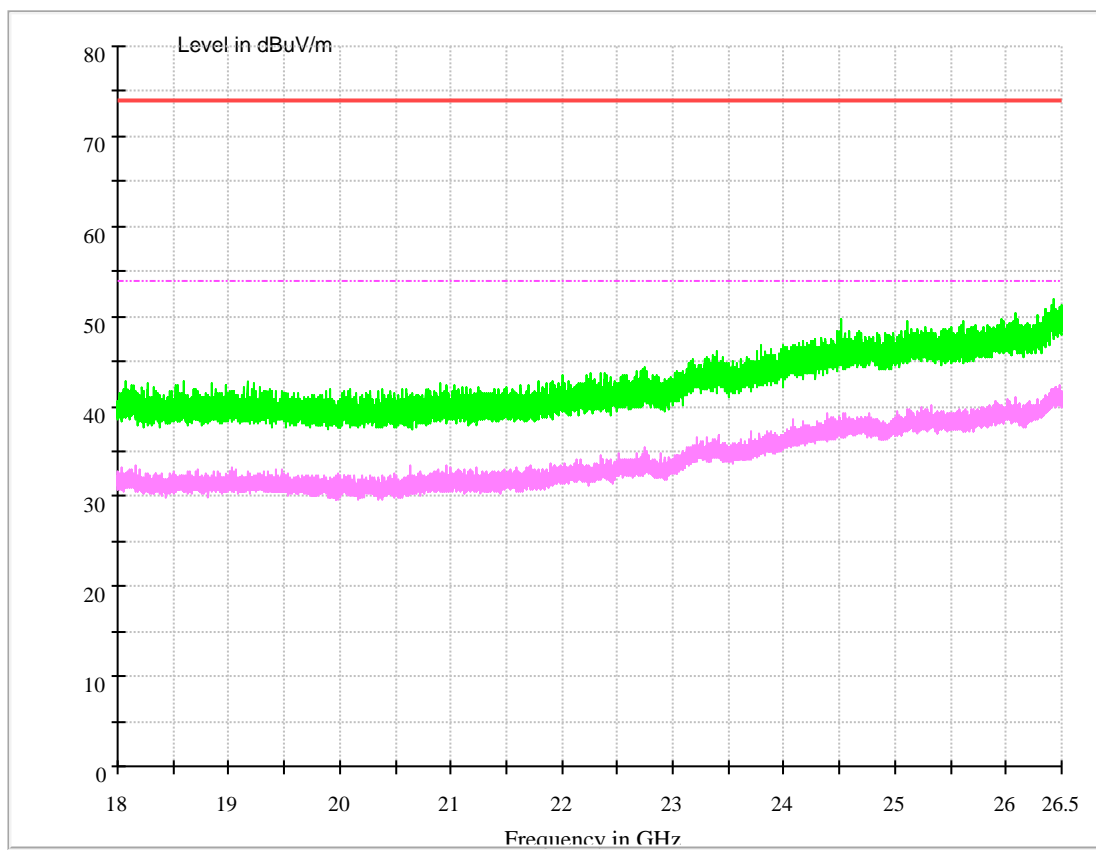



Appendix I: Conducted Emission at Power Port




1 Result Table

In this Appendix, only the test results and plots under the worst case can be reported.

EUT Conf.	Maximum Emissions	Verdict
TM1_DH5_Ch78	Not found obvious spikes or see marked spikes on plots and listed emissions records.	Pass

2 Result Plot

Channel 78

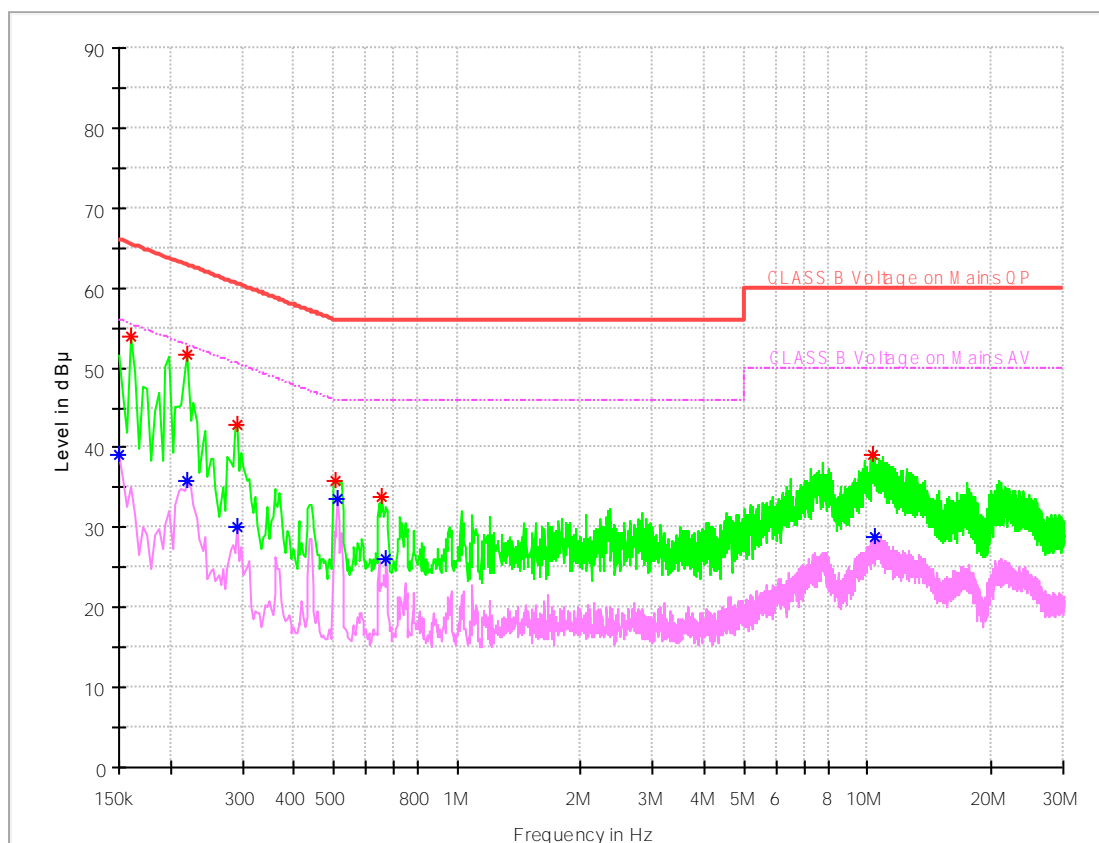

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μV)	Limit (dB μV)	Transd. (dB)	Margin (dB)	Line	PE
0.161194	53.88	65.4	9.7	11.52	N	FLO
0.220894	51.62	62.79	9.7	11.17	L1	FLO
0.291788	42.99	60.47	9.7	17.48	L1	FLO
0.504469	35.84	56.00	9.7	20.16	N	FLO
0.657450	33.79	56.00	9.7	22.21	N	FLO
10.310194	39.17	60.00	10.0	20.83	L1	FLO

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μV)	Limit (dB μV)	Transd. (dB)	Margin (dB)	Line	PE
0.150000	39.06	56.00	9.7	16.94	L1	FLO



0.220894	35.94	52.79	9.7	16.85	L1	FLO
0.291788	30.17	50.47	9.7	20.30	L1	FLO
0.511931	33.47	46.00	9.7	12.53	N	FLO
0.672375	25.98	46.00	9.7	20.02	N	FLO
10.444519	28.86	50.00	10.0	21.14	N	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END