

# FCC TEST REPORT

For

**LTE module**

**Model Number: ME906s-158**

**FCC ID: QISME906S-158**

**Report Number : WT158001262**

|                 |   |                                                                           |
|-----------------|---|---------------------------------------------------------------------------|
| Test Laboratory | : | Shenzhen Academy of Metrology and Quality Inspection                      |
|                 |   | National Digital Electronic Product Testing Center                        |
| Site Location   | : | No.4 Tongfa Road, Xili Town, Nanshan District, Shenzhen, Guangdong, China |
| Tel             | : | 0086-755-86928965                                                         |
| Fax             | : | 0086-755-86009898-31396                                                   |
| Web             | : | <a href="http://www.smq.com.cn">www.smq.com.cn</a>                        |
| Email           | : | <a href="mailto:emcrf@smq.com.cn">emcrf@smq.com.cn</a>                    |

## TEST REPORT DECLARATION

Applicant : Huawei Technologies Co.,Ltd

Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Manufacturer : Huawei Technologies Co.,Ltd

Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

EUT Description : LTE module

Model No : ME906s-158

Trade mark : HUAWEI

Serial Number : P6M011512700204




FCC ID : QISME906S-158

Test Standards:

### **FCC Part 15 Subpart B 15.107, 15.109 (2014)**

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

|                   |                                                                                                         |       |                    |
|-------------------|---------------------------------------------------------------------------------------------------------|-------|--------------------|
| Project Engineer: | <br>(Wan Xiaojing)   | Date: | <u>Apr.07.2015</u> |
| Checked by:       | <br>(Yang Dong Ping) | Date: | <u>Apr.07.2015</u> |
| Approved by:      | <br>(Lin Bin)        | Date: | <u>Apr.07.2015</u> |

## TABLE OF CONTENTS

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>TEST REPORT DECLARATION .....</b>                             | <b>2</b>  |
| <b>1. TEST RESULTS SUMMARY .....</b>                             | <b>4</b>  |
| <b>2. GENERAL INFORMATION .....</b>                              | <b>5</b>  |
| 2.1. Report information.....                                     | 5         |
| 2.2. Laboratory Accreditation and Relationship to Customer ..... | 5         |
| 2.3. Measurement Uncertainty .....                               | 5         |
| <b>3. PRODUCT DESCRIPTION.....</b>                               | <b>6</b>  |
| 3.1. EUT Description.....                                        | 6         |
| 3.2. Block Diagram of EUT Configuration .....                    | 6         |
| 3.3. Operating Condition of EUT.....                             | 6         |
| 3.4. Support Equipment List .....                                | 7         |
| 3.5. Test Conditions .....                                       | 7         |
| 3.6. Modifications .....                                         | 7         |
| <b>4. TEST EQUIPMENT USED.....</b>                               | <b>8</b>  |
| 4.1. Test Equipment Used to Measure Conducted Disturbance .....  | 8         |
| 4.2. Test Equipment Used to Measure Radiated Disturbance.....    | 8         |
| <b>5. CONDUCTED DISTURBANCE TEST .....</b>                       | <b>9</b>  |
| 5.1. Test Standard and Limit .....                               | 9         |
| 5.2. Test Procedure .....                                        | 9         |
| 5.3. Test Arrangement.....                                       | 9         |
| 5.4. Test Data .....                                             | 9         |
| <b>6. RADIATION DISTURBANCE TEST .....</b>                       | <b>13</b> |
| 6.1. Test Standard and Limit .....                               | 13        |
| 6.2. Test Procedure .....                                        | 13        |
| 6.3. Test Arrangement.....                                       | 13        |
| 6.4. Test Data .....                                             | 13        |

**1. TEST RESULTS SUMMARY**

Table 1 Test Results Summary

| Test Items            | FCC Rules | Test Results |
|-----------------------|-----------|--------------|
| Conducted Disturbance | 15.107    | Pass         |
| Radiation Emission    | 15.109    | Pass         |

Remark: "N/A" means "Not applicable."

## **2. GENERAL INFORMATION**

### **2.1. Report information**

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

### **2.2. Laboratory Accreditation and Relationship to Customer**

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Committee for Laboratories (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 446246 806614 994606(semi anechoic chamber).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is IC4174.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

Measurement Uncertainty

### **2.3. Measurement Uncertainty**

Conducted Emission  
9kHz~30MHz 3.5dB

Radiated Emission  
30MHz~1000MHz 4.5dB  
1GHz~18GHz 4.6dB

### 3. PRODUCT DESCRIPTION


#### 3.1. EUT Description

Table 2 Specification of the Equipment under Test

|                        |                                                                                                                                                                                                                              |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Type:          | ME906s-158                                                                                                                                                                                                                   |
| Hardware Version:      | V3                                                                                                                                                                                                                           |
| Software Version :     | NA                                                                                                                                                                                                                           |
| FCC-ID:                | QISME906S-158                                                                                                                                                                                                                |
| Frequency:             | GSM 850: 824-849MHz;<br>PCS 1900: 1850-1910MHz<br>WCDMA Band II: 1850MHz To 1910MHz<br>WCDMA Band V: 824MHz To 849MHz<br>LTE Band II: 1850MHz To 1910MHz<br>LTE Band V: 824MHz To 849MHz<br>LTE Band VII: 2500MHz To 2570MHz |
| Type(s) of Modulation: | GSM/WCDMA: GMSK; 8-PSK; QPSK<br>LTE: QPSK 16QAM                                                                                                                                                                              |
| Operating voltage:     | 3.135V-4.4V                                                                                                                                                                                                                  |

Remark: N/A

#### 3.2. Block Diagram of EUT Configuration

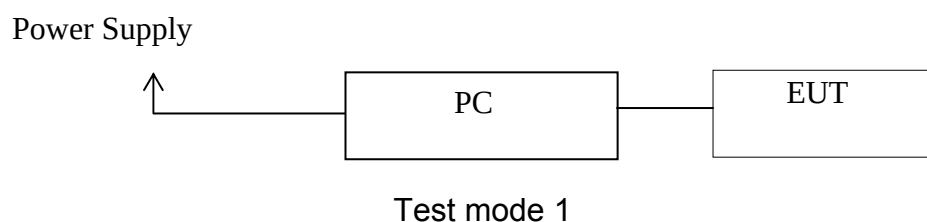

#### 3.3. Operating Condition of EUT

Test mode 1: charging with PC by USB port + SIM Card + Traffic

The Radiated emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

### 3.4. Support Equipment List

| Name                 | Model No       | S/N                    | Manufacturer         |
|----------------------|----------------|------------------------|----------------------|
| Notebook             | R51            | --                     | IBM                  |
| Adaptor for Notebook | 02K6654        | --                     | IBM                  |
| Baseboard            | --             | --                     | HUAWEI               |
| USB Cable            | --             | 02450786<br>H09-000181 | PangNgai             |
| Antenna              | TN-07091727-04 | --                     | Tongyu Communication |

### 3.5. Test Conditions

Date of test: Apr 03, 2015

Date of EUT Receive: Mar 30, 2015

Temperature: 21-24 °C

Relative Humidity: 48-60%

### 3.6. Modifications

No modification was made.

## 4. TEST EQUIPMENT USED

### 4.1. Test Equipment Used to Measure Conducted Disturbance

Table 2 Conducted Disturbance Test Equipment

| No.    | Equipment         | Manufacturer | Model No. | LAST CALIB  | Period |
|--------|-------------------|--------------|-----------|-------------|--------|
| SB3319 | EMI Test Receiver | R&S          | ESCS30    | Dec.29,2014 | 1 Year |
| SB4357 | AMN               | R&S          | ENV216    | Oct.14,2014 | 1 Year |

### 4.2. Test Equipment Used to Measure Radiated Disturbance

Table 3 Radiated Disturbance Test Equipment

| No.       | Equipment                                      | Manufacturer    | Model No. | LAST CALIB  | Period |
|-----------|------------------------------------------------|-----------------|-----------|-------------|--------|
| SB3436    | EMI Test Receiver                              | Rohde & Schwarz | ESI26     | Dec.29,2014 | 1 Year |
| SB8501/09 | EMI Test Receiver                              | Rohde & Schwarz | ESU40     | Mar.19,2015 | 1 Year |
| SB5472/02 | Trilog Broadband Antenna(30M-3GHz)             | SCHWARZBECK     | VULB9163  | Jan.19,2015 | 1 Year |
| SB3435    | Double-Ridged Waveguide Horn Antenna(1G~18GHz) | Rohde & Schwarz | HF906     | Jan.19,2015 | 1 Year |



## 5. CONDUCTED DISTURBANCE TEST

### 5.1. Test Standard and Limit

#### 5.1.1. Test Standard

FCC Part 15: Section 15.107

#### 5.1.2. Test Limit

Table 4 Conducted Disturbance Test Limit (Class B)

| Frequency        | Power Port limits (dB $\mu$ V) |         |
|------------------|--------------------------------|---------|
|                  | Quasi-peak                     | Average |
| 0.15MHz ~ 0.5MHz | 66~56*                         | 56~46*  |
| 0.5MHz ~ 5 MHz   | 56                             | 46      |
| 5 MHz ~ 30MHz    | 60                             | 50      |

\* Decreasing linearly with logarithm of the frequency

### 5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

### 5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 5.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits, the test curves are shown in the next page.


**Table 5 Conducted Disturbance Test Data at mains Port**

| Model No.: ME906s-158                                        |                    |                              |                         |                                   |                        |                         |                                   |                        |
|--------------------------------------------------------------|--------------------|------------------------------|-------------------------|-----------------------------------|------------------------|-------------------------|-----------------------------------|------------------------|
| Test mode: charging with PC by USB port + SIM Card + Traffic |                    |                              |                         |                                   |                        |                         |                                   |                        |
|                                                              | Frequency<br>(MHz) | Correction<br>Factor<br>(dB) | Quasi-Peak              |                                   |                        | Average                 |                                   |                        |
|                                                              |                    |                              | Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V) | Limits<br>(dB $\mu$ V) | Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V) | Limits<br>(dB $\mu$ V) |
| Line                                                         | 0.150              | 9.7                          | 48.4                    | 58.1                              | 66                     | 25.5                    | 35.2                              | 56                     |
|                                                              | 0.222              | 9.7                          | 39.3                    | 49.0                              | 62.7                   | 23.9                    | 33.6                              | 52.7                   |
|                                                              | 0.566              | 9.8                          | 21.9                    | 31.7                              | 56                     | 8.0                     | 17.8                              | 46                     |
|                                                              | 0.674              | 9.8                          | 32.2                    | 42.0                              | 56                     | 11.8                    | 21.6                              | 46                     |
|                                                              | 2.462              | 9.9                          | 24.0                    | 33.9                              | 56                     | 4.7                     | 14.6                              | 46                     |
|                                                              | 2.870              | 9.9                          | 24.2                    | 34.1                              | 56                     | 7.3                     | 17.2                              | 46                     |
| Neutral                                                      | 0.150              | 9.7                          | 46.2                    | 55.9                              | 66                     | 24.5                    | 34.2                              | 56                     |
|                                                              | 0.190              | 9.7                          | 36.4                    | 46.1                              | 64.0                   | 18.1                    | 27.8                              | 54.0                   |
|                                                              | 0.258              | 9.7                          | 30.5                    | 40.2                              | 61.5                   | 21.7                    | 31.4                              | 51.5                   |
|                                                              | 0.386              | 9.7                          | 27.7                    | 37.4                              | 58.1                   | 14.6                    | 24.3                              | 48.1                   |
|                                                              | 0.494              | 9.7                          | 25.7                    | 35.4                              | 56.1                   | 13.0                    | 22.7                              | 46.1                   |
|                                                              | 0.634              | 9.8                          | 24.1                    | 33.9                              | 56                     | 7.5                     | 17.3                              | 46                     |

REMARKS: 1. Emission level(dBuV)=Read Value(dBuV) + Correction Factor(dB)  
 2. Correction Factor(dB) =LISN Factor (dB) + Cable Factor (dB)+Limiter Factor(dB)  
 3. The other emission levels were are more than 20dB below the limits.


Conducted Disturbance

EUT: ME906s-158  
Op Cond: charging with PC by USB port + SIM Card + Traffic  
Test Spec: L  
Comment: AC 120V/60Hz

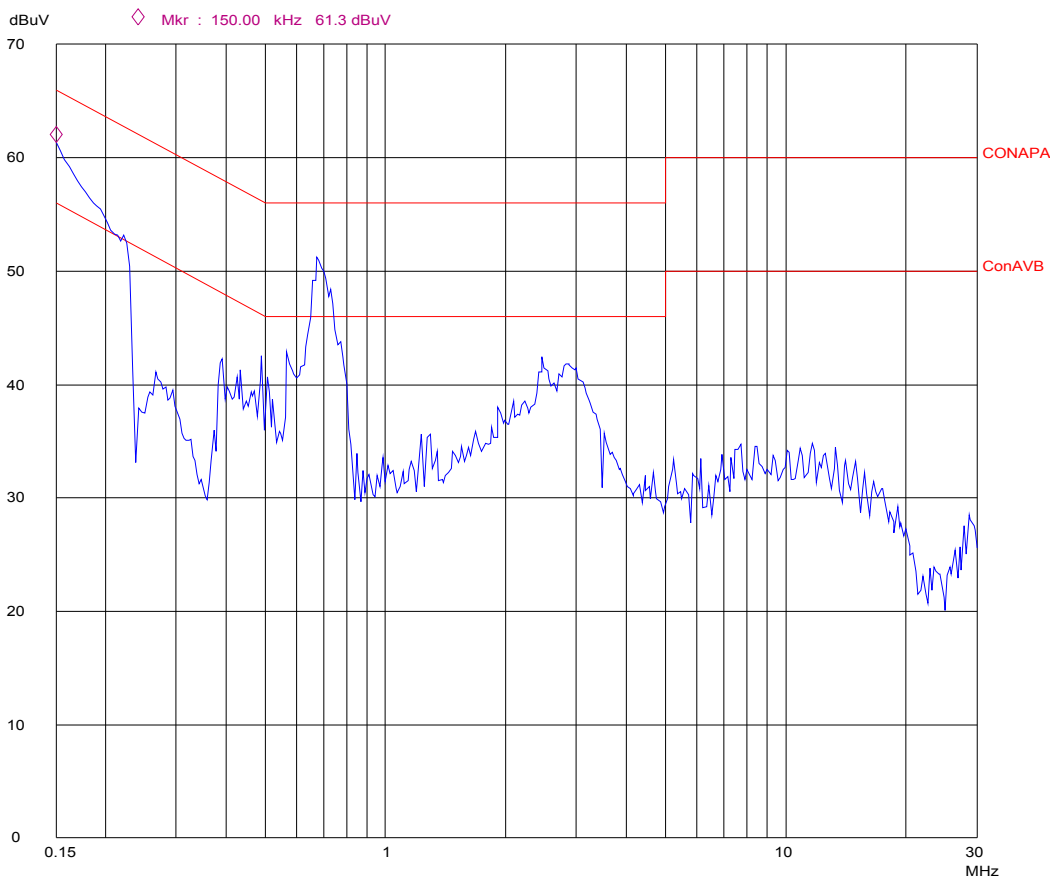

Conducted Disturbance

EUT: ME906s-158  
Op Cond: charging with PC by USB port + SIM Card + Traffic  
Test Spec: N  
Comment: AC 120V/60Hz

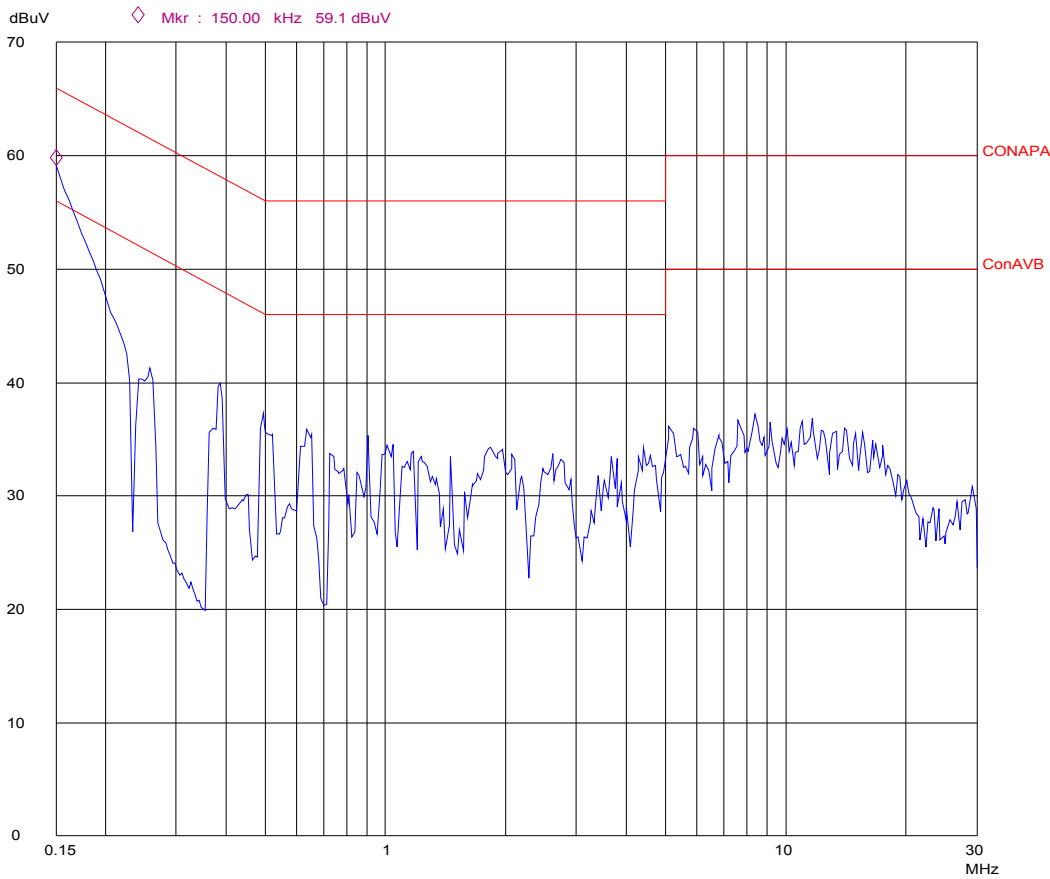

## 6. RADIATION DISTURBANCE TEST

### 6.1. Test Standard and Limit

#### 6.1.1. Test Standard

FCC Part 15: Section 15.109

#### 6.1.2. Test Limit

Table 6 Radiation Disturbance Test Limit for FCC (Class B)

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

\* The lower limit shall apply at the transition frequency.

\* The test distance is 3m.

### 6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set **3 meters** away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test. Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Detector function = peak; Set RBW = 1 MHz, VBW= 3MHz for  $f > 1$  GHz for peak measurement.

### 6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 6.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits, the test curves are shown in the next page.

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Table 7 Radiated Disturbance Test Data

| Frequency<br>MHz | Cable<br>Loss<br>+pre amp<br>(dB) | Antenna<br>Factor<br>(dB) | Readings<br>(dBµV/m) | Level<br>(dBµV/m) | Polarity<br>(H/V) | Turntable<br>Angle<br>(deg) | Antenna<br>Height<br>(cm) | Limits<br>(dBµV/m) | Margin<br>(dB) |
|------------------|-----------------------------------|---------------------------|----------------------|-------------------|-------------------|-----------------------------|---------------------------|--------------------|----------------|
| 180.156          | 1.6                               | 9.7                       | 12.0                 | 23.3              | H                 | 130                         | 100                       | 43.5               | 20.2           |
| 199.944          | 1.6                               | 10.6                      | 15.1                 | 27.3              | H                 | 40                          | 100                       | 43.5               | 16.2           |
| 269.978          | 1.9                               | 12.1                      | 13.9                 | 27.9              | H                 | 140                         | 100                       | 46.0               | 18.1           |
| 366.784          | 2.2                               | 14.3                      | 11.7                 | 28.2              | H                 | 90                          | 200                       | 46.0               | 17.8           |
| 393.265          | 2.4                               | 14.6                      | 7.6                  | 24.6              | H                 | 0                           | 100                       | 46.0               | 21.4           |
| 455.054          | 2.6                               | 15.6                      | 11.0                 | 29.2              | H                 | 180                         | 100                       | 46.0               | 16.8           |
| 82.380           | 1.0                               | 8.5                       | 12.1                 | 21.6              | V                 | 30                          | 100                       | 40.0               | 18.4           |
| 180.641          | 1.6                               | 9.7                       | 12.2                 | 23.5              | V                 | 0                           | 100                       | 43.5               | 20.0           |
| 199.944          | 1.6                               | 10.6                      | 11.4                 | 23.6              | V                 | 60                          | 100                       | 43.5               | 19.9           |
| 269.978          | 1.9                               | 12.1                      | 10.9                 | 24.9              | V                 | 170                         | 100                       | 46.0               | 21.1           |
| 309.166          | 2.1                               | 13.1                      | 8.4                  | 23.6              | V                 | 0                           | 100                       | 46.0               | 22.4           |
| 533.818          | 2.8                               | 16.6                      | 6.3                  | 25.7              | V                 | 50                          | 100                       | 46.0               | 20.3           |
| PK               |                                   |                           |                      |                   |                   |                             |                           |                    |                |
| 1516.801         | -40.8                             | 25.1                      | 71.0                 | 55.3              | H                 | 30                          | 150                       | 74                 | 18.7           |
| 2579.599         | -40.0                             | 28.6                      | 71.3                 | 59.9              | H                 | 150                         | 150                       | 74                 | 14.1           |
| 5326.500         | -38.6                             | 33.9                      | 51.9                 | 47.2              | H                 | 80                          | 150                       | 74                 | 26.8           |
| 7530.000         | -37.5                             | 35.6                      | 53.6                 | 51.7              | H                 | 190                         | 150                       | 74                 | 22.3           |
| 11005.500        | -35.0                             | 37.3                      | 51.9                 | 54.2              | H                 | 180                         | 150                       | 74                 | 19.8           |
| 14485.500        | -34.0                             | 40.2                      | 51.5                 | 57.7              | H                 | 330                         | 150                       | 74                 | 16.3           |
| 1516.801         | -40.8                             | 25.1                      | 70.0                 | 54.3              | V                 | 260                         | 150                       | 74                 | 19.7           |
| 2579.599         | -40.0                             | 28.6                      | 71.8                 | 60.4              | V                 | 0                           | 150                       | 74                 | 13.6           |
| 5326.500         | -38.6                             | 33.9                      | 51.4                 | 46.7              | V                 | 30                          | 150                       | 74                 | 27.3           |
| 7530.000         | -37.5                             | 35.6                      | 52.7                 | 50.8              | V                 | 190                         | 150                       | 74                 | 23.2           |
| 11005.500        | -35.0                             | 37.3                      | 52.3                 | 54.6              | V                 | 210                         | 150                       | 74                 | 19.4           |
| 14485.500        | -34.0                             | 40.2                      | 51.6                 | 57.8              | V                 | 90                          | 150                       | 74                 | 16.2           |
| AV               |                                   |                           |                      |                   |                   |                             |                           |                    |                |
| 1516.801         | -40.8                             | 25.1                      | 57.0                 | 41.3              | H                 | 30                          | 150                       | 54                 | 12.7           |
| 2579.599         | -40.0                             | 28.6                      | 58.0                 | 46.6              | H                 | 150                         | 150                       | 54                 | 7.4            |
| 5326.500         | -38.6                             | 33.9                      | 38.1                 | 33.4              | H                 | 80                          | 150                       | 54                 | 20.6           |
| 7530.000         | -37.5                             | 35.6                      | 39.4                 | 37.5              | H                 | 190                         | 150                       | 54                 | 16.5           |
| 11005.500        | -35.0                             | 37.3                      | 38.6                 | 40.9              | H                 | 180                         | 150                       | 54                 | 13.1           |
| 14485.500        | -34.0                             | 40.2                      | 38.1                 | 44.3              | H                 | 330                         | 150                       | 54                 | 9.7            |
| 1516.801         | -40.8                             | 25.1                      | 57.0                 | 41.3              | V                 | 260                         | 150                       | 54                 | 12.7           |
| 2579.599         | -40.0                             | 28.6                      | 58.0                 | 46.6              | V                 | 0                           | 150                       | 54                 | 7.4            |
| 5326.500         | -38.6                             | 33.9                      | 38.1                 | 33.4              | V                 | 30                          | 150                       | 54                 | 20.6           |
| 7530.000         | -37.5                             | 35.6                      | 39.4                 | 37.5              | V                 | 190                         | 150                       | 54                 | 16.5           |
| 11005.500        | -35.0                             | 37.3                      | 38.8                 | 41.1              | V                 | 210                         | 150                       | 54                 | 12.9           |
| 14485.500        | -34.0                             | 40.2                      | 38.2                 | 44.4              | V                 | 90                          | 150                       | 54                 | 9.6            |

# Radiated Emission


## EUT Information

EUT Model name: ME906s-158  
Operator Mode: charging with PC by USB port + SIM Card + Traffic  
Comment:

## Common Information

Test Description: SMQ NETC EMC Lab.3m Chamber  
Customer  
Antenna Position: Horizontal  
Operator Name:  
Comment1: AC 120V/60Hz  
Comment2:

Field strength 30M-1GHz 1F 3m chamber

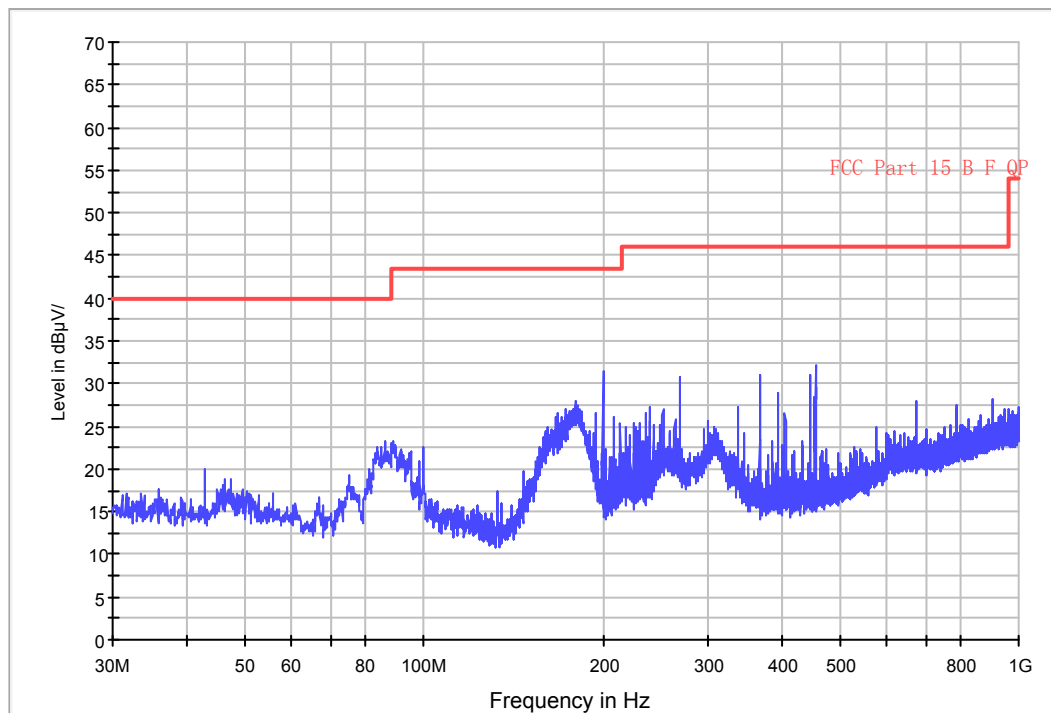

# Radiated Emission


## EUT Information

EUT Model name: ME906s-158  
Operator Mode: charging with PC by USB port + SIM Card + Traffic  
Comment:

## Common Information

Test Description: SMQ NETC EMC Lab.3m Chamber  
Customer:  
Antenna Position: Vertical  
Operator Name:  
Comment1: AC 120V/60Hz  
Comment2:

Field strength 30M-1GHz 1F 3m chamber

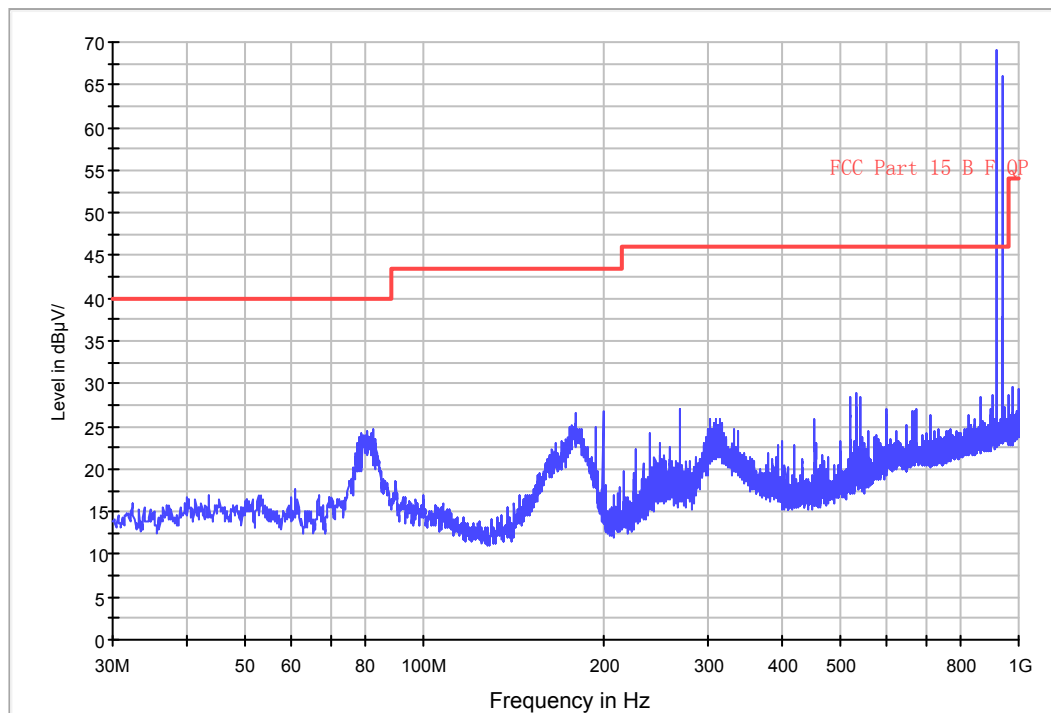



# Radiated Emission


## EUT Information

EUT Model name: ME906s-158  
Operator Mode: charging with PC by USB port + SIM Card + Traffic  
Comment:

## Common Information

Test Description: SMQ NETC EMC Lab.3m Chamber  
Customer  
Antenna Position: Horizontal  
Operator Name:  
Comment1: AC 120V/60Hz  
Comment2:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

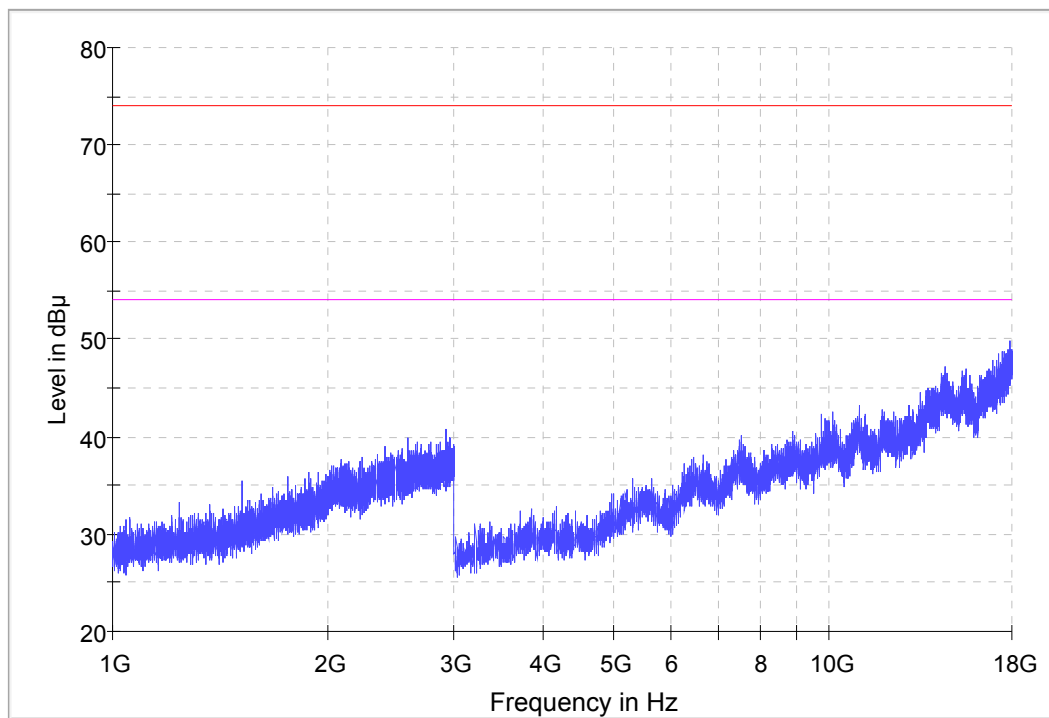

# Radiated Emission

## EUT Information

EUT Model name: ME906s-158  
Operator Mode: charging with PC by USB port + SIM Card + Traffic  
Comment:

## Common Information

Test Description: SMQ NETC EMC Lab.3m Chamber  
Customer  
Antenna Position: Vertical  
Operator Name:  
Comment1: AC 120V/60Hz  
Comment2:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

