

**Appendix A. System Check Plots**

<b>Table of contents</b>
SystemPerformanceCheck-D750-ES-Head
SystemPerformanceCheck-D750-ES-Body
SystemPerformanceCheck-D835-EX-Head
SystemPerformanceCheck-D835-EX-Body
SystemPerformanceCheck-D835-EX-Body
SystemPerformanceCheck-D1750-EX-Head
SystemPerformanceCheck-D1750-EX-Head
SystemPerformanceCheck-D1750-ES-Body
SystemPerformanceCheck-D1750-EX-Body
SystemPerformanceCheck-D1750-ES-Body
SystemPerformanceCheck-D1900-EX-Head
SystemPerformanceCheck-D1900-EX-Body
SystemPerformanceCheck-D1900-ES-Body
SystemPerformanceCheck-D2450-EX-Head
SystemPerformanceCheck-D2450-EX-Body
SystemPerformanceCheck-D2600-ES-Head
SystemPerformanceCheck-D2600-EX-Head
SystemPerformanceCheck-D2600-EX-Body
SystemPerformanceCheck-D2600-ES-Body
SystemPerformanceCheck-D2600-EX-Body
SystemPerformanceCheck-D2600-EX-Body
SystemPerformanceCheck-D5600-EX-Head
SystemPerformanceCheck-D5600-EX-Body
SystemPerformanceCheck-D5750-EX-Head
SystemPerformanceCheck-D5750-EX-Body

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D750-ES-Head

**DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1044**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 42.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.93, 6.93, 6.93); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.22 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 52.42 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 3.12 W/kg

**SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.36 W/kg**

Maximum value of SAR (measured) = 2.44 W/kg

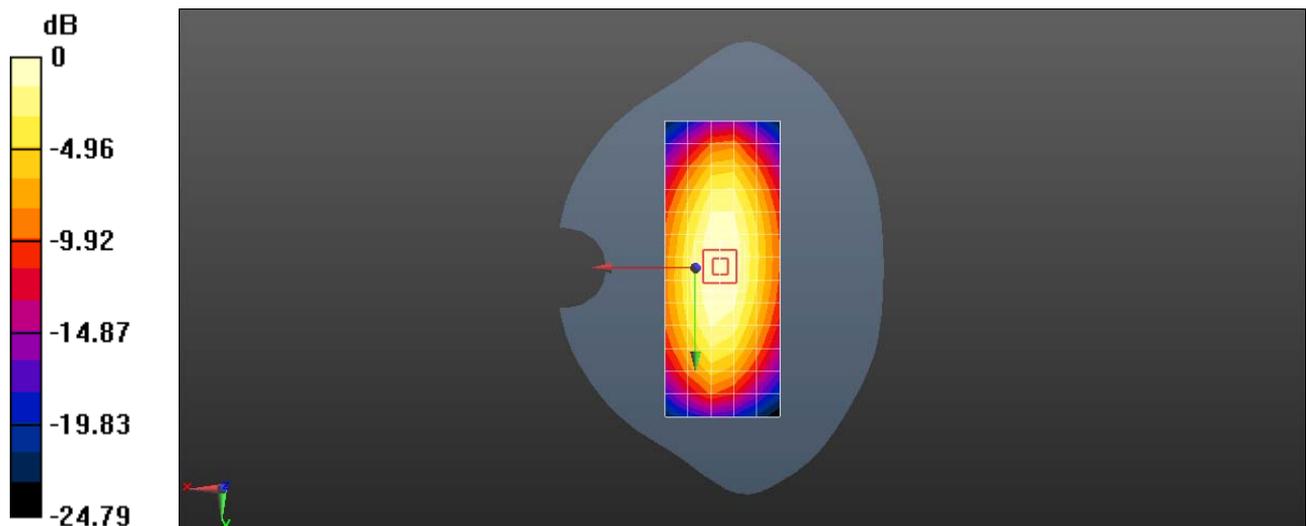

0 dB = 2.22 W/kg = 3.46 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D750-ES-Body

**DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1044**

Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.971$  S/m;  $\epsilon_r = 56.066$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.73 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 53.52 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.40 W/kg

**SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.48 W/kg**

Maximum value of SAR (measured) = 2.64 W/kg

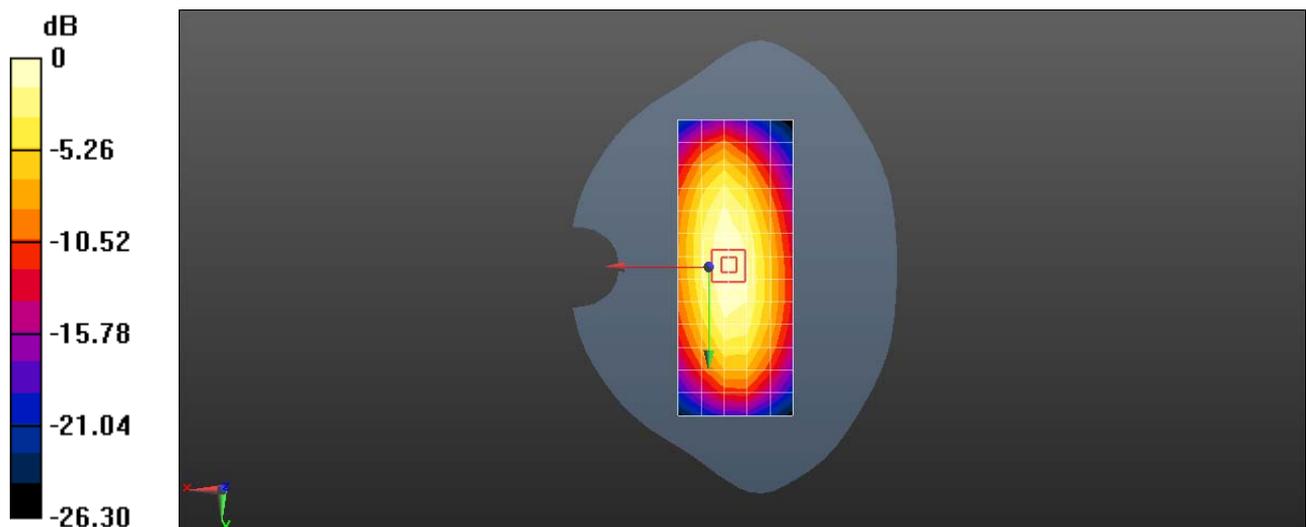

0 dB = 2.73 W/kg = 4.36 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D835-EX-Head

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 41.874$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 3.07 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 52.81 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.57 W/kg**

Maximum value of SAR (measured) = 3.24 W/kg

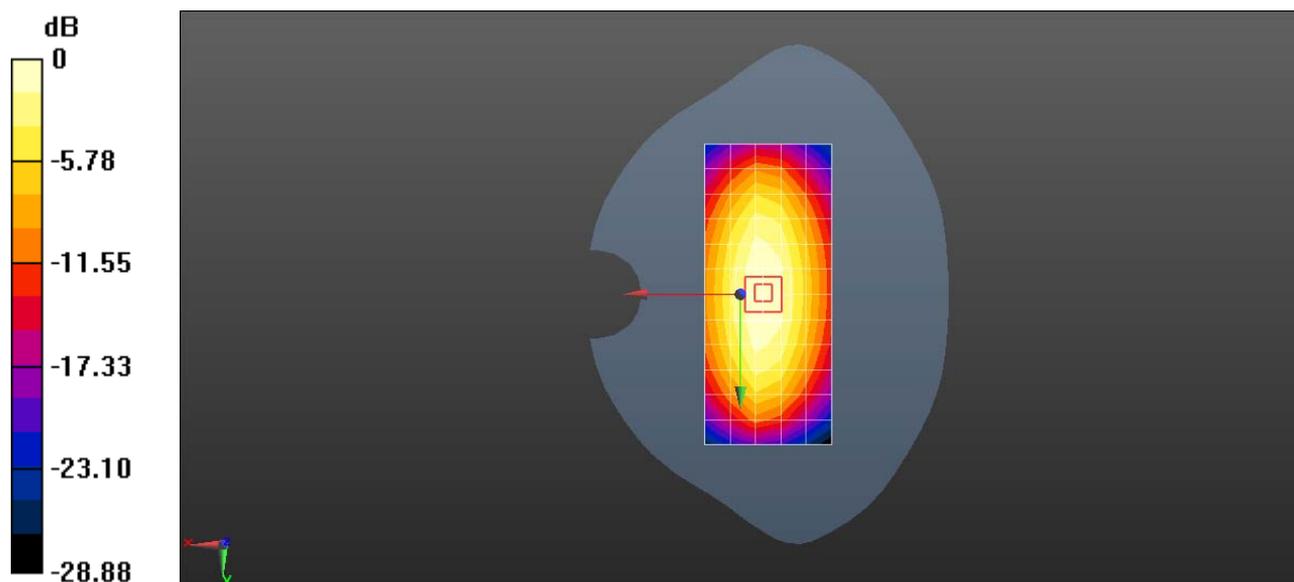

0 dB = 3.07 W/kg = 4.87 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D835-EX-Body

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.951$  S/m;  $\epsilon_r = 54.258$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 3.16 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 52.57 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.66 W/kg

**SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.62 W/kg**

Maximum value of SAR (measured) = 3.26 W/kg

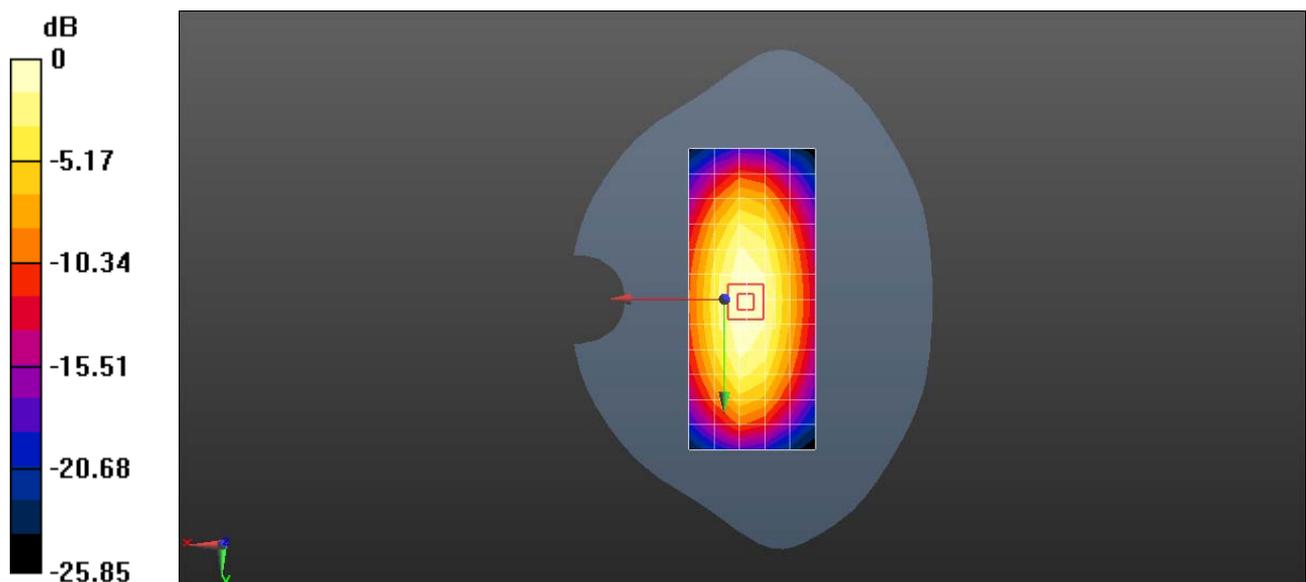

0 dB = 3.16 W/kg = 5.00 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D835-EX-Body

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.985$  S/m;  $\epsilon_r = 53.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(9.53, 9.53, 9.53); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 3.01 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 54.31 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.91 W/kg

**SAR(1 g) = 2.53 W/kg; SAR(10 g) = 1.65 W/kg**

Maximum value of SAR (measured) = 3.43 W/kg

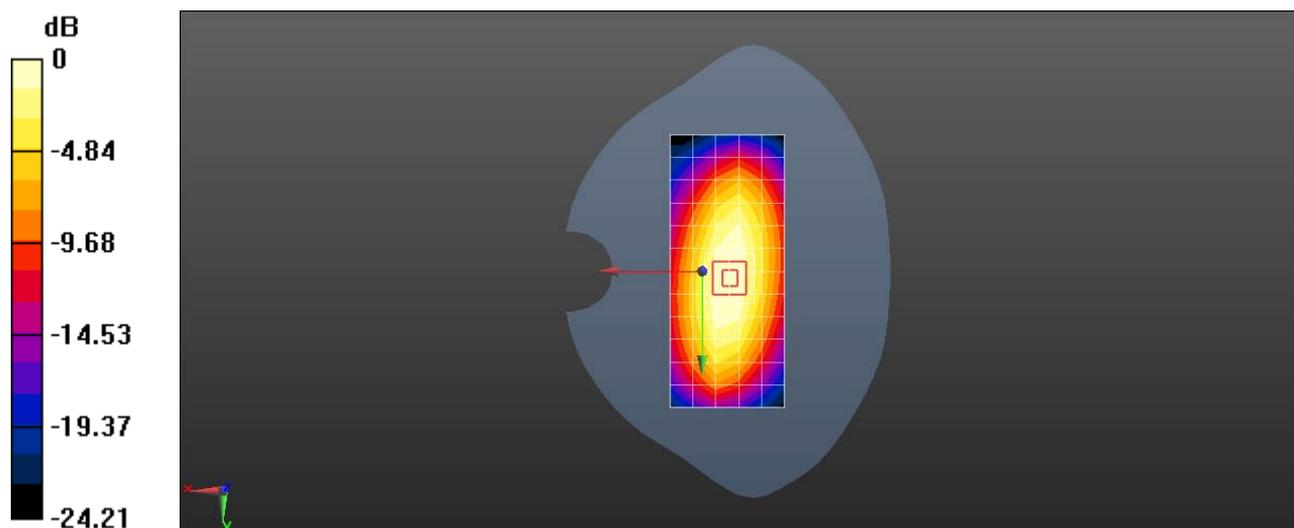

0 dB = 3.01 W/kg = 4.79 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D1750-EX-Head

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1145**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.632$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(8.3, 8.3, 8.3); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 8.47 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 83.74 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 15.4 W/kg

**SAR(1 g) = 8.52 W/kg; SAR(10 g) = 4.51 W/kg**

Maximum value of SAR (measured) = 10.8 W/kg

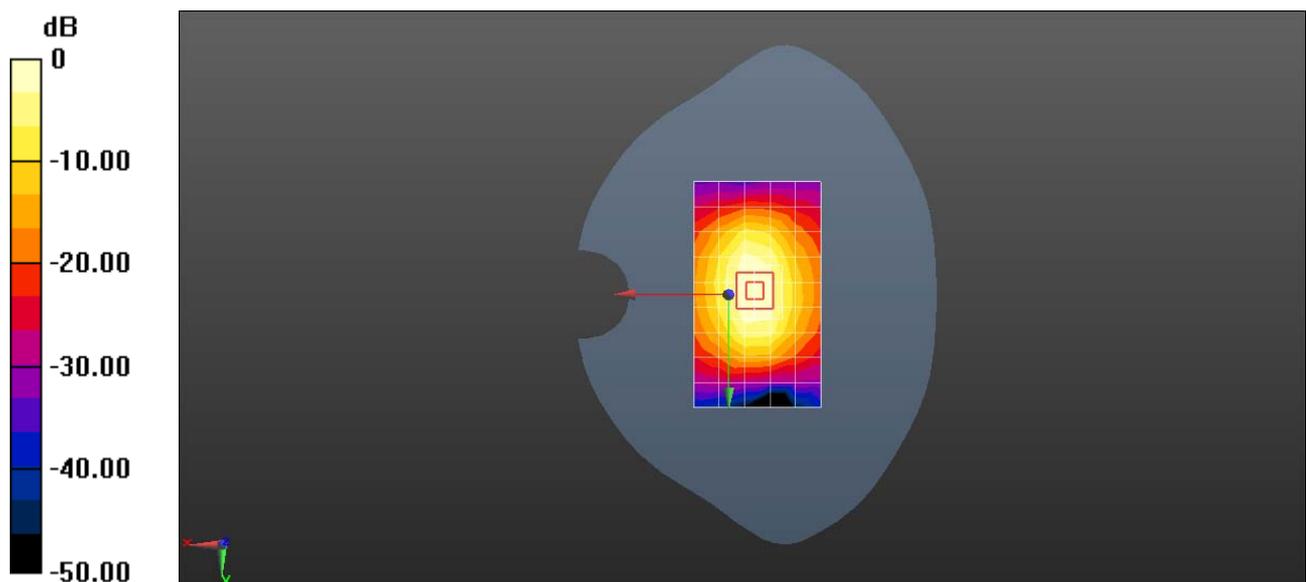

0 dB = 8.47 W/kg = 9.28 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D1750-EX-Head

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1145**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 40.09$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(8.37, 8.37, 8.37); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 12.8 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 88.56 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 18.7 W/kg

**SAR(1 g) = 9.83 W/kg; SAR(10 g) = 5.18 W/kg**

Maximum value of SAR (measured) = 15.4 W/kg

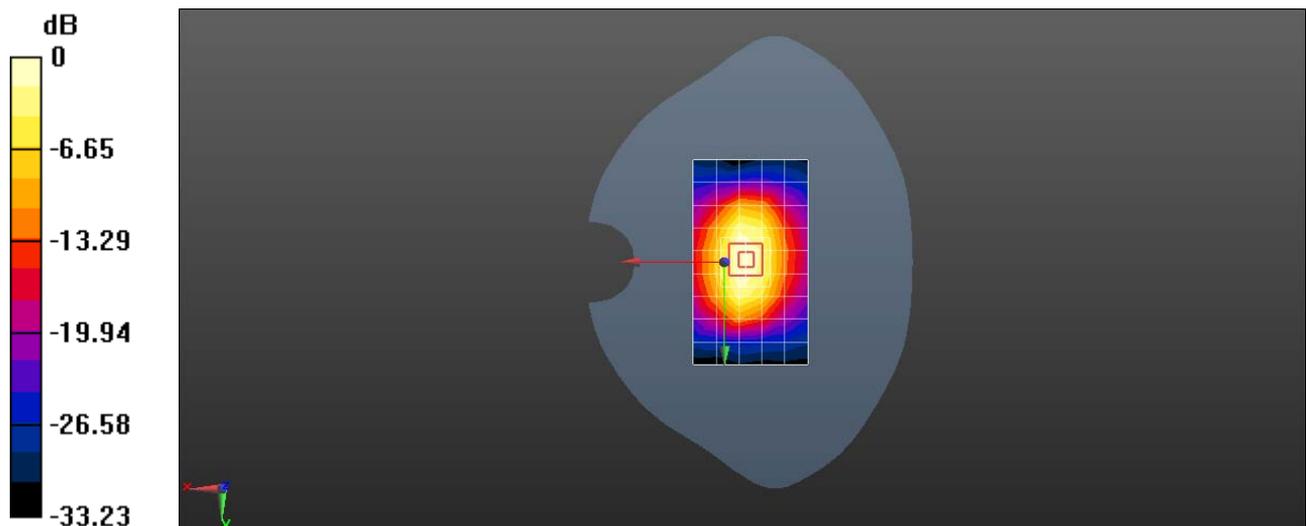

0 dB = 12.8 W/kg = 11.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D1750-ES-Body

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1145**

Communication System: UID 0, CW (0); Frequency: 1750 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.431$  S/m;  $\epsilon_r = 51.677$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.22, 5.22, 5.22); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 8.75 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 82.22 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 15.3 W/kg

**SAR(1 g) = 8.73 W/kg; SAR(10 g) = 4.64 W/kg**

Maximum value of SAR (measured) = 11.0 W/kg

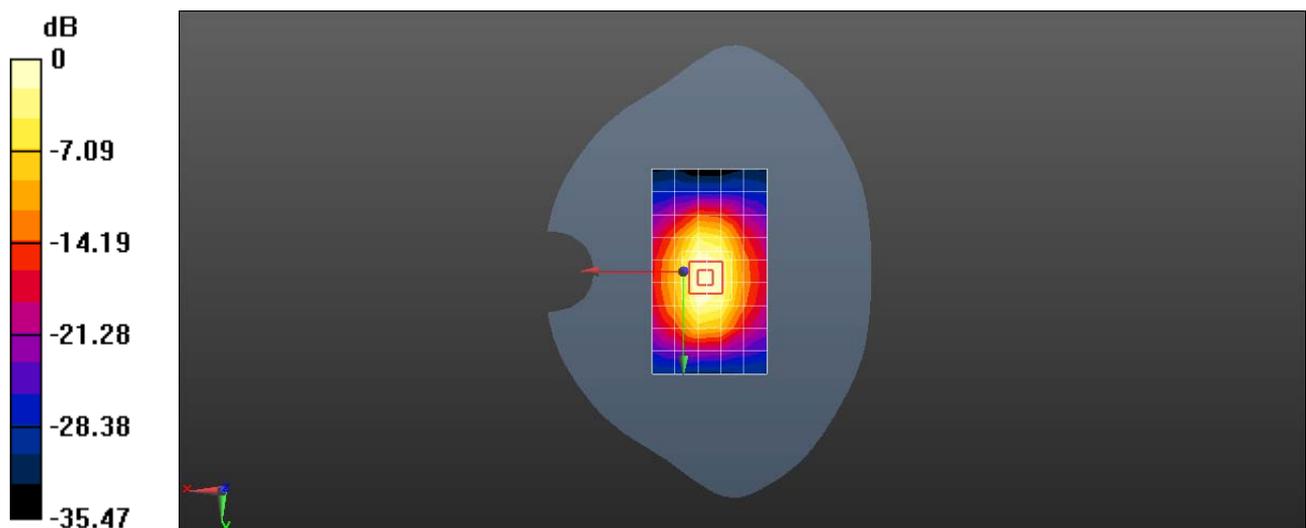

0 dB = 8.75 W/kg = 9.42 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1750-EX-Body

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1145**

Communication System: UID 0, CW (0); Frequency: 1750 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.421$  S/m;  $\epsilon_r = 51.765$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.8, 7.8, 7.8); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 9.23 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 82.61 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 16.3 W/kg

**SAR(1 g) = 9.13 W/kg; SAR(10 g) = 4.85 W/kg**

Maximum value of SAR (measured) = 11.5 W/kg

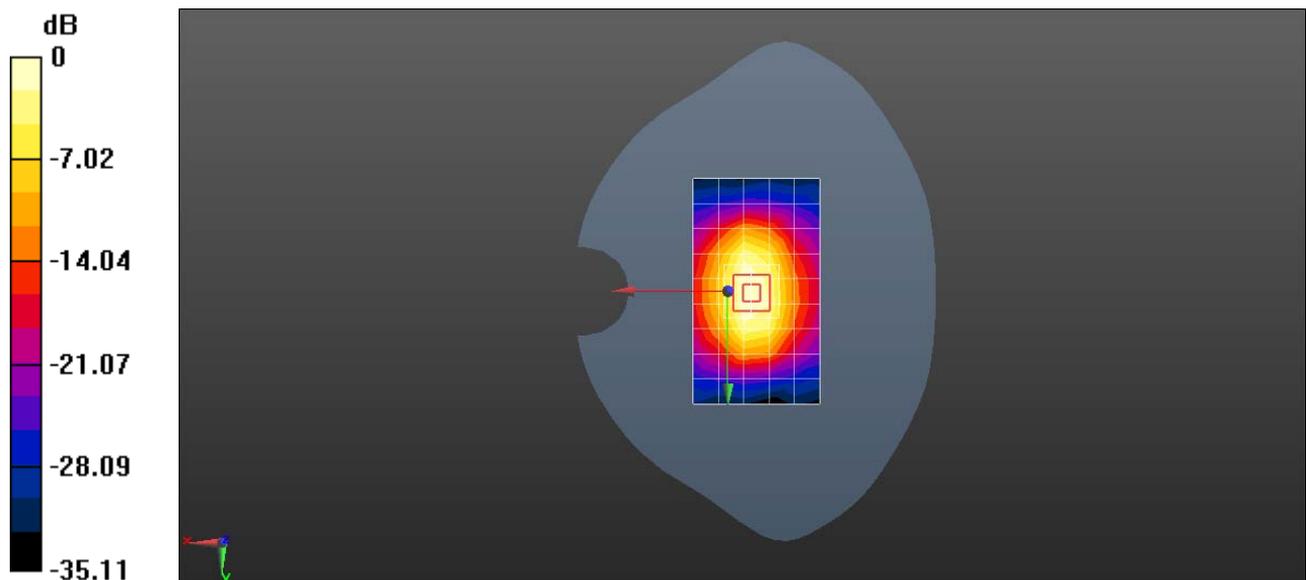

0 dB = 9.23 W/kg = 9.65 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D1750-ES-Body

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1145**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.503$  S/m;  $\epsilon_r = 52.294$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.22, 5.22, 5.22); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 8.98 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 80.10 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 16.1 W/kg

**SAR(1 g) = 9.17 W/kg; SAR(10 g) = 4.87 W/kg**

Maximum value of SAR (measured) = 11.5 W/kg

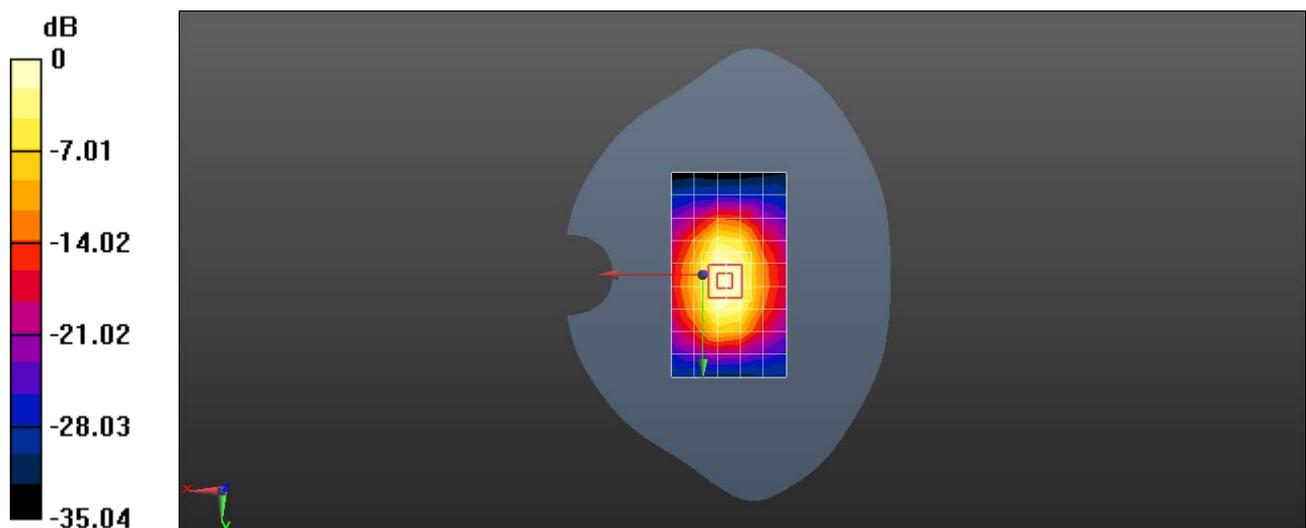

0 dB = 8.98 W/kg = 9.53 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-1900-EX-Head

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.397$  S/m;  $\epsilon_r = 39.367$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 12.2 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 87.35 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 19.0 W/kg

**SAR(1 g) = 9.85 W/kg; SAR(10 g) = 5.07 W/kg**

Maximum value of SAR (measured) = 15.4 W/kg

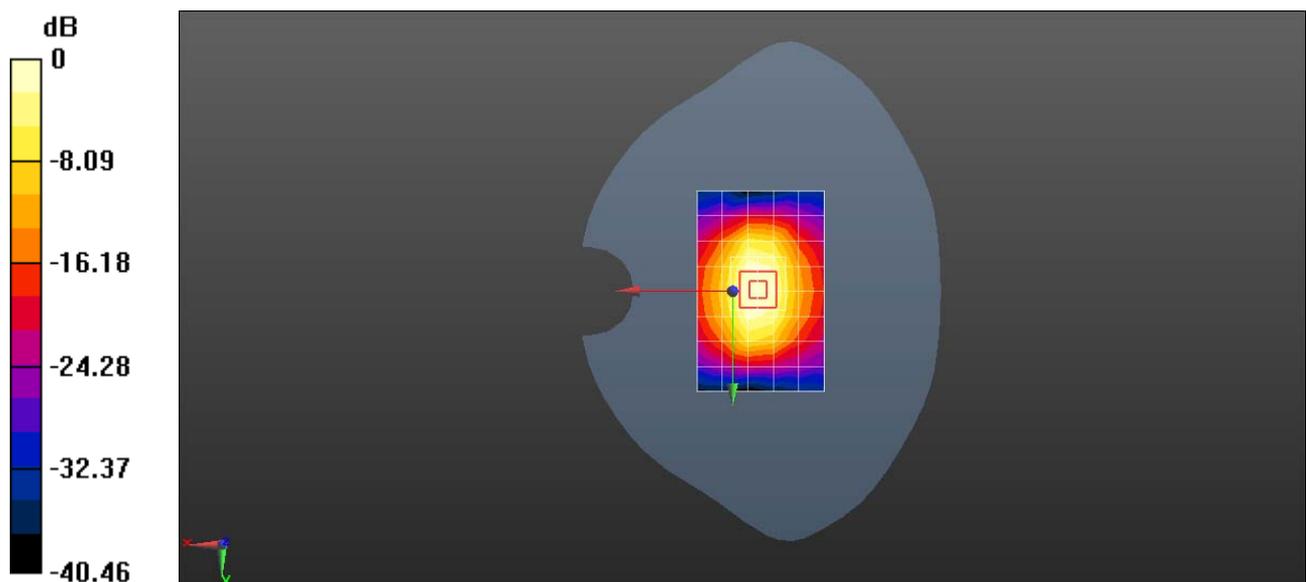

0 dB = 12.2 W/kg = 10.86 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-1900-EX-Body

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.553$  S/m;  $\epsilon_r = 52.469$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 12.9 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 87.05 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 19.8 W/kg

**SAR(1 g) = 10.8 W/kg; SAR(10 g) = 5.59 W/kg**

Maximum value of SAR (measured) = 16.8 W/kg

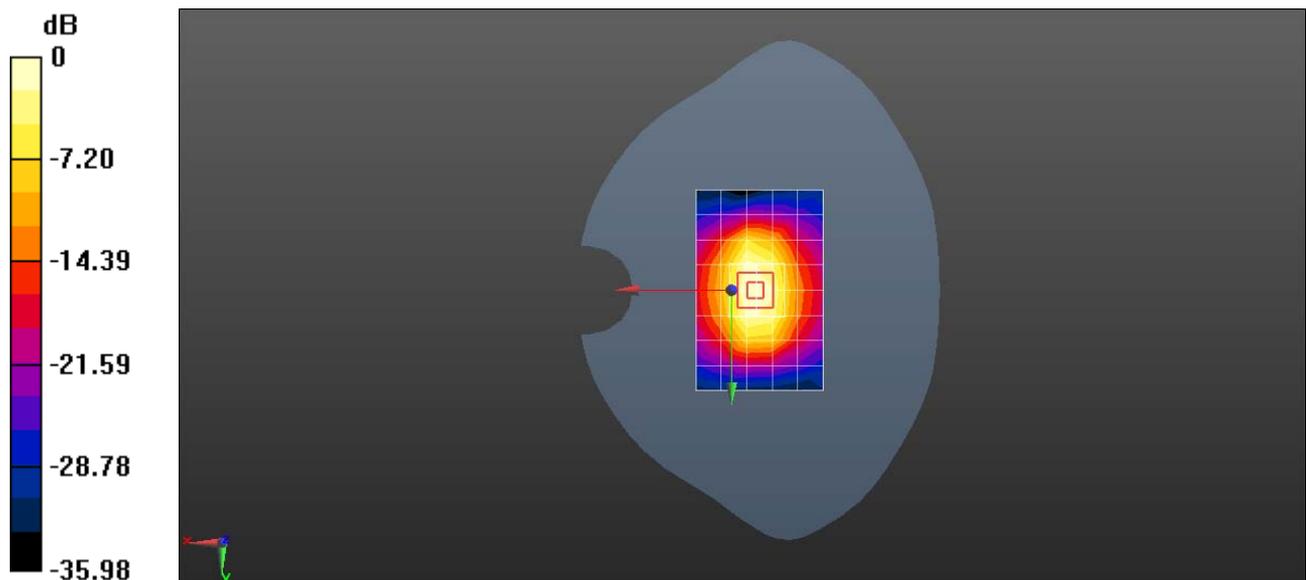

0 dB = 12.9 W/kg = 11.11 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-1900-ES-Body

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.508$  S/m;  $\epsilon_r = 52.229$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 11.6 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 82.12 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 18.0 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.33 W/kg**

Maximum value of SAR (measured) = 12.5 W/kg

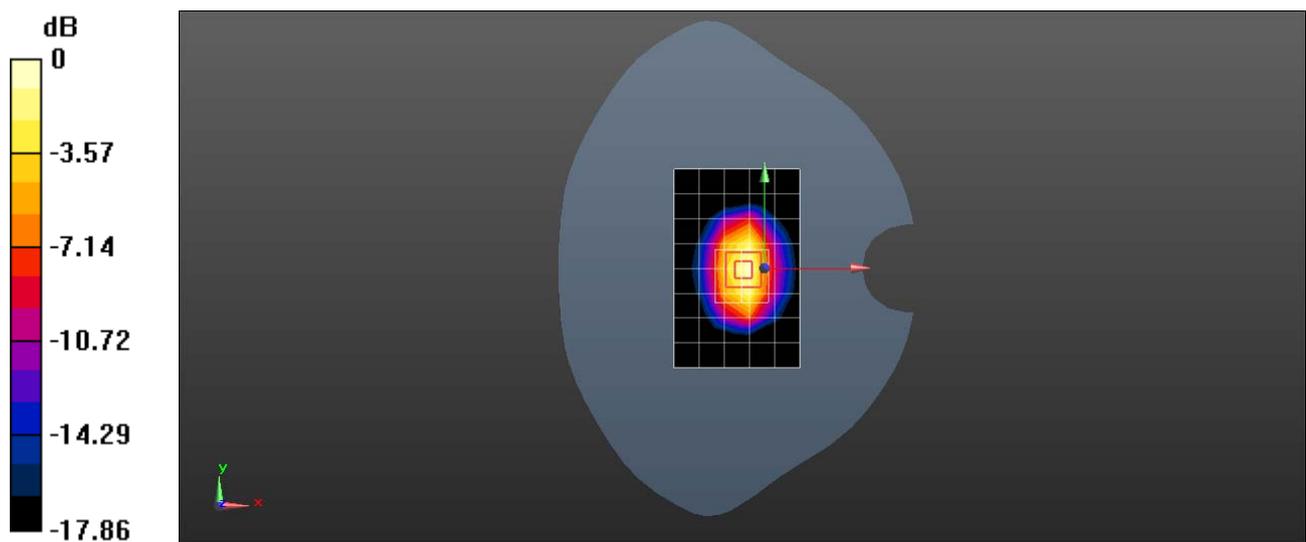

0 dB = 12.5 W/kg = 10.97 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2450-EX-Head

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.811$  S/m;  $\epsilon_r = 38.227$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.44, 7.44, 7.44); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 19.8 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 99.54 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 27.2 W/kg

**SAR(1 g) = 13 W/kg; SAR(10 g) = 6.03 W/kg**

Maximum value of SAR (measured) = 21.9 W/kg

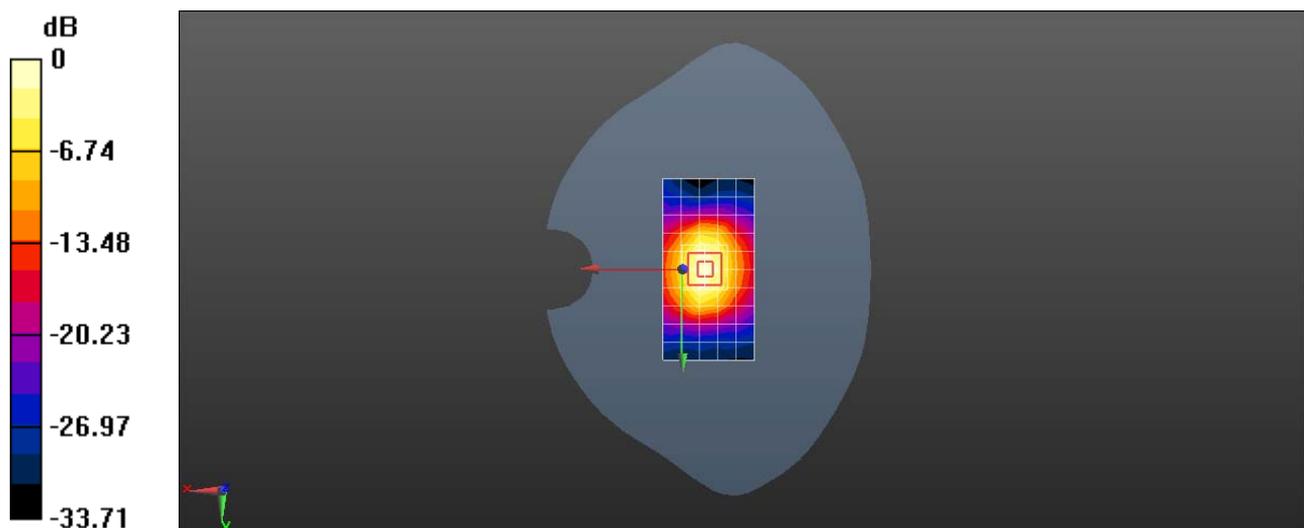

0 dB = 19.8 W/kg = 12.97 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2450-EX-Body

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.006$  S/m;  $\epsilon_r = 50.648$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.43, 7.43, 7.43); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 17.6 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 88.88 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 24.2 W/kg

**SAR(1 g) = 12.1 W/kg; SAR(10 g) = 5.59 W/kg**

Maximum value of SAR (measured) = 20.0 W/kg

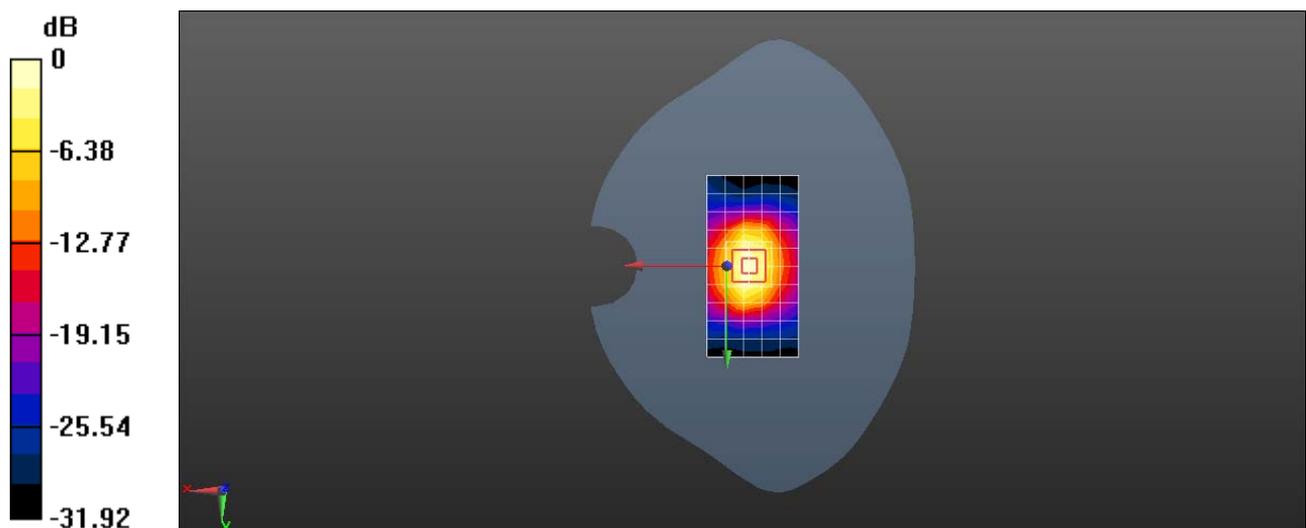

0 dB = 17.6 W/kg = 12.46 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2600-ES-Head

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1058**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.969$  S/m;  $\epsilon_r = 38.622$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.69, 4.69, 4.69); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 14.7 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 92.55 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 28.9 W/kg

**SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.22 W/kg**

Maximum value of SAR (measured) = 17.9 W/kg

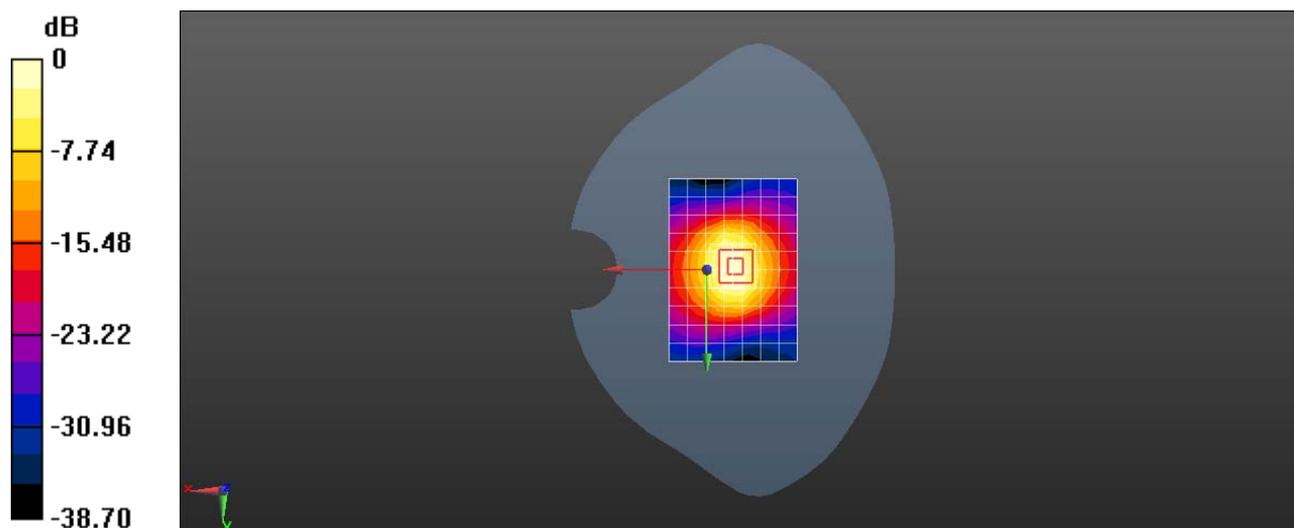

0 dB = 14.7 W/kg = 11.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2600-EX-Head

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.23$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.31, 7.31, 7.31); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 22.6 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 110.3 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 30.1 W/kg

**SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.47 W/kg**

Maximum value of SAR (measured) = 24.1 W/kg

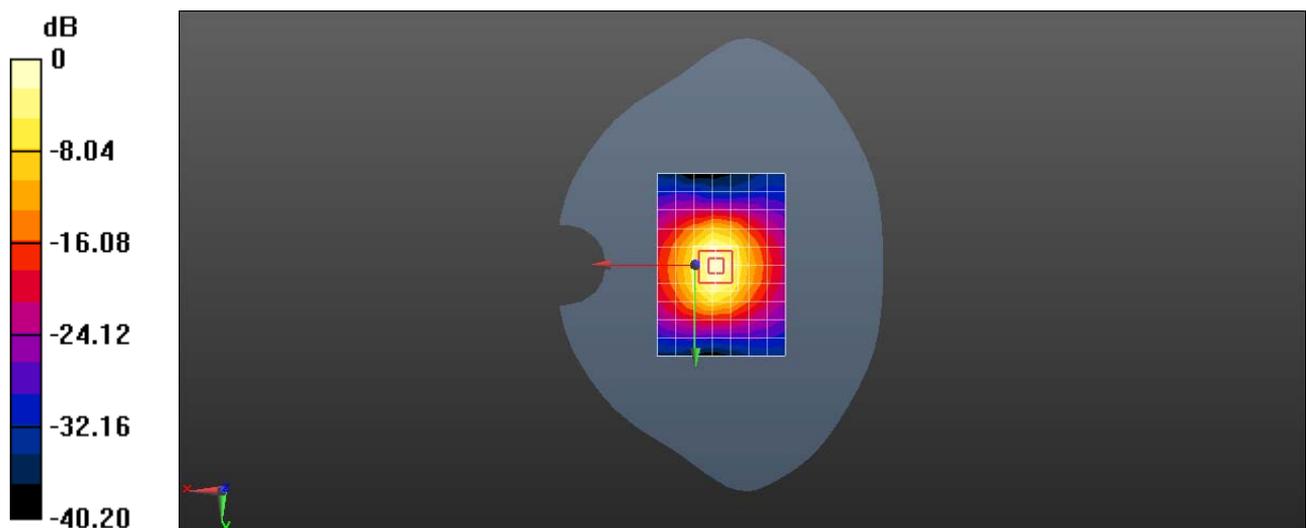

0 dB = 22.6 W/kg = 13.54 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2600-EX-Body

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1058**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.182$  S/m;  $\epsilon_r = 50.584$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(6.96, 6.96, 6.96); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 22.3 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 82.13 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 31.9 W/kg

**SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.33 W/kg**

Maximum value of SAR (measured) = 24.7 W/kg

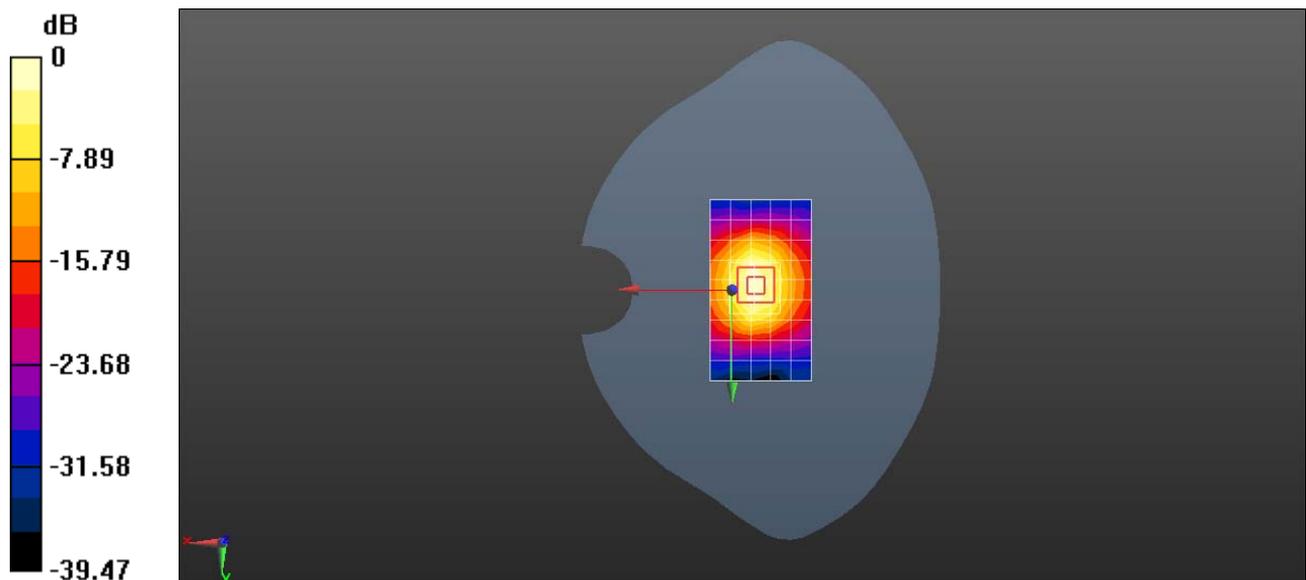

0 dB = 22.3 W/kg = 13.48 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2600-ES-Body

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1058**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.224$  S/m;  $\epsilon_r = 51.778$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.31, 4.31, 4.31); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 15.1 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 82.94 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 29.5 W/kg

**SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.19 W/kg**

Maximum value of SAR (measured) = 18.1 W/kg

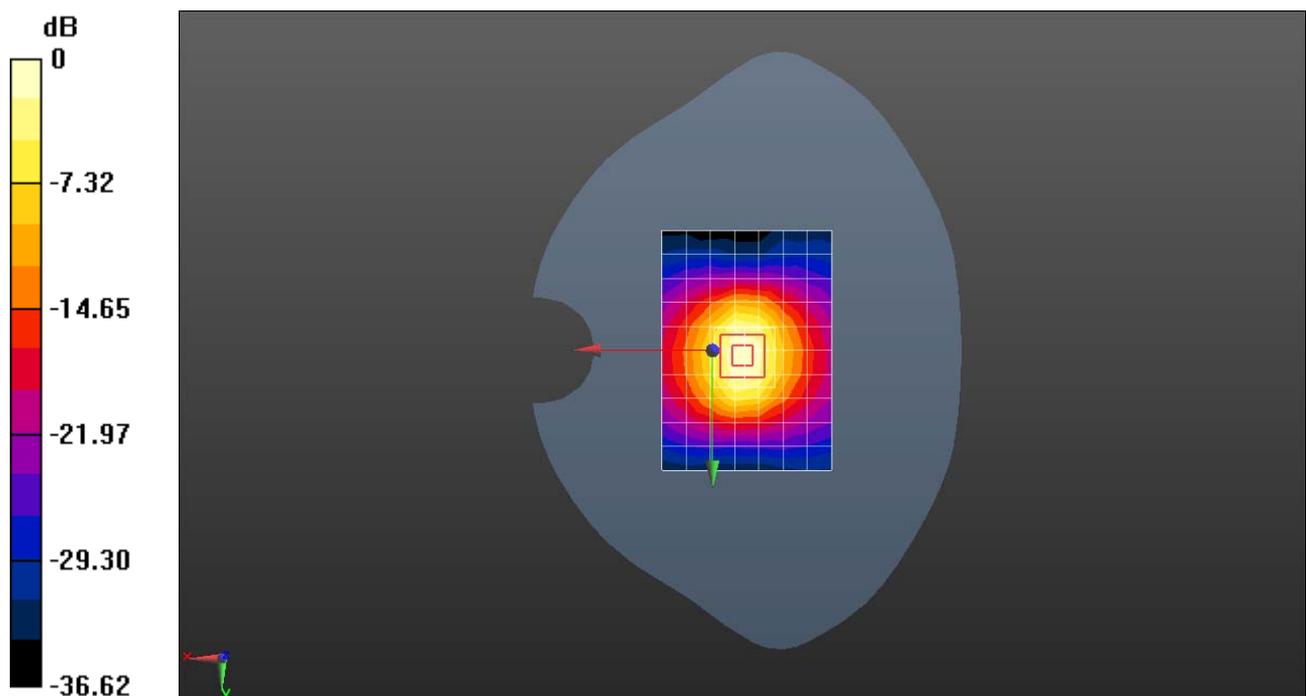

0 dB = 15.1 W/kg = 11.79 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2600-EX-Body

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1058**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.133$  S/m;  $\epsilon_r = 50.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 13.3 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 83.46 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 26.4 W/kg

**SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.83 W/kg**

Maximum value of SAR (measured) = 17.2 W/kg

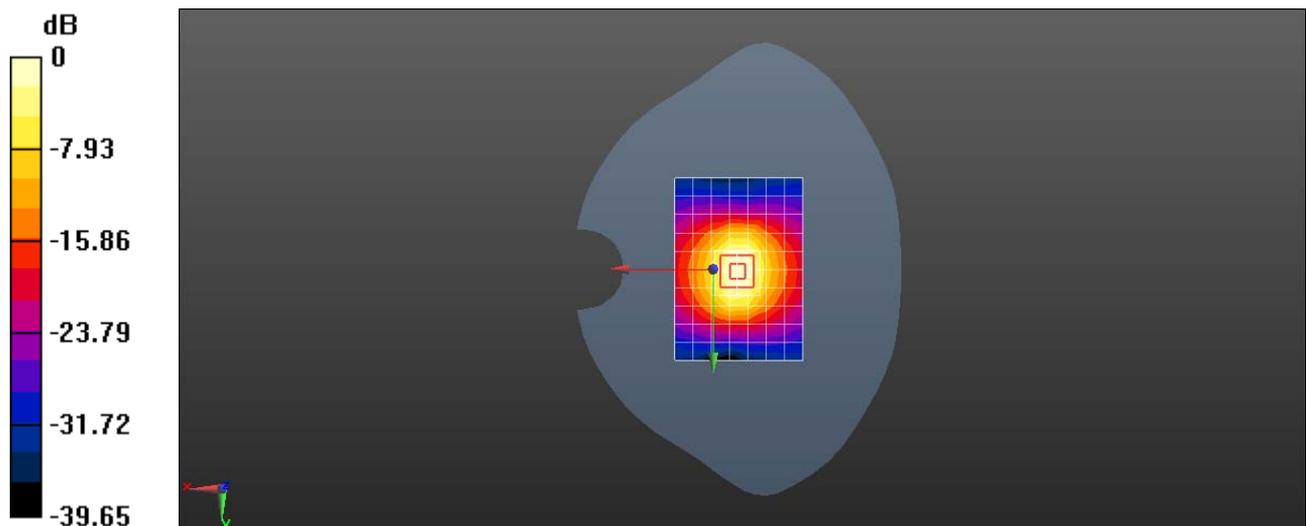

0 dB = 13.3 W/kg = 11.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2600-EX-Body

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.215$  S/m;  $\epsilon_r = 50.27$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 17.4 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 85.20 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 29.3 W/kg

**SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.27 W/kg**

Maximum value of SAR (measured) = 23.9 W/kg

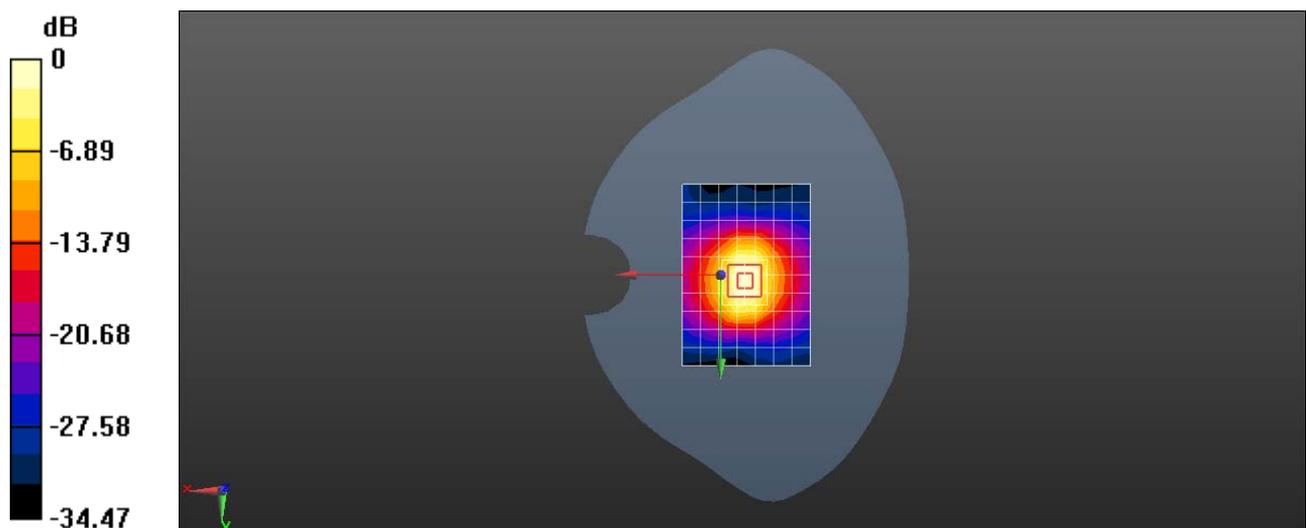

0 dB = 17.4 W/kg = 12.41 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D5600-EX-Head

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155**


Communication System: UID 0, CW (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.949$  S/m;  $\epsilon_r = 34.609$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(4.76, 4.76, 4.76); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 16.7 W/kg

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 63.04 V/m; Power Drift = -0.11 dB  
 Peak SAR (extrapolated) = 33.6 W/kg  
**SAR(1 g) = 7.62 W/kg; SAR(10 g) = 2.18 W/kg**  
 Maximum value of SAR (measured) = 18.8 W/kg

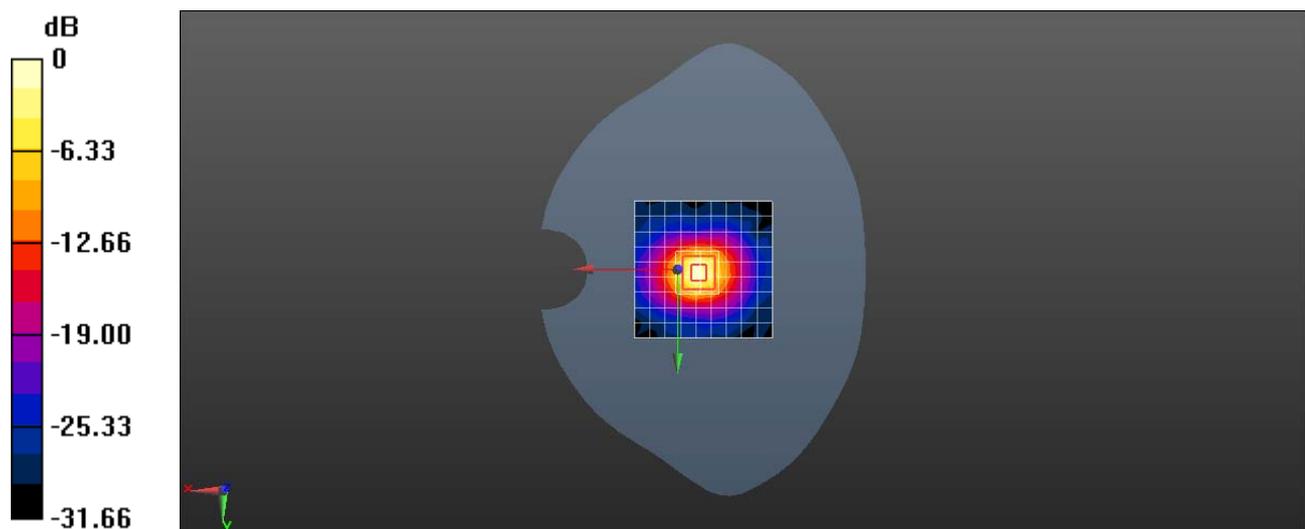

0 dB = 16.7 W/kg = 12.23 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## System Performance Check-D5600-EX-Body

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155**


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.744$  S/m;  $\epsilon_r = 48.016$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(4.3, 4.3, 4.3); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 15.7 W/kg

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 63.88 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 34.7 W/kg  
**SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.14 W/kg**  
 Maximum value of SAR (measured) = 19.6 W/kg

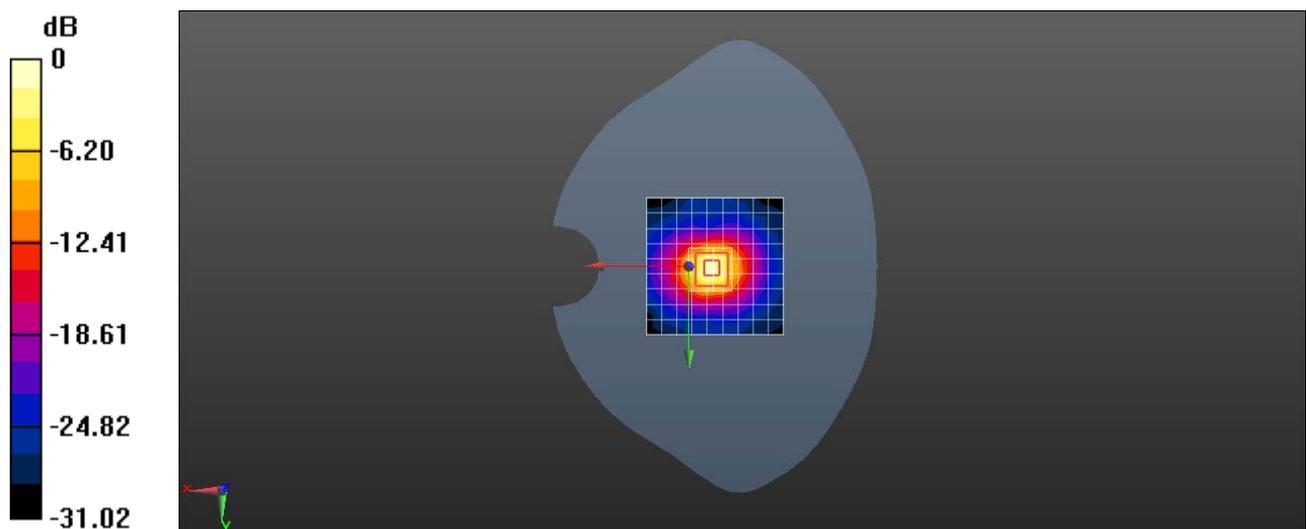

0 dB = 15.7 W/kg = 11.96 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## System Performance Check-D5750-EX-Head

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155**


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.1$  S/m;  $\epsilon_r = 34.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(4.79, 4.79, 4.79); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 14.7 W/kg

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 66.80 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 35.6 W/kg  
**SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.21 W/kg**  
 Maximum value of SAR (measured) = 19.0 W/kg

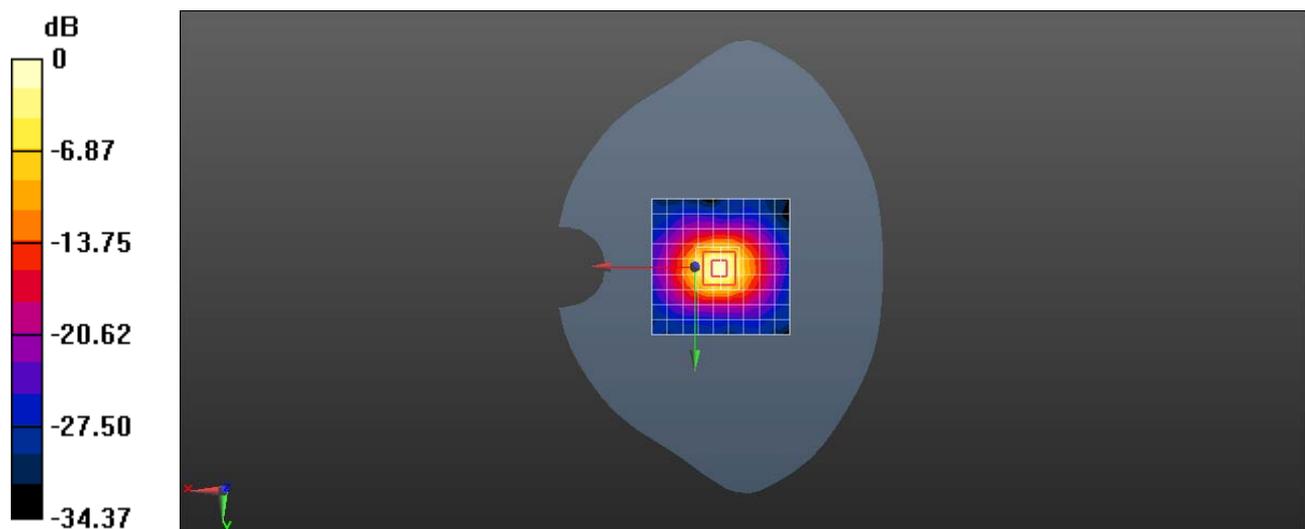

0 dB = 14.7 W/kg = 11.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### System Performance Check-D5750-EX-Body

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155**


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.024$  S/m;  $\epsilon_r = 47.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(4.48, 4.48, 4.48); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 14.5 W/kg

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 59.53 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 30.2 W/kg  
**SAR(1 g) = 6.98 W/kg; SAR(10 g) = 1.96 W/kg**  
Maximum value of SAR (measured) = 17.3 W/kg

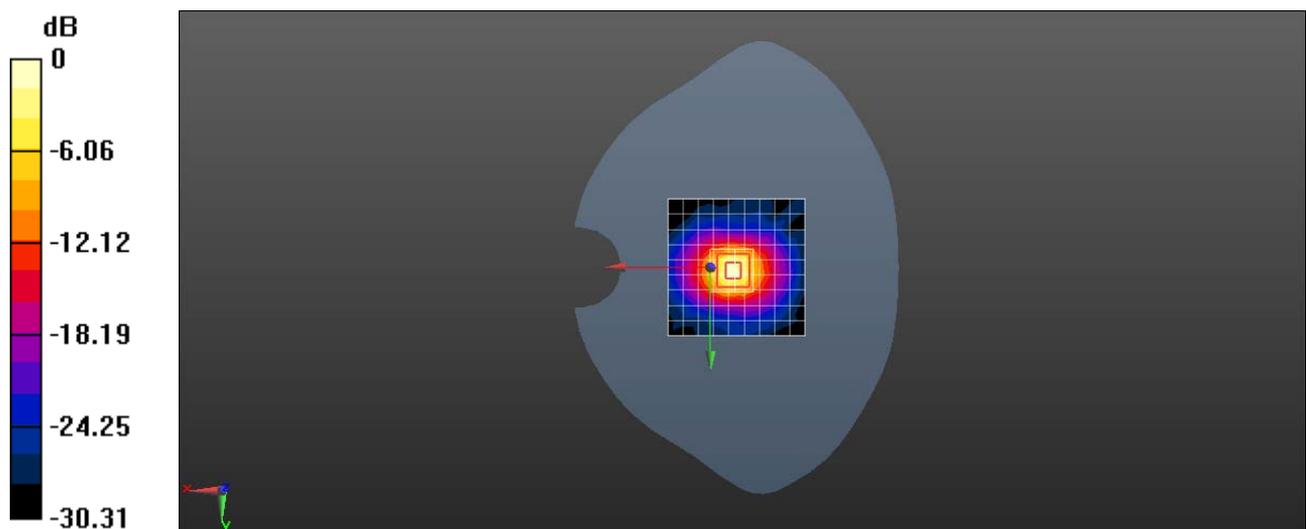

0 dB = 14.5 W/kg = 11.61 dBW/kg