



中国认可
国际互认
检测
TESTING
CNAS L0310



FCC SAR Compliance Test Report

Product Name: Smart Phone

Model: MRD-LX3

Report No.: SYBH(Z-SAR) 20181114006001-2

FCC ID: QISMRD-LX3

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Lin Jiekai</i>
DATE	2018-12-21	2018-12-21

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C
Tel: +86 755 28780808 Fax: +86 755 89652518

※ ※ **Notice** ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03
3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
5. The test report is invalid if there is any evidence of erasure and/or falsification.
6. The test report is only valid for the test samples.
7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory

Table of Contents

1	General Information.....	6
1.1	Statement of Compliance	6
1.2	RF exposure limits	7
1.3	EUT Description.....	8
1.3.1	General Description	10
1.4	Test specification(s).....	11
1.5	Testing laboratory	11
1.6	Applicant and Manufacturer	11
1.7	Application details	11
1.8	Ambient Condition.....	11
2	SAR Measurement System	12
2.1	SAR Measurement Set-up.....	12
2.2	Test environment	13
2.3	Data Acquisition Electronics description.....	13
2.4	Probe description	14
2.5	Phantom description	15
2.6	Device holder description	16
2.7	Test Equipment List	17
3	SAR Measurement Procedure	19
3.1	Scanning procedure.....	19
3.2	Spatial Peak SAR Evaluation	20
3.3	Data Storage and Evaluation	21
4	System Verification Procedure	23
4.1	Tissue Verification.....	23
4.2	System Check.....	26
4.3	System check Procedure	27
5	SAR measurement variability and uncertainty	28
5.1	SAR measurement variability	28
5.2	SAR measurement uncertainty.....	28
6	SAR Test Configuration.....	29
6.1	Test Positions Configuration	29
6.1.1	General considerations	29
6.1.2	Head Exposure Condition	29
6.1.3	Body-worn Exposure Condition	30
6.1.4	Hotspot Exposure Condition	30
6.1.5	Product Specific 10-g SAR Exposure Condition.....	31
6.2	3G SAR Test Reduction Procedure	31
6.3	GSM Test Configuration	31
6.4	UMTS Test Configuration	32
6.5	LTE Test Configuration	38
6.6	WiFi Test Configuration	40
6.6.1	Initial Test Position Procedure	40
6.6.2	Initial Test Configuration Procedure	40
6.6.3	Sub Test Configuration Procedure	40
6.6.4	WiFi 2.4G SAR Test Procedures	41
6.6.5	OFDM Transmission Mode SAR Test Channel Selection Requirements	41
6.7	Power Reduction Specification	42
6.7.1	Power Reduction Specification by specific use conditions.....	43
6.7.2	Proximity sensor Power Reduction Test configuration and validation.....	45
7	SAR Measurement Results	51
7.1	Conducted power measurements.....	51
7.1.1	Conducted power measurements of GSM850	52
7.1.2	Conducted power measurements of GSM1900	54
7.1.3	Conducted power measurements of UMTS Band II	55
7.1.4	Conducted power measurements of UMTS Band IV.....	57
7.1.5	Conducted power measurements of UMTS Band V.....	59
7.1.6	Conducted power measurements of LTE Band 2.....	60
7.1.7	Conducted power measurements of LTE Band 4.....	66
7.1.8	Conducted power measurements of LTE Band 5.....	72

7.1.9	Conducted power measurements of LTE Band 7.....	76
7.1.10	Conducted power measurements of LTE Band 17.....	80
7.1.11	Conducted power measurements of WiFi 2.4G.....	82
7.1.12	Conducted power measurements of BT	84
7.2	SAR measurement Results	86
7.2.1	SAR measurement Result of GSM850.....	88
7.2.2	SAR measurement Result of GSM1900.....	90
7.2.3	SAR measurement Result of UMTS Band II	92
7.2.4	SAR measurement Result of UMTS Band IV	94
7.2.5	SAR measurement Result of UMTS Band V	96
7.2.6	SAR measurement Result of LTE Band 2.....	98
7.2.7	SAR measurement Result of LTE Band 4.....	100
7.2.8	SAR measurement Result of LTE Band 5.....	103
7.2.9	SAR measurement Result of LTE Band 7.....	106
7.2.10	SAR measurement Result of LTE Band 17.....	109
7.2.11	SAR measurement Result of WiFi 2.4G.....	112
7.2.12	SAR measurement Result of BT.....	114
7.3	Multiple Transmitter Evaluation	115
7.3.1	Stand-alone SAR test exclusion	116
7.3.2	Simultaneous Transmission Possibilities.....	117
7.3.3	SAR Summation Scenario	118
7.3.4	Simultaneous Transmission Conclusion.....	118
	Appendix A. System Check Plots.....	119
	Appendix B. SAR Measurement Plots.....	119
	Appendix C. Calibration Certificate	119
	Appendix D. Photo documentation.....	119
	Appendix E. Antenna Location	119

※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2018-12-21	Lin Jiekai

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for this device are as below Table 1.

Band	Max Reported SAR(W/kg)			
	1-g Head	1-g Body-worn (15mm) *	1-g Hotspot (10mm)	Product Specific 10-g SAR (0mm)
GSM850	0.27	0.40	0.46	/
GSM1900	0.28	0.21	0.37	/
UMTS Band II	0.40	0.26	0.41	/
UMTS Band IV	0.22	0.60	0.61	0.74
UMTS Band V	0.35	0.51	0.54	/
LTE Band 2	0.32	0.22	0.35	/
LTE Band 4	0.19	0.45	0.46	0.62
LTE Band 5	0.23	0.39	0.48	/
LTE Band 7	0.19	0.23	0.58	1.51
LTE Band 17	0.20	0.36	0.33	/
WiFi 2.4G	0.56	0.12	0.26	/
BT	0.24	/	/	/
<p>The highest reported SAR for Head, Body Worn, Hotspot, Simultaneous transmission and Product Specific 10-g SAR exposure conditions are 0.56 W/kg, 0.60 W/kg, 0.61 W/kg, 0.96W/kg and 1.51 W/kg respectively per KDB690783 D01.</p>				

Table 1:Summary of test result

Note:

1)* For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation

1.3 EUT Description

Device Information:			
Product Name:	Smart Phone		
Model:	MRD-LX3		
FCC ID :	QISMRD-LX3		
SN:	1#: ASJ0118B08000392 2#: ASJ0118B08000383 3#: ASJ0118B08000400 4#: ASJ0118B08000385 5#: ASJ0118B08000017 6#: ASJ0118B08000388 7#: ASJ0118B08000379 8#: ASJ0118B08000382		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	HL1JATM		
Software Version :	5.0.1.57(SP1C900E64R1P3)		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band II/IV/V, LTE Band 2/4/5/7/17, WiFi 2.4G, BT		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK/16QAM), LTE(QPSK/16QAM),WiFi(DSSS/OFDM),BT(GFSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band II	1850-1910	1930-1990
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band V	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 17	704-716	734-746
		BT	2402-2480
	WiFi 2.4G	2412-2462	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
HSDPA UE Category	14		
HSUPA UE Category	7		
DC-HSDPA UE Category	24		
HSPA+(16QAM Uplink) UE Category	7		

Power Class:	4, tested with power level 5(GSM850)
	1, tested with power level 0(GSM1900)
	3, tested with power control "all 1"(UMTS Band II)
	3, tested with power control "all 1"(UMTS Band IV)
	3, tested with power control "all 1"(UMTS Band V)
	3, tested with power control all Max.(LTE Band 2)
	3, tested with power control all Max.(LTE Band 4)
	3, tested with power control all Max.(LTE Band 5)
	3, tested with power control all Max.(LTE Band 7)
	3, tested with power control all Max.(LTE Band 17)
Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	9262-9400-9538(UMTS Band II)
	1312-1413-1513(UMTS Band IV)
	4132-4182-4233(UMTS Band V)
	18607-18900-19193(LTE Band 2 BW=1.4MHz)
	18615-18900-19185(LTE Band 2 BW=3MHz)
	18625-18900-19175(LTE Band 2 BW=5MHz)
	18650-18900-19150(LTE Band 2 BW=10MHz)
	18675-18900-19125(LTE Band 2 BW=15MHz)
	18700-18900-19100(LTE Band 2 BW=20MHz)
	19957-20175-20393(LTE Band 4 BW=1.4MHz)
	19965-20175-20385(LTE Band 4 BW=3MHz)
	19975-20175-20375(LTE Band 4 BW=5MHz)
	20000-20175-20350(LTE Band 4 BW=10MHz)
	20025-20175-20325(LTE Band 4 BW=15MHz)
	20050-20175-20300(LTE Band 4 BW=20MHz)
	20407-20525-20643(LTE Band 5 BW=1.4MHz)
	20415-20525-20635(LTE Band 5 BW=3MHz)
	20425-20525-20625(LTE Band 5 BW=5MHz)
	20450-20525-20600(LTE Band 5 BW=10MHz)
	20775-21100-21425(LTE Band 7 BW=5MHz)
	20800-21100-21400(LTE Band 7 BW=10MHz)
	20825-21100-21375(LTE Band 7 BW=15MHz)
	20850-21100-21350(LTE Band 7 BW=20MHz)
	23755-23790-23825(LTE Band 17 BW=5MHz)
	23780-23790-23800(LTE Band 17 BW=10MHz)
802.11b:1-6-7-11-13(WiFi 2.4G)	
802.11g/n 20M:1-2-6-7-10-11-13 (WiFi 2.4G)	
802.11/n 40M:3-4-6-7-8-9-11 (WiFi 2.4G)	
BT :0-19-39-78	

Table 3: Device information and operating configuration

1.3.1 General Description

MRD-LX3 is subscriber equipment in the GSM/WCDMA/LTE system. The GSM frequency bands include GSM850, GSM900, DCS1800 and PCS1900. The UMTS frequency band includes band I, band II, band IV, band V and band VIII. The LTE frequency bands include band 2, band 4, band 5, band 7, band 17, band 28. But only GSM850 and GSM1900, UMTS frequency band II, band IV and band V, LTE frequency band 2, band 4, band 5, band 7 and band 17 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides one micro SD card interface, earphone port (to provide voice service), and dual SIM card interface. MRD-LX3 is dual SIM smart phone. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Battery information:

Name	Manufacturer/trademark	Description
Rechargeable Li-ion	HuaweiTechnologies Co., Ltd. (Manufacturer: Sunwoda)	Battery Model: HB405979ECW Rated capacity: 2920mAh Nominal Voltage: +3.82V
	HuaweiTechnologies Co., Ltd. (Manufacturer: SCUD)	
	HuaweiTechnologies Co., Ltd. (Manufacturer: Desay)	

1.4 Test specification(s)

ANSI C95.1:1992 /IEEE C95.1:1991	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05
KDB941225 D06	Hotspot SAR v02r01
KDB447498 D01	General RF Exposure Guidance v06
KDB648474 D04	Handsets SAR v01r03
KDB248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	RF Exposure Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03
KDB616217 D04	SAR for laptop and tablets v01r02

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	NO.2 New City Avenue Songshan Lake Sci. & Tech. Industry Park, Dongguan, Guangdong, P.R.C
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT # 2174.01 & 2174.02 & 2174.03

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2018-12-10
End Date of test	2018-12-16

1.8 Ambient Condition

Ambient temperature	18°C – 25°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

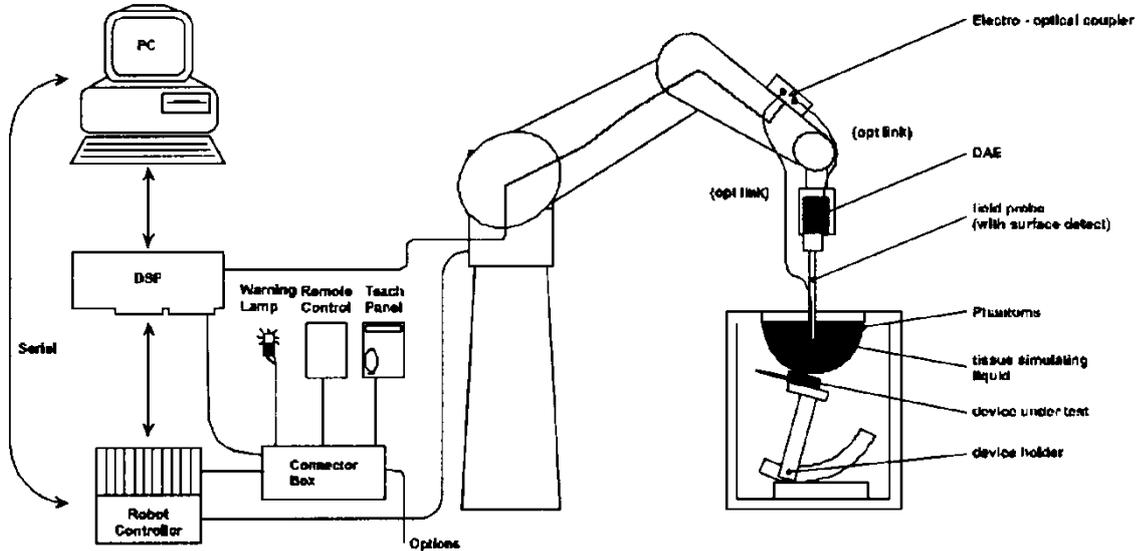

The DAS system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DAS measurement server.
- The DAS measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DAS software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

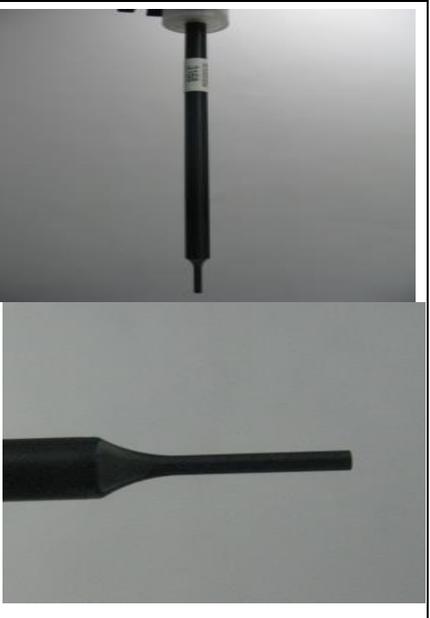Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements


Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	

2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	
<p>The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.</p>		

The following figure shows the definition of reference point:

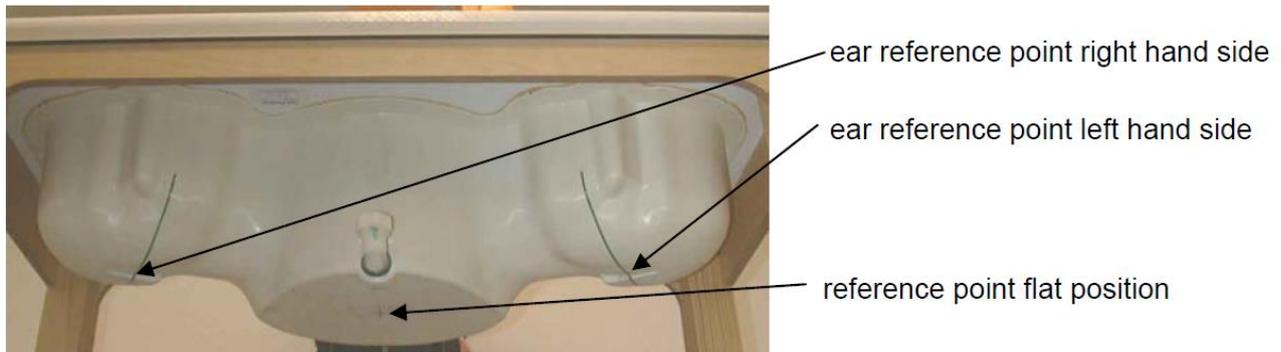

ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	
<p>The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.</p>		

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity $2 \leq \epsilon_r \leq 5$ at ≤ 3 GHz, $3 \leq \epsilon_r \leq 4$ at > 3 GHz and a loss tangent ≤ 0.05 .

Modular Triple Flat Phantom

Shell Thickness (bottom plate)	2mm±0.2mm	
Filling Volume (Module)	approx. 8.1 liters (filling height: 155 mm)	
Dimensions	Length: 292 mm Width: 178 mm Height: 178 mm Useable area: 280 x 175 mm	
Measurement Areas	Flat phantom	
<p>The Modular Flat Phantom consists of three identical modules that can be installed and removed separately without emptying the liquid. It is used for compliance testing of small wireless devices in body-worn configurations according to IEC 62209-2, etc.</p>		

2.6 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\sigma = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of $\pm 1^\circ$ in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

Items	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2018-07-25	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	7505	2018-06-12	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	7381	2018-09-28	One year
<input checked="" type="checkbox"/>	SPEAG	750 MHz Dipole	D750V3	1044	2018-09-18	Three years
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d126	2018-07-24	Three years
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d059	2016-04-20	Three years
<input checked="" type="checkbox"/>	SPEAG	1750 MHz Dipole	D1750V2	1123	2017-07-27	Three years
<input checked="" type="checkbox"/>	SPEAG	1750 MHz Dipole	D1750V2	1145	2016-02-02	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d091	2018-09-19	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	903	2018-10-26	Three years
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2018-07-26	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE3	393	2018-08-14	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2018-04-23	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1236	2018-07-18	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	1474	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM5	1892	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM7	1594	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Triple Flat Phantom	Triple Flat Phantom 5.1C	1176/2	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	111379	2017-12-30	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	158850	2018-05-08	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	116265	2018-03-05	One year
<input checked="" type="checkbox"/>	Anritsu	Singal Analyser	MS2690A	6261767335	2018-03-15	One year
<input checked="" type="checkbox"/>	Anritsu	Radio Communication Analyser	MT8821C	6201830585	2018-05-30	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46107368	2018-10-15	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Keysight	Signal Generator	E8257D	MY56440071	2017-12-25	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	SHX	Dual Directional Coupler	DDTO-4-20	17121801	2018-01-02	One year
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	04232641	2018-04-28	One year
<input checked="" type="checkbox"/>	Keysight	Power Meter	E4417A	MY57160005	2018-03-15	One year
<input checked="" type="checkbox"/>	Keysight	Power Meter Sensor	E9321A	MY57150002	2018-03-15	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	106288	2018-07-17	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	100740	2018-07-17	One year

Note:

1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- For power drift measurement, DASY software supports that the reference position can be either the selected section’s grid reference point or a user point. If the E-field of power reference measurement in the default grid reference point is very small, the test lab may set the reference position to the user point near the hotspot location to avoid large measurement uncertainty.
- The “surface check” measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{area}, \Delta y_{area}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{Zoom}, \Delta y_{Zoom}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 22\text{mm}$

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compansate boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp _i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes
ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Simulating Head Liquid (HBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Esters, Emulsifiers, Inhibitors	10-30%
Sodium salt	8-25%

Simulating Body Liquid (MBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters, Emulsifiers, Inhibitors	20-40%
Sodium salt	0-1.5%

Tissue Type	Target Frequency	Target Tissue		Measured Tissue		Deviation (Within +/-5%)		Test Date
		Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	$\Delta\epsilon_r$	$\Delta\sigma$	
750MHz Head	705	42.14	0.89	43.11	0.899	2.30%	1.06%	2018-12-14
	710	42.11	0.89	43.09	0.901	2.33%	1.20%	
	750	41.90	0.89	42.98	0.912	2.58%	2.47%	
835MHz Head	825	41.60	0.90	42.16	0.925	1.35%	2.74%	2018-12-13
	835	41.50	0.90	42.14	0.928	1.54%	3.16%	
	850	41.50	0.92	42.12	0.934	1.49%	1.47%	
1750MHz Head	1710	40.10	1.35	40.19	1.401	0.22%	3.78%	2018-12-14
	1730	40.10	1.36	40.16	1.413	0.15%	3.90%	
	1750	40.10	1.37	40.12	1.424	0.02%	3.94%	
	1800	40.00	1.40	40.03	1.450	0.08%	3.57%	
1900MHz Head	1850	40.00	1.40	39.83	1.404	-0.43%	0.29%	2018-12-12
	1880	40.00	1.40	39.77	1.420	-0.57%	1.43%	
	1900	40.00	1.40	39.73	1.430	-0.68%	2.14%	
	1910	40.00	1.40	39.72	1.435	-0.70%	2.50%	
2450MHz Head	2410	39.30	1.76	41.07	1.842	4.50%	4.66%	2018-12-15
	2435	39.20	1.79	41.02	1.861	4.64%	3.97%	
	2450	39.20	1.80	40.99	1.872	4.57%	4.06%	
	2460	39.20	1.81	40.97	1.880	4.52%	3.87%	
2600MHz Head	2510	39.12	1.86	39.95	1.908	2.12%	2.58%	2018-12-14
	2535	39.10	1.89	39.94	1.926	2.15%	1.90%	
	2560	39.00	1.92	39.93	1.941	2.38%	1.09%	
	2600	39.00	1.96	39.88	1.976	2.26%	0.82%	
750MHz Body	705	55.70	0.96	52.94	0.979	-4.96%	1.96%	2018-12-13
	710	55.70	0.96	52.92	0.981	-4.99%	2.15%	
	750	55.50	0.96	52.85	0.994	-4.77%	3.57%	
835MHz Body	825	55.20	0.97	53.41	0.986	-3.24%	1.62%	2018-12-11
	835	55.20	0.97	53.38	0.990	-3.30%	2.05%	
	850	55.20	0.99	53.35	0.996	-3.35%	0.61%	
1750MHz Body	1710	53.50	1.46	51.16	1.409	-4.37%	-3.49%	2018-12-11
	1730	53.50	1.48	51.15	1.422	-4.39%	-3.92%	
	1750	53.40	1.49	51.12	1.434	-4.27%	-3.76%	
	1800	53.30	1.52	51.03	1.466	-4.26%	-3.55%	
1900MHz Body	1850	53.30	1.52	51.89	1.550	-2.65%	1.97%	2018-12-10
	1880	53.30	1.52	51.83	1.564	-2.76%	2.89%	
	1900	53.30	1.52	51.80	1.574	-2.81%	3.55%	
	1910	53.30	1.52	51.84	1.580	-2.74%	3.95%	
2450MHz Body	2410	52.80	1.91	52.49	2.004	-0.59%	4.92%	2018-12-15
	2435	52.70	1.94	52.44	2.028	-0.49%	4.54%	
	2450	52.70	1.95	52.39	2.042	-0.59%	4.72%	
	2460	52.70	1.96	52.37	2.052	-0.63%	4.69%	
2600MHz Body	2510	52.62	2.03	50.34	2.126	-4.33%	4.73%	2018-12-13
	2535	52.59	2.07	50.31	2.150	-4.34%	3.86%	
	2560	52.57	2.09	50.27	2.170	-4.38%	3.83%	
	2600	52.50	2.16	50.20	2.210	-4.38%	2.31%	

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).

System Validation Kit	System Check	Target SAR (Normalized to 1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10%)		Test Date
		1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)	Δ 1-g	Δ 10-g	
1044	750MHz Head	8.24	5.34	7.88	5.20	-4.37%	-2.62%	2018-12-14
4d059	835MHz Head	9.30	6.05	9.52	6.24	2.37%	3.14%	2018-12-13
1123	1750MHz Head	36.60	19.40	34.68	18.60	-5.25%	-4.12%	2018-12-14
5d091	1900MHz Head	40.40	21.30	38.80	20.32	-3.96%	-4.60%	2018-12-12
903	2450MHz Head	51.60	24.00	54.40	25.40	5.43%	5.83%	2018-12-15
1021	2600MHz Head	56.60	25.50	56.80	26.00	0.35%	1.96%	2018-12-14
1044	750MHz Body	8.54	5.61	8.12	5.44	-4.92%	-3.03%	2018-12-13
4d126	835MHz Body	9.65	6.32	9.60	6.40	-0.52%	1.27%	2018-12-11
1145	1750MHz Body	36.50	19.40	34.96	18.60	-4.22%	-4.12%	2018-12-11
5d091	1900MHz Body	40.40	21.10	39.92	21.00	-1.19%	-0.47%	2018-12-10
903	2450MHz Body	50.50	23.50	50.00	23.36	-0.99%	-0.60%	2018-12-15
1021	2600MHz Body	55.70	25.00	58.40	25.88	4.85%	3.52%	2018-12-13

Table 6: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SAM. It is fed with a power of 250 mW (below 3GHz) or 100mW (3-6GHz). To adjust this power, a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

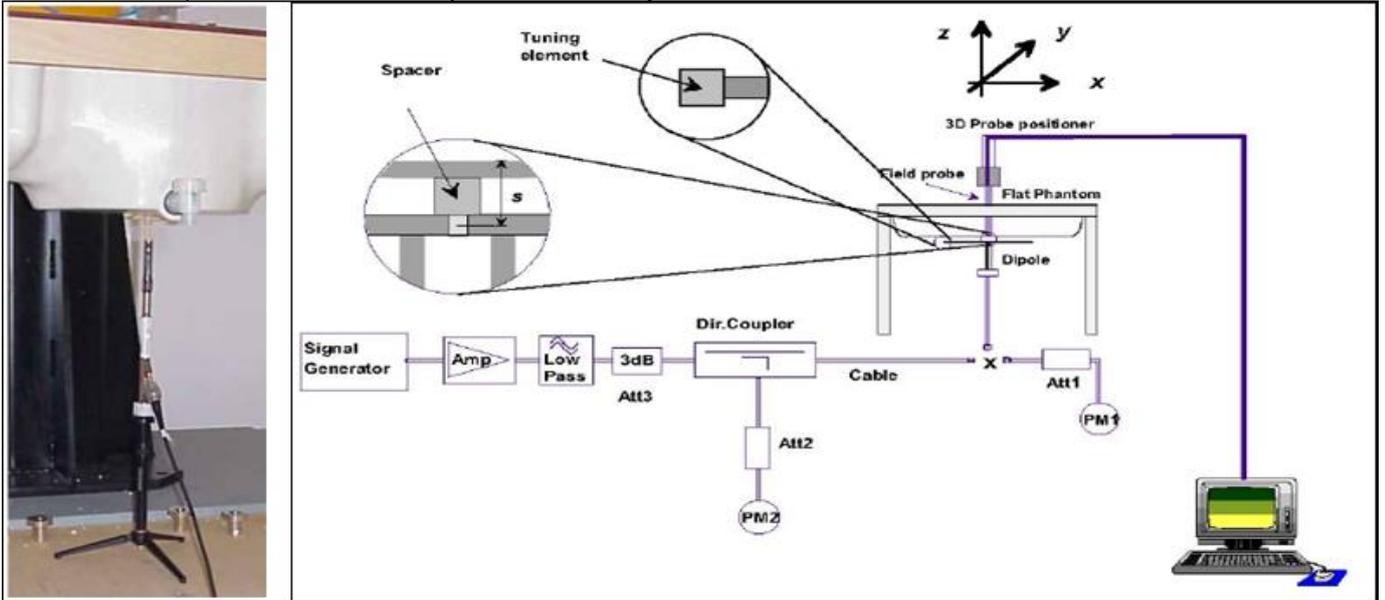

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6 SAR Test Configuration

6.1 Test Positions Configuration

6.1.1 General considerations

Per IEEE 1528-2013, two imaginary lines on the handset were established: the vertical centerline and the horizontal line (See Figure 1).

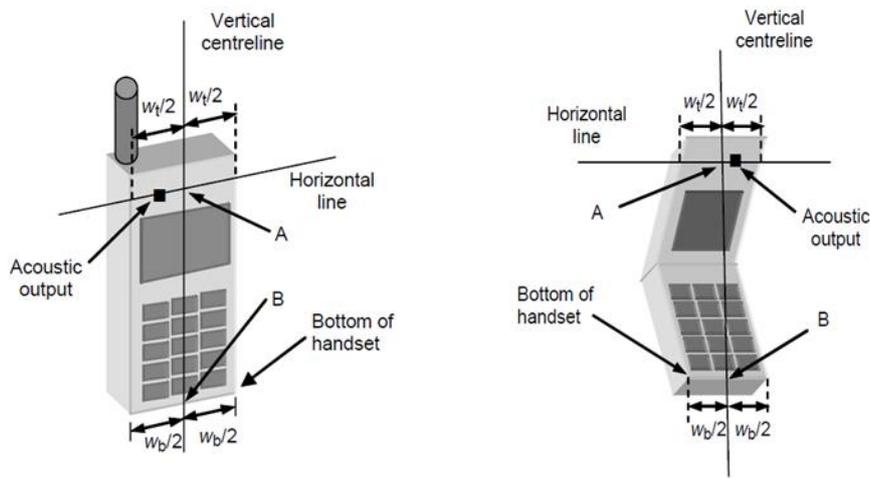


Figure 1 Hand Vertical Center & Horizontal Line Reference Points

6.1.2 Head Exposure Condition

Per IEEE 1528-2013, Head SAR measurements were made in the “cheek” position (See Figure 2) and the “tilt” position (See Figure 3). The device should be tested in both positions on left and right sides of the SAM phantom.

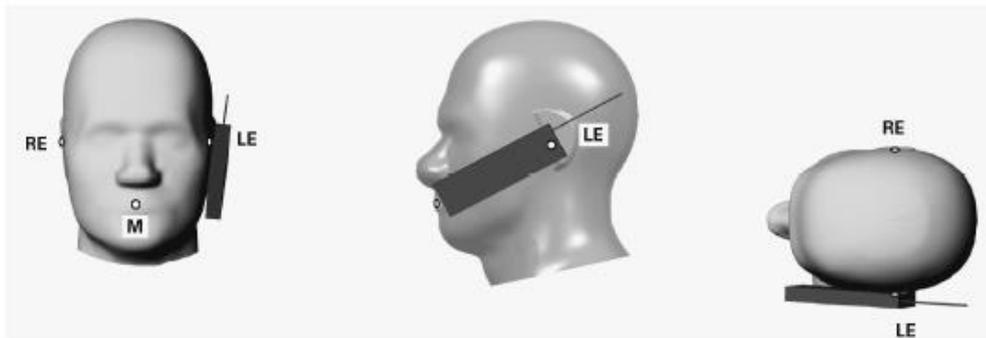


Figure 2 Front, Side and Top View of Cheek Position

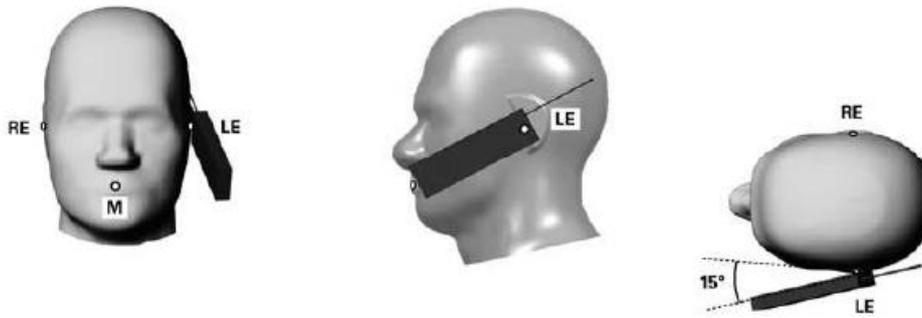


Figure 3 Front, Side and Top View of Tilt 15° Position

Note:

M Mouth reference point

LE Left ear reference point (ERP)

RE Right ear reference point(ERP)

6.1.3 Body-worn Exposure Condition

Body-worn operating configurations are tested with the holder attached to the device and positioned against a flat phantom with test separation distance of 15mm in a normal use configuration (See Figure 4). Per FCC KDB648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

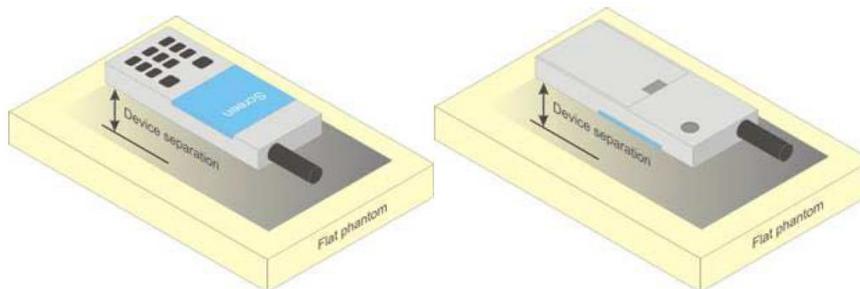


Figure 4 Test position for Body-Worn device

6.1.4 Hotspot Exposure Condition

Per FCC KDB941225 D06, the SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is $> 9 \text{ cm} \times 5 \text{ cm}$, a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode. The SAR results are used to determine simultaneous transmission SAR test exclusion for hotspot mode; otherwise, simultaneous transmission SAR measurement is required.

6.1.5 Product Specific 10-g SAR Exposure Condition

Per FCC KDB648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as “Phablet”.

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

6.3 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMW500 the power level is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8 PSK.

6.4 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when $\Delta ACK, \Delta NACK, \Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test [Ⓢ]	β_c [Ⓢ]	β_d [Ⓢ]	β_d (SF) [Ⓢ]	β_c/β_d [Ⓢ]	β_{hs} (1) [Ⓢ]	CM(dB)(2) [Ⓢ]	MPR (dB) [Ⓢ]
1 [Ⓢ]	2/15 [Ⓢ]	15/15 [Ⓢ]	64 [Ⓢ]	2/15 [Ⓢ]	4/15 [Ⓢ]	0.0 [Ⓢ]	0 [Ⓢ]
2 [Ⓢ]	12/15(3) [Ⓢ]	15/15(3) [Ⓢ]	64 [Ⓢ]	12/15(3) [Ⓢ]	24/15 [Ⓢ]	1.0 [Ⓢ]	0 [Ⓢ]
3 [Ⓢ]	15/15 [Ⓢ]	8/15 [Ⓢ]	64 [Ⓢ]	15/8 [Ⓢ]	30/15 [Ⓢ]	1.5 [Ⓢ]	0.5 [Ⓢ]
4 [Ⓢ]	15/15 [Ⓢ]	4/15 [Ⓢ]	64 [Ⓢ]	15/4 [Ⓢ]	30/15 [Ⓢ]	1.5 [Ⓢ]	0.5 [Ⓢ]

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note 2 : CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 9: HSDPA UE category

4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Device’ sections of 3G device.

Sub-test [Ⓛ]	β_c [Ⓛ]	β_d [Ⓛ]	β_d (SF) [Ⓛ]	β_c/β_d [Ⓛ]	β_{hs} ^{(1)Ⓛ}	β_{ec} [Ⓛ]	β_{ed} [Ⓛ]	β_e ^{cⓁ} (SF) [Ⓛ]	β_{ed} ^{cⓁ} (code) [Ⓛ]	CM ^{(2)Ⓛ} (dB) [Ⓛ]	MP R [Ⓛ] (dB) [Ⓛ]	AG ^{(4)Ⓛ} Inde ^{xⓁ}	E-TFC I [Ⓛ]
1 [Ⓛ]	11/15 ^{(3)Ⓛ}	15/15 ^{(3)Ⓛ}	64 [Ⓛ]	11/15 ^{(3)Ⓛ}	22/15 [Ⓛ]	209/225 [Ⓛ]	1039/225 [Ⓛ]	4 [Ⓛ]	1 [Ⓛ]	1.0 [Ⓛ]	0.0 [Ⓛ]	20 [Ⓛ]	75 [Ⓛ]
2 [Ⓛ]	6/15 [Ⓛ]	15/15 [Ⓛ]	64 [Ⓛ]	6/15 [Ⓛ]	12/15 [Ⓛ]	12/15 [Ⓛ]	94/75 [Ⓛ]	4 [Ⓛ]	1 [Ⓛ]	3.0 [Ⓛ]	2.0 [Ⓛ]	12 [Ⓛ]	67 [Ⓛ]
3 [Ⓛ]	15/15 [Ⓛ]	9/15 [Ⓛ]	64 [Ⓛ]	15/9 [Ⓛ]	30/15 [Ⓛ]	30/15 [Ⓛ]	$\beta_{ed1}:47/15$ [Ⓛ] $\beta_{ed2}:47/15$ [Ⓛ]	4 [Ⓛ]	2 [Ⓛ]	2.0 [Ⓛ]	1.0 [Ⓛ]	15 [Ⓛ]	92 [Ⓛ]
4 [Ⓛ]	2/15 [Ⓛ]	15/15 [Ⓛ]	64 [Ⓛ]	2/15 [Ⓛ]	4/15 [Ⓛ]	2/15 [Ⓛ]	56/75 [Ⓛ]	4 [Ⓛ]	1 [Ⓛ]	3.0 [Ⓛ]	2.0 [Ⓛ]	17 [Ⓛ]	71 [Ⓛ]
5 [Ⓛ]	15/15 ^{(4)Ⓛ}	15/15 ^{(4)Ⓛ}	64 [Ⓛ]	15/15 ^{(4)Ⓛ}	30/15 [Ⓛ]	24/15 [Ⓛ]	134/15 [Ⓛ]	4 [Ⓛ]	1 [Ⓛ]	1.0 [Ⓛ]	0.0 [Ⓛ]	21 [Ⓛ]	81 [Ⓛ]

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference[Ⓛ]
Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ [Ⓛ]
Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ [Ⓛ]
Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g[Ⓛ]
Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.[Ⓛ]

Table 10:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2S F4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2S F4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 11:HSUPA UE category

5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

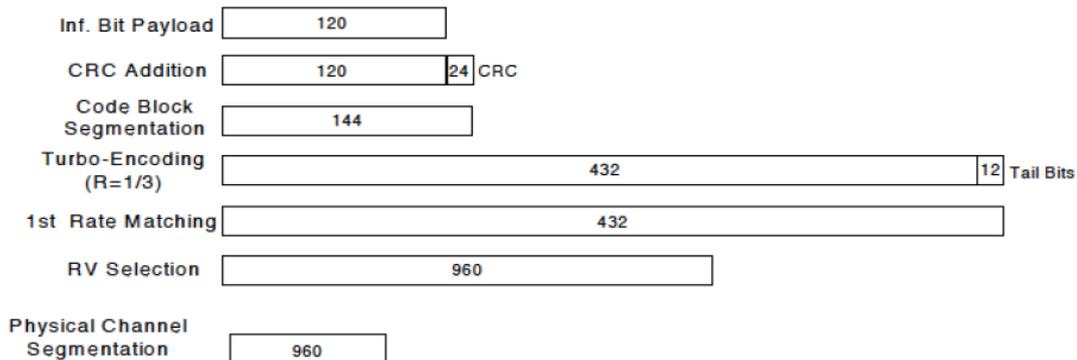


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: Δ ACK, Δ NACK and Δ CQI=8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCCH and HS-DPCCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c=11/15$ and $\beta_d=15/15$

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.

6.The device doesn't support carrier aggregation for it just can operate in Release 8.

6) HSPA+

Per KDB941225 D01, SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode. Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS+} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
<p>Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.</p> <p>Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).</p> <p>Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.</p> <p>Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.</p> <p>Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.</p>											

6.5 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

6.6 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB248227 D01 are applied. (Refer to KDB248227 D01 for more details)

6.6.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported SAR* is $> 0.8\text{W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported SAR* is $\leq 1.2\text{W/kg}$ or all required channels are tested.

6.6.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB248227 D01). SAR test reduction of subsequent highest output test channels is based on the *reported SAR* of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported SAR* of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported SAR* is $\leq 1.2\text{W/kg}$ or all required channels are tested.

6.6.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$, SAR is not required for that subsequent test configuration.

6.6.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227 D01) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the *reported* SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227 D01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

6.6.5 OFDM Transmission Mode SAR Test Channel Selection Requirements

For 2.4 GHz bands, When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11g and 802.11n with the same channel bandwidth, modulation, and data rate, etc), the lower order 802.11 mode (i.e., 802.11g is chosen over 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channel, either according to the default or additional power measurement requirement, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.7 Power Reduction Specification

This device uses the following power reduction features to reduce the transmit power and ensure SAR compliance. These power reduction features are implemented using a single fixed level of reduction through static table look-up for some wireless operating modes or frequency bands and triggered by a single event or operation. The published RF exposure KDB procedures are applicable to the specific implementation and applied for testing. So PAG is not required for these features.

- 1) A fixed level power reduction is applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
- 2) Power reduction technologies are applied for some WWAN bands and WiFi when they are transmitting simultaneously. For simultaneous transmission, SAR test exclusion is applied according to the reported standalone SAR tested at the maximum output power level without any power.
- 3) This device uses the receiver to indicate whether the user is making a voice call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism. A fixed level power reduction is applied for some frequency bands when the audio receiver is on.
- 4) This device uses a proximity sensor that shares the same metallic electrode as the 2G/3G/4G main transmitting antenna to reduce the maximum output power in selected wireless modes and operating configurations to ensure SAR compliance. The procedures in KDB 616217 are applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions.

6.7.1 Power Reduction Specification by specific use conditions

6.7.1.1 Power Reduction Specification by WiFi Antenna

This device uses the mobile country code (MCC) to indicate whether the users in CE countries or FCC countries. The selection between CE countries and FCC countries power levels is based on the country code detection mechanism. It can determine the countries where users are and set the relevant power level for WiFi antennas accordingly.

Antenna	MCC OF CE COUNTRY (CE standard)	MCC OF FCC COUNTRY (FCC standard)
WiFi 2.4G	Power Level A1	Power Level B1

For FCC SAR test: Standalone FCC SAR of Wifi 2.4G is evaluated at power level B1;(FCC mobile country code)

The following tables summarize the key power reduction information of WiFi antenna. The detailed full power and reduced conducted power measurement results are provided in section 7.1 of this report:

Band	Power Reduction Level Amount (dB)			
	WiFi Antenna (FCC country code)		WiFi Antenna (CE country code)	
	Receiver on	Receiver off	Receiver on	Full Power
WiFi 2.4G 802.11b	4.0	0	4.0	0
WiFi 2.4G 802.11g (CH1&CH11)	3.5	3.5	3.5	0
WiFi 2.4G 802.11g (other channels)	3.5	0	3.5	0
WiFi 2.4G 802.11n(20M) (CH1&CH11)	3.0	3.0	3.0	0
WiFi 2.4G 802.11n(20M) (other channels)	3.0	0	3.0	0
WiFi 2.4G 802.11n(40M) (CH3&CH9)	0.5	0.5	0.5	0
WiFi 2.4G 802.11n(40M) (other channels)	0.5	0	0.5	0

The SAR test plan is as below:

For WiFi Antenna, standalone Head SAR should be evaluated with reduced power levels according to the real usage scenarios. Body SAR is tested at the maximum output power level.

6.7.1.2 Power Reduction Specification by 2G&3G&4G Main antenna

The following tables summarize the key power reduction information of 2G/3G/4G main antenna. The detailed full power and reduced conducted power measurement results are provided in section 7.1 of this report:

Band	Power Reduction Level Amount (dB)			
	Main Antenna			
	Receiver off(Body)			Receiver on(Head)
	Hotspot on+Sensor on	Sensor on	Hotspot on	Full power
	Reduced Power D1	Reduced Power D2	Reduced Power D3	
GSM850	1.0	1.0	1.0	0
GSM1900	2.0	2.0	2.0	0
UMTS Band II	3.0	3.0	3.0	0
UMTS Band IV	6.0	6.0	6.0	0
UMTS Band V	1.0	1.0	1.0	0
LTE Band 2	3.0	3.0	3.0	0
LTE Band 4	6.0	6.0	6.0	0
LTE Band 5	1.0	1.0	1.0	0
LTE Band 7	4.0	4.0	4.0	0
LTE Band 17	1.0	1.0	1.0	0

1) Please refer to section 6.7.2 for detailed Proximity sensor power reduction test configuration and validation results per KDB 616217.

6.7.2 Proximity sensor Power Reduction Test configuration and validation

Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the device is held close to a user's body/hotspot exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance.

The following tables summarize the key power reduction information for proximity sensor. The test procedures in KDB 616217 should be applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

Band	Sensor Trigger Distance	Power Reduction(dB)
GSM850	Back side: 19mm	1.0
	Bottom side: 13mm	
	Front side:13mm	
GSM1900	Back side: 19mm	2.0
	Bottom side: 13mm	
	Front side:13mm	
UMTS Band II	Back side: 19mm	3.0
	Bottom side: 13mm	
	Front side:13mm	
UMTS Band IV	Back side: 19mm	6.0
	Bottom side: 13mm	
	Front side:13mm	
UMTS Band V	Back side: 19mm	1.0
	Bottom side: 13mm	
	Front side:13mm	
LTE Band 2	Back side: 19mm	3.0
	Bottom side: 13mm	
	Front side:13mm	
LTE Band 4	Back side: 19mm	6.0
	Bottom side: 13mm	
	Front side:13mm	
LTE Band 5	Back side: 19mm	1.0
	Bottom side: 13mm	
	Front side:13mm	
LTE Band 7	Back side: 19mm	4.0
	Bottom side: 13mm	
	Front side:13mm	
LTE Band 17	Back side: 19mm	1.0
	Bottom side: 13mm	
	Front side:13mm	

Note:


1) To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering and sensor coverage for normal and tilt positions for all usage conditions and applicable sides, minus 1 mm, must be used as the test separation distance for additional SAR testing of each higher power stage.

2) For the other sides or other frequency bands of the device, SAR is still tested at the maximum full power level with sensor off.

1) Procedures for determining proximity sensor triggering distances

The device was tested by the test lab to determine the proximity sensor triggering distances for the front side, back side and bottom side of the device. To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering minus 1 mm, must be used as the test separation distance for SAR testing.

the proximity sensor triggering distance measurement method are as below:

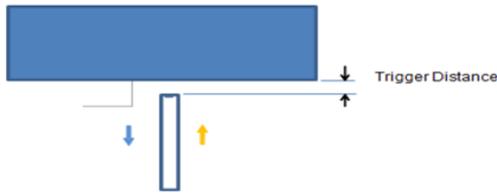

Picture: Proximity sensor triggering distances assessment Bottom Side




Picture: Proximity sensor triggering distances assessment Front Side and Back side

Table: Summary of Trigger Distances


Band	Trigger distance-Front Side		Trigger distance-Back Side		Trigger distance-Bottom Side	
	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom
GSM850	13mm	15mm	19mm	21mm	13mm	15mm
GSM1900	13mm	15mm	19mm	21mm	13mm	15mm
UMTS Band II	13mm	15mm	19mm	21mm	13mm	15mm
UMTS Band IV	13mm	15mm	19mm	21mm	13mm	15mm
UMTS Band V	13mm	15mm	19mm	21mm	13mm	15mm
LTE Band 2	13mm	15mm	19mm	21mm	13mm	15mm
LTE Band 4	13mm	15mm	19mm	21mm	13mm	15mm
LTE Band 5	13mm	15mm	19mm	21mm	13mm	15mm
LTE Band 7	13mm	15mm	19mm	21mm	13mm	15mm
LTE Band 17	13mm	15mm	19mm	21mm	13mm	15mm

The detailed conducted power measurement data to determine the triggering distances is as below:


The DUT(Front side) is moved towards the flat phantom(Hotspot off/on):

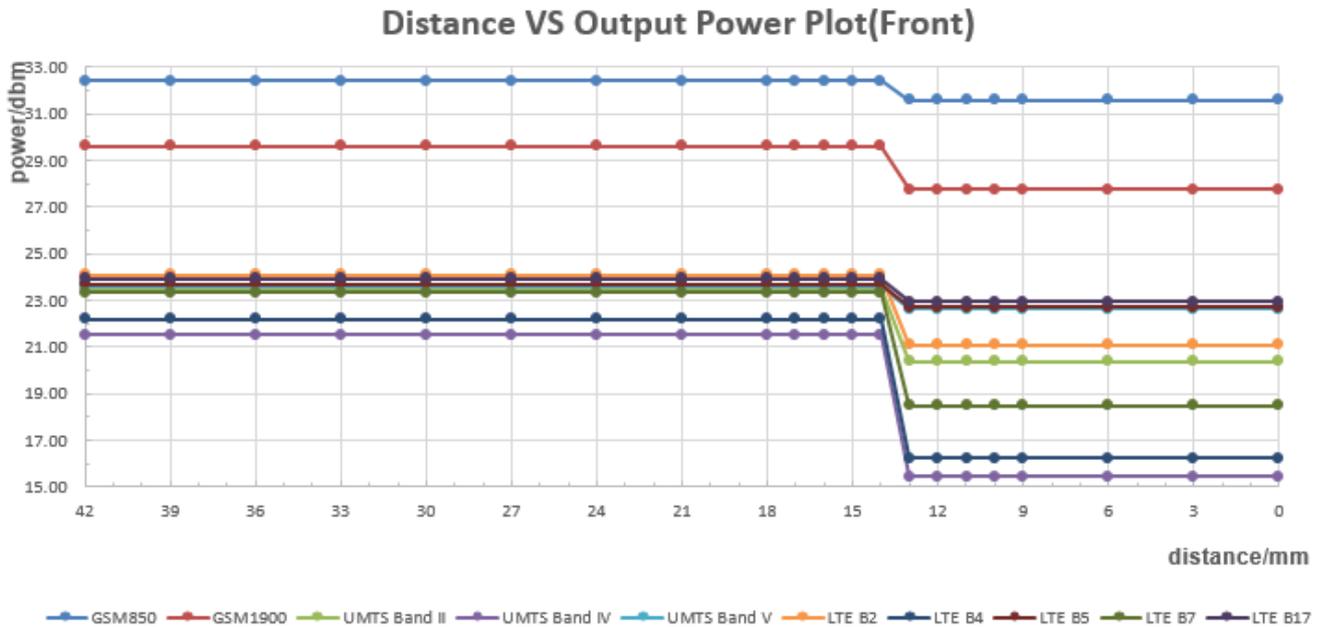


The DUT(Back side) is moved towards the flat phantom(Hotspot off/on):

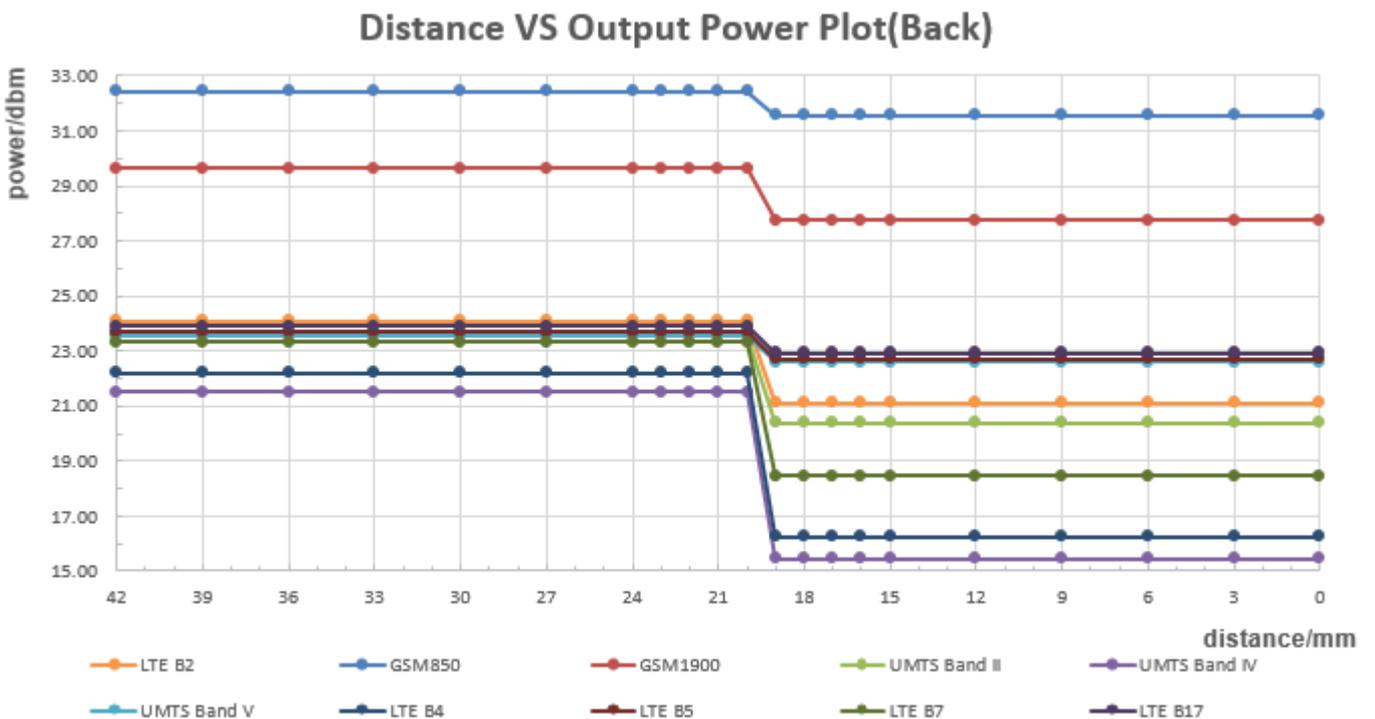


The DUT(Bottom side) is moved towards the flat phantom(Hotspot off/on):

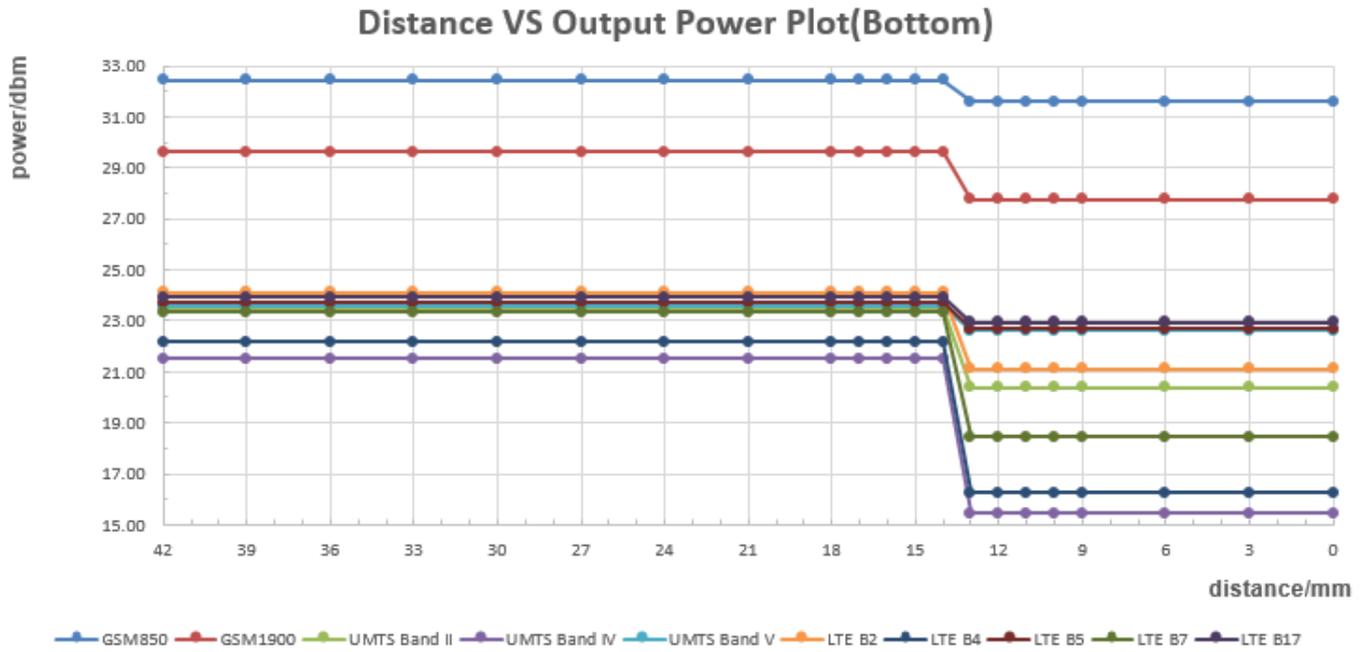


The DUT(Front side) is moved away from the flat phantom(Hotspot off/on):

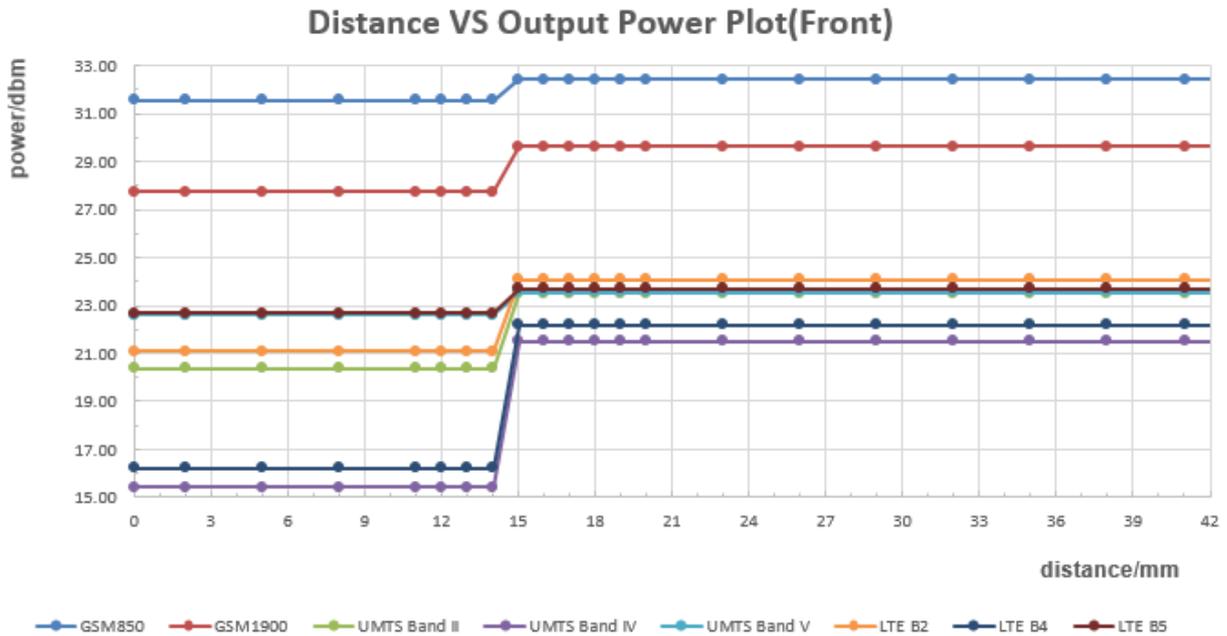

The DUT(Back side) is moved away from the flat phantom(Hotspot off/on):

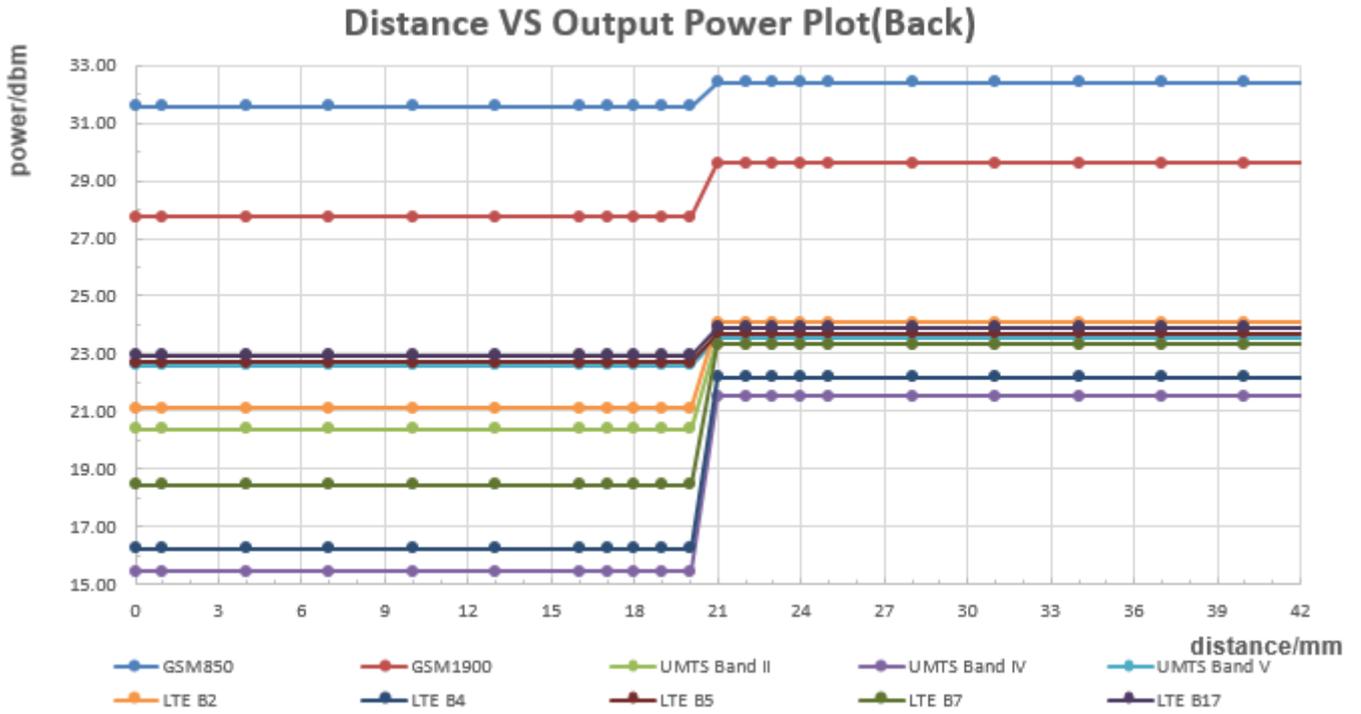

The DUT(Bottom side) is moved away from the flat phantom(Hotspot off/on):

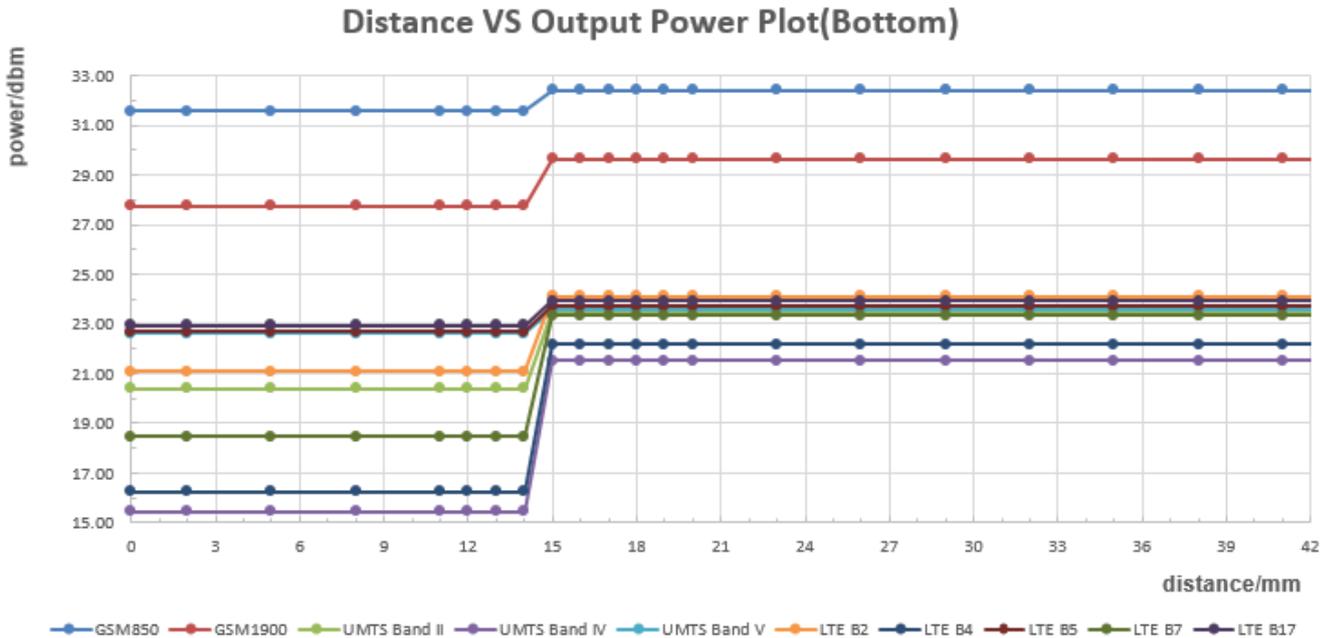

Conclusion: It can be ensured that the proximity sensor can be valid triggered for the body exposure condition.

2) Procedures for determining antenna and proximity sensor coverage

There is no spatial offset between the Main antenna and the proximity sensor element, so procedures for determining the proximity sensor coverage does not need to be assessed per KDB616217.

3) Procedures for determining device tilt angle influences to proximity sensor triggering

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Bottom side parallel to the base of the flat phantom for each band.

The EUT was rotated about Bottom side for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

The proximity sensor triggering tilt angle measurement method are as below:

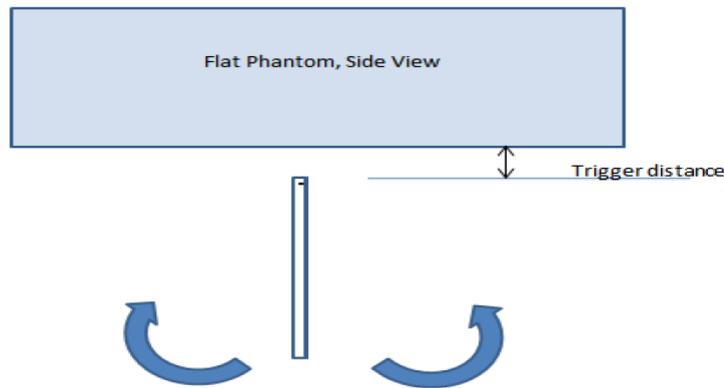


Table: Summary of the device Tilt Angle Influence to Proximity Sensor Triggering(Bottom side)

Band(MHz)	Minimum trigger distance at which power reduction was maintained over $\pm 45^\circ$	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
GSM850	13mm	on	on	on	on	on	on	on	on	on	on	on	on
GSM1900	13mm	on	on	on	on	on	on	on	on	on	on	on	on
UMTS Band II	13mm	on	on	on	on	on	on	on	on	on	on	on	on
UMTS Band IV	13mm	on	on	on	on	on	on	on	on	on	on	on	on
UMTS Band V	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 2	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 4	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 5	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 7	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 17	13mm	on	on	on	on	on	on	on	on	on	on	on	on

Conclusion: It can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition.

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Radio Communication Tester was used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: Radio Communication Tester measures GSM peak and average output power for active timeslots.

For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore, one coding scheme per mode was selected for conducted power measurements.

A Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

7.1.1 Conducted power measurements of GSM850

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
		Max.					Max.			
GSM (CS)		34.00	32.33	32.42	32.32	-9.19	24.81	23.14	23.23	23.13
GPRS (GMSK)	1 Tx Slot	34.00	32.34	32.41	32.33	-9.19	24.81	23.15	23.22	23.14
	2 Tx Slots	31.00	29.27	29.45	29.38	-6.13	24.87	23.14	23.32	23.25
	3 Tx Slots	29.20	27.64	27.65	27.51	-4.42	24.78	23.22	23.23	23.09
	4 Tx Slots	28.00	26.32	26.30	26.15	-3.18	24.82	23.14	23.12	22.97
EDGE (GMSK)	1 Tx Slot	34.00	32.22	32.31	32.25	-9.19	24.81	23.03	23.12	23.06
	2 Tx Slots	31.00	29.24	29.30	29.16	-6.13	24.87	23.11	23.17	23.03
	3 Tx Slots	29.20	27.55	27.52	27.33	-4.42	24.78	23.13	23.10	22.91
	4 Tx Slots	28.00	26.24	26.27	26.03	-3.18	24.82	23.06	23.09	22.85
EDGE (8PSK)	1 Tx Slot	28.00	26.84	26.88	26.85	-9.19	18.81	17.65	17.69	17.66
	2 Tx Slots	25.00	23.90	23.80	23.74	-6.13	18.87	17.77	17.67	17.61
	3 Tx Slots	23.20	21.91	21.88	21.85	-4.42	18.78	17.49	17.46	17.43
	4 Tx Slots	22.00	20.41	20.37	20.31	-3.18	18.82	17.23	17.19	17.13

Table 13: Conducted power measurement results of GSM850(Full Power)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
		Max.					Max.			
GSM (CS)		33.00	31.41	31.58	31.51	-9.19	23.81	22.22	22.39	22.32
GPRS (GMSK)	1 Tx Slot	33.00	31.40	31.57	31.51	-9.19	23.81	22.21	22.38	22.32
	2 Tx Slots	30.00	28.25	28.37	28.28	-6.13	23.87	22.12	22.24	22.15
	3 Tx Slots	28.20	26.90	26.98	26.88	-4.42	23.78	22.48	22.56	22.46
	4 Tx Slots	27.00	25.40	25.48	25.34	-3.18	23.82	22.22	22.30	22.16
EDGE (GMSK)	1 Tx Slot	33.00	31.35	31.46	31.39	-9.19	23.81	22.16	22.27	22.20
	2 Tx Slots	30.00	28.24	28.32	28.28	-6.13	23.87	22.11	22.19	22.15
	3 Tx Slots	28.20	26.80	26.91	26.72	-4.42	23.78	22.38	22.49	22.30
	4 Tx Slots	27.00	25.36	25.37	25.29	-3.18	23.82	22.18	22.19	22.11
EDGE (8PSK)	1 Tx Slot	28.00	26.84	26.99	26.95	-9.19	18.81	17.65	17.80	17.76
	2 Tx Slots	25.00	23.88	23.91	23.82	-6.13	18.87	17.75	17.78	17.69
	3 Tx Slots	23.20	21.88	21.99	21.97	-4.42	18.78	17.46	17.57	17.55
	4 Tx Slots	22.00	20.37	20.50	20.43	-3.18	18.82	17.19	17.32	17.25

Table 14: Conducted power measurement results of GSM850 (Reduced Power D1/D2/D3)

Note:

- 1) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 2) Per KDB 941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.2 Conducted power measurements of GSM1900

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
		Max.					Max.			
GSM (CS)		31.00	29.43	29.63	29.70	-9.19	21.81	20.24	20.44	20.51
GPRS (GMSK)	1 Tx Slot	31.00	29.42	29.62	29.68	-9.19	21.81	20.23	20.43	20.49
	2 Tx Slots	28.00	26.67	26.85	27.04	-6.13	21.87	20.54	20.72	20.91
	3 Tx Slots	26.20	24.65	25.09	25.41	-4.42	21.78	20.23	20.67	20.99
	4 Tx Slots	25.00	23.33	23.81	24.14	-3.18	21.82	20.15	20.63	20.96
EDGE (GMSK)	1 Tx Slot	31.00	29.30	29.50	29.57	-9.19	21.81	20.11	20.31	20.38
	2 Tx Slots	28.00	26.35	26.76	27.02	-6.13	21.87	20.22	20.63	20.89
	3 Tx Slots	26.20	24.50	25.02	25.27	-4.42	21.78	20.08	20.60	20.85
	4 Tx Slots	25.00	23.25	23.72	24.02	-3.18	21.82	20.07	20.54	20.84
EDGE (8PSK)	1 Tx Slot	27.00	25.43	25.85	25.92	-9.19	17.81	16.24	16.66	16.73
	2 Tx Slots	24.00	22.52	22.87	23.09	-6.13	17.87	16.39	16.74	16.96
	3 Tx Slots	22.20	20.62	20.91	21.17	-4.42	17.78	16.20	16.49	16.75
	4 Tx Slots	21.00	19.28	19.61	19.77	-3.18	17.82	16.10	16.43	16.59

Table 15: Conducted power measurement results of GSM1900(Full Power)

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
		Max.					Max.			
GSM (CS)		29.00	27.57	27.75	27.97	-9.19	19.81	18.38	18.56	18.78
GPRS (GMSK)	1 Tx Slot	29.00	27.67	27.86	28.10	-9.19	19.81	18.48	18.67	18.91
	2 Tx Slots	26.00	24.67	24.85	25.12	-6.13	19.87	18.54	18.72	18.99
	3 Tx Slots	24.20	23.28	23.53	23.90	-4.42	19.78	18.86	19.11	19.48
	4 Tx Slots	23.00	21.67	21.99	22.40	-3.18	19.82	18.49	18.81	19.22
EDGE (GMSK)	1 Tx Slot	29.00	27.56	27.75	27.95	-9.19	19.81	18.37	18.56	18.76
	2 Tx Slots	26.00	24.60	24.83	25.16	-6.13	19.87	18.47	18.70	19.03
	3 Tx Slots	24.20	23.10	23.36	23.72	-4.42	19.78	18.68	18.94	19.30
	4 Tx Slots	23.00	21.51	21.83	22.24	-3.18	19.82	18.33	18.65	19.06
EDGE (8PSK)	1 Tx Slot	27.00	25.64	25.82	26.02	-9.19	17.81	16.45	16.63	16.83
	2 Tx Slots	24.00	22.60	22.81	22.97	-6.13	17.87	16.47	16.68	16.84
	3 Tx Slots	22.20	20.76	20.86	21.10	-4.42	17.78	16.34	16.44	16.68
	4 Tx Slots	21.00	19.33	19.54	19.66	-3.18	17.82	16.15	16.36	16.48

Table 16: Conducted power measurement results of GSM1900(Reduced Power D1/D2/D3)

Note:

- 1) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 2) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.3 Conducted power measurements of UMTS Band II

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	24.50	23.36	23.52	23.21
	12.2kbps AMR	24.50	23.44	23.40	23.25
HSDPA	Subtest 1	24.00	23.40	23.34	23.04
	Subtest 2	24.00	22.74	22.82	22.80
	Subtest 3	23.50	22.81	22.83	22.49
	Subtest 4	23.50	22.83	22.82	22.42
HSUPA	Subtest 1	22.00	21.34	21.43	21.07
	Subtest 2	22.00	21.27	21.35	20.98
	Subtest 3	23.00	22.25	22.38	22.08
	Subtest 4	21.50	20.76	20.83	20.45
	Subtest 5	23.00	22.44	22.41	22.04
DC-HSDPA	Subtest 1	24.00	23.32	23.30	23.01
	Subtest 2	24.00	22.62	22.66	22.71
	Subtest 3	23.50	22.71	22.71	22.33
	Subtest 4	23.50	22.80	22.77	22.41
HSPA+	Subtest 1(UL 16QAM)	22.00	21.07	21.22	21.00

Table 17: Conducted power measurement results of UMTS Band II (Full Power)

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	21.50	20.44	20.38	20.45
	12.2kbps AMR	21.50	20.40	20.12	20.08
HSDPA	Subtest 1	21.00	20.40	20.38	20.02
	Subtest 2	21.00	19.87	19.83	19.59
	Subtest 3	20.50	19.85	19.80	19.44
	Subtest 4	20.50	19.85	19.89	19.54
HSUPA	Subtest 1	19.00	18.36	18.35	18.10
	Subtest 2	19.00	18.28	18.36	17.99
	Subtest 3	20.00	19.35	19.36	19.08
	Subtest 4	18.50	17.74	17.85	17.45
	Subtest 5	20.00	19.47	19.46	19.04
DC-HSDPA	Subtest 1	21.00	20.31	20.30	19.89
	Subtest 2	21.00	19.77	19.71	19.52
	Subtest 3	20.50	19.71	19.66	19.32
	Subtest 4	20.50	19.71	19.71	19.44
HSPA+	Subtest 1(UL 16QAM)	19.00	18.11	18.26	18.07

Table 18: Conducted power measurement results of UMTS Band II (Reduced Power D1/D2/D3)

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.4 Conducted power measurements of UMTS Band IV

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	23.00	21.49	21.51	21.36
	12.2kbps AMR	23.00	21.52	21.46	21.51
HSDPA	Subtest 1	22.50	21.19	21.23	21.21
	Subtest 2	22.50	20.60	20.66	20.79
	Subtest 3	22.00	20.70	20.60	20.69
	Subtest 4	22.00	20.64	20.64	20.65
HSUPA	Subtest 1	21.00	19.29	19.53	19.54
	Subtest 2	21.00	19.27	19.53	19.55
	Subtest 3	22.00	20.29	20.51	20.54
	Subtest 4	20.50	18.78	18.99	19.04
	Subtest 5	22.00	20.27	20.36	20.32
DC-HSDPA	Subtest 1	22.50	21.10	21.20	21.11
	Subtest 2	22.50	20.60	20.61	20.73
	Subtest 3	22.00	20.61	20.55	20.66
	Subtest 4	22.00	20.60	20.58	20.59
HSPA+	Subtest 1(UL 16QAM)	21.00	19.21	19.55	19.35

Table 19: Conducted power measurement results of UMTS Band IV (Full Power)

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	17.00	15.46	15.44	15.41
	12.2kbps AMR	17.00	15.41	15.55	15.52
HSDPA	Subtest 1	16.50	15.22	15.16	15.20
	Subtest 2	16.50	14.71	14.64	14.75
	Subtest 3	16.00	14.62	14.63	14.69
	Subtest 4	16.00	14.65	14.64	14.60
HSUPA	Subtest 1	15.00	13.29	13.51	13.53
	Subtest 2	15.00	13.27	13.53	13.56
	Subtest 3	16.00	14.30	14.53	14.56
	Subtest 4	14.50	12.79	12.99	13.01
	Subtest 5	16.00	14.28	14.26	14.34
DC-HSDPA	Subtest 1	16.50	15.12	15.11	15.11
	Subtest 2	16.50	14.55	14.45	14.65
	Subtest 3	16.00	14.55	14.55	14.60
	Subtest 4	16.00	14.55	14.54	14.56
HSPA+	Subtest 1(UL 16QAM)	15.00	13.57	13.52	13.34

Table 20: Conducted power measurement results of UMTS Band IV (Reduced Power D1/D2/D3)

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB 941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.5 Conducted power measurements of UMTS Band V

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	25.00	23.65	23.57	23.53
	12.2kbps AMR	25.00	23.66	23.58	23.55
HSDPA	Subtest 1	24.50	23.44	23.33	23.43
	Subtest 2	24.50	22.87	22.87	22.95
	Subtest 3	24.00	23.07	22.91	23.08
	Subtest 4	24.00	22.79	22.74	22.88
HSUPA	Subtest 1	23.00	21.47	21.55	21.57
	Subtest 2	23.00	20.53	21.65	21.40
	Subtest 3	24.00	22.39	22.67	22.68
	Subtest 4	22.50	21.16	21.15	20.94
	Subtest 5	24.00	22.62	22.50	22.63
DC-HSDPA	Subtest 1	24.50	23.40	23.31	23.37
	Subtest 2	24.50	22.81	22.80	22.90
	Subtest 3	24.00	23.01	22.82	23.08
	Subtest 4	24.00	22.71	22.64	22.88
HSPA+	Subtest 1(UL 16QAM)	23.00	21.54	21.49	21.60

Table 21: Conducted power measurement results of UMTS Band V(Full Power)

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	24.00	22.67	22.61	22.62
	12.2kbps AMR	24.00	22.62	22.64	22.56
HSDPA	Subtest 1	23.50	22.42	22.42	22.44
	Subtest 2	23.50	21.93	21.82	21.96
	Subtest 3	23.00	21.98	21.68	21.99
	Subtest 4	23.00	21.79	21.95	21.81
HSUPA	Subtest 1	22.00	20.49	20.64	20.66
	Subtest 2	22.00	20.57	20.65	20.40
	Subtest 3	23.00	21.35	21.64	21.66
	Subtest 4	21.50	20.18	20.17	19.94
	Subtest 5	23.00	21.63	21.41	21.62
DC-HSDPA	Subtest 1	23.50	22.41	22.41	22.34
	Subtest 2	23.50	21.83	21.72	21.96
	Subtest 3	23.00	21.88	21.60	21.91
	Subtest 4	23.00	21.74	21.88	21.81
HSPA+	Subtest 1(UL 16QAM)	22.00	20.44	20.65	20.57

Table 22: Conducted power measurement results of UMTS Band V(Reduced Power D1/D2/D3)

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB 941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.6 Conducted power measurements of LTE Band 2

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	24.50	23.97	23.91	23.72
		1	3	24.50	24.10	24.06	23.87
		1	5	24.50	23.96	23.89	23.74
		3	0	24.50	23.99	23.94	23.74
		3	2	24.50	24.09	23.99	23.78
		3	3	24.50	24.01	23.95	23.74
		6	0	23.50	23.02	22.97	22.84
	16QAM	1	0	23.50	23.02	22.85	22.64
		1	3	23.50	23.18	23.06	22.79
		1	5	23.50	23.06	22.86	22.64
		3	0	23.50	23.20	23.04	22.70
		3	2	23.50	23.14	23.08	22.73
		3	3	23.50	23.14	23.03	22.67
		6	0	22.50	22.02	21.87	21.75
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18615CH	18900CH	19185CH
3MHz	QPSK	1	0	24.50	23.94	23.87	23.77
		1	7	24.50	23.89	23.88	23.75
		1	14	24.50	23.86	23.85	23.73
		8	0	23.50	22.92	22.90	22.71
		8	4	23.50	22.95	22.91	22.71
		8	7	23.50	22.89	22.88	22.70
		15	0	23.50	22.89	22.85	22.65
	16QAM	1	0	23.50	23.37	22.98	22.70
		1	7	23.50	23.39	22.97	22.65
		1	14	23.50	23.33	22.98	22.60
		8	0	22.50	21.98	21.96	21.70
		8	4	22.50	22.01	21.95	21.72
		8	7	22.50	21.96	21.90	21.67
		15	0	22.50	21.92	21.80	21.69

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18625CH	18900CH	19175CH
5MHz	QPSK	1	0	24.50	23.78	23.80	23.62
		1	13	24.50	23.91	23.94	23.73
		1	24	24.50	23.79	23.79	23.60
		12	0	23.50	22.86	22.87	22.70
		12	6	23.50	22.90	22.92	22.70
		12	13	23.50	22.87	22.83	22.67
		25	0	23.50	22.86	22.86	22.67
	16QAM	1	0	23.50	22.66	23.02	22.63
		1	13	23.50	22.77	23.14	22.75
		1	24	23.50	22.67	23.02	22.60
		12	0	22.50	21.90	21.96	21.75
		12	6	22.50	21.93	22.01	21.71
		12	13	22.50	21.92	21.94	21.66
		25	0	22.50	21.88	21.85	21.69
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18650CH	18900CH	19150CH
10MHz	QPSK	1	0	24.50	23.90	23.80	23.78
		1	25	24.50	24.07	23.96	23.91
		1	49	24.50	23.84	23.85	23.77
		25	0	23.50	22.88	22.86	22.77
		25	13	23.50	22.91	22.87	22.75
		25	25	23.50	22.88	22.84	22.70
		50	0	23.50	22.90	22.85	22.73
	16QAM	1	0	23.50	23.30	22.93	22.72
		1	25	23.50	23.01	23.09	22.87
		1	49	23.50	23.34	22.96	22.64
		25	0	22.50	21.87	21.89	21.83
		25	13	22.50	21.92	21.90	21.82
		25	25	22.50	21.91	21.87	21.88
		50	0	22.50	21.90	21.84	21.74

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18675CH	18900CH	19125CH
15MHz	QPSK	1	0	24.50	23.81	23.72	23.69
		1	38	24.50	23.89	23.90	23.83
		1	74	24.50	23.72	23.73	23.60
		36	0	23.50	22.95	22.92	22.87
		36	18	23.50	22.97	22.96	22.83
		36	39	23.50	22.93	22.93	22.76
		75	0	23.50	22.93	22.92	22.81
	16QAM	1	0	23.50	23.22	22.85	22.97
		1	38	23.50	23.39	23.03	23.09
		1	74	23.50	23.23	22.85	22.87
		36	0	22.50	21.86	21.91	21.76
		36	18	22.50	21.90	21.91	21.73
		36	39	22.50	21.88	21.88	21.65
		75	0	22.50	21.92	21.86	21.75
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18700CH	18900CH	19100CH
20MHz	QPSK	1	0	24.50	23.62	23.57	23.51
		1	50	24.50	24.02	24.10	23.92
		1	99	24.50	23.60	23.64	23.45
		50	0	23.50	22.84	22.86	22.83
		50	25	23.50	22.88	22.88	22.78
		50	50	23.50	22.89	22.83	22.66
		100	0	23.50	22.89	22.88	22.74
	16QAM	1	0	23.50	22.84	22.70	23.00
		1	50	23.50	23.28	23.27	23.37
		1	99	23.50	22.86	22.74	22.91
		50	0	22.50	21.90	21.89	21.82
		50	25	22.50	21.92	21.88	21.77
		50	50	22.50	21.89	21.85	21.63
		100	0	22.50	21.89	21.87	21.73

Table 23: Conducted power measurement results of LTE Band 2(Full Power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	21.50	20.88	20.83	20.70
		1	3	21.50	21.09	21.01	20.86
		1	5	21.50	20.86	20.81	20.66
		3	0	21.50	20.94	20.97	20.77
		3	2	21.50	21.06	20.96	20.81
		3	3	21.50	20.97	20.91	20.70
		6	0	21.50	20.93	20.91	20.75
	16QAM	1	0	21.50	20.88	20.82	20.77
		1	3	21.50	21.09	20.99	21.00
		1	5	21.50	20.91	20.84	20.80
		3	0	21.50	21.12	20.94	20.94
		3	2	21.50	21.16	20.94	20.87
		3	3	21.50	21.13	20.92	20.92
		6	0	21.50	20.91	20.91	20.81
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18615CH	18900CH	19185CH
3MHz	QPSK	1	0	21.50	20.85	20.85	20.72
		1	7	21.50	20.86	20.86	20.68
		1	14	21.50	20.79	20.85	20.66
		8	0	21.50	20.88	20.85	20.70
		8	4	21.50	20.92	20.86	20.73
		8	7	21.50	20.85	20.83	20.69
		15	0	21.50	20.86	20.88	20.70
	16QAM	1	0	21.50	21.44	21.00	20.77
		1	7	21.50	21.43	21.00	20.70
		1	14	21.50	21.39	20.97	20.64
		8	0	21.50	21.02	20.96	20.72
		8	4	21.50	21.00	21.00	20.76
		8	7	21.50	20.98	20.94	20.72
		15	0	21.50	20.93	20.81	20.75

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18625CH	18900CH	19175CH
5MHz	QPSK	1	0	21.50	20.81	20.79	20.59
		1	13	21.50	20.93	20.91	20.72
		1	24	21.50	20.76	20.78	20.57
		12	0	21.50	20.84	20.87	20.73
		12	6	21.50	20.89	20.91	20.75
		12	13	21.50	20.84	20.84	20.65
		25	0	21.50	20.89	20.85	20.71
	16QAM	1	0	21.50	20.71	21.04	20.70
		1	13	21.50	20.85	21.19	20.80
		1	24	21.50	20.71	21.04	20.67
		12	0	21.50	20.90	21.01	20.79
		12	6	21.50	20.98	21.01	20.75
		12	13	21.50	20.95	20.95	20.68
		25	0	21.50	20.94	20.88	20.74
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18650CH	18900CH	19150CH
10MHz	QPSK	1	0	21.50	20.82	20.84	20.75
		1	25	21.50	21.00	21.08	20.88
		1	49	21.50	20.84	20.86	20.71
		25	0	21.50	20.88	20.88	20.78
		25	13	21.50	20.92	20.90	20.77
		25	25	21.50	20.92	20.87	20.68
		50	0	21.50	20.90	20.87	20.79
	16QAM	1	0	21.50	21.39	20.97	20.75
		1	25	21.50	21.06	21.16	20.91
		1	49	21.50	21.43	20.98	20.71
		25	0	21.50	20.90	20.93	20.89
		25	13	21.50	20.98	20.98	20.86
		25	25	21.50	20.96	20.90	20.78
		50	0	21.50	20.94	20.86	20.78

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18675CH	18900CH	19125CH
15MHz	QPSK	1	0	21.50	20.75	20.72	20.68
		1	38	21.50	20.86	20.91	20.79
		1	74	21.50	20.71	20.74	20.57
		36	0	21.50	20.87	20.91	20.81
		36	18	21.50	20.91	20.87	20.83
		36	39	21.50	20.89	20.86	20.68
		75	0	21.50	20.88	20.85	20.75
	16QAM	1	0	21.50	21.32	20.87	21.09
		1	38	21.50	21.42	21.03	21.18
		1	74	21.50	21.29	20.89	20.99
		36	0	21.50	20.88	20.90	20.76
		36	18	21.50	20.88	20.92	20.75
		36	39	21.50	20.89	20.91	20.66
		75	0	21.50	20.89	20.87	20.75
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18700CH	18900CH	19100CH
20MHz	QPSK	1	0	21.50	20.61	20.63	20.52
		1	50	21.50	21.03	21.10	20.87
		1	99	21.50	20.60	20.63	20.41
		50	0	21.50	20.85	20.89	20.86
		50	25	21.50	20.90	20.89	20.81
		50	50	21.50	20.88	20.83	20.64
		100	0	21.50	20.86	20.87	20.77
	16QAM	1	0	21.50	20.90	20.76	21.03
		1	50	21.50	21.37	21.27	21.44
		1	99	21.50	20.93	20.81	21.04
		50	0	21.50	20.91	20.93	20.86
		50	25	21.50	20.92	20.88	20.81
		50	50	21.50	20.90	20.89	20.66
		100	0	21.50	20.90	20.88	20.76

Table 24: Conducted power measurement results of LTE Band 2 (Reduced Power D1/D2/D3)

7.1.7 Conducted power measurements of LTE Band 4

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	23.00	22.01	21.95	21.88
		1	3	23.00	22.03	22.13	22.09
		1	5	23.00	21.94	21.96	21.85
		3	0	23.00	22.13	22.07	21.99
		3	2	23.00	22.09	22.09	22.03
		3	3	23.00	22.08	22.02	22.07
		6	0	22.00	20.97	21.00	20.92
	16QAM	1	0	22.00	21.05	21.07	20.97
		1	3	22.00	21.23	21.32	21.17
		1	5	22.00	21.07	21.11	20.95
		3	0	22.00	21.21	21.28	21.19
		3	2	22.00	21.18	21.29	21.24
		3	3	22.00	21.12	21.28	21.26
		6	0	21.00	20.06	20.06	19.94
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19965CH	20175CH	20385CH
3MHz	QPSK	1	0	23.00	21.97	21.97	21.96
		1	7	23.00	21.91	22.05	21.96
		1	14	23.00	21.85	22.00	21.90
		8	0	22.00	20.97	20.96	20.94
		8	4	22.00	20.97	21.01	20.99
		8	7	22.00	20.91	20.96	20.93
		15	0	22.00	20.98	20.98	20.96
	16QAM	1	0	22.00	21.69	21.14	21.00
		1	7	22.00	21.61	21.17	21.00
		1	14	22.00	21.57	21.12	20.99
		8	0	21.00	20.15	20.11	20.00
		8	4	21.00	20.16	20.13	20.04
		8	7	21.00	20.09	20.08	19.98
		15	0	21.00	20.12	19.97	20.02

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19975CH	20175CH	20375CH
5MHz	QPSK	1	0	23.00	21.91	21.88	21.82
		1	13	23.00	22.02	22.04	22.00
		1	24	23.00	21.89	21.91	21.83
		12	0	22.00	20.98	20.97	20.94
		12	6	22.00	21.02	21.06	20.99
		12	13	22.00	21.00	20.99	20.96
		25	0	22.00	21.01	20.98	20.94
	16QAM	1	0	22.00	20.90	21.19	20.94
		1	13	22.00	20.96	21.38	21.07
		1	24	22.00	20.85	21.24	20.94
		12	0	21.00	20.12	20.12	20.02
		12	6	21.00	20.14	20.21	20.07
		12	13	21.00	20.13	20.14	20.03
		25	0	21.00	20.11	19.99	20.00
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20000CH	20175CH	20350CH
10MHz	QPSK	1	0	23.00	21.96	21.95	21.95
		1	25	23.00	22.14	22.14	22.07
		1	49	23.00	22.04	21.98	21.91
		25	0	22.00	21.00	20.98	20.96
		25	13	22.00	21.06	21.03	20.99
		25	25	22.00	21.08	21.01	20.95
		50	0	22.00	21.04	20.97	20.97
	16QAM	1	0	22.00	21.68	21.13	20.95
		1	25	22.00	21.83	21.35	21.11
		1	49	22.00	21.65	21.16	20.97
		25	0	21.00	20.09	20.06	20.05
		25	13	21.00	20.11	20.08	20.13
		25	25	21.00	20.13	20.04	20.07
		50	0	21.00	20.11	20.05	20.01

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20025CH	20175CH	20325CH
15MHz	QPSK	1	0	23.00	21.84	21.88	21.87
		1	38	23.00	21.96	22.01	21.92
		1	74	23.00	21.85	21.89	21.80
		36	0	22.00	20.95	20.95	20.96
		36	18	22.00	21.00	20.99	20.97
		36	39	22.00	21.00	20.97	20.98
		75	0	22.00	20.97	20.94	20.94
	16QAM	1	0	22.00	21.48	21.03	21.33
		1	38	22.00	21.67	21.19	21.45
		1	74	22.00	21.51	21.04	21.25
		36	0	21.00	19.94	20.02	19.99
		36	18	21.00	20.03	20.06	19.98
		36	39	21.00	20.04	20.06	19.94
		75	0	21.00	20.03	19.98	19.95
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20050CH	20175CH	20300CH
20MHz	QPSK	1	0	23.00	21.72	21.74	21.63
		1	50	23.00	22.18	22.19	22.05
		1	99	23.00	21.79	21.83	21.66
		50	0	22.00	20.98	21.03	21.03
		50	25	22.00	21.05	21.03	21.05
		50	50	22.00	21.08	20.99	21.01
		100	0	22.00	21.03	21.06	21.02
	16QAM	1	0	22.00	21.06	20.98	21.27
		1	50	22.00	21.46	21.42	21.70
		1	99	22.00	21.12	21.06	21.27
		50	0	21.00	20.02	20.05	20.06
		50	25	21.00	20.14	20.07	20.06
		50	50	21.00	20.15	20.05	20.00
		100	0	21.00	20.09	20.06	20.07

Table 25: Conducted power measurement results of LTE Band 4(Full Power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	17.00	15.99	16.01	15.93
		1	3	17.00	16.11	16.17	16.09
		1	5	17.00	15.96	15.95	15.92
		3	0	17.00	16.15	16.07	15.98
		3	2	17.00	16.15	16.07	16.01
		3	3	17.00	16.13	16.04	15.99
		6	0	17.00	16.03	16.04	16.01
	16QAM	1	0	17.00	16.04	15.98	16.01
		1	3	17.00	16.24	16.21	16.24
		1	5	17.00	16.08	16.01	16.06
		3	0	17.00	16.31	16.12	16.19
		3	2	17.00	16.31	16.12	16.15
		3	3	17.00	16.29	16.08	16.13
		6	0	17.00	15.98	16.09	16.07
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19965CH	20175CH	20385CH
3MHz	QPSK	1	0	17.00	16.05	16.03	15.97
		1	7	17.00	16.00	16.05	15.95
		1	14	17.00	15.95	16.00	15.93
		8	0	17.00	16.03	16.05	15.98
		8	4	17.00	16.06	16.07	16.02
		8	7	17.00	16.01	16.04	15.97
		15	0	17.00	16.05	16.05	15.98
	16QAM	1	0	17.00	16.71	16.17	16.03
		1	7	17.00	16.67	16.16	16.00
		1	14	17.00	16.59	16.14	15.97
		8	0	17.00	16.19	16.15	16.04
		8	4	17.00	16.19	16.18	16.07
		8	7	17.00	16.14	16.15	16.06
		15	0	17.00	16.12	16.02	16.05

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19975CH	20175CH	20375CH
5MHz	QPSK	1	0	17.00	15.99	15.93	15.84
		1	13	17.00	16.08	16.08	16.02
		1	24	17.00	15.98	15.95	15.87
		12	0	17.00	16.08	16.02	16.01
		12	6	17.00	16.02	16.10	16.02
		12	13	17.00	16.06	16.05	15.99
		25	0	17.00	16.06	16.01	15.99
	16QAM	1	0	17.00	15.92	16.22	16.00
		1	13	17.00	16.02	16.39	16.13
		1	24	17.00	15.89	16.22	15.97
		12	0	17.00	16.13	16.18	16.03
		12	6	17.00	16.14	16.20	16.06
		12	13	17.00	16.13	16.18	16.03
		25	0	17.00	16.11	16.04	16.04
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20000CH	20175CH	20350CH
10MHz	QPSK	1	0	17.00	15.99	15.99	16.00
		1	25	17.00	16.17	16.30	16.16
		1	49	17.00	16.01	16.05	16.00
		25	0	17.00	16.03	16.07	16.05
		25	13	17.00	16.07	16.08	16.04
		25	25	17.00	16.16	16.08	16.07
		50	0	17.00	16.10	16.07	16.05
	16QAM	1	0	17.00	16.64	16.15	16.00
		1	25	17.00	16.85	16.40	16.18
		1	49	17.00	16.65	16.20	15.97
		25	0	17.00	16.07	16.15	16.16
		25	13	17.00	16.14	16.14	16.17
		25	25	17.00	16.15	16.18	16.18
		50	0	17.00	16.07	16.10	16.10

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20025CH	20175CH	20325CH
15MHz	QPSK	1	0	17.00	15.89	15.92	15.94
		1	38	17.00	16.06	16.07	15.98
		1	74	17.00	15.92	15.93	15.86
		36	0	17.00	16.00	16.01	16.03
		36	18	17.00	16.06	16.08	16.03
		36	39	17.00	16.09	16.05	16.00
		75	0	17.00	16.05	16.03	16.00
	16QAM	1	0	17.00	16.54	16.07	16.36
		1	38	17.00	16.69	16.18	16.39
		1	74	17.00	16.56	16.06	16.26
		36	0	17.00	15.97	16.06	16.01
		36	18	17.00	16.05	16.08	16.00
		36	39	17.00	16.07	16.10	15.94
		75	0	17.00	16.05	16.04	15.98
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20050CH	20175CH	20300CH
20MHz	QPSK	1	0	17.00	15.75	15.79	15.72
		1	50	17.00	16.22	16.24	16.11
		1	99	17.00	15.81	15.86	15.73
		50	0	17.00	16.12	16.07	16.09
		50	25	17.00	16.05	16.06	16.06
		50	50	17.00	16.00	16.09	16.07
		100	0	17.00	16.09	16.12	16.09
	16QAM	1	0	17.00	16.06	16.04	16.27
		1	50	17.00	16.54	16.45	16.72
		1	99	17.00	16.14	16.07	16.33
		50	0	17.00	16.05	16.08	16.14
		50	25	17.00	16.13	16.06	16.06
		50	50	17.00	16.20	16.13	16.04
		100	0	17.00	16.10	16.11	16.11

Table 26: Conducted power measurement results of LTE Band 4 (Reduced Power D1/D2/D3)

7.1.8 Conducted power measurements of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.50	23.52	23.48	23.45
		1	3	24.50	23.50	23.54	23.52
		1	5	24.50	23.50	23.46	23.42
		3	0	24.50	23.49	23.53	23.54
		3	2	24.50	23.58	23.55	23.61
		3	3	24.50	23.55	23.51	23.56
		6	0	23.50	22.54	22.57	22.54
	16QAM	1	0	23.50	22.51	22.53	22.47
		1	3	23.50	23.50	22.83	22.68
		1	5	23.50	22.56	22.57	22.52
		3	0	23.50	22.57	22.70	22.66
		3	2	23.50	22.55	22.68	22.72
		3	3	23.50	22.55	22.70	22.70
		6	0	22.50	21.57	21.63	21.49
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20415CH	20525CH	20635CH
3MHz	QPSK	1	0	24.50	23.50	23.49	23.50
		1	7	24.50	23.48	23.51	23.51
		1	14	24.50	23.49	23.45	23.49
		8	0	23.50	22.50	22.51	22.54
		8	4	23.50	22.56	22.55	22.56
		8	7	23.50	22.47	22.49	22.48
		15	0	23.50	22.47	22.48	22.52
	16QAM	1	0	23.50	23.06	22.62	22.52
		1	7	23.50	23.07	22.59	22.56
		1	14	23.50	23.05	22.61	22.48
		8	0	22.50	21.63	21.64	21.58
		8	4	22.50	21.70	21.64	21.63
		8	7	22.50	21.59	21.55	21.56
		15	0	22.50	21.54	21.46	21.57

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.50	23.41	23.42	23.37
		1	13	24.50	23.60	23.52	23.48
		1	24	24.50	23.39	23.42	23.40
		12	0	23.50	22.50	22.49	22.45
		12	6	23.50	22.57	22.54	22.57
		12	13	23.50	22.54	22.44	22.49
		25	0	23.50	22.50	22.51	22.45
	16QAM	1	0	23.50	22.33	22.70	22.46
		1	13	23.50	22.48	22.79	22.60
		1	24	23.50	22.33	22.68	22.47
		12	0	22.50	21.55	21.62	21.52
		12	6	22.50	21.63	21.66	21.61
		12	13	22.50	21.60	21.59	21.57
		25	0	22.50	21.56	21.49	21.54
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.50	23.45	23.46	23.50
		1	25	24.50	23.61	23.70	23.67
		1	49	24.50	23.51	23.53	23.51
		25	0	23.50	22.54	22.55	22.54
		25	13	23.50	22.53	22.54	22.55
		25	25	23.50	22.60	22.53	22.55
		50	0	23.50	22.57	22.52	22.54
	16QAM	1	0	23.50	23.02	22.61	22.48
		1	25	23.50	23.16	22.86	22.68
		1	49	23.50	23.06	22.66	22.54
		25	0	22.50	21.56	21.60	21.66
		25	13	22.50	21.62	21.60	21.65
		25	25	22.50	21.63	21.59	21.63
		50	0	22.50	21.61	21.54	21.58

Table 27: Conducted power measurement results of LTE Band 5(Full power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	23.50	22.51	22.48	22.45
		1	3	23.50	22.68	22.65	22.63
		1	5	23.50	22.52	22.50	22.45
		3	0	23.50	22.58	22.55	22.55
		3	2	23.50	22.61	22.53	22.58
		3	3	23.50	22.58	22.54	22.57
		6	0	23.50	22.57	22.56	22.53
	16QAM	1	0	23.50	22.53	22.61	22.44
		1	3	23.50	22.70	22.78	22.69
		1	5	23.50	22.52	22.60	22.49
		3	0	23.50	22.64	22.72	22.69
		3	2	23.50	22.59	22.73	22.71
		3	3	23.50	22.57	22.73	22.73
		6	0	22.50	21.61	21.62	21.50
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20415CH	20525CH	20635CH
3MHz	QPSK	1	0	23.50	22.53	22.53	22.54
		1	7	23.50	22.50	22.54	22.49
		1	14	23.50	22.47	22.51	22.46
		8	0	23.50	22.54	22.54	22.54
		8	4	23.50	22.58	22.55	22.52
		8	7	23.50	22.50	22.48	22.51
		15	0	23.50	22.52	22.50	22.50
	16QAM	1	0	23.50	23.07	22.62	22.51
		1	7	23.50	23.04	22.63	22.54
		1	14	23.50	23.05	22.62	22.49
		8	0	22.50	21.66	21.65	21.58
		8	4	22.50	21.69	21.68	21.63
		8	7	22.50	21.63	21.57	21.56
		15	0	22.50	21.59	21.43	21.58

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20425CH	20525CH	20625CH
5MHz	QPSK	1	0	23.50	22.43	22.47	22.38
		1	13	23.50	22.60	22.57	22.54
		1	24	23.50	22.43	22.48	22.41
		12	0	23.50	22.55	22.52	22.46
		12	6	23.50	22.58	22.56	22.58
		12	13	23.50	22.56	22.48	22.49
		25	0	23.50	22.51	22.48	22.51
	16QAM	1	0	23.50	22.34	22.74	22.47
		1	13	23.50	22.51	22.85	22.60
		1	24	23.50	22.33	22.73	22.49
		12	0	22.50	21.57	21.63	21.54
		12	6	22.50	21.61	21.71	21.62
		12	13	22.50	21.61	21.61	21.58
		25	0	22.50	21.60	21.51	21.56
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20450CH	20525CH	20600CH
10MHz	QPSK	1	0	23.50	22.49	22.49	22.50
		1	25	23.50	22.65	22.70	22.68
		1	49	23.50	22.51	22.55	22.53
		25	0	23.50	22.58	22.56	22.60
		25	13	23.50	22.55	22.56	22.57
		25	25	23.50	22.61	22.54	22.57
		50	0	23.50	22.58	22.56	22.57
	16QAM	1	0	23.50	23.03	22.59	22.49
		1	25	23.50	23.19	22.79	22.69
		1	49	23.50	23.09	22.66	22.56
		25	0	22.50	21.58	21.60	21.66
		25	13	22.50	21.61	21.63	21.65
		25	25	22.50	21.65	21.59	21.65
		50	0	22.50	21.60	21.56	21.58

Table 28: Conducted power measurement results of LTE Band 5 (Reduced Power D1/D2/D3)

7.1.9 Conducted power measurements of LTE Band 7

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	24.00	23.09	22.94	23.00
		1	13	24.00	23.17	23.10	23.20
		1	24	24.00	23.04	22.95	23.03
		12	0	23.00	22.15	22.09	22.09
		12	6	23.00	22.20	22.11	22.17
		12	13	23.00	22.08	22.06	22.05
		25	0	23.00	22.13	22.04	22.08
	16QAM	1	0	23.00	22.10	21.83	22.22
		1	13	23.00	22.24	21.96	22.40
		1	24	23.00	22.14	21.85	22.27
		12	0	22.00	21.18	21.16	21.27
		12	6	22.00	21.26	21.21	21.32
		12	13	22.00	21.21	21.13	21.22
		25	0	22.00	21.21	21.16	21.12
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	24.00	23.18	23.07	23.08
		1	25	24.00	23.24	23.26	23.27
		1	49	24.00	23.17	23.10	23.17
		25	0	23.00	22.24	22.14	22.09
		25	13	23.00	22.17	22.13	22.08
		25	25	23.00	22.21	22.11	22.13
		50	0	23.00	22.25	22.14	22.09
	16QAM	1	0	23.00	22.59	22.16	22.12
		1	25	23.00	22.80	22.37	22.19
		1	49	23.00	22.75	22.21	22.10
		25	0	22.00	21.31	21.20	21.22
		25	13	22.00	21.29	21.18	21.21
		25	25	22.00	21.32	21.20	21.21
		50	0	22.00	21.32	21.17	21.20

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	24.00	23.07	23.00	22.98
		1	38	24.00	23.15	23.10	23.13
		1	74	24.00	23.02	22.99	23.06
		36	0	23.00	22.25	22.19	22.13
		36	18	23.00	22.25	22.21	22.19
		36	39	23.00	22.22	22.18	22.22
		75	0	23.00	22.29	22.23	22.20
	16QAM	1	0	23.00	22.55	22.14	22.41
		1	38	23.00	22.74	22.22	22.51
		1	74	23.00	22.64	22.12	22.32
		36	0	22.00	21.22	21.14	21.11
		36	18	22.00	21.25	21.20	21.14
		36	39	22.00	21.26	21.17	21.17
		75	0	22.00	21.32	21.19	21.17
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	24.00	22.91	22.82	22.75
		1	50	24.00	23.34	23.34	23.24
		1	99	24.00	22.97	22.94	22.87
		50	0	23.00	22.20	22.03	21.99
		50	25	23.00	22.21	22.13	22.12
		50	50	23.00	22.28	22.01	22.11
		100	0	23.00	22.24	22.06	22.07
	16QAM	1	0	23.00	22.12	22.03	22.36
		1	50	23.00	22.69	22.41	22.77
		1	99	23.00	22.28	22.11	22.34
		50	0	22.00	21.28	21.08	21.09
		50	25	22.00	21.29	21.14	21.14
		50	50	22.00	21.38	21.04	21.17
		100	0	22.00	21.33	21.09	21.16

Table 29: Conducted power measurement results of LTE Band 7 (Full Power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	20.00	18.19	18.14	18.06
		1	13	20.00	18.29	18.24	18.26
		1	24	20.00	18.19	18.11	18.18
		12	0	20.00	18.29	18.24	18.22
		12	6	20.00	18.35	18.26	18.26
		12	13	20.00	18.26	18.15	18.15
		25	0	20.00	18.23	18.20	18.17
	16QAM	1	0	20.00	18.36	18.07	18.40
		1	13	20.00	18.43	18.19	18.60
		1	24	20.00	18.30	18.05	18.46
		12	0	20.00	18.33	18.32	18.37
		12	6	20.00	18.43	18.39	18.44
		12	13	20.00	18.32	18.25	18.28
		25	0	20.00	18.35	18.25	18.25
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	20.00	18.27	18.20	18.18
		1	25	20.00	18.36	18.41	18.33
		1	49	20.00	18.28	18.23	18.25
		25	0	20.00	18.34	18.24	18.14
		25	13	20.00	18.29	18.25	18.21
		25	25	20.00	18.33	18.20	18.17
		50	0	20.00	18.33	18.21	18.17
	16QAM	1	0	20.00	18.88	18.38	18.22
		1	25	20.00	19.05	18.54	18.33
		1	49	20.00	18.94	18.37	18.21
		25	0	20.00	18.45	18.30	18.34
		25	13	20.00	18.36	18.32	18.35
		25	25	20.00	18.41	18.30	18.35
		50	0	20.00	18.43	18.25	18.26

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	20.00	18.19	18.19	18.12
		1	38	20.00	18.31	18.26	18.24
		1	74	20.00	18.18	18.16	18.27
		36	0	20.00	18.41	18.38	18.18
		36	18	20.00	18.42	18.36	18.30
		36	39	20.00	18.41	18.33	18.35
		75	0	20.00	18.40	18.36	18.29
	16QAM	1	0	20.00	18.82	18.42	18.59
		1	38	20.00	18.90	18.45	18.69
		1	74	20.00	18.85	18.35	18.61
		36	0	20.00	18.33	18.32	18.23
		36	18	20.00	18.34	18.36	18.24
		36	39	20.00	18.39	18.25	18.33
		75	0	20.00	18.39	18.28	18.28
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	20.00	17.99	17.99	17.84
		1	50	20.00	18.47	18.46	18.37
		1	99	20.00	18.10	18.08	17.96
		50	0	20.00	18.33	18.24	18.16
		50	25	20.00	18.33	18.26	18.26
		50	50	20.00	18.43	18.16	18.29
		100	0	20.00	18.39	18.24	18.23
	16QAM	1	0	20.00	18.35	18.25	18.47
		1	50	20.00	18.82	18.58	19.03
		1	99	20.00	18.44	18.29	18.53
		50	0	20.00	18.40	18.23	18.23
		50	25	20.00	18.37	18.34	18.27
		50	50	20.00	18.47	18.23	18.33
		100	0	20.00	18.42	18.26	18.31

Table 30: Conducted power measurement results of LTE Band 7 (Reduced Power D1/D2/D3)

7.1.10 Conducted power measurements of LTE Band 17

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	23755CH	23790CH	23825CH
5MHz	QPSK	1	0	24.50	23.71	23.69	23.64
		1	13	24.50	23.83	23.81	23.81
		1	24	24.50	23.68	23.66	23.65
		12	0	23.50	22.81	22.78	22.79
		12	6	23.50	22.88	22.86	22.84
		12	13	23.50	22.83	22.78	22.72
	16QAM	25	0	23.50	22.83	22.79	22.78
		1	0	23.50	22.82	22.59	22.94
		1	13	23.50	22.90	22.74	23.14
		1	24	23.50	22.81	22.57	22.95
		12	0	22.50	21.88	21.85	21.89
		12	6	22.50	21.88	21.88	21.95
		12	13	22.50	21.87	21.84	21.86
		25	0	22.50	21.88	21.85	21.78
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	23780CH	23790CH	23800CH
10MHz	QPSK	1	0	24.50	23.74	23.75	23.76
		1	25	24.50	23.92	23.92	23.88
		1	49	24.50	23.74	23.76	23.81
		25	0	23.50	22.81	22.83	22.80
		25	13	23.50	22.85	22.84	22.80
		25	25	23.50	22.80	22.75	22.78
		50	0	23.50	22.79	22.79	22.82
	16QAM	1	0	23.50	23.34	22.90	22.77
		1	25	23.50	23.49	23.08	22.93
		1	49	23.50	23.30	22.94	22.79
		25	0	22.50	21.86	21.87	21.94
		25	13	22.50	21.84	21.87	21.90
		25	25	22.50	21.81	21.80	21.86
		50	0	22.50	21.85	21.84	21.84

Table 31: Conducted power measurement results of LTE Band 17 (Full Power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	23755CH	23790CH	23825CH
5MHz	QPSK	1	0	23.50	22.77	22.73	22.67
		1	13	23.50	22.86	22.87	22.83
		1	24	23.50	22.72	22.72	22.66
		12	0	23.50	22.84	22.80	22.80
		12	6	23.50	22.86	22.85	22.87
		12	13	23.50	22.83	22.79	22.76
		25	0	23.50	22.83	22.84	22.77
	16QAM	1	0	23.50	22.63	23.00	22.73
		1	13	23.50	22.74	23.16	22.91
		1	24	23.50	22.62	22.97	22.74
		12	0	22.50	21.91	21.92	21.84
		12	6	22.50	21.92	21.99	21.90
		12	13	22.50	21.90	21.91	21.78
		25	0	22.50	21.92	21.80	21.82
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	23780CH	23790CH	23800CH
10MHz	QPSK	1	0	23.50	22.79	22.78	22.74
		1	25	23.50	22.93	22.94	22.93
		1	49	23.50	22.78	22.77	22.78
		25	0	23.50	22.85	22.82	22.85
		25	13	23.50	22.87	22.85	22.83
		25	25	23.50	22.80	22.76	22.75
		50	0	23.50	22.84	22.80	22.83
	16QAM	1	0	23.50	23.39	22.90	22.77
		1	25	23.50	23.47	23.09	22.97
		1	49	23.50	23.33	22.90	22.79
		25	0	22.50	21.89	21.88	21.94
		25	13	22.50	21.87	21.89	21.92
		25	25	22.50	21.85	21.82	21.86
		50	0	22.50	21.88	21.81	21.82

Table 32: Conducted power measurement results of LTE Band 17 (Reduced Power D1/D2/D3)

7.1.11 Conducted power measurements of WiFi 2.4G

The output power of WiFi antenna is as following:

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1Mbps	18.50	17.28	No
	6	2437		18.50	17.43	Yes
	11	2462		18.50	17.35	No
802.11g	1	2412	6Mbps	14.50	11.90	No
	2	2417		18.00	15.44	No
	6	2437		18.00	15.68	No
	10	2457		18.00	15.40	No
	11	2462		14.50	12.20	No
802.11n 20M	1	2412	MCS0	14.50	11.81	No
	2	2417		17.50	15.24	No
	6	2437		17.50	15.50	No
	10	2457		17.50	15.24	No
	11	2462		14.50	12.05	No
802.11n 40M	3	2422	MCS0	14.50	11.97	No
	4	2427		15.00	12.38	No
	6	2437		15.00	12.63	No
	8	2447		15.00	12.77	No
	9	2452		14.50	12.33	No

Table 33: Conducted power measurement results of WiFi 2.4G (MCC of FCC countries, Receiver off)

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1Mbps	14.50	12.13	No
	6	2437		14.50	12.55	No
	11	2462		14.50	12.62	Yes
802.11g	1	2412	6Mbps	14.50	11.87	No
	6	2437		14.50	12.09	No
	11	2462		14.50	12.21	No
802.11n 20M	1	2412	MCS0	14.50	11.84	No
	6	2437		14.50	12.15	No
	11	2462		14.50	12.07	No
802.11n 40M	3	2422	MCS0	14.50	11.10	No
	6	2437		14.50	11.24	No
	9	2452		14.50	11.14	No

Table 34: Conducted power measurement results of WiFi 2.4G (MCC of FCC countries, Receiver on)

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1Mbps	18.50	17.28	No
	7	2442		18.50	17.43	No
	13	2472		18.50	17.35	No
802.11g	1	2412	6Mbps	18.00	15.48	No
	7	2442		18.00	15.68	No
	13	2472		18.00	15.51	No
802.11n 20M	1	2412	MCS0	17.50	15.28	No
	7	2442		17.50	15.50	No
	13	2472		17.50	15.21	No
802.11n 40M	3	2422	MCS0	15.00	12.33	No
	7	2442		15.00	12.63	No
	11	2462		15.00	12.54	No

Table 35: Conducted power measurement results of WiFi 2.4G (MCC of CE countries, Full Power)

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1Mbps	14.50	12.13	No
	7	2442		14.50	12.56	No
	13	2472		14.50	12.70	No
802.11g	1	2412	6Mbps	14.50	11.87	No
	7	2442		14.50	12.15	No
	13	2472		14.50	12.08	No
802.11n 20M	1	2412	MCS0	14.50	11.84	No
	7	2442		14.50	12.09	No
	13	2472		14.50	12.15	No
802.11n 40M	3	2422	MCS0	14.50	11.10	No
	7	2442		14.50	11.28	No
	11	2462		14.50	11.44	No

Table 36: Conducted power measurement results of WiFi 2.4G (MCC of CE countries, Receiver on)

7.1.12 Conducted power measurements of BT

The output power of BT antenna is as the following:

BT	Tune-up	Average Conducted Power (dBm)		
	Max.	0CH	39CH	78CH
DH5	11.00	9.73	9.31	8.94
2DH5	9.00	8.90	8.83	8.27
3DH5	9.00	8.85	8.75	8.15
BT	Tune-up	Average Conducted Power (dBm)		
	Max.	0CH	19CH	39CH
BLE	1.00	-3.10	-2.42	-2.41

Table 37: Conducted power measurement results of BT.

Note:

- 1)The conducted power of BT is measured with RMS detector.
- 2)The bolded mode was selected for SAR testing.
- 3)As different maximum tune-up output power is specified across the different channels range. So the additional conducted power measurement for the adjacent channel of each power level stage is also performed in this report to ensure compliance.

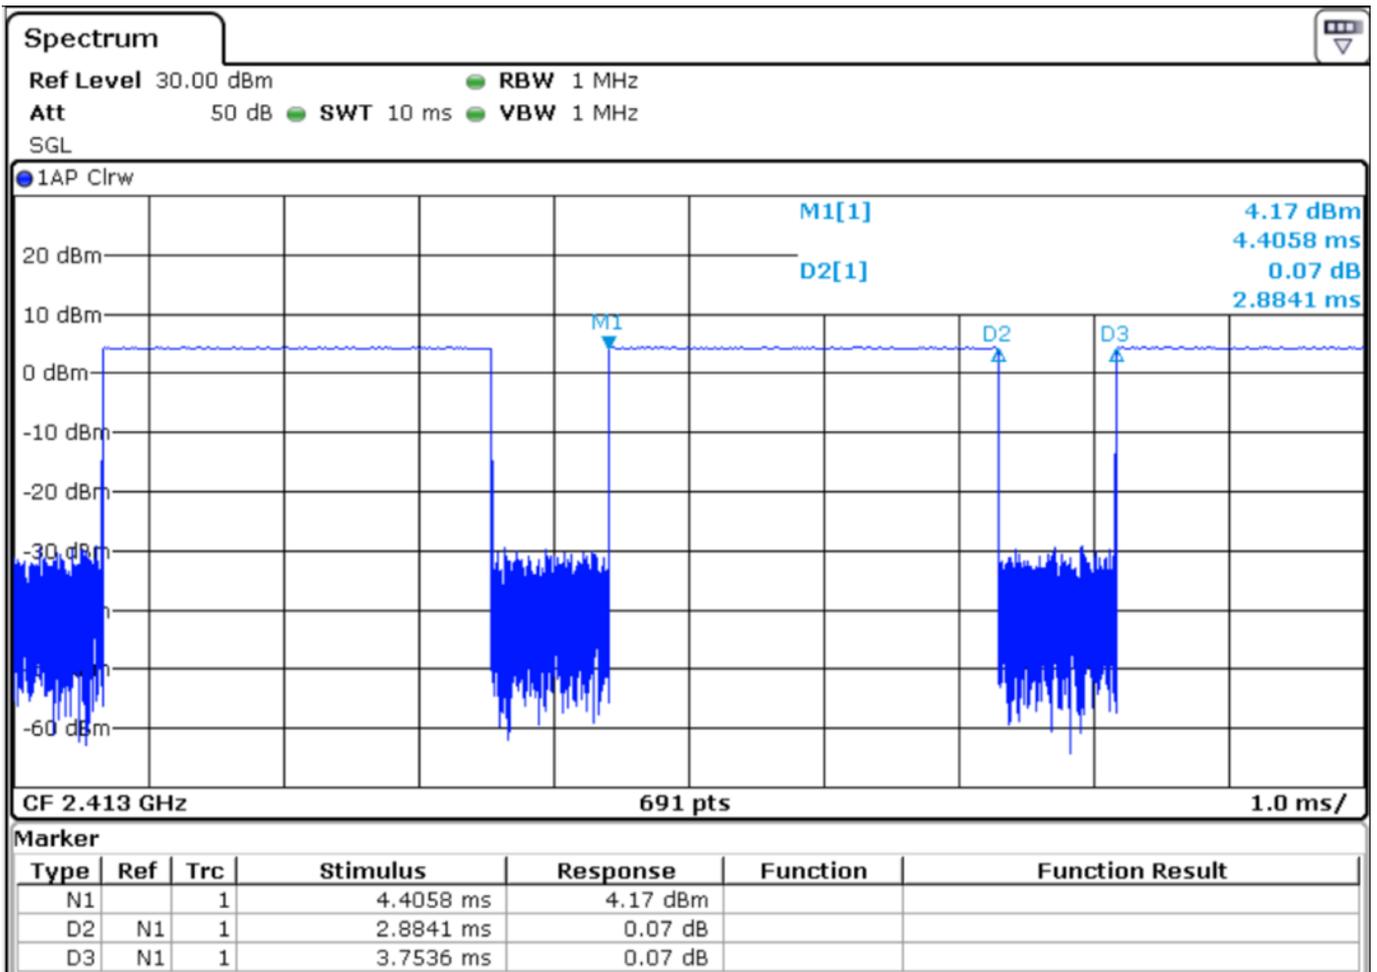


Figure: Bluetooth Transmission Plot

So the actual bluetooth duty cycle is calculated as below:

$$\text{Dutycycle} = \text{pules} \frac{\text{width}}{\text{period}} * 100\% = \frac{2.8841\text{ms}}{3.7536\text{ms}} = 77\%$$

7.2 SAR measurement Results

General Notes:

- 1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.When the maximum output power variation across the required test channels is $> \frac{1}{2}\text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is $\leq 1.2\text{ W/kg}$, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is $> 1.5\text{ W/kg}$, or $> 7.0\text{ W/kg}$ for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

GSM Notes:

- 1) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
- 2) Per KDB648474 D04, the device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

UMTS Notes:

1) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

LTE Notes:

1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices. The general test procedures used for SAR testing can be found in Section 6.5.

2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

WiFi Notes:

Per KDB248227D01:

1) When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested..

2) When the DSSS *reported* SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

3) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations

4) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

7.2.1 SAR measurement Result of GSM850

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	190/836.6	GSM	0.186	0.143	0.15	32.42	34.00	0.268	Battery 1#	Yes
Left tilt	190/836.6	GSM	0.091	0.063	-0.05	32.42	34.00	0.130	Battery 1#	/
Right cheek	190/836.6	GSM	0.170	0.118	0.04	32.42	34.00	0.245	Battery 1#	/
Right tilt	190/836.6	GSM	0.093	0.065	0.00	32.42	34.00	0.134	Battery 1#	/
Left cheek	190/836.6	GSM	0.182	0.142	0.05	32.42	34.00	0.262	Battery 2#	/
Left cheek	190/836.6	GSM	0.183	0.140	0.01	32.42	34.00	0.263	Battery 3#	/
Left cheek	190/836.6	GSM	0.170	0.134	0.05	32.42	34.00	0.245	With SIM2	/

Table 38: Head SAR test results of GSM850

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	190/836.6	GSM	0.166	0.118	-0.04	32.42	34.00	0.239	Battery 1#	/
Back Side	15mm	190/836.6	GSM	0.290	0.222	-0.03	31.58	33.00	0.402	Battery 1#	Yes
Back Side	15mm	190/836.6	GSM	0.248	0.191	-0.02	31.58	33.00	0.344	Battery 2#	/
Back Side	15mm	190/836.6	GSM	0.277	0.214	-0.02	31.58	33.00	0.384	Battery 3#	/
Back Side	15mm	190/836.6	GSM	0.273	0.210	-0.09	31.58	33.00	0.379	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	190/836.6	GSM	0.252	0.177	-0.12	32.42	34.00	0.363	Battery 1#	/

Table 39: Body-Worn SAR test results of GSM850

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	190/836.6	GPRS 2TS	0.134	0.095	-0.03	28.37	30.00	0.195	Battery 1#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.317	0.244	-0.16	28.37	30.00	0.461	Battery 1#	Yes
Left Side	10mm	190/836.6	GPRS 2TS	0.221	0.148	0.01	28.37	30.00	0.322	Battery 1#	/
Right Side	10mm	190/836.6	GPRS 2TS	0.206	0.138	-0.06	28.37	30.00	0.300	Battery 1#	/
Bottom Side	10mm	190/836.6	GPRS 2TS	0.032	0.018	-0.12	28.37	30.00	0.046	Battery 1#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.313	0.242	-0.03	28.37	30.00	0.456	Battery 2#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.274	0.213	-0.02	28.37	30.00	0.399	Battery 3#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.314	0.242	-0.05	28.37	30.00	0.457	With SIM2	/

Table 40: Hotspot SAR test results of GSM850

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	190/836.6	GPRS 2TS	0.134	0.095	-0.03	28.37	31.00	0.246	Yes
Back Side	10mm	190/836.6	GPRS 2TS	0.317	0.244	-0.16	28.37	31.00	0.581	Yes
Left Side	10mm	190/836.6	GPRS 2TS	0.221	0.148	0.01	28.37	31.00	0.405	Yes
Right Side	10mm	190/836.6	GPRS 2TS	0.206	0.138	-0.06	28.37	31.00	0.377	Yes
Bottom Side	10mm	190/836.6	GPRS 2TS	0.032	0.018	-0.12	28.37	31.00	0.058	Yes
Back Side	10mm	190/836.6	GPRS 2TS	0.313	0.242	-0.03	28.37	31.00	0.574	Yes
Back Side	10mm	190/836.6	GPRS 2TS	0.274	0.213	-0.02	28.37	31.00	0.502	Yes
Back Side	10mm	190/836.6	GPRS 2TS	0.314	0.242	-0.05	28.37	31.00	0.575	Yes

Table 41: Product Specific 10-g SAR test reduction evaluation of GSM850

Note: According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

7.2.2 SAR measurement Result of GSM1900

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	661/1880	GSM	0.202	0.130	-0.07	29.63	31.00	0.277	Battery 1#	/
Left tilt	661/1880	GSM	0.124	0.074	-0.13	29.63	31.00	0.170	Battery 1#	/
Right cheek	661/1880	GSM	0.159	0.097	0.07	29.63	31.00	0.218	Battery 1#	/
Right tilt	661/1880	GSM	0.111	0.066	-0.12	29.63	31.00	0.152	Battery 1#	/
Left cheek	661/1880	GSM	0.206	0.132	-0.11	29.63	31.00	0.282	Battery 2#	Yes
Left cheek	661/1880	GSM	0.200	0.129	0.05	29.63	31.00	0.274	Battery 3#	/
Left cheek	661/1880	GSM	0.189	0.122	0.00	29.63	31.00	0.259	With SIM2	/

Table 42: Head SAR test results of GSM1900

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	661/1880	GSM	0.116	0.077	-0.09	29.63	31.00	0.159	Battery 1#	/
Back Side	15mm	661/1880	GSM	0.157	0.093	-0.08	27.75	29.00	0.209	Battery 1#	/
Back Side	15mm	661/1880	GSM	0.159	0.094	-0.10	27.75	29.00	0.212	Battery 2#	Yes
Back Side	15mm	661/1880	GSM	0.152	0.090	-0.18	27.75	29.00	0.203	Battery 3#	/
Back Side	15mm	661/1880	GSM	0.151	0.089	-0.14	27.75	29.00	0.201	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	661/1880	GSM	0.113	0.067	-0.16	29.63	31.00	0.155	Battery 2#	/

Table 43: Body-Worn SAR test results of GSM1900

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	661/1880	GPRS 2TS	0.107	0.064	-0.19	24.85	26.00	0.139	Battery 1#	/
Back Side	10mm	661/1880	GPRS 2TS	0.234	0.128	-0.09	24.85	26.00	0.305	Battery 1#	/
Left Side	10mm	661/1880	GPRS 2TS	0.096	0.054	-0.15	24.85	26.00	0.124	Battery 1#	/
Right Side	10mm	661/1880	GPRS 2TS	0.079	0.044	-0.17	24.85	26.00	0.102	Battery 1#	/
Bottom Side	10mm	661/1880	GPRS 2TS	0.202	0.102	-0.12	24.85	26.00	0.263	Battery 1#	/
Back Side	10mm	661/1880	GPRS 2TS	0.255	0.137	0.01	24.85	26.00	0.332	Battery 2#	/
Back Side	10mm	661/1880	GPRS 2TS	0.231	0.129	-0.17	24.85	26.00	0.301	Battery 3#	/
Back Side	10mm	661/1880	GPRS 2TS	0.283	0.141	-0.08	24.85	26.00	0.369	With SIM2	Yes

Table 44: Hotspot SAR test results of GSM1900

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	661/1880	GPRS 2TS	0.107	0.064	-0.19	24.85	28.00	0.221	Yes
Back Side	10mm	661/1880	GPRS 2TS	0.234	0.128	-0.09	24.85	28.00	0.483	Yes
Left Side	10mm	661/1880	GPRS 2TS	0.096	0.054	-0.15	24.85	28.00	0.197	Yes
Right Side	10mm	661/1880	GPRS 2TS	0.079	0.044	-0.17	24.85	28.00	0.162	Yes
Bottom Side	10mm	661/1880	GPRS 2TS	0.202	0.102	-0.12	24.85	28.00	0.417	Yes
Back Side	10mm	661/1880	GPRS 2TS	0.255	0.137	0.01	24.85	28.00	0.527	Yes
Back Side	10mm	661/1880	GPRS 2TS	0.231	0.129	-0.17	24.85	28.00	0.477	Yes
Back Side	10mm	661/1880	GPRS 2TS	0.283	0.141	-0.08	24.85	28.00	0.585	Yes

Table 45: Product Specific 10-g SAR test reduction evaluation of GSM1900

Note: According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

7.2.3 SAR measurement Result of UMTS Band II

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	9400/1880	RMC	0.322	0.209	-0.05	23.52	24.50	0.404	Battery 1#	Yes
Left tilt	9400/1880	RMC	0.210	0.125	-0.04	23.52	24.50	0.263	Battery 1#	/
Right cheek	9400/1880	RMC	0.281	0.186	-0.02	23.52	24.50	0.352	Battery 1#	/
Right tilt	9400/1880	RMC	0.205	0.122	-0.02	23.52	24.50	0.257	Battery 1#	/
Left cheek	9400/1880	RMC	0.276	0.185	0.08	23.52	24.50	0.346	Battery 2#	/
Left cheek	9400/1880	RMC	0.289	0.193	0.10	23.52	24.50	0.362	Battery 3#	/
Left cheek	9400/1880	RMC	0.314	0.207	-0.11	23.52	24.50	0.393	With SIM2	/

Table 46: Head SAR test results of UMTS Band II

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	9400/1880	RMC	0.188	0.126	-0.12	23.52	24.50	0.236	Battery 1#	/
Back Side	15mm	9400/1880	RMC	0.144	0.084	-0.08	20.38	21.50	0.186	Battery 1#	/
Front Side	15mm	9400/1880	RMC	0.210	0.141	-0.01	23.52	24.50	0.263	Battery 2#	Yes
Front Side	15mm	9400/1880	RMC	0.166	0.111	-0.09	23.52	24.50	0.208	Battery 3#	/
Front Side	15mm	9400/1880	RMC	0.205	0.137	0.02	23.52	24.50	0.257	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	9400/1880	RMC	0.197	0.112	0.01	23.52	24.50	0.247	Battery 2#	/

Table 47: Body-Worn SAR test results of UMTS Band II

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	9400/1880	RMC	0.160	0.095	-0.11	20.38	21.50	0.207	Battery 1#	/
Back Side	10mm	9400/1880	RMC	0.318	0.172	-0.15	20.38	21.50	0.412	Battery 1#	Yes
Left Side	10mm	9400/1880	RMC	0.138	0.079	-0.14	20.38	21.50	0.179	Battery 1#	/
Right Side	10mm	9400/1880	RMC	0.108	0.062	-0.09	20.38	21.50	0.140	Battery 1#	/
Bottom Side	10mm	9400/1880	RMC	0.233	0.118	-0.10	20.38	21.50	0.302	Battery 1#	/
Back Side	10mm	9400/1880	RMC	0.287	0.159	-0.16	20.38	21.50	0.371	Battery 2#	/
Back Side	10mm	9400/1880	RMC	0.298	0.164	-0.10	20.38	21.50	0.386	Battery 3#	/
Back Side	10mm	9400/1880	RMC	0.305	0.167	-0.14	20.38	21.50	0.395	With SIM2	/

Table 48: Hotspot SAR test results of UMTS Band II

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	9400/1880	RMC	0.160	0.095	-0.11	20.38	24.50	0.413	Yes
Back Side	10mm	9400/1880	RMC	0.318	0.172	-0.15	20.38	24.50	0.821	Yes
Left Side	10mm	9400/1880	RMC	0.138	0.079	-0.14	20.38	24.50	0.356	Yes
Right Side	10mm	9400/1880	RMC	0.108	0.062	-0.09	20.38	24.50	0.279	Yes
Bottom Side	10mm	9400/1880	RMC	0.233	0.118	-0.10	20.38	24.50	0.602	Yes
Back Side	10mm	9400/1880	RMC	0.287	0.159	-0.16	20.38	24.50	0.741	Yes
Back Side	10mm	9400/1880	RMC	0.298	0.164	-0.10	20.38	24.50	0.770	Yes
Back Side	10mm	9400/1880	RMC	0.305	0.167	-0.14	20.38	24.50	0.788	Yes

Table 49: Product Specific 10-g SAR test reduction evaluation of UMTS Band II

Note: According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

7.2.4 SAR measurement Result of UMTS Band IV

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	1413/1732.6	RMC	0.081	0.056	-0.10	21.51	23.00	0.115	Battery 1#	/
Left tilt	1413/1732.6	RMC	0.099	0.065	-0.15	21.51	23.00	0.140	Battery 1#	/
Right cheek	1413/1732.6	RMC	0.150	0.098	-0.01	21.51	23.00	0.211	Battery 1#	/
Right tilt	1413/1732.6	RMC	0.129	0.084	-0.05	21.51	23.00	0.182	Battery 1#	/
Right cheek	1413/1732.6	RMC	0.151	0.100	-0.01	21.51	23.00	0.213	Battery 2#	/
Right cheek	1413/1732.6	RMC	0.152	0.100	-0.06	21.51	23.00	0.214	Battery 3#	/
Right cheek	1413/1732.6	RMC	0.153	0.100	-0.16	21.51	23.00	0.216	With SIM2	Yes

Table 50: Head SAR test results of UMTS Band IV

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	1413/1732.6	RMC	0.209	0.123	-0.05	21.51	23.00	0.295	Battery 1#	/
Back Side	15mm	1413/1732.6	RMC	0.157	0.088	-0.10	15.44	17.00	0.225	Battery 1#	/
Front Side	15mm	1413/1732.6	RMC	0.208	0.123	-0.11	21.51	23.00	0.293	Battery 2#	/
Front Side	15mm	1413/1732.6	RMC	0.196	0.116	-0.10	21.51	23.00	0.276	Battery 3#	/
Front Side	15mm	1413/1732.6	RMC	0.193	0.115	-0.07	21.51	23.00	0.272	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	1413/1732.6	RMC	0.428	0.247	-0.06	21.51	23.00	0.603	Battery 1#	Yes

Table 51: Body-Worn SAR test results of UMTS Band IV

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	1413/1732.6	RMC	0.093	0.053	-0.16	15.44	17.00	0.133	Battery 1#	/
Back Side	10mm	1413/1732.6	RMC	0.321	0.170	-0.05	15.44	17.00	0.460	Battery 1#	/
Left Side	10mm	1413/1732.6	RMC	0.026	0.015	0.05	15.44	17.00	0.037	Battery 1#	/
Right Side	10mm	1413/1732.6	RMC	0.033	0.020	0.08	15.44	17.00	0.047	Battery 1#	/
Bottom Side	10mm	1413/1732.6	RMC	0.322	0.175	0.11	15.44	17.00	0.461	Battery 1#	/
Bottom Side	10mm	1413/1732.6	RMC	0.356	0.191	0.15	15.44	17.00	0.510	Battery 2#	/
Bottom Side	10mm	1413/1732.6	RMC	0.423	0.227	0.17	15.44	17.00	0.606	Battery 3#	Yes
Bottom Side	10mm	1413/1732.6	RMC	0.313	0.169	-0.03	15.44	17.00	0.448	With SIM2	/

Table 52: Hotspot SAR test results of UMTS Band IV

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	1413/1732.6	RMC	0.093	0.053	-0.16	15.44	23.00	0.528	Yes
Back Side	10mm	1413/1732.6	RMC	0.321	0.170	-0.05	15.44	23.00	1.830	No
Left Side	10mm	1413/1732.6	RMC	0.026	0.015	0.05	15.44	23.00	0.145	Yes
Right Side	10mm	1413/1732.6	RMC	0.033	0.020	0.08	15.44	23.00	0.188	Yes
Bottom Side	10mm	1413/1732.6	RMC	0.322	0.175	0.11	15.44	23.00	1.836	No
Bottom Side	10mm	1413/1732.6	RMC	0.356	0.191	0.15	15.44	23.00	2.030	No
Bottom Side	10mm	1413/1732.6	RMC	0.423	0.227	0.17	15.44	23.00	2.412	No
Bottom Side	10mm	1413/1732.6	RMC	0.313	0.169	-0.03	15.44	23.00	1.785	No

Table 53: Product Specific 10-g SAR test reduction evaluation of UMTS Band IV

Note: According to the table above, Product Specific 10-g SAR test is required for this frequency band for Back Side, Bottom Side

Product Specific 10-g SAR	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Main Antenna(1#Sunwoda ,2#SCUD ,3#Desay)											
Back Side	0mm	1413/1732.6	RMC	0.729	0.330	0.16	15.44	17.00	0.472	Battery 1#	/
Bottom Side	0mm	1413/1732.6	RMC	0.639	0.282	-0.17	15.44	17.00	0.404	Battery 1#	/
Back Side	0mm	1413/1732.6	RMC	0.598	0.335	0.15	15.44	17.00	0.479	Battery 2#	/
Back Side	0mm	1413/1732.6	RMC	0.723	0.320	0.10	15.44	17.00	0.458	Battery 3#	/
Back Side	0mm	1413/1732.6	RMC	0.722	0.319	0.02	15.44	17.00	0.457	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	1413/1732.6	RMC	0.428	0.247	-0.06	21.51	23.00	0.348	Battery 2#	/
Bottom Side	12mm	1413/1732.6	RMC	0.950	0.528	0.17	21.51	23.00	0.744	Battery 2#	Yes

Table 54: Product Specific 10-g SAR test results of UMTS Band IV

7.2.5 SAR measurement Result of UMTS Band V

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	4182/836.4	RMC	0.252	0.194	0.02	23.57	25.00	0.350	Battery 1#	Yes
Left tilt	4182/836.4	RMC	0.147	0.102	0.00	23.57	25.00	0.204	Battery 1#	/
Right cheek	4182/836.4	RMC	0.235	0.163	0.03	23.57	25.00	0.327	Battery 1#	/
Right tilt	4182/836.4	RMC	0.158	0.109	0.00	23.57	25.00	0.220	Battery 1#	/
Left cheek	4182/836.4	RMC	0.249	0.189	-0.01	23.57	25.00	0.346	Battery 2#	/
Left cheek	4182/836.4	RMC	0.248	0.188	0.12	23.57	25.00	0.345	Battery 3#	/
Left cheek	4182/836.4	RMC	0.239	0.184	0.01	23.57	25.00	0.332	With SIM2	/

Table 55: Head SAR test results of UMTS Band V

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	4182/836.4	RMC	0.231	0.165	-0.18	23.57	25.00	0.321	Battery 1#	/
Back Side	15mm	4182/836.4	RMC	0.330	0.256	-0.17	22.61	24.00	0.454	Battery 1#	/
Back Side	15mm	4182/836.4	RMC	0.331	0.256	-0.17	22.61	24.00	0.456	Battery 2#	/
Back Side	15mm	4182/836.4	RMC	0.338	0.261	-0.17	22.61	24.00	0.465	Battery 3#	/
Back Side	15mm	4182/836.4	RMC	0.334	0.258	-0.07	22.61	24.00	0.460	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	4182/836.4	RMC	0.363	0.280	-0.02	23.57	25.00	0.505	Battery 3#	Yes

Table 56: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	4182/836.4	RMC	0.174	0.122	-0.02	22.61	24.00	0.240	Battery 1#	/
Back Side	10mm	4182/836.4	RMC	0.381	0.299	-0.02	22.61	24.00	0.525	Battery 1#	/
Left Side	10mm	4182/836.4	RMC	0.293	0.195	-0.14	22.61	24.00	0.404	Battery 1#	/
Right Side	10mm	4182/836.4	RMC	0.269	0.180	-0.09	22.61	24.00	0.370	Battery 1#	/
Bottom Side	10mm	4182/836.4	RMC	0.048	0.025	-0.19	22.61	24.00	0.066	Battery 1#	/
Back Side	10mm	4182/836.4	RMC	0.389	0.303	-0.04	22.61	24.00	0.536	Battery 2#	Yes
Back Side	10mm	4182/836.4	RMC	0.387	0.304	-0.08	22.61	24.00	0.533	Battery 3#	/
Back Side	10mm	4182/836.4	RMC	0.384	0.300	-0.04	22.61	24.00	0.529	With SIM2	/

Table 57: Hotspot SAR test results of UMTS Band V

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	4182/836.4	RMC	0.174	0.122	-0.02	22.61	25.00	0.302	Yes
Back Side	10mm	4182/836.4	RMC	0.381	0.299	-0.02	22.61	25.00	0.661	Yes
Left Side	10mm	4182/836.4	RMC	0.293	0.195	-0.14	22.61	25.00	0.508	Yes
Right Side	10mm	4182/836.4	RMC	0.269	0.180	-0.09	22.61	25.00	0.466	Yes
Bottom Side	10mm	4182/836.4	RMC	0.048	0.025	-0.19	22.61	25.00	0.083	Yes
Back Side	10mm	4182/836.4	RMC	0.389	0.303	-0.04	22.61	25.00	0.674	Yes
Back Side	10mm	4182/836.4	RMC	0.387	0.304	-0.08	22.61	25.00	0.671	Yes
Back Side	10mm	4182/836.4	RMC	0.384	0.300	-0.04	22.61	25.00	0.666	Yes

Table 58: Product Specific 10-g SAR test reduction evaluation of UMTS Band V

Note: According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

7.2.6 SAR measurement Result of LTE Band 2

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	18900/1880	20M QPSK 1RB#50	0.271	0.176	-0.14	24.10	24.50	0.297	Battery 1#	/
Left tilt	18900/1880	20M QPSK 1RB#50	0.186	0.111	-0.01	24.10	24.50	0.204	Battery 1#	/
Right cheek	18900/1880	20M QPSK 1RB#50	0.214	0.144	-0.12	24.10	24.50	0.235	Battery 1#	/
Right tilt	18900/1880	20M QPSK 1RB#50	0.180	0.108	-0.14	24.10	24.50	0.197	Battery 1#	/
Left cheek	18700/1860	20M QPSK 50%RB#50	0.183	0.120	-0.13	22.89	23.50	0.211	Battery 1#	/
Left tilt	18700/1860	20M QPSK 50%RB#50	0.120	0.072	0.00	22.89	23.50	0.138	Battery 1#	/
Right cheek	18700/1860	20M QPSK 50%RB#50	0.139	0.094	-0.12	22.89	23.50	0.160	Battery 1#	/
Right tilt	18700/1860	20M QPSK 50%RB#50	0.115	0.068	-0.16	22.89	23.50	0.132	Battery 1#	/
Left cheek	18900/1880	20M QPSK 1RB#50	0.284	0.185	0.17	24.10	24.50	0.311	Battery 2#	/
Left cheek	18900/1880	20M QPSK 1RB#50	0.291	0.188	0.04	24.10	24.50	0.319	Battery 3#	Yes
Left cheek	18900/1880	20M QPSK 1RB#50	0.248	0.163	0.01	24.10	24.50	0.272	With SIM2	/

Table 59: Head SAR test results of LTE Band 2

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	18900/1880	20M QPSK 1RB#50	0.175	0.116	-0.07	24.10	24.50	0.192	Battery 1#	/
Back Side	15mm	18900/1880	20M QPSK 1RB#50	0.131	0.073	0.11	21.10	21.50	0.144	Battery 1#	/
Front Side	15mm	18700/1860	20M QPSK 50%RB#50	0.106	0.066	-0.13	22.89	23.50	0.122	Battery 1#	/
Back Side	15mm	18700/1860	20M QPSK 50%RB#25	0.118	0.065	-0.02	20.90	21.50	0.135	Battery 1#	/
Front Side	15mm	18900/1880	20M QPSK 1RB#50	0.204	0.137	-0.08	24.10	24.50	0.224	Battery 2#	Yes
Front Side	15mm	18900/1880	20M QPSK 1RB#50	0.173	0.116	-0.15	24.10	24.50	0.190	Battery 3#	/
Front Side	15mm	18900/1880	20M QPSK 1RB#50	0.172	0.115	0.02	24.10	24.50	0.189	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	18900/1880	20M QPSK 1RB#50	0.179	0.109	-0.06	24.10	24.50	0.196	Battery 2#	/
Back Side	18mm	18700/1860	20M QPSK 50%RB#50	0.122	0.069	-0.15	22.89	23.50	0.140	Battery 2#	/

Table 60: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	18900/1880	20M QPSK 1RB#50	0.146	0.086	-0.10	21.10	21.50	0.160	Battery 1#	/
Back Side	10mm	18900/1880	20M QPSK 1RB#50	0.276	0.150	-0.10	21.10	21.50	0.303	Battery 1#	/
Left Side	10mm	18900/1880	20M QPSK 1RB#50	0.119	0.093	-0.08	21.10	21.50	0.130	Battery 1#	/
Right Side	10mm	18900/1880	20M QPSK 1RB#50	0.102	0.057	-0.17	21.10	21.50	0.112	Battery 1#	/
Bottom Side	10mm	18900/1880	20M QPSK 1RB#50	0.217	0.113	-0.14	21.10	21.50	0.238	Battery 1#	/
Front Side	10mm	18700/1860	20M QPSK 50%RB#25	0.112	0.065	-0.11	20.90	21.50	0.129	Battery 1#	/
Back Side	10mm	18700/1860	20M QPSK 50%RB#25	0.236	0.118	-0.16	20.90	21.50	0.271	Battery 1#	/
Left Side	10mm	18700/1860	20M QPSK 50%RB#25	0.088	0.050	-0.01	20.90	21.50	0.101	Battery 1#	/
Right Side	10mm	18700/1860	20M QPSK 50%RB#25	0.081	0.046	-0.10	20.90	21.50	0.093	Battery 1#	/
Bottom Side	10mm	18700/1860	20M QPSK 50%RB#25	0.209	0.109	-0.14	20.90	21.50	0.240	Battery 1#	/
Back Side	10mm	18900/1880	20M QPSK 1RB#50	0.279	0.151	-0.05	21.10	21.50	0.306	Battery 2#	/
Back Side	10mm	18900/1880	20M QPSK 1RB#50	0.293	0.160	-0.11	21.10	21.50	0.321	Battery 3#	/
Back Side	10mm	18900/1880	20M QPSK 1RB#50	0.317	0.170	-0.16	21.10	21.50	0.348	With SIM2	Yes

Table 61: Hotspot SAR test results of LTE Band 2

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	18900/1880	20M QPSK 1RB#50	0.146	0.086	-0.10	21.10	24.50	0.319	Yes
Back Side	10mm	18900/1880	20M QPSK 1RB#50	0.276	0.150	-0.10	21.10	24.50	0.604	Yes
Left Side	10mm	18900/1880	20M QPSK 1RB#50	0.119	0.093	-0.08	21.10	24.50	0.260	Yes
Right Side	10mm	18900/1880	20M QPSK 1RB#50	0.102	0.057	-0.17	21.10	24.50	0.223	Yes
Bottom Side	10mm	18900/1880	20M QPSK 1RB#50	0.217	0.113	-0.14	21.10	24.50	0.475	Yes
Front Side	10mm	18700/1860	20M QPSK 50%RB#25	0.112	0.065	-0.11	20.90	23.50	0.204	Yes
Back Side	10mm	18700/1860	20M QPSK 50%RB#25	0.236	0.118	-0.16	20.90	23.50	0.429	Yes
Left Side	10mm	18700/1860	20M QPSK 50%RB#25	0.088	0.050	-0.01	20.90	23.50	0.160	Yes
Right Side	10mm	18700/1860	20M QPSK 50%RB#25	0.081	0.046	-0.10	20.90	23.50	0.148	Yes
Bottom Side	10mm	18700/1860	20M QPSK 50%RB#25	0.209	0.109	-0.14	20.90	23.50	0.380	Yes
Back Side	10mm	18900/1880	20M QPSK 1RB#50	0.279	0.151	-0.05	21.10	24.50	0.610	Yes
Back Side	10mm	18900/1880	20M QPSK 1RB#50	0.293	0.160	-0.11	21.10	24.50	0.641	Yes
Back Side	10mm	18900/1880	20M QPSK 1RB#50	0.317	0.170	-0.16	21.10	24.50	0.694	Yes

Table 62: Product Specific 10-g SAR test reduction evaluation of LTE Band 2

Note: According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

7.2.7 SAR measurement Result of LTE Band 4

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	20175/1732.5	20M QPSK 1RB#50	0.118	0.078	0.02	22.19	23.00	0.142	Battery 1#	/
Left tilt	20175/1732.5	20M QPSK 1RB#50	0.102	0.060	-0.06	22.19	23.00	0.123	Battery 1#	/
Right cheek	20175/1732.5	20M QPSK 1RB#50	0.154	0.101	-0.10	22.19	23.00	0.186	Battery 1#	/
Right tilt	20175/1732.5	20M QPSK 1RB#50	0.137	0.089	0.01	22.19	23.00	0.165	Battery 1#	/
Left cheek	20050/1720	20M QPSK 50%RB#50	0.106	0.062	-0.18	21.08	22.00	0.131	Battery 1#	/
Left tilt	20050/1720	20M QPSK 50%RB#50	0.086	0.051	0.01	21.08	22.00	0.107	Battery 1#	/
Right cheek	20050/1720	20M QPSK 50%RB#50	0.086	0.053	0.08	21.08	22.00	0.107	Battery 1#	/
Right tilt	20050/1720	20M QPSK 50%RB#50	0.117	0.067	0.05	21.08	22.00	0.145	Battery 1#	/
Right cheek	20175/1732.5	20M QPSK 1RB#50	0.158	0.104	0.01	22.19	23.00	0.190	Battery 2#	/
Right cheek	20175/1732.5	20M QPSK 1RB#50	0.151	0.091	-0.01	22.19	23.00	0.182	Battery 3#	/
Right cheek	20175/1732.5	20M QPSK 1RB#50	0.161	0.105	-0.10	22.19	23.00	0.194	With SIM2	Yes

Table 63: Head SAR test results of LTE Band 4

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	20175/1732.5	20M QPSK 1RB#50	0.198	0.118	0.13	22.19	23.00	0.239	Battery 1#	/
Back Side	15mm	20175/1732.5	20M QPSK 1RB#50	0.166	0.093	0.19	16.24	17.00	0.198	Battery 1#	/
Front Side	15mm	20050/1720	20M QPSK 50%RB#50	0.174	0.104	0.03	21.08	22.00	0.215	Battery 1#	/
Back Side	15mm	20050/1720	20M QPSK 50%RB#0	0.180	0.101	-0.03	16.12	17.00	0.220	Battery 1#	/
Front Side	15mm	20175/1732.5	20M QPSK 1RB#50	0.241	0.142	-0.09	22.19	23.00	0.290	Battery 2#	/
Front Side	15mm	20175/1732.5	20M QPSK 1RB#50	0.228	0.135	-0.04	22.19	23.00	0.275	Battery 3#	/
Front Side	15mm	20175/1732.5	20M QPSK 1RB#50	0.211	0.126	-0.06	22.19	23.00	0.254	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	20175/1732.5	20M QPSK 1RB#50	0.374	0.217	0.09	22.19	23.00	0.451	Battery 2#	Yes
Back Side	18mm	20050/1720	20M QPSK 50%RB#50	0.324	0.187	-0.18	21.08	22.00	0.400	Battery 2#	/

Table 64: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.101	0.057	-0.02	16.24	17.00	0.120	Battery 1#	/
Back Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.295	0.154	0.15	16.24	17.00	0.351	Battery 1#	/
Left Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.034	0.020	0.03	16.24	17.00	0.041	Battery 1#	/
Right Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.031	0.018	0.01	16.24	17.00	0.036	Battery 1#	/
Bottom Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.366	0.180	0.02	16.24	17.00	0.436	Battery 1#	/
Front Side	10mm	20050/1720	20M QPSK 50%RB#0	0.105	0.059	0.17	16.12	17.00	0.129	Battery 1#	/
Back Side	10mm	20050/1720	20M QPSK 50%RB#0	0.374	0.196	0.19	16.12	17.00	0.458	Battery 1#	Yes
Left Side	10mm	20050/1720	20M QPSK 50%RB#0	0.037	0.021	0.13	16.12	17.00	0.045	Battery 1#	/
Right Side	10mm	20050/1720	20M QPSK 50%RB#0	0.031	0.018	0.02	16.12	17.00	0.037	Battery 1#	/
Bottom Side	10mm	20050/1720	20M QPSK 50%RB#0	0.362	0.196	-0.17	16.12	17.00	0.443	Battery 1#	/
Back Side	10mm	20050/1720	20M QPSK 50%RB#0	0.317	0.172	-0.06	16.12	17.00	0.388	Battery 2#	/
Back Side	10mm	20050/1720	20M QPSK 50%RB#0	0.297	0.160	-0.06	16.12	17.00	0.364	Battery 3#	/
Back Side	10mm	20050/1720	20M QPSK 50%RB#0	0.321	0.175	0.05	16.12	17.00	0.393	With SIM2	/

Table 65: Hotspot SAR test results of LTE Band 4

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.101	0.057	-0.02	16.24	23.00	0.479	Yes
Back Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.295	0.154	0.15	16.24	23.00	1.399	No
Left Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.034	0.020	0.03	16.24	23.00	0.162	Yes
Right Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.031	0.018	0.01	16.24	23.00	0.145	Yes
Bottom Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.366	0.180	0.02	16.24	23.00	1.736	No
Front Side	10mm	20050/1720	20M QPSK 50%RB#0	0.105	0.059	0.17	16.12	23.00	0.512	Yes
Back Side	10mm	20050/1720	20M QPSK 50%RB#0	0.374	0.196	0.19	16.12	23.00	1.823	No
Left Side	10mm	20050/1720	20M QPSK 50%RB#0	0.037	0.021	0.13	16.12	23.00	0.179	Yes
Right Side	10mm	20050/1720	20M QPSK 50%RB#0	0.031	0.018	0.02	16.12	23.00	0.149	Yes
Bottom Side	10mm	20050/1720	20M QPSK 50%RB#0	0.362	0.196	-0.17	16.12	23.00	1.765	No
Back Side	10mm	20050/1720	20M QPSK 50%RB#0	0.317	0.172	-0.06	16.12	23.00	1.545	No
Back Side	10mm	20050/1720	20M QPSK 50%RB#0	0.297	0.160	-0.06	16.12	23.00	1.448	No
Back Side	10mm	20050/1720	20M QPSK 50%RB#0	0.321	0.175	0.05	16.12	23.00	1.565	No

Table 66: Product Specific 10-g SAR test reduction evaluation of LTE Band 4

Note: According to the table above , Product Specific 10-g SAR test is required for this frequency band for Back Side, Bottom Side

Product Specific 10-g SAR	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Back Side	0mm	20175/1732.5	20M QPSK 1RB#50	0.745	0.326	-0.15	16.24	17.00	0.388	Battery 1#	/
Bottom Side	0mm	20175/1732.5	20M QPSK 1RB#50	0.567	0.280	0.16	16.24	17.00	0.334	Battery 1#	/
Back Side	0mm	20050/1720	20M QPSK 50%RB#0	0.785	0.342	-0.17	16.12	17.00	0.419	Battery 1#	/
Bottom Side	0mm	20050/1720	20M QPSK 50%RB#0	0.569	0.280	0.13	16.12	17.00	0.343	Battery 1#	/
Back Side	0mm	20050/1720	20M QPSK 50%RB#0	0.732	0.331	0.14	16.12	17.00	0.405	Battery 2#	/
Back Side	0mm	20050/1720	20M QPSK 50%RB#0	0.685	0.311	0.14	16.12	17.00	0.381	Battery 3#	/
Back Side	0mm	20050/1720	20M QPSK 50%RB#0	0.730	0.322	0.07	16.12	17.00	0.394	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	20175/1732.5	20M QPSK 1RB#50	0.374	0.217	0.09	22.19	23.00	0.261	Battery 1#	/
Bottom Side	12mm	20175/1732.5	20M QPSK 1RB#50	0.937	0.515	0.07	22.19	23.00	0.621	Battery 1#	Yes
Back Side	18mm	20050/1720	20M QPSK 50%RB#50	0.324	0.187	-0.18	21.08	22.00	0.231	Battery 1#	/
Bottom Side	12mm	20050/1720	20M QPSK 50%RB#50	0.850	0.447	0.04	21.08	22.00	0.552	Battery 1#	/

Table 67: Product Specific 10-g SAR test results of LTE Band 4

7.2.8 SAR measurement Result of LTE Band 5

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	20525/836.5	10M QPSK 1RB#25	0.182	0.142	0.17	23.70	24.50	0.219	Battery 1#	/
Left tilt	20525/836.5	10M QPSK 1RB#25	0.099	0.069	0.02	23.70	24.50	0.119	Battery 1#	/
Right cheek	20525/836.5	10M QPSK 1RB#25	0.179	0.140	0.02	23.70	24.50	0.215	Battery 1#	/
Right tilt	20525/836.5	10M QPSK 1RB#25	0.124	0.082	-0.10	23.70	24.50	0.149	Battery 1#	/
Left cheek	20450/829	10M QPSK 50%RB#25	0.120	0.083	0.15	22.60	23.50	0.148	Battery 1#	/
Left tilt	20450/829	10M QPSK 50%RB#25	0.079	0.062	-0.07	22.60	23.50	0.097	Battery 1#	/
Right cheek	20450/829	10M QPSK 50%RB#25	0.146	0.114	0.09	22.60	23.50	0.180	Battery 1#	/
Right tilt	20450/829	10M QPSK 50%RB#25	0.104	0.068	0.09	22.60	23.50	0.128	Battery 1#	/
Left cheek	20525/836.5	10M QPSK 1RB#25	0.193	0.151	-0.02	23.70	24.50	0.232	Battery 2#	Yes
Left cheek	20525/836.5	10M QPSK 1RB#25	0.191	0.150	0.16	23.70	24.50	0.230	Battery 3#	/
Left cheek	20525/836.5	10M QPSK 1RB#25	0.190	0.150	0.16	23.70	24.50	0.228	With SIM2	/

Table 68: Head SAR test results of LTE Band 5

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	20525/836.5	10M QPSK 1RB#25	0.161	0.114	-0.05	23.70	24.50	0.194	Battery 1#	/
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.275	0.213	-0.07	22.70	23.50	0.330	Battery 1#	/
Front Side	15mm	20450/829	10M QPSK 50%RB#25	0.120	0.085	-0.13	22.60	23.50	0.148	Battery 1#	/
Back Side	15mm	20450/829	10M QPSK 50%RB#25	0.250	0.176	-0.02	22.61	23.50	0.307	Battery 1#	/
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.274	0.213	-0.12	22.70	23.50	0.329	Battery 2#	/
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.259	0.201	-0.16	22.70	23.50	0.311	Battery 3#	/
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.262	0.203	-0.14	22.70	23.50	0.315	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	20525/836.5	10M QPSK 1RB#25	0.321	0.248	-0.09	23.70	24.50	0.386	Battery 1#	Yes
Back Side	18mm	20450/829	10M QPSK 50%RB#25	0.225	0.159	-0.10	22.60	23.50	0.277	Battery 1#	/

Table 69: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	20525/836.5	10M QPSK 1RB#25	0.184	0.130	-0.16	22.70	23.50	0.221	Battery 1#	/
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.389	0.305	-0.06	22.70	23.50	0.467	Battery 1#	/
Left Side	10mm	20525/836.5	10M QPSK 1RB#25	0.277	0.186	-0.10	22.70	23.50	0.333	Battery 1#	/
Right Side	10mm	20525/836.5	10M QPSK 1RB#25	0.240	0.163	-0.12	22.70	23.50	0.288	Battery 1#	/
Bottom Side	10mm	20525/836.5	10M QPSK 1RB#25	0.046	0.026	-0.18	22.70	23.50	0.056	Battery 1#	/
Front Side	10mm	20450/829	10M QPSK 50%RB#25	0.136	0.097	-0.17	22.61	23.50	0.167	Battery 1#	/
Back Side	10mm	20450/829	10M QPSK 50%RB#25	0.278	0.197	-0.09	22.61	23.50	0.341	Battery 1#	/
Left Side	10mm	20450/829	10M QPSK 50%RB#25	0.200	0.135	-0.12	22.61	23.50	0.245	Battery 1#	/
Right Side	10mm	20450/829	10M QPSK 50%RB#25	0.181	0.121	-0.16	22.61	23.50	0.222	Battery 1#	/
Bottom Side	10mm	20450/829	10M QPSK 50%RB#25	0.033	0.019	-0.15	22.61	23.50	0.041	Battery 1#	/
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.396	0.308	-0.13	22.70	23.50	0.476	Battery 2#	Yes
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.316	0.245	-0.04	22.70	23.50	0.379	Battery 3#	/
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.296	0.229	-0.01	22.70	23.50	0.355	With SIM2	/

Table 70: Hotspot SAR test results of LTE Band 5

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	20525/836.5	10M QPSK 1RB#25	0.184	0.130	-0.16	22.70	24.50	0.278	Yes
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.389	0.305	-0.06	22.70	24.50	0.588	Yes
Left Side	10mm	20525/836.5	10M QPSK 1RB#25	0.277	0.186	-0.10	22.70	24.50	0.419	Yes
Right Side	10mm	20525/836.5	10M QPSK 1RB#25	0.240	0.163	-0.12	22.70	24.50	0.363	Yes
Bottom Side	10mm	20525/836.5	10M QPSK 1RB#25	0.046	0.026	-0.18	22.70	24.50	0.070	Yes
Front Side	10mm	20450/829	10M QPSK 50%RB#25	0.136	0.097	-0.17	22.61	23.50	0.167	Yes
Back Side	10mm	20450/829	10M QPSK 50%RB#25	0.278	0.197	-0.09	22.61	23.50	0.341	Yes
Left Side	10mm	20450/829	10M QPSK 50%RB#25	0.200	0.135	-0.12	22.61	23.50	0.245	Yes
Right Side	10mm	20450/829	10M QPSK 50%RB#25	0.181	0.121	-0.16	22.61	23.50	0.222	Yes
Bottom Side	10mm	20450/829	10M QPSK 50%RB#25	0.033	0.019	-0.15	22.61	23.50	0.041	Yes
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.396	0.308	-0.13	22.70	24.50	0.599	Yes
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.316	0.245	-0.04	22.70	24.50	0.478	Yes
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.296	0.229	-0.01	22.70	24.50	0.447	Yes

Table 71: Product Specific 10-g SAR test reduction evaluation of LTE Band 5

Note: According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

7.2.9 SAR measurement Result of LTE Band 7

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	21100/2535	20M QPSK 1RB#50	0.102	0.061	0.18	23.34	24.00	0.119	Battery 1#	/
Left tilt	21100/2535	20M QPSK 1RB#50	0.103	0.055	-0.09	23.34	24.00	0.120	Battery 1#	/
Right cheek	21100/2535	20M QPSK 1RB#50	0.159	0.089	-0.16	23.34	24.00	0.185	Battery 1#	Yes
Right tilt	21100/2535	20M QPSK 1RB#50	0.074	0.040	-0.04	23.34	24.00	0.087	Battery 1#	/
Left cheek	20850/2510	20M QPSK 50%RB#50	0.086	0.049	-0.05	22.28	23.00	0.102	Battery 1#	/
Left tilt	20850/2510	20M QPSK 50%RB#50	0.085	0.045	0.01	22.28	23.00	0.100	Battery 1#	/
Right cheek	20850/2510	20M QPSK 50%RB#50	0.147	0.084	-0.10	22.28	23.00	0.174	Battery 1#	/
Right tilt	20850/2510	20M QPSK 50%RB#50	0.064	0.036	-0.13	22.28	23.00	0.076	Battery 1#	/
Right cheek	21100/2535	20M QPSK 1RB#50	0.119	0.070	-0.03	23.34	24.00	0.139	Battery 2#	/
Right cheek	21100/2535	20M QPSK 1RB#50	0.124	0.071	-0.01	23.34	24.00	0.144	Battery 3#	/
Right cheek	21100/2535	20M QPSK 1RB#50	0.152	0.087	-0.04	23.34	24.00	0.177	With SIM2	/

Table 72: Head SAR test results of LTE Band 7

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	21100/2535	20M QPSK 1RB#50	0.148	0.083	0.11	23.34	24.00	0.172	Battery 1#	/
Back Side	15mm	20850/2510	20M QPSK 1RB#50	0.123	0.065	0.19	18.47	20.00	0.175	Battery 1#	/
Front Side	15mm	20850/2510	20M QPSK 50%RB#50	0.117	0.067	-0.05	22.28	23.00	0.138	Battery 1#	/
Back Side	15mm	20850/2510	20M QPSK 50%RB#50	0.144	0.077	-0.05	18.43	20.00	0.207	Battery 1#	/
Back Side	15mm	20850/2510	20M QPSK 50%RB#50	0.088	0.046	0.03	18.43	20.00	0.126	Battery 2#	/
Back Side	15mm	20850/2510	20M QPSK 50%RB#50	0.077	0.041	0.17	18.43	20.00	0.111	Battery 3#	/
Back Side	15mm	20850/2510	20M QPSK 50%RB#50	0.163	0.086	0.10	18.43	20.00	0.234	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	21100/2535	20M QPSK 1RB#50	0.190	0.107	0.02	23.34	24.00	0.221	With SIM2	Yes
Back Side	18mm	20850/2510	20M QPSK 50%RB#50	0.155	0.087	-0.18	22.28	23.00	0.183	With SIM2	/

Table 73: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	20850/2510	20M QPSK 1RB#50	0.105	0.052	-0.17	18.47	20.00	0.149	Battery 1#	/
Back Side	10mm	20850/2510	20M QPSK 1RB#50	0.259	0.128	-0.11	18.47	20.00	0.368	Battery 1#	/
Left Side	10mm	20850/2510	20M QPSK 1RB#50	0.039	0.021	0.14	18.47	20.00	0.055	Battery 1#	/
Right Side	10mm	20850/2510	20M QPSK 1RB#50	0.036	0.020	-0.03	18.47	20.00	0.051	Battery 1#	/
Bottom Side	10mm	20850/2510	20M QPSK 1RB#50	0.406	0.191	0.12	18.47	20.00	0.577	Battery 1#	Yes
Front Side	10mm	20850/2510	20M QPSK 50%RB#50	0.106	0.053	-0.19	18.43	20.00	0.152	Battery 1#	/
Back Side	10mm	20850/2510	20M QPSK 50%RB#50	0.277	0.133	0.01	18.43	20.00	0.398	Battery 1#	/
Left Side	10mm	20850/2510	20M QPSK 50%RB#50	0.039	0.021	0.18	18.43	20.00	0.056	Battery 1#	/
Right Side	10mm	20850/2510	20M QPSK 50%RB#50	0.037	0.021	0.01	18.43	20.00	0.053	Battery 1#	/
Bottom Side	10mm	20850/2510	20M QPSK 50%RB#50	0.352	0.163	-0.10	18.43	20.00	0.505	Battery 1#	/
Bottom Side	10mm	20850/2510	20M QPSK 1RB#50	0.328	0.154	0.17	18.47	20.00	0.467	Battery 2#	/
Bottom Side	10mm	20850/2510	20M QPSK 1RB#50	0.339	0.161	0.19	18.47	20.00	0.482	Battery 3#	/
Bottom Side	10mm	20850/2510	20M QPSK 1RB#50	0.355	0.165	0.10	18.47	20.00	0.505	With SIM2	/

Table 74: Hotspot SAR test results of LTE Band 7

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	20850/2510	20M QPSK 1RB#50	0.105	0.052	-0.17	18.47	24.00	0.375	Yes
Back Side	10mm	20850/2510	20M QPSK 1RB#50	0.259	0.128	-0.11	18.47	24.00	0.925	Yes
Left Side	10mm	20850/2510	20M QPSK 1RB#50	0.039	0.021	0.14	18.47	24.00	0.138	Yes
Right Side	10mm	20850/2510	20M QPSK 1RB#50	0.036	0.020	-0.03	18.47	24.00	0.127	Yes
Bottom Side	10mm	20850/2510	20M QPSK 1RB#50	0.406	0.191	0.12	18.47	24.00	1.451	No
Front Side	10mm	20850/2510	20M QPSK 50%RB#50	0.106	0.053	-0.19	18.43	23.00	0.304	Yes
Back Side	10mm	20850/2510	20M QPSK 50%RB#50	0.277	0.133	0.01	18.43	23.00	0.793	Yes
Left Side	10mm	20850/2510	20M QPSK 50%RB#50	0.039	0.021	0.18	18.43	23.00	0.112	Yes
Right Side	10mm	20850/2510	20M QPSK 50%RB#50	0.037	0.021	0.01	18.43	23.00	0.105	Yes
Bottom Side	10mm	20850/2510	20M QPSK 50%RB#50	0.352	0.163	-0.10	18.43	23.00	1.008	Yes
Bottom Side	10mm	20850/2510	20M QPSK 1RB#50	0.328	0.154	0.17	18.47	24.00	1.172	Yes
Bottom Side	10mm	20850/2510	20M QPSK 1RB#50	0.339	0.161	0.19	18.47	24.00	1.211	No
Bottom Side	10mm	20850/2510	20M QPSK 1RB#50	0.355	0.165	0.10	18.47	24.00	1.268	No

Table 75: Product Specific 10-g SAR test reduction evaluation of LTE Band 7

Note: According to the table above , Product Specific 10-g SAR test is required for this frequency band for Bottom Side

Product Specific 10-g SAR	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Bottom Side	0mm	20850/2510	20M QPSK 1RB#50	2.200	0.781	-0.14	18.47	20.00	1.111	Battery 1#	/
Bottom Side	0mm	20850/2510	20M QPSK 50%RB#50	3.080	1.050	-0.12	18.43	20.00	1.507	Battery 1#	Yes
Bottom Side	0mm	20850/2510	20M QPSK 50%RB#50	2.880	0.997	0.03	18.43	20.00	1.431	Battery 2#	/
Bottom Side	0mm	20850/2510	20M QPSK 50%RB#50	2.840	0.987	-0.06	18.43	20.00	1.417	Battery 3#	/
Bottom Side	0mm	20850/2510	20M QPSK 50%RB#50	3.060	1.040	-0.04	18.43	20.00	1.493	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Bottom Side	12mm	21100/2535	20M QPSK 1RB#50	0.550	0.272	0.09	23.34	24.00	0.317	Battery 1#	/
Bottom Side	12mm	20850/2510	20M QPSK 50%RB#50	0.424	0.207	0.12	22.28	23.00	0.244	Battery 1#	/

Table 76: Product Specific 10-g SAR test results of LTE Band 7

7.2.10 SAR measurement Result of LTE Band 17

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left cheek	23790/710	10M QPSK 1RB#25	0.172	0.136	0.08	23.92	24.50	0.197	Battery 1#	Yes
Left tilt	23790/710	10M QPSK 1RB#25	0.087	0.062	-0.01	23.92	24.50	0.099	Battery 1#	/
Right cheek	23790/710	10M QPSK 1RB#25	0.118	0.095	0.09	23.92	24.50	0.135	Battery 1#	/
Right tilt	23790/710	10M QPSK 1RB#25	0.060	0.043	0.05	23.92	24.50	0.069	Battery 1#	/
Left cheek	23780/709	10M QPSK 50%RB#13	0.119	0.084	0.14	22.85	23.50	0.138	Battery 1#	/
Left tilt	23780/709	10M QPSK 50%RB#13	0.066	0.047	-0.03	22.85	23.50	0.076	Battery 1#	/
Right cheek	23780/709	10M QPSK 50%RB#13	0.092	0.073	-0.13	22.85	23.50	0.106	Battery 1#	/
Right tilt	23780/709	10M QPSK 50%RB#13	0.046	0.033	-0.02	22.85	23.50	0.053	Battery 1#	/
Left cheek	23790/710	10M QPSK 1RB#25	0.119	0.084	0.14	23.92	24.50	0.136	Battery 2#	/
Left cheek	23790/710	10M QPSK 1RB#25	0.148	0.119	0.16	23.92	24.50	0.169	Battery 3#	/
Left cheek	23790/710	10M QPSK 1RB#25	0.148	0.118	0.18	23.92	24.50	0.169	With SIM2	/

Table 77: Head SAR test results of LTE Band 17

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	23790/710	10M QPSK 1RB#25	0.249	0.195	-0.12	23.92	24.50	0.284	Battery 1#	/
Back Side	15mm	23790/710	10M QPSK 1RB#25	0.261	0.204	0.02	22.94	23.50	0.297	Battery 1#	/
Front Side	15mm	23780/709	10M QPSK 50%RB#13	0.178	0.127	-0.10	22.85	23.50	0.207	Battery 1#	/
Back Side	15mm	23780/709	10M QPSK 50%RB#13	0.249	0.178	-0.08	22.87	23.50	0.288	Battery 1#	/
Back Side	15mm	23790/710	10M QPSK 1RB#25	0.270	0.212	-0.05	22.94	23.50	0.307	Battery 2#	/
Back Side	15mm	23790/710	10M QPSK 1RB#25	0.248	0.194	-0.12	22.94	23.50	0.282	Battery 3#	/
Back Side	15mm	23790/710	10M QPSK 1RB#25	0.272	0.212	-0.10	22.94	23.50	0.309	With SIM2	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Back Side	18mm	23790/710	10M QPSK 1RB#25	0.318	0.249	-0.07	23.92	24.50	0.363	With SIM2	Yes
Back Side	18mm	23780/709	10M QPSK 50%RB#13	0.227	0.162	-0.01	22.85	23.50	0.264	With SIM2	/

Table 78: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	23790/710	10M QPSK 1RB#25	0.171	0.122	-0.12	22.94	23.50	0.195	Battery 1#	/
Back Side	10mm	23790/710	10M QPSK 1RB#25	0.286	0.227	-0.08	22.94	23.50	0.325	Battery 1#	Yes
Left Side	10mm	23790/710	10M QPSK 1RB#25	0.196	0.133	-0.07	22.94	23.50	0.223	Battery 1#	/
Right Side	10mm	23790/710	10M QPSK 1RB#25	0.185	0.126	-0.12	22.94	23.50	0.210	Battery 1#	/
Bottom Side	10mm	23790/710	10M QPSK 1RB#25	0.021	0.012	-0.14	22.94	23.50	0.024	Battery 1#	/
Front Side	10mm	23780/709	10M QPSK 50%RB#13	0.159	0.114	-0.11	22.87	23.50	0.184	Battery 1#	/
Back Side	10mm	23780/709	10M QPSK 50%RB#13	0.258	0.184	-0.14	22.87	23.50	0.298	Battery 1#	/
Left Side	10mm	23780/709	10M QPSK 50%RB#13	0.182	0.124	-0.14	22.87	23.50	0.210	Battery 1#	/
Right Side	10mm	23780/709	10M QPSK 50%RB#13	0.172	0.117	-0.08	22.87	23.50	0.199	Battery 1#	/
Bottom Side	10mm	23780/709	10M QPSK 50%RB#13	0.019	0.011	-0.11	22.87	23.50	0.022	Battery 1#	/
Back Side	10mm	23790/710	10M QPSK 1RB#25	0.242	0.189	-0.11	22.94	23.50	0.275	Battery 2#	/
Back Side	10mm	23790/710	10M QPSK 1RB#25	0.249	0.195	-0.13	22.94	23.50	0.283	Battery 3#	/
Back Side	10mm	23790/710	10M QPSK 1RB#25	0.245	0.192	-0.16	22.94	23.50	0.279	With SIM2	/

Table 79: Hotspot SAR test results of LTE Band 17

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Front Side	10mm	23790/710	10M QPSK 1RB#25	0.171	0.122	-0.12	22.94	24.50	0.245	Yes
Back Side	10mm	23790/710	10M QPSK 1RB#25	0.286	0.227	-0.08	22.94	24.50	0.410	Yes
Left Side	10mm	23790/710	10M QPSK 1RB#25	0.196	0.133	-0.07	22.94	24.50	0.281	Yes
Right Side	10mm	23790/710	10M QPSK 1RB#25	0.185	0.126	-0.12	22.94	24.50	0.265	Yes
Bottom Side	10mm	23790/710	10M QPSK 1RB#25	0.021	0.012	-0.14	22.94	24.50	0.030	Yes
Front Side	10mm	23780/709	10M QPSK 50%RB#13	0.159	0.114	-0.11	22.87	23.50	0.184	Yes
Back Side	10mm	23780/709	10M QPSK 50%RB#13	0.258	0.184	-0.14	22.87	23.50	0.298	Yes
Left Side	10mm	23780/709	10M QPSK 50%RB#13	0.182	0.124	-0.14	22.87	23.50	0.210	Yes
Right Side	10mm	23780/709	10M QPSK 50%RB#13	0.172	0.117	-0.08	22.87	23.50	0.199	Yes
Bottom Side	10mm	23780/709	10M QPSK 50%RB#13	0.019	0.011	-0.11	22.87	23.50	0.022	Yes
Back Side	10mm	23790/710	10M QPSK 1RB#25	0.242	0.189	-0.11	22.94	24.50	0.347	Yes
Back Side	10mm	23790/710	10M QPSK 1RB#25	0.249	0.195	-0.13	22.94	24.50	0.357	Yes
Back Side	10mm	23790/710	10M QPSK 1RB#25	0.245	0.192	-0.16	22.94	24.50	0.351	Yes

Table 80: Product Specific 10-g SAR test reduction evaluation of LTE Band 17

Note: According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

7.2.11 SAR measurement Result of WiFi 2.4G

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty cycle	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g								
Left cheek	11/2462	802.11b	0.404	0.353	0.178	-0.08	99%	0.357	12.62	14.50	0.550	Battery 1#	/
Left tilt	11/2462	802.11 b	0.325	0.268	0.131	-0.08	99%	0.271	12.62	14.50	0.417	Battery 1#	/
Right cheek	11/2462	802.11 b	0.172	0.165	0.093	-0.05	99%	0.167	12.62	14.50	0.257	Battery 1#	/
Right tilt	11/2462	802.11 b	0.190	0.199	0.100	0.04	99%	0.201	12.62	14.50	0.310	Battery 1#	/
Left cheek	11/2462	802.11 b	0.398	0.357	0.180	-0.04	99%	0.361	12.62	14.50	0.556	Battery 2#	Yes
Left cheek	11/2462	802.11 b	0.400	0.354	0.179	-0.12	99%	0.358	12.62	14.50	0.551	Battery 3#	/

Table 81: Head SAR test results of WiFi 2.4G

Note: Per KDB248227D01, for Head SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty cycle	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g								
Front Side	15mm	6/2437	802.11 b	0.087	0.085	0.050	-0.10	99%	0.086	17.43	18.50	0.110	Battery 1#	/
Back Side	15mm	6/2437	802.11 b	0.092	0.092	0.052	-0.11	99%	0.093	17.43	18.50	0.119	Battery 1#	/
Back Side	15mm	6/2437	802.11 b	0.098	0.091	0.051	0.02	99%	0.092	17.43	18.50	0.117	Battery 2#	/
Back Side	15mm	6/2437	802.11 b	0.100	0.096	0.054	0.12	99%	0.097	17.43	18.50	0.124	Battery 3#	Yes

Table 82: Body-Worn SAR test results of WiFi 2.4G

Note: Per KDB248227D01, for Body-worn SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty cycle	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g								
Front Side	10mm	6/2437	802.11 b	0.160	0.154	0.086	-0.01	99%	0.156	17.43	18.50	0.199	Battery 1#	/
Back Side	10mm	6/2437	802.11 b	0.196	0.188	0.101	-0.07	99%	0.190	17.43	18.50	0.243	Battery 1#	/
Right Side	10mm	6/2437	802.11 b	0.112	0.112	0.056	-0.19	99%	0.113	17.43	18.50	0.145	Battery 1#	/
Top Side	10mm	6/2437	802.11 b	0.197	0.198	0.100	-0.07	99%	0.200	17.43	18.50	0.256	Battery 1#	/
Top Side	10mm	6/2437	802.11 b	0.194	0.200	0.100	-0.09	99%	0.202	17.43	18.50	0.258	Battery 2#	Yes
Top Side	10mm	6/2437	802.11 b	0.184	0.189	0.097	-0.05	99%	0.191	17.43	18.50	0.244	Battery 3#	/

Table 83: Hotspot SAR test results of WiFi 2.4G

Note:

1) Per KDB248227D01, for Hotspot SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

2) Note: For WiFi antenna, per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

7.2.12 SAR measurement Result of BT

Test Position of Head	Test Channel / Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Actual duty factor	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g								
Left cheek	0/2402	DH5	0.133	0.066	-0.10	77%	0.173	9.73	11.00	0.231	Battery 1#	/
Left tilt	0/2402	DH5	0.092	0.046	-0.15	77%	0.120	9.73	11.00	0.160	Battery 1#	/
Right cheek	0/2402	DH5	0.055	0.032	-0.07	77%	0.072	9.73	11.00	0.096	Battery 1#	/
Right tilt	0/2402	DH5	0.060	0.032	-0.04	77%	0.078	9.73	11.00	0.104	Battery 1#	/
Left cheek	0/2402	DH5	0.138	0.069	-0.01	77%	0.179	9.73	11.00	0.240	Battery 2#	Yes
Left cheek	0/2402	DH5	0.110	0.059	-0.12	77%	0.143	9.73	11.00	0.191	Battery 3#	/

Table 84: Head SAR test results of BT

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498 D01 General RF Exposure Guidance.

The location of the antennas inside the device please refers to Appendix E.

- 1) Per KDB 648474 D04, because the diagonal distance of this device is $\geq 160\text{mm}$, so it is a phablet .
- 2) Second antenna(Div antenna) does not support TX function.
- 3) The proximity sensor and main antenna use same metallic electrode ,so the location is same.

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main antenna	Hotspot/ Product specific 10g SAR	Yes	Yes	Yes	Yes	No	Yes
WiFi/BT antenna	Hotspot/ Product specific 10g SAR	Yes	Yes	No	Yes	Yes	No

Table 85: Sides for Hotspot/ Product specific 10g SAR testing

Note:

- 1) Per KDB 941225 D06 and KDB 648474 D04, particular DUT edges were not required to be evaluated for Hotspot/ Product specific 10g SAR SAR if the antessnna-tso-edge distance is greater than 2.5cm;

7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498 D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Head	11.00	12.59	5	2.480	3.97	3.00	No
BT	Body-Worn	11.00	12.59	15	2.480	1.32	3.00	Yes
BT	Hospot	11.00	12.59	10	2.480	1.98	3.00	Yes
BT	Product specific 10g SAR	11.00	12.59	5	2.480	3.97	7.50	Yes

Table 86: Standalone SAR test exclusion for BT

Note:

1)* - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/kg)*
BT	Body-worn	11.00	12.59	15	2.480	7.50	0.176
BT	Hotspot	11.00	12.59	10	2.450	7.50	0.263
BT	Product specific 10g SAR	11.00	12.59	5	2.480	18.75	0.211

Table 87: Estimated SAR calculation for BT

Note:

1) * - maximum possible output power declared by manufacturer

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Simultaneous TX Combination	Head	Body-worn	Hotspot (10mm)	Product Specific 10-g (0mm)
1	GSM Voice+ BT	Yes	Yes	N/A	Yes
2	GSM DATA + BT	N/A	Yes	N/A	Yes
3	GSM Voice + WiFi 2.4G	Yes	Yes	N/A	Yes
4	GSM DATA + WiFi 2.4G	N/A	Yes	Yes	Yes
5	UMTS Voice + BT	Yes	Yes	N/A	Yes
6	UMTS Data + BT	Yes	Yes	N/A	Yes
7	UMTS Voice+ WiFi 2.4G	Yes	Yes	N/A	Yes
8	UMTS Data + WiFi 2.4G	Yes	Yes	Yes	Yes
9	LTE+ BT	Yes	Yes	N/A	Yes
10	LTE+ WiFi 2.4G	Yes	Yes	Yes	Yes

Table 88: Simultaneous Transmission Possibilities

Note:

- 1) WiFi 2.4G and Bluetooth can't transmit simultaneously.
- 2) The device supports WiFi VOIP function.
- 3) The device supports VoLTE function.
- 4) VOIP 3rd party applications may possibly be installed and used by the user.
- 5) The device does not support DTM function.

7.3.3 SAR Summation Scenario

Test Position		Main antenna SARMax										WiFi/BT antenna SARMax		Σ1-gSAR
		GSM850	GSM1900	UMTS B2	UMTS B4	UMTS B5	LTE B2	LTE B4	LTE B5	LTE B7	LTE B17	WiFi 2.4G	BT	
Head	Left cheek	0.268	0.282	0.404	0.115	0.350	0.319	0.142	0.232	0.119	0.197	0.556	0.240	0.960
	Left tilt	0.130	0.170	0.263	0.140	0.204	0.204	0.123	0.119	0.120	0.099	0.417	0.160	0.680
	Right cheek	0.245	0.218	0.352	0.216	0.327	0.235	0.194	0.215	0.185	0.135	0.257	0.096	0.609
	Right tilt	0.134	0.152	0.257	0.182	0.220	0.197	0.165	0.149	0.087	0.069	0.310	0.104	0.567
Body Worn	Front Side	0.239	0.159	0.263	0.295	0.321	0.224	0.290	0.194	0.172	0.284	0.110	0.176	0.497
	Back Side	0.402	0.212	0.247	0.603	0.505	0.196	0.451	0.386	0.234	0.363	0.124	0.176	0.779
Hotspot	Front Side	0.195	0.139	0.207	0.133	0.240	0.160	0.129	0.221	0.152	0.195	0.199	0.263	0.503
	Back Side	0.461	0.369	0.412	0.460	0.536	0.348	0.458	0.476	0.398	0.325	0.243	0.263	0.799
	Left Side	0.322	0.124	0.179	0.037	0.404	0.130	0.045	0.333	0.056	0.223	/	/	0.404
	Right Side	0.300	0.102	0.140	0.047	0.370	0.112	0.037	0.288	0.053	0.210	0.145	0.263	0.633
	Top Side	/	/	/	/	/	/	/	/	/	/	0.258	0.263	0.263
	Bottom Side	0.046	0.263	0.302	0.606	0.066	0.240	0.443	0.056	0.577	0.024	/	/	0.606
Product Specific 10-g	Front Side	/	/	/	/	/	/	/	/	/	/	/	0.211	0.211
	Back Side	/	/	/	0.479	/	/	0.419	/	0.125	/	/	0.211	0.690
	Left Side	/	/	/	/	/	/	/	/	/	/	/	/	/
	Right Side	/	/	/	/	/	/	/	/	/	/	/	0.211	0.211
	Top Side	/	/	/	/	/	/	/	/	/	/	/	0.211	0.211
	Bottom Side	/	/	/	0.744	/	/	0.621	/	1.507	/	/	/	1.507

Table 89: SAR Simultaneous Tx Combination of Main antenna and WiFi/BT antenna.

7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01.

Appendix A. System Check Plots

(Please See Appendix No.: SYBH(Z-SAR) 20181114006001-2A, total: 18 pages)

Appendix B. SAR Measurement Plots

(Please See Appendix No.: SYBH(Z-SAR)20181114006001-2B, total: 38 pages)

Appendix C. Calibration Certificate

(Please See Appendix No.: SYBH(Z-SAR)20181114006001-2C, total: 171 pages)

Appendix D. Photo documentation

(Please See Appendix No.: SYBH(Z-SAR)20181114006001-2D, total: 5 pages)

Appendix E. Antenna Location

(Please See Appendix No.: SYBH(Z-SAR)20181114006001-2E, total: 1 pages)

End