



FCC Radio Test Report

FCC ID: QISMT1-U06

This report concerns (check one) : Original Grant Class I Change

Issued Date : Mar. 20, 2013
Project No. : 1302C057A
Equipment : Smart Phone
Model Name : HUAWEI MT1-U06; MT1-U06
Applicant : Huawei Technologies Co.,Ltd.
Address : Bantian, Longgang District, Shenzhen, China

Tested by:

Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Feb. 22, 2013

Date of Test:

Feb. 22, 2013 ~ Mar. 18, 2013

Testing Engineer : David Mao
(David Mao)

Technical Manager : Leo Hung
(Leo Hung)

Authorized Signatory : Steven Lu
(Steven Lu)

Neutron Engineering Inc.

No.3, Jinshagang 1st Road, ShiXia, Dalang
Town, Dong Guan, China.
TEL : (0769) 8318-3000 FAX : (0769) 8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION	14
4.1.2 MEASUREMENT INSTRUMENTS LIST	14
4.1.3 TEST PROCEDURE	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 MEASUREMENT INSTRUMENTS LIST	21
4.2.3 TEST PROCEDURE	21
4.2.4 DEVIATION FROM TEST STANDARD	22
4.2.5 TEST SETUP	22
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS (BELOW 30MHz)	24
4.2.8 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	25
4.2.9 TEST RESULTS - ABOVE 1000MHZ	32
5 . 26dB SPECTRUM BANDWIDTH	132
5.1 APPLIED PROCEDURES / LIMIT	132
5.1.1 MEASUREMENT INSTRUMENTS LIST	132
5.1.2 TEST PROCEDURE	132
5.1.3 DEVIATION FROM STANDARD	132
5.1.4 TEST SETUP	132
5.1.5 EUT OPERATION CONDITIONS	133
5.1.6 TEST RESULTS	134
6 . MAXIMUM CONDUCTED OUTPUT POWER	152



Table of Contents

	Page
6.1 APPLIED PROCEDURES / LIMIT	152
6.1.1 MEASUREMENT INSTRUMENTS LIST	152
6.1.2 TEST PROCEDURE	152
6.1.3 DEVIATION FROM STANDARD	153
6.1.4 TEST SETUP	153
6.1.5 EUT OPERATION CONDITIONS	153
6.1.6 TEST RESULTS	154
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	172
7.1 APPLIED PROCEDURES / LIMIT	172
7.1.1 MEASUREMENT INSTRUMENTS LIST	172
7.1.2 TEST PROCEDURE	172
7.1.3 DEVIATION FROM STANDARD	172
7.1.4 TEST SETUP	172
7.1.5 EUT OPERATION CONDITIONS	172
7.1.6 TEST RESULTS	173
8 . POWER SPECTRAL DENSITY TEST	191
8.1 APPLIED PROCEDURES / LIMIT	191
8.1.1 MEASUREMENT INSTRUMENTS LIST	191
8.1.2 TEST PROCEDURE	191
8.1.3 DEVIATION FROM STANDARD	191
8.1.4 TEST SETUP	191
8.1.5 EUT OPERATION CONDITIONS	191
9 . PEAK EXCURSION MEASUREMENT	210
9.1 APPLIED PROCEDURES / LIMIT	210
9.1.1 MEASUREMENT INSTRUMENTS LIST	210
9.1.2 TEST PROCEDURE	210
9.1.3 DEVIATION FROM STANDARD	210
9.1.4 TEST SETUP	211
9.1.5 EUT OPERATION CONDITIONS	211
9.1.6 TEST RESULTS	212
10 . FREQUENCY STABILITY MEASUREMENT	230
10.1 APPLIED PROCEDURES / LIMIT	230
10.1.1 MEASUREMENT INSTRUMENTS LIST	230
10.1.2 TEST PROCEDURE	230
10.1.3 DEVIATION FROM STANDARD	230
10.1.4 TEST SETUP	231
10.1.5 EUT OPERATION CONDITIONS	231
10.1.6 TEST RESULTS	232
11. EUT TEST PHOTO	235



1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI MT1-U06; MT1-U06
Applicant : Huawei Technologies Co.,Ltd.
Date of Test : Feb. 22, 2013 ~ Mar. 13, 2013
Test Item : ENGINEERING SAMPLE
Standards : FCC Part15, Subpart E(15.407) / ANSI C63.4 : 2009;
FCC KDB 789033 D01 General UNII Test Procedures v01r01.

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1302C057A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5150MHz~5250MHz;5250MHz~5350MHz; 5470MHz~5725MHz Mode part of the product.

**2. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

FCC Part15, Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Peak Excursion	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this test report.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792
Neutron's test firm number for FCC 319330

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%** .

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	4.23	
		1GHz~18GHz	H	4.15	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone																
Brand Name	HUAWEI																
Model Name	HUAWEI MT1-U06; MT1-U06																
Mode Different	Compared with the previous report NEI-FCCP-1-1302C057 (band 1 to band 3), the FCC ID was changed and without NFC function, the rest are the same.																
Product Description	<p>The EUT is a Smart Phone.</p> <table border="1"><tr><td>Operation Frequency</td><td>Band 1: 150MHz~5250MHz Band 2: 250MHz~5350MHz Band 3: 3470MHz~5725MHz</td></tr><tr><td>Modulation Technology</td><td>OFDM</td></tr><tr><td>Bit Rate of Transmitter</td><td>11a: 6/9/12/18/24/36/48/54 11n: MCS0/1/2/3/4/5/6/7</td></tr><tr><td>Antenna Designation</td><td>Please see note 3.(Page 9)</td></tr><tr><td>Antenna Gain(Peak)</td><td></td></tr><tr><td>Output Power Band 1</td><td>802.11a: 13.97dBm 802.11n (20M): 12.94 dBm 802.11n (40M): 12.90 dBm</td></tr><tr><td>Output Power Band 2</td><td>802.11a: 13.88dBm 802.11n (20M): 12.96 dBm 802.11n (40M): 12.97dBm</td></tr><tr><td>Output Power Band 3</td><td>802.11a: 12.87dBm 802.11n (20M): 12.97 dBm 802.11n (40M): 12.93dBm</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency	Band 1: 150MHz~5250MHz Band 2: 250MHz~5350MHz Band 3: 3470MHz~5725MHz	Modulation Technology	OFDM	Bit Rate of Transmitter	11a: 6/9/12/18/24/36/48/54 11n: MCS0/1/2/3/4/5/6/7	Antenna Designation	Please see note 3.(Page 9)	Antenna Gain(Peak)		Output Power Band 1	802.11a: 13.97dBm 802.11n (20M): 12.94 dBm 802.11n (40M): 12.90 dBm	Output Power Band 2	802.11a: 13.88dBm 802.11n (20M): 12.96 dBm 802.11n (40M): 12.97dBm	Output Power Band 3	802.11a: 12.87dBm 802.11n (20M): 12.97 dBm 802.11n (40M): 12.93dBm
Operation Frequency	Band 1: 150MHz~5250MHz Band 2: 250MHz~5350MHz Band 3: 3470MHz~5725MHz																
Modulation Technology	OFDM																
Bit Rate of Transmitter	11a: 6/9/12/18/24/36/48/54 11n: MCS0/1/2/3/4/5/6/7																
Antenna Designation	Please see note 3.(Page 9)																
Antenna Gain(Peak)																	
Output Power Band 1	802.11a: 13.97dBm 802.11n (20M): 12.94 dBm 802.11n (40M): 12.90 dBm																
Output Power Band 2	802.11a: 13.88dBm 802.11n (20M): 12.96 dBm 802.11n (40M): 12.97dBm																
Output Power Band 3	802.11a: 12.87dBm 802.11n (20M): 12.97 dBm 802.11n (40M): 12.93dBm																
Power Source	1# Supplied from Li-ion Battery. Brand/Model: HUAWEI/HB496791EBC 2# Supplied from AC/DC Adapter. Brand/Model: HUAWEI/HW-050200U3W																
Power Rating	1# DC 3.8V 3900mAh(Charging Voltage: 4.35V) 2# I/P AC 100-240V~50/60Hz 0.5A O/P DC 5V 2A																

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. Channel List:

802.11a / 802.11n 20M							
Band 1		Band 2		Band 3			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	116	5580
40	5200	56	5280	104	5520	132	5660
44	5220	60	5300	108	5540	136	5680
48	5240	64	5320	112	5560	140	5700

802.11n 40M							
Band 1		Band 2		Band 3			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	134	5670
46	5230	62	5310	110	5550		

3. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type / Connector	Gain (dBi)
1	--	--	Integral	1.8



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48(Band 1) TX A Mode / CH52, CH56, CH64(Band 2) TX A Mode / CH100, CH116, CH140(Band 3)
Mode 2	TX N20 Mode / CH36, CH40, CH48(Band 1) TX N20 Mode / CH52, CH56, CH64(Band 2) TX A Mode / CH100, CH116, CH140(Band 3)
Mode 3	TX N40 Mode / CH38, CH46 (Band 1) TX N40 Mode / CH54, CH62 (Band 2) TX A Mode / CH100, CH116, CH140(Band 3)
Mode 4	Normal Link

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 3	Normal Link

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48(Band 1) TX A Mode / CH52, CH56, CH64(Band 2) TX A Mode / CH100, CH116, CH140(Band 3)
Mode 2	TX N20 Mode / CH36, CH40, CH48(Band 1) TX N20 Mode / CH52, CH56, CH64(Band 2) TX A Mode / CH100, CH116, CH140(Band 3)
Mode 3	TX N40 Mode / CH38, CH46 (Band 1) TX N40 Mode / CH54, CH62 (Band 2) TX A Mode / CH100, CH116, CH140(Band 3)

Note: The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

**3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING**

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

Test software version	Cart		
Frequency	5180 MHz	5200MHz	5240 MHz
A Mode	16800	17000	17000
Frequency	5260 MHz	5280 MHz	5320 MHz
A Mode	17000	17200	17600
Frequency	5500	5580	5700
A Mode	17000	17200	17400


Test software version	Cart		
Frequency	5180 MHz	5200MHz	5240 MHz
N20 Mode	14600	14700	14700
Frequency	5260 MHz	5280 MHz	5320 MHz
N20 Mode	16000	16200	16600
Frequency	5500	5580	5700
N20 Mode	17000	17000	17200

Test software version	Cart		
Frequency	5190 MHz	5230MHz	
N40 Mode	16000	16000	
Frequency	5270	5310	
N40 Mode	16400	16600	
Frequency	5510	5550	5670
N40M Mode	15400	15400	15400




3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Mode:

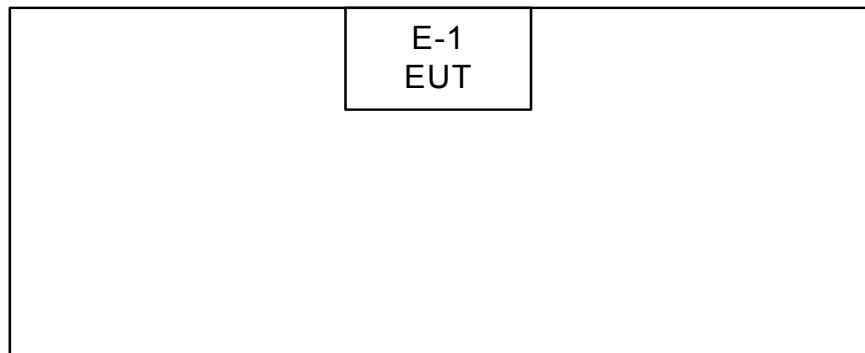

Radiated Mode:

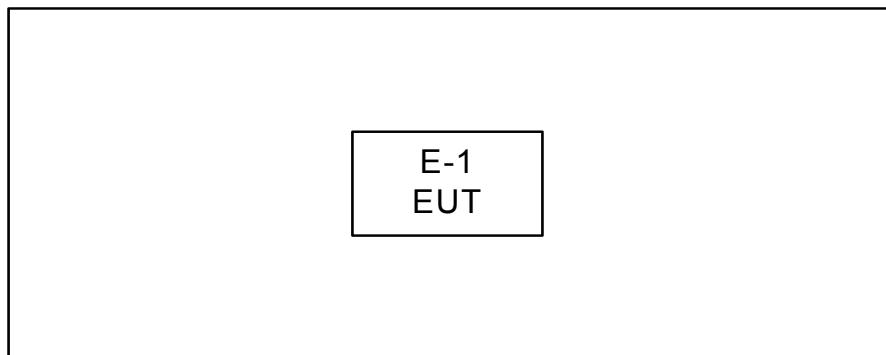



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Smart Phone	HUAWEI	HUAWEI MT1-U06	QISMT1-U06	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in m in 『Length』 column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Next Calibration
1	LISN	EMCO	3816/2	00052765	May.26.2012	May.04.2013
2	LISN	R&S	ENV216	100087	May.26.2012	May.04.2013
3	Test Cable	N/A	C_17	N/A	Mar.18.2012	Mar.28.2013
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	May.26.2012	May.04.2013
5	50Ω Terminator	SHX	TF2-3G-A	08122902	May.26.2012	May.04.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.




4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

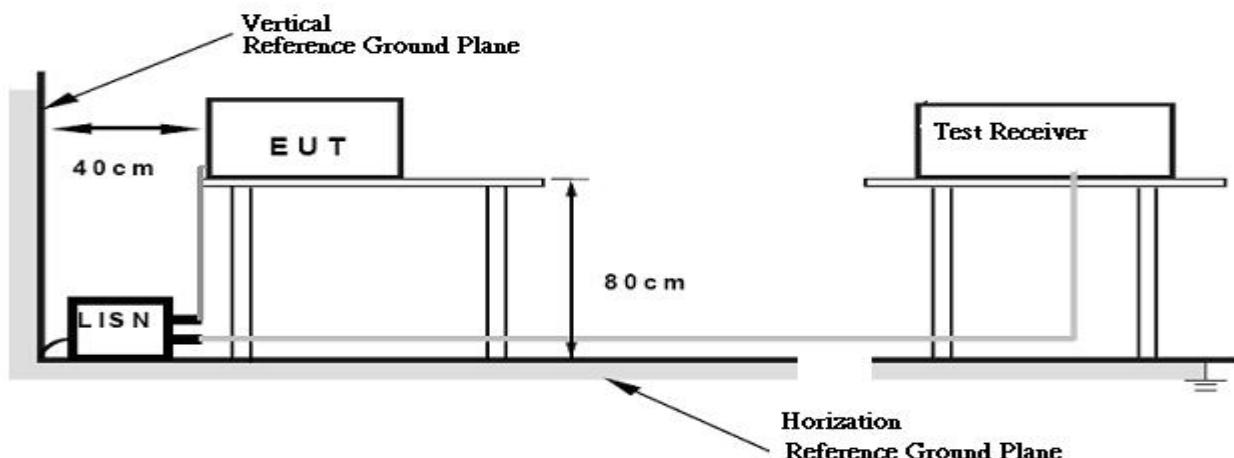

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/Normal Link mode.




4.1.7 TEST RESULTS

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Pressure :	1010hPa	Test Power :	AC 120V/60Hz
Test Mode :	Normal Link	Phase:	Line

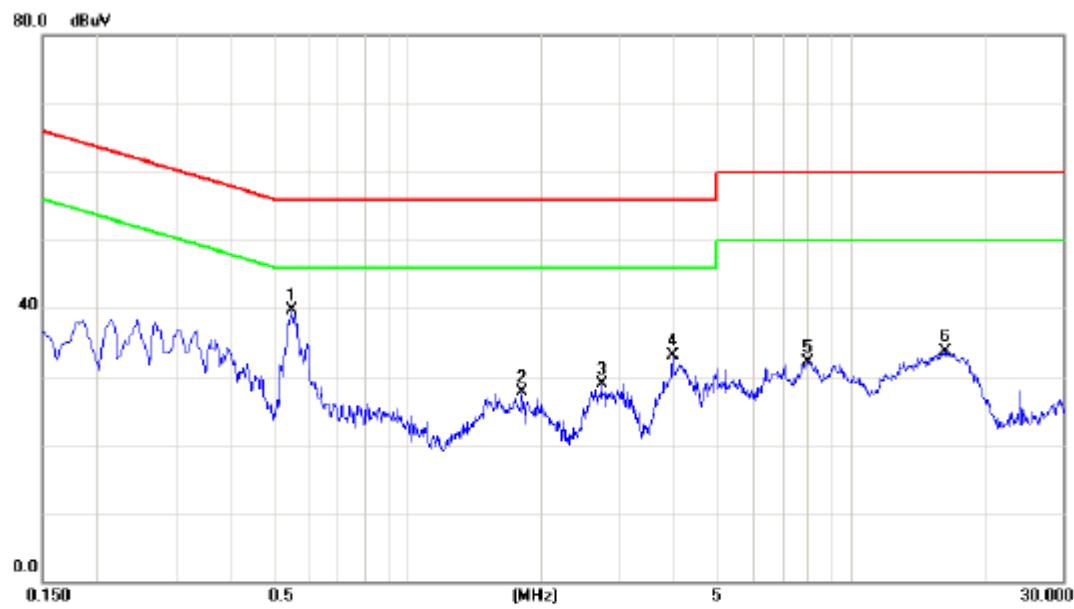

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	0.5500	30.08	9.70	39.78	56.00	-16.22	peak	
2		1.8100	17.91	9.75	27.66	56.00	-28.34	peak	
3		2.7380	19.20	9.78	28.98	56.00	-27.02	peak	
4		3.9740	23.34	9.82	33.16	56.00	-22.84	peak	
5		7.9820	22.01	10.02	32.03	60.00	-27.97	peak	
6		16.3940	23.46	10.27	33.73	60.00	-26.27	peak	



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Pressure :	1010hPa	Test Power :	AC 120V/60Hz
Test Mode :	Normal Link	Phase:	Neutral

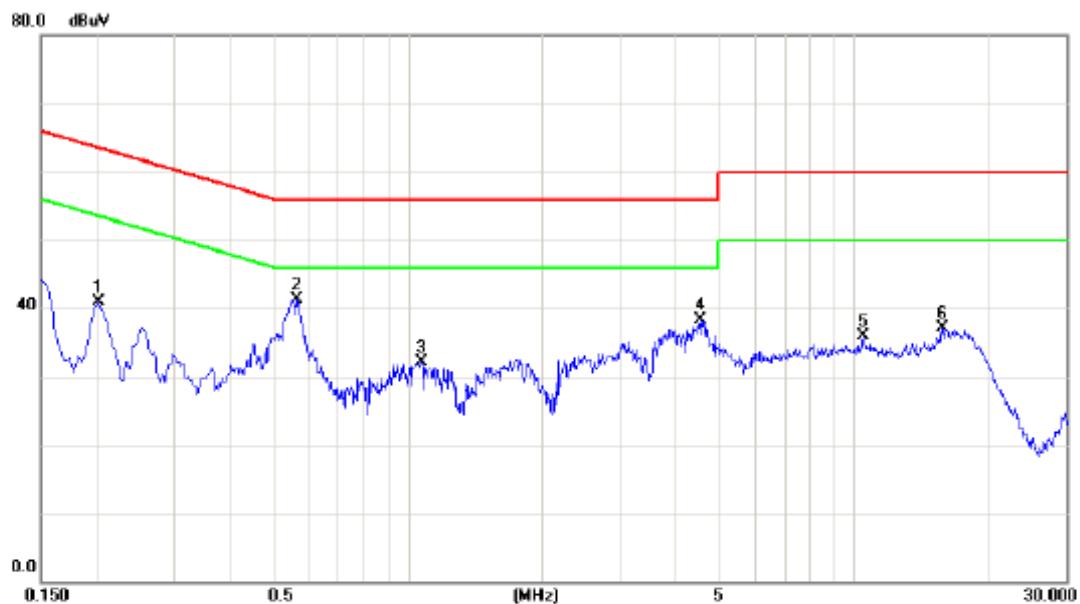

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2020	31.14	9.69	40.83	63.53	-22.70	peak	
2 *		0.5660	31.60	9.70	41.30	56.00	-14.70	peak	
3		1.0740	22.40	9.72	32.12	56.00	-23.88	peak	
4		4.5420	28.41	9.83	38.24	56.00	-17.76	peak	
5		10.5420	25.76	10.13	35.89	60.00	-24.11	peak	
6		15.8140	26.82	10.32	37.14	60.00	-22.86	peak	



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 1.5m)	
	PEAK	AVERAGE
Above 1000	80	60

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = 20 log (3m/1.5m) dB ;
Limit line = specific limits (dBuV) + 6 dB
- (4) For the following data, measurements were performed at a separation distance of 1 meter.
The field strength was then converted to EIRP per KDB 789033:
EIRP [dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
EIRP is the equivalent isotropically radiated power in Watts
E is the field strength
D is the measurement distance



LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27	68.3
	-17	78.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu V/m, \text{ where } P \text{ is the eirp (Watts)}$$

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Next Calibration
1	Antenna	Schwarbeck	VULB9160	9160-3232	Jun.04.2012	May.25.2013
2	Amplifier	HP	8447D	2944A09673	May.26.2012	May.04.2013
3	Test Receiver	R&S	ESCI	100382	May.26.2012	May.04.2013
4	Test Cable	N/A	C-01_CB03	N/A	Jul.01.2012	Jul.01.2013
5	Antenna	ETS	3115	00075789	May.26.2012	May.25.2013
6	Amplifier	Agilent	8449B	3008A02274	May.26.2012	May.04.2013
7	Spectrum	Agilent	E4408B	US39240143	Nov.25.2012	Nov.25.2013
8	Test Cable	HUBER+SUHNER	C-45	N/A	May.04.2012	May.02.2013
9	Controller	CT	SC100	N/A	N/A	N/A
10	Active Loop Antenna	R&S	HFH2-Z2	830749/020	May.26.2012	May.04.2013
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct.13.2012	Oct.13.2013
12	Horn Antenna	EMCO	3115	9605-4803	May.26.2012	May.25.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

4.2.3 TEST PROCEDURE

- a. The measuring distance of at 1.5 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

Radiated Emission Test Set-Up Frequency 30 - 1000MHz

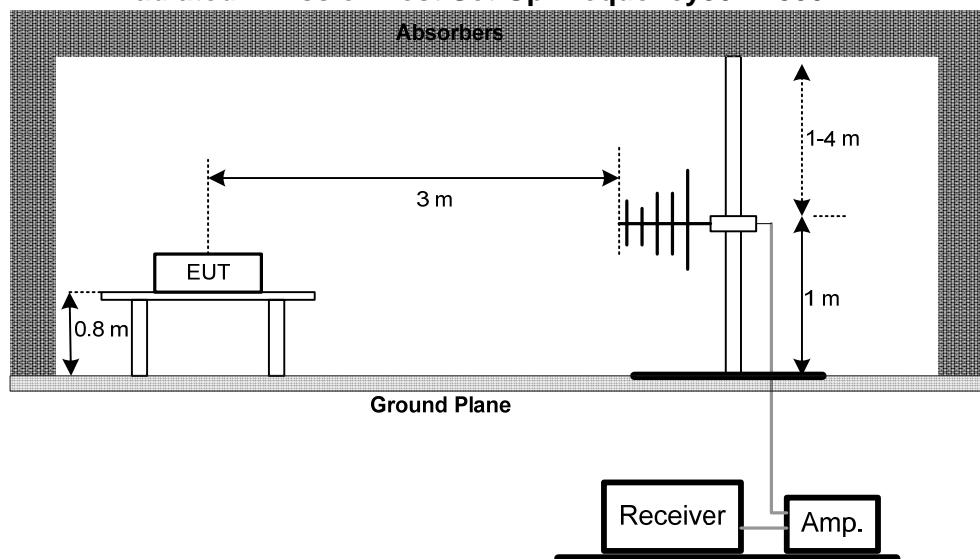


Radiated Emission Test Set-Up Frequency Above 1 GHz

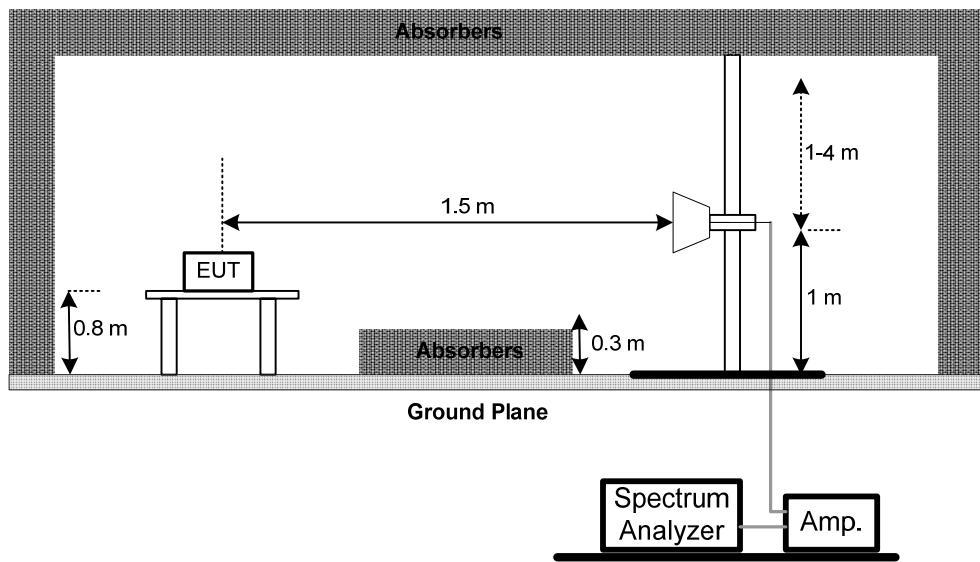



(C) For radiated emissions below 30MHz

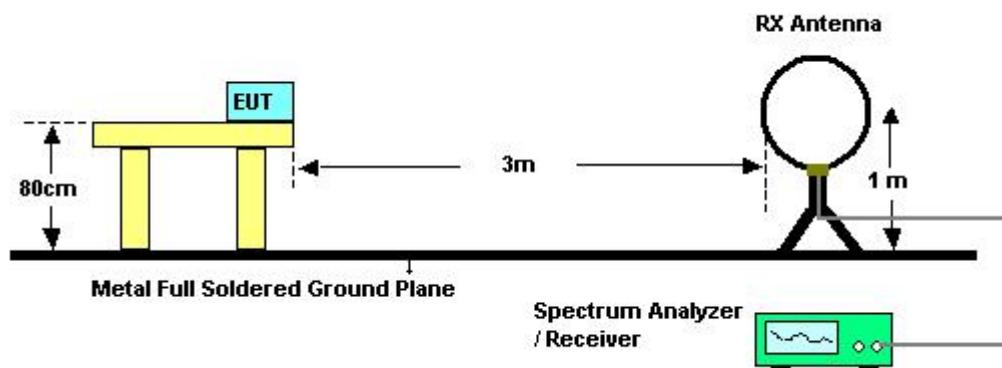

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.2.7 TEST RESULTS (BELOW 30MHz)**

EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Mode		

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0095	0°	17.23	24.30	41.53	128.01	-86.48	AVG
0.0095	0°	19.42	24.30	43.72	148.01	-104.29	PK
0.0138	0°	18.03	24.30	42.33	124.84	-82.51	AVG
0.0138	0°	20.46	24.30	44.76	144.84	-100.08	PK
0.0245	0°	17.52	24.02	41.54	119.82	-78.29	AVG
0.0245	0°	20.39	24.02	44.41	139.82	-95.42	PK
0.0357	0°	18.05	23.30	41.35	116.55	-75.19	AVG
0.0357	0°	20.54	23.30	43.84	136.55	-92.70	PK
0.4275	0°	18.07	19.97	38.04	94.99	-56.94	AVG
0.4275	0°	20.57	19.97	40.54	114.99	-74.44	PK
1.2367	0°	18.59	19.58	38.17	65.76	-27.59	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0093	90°	18.15	24.30	42.45	128.20	-85.75	AVG
0.0093	90°	20.46	24.30	44.76	148.20	-103.44	PK
0.0256	90°	17.24	23.95	41.19	119.44	-78.25	AVG
0.0256	90°	20.42	23.95	44.37	139.44	-95.07	PK
0.0372	90°	18.54	23.21	41.75	116.19	-74.44	AVG
0.0372	90°	20.76	23.21	43.97	136.19	-92.22	PK
0.0454	90°	18.14	22.69	40.83	114.46	-73.63	AVG
0.0454	90°	20.57	22.69	43.26	134.46	-91.20	PK
0.2684	90°	17.20	20.36	37.56	99.03	-61.47	AVG
0.2684	90°	20.48	20.36	40.84	119.03	-78.19	PK
1.4290	90°	18.25	19.56	37.81	64.50	-26.70	QP

Remark :

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB); ◦
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor. ◦




4.2.8 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25°C	Relative Humidity :	58 %
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX A Mode 5180MHz	Phase:	Vertical

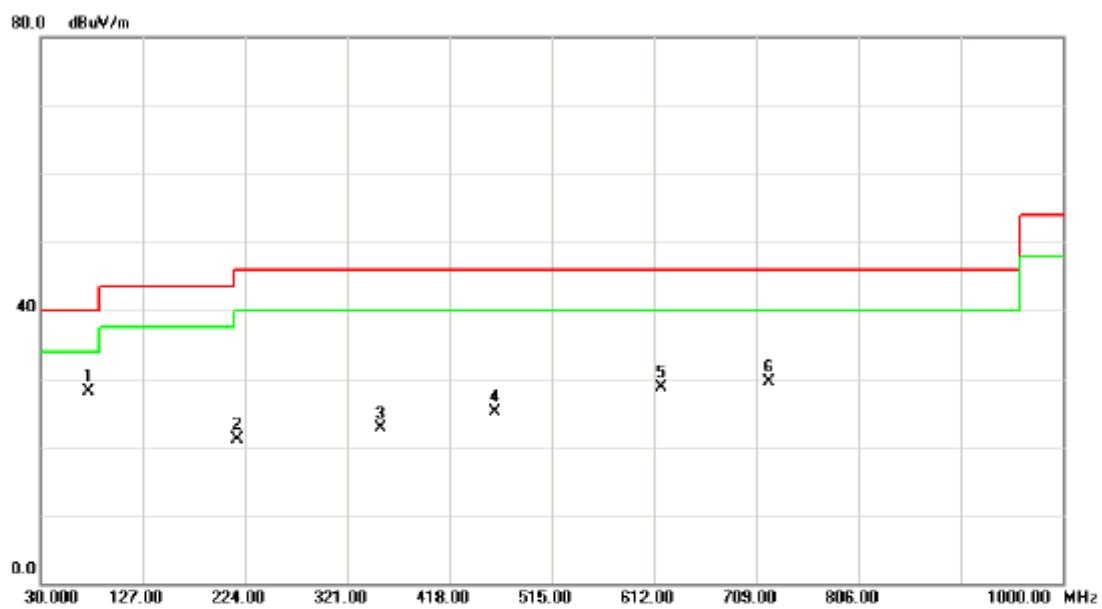

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	76.0750	47.14	-19.01	28.13	40.00	-11.87	peak	
2		216.7250	37.55	-16.46	21.09	46.00	-24.91	peak	
3		352.5250	34.13	-11.44	22.69	46.00	-23.31	peak	
4		461.6500	33.91	-8.86	25.05	46.00	-20.95	peak	
5		619.2750	33.90	-5.17	28.73	46.00	-17.27	peak	
6		721.1250	33.97	-4.49	29.48	46.00	-16.52	peak	




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25°C	Relative Humidity :	58 %
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX A Mode 5180MHz	Phase:	Horizontal



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	71.2250	44.52	-18.61	25.91	40.00	-14.09	peak	
2		175.5000	32.61	-17.41	15.20	43.50	-28.30	peak	
3		323.4250	32.77	-12.12	20.65	46.00	-25.35	peak	
4		439.8250	33.53	-9.17	24.36	46.00	-21.64	peak	
5		643.5250	33.95	-4.79	29.16	46.00	-16.84	peak	
6		789.0250	33.23	-3.75	29.48	46.00	-16.52	peak	




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25°C	Relative Humidity :	58 %
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX A Mode 5260MHz	Phase:	Vertical

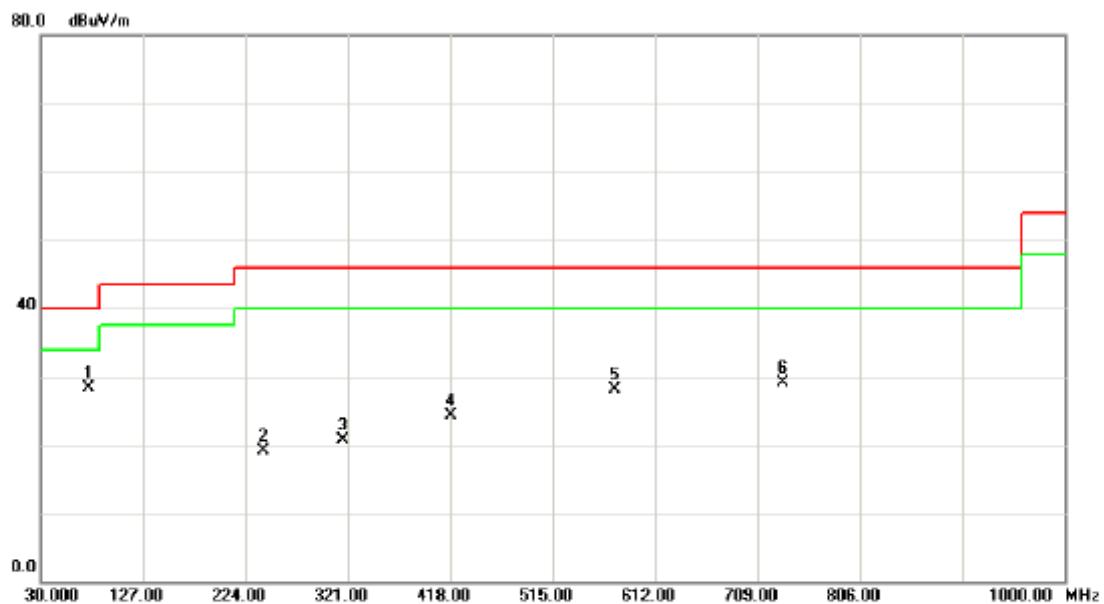

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	76.0750	47.35	-19.01	28.34	40.00	-11.66	peak	
2		240.9750	34.67	-15.63	19.04	46.00	-26.96	peak	
3		316.1500	33.03	-12.29	20.74	46.00	-25.26	peak	
4		418.0000	33.89	-9.52	24.37	46.00	-21.63	peak	
5		573.2000	34.17	-6.09	28.08	46.00	-17.92	peak	
6		733.2500	33.41	-4.39	29.02	46.00	-16.98	peak	




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25°C	Relative Humidity :	58 %
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX A Mode 5260MHz	Phase:	Horizontal

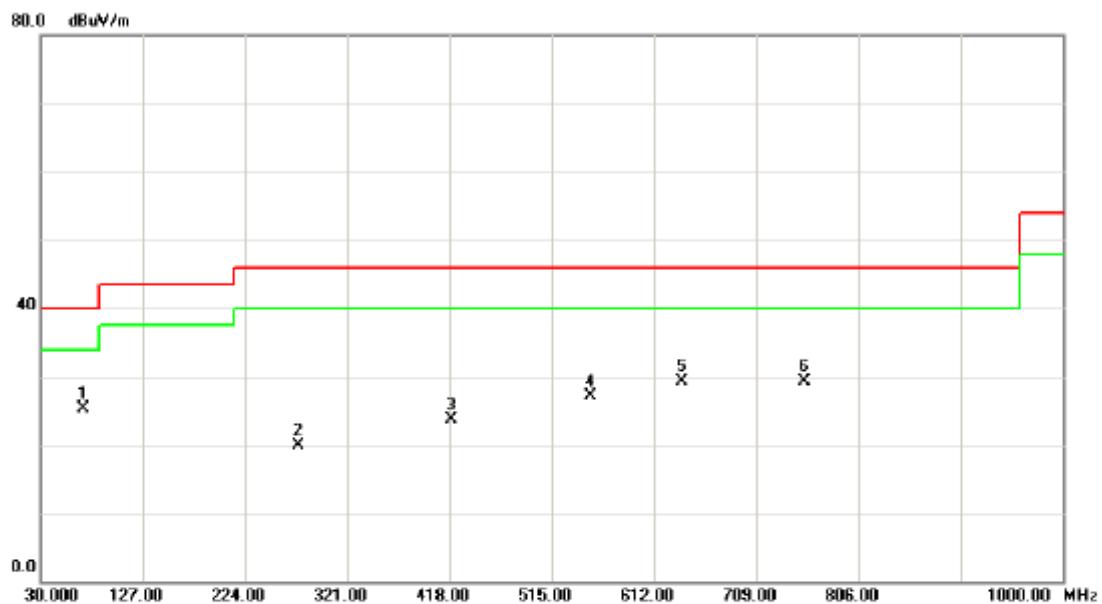

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	71.2250	44.01	-18.61	25.40	40.00	-14.60	peak	
2		274.9250	33.30	-13.49	19.81	46.00	-26.19	peak	
3		420.4250	33.09	-9.48	23.61	46.00	-22.39	peak	
4		551.3750	33.64	-6.56	27.08	46.00	-18.92	peak	
5		638.6750	34.09	-4.85	29.24	46.00	-16.76	peak	
6		755.0750	33.49	-4.18	29.31	46.00	-16.69	peak	




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25°C	Relative Humidity :	58 %
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX A Mode 5500MHz	Phase:	Vertical

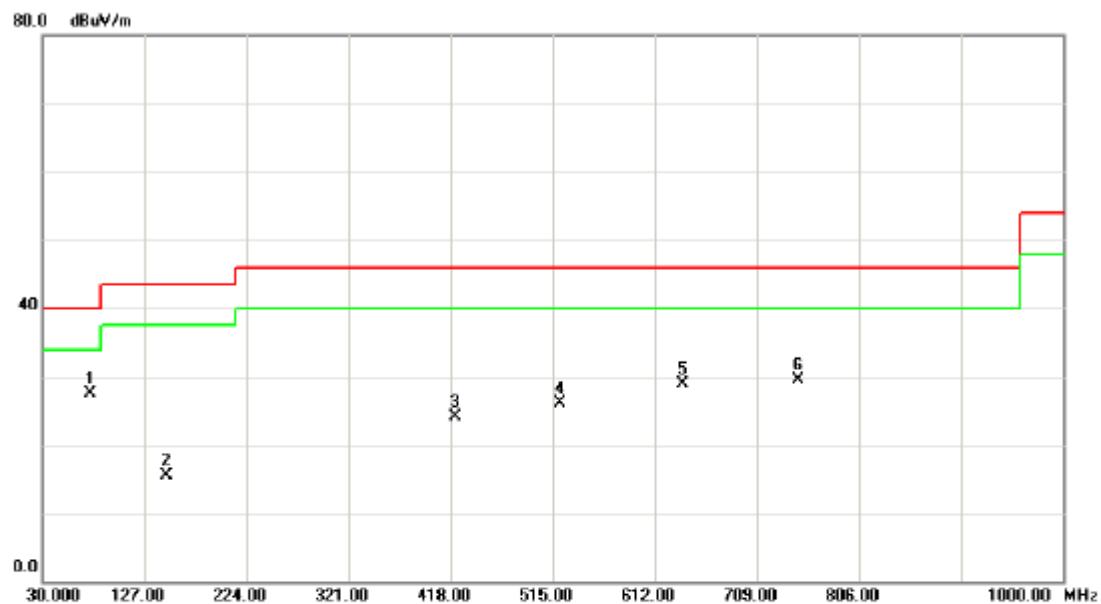

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	76.0750	46.44	-19.01	27.43	40.00	-12.57	peak	
2		148.8250	33.29	-17.85	15.44	43.50	-28.06	peak	
3		422.8500	33.46	-9.44	24.02	46.00	-21.98	peak	
4		522.2750	33.70	-7.59	26.11	46.00	-19.89	peak	
5		638.6750	33.73	-4.85	28.88	46.00	-17.12	peak	
6		747.8000	33.79	-4.26	29.53	46.00	-16.47	peak	



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25°C	Relative Humidity :	58 %
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX A Mode 5500MHz	Phase:	Horizontal

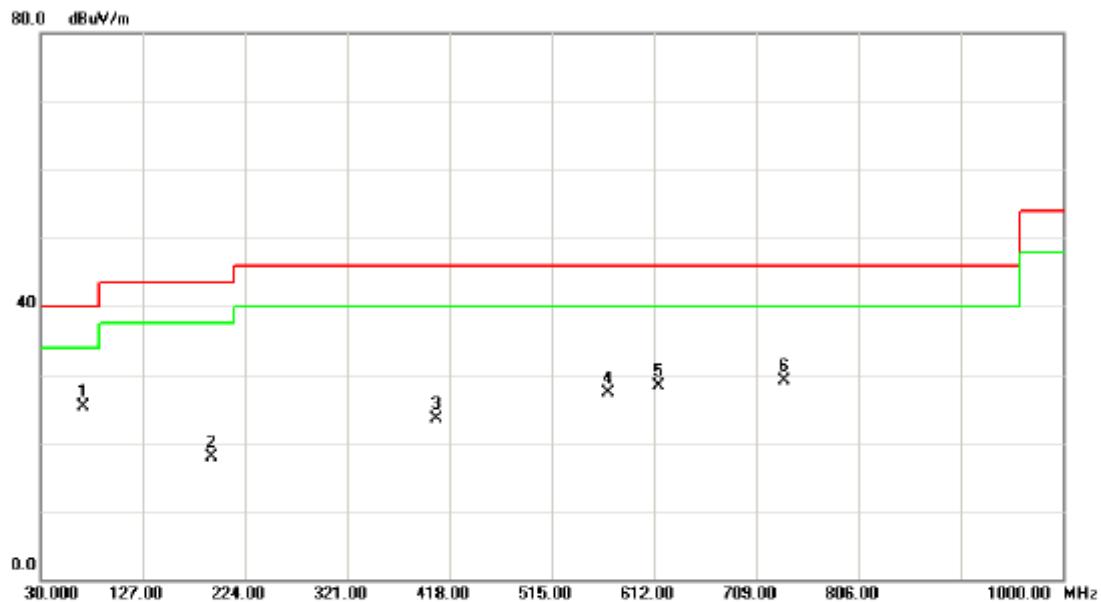

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	71.2250	44.00	-18.61	25.39	40.00	-14.61	peak	
2		192.4750	35.05	-17.06	17.99	43.50	-25.51	peak	
3		405.8750	33.21	-9.72	23.49	46.00	-22.51	peak	
4		568.3500	33.40	-6.19	27.21	46.00	-18.79	peak	
5		616.8500	33.44	-5.23	28.21	46.00	-17.79	peak	
6		735.6750	33.54	-4.36	29.18	46.00	-16.82	peak	

**4.2.9 TEST RESULTS - ABOVE 1000MHZ**

EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX A Mode 5180MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	26.37	15.04	40.09	66.46	55.13	-38.31	-49.64	80.00	60.00	-21.30	-41.30	X/E
5183.25	V	63.45	43.18	40.18	103.63	83.36	-1.14	-21.41					X/F
10359.98	V	40.35	28.96	13.73	54.08	42.69	-50.69	-62.08	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH36(Above 1000 MHz, Vertical)

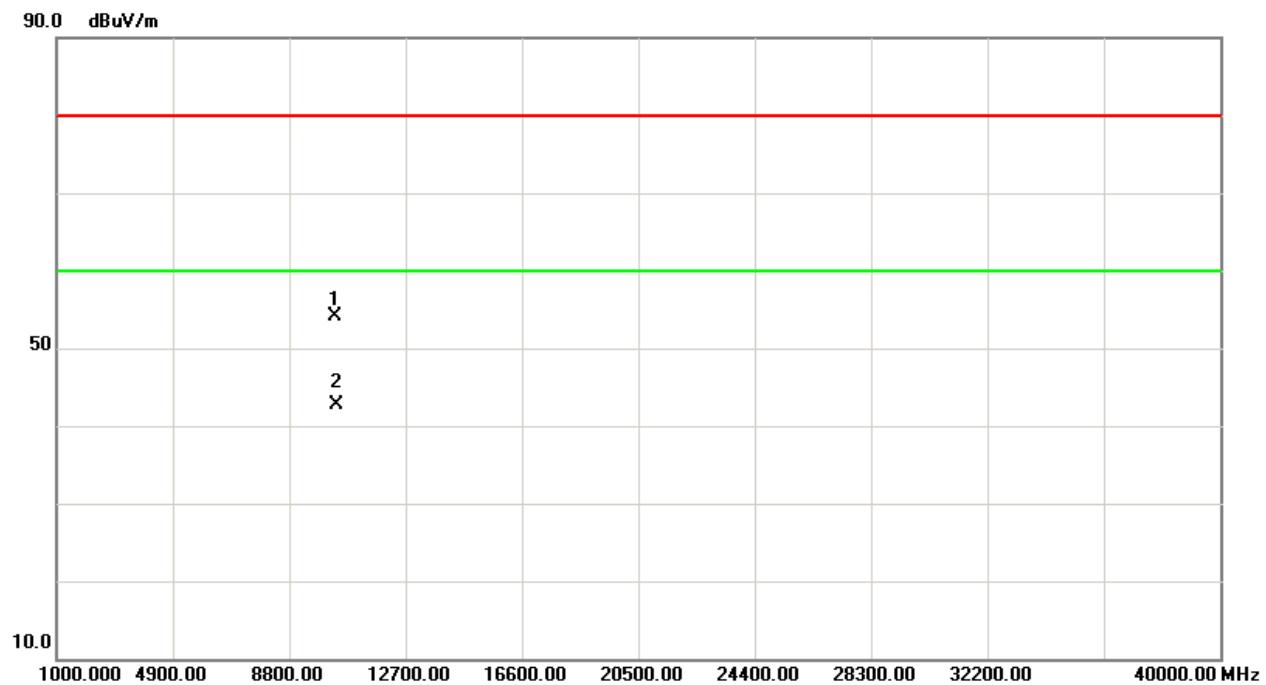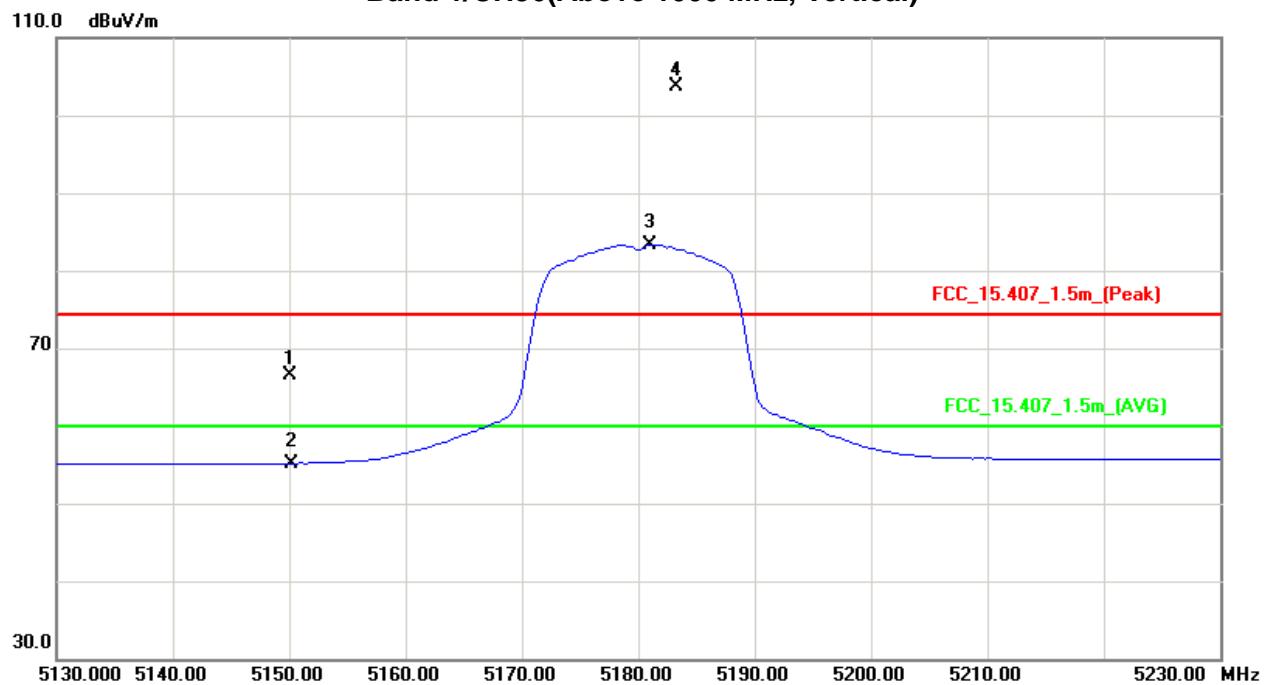



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX A Mode 5180MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBuV/m)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	25.76	14.95	40.09	65.85	55.04	-32.92	-43.73	80.00	60.00	-15.30	-35.30	X/E
5178.00	H	57.19	38.36	40.16	97.35	78.52	-1.42	-20.25					X/F
10360.02	H	41.21	29.45	13.73	54.94	43.18	-43.83	-55.59	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH36(Above 1000 MHz, Horizontal)

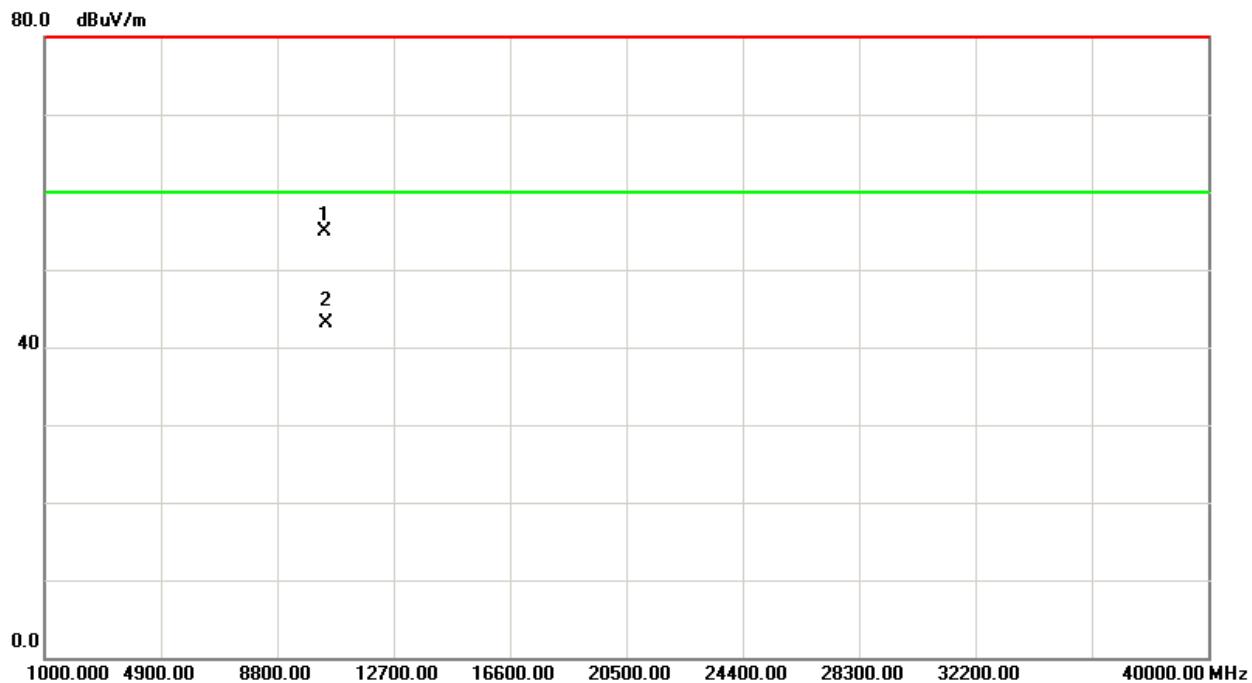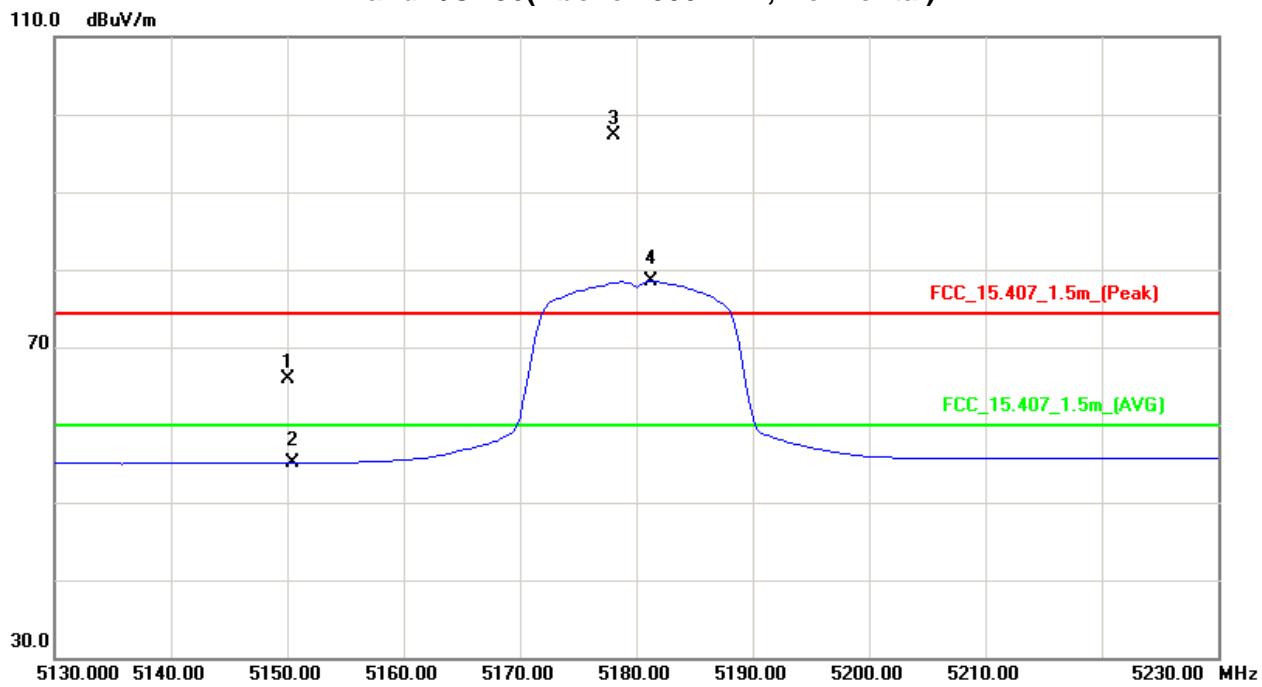



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX A Mode 5200MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5199.25	V	63.96	43.65	40.22	104.18	83.87	-0.59	-20.90					X/F
10399.96	V	40.15	28.78	13.78	53.93	42.56	-50.84	-62.21	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH40(Above 1000 MHz, Vertical)

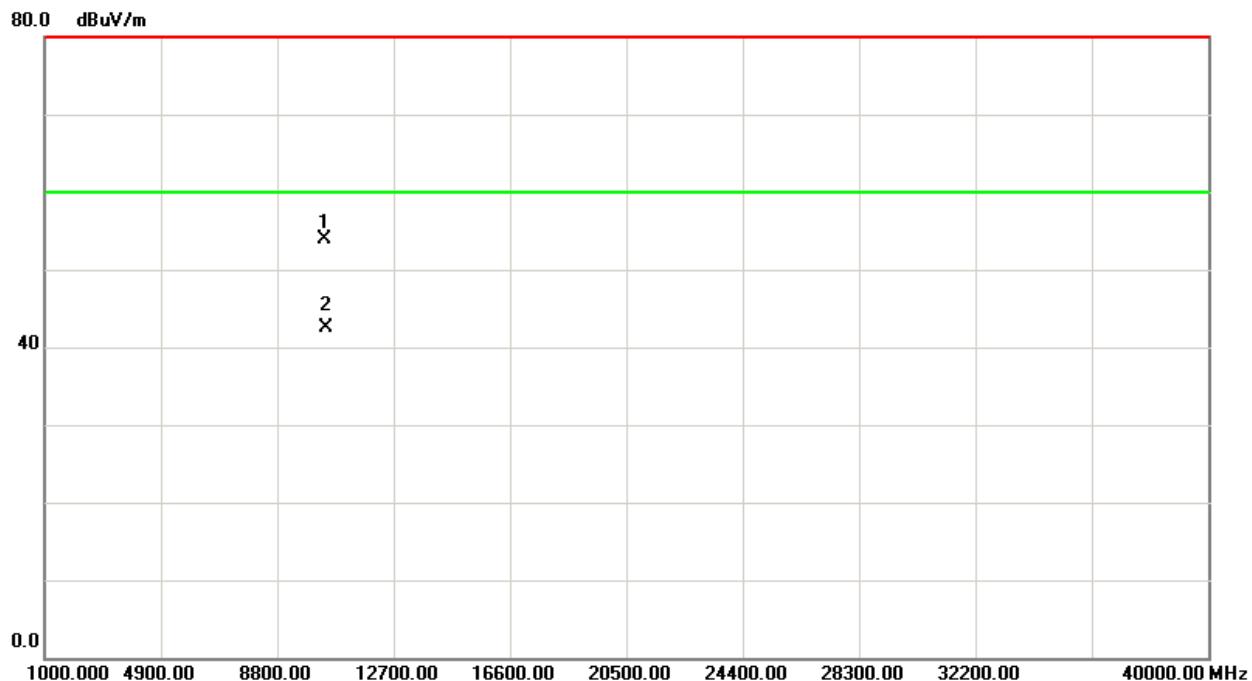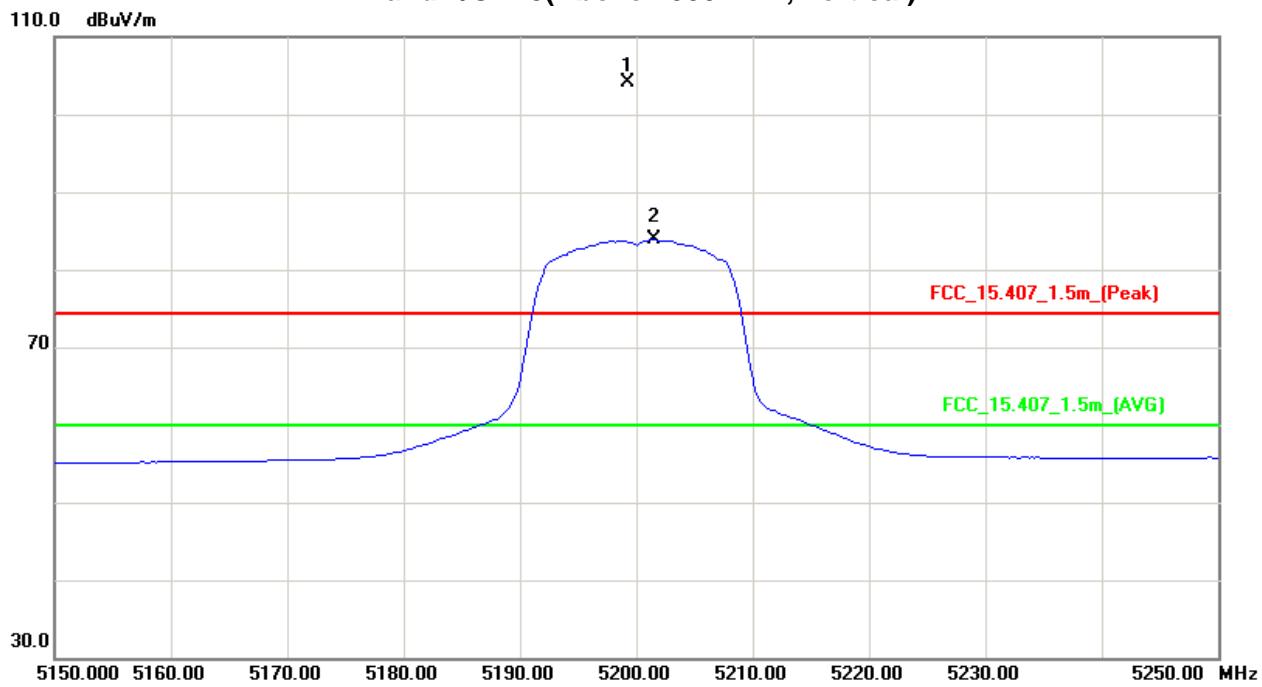



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX A Mode 5200MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5198.25	H	56.41	37.80	40.22	96.63	78.02	-8.14	-26.75					X/F
10400.00	H	41.08	29.35	13.78	54.86	43.13	-49.91	-61.64	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH40(Above 1000 MHz, Horizontal)

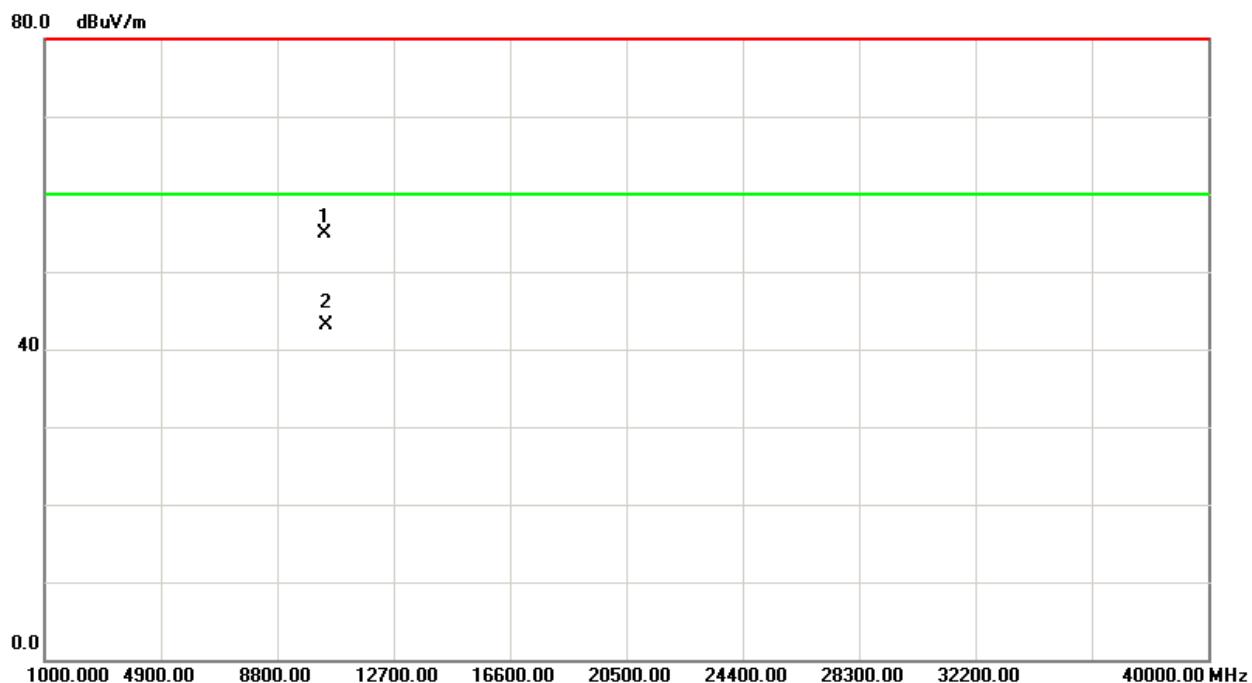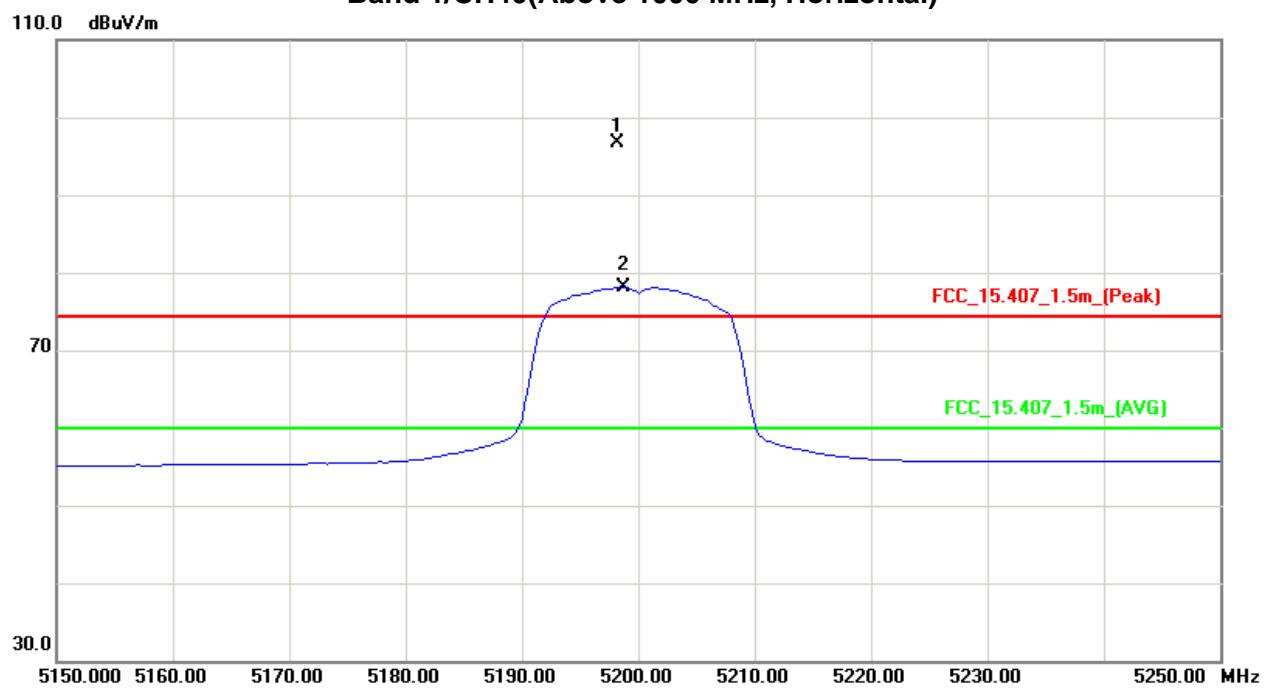



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX A Mode 5240MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5239.00	V	63.34	43.27	40.32	103.66	83.59	-1.11	-21.18					X/F
10480.06	V	40.08	28.72	13.87	53.95	42.59	-50.82	-62.18	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH48(Above 1000 MHz, Vertical)

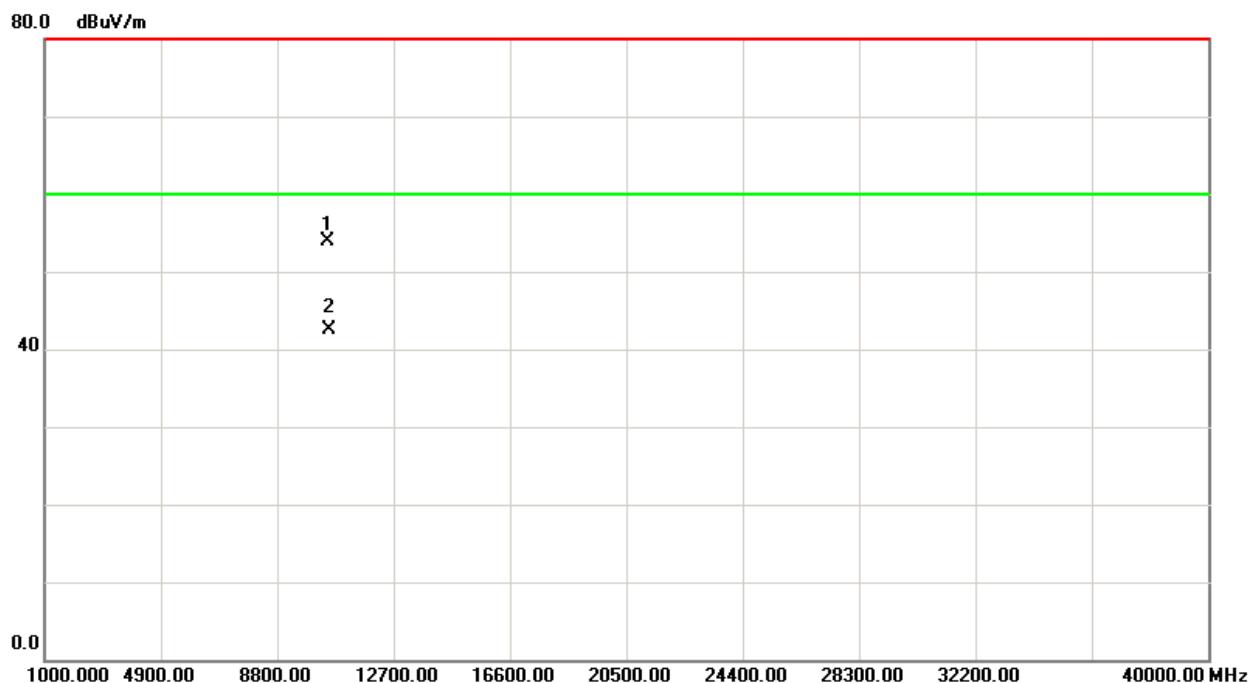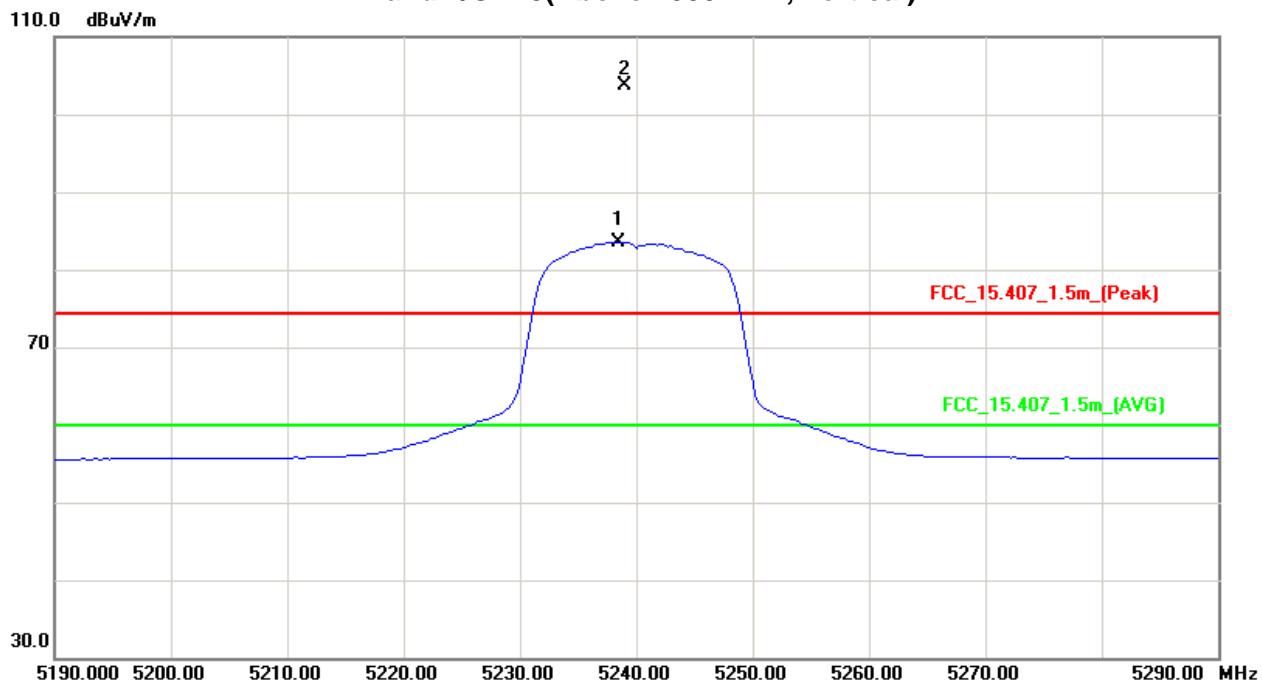



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX A Mode 5240MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5240.75	H	54.16	36.45	40.32	94.48	76.77	-10.29	-28.00					X/F
10480.04	H	41.17	29.09	13.87	55.04	42.96	-49.73	-61.81	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH48(Above 1000 MHz, Horizontal)

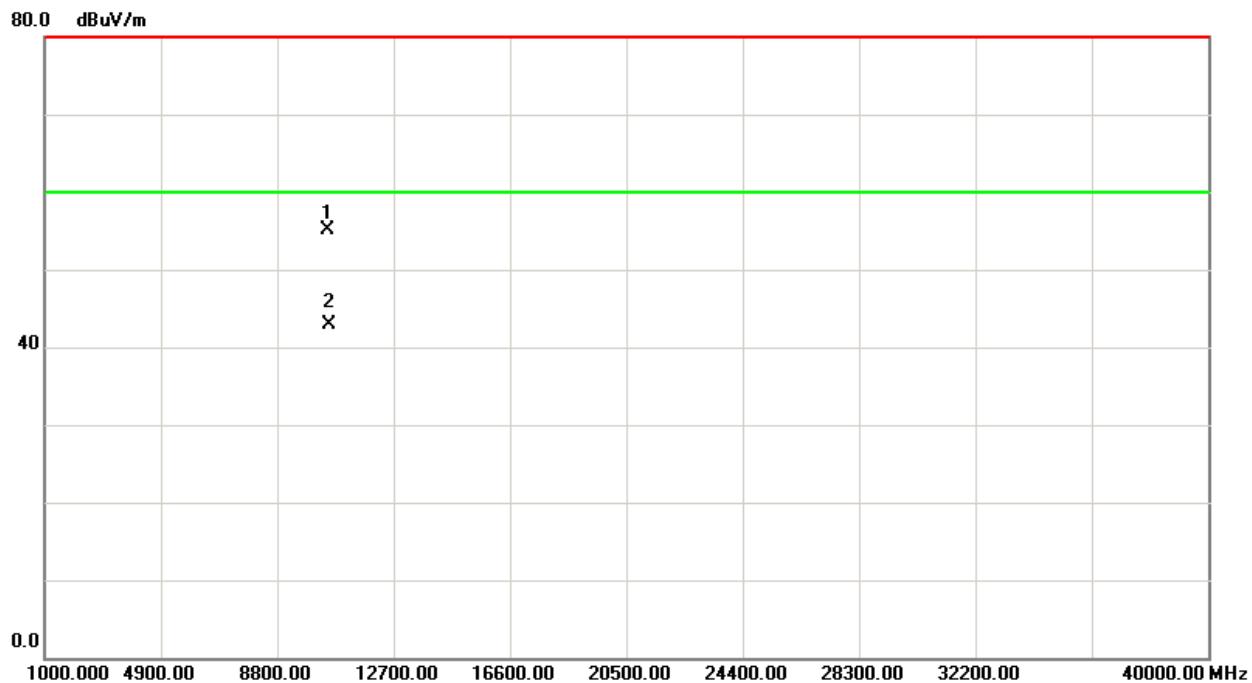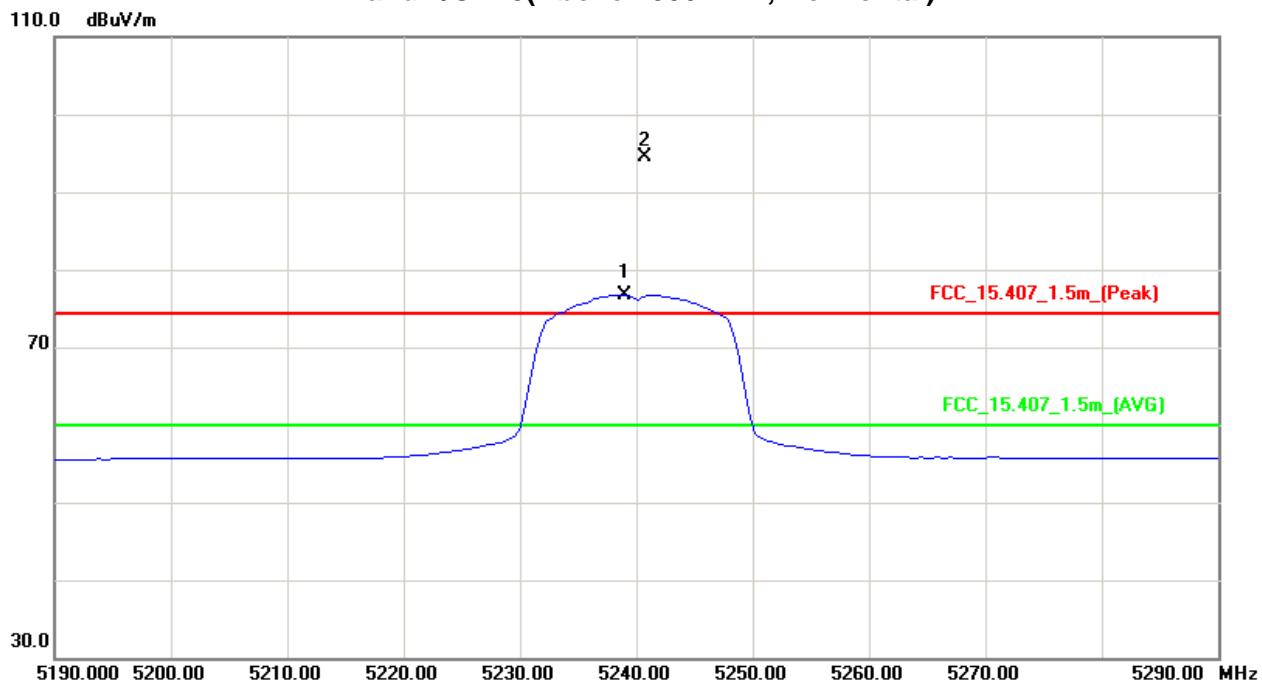



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N20 Mode 5180MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	26.31	15.01	40.09	66.40	55.10	-38.37	-49.67	80.00	60.00	-15.30	-35.30	X/E
5182.50	V	62.15	41.00	40.18	102.33	81.18	-2.44	-23.59					X/F
10360.05	V	40.15	28.02	13.73	53.88	41.75	-50.89	-63.02	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH36(Above 1000 MHz, Vertical)

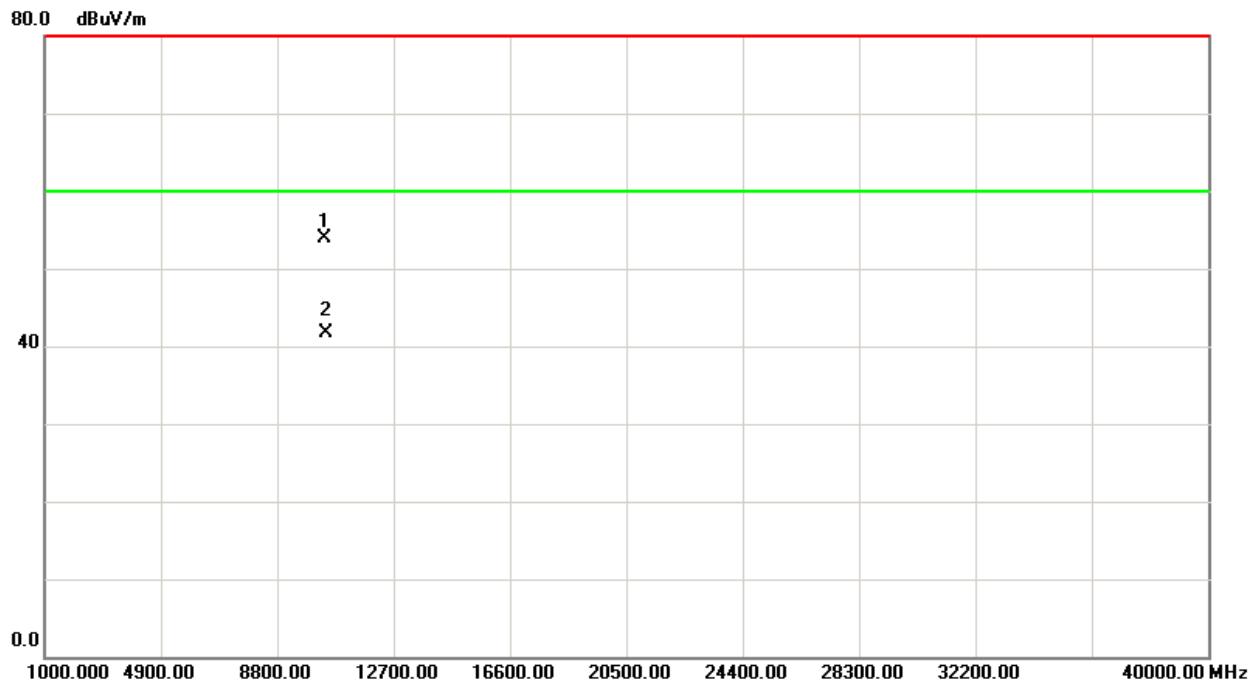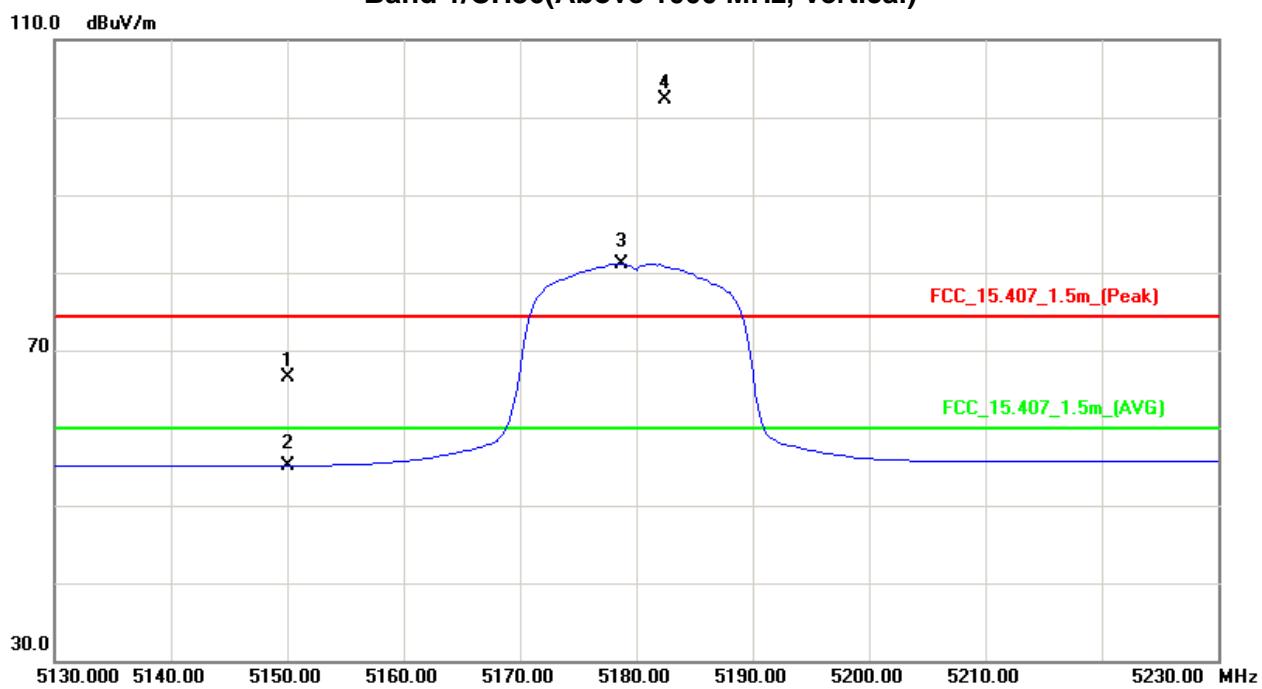



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N20 Mode 5180MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	26.07	15.00	40.09	66.16	55.09	-38.61	-49.68	80.00	60.00	-15.30	-95.30	X/E
5179.00	H	55.11	36.75	40.16	95.27	76.91	-9.50	-27.86					X/F
10360.12	H	40.89	28.54	13.73	54.62	42.27	-50.15	-62.50	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH36(Above 1000 MHz, Horizontal)

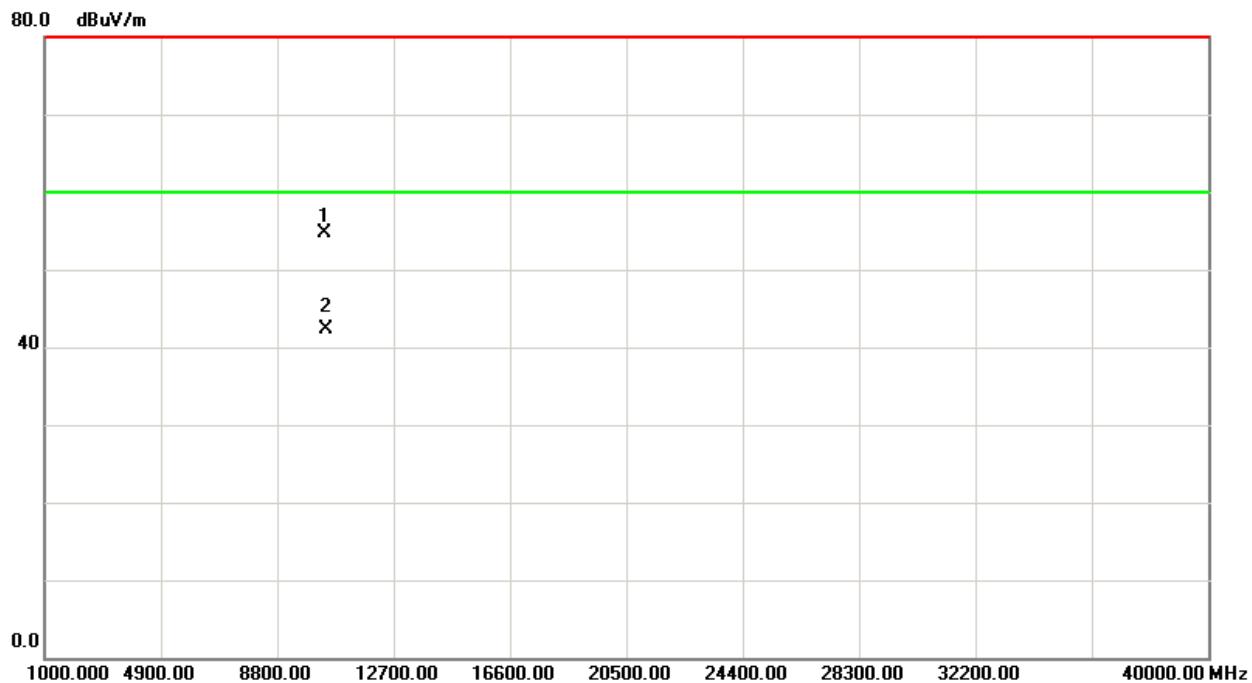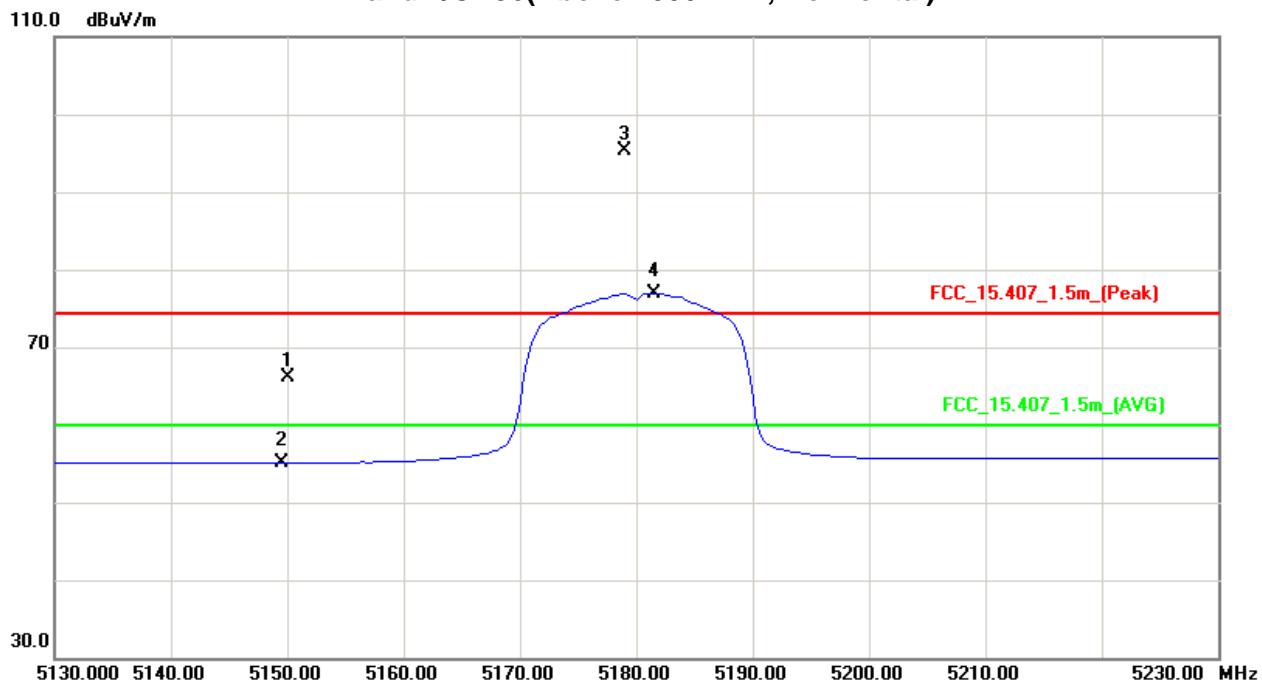



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N20 Mode 5200MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5201.50	V	61.04	41.03	40.22	101.26	81.25	-3.51	-23.52					X/F
10400.16	V	40.18	28.32	13.78	53.96	42.10	-50.81	-62.67	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH40(Above 1000 MHz, Vertical)

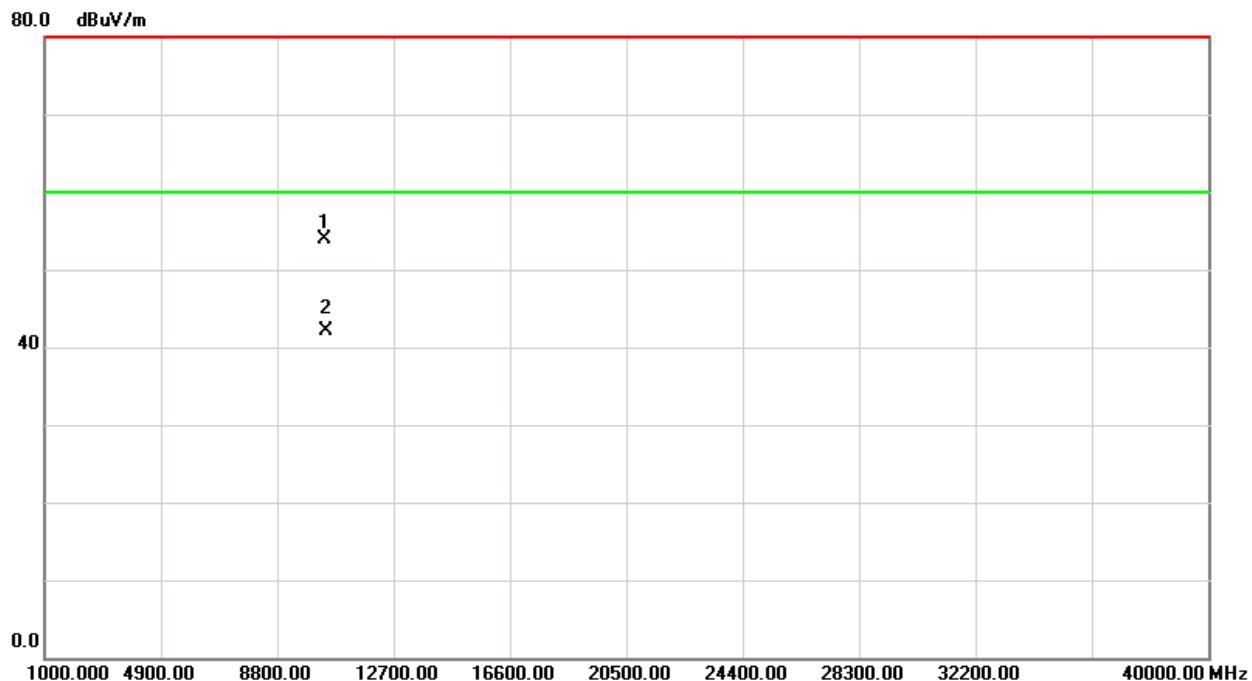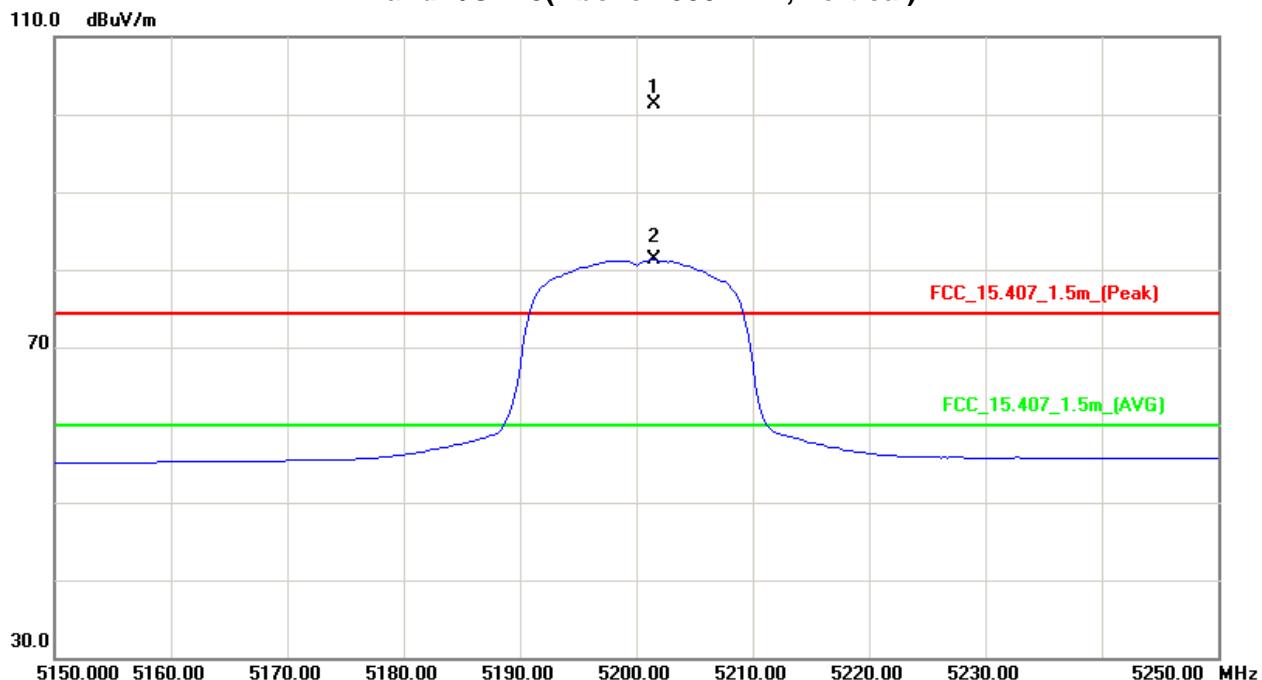



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N20 Mode 5200MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5201.75	H	55.56	36.97	40.22	95.78	77.19	-8.99	-27.58					X/F
10400.25	H	40.75	28.14	13.78	54.53	41.92	-50.24	-62.85	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH40(Above 1000 MHz, Horizontal)

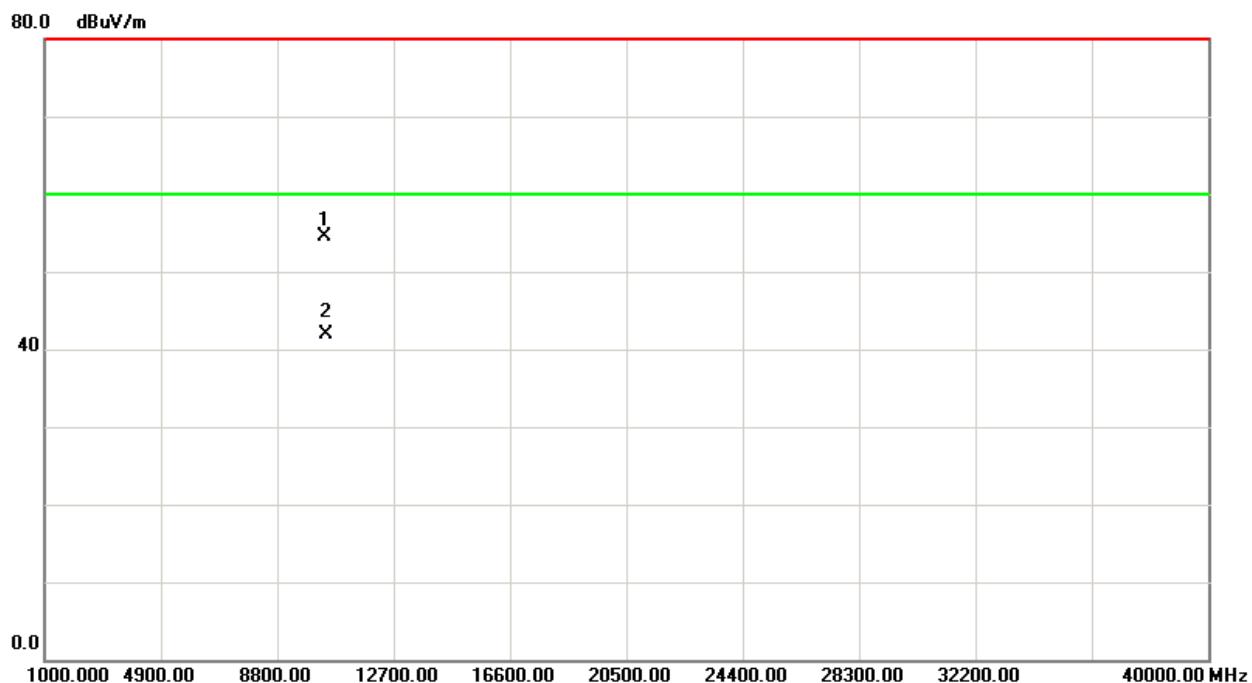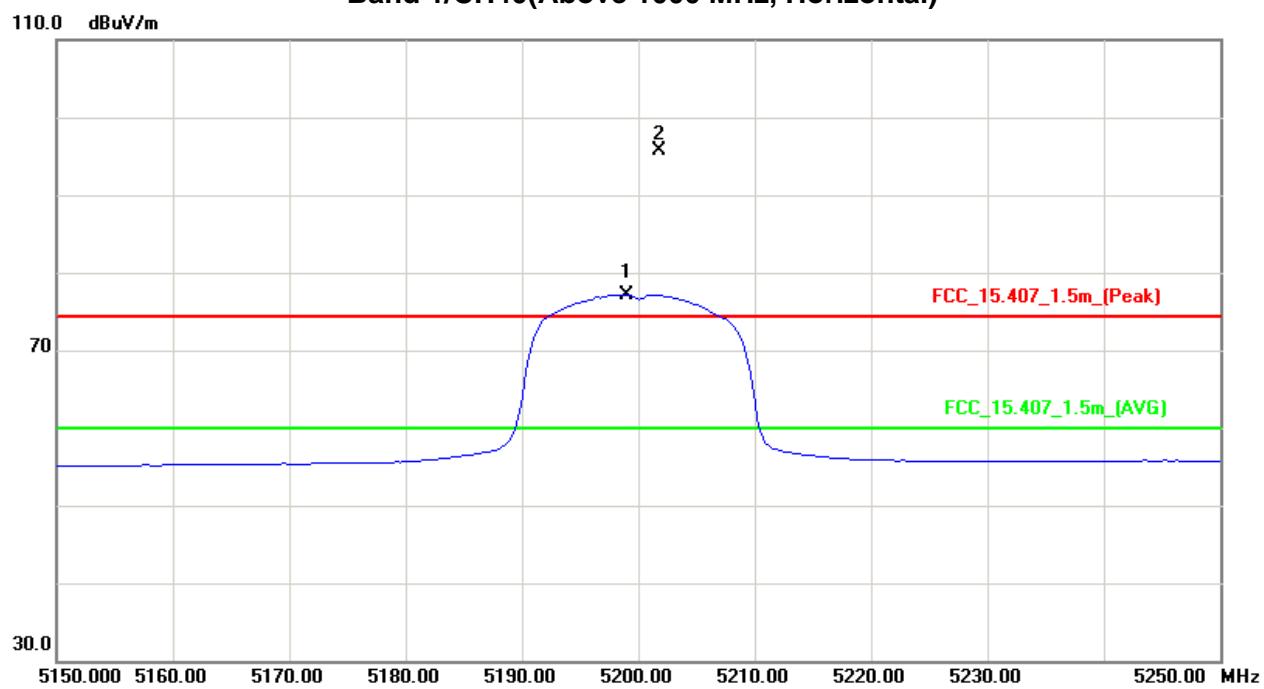



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N20 Mode 5240MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5238.50	V	62.73	42.05	40.32	103.05	82.37	-1.72	-22.40					X/F
10480.16	V	40.03	28.12	13.87	53.90	41.99	-50.87	-62.78	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH48(Above 1000 MHz, Vertical)

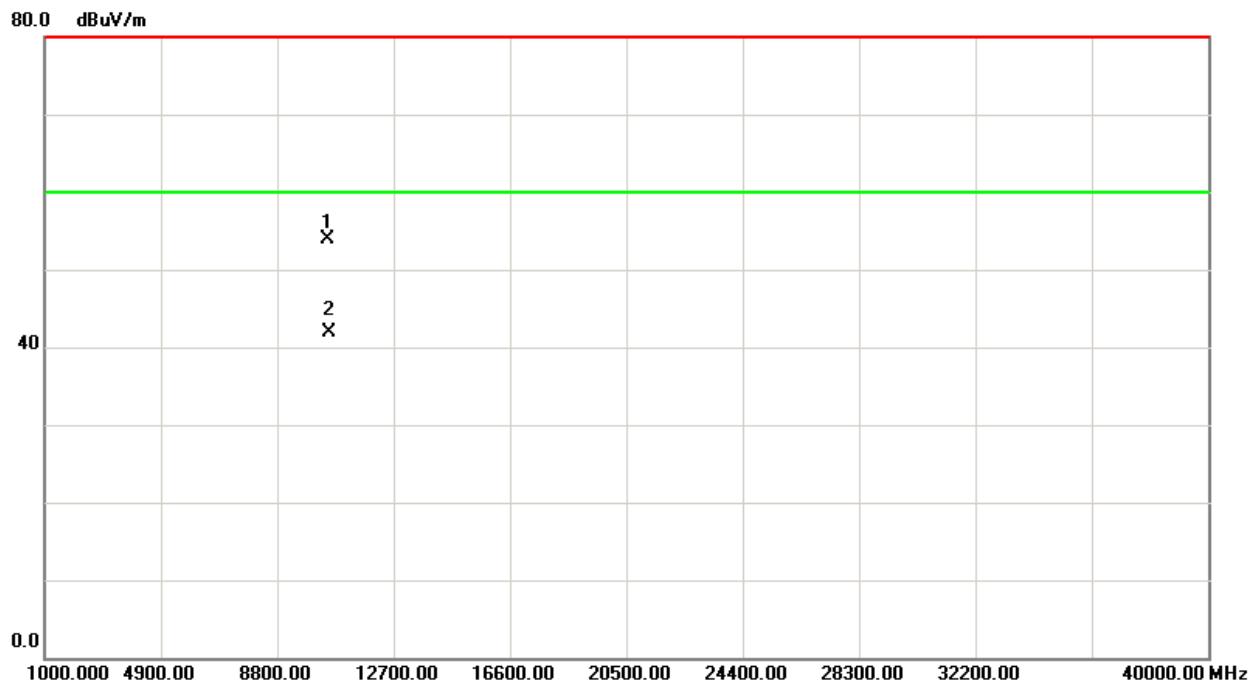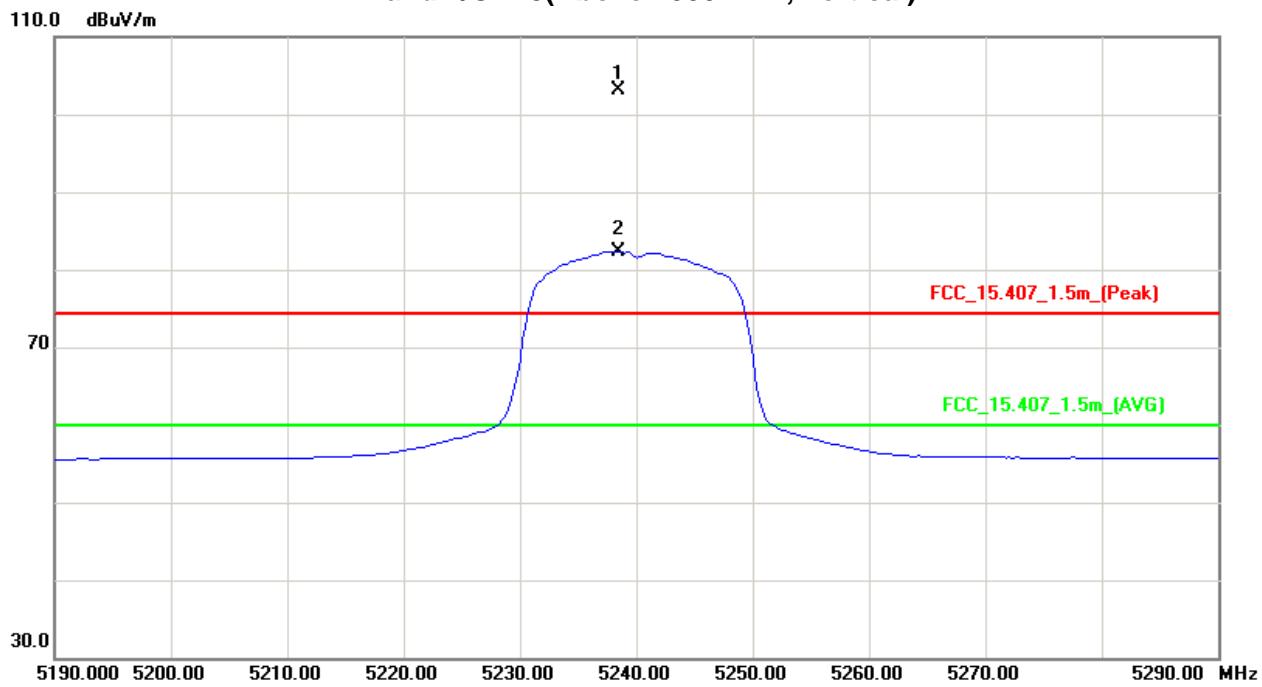



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N20 Mode 5240MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5238.25	H	52.80	35.14	40.32	93.12	75.46	-11.65	-29.31					X/F
10480.20	H	40.35	28.42	13.87	54.22	42.29	-50.55	-62.48	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH48(Above 1000 MHz, Horizontal)

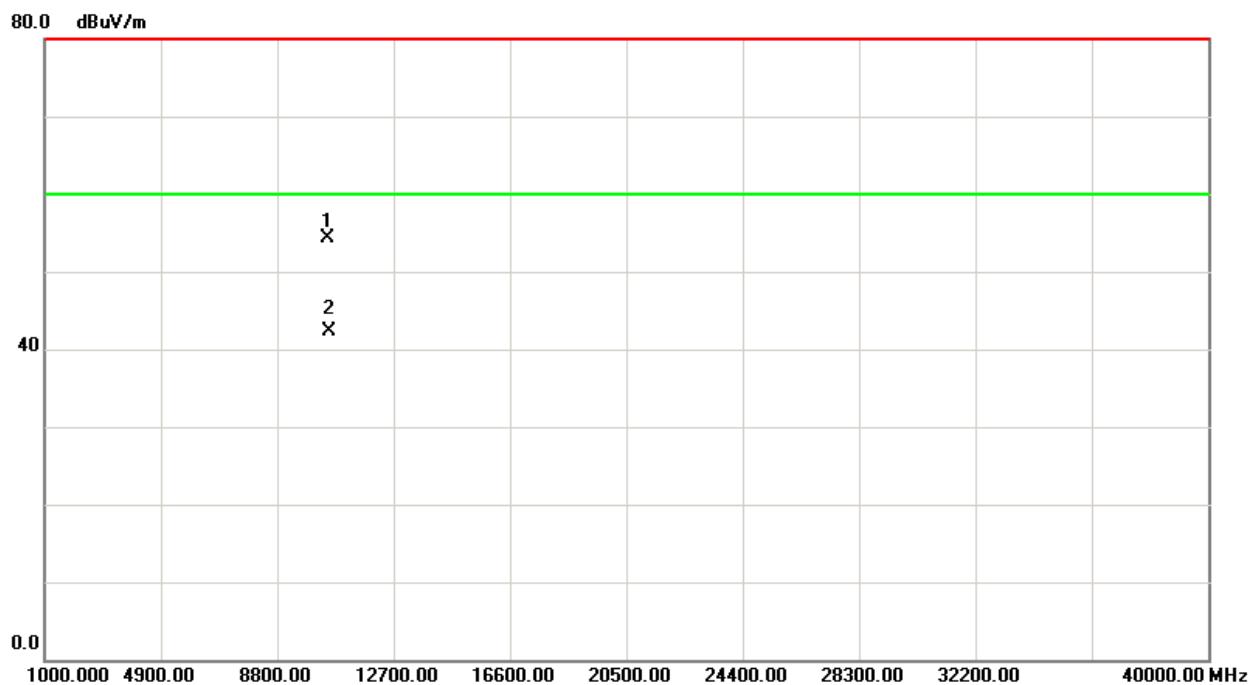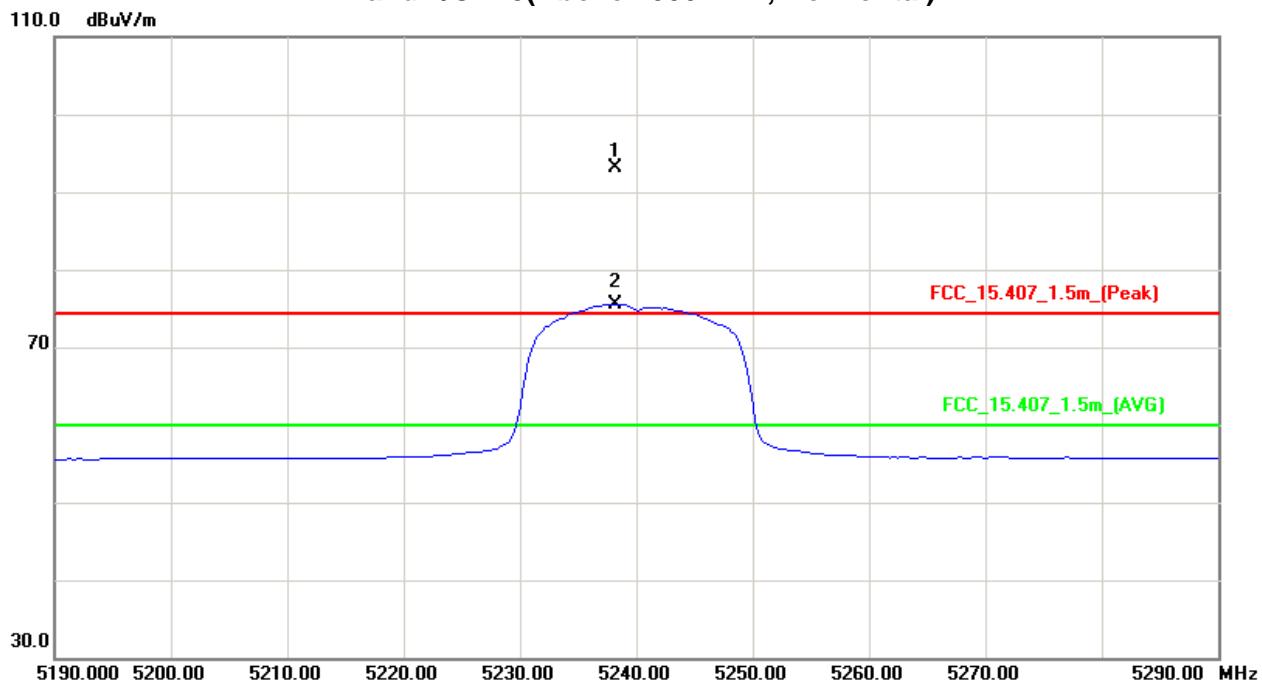



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N40 Mode 5190MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	24.98	15.06	40.09	65.07	55.15	-39.70	-49.62	80.00	60.00	-15.30	-35.30	X/E
5192.00	V	59.81	34.23	40.20	100.01	74.43	-4.76	-30.34					X/F
10380.24	V	39.87	27.86	13.76	53.63	41.62	-51.14	-63.15	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH38(Above 1000 MHz, Vertical)

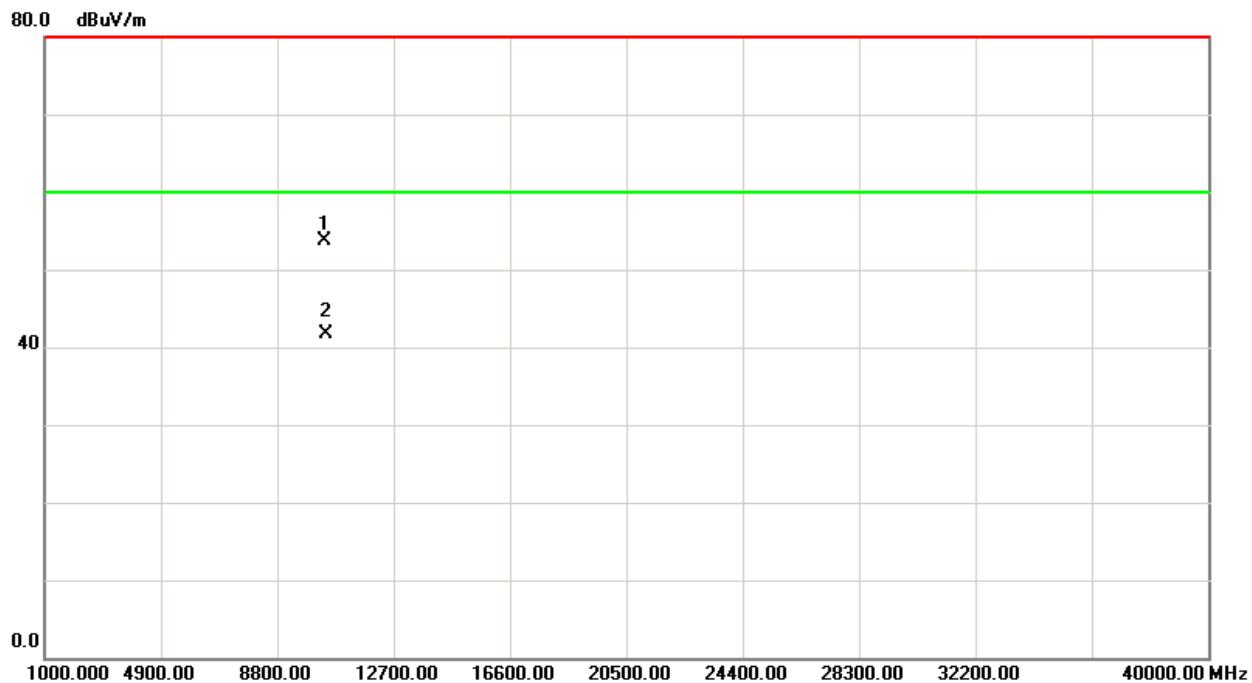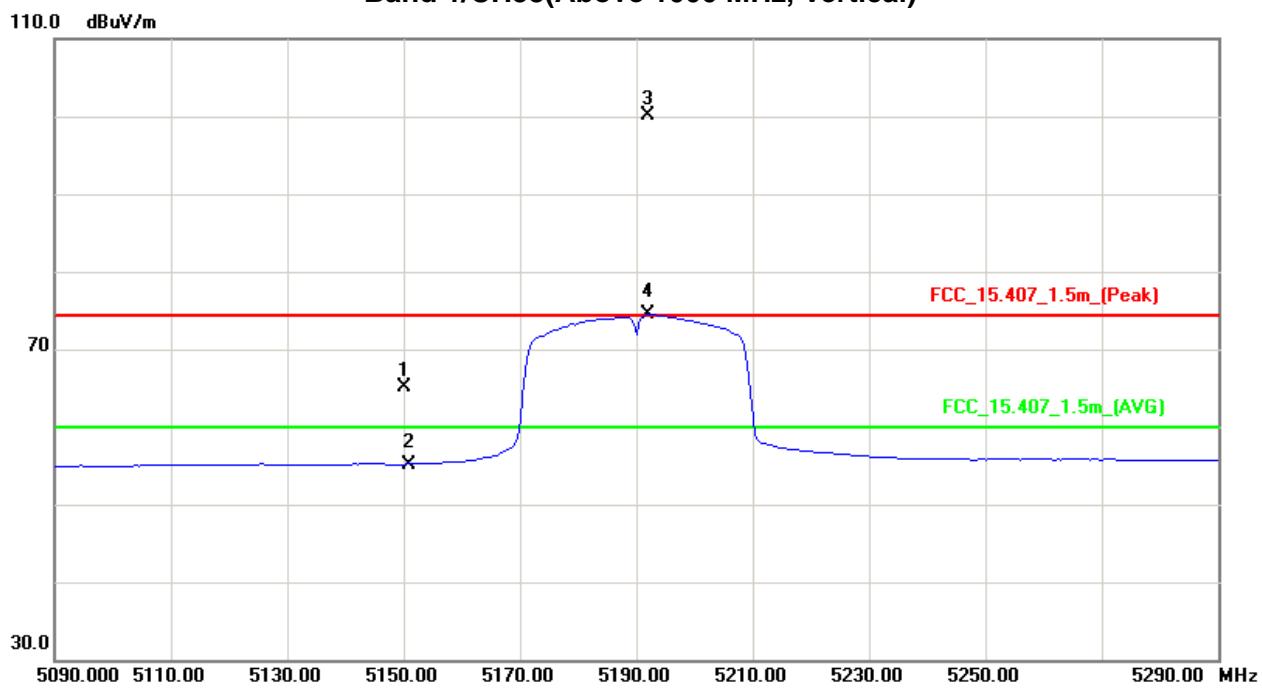



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N40 Mode 5190MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	25.55	15.01	40.09	65.64	55.10	-39.13	-49.67	80.00	60.00	-15.30	-35.30	X/E
5194.00	H	53.40	30.31	40.21	93.61	70.52	-11.16	-34.25					X/F
10380.18	H	40.12	28.16	13.76	53.88	41.92	-50.89	-62.85	74.30		-21.00		X/H


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH38(Above 1000 MHz, Horizontal)

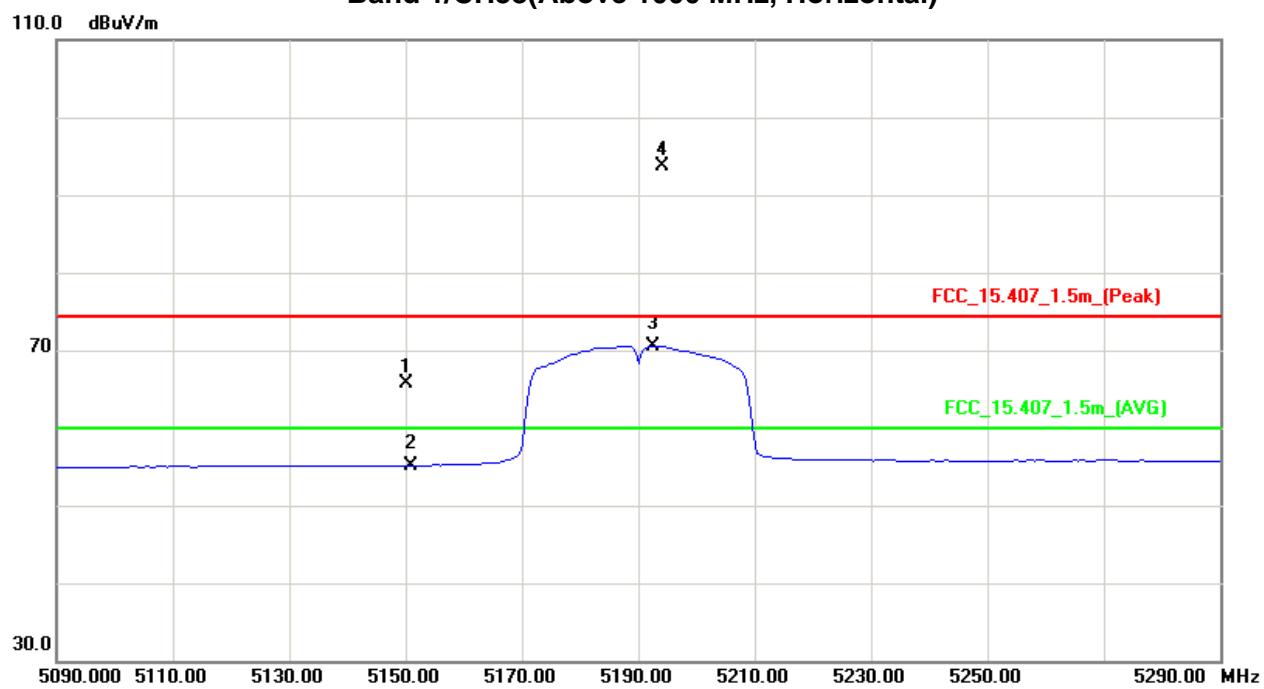



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N40 Mode 5230MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5225.00	V	58.91	33.63	40.29	99.20	73.92	-5.57	-30.85					X/F
10460.15	V	39.84	28.00	13.85	53.69	41.85	-51.08	-62.92	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH46(Above 1000 MHz, Vertical)

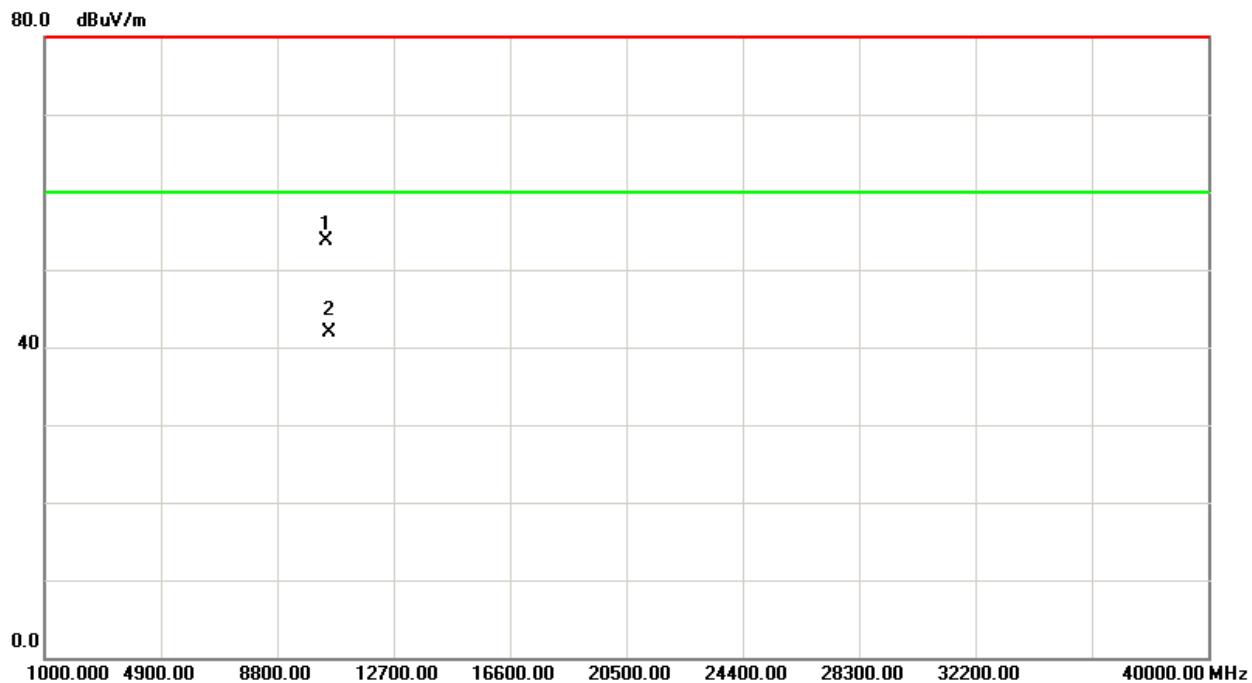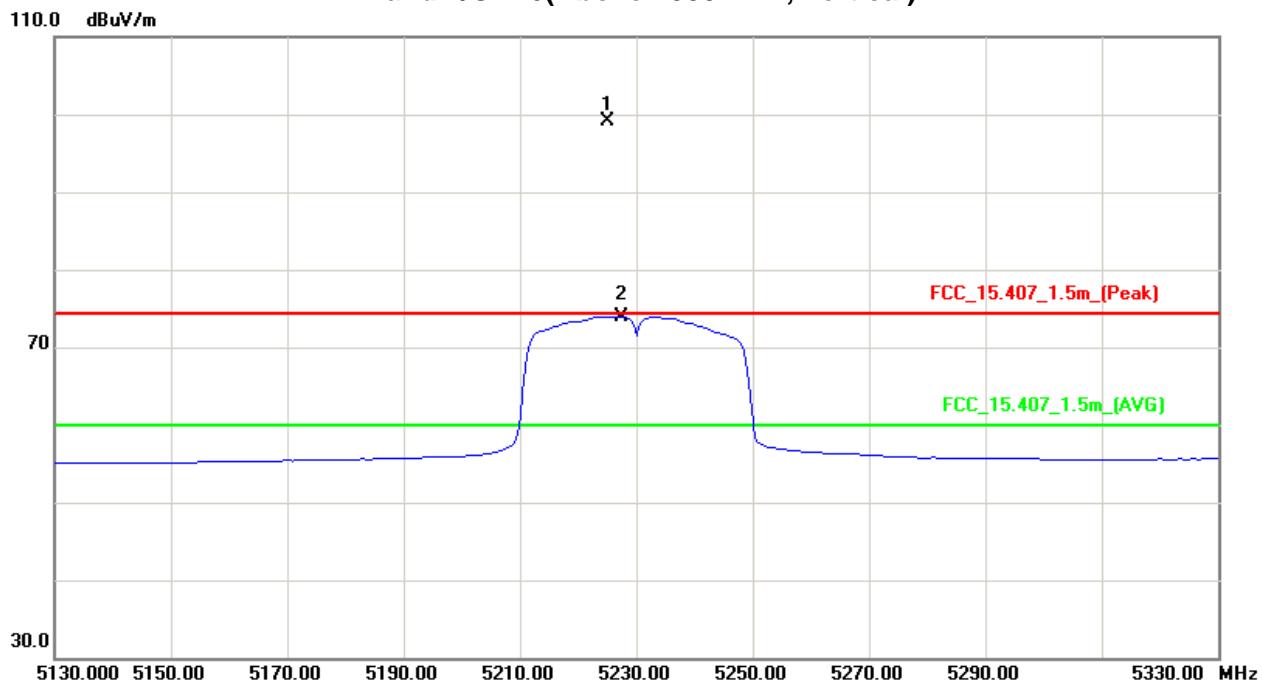



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/ TX N40 Mode 5230MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5227.50	H	50.17	28.93	40.29	90.46	69.22	-14.31	-35.55					X/F
10460.20	H	40.07	28.25	13.85	53.92	42.10	-50.85	-62.67	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 1/CH46(Above 1000 MHz, Horizontal)

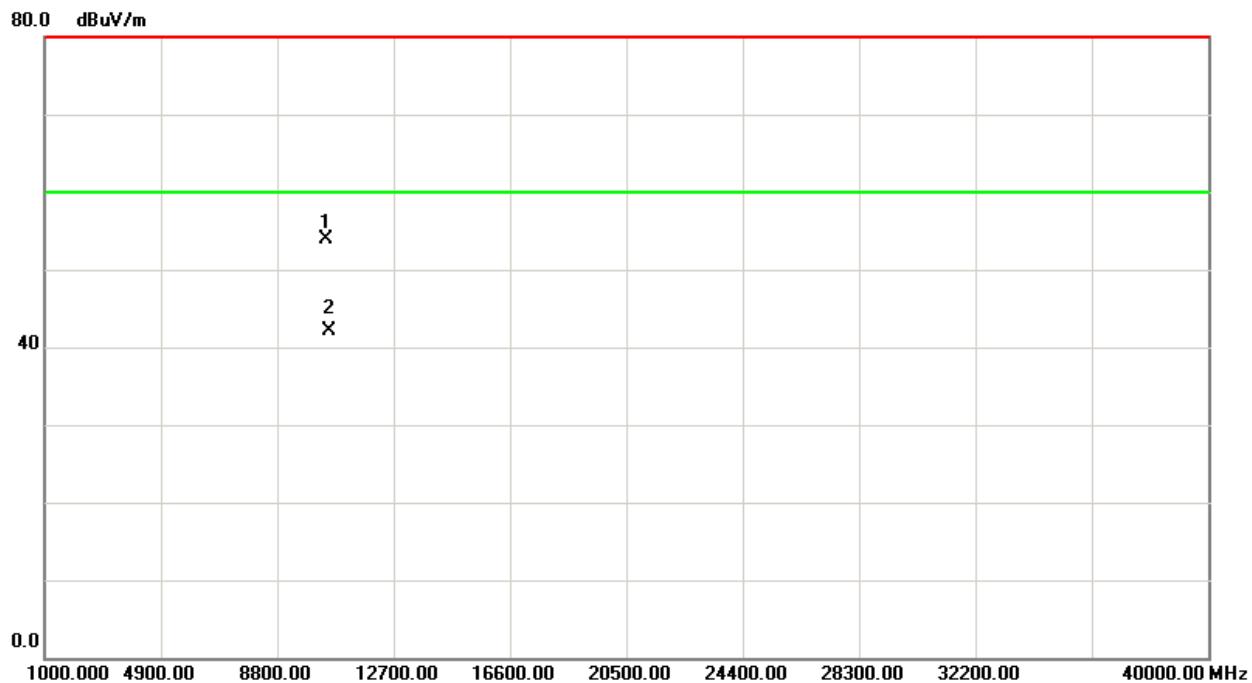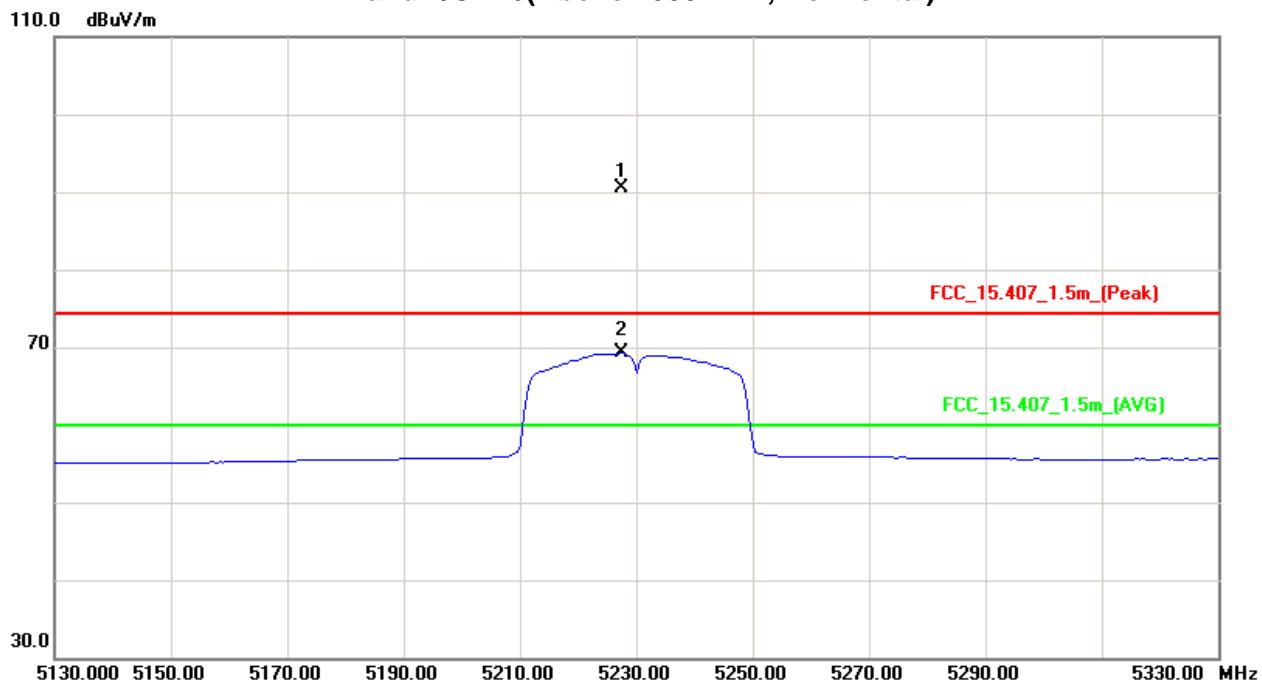



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX A Mode 5260MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5258.25	V	64.04	43.31	40.37	104.41	83.68	-0.36	-21.09					X/F
10519.88	V	40.10	28.56	13.90	54.00	42.46	-50.77	-62.31	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH52(Above 1000 MHz, Vertical)

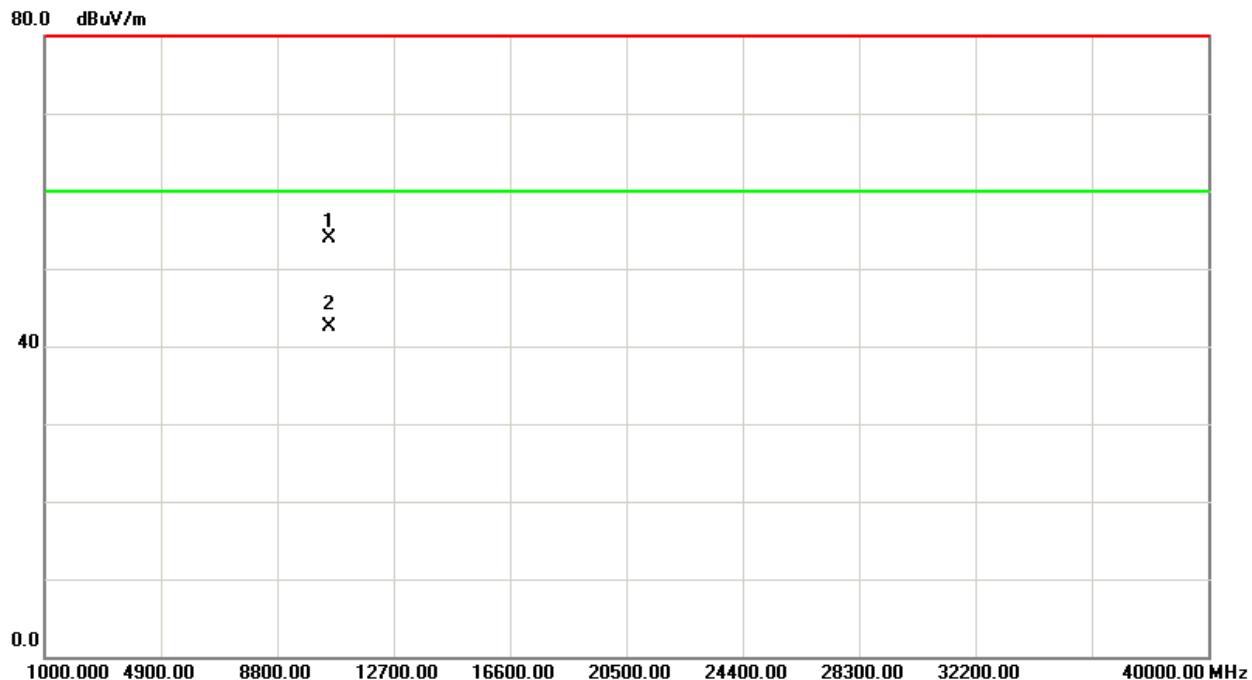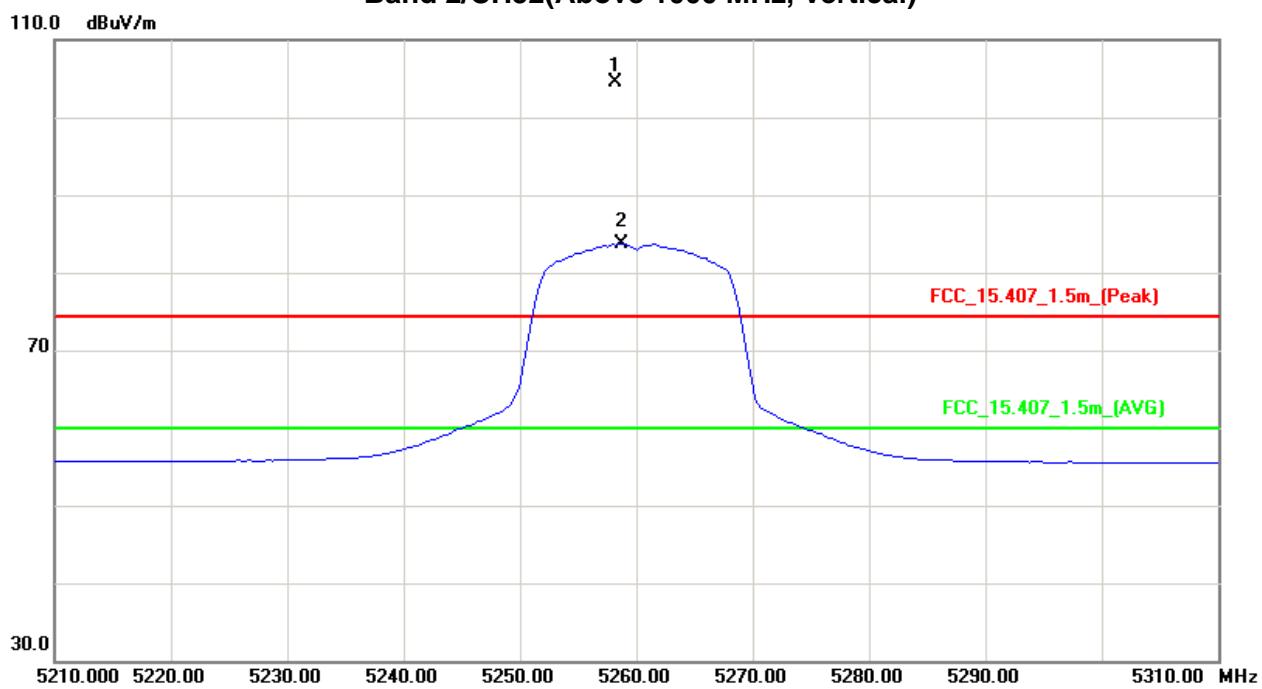



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX A Mode 5260MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5261.50	H	55.59	37.08	40.38	95.97	77.46	-8.80	-27.31					X/F
10520.05	H	41.06	29.11	13.90	54.96	43.01	-49.81	-61.76	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH52 (Above 1000 MHz, Horizontal)

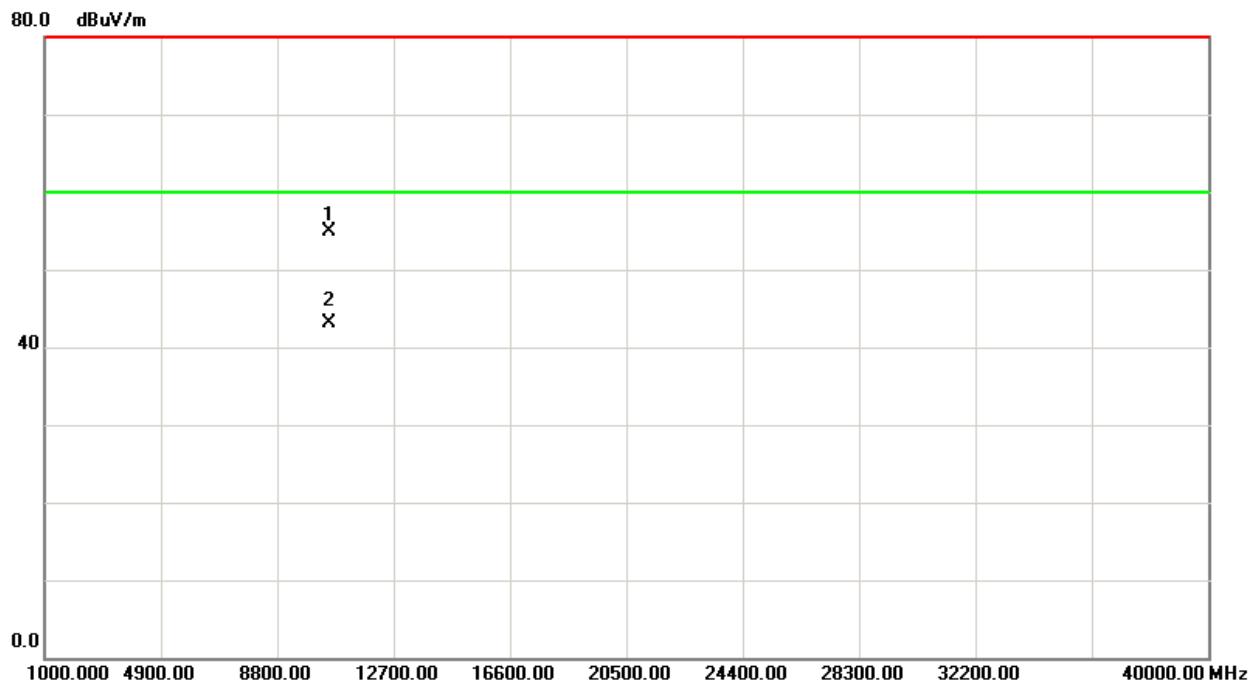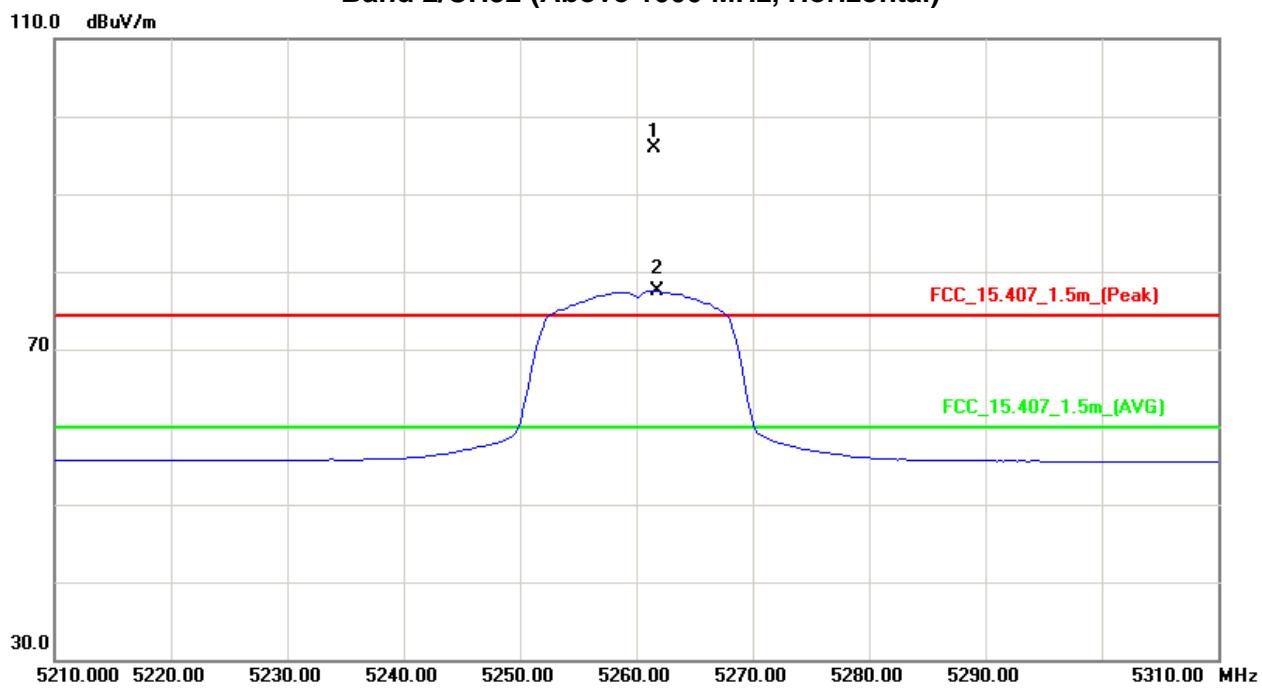



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX A Mode 5280MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5281.50	V	63.50	43.21	40.44	103.94	83.65	-0.83	-21.12					X/F
10560.03	V	40.05	28.49	13.90	53.95	42.39	-50.82	-62.38	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH56(Above 1000 MHz, Vertical)

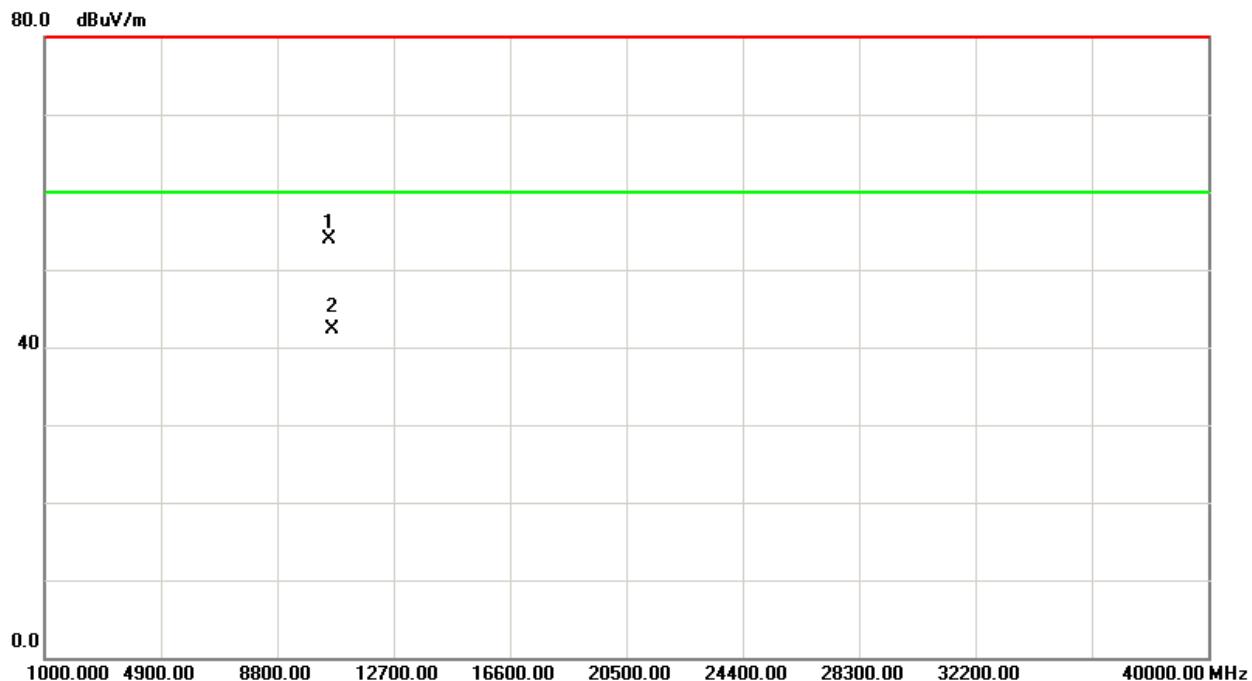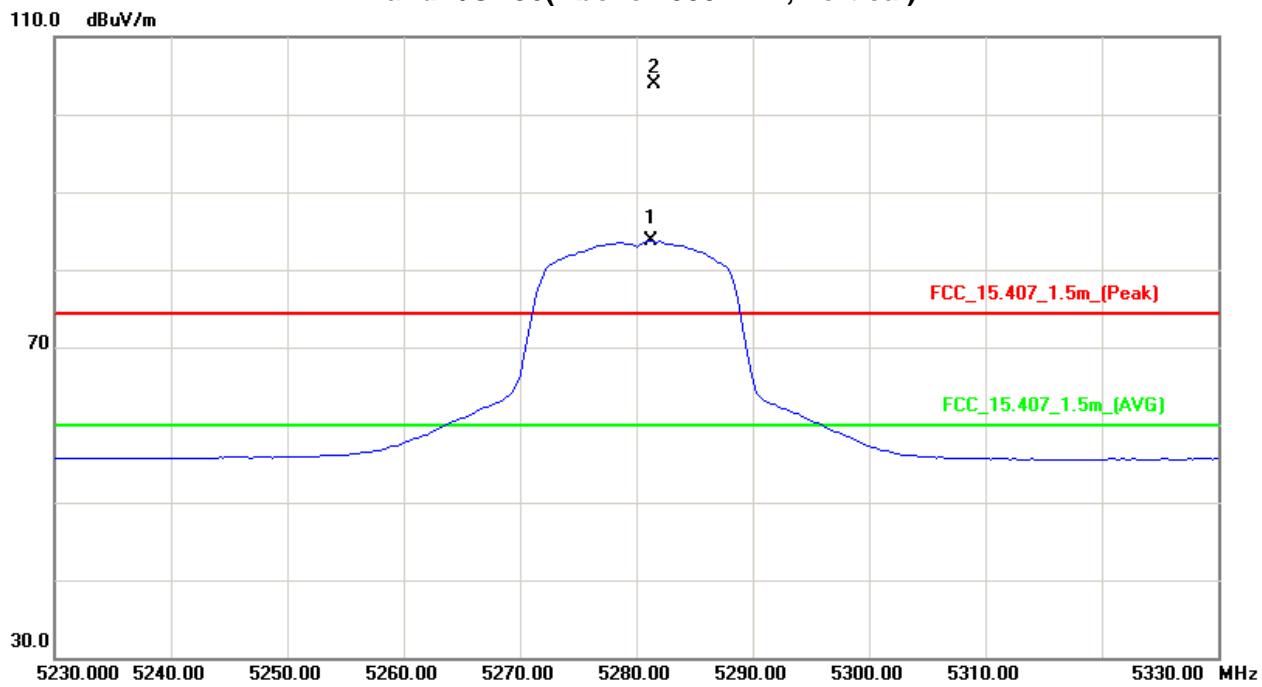



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX A Mode 5280MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5282.25	H	55.28	37.41	40.44	95.72	77.85	-9.05	-26.92					X/F
10560.24	H	41.17	29.02	13.90	55.07	42.92	-49.70	-61.85	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH56(Above 1000 MHz, Horizontal)

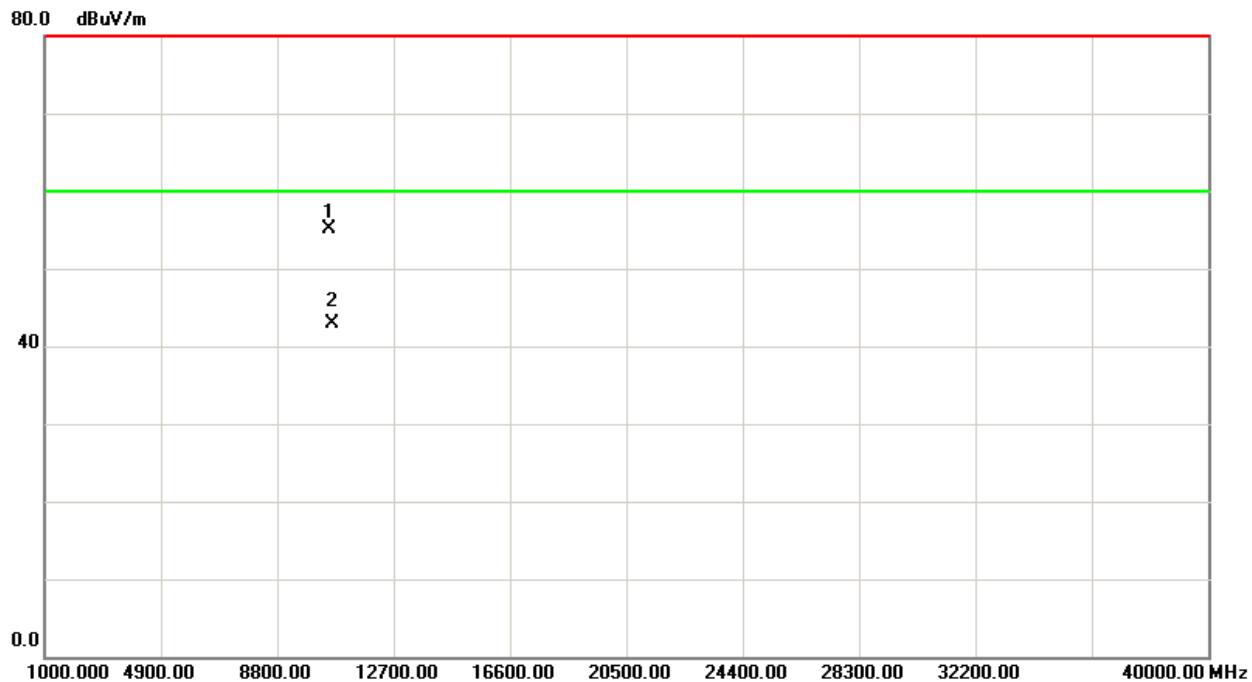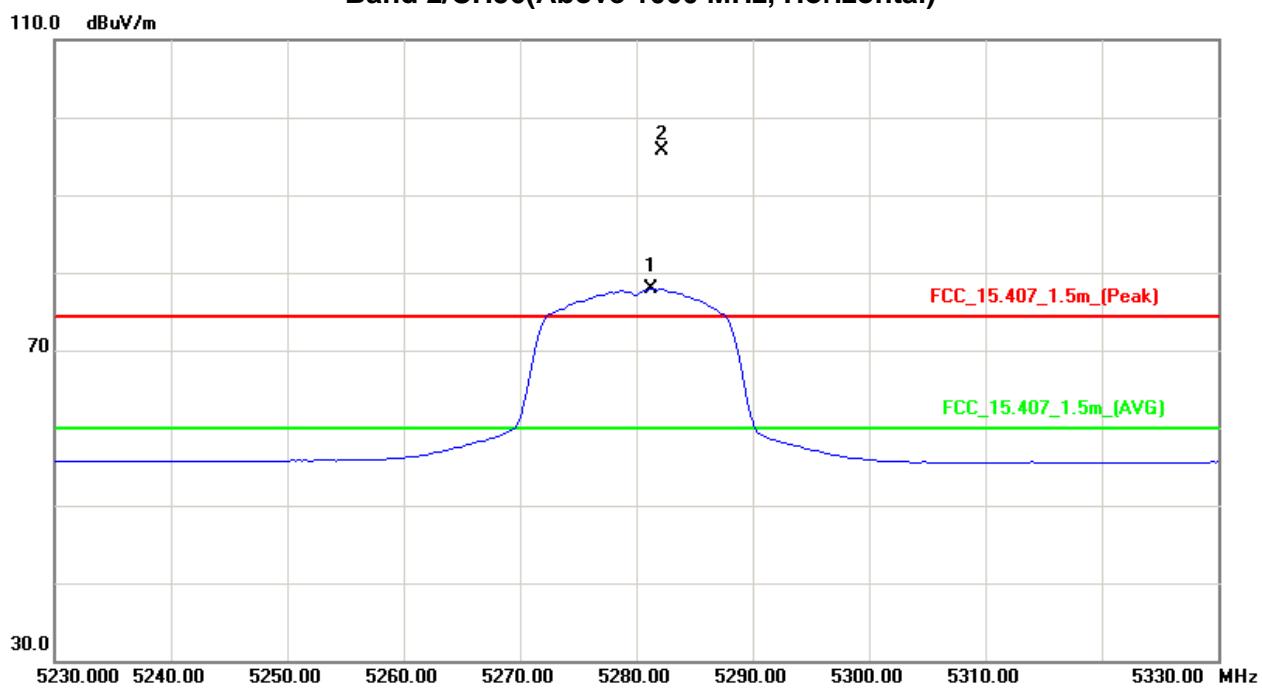



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX A Mode 5320MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5318.25	V	63.88	42.99	40.52	104.40	83.51	-0.37	-21.26					X/F
5350.00	V	26.25	15.12	40.61	66.86	55.73	-37.91	-49.04	80.00	60.00	-15.30	-35.30	X/E
10640.12	V	40.09	28.39	13.90	53.99	42.29	-50.78	-62.48	80.00	60.00	-15.30	-35.30	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH64(Above 1000 MHz, Vertical)

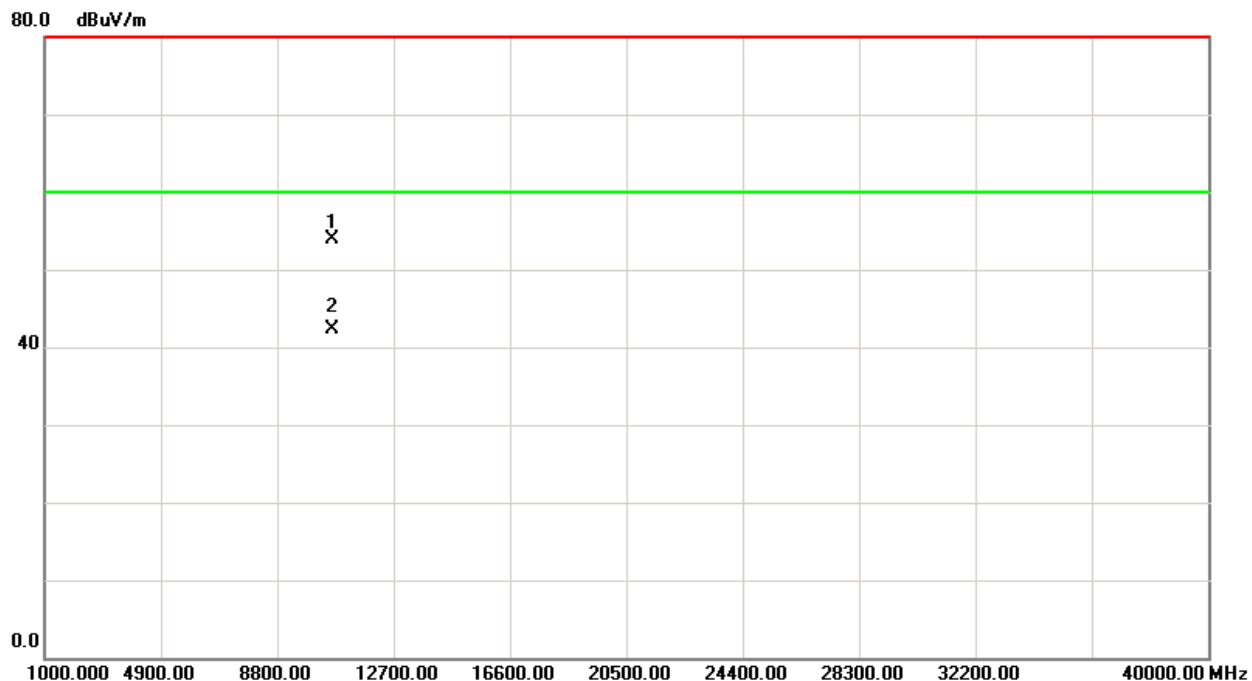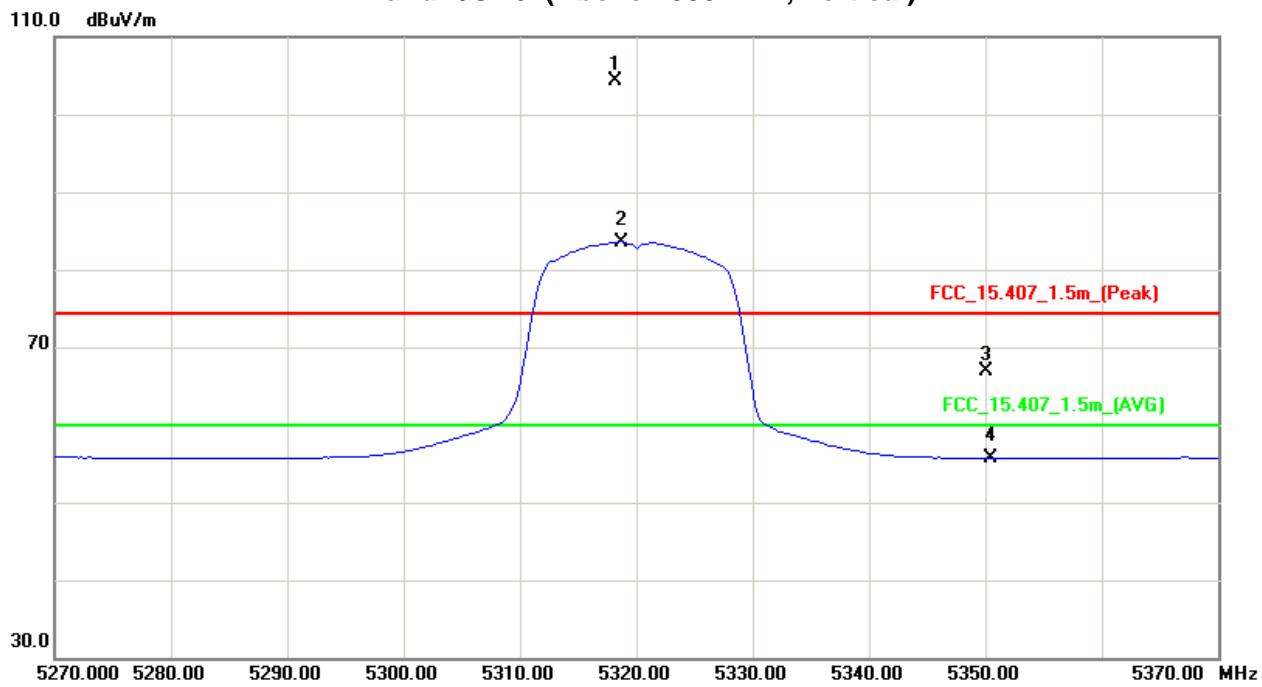



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX A Mode 5320MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5318.25	H	55.74	37.10	40.52	96.26	77.62	-8.51	-27.15					X/F
5350.00	H	25.89	15.08	40.61	66.50	55.69	-38.27	-49.08	80.00	60.00	-15.30	-35.30	X/E
10640.08	H	40.86	28.98	13.90	54.76	42.88	-50.01	-61.89	80.00	60.00	-15.30	-35.30	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH64(Above 1000 MHz, Horizontal)

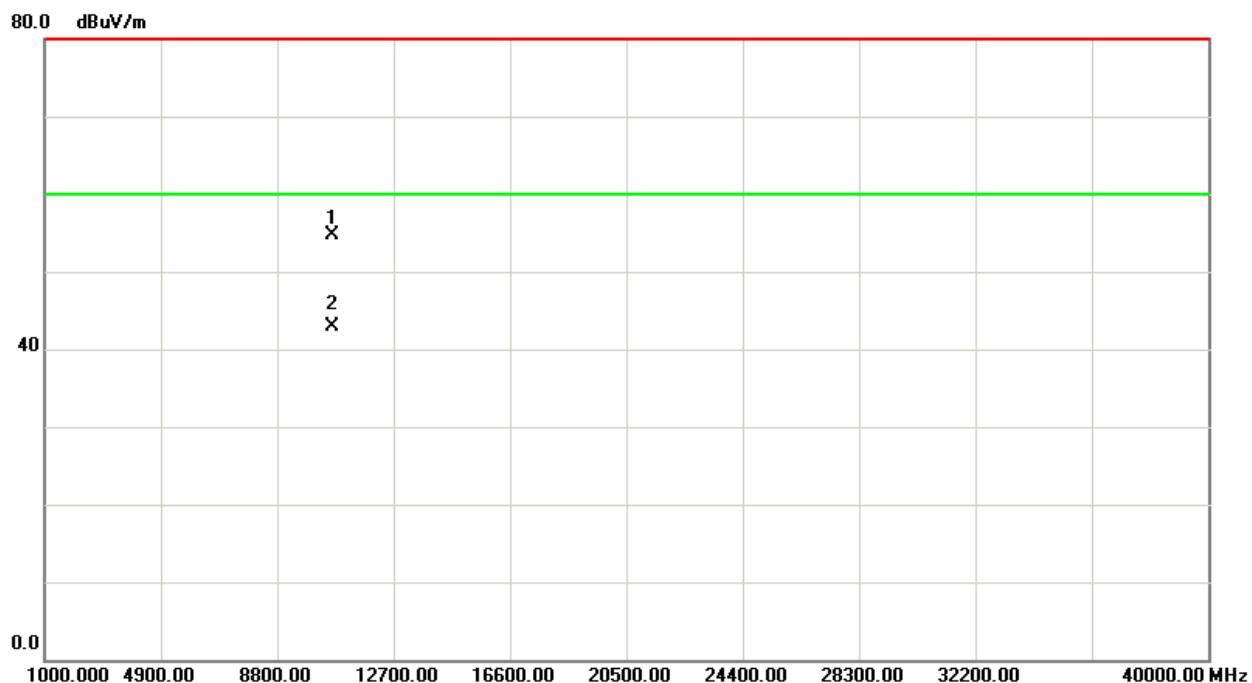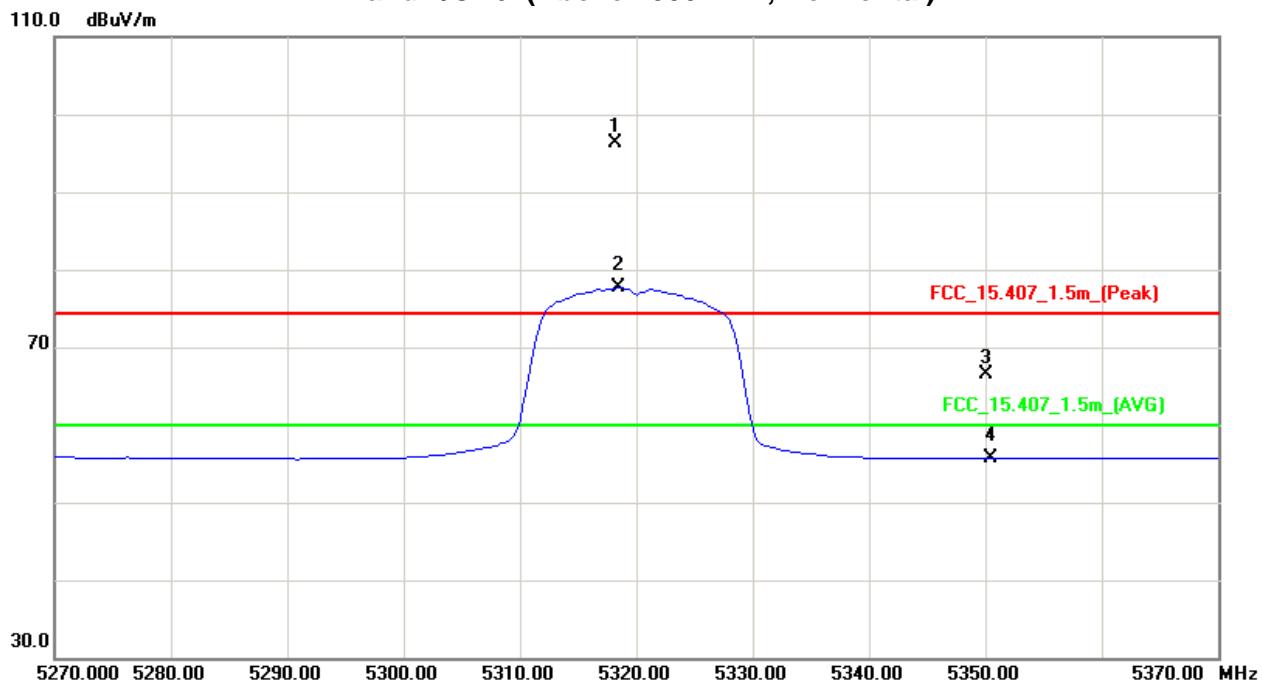



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N20 Mode 5260MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5258.50	V	62.43	41.86	40.38	102.81	82.24	-1.96	-22.53					X/F
10519.86	V	39.95	28.02	13.90	53.85	41.92	-50.92	-62.85	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH52(Above 1000 MHz, Vertical)

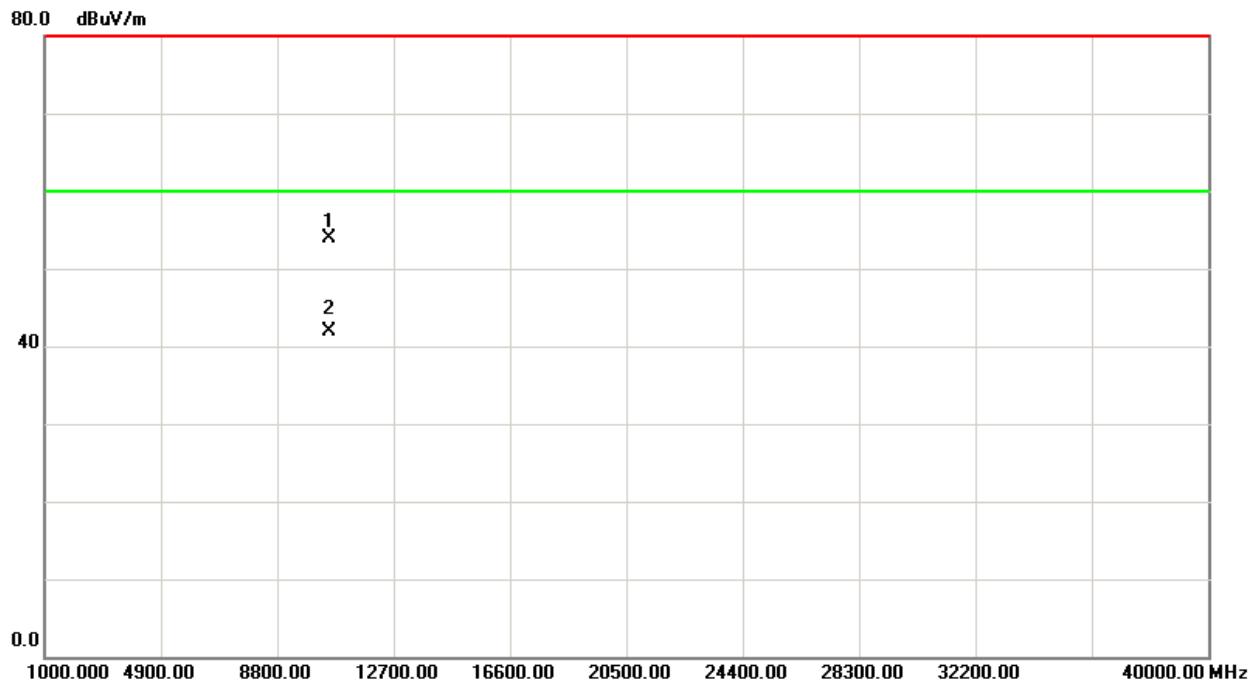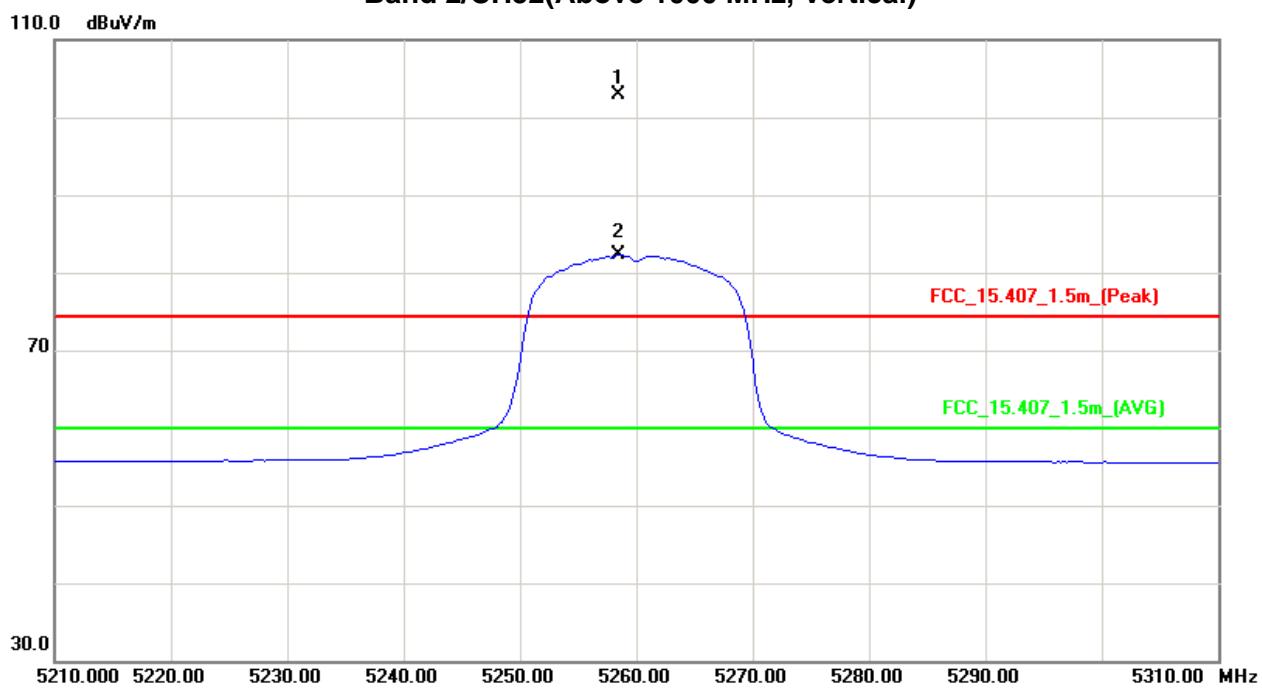



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N20 Mode 5260MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5264.50	H	53.88	36.06	40.39	94.27	76.45	-10.50	-28.32					X/F
10520.14	H	40.40	28.35	13.90	54.30	42.25	-50.47	-62.52	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH52(Above 1000 MHz, Horizontal)

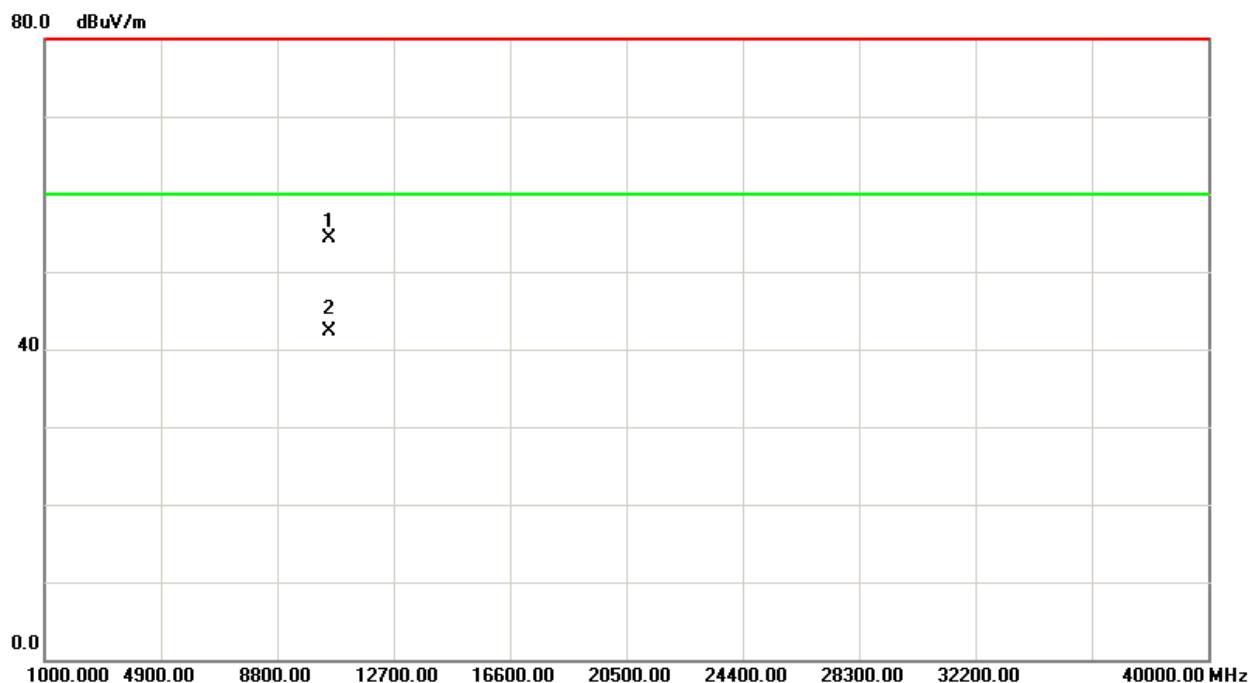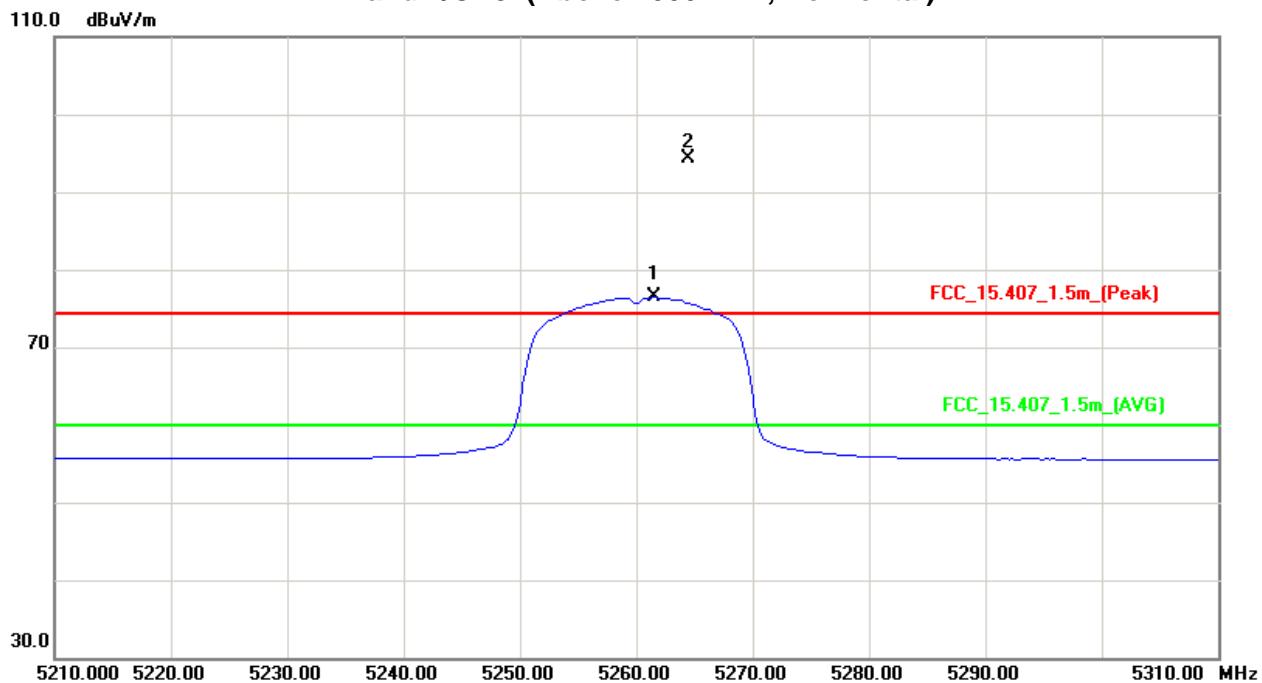



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N20 Mode 5280MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5281.50	V	62.24	41.83	40.44	102.68	82.27	-2.09	-22.50					X/F
10560.20	V	39.92	28.04	13.90	53.82	41.94	-50.95	-62.83	74.30		-21.00		X/H


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH56(Above 1000 MHz, Vertical)

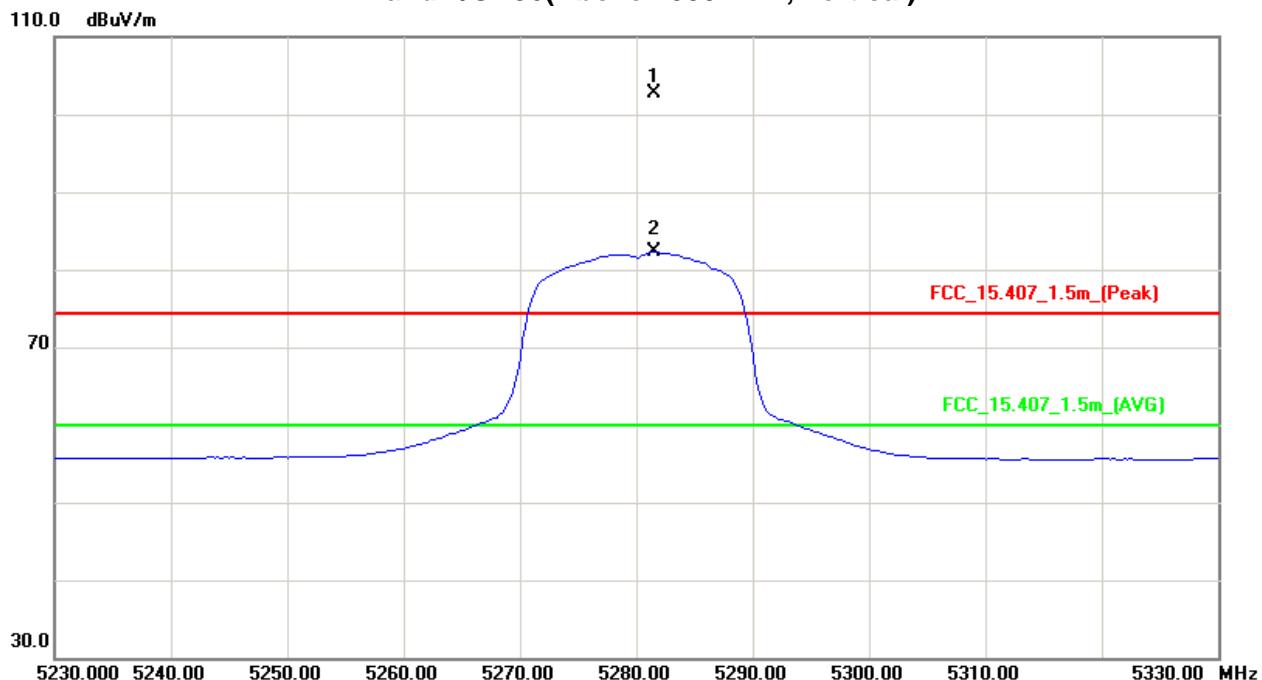



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N20 Mode 5280MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5282.25	H	55.47	36.58	40.44	95.91	77.02	-8.86	-27.75					X/F
10560.08	H	40.09	28.45	13.90	53.99	42.35	-50.78	-62.42	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH56(Above 1000 MHz, Horizontal)

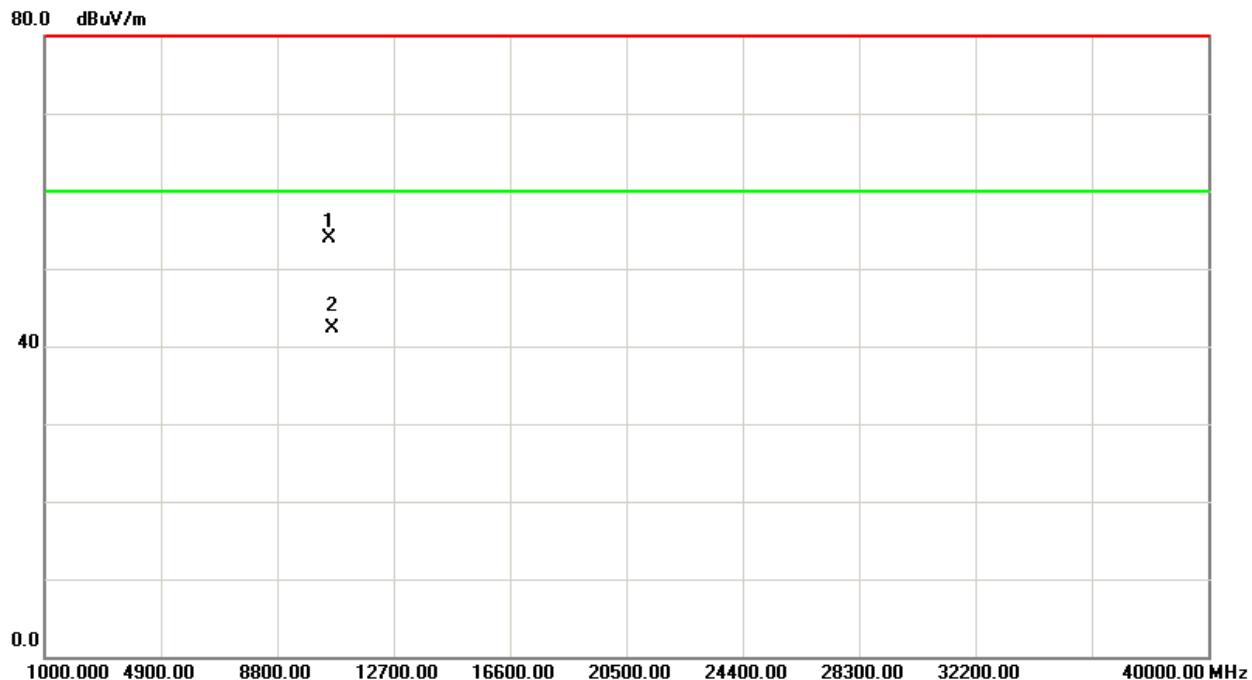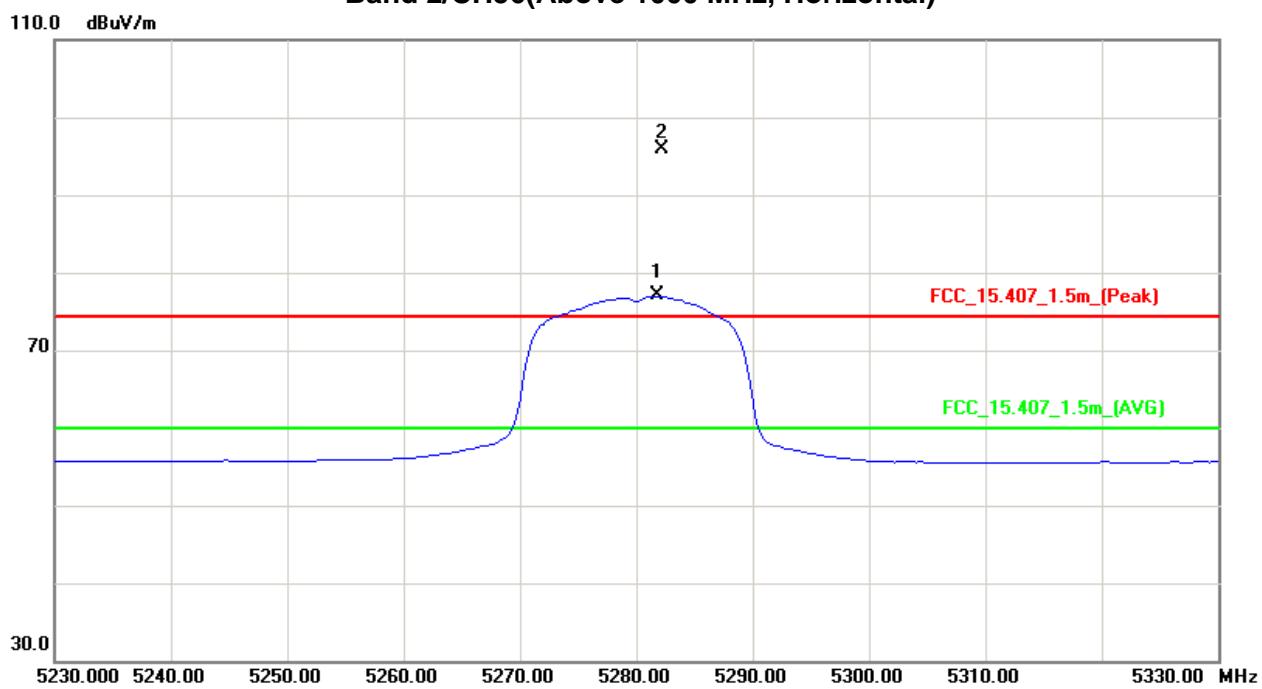



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N20 Mode 5320MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5318.75	V	63.19	42.42	40.53	103.72	82.95	-1.05	-21.82					X/F
5350.00	V	25.90	15.16	40.61	66.51	55.77	-38.26	-49.00	80.00	60.00	-15.30	-35.30	X/E
10639.85	V	39.79	27.95	13.90	53.69	41.85	-51.08	-62.92	80.00	60.00	-15.30	-35.30	X/H


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH64(Above 1000 MHz, Vertical)

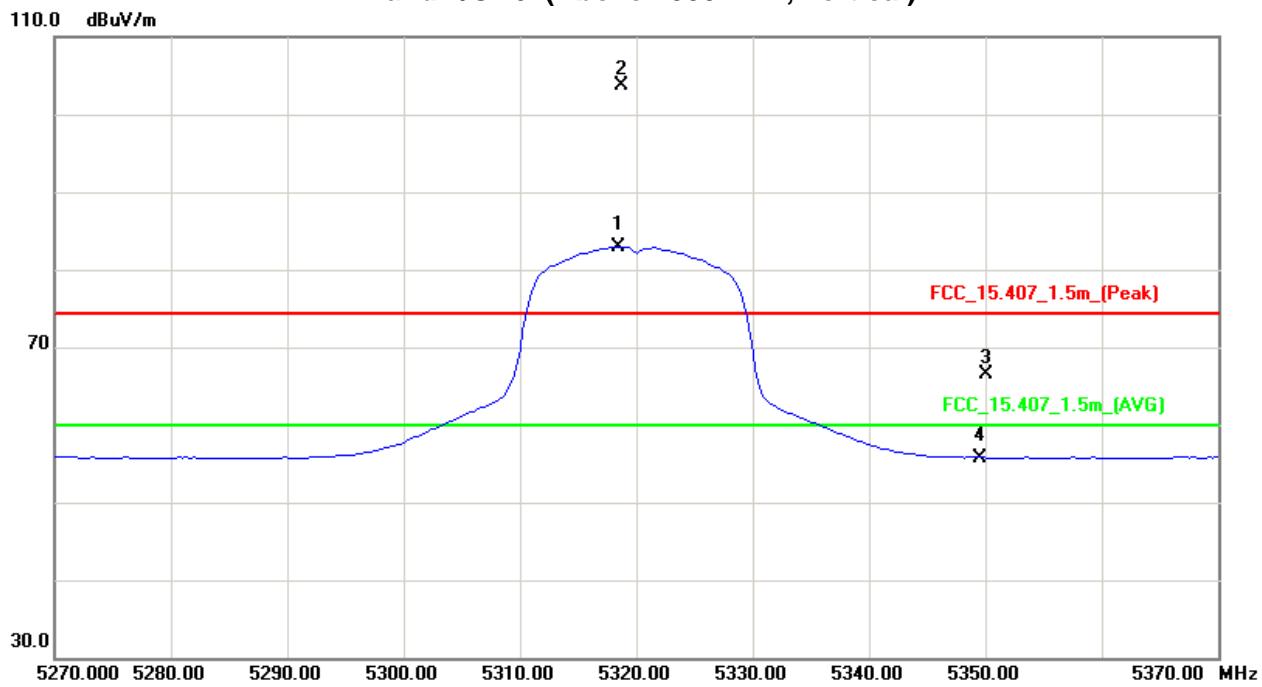



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N20 Mode 5320MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5317.75	H	55.22	36.31	40.52	95.74	76.83	-9.03	-27.94					X/F
5350.00	H	26.12	15.07	40.61	66.73	55.68	-38.04	-49.09	80.00	60.00	-15.30	-35.30	X/E
10640.08	H	40.05	28.37	13.90	53.95	42.27	-50.82	-62.50	80.00	60.00	-15.30	-35.30	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH64(Above 1000 MHz, Horizontal)

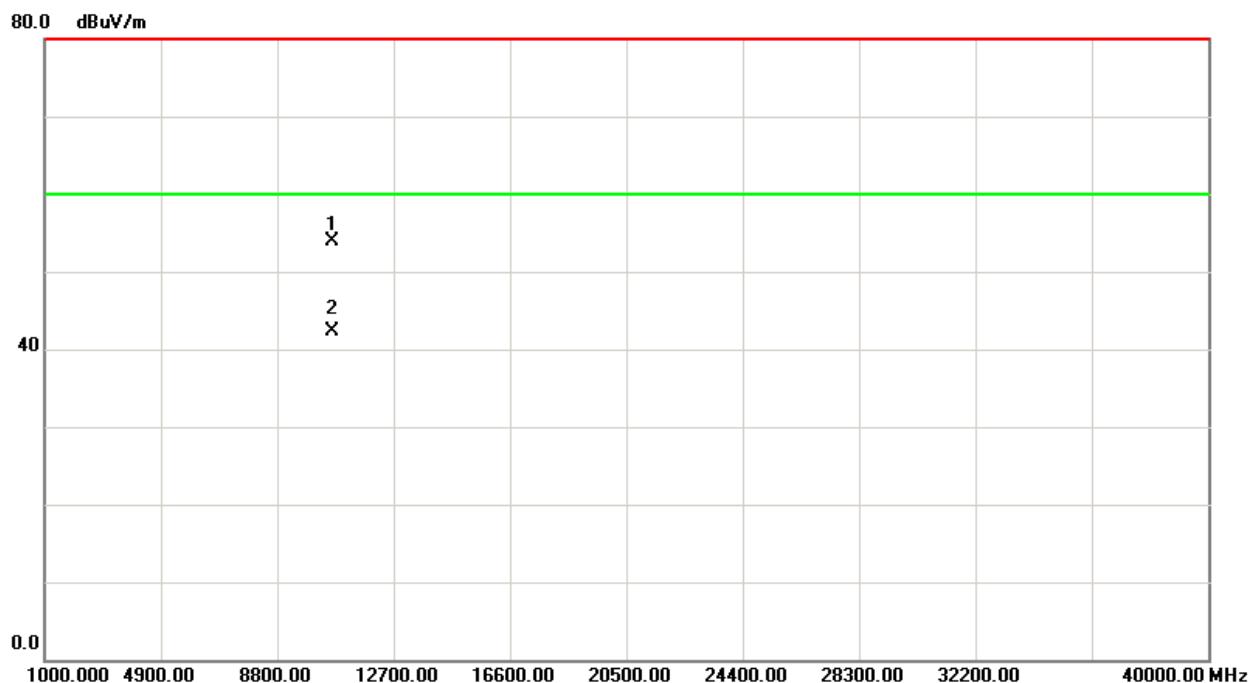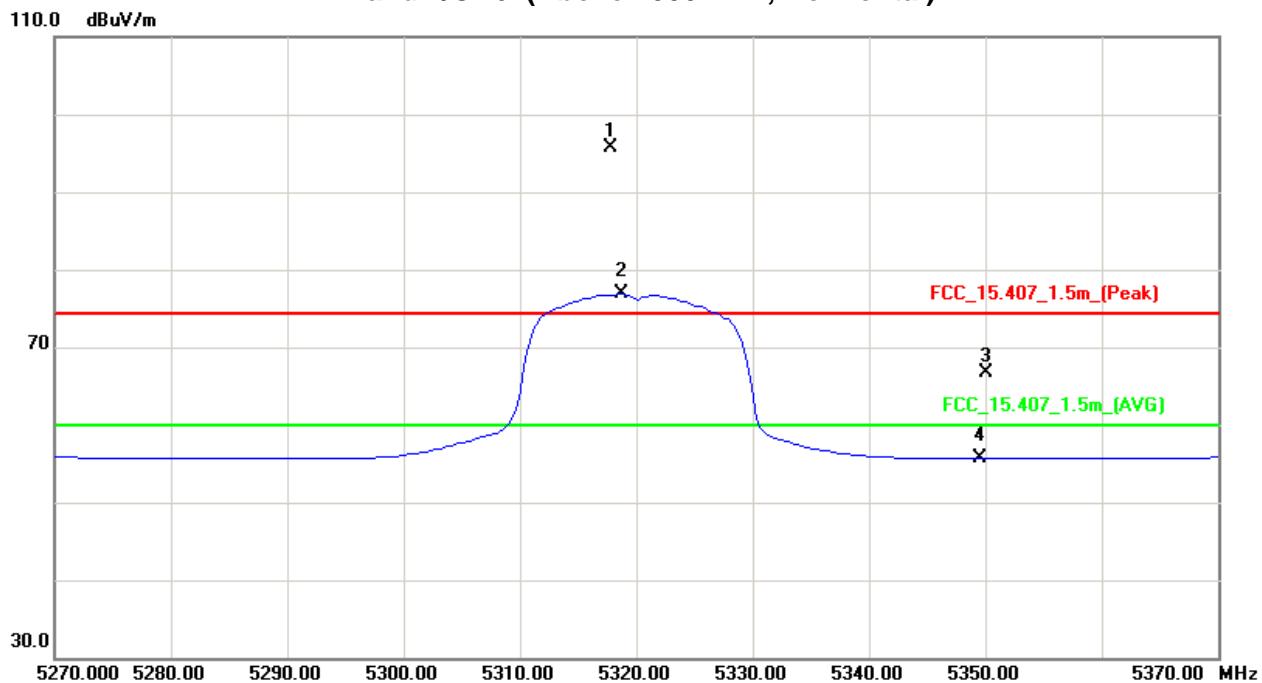



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N40 Mode 5270MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5268.00	V	58.72	33.43	40.39	99.11	73.82	-5.66	-30.95					X/F
10540.22	V	39.79	27.90	13.90	53.69	41.80	-51.08	-62.97	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH54(Above 1000 MHz, Vertical)

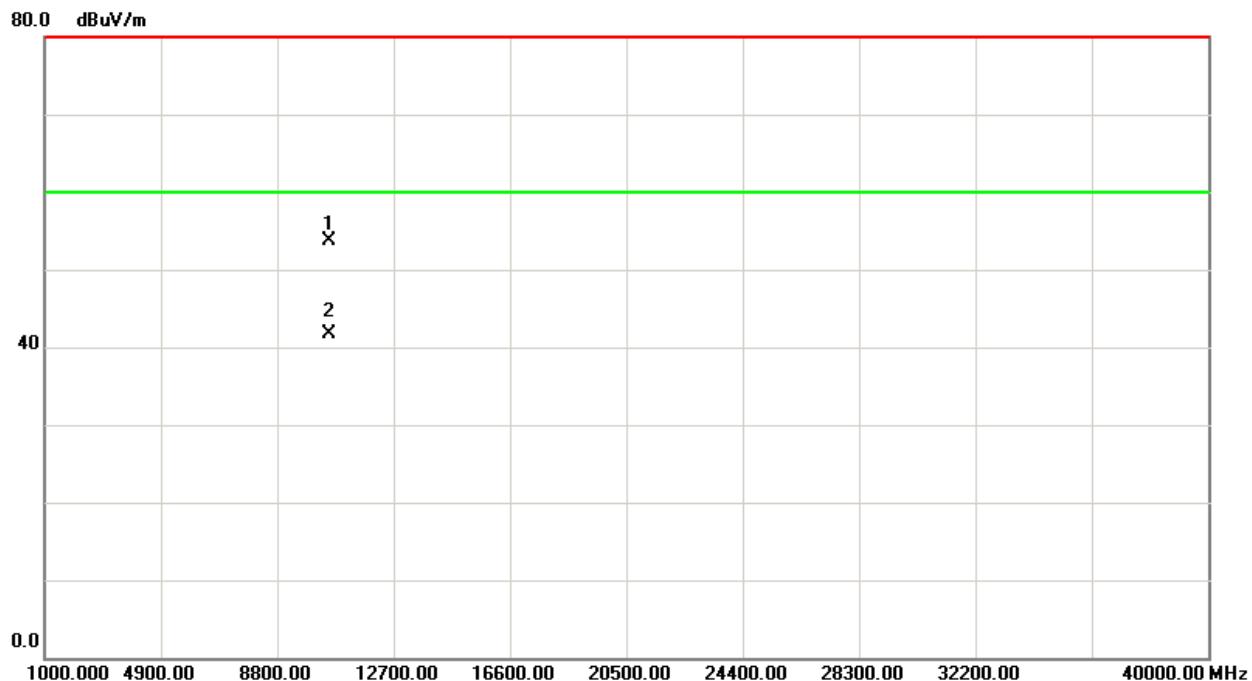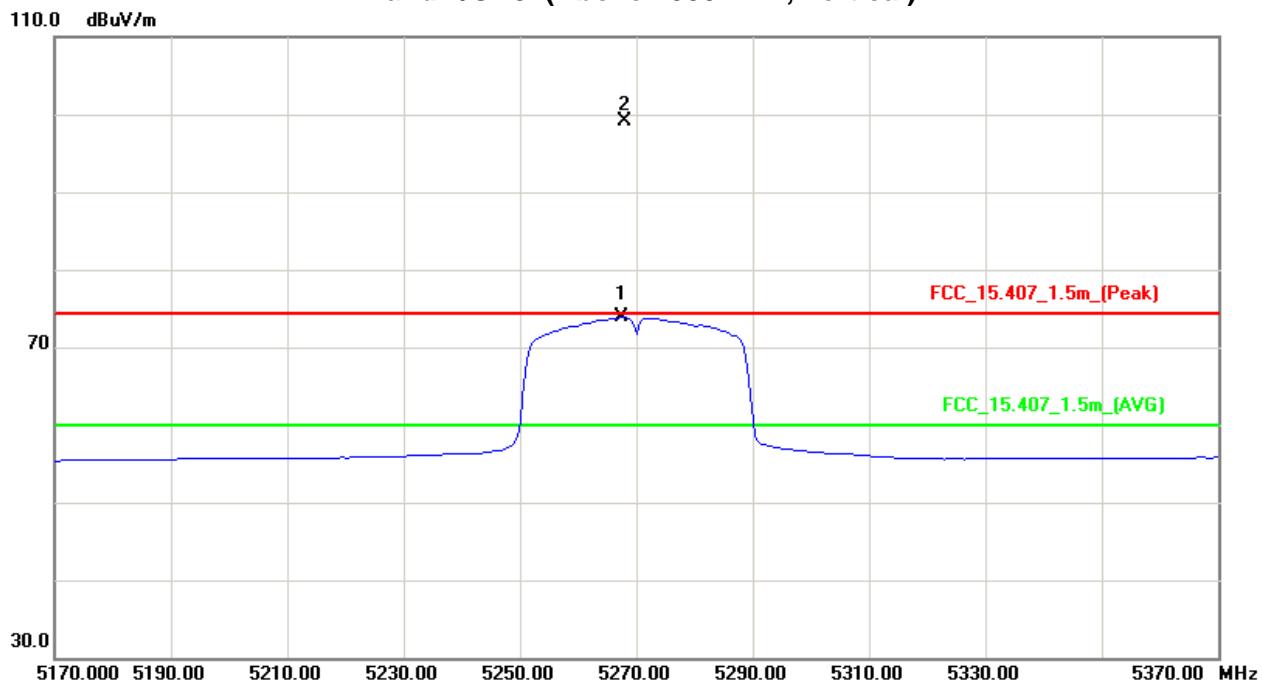



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N40 Mode 5270MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5268.00	H	51.17	29.63	40.39	91.56	70.02	-13.21	-34.75					X/F
10540.18	H	40.02	28.06	13.90	53.92	41.96	-50.85	-62.81	74.30		-21.00		X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH54(Above 1000 MHz, Horizontal)

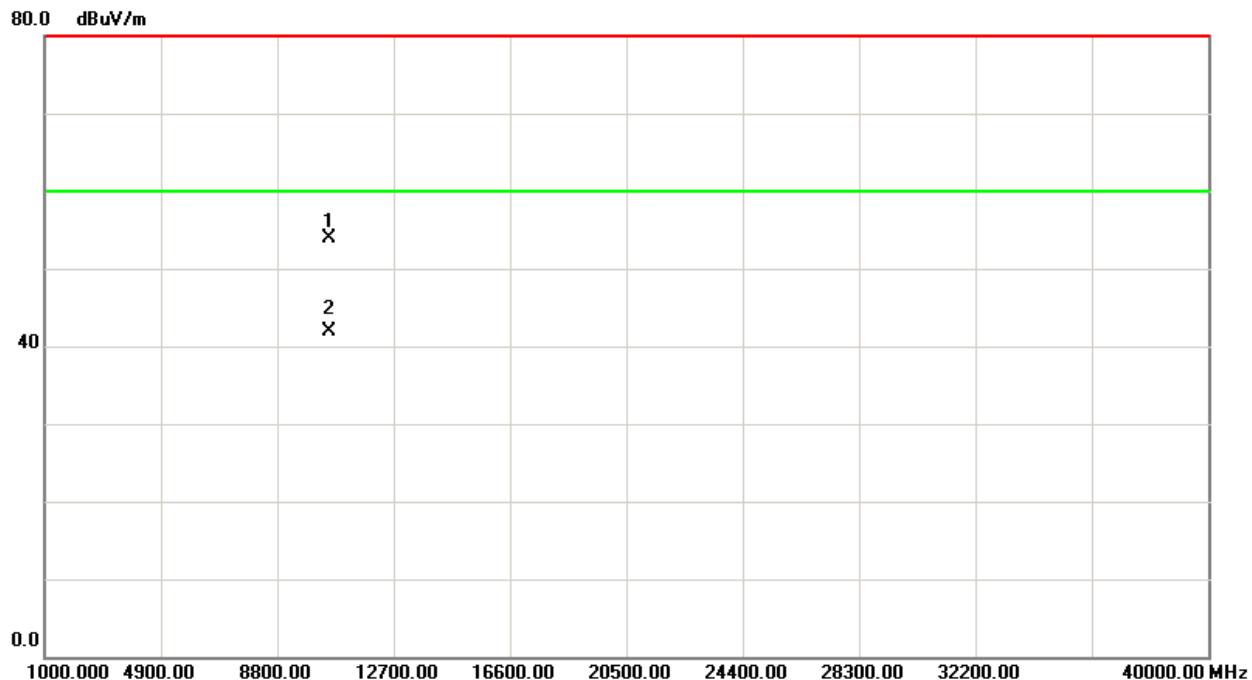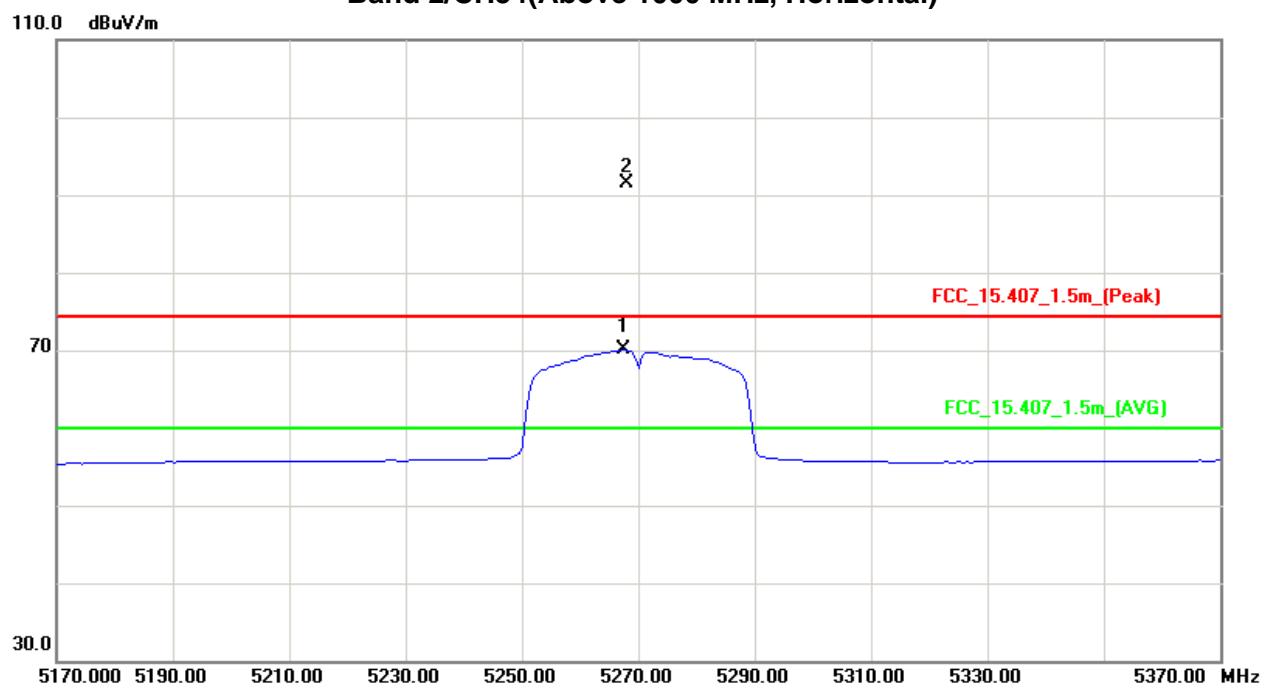



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N40 Mode 5310MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5304.00	V	60.01	34.07	40.49	100.50	74.56	-4.27	-30.21					X/F
5350.00	V	27.45	15.47	40.61	68.06	56.08	-36.71	-48.69	80.00	60.00	-15.30	-35.30	X/E
10620.26	V	39.75	27.70	13.90	53.65	41.60	-51.12	-63.17	80.00	60.00	-15.30	-35.30	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH62(Above 1000 MHz, Vertical)

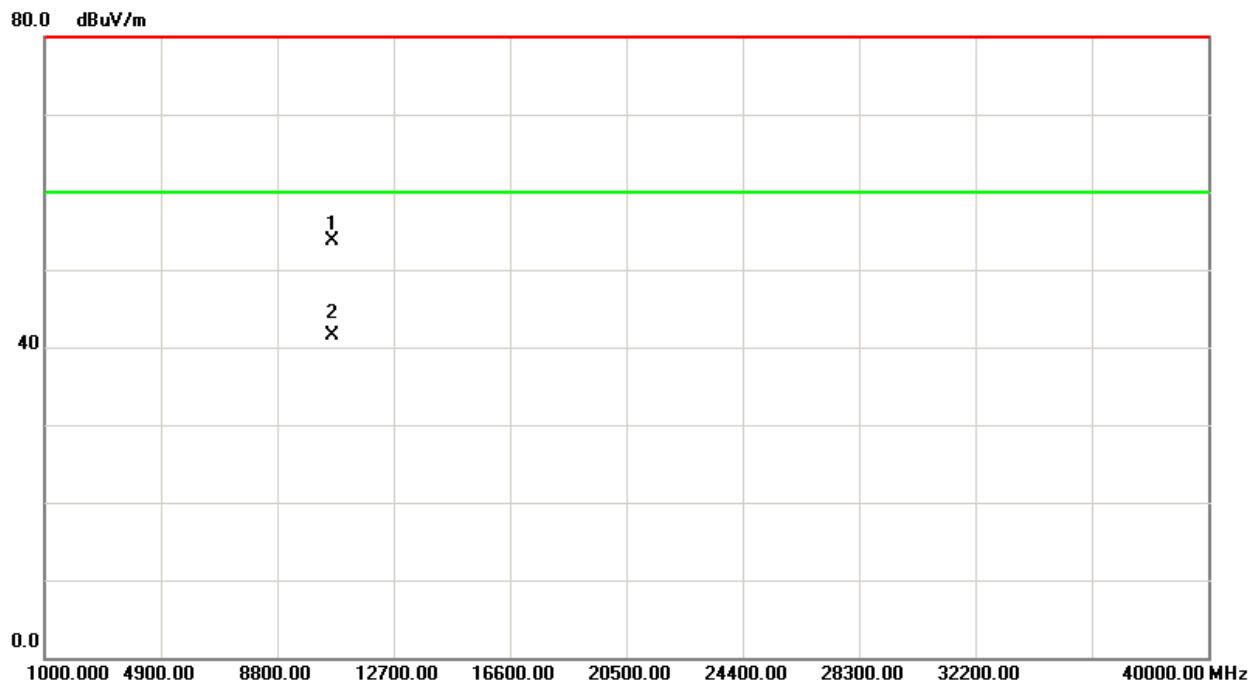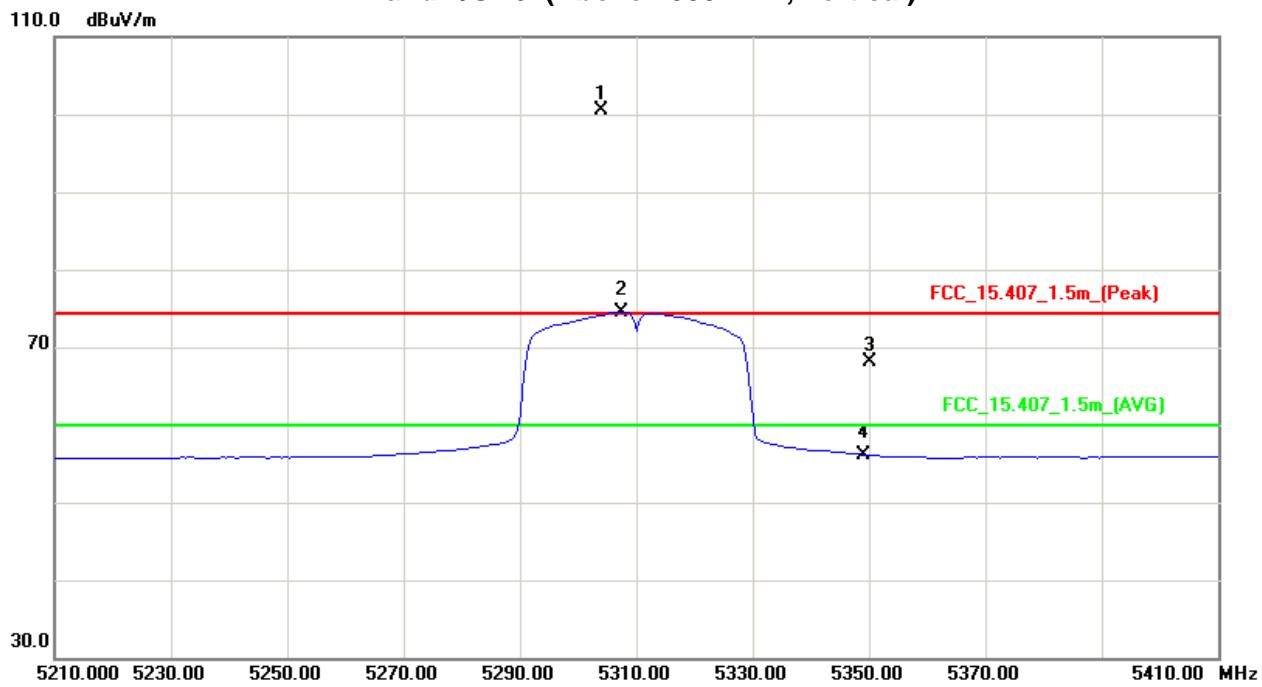



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/ TX N40 Mode 5310MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5306.00	H	52.50	29.88	40.49	92.99	70.37	-11.78	-34.40					X/F
5350.00	H	25.94	15.15	40.61	66.55	55.76	-38.22	-49.01	80.00	60.00	-15.30	-35.30	X/E
10620.09	H	39.95	27.88	13.90	53.85	41.78	-50.92	-62.99	80.00	60.00	-15.30	-35.30	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

Band 2/CH62(Above 1000 MHz, Horizontal)

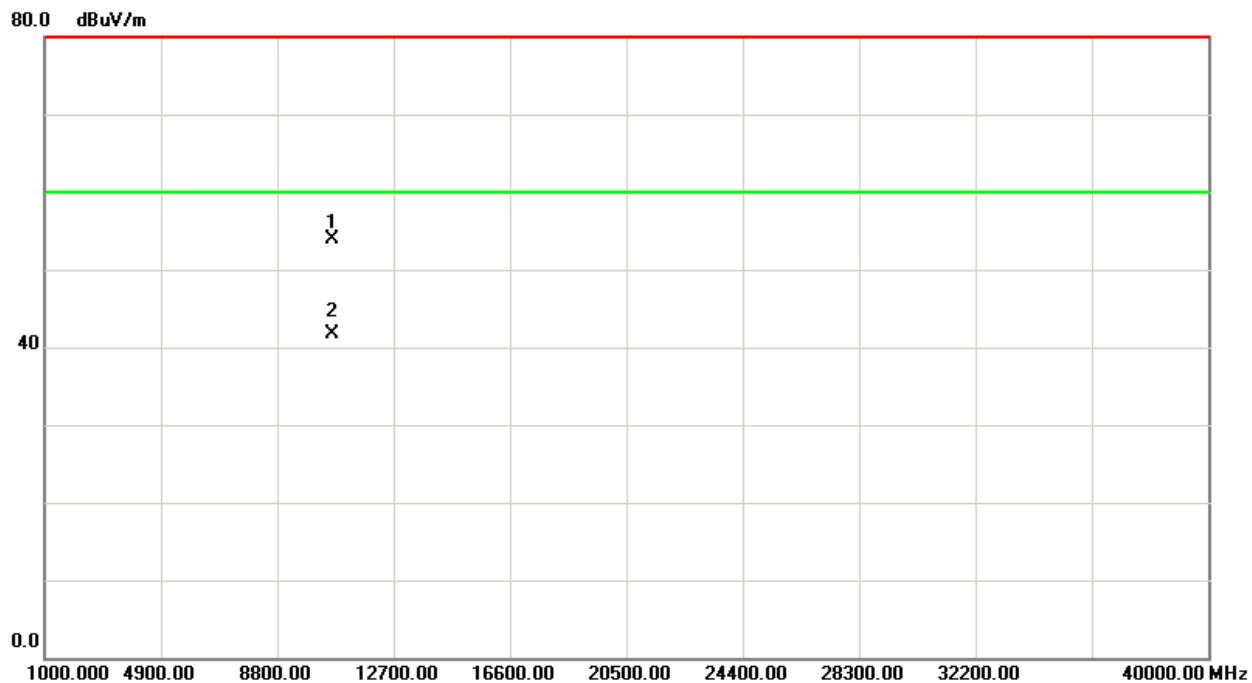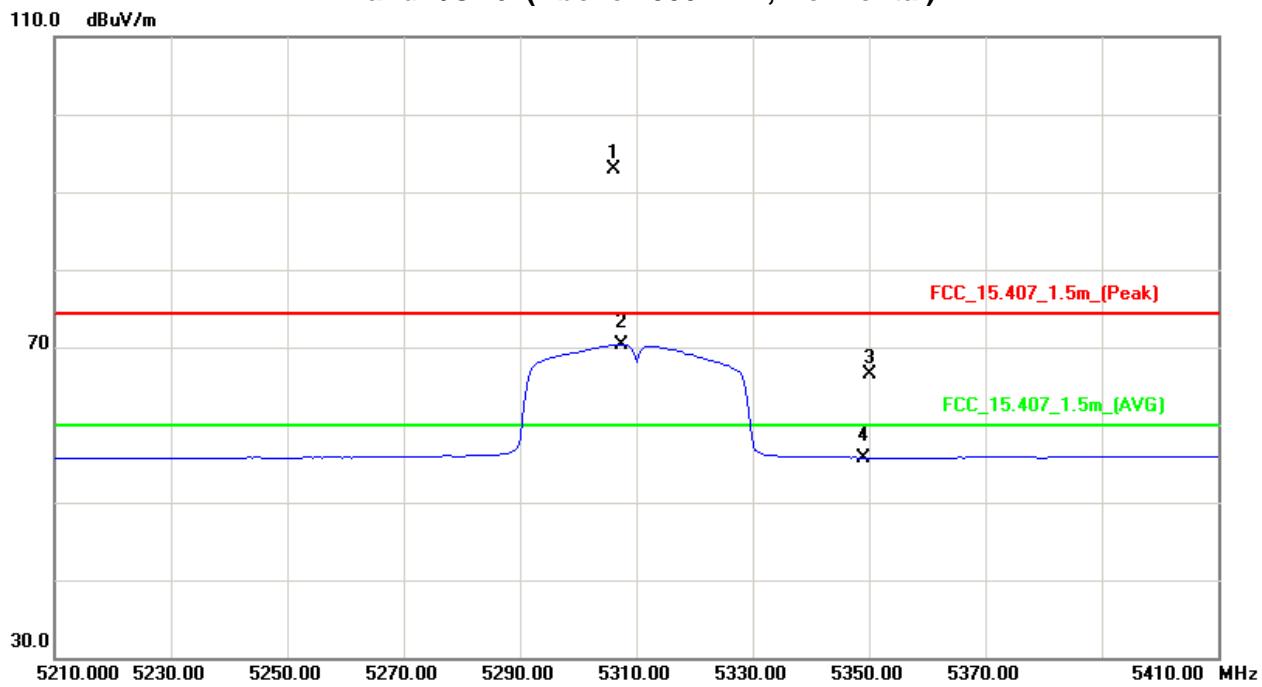



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX A Mode 5500MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	25.99	14.64	40.90	66.89	55.54	-37.88	-49.23	80.00	60.00	-24.77	-44.77	X/E
5470.00	V	25.94	14.60	40.93	66.87	55.53	-37.90	-49.24	74.30		-27.00		X/E
5500.25	V	61.05	40.97	41.00	102.05	81.97	-2.72	-22.80					X/F
11000.05	V	40.05	29.86	13.93	53.98	43.79	-50.79	-60.98	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH100(Above 1000 MHz, Vertical)

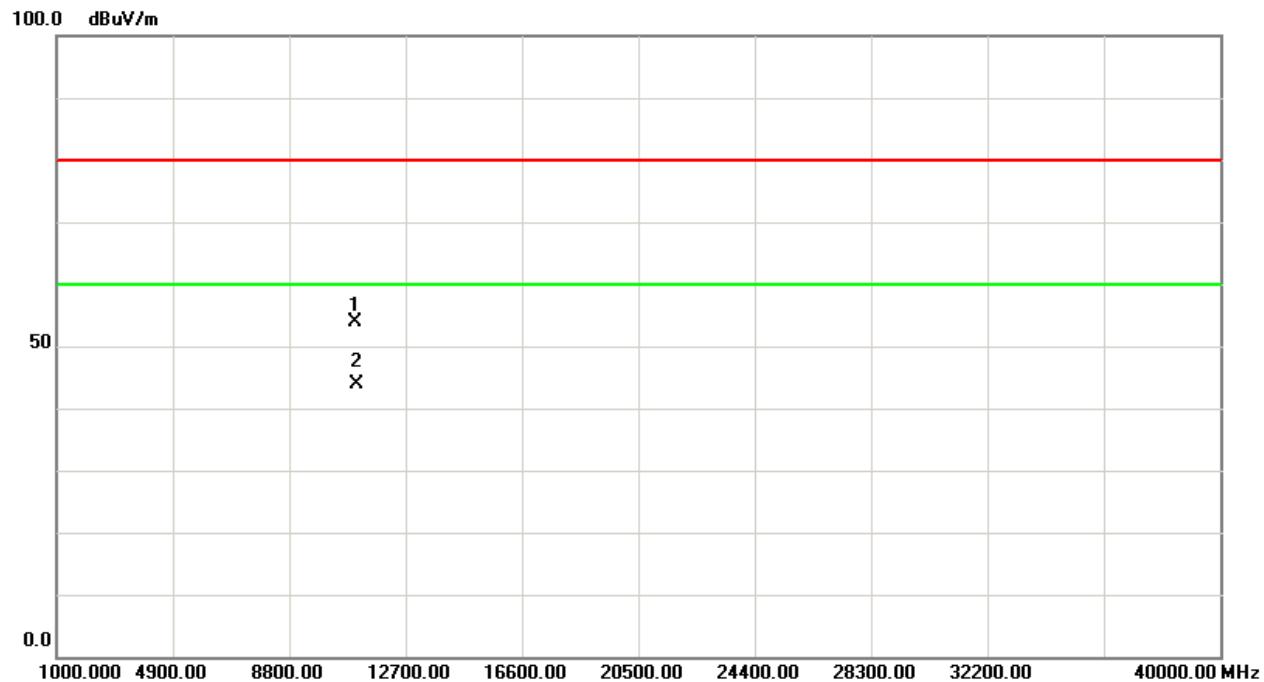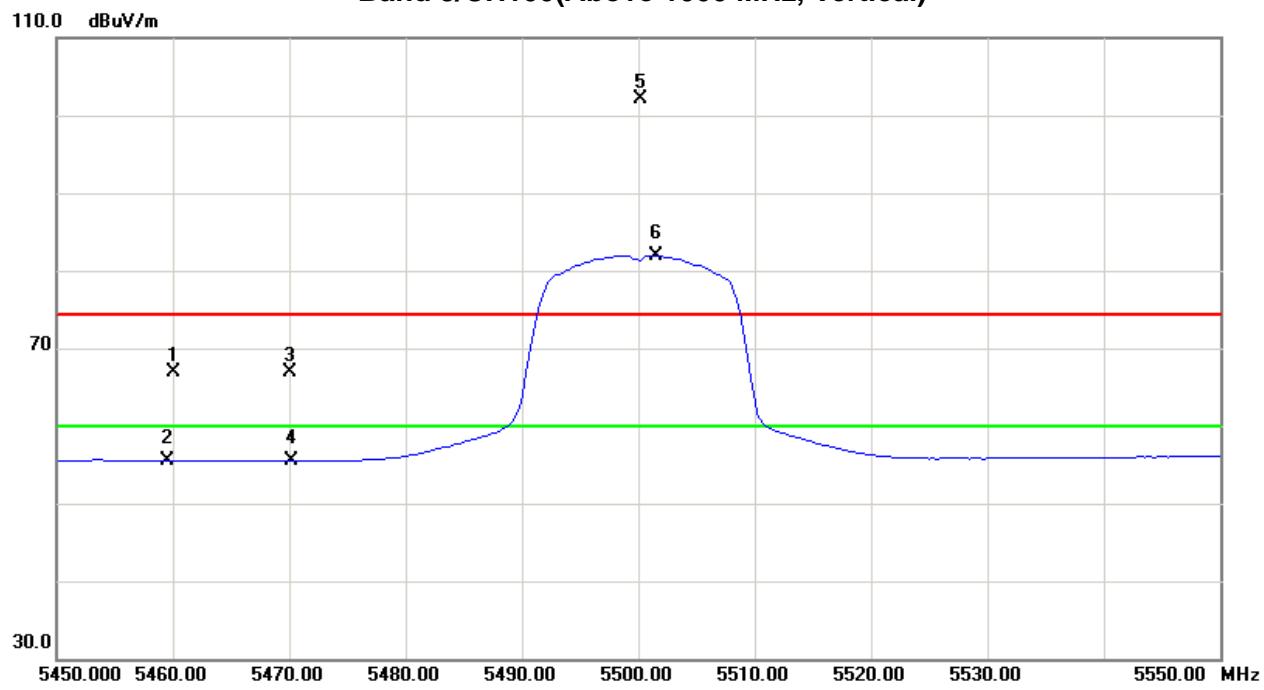



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX A Mode 5500MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	25.30	14.66	40.90	66.20	55.56	-38.57	-49.21	80.00	60.00	-24.77	-44.77	X/E
5470.00	H	26.15	14.57	40.93	67.08	55.50	-37.69	-49.27	74.30		-27.00		X/E
5497.75	H	53.45	35.17	41.00	94.45	76.17	-10.32	-28.60					X/F
11000.02	H	41.25	30.40	13.93	55.18	44.33	-49.59	-60.44	80.00	60.00	-24.77	-44.77	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m) \text{ dB}$;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X

Band 3/CH100 (Above 1000 MHz, Horizontal)

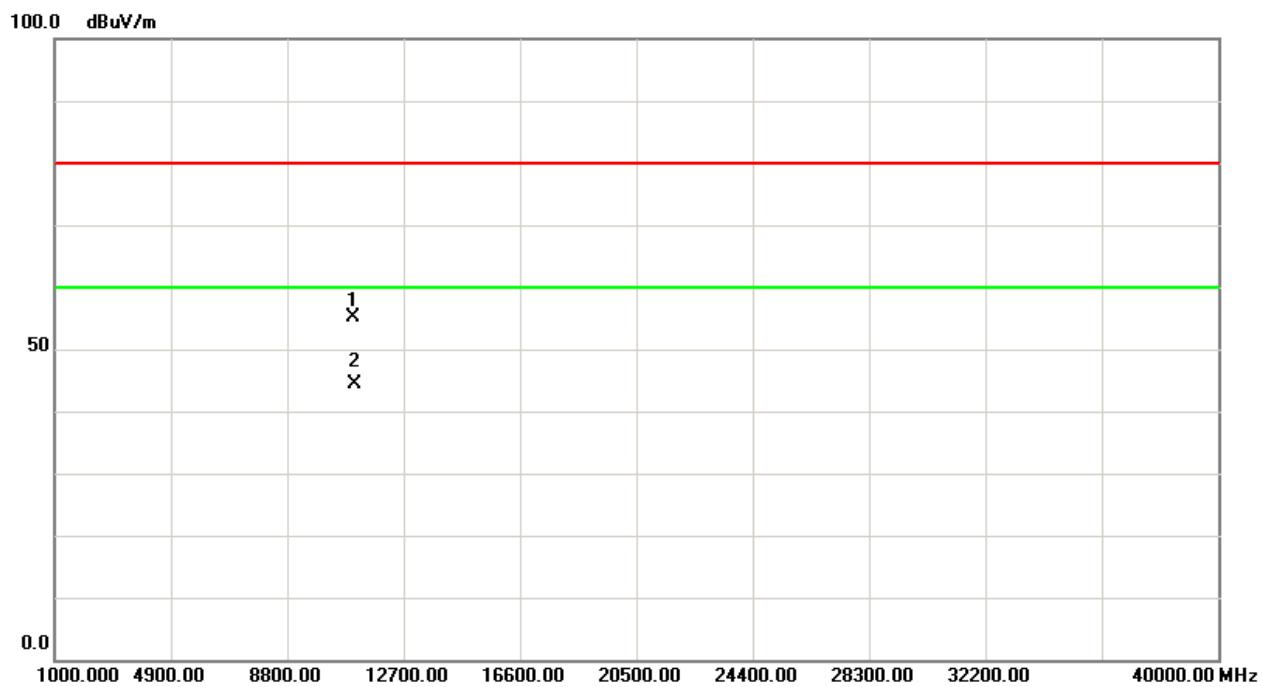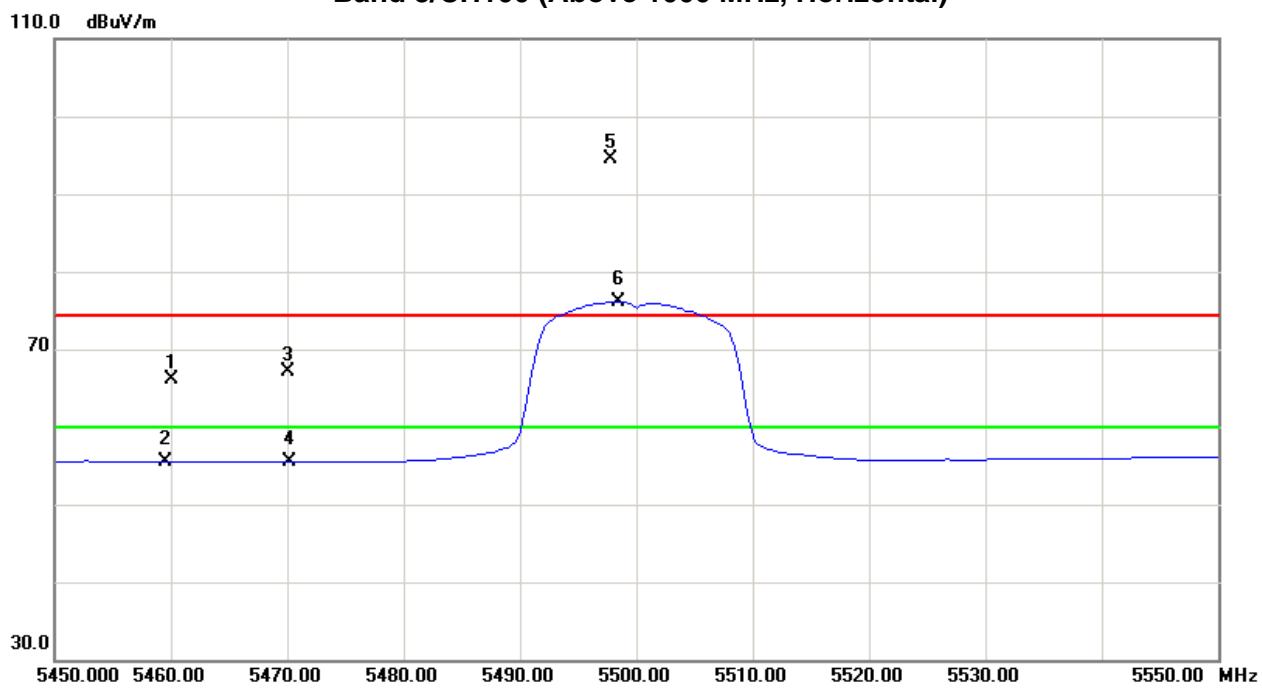



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX A Mode 5580MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5583.25	V	62.45	42.06	41.33	103.78	83.39	-0.99	-21.38					X/F
11160.04	V	40.34	29.77	14.04	54.38	43.81	-50.39	-60.96	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH116(Above 1000 MHz, Vertical)

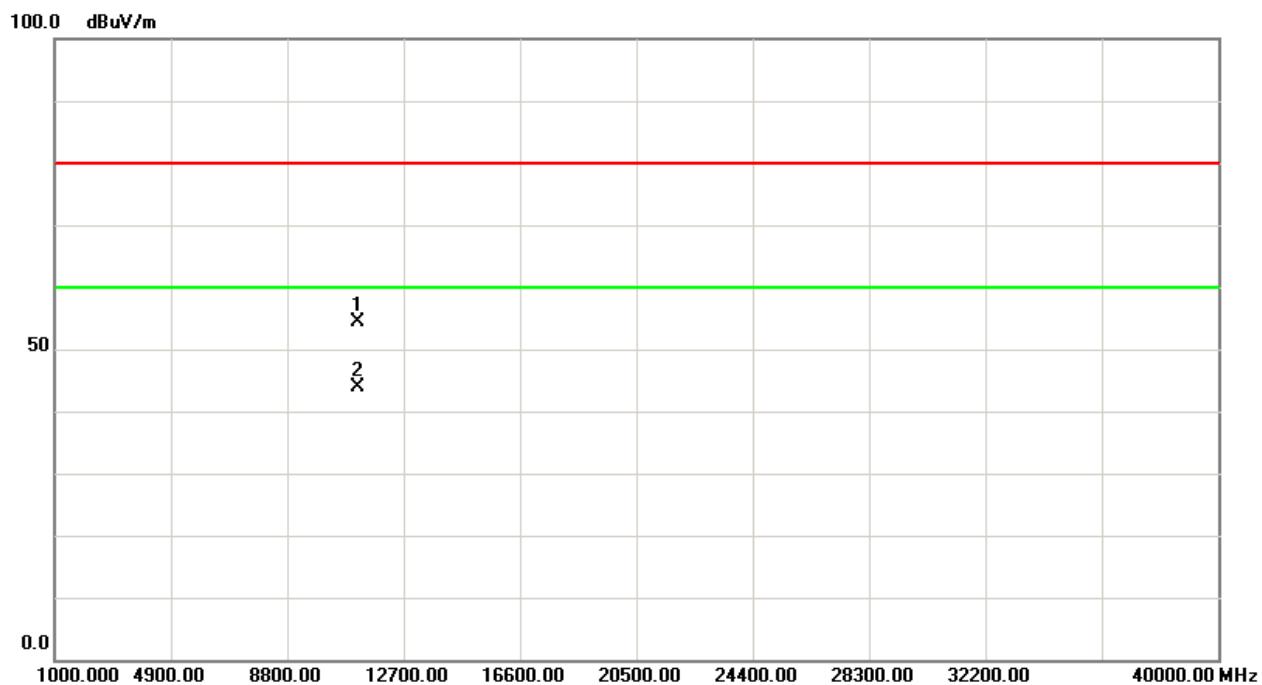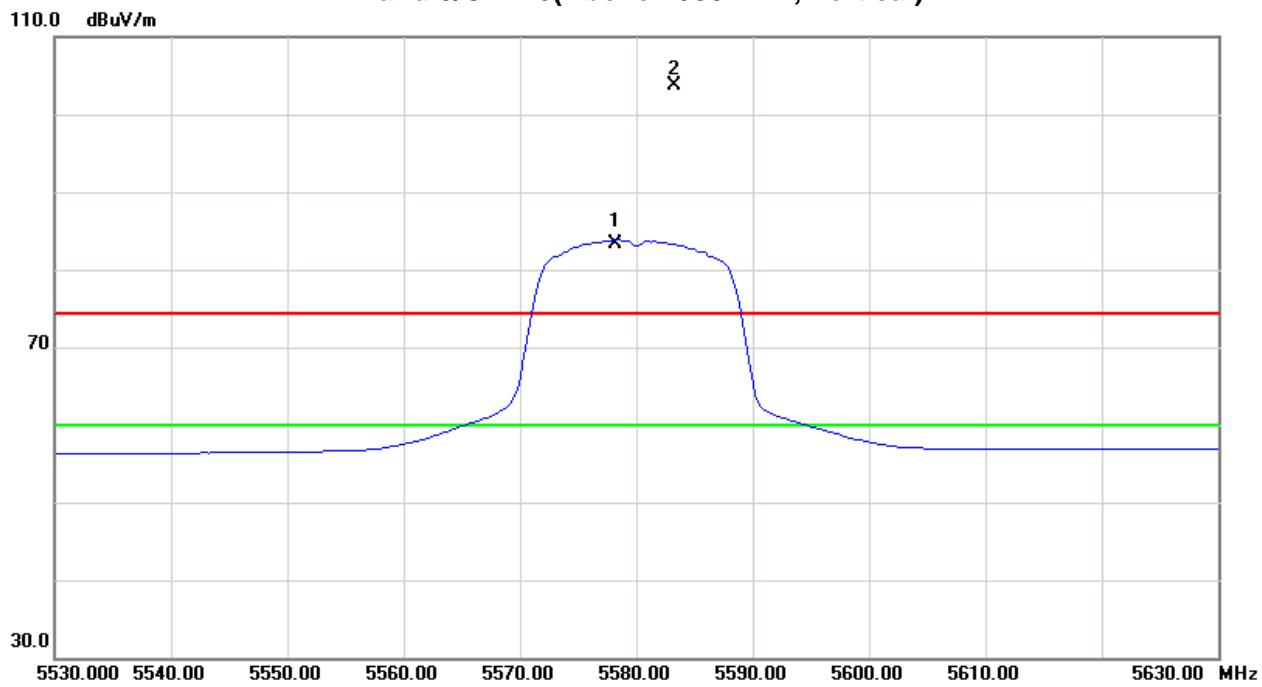



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX A Mode 5580MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5579.00	H	53.02	35.73	41.32	94.34	77.05	-10.43	-27.72					X/F
11160.00	H	41.14	30.40	14.04	55.18	44.44	-49.59	-60.33	80.00	60.00	-24.77	-44.77	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m) \text{ dB}$;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X

Band 3/CH116(Above 1000 MHz, Horizontal)

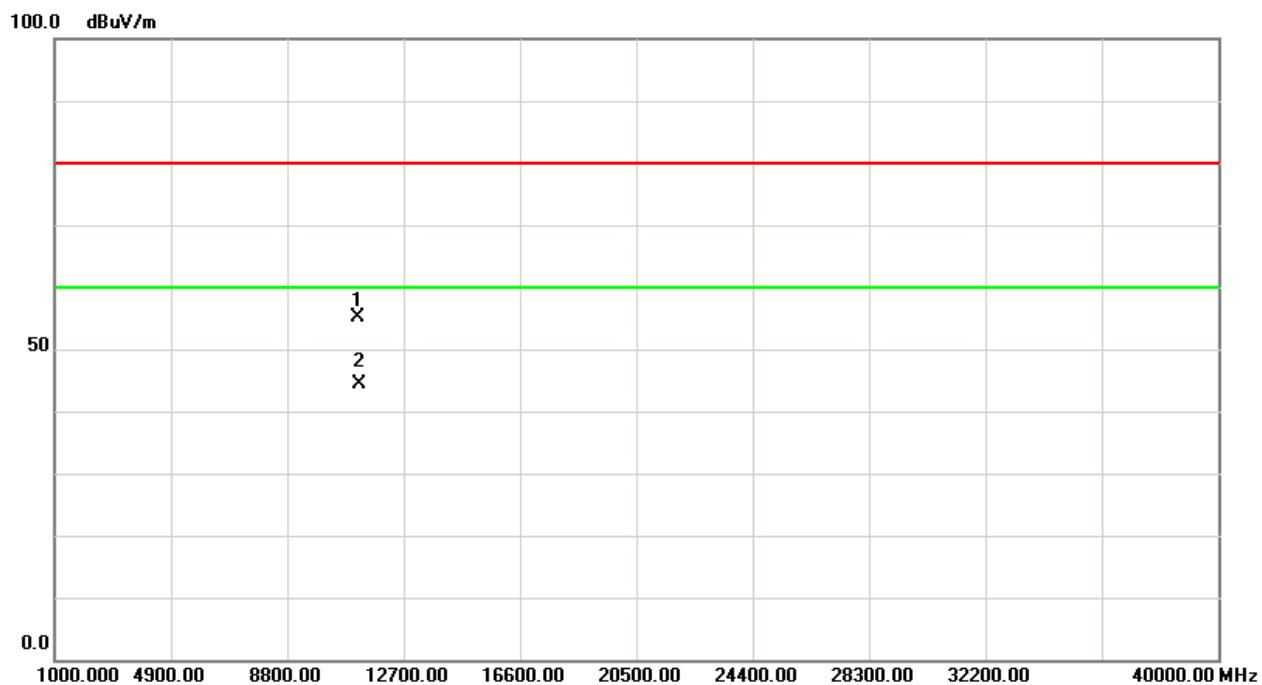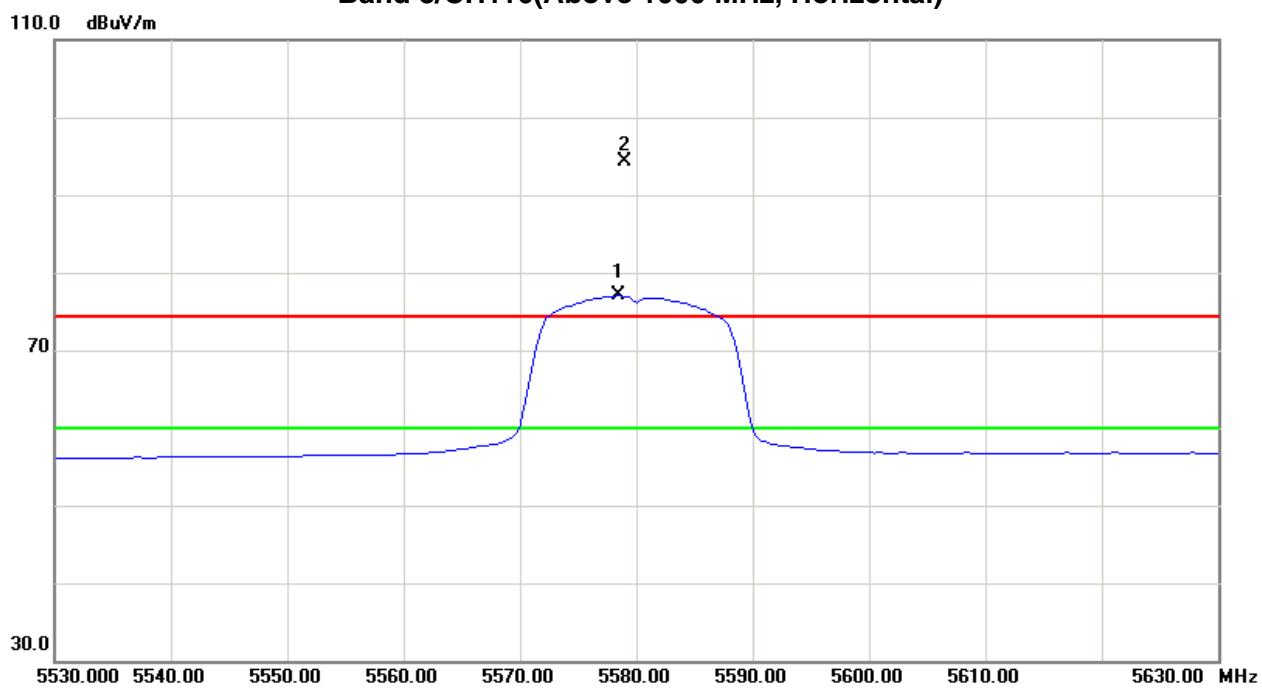



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX A Mode 5700MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5698.75	V	60.57	41.06	41.80	102.37	82.86	-2.40	-21.91					X/F
5725.00	V	26.03	15.55	41.91	67.94	57.46	-36.83	-47.31	74.30		-27.00		X/E
11400.05	V	40.09	29.80	14.20	54.29	44.00	-50.48	-60.77	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
 - (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
 - (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH140(Above 1000 MHz, Vertical)

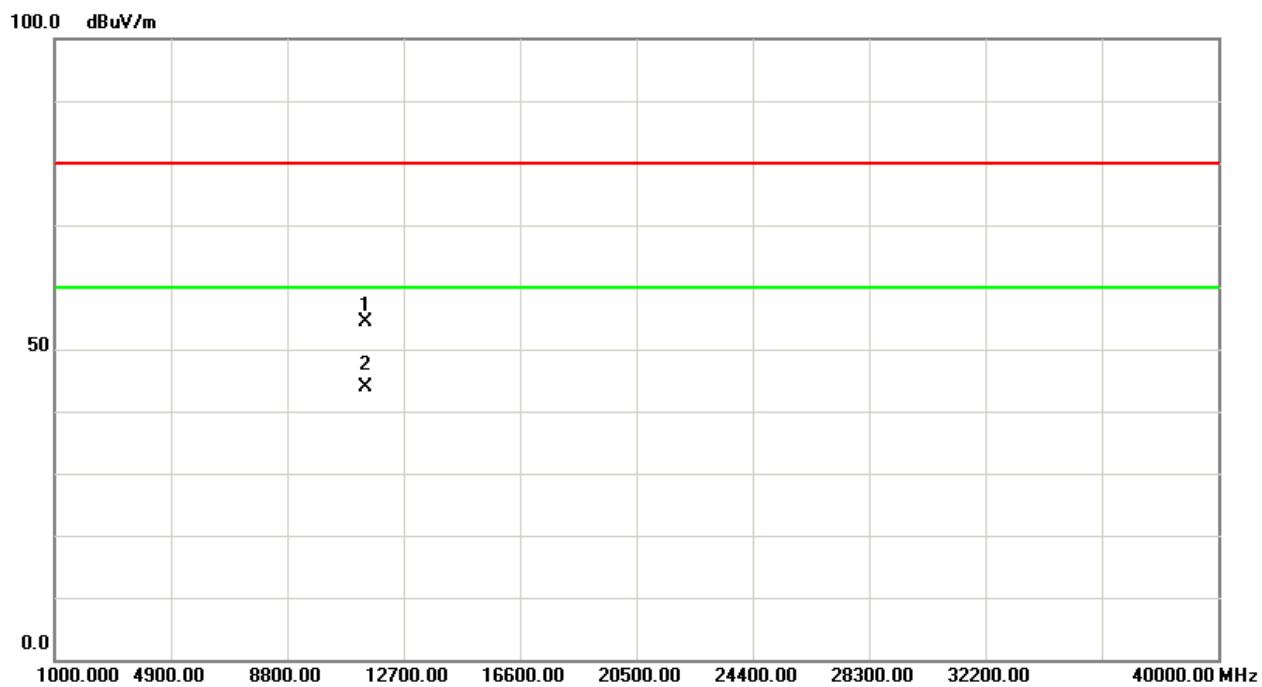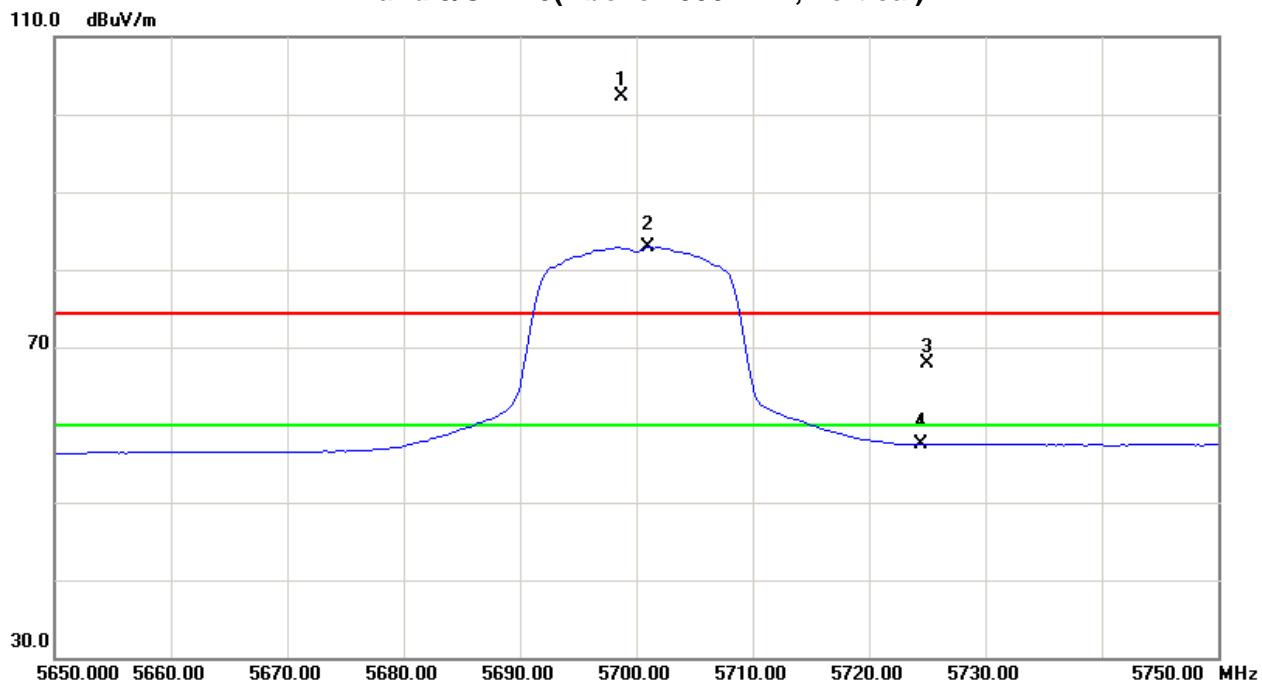



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX A Mode 5700MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5698.50	H	53.90	35.97	41.79	95.69	77.76	-9.08	-27.01					X/F
5725.00	H	26.66	15.49	41.91	68.57	57.40	-36.20	-47.37	74.30		-27.00		X/E
11400.00	H	41.20	30.58	14.20	55.40	44.78	-49.37	-59.99	80.00	60.00	-24.77	-44.77	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X

Band 3/CH140(Above 1000 MHz, Horizontal)

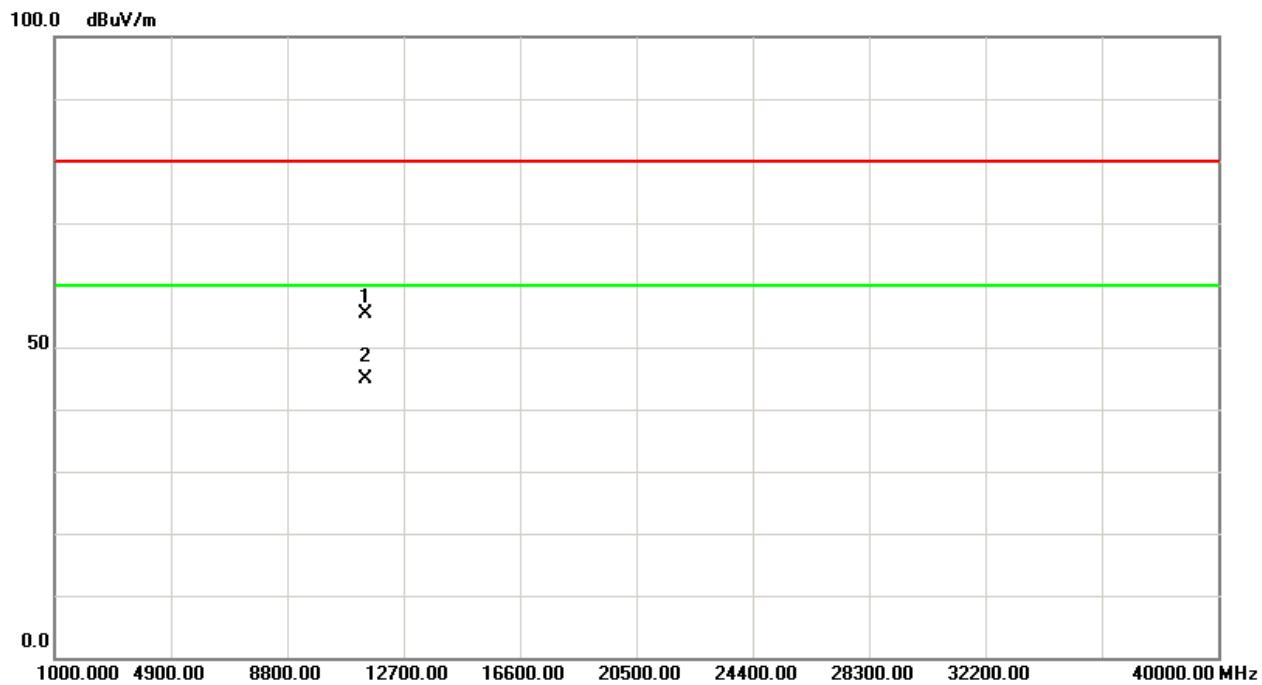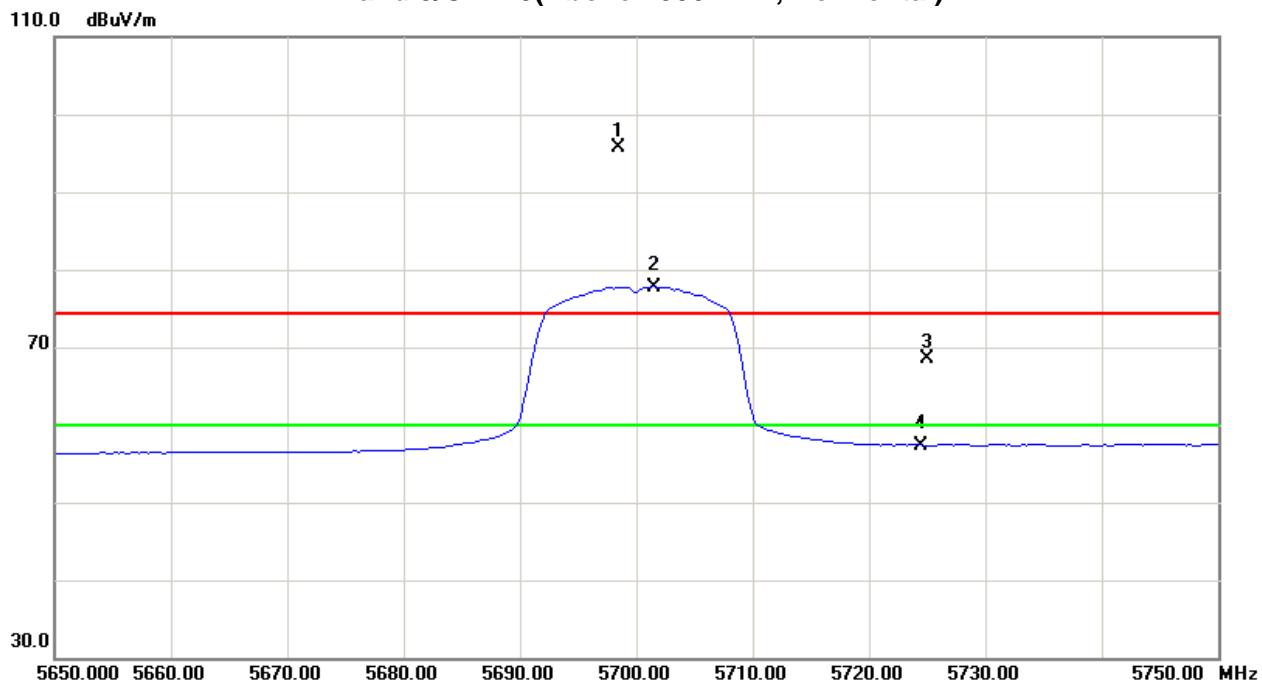



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N20 Mode 5500MHz		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	26.29	14.69	40.90	67.19	55.59	-37.58	-49.18	80.00	60.00	-24.77	-44.77	X/E
5470.00	V	26.78	14.67	40.93	67.71	55.60	-37.06	-49.17	74.30		-27.00		X/E
5498.75	V	61.69	40.34	41.00	102.69	81.34	-2.08	-23.43					X/F
11000.02	V	40.02	29.15	13.93	53.95	43.08	-50.82	-61.69	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH100(Above 1000 MHz, Vertical)

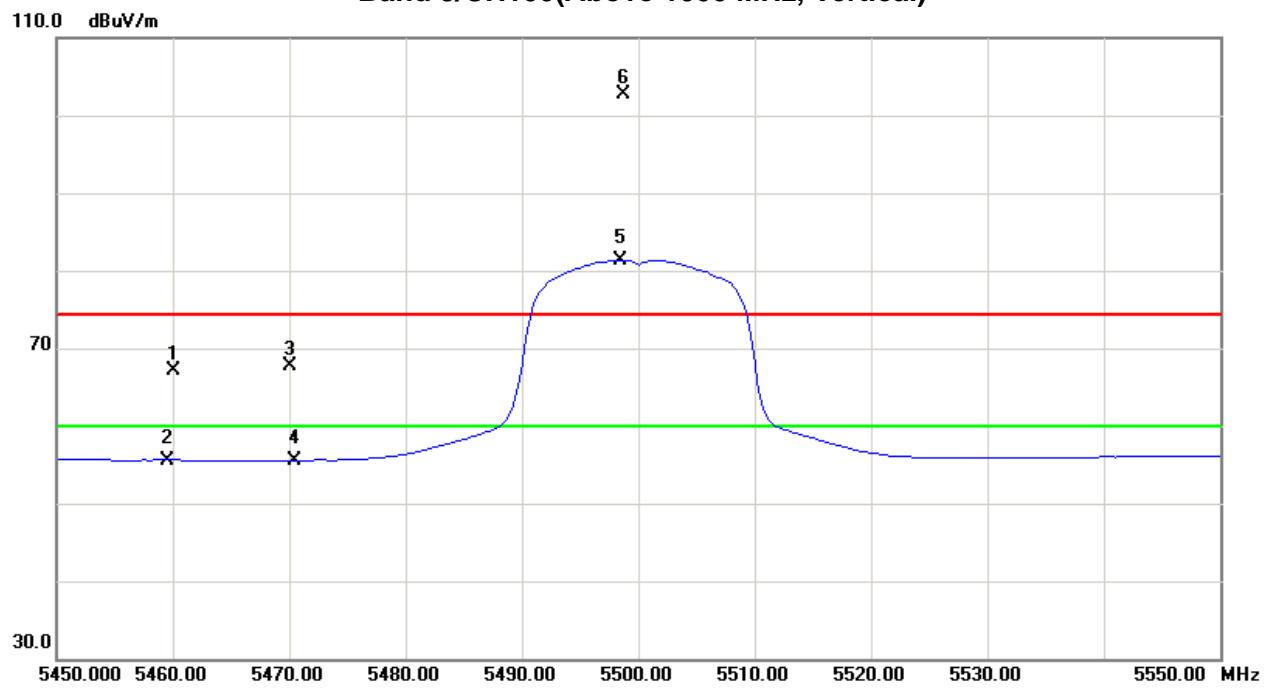



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N20 Mode 5500MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	26.14	14.68	40.90	67.04	55.58	-37.73	-49.19	80.00	60.00	-24.77	-44.77	X/E
5470.00	H	27.03	14.55	40.93	67.96	55.48	-36.81	-49.29	74.30		-27.00		X/E
5502.00	H	52.94	34.78	41.01	93.95	75.79	-10.82	-28.98					X/F
10999.96	H	40.85	29.95	13.93	54.78	43.88	-49.99	-60.89	80.00	60.00	-24.77	-44.77	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m) \text{ dB}$;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X

Band 3/CH100 (Above 1000 MHz, Horizontal)

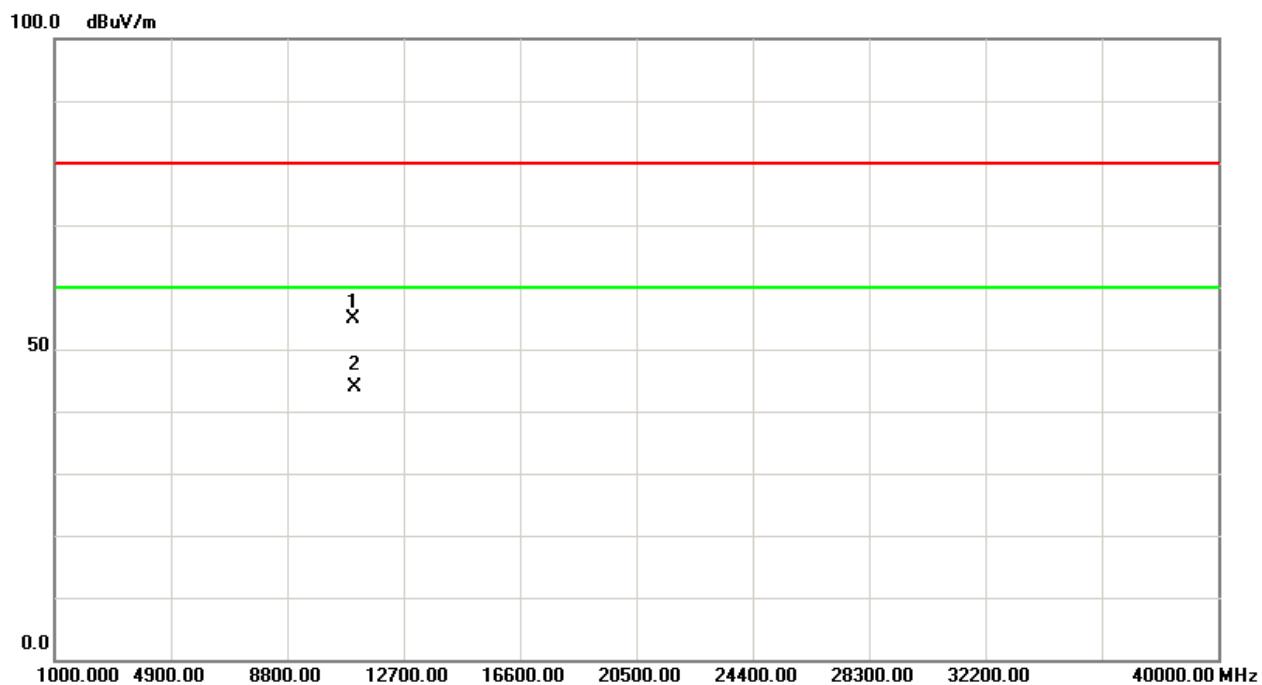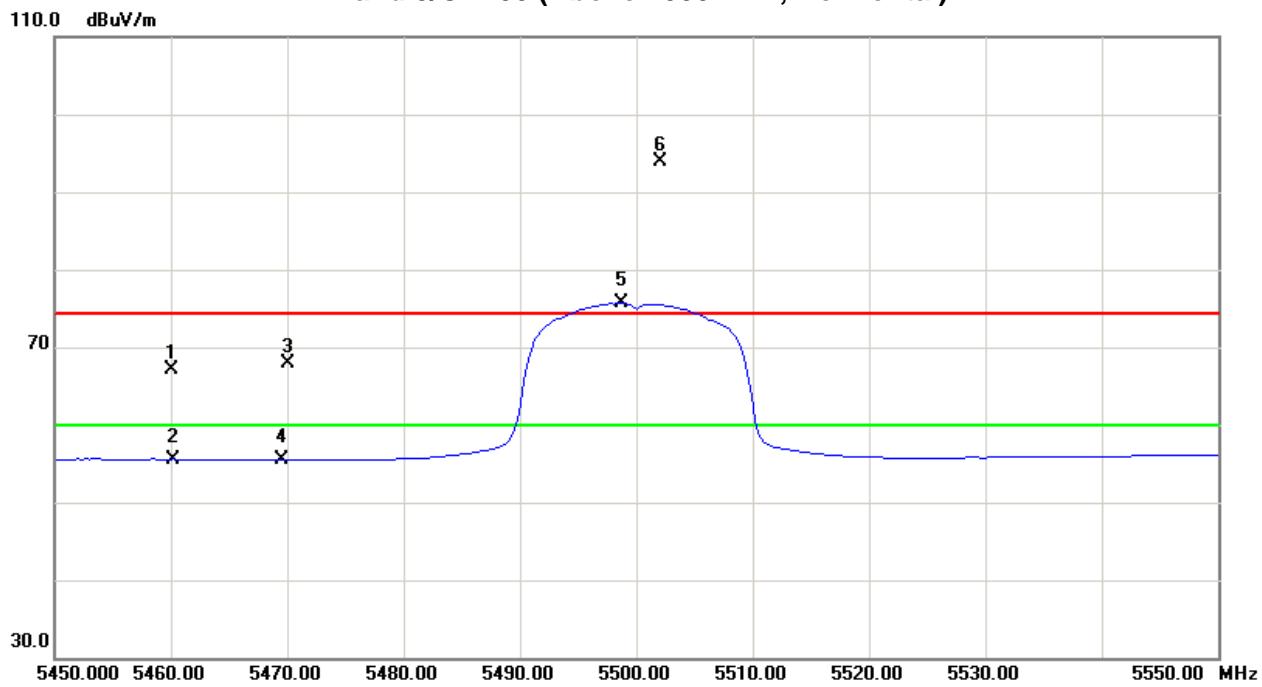



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N20 Mode 5580MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5577.75	V	62.28	41.49	41.31	103.59	82.80	-1.18	-21.97					X/F
11160.04	V	39.88	29.12	14.04	53.92	43.16	-50.85	-61.61	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH116(Above 1000 MHz, Vertical)

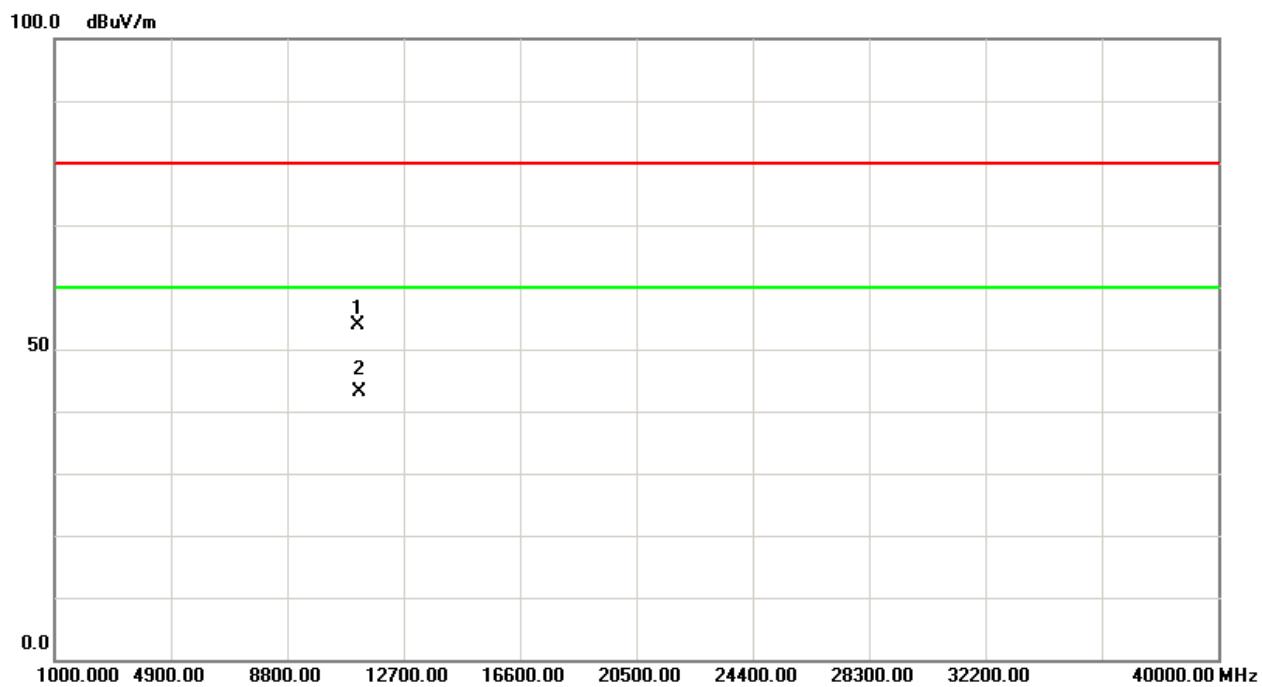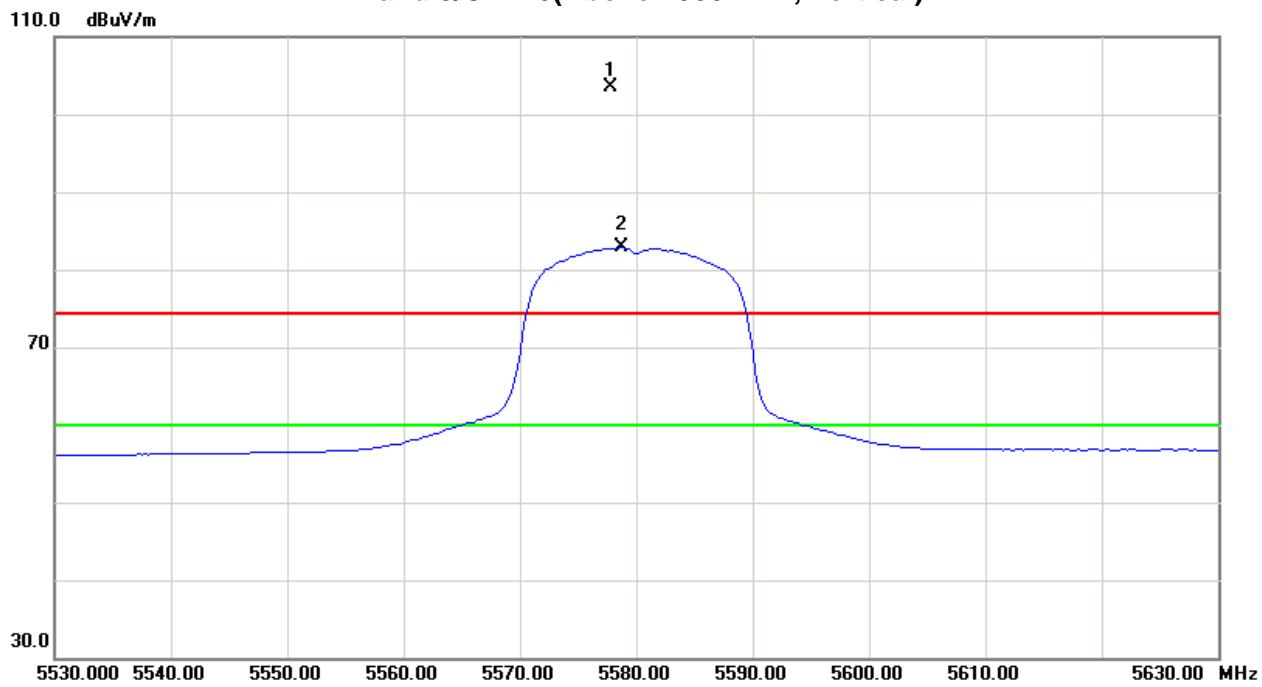



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N20 Mode 5580MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5578.50	H	53.22	35.32	41.32	94.54	76.64	-10.23	-28.13					X/F
11159.96	H	40.41	29.81	14.04	54.45	43.85	-50.32	-60.92	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m) \text{ dB}$;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH116 (Above 1000 MHz, Horizontal)

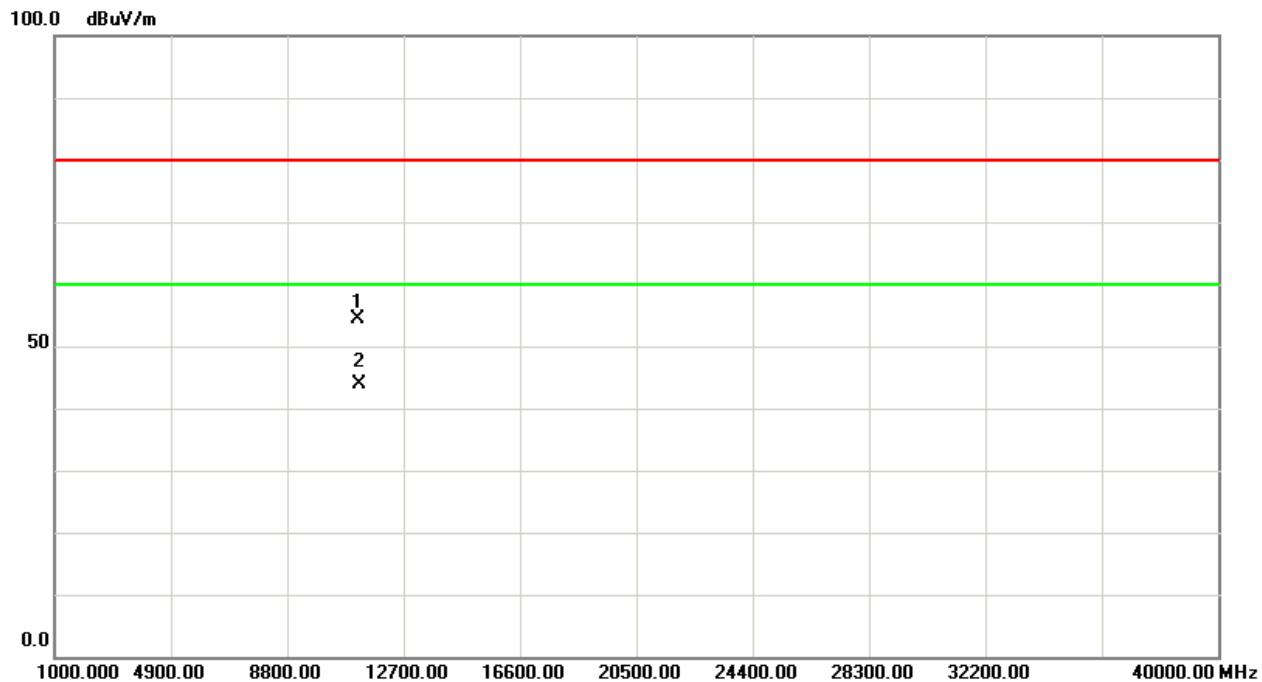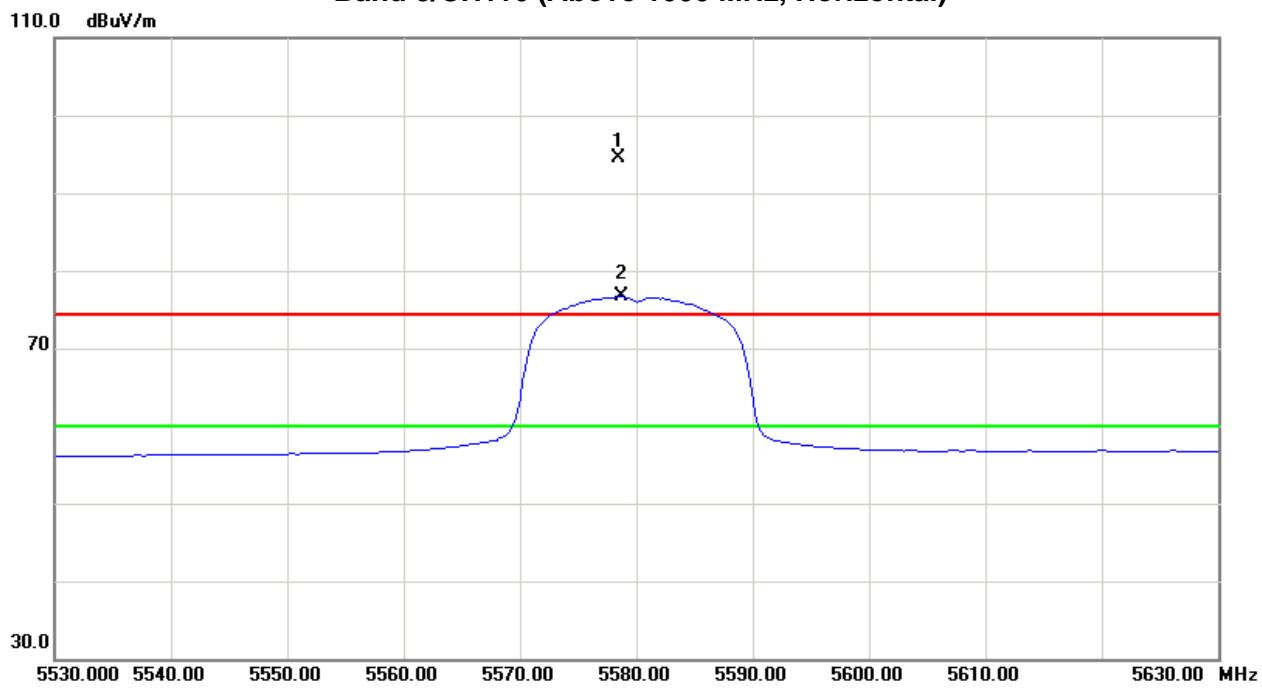



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N20 Mode 5700MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5698.50	V	60.39	40.68	41.79	102.18	82.47	-2.59	-22.30					X/F
5725.00	V	25.97	15.58	41.91	67.88	57.49	-36.89	-47.28	74.30		-27.00		X/H
11400.10	V	39.65	29.08	14.20	53.85	43.28	-50.92	-61.49	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH140(Above 1000 MHz, Vertical)

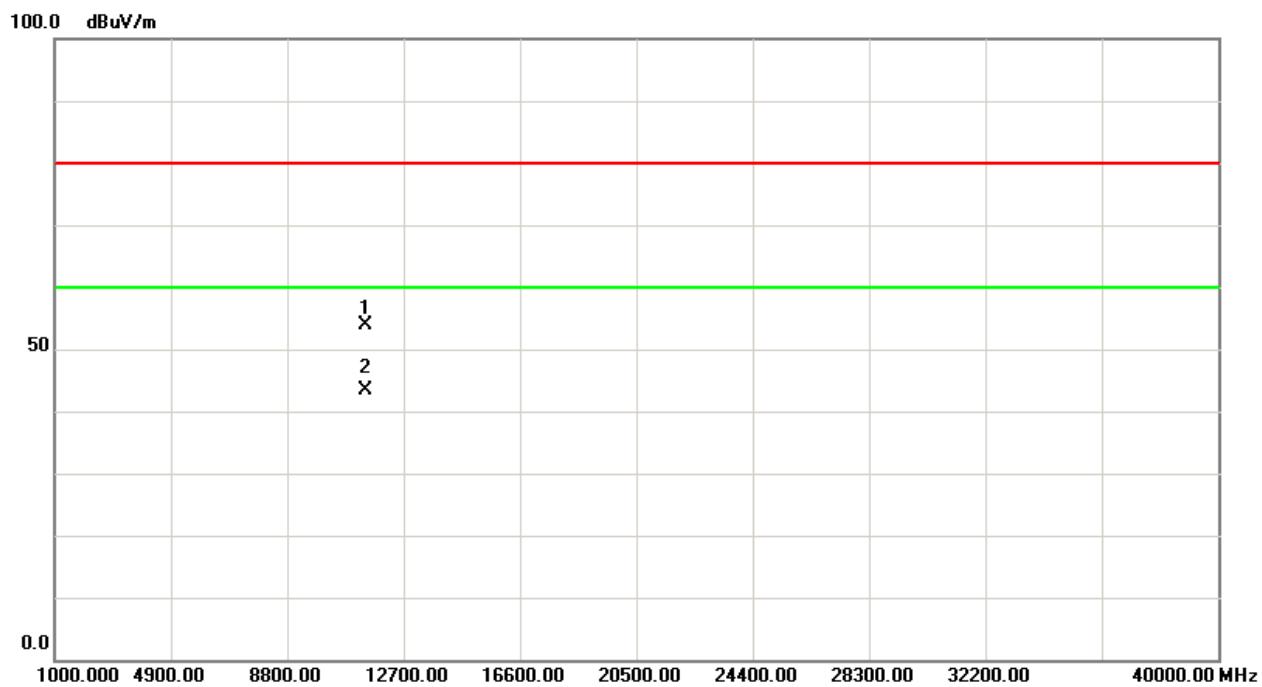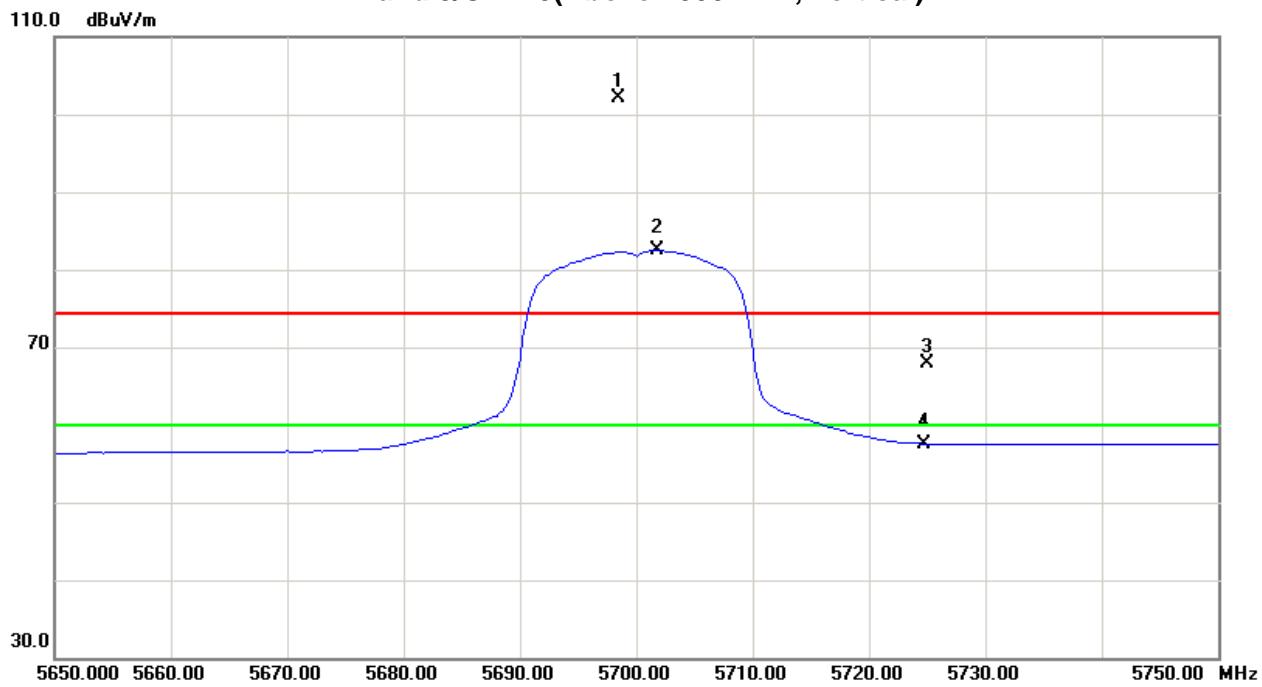



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N20 Mode 5700MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5701.50	H	53.54	35.54	41.81	95.35	77.35	-9.42	-27.42					X/F
5725.00	H	26.28	15.52	41.91	68.19	57.43	-36.58	-47.34	74.30		-27.00		X/H
11400.02	H	40.28	29.80	14.20	54.48	44.00	-50.29	-60.77	80.00	60.00	-24.77	-44.77	X/H


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X

Band 3/CH140 (Above 1000 MHz, Horizontal)

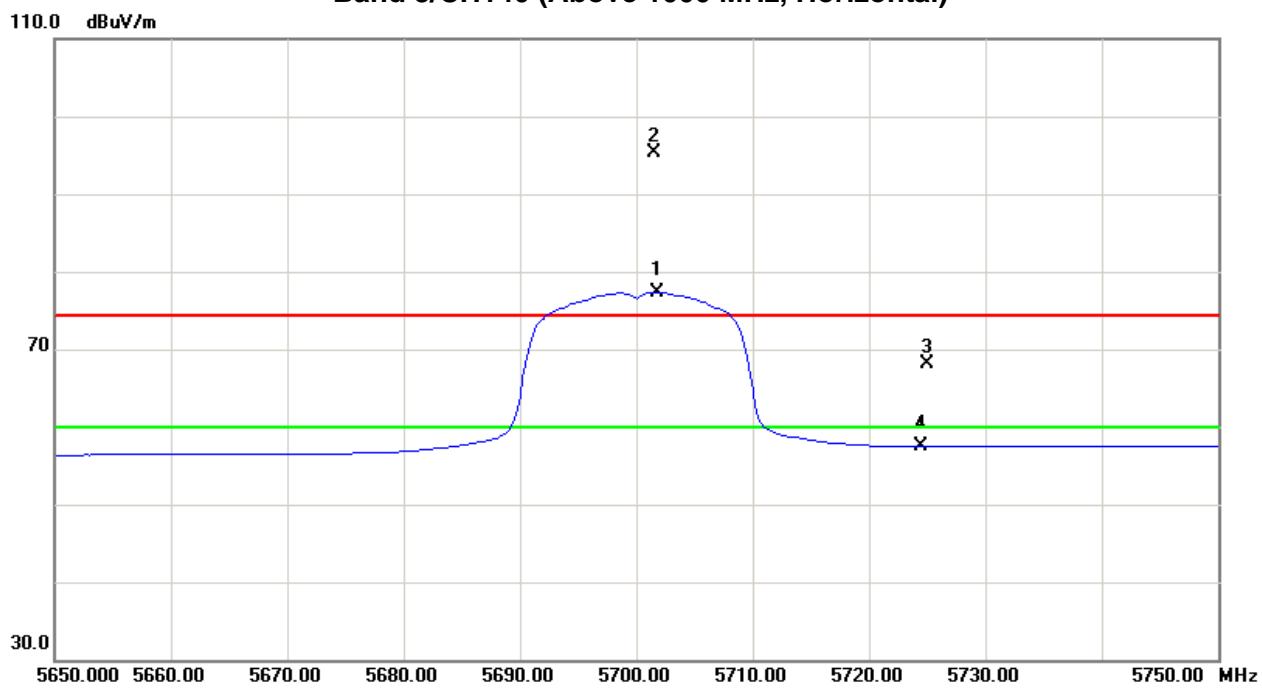



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N40 Mode 5510MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	24.69	14.73	40.90	65.59	55.63	-39.18	-49.14	80.00	60.00	-24.77	-44.77	X/E
5470.00	V	26.15	14.85	40.93	67.08	55.78	-37.69	-48.99	74.30		-27.00		X/E
5506.00	V	56.06	31.68	41.02	97.08	72.70	-7.69	-32.07					X/F
11019.98	V	39.20	28.78	13.94	53.14	42.72	-51.63	-62.05	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH102(Above 1000 MHz, Vertical)

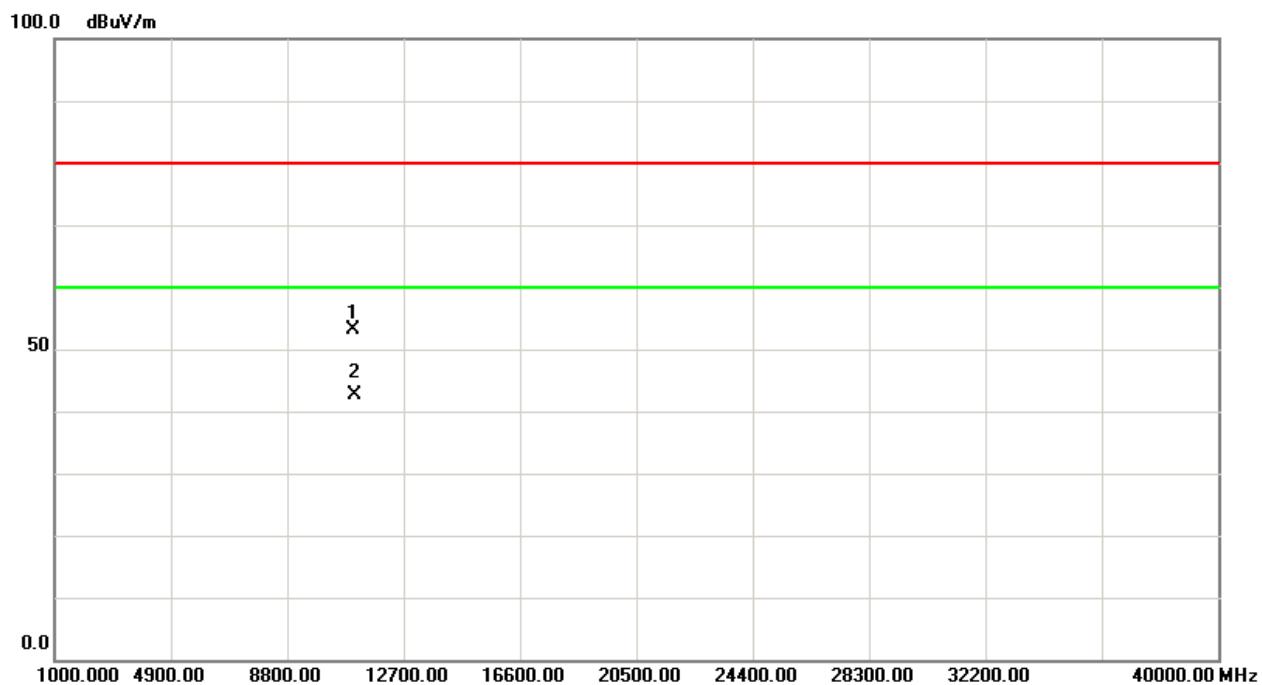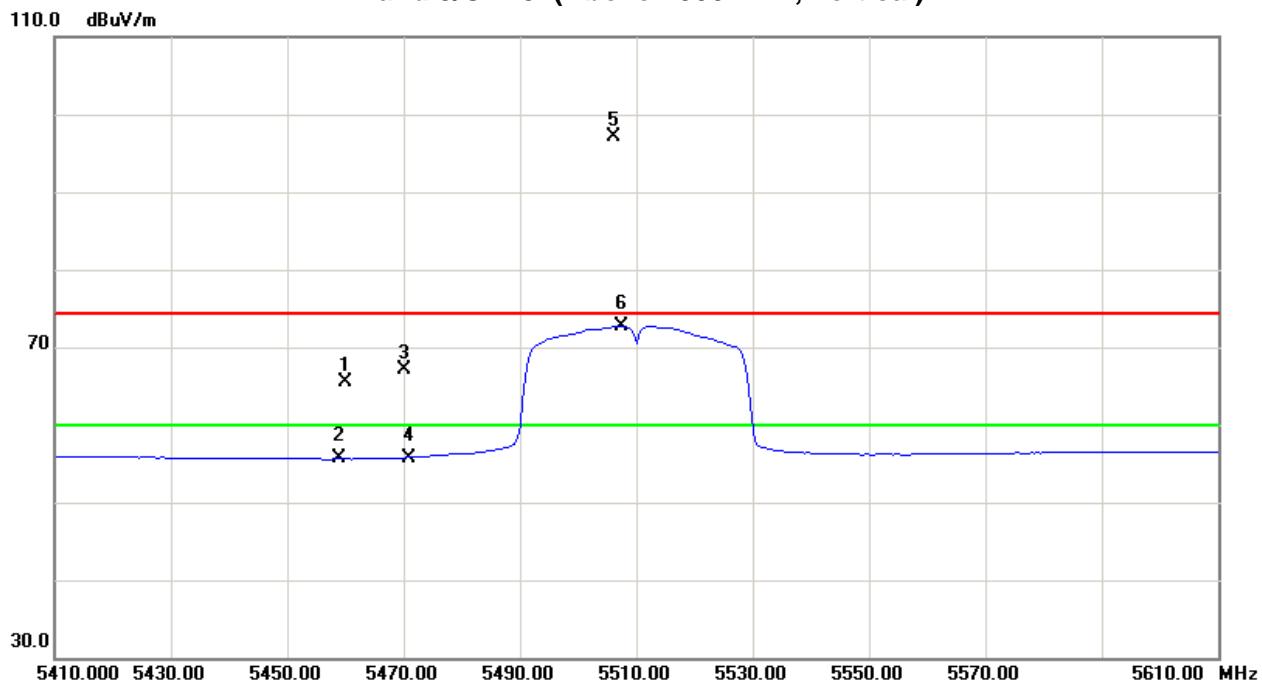



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N40 Mode 5510MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	25.69	14.65	40.90	66.59	55.55	-38.18	-49.22	80.00	60.00	-24.77	-44.77	X/E
5470.00	H	24.54	14.62	40.93	65.47	55.55	-39.30	-49.22	74.30		-27.00		X/E
5512.00	H	47.82	27.42	41.05	88.87	68.47	-15.90	-36.30					X/F
11019.86	H	39.95	29.35	13.94	53.89	43.29	-50.88	-61.48	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH102(Above 1000 MHz, Horizontal)

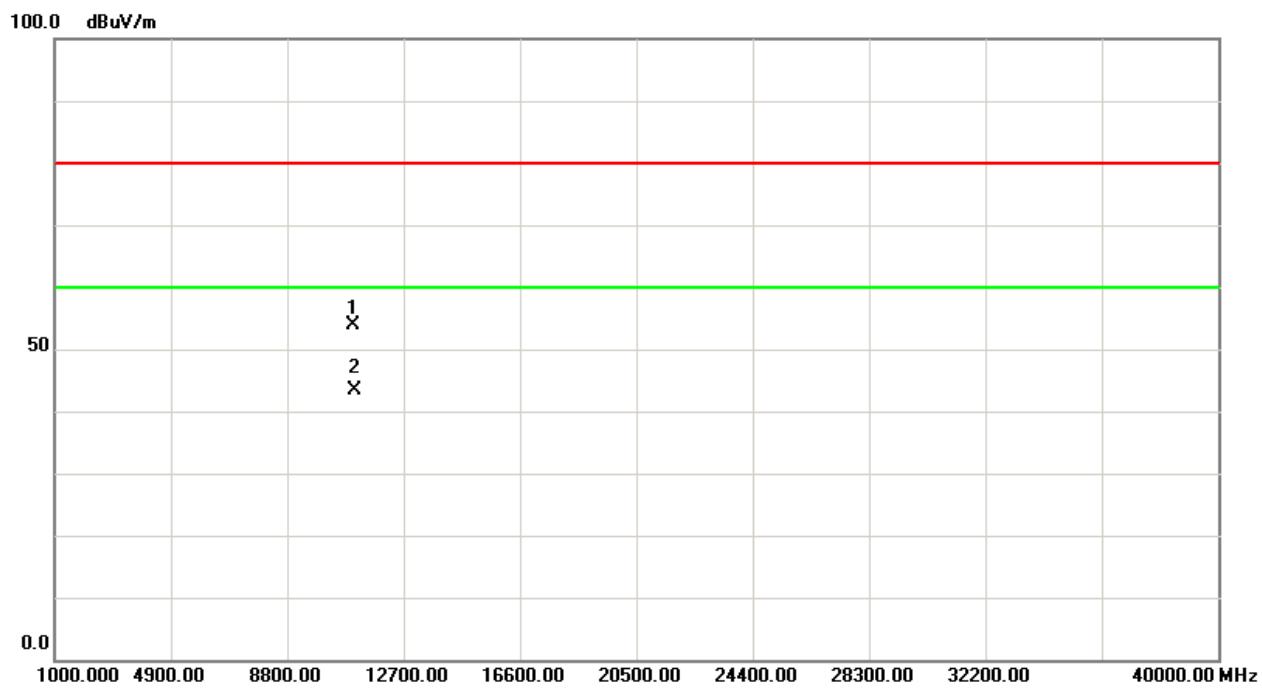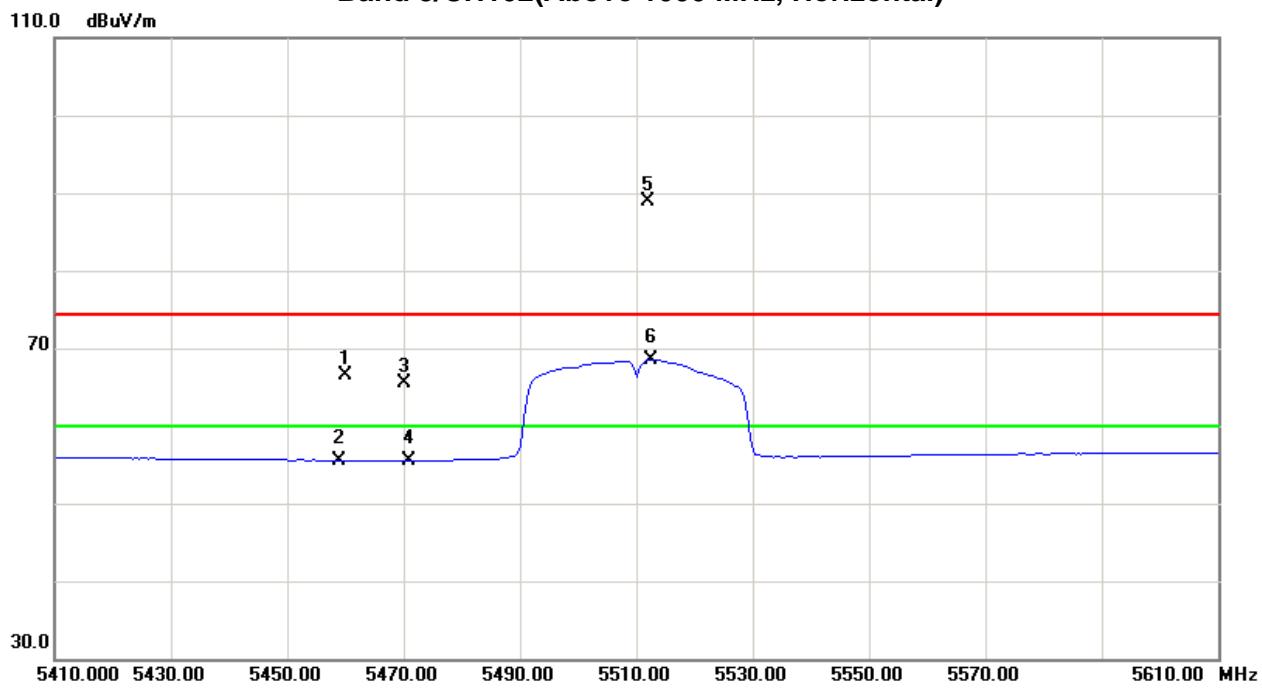



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N40 Mode 5550MHz		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5554.00	V	57.86	33.09	41.21	99.07	74.30	-5.70	-30.47					X/F
11099.98	V	39.21	28.81	13.99	53.20	42.80	-51.57	-61.97	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m)$ dB ;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH110(Above 1000 MHz, Vertical)

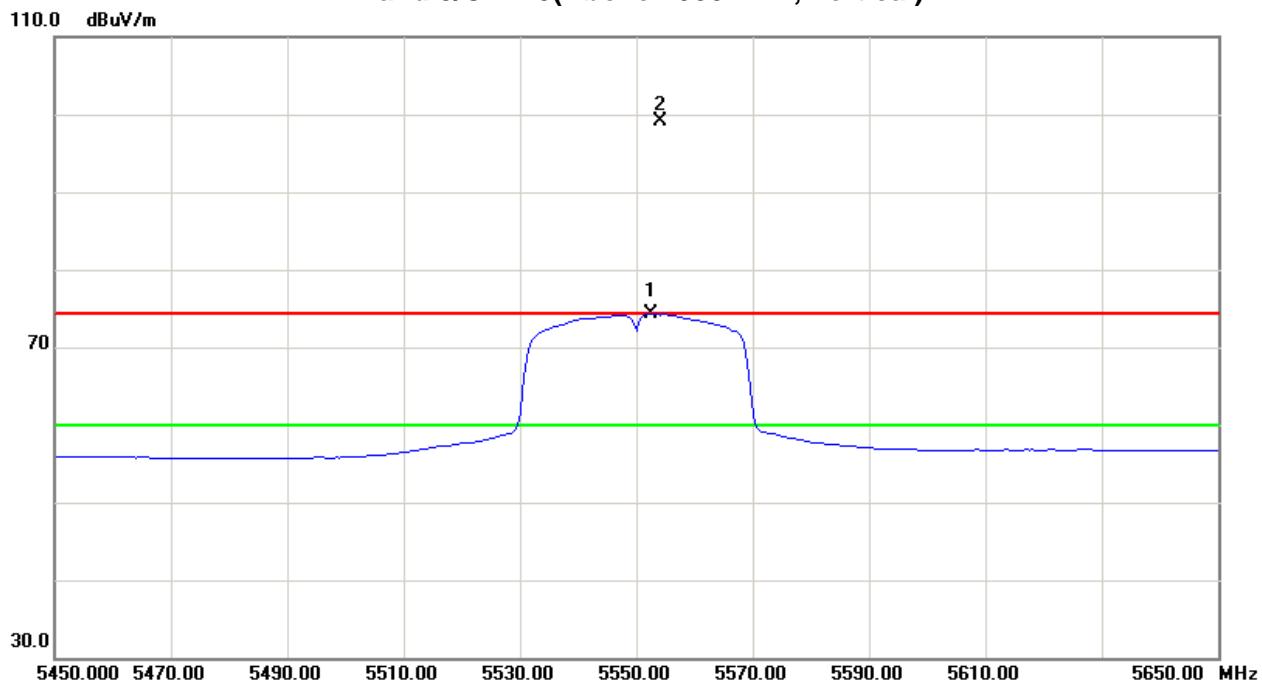



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N40 Mode 5550MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5552.50	H	49.02	28.26	41.21	90.23	69.47	-14.54	-35.30					X/F
11100.16	H	39.88	29.30	14.00	53.88	43.30	-50.89	-61.47	80.00	60.00	-24.77	-44.77	X/H


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m) \text{ dB}$;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X

Band 3/CH110(Above 1000 MHz, Horizontal)

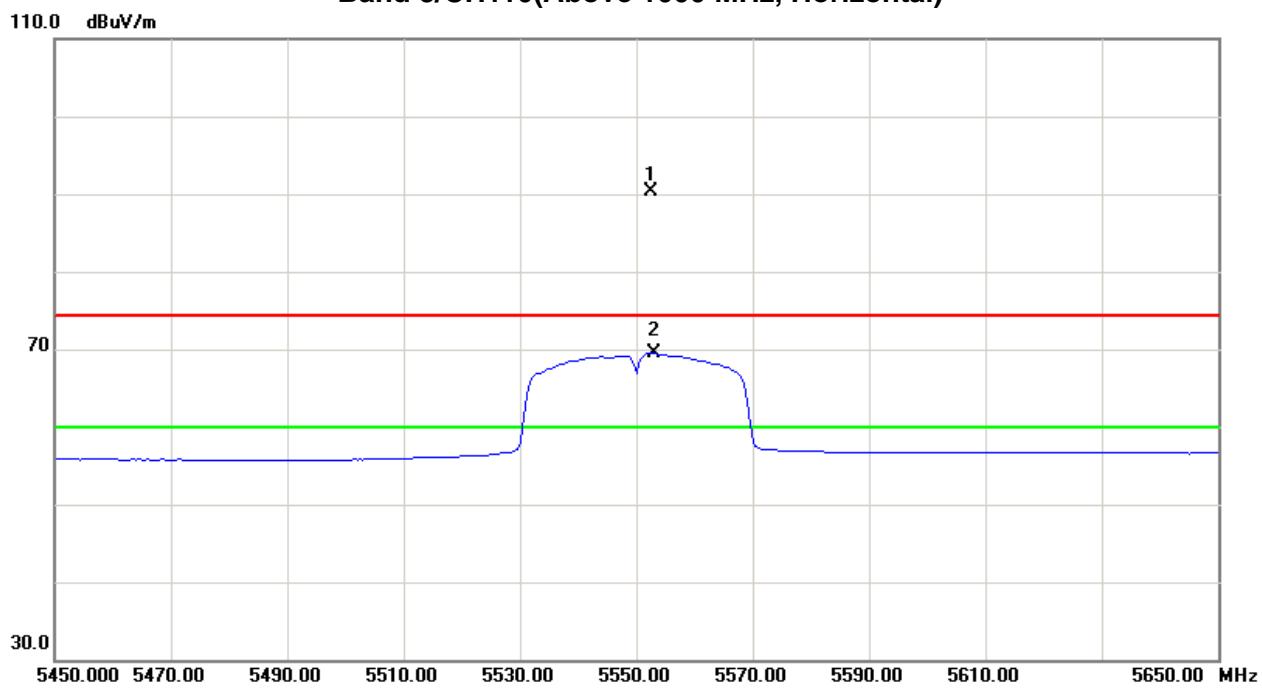



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N40 Mode 5670MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5667.00	V	56.60	32.15	41.67	98.27	73.82	-6.50	-30.95					X/F
5725.00	V	26.94	15.53	41.91	68.85	57.44	-35.92	-47.33	74.30		-27.00		X/E
11339.96	V	39.08	28.69	14.16	53.24	42.85	-51.53	-61.92	80.00	60.00	-24.77	-44.77	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m) \text{ dB}$;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X
Band 3/CH134(Above 1000 MHz, Vertical)

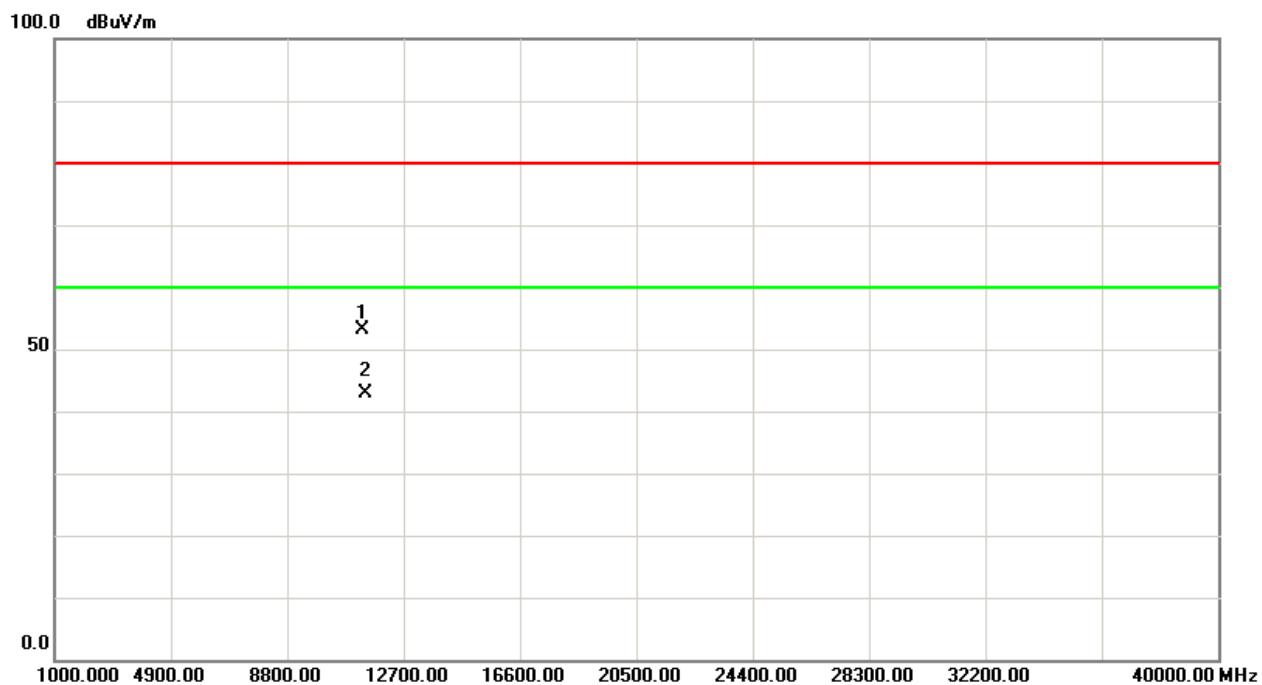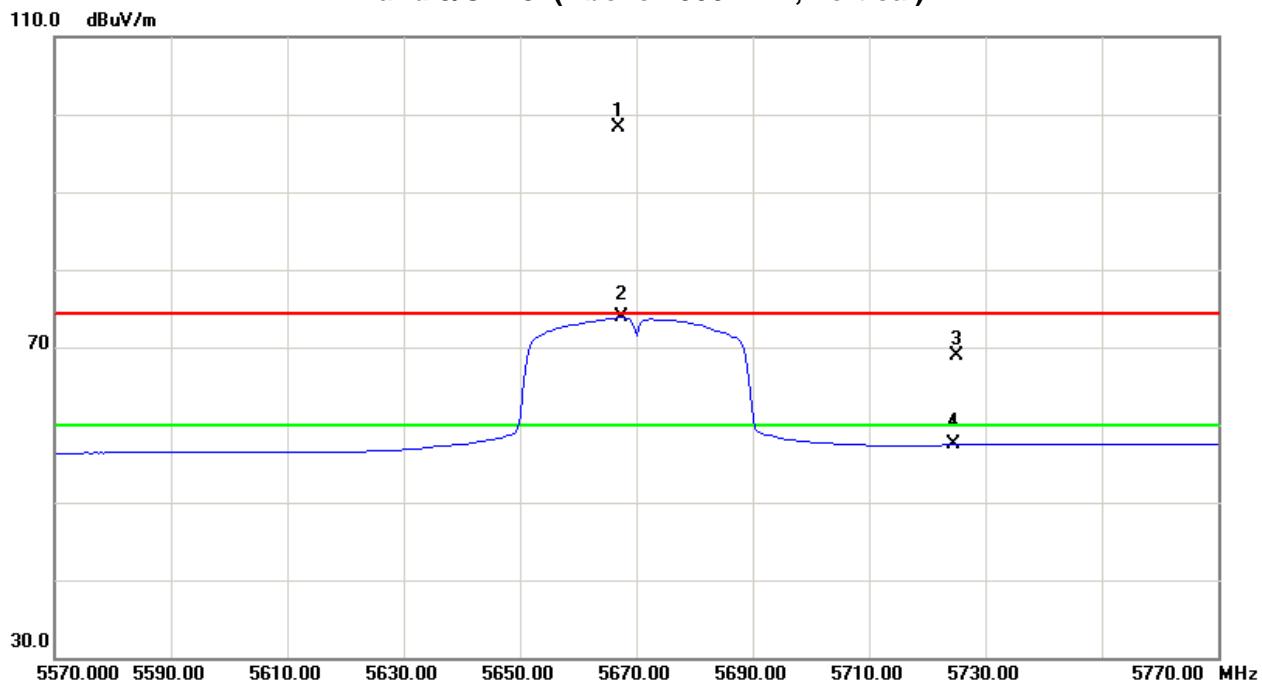



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	52 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/ TX N40 Mode 5670MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5665.50	H	48.02	27.48	41.66	89.68	69.14	-15.09	-35.63					X/F
5725.00	H	26.85	15.51	41.91	68.76	57.42	-36.01	-47.35	74.30		-27.00		X/E
11340.20	H	39.88	29.28	14.16	54.04	43.44	-50.73	-61.33	80.00	60.00	-24.77	-44.77	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 - “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (9) The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor = $20 \log (3m/1.5m) \text{ dB}$;
Limit line = specific limits (dBuV) + 6 dB



Orthogonal Axis : X

Band 3/CH134(Above 1000 MHz, Horizontal)

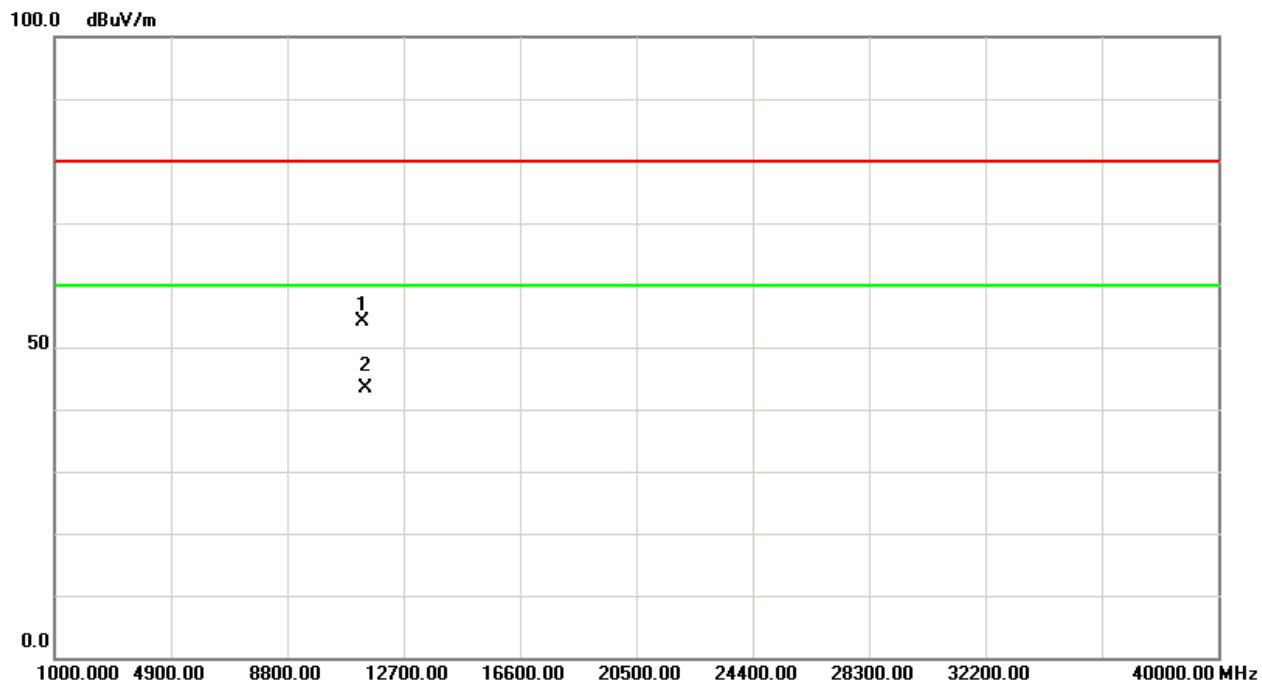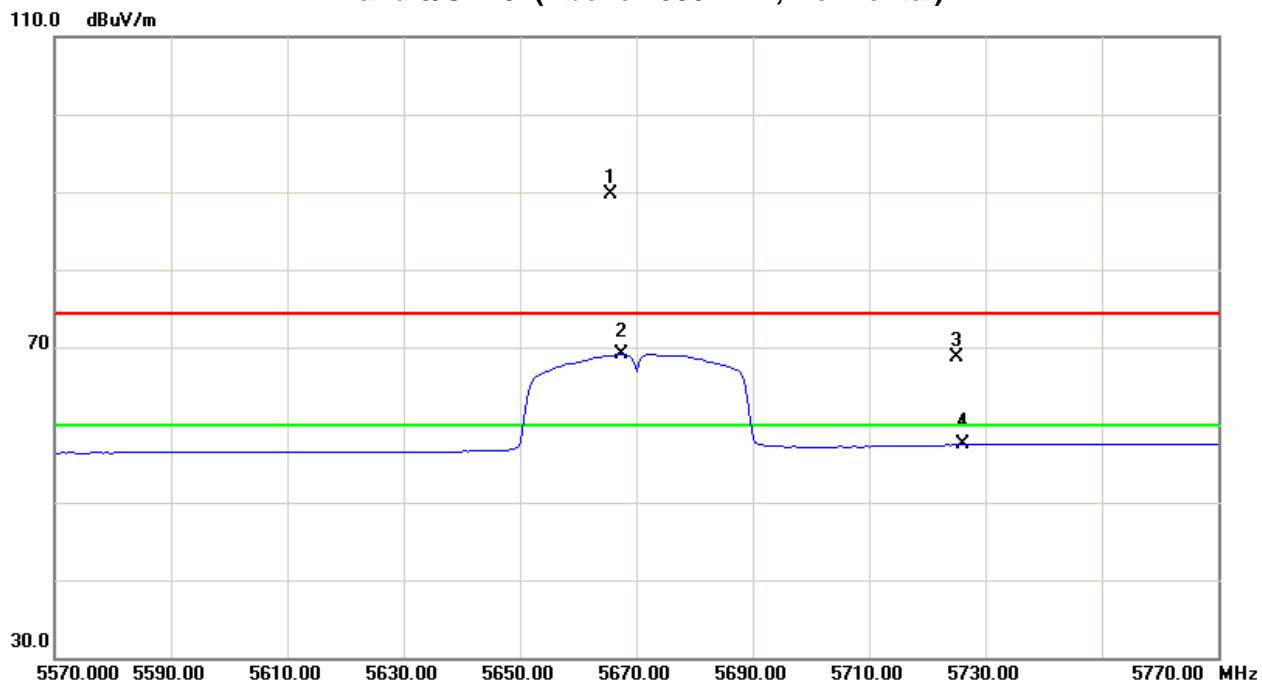



5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
26 dB Bandwidth	-----	5150MHz~5250 5250MHz~5350 5470MHz~5725	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Next Calibration
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2012	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

5.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP





5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




5.1.6 TEST RESULTS

EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX A Mode /CH36, CH40, CH48		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.20	16.40
CH40	5200	21.00	16.50
CH48	5240	20.80	16.50


CH36

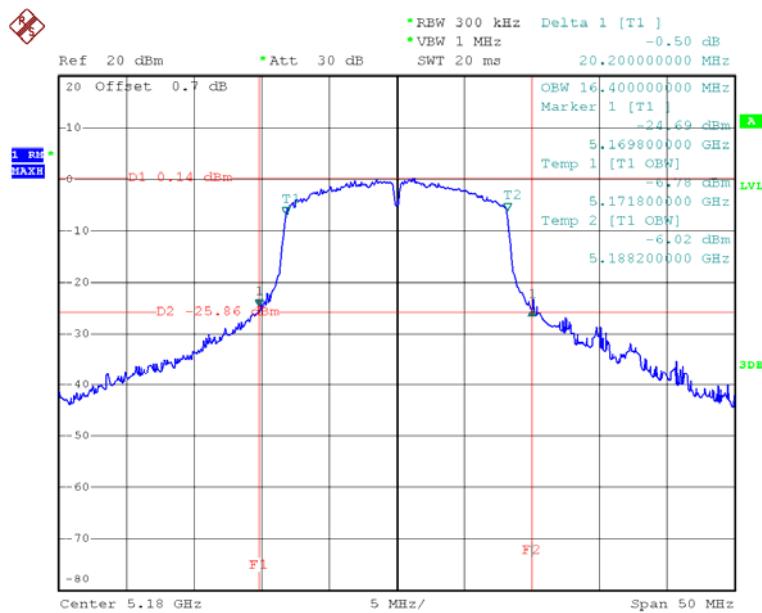

Date: 12.MAR.2013 14:10:44




CH40

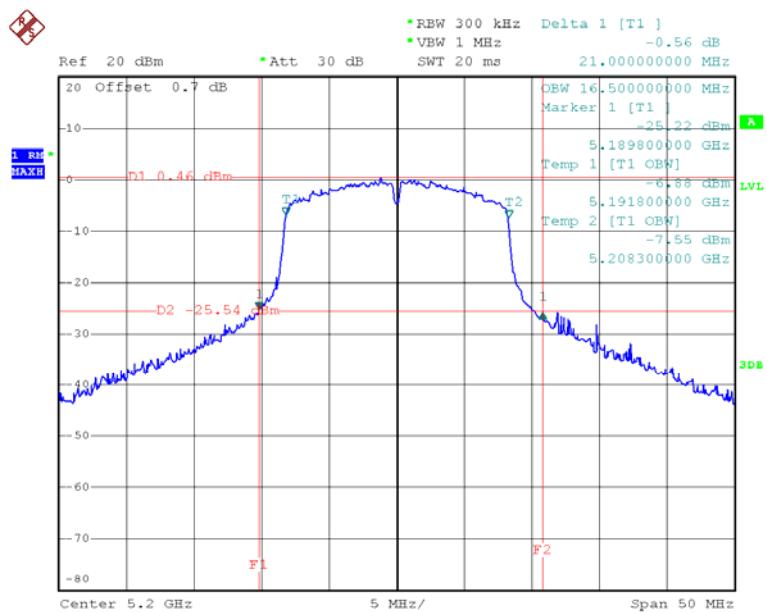

Date: 12.MAR.2013 14:12:15

CH48

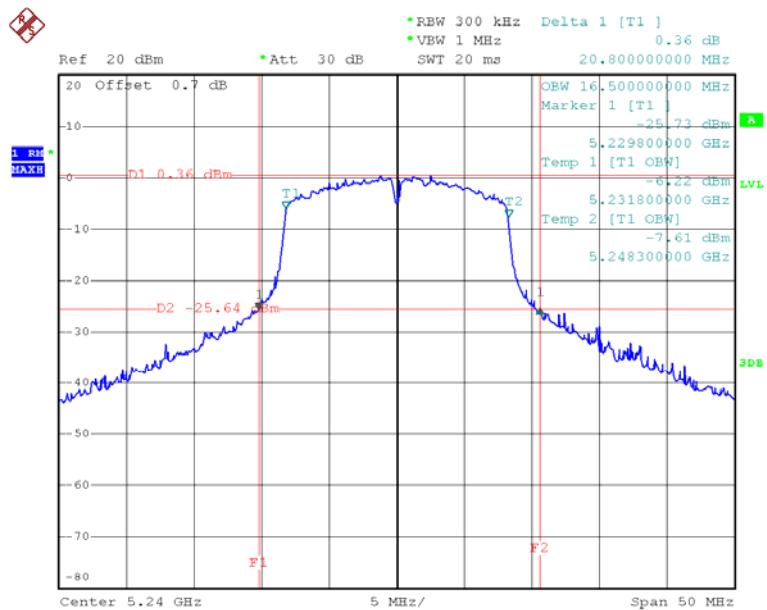


Date: 12.MAR.2013 14:13:37



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TXN20 Mode /CH36, CH40, CH48		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.10	17.60
CH40	5200	20.80	17.60
CH48	5240	21.40	17.60


CH36

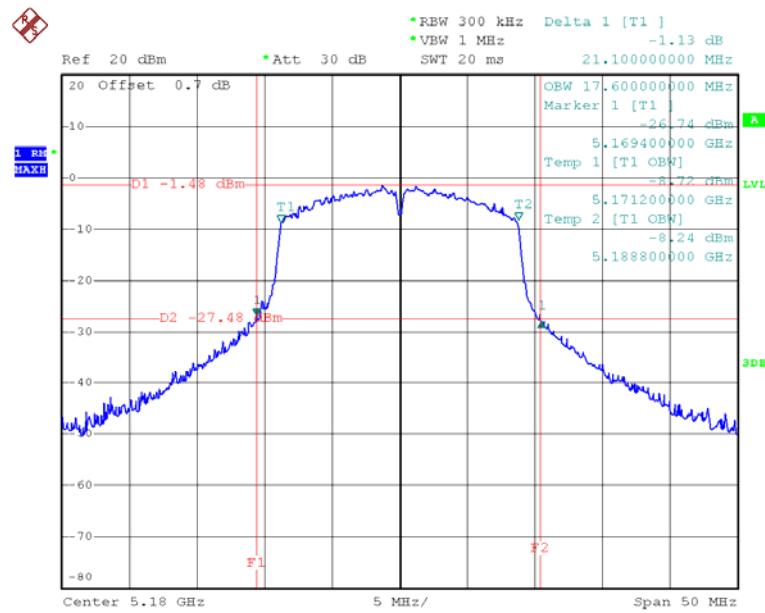

Date: 12.MAR.2013 14:21:36




CH40

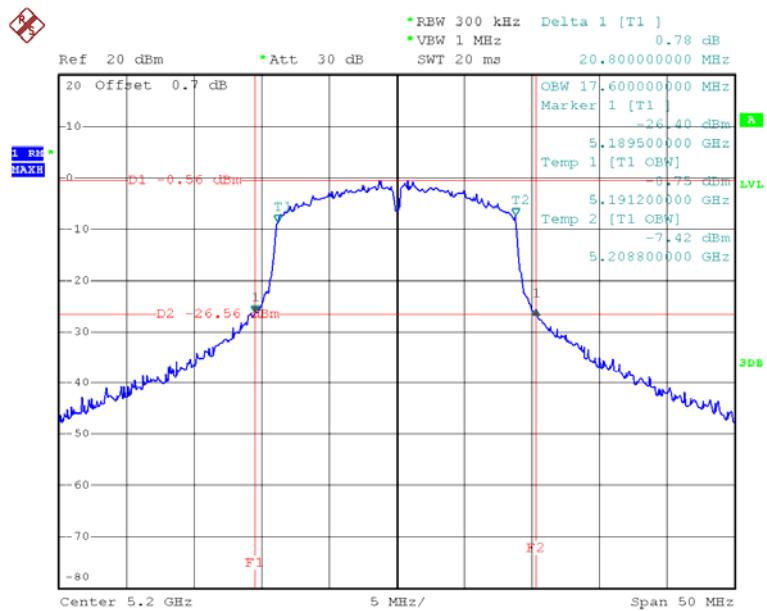

Date: 12.MAR.2013 14:22:50

CH48

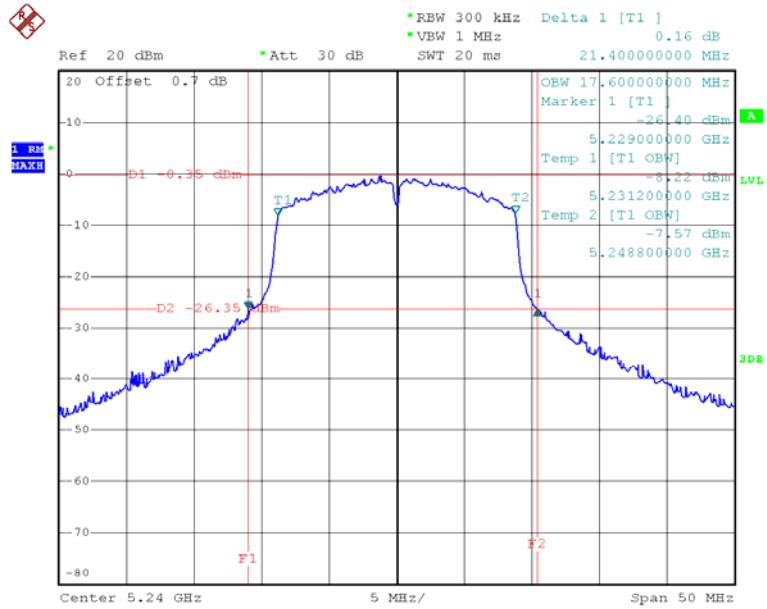


Date: 12.MAR.2013 14:24:15



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TXN40 Mode /CH38, CH46		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.00	36.00
CH46	5230	40.00	36.00


CH38

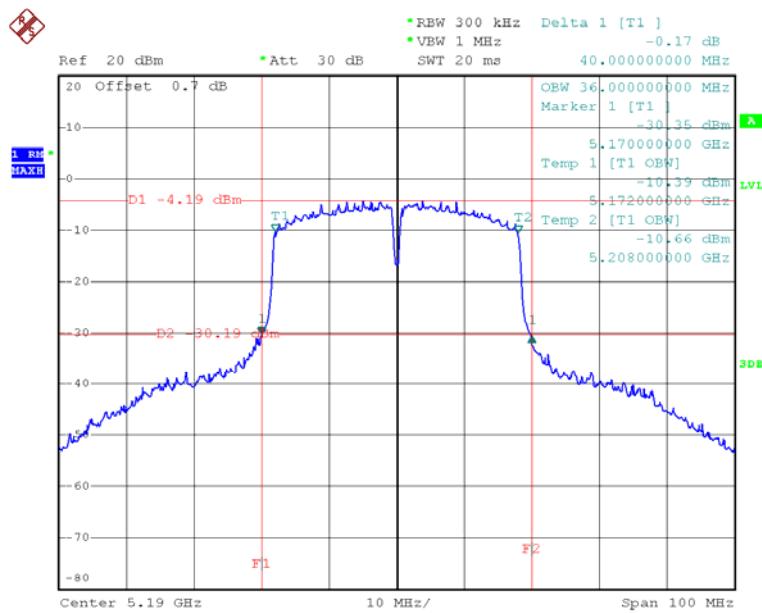

Date: 12.MAR.2013 14:30:55



CH46

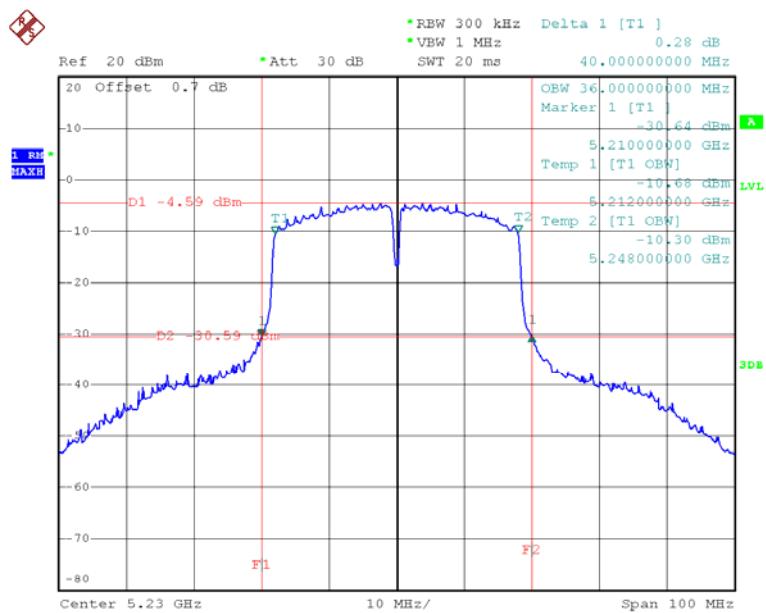


Date: 12.MAR.2013 14:32:05



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX A Mode /CH52, CH56, CH64		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	21.00	16.50
CH56	5280	21.10	16.50
CH64	5320	22.00	16.50


CH52

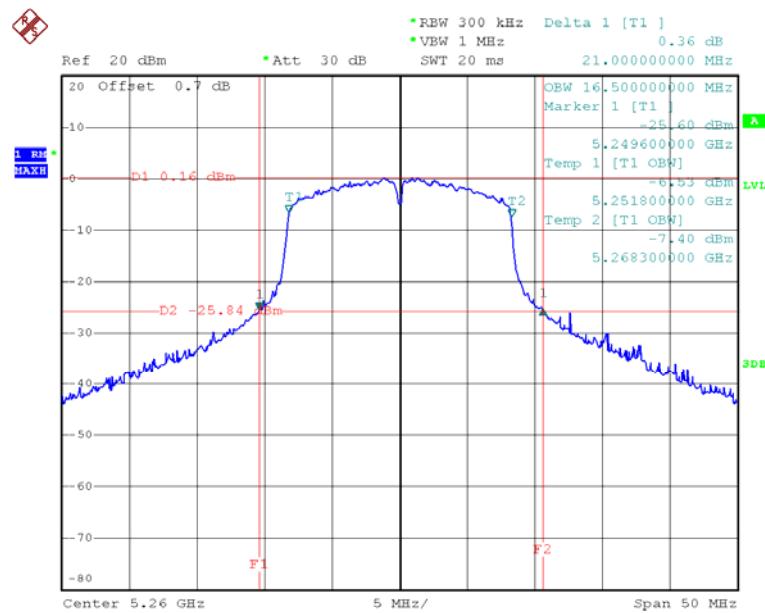

Date: 12.MAR.2013 14:15:35




CH56

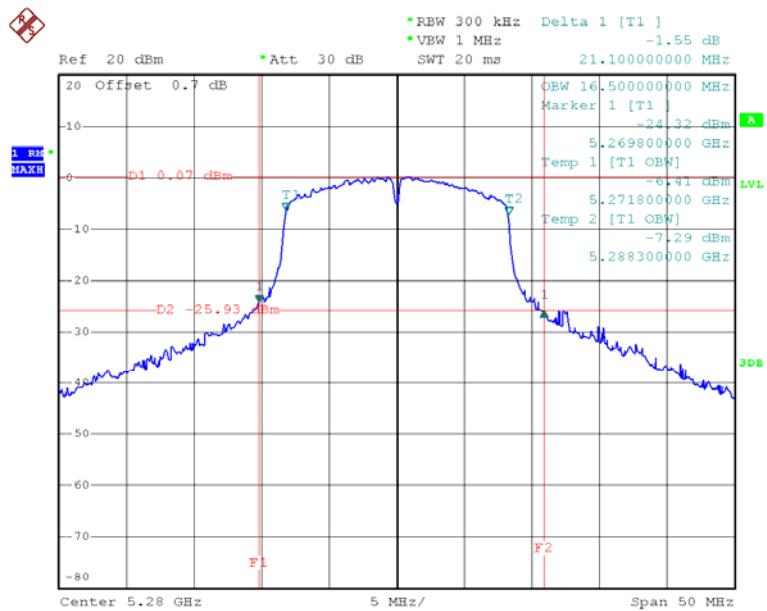

Date: 12.MAR.2013 14:18:12

CH64

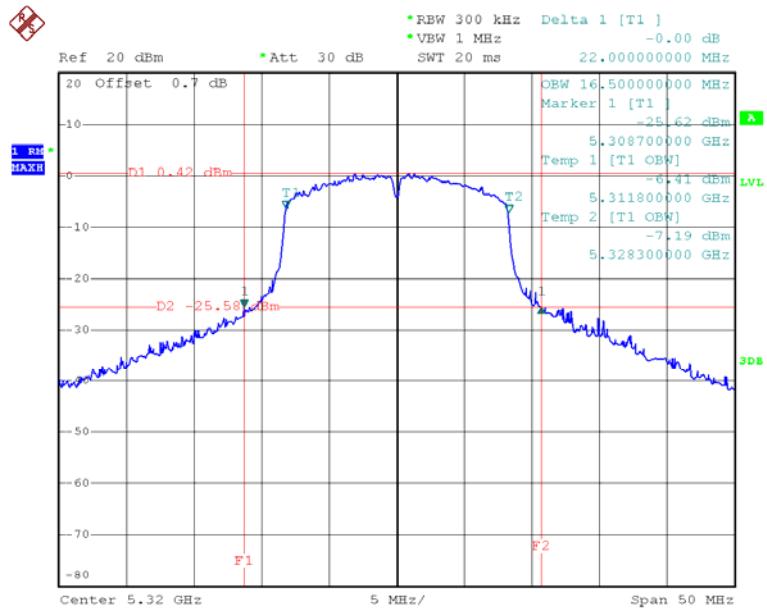


Date: 12.MAR.2013 14:19:55



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N20 Mode /CH52, CH56, CH64		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	21.20	17.60
CH56	5280	21.70	17.60
CH64	5320	21.60	17.60


CH52

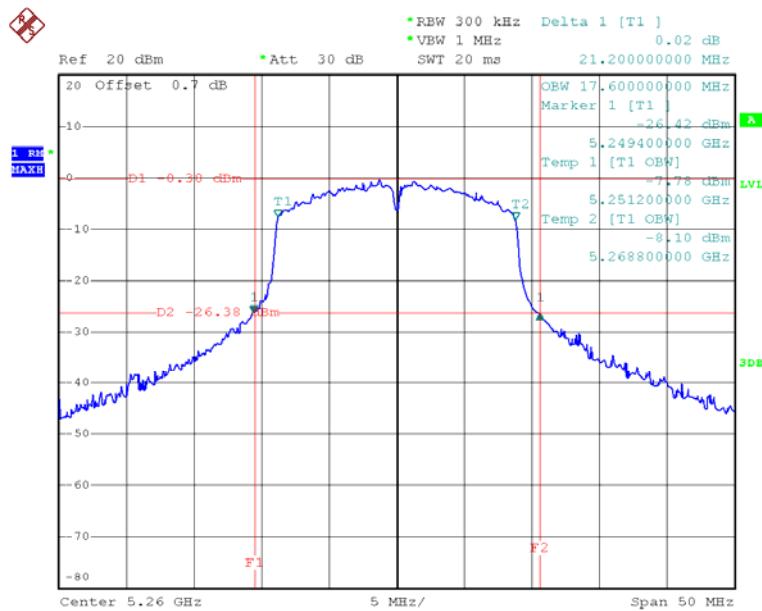

Date: 12.MAR.2013 14:25:59




CH56

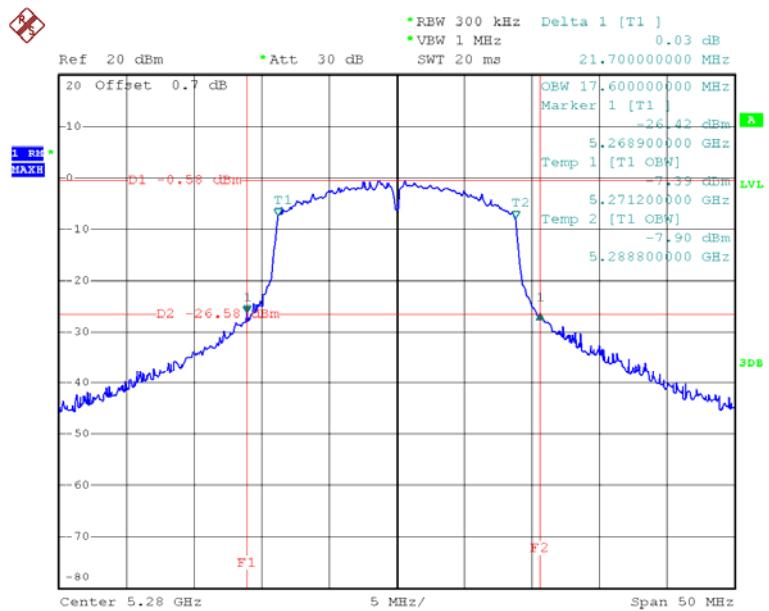

Date: 12.MAR.2013 14:27:57

CH64

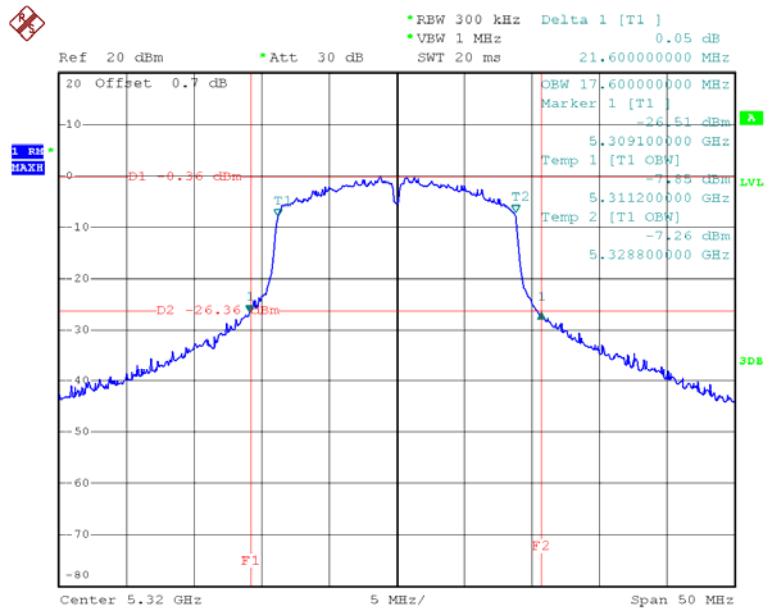


Date: 12.MAR.2013 14:29:13



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N40 Mode /CH54, CH62		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.00	36.00
CH62	5310	39.60	36.00


CH54

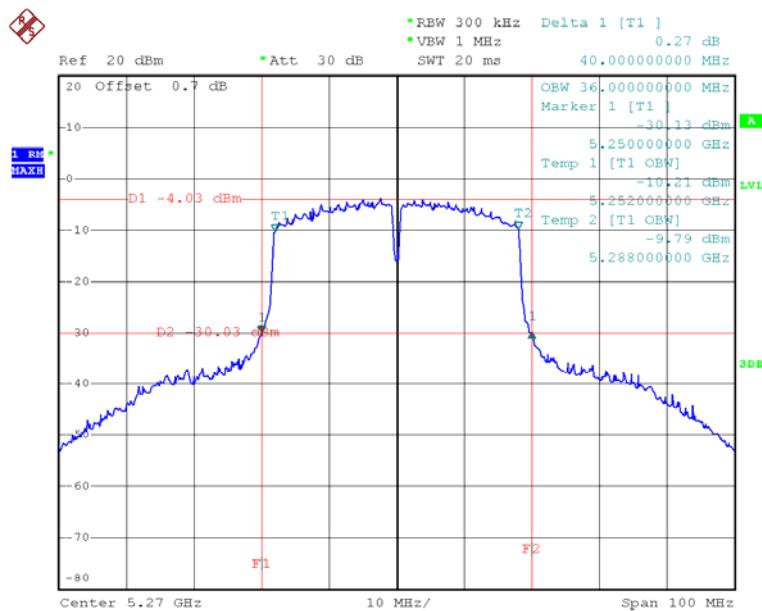

Date: 12.MAR.2013 14:32:59



CH62

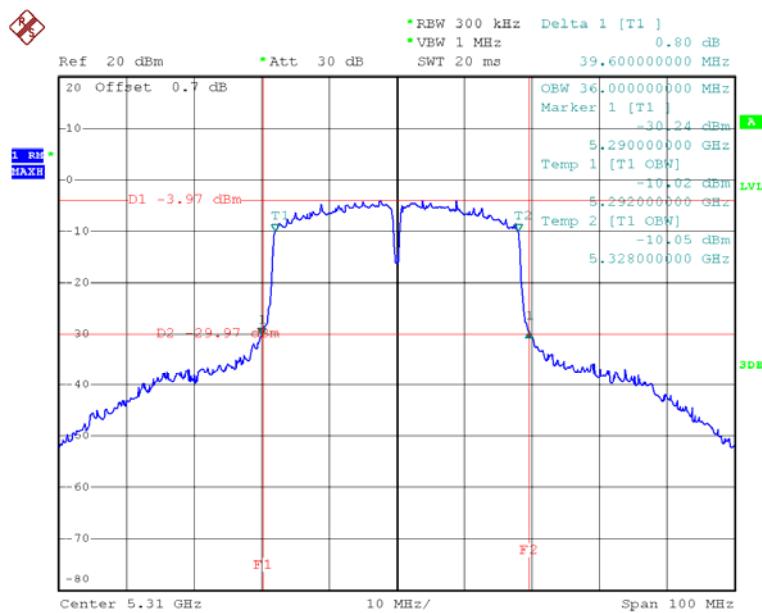


Date: 12.MAR.2013 14:34:10



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX A Mode /CH100, CH116, CH140		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	26.55	17.16
CH116	5580	26.05	17.07
CH140	5700	26.35	17.27


CH100

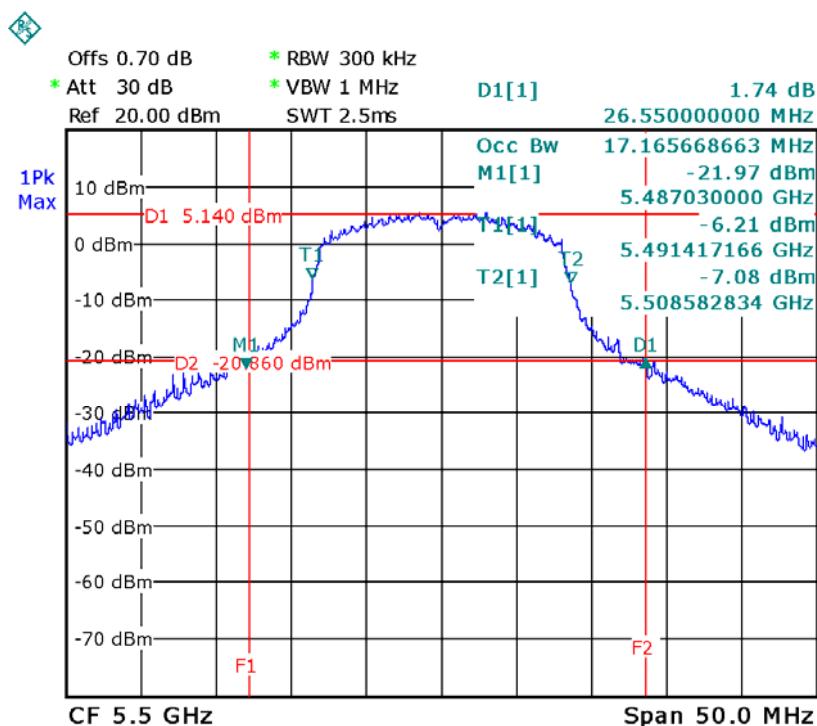

Date: 16.MAR.2013 12:57:45




CH116

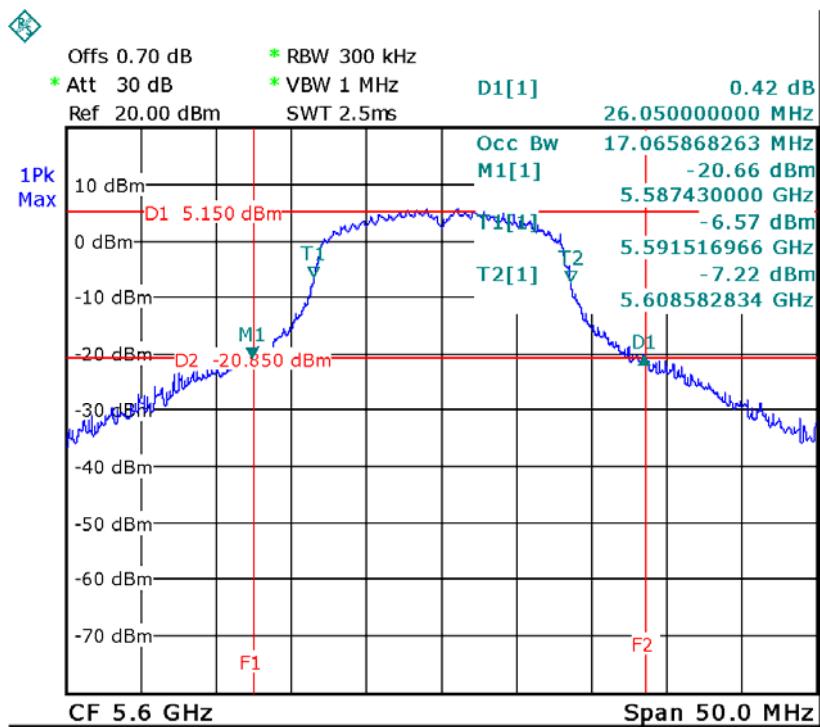

Date: 16.MAR.2013 12:55:18

CH140

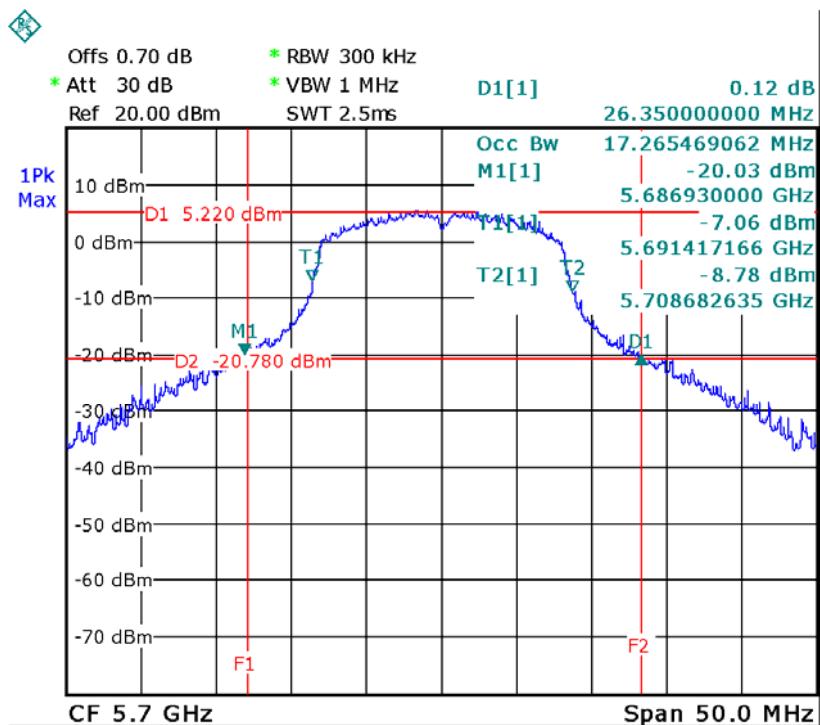


Date: 16.MAR.2013 12:52:12



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N20 Mode /CH100, CH116, CH140		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	29.64	18.16
CH116	5580	26.75	18.16
CH140	5700	29.94	18.36


CH100

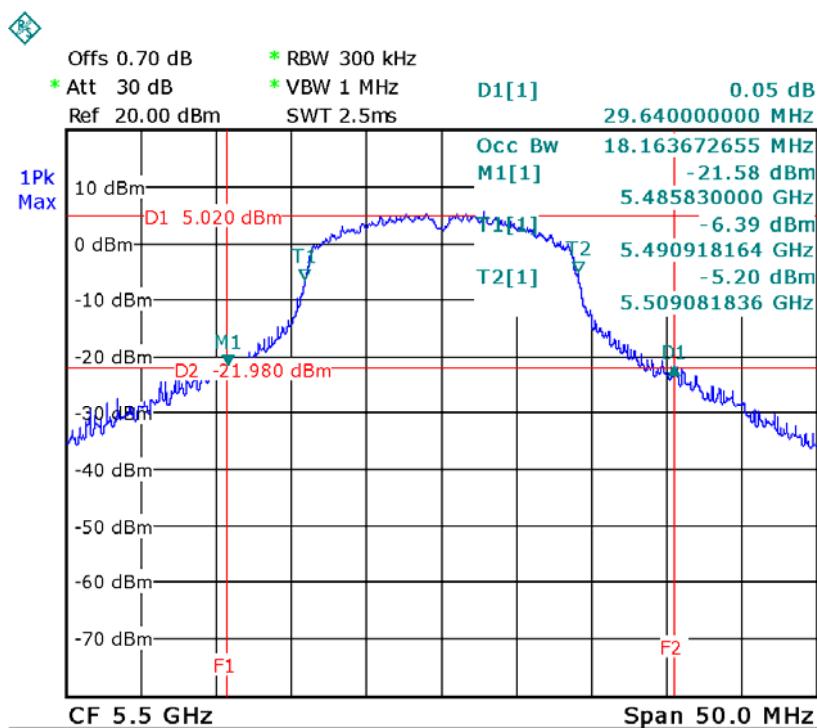

Date: 16.MAR.2013 12:45:27




CH116

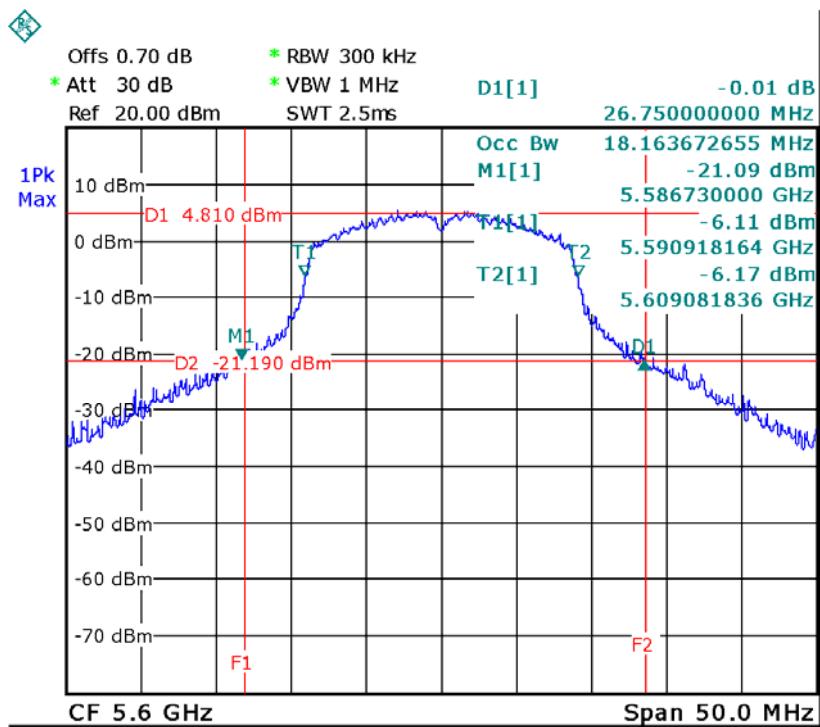

Date: 16.MAR.2013 12:47:12

CH140

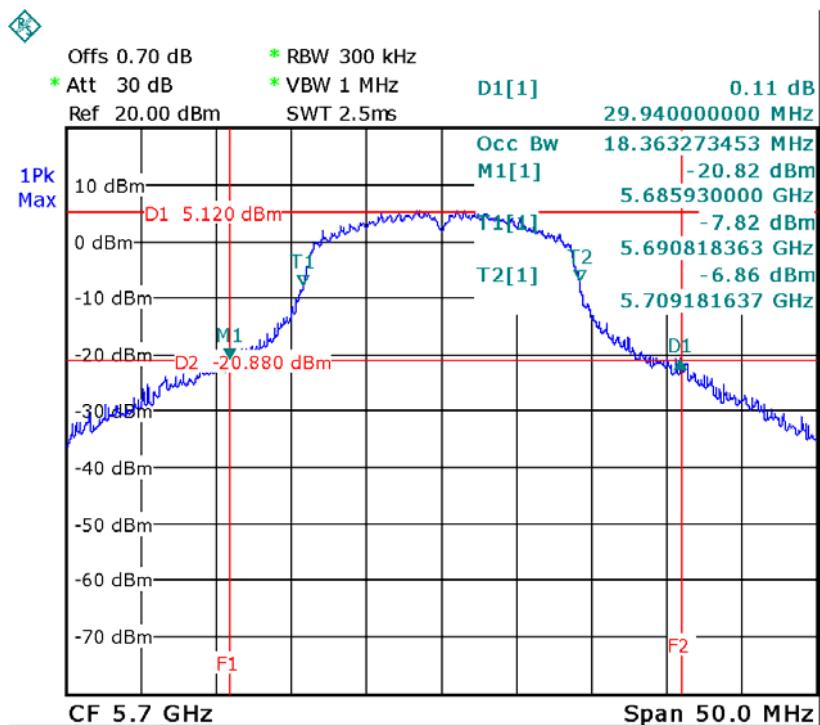


Date: 16.MAR.2013 12:49:49



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N40 Mode /CH52, CH56, CH64		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	51.50	36.13
CH110	5550	47.27	36.13
CH134	5670	49.70	36.13


CH102

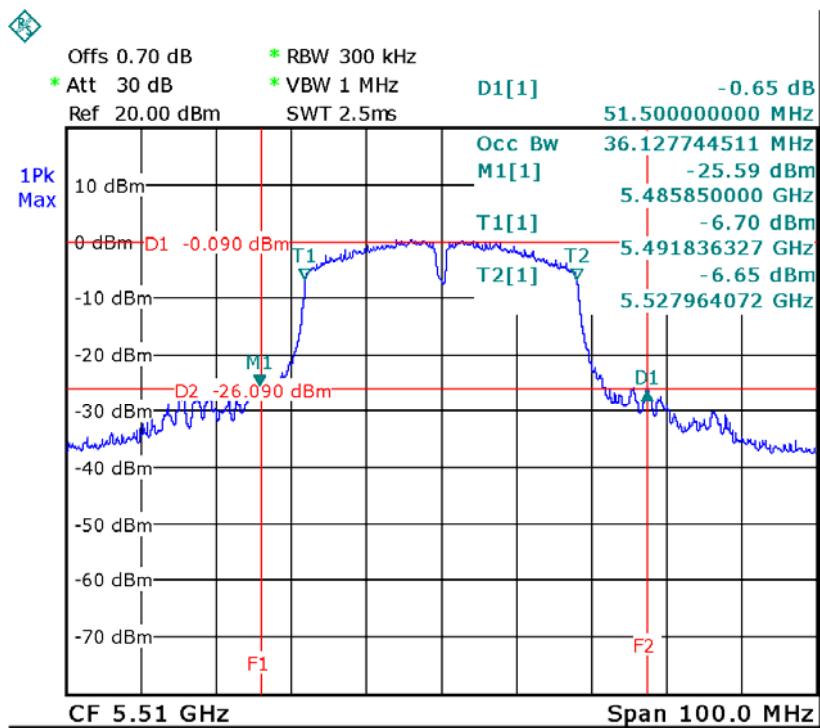

Date: 16.MAR.2013 12:42:13




CH110

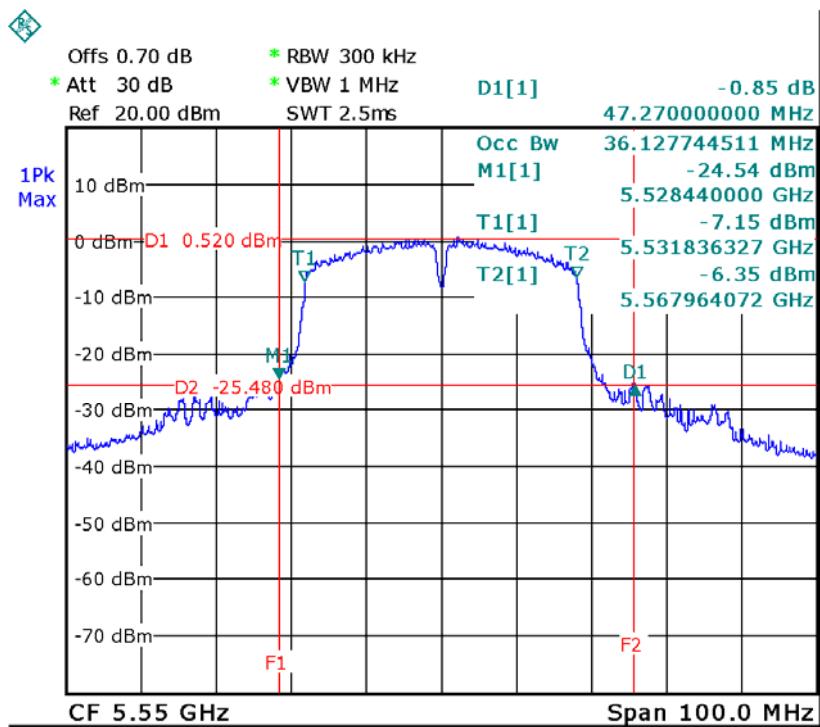

Date: 18.MAR.2013 14:18:04

CH134

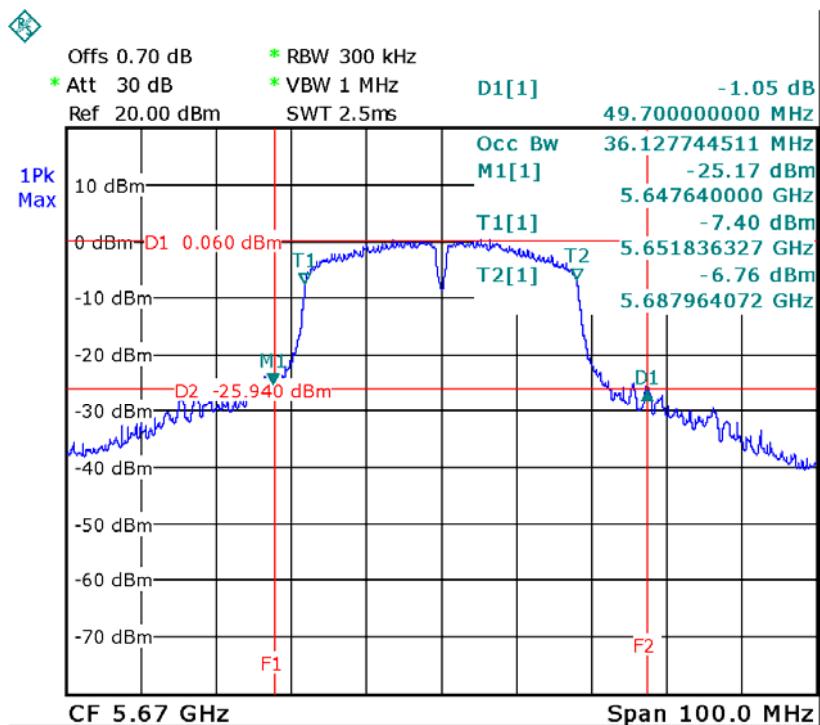

Date: 16.MAR.2013 12:39:28



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Frequency Range (MHz)	Limit	Result
Peak Output Power	5150 - 5250	not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B,	PASS
	5250 - 5350	not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B	PASS
	5470 - 5725	not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B	N/A

Note: where "B" is the 26 dB emissions bandwidth in MHz.

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Next Calibration
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2012	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

6.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

b. Test was performed in accordance with method of KDB 789033 D01.



6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP



6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




6.1.6 TEST RESULTS

EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		

Peak Output Power

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	13.89	17.00	0.0501
CH40	5200	13.90	17.00	0.0501
CH48	5240	13.97	17.00	0.0501


CH36

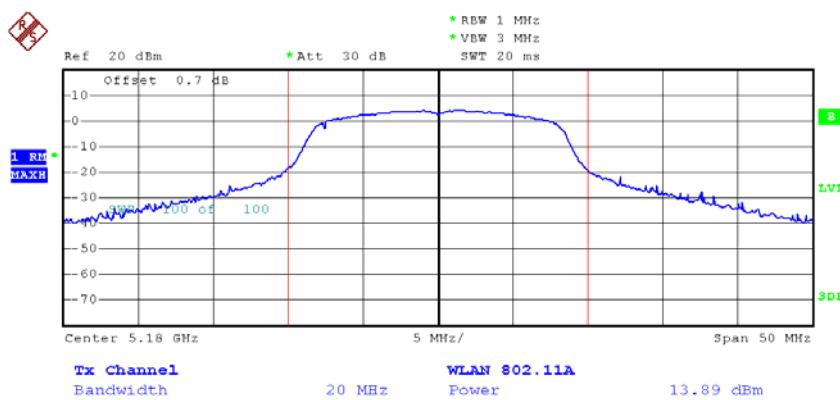

Date: 8.MAR.2013 09:35:02




CH40

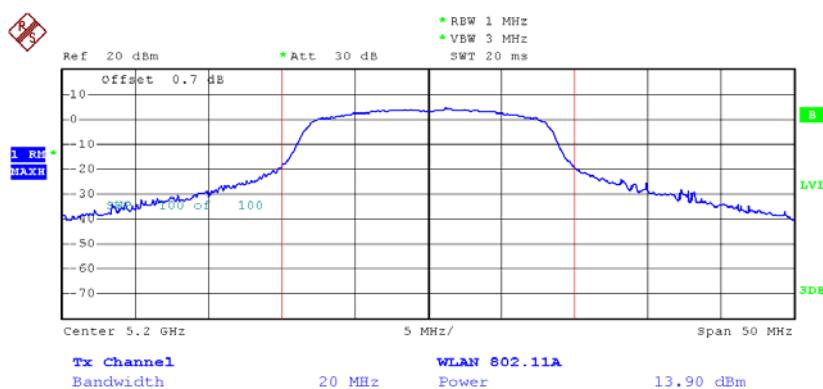

Date: 8.MAR.2013 09:36:52

CH48

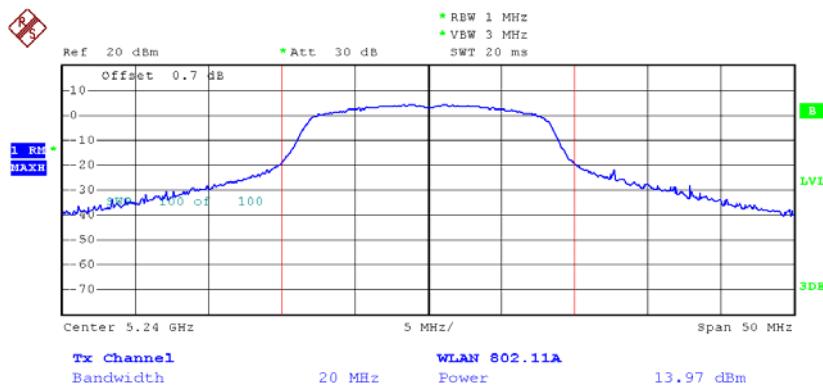


Date: 8.MAR.2013 09:37:22




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48		


Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	11.97	17.00	0.0501
CH40	5200	12.94	17.00	0.0501
CH48	5240	12.91	17.00	0.0501

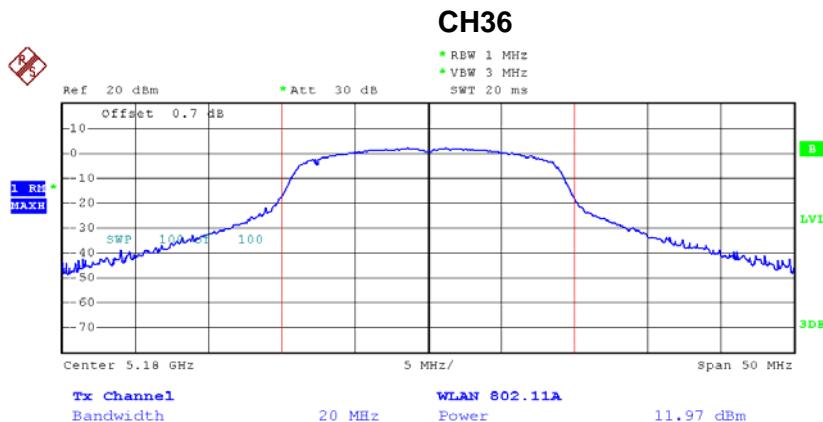

Date: 8.MAR.2013 09:43:18

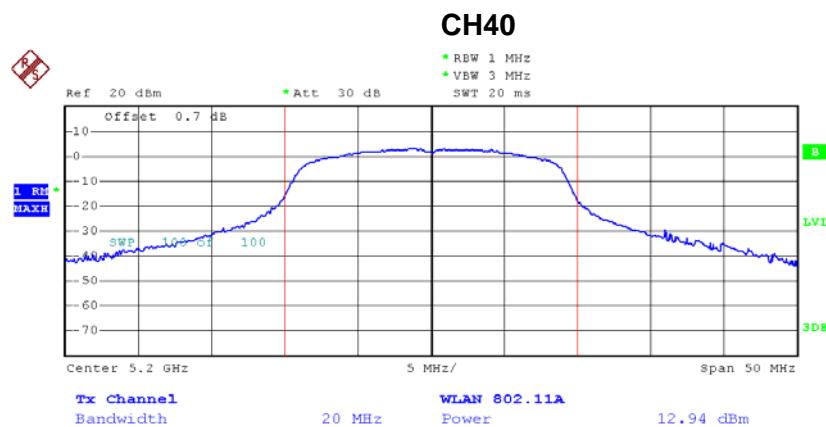

Date: 8.MAR.2013 09:45:27

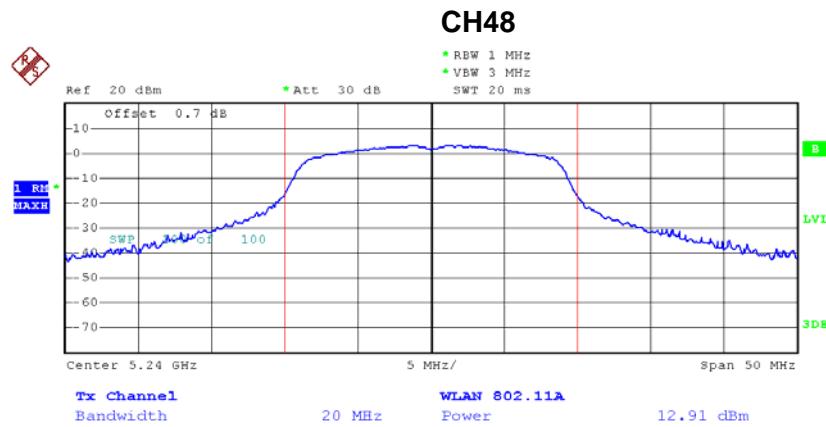


Date: 8.MAR.2013 09:45:54




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	12.85	17.00	0.0501
CH46	5230	12.90	17.00	0.0501

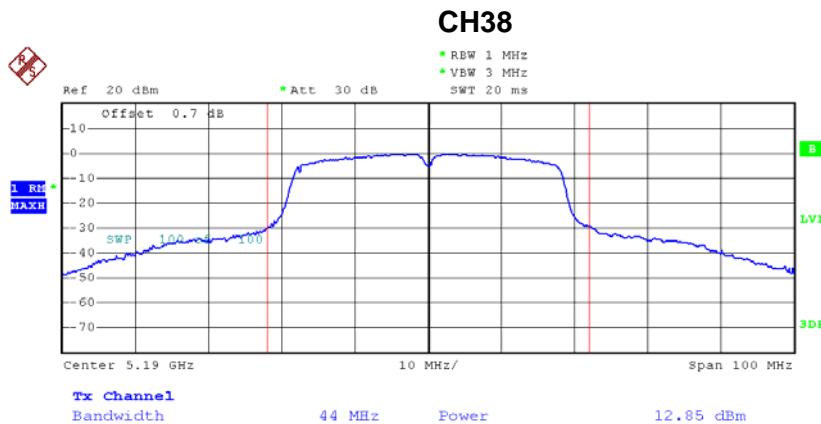

Date: 8.MAR.2013 09:54:08

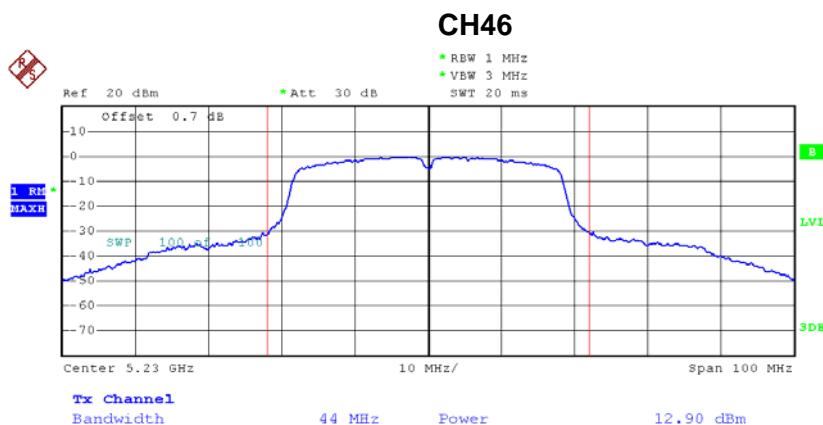

Date: 8.MAR.2013 09:55:55




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX A Mode/CH52, CH56, CH64		

Peak Output Power

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH52	5260	13.87	24	0.251
CH56	5280	13.87	24	0.251
CH64	5320	13.88	24	0.251


CH52

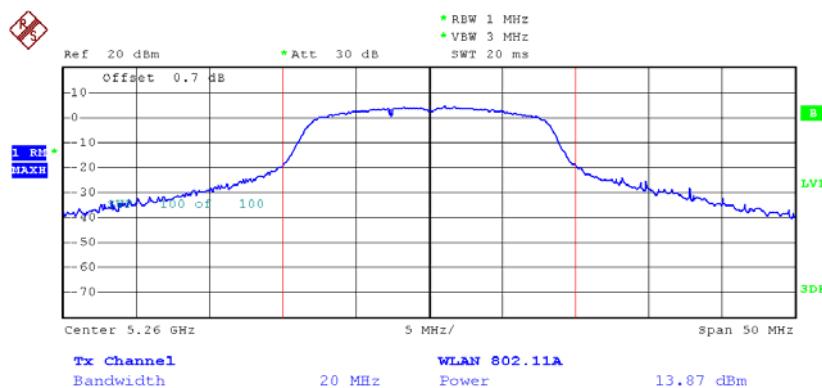

Date: 8.MAR.2013 09:38:37




CH56

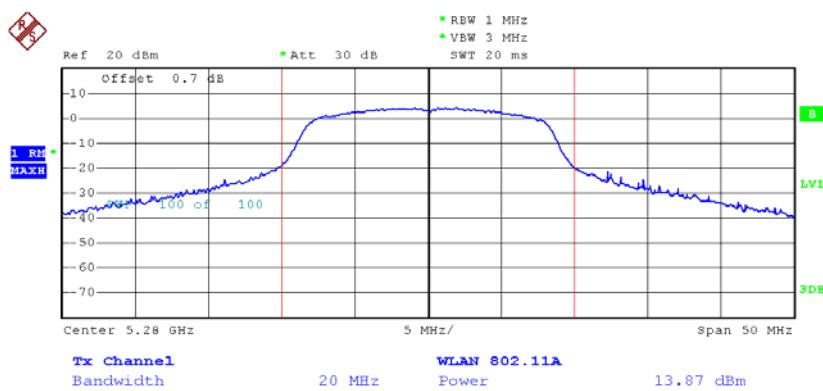

Date: 8.MAR.2013 09:39:37

CH64

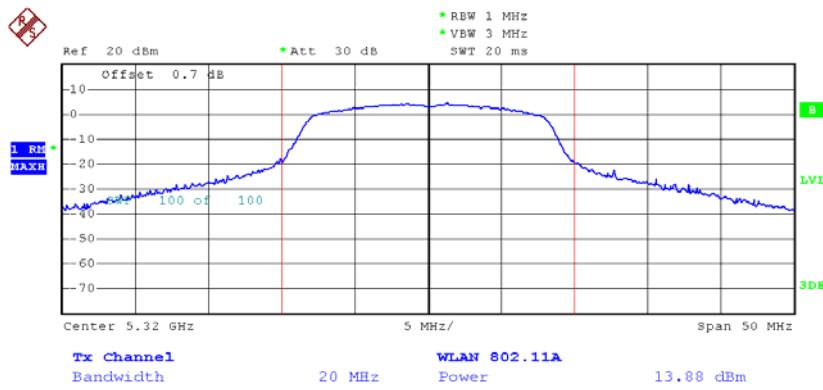


Date: 8.MAR.2013 09:40:27




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N20 Mode/CH52, CH56, CH64		


Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH52	5260	12.95	24	0.251
CH56	5280	12.89	24	0.251
CH64	5320	12.96	24	0.251

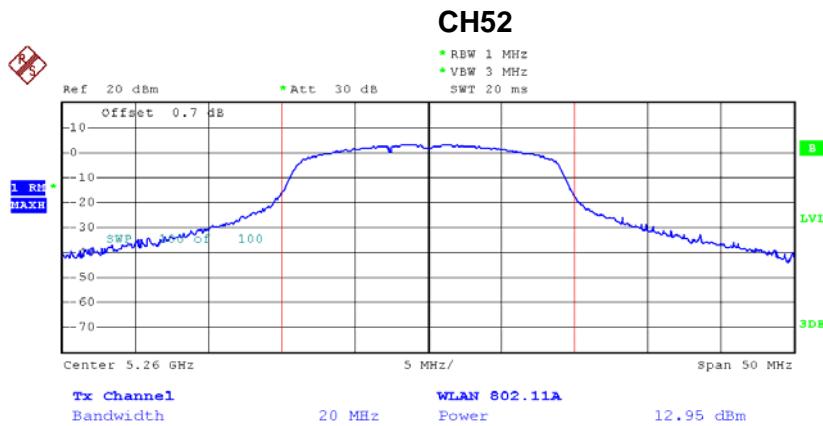

Date: 8.MAR.2013 09:48:34

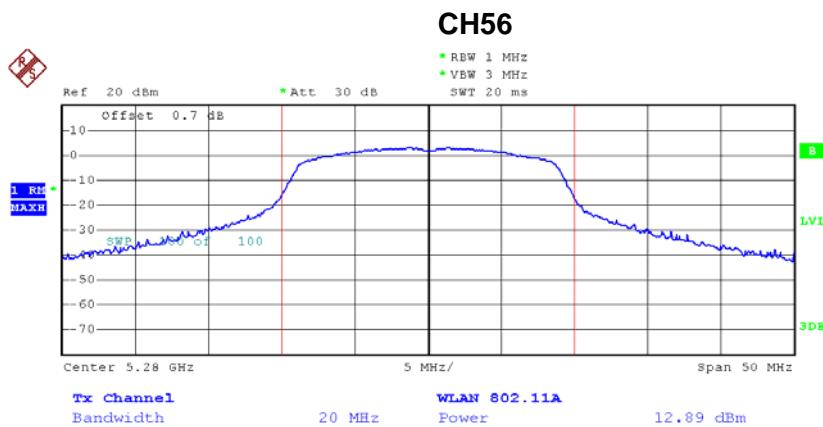

Date: 8.MAR.2013 09:49:23

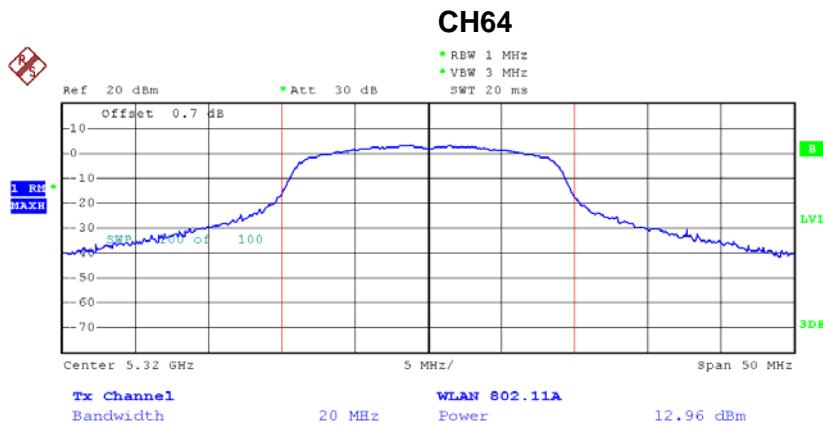

Date: 8.MAR.2013 09:50:24




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N40 Mode/CH54, CH62		


Peak Output Power

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH54	5270	12.97	24	0.251
CH62	5310	12.86	24	0.251

CH54

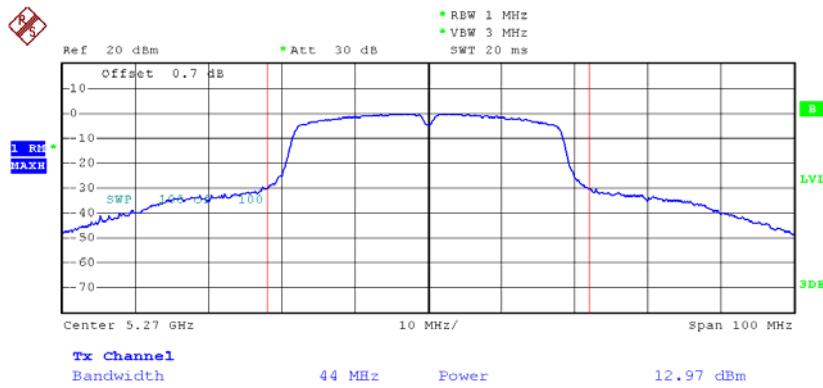

Date: 8.MAR.2013 09:58:19

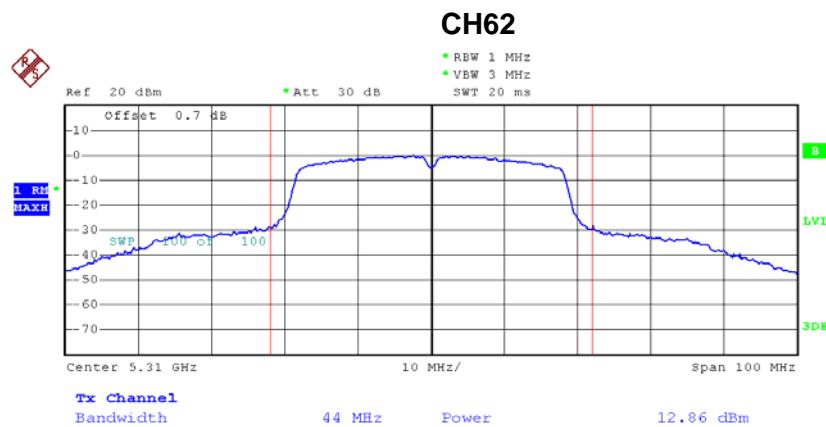

Date: 8.MAR.2013 09:56:49




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX A Mode/CH100, CH116, CH140		

Peak Output Power

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH100	5500	12.87	24	0.251
CH116	5580	12.86	24	0.251
CH140	5700	12.85	24	0.251


CH100

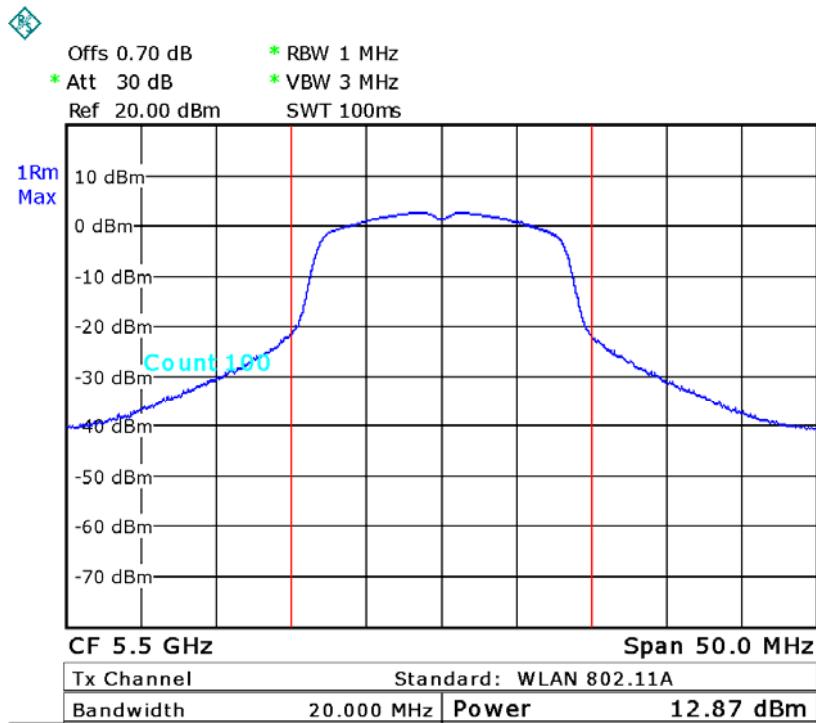

Date: 16.MAR.2013 11:20:00




CH116

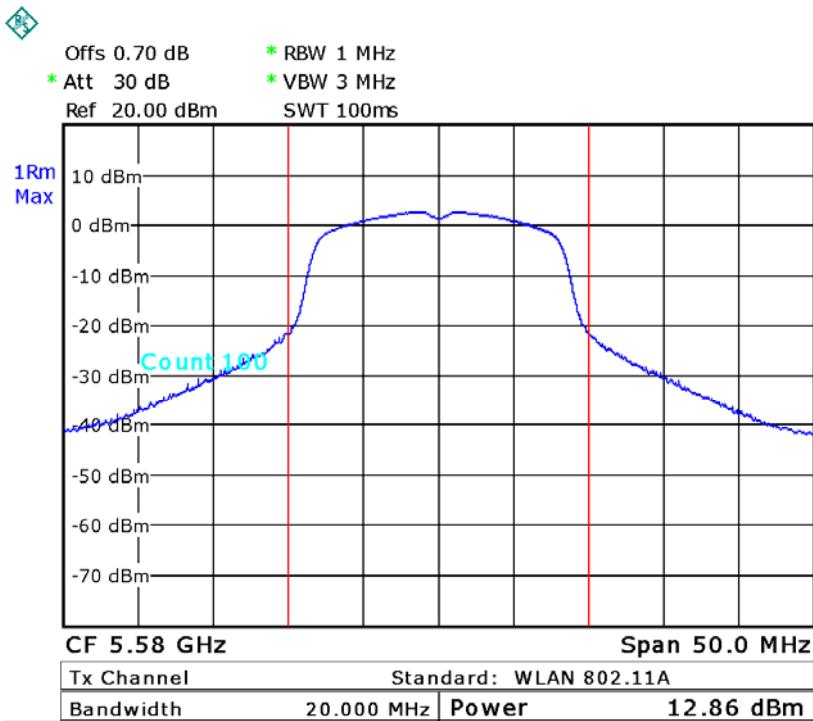

Date: 16.MAR.2013 11:21:53

CH140

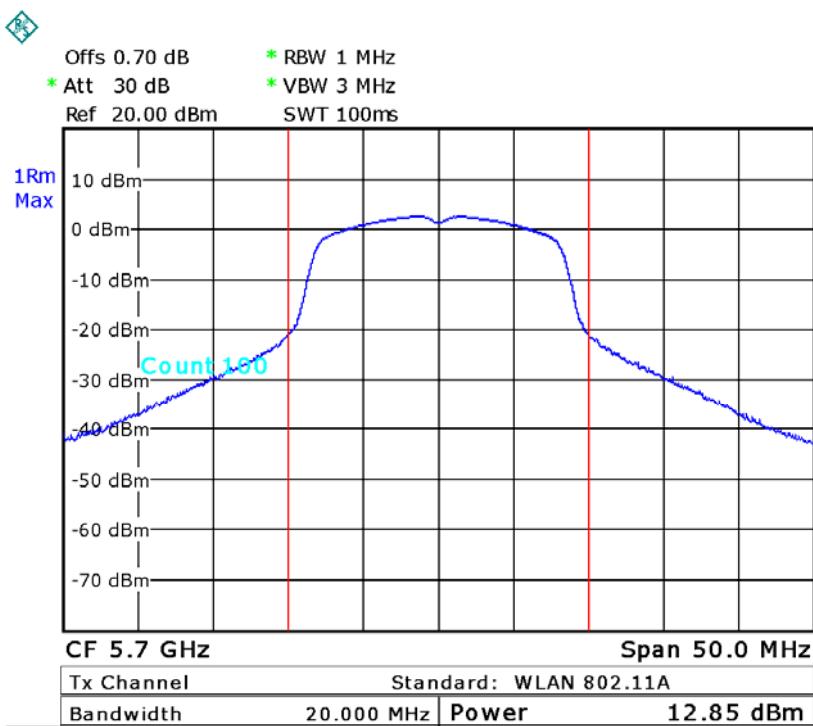


Date: 16.MAR.2013 11:23:18



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N20 Mode/CH100, CH116, CH140		

Peak Output Power


Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH100	5500	12.97	24	0.251
CH116	5580	12.74	24	0.251
CH140	5700	12.81	24	0.251

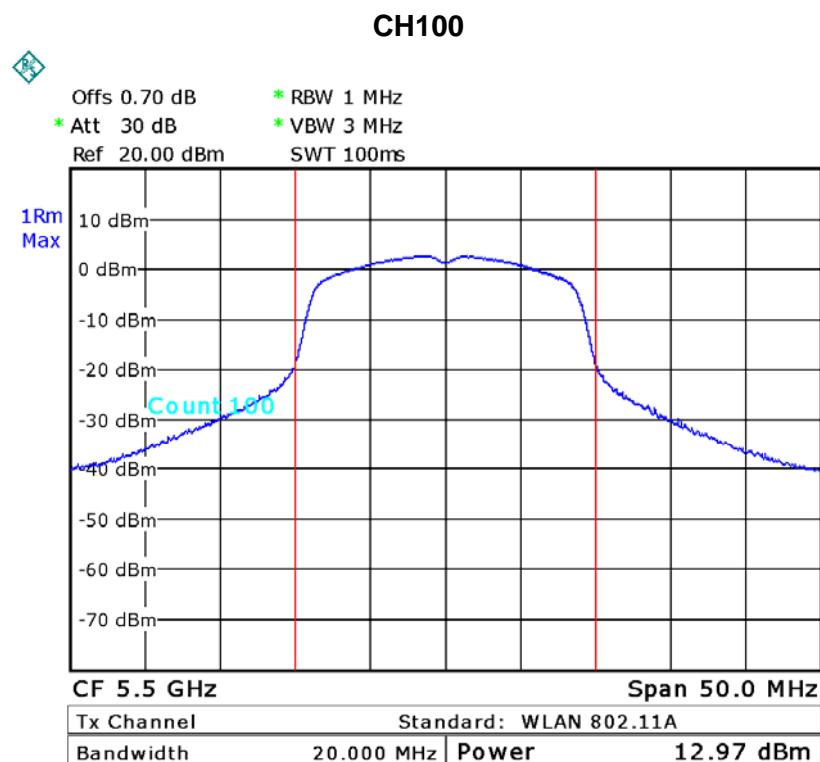

Date: 16.MAR.2013 11:33:52




CH116

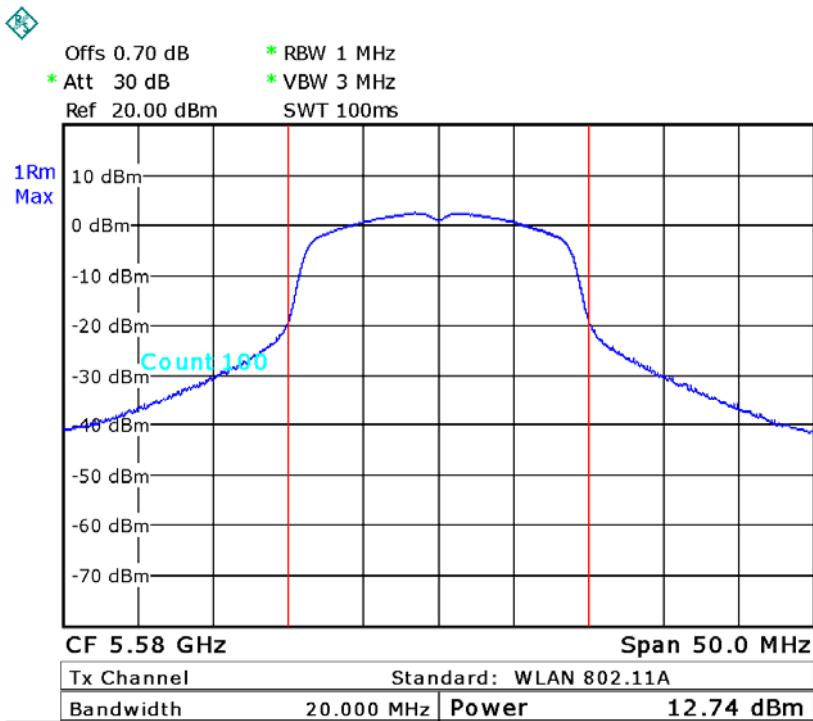

Date: 16.MAR.2013 11:35:33

CH140

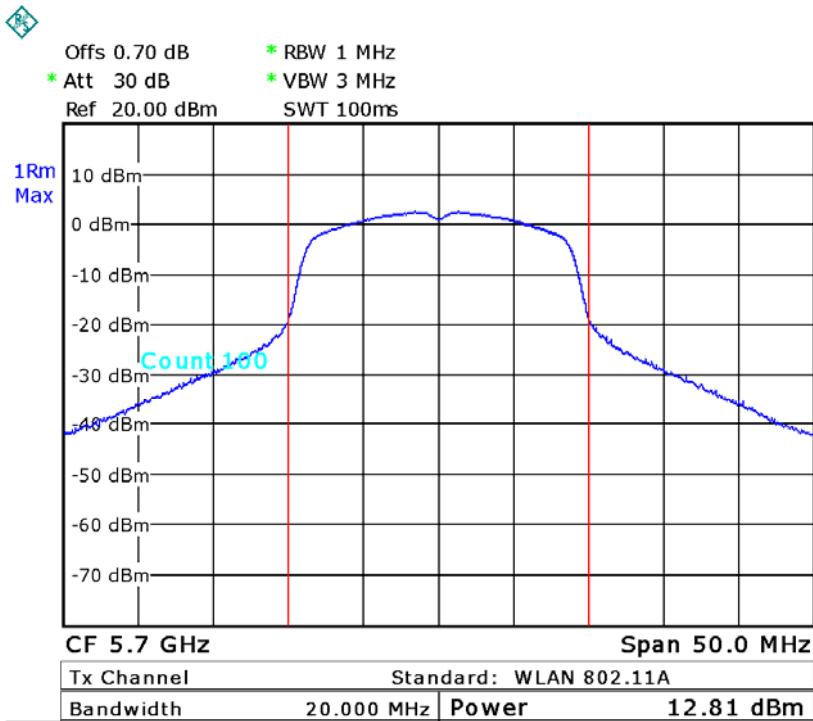


Date: 16.MAR.2013 11:36:21



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N40 Mode/CH102, CH110, CH134		


Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH102	5510	12.93	24	0.251
CH110	5550	12.81	24	0.251
CH134	5670	12.89	24	0.251

CH102

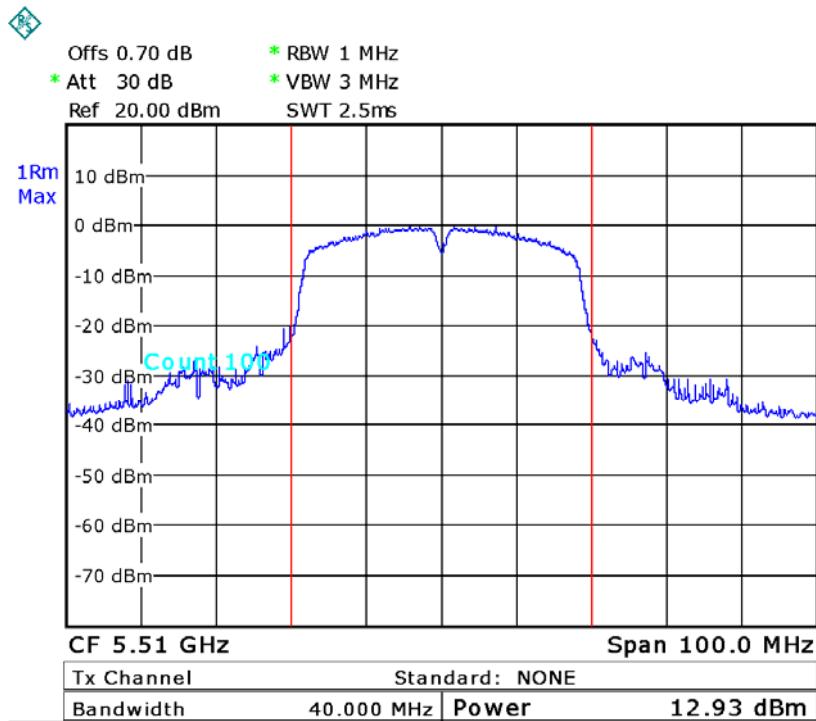




CH110

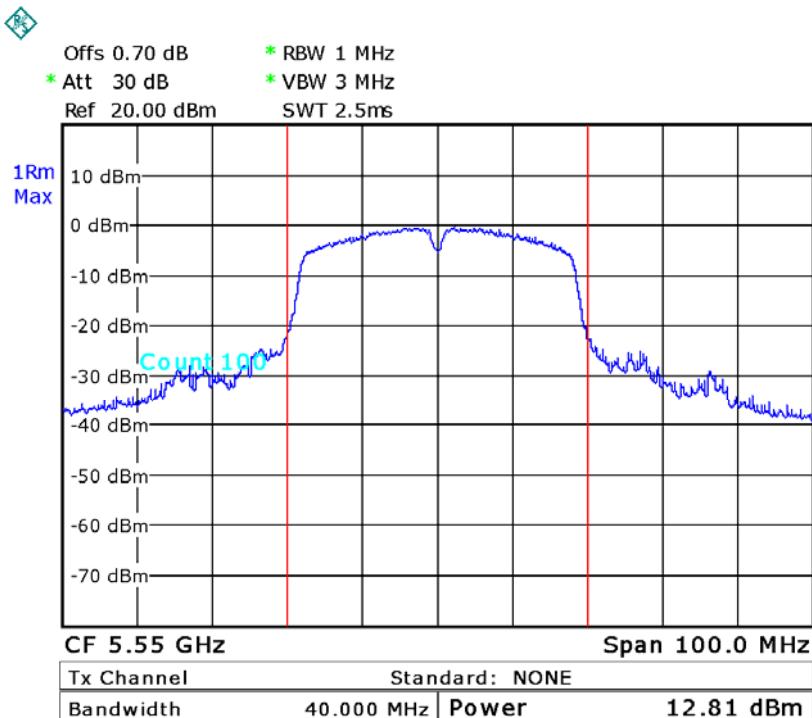

Date: 18.MAR.2013 14:06:59

CH134

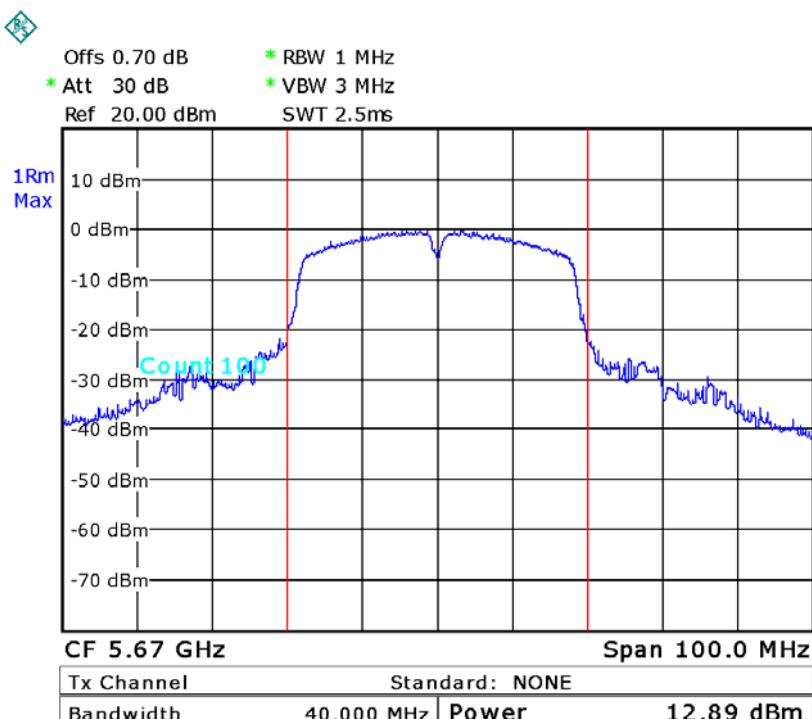

Date: 16.MAR.2013 11:43:14



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27 dBm/1MHz	5150 – 5250 5250 - 5350	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Next Calibration
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2012	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

7.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.	Spectrum Parameter	Setting
	Attenuation	Auto
	RB	1000 kHz
	VB	1000 kHz
	Trace	Max Hold
	Sweep Time	Auto

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




7.1.6 TEST RESULTS

EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX A Mode/ CH36, CH40, CH48		

Channel of Worst Data: CH36			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5148.80	-31.60	5350.00	-45.00
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH36

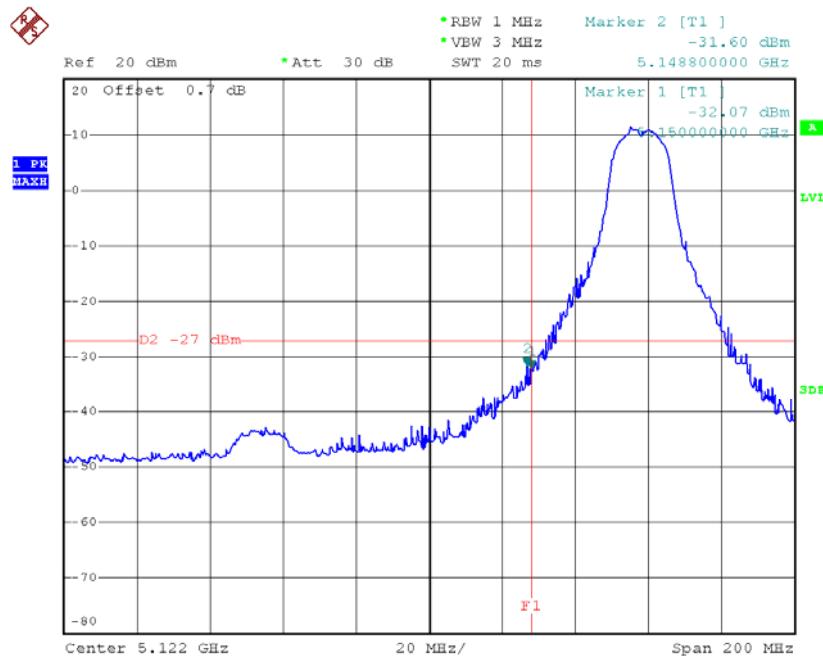

Date: 13.MAR.2013 15:25:25

TX mode CH48

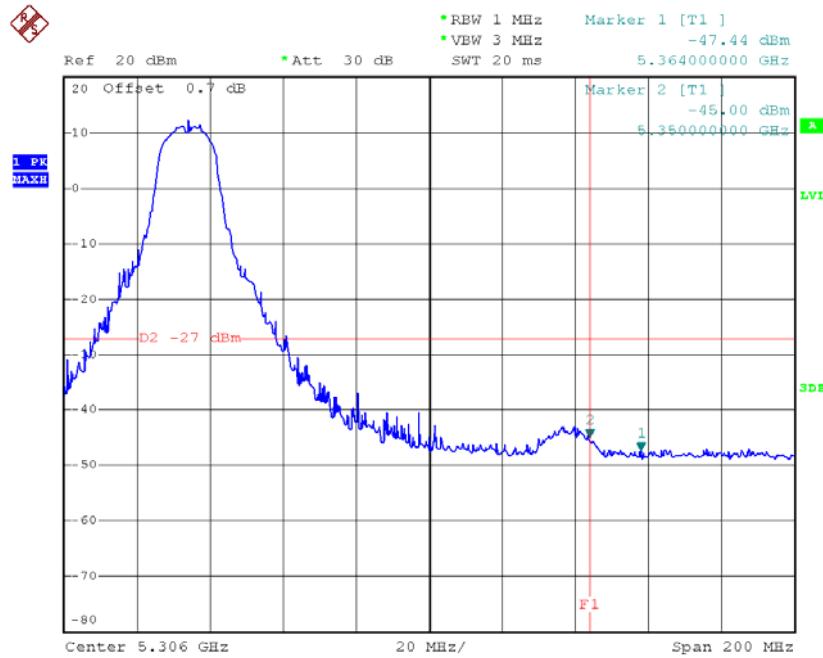

Date: 13.MAR.2013 15:28:37




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX N20 Mode/ H36, CH40 , CH48		

Channel of Worst Data: CH36			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-35.29	5351.60	-45.44
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH36

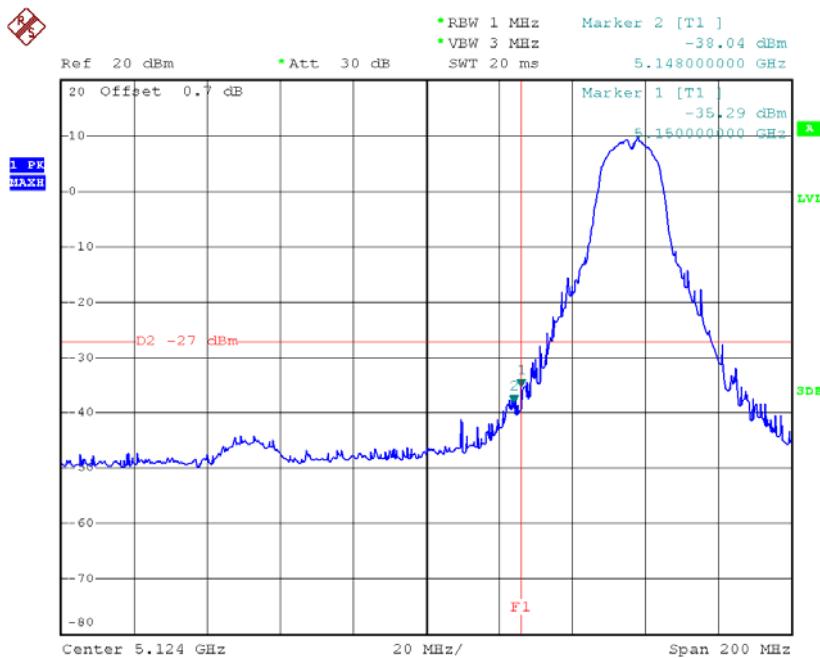

Date: 13.MAR.2013 15:39:23

TX mode CH48

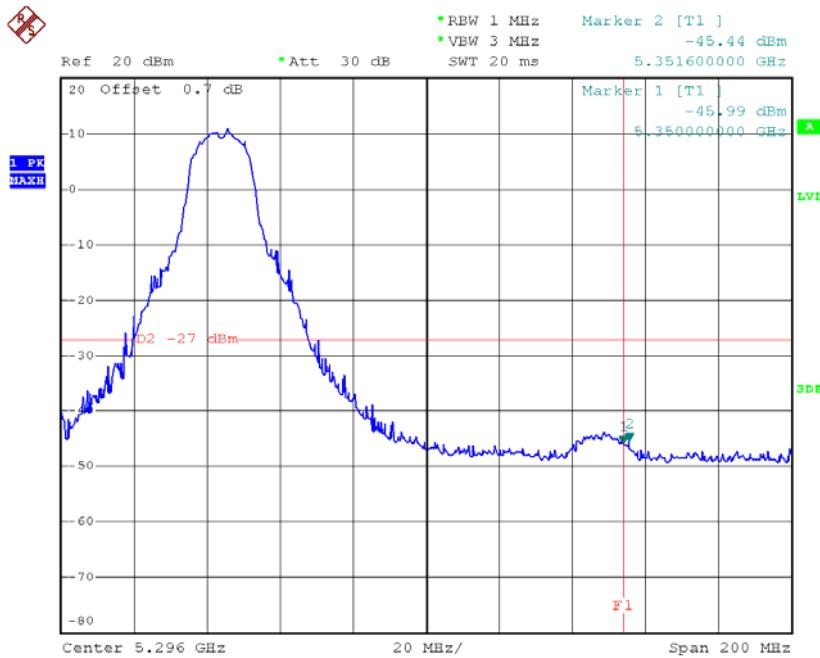

Date: 13.MAR.2013 15:42:24




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX N40 Mode/ CH38, CH46		

Channel of Worst Data: CH38			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-28.86	5376.40	-46.74
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH38

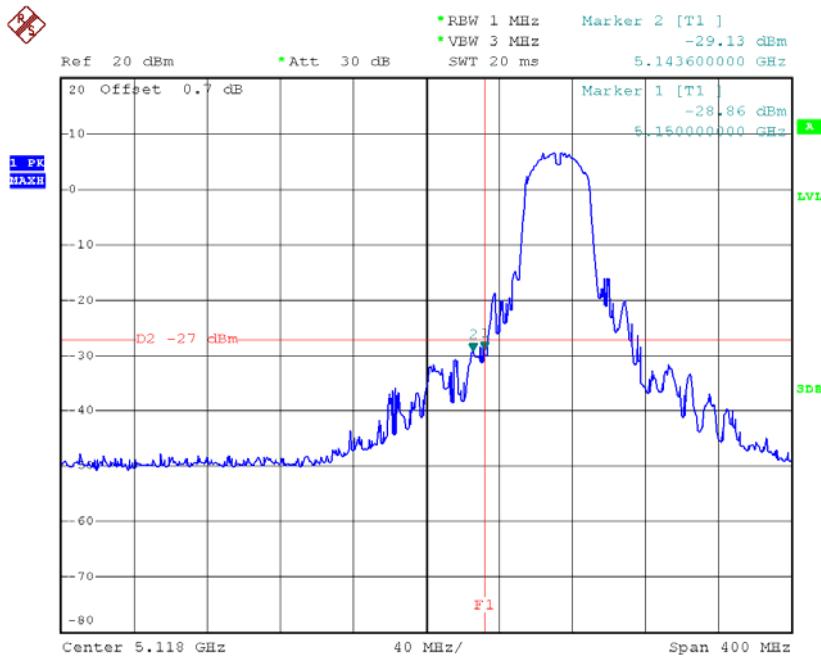

Date: 13.MAR.2013 16:03:46

TX mode CH46

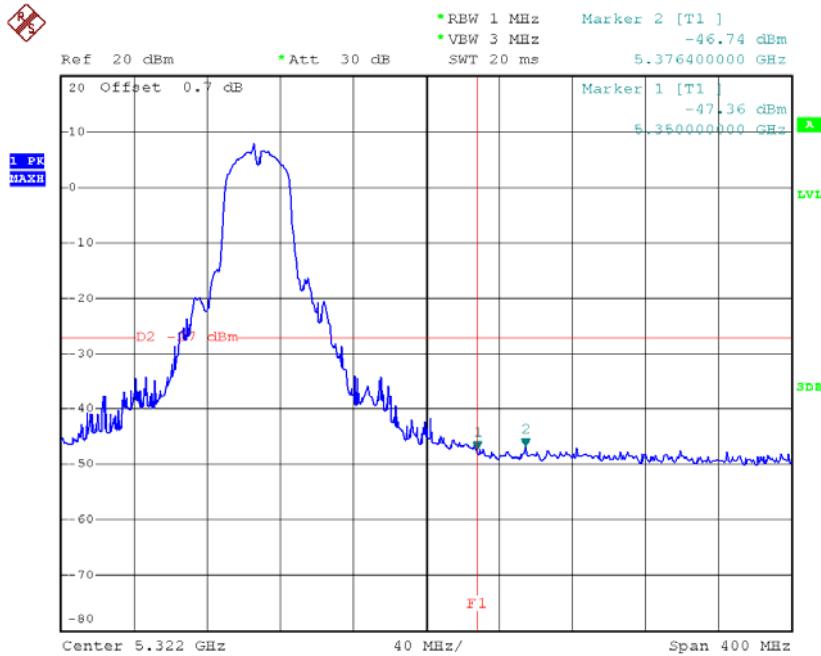

Date: 13.MAR.2013 16:05:49




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX A Mode/ CH52, CH56 , CH60		

Channel of Worst Data: CH52			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-44.59	5350.00	-31.01
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH52

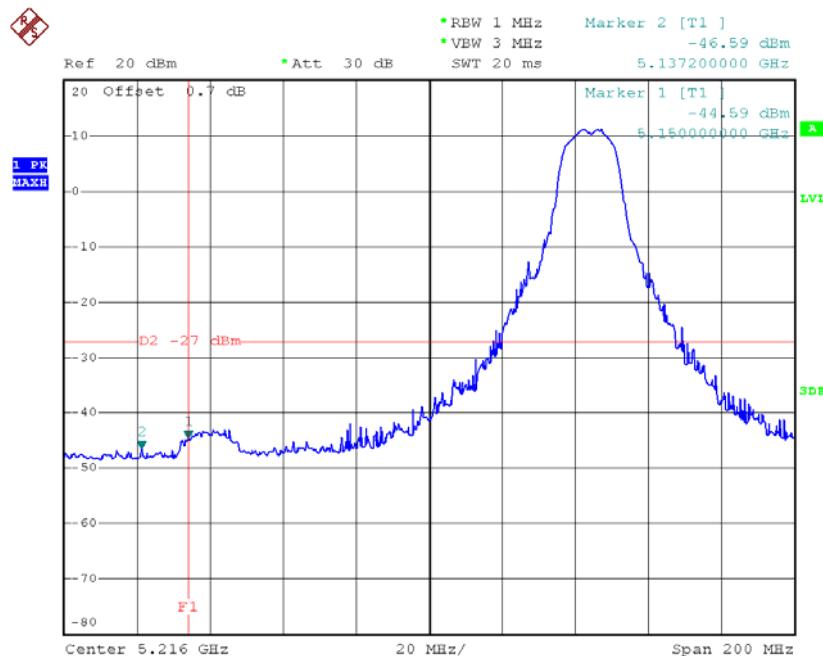

Date: 13.MAR.2013 15:32:15

TX mode CH64

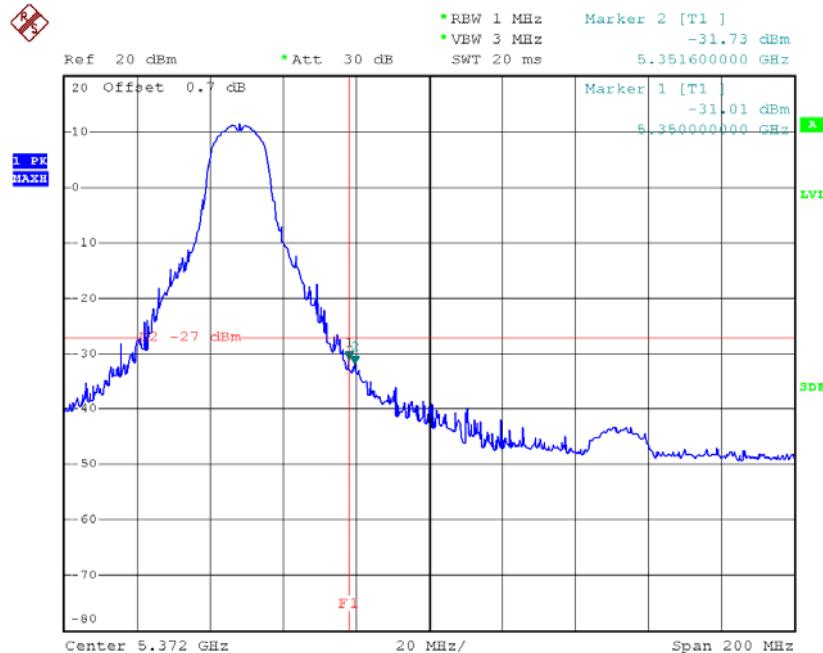

Date: 13.MAR.2013 15:37:34




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N20 Mode/ CH52, CH56 , CH64		

Channel of Worst Data: CH52			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-46.00	5353.20	-32.96
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH52

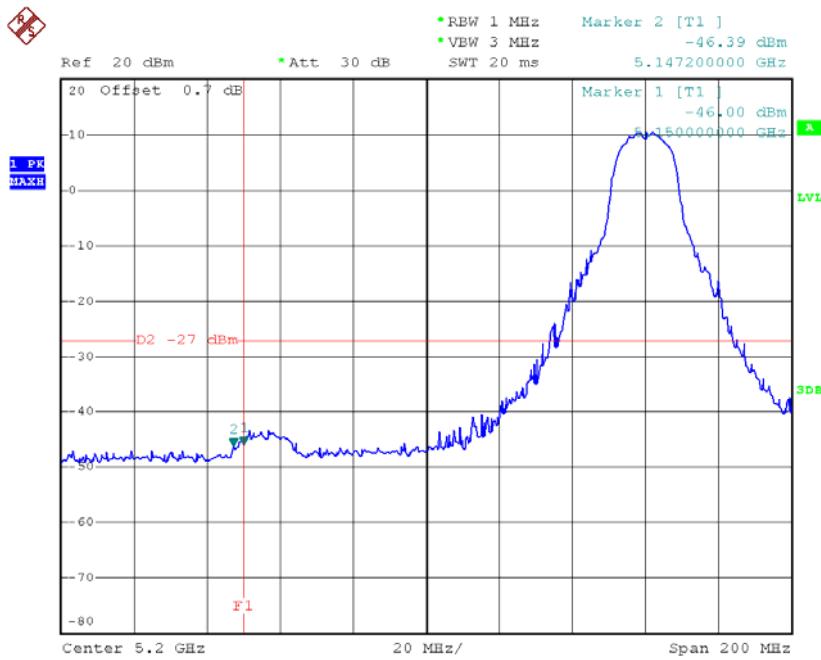

Date: 13.MAR.2013 15:45:25

TX mode CH64

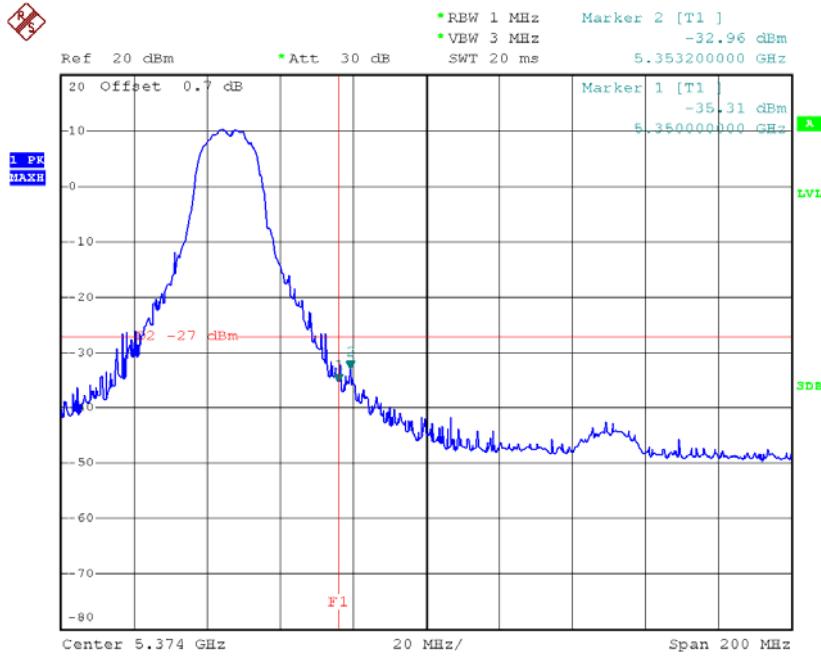

Date: 13.MAR.2013 16:01:29




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N40 Mode/ CH64, CH62		

Channel of Worst Data: CH54			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-47.25	5352.40	-29.48
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH54

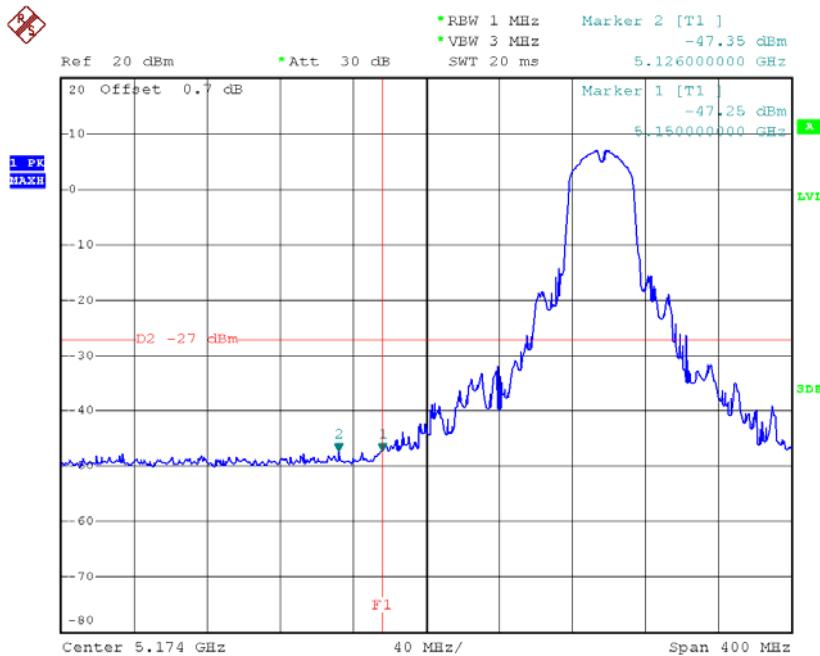

Date: 13.MAR.2013 16:08:00

TX mode CH62

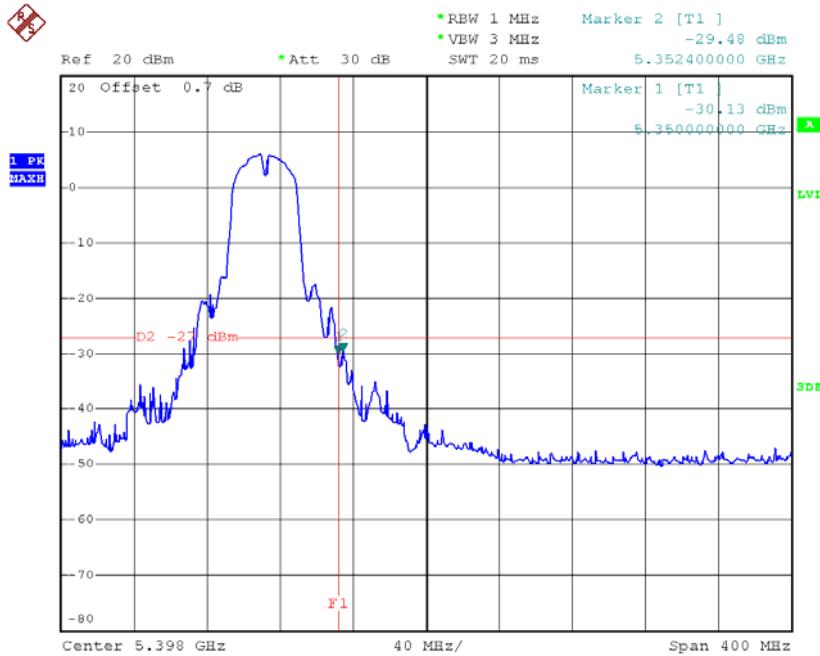

Date: 13.MAR.2013 16:10:57




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX A Mode/ CH100, CH116 , CH140		

Channel of Worst Data: CH140			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5458.40	-40.07	5726.40	-28.59
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH100

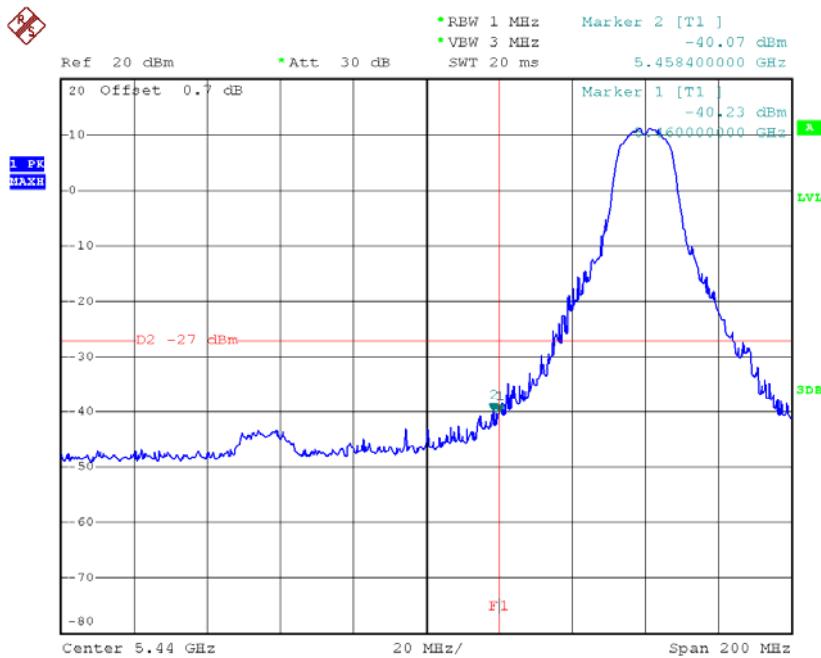

Date: 16.MAR.2013 16:27:51

TX mode CH140

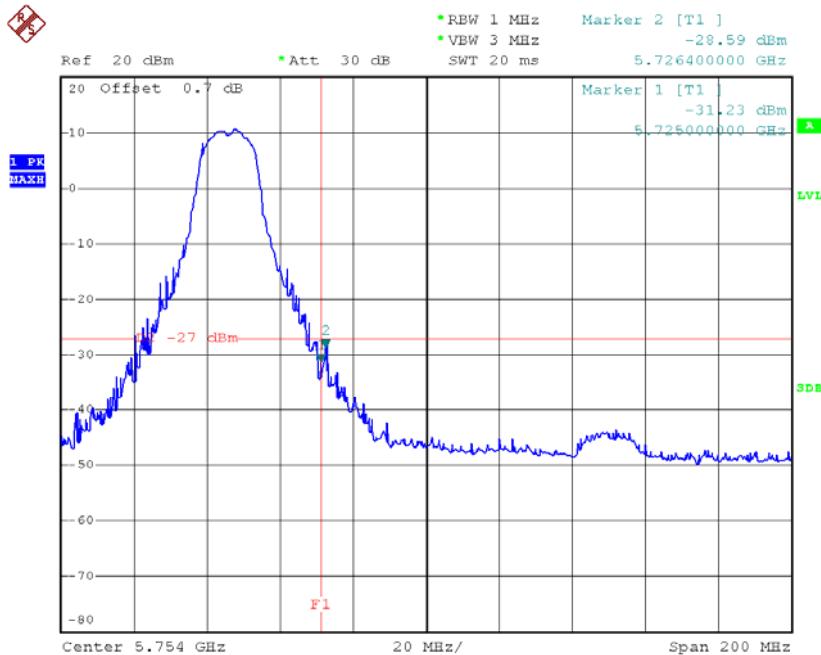

Date: 16.MAR.2013 16:36:05




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N20 Mode/ CH100, CH116 , CH140		

Channel of Worst Data: CH140			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5460.00	-38.18	5725.00	-29.52
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH100

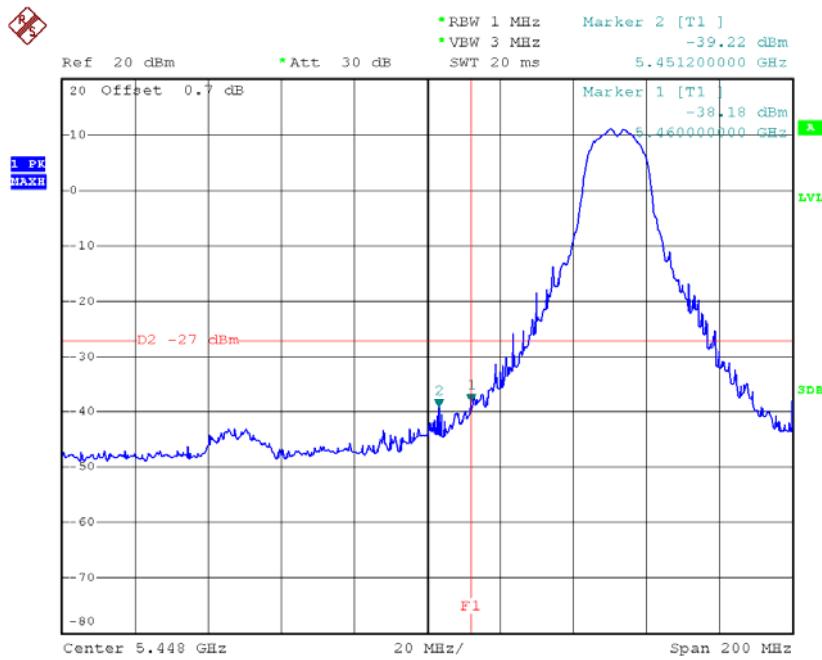

Date: 16.MAR.2013 16:38:42

TX mode CH140

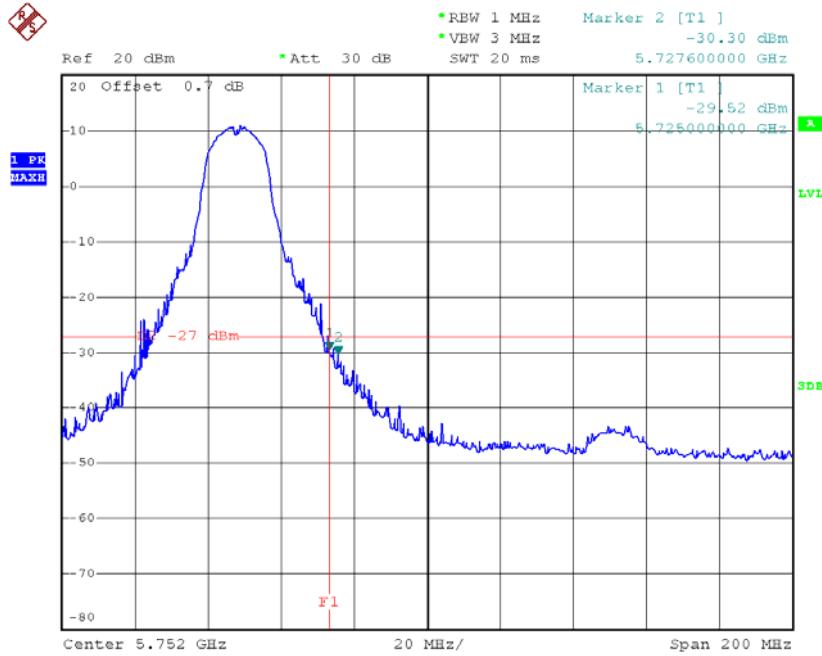

Date: 16.MAR.2013 16:42:36




EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N40 Mode/ CH102, CH110, CH134		

Channel of Worst Data: CH102			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5460.00	-32.84	5728.40	-39.40
Limit: -27 dBm/1MHz		Result: PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH102

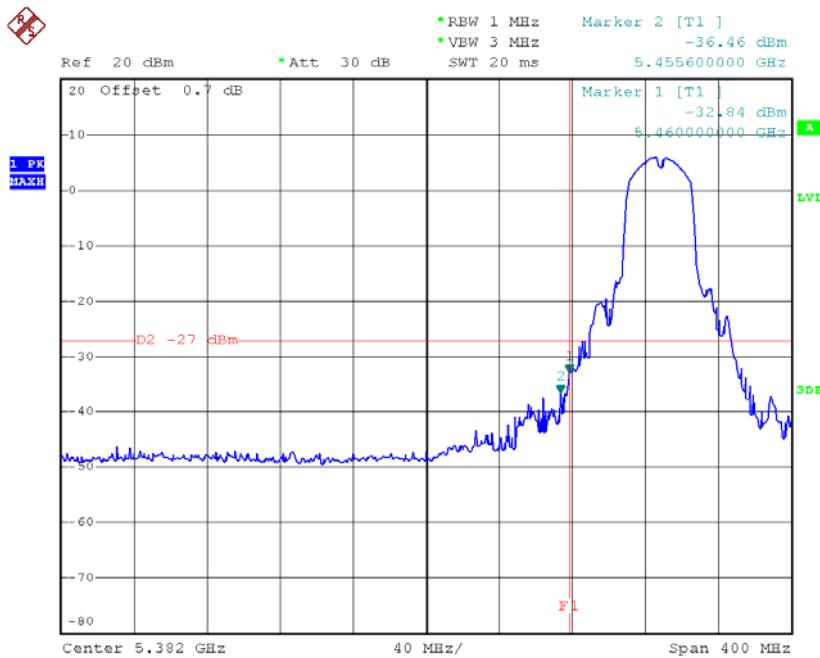

Date: 16.MAR.2013 16:47:58

TX mode CH134

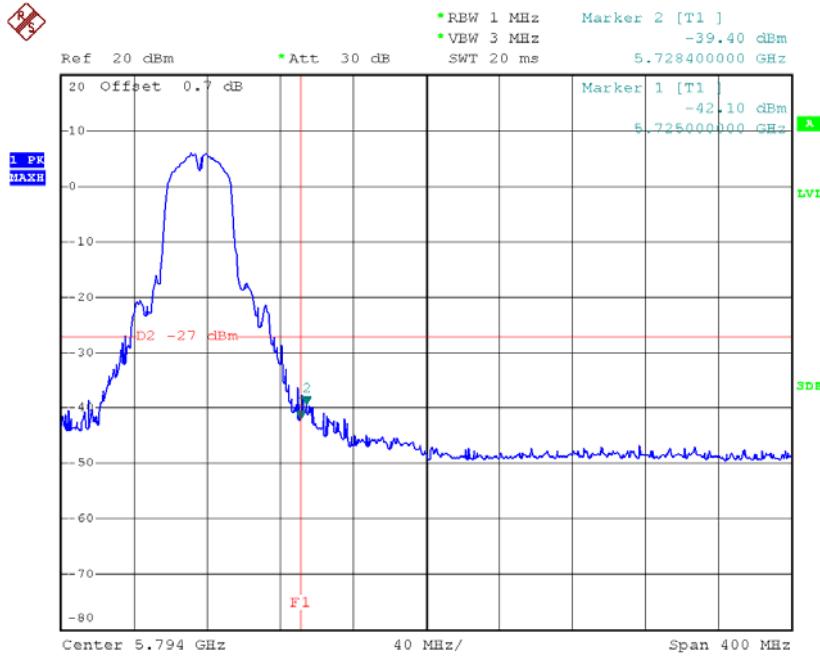

Date: 16.MAR.2013 16:46:04



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	4 dBm	5150 - 5250	PASS
	11 dBm	5250 - 5350	PASS
	11 dBm	5470 - 5725	N/A

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Next Calibration
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2012	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

8.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,


b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	= 1 MHz.
VB	\geq 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP



8.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.1.6 TEST RESULTS

EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	2.75	4.00
CH40	5200	2.82	4.00
CH48	5240	3.19	4.00

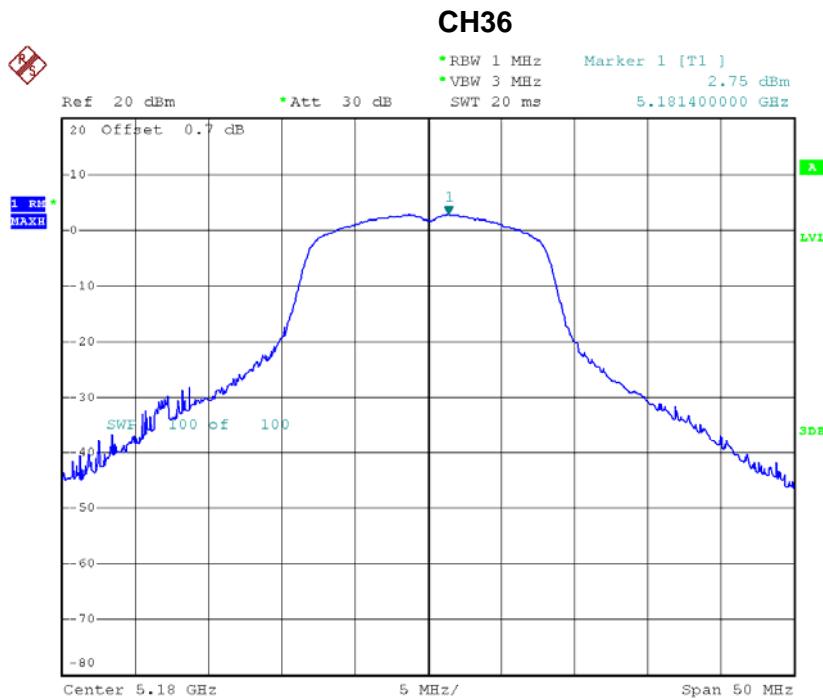

Date: 12.MAR.2013 15:12:34




CH40

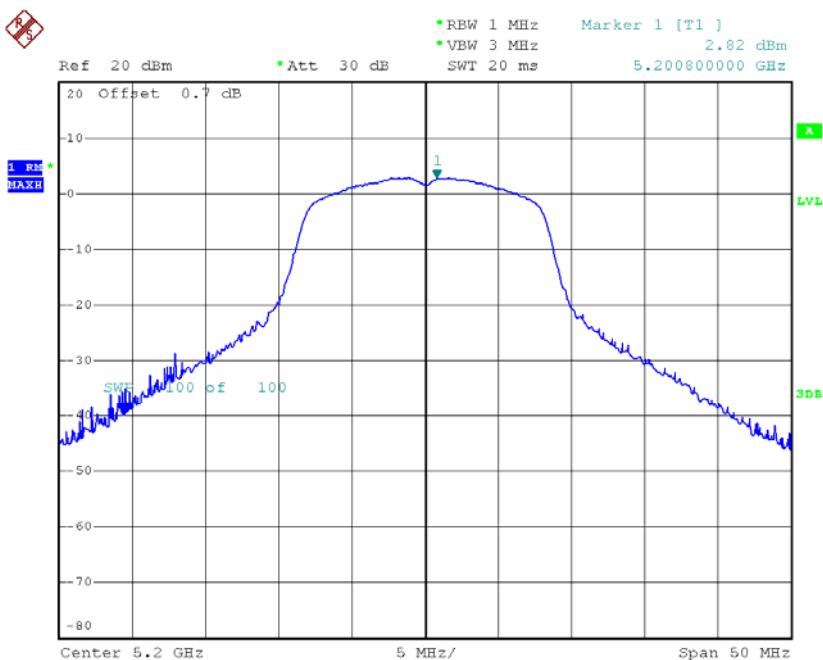

Date: 12.MAR.2013 15:11:43

CH48

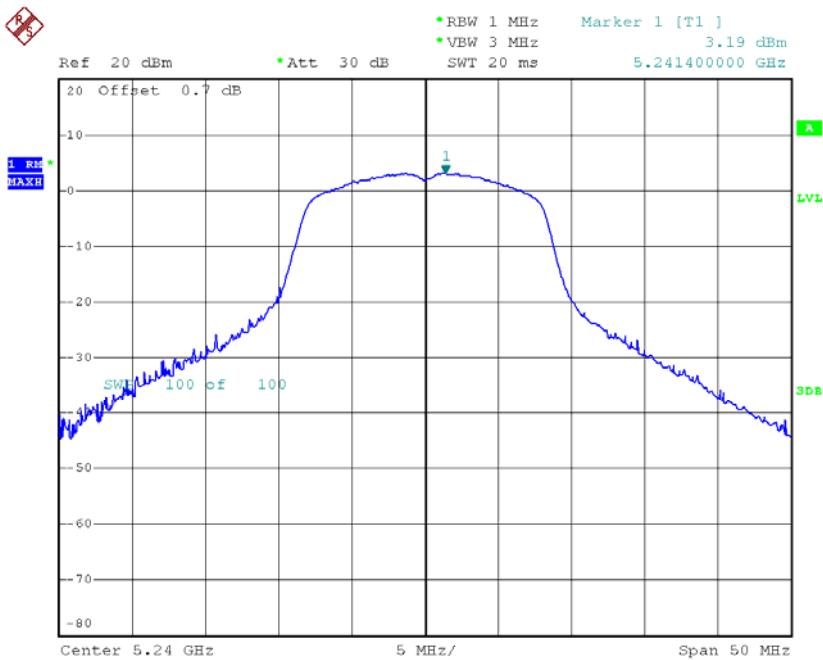


Date: 12.MAR.2013 15:11:02



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	1.43	4.00
CH40	5200	2.32	4.00
CH48	5240	2.58	4.00


CH36

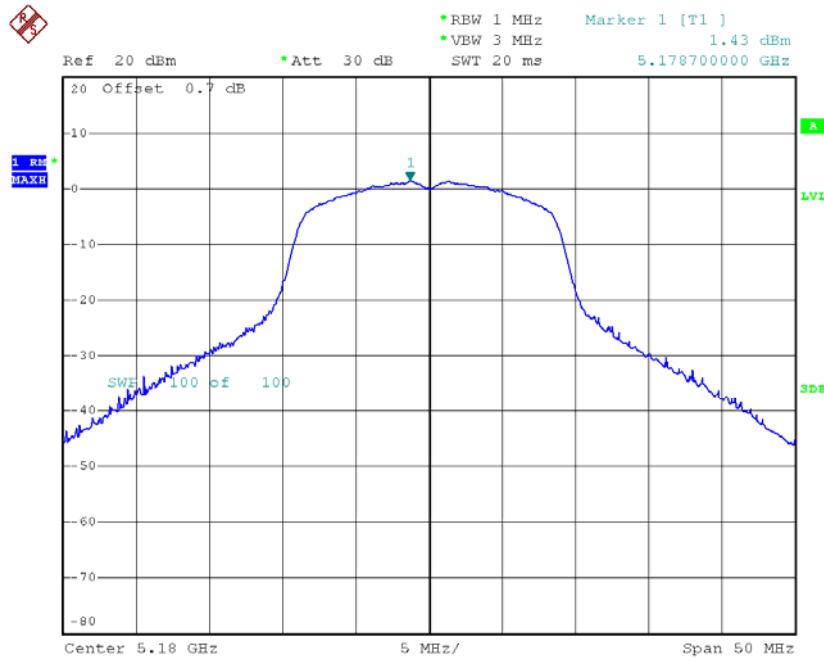

Date: 12.MAR.2013 15:19:27




CH40

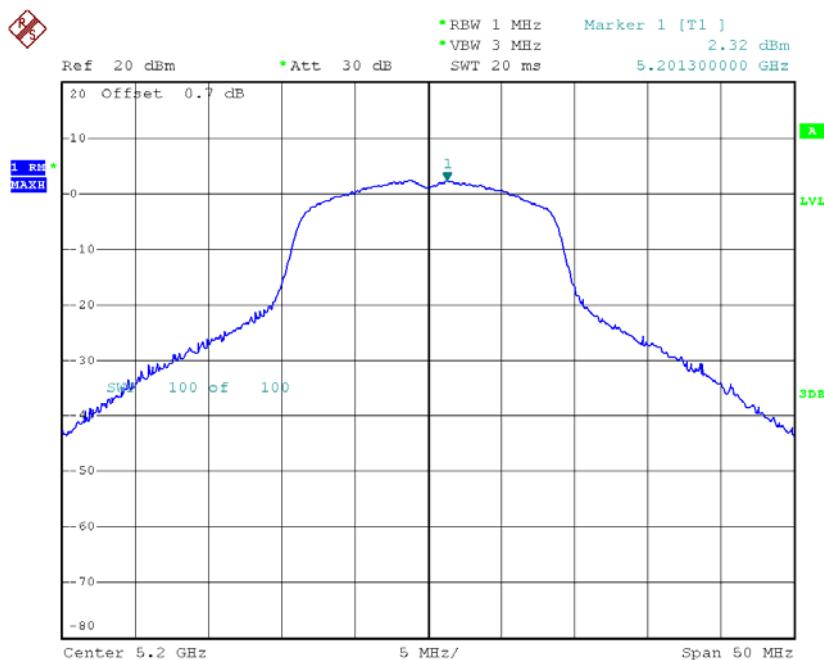

Date: 12.MAR.2013 15:18:29

CH48

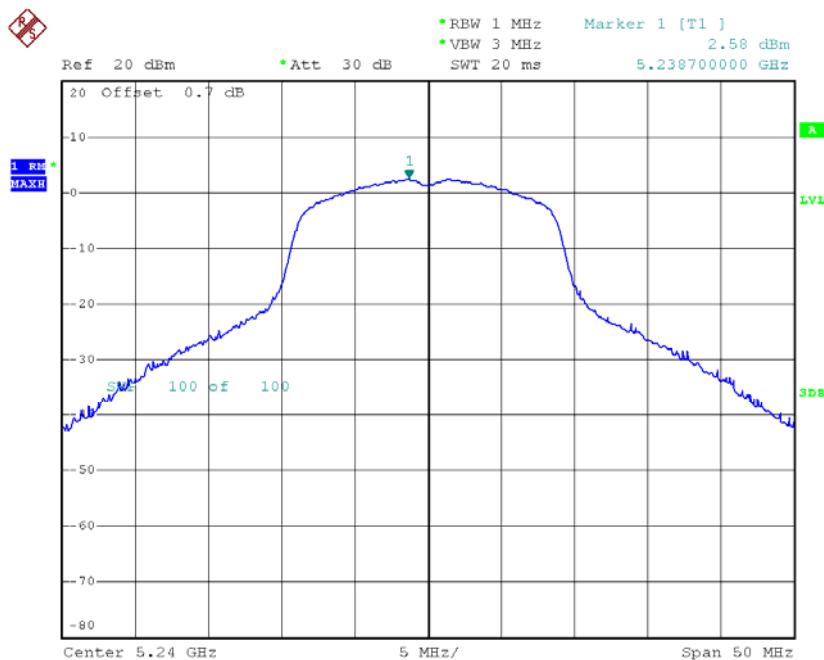


Date: 12.MAR.2013 15:17:12



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH38	5190	-1.17	4.00
CH46	5230	-1.44	4.00


CH38

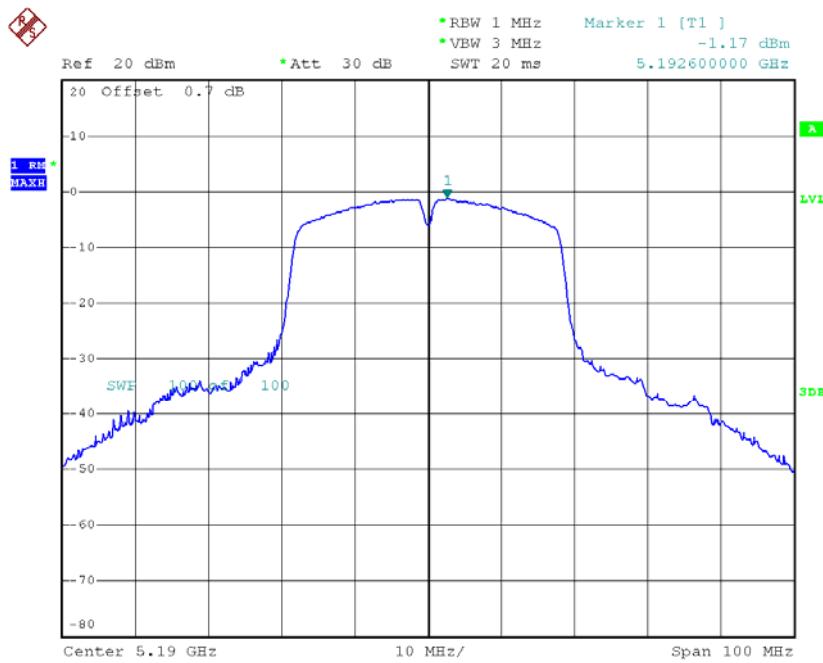

Date: 12.MAR.2013 15:28:54



CH46

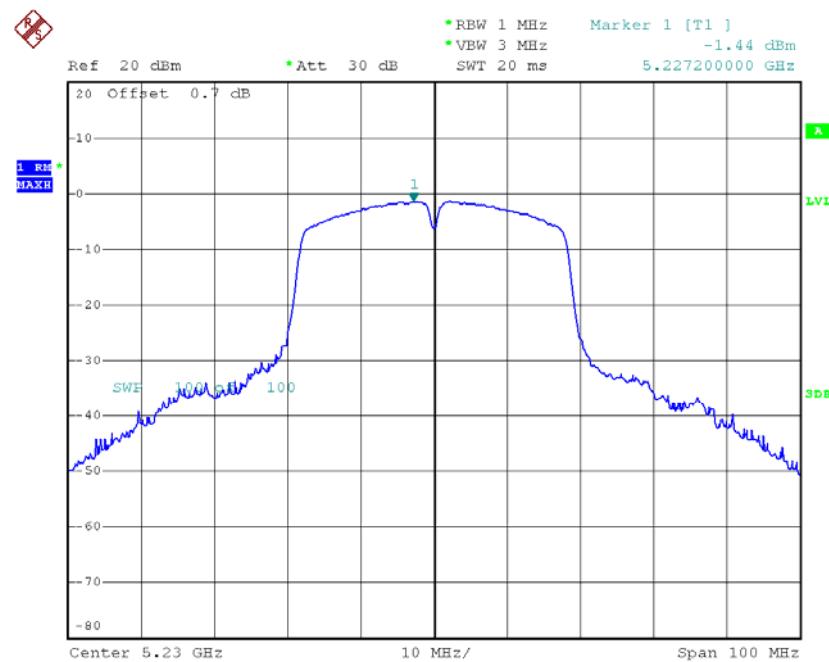


Date: 12.MAR.2013 15:28:19



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX A Mode/CH52, CH56, CH64		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH52	5260	3.16	11
CH56	5280	3.16	11
CH64	5320	3.51	11


CH52

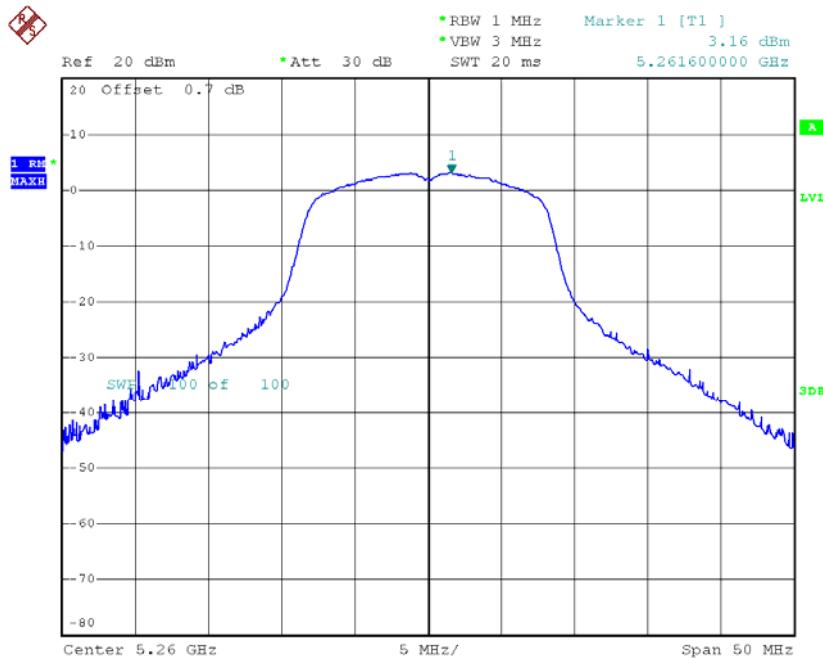

Date: 12.MAR.2013 15:13:58




CH56

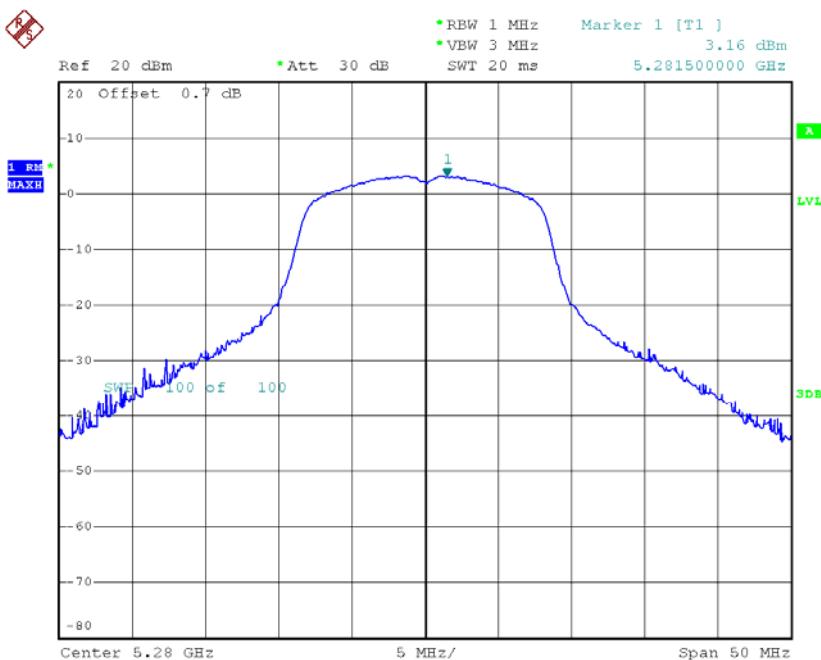

Date: 12.MAR.2013 15:14:40

CH64

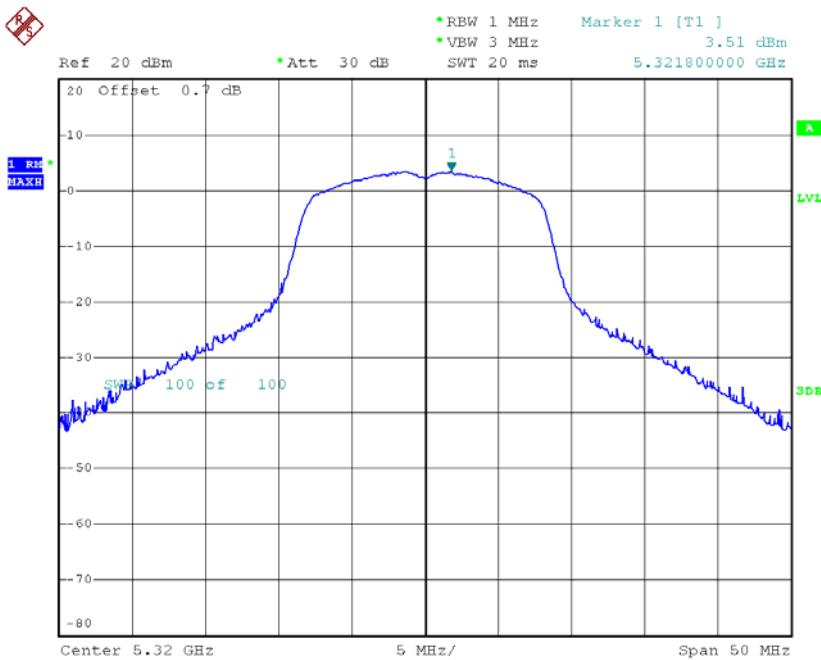


Date: 12.MAR.2013 15:15:22



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N20 Mode/CH52, CH56, CH64		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH52	5260	2.56	11
CH56	5280	2.60	11
CH64	5320	2.67	11


CH52

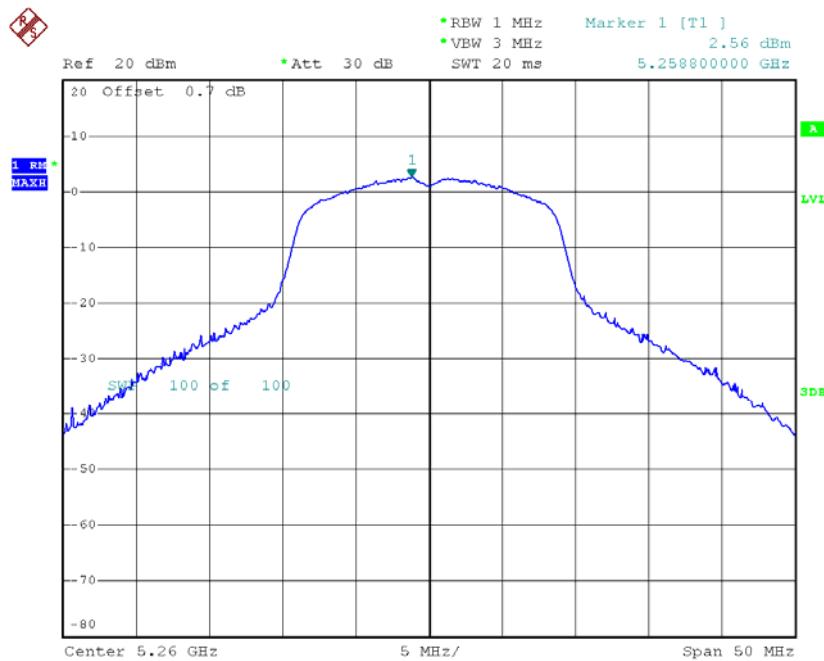

Date: 12.MAR.2013 15:21:14




CH56

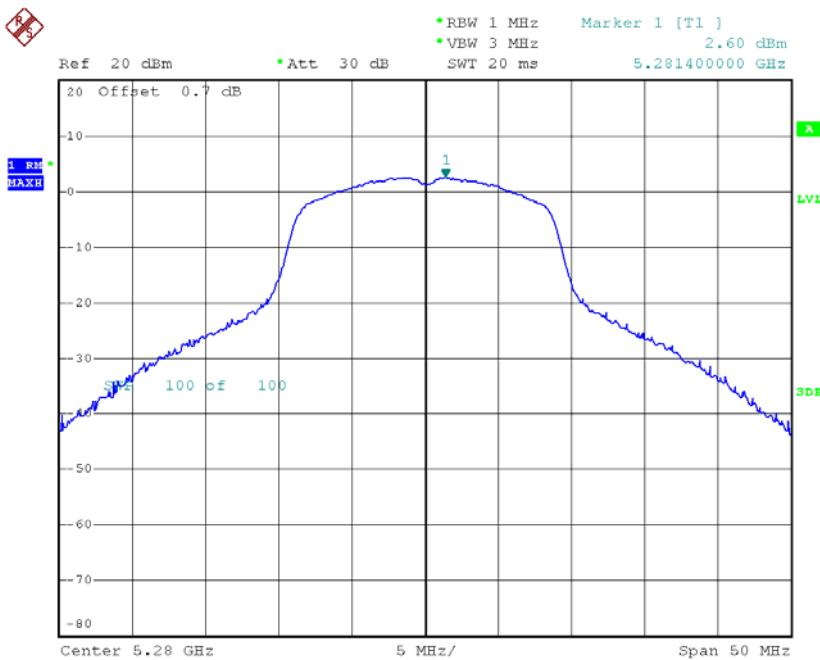

Date: 12.MAR.2013 15:20:42

CH64

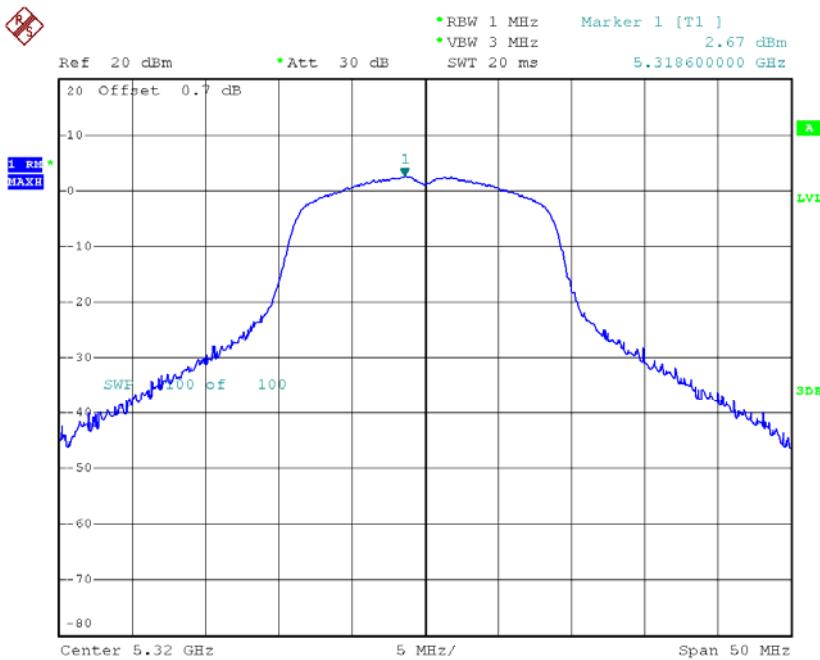

Date: 12.MAR.2013 15:20:06



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N40 Mode/CH54, CH62		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH54	5270	-1.08	11
CH62	5310	-1.03	11



Date: 12.MAR.2013 15:30:10



CH62

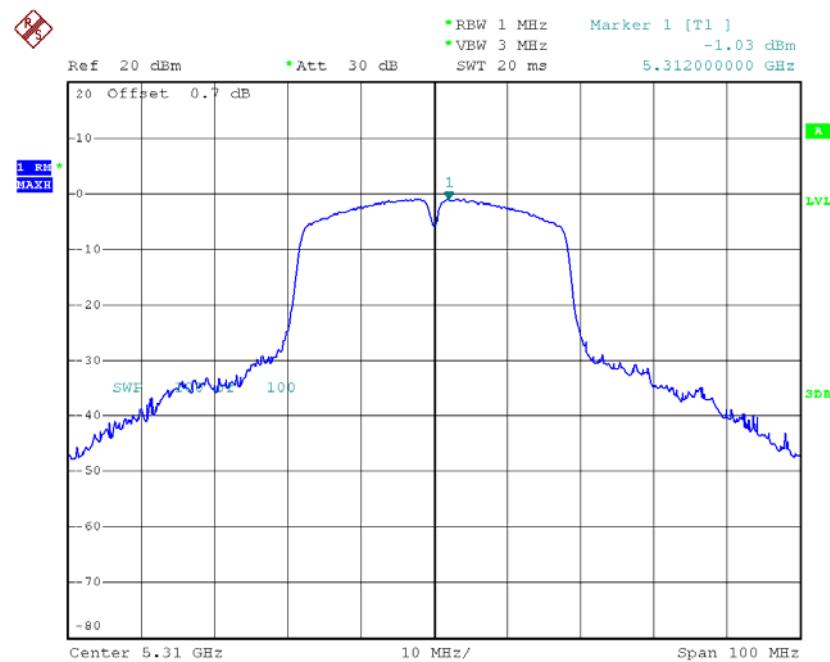


Date: 12.MAR.2013 15:29:20



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX A Mode/CH100, CH116, CH140		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH100	5500	5.21	11
CH116	5580	5.00	11
CH140	5700	4.70	11

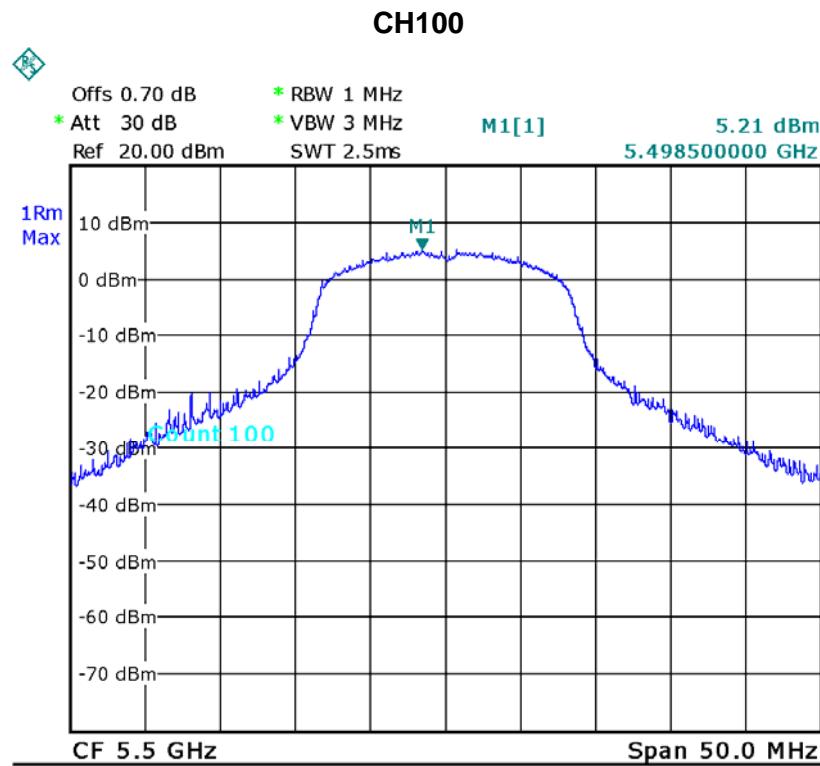

Date: 16.MAR.2013 13:09:23




CH116

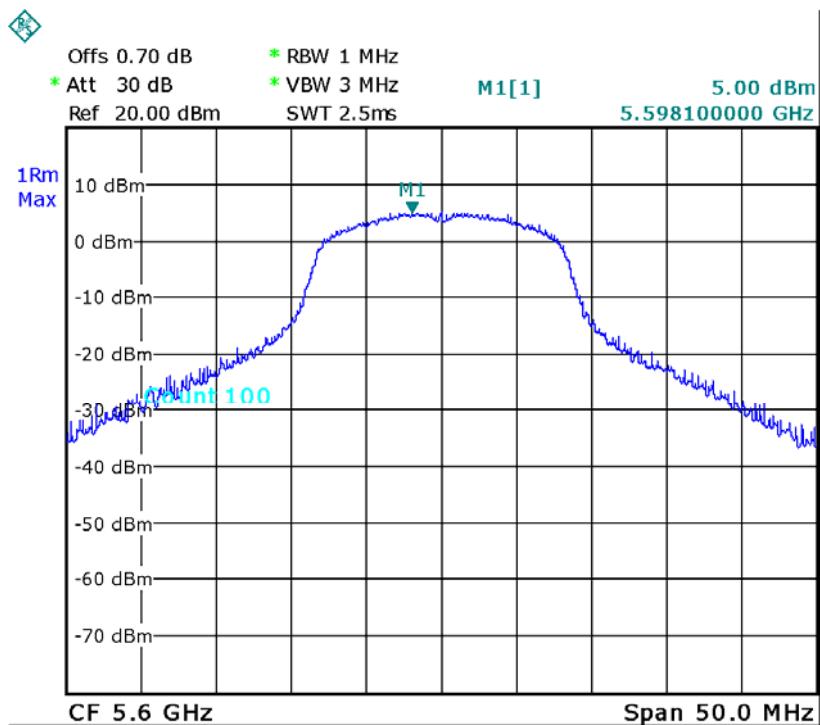

Date: 16.MAR.2013 13:08:17

CH140

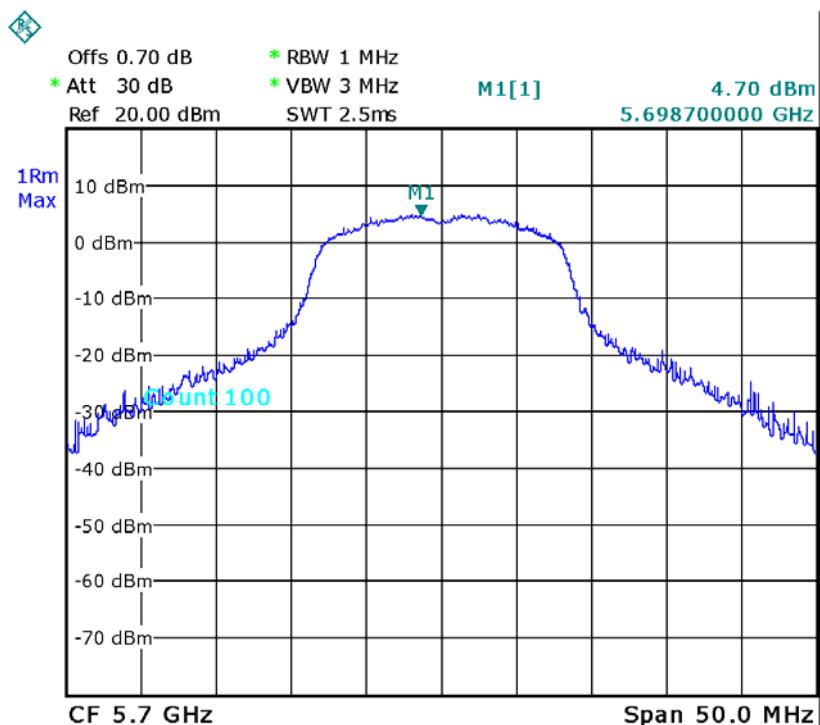


Date: 16.MAR.2013 13:13:20



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N20 Mode/CH100, CH116, CH140		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH100	5500	4.97	11
CH116	5580	4.62	11
CH140	5700	4.41	11


CH100

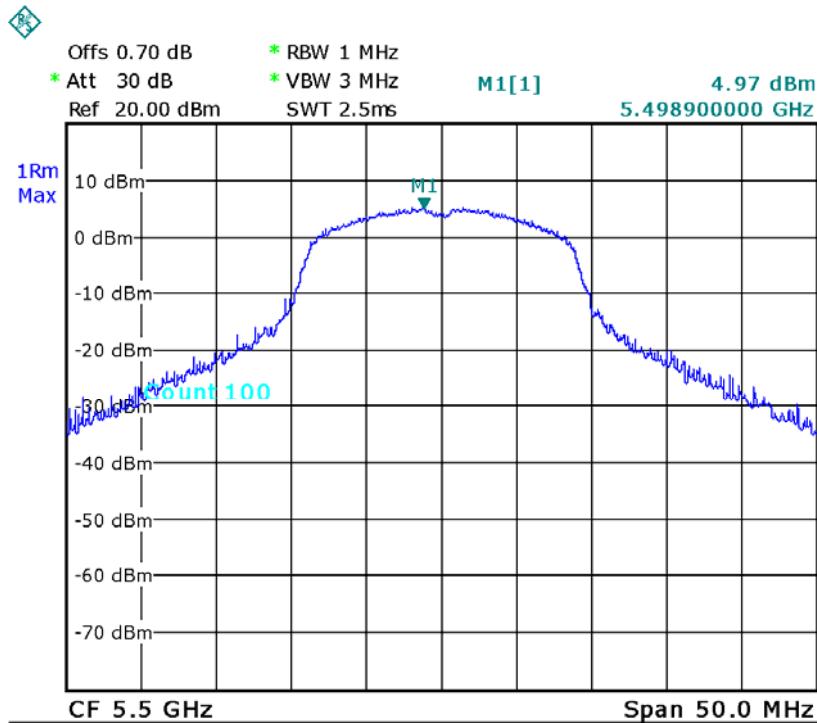

Date: 16.MAR.2013 13:16:52




CH116

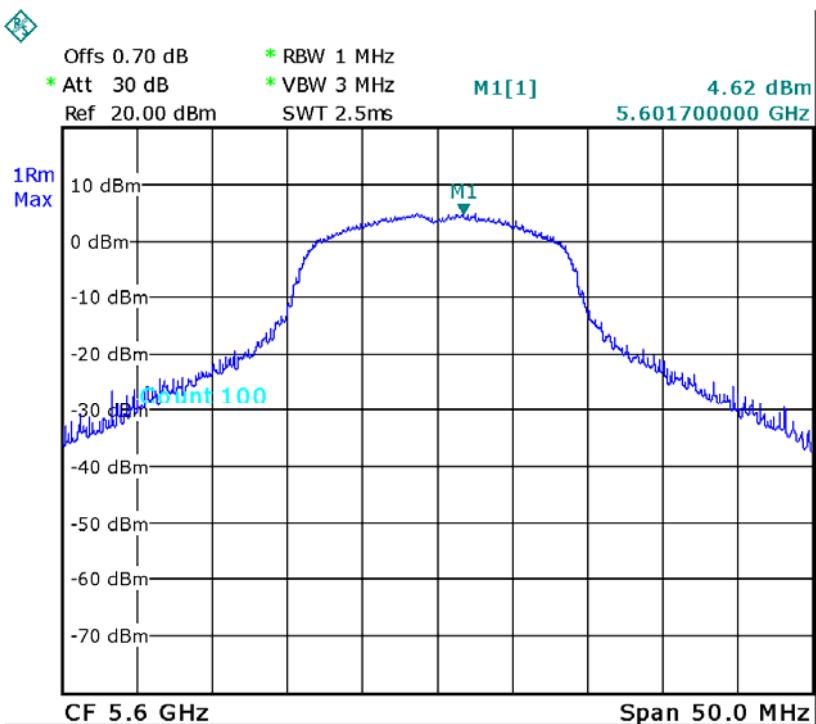

Date: 16.MAR.2013 13:15:33

CH140

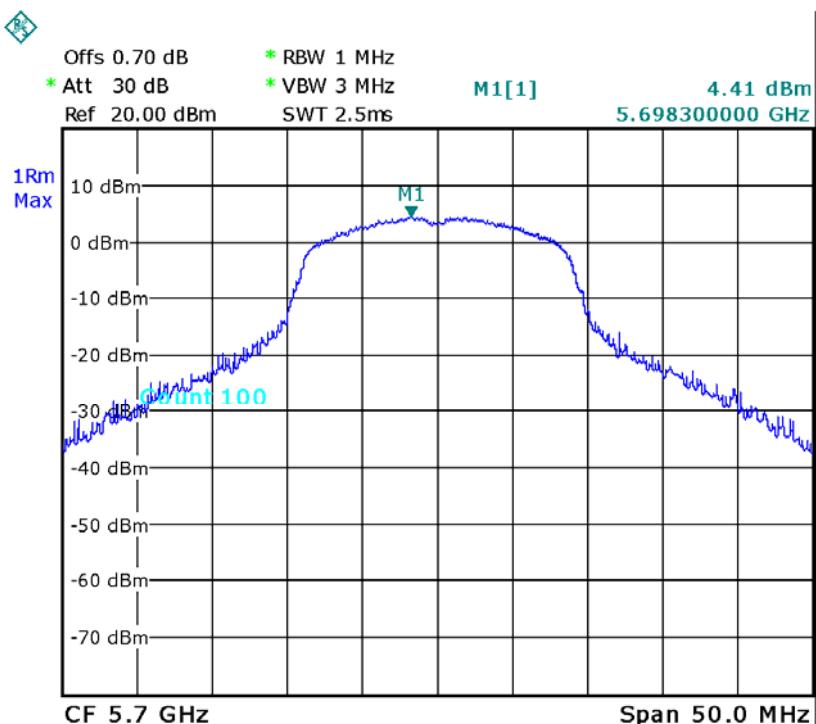


Date: 16.MAR.2013 13:14:07



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N40 Mode/CH102, CH110, CH134		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH102	5510	-0.15	11
CH110	5550	-1.94	11
CH134	5670	-0.04	11


CH102

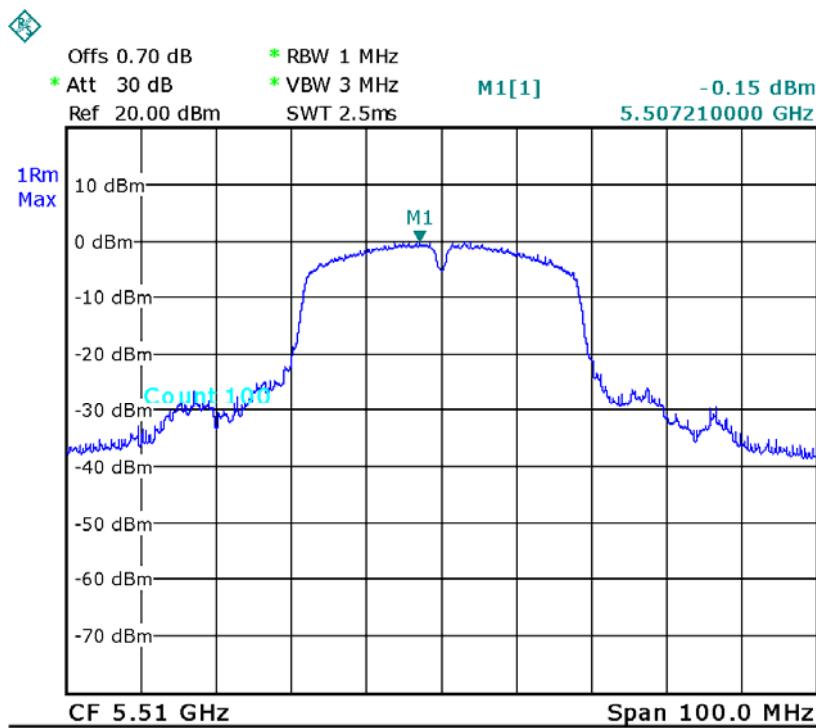

Date: 16.MAR.2013 13:17:41




CH110

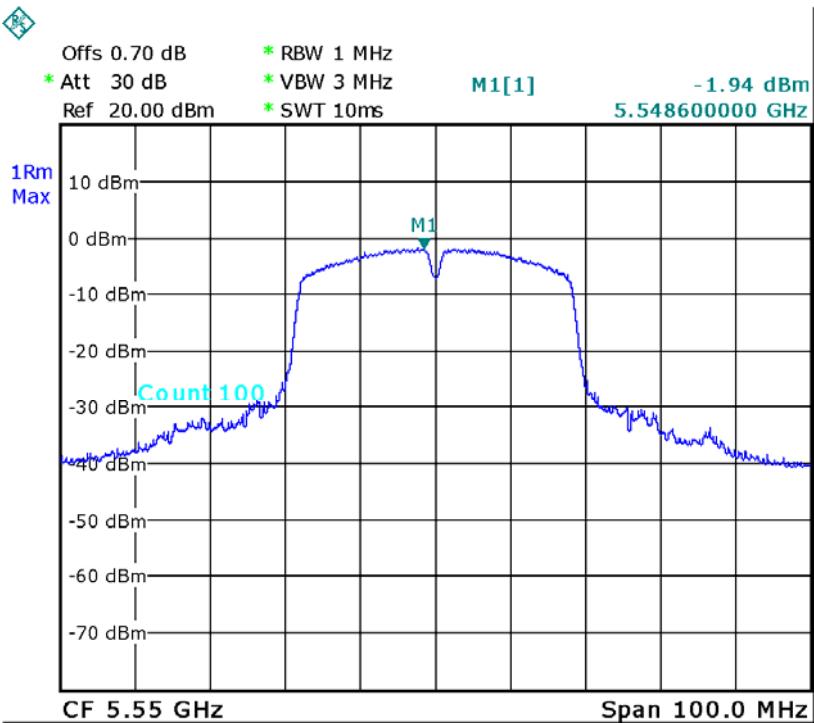

Date: 18.MAR.2013 14:07:16

CH134

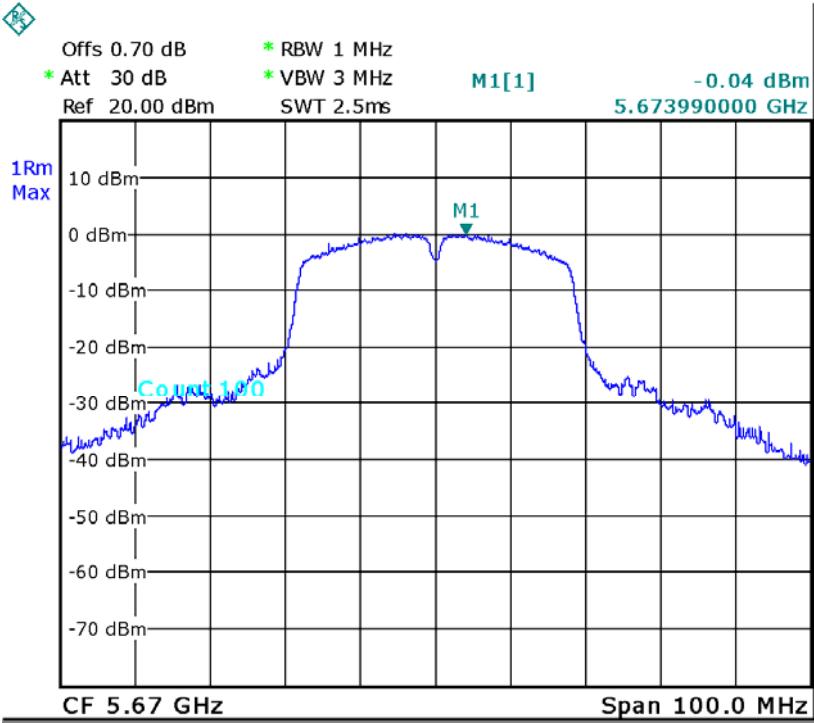

Date: 16.MAR.2013 13:19:23



9. PEAK EXCURSION MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Excursion Measurement	13 dB	5150 - 5250	PASS
		5250 - 5350	PASS
		5470 - 5725	N/A

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Next Calibration
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2012	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

9.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 3000 kHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Max Hold
Sweep Time	60s

c. Peak Trace: Set RBW = 1 MHz, VBW \geq 3 MHz with peak detector and maxhold settings.

d. Average Trace: set RBW = 1 MHz, VBW = 3 MHz with RMS detector and trace average across 100 traces in power averaging mode.

9.1.3 DEVIATION FROM STANDARD

No deviation.



9.1.4 TEST SETUP



9.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.1.6 TEST RESULTS

EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH36	5180	5.40	13
CH40	5200	6.30	13
CH48	5240	5.94	13

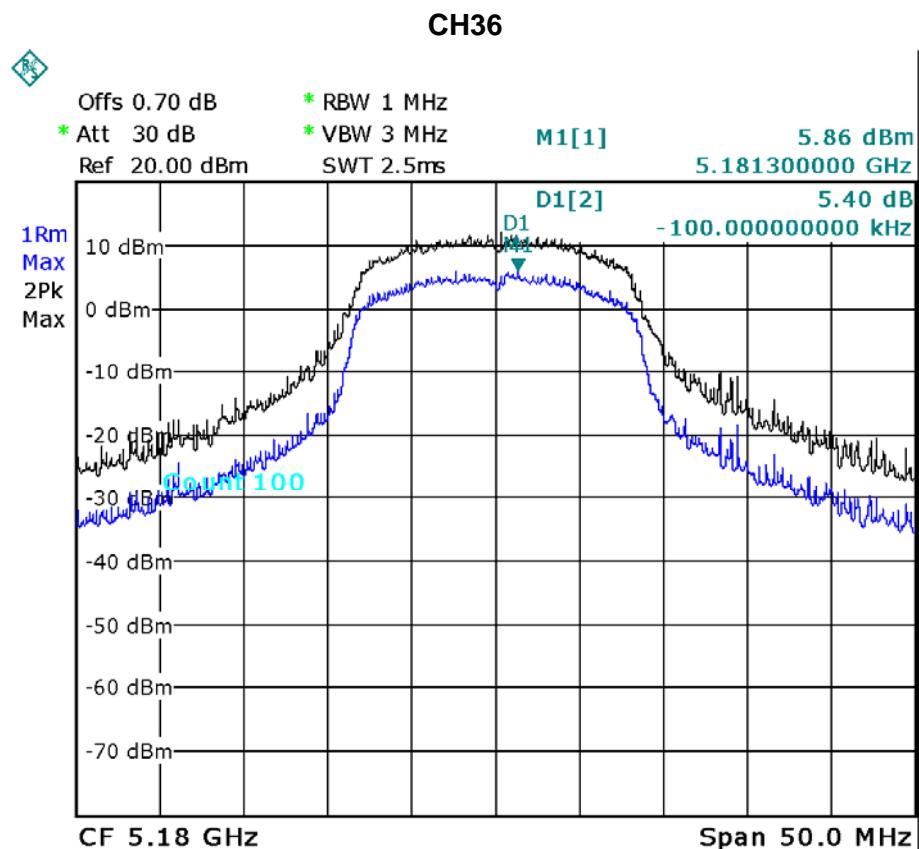

Date: 12.MAR.2013 07:53:04




CH40

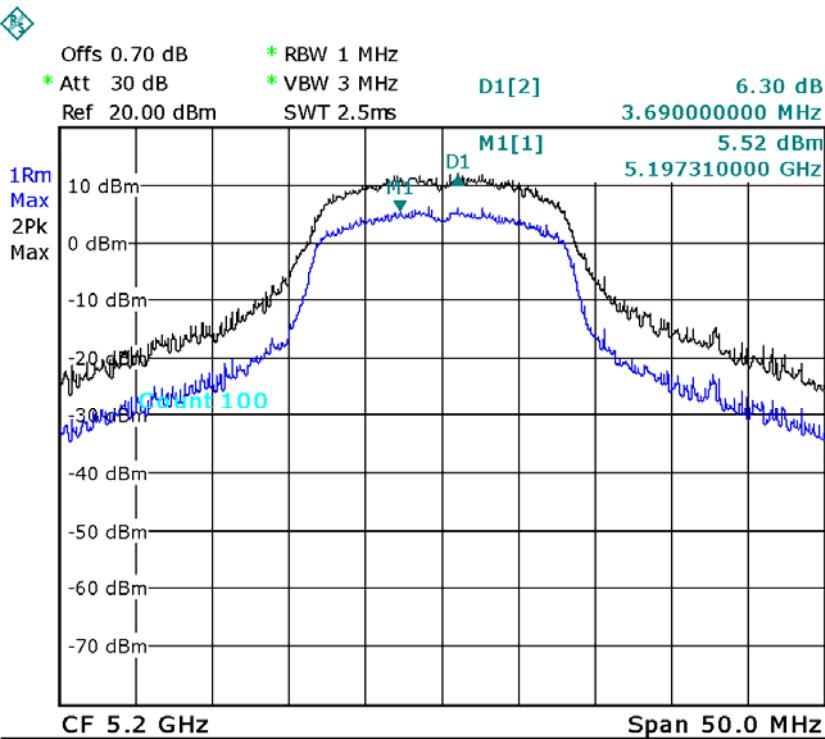

Date: 12.MAR.2013 07:52:22

CH48

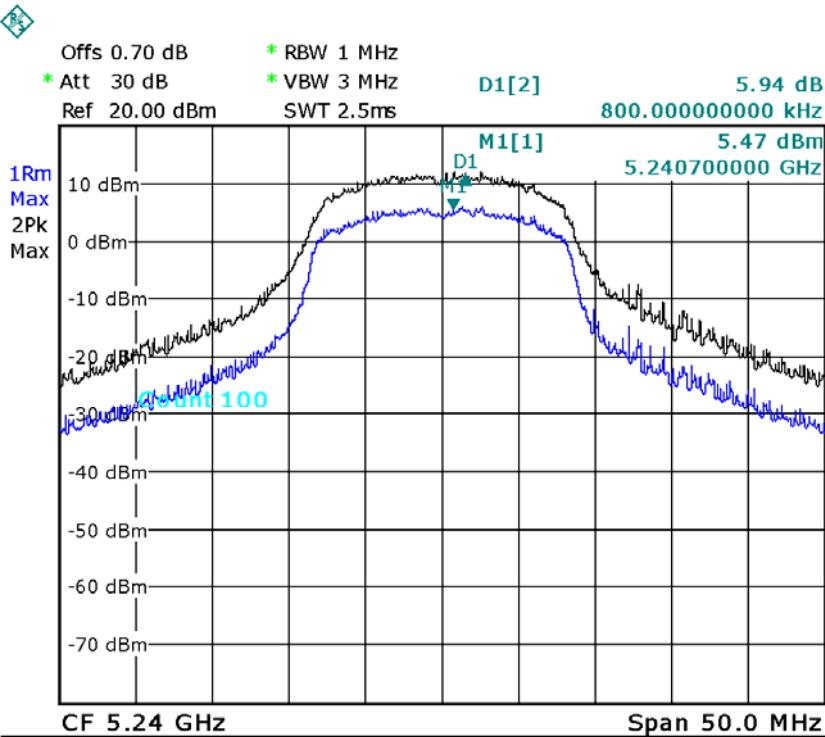


Date: 12.MAR.2013 07:54:54



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48		

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH36	5180	5.94	13
CH40	5200	6.24	13
CH48	5240	6.52	13


CH36

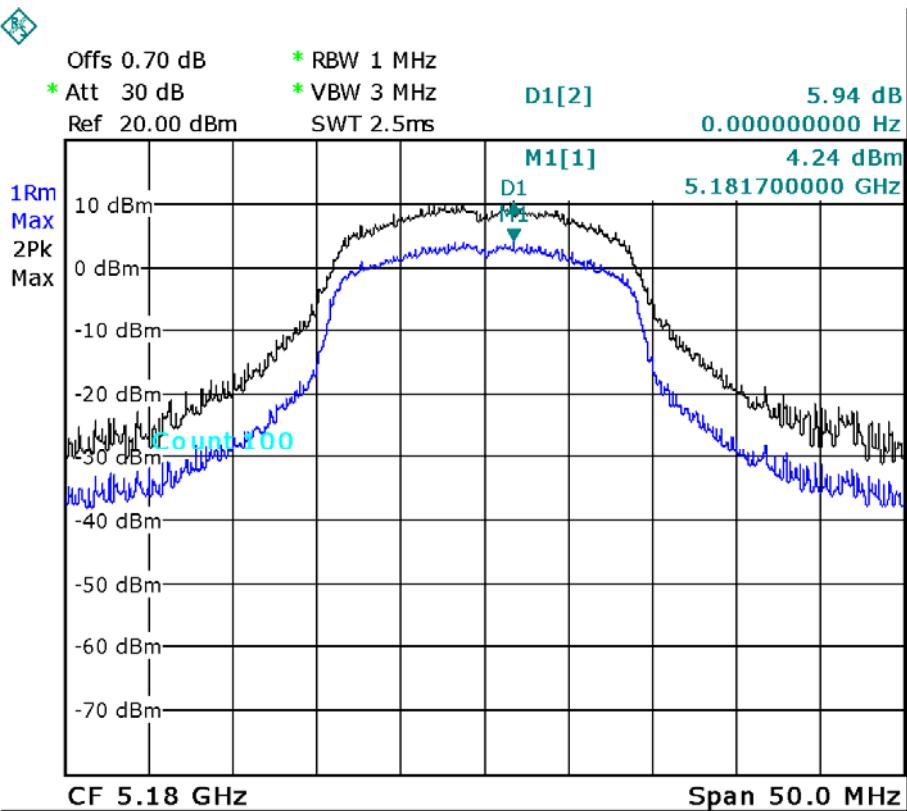

Date: 12.MAR.2013 08:00:17




CH40

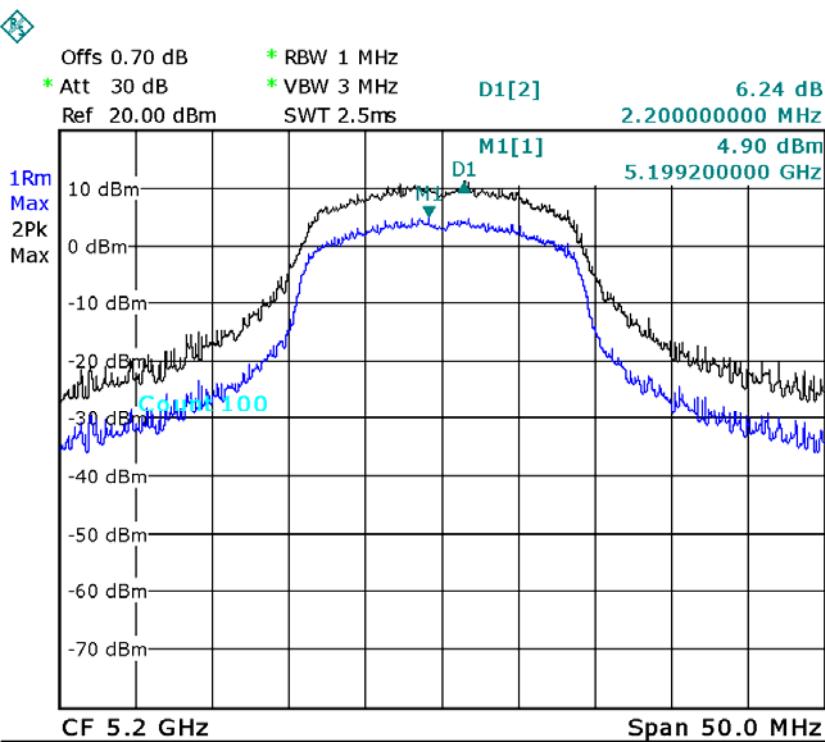

Date: 12.MAR.2013 08:01:14

CH48

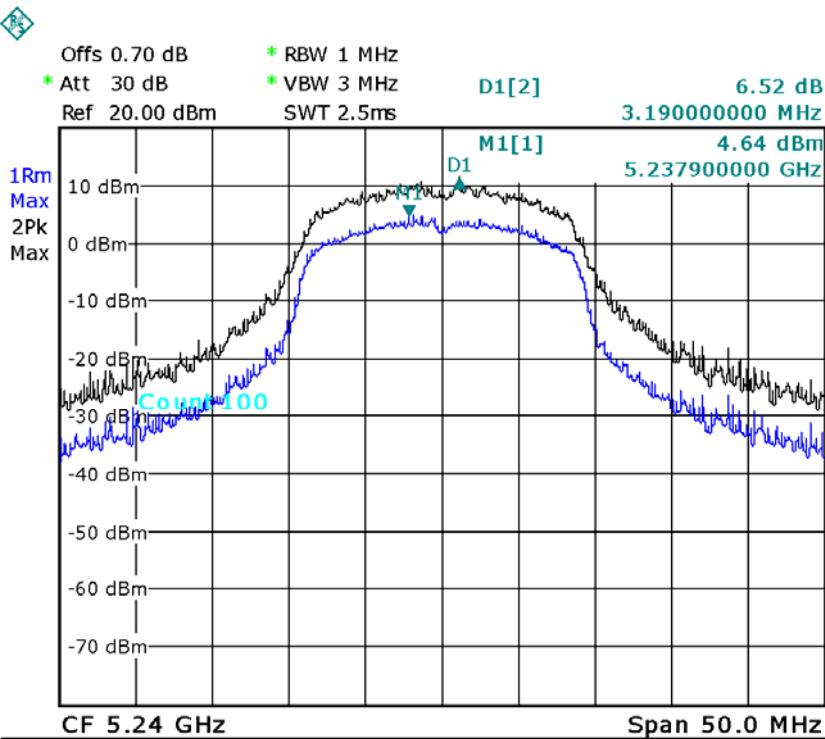


Date: 12.MAR.2013 08:02:02



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46		

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH38	5190	5.90	13
CH46	5230	5.99	13


CH38

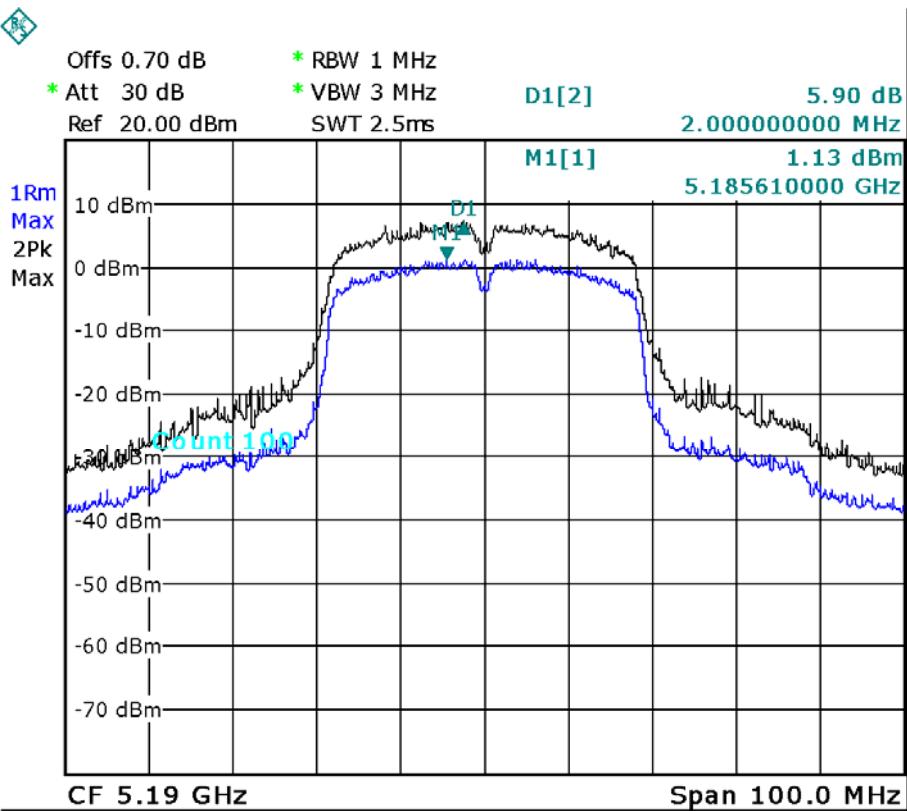

Date: 12.MAR.2013 08:08:22



CH46

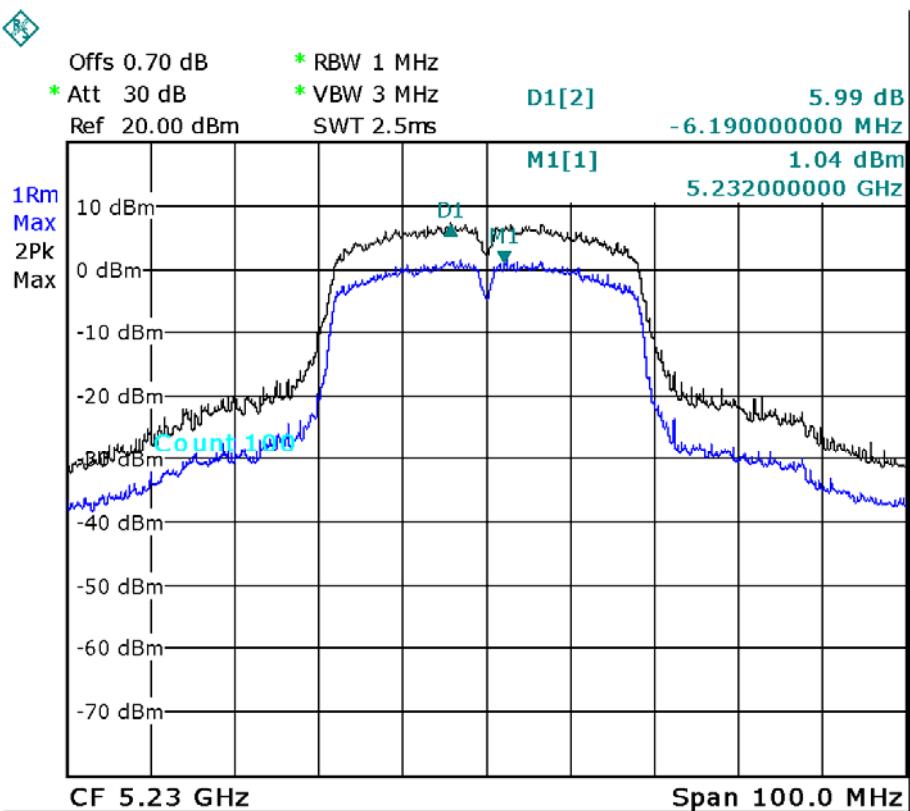


Date: 12.MAR.2013 08:09:46



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX A Mode/CH52, CH56, CH64		

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	6.37	13
CH56	5280	5.96	13
CH64	5320	5.93	13


CH52

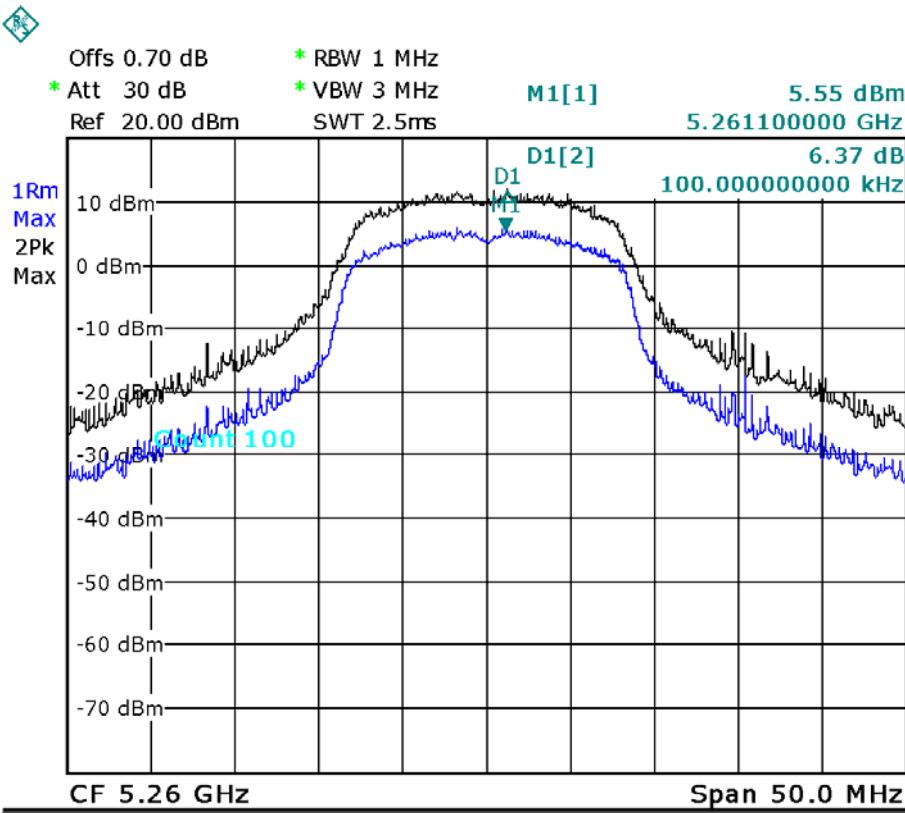

Date: 12.MAR.2013 07:56:49




CH56

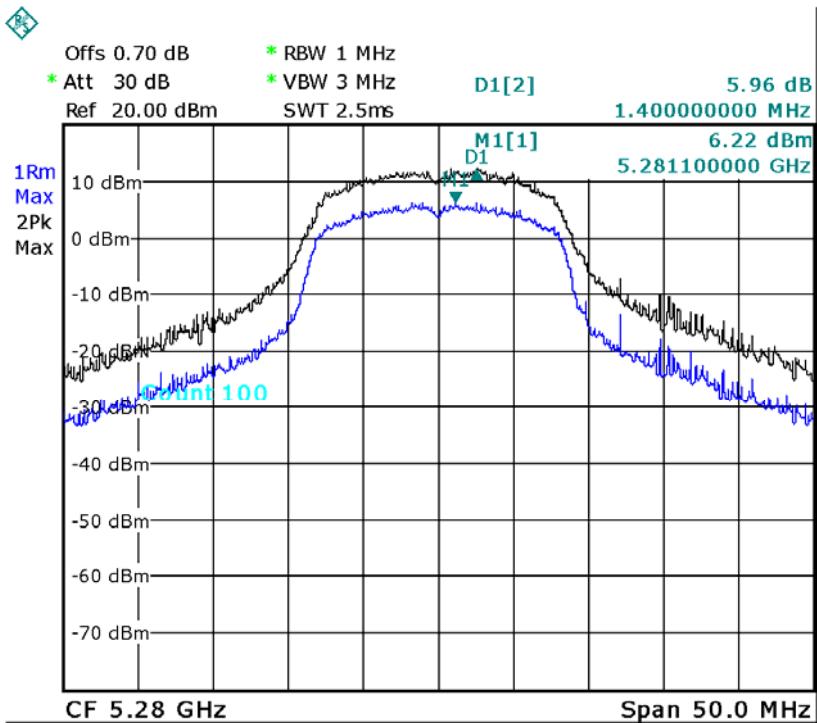

Date: 12.MAR.2013 07:58:01

CH64

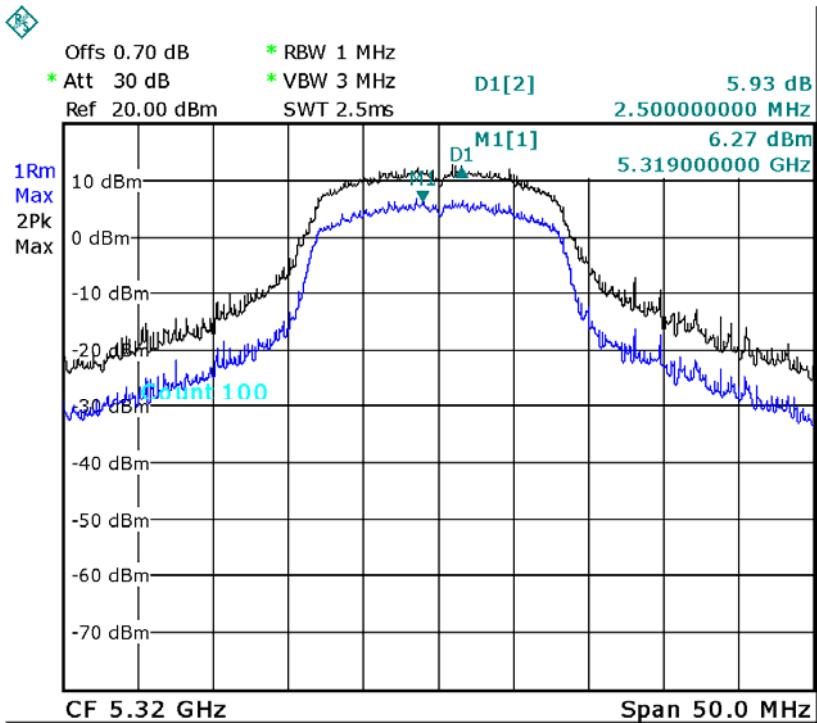


Date: 12.MAR.2013 07:59:07



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N20 Mode/CH52, CH56, CH64		

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	5.34	13
CH56	5280	5.42	13
CH64	5320	5.03	13


CH52

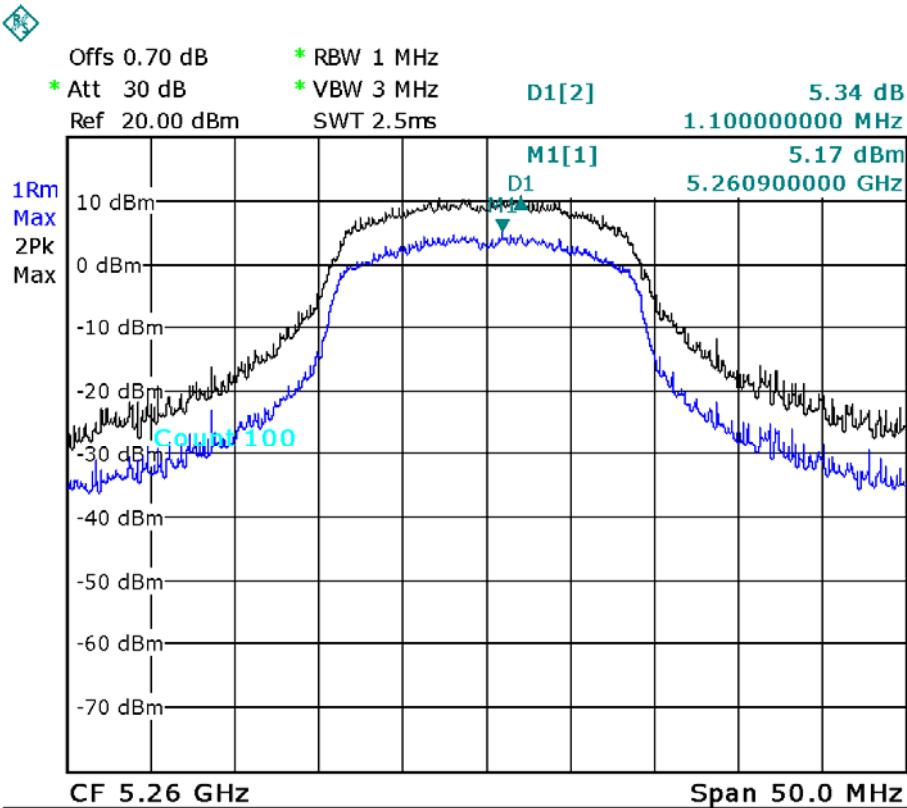

Date: 12.MAR.2013 08:05:53




CH56

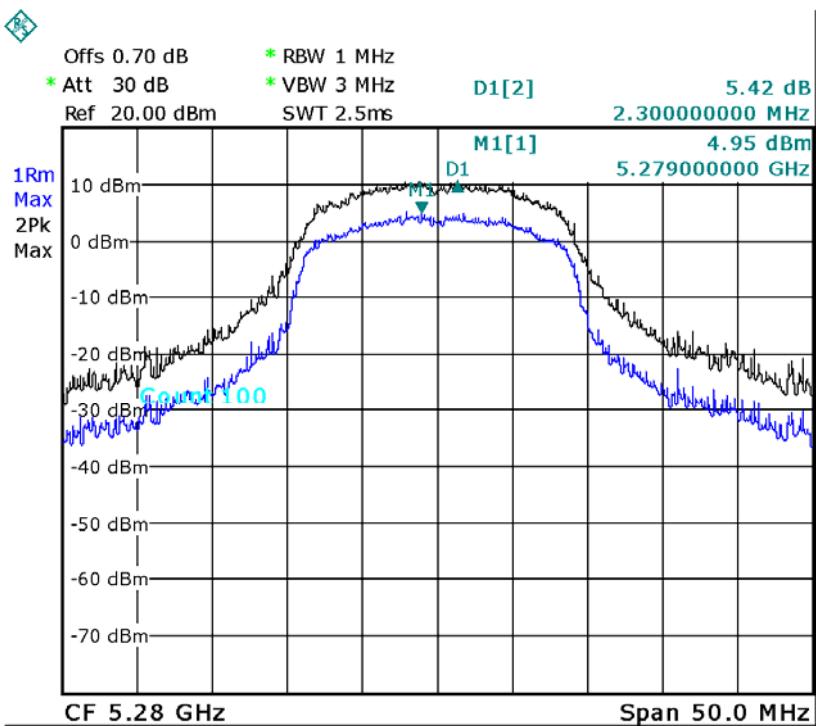

Date: 12.MAR.2013 08:06:38

CH64

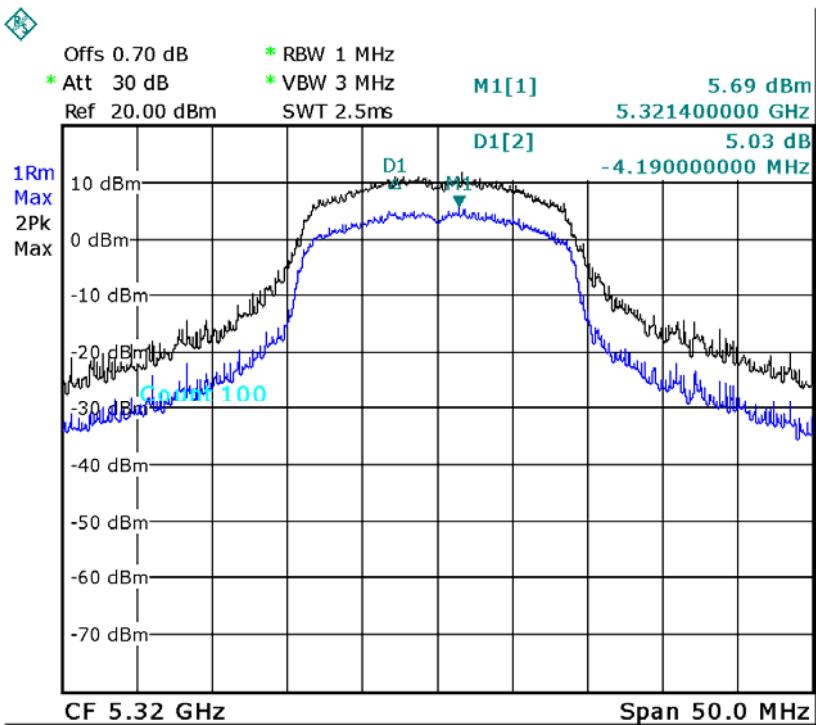


Date: 12.MAR.2013 08:07:27



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2/TX N40 Mode/CH54, CH62		

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH54	5270	5.59	13
CH62	5310	5.82	13


CH54

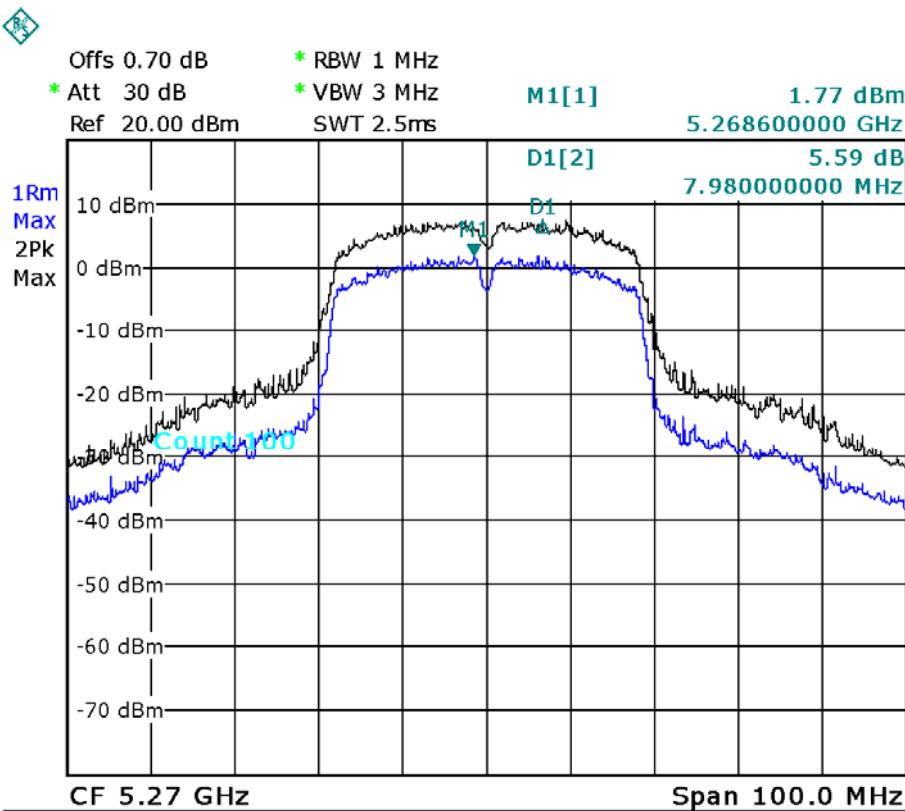

Date: 12.MAR.2013 08:11:44



CH62

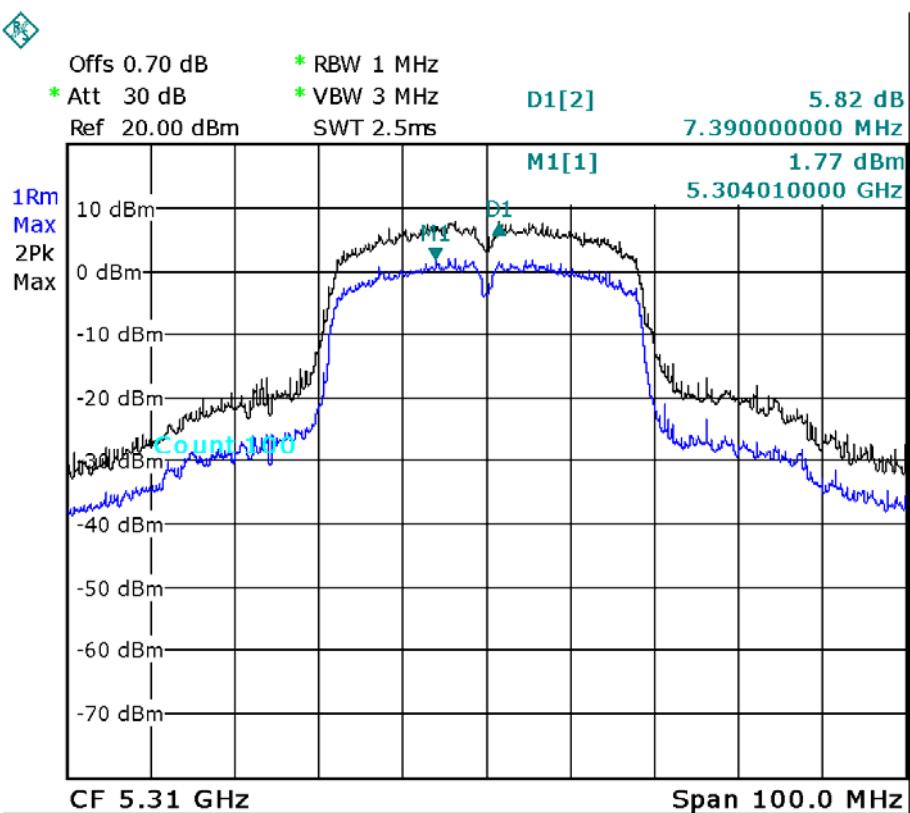


Date: 12.MAR.2013 08:12:36



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX A Mode/CH100, CH116, CH140		

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH100	5500	5.86	13
CH116	5580	7.21	13
CH140	5700	6.23	13


CH100

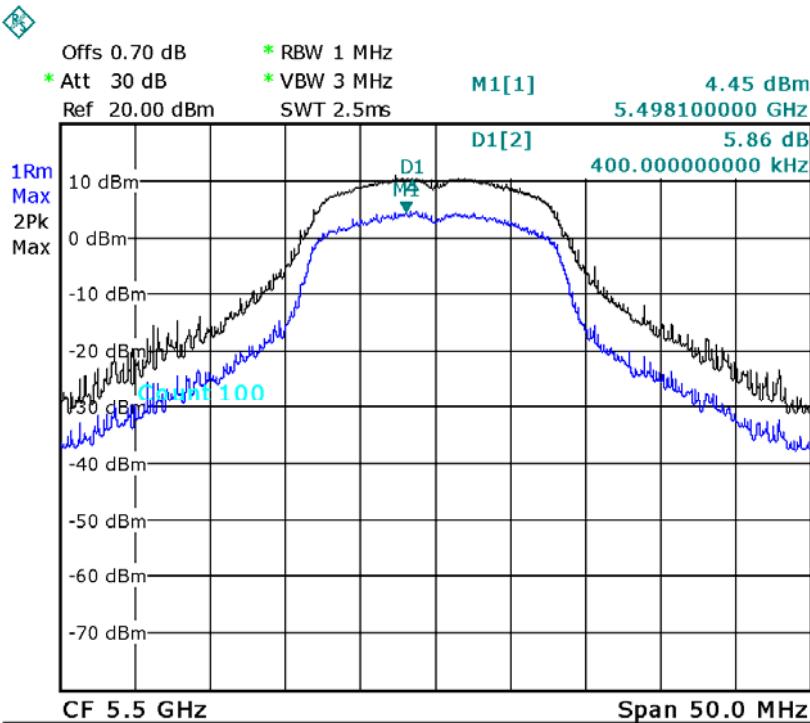

Date: 16.MAR.2013 13:31:03




CH116

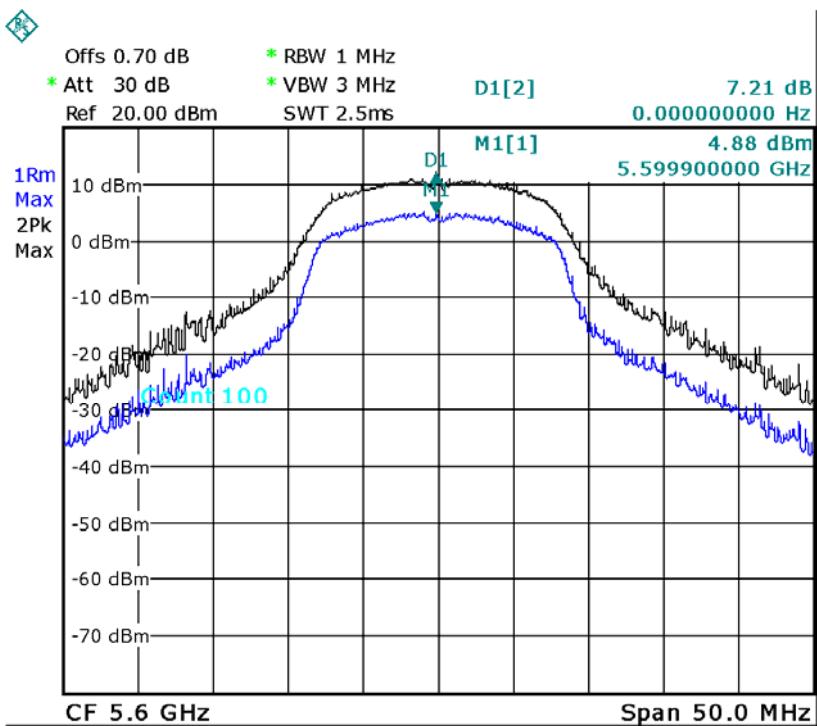

Date: 16.MAR.2013 13:30:07

CH140

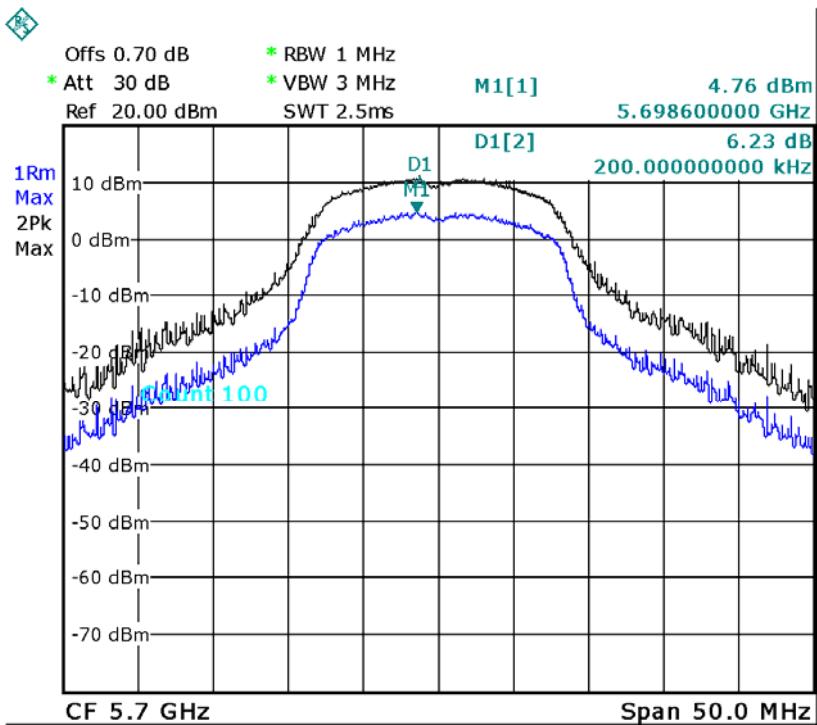


Date: 16.MAR.2013 13:28:57



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N20 Mode/CH52, CH56, CH64		

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH100	5500	6.54	13
CH116	5580	6.32	13
CH140	5700	5.70	13


CH100

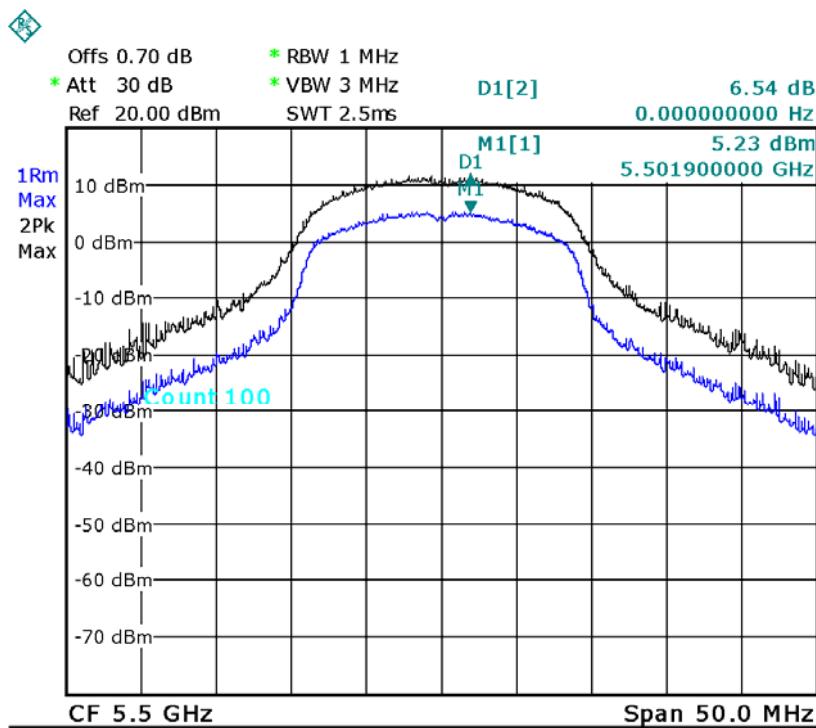

Date: 16.MAR.2013 13:25:58




CH116

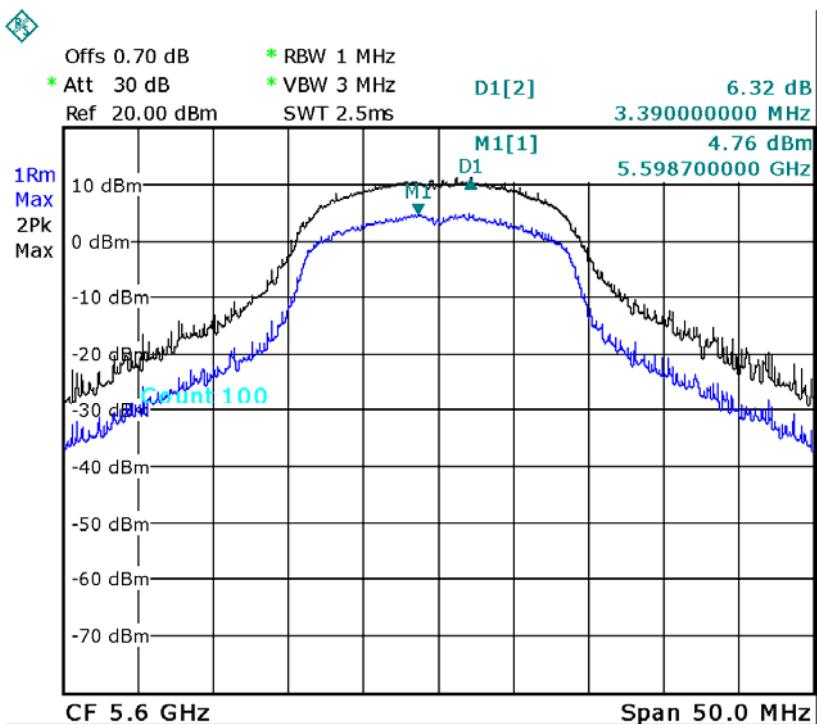

Date: 16.MAR.2013 13:27:05

CH140

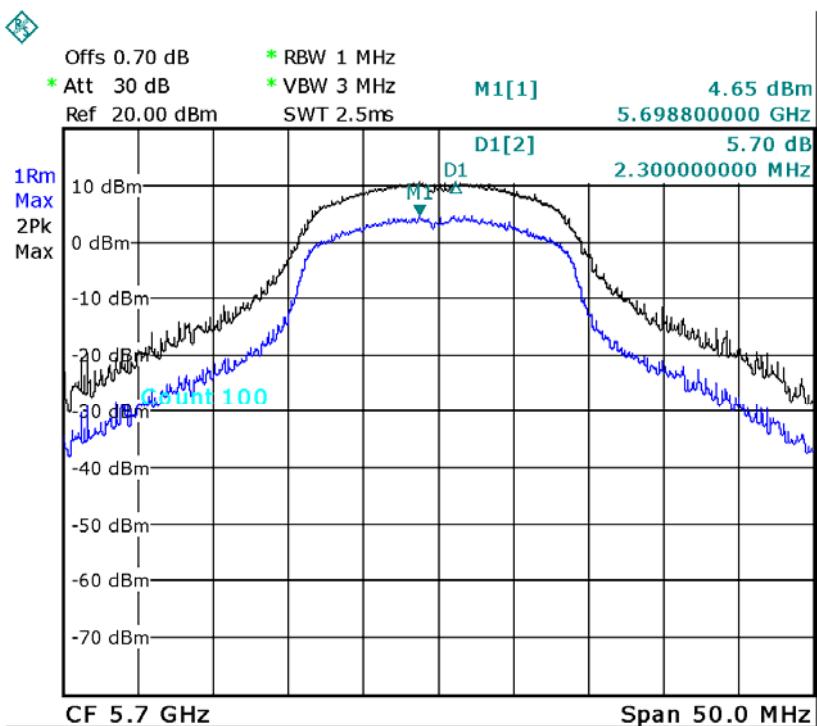


Date: 16.MAR.2013 13:28:14



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3/TX N40 Mode/CH102, CH110, CH134		

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH102	5510	6.46	13
CH110	5550	7.99	13
CH134	5670	6.68	13


CH102

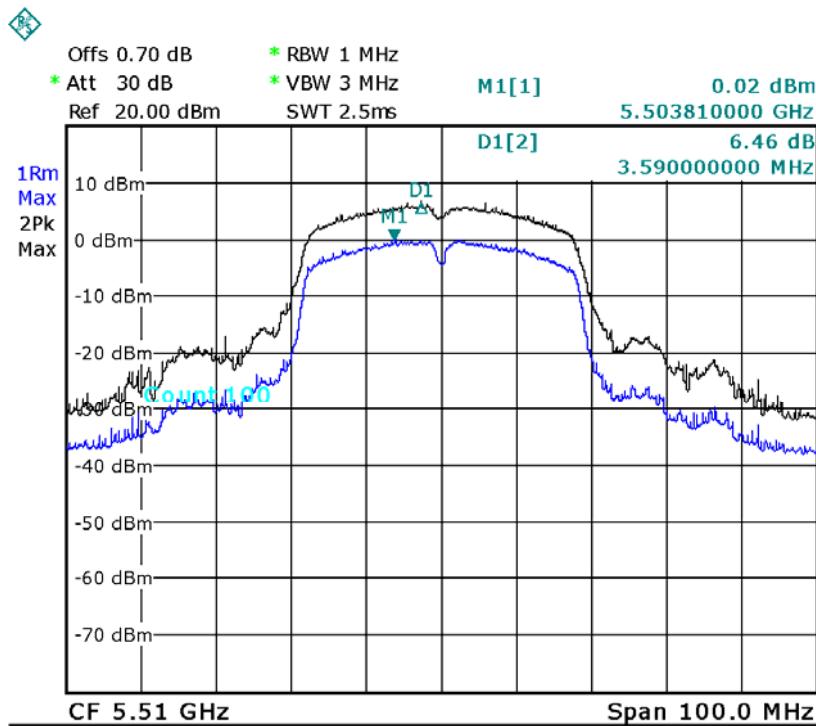

Date: 16.MAR.2013 13:23:25




CH110

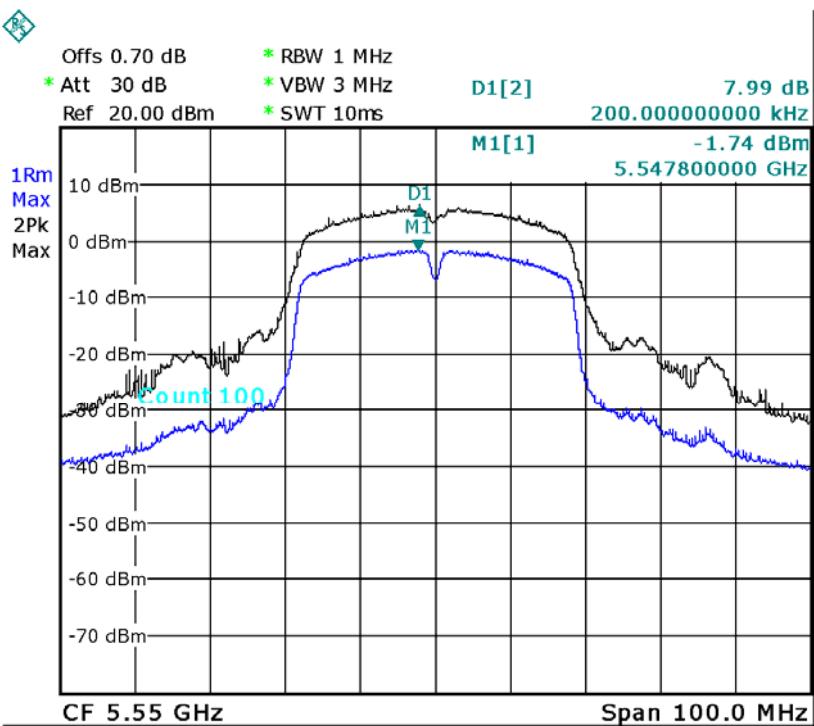

Date: 18.MAR.2013 14:08:22

CH134

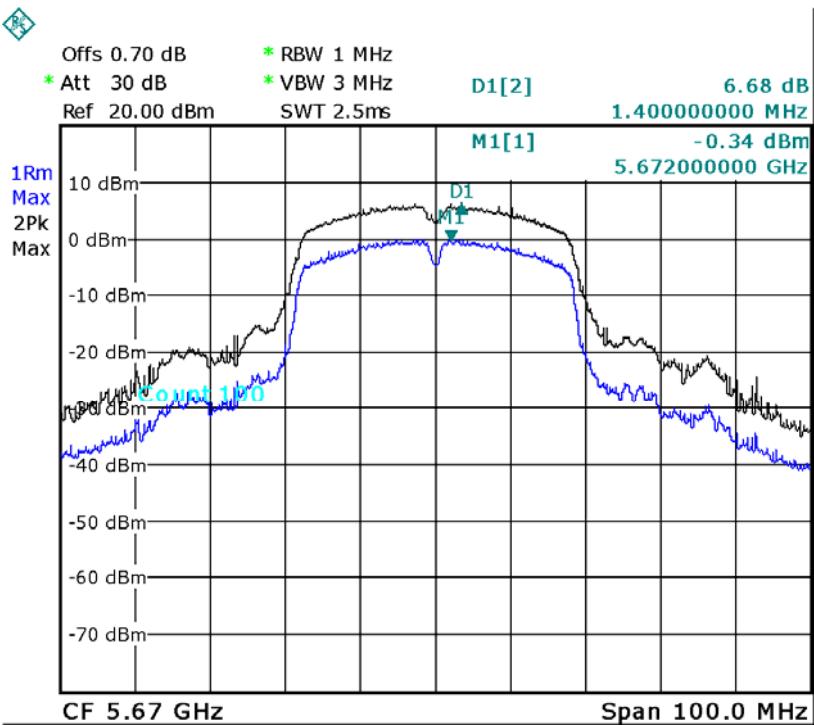

Date: 16.MAR.2013 13:21:58



10. FREQUENCY STABILITY MEASUREMENT

10.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E 15.407(g)			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	specified in the user's manual	5150 – 5250	PASS
		5250 – 5350	PASS
		5470 – 5725	N/A

10.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov. 26.2013
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May.11.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

10.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. user manual temperature is -10°C~55°C.

10.1.3 DEVIATION FROM STANDARD

No deviation.



10.1.4 TEST SETUP



10.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**10.1.6 TEST RESULTS**

EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 1		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180
138	5180.00685
120	5180.007150
102	5180.007080
Max. Deviation (MHz)	0.007150
Max. Deviation (ppm)	1.38

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180
-10	5180.0036
5	5180.003
20	5180.0029
35	5180.0027
55	5180.0031
Max. Deviation (MHz)	0.003600
Max. Deviation (ppm)	0.69



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 2		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5320
138	5320.002600
120	5320.002200
102	5320.003100
Max. Deviation (MHz)	0.003100
Max. Deviation (ppm)	0.58

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5320
-10	5320.004500
5	5320.003600
20	5320.003200
35	5320.002800
55	5320.004100
Max. Deviation (MHz)	0.004500
Max. Deviation (ppm)	0.85



EUT :	Smart Phone	Model Name :	HUAWEI MT1-U06
Temperature :	25 °C	Relative Humidity :	58 %
Test Voltage :	DC 3.8V		
Test Mode :	Band 3		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5700
138	5700.002700
120	5700.001500
102	5700.002500
Max. Deviation (MHz)	0.002700
Max. Deviation (ppm)	0.47

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5700
-10	5700.004300
5	5700.003700
20	5700.001200
35	5700.001800
55	5700.003300
Max. Deviation (MHz)	0.004300
Max. Deviation (ppm)	0.75