






LTE Band 26 16QAM 15MHz CH-Low 1RB

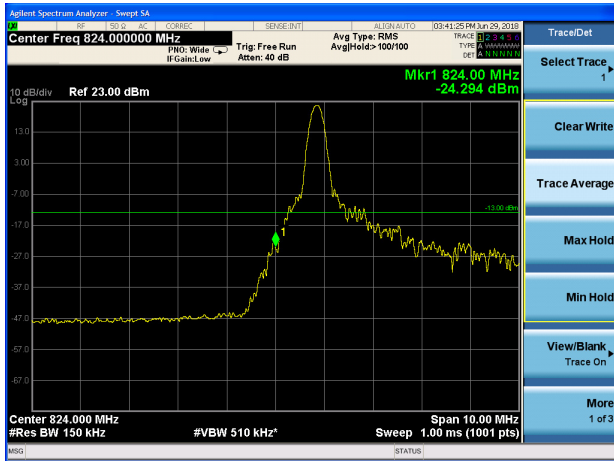


LTE Band 26 16QAM 15MHz CH-High 1RB

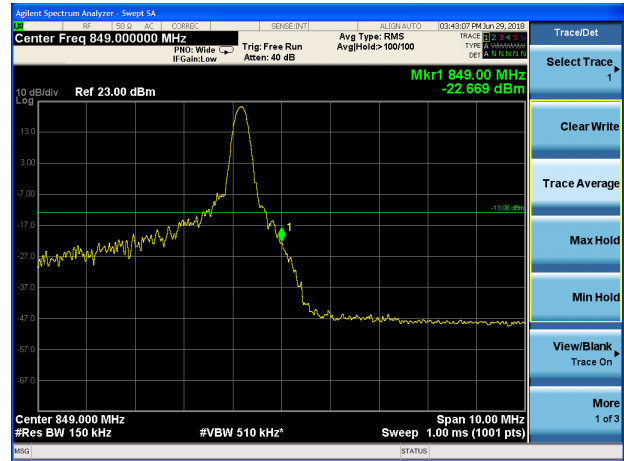

LTE Band 26 16QAM 15MHz CH-Low 100%RB

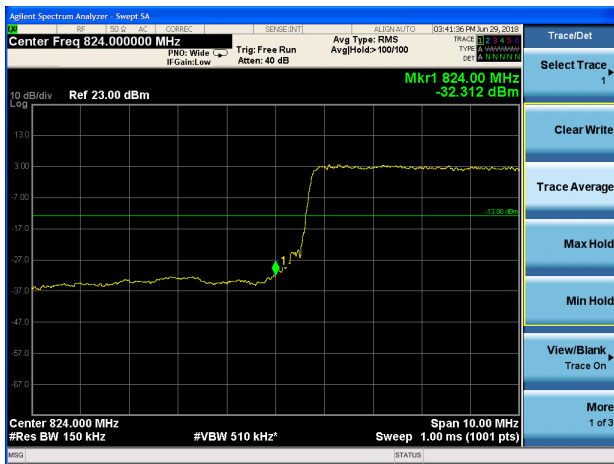


LTE Band 26 16QAM 15MHz CH-High 100%RB

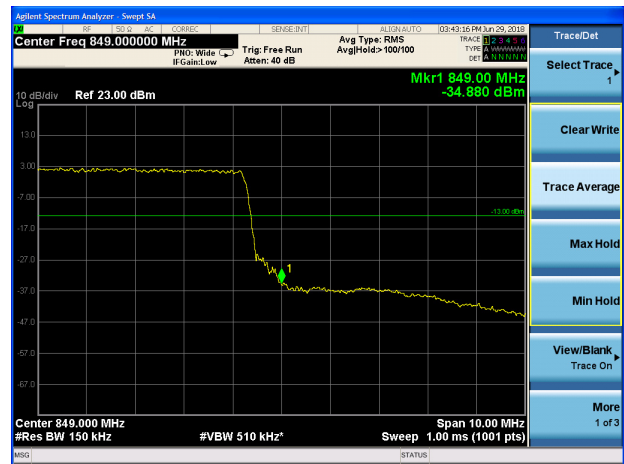





LTE Band 26 64QAM 1.4MHz CH-Low 1RB

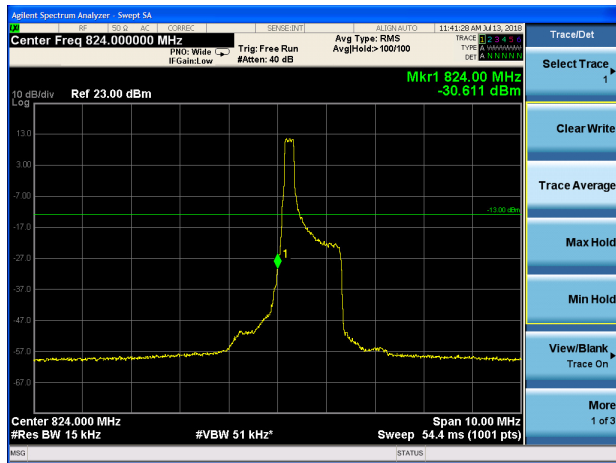


LTE Band 26 64QAM 1.4MHz CH-High 1RB

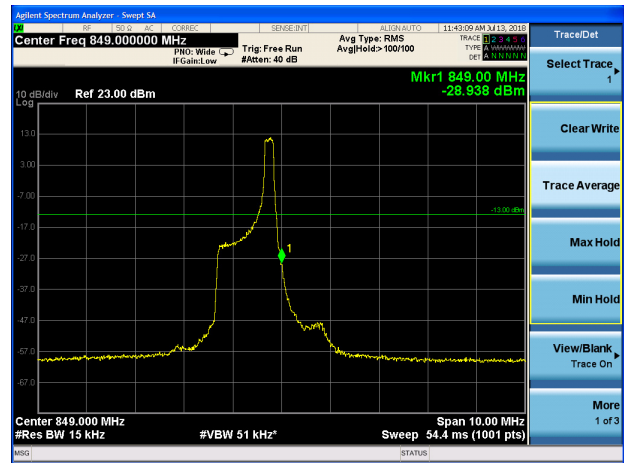


LTE Band 26 64QAM 1.4MHz CH-Low 100%RB

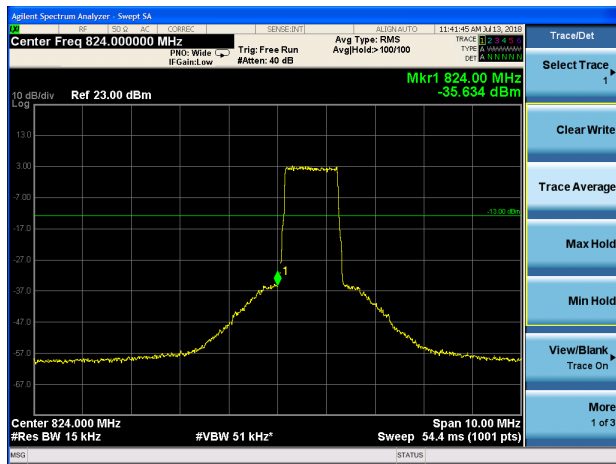


LTE Band 26 64QAM 1.4MHz CH-High 100%RB

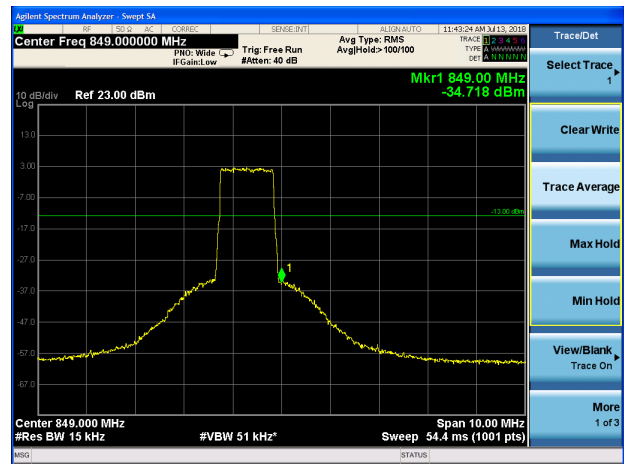

LTE Band 26 64QAM 3MHz CH-Low 1RB

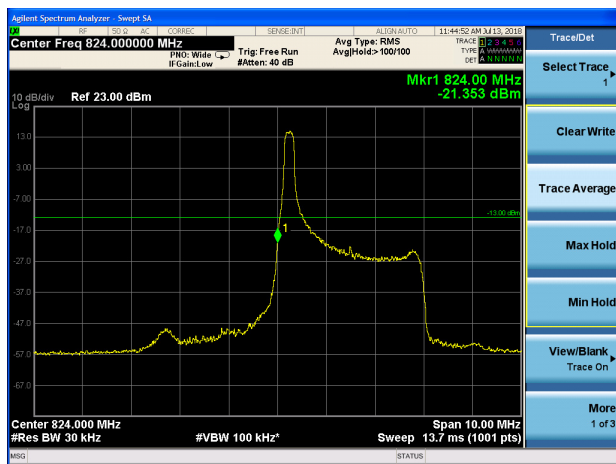


LTE Band 26 64QAM 3MHz CH-High 1RB

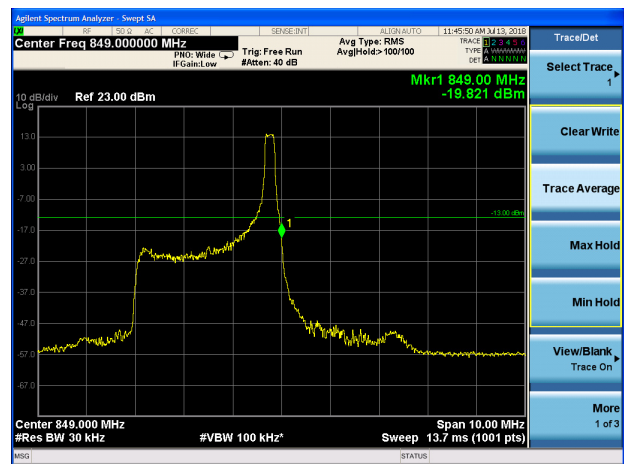




LTE Band 26 64QAM 3MHz CH-Low 100%RB

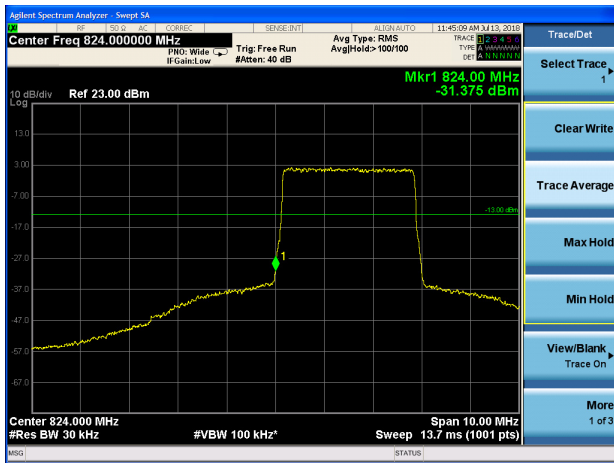


LTE Band 26 64QAM 3MHz CH-High 100%RB




LTE Band 26 64QAM 5MHz CH-Low 1RB

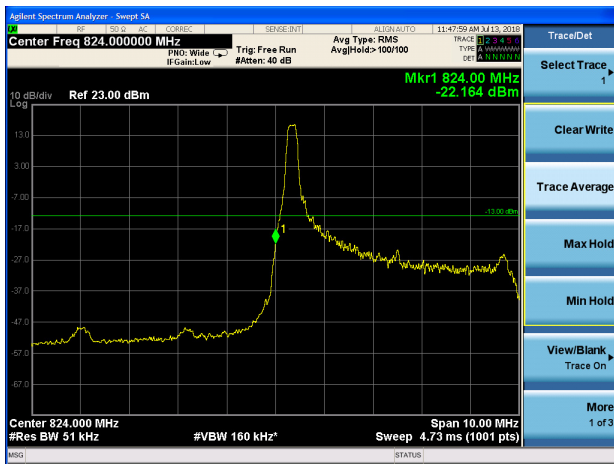


LTE Band 26 64QAM 5MHz CH-High 1RB

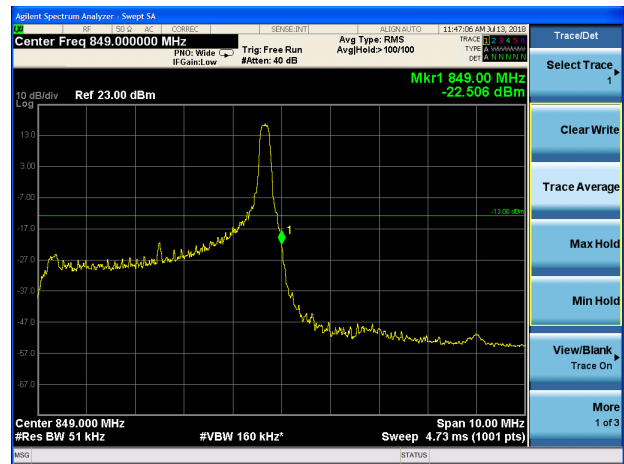

LTE Band 26 64QAM 5MHz CH-Low 100%RB

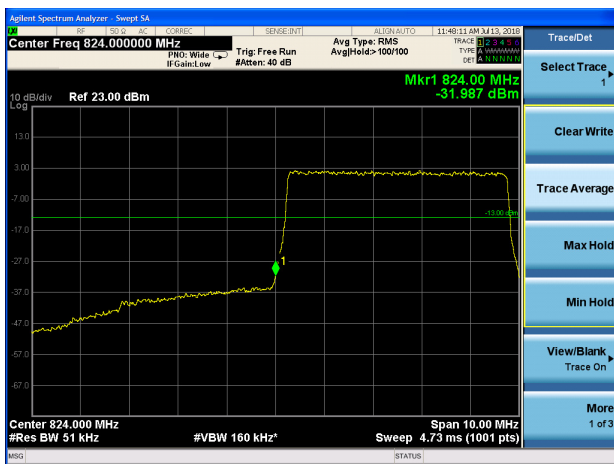


LTE Band 26 64QAM 5MHz CH-High 100%RB

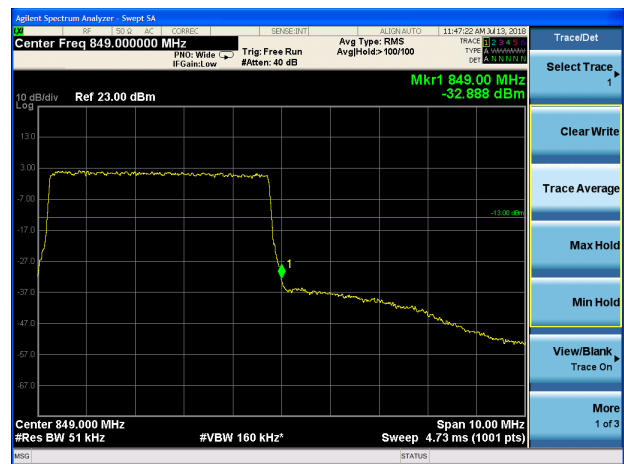





LTE Band 26 64QAM 10MHz CH-Low 1RB

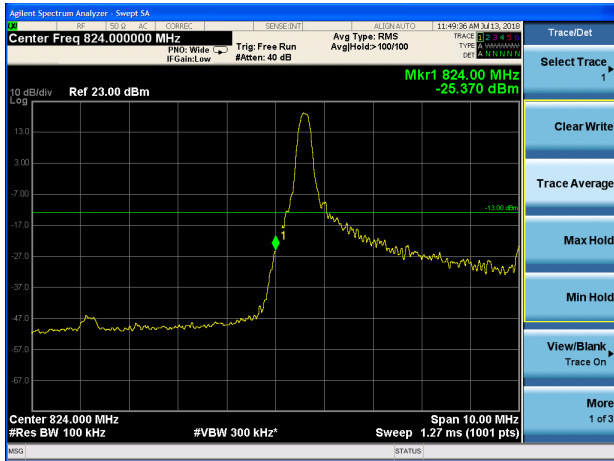


LTE Band 26 64QAM 10MHz CH-High 1RB

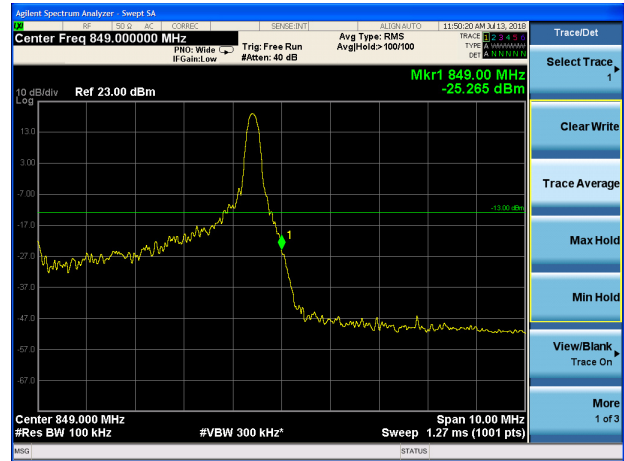


LTE Band 26 64QAM 10MHz CH-Low 100%RB

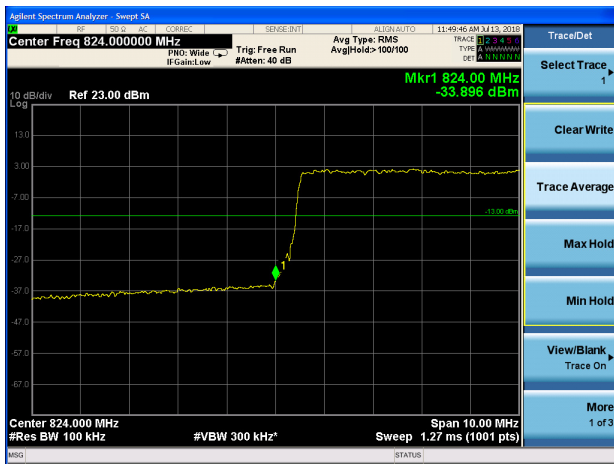


LTE Band 26 64QAM 10MHz CH-High 100%RB

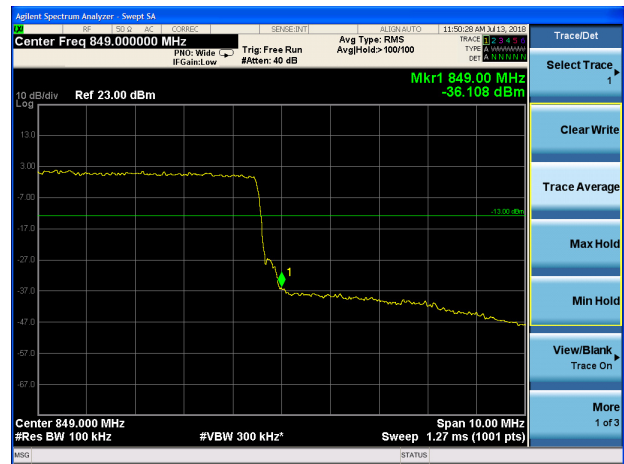

LTE Band 26 64QAM 15MHz CH-Low 1RB

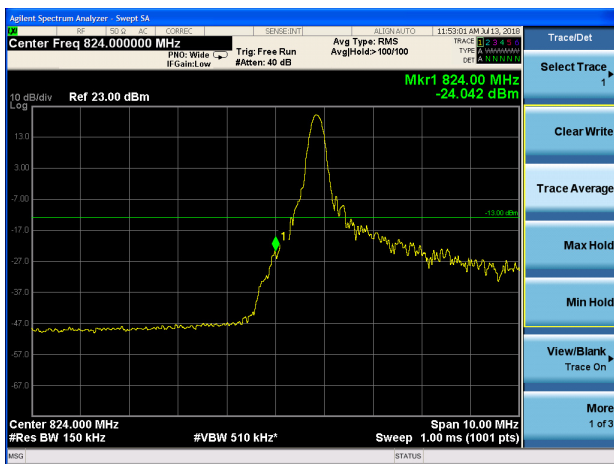


LTE Band 26 64QAM 15MHz CH-High 1RB

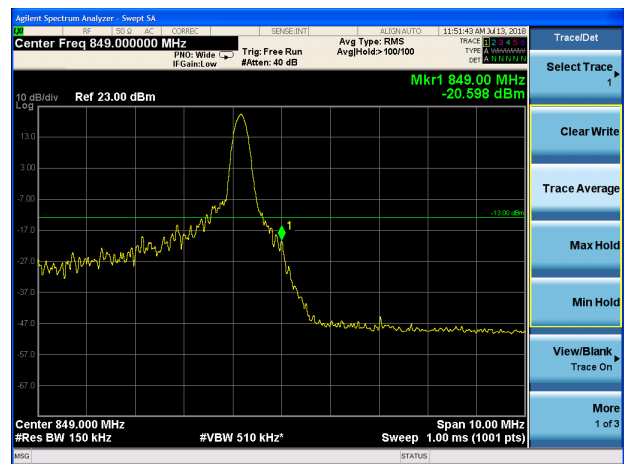



LTE Band 26 64QAM 15MHz CH-Low 100%RB

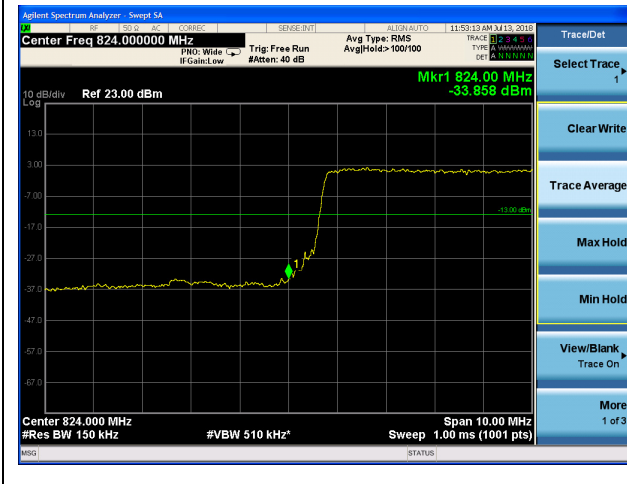

LTE Band 26 64QAM 15MHz CH-High 100%RB



5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

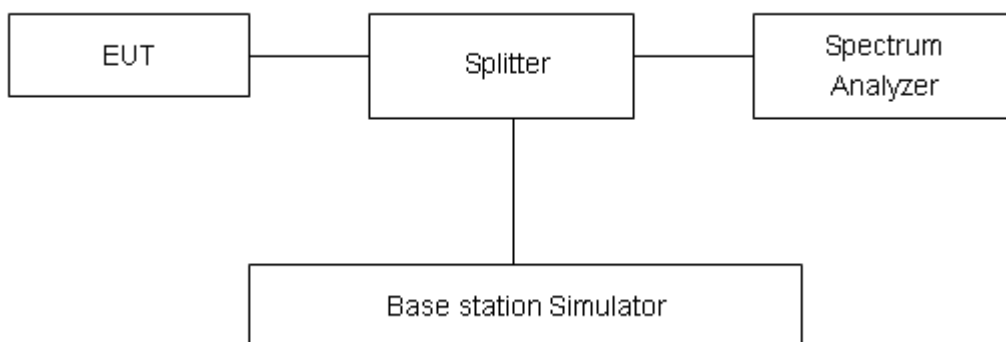

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

LTE Band 26								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	26797	824.7	28.21	22.98	5.23	≤13	PASS
		26915	836.5	27.35	23.04	4.31	≤13	PASS
		27033	848.3	27.65	22.95	4.70	≤13	PASS
	3	26805	825.5	28.30	22.96	5.34	≤13	PASS
		26915	836.5	28.30	23.03	5.27	≤13	PASS
		27025	847.5	27.81	22.93	4.88	≤13	PASS
	5	26815	826.5	28.41	23.04	5.37	≤13	PASS
		26915	836.5	28.32	23.05	5.27	≤13	PASS
		27015	846.5	27.95	22.97	4.98	≤13	PASS
	10	26840	829	28.45	23.02	5.43	≤13	PASS
		26915	836.5	28.27	23.01	5.26	≤13	PASS
		26990	844	28.03	22.92	5.11	≤13	PASS
	15	26865	831.5	28.43	22.99	5.44	≤13	PASS
		26915	836.5	28.34	22.96	5.38	≤13	PASS
		26965	841.5	28.23	22.88	5.35	≤13	PASS
16QAM	1.4	26797	824.7	28.06	22.00	6.06	≤13	PASS
		26915	836.5	27.98	21.95	6.03	≤13	PASS
		27033	848.3	27.39	21.93	5.46	≤13	PASS
	3	26805	825.5	28.04	21.98	6.06	≤13	PASS
		26915	836.5	27.95	21.91	6.04	≤13	PASS
		27025	847.5	27.51	21.88	5.63	≤13	PASS
	5	26815	826.5	28.06	22.01	6.05	≤13	PASS
		26915	836.5	28.02	21.96	6.06	≤13	PASS
		27015	846.5	27.61	21.92	5.69	≤13	PASS
	10	26840	829	28.11	21.98	6.13	≤13	PASS
		26915	836.5	27.97	21.91	6.06	≤13	PASS
		26990	844	27.73	21.88	5.85	≤13	PASS
	15	26865	831.5	28.06	21.96	6.10	≤13	PASS
		26915	836.5	27.87	21.87	6.00	≤13	PASS
		26965	841.5	27.80	21.85	5.95	≤13	PASS
64QAM	1.4	26797	824.7	25.89	19.70	6.19	≤13	PASS
		26915	836.5	25.95	19.79	6.16	≤13	PASS
		27033	848.3	25.32	19.73	5.59	≤13	PASS
	3	26805	825.5	25.92	19.73	6.19	≤13	PASS
		26915	836.5	26.00	19.83	6.17	≤13	PASS
		27025	847.5	25.52	19.76	5.76	≤13	PASS



	5	26815	826.5	25.92	19.74	6.18	≤13	PASS
		26915	836.5	26.03	19.84	6.19	≤13	PASS
		27015	846.5	25.57	19.75	5.82	≤13	PASS
	10	26840	829	25.97	19.71	6.26	≤13	PASS
		26915	836.5	25.98	19.79	6.19	≤13	PASS
		26990	844	25.69	19.71	5.98	≤13	PASS
	15	26865	831.5	25.92	19.69	6.23	≤13	PASS
		26915	836.5	25.88	19.75	6.13	≤13	PASS
		26965	841.5	25.76	19.68	6.08	≤13	PASS

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.35 V, with a nominal voltage of 3.8V.

Test setup

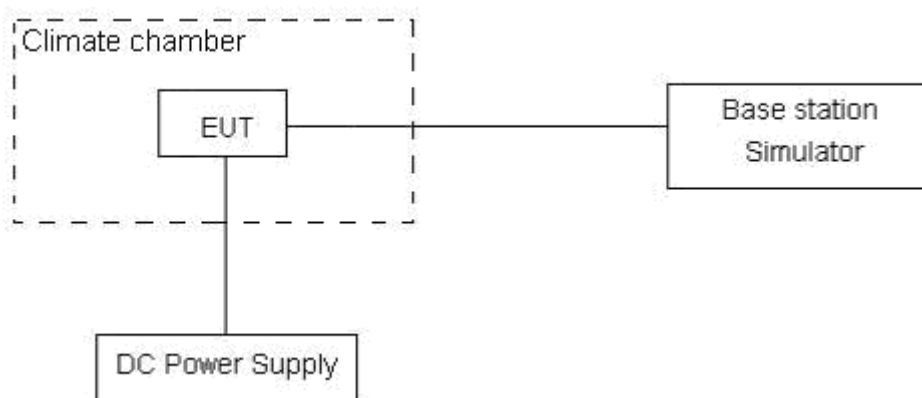

**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.



Test Result

LTE Band 26					
(QPSK, 15MHz BANDWIDTH)					
Condition		824	849	Delta (Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.5171	848.6958	-1.23	-0.00147
Extreme (50°C)		824.5168	848.6961	-1.43	-0.00171
Extreme (40°C)		824.5183	848.6946	0.04	0.00005
Extreme (30°C)		824.5164	848.6965	0.30	0.00036
Extreme (20°C)		824.5161	848.6968	0.90	0.00108
Extreme (10C)		824.5176	848.6956	-0.40	-0.00048
Extreme (0°C)		824.5167	848.6964	-1.22	-0.00146
Extreme (-10°C)		824.5162	848.6967	-0.01	-0.00001
Extreme (-20°C)		824.5178	848.6951	-0.93	-0.00111
Extreme (-30°C)		824.5169	848.6966	0.27	0.00032
25°C		LV	824.5164	848.6965	0.19
	HV	824.5175	848.6959	0.99	0.00118
(16QAM,15MHz BANDWIDTH)					
Condition		824	849	Delta (Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.5716	848.6151	1.04	0.00124
Extreme (50°C)		824.5713	848.6148	-0.30	-0.00036
Extreme (40°C)		824.5698	848.6165	0.82	0.00098
Extreme (30°C)		824.5717	848.6144	-0.80	-0.00096
Extreme (20°C)		824.5725	848.6141	0.97	0.00116
Extreme (10C)		824.5707	848.6156	0.56	0.00067
Extreme (0°C)		824.5716	848.6145	0.33	0.00039
Extreme (-10°C)		824.5719	848.6142	-0.93	-0.00111
Extreme (-20°C)		824.5703	848.6158	0.46	0.00055
Extreme (-30°C)		824.5712	848.6149	0.47	0.00056
25°C		LV	824.5717	848.6144	-0.63
	HV	824.5711	848.6151	1.34	0.00160
(64QAM,15MHz BANDWIDTH)					
Condition		824	849	Delta (Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.5767	848.6114	3.01	0.00360
Extreme (50°C)		824.5764	848.6111	-3.89	-0.00465
Extreme (40°C)		824.5749	848.6128	3.60	0.00430
Extreme (30°C)		824.5768	848.6107	-2.68	-0.00320



Extreme (20°C)		824.5776	848.6104	2.03	0.00243
Extreme (10C)		824.5758	848.6119	1.01	0.00121
Extreme (0°C)		824.5767	848.6108	3.90	0.00466
Extreme (-10°C)		824.5770	848.6105	5.63	0.00673
Extreme (-20°C)		824.5754	848.6121	1.08	0.00129
Extreme (-30°C)		824.5763	848.6112	3.77	0.00451
25°C	LV	824.5768	848.6107	3.41	0.00408
	HV	824.5762	848.6114	-1.48	-0.00177

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

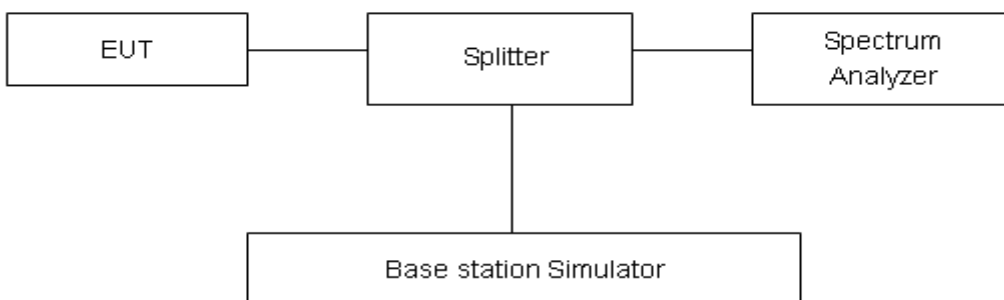

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-10GHz	1.407 dB



Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

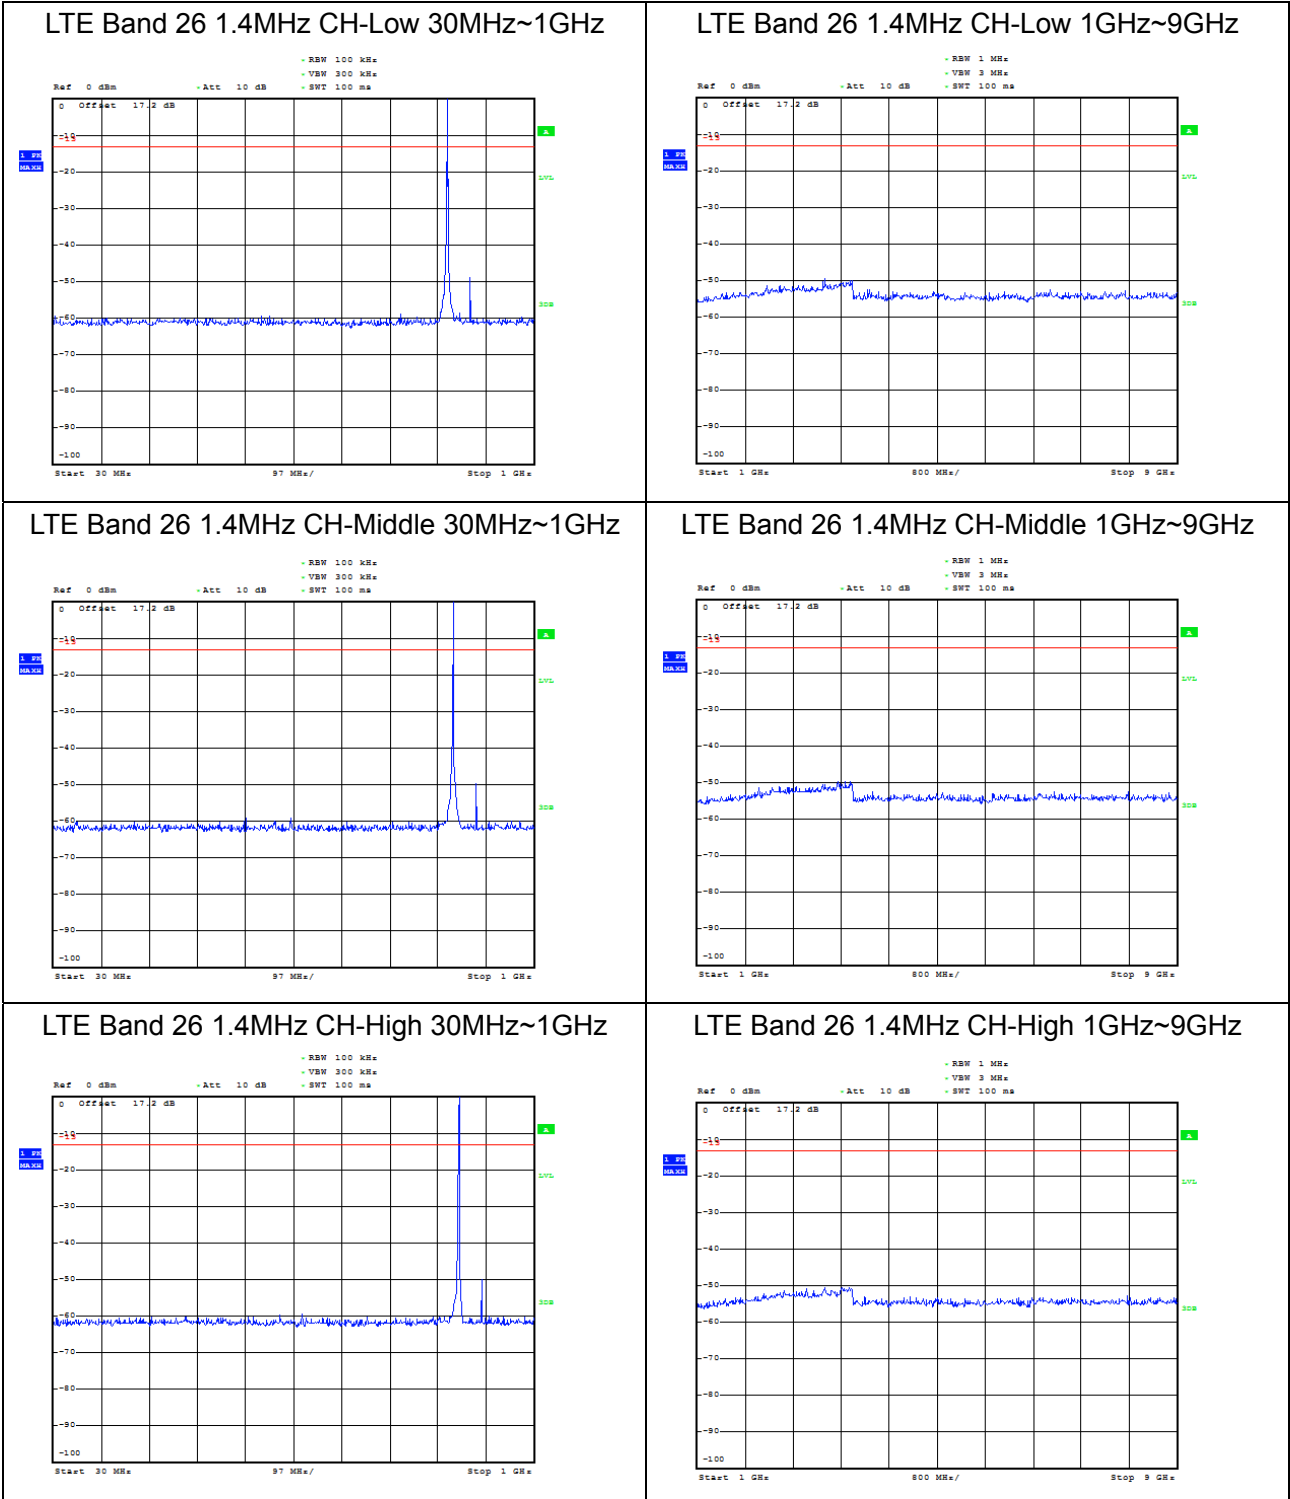





LTE Band 26 3MHz CH-Low 30MHz~1GHz

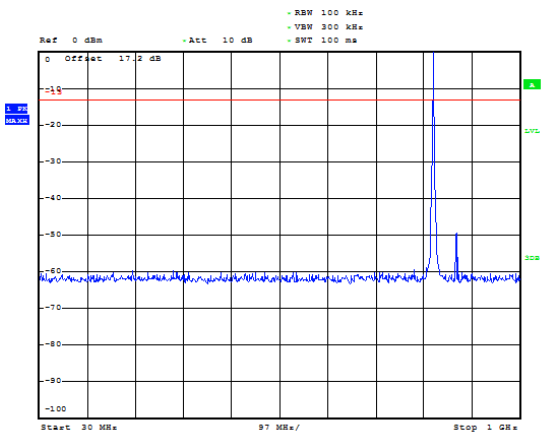


LTE Band 26 3MHz CH-Low 1GHz~9GHz

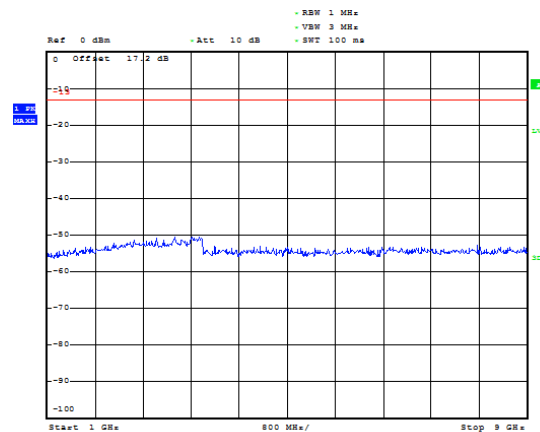


LTE Band 26 3MHz CH-Middle 30MHz~1GHz

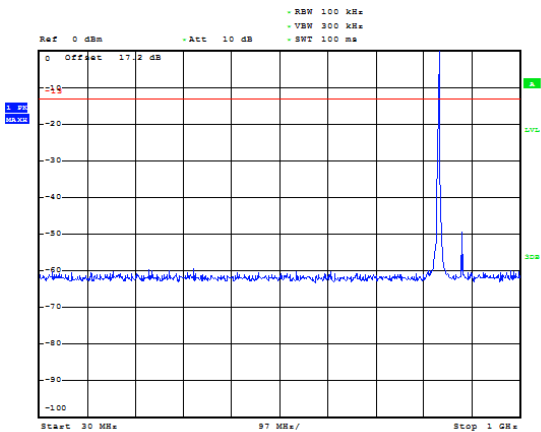


LTE Band 26 3MHz CH-Middle 1GHz~9GHz

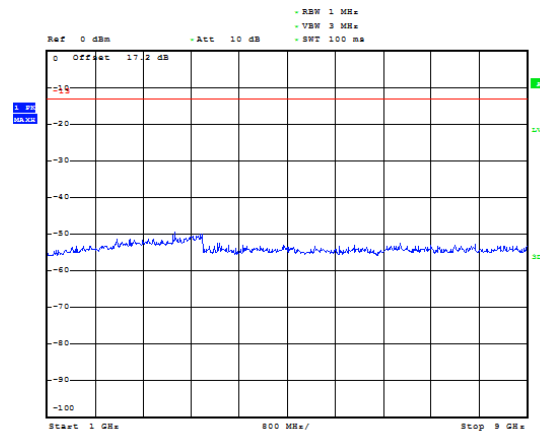

LTE Band 26 3MHz CH-High 30MHz~1GHz

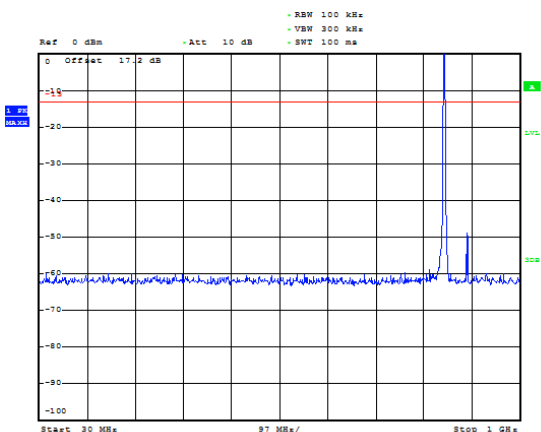


LTE Band 26 3MHz CH-High 1GHz~9GHz

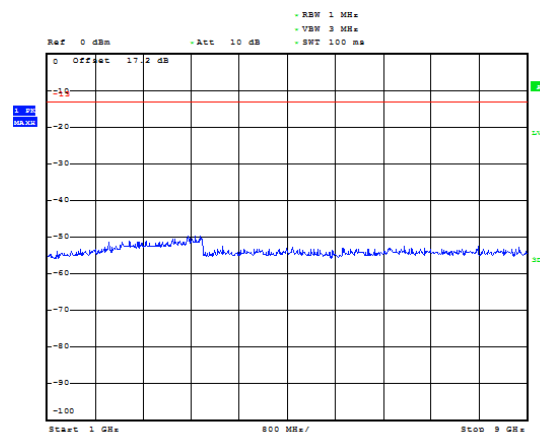





LTE Band 26 5MHz CH-Low 30MHz~1GHz

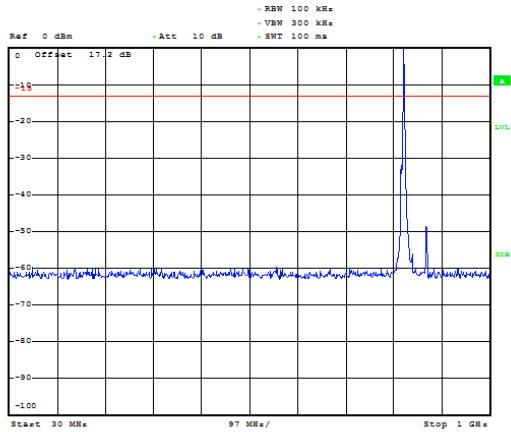


LTE Band 26 5MHz CH-Low 1GHz~9GHz

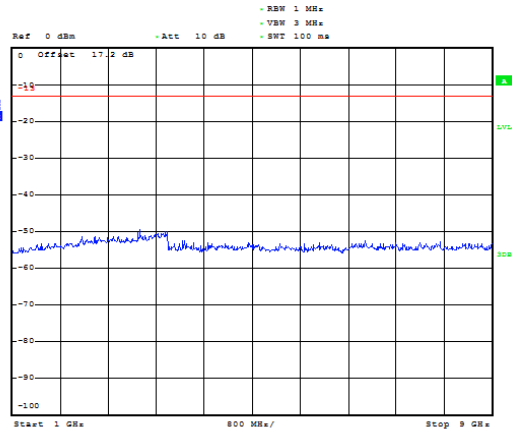


LTE Band 26 5MHz CH-Middle 30MHz~1GHz

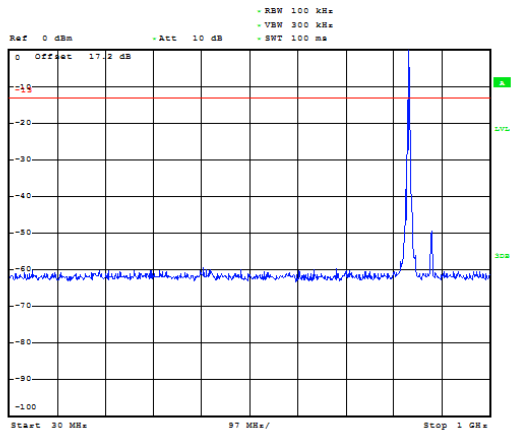


LTE Band 26 5MHz CH-Middle 1GHz~9GHz

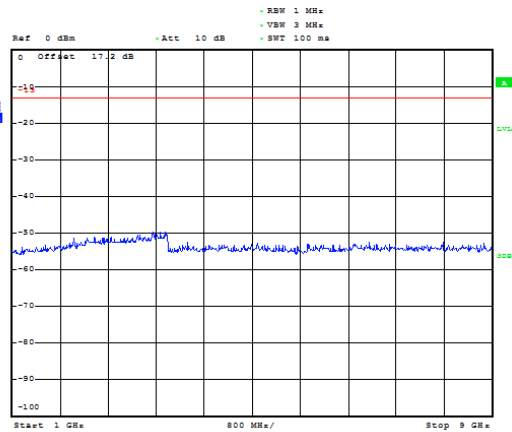

LTE Band 26 5MHz CH-High 30MHz~1GHz

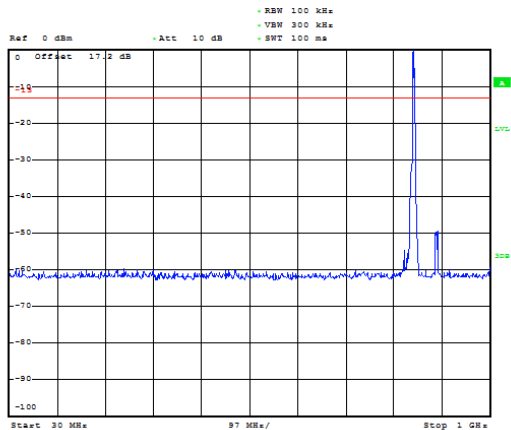


LTE Band 26 5MHz CH-High 1GHz~9GHz

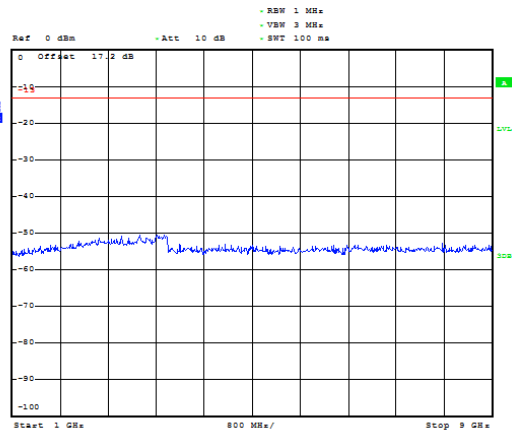





LTE Band 26 10MHz CH-Low 30MHz~1GHz

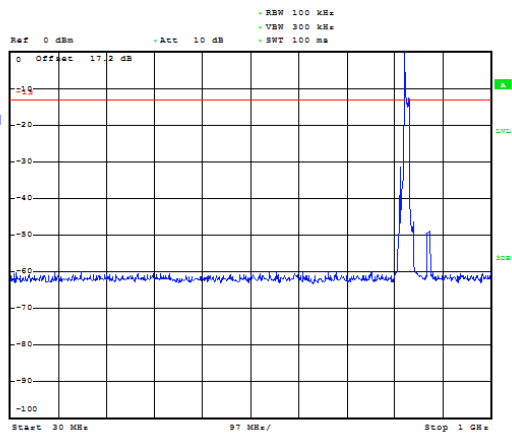


LTE Band 26 10MHz CH-Low 1GHz~9GHz

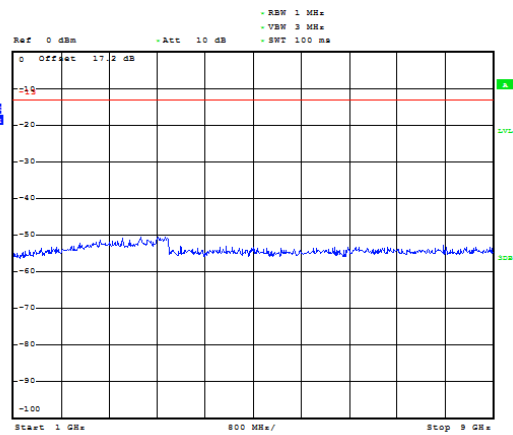


LTE Band 26 10MHz CH-Middle 30MHz~1GHz

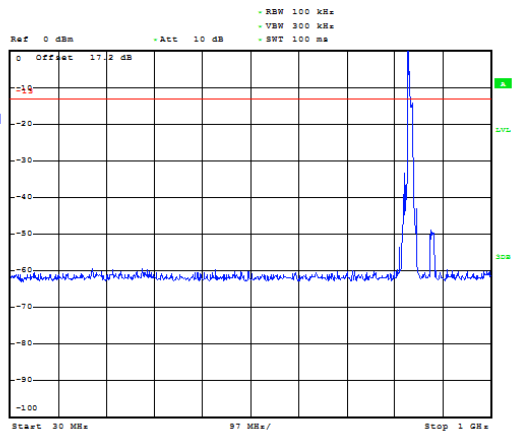


LTE Band 26 10MHz CH-Middle 1GHz~9GHz

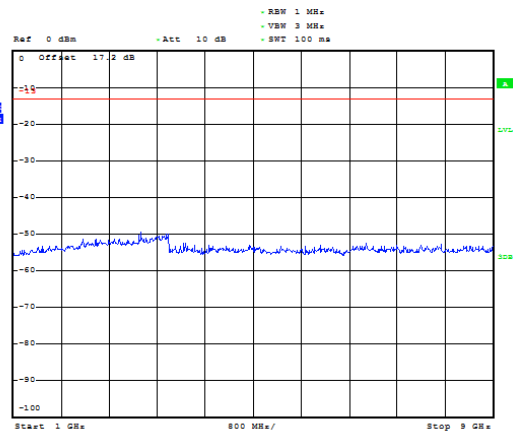

LTE Band 26 10MHz CH-High 30MHz~1GHz

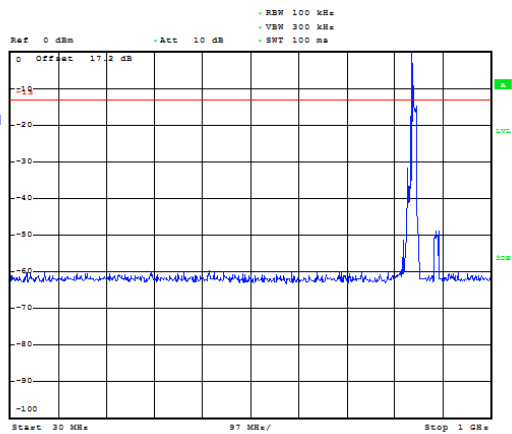


LTE Band 26 10MHz CH-High 1GHz~9GHz

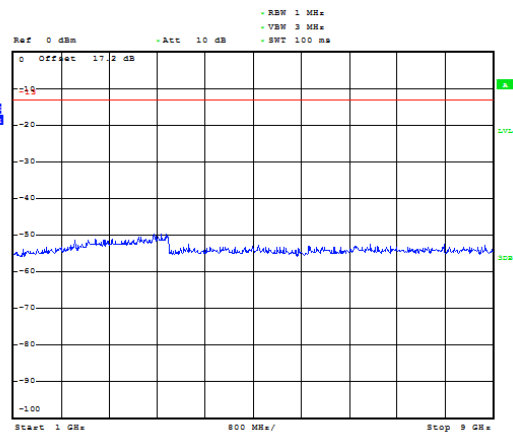





LTE Band 26 15MHz CH-Low 30MHz~1GHz

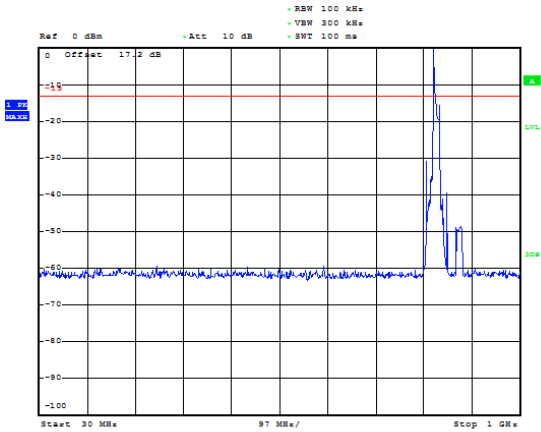


LTE Band 26 15MHz CH-Low 1GHz~9GHz

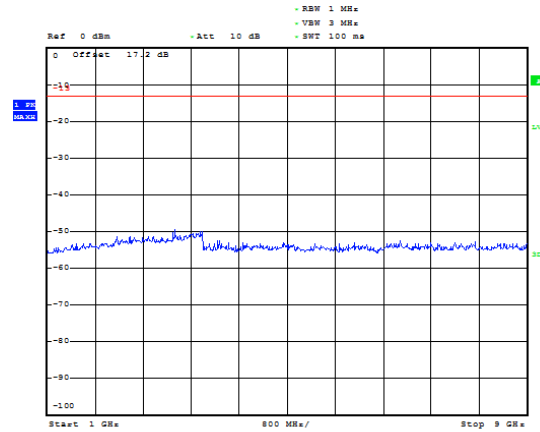


LTE Band 26 15MHz CH-Middle 30MHz~1GHz

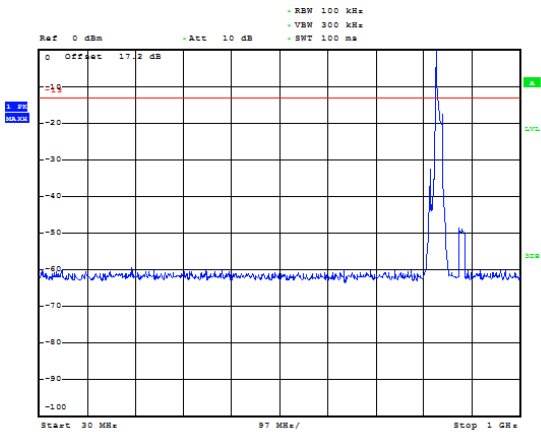


LTE Band 26 15MHz CH-Middle 1GHz~9GHz

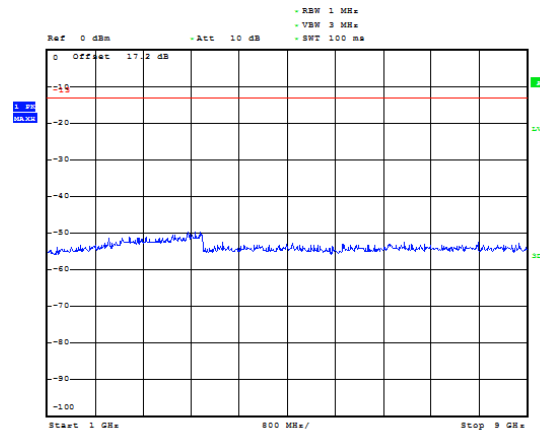

LTE Band 26 15MHz CH-High 30MHz~1GHz

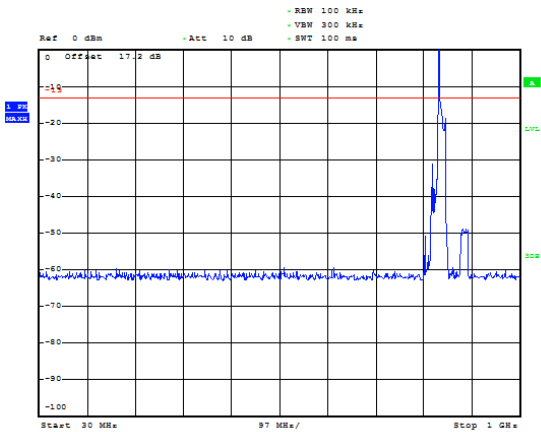

LTE Band 26 15MHz CH-High 1GHz~9GHz

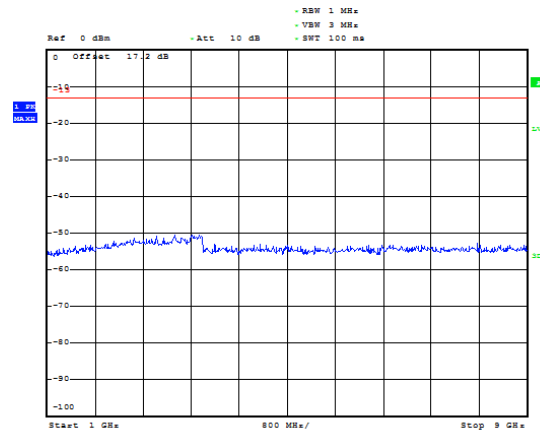

5.8. Radiates Spurious Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


- The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).
- The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
- A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below:
 $Power(EIRP) = PMea - PAg - Pcl + Ga$
 The measurement results are amend as described below:
 $Power(EIRP) = PMea - Pcl + Ga$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.
 The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~1GHz

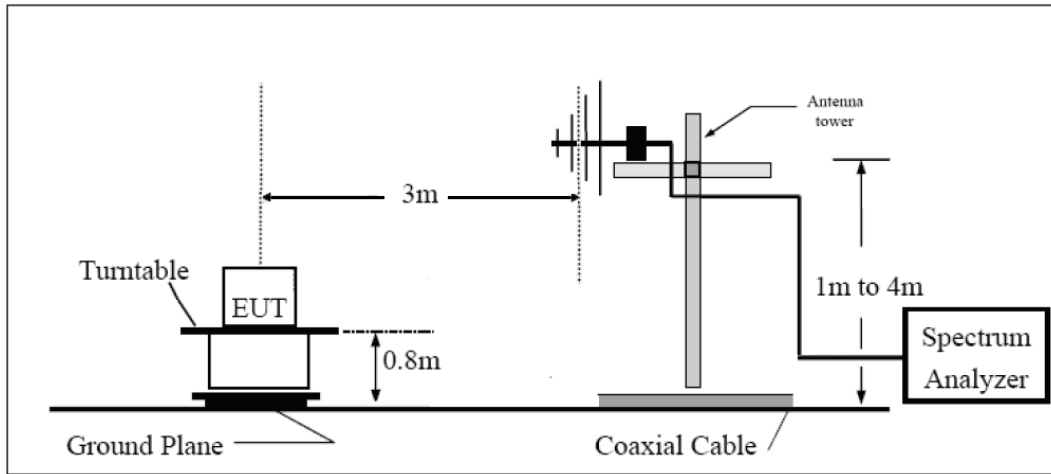

Above 1GHz

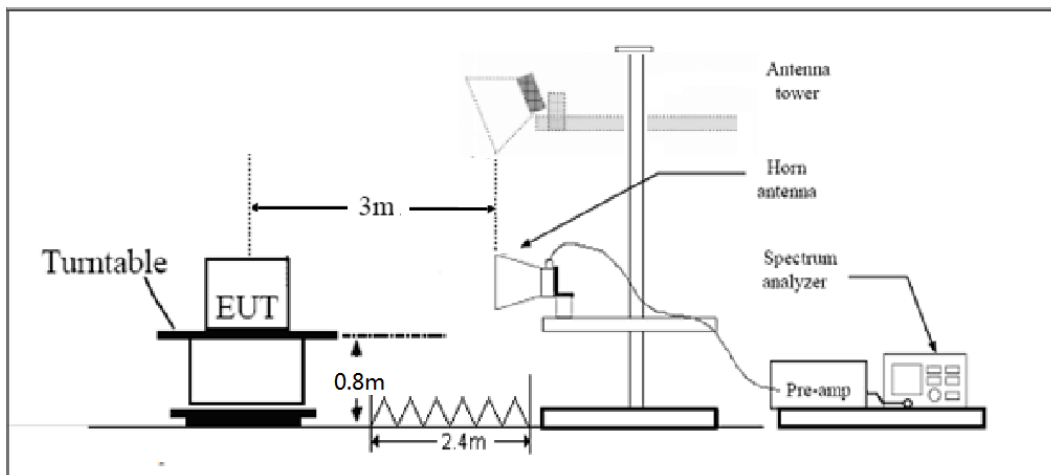

Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

Main antenna (Ant1)

LTE Band 26 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-65.70	2.00	10.75	Horizontal	-59.10	-13.00	46.10	315
3	2509.50	-60.93	2.51	11.05	Horizontal	-54.54	-13.00	41.54	225
4	3346.00	-61.12	4.20	11.15	Horizontal	-56.32	-13.00	43.32	315
5	4182.50	-58.05	5.20	11.15	Horizontal	-54.25	-13.00	41.25	135
6	5019.00	-54.73	5.50	11.95	Horizontal	-50.43	-13.00	37.43	270
7	5855.50	-55.82	5.70	13.55	Horizontal	-50.12	-13.00	37.12	315
8	6692.00	-52.42	6.30	13.75	Horizontal	-47.12	-13.00	34.12	135
9	7528.50	-51.91	6.80	13.85	Horizontal	-47.01	-13.00	34.01	270
10	8365.00	-52.20	6.90	14.25	Horizontal	-47.00	-13.00	34.00	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-65.70	2.00	10.75	Horizontal	-59.10	-13.00	46.10	45
3	2509.50	-58.49	2.51	11.05	Horizontal	-52.10	-13.00	39.10	45
4	3346.00	-61.29	4.20	11.15	Horizontal	-56.49	-13.00	43.49	45
5	4182.50	-57.32	5.20	11.15	Horizontal	-53.52	-13.00	40.52	45
6	5019.00	-53.55	5.50	11.95	Horizontal	-49.25	-13.00	36.25	0
7	5855.50	-55.95	5.70	13.55	Horizontal	-50.25	-13.00	37.25	315
8	6692.00	-53.22	6.30	13.75	Horizontal	-47.92	-13.00	34.92	135
9	7528.50	-52.02	6.80	13.85	Horizontal	-47.12	-13.00	34.12	270
10	8365.00	-52.18	6.90	14.25	Horizontal	-46.98	-13.00	33.98	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.



LTE Band 26 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-66.29	2.00	10.75	Horizontal	-59.69	-13.00	46.69	45
3	2509.50	-62.19	2.51	11.05	Horizontal	-55.80	-13.00	42.80	0
4	3346.00	-61.21	4.20	11.15	Horizontal	-56.41	-13.00	43.41	270
5	4182.50	-57.79	5.20	11.15	Horizontal	-53.99	-13.00	40.99	180
6	5019.00	-54.72	5.50	11.95	Horizontal	-50.42	-13.00	37.42	90
7	5855.50	-56.98	5.70	13.55	Horizontal	-51.28	-13.00	38.28	45
8	6692.00	-54.13	6.30	13.75	Horizontal	-48.83	-13.00	35.83	45
9	7528.50	-51.92	6.80	13.85	Horizontal	-47.02	-13.00	34.02	0
10	8365.00	-52.62	6.90	14.25	Horizontal	-47.42	-13.00	34.42	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

Secondary antenna (Ant 2)

LTE Band 26 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-64.57	2.00	10.75	Horizontal	-57.97	-13.00	44.97	315
3	2509.50	-60.35	2.51	11.05	Horizontal	-53.96	-13.00	40.96	225
4	3346.00	-60.42	4.20	11.15	Horizontal	-55.62	-13.00	42.62	315
5	4182.50	-57.63	5.20	11.15	Horizontal	-53.83	-13.00	40.83	135
6	5019.00	-54.51	5.50	11.95	Horizontal	-50.21	-13.00	37.21	270
7	5855.50	-55.89	5.70	13.55	Horizontal	-50.19	-13.00	37.19	315
8	6692.00	-54.49	6.30	13.75	Horizontal	-49.19	-13.00	36.19	135
9	7528.50	-50.82	6.80	13.85	Horizontal	-45.92	-13.00	32.92	270
10	8365.00	-51.64	6.90	14.25	Horizontal	-46.44	-13.00	33.44	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.



LTE Band 26 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-63.97	2.00	10.75	Horizontal	-57.37	-13.00	44.37	45
3	2509.50	-59.54	2.51	11.05	Horizontal	-53.15	-13.00	40.15	45
4	3346.00	-61.08	4.20	11.15	Horizontal	-56.28	-13.00	43.28	45
5	4182.50	-57.99	5.20	11.15	Horizontal	-54.19	-13.00	41.19	45
6	5019.00	-55.36	5.50	11.95	Horizontal	-51.06	-13.00	38.06	0
7	5855.50	-55.59	5.70	13.55	Horizontal	-49.89	-13.00	36.89	315
8	6692.00	-50.83	6.30	13.75	Horizontal	-45.53	-13.00	32.53	135
9	7528.50	-50.50	6.80	13.85	Horizontal	-45.60	-13.00	32.60	270
10	8365.00	-50.62	6.90	14.25	Horizontal	-45.42	-13.00	32.42	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-64.35	2.00	10.75	Horizontal	-57.75	-13.00	44.75	45
3	2509.50	-61.11	2.51	11.05	Horizontal	-54.72	-13.00	41.72	0
4	3346.00	-61.21	4.20	11.15	Horizontal	-56.41	-13.00	43.41	270
5	4182.50	-58.52	5.20	11.15	Horizontal	-54.72	-13.00	41.72	180
6	5019.00	-55.62	5.50	11.95	Horizontal	-51.32	-13.00	38.32	90
7	5855.50	-55.82	5.70	13.55	Horizontal	-50.12	-13.00	37.12	45
8	6692.00	-51.42	6.30	13.75	Horizontal	-46.12	-13.00	33.12	45
9	7528.50	-50.22	6.80	13.85	Horizontal	-45.32	-13.00	32.32	0
10	8365.00	-51.33	6.90	14.25	Horizontal	-46.13	-13.00	33.13	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2018-05-20	2019-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	NA	NA
Spectrum Analyzer	Agilent	N9010A	MY47191109	2018-05-20	2019-05-19
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Signal generator	R&S	SMB 100A	102594	2018-05-13	2019-05-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2014-12-06	2019-12-05
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Horn Antenna	ETS-Lindgren	3160-09	00102644	2015-01-30	2020-01-29
Climatic Chamber	Re Ce	PT-30B	20101891	2015-07-18	2018-07-17
RF Cable	Agilent	SMA 15cm	0001	2018-02-03	2018-08-02
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
Software	R&S	EMC32	V9.26.0	/	/
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-07	2019-05-06

*****END OF REPORT *****