



# Appendix A: 20dB Emission Bandwidth (EBW)



## 1 Result Table


EUT Conf.	EBW [MHz]	Verdict
TM1_DH5_Ch0	0.95	Pass
TM1_DH5_Ch39	0.95	Pass
TM1_DH5_Ch78	0.95	Pass
TM2_2DH5_Ch0	1.27	Pass
TM2_2DH5_Ch39	1.27	Pass
TM2_2DH5_Ch78	1.27	Pass
TM3_3DH5_Ch0	1.27	Pass
TM3_3DH5_Ch39	1.27	Pass
TM3_3DH5_Ch78	1.27	Pass

## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0



2.2 TM1\_DH5\_Ch39

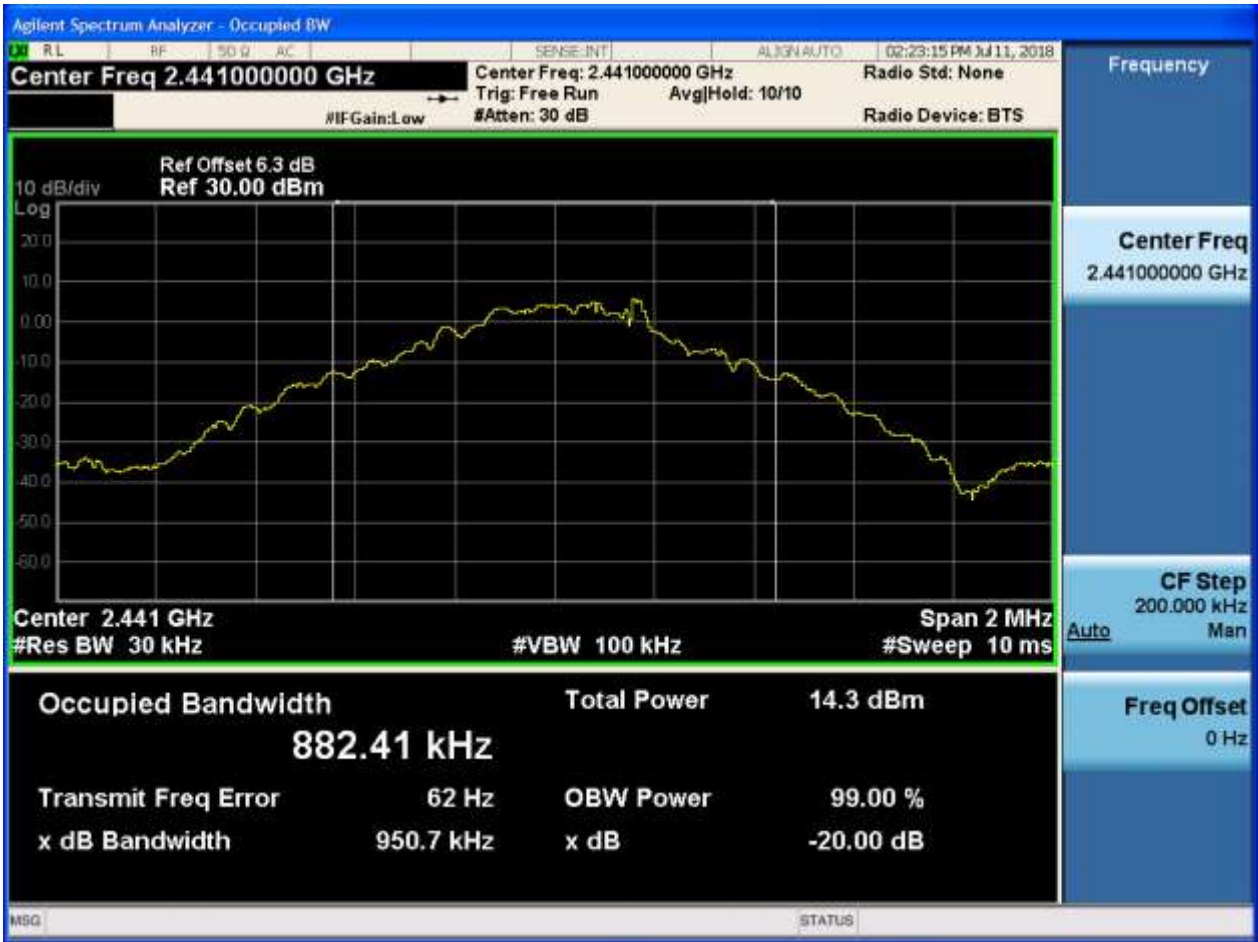

### 2.3 TM1\_DH5\_Ch78



2.4 TM2\_2DH5\_Ch0



2.5 TM2\_2DH5\_Ch39



2.6 TM2\_2DH5\_Ch78





2.7 TM3\_3DH5\_Ch0



2.8 TM3\_3DH5\_Ch39



2.9 TM3\_3DH5\_Ch78





# Appendix B: Carrier Frequency Separation




## 1 Result Table


EUT Conf.	Carrier Frequency Separation [MHz]	Verdict
TM1_DH5_Hop	1.15	Pass
TM2_2DH5_Hop	0.8	Pass
TM3_3DH5_Hop	1.15	Pass

## 2 Test Plot

### 2.1 TM1\_DH5\_Hop

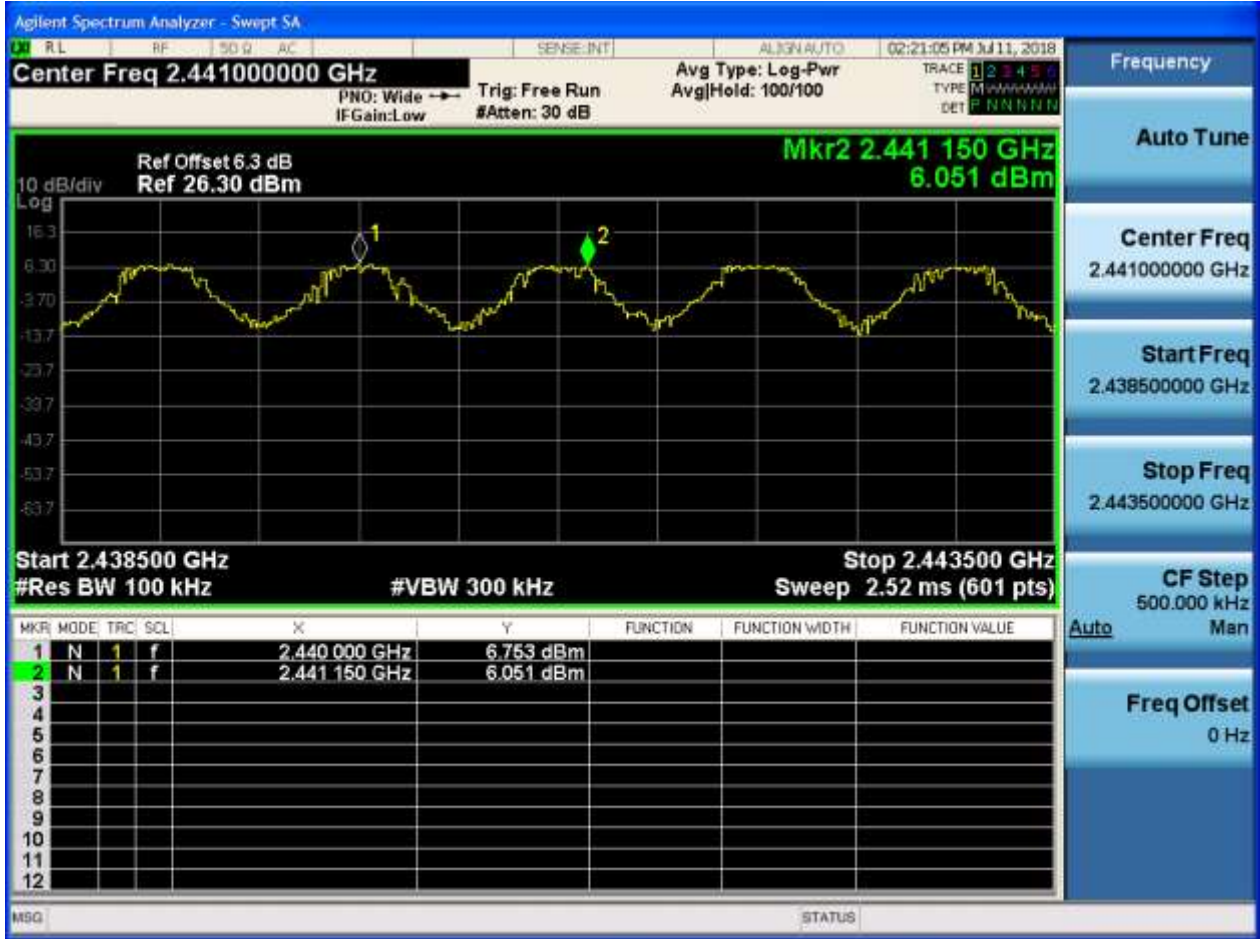


## 2.2 TM2\_2DH5\_Hop

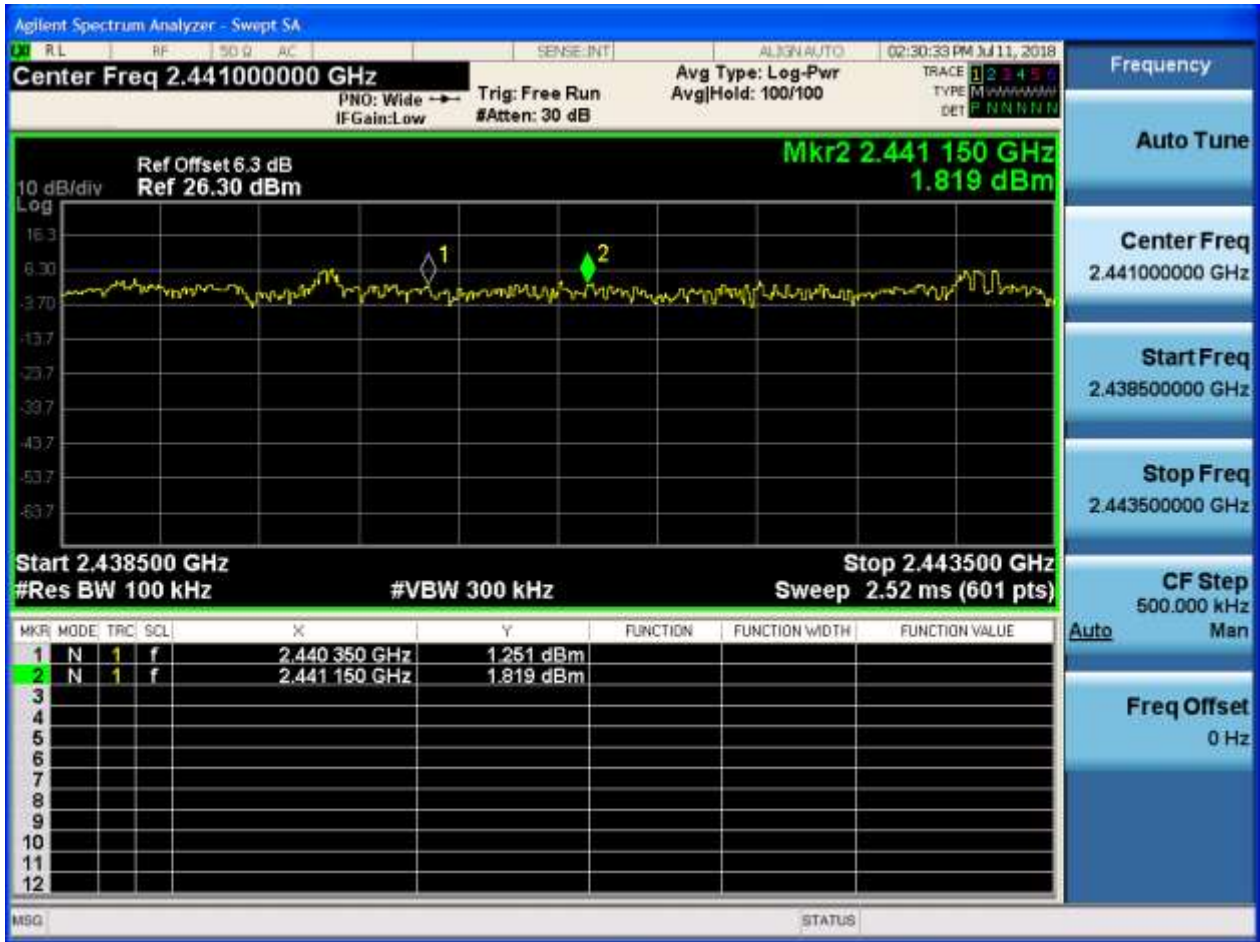



### 2.3 TM3\_3DH5\_Hop

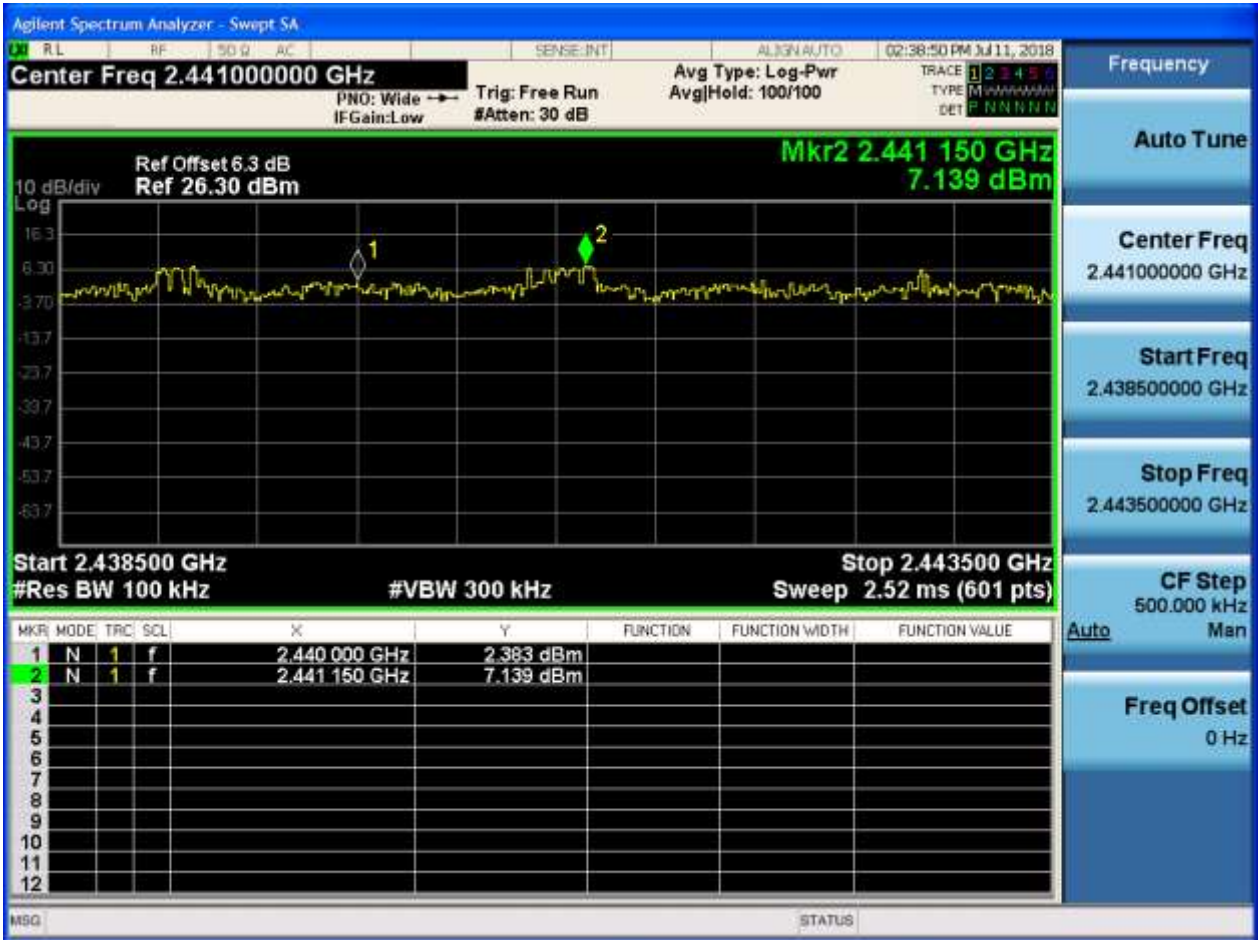





# Appendix C: Number of Hopping Channel



## 1 Result Table

EUT Conf.	Number of Hopping Channel	Verdict
TM1_DH5_Hop	79	Pass
TM2_2DH5_Hop	79	Pass
TM3_3DH5_Hop	79	Pass

## 2 Test Plot


### 2.1 TM1\_DH5\_Hop



## 2.2 TM2\_2DH5\_Hop



### 2.3 TM3\_3DH5\_Hop

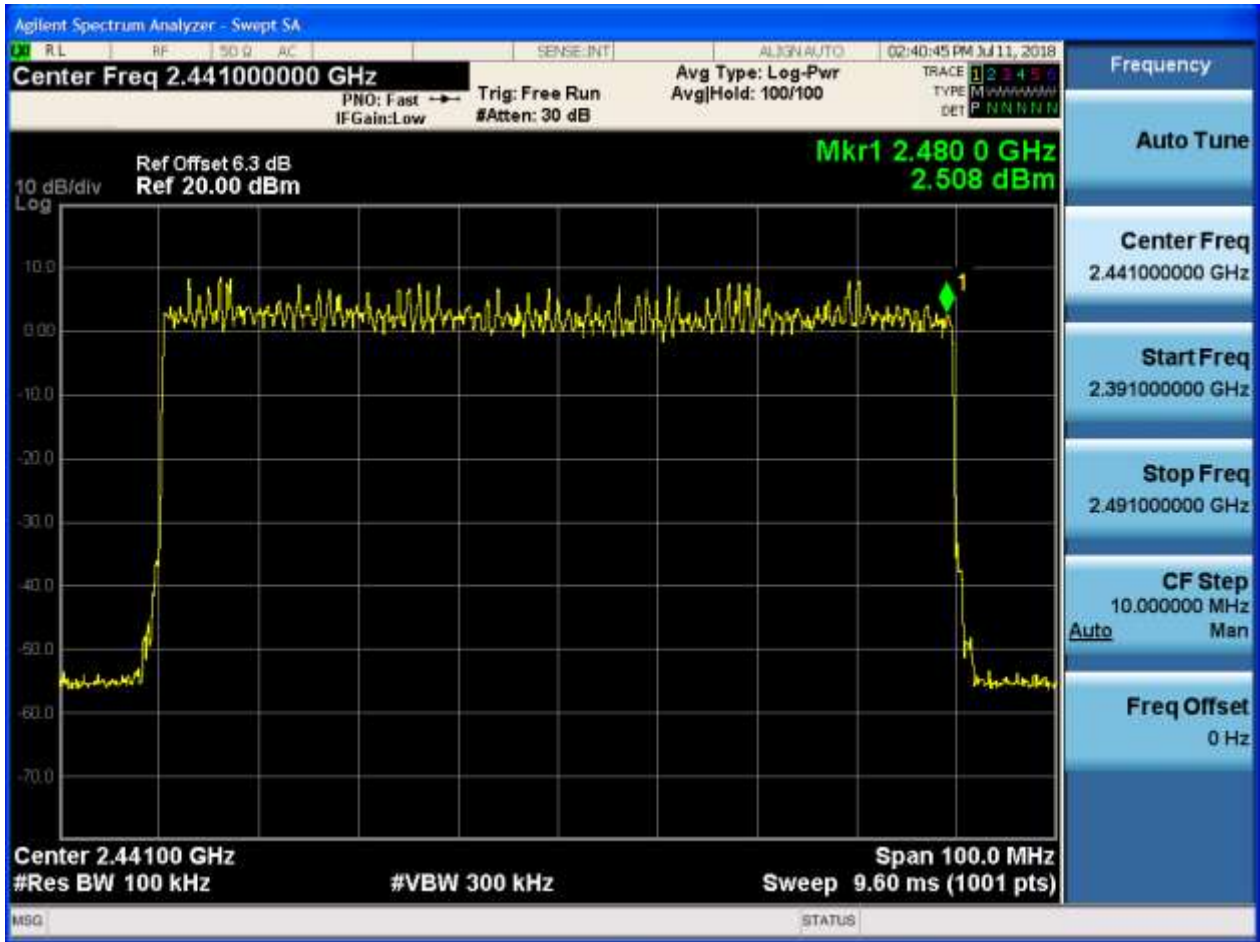



# Appendix D: Time of Occupancy (Dwell Time)

## 1 Result Table

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:


- The duration for dwell time calculation:  $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$ ;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600 / 6 = 266.67 \text{ [ch*hop/s]}$ ;
- The hops per second on one channel:  $266.67 \text{ [ch*hop/s]} / 79 \text{ [ch]} = 3.38 \text{ [hop/s]}$ ;
- The total hops for all channels within the dwell time calculation duration:  $3.38 \text{ [hop/s]} * 31.6 \text{ [s*ch]} = 106.67 \text{ [hop*ch]}$ ;
- The dwell time for all channels hopping:  $106.67 \text{ [hop*ch]} * \text{Burst Width [ms/hop/ch]}$ .

EUT Conf.	Burst Width [s/hop/ch]	Total Hops [hop*ch]	Dwell Time [ms]	Verdict
TM1_DH5_Ch39	0.0029	106.67	0.309	Pass
TM2_2DH5_Ch39	0.0029	106.67	0.309	Pass
TM3_3DH5_Ch39	0.0029	106.67	0.309	Pass

## 2 Test Plot


NOTE: The test plots are only for Burst Width measurements.

### 2.1 TM1\_DH5\_Ch39

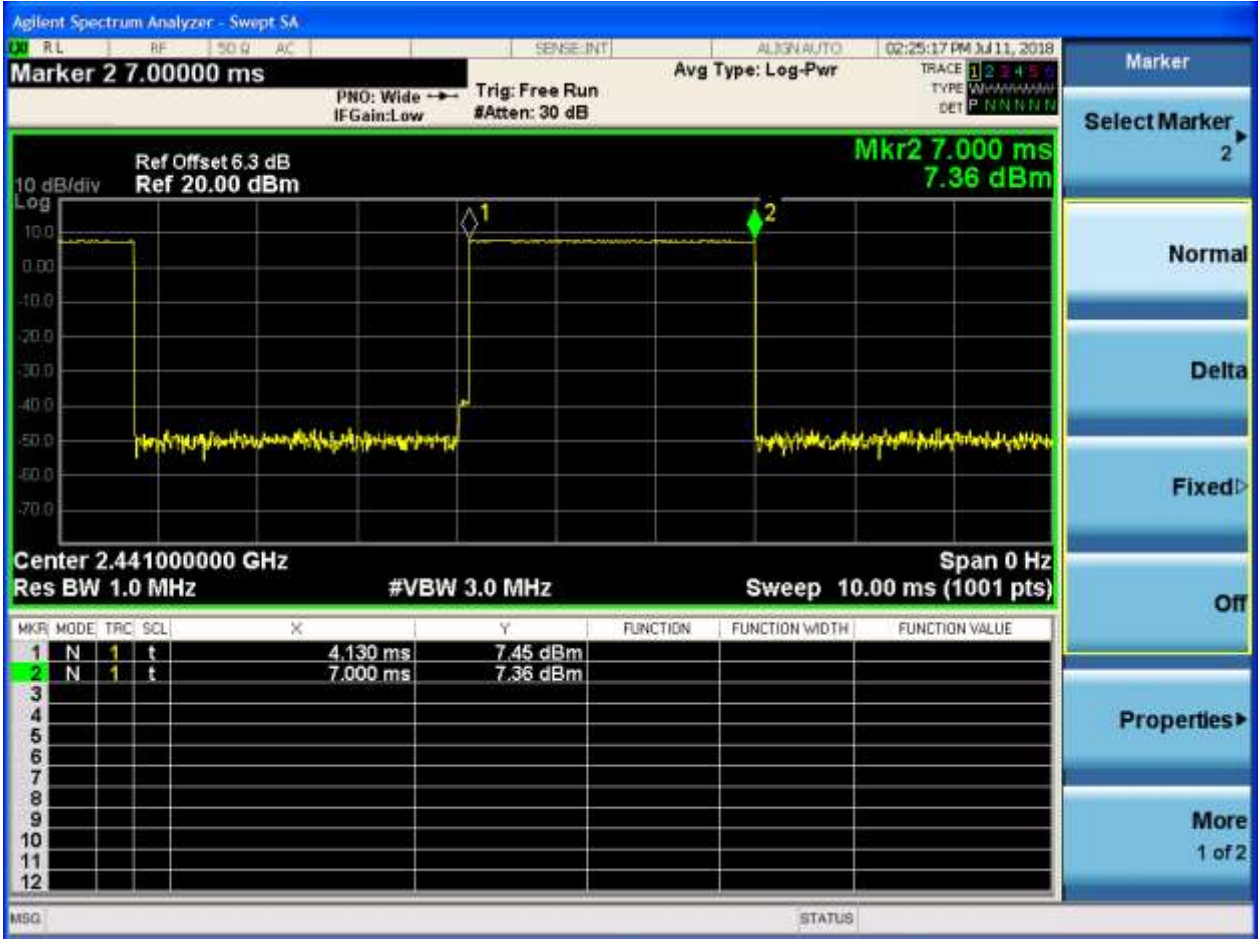




2.2 TM2\_2DH5\_Ch39

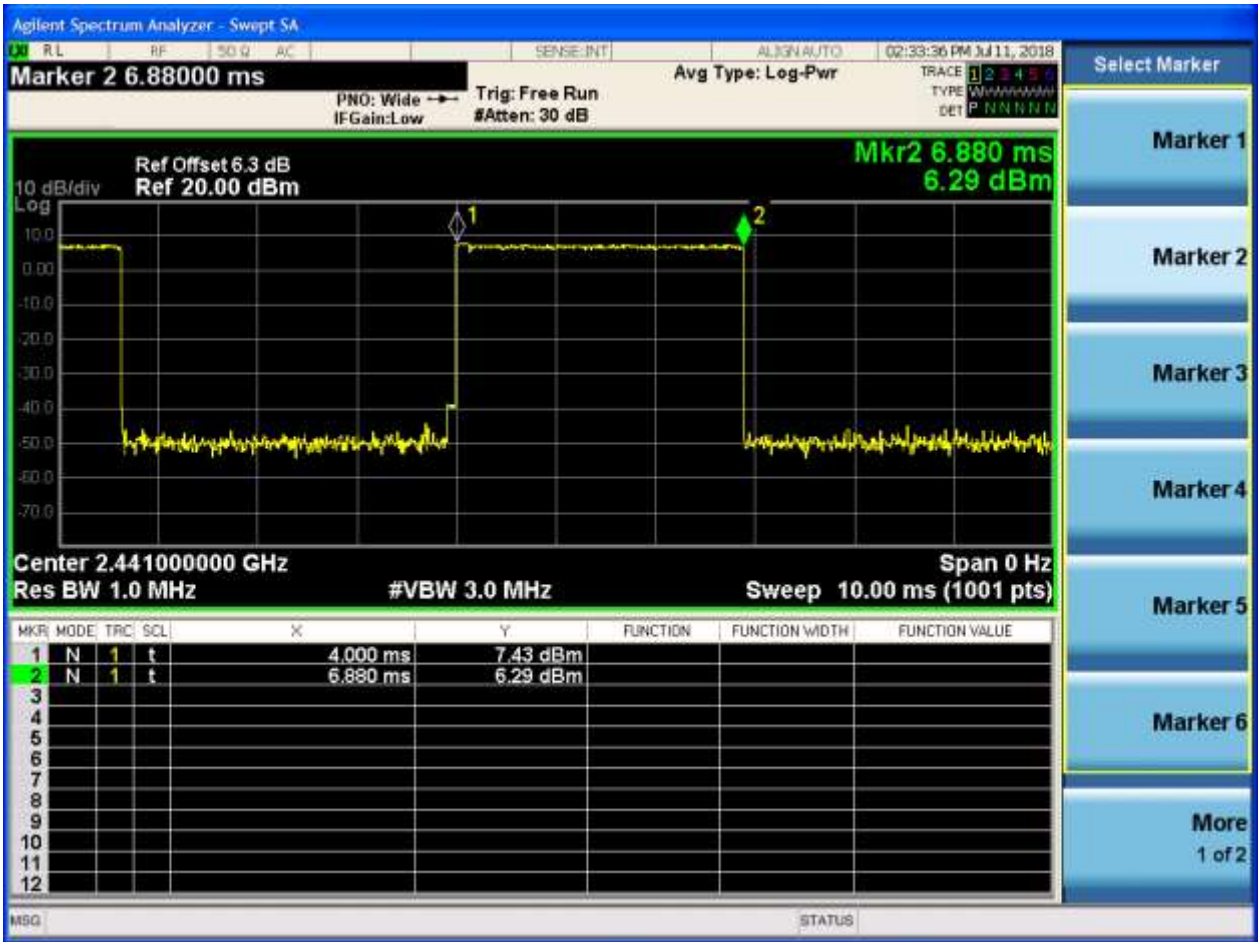

2.3 TM3\_3DH5\_Ch39

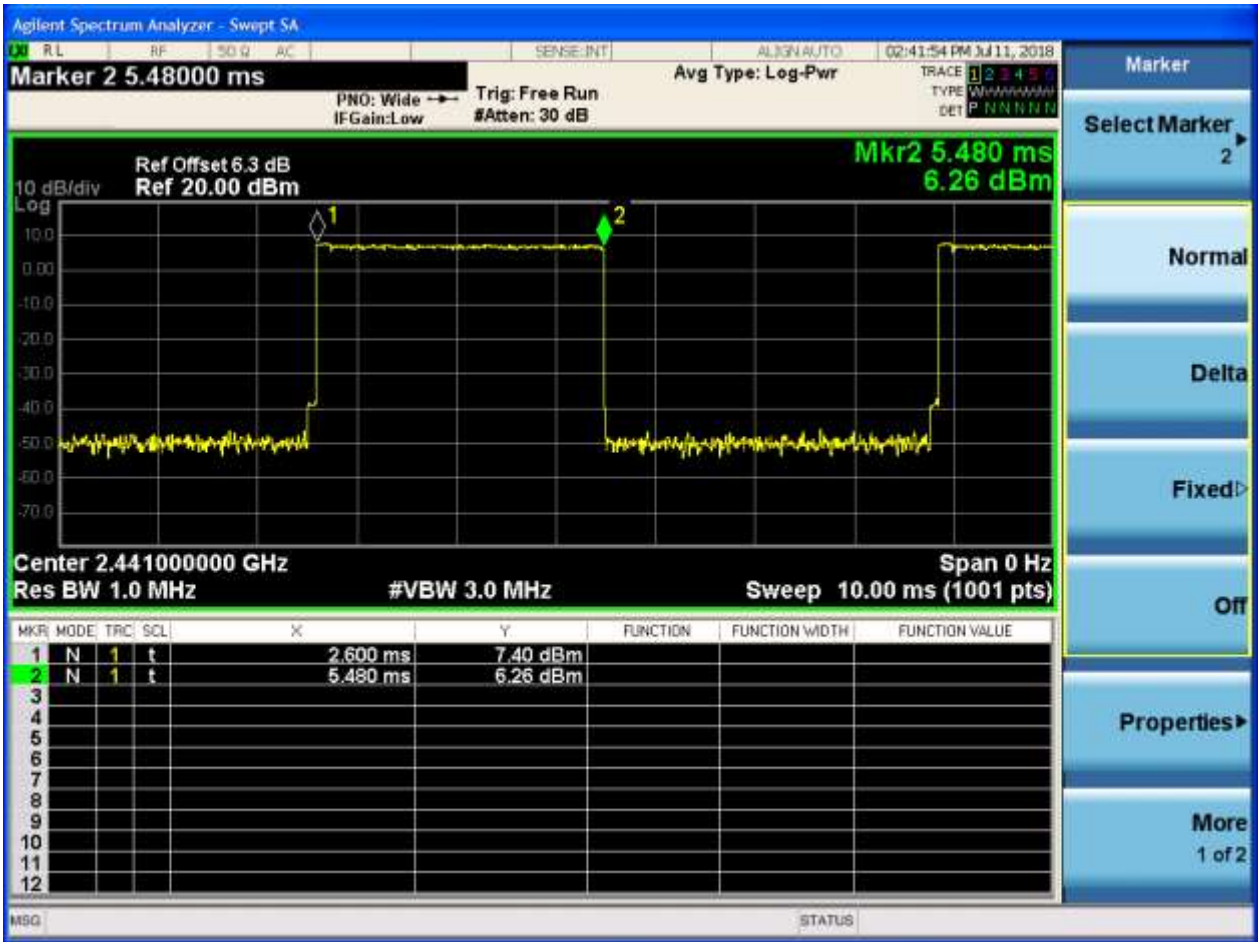



# Appendix E: Maximum Peak Conducted Output Power



## 1 Result Table

EUT Conf.	Max. Peak Power [dBm]	Verdict
TM1_DH5_Ch0	8.572	Pass
TM1_DH5_Ch39	7.621	Pass
TM1_DH5_Ch78	7.386	Pass
TM2_2DH5_Ch0	8.829	Pass
TM2_2DH5_Ch39	7.909	Pass
TM2_2DH5_Ch78	7.720	Pass
TM3_3DH5_Ch0	8.862	Pass
TM3_3DH5_Ch39	7.889	Pass
TM3_3DH5_Ch78	7.711	Pass

## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0



2.2 TM1\_DH5\_Ch39



2.3 TM1\_DH5\_Ch78



2.4 TM2\_2DH5\_Ch0





2.5 TM2\_2DH5\_Ch39



## 2.6 TM2\_2DH5\_Ch78



2.7 TM3\_3DH5\_Ch0



2.8 TM3\_3DH5\_Ch39



2.9 TM3\_3DH5\_Ch78





# Appendix F: Band edge spurious emission



## 1 Result Table

EUT Conf.	Channel No.	Carrier Frequency [MHz]	Max. Spurious Level [dBm]	Frequency Hopping	Carrier Power [dBm]	Limit [dBm]	Result
TM1_DH5_Ch0	0	2402	-46.576	Off	8.306	-11.694	Pass
	-	-	-48.968	On	7.764	-12.236	Pass
TM1_DH5_Ch78	78	2480	-56.515	Off	7.004	-12.996	Pass
	-	-	-55.171	On	6.55	-13.45	Pass
TM2_2DH_5_Ch0	0	2402	-45.827	Off	8.26	-11.74	Pass
	-	-	-50.794	On	8.04	-11.96	Pass
TM2_2DH_5_Ch78	78	2480	-55.863	Off	6.916	-13.084	Pass
	-	-	-55.895	On	2.762	-17.238	Pass
TM3_3DH_5_Ch0	0	2402	-45.534	Off	8.184	-11.816	Pass
	-	-	-49.062	On	4.87	-15.13	Pass
TM3_3DH_5_Ch78	78	2480	-55.859	Off	7.01	-12.99	Pass
	-	-	-56.751	On	3.404	-16.596	Pass

## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0

No hopping





With hopping



2.2 TM1\_DH5\_Ch78

No hopping



With hopping



2.3 TM2\_2DH5\_Ch0

No hopping



With hopping





2.4 TM2\_2DH5\_Ch78

No hopping



With hopping



2.5 TM3\_3DH5\_Ch0

No hopping





With hopping



2.6 TM3\_3DH5\_Ch78

No hopping



With hopping





# Appendix G: Conducted RF Spurious Emission

## 1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.

EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	8.321	< Limit	Pass
TM1_DH5_Ch39	7.319	< Limit	Pass
TM1_DH5_Ch78	7.035	< Limit	Pass
TM2_2DH5_Ch0	8.292	< Limit	Pass
TM2_2DH5_Ch39	7.299	< Limit	Pass
TM2_2DH5_Ch78	7.038	< Limit	Pass
TM3_3DH5_Ch0	8.275	< Limit	Pass
TM3_3DH5_Ch39	7.296	< Limit	Pass
TM3_3DH5_Ch78	7.046	< Limit	Pass

## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0


#### 2.1.1 Pref




### 2.1.2 Puw







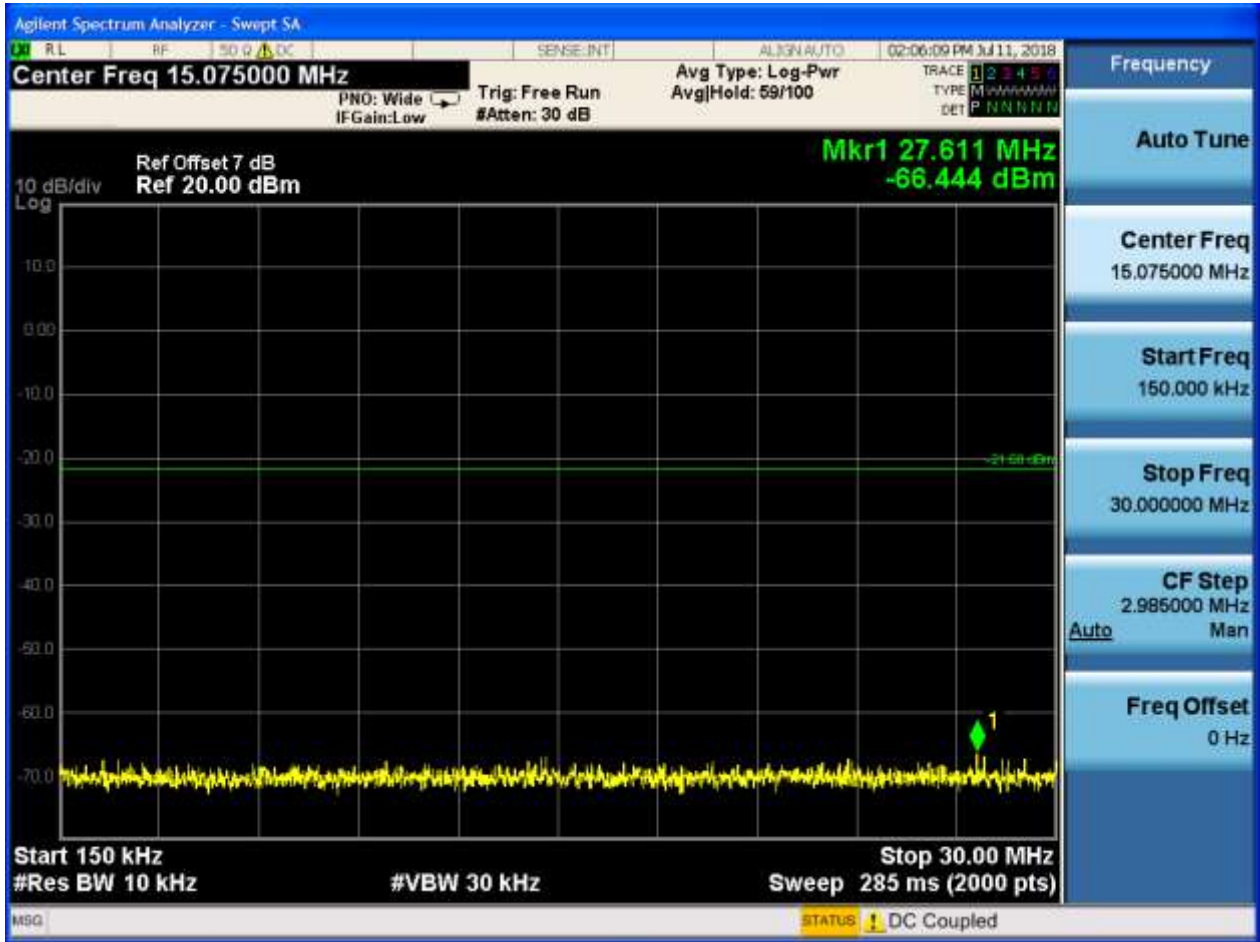



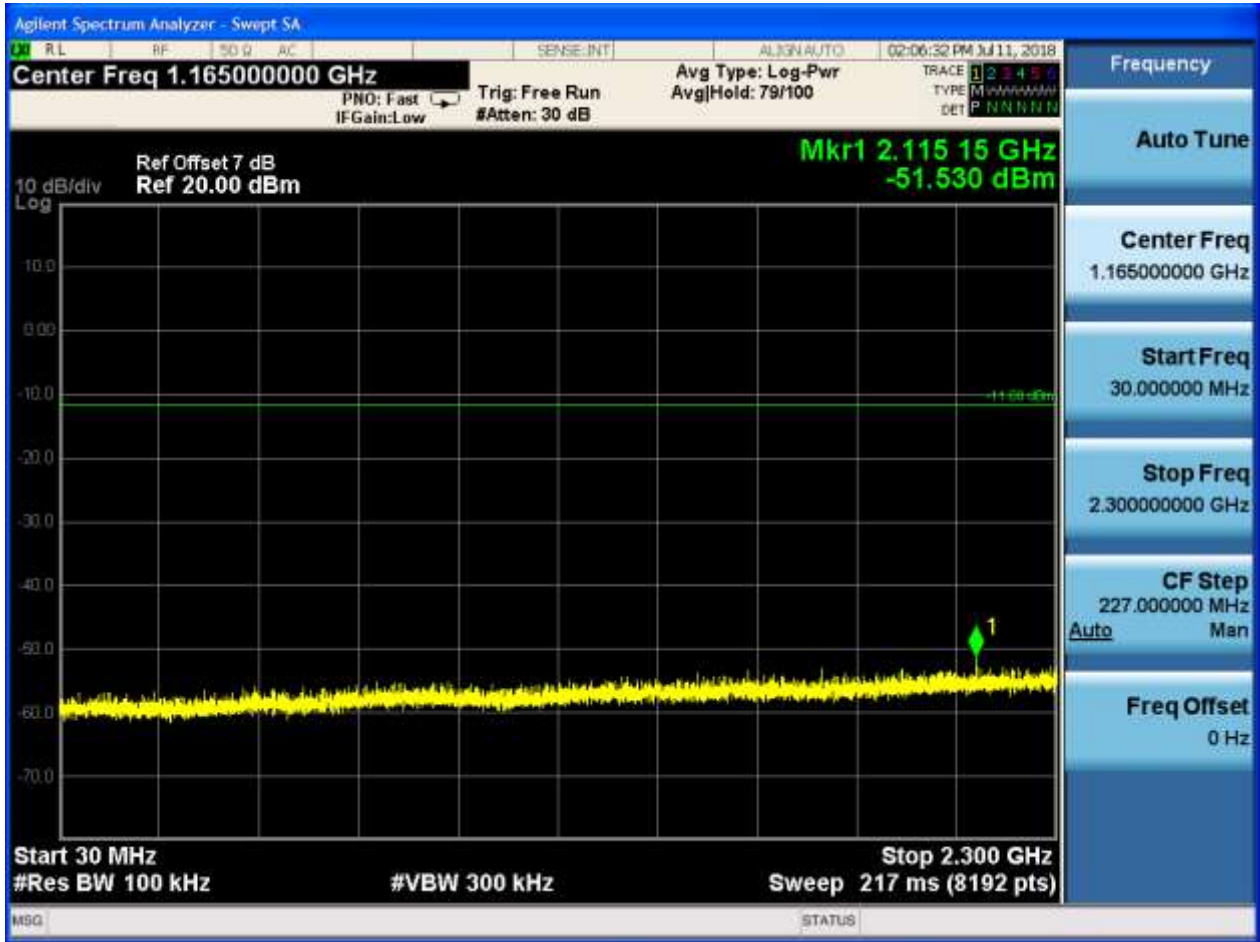

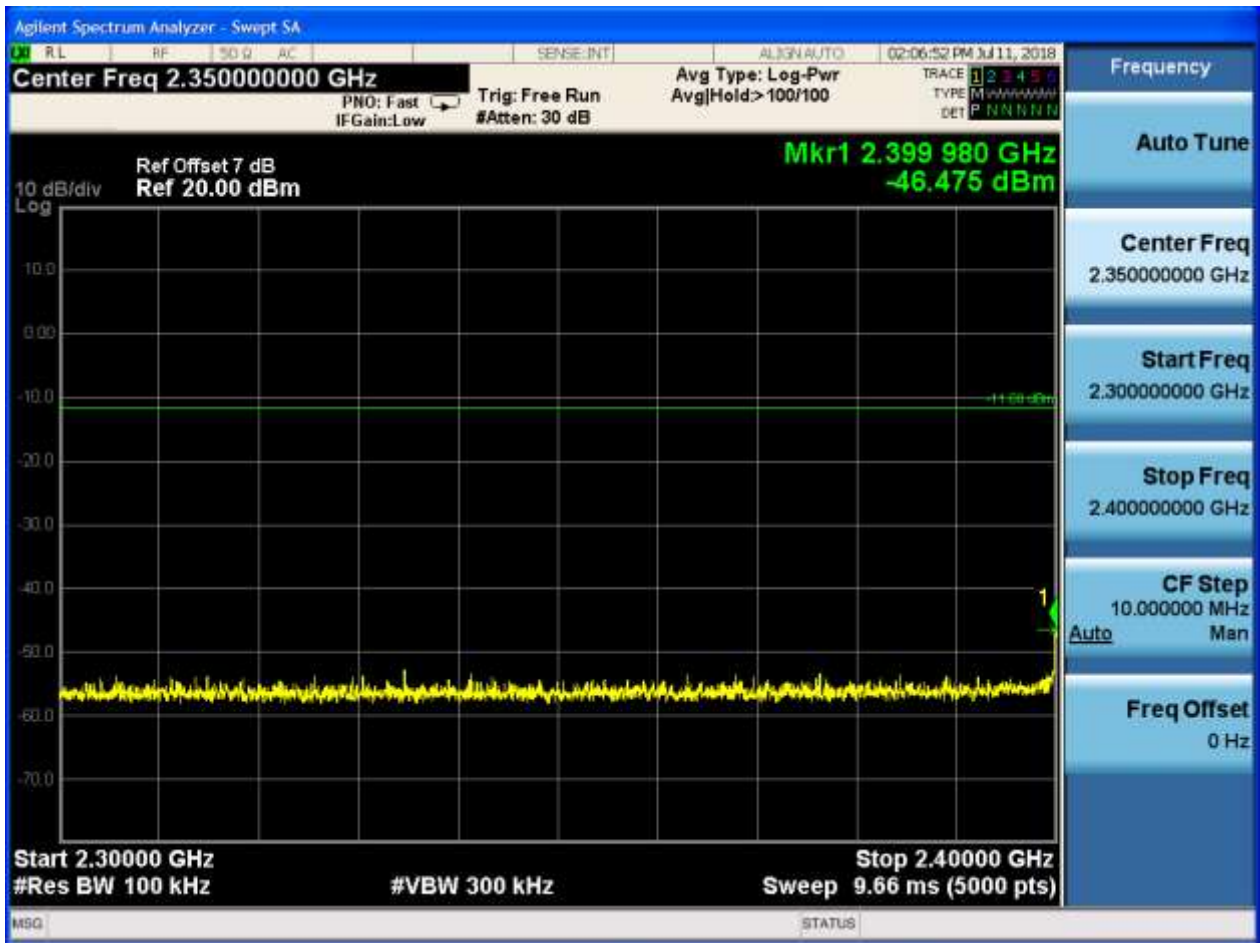

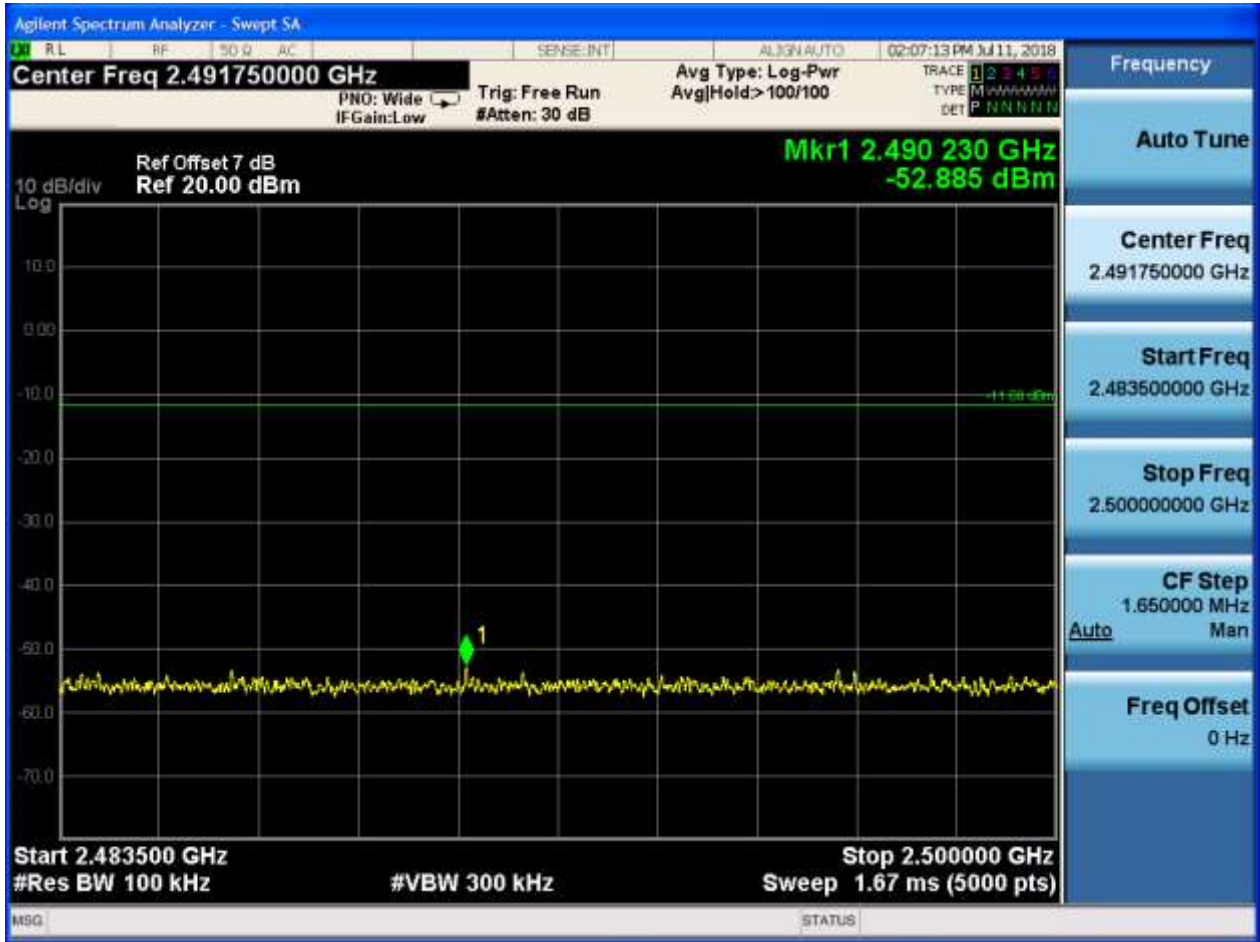



## 2.2 TM1\_DH5\_Ch39


### 2.2.1 Pref




### 2.2.2 P<sub>uw</sub>







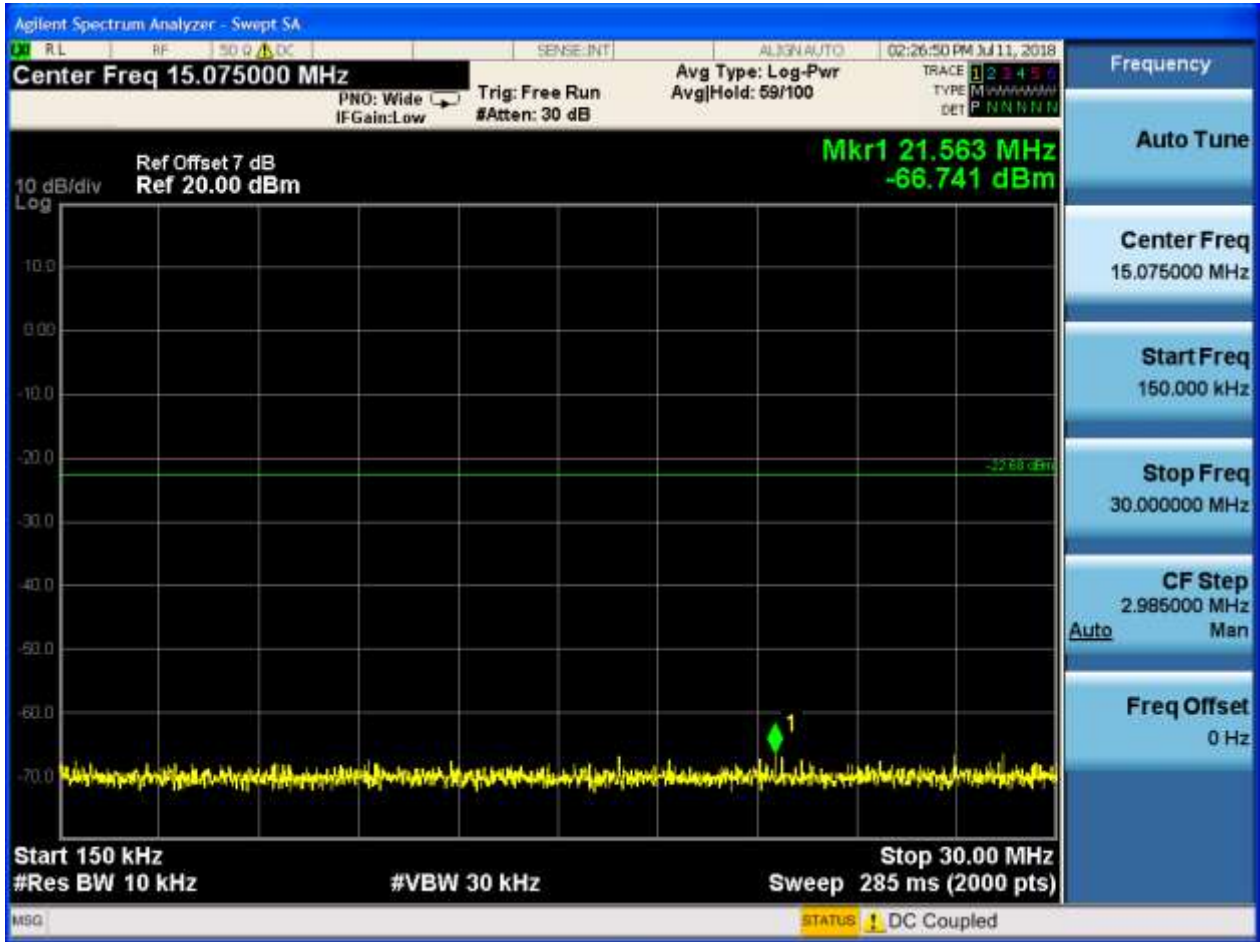

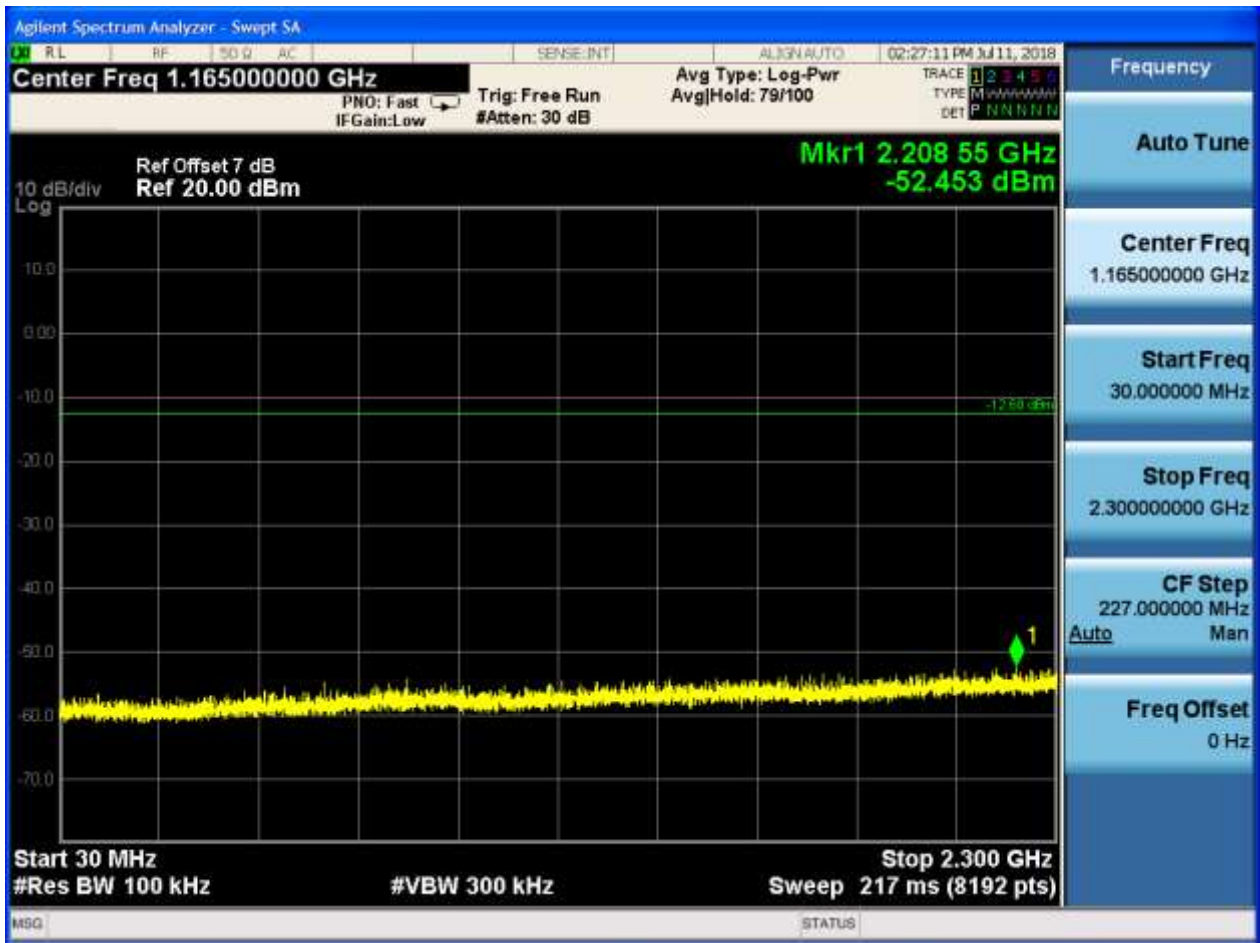



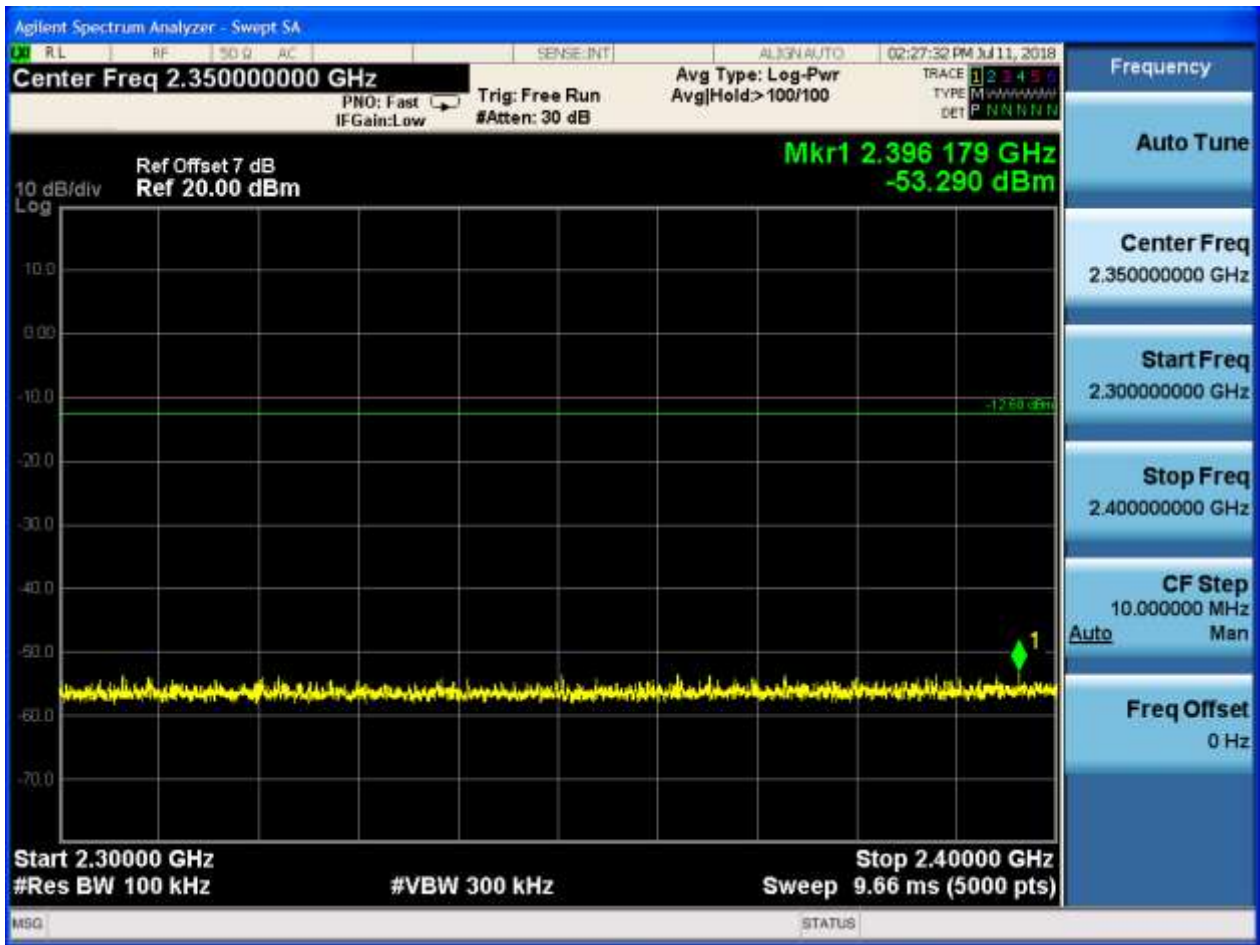

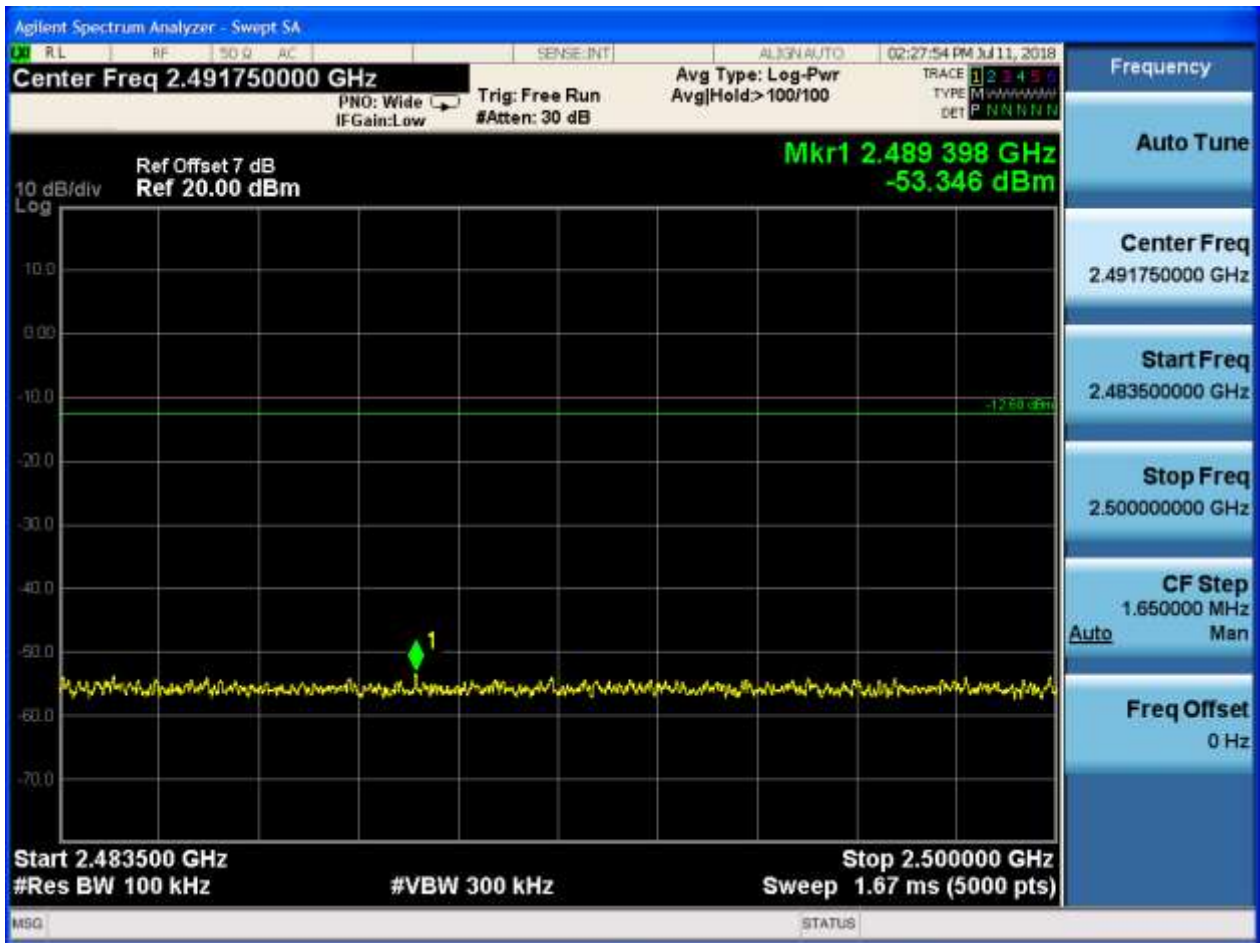






### 2.3 TM1\_DH5\_Ch78

#### 2.3.1 Pref




### 2.3.2 Puw




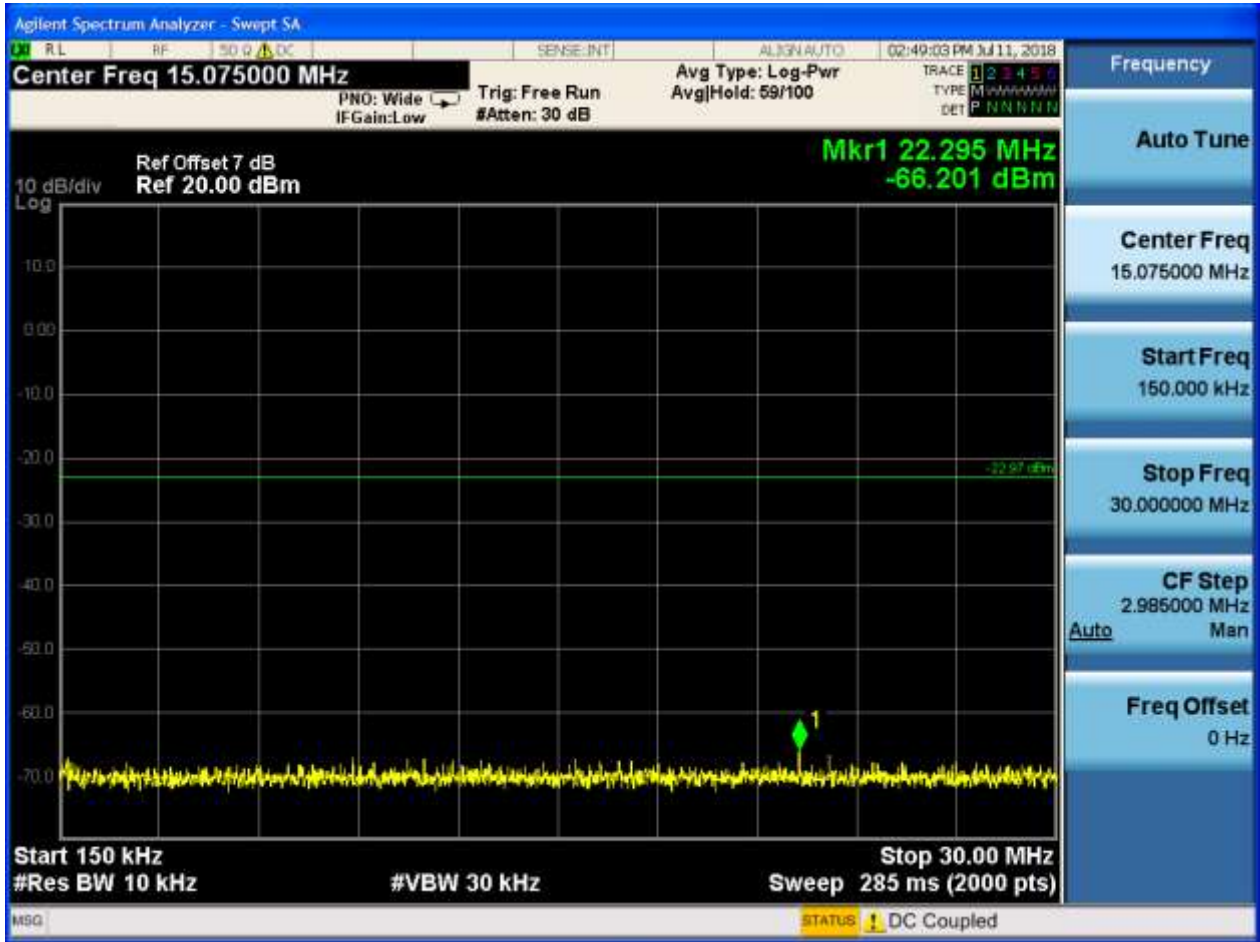




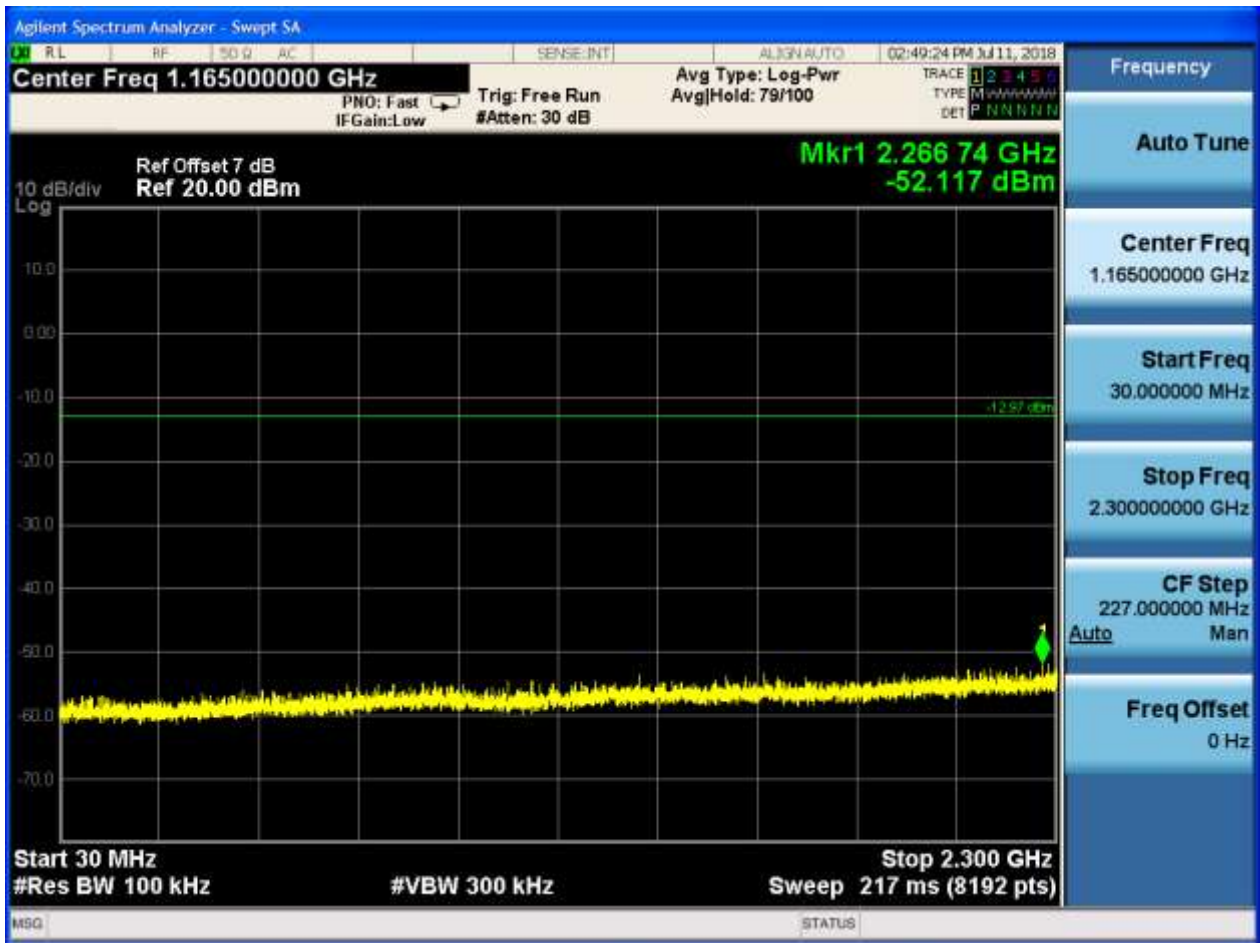



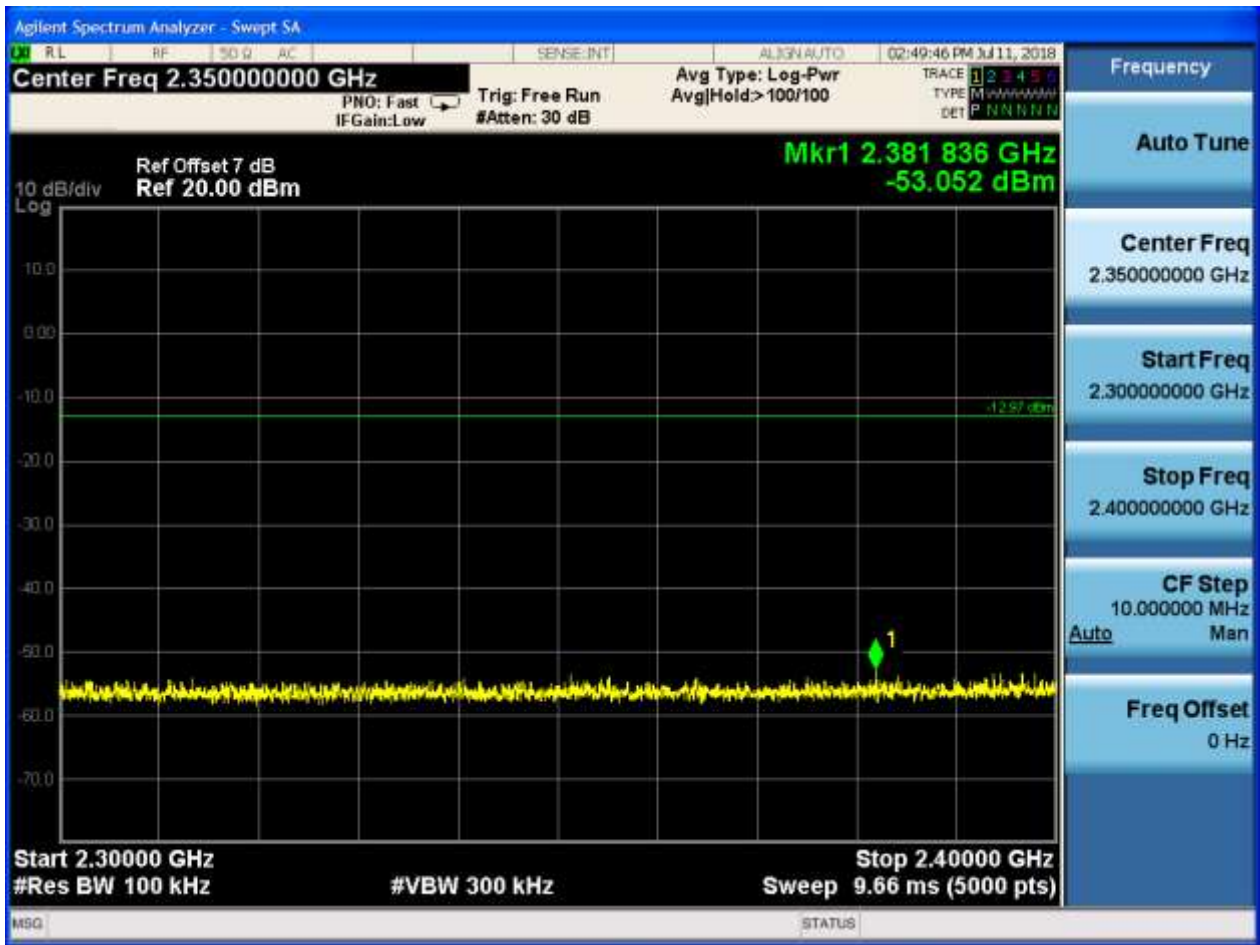

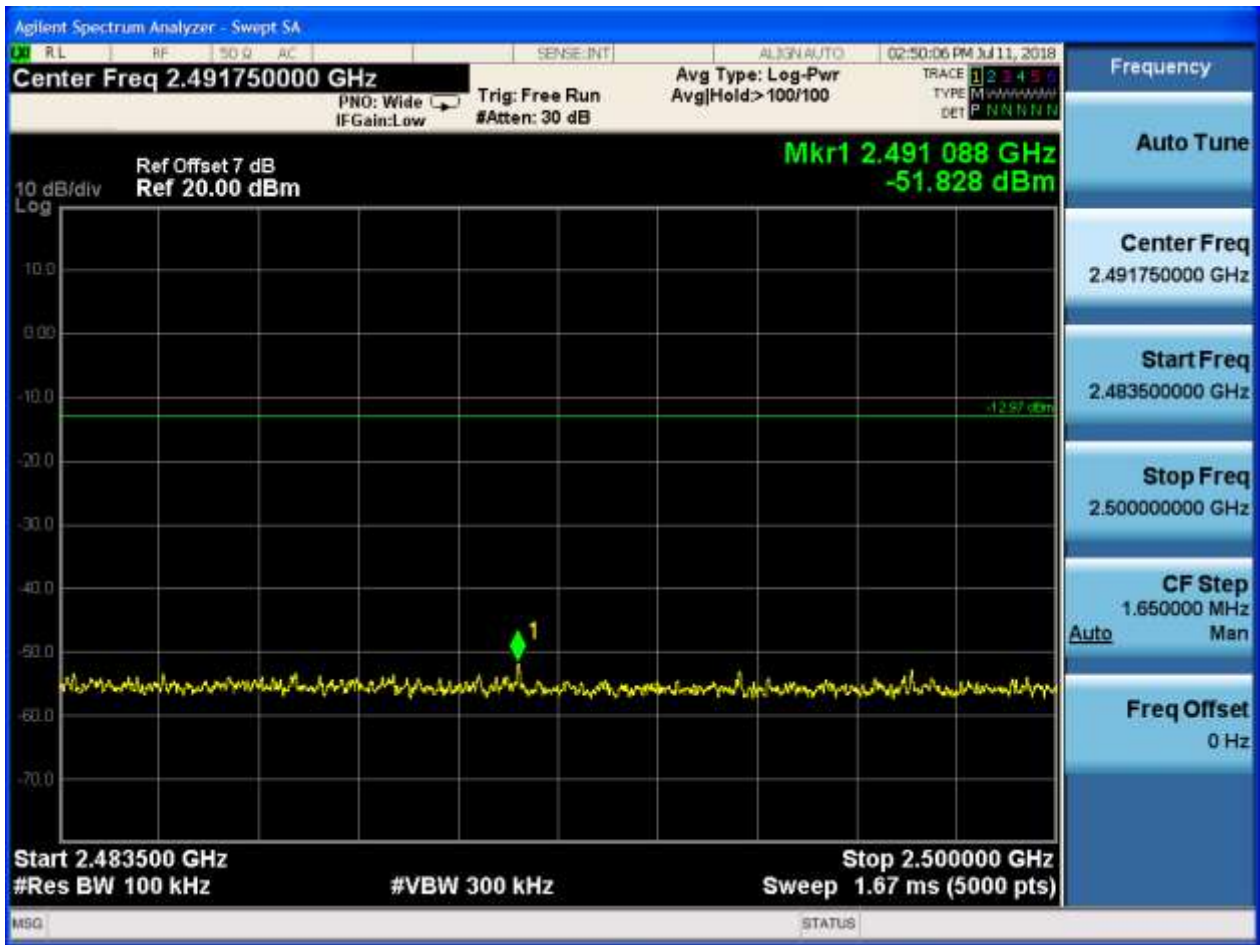




## 2.4 TM2\_2DH5\_Ch0

### 2.4.1 Pref




### 2.4.2 Puw




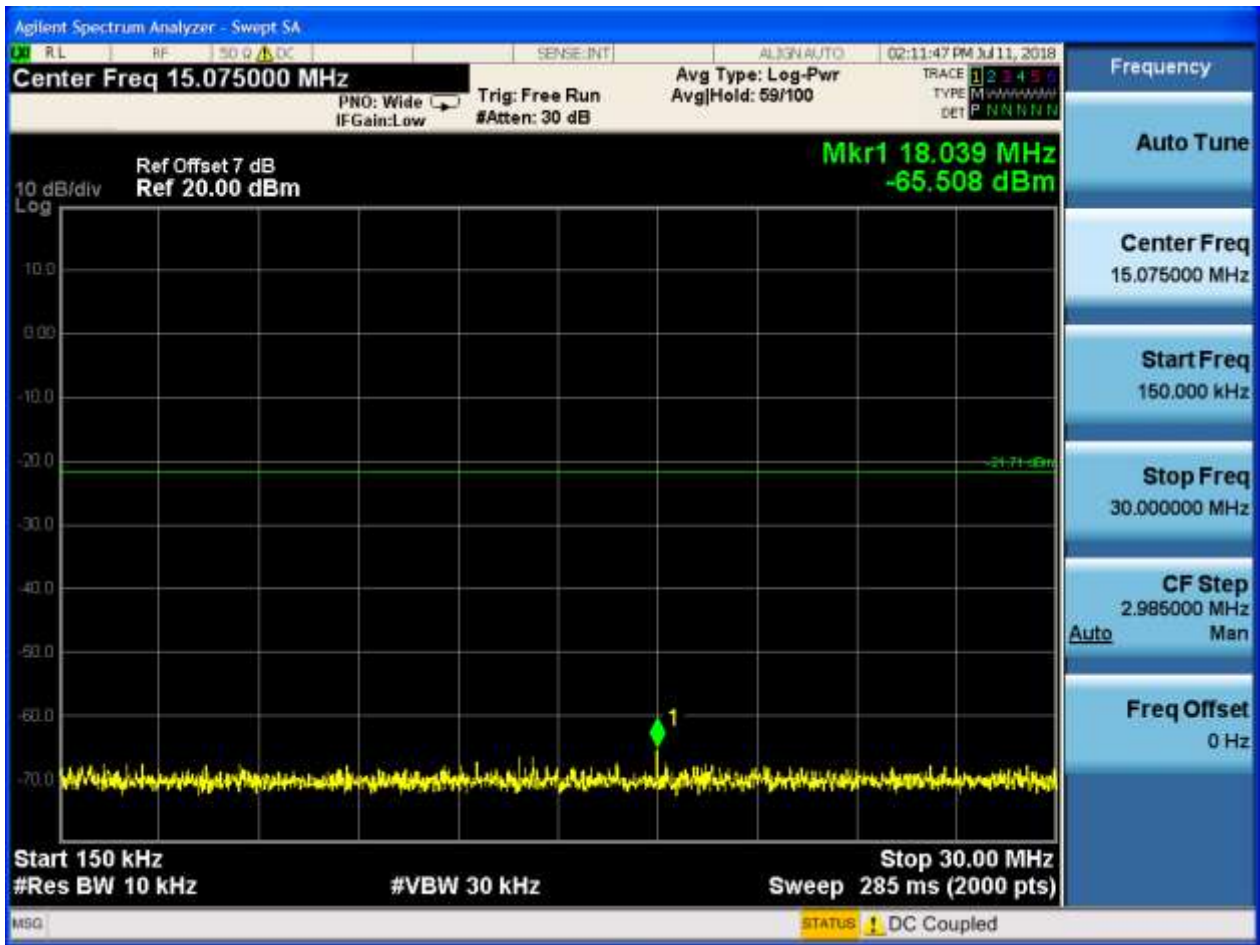




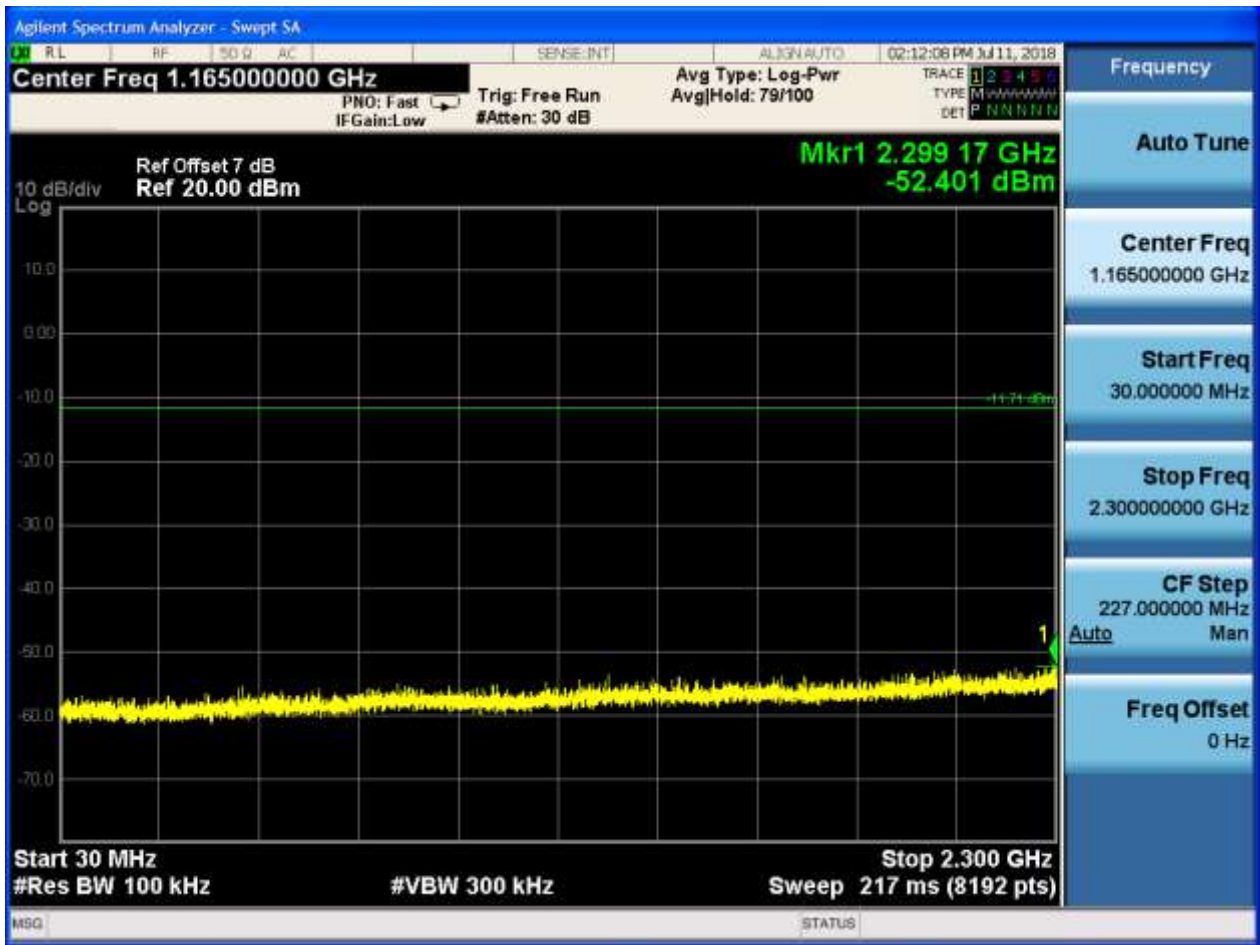



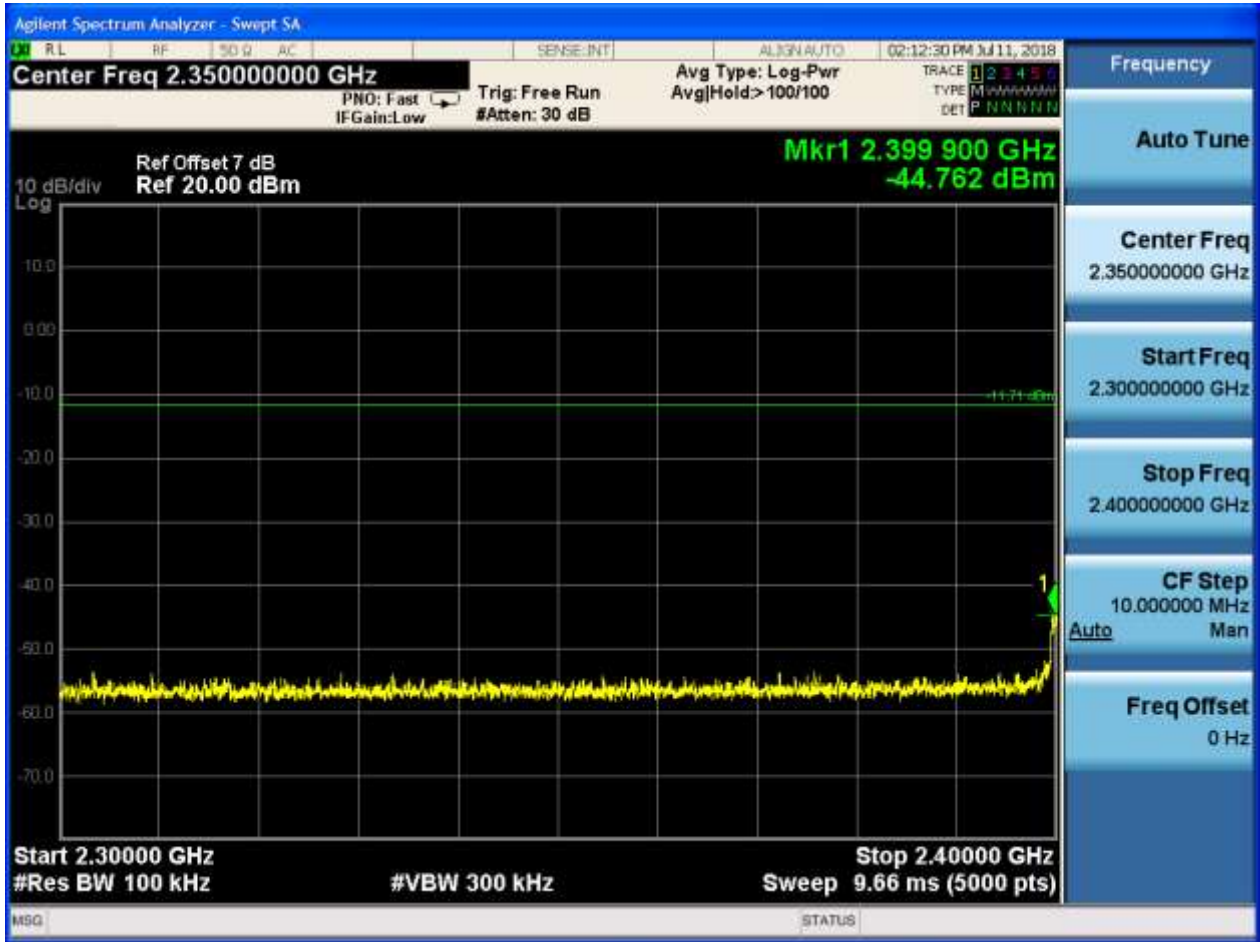

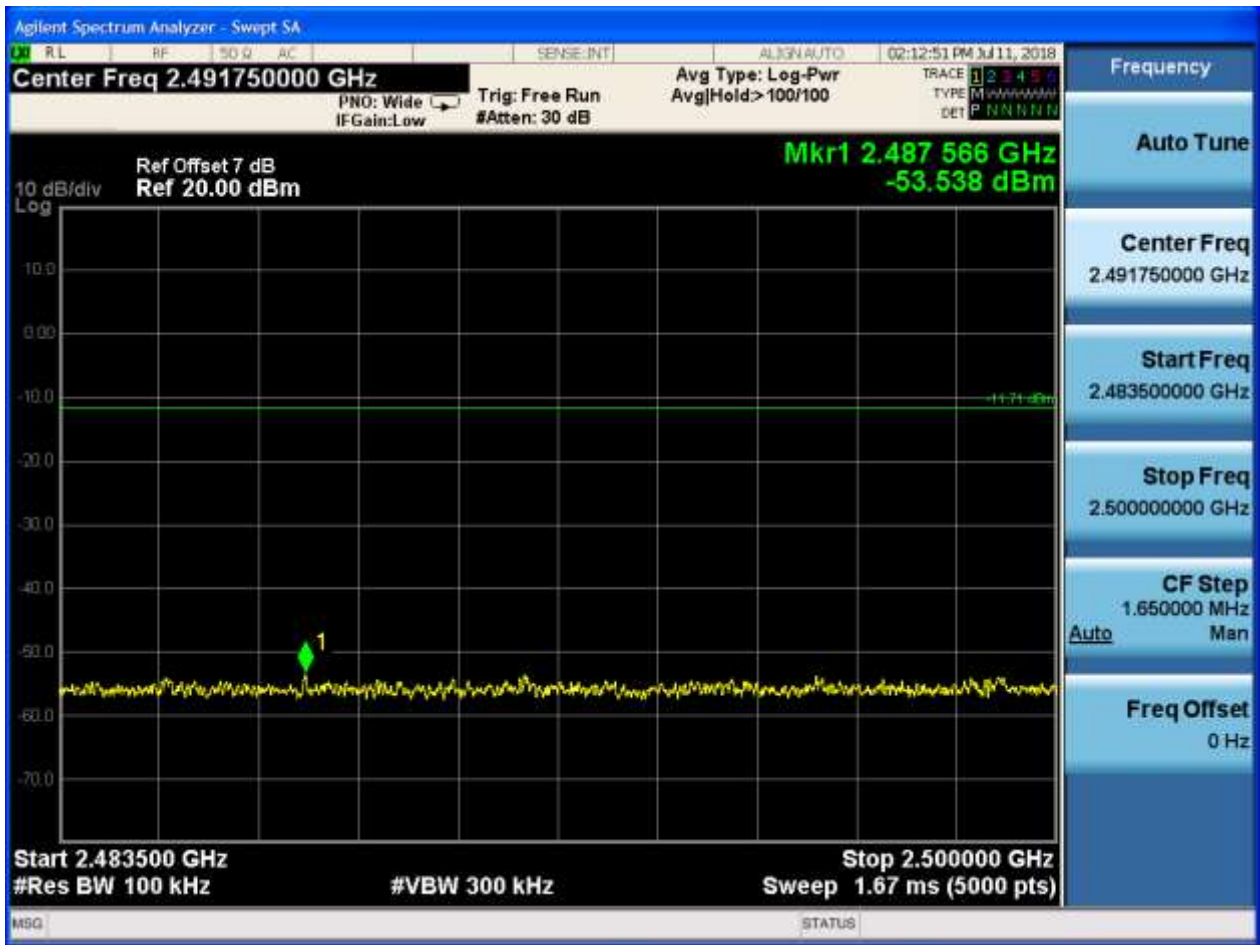




## 2.5 TM2\_2DH5\_Ch39

### 2.5.1 Pref




### 2.5.2 Puw




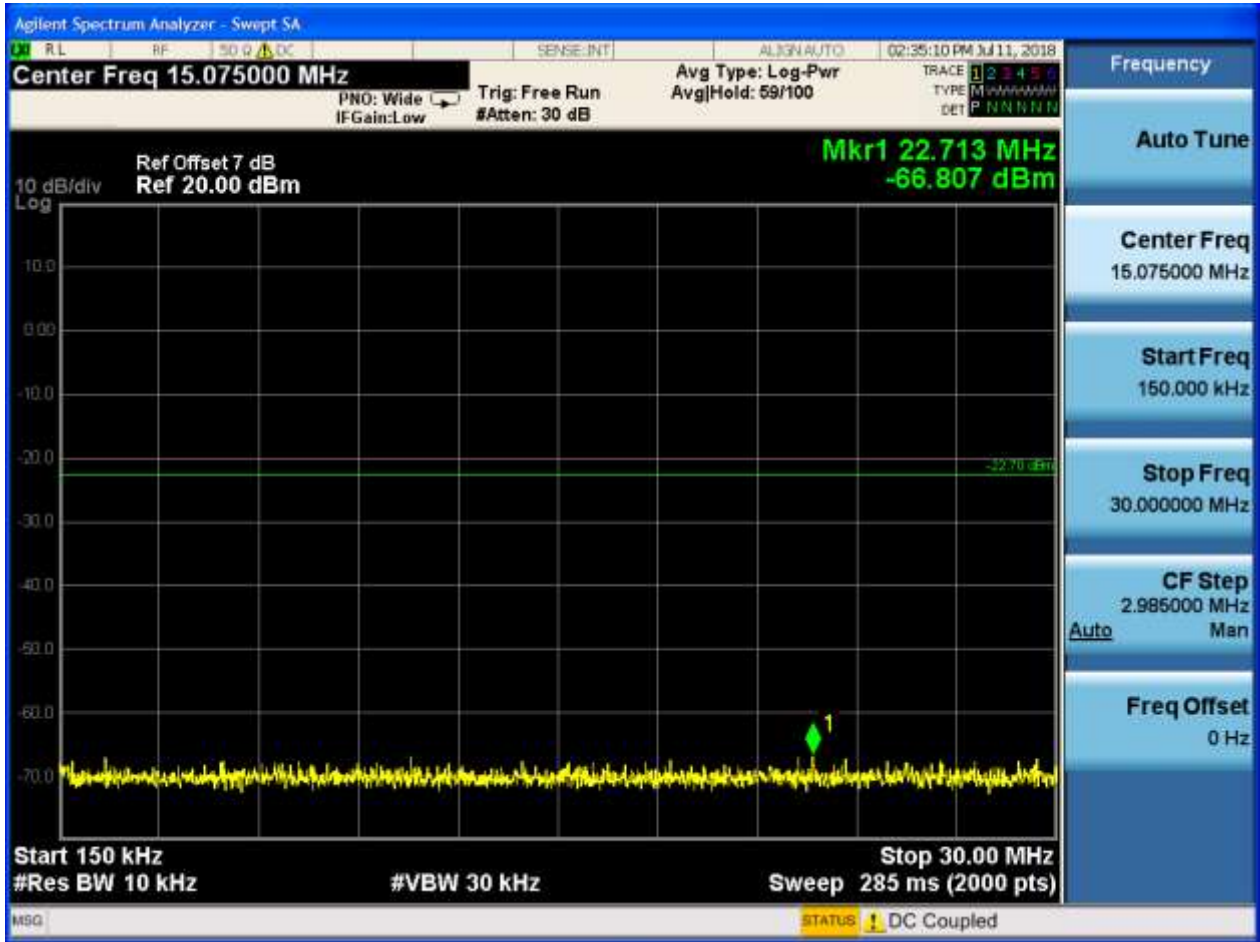




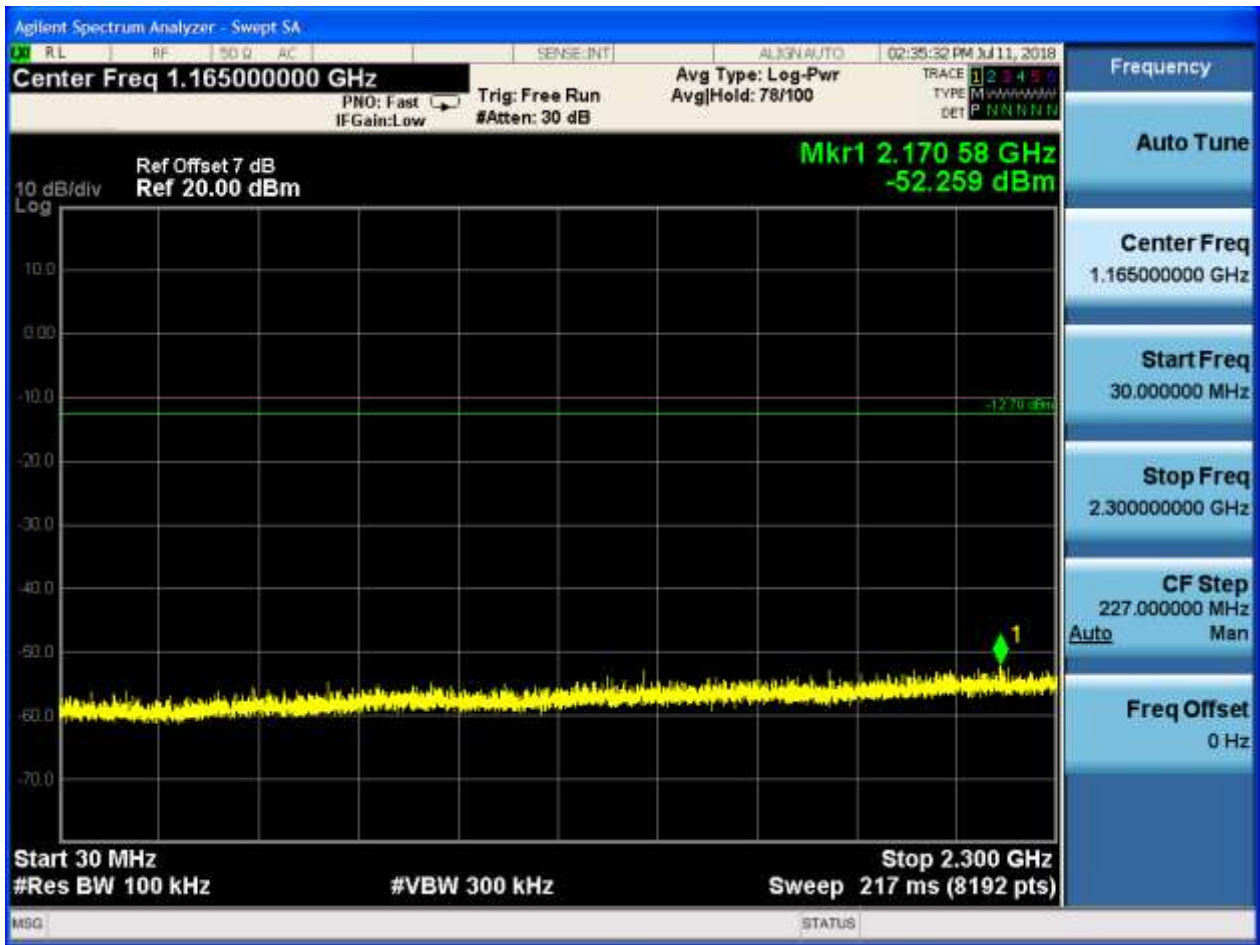



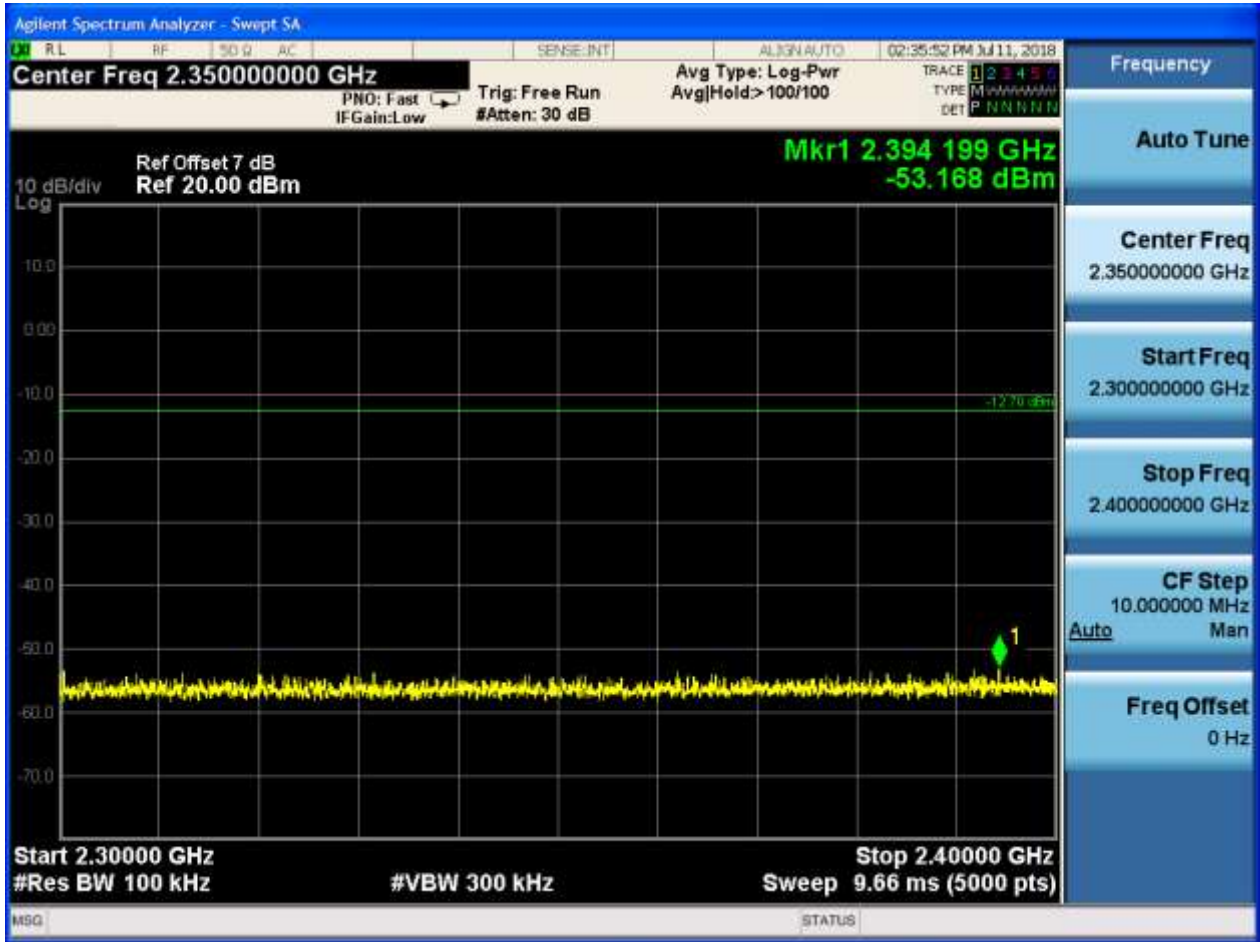


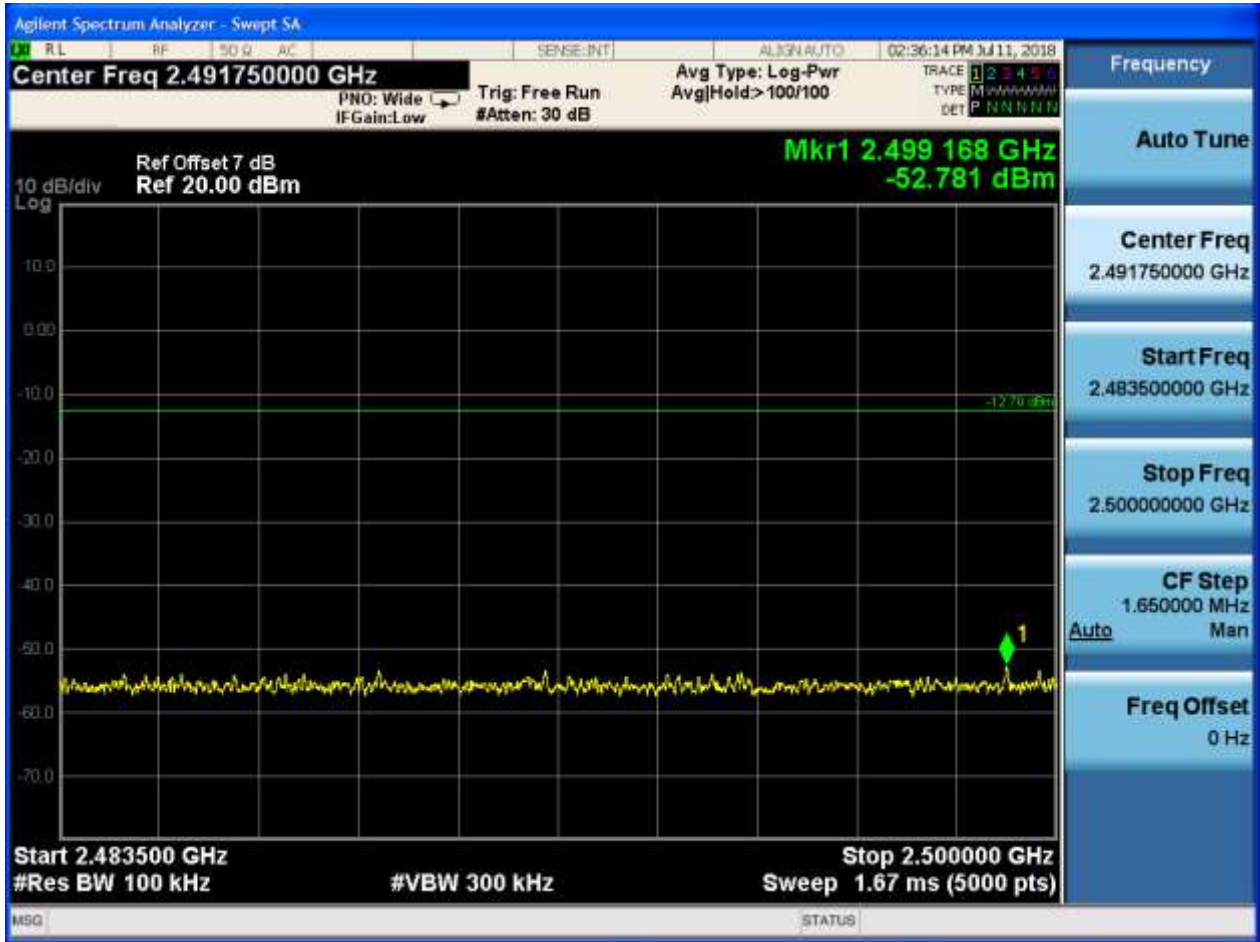




## 2.6 TM2\_2DH5\_Ch78

### 2.6.1 Pref

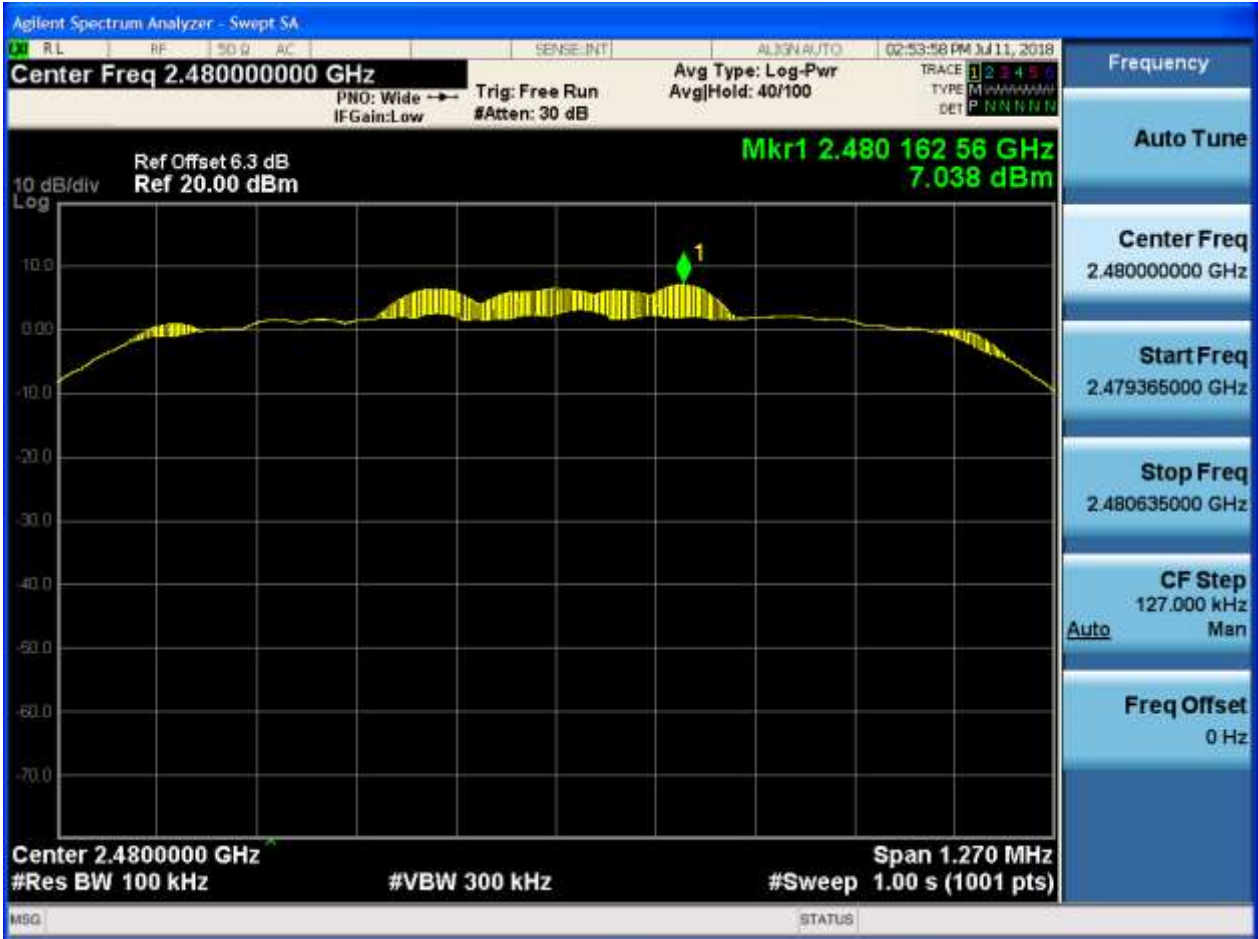

### 2.6.2 Puw




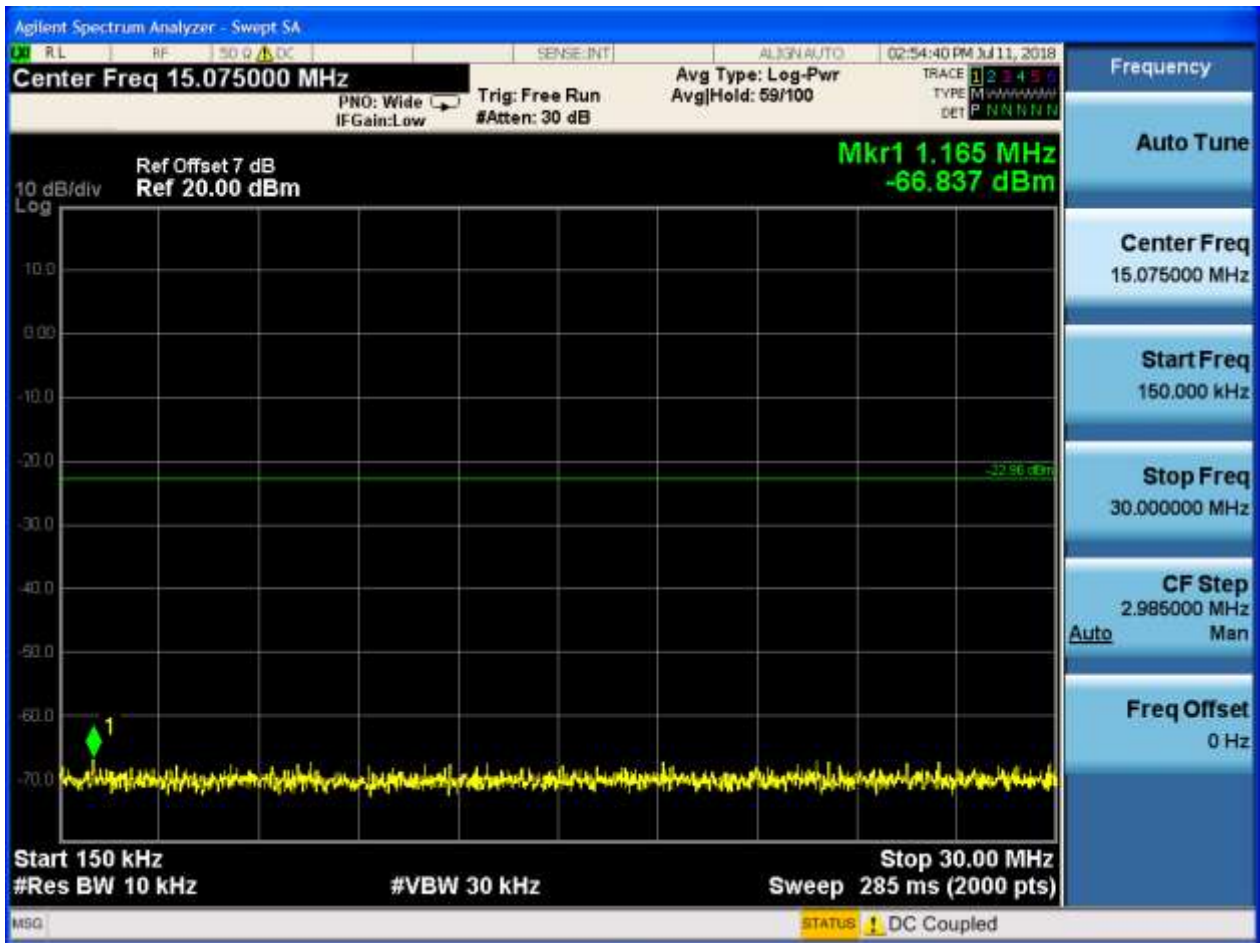








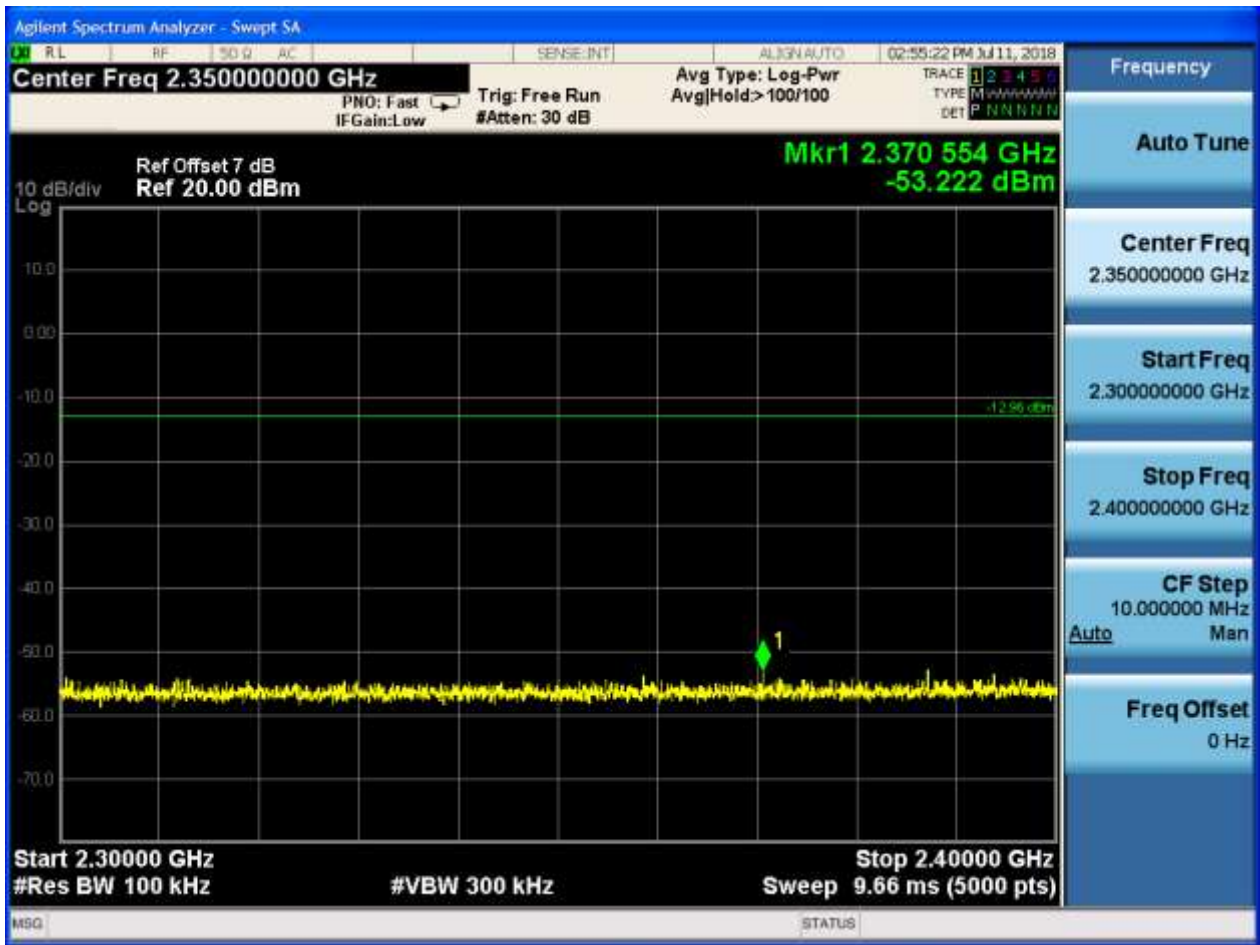

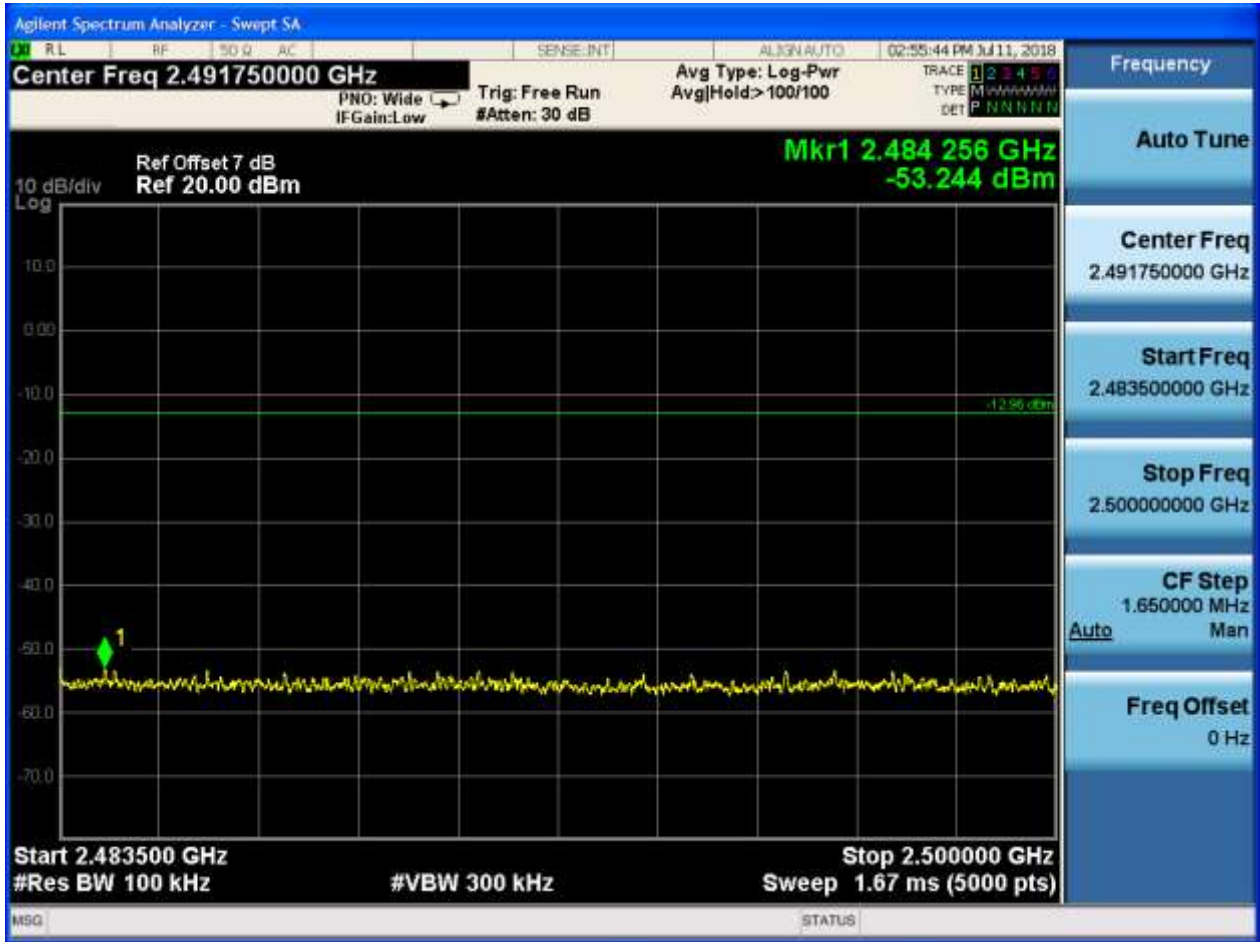




## 2.7 TM3\_3DH5\_Ch0

### 2.7.1 Pref




### 2.7.2 Puw




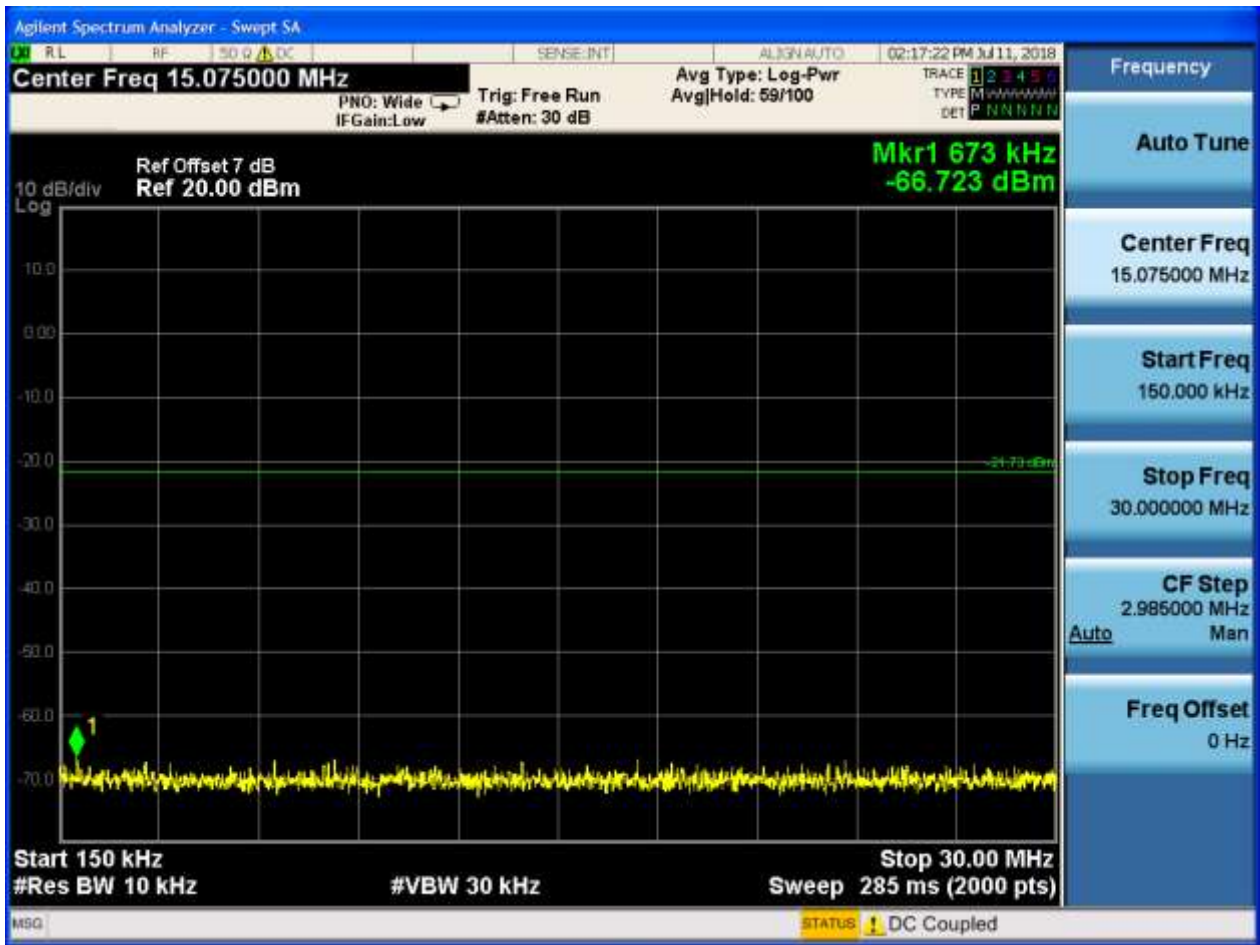




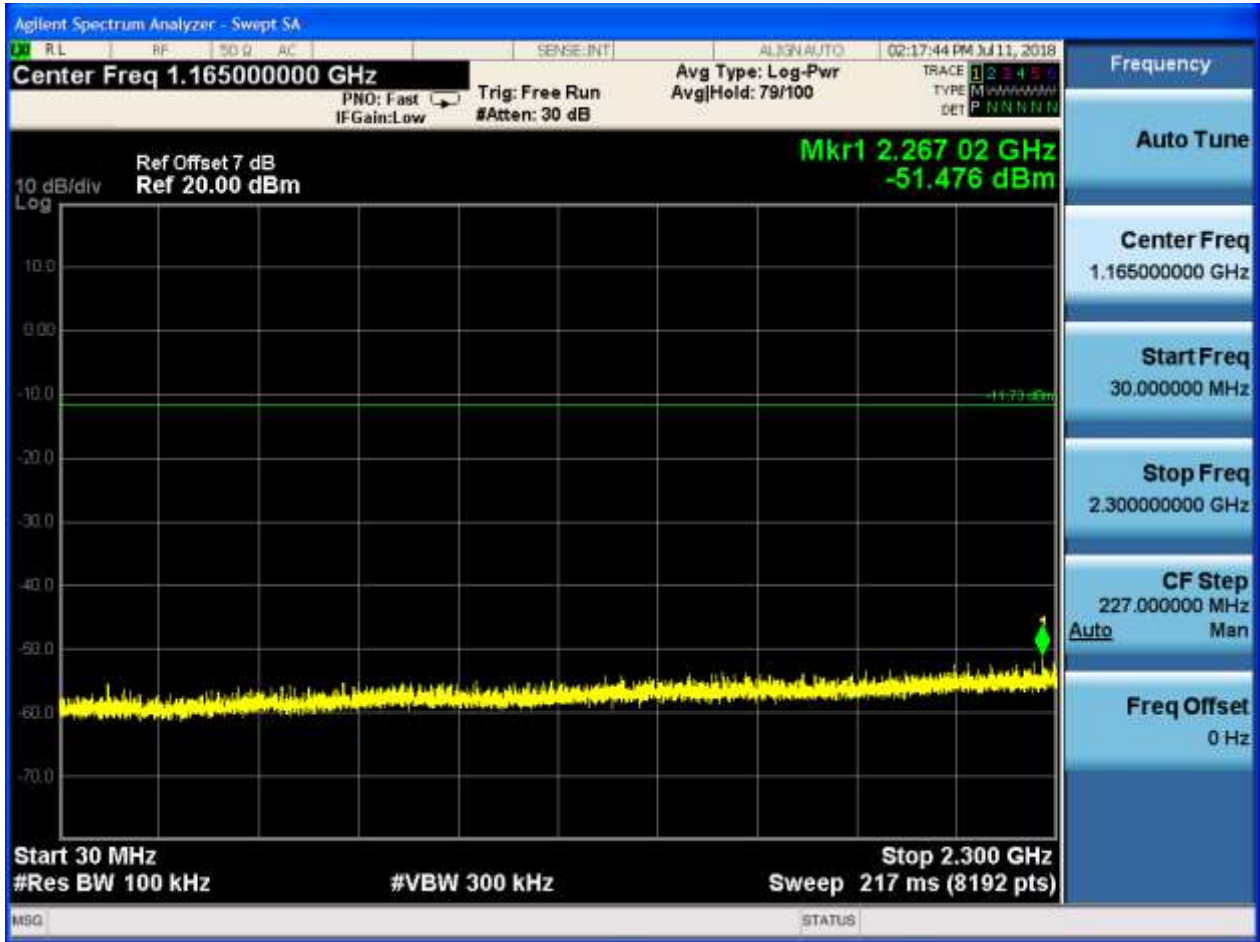



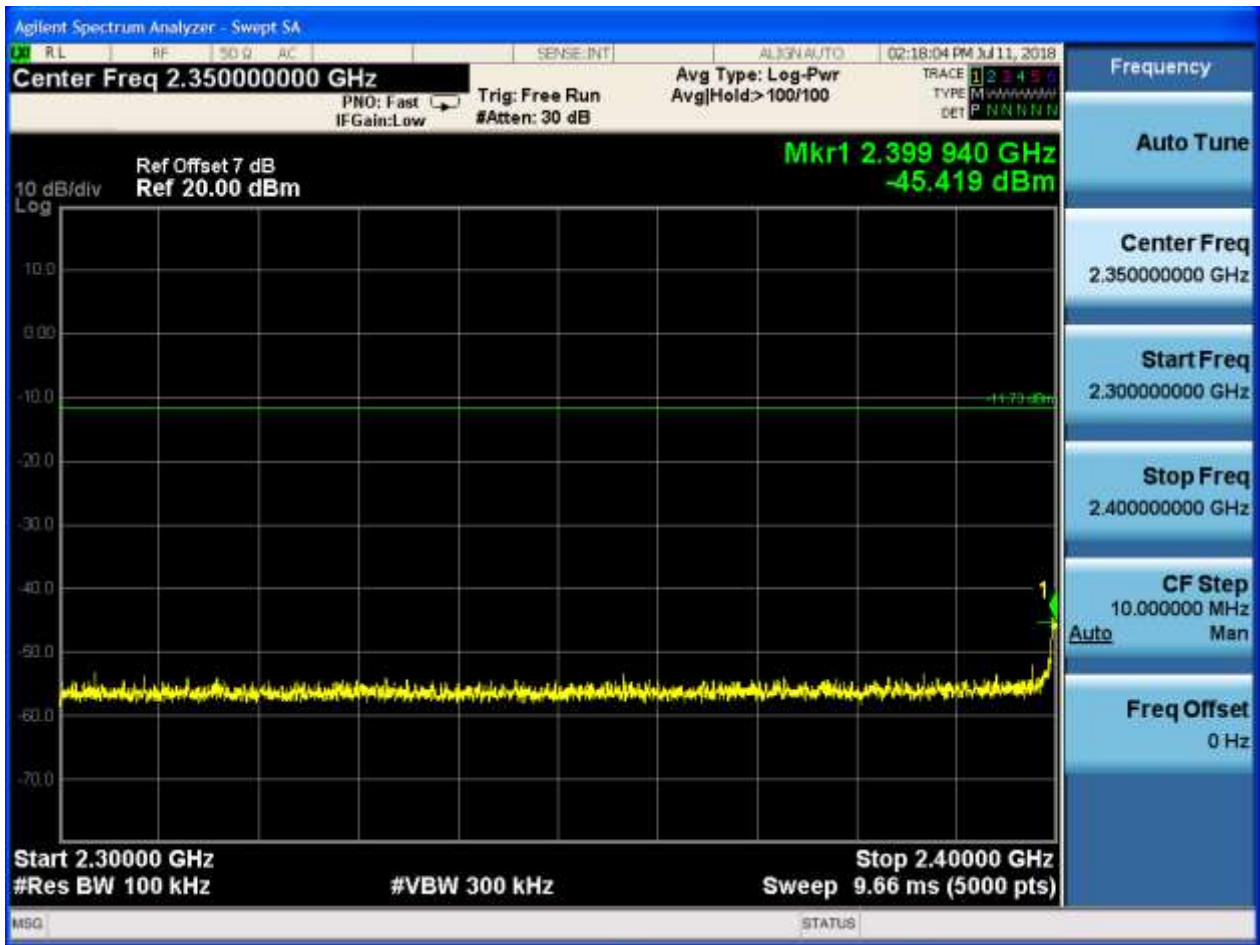


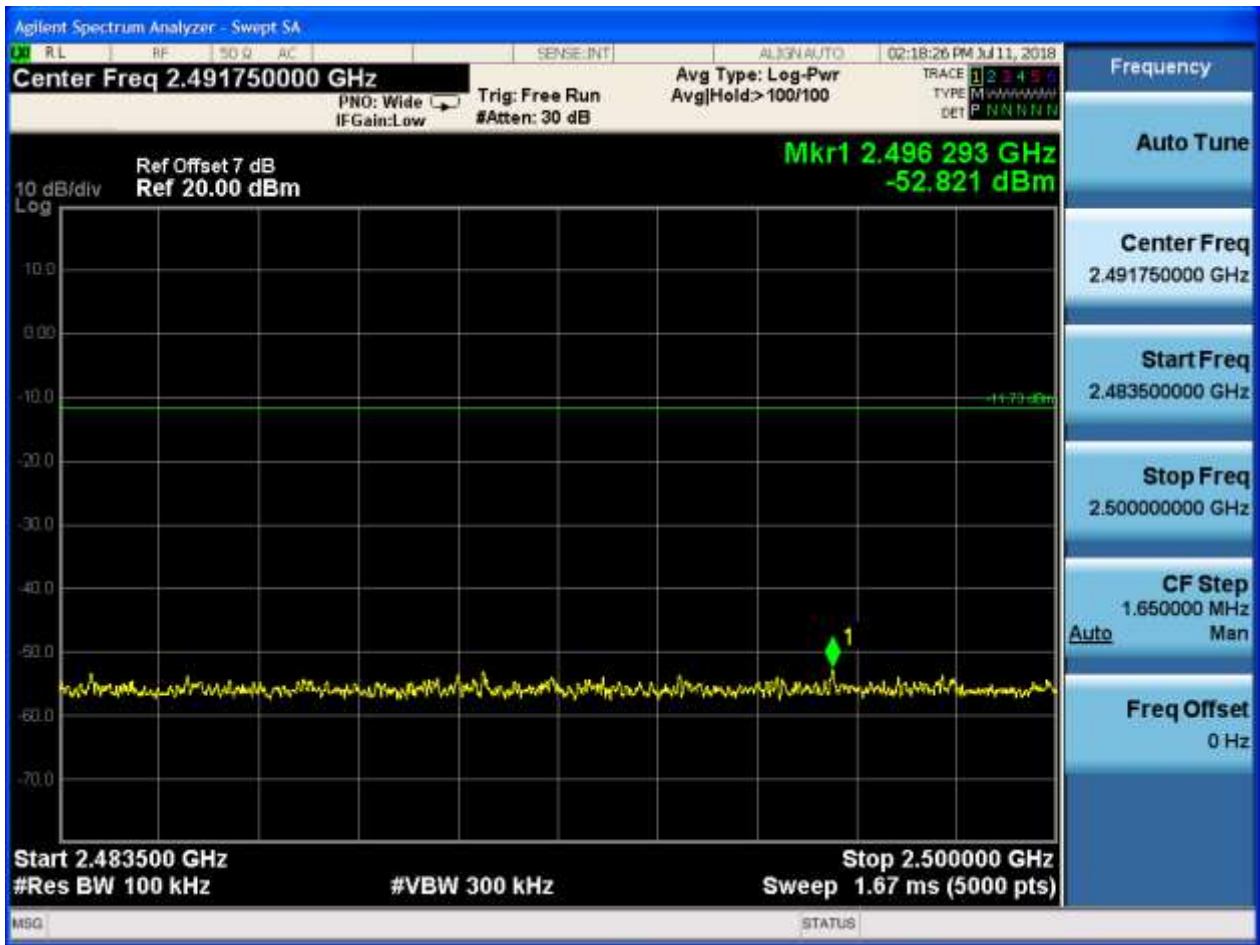




## 2.8 TM3\_3DH5\_Ch39

### 2.8.1 Pref

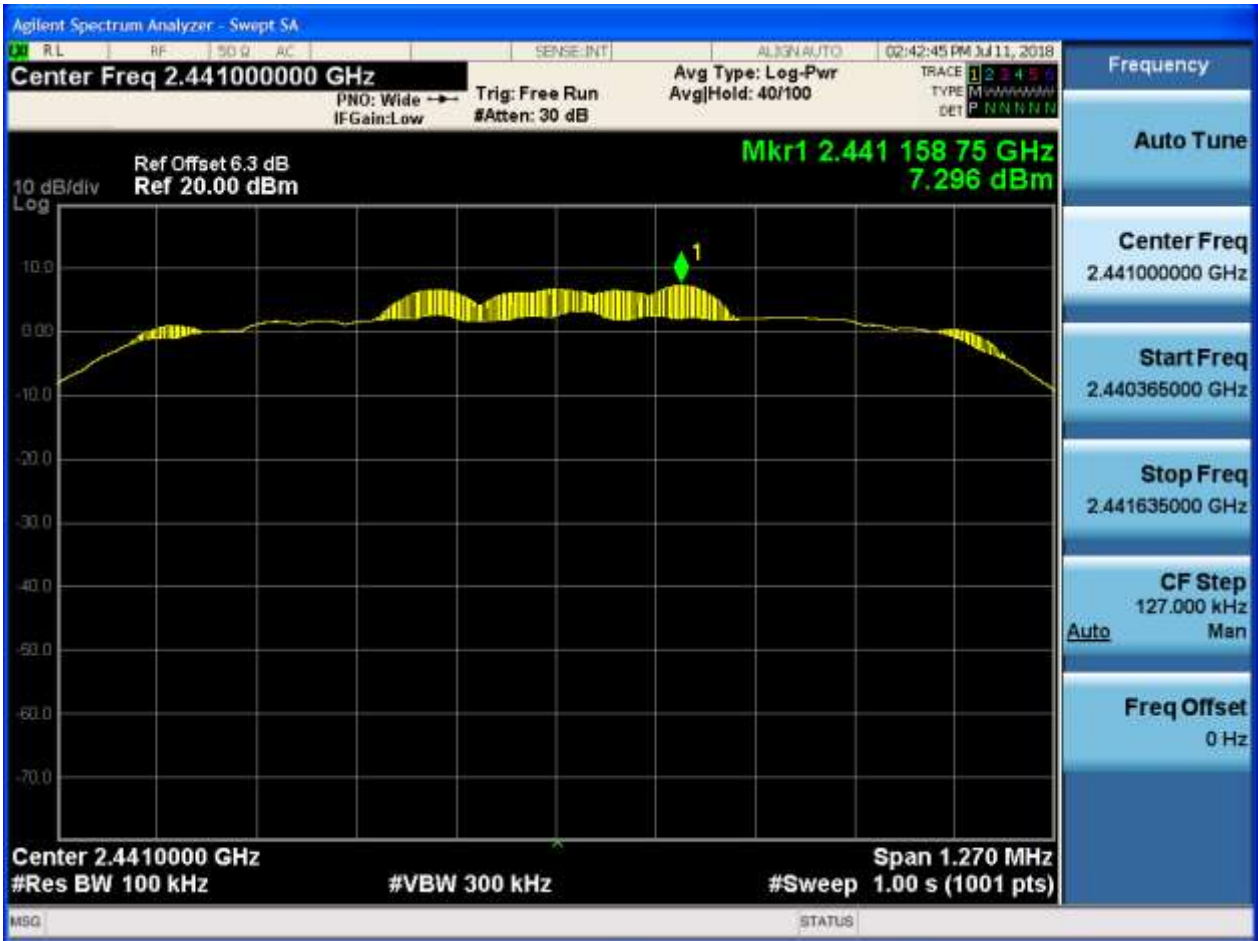


### 2.8.2 P<sub>uw</sub>




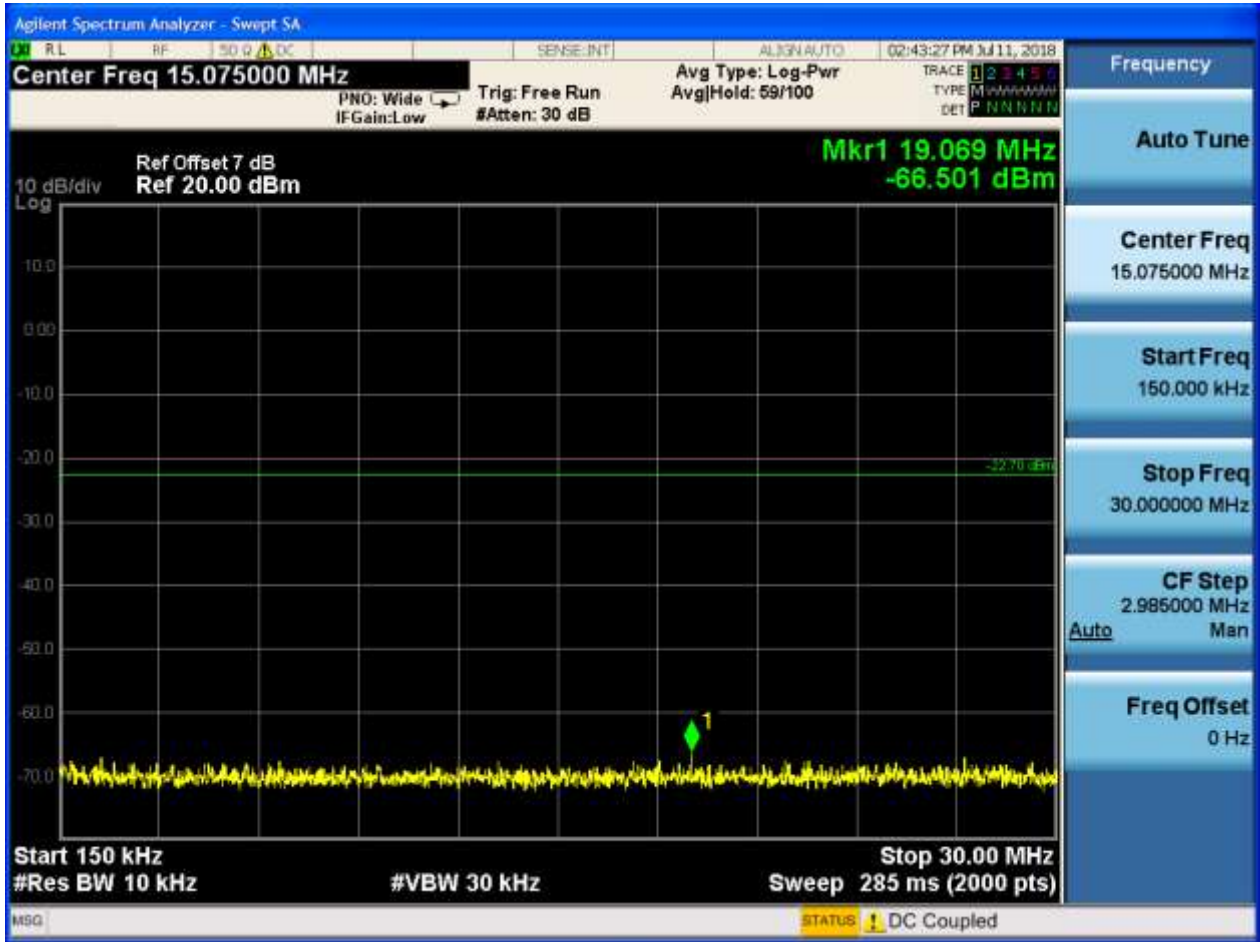




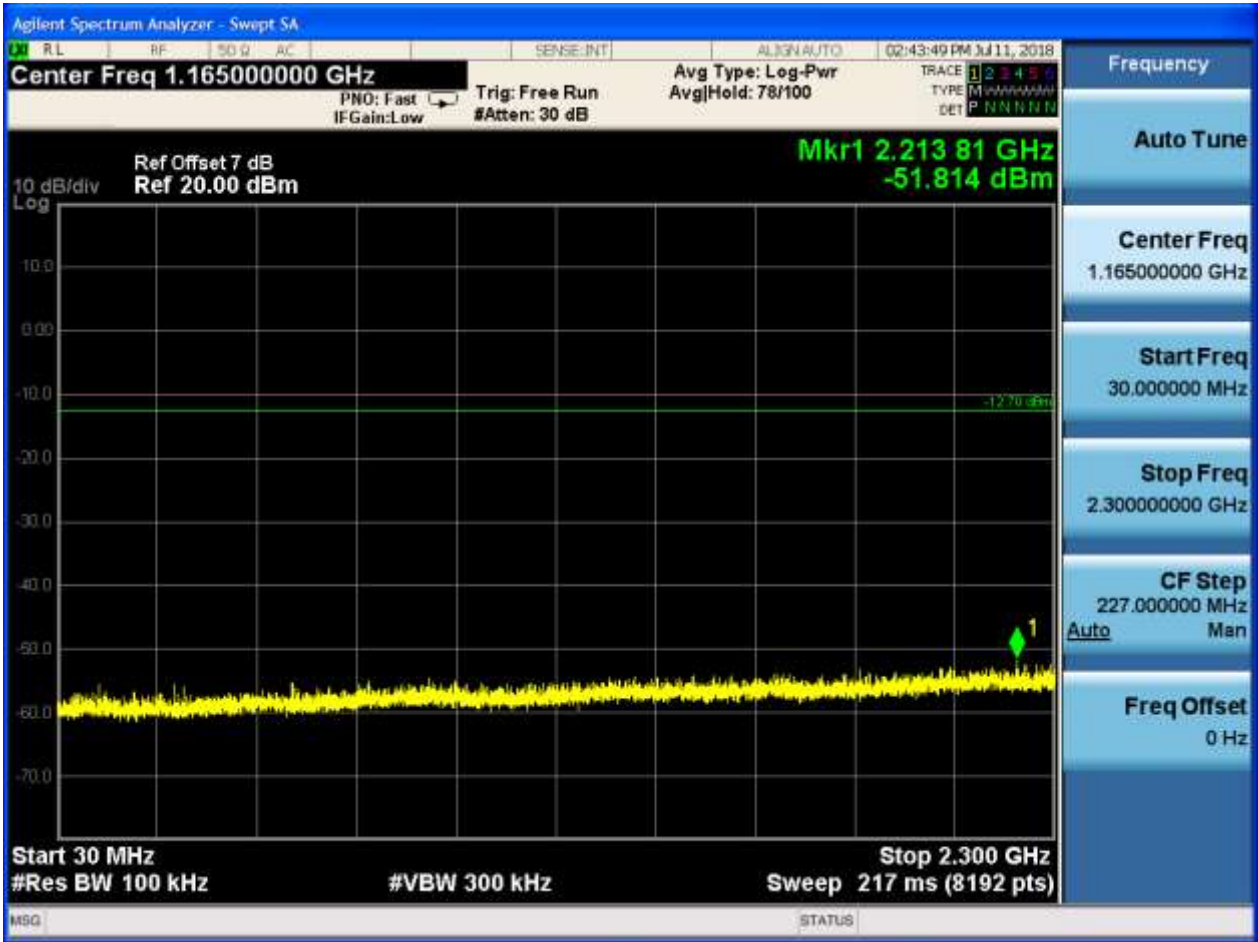



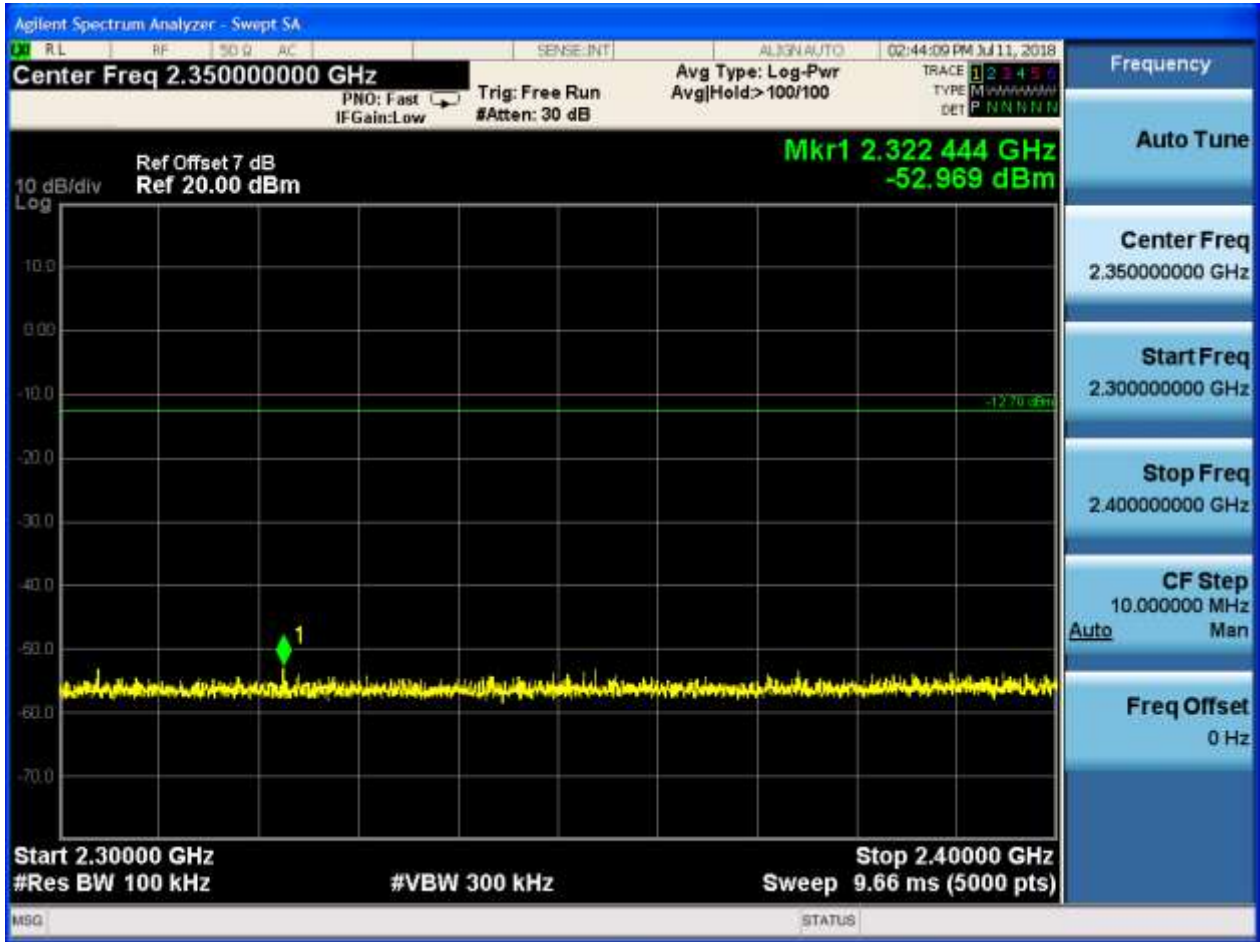

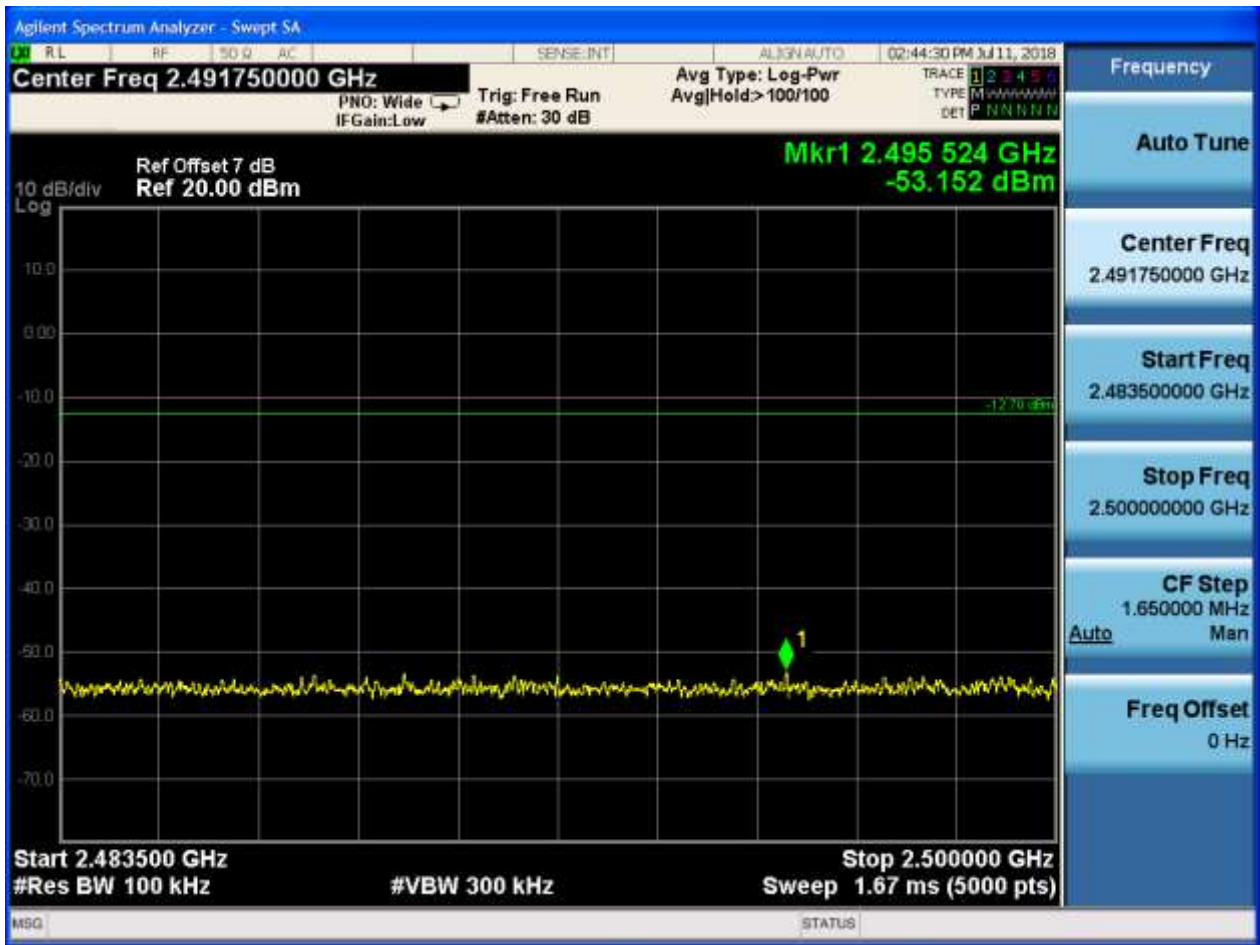




## 2.9 TM3\_3DH5\_Ch78

### 2.9.1 Pref



### 2.9.2 P<sub>uw</sub>




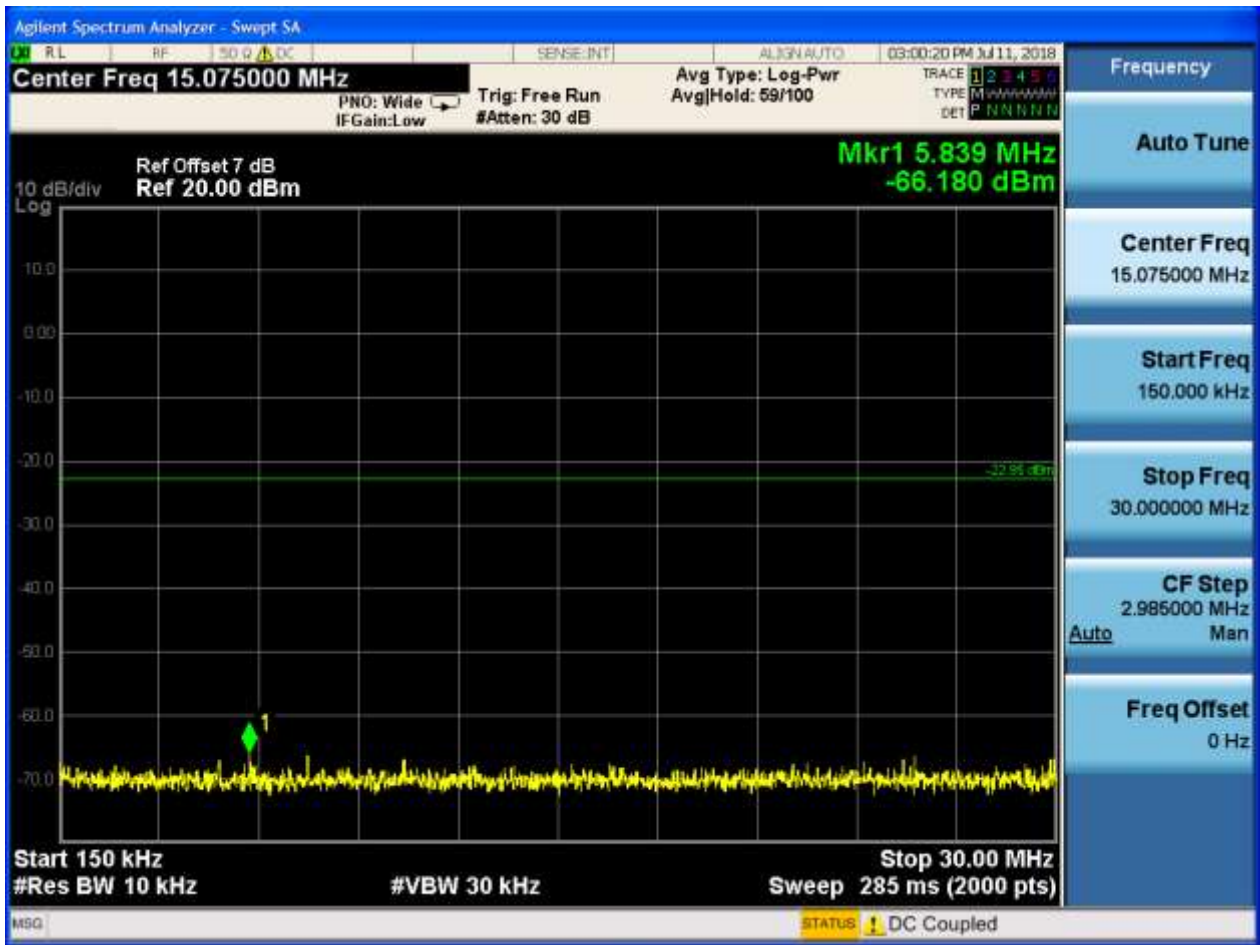








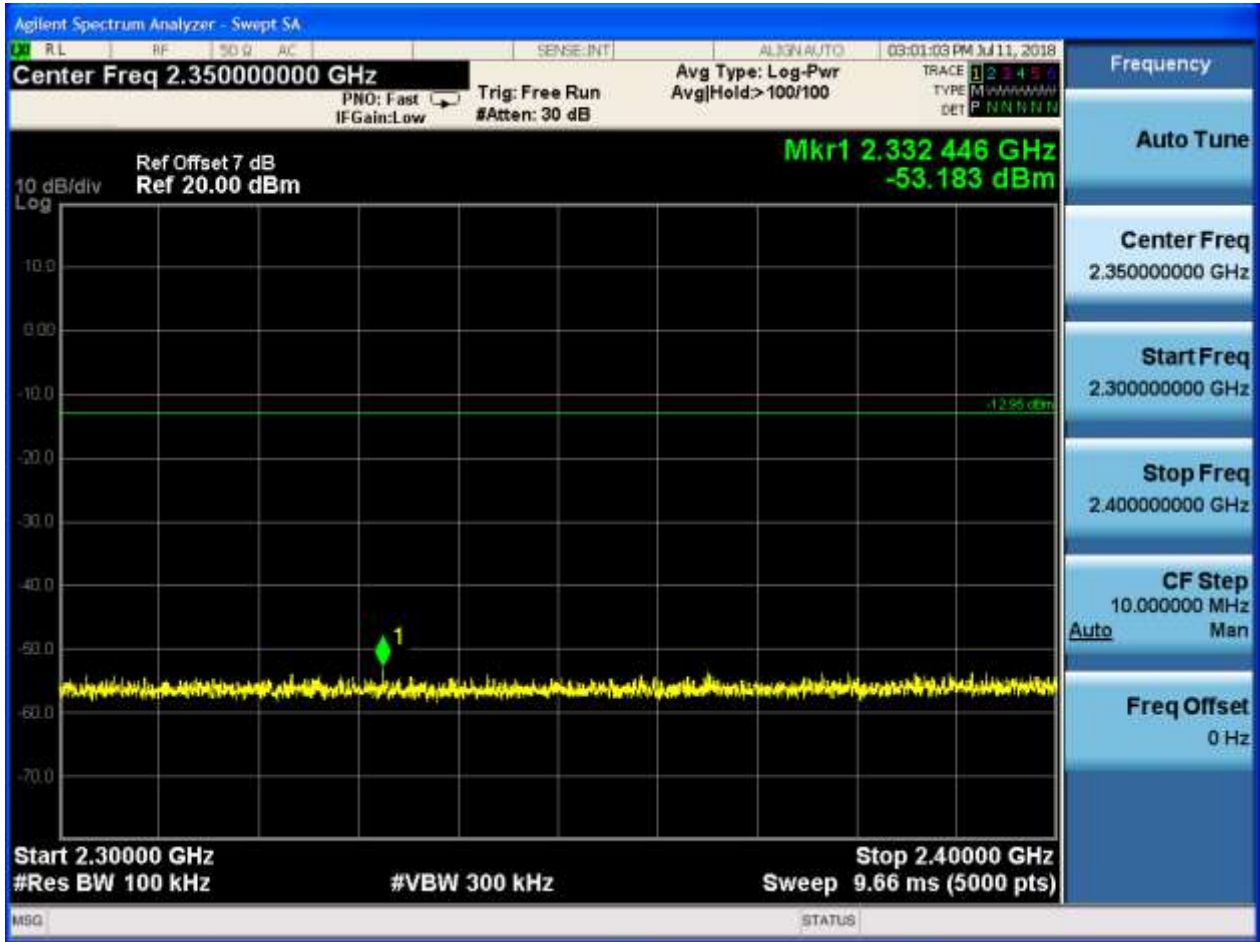

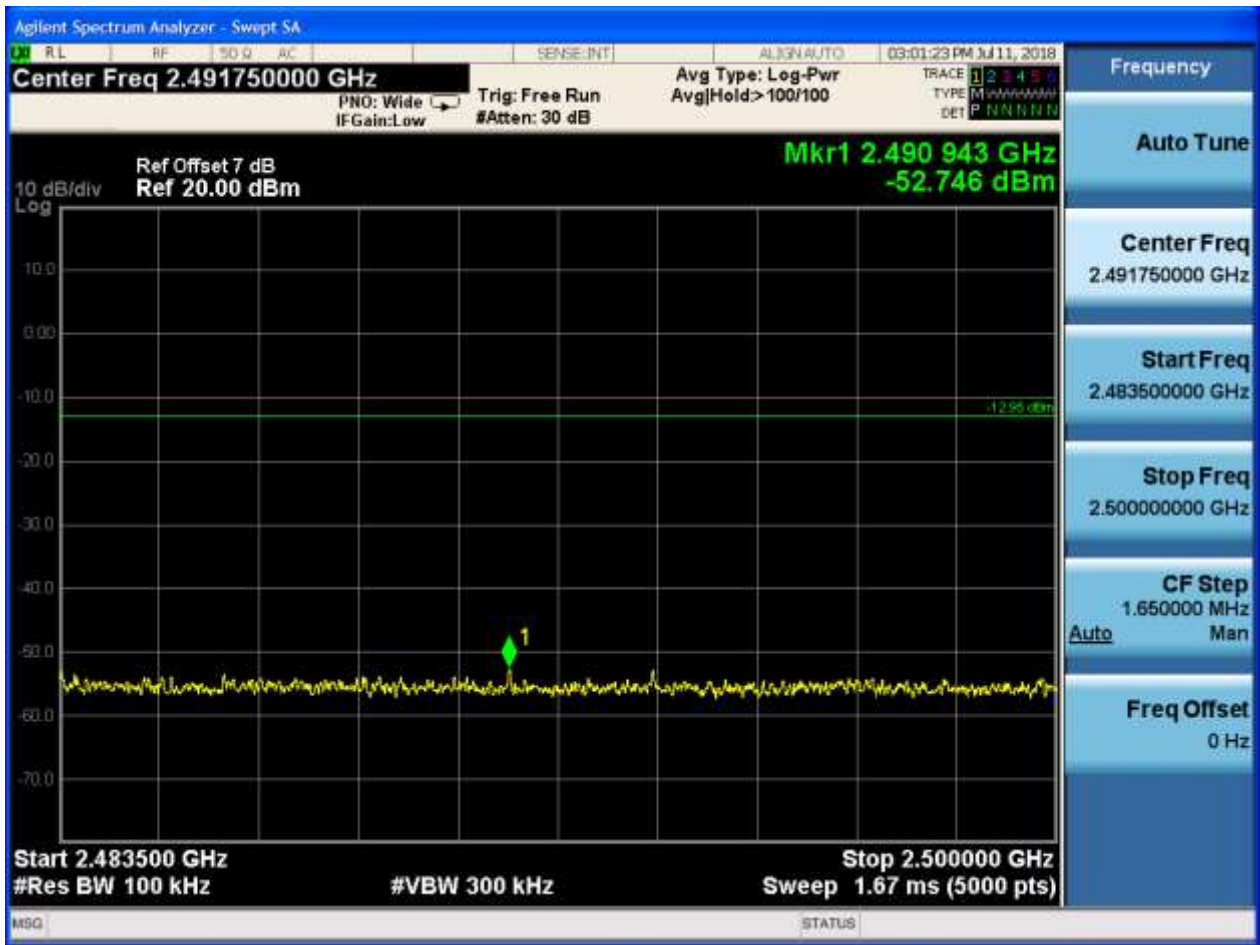





# Appendix H: Radiated Emissions in the Restricted Bands

## 1 Result Table

The whole testing range is from “30 MHz to 26.5 GHz (10th harmonics)” is divided into 4 parts according to the test site settings, which are:

- (Part 1): Test range of “9 KHz to 30 MHz”,
- (Part 2): Test range of “30 MHz to 1 GHz”,
- (Part 3): Test range of “1 GHz to 3 GHz”.
- (Part 4): Test range of “3 GHz to 18 GHz”,
- (Part 5): Test range of “18 GHz to 26.5 GHz”.

In this Appendix, only the test results and plots under the worst case can be reported. In the result table, the “< Limit” denotes that “Not found obvious spikes or see marked spikes on plots and listed emissions records”.


Test Range	EUT Conf.	Emissions	Verdict
30 MHz to 1 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
1 GHz to 3 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
	TM1_DH5_Ch78 (Worst Conf.)	< Limit	Pass
3 GHz to 18 GHz	TM1_DH5_Ch0 (Worse Conf.)	< Limit	Pass
18 GHz to 26.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass

Note: We tested all modes, but the data presented below is the worst case.

## 2 Result Plot


### Part 1: Testing Range of “9 kHz to 30MHz”

Note 1: The test results and plot for testing range of “9 KHz to 30 MHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

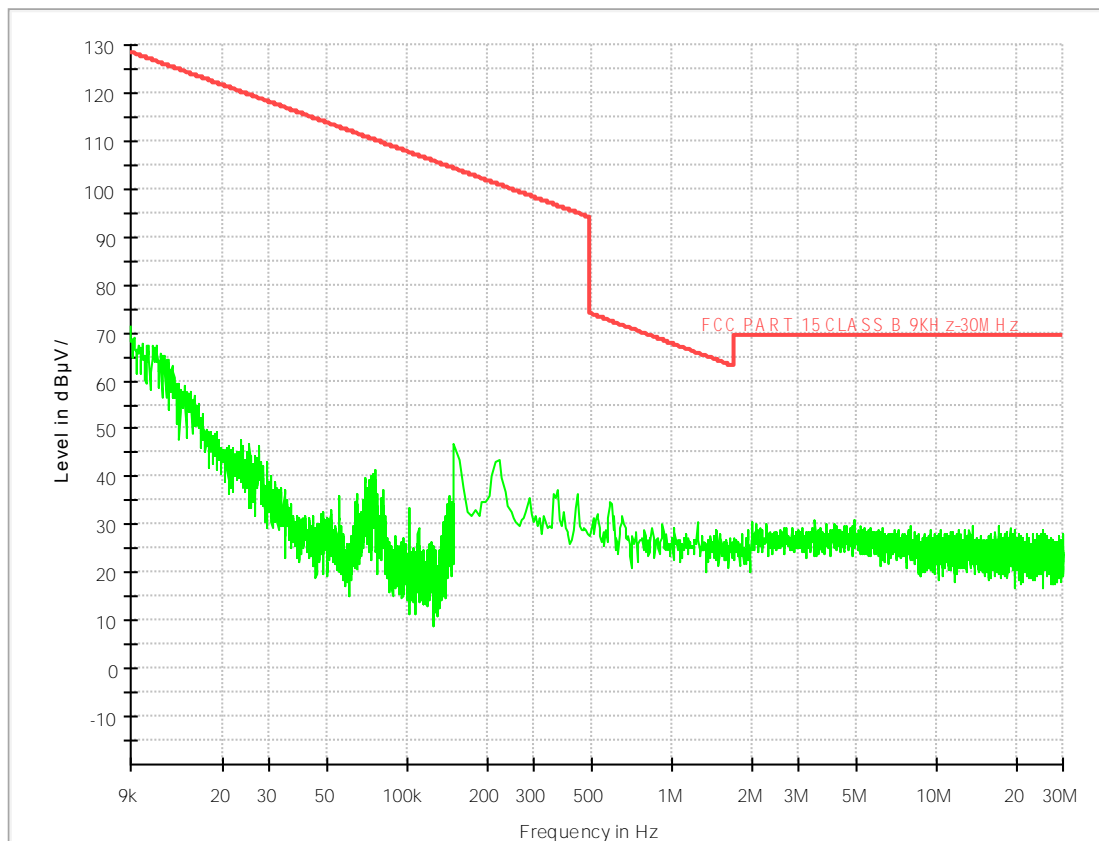

**Part 2: Testing Range of “30 MHz to 1 GHz”**

- Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

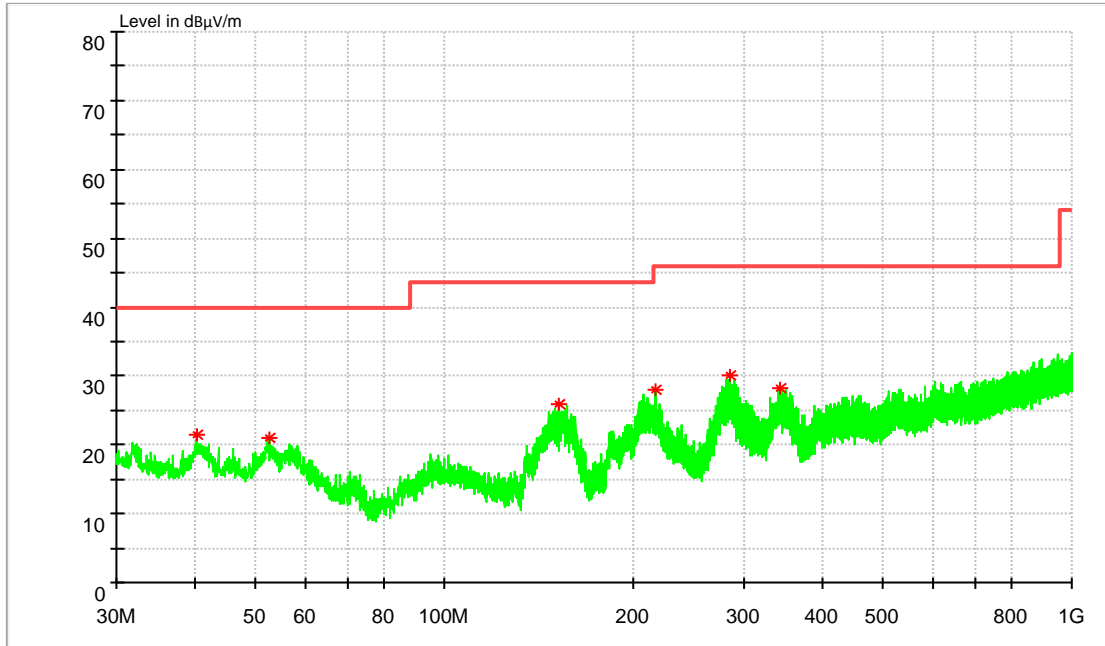

**MEASUREMENT RESULT: QP Detector**

Frequency (MHz)	Level (dB µ V/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Trans d. (dB)
40.185000	21.57	40.00	18.43	100.0	V	0.0	14.4
52.601000	21.06	40.00	18.94	100.0	V	321.0	14.1
151.929000	25.78	43.50	17.72	100.0	V	321.0	9.9
216.725000	27.88	46.00	18.12	100.0	V	193.0	13.2
284.916000	30.17	46.00	15.83	100.0	H	274.0	15.1
342.388500	28.11	46.00	17.89	100.0	H	111.0	16.7


Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)  
 The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit - Level




### Part 3: Testing Range of “1GHz to 3GHz”

- Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

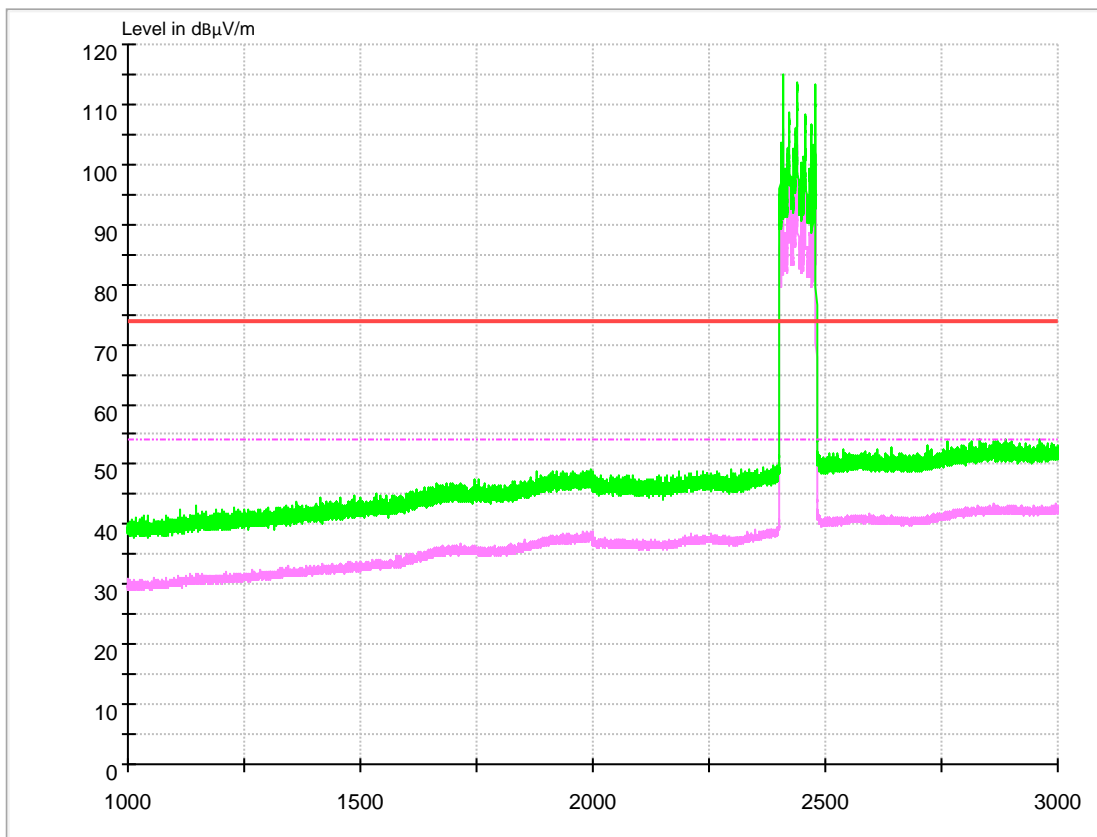

**Channel 0**

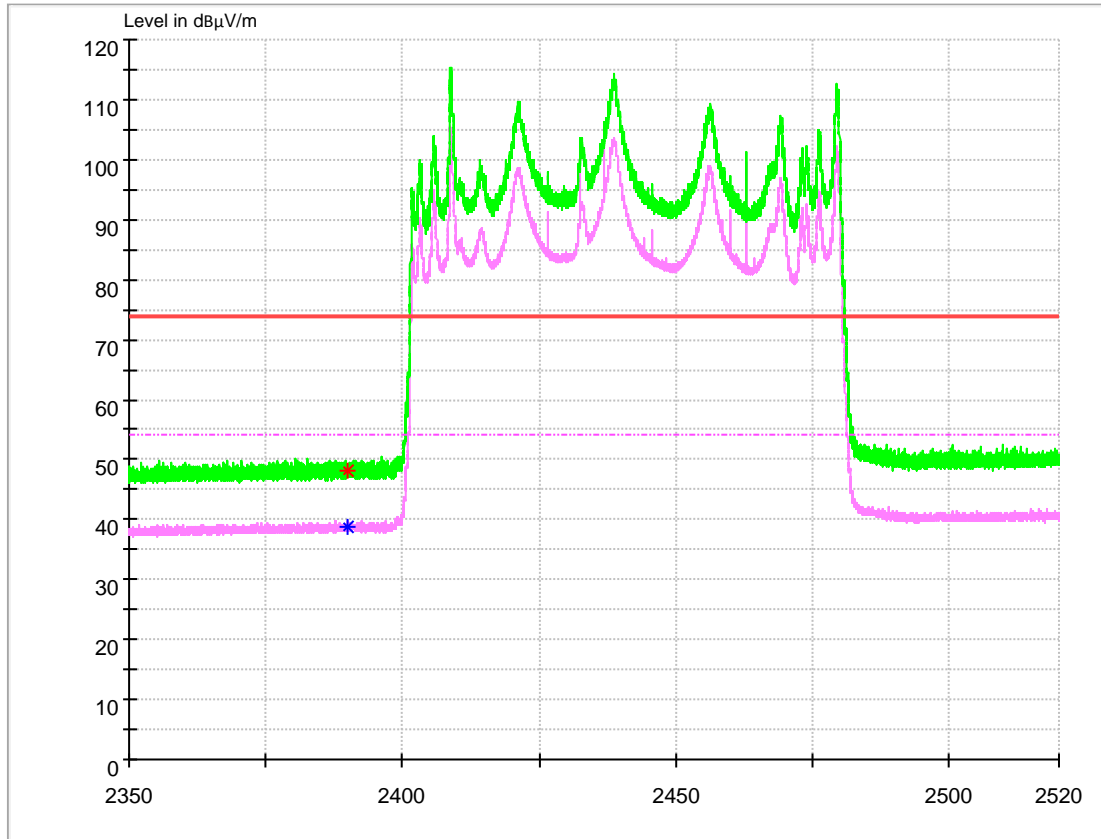

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2389.984	38.78	54.00	15.22	150.0	H	2.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2389.9755	48.24	74.00	25.76	150.0	V	355.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

**Channel 78**

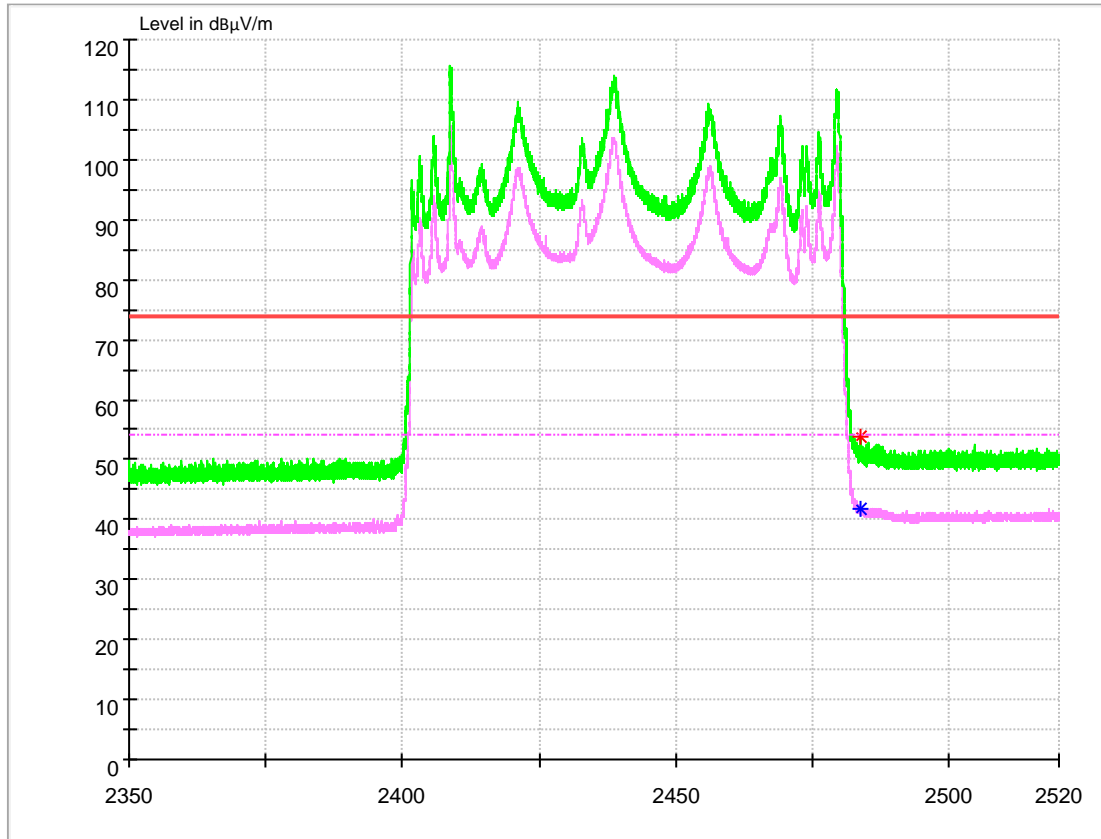

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5605	41.87	54.00	12.13	150.0	H	349.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.552	53.89	74.00	20.11	150.0	H	178.0	-6.8

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level


#### Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

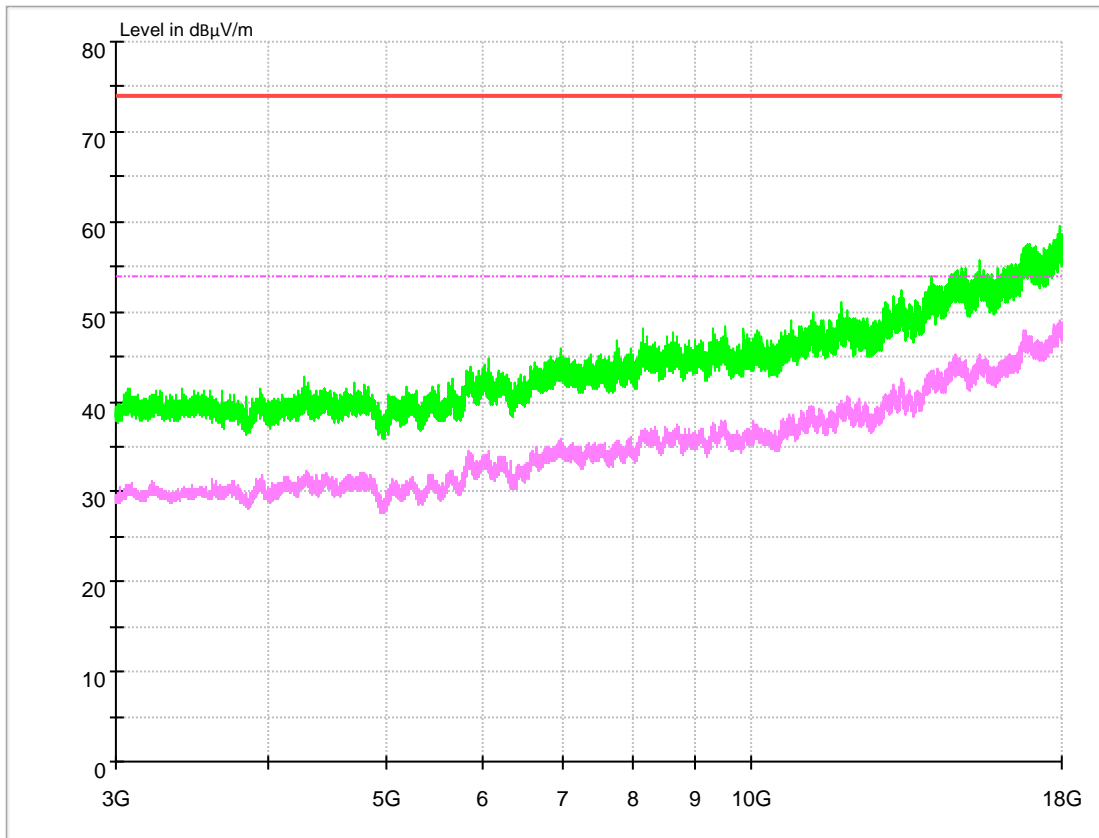

### Part 5: Testing Range of “18 GHz to 26.5 GHz”

- Note 1: The test results and plot for testing range of “18 GHz to 26.5 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “18 GHz to 26.5 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

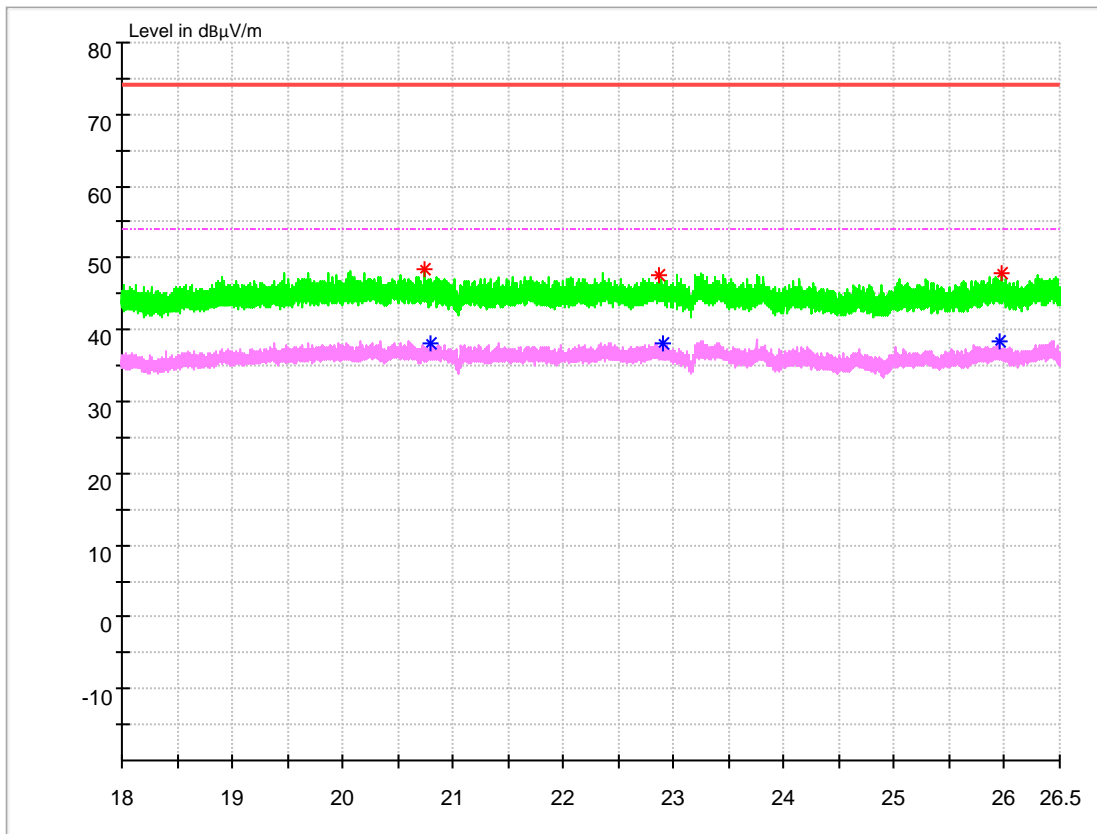

NOTE1: No peak found in the Test Range of “18 GHz to 26.5GHz”



# Appendix I: Conducted Emission at Power Port



## 1 Result Table


In this Appendix, only the test results and plots under the worst case can be reported.

EUT Conf.	Maximum Emissions	Verdict
TM1_DH5_Ch39	Not found obvious spikes or see marked spikes on plots and listed emissions records.	Pass



2 Result Plot

# Channel 39

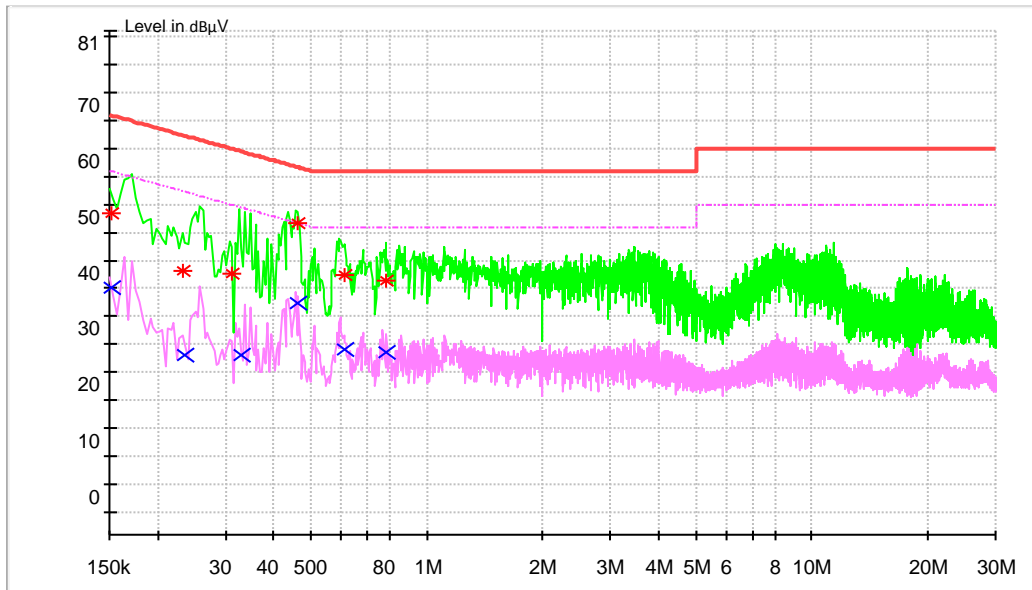

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB µ V)	Limit (dB µ V)	Transd. (dB)	Margin (dB)	Line	PE
0.150877	48.39	65.95	9.7	17.56	N	FLO
0.232637	38.09	62.36	9.7	24.27	N	FLO
0.311228	37.70	59.94	9.7	22.24	N	FLO
0.461780	46.58	56.66	9.7	10.08	L1	FLO
0.611016	37.48	56.00	9.7	18.52	N	FLO
0.781477	36.48	56.00	9.7	19.52	N	FLO

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB µ V)	Limit (dB µ V)	Transd. (dB)	Margin (dB)	Line	PE
0.150875	35.16	55.95	9.7	20.79	N	FLO
0.234352	23.19	52.29	9.7	29.10	N	FLO
0.329828	23.09	49.46	9.7	26.37	N	FLO
0.463933	32.27	46.62	9.7	14.35	L1	FLO
0.612519	24.07	46.00	9.7	21.93	N	FLO
0.782692	23.54	46.00	9.7	22.46	N	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END