



中国认可  
国际互认  
检测  
TESTING  
CNAS L0310



## FCC SAR Compliance Test Report

**Product Name:** Smart Phone

**Model:** POT-LX3

**Report No.:** SYBH(Z-SAR) 20180917016002-2

**FCC ID:** QISPOT-LX3

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Zhang Chao</i>
DATE	2018-11-03	2018-11-03

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C  
Tel: +86 755 28780808 Fax: +86 755 89652518

※ ※ **Notice** ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03
3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
5. The test report is invalid if there is any evidence of erasure and/or falsification.
6. The test report is only valid for the test samples.
7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory

## Table of Contents

1	General Information.....	6
1.1	Statement of Compliance .....	6
1.2	RF exposure limits .....	7
1.3	EUT Description .....	8
1.3.1	General Description .....	10
1.4	Test specification(s).....	11
1.5	Testing laboratory .....	11
1.6	Applicant and Manufacturer .....	11
1.7	Application details .....	11
1.8	Ambient Condition.....	11
2	SAR Measurement System .....	12
2.1	SAR Measurement Set-up .....	12
2.2	Test environment .....	13
2.3	Data Acquisition Electronics description.....	13
2.4	Probe description .....	14
2.5	Phantom description .....	15
2.6	Device holder description .....	16
2.7	Test Equipment List .....	17
3	SAR Measurement Procedure .....	19
3.1	Scanning procedure.....	19
3.2	Spatial Peak SAR Evaluation .....	20
3.3	Data Storage and Evaluation.....	21
4	System Verification Procedure .....	23
4.1	Tissue Verification.....	23
4.2	System Check .....	26
4.3	System check Procedure .....	27
5	SAR measurement variability and uncertainty .....	28
5.1	SAR measurement variability .....	28
5.2	SAR measurement uncertainty .....	28
6	SAR Test Configuration .....	29
6.1	Test Positions Configuration .....	29
6.1.1	General considerations .....	29
6.1.2	Head Exposure Condition .....	29
6.1.3	Body-worn Exposure Condition .....	30
6.1.4	Hotspot Exposure Condition .....	30
6.1.5	Product Specific 10-g SAR Exposure Condition .....	31
6.2	3G SAR Test Reduction Procedure .....	31
6.3	GSM Test Configuration .....	31
6.4	UMTS Test Configuration .....	32
6.5	LTE Test Configuration .....	37
6.6	WiFi Test Configuration .....	39
6.6.1	Initial Test Position Procedure .....	39
6.6.2	Initial Test Configuration Procedure .....	39
6.6.3	Sub Test Configuration Procedure .....	39
6.6.4	WiFi 2.4G SAR Test Procedures .....	40
6.6.5	OFDM Transmission Mode SAR Test Channel Selection Requirements .....	40
6.7	Dynamic antenna switching Test Configurations.....	41
6.8	Power Reduction Specification .....	42
6.8.1	Power reduction triggered by specific use conditions.....	42
7	SAR Measurement Results .....	44
7.1	Conducted power measurements .....	44
7.1.1	Conducted power measurements of GSM850 (Second Antenna) .....	45
7.1.2	Conducted power measurements of GSM850 (Main Antenna).....	46
7.1.3	Conducted power measurements of GSM1900 (Second Antenna) .....	47
7.1.4	Conducted power measurements of GSM1900 (Main Antenna).....	48
7.1.5	Conducted power measurements of UMTS Band II (Second Antenna).....	49
7.1.6	Conducted power measurements of UMTS Band II (Main Antenna) .....	50
7.1.7	Conducted power measurements of UMTS Band IV (Second Antenna) .....	52
7.1.8	Conducted power measurements of UMTS Band IV (Main Antenna) .....	53

---

7.1.9	Conducted power measurements of UMTS Band V (Second Antenna) .....	55
7.1.10	Conducted power measurements of UMTS Band V (Main Antenna).....	57
7.1.11	Conducted power measurements of LTE Band 2 (Main Antenna).....	58
7.1.12	Conducted power measurements of LTE Band 4 (Main Antenna).....	70
7.1.13	Conducted power measurements of LTE Band 5 (Second Antenna) .....	82
7.1.14	Conducted power measurements of LTE Band 5 (Main Antenna).....	86
7.1.15	Conducted power measurements of LTE Band 7 (Main Antenna).....	88
7.1.16	Conducted power measurements of WiFi 2.4G.....	96
7.1.17	Conducted power measurements of BT .....	97
7.2	SAR measurement Results .....	98
7.2.1	SAR measurement Result of GSM850.....	100
7.2.2	SAR measurement Result of GSM1900 .....	102
7.2.3	SAR measurement Result of UMTS Band II .....	105
7.2.4	SAR measurement Result of UMTS Band IV .....	108
7.2.5	SAR measurement Result of UMTS Band V .....	112
7.2.6	SAR measurement Result of LTE Band 2 .....	115
7.2.7	SAR measurement Result of LTE Band 4 .....	118
7.2.8	SAR measurement Result of LTE Band 5 .....	121
7.2.9	SAR measurement Result of LTE Band 7 .....	124
7.2.10	SAR measurement Result of WiFi 2.4G .....	127
7.3	Multiple Transmitter Evaluation .....	129
7.3.1	Stand-alone SAR test exclusion .....	130
7.3.2	Simultaneous Transmission Possibilities.....	131
7.3.3	SAR Summation Scenario .....	132
7.3.4	Simultaneous Transmission Conclusion.....	133
	Appendix A. System Check Plots.....	134
	Appendix B. SAR Measurement Plots.....	134
	Appendix C. Calibration Certificate .....	134
	Appendix D. Photo documentation.....	134

※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2018-11-03	Zhang Chao

## 1 General Information

### 1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for POT-LX3 are as below Table 1.

Band	Max Reported SAR(W/kg)		
	1-g Head	1-g Body-worn (15mm) *	1-g Hotspot (10mm)
<b>GSM850</b>	<b>0.56</b>	0.22	0.59
<b>GSM1900</b>	0.44	0.26	0.28
<b>UMTS Band II</b>	0.46	0.26	0.35
<b>UMTS Band IV</b>	0.38	0.36	0.37
<b>UMTS Band V</b>	0.53	<b>0.48</b>	0.51
<b>LTE Band 2</b>	0.21	0.31	0.35
<b>LTE Band 4</b>	0.20	0.33	0.37
<b>LTE Band 5</b>	0.54	0.41	<b>0.64</b>
<b>LTE Band 7</b>	0.21	0.28	0.31
<b>WiFi 2.4G</b>	0.15	0.25	0.31
<b>BT</b>	/	/	/

**The highest reported SAR for Head, Body Worn, Hotspot and Simultaneous transmission exposure conditions are 0.56 W/kg, 0.48 W/kg, 0.64 W/kg and 0.95 W/kg per KDB690783 D01.**

Table 1:Summary of test result

Note:

1)\* For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

## 1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain/Body/Arms/Legs)	<b>1.60 W/kg</b>	8.00 W/kg
<b>Spatial Average SAR**</b> (Whole Body)	0.08 W/kg	0.40 W/kg
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

**Notes:**

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation

### 1.3 EUT Description

Device Information:			
Product Name:	Smart Phone		
Model:	POT-LX3		
FCC ID :	QISPORT-LX3		
SN:	1#:KBT0118915000055 2#:KBT0118915000211 3#:KBT0118915000184 4#:KBT0118915000226 5#:KBT0118915000163 6#:KBT0118915000275 7#:KBT0118915000260 8#:KBT0118915000091		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	HL3POTM		
Software Version :	5.0.1.50M(SP3C900E61R1P9log)		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band II/IV/V, LTE Band 2/4/5/7, WiFi 2.4G, BT		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK), LTE(QPSK/16QAM),WiFi(DSSS/OFDM),BT(GFSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band II	1850-1910	1930-1990
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band V	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	BT	2400-2483.5	
	WiFi 2.4G	2400-2472	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band II)		

	3, tested with power control "all 1"(UMTS Band IV)
	3, tested with power control "all 1"(UMTS Band V)
	3, tested with power control all Max.(LTE Band 2)
	3, tested with power control all Max.(LTE Band 4)
	3, tested with power control all Max.(LTE Band 5)
	3, tested with power control all Max.(LTE Band 7)
Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	9262-9400-9538(UMTS Band II)
	1312-1413-1513(UMTS Band IV)
	4132-4182-4233(UMTS Band V)
	18607-18900-19193(LTE Band 2 BW=1.4MHz)
	18615-18900-19185(LTE Band 2 BW=3MHz)
	18625-18900-19175(LTE Band 2 BW=5MHz)
	18650-18900-19150(LTE Band 2 BW=10MHz)
	18675-18900-19125(LTE Band 2 BW=15MHz)
	18700-18900-19100(LTE Band 2 BW=20MHz)
	19957-20175-20393(LTE Band 4 BW=1.4MHz)
	19965-20175-20385(LTE Band 4 BW=3MHz)
	19975-20175-20375(LTE Band 4 BW=5MHz)
	20000-20175-20350(LTE Band 4 BW=10MHz)
	20025-20175-20325(LTE Band 4 BW=15MHz)
	20050-20175-20300(LTE Band 4 BW=20MHz)
	20407-20525-20643(LTE Band 5 BW=1.4MHz)
	20415-20525-20635(LTE Band 5 BW=3MHz)
	20425-20525-20625(LTE Band 5 BW=5MHz)
	20450-20525-20600(LTE Band 5 BW=10MHz)
	20775-21100-21425(LTE Band 7 BW=5MHz)
	20800-21100-21400(LTE Band 7 BW=10MHz)
	20825-21100-21375(LTE Band 7 BW=15MHz)
	20850-21100-21350(LTE Band 7 BW=20MHz)
	802.11b:1-6-11(WiFi 2.4G)
	802.11g/n 20M:1-2-6-10-11 (WiFi 2.4G)
	802.11n 40M:3-4-6-8-9 (WiFi 2.4G)
	BT :0-19-39-78

Table 3:Device information and operating configuration

### 1.3.1 General Description

POT-LX3 is subscriber equipment in the GSM/WCDMA/LTE system. The GSM frequency band includes GSM850, GSM900, DCS1800 and PCS1900. The UMTS frequency band is band VIII, band I, band V, band IV and Band II. The LTE frequency band is band 2 band 4, band 5, band 7 and band 28. But only GSM850 and GSM1900, UMTS frequency band II, band IV and band V, LTE frequency band 2, band 4, band 5 and band 7 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides one micro SD card interface, earphone port (to provide voice service) and one and two SIM card interface. POT-LX3 is dual and single SIM smart phone. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

#### Battery information:

Name	Manufacturer/trademark	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd. (Manufacturer: SCUD)	Battery Model: HB396286ECW Rated capacity: 3320mAh Nominal: Voltage: <del>—</del> +3.82V Charging: Voltage: <del>—</del> +4.40V
	Huawei Technologies Co., Ltd. (Manufacturer: Desay)	
	Huawei Technologies Co., Ltd. (Manufacturer: SWD)	
	Huawei Technologies Co., Ltd. (Manufacturer: NVT)	

#### 1.4 Test specification(s)

ANSI C95.1:1992 /IEEE C95.1:1991	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05
KDB941225 D06	Hotspot SAR v02r01
KDB447498 D01	General RF Exposure Guidance v06
KDB648474 D04	Handsets SAR v01r03
KDB248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	RF Exposure Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03

#### 1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	NO.2 New City Avenue Songshan Lake Sci. & Tech. Industry Park, Dongguan, Guangdong, P.R.C
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT # 2174.01 & 2174.02 & 2174.03

#### 1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

#### 1.7 Application details


Start Date of test	2018-10-23
End Date of test	2018-10-31

#### 1.8 Ambient Condition

Ambient temperature	18°C – 25°C
Relative Humidity	30% – 70%

## 2 SAR Measurement System

### 2.1 SAR Measurement Set-up

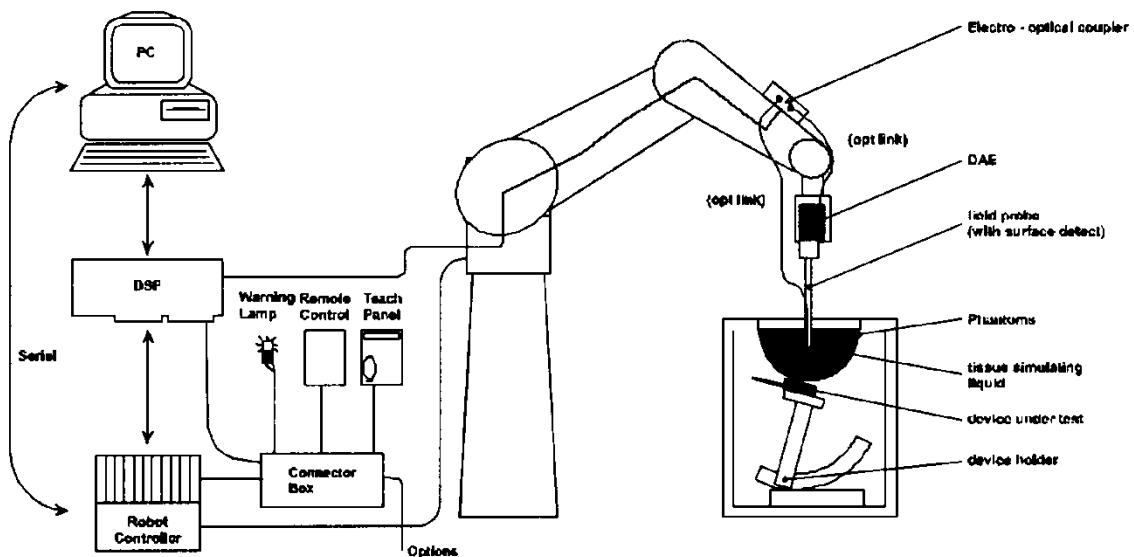

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
- The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

## 2.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m<sup>3</sup>, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m<sup>2</sup> array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment. The system allows the measurement of SAR values larger than 0.005 mW/g.

## 2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

## 2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor ( $\pm 2$  dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)	
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)	
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB(noise:typically<1 $\mu$ W/g)	
Dimensions	Overall length: 337 mm (Tip:20 mm) Tip diameter:2.5 mm (Body:12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario(e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


## 2.5 Phantom description

### SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

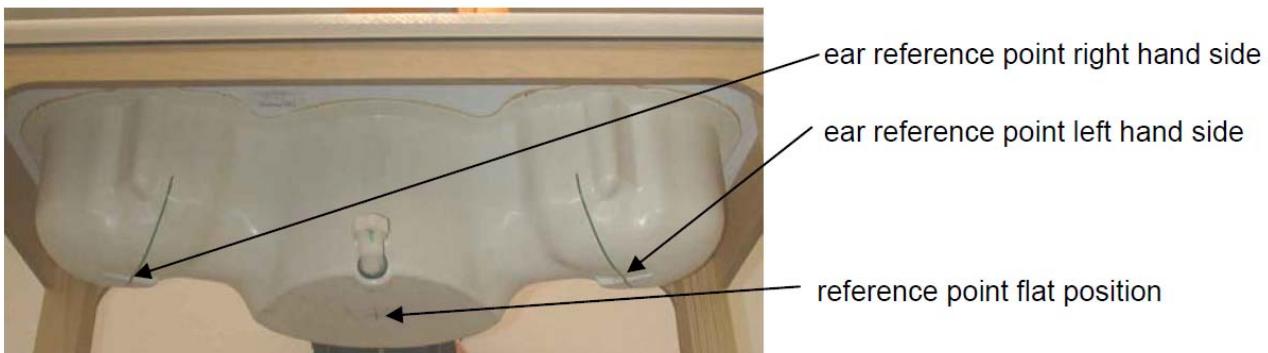

### ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity  $2 \leq \epsilon_r \leq 5$  at  $\leq 3$  GHz,  $3 \leq \epsilon_r \leq 4$  at  $> 3$  GHz and a loss tangent  $\leq 0.05$ .

### Modular Triple Flat Phantom

Shell Thickness (bottom plate)	2mm±0.2mm		
Filling Volume (Module)	approx. 8.1 liters (filling height: 155 mm)		
Dimensions	Length: 292 mm Width: 178 mm Height: 178 mm Useable area: 280 × 175 mm		
Measurement Areas	Flat phantom		
The Modular Flat Phantom consists of three identical modules that can be installed and removed separately without emptying the liquid. It is used for compliance testing of small wireless devices in body-worn configurations according to IEC 62209-2, etc.			

### 2.6 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\sigma = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of  $\pm 1^\circ$  in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

## 2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3071	2017-12-18	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2018-09-27	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2018-04-27	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	7505	2018-06-12	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	7381	2018-09-28	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d059	2016-04-20	Three years
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d126	2018-07-24	Three years
<input checked="" type="checkbox"/>	SPEAG	1750 MHz Dipole	D1750V2	1123	2017-07-27	Three years
<input checked="" type="checkbox"/>	SPEAG	1750 MHz Dipole	D1750V2	1145	2016-02-02	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d091	2018-09-19	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2017-11-15	Three years
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2018-07-26	Three years
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1032	2018-09-17	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	851	2018-07-18	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1492	2018-05-29	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1554	2018-06-05	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1235	2017-11-16	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	1474	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM3	1597	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM4	1620	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM6	1892	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM7	1894	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM9	1958	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2018-06-02	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	126855	2018-05-08	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	158850	2018-05-08	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	116265	2018-03-05	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	165424	2018-07-07	One year
<input checked="" type="checkbox"/>	Anritsu	Spectrum Analyzer	MS2690A	6261767335	2018-03-15	One year
<input checked="" type="checkbox"/>	Keysight	Signal Generator	N5181A	MY50145341	2017-12-08	One year
<input checked="" type="checkbox"/>	Anritsu	Radio Communication Analyser	MT8821C	6201735100	2018-03-15	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46107368	2018-10-15	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Keysight	Signal Generator	E8257D	MY56440071	2017-12-25	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	SHX	Dual Directional Coupler	DDTO-4-20	17121801	2018-01-02	One year
<input checked="" type="checkbox"/>	Agilent	Dual Directional Coupler	772D	MY52180173	2018-01-08	One year
<input checked="" type="checkbox"/>	Keysight	Power Meter	E4417A	MY57160005	2018-03-15	One year
<input checked="" type="checkbox"/>	Keysight	Power Meter	E9321A	MY57150002	2018-03-15	One year

<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	106288	2018-07-17	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	100740	2018-07-17	One year

Note:

- 1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
  - a) There is no physical damage on the dipole;
  - b) System check with specific dipole is within 10% of calibrated value;
  - c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
  - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within  $5\Omega$  from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

### 3 SAR Measurement Procedure

#### 3.1 Scanning procedure

The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- For power drift measurement, DASY software supports that the reference position can be either the selected section’s grid reference point or a user point. If the E-field of power reference measurement in the default grid reference point is very small, the test lab may set the reference position to the user point near the hotspot location to avoid large measurement uncertainty.
- The “surface check” measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension(2-4 GHz) and 10mm in x- and y- dimension(4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.  
Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}} = \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$ ,  $2\text{-}4\text{GHz} - \leq 5\text{ mm}$  and  $4\text{-}6\text{GHz} - \leq 4\text{mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$ ,  $3\text{-}4\text{GHz} - \leq 4\text{mm}$  and  $4\text{-}6\text{GHz} - \leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ( $\Delta x_{area}, \Delta y_{area}$ )	Maximun Zoom Scan spatial resolution ( $\Delta x_{Zoom}, \Delta y_{Zoom}$ )	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^*\Delta z_{Zoom}(n-1)$	$\geq 30\text{mm}$
$2\text{-}3\text{GHz}$	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^*\Delta z_{Zoom}(n-1)$	$\geq 30\text{mm}$
$3\text{-}4\text{GHz}$	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5^*\Delta z_{Zoom}(n-1)$	$\geq 28\text{mm}$
$4\text{-}5\text{GHz}$	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5^*\Delta z_{Zoom}(n-1)$	$\geq 25\text{mm}$
$5\text{-}6\text{GHz}$	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5^*\Delta z_{Zoom}(n-1)$	$\geq 22\text{mm}$

### 3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of  $5 \times 5 \times 7$  points( with 8mm horizontal resolution) or  $7 \times 7 \times 7$  points( with 5mm horizontal resolution) or  $8 \times 8 \times 7$  points( with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points ( $20 \times 20 \times 20$ ) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

### 3.3 Data Storage and Evaluation

#### Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcp <sub>i</sub>
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with     $V_i$         = compensated signal of channel i    ( $i = x, y, z$ )  
       $U_i$         = input signal of channel i                  ( $i = x, y, z$ )  
      cf            = crest factor of exciting field (DASY parameter)  
      dcp<sub>i</sub>        = diode compression point              (DASY parameter)

From the compensated input signals the primary field data for each channel can be

evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$   
 H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with	$V_i$	= compensated signal of channel i	$(i = x, y, z)$
	$Norm_i$	= sensor sensitivity of channel i	$(i = x, y, z)$
		[mV/(V/m) <sup>2</sup> ] for E-field Probes	
	ConvF	= sensitivity enhancement in solution	
	$a_{ij}$	= sensor sensitivity factors for H-field probes	
	$f$	= carrier frequency [GHz]	
	$E_i$	= electric field strength of channel i in V/m	
	$H_i$	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with	SAR	= local specific absorption rate in mW/g
	$E_{tot}$	= total field strength in V/m
	$\sigma$	= conductivity in [mho/m] or [Siemens/m]
	$\rho$	= equivalent tissue density in g/cm <sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with	$P_{pwe}$	= equivalent power density of a plane wave in mW/cm <sup>2</sup>
	$E_{tot}$	= total electric field strength in V/m
	$H_{tot}$	= total magnetic field strength in A/m

## 4 System Verification Procedure

### 4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue				
Frequency Band (MHz)	750	<b>835</b>	1750	<b>1900</b>	<b>2450</b>
Water	39.2	41.45	52.64	55.242	62.7
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5
Sugar	57.0	56.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8
Ingredients (% of weight)	Body Tissue				
Frequency Band (MHz)	750	<b>835</b>	1750	<b>1900</b>	<b>2450</b>
Water	50.3	52.4	69.91	69.91	73.2
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04
Sugar	47.0	45.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized,  $16M\Omega\cdot$  resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

#### Simulating Head Liquid (HBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Esters,Emulsifiers,Inhibitors	10-30%
Sodium salt	8-25%

#### Simulating Body Liquid (MBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters,Emulsifiers,Inhibitors	20-40%
Sodium salt	0-1.5%

Tissue Type	Target Frequency	Target Tissue		Measured Tissue		Deviation (Within +/-5% )		Liquid Temp.	Test Date
		Permit-tivity	Conduc-tivity [S/m]	Permit-tivity	Conduc-tivity [S/m]	$\Delta\epsilon_r$	$\Delta\sigma$		
835MHz Head	825	41.60	0.90	41.34	0.877	-0.62%	-2.60%	22.4°C	2018-10-28
	835	41.50	0.90	41.32	0.881	-0.43%	-2.13%		
	850	41.50	0.92	41.27	0.886	-0.55%	-3.73%		
1750MHz Head	1710	40.10	1.35	41.52	1.287	3.54%	-4.67%	21.5°C	2018-10-23
	1730	40.10	1.36	41.50	1.296	3.49%	-4.71%		
	1750	40.10	1.37	41.49	1.307	3.47%	-4.60%		
	1800	40.00	1.40	41.46	1.338	3.65%	-4.43%		
1900MHz Head	1850	40.00	1.40	38.99	1.431	-2.52%	2.21%	21.6°C	2018-10-26
	1880	40.00	1.40	38.92	1.448	-2.70%	3.43%		
	1900	40.00	1.40	38.88	1.459	-2.80%	4.21%		
	1910	40.00	1.40	38.87	1.464	-2.83%	4.57%		
2450MHz Head	2410	39.30	1.76	39.55	1.762	0.64%	0.11%	21.5°C	2018-10-30
	2435	39.20	1.79	39.52	1.782	0.82%	-0.45%		
	2450	39.20	1.80	39.51	1.792	0.79%	-0.44%		
	2460	39.20	1.81	39.49	1.801	0.74%	-0.50%		
2600MHz Head	2510	39.12	1.86	38.47	1.905	-1.66%	2.42%	21.5°C	2018-10-28
	2535	39.10	1.89	38.40	1.919	-1.79%	1.53%		
	2560	39.00	1.92	38.32	1.935	-1.74%	0.78%		
	2600	39.00	1.96	38.32	1.968	-1.74%	0.41%		
835MHz Body	825	55.20	0.97	52.82	0.984	-4.31%	1.43%	23.0°C	2018-10-26
	835	55.20	0.97	52.78	0.989	-4.38%	1.92%		
	850	55.20	0.99	52.72	0.995	-4.49%	0.46%		
835MHz Body	825	55.20	0.97	53.41	0.986	-3.24%	1.62%	22.3°C	2018-10-29
	835	55.20	0.97	53.38	0.990	-3.30%	2.05%		
	850	55.20	0.99	53.35	0.996	-3.35%	0.61%		
1750MHz Body	1710	53.50	1.46	51.25	1.497	-4.21%	2.53%	22.8°C	2018-10-25
	1730	53.50	1.48	51.13	1.504	-4.43%	1.62%		
	1750	53.40	1.49	51.37	1.510	-3.80%	1.34%		
	1800	53.30	1.52	51.43	1.558	-3.51%	2.50%		
1900MHz Body	1850	53.30	1.52	51.87	1.537	-2.68%	1.12%	22.6°C	2018-10-23
	1880	53.30	1.52	51.79	1.556	-2.83%	2.37%		
	1900	53.30	1.52	51.75	1.567	-2.91%	3.09%		
	1910	53.30	1.52	51.75	1.574	-2.91%	3.55%		
1900MHz Body	1850	53.30	1.52	53.34	1.528	0.08%	0.53%	22.0°C	2018-10-25
	1880	53.30	1.52	53.36	1.550	0.11%	1.97%		
	1900	53.30	1.52	53.25	1.571	-0.09%	3.36%		
	1910	53.30	1.52	53.18	1.581	-0.23%	4.01%		
2450MHz Body	2410	52.80	1.91	52.54	1.980	-0.49%	3.66%	22.8°C	2018-10-30
	2435	52.70	1.94	52.50	2.004	-0.38%	3.30%		
	2450	52.70	1.95	52.47	2.019	-0.44%	3.54%		
	2460	52.70	1.96	52.45	2.028	-0.47%	3.47%		

2600MHz Body	2510	52.62	2.03	52.17	2.081	-0.86%	2.51%	21.5°C	2018-10-26
	2535	52.59	2.07	52.15	2.107	-0.84%	1.79%		
	2560	52.57	2.09	52.13	2.132	-0.84%	2.01%		
	2600	52.50	2.16	52.07	2.175	-0.82%	0.69%		

Table 5:Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3 ) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

## 4.2 System Check


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).

System Check	Target SAR (Normalized to 1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10% )		Test Date	Dipole Information
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)	$\Delta$ 1-g	$\Delta$ 10-g		SN
835MHz Head	9.44	6.06	8.96	5.96	-5.08%	-1.65%	2018/10/28	4d126
1750MHz Head	36.10	19.10	33.36	18.04	-7.59%	-5.55%	2018/10/23	1145
1900MHz Head	40.40	21.30	41.20	21.20	1.98%	-0.47%	2018/10/26	5d091
2450MHz Head	51.20	23.90	50.80	24.24	-0.78%	1.42%	2018/10/30	860
2600MHz Head	56.60	25.50	60.00	26.96	6.01%	5.73%	2018/10/28	1021
835MHz Body	9.65	6.32	9.76	6.36	1.14%	0.63%	2018/10/26	4d126
835MHz Body	9.41	6.20	9.72	6.68	3.29%	7.74%	2018/10/29	4d059
1750MHz Body	36.40	19.40	36.48	19.64	0.22%	1.24%	2018/10/25	1123
1900MHz Body	40.40	21.10	39.88	20.44	-1.29%	-3.13%	2018/10/23	5d091
1900MHz Body	40.40	21.10	42.40	21.60	4.95%	2.37%	2018/10/25	5d091
2450MHz Body	50.10	23.50	51.60	23.72	2.99%	0.94%	2018/10/30	860
2600MHz Body	55.10	24.50	55.60	24.88	0.91%	1.55%	2018/10/26	1032

Table 6:System Check Results

### 4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SAM. It is fed with a power of 250 mW(below 3GHz) or 100mW(3-6GHz). To adjust this power, a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

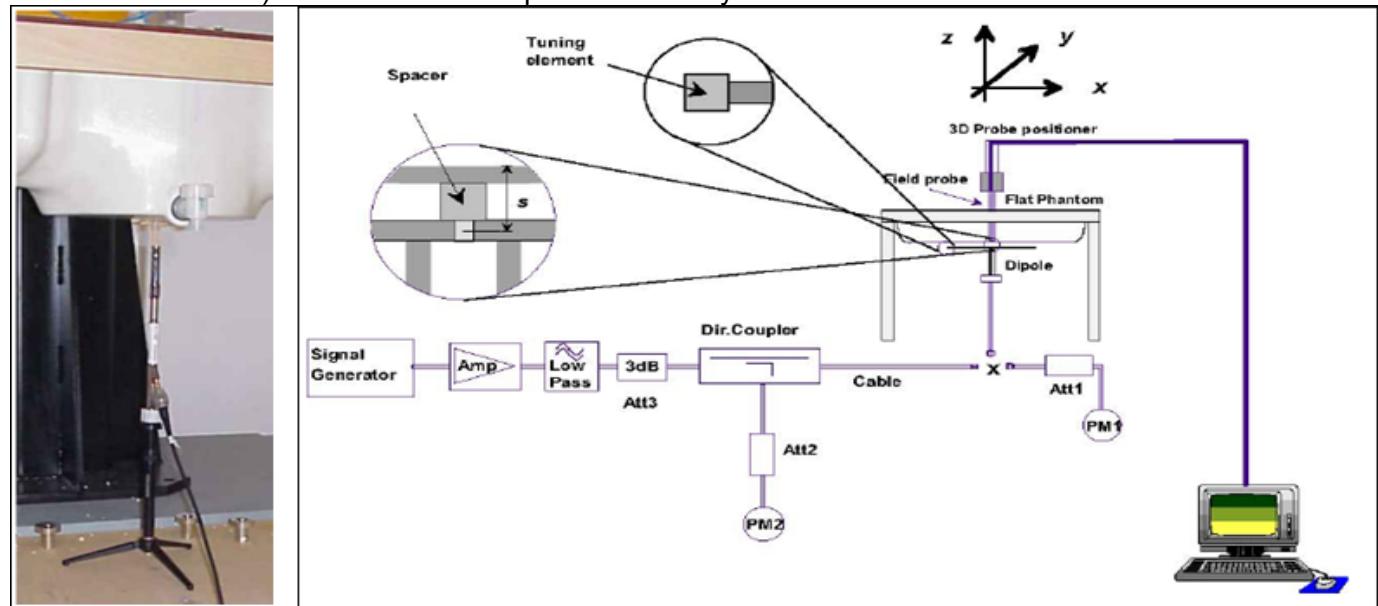

## 5 SAR measurement variability and uncertainty

### 5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

### 5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6 SAR Test Configuration

### 6.1 Test Positions Configuration

#### 6.1.1 General considerations

Per IEEE 1528-2013, two imaginary lines on the handset were established: the vertical centerline and the horizontal line (See Figure 1).

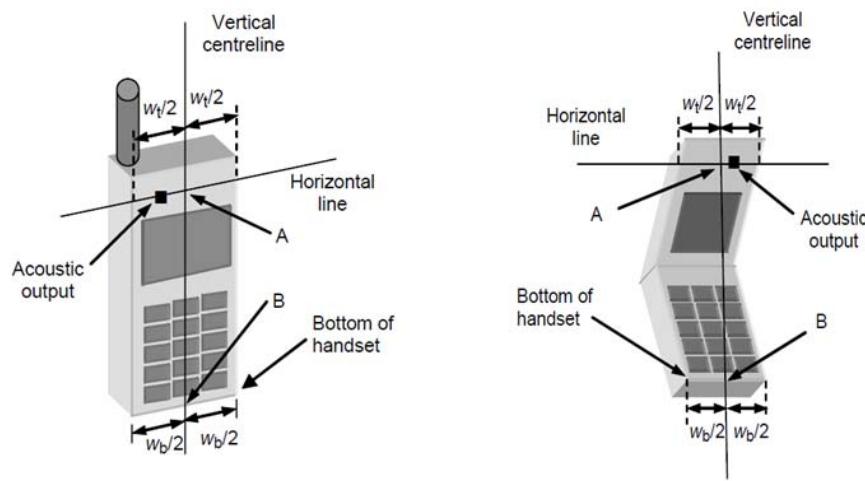


Figure 1 Hand Vertical Center & Horizontal Line Reference Points

#### 6.1.2 Head Exposure Condition

Per IEEE 1528-2013, Head SAR measurements were made in the “cheek” position (See Figure 2) and the “tilt” position (See Figure 3). The device should be tested in both positions on left and right sides of the SAM phantom.

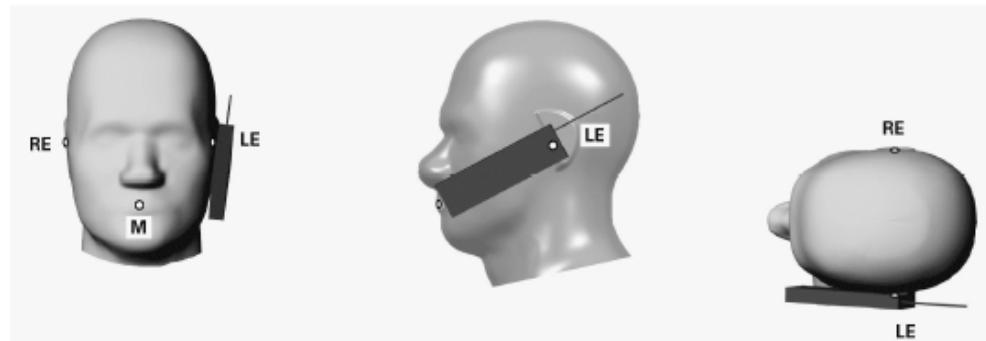


Figure 2 Front, Side and Top View of Cheek Position

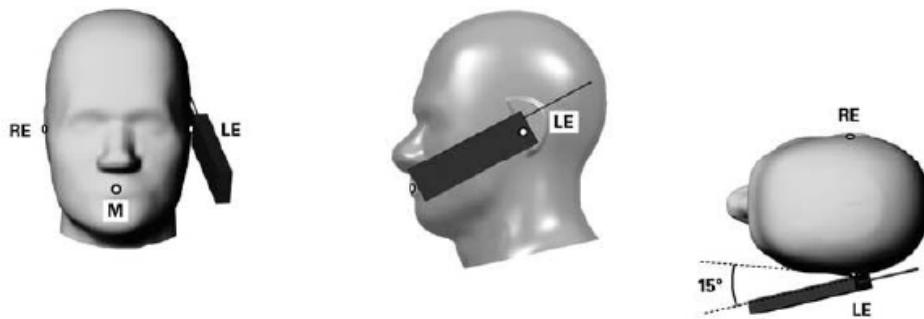


Figure 3 Front, Side and Top View of Tilt 15° Position

Note:

M Mouth reference point

LE Left ear reference point (ERP)

RE Right ear reference point(ERP)

### 6.1.3 Body-worn Exposure Condition

Body-worn operating configurations are tested with the holder attached to the device and positioned against a flat phantom with test separation distance of 15mm in a normal use configuration (See Figure 4). Per FCC KDB648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

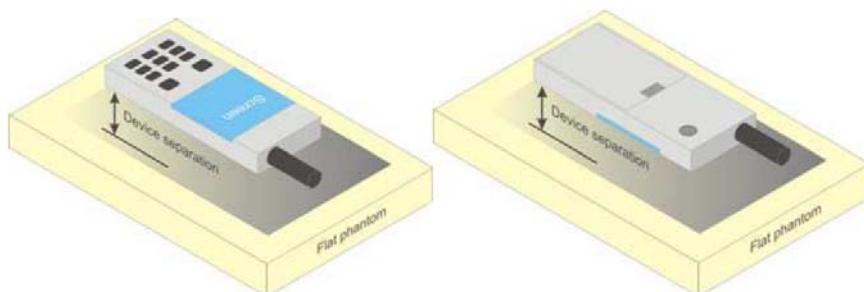


Figure 4 Test position for Body-Worn device

### 6.1.4 Hotspot Exposure Condition

Per FCC KDB 941225D06, the SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is > 9 cm x 5 cm, a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode. The SAR results are used to determine simultaneous transmission SAR test exclusion for hotspot mode; otherwise, simultaneous transmission SAR measurement is required.

### 6.1.5 Product Specific 10-g SAR Exposure Condition

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as “Phablet”.

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

### 6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

### 6.3 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8 PSK.

## 6.4 UMTS Test Configuration

### 1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

## 2) WCDMA

### a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

### b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

## 3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the below table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta ACK, \Delta NACK, \Delta CQI = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

Sub-test <sup>a</sup>	$\beta_c$ <sup>a</sup>	$\beta_d$ <sup>a</sup>	$\beta_d$ (SF) <sup>a</sup>	$\beta_c / \beta_d$ <sup>a</sup>	$\beta_{hs}$ (1) <sup>a</sup>	CM(dB)(2) <sup>a</sup>	MPR (dB) <sup>a</sup>
1 <sup>a</sup>	2/15 <sup>a</sup>	15/15 <sup>a</sup>	64 <sup>a</sup>	2/15 <sup>a</sup>	4/15 <sup>a</sup>	0.0 <sup>a</sup>	0 <sup>a</sup>
2 <sup>a</sup>	12/15(3) <sup>a</sup>	15/15(3) <sup>a</sup>	64 <sup>a</sup>	12/15(3) <sup>a</sup>	24/15 <sup>a</sup>	1.0 <sup>a</sup>	0 <sup>a</sup>
3 <sup>a</sup>	15/15 <sup>a</sup>	8/15 <sup>a</sup>	64 <sup>a</sup>	15/8 <sup>a</sup>	30/15 <sup>a</sup>	1.5 <sup>a</sup>	0.5 <sup>a</sup>
4 <sup>a</sup>	15/15 <sup>a</sup>	4/15 <sup>a</sup>	64 <sup>a</sup>	15/4 <sup>a</sup>	30/15 <sup>a</sup>	1.5 <sup>a</sup>	0.5 <sup>a</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI = 8       $A_{hs} = \beta_{hs}/\beta_c = 30/15$        $\beta_{hs} = 30/15 * \beta_c$ <sup>a</sup>

Note 2 : CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.<sup>a</sup>

Note 3 : For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ <sup>a</sup>

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8:settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600

16	15	1	27952	345600
----	----	---	-------	--------

Table 9:HSDPA UE category

#### 4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Device’ sections of 3G device.

Sub-test <sup>a</sup>	$\beta_c$ <sup>a</sup>	$\beta_d$ <sup>a</sup>	$\beta_d$ (SF) <sup>a</sup>	$\beta_c/\beta_d$ <sup>a</sup>	$\beta_{hs}$ <sup>(1)</sup> $\beta_c$ <sup>a</sup>	$\beta_{ec}$ <sup>a</sup>	$\beta_{ad}$ <sup>a</sup>	$\beta_e$ $\beta_c$ <sup>a</sup> (SF) <sup>a</sup>	$\beta_{ad}$ (code) <sup>a</sup>	CM <sup>(2)</sup> $\beta_c$ <sup>a</sup> (dB) <sup>a</sup>	MP R <sup>a</sup> (dB) <sup>a</sup>	AG <sup>(4)</sup> Inde x <sup>a</sup>	E-TFC I <sup>a</sup>
1 <sup>a</sup>	11/15 <sup>(3)</sup> <sup>a</sup>	15/15 <sup>(3)</sup> <sup>a</sup>	64 <sup>a</sup>	11/15 <sup>(3)</sup> <sup>a</sup>	22/15 <sup>a</sup>	209/22 5 <sup>a</sup>	1039/225 <sup>a</sup>	4 <sup>a</sup>	1 <sup>a</sup>	1.0 <sup>a</sup>	0.0 <sup>a</sup>	20 <sup>a</sup>	75 <sup>a</sup>
2 <sup>a</sup>	6/15 <sup>a</sup>	15/15 <sup>a</sup>	64 <sup>a</sup>	6/15 <sup>a</sup>	12/15 <sup>a</sup>	12/15 <sup>a</sup>	94/75 <sup>a</sup>	4 <sup>a</sup>	1 <sup>a</sup>	3.0 <sup>a</sup>	2.0 <sup>a</sup>	12 <sup>a</sup>	67 <sup>a</sup>
3 <sup>a</sup>	15/15 <sup>a</sup>	9/15 <sup>a</sup>	64 <sup>a</sup>	15/9 <sup>a</sup>	30/15 <sup>a</sup>	30/15 <sup>a</sup>	$\beta_{ad1}:47/1$ 5 <sup>a</sup> $\beta_{ad2}:47/1$ 5 <sup>a</sup>	4 <sup>a</sup>	2 <sup>a</sup>	2.0 <sup>a</sup>	1.0 <sup>a</sup>	15 <sup>a</sup>	92 <sup>a</sup>
4 <sup>a</sup>	2/15 <sup>a</sup>	15/15 <sup>a</sup>	64 <sup>a</sup>	2/15 <sup>a</sup>	4/15 <sup>a</sup>	2/15 <sup>a</sup>	56/75 <sup>a</sup>	4 <sup>a</sup>	1 <sup>a</sup>	3.0 <sup>a</sup>	2.0 <sup>a</sup>	17 <sup>a</sup>	71 <sup>a</sup>
5 <sup>a</sup>	15/15 <sup>(4)</sup> <sup>a</sup>	15/15 <sup>(4)</sup> <sup>a</sup>	64 <sup>a</sup>	15/15 <sup>(4)</sup> <sup>a</sup>	30/15 <sup>a</sup>	24/15 <sup>a</sup>	134/15 <sup>a</sup>	4 <sup>a</sup>	1 <sup>a</sup>	1.0 <sup>a</sup>	0.0 <sup>a</sup>	21 <sup>a</sup>	81 <sup>a</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI = 8       $A_{hs} = \beta_{hs}/\beta_c = 30/15$        $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3 : For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$

Note 4 : For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g

Note 6:  $\beta_{ad}$  can not be set directly; it is set by Absolute Grant Value.

Table 10:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
(No DPDCH)	4	8	10	2SF2&2SF 4	11484	5.76
	4	4	2		20000	2.00
(No DPDCH)	4	8	2	2SF2&2SF 4	22996	?
	4	4	10		20000	

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 11: HSUPA UE category

## 5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12:settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

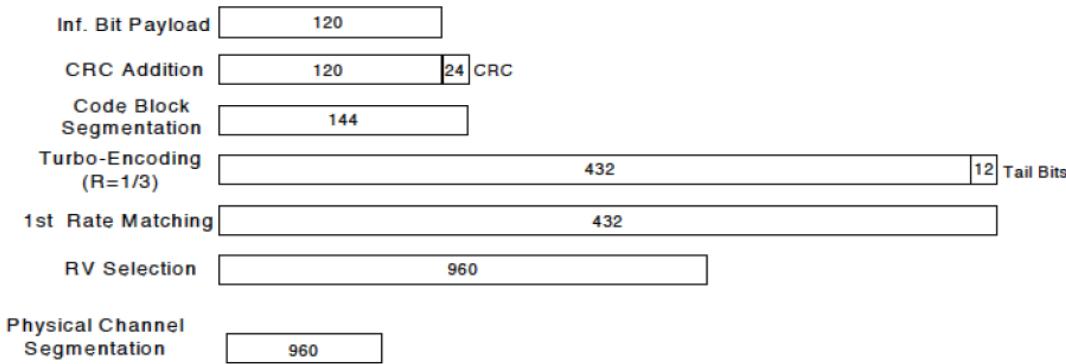


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>a</sup>	$\beta_c$ <sup>a</sup>	$\beta_d$ <sup>a</sup>	$\beta_d \cdot (SF)$ <sup>a</sup>	$\beta_c / \beta_d$ <sup>a</sup>	$\beta_{hs} (1)$ <sup>a</sup>	CM(dB)(2) <sup>a</sup>	MPR (dB) <sup>a</sup>
1 <sup>a</sup>	2/15 <sup>a</sup>	15/15 <sup>a</sup>	64 <sup>a</sup>	2/15 <sup>a</sup>	4/15 <sup>a</sup>	0.0 <sup>a</sup>	0 <sup>a</sup>
2 <sup>a</sup>	12/15(3) <sup>a</sup>	15/15(3) <sup>a</sup>	64 <sup>a</sup>	12/15(3) <sup>a</sup>	24/15 <sup>a</sup>	1.0 <sup>a</sup>	0 <sup>a</sup>
3 <sup>a</sup>	15/15 <sup>a</sup>	8/15 <sup>a</sup>	64 <sup>a</sup>	15/8 <sup>a</sup>	30/15 <sup>a</sup>	1.5 <sup>a</sup>	0.5 <sup>a</sup>
4 <sup>a</sup>	15/15 <sup>a</sup>	4/15 <sup>a</sup>	64 <sup>a</sup>	15/4 <sup>a</sup>	30/15 <sup>a</sup>	1.5 <sup>a</sup>	0.5 <sup>a</sup>

Note1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI=8       $A_{hs} = \beta_{hs} / \beta_c = 30/15$        $\beta_{hs} = 30/15 * \beta_c$   
 Note 2 : CM=1 for  $\beta_c / \beta_d = 12/15$ ,  $\beta_{hs} / \beta_c = 24/15$ . For all other combinations of DPDCH,DPCCCH and HS-DPCCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.  
 Note 3 : For subtest 2 the  $\beta_c / \beta_d$  ratio of 12/15 for the TFC during the measurement period(TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

## 6.5 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

### 1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

### 3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS\_01" on the base station simulator.

## 4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

### i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

### ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are  $\leq 0.8 \text{ W/kg}$ . Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45 \text{ W/kg}$ , the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2} \text{ dB}$  higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45 \text{ W/kg}$ .

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2} \text{ dB}$  higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45 \text{ W/kg}$ .

## 6.6 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227D01v02 are applied. (Refer to KDB 248227D01 for more details)

### 6.6.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated(peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4\text{W/kg}$ , no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8\text{W/kg}$  or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is  $> 0.8 \text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.

### 6.6.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is  $> 0.8 \text{ W/kg}$ , SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.

### 6.6.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR is not required for that subsequent test configuration.

#### 6.6.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

##### A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1 of KDB 248227D01) for the exposure configuration is  $\leq 0.8 \text{ W/kg}$ , no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the *reported* SAR is  $> 0.8 \text{ W/kg}$ , SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2 \text{ W/kg}$ , SAR is required for the third channel; i.e., all channels require testing.

##### B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of KDB 248227D01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ .

#### 6.6.5 OFDM Transmission Mode SAR Test Channel Selection Requirements

For 2.4 GHz bands, When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11g and 802.11n with the same channel bandwidth, modulation, and data rate, etc), the lower order 802.11 mode (i.e., 802.11g is chosen over 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channel, either according to the default or additional power measurement requirement, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

## 6.7 Dynamic antenna switching Test Configurations

The device supports the dynamic antenna switching function to optimize transmission efficiency for wide range frequency operations. It has two 2G/3G/4G Tx antennas (Main Antenna and Secondary Antenna). It can transmit from either Main Antenna or Secondary Antenna. The Main Antenna and Second Antenna can not transmit simultaneously.

### SAR test procedure for dynamic antenna switching is as below:

The Main Antenna and Second Antenna are set to the MAX transmit power level respectively and test the SAR respectively in all applicable RF exposure conditions. Some commands or test scripts are supplied to fix the operation state so that only one TX antenna is chosen and tested at a time. All independent antennas are completely covered by the appropriate SAR measurements.

Note: main antenna (Ant1) and Secondary antenna (Ant 2) can't transmit simultaneously which will be chosen based on the RSSI. Only one antenna can be used for 2G/3G/4G transmission at a time. Secondary antenna's Bands: GSM850/1900, WCDMA Band II/IV/V, LTE B5

## 6.8 Power Reduction Specification

### 6.8.1 Power reduction triggered by specific use conditions

This device uses the following power reduction features to reduce the transmit power and ensure SAR compliance. These power reduction features are implemented using a single fixed level of reduction through static table look-up for some wireless operating modes or frequency bands and triggered by a single event or operation. The published RF exposure KDB procedures are applicable to the specific implementation and applied for testing. So PAG is not required for these features.

- a) This device uses the receiver to indicate whether the user is making a voice call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism.
- b) A fixed level power reduction is applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.

The following tables summarize the key power reduction information triggered by specific use conditions. The detailed full power and reduced conducted power measurement results are provided in Section 7 of this report:

Band	Power Reduction Level Amount (dB)			
	Second Antenna			
	Receiver on(Head)		Receiver off(Body)	
	Hotspot on	Hotspot off	Hotspot on	Hotspot off (Full power)
GSM850	2.5	2.5	0	0
GSM1900	3.0	0	3.0	0
UMTS Band II	3.0	0	3.0	0
UMTS Band IV	3.0	0	3.0	0
UMTS Band V	6.5	3.5	3.0	0
LTE Band 5	2.5	2.5	0	0

Band	Power Reduction Level Amount (dB)			
	Main Antenna			
	Receiver off(Body)		Receiver on(Head)	
	Hotspot on	Hotspot off	Hotspot on	Hotspot off (Full power)
GSM1900	3.0	0	3.0	0
UMTS Band II	3.7	0.7	3.0	0
UMTS Band IV	3.5	0.5	3.0	0
LTE Band 2	4.0	1.0	3.0	0
LTE Band 4	4.0	1.0	3.0	0
LTE Band 7	4.8	1.8	3.0	0

Mode	Power Reduction Level Amount (dB)	
	WiFi Antenna	
	Receiver off(Body)	Receiver on(Head)
802.11b	0	8.0
802.11g	0	7.0
802.11n	0	5.0

The SAR test plan is as below:

- a) For 2G/3G/4G bands supporting the receiver detection mechanism, standalone Head SAR should be evaluated with Receiver on. In the LTE and UMTS VOIP test mode, as the audio Receiver only works in voice mode when the user is making a call in head scenario, and the lack of the third-party VOIP server and the unstandardized VOIP operating characteristics, so the test script is used to trigger the Receiver on during the test. The test scripts function is only used to trigger audio Receiver on and simulate voice and VOIP usage scene. It can be ensured that the unmodified settings in production units, including maximum output power, amplifier gain and other RF performance or tuning parameters, are used for SAR measurement. Standalone Body SAR should be evaluated with Receiver off.
- b) For WiFi Antenna, standalone Head SAR should be evaluated with reduced power levels according to the real usage scenarios. Body SAR is tested at the maximum output power level.

## 7 SAR Measurement Results

### 7.1 Conducted power measurements

For the measurements a Radio Communication Tester was used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: Radio Communication Tester measures GSM peak and average output power for active timeslots.

For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore, one coding scheme per mode was selected for conducted power measurements.

A Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

### 7.1.1 Conducted power measurements of GSM850 (Second Antenna)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up Max.	128CH	190CH	251CH		Tune-up Max.	128CH	190CH	251CH
GSM (CS)		33.70	32.78	<b>32.82</b>	32.71	-9.19	24.51	23.59	23.63	23.52
GPRS (GMSK)	1 Tx Slot	33.70	32.78	32.81	32.71	-9.19	24.51	23.59	23.62	23.52
	2 Tx Slots	30.70	29.74	<b>29.80</b>	29.74	-6.13	24.57	23.61	23.67	23.61
	3 Tx Slots	28.90	27.85	27.90	27.86	-4.42	24.48	23.43	23.48	23.44
	4 Tx Slots	27.70	26.68	26.76	26.71	-3.18	24.52	23.50	23.58	23.53
EDGE (GMSK)	1 Tx Slot	33.70	32.74	32.79	32.69	-9.19	24.51	23.55	23.60	23.50
	2 Tx Slots	30.70	29.73	29.79	29.73	-6.13	24.57	23.60	23.66	23.60
	3 Tx Slots	28.90	27.84	27.90	27.87	-4.42	24.48	23.42	23.48	23.45
	4 Tx Slots	27.70	26.69	26.75	26.71	-3.18	24.52	23.51	23.57	23.53
EDGE (8PSK)	1 Tx Slot	27.50	26.05	26.26	26.30	-9.19	18.31	16.86	17.07	17.11
	2 Tx Slots	24.50	23.03	23.20	23.18	-6.13	18.37	16.90	17.07	17.05
	3 Tx Slots	22.70	21.31	21.47	21.50	-4.42	18.28	16.89	17.05	17.08
	4 Tx Slots	21.50	20.07	20.25	20.27	-3.18	18.32	16.89	17.07	17.09

Table 13:Conducted power measurement results of GSM850(Full Power)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up Max.	128CH	190CH	251CH		Tune-up Max.	128CH	190CH	251CH
GSM (CS)		31.20	30.27	<b>30.32</b>	30.27	-9.19	22.01	21.08	21.13	21.08
GPRS (GMSK)	1 Tx Slot	31.20	30.26	30.32	30.27	-9.19	22.01	21.07	21.13	21.08
	2 Tx Slots	28.20	27.15	27.21	27.18	-6.13	22.07	21.02	21.08	21.05
	3 Tx Slots	26.40	25.37	25.44	25.39	-4.42	21.98	20.95	21.02	20.97
	4 Tx Slots	25.20	24.18	24.25	24.18	-3.18	22.02	21.00	21.07	21.00
EDGE (GMSK)	1 Tx Slot	31.20	30.24	30.31	30.26	-9.19	22.01	21.05	21.12	21.07
	2 Tx Slots	28.20	27.15	27.22	27.18	-6.13	22.07	21.02	21.09	21.05
	3 Tx Slots	26.40	25.37	25.43	25.39	-4.42	21.98	20.95	21.01	20.97
	4 Tx Slots	25.20	24.18	24.25	24.20	-3.18	22.02	21.00	21.07	21.02
EDGE (8PSK)	1 Tx Slot	25.30	23.75	23.96	23.89	-9.19	16.11	14.56	14.77	14.70
	2 Tx Slots	22.30	20.65	20.82	20.87	-6.13	16.17	14.52	14.69	14.74
	3 Tx Slots	20.50	18.86	19.04	19.07	-4.42	16.08	14.44	14.62	14.65
	4 Tx Slots	19.30	17.62	17.89	17.89	-3.18	16.12	14.44	14.71	14.71

Table 14:Conducted power measurement results of GSM850(Receiver ON)

Note:

- 1) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 2) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.2 Conducted power measurements of GSM850 (Main Antenna)

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)				
		Tune-up Max.	128CH	190CH		Tune-up Max.	128CH	190CH	251CH	
GSM (CS)		33.70	32.61	<b>32.66</b>	32.57	-9.19	24.51	23.42	23.47	23.38
GPRS (GMSK)	1 Tx Slot	33.70	32.60	32.66	32.58	-9.19	24.51	23.41	23.47	23.39
	2 Tx Slots	30.70	29.52	<b>29.58</b>	29.53	-6.13	24.57	23.39	23.45	23.40
	3 Tx Slots	28.90	27.62	27.68	27.65	-4.42	24.48	23.20	23.26	23.23
	4 Tx Slots	27.70	26.46	26.52	26.48	-3.18	24.52	23.28	23.34	23.30
EDGE (GMSK)	1 Tx Slot	33.70	32.58	32.64	32.55	-9.19	24.51	23.39	23.45	23.36
	2 Tx Slots	30.70	29.50	29.56	29.51	-6.13	24.57	23.37	23.43	23.38
	3 Tx Slots	28.90	27.61	27.67	27.64	-4.42	24.48	23.19	23.25	23.22
	4 Tx Slots	27.70	26.45	26.51	26.47	-3.18	24.52	23.27	23.33	23.29
EDGE (8PSK)	1 Tx Slot	27.50	25.91	26.09	26.03	-9.19	18.31	16.72	16.90	16.84
	2 Tx Slots	24.50	22.78	22.94	22.98	-6.13	18.37	16.65	16.81	16.85
	3 Tx Slots	22.70	21.03	21.28	21.23	-4.42	18.28	16.61	16.86	16.81
	4 Tx Slots	21.50	19.90	20.06	20.08	-3.18	18.32	16.72	16.88	16.90

Table 15:Conducted power measurement results of GSM850

Note:

- 1) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 2) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.3 Conducted power measurements of GSM1900 (Second Antenna)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up Max.	512CH	661CH	810CH		Tune-up Max.	512CH	661CH	810CH
GSM (CS)		29.00	27.54	<b>27.48</b>	27.40	-9.19	19.81	18.35	18.29	18.21
GPRS (GMSK)	1 Tx Slot	29.00	27.53	27.47	27.40	-9.19	19.81	18.34	18.28	18.21
	2 Tx Slots	25.80	24.50	24.45	24.40	-6.13	19.67	18.37	18.32	18.27
	3 Tx Slots	24.00	22.66	22.61	22.57	-4.42	19.58	18.24	18.19	18.15
	4 Tx Slots	22.80	21.49	21.44	21.39	-3.18	19.62	18.31	18.26	18.21
EDGE (GMSK)	1 Tx Slot	29.00	27.39	27.59	27.35	-9.19	19.81	18.20	18.40	18.16
	2 Tx Slots	25.80	24.49	24.31	24.41	-6.13	19.67	18.36	18.18	18.28
	3 Tx Slots	24.00	22.56	22.76	22.68	-4.42	19.58	18.14	18.34	18.26
	4 Tx Slots	22.80	21.51	21.50	21.25	-3.18	19.62	18.33	18.32	18.07
EDGE (8PSK)	1 Tx Slot	24.20	22.72	22.76	22.95	-9.19	15.01	13.53	13.57	13.76
	2 Tx Slots	21.00	19.69	19.71	19.83	-6.13	14.87	13.56	13.58	13.70
	3 Tx Slots	19.20	17.87	17.89	17.89	-4.42	14.78	13.45	13.47	13.47
	4 Tx Slots	18.00	16.59	16.60	16.60	-3.18	14.82	13.41	13.42	13.42

Table 16: Conducted power measurement results of GSM1900(Full Power)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up Max.	512CH	661CH	810CH		Tune-up Max.	512CH	661CH	810CH
GSM (CS)		26.00	24.52	24.46	24.40	-9.19	16.81	15.33	15.27	15.21
GPRS (GMSK)	1 Tx Slot	25.80	24.50	24.45	24.39	-9.19	16.61	15.31	15.26	15.20
	2 Tx Slots	22.80	21.50	<b>21.46</b>	21.42	-6.13	16.67	15.37	15.33	15.29
	3 Tx Slots	21.00	19.61	19.57	19.53	-4.42	16.58	15.19	15.15	15.11
	4 Tx Slots	19.80	18.41	18.36	18.33	-3.18	16.62	15.23	15.18	15.15
EDGE (GMSK)	1 Tx Slot	25.80	24.59	24.59	24.37	-9.19	16.61	15.40	15.40	15.18
	2 Tx Slots	22.80	21.41	21.53	21.39	-6.13	16.67	15.28	15.40	15.26
	3 Tx Slots	21.00	19.59	19.57	19.54	-4.42	16.58	15.17	15.15	15.12
	4 Tx Slots	19.80	18.41	18.51	18.19	-3.18	16.62	15.23	15.33	15.01
EDGE (8PSK)	1 Tx Slot	21.00	19.75	19.78	19.91	-9.19	11.81	10.56	10.59	10.72
	2 Tx Slots	18.00	16.80	16.83	16.81	-6.13	11.87	10.67	10.70	10.68
	3 Tx Slots	16.50	14.94	14.95	14.94	-4.42	12.08	10.52	10.53	10.52
	4 Tx Slots	15.00	13.64	13.65	13.63	-3.18	11.82	10.46	10.47	10.45

Table 17: Conducted power measurement results of GSM1900(Hotspot ON)

Note:

- 1) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 2) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

#### 7.1.4 Conducted power measurements of GSM1900 (Main Antenna)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up Max.	512CH	661CH	810CH		Tune-up Max.	512CH	661CH	810CH
GSM (CS)		31.00	29.39	<b>29.43</b>	29.41	-9.19	21.81	20.20	20.24	20.22
GPRS (GMSK)	1 Tx Slot	30.80	29.38	29.41	29.40	-9.19	21.61	20.19	20.22	20.21
	2 Tx Slots	27.80	26.07	26.10	26.14	-6.13	21.67	19.94	19.97	20.01
	3 Tx Slots	26.00	24.16	24.19	24.25	-4.42	21.58	19.74	19.77	19.83
	4 Tx Slots	24.80	22.88	22.92	22.97	-3.18	21.62	19.70	19.74	19.79
EDGE (GMSK)	1 Tx Slot	30.80	29.27	29.49	29.31	-9.19	21.61	20.08	20.30	20.12
	2 Tx Slots	27.80	26.13	25.97	26.10	-6.13	21.67	20.00	19.84	19.97
	3 Tx Slots	26.00	24.20	24.18	24.25	-4.42	21.58	19.78	19.76	19.83
	4 Tx Slots	24.80	23.02	22.82	23.06	-3.18	21.62	19.84	19.64	19.88
EDGE (8PSK)	1 Tx Slot	26.00	24.33	24.36	24.34	-9.19	16.81	15.14	15.17	15.15
	2 Tx Slots	23.00	20.96	20.93	20.92	-6.13	16.87	14.83	14.80	14.79
	3 Tx Slots	21.20	19.12	19.09	19.11	-4.42	16.78	14.70	14.67	14.69
	4 Tx Slots	20.00	17.75	17.82	17.83	-3.18	16.82	14.57	14.64	14.65

Table 18: Conducted power measurement results of GSM1900(Full Power)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up Max.	512CH	661CH	810CH		Tune-up Max.	512CH	661CH	810CH
GSM (CS)		28.00	26.11	26.14	26.19	-9.19	18.81	16.92	16.95	17.00
GPRS (GMSK)	1 Tx Slot	27.80	26.13	26.16	26.20	-9.19	18.61	16.94	16.97	17.01
	2 Tx Slots	24.80	22.90	<b>23.02</b>	23.08	-6.13	18.67	16.77	16.89	16.95
	3 Tx Slots	23.00	21.20	21.23	21.30	-4.42	18.58	16.78	16.81	16.88
	4 Tx Slots	21.80	19.88	19.92	19.99	-3.18	18.62	16.70	16.74	16.81
EDGE (GMSK)	1 Tx Slot	27.80	26.12	26.23	26.23	-9.19	18.61	16.93	17.04	17.04
	2 Tx Slots	24.80	22.77	23.06	23.15	-6.13	18.67	16.64	16.93	17.02
	3 Tx Slots	23.00	21.21	21.13	21.44	-4.42	18.58	16.79	16.71	17.02
	4 Tx Slots	21.80	19.78	19.78	20.08	-3.18	18.62	16.60	16.60	16.90
EDGE (8PSK)	1 Tx Slot	23.00	21.36	21.34	21.40	-9.19	13.81	12.17	12.15	12.21
	2 Tx Slots	20.00	17.95	17.99	18.03	-6.13	13.87	11.82	11.86	11.90
	3 Tx Slots	18.20	16.20	16.19	16.22	-4.42	13.78	11.78	11.77	11.80
	4 Tx Slots	17.00	14.88	15.00	15.07	-3.18	13.82	11.70	11.82	11.89

Table 19: Conducted power measurement results of GSM1900(Hotspot ON)

Note:

- 1) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 2) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.5 Conducted power measurements of UMTS Band II (Second Antenna)

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	20.00	19.01	<b>19.02</b>	19.13
	12.2kbps AMR	20.00	19.07	18.88	18.86
HSDPA	Subtest 1	19.40	18.28	18.50	18.55
	Subtest 2	18.80	17.71	17.61	17.74
	Subtest 3	18.50	16.98	16.97	17.12
	Subtest 4	18.50	17.03	17.05	17.19
HSUPA	Subtest 1	18.00	17.21	17.15	17.14
	Subtest 2	15.00	13.97	13.79	13.60
	Subtest 3	17.00	16.16	15.88	16.17
	Subtest 4	15.90	14.05	14.19	14.31
	Subtest 5	18.00	17.11	17.15	17.21
DC-HSDPA	Subtest 1	19.40	18.29	18.66	18.32
	Subtest 2	18.80	17.46	17.35	17.83
	Subtest 3	18.50	17.04	16.94	17.06
	Subtest 4	18.50	17.08	16.92	17.07

Table 20: Conducted power measurement results of UMTS Band II (Full Power)

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	17.00	15.97	<b>15.88</b>	15.85
	12.2kbps AMR	17.00	15.91	15.83	16.01
HSDPA	Subtest 1	16.40	15.28	15.30	15.31
	Subtest 2	15.80	14.47	14.58	14.64
	Subtest 3	15.50	14.01	14.02	14.14
	Subtest 4	15.50	13.91	13.98	14.22
HSUPA	Subtest 1	14.00	12.59	12.65	12.93
	Subtest 2	12.00	10.63	10.24	10.42
	Subtest 3	12.50	11.32	11.78	10.95
	Subtest 4	12.00	10.97	10.65	10.61
	Subtest 5	14.90	13.09	13.15	13.08
DC-HSDPA	Subtest 1	16.40	15.28	15.22	15.49
	Subtest 2	15.80	14.59	14.48	14.63
	Subtest 3	15.50	13.90	13.96	14.15
	Subtest 4	15.50	14.03	14.02	14.13

Table 21: Conducted power measurement results of UMTS Band II (Hotspot ON)

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.6 Conducted power measurements of UMTS Band II (Main Antenna)

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	24.0	23.28	<b>23.12</b>	23.19
	12.2kbps AMR	24.0	23.22	23.26	23.32
HSDPA	Subtest 1	23.4	22.77	22.35	22.90
	Subtest 2	22.8	21.60	21.82	22.01
	Subtest 3	22.5	21.31	21.34	21.32
	Subtest 4	22.5	21.21	21.16	21.23
HSUPA	Subtest 1	22.0	20.96	20.79	21.08
	Subtest 2	19.8	19.05	18.88	19.02
	Subtest 3	20.8	19.51	19.44	19.65
	Subtest 4	19.8	18.91	19.07	19.23
	Subtest 5	22.8	20.93	20.95	21.30
DC-HSDPA	Subtest 1	23.4	22.71	22.37	22.84
	Subtest 2	22.8	21.89	22.05	21.95
	Subtest 3	22.5	21.19	21.14	21.49
	Subtest 4	22.5	21.17	21.03	21.69

Table 22: Conducted power measurement results of UMTS Band II (Full Power)

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.3	22.55	<b>22.52</b>	22.65
	12.2kbps AMR	23.3	22.28	22.41	22.52
HSDPA	Subtest 1	22.7	21.93	21.90	22.14
	Subtest 2	21.6	20.88	20.92	21.19
	Subtest 3	21.1	20.40	20.48	20.56
	Subtest 4	21.1	20.64	20.68	20.61
HSUPA	Subtest 1	21.7	20.56	20.72	21.03
	Subtest 2	19.2	17.90	18.04	17.94
	Subtest 3	20.1	18.75	18.70	18.67
	Subtest 4	19.1	18.02	18.31	18.34
	Subtest 5	21.2	20.49	20.19	20.49
DC-HSDPA	Subtest 1	22.5	22.11	21.49	21.84
	Subtest 2	21.6	21.05	20.97	21.23
	Subtest 3	21.1	20.25	20.45	20.54
	Subtest 4	21.1	20.35	20.63	20.57

Table 23: Conducted power measurement results of UMTS Band II (Hotspot OFF+Receiver OFF)

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	20.3	19.66	<b>19.65</b>	19.67
	12.2kbps AMR	20.3	19.70	19.65	19.67
HSDPA	Subtest 1	19.7	19.14	19.16	19.13
	Subtest 2	18.6	18.36	18.37	18.39
	Subtest 3	18.1	17.85	17.87	17.86
	Subtest 4	18.1	17.83	17.83	17.84
HSUPA	Subtest 1	18.7	17.72	17.56	17.50
	Subtest 2	14.9	13.77	13.76	13.62
	Subtest 3	17.3	16.41	16.33	16.31
	Subtest 4	16.6	15.54	14.97	14.91
	Subtest 5	18.2	17.68	17.56	17.67
DC-HSDPA	Subtest 1	19.5	19.14	19.17	19.13
	Subtest 2	18.6	18.35	18.36	18.39
	Subtest 3	18.1	17.86	17.87	17.87
	Subtest 4	18.1	17.87	17.77	17.86

Table 24: Conducted power measurement results of UMTS Band II (Hotspot ON+Receiver OFF)

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	21.0	20.05	19.87	19.73
	12.2kbps AMR	21.0	19.94	19.83	19.95
HSDPA	Subtest 1	20.4	19.33	19.41	19.38
	Subtest 2	19.8	18.67	18.60	18.61
	Subtest 3	19.5	17.90	18.22	17.93
	Subtest 4	19.5	18.25	18.28	17.93
HSUPA	Subtest 1	19.0	18.09	18.01	18.10
	Subtest 2	16.8	16.33	16.27	16.46
	Subtest 3	17.8	17.12	17.11	16.88
	Subtest 4	17.3	16.77	16.70	16.83
	Subtest 5	19.7	17.98	17.88	18.00
DC-HSDPA	Subtest 1	20.4	19.39	19.52	19.48
	Subtest 2	19.8	18.38	18.47	18.62
	Subtest 3	19.5	18.10	18.14	18.18
	Subtest 4	19.5	17.88	18.04	18.22

Table 25: Conducted power measurement results of UMTS Band II (Hotspot ON+Receiver ON)

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.7 Conducted power measurements of UMTS Band IV (Second Antenna)

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	20.50	19.37	<b>19.22</b>	19.42
	12.2kbps AMR	20.50	19.39	19.36	19.30
HSDPA	Subtest 1	19.90	18.98	19.05	19.07
	Subtest 2	18.90	18.09	18.16	17.98
	Subtest 3	18.50	17.66	17.75	17.63
	Subtest 4	18.50	17.68	17.44	17.51
HSUPA	Subtest 1	18.50	17.70	17.71	17.88
	Subtest 2	16.50	15.85	15.05	15.41
	Subtest 3	17.50	16.42	15.70	16.01
	Subtest 4	16.50	15.78	15.41	15.42
	Subtest 5	18.80	17.47	17.32	17.38
DC-HSDPA	Subtest 1	19.90	19.04	18.87	18.88
	Subtest 2	18.90	18.20	18.20	18.24
	Subtest 3	18.50	17.57	17.71	17.37
	Subtest 4	18.50	17.60	17.49	17.62

Table 26: Conducted power measurement results of UMTS Band IV (Full Power)

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	17.50	16.33	<b>16.42</b>	16.29
	12.2kbps AMR	17.50	16.32	16.37	16.49
HSDPA	Subtest 1	16.90	16.53	16.56	16.59
	Subtest 2	16.40	16.05	14.82	15.02
	Subtest 3	15.50	15.19	14.40	14.68
	Subtest 4	15.50	15.09	14.48	14.41
HSUPA	Subtest 1	15.50	14.93	14.55	14.73
	Subtest 2	13.80	12.76	12.25	12.00
	Subtest 3	14.80	13.70	13.72	13.82
	Subtest 4	13.50	12.63	12.16	12.03
	Subtest 5	15.80	15.26	14.79	15.07
DC-HSDPA	Subtest 1	16.90	16.53	16.46	16.36
	Subtest 2	16.40	16.05	15.11	15.11
	Subtest 3	15.50	15.42	14.51	14.54
	Subtest 4	15.50	15.22	14.50	14.32

Table 27: Conducted power measurement results of UMTS Band IV (Hotspot ON)

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.8 Conducted power measurements of UMTS Band IV (Main Antenna)

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	24.5	23.39	<b>23.42</b>	23.42
	12.2kbps AMR	24.5	23.38	23.29	23.30
HSDPA	Subtest 1	23.9	23.09	22.95	22.79
	Subtest 2	22.9	22.06	22.19	21.83
	Subtest 3	22.5	21.87	21.55	21.73
	Subtest 4	22.5	21.78	21.81	21.65
HSUPA	Subtest 1	22.5	21.73	21.24	21.16
	Subtest 2	20.5	18.88	19.66	19.53
	Subtest 3	21.5	19.92	20.32	20.18
	Subtest 4	20.5	18.86	18.99	18.94
	Subtest 5	22.8	21.39	21.42	21.38
DC-HSDPA	Subtest 1	23.9	22.83	23.01	22.81
	Subtest 2	22.9	22.37	22.34	21.88
	Subtest 3	22.5	21.74	21.79	21.56
	Subtest 4	22.5	21.66	21.79	21.43

Table 28: Conducted power measurement results of UMTS Band IV (Full Power)

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	24.0	23.04	<b>22.90</b>	22.99
	12.2kbps AMR	24.0	22.80	22.92	22.78
HSDPA	Subtest 1	23.4	22.29	22.42	22.15
	Subtest 2	22.4	21.68	21.54	21.48
	Subtest 3	22.0	21.07	21.26	21.20
	Subtest 4	22.0	21.14	21.24	20.98
HSUPA	Subtest 1	22.0	20.95	21.14	21.15
	Subtest 2	20.0	19.13	18.74	18.35
	Subtest 3	21.0	19.94	19.34	19.39
	Subtest 4	20.0	18.84	19.06	18.69
	Subtest 5	22.3	20.85	21.06	21.01
DC-HSDPA	Subtest 1	23.4	22.57	22.53	22.31
	Subtest 2	22.4	21.41	21.76	21.43
	Subtest 3	22.0	21.24	20.98	21.17
	Subtest 4	22.0	21.19	21.20	21.18

Table 29: Conducted power measurement results of UMTS Band IV (Hotspot OFF+Receiver OFF)

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	21.0	20.05	<b>20.11</b>	19.89
	12.2kbps AMR	21.0	19.96	20.04	19.69
HSDPA	Subtest 1	20.4	19.25	19.39	19.29
	Subtest 2	19.4	18.60	18.75	18.49
	Subtest 3	19.0	17.91	18.20	18.17
	Subtest 4	19.0	18.31	18.18	18.21
HSUPA	Subtest 1	19.0	18.04	18.11	18.22
	Subtest 2	17.0	15.39	15.53	15.90
	Subtest 3	18.0	17.07	16.17	16.27
	Subtest 4	17.0	16.07	15.92	15.97
	Subtest 5	19.3	18.11	18.03	17.76
DC-HSDPA	Subtest 1	20.4	19.36	19.49	19.19
	Subtest 2	19.4	18.76	18.63	18.71
	Subtest 3	19.0	18.11	17.94	18.21
	Subtest 4	19.0	18.10	18.16	18.18

Table 30: Conducted power measurement results of UMTS Band IV (Hotspot ON+Receiver OFF)

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	21.5	20.44	20.59	20.56
	12.2kbps AMR	21.5	20.29	20.60	20.19
HSDPA	Subtest 1	20.9	19.83	19.97	19.87
	Subtest 2	19.9	19.14	18.97	18.86
	Subtest 3	19.5	18.63	18.73	18.48
	Subtest 4	19.5	18.58	18.44	18.46
HSUPA	Subtest 1	19.5	18.35	18.26	18.24
	Subtest 2	17.5	16.09	15.72	15.70
	Subtest 3	18.5	16.88	17.25	17.14
	Subtest 4	17.5	16.03	15.97	16.07
	Subtest 5	19.8	18.58	18.58	18.41
DC-HSDPA	Subtest 1	20.9	20.04	20.10	19.95
	Subtest 2	19.9	19.20	18.99	19.20
	Subtest 3	19.5	18.87	18.51	18.42
	Subtest 4	19.5	18.70	18.58	18.51

Table 31: Conducted power measurement results of UMTS Band IV (Hotspot ON+Receiver ON)

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.9 Conducted power measurements of UMTS Band V (Second Antenna)

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	25.00	23.80	<b>23.84</b>	23.77
	12.2kbps AMR	25.00	23.80	23.84	23.64
HSDPA	Subtest 1	24.70	23.30	23.34	23.16
	Subtest 2	24.20	22.82	22.87	22.66
	Subtest 3	23.80	22.41	22.47	22.26
	Subtest 4	23.80	22.41	22.44	22.28
HSUPA	Subtest 1	24.00	22.69	22.57	22.50
	Subtest 2	22.00	20.40	20.15	19.99
	Subtest 3	22.80	20.96	20.82	21.17
	Subtest 4	22.00	20.13	20.49	20.11
	Subtest 5	23.30	21.83	21.84	21.67
DC-HSDPA	Subtest 1	24.70	23.28	23.36	23.17
	Subtest 2	24.20	22.75	22.86	22.68
	Subtest 3	23.80	22.39	22.45	22.26
	Subtest 4	23.80	22.43	22.47	22.28

Table 32: Conducted power measurement results of UMTS Band V (Full Power)

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	21.50	20.27	<b>20.34</b>	20.24
	12.2kbps AMR	21.50	20.30	20.33	20.12
HSDPA	Subtest 1	21.20	19.84	19.83	19.64
	Subtest 2	20.70	19.35	19.36	19.15
	Subtest 3	20.30	18.91	18.99	18.75
	Subtest 4	20.30	18.91	18.95	18.77
HSUPA	Subtest 1	20.50	19.31	19.32	19.16
	Subtest 2	18.00	16.54	16.45	16.37
	Subtest 3	18.50	17.22	18.13	17.80
	Subtest 4	17.90	16.37	16.67	16.54
	Subtest 5	19.30	18.31	18.35	18.16
DC-HSDPA	Subtest 1	21.20	19.81	19.82	19.65
	Subtest 2	20.70	19.34	19.35	19.16
	Subtest 3	20.30	18.94	18.97	18.73
	Subtest 4	20.30	18.90	18.97	18.78

Table 33: Conducted power measurement results of UMTS Band V (Hotspot OFF+Receiver ON)

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	18.50	17.30	17.34	17.25
	12.2kbps AMR	18.50	17.32	17.33	17.16
HSDPA	Subtest 1	18.20	16.79	16.81	16.64
	Subtest 2	17.70	16.34	16.35	16.15
	Subtest 3	17.30	15.93	15.96	15.75
	Subtest 4	17.30	15.91	15.94	15.75
HSUPA	Subtest 1	16.60	15.61	16.47	15.53
	Subtest 2	14.50	12.96	13.56	13.66
	Subtest 3	14.80	14.51	14.40	14.11
	Subtest 4	14.20	13.47	13.89	13.78
	Subtest 5	16.80	15.72	16.02	15.93
DC-HSDPA	Subtest 1	18.20	16.77	16.84	16.66
	Subtest 2	17.70	16.33	16.35	16.16
	Subtest 3	17.30	15.94	15.95	15.74
	Subtest 4	17.30	15.92	15.95	15.76

Table 34: Conducted power measurement results of UMTS Band V (Hotspot ON+Receiver ON)

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	22.00	20.83	<b>20.83</b>	20.76
	12.2kbps AMR	22.00	20.81	20.82	20.64
HSDPA	Subtest 1	21.70	20.32	20.34	20.16
	Subtest 2	21.20	19.85	19.86	19.69
	Subtest 3	20.80	19.43	19.49	19.27
	Subtest 4	20.80	19.43	19.47	19.29
HSUPA	Subtest 1	21.30	19.40	19.80	19.24
	Subtest 2	18.50	17.55	17.35	17.32
	Subtest 3	19.40	18.31	18.13	17.79
	Subtest 4	18.40	17.36	17.66	16.53
	Subtest 5	20.30	18.80	18.84	18.66
DC-HSDPA	Subtest 1	21.70	20.28	20.32	20.16
	Subtest 2	21.20	19.83	19.84	19.66
	Subtest 3	20.80	19.42	19.46	19.29
	Subtest 4	20.80	19.45	19.47	19.29

Table 35: Conducted power measurement results of UMTS Band V (Hotspot ON+Receiver OFF)

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.10 Conducted power measurements of UMTS Band V (Main Antenna)

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	25.00	23.70	<b>23.75</b>	23.66
	12.2kbps AMR	25.00	23.69	23.72	23.57
HSDPA	Subtest 1	24.70	23.18	23.23	23.04
	Subtest 2	24.20	22.70	22.76	22.56
	Subtest 3	23.80	22.30	22.35	22.16
	Subtest 4	23.80	22.29	22.35	22.19
HSUPA	Subtest 1	24.00	22.61	22.86	22.63
	Subtest 2	22.00	20.28	20.43	20.26
	Subtest 3	22.80	20.82	20.97	20.84
	Subtest 4	22.00	20.11	20.00	20.05
	Subtest 5	23.30	21.68	21.72	21.56
DC-HSDPA	Subtest 1	24.70	23.16	23.23	23.03
	Subtest 2	24.20	22.68	22.74	22.58
	Subtest 3	23.80	22.29	22.35	22.17
	Subtest 4	23.80	22.29	22.37	22.19

Table 36: Conducted power measurement results of UMTS Band V

Note:

- 1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.11 Conducted power measurements of LTE Band 2 (Main Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	24.00	23.18	23.00	23.05
		1	3	24.00	23.12	23.01	23.02
		1	5	24.00	23.19	23.03	22.99
		3	0	24.00	23.18	22.94	22.86
		3	2	24.00	23.11	23.03	22.99
		3	3	24.00	22.97	23.04	23.06
		6	0	23.00	22.14	21.88	21.84
	16QAM	1	0	23.00	22.23	22.08	22.09
		1	3	23.00	22.17	22.08	22.00
		1	5	23.00	22.29	22.03	22.09
		3	0	23.00	22.07	22.00	21.97
		3	2	23.00	22.18	21.90	22.06
		3	3	23.00	22.10	21.94	21.98
		6	0	22.00	20.97	20.89	20.82
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18615CH	18900CH	19185CH
3MHz	QPSK	1	0	24.00	23.18	22.97	23.03
		1	7	24.00	23.16	22.97	22.98
		1	14	24.00	23.15	23.02	22.97
		8	0	23.00	22.16	21.96	21.97
		8	4	23.00	22.16	21.98	21.93
		8	7	23.00	22.09	21.85	21.94
		15	0	23.00	22.13	22.01	21.96
	16QAM	1	0	23.00	22.17	22.17	22.22
		1	7	23.00	22.28	22.08	22.18
		1	14	23.00	22.22	22.15	22.08
		8	0	22.00	21.02	20.87	20.95
		8	4	22.00	20.94	20.87	20.87
		8	7	22.00	20.98	20.89	20.94
		15	0	22.00	21.12	21.01	20.92

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18625CH	18900CH	19175CH
5MHz	QPSK	1	0	24.00	23.12	22.95	22.91
		1	13	24.00	23.14	22.97	22.97
		1	24	24.00	23.13	23.04	23.02
		12	0	23.00	22.18	22.09	21.97
		12	6	23.00	22.18	21.97	21.97
		12	13	23.00	22.18	21.97	21.97
		25	0	23.00	22.07	21.98	22.02
	16QAM	1	0	23.00	22.07	22.06	22.11
		1	13	23.00	22.14	22.04	21.96
		1	24	23.00	22.08	22.11	22.07
		12	0	22.00	21.05	21.00	20.93
		12	6	22.00	21.10	21.01	20.95
		12	13	22.00	21.07	21.01	20.90
		25	0	22.00	21.04	20.90	20.93
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18650CH	18900CH	19150CH
10MHz	QPSK	1	0	24.00	23.13	22.94	22.93
		1	25	24.00	23.10	22.93	22.97
		1	49	24.00	23.04	22.92	22.97
		25	0	23.00	22.12	21.95	21.94
		25	13	23.00	22.12	21.95	21.94
		25	25	23.00	22.11	21.95	21.94
		50	0	23.00	22.05	21.94	21.95
	16QAM	1	0	23.00	22.15	21.96	21.80
		1	25	23.00	22.13	21.94	21.85
		1	49	23.00	22.20	21.95	22.03
		25	0	22.00	21.04	20.92	20.89
		25	13	22.00	21.01	20.91	20.91
		25	25	22.00	21.02	20.92	20.90
		50	0	22.00	20.96	20.83	20.84

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18675CH	18900CH	19125CH
15MHz	QPSK	1	0	24.00	23.11	22.95	22.89
		1	38	24.00	23.13	22.95	22.95
		1	74	24.00	23.16	22.93	22.94
		36	0	23.00	22.06	21.96	21.97
		36	18	23.00	22.06	21.96	21.97
		36	39	23.00	22.06	21.96	21.97
		75	0	23.00	22.04	22.04	21.91
	16QAM	1	0	23.00	22.20	22.04	21.94
		1	38	23.00	22.10	21.97	22.16
		1	74	23.00	22.11	21.92	21.99
		36	0	22.00	21.03	20.96	20.90
		36	18	22.00	20.98	20.91	20.88
		36	39	22.00	20.99	20.89	20.87
		75	0	22.00	20.90	20.97	20.86
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18700CH	18900CH	19100CH
20MHz	QPSK	1	0	24.00	23.12	22.99	23.01
		1	50	24.00	23.11	23.00	22.97
		1	99	24.00	<b>23.12</b>	23.03	23.01
		50	0	23.00	<b>22.02</b>	22.00	21.92
		50	25	23.00	22.01	22.00	21.92
		50	50	23.00	22.01	22.00	21.91
		100	0	23.00	22.05	21.96	21.91
	16QAM	1	0	23.00	22.34	22.17	22.15
		1	50	23.00	22.25	22.12	22.15
		1	99	23.00	22.38	22.20	22.01
		50	0	22.00	20.90	20.93	20.90
		50	25	22.00	20.90	20.93	20.78
		50	50	22.00	20.91	20.94	20.86
		100	0	22.00	20.91	20.86	20.81

Table 37: Conducted power measurement results of LTE Band 2(Full Power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	23.00	22.05	22.03	22.05
		1	3	23.00	22.09	22.07	22.06
		1	5	23.00	22.25	22.07	22.07
		3	0	23.00	22.11	22.03	21.94
		3	2	23.00	22.14	22.04	21.98
		3	3	23.00	22.12	22.00	22.01
		6	0	23.00	22.09	21.98	21.94
	16QAM	1	0	23.00	22.27	22.05	22.11
		1	3	23.00	22.22	22.05	22.14
		1	5	23.00	22.23	22.17	22.08
		3	0	23.00	22.27	22.10	22.02
		3	2	23.00	22.23	22.01	22.10
		3	3	23.00	22.25	21.97	22.01
		6	0	22.00	21.10	20.77	20.80
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18615CH	18900CH	19185CH
3MHz	QPSK	1	0	23.00	22.22	22.05	22.06
		1	7	23.00	22.22	22.02	22.05
		1	14	23.00	22.19	22.04	22.09
		8	0	23.00	22.18	22.06	22.01
		8	4	23.00	22.22	22.00	21.97
		8	7	23.00	22.17	22.08	22.00
		15	0	23.00	22.20	22.05	22.03
	16QAM	1	0	23.00	22.34	22.41	22.12
		1	7	23.00	22.41	22.28	22.24
		1	14	23.00	22.25	22.23	22.32
		8	0	22.00	21.02	21.06	20.94
		8	4	22.00	21.12	20.94	20.91
		8	7	22.00	21.06	20.94	20.94
		15	0	22.00	21.10	21.02	20.92

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18625CH	18900CH	19175CH
5MHz	QPSK	1	0	23.00	22.21	22.05	22.08
		1	13	23.00	22.21	22.05	22.08
		1	24	23.00	22.20	22.05	22.09
		12	0	23.00	22.19	22.15	22.14
		12	6	23.00	22.18	22.15	22.13
		12	13	23.00	22.19	22.16	22.14
		25	0	23.00	22.19	22.04	22.06
	16QAM	1	0	23.00	22.37	22.30	22.45
		1	13	23.00	22.35	22.21	22.24
		1	24	23.00	22.29	22.10	22.27
		12	0	22.00	21.21	21.06	21.01
		12	6	22.00	21.25	21.09	21.01
		12	13	22.00	21.25	21.09	21.06
		25	0	22.00	21.12	21.04	20.96
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18650CH	18900CH	19150CH
10MHz	QPSK	1	0	23.00	22.18	22.13	21.97
		1	25	23.00	22.18	22.06	22.08
		1	49	23.00	22.21	22.08	22.03
		25	0	23.00	22.21	22.09	22.01
		25	13	23.00	22.22	22.10	22.04
		25	25	23.00	22.21	22.09	22.00
		50	0	23.00	22.14	22.03	22.02
	16QAM	1	0	23.00	22.21	22.03	22.04
		1	25	23.00	22.24	22.02	22.06
		1	49	23.00	22.16	22.08	22.04
		25	0	22.00	21.10	21.02	20.95
		25	13	22.00	21.15	21.02	20.98
		25	25	22.00	21.12	21.00	20.99
		50	0	22.00	21.08	20.99	20.94

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18675CH	18900CH	19125CH
15MHz	QPSK	1	0	23.00	22.21	22.05	21.99
		1	38	23.00	22.18	22.00	21.96
		1	74	23.00	22.18	22.05	21.98
		36	0	23.00	22.12	22.07	22.05
		36	18	23.00	22.12	22.08	22.04
		36	39	23.00	22.12	22.07	22.04
		75	0	23.00	22.09	22.14	21.99
	16QAM	1	0	23.00	22.29	22.24	22.06
		1	38	23.00	22.17	22.12	22.06
		1	74	23.00	22.43	22.00	22.19
		36	0	22.00	21.16	21.06	20.99
		36	18	22.00	21.15	21.05	21.00
		36	39	22.00	21.12	21.06	21.06
		75	0	22.00	21.10	21.04	20.99
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18700CH	18900CH	19100CH
20MHz	QPSK	1	0	23.00	22.25	22.10	22.10
		1	50	23.00	22.26	22.19	22.10
		1	99	23.00	<b>22.29</b>	22.15	22.09
		50	0	23.00	<b>22.16</b>	22.06	22.06
		50	25	23.00	22.16	22.12	22.05
		50	50	23.00	22.16	22.12	22.06
		100	0	23.00	22.08	22.14	22.06
	16QAM	1	0	23.00	22.31	22.40	22.18
		1	50	23.00	22.40	22.31	22.12
		1	99	23.00	22.37	22.26	22.30
		50	0	22.00	21.06	21.05	20.96
		50	25	22.00	21.05	21.07	20.96
		50	50	22.00	21.07	20.99	20.99
		100	0	22.00	21.07	21.05	20.97

Table 38: Conducted power measurement results of LTE Band 2 (Hotspot OFF+Receiver OFF)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	20.00	19.20	19.02	19.01
		1	3	20.00	19.19	19.02	19.02
		1	5	20.00	19.16	19.05	19.02
		3	0	20.00	19.19	18.91	18.92
		3	2	20.00	19.17	19.03	18.92
		3	3	20.00	19.07	18.91	18.94
		6	0	20.00	19.17	19.03	18.98
	16QAM	1	0	20.00	19.32	19.08	18.90
		1	3	20.00	19.26	19.03	19.08
		1	5	20.00	19.37	19.12	19.21
		3	0	20.00	18.94	18.98	18.92
		3	2	20.00	19.13	19.09	19.07
		3	3	20.00	19.22	18.91	19.02
		6	0	20.00	18.94	18.77	18.91
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18615CH	18900CH	19185CH
3MHz	QPSK	1	0	20.00	19.17	19.08	19.03
		1	7	20.00	19.17	19.11	19.04
		1	14	20.00	19.16	19.11	19.05
		8	0	20.00	19.16	18.99	18.97
		8	4	20.00	19.15	18.91	18.93
		8	7	20.00	19.15	19.00	18.99
		15	0	20.00	19.17	19.08	19.02
	16QAM	1	0	20.00	19.19	19.03	19.09
		1	7	20.00	19.17	19.17	19.08
		1	14	20.00	19.26	19.12	18.89
		8	0	20.00	19.17	18.86	18.81
		8	4	20.00	19.12	18.92	18.82
		8	7	20.00	19.04	18.91	18.94
		15	0	20.00	19.08	18.98	18.94

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18625CH	18900CH	19175CH
5MHz	QPSK	1	0	20.00	19.21	19.06	19.04
		1	13	20.00	19.20	19.06	19.03
		1	24	20.00	19.25	19.06	19.02
		12	0	20.00	19.17	19.01	19.02
		12	6	20.00	19.17	19.13	19.02
		12	13	20.00	19.17	19.02	19.03
		25	0	20.00	19.08	19.02	18.97
	16QAM	1	0	20.00	19.52	19.29	19.12
		1	13	20.00	19.16	19.29	19.07
		1	24	20.00	19.38	19.12	19.16
		12	0	20.00	19.11	19.03	19.08
		12	6	20.00	19.13	19.12	19.05
		12	13	20.00	19.16	19.03	19.04
		25	0	20.00	19.07	18.97	18.96
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18650CH	18900CH	19150CH
10MHz	QPSK	1	0	20.00	19.16	18.97	19.03
		1	25	20.00	19.14	18.98	19.01
		1	49	20.00	19.16	19.01	18.97
		25	0	20.00	19.12	19.10	18.96
		25	13	20.00	19.12	19.07	18.95
		25	25	20.00	19.15	19.05	18.94
		50	0	20.00	19.07	19.02	18.96
	16QAM	1	0	20.00	19.27	19.07	18.84
		1	25	20.00	19.25	19.08	19.03
		1	49	20.00	19.21	19.00	18.93
		25	0	20.00	19.12	18.99	18.92
		25	13	20.00	19.14	18.91	18.90
		25	25	20.00	19.10	18.93	18.94
		50	0	20.00	18.99	18.93	18.84

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18675CH	18900CH	19125CH
15MHz	QPSK	1	0	20.00	19.15	19.00	18.94
		1	38	20.00	19.15	19.00	18.97
		1	74	20.00	19.14	19.00	18.92
		36	0	20.00	19.13	19.01	19.05
		36	18	20.00	19.09	19.01	19.05
		36	39	20.00	19.16	19.02	19.05
		75	0	20.00	19.03	19.03	18.93
	16QAM	1	0	20.00	18.94	19.20	19.05
		1	38	20.00	19.11	19.29	19.07
		1	74	20.00	19.26	19.17	18.94
		36	0	20.00	19.13	18.97	18.93
		36	18	20.00	19.10	18.95	18.97
		36	39	20.00	19.11	18.95	18.93
		75	0	20.00	18.94	18.93	18.88
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18700CH	18900CH	19100CH
20MHz	QPSK	1	0	20.00	19.14	19.11	19.13
		1	50	20.00	<b>19.15</b>	19.10	19.10
		1	99	20.00	19.13	19.12	19.11
		50	0	20.00	19.03	19.07	18.98
		50	25	20.00	19.04	19.08	18.97
		50	50	20.00	19.04	<b>19.08</b>	18.98
		100	0	20.00	19.06	19.08	19.01
	16QAM	1	0	20.00	19.41	19.16	19.14
		1	50	20.00	19.21	19.27	19.36
		1	99	20.00	19.17	19.34	19.29
		50	0	20.00	18.95	19.00	18.90
		50	25	20.00	18.96	19.00	18.90
		50	50	20.00	18.94	18.99	18.89
		100	0	20.00	18.97	18.90	18.91

Table 39: Conducted power measurement results of LTE Band 2 (Hotspot ON+Receiver OFF)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	21.00	20.13	20.02	20.07
		1	3	21.00	20.16	20.01	20.09
		1	5	21.00	20.11	20.00	20.04
		3	0	21.00	20.13	19.96	20.06
		3	2	21.00	20.17	20.06	19.93
		3	3	21.00	20.13	19.95	20.10
		6	0	21.00	20.09	19.94	19.88
	16QAM	1	0	21.00	20.40	20.12	20.19
		1	3	21.00	20.20	20.15	20.07
		1	5	21.00	20.36	19.97	20.12
		3	0	21.00	20.18	20.05	20.04
		3	2	21.00	20.13	20.02	19.91
		3	3	21.00	20.13	20.10	19.95
		6	0	21.00	19.86	19.91	19.89
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18615CH	18900CH	19185CH
3MHz	QPSK	1	0	21.00	20.16	20.08	19.97
		1	7	21.00	20.14	20.08	19.98
		1	14	21.00	20.16	19.98	20.00
		8	0	21.00	20.11	19.99	19.96
		8	4	21.00	20.14	20.03	19.96
		8	7	21.00	20.13	19.97	19.99
		15	0	21.00	20.13	20.05	19.99
	16QAM	1	0	21.00	20.33	20.25	20.07
		1	7	21.00	20.24	20.30	20.06
		1	14	21.00	20.28	20.27	20.03
		8	0	21.00	19.97	19.95	19.81
		8	4	21.00	20.10	19.87	19.86
		8	7	21.00	20.09	19.90	19.86
		15	0	21.00	20.14	20.02	19.95

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18625CH	18900CH	19175CH
5MHz	QPSK	1	0	21.00	20.18	20.05	20.05
		1	13	21.00	20.20	20.03	19.97
		1	24	21.00	20.22	20.05	20.02
		12	0	21.00	20.16	20.11	20.06
		12	6	21.00	20.13	20.11	20.05
		12	13	21.00	20.13	20.12	20.05
		25	0	21.00	20.13	20.00	20.00
	16QAM	1	0	21.00	20.40	20.24	20.22
		1	13	21.00	20.33	20.15	20.14
		1	24	21.00	20.32	20.15	20.18
		12	0	21.00	20.14	20.02	19.97
		12	6	21.00	20.14	20.01	19.99
		12	13	21.00	20.12	20.03	20.00
		25	0	21.00	20.09	20.00	19.96
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18650CH	18900CH	19150CH
10MHz	QPSK	1	0	21.00	20.13	19.98	19.96
		1	25	21.00	20.16	19.98	19.95
		1	49	21.00	20.14	19.99	19.94
		25	0	21.00	20.18	20.07	19.96
		25	13	21.00	20.14	20.06	20.03
		25	25	21.00	20.18	20.06	20.02
		50	0	21.00	20.08	20.00	19.99
	16QAM	1	0	21.00	20.14	20.05	19.98
		1	25	21.00	20.28	20.00	19.87
		1	49	21.00	20.13	20.14	19.94
		25	0	21.00	20.09	19.94	19.93
		25	13	21.00	20.08	19.96	19.93
		25	25	21.00	20.05	19.94	19.98
		50	0	21.00	20.00	19.96	19.89

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18675CH	18900CH	19125CH
15MHz	QPSK	1	0	21.00	20.13	20.00	19.95
		1	38	21.00	20.13	20.01	19.91
		1	74	21.00	20.13	20.01	19.93
		36	0	21.00	20.15	19.99	19.93
		36	18	21.00	20.16	19.99	20.01
		36	39	21.00	20.15	19.99	20.01
		75	0	21.00	20.11	20.00	20.01
	16QAM	1	0	21.00	20.04	20.07	19.97
		1	38	21.00	20.23	20.24	20.07
		1	74	21.00	20.17	20.03	20.06
		36	0	21.00	20.11	20.02	19.97
		36	18	21.00	20.06	19.99	19.98
		36	39	21.00	20.11	20.00	19.96
		75	0	21.00	20.05	19.95	19.87
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18700CH	18900CH	19100CH
20MHz	QPSK	1	0	21.00	20.12	20.12	20.11
		1	50	21.00	20.14	20.11	20.12
		1	99	21.00	20.12	20.11	20.11
		50	0	21.00	20.12	20.05	19.96
		50	25	21.00	20.12	20.06	19.95
		50	50	21.00	20.13	20.05	19.95
		100	0	21.00	20.03	20.06	19.98
	16QAM	1	0	21.00	20.28	20.32	20.01
		1	50	21.00	20.18	20.24	20.29
		1	99	21.00	20.43	20.22	20.28
		50	0	21.00	19.93	19.98	19.91
		50	25	21.00	19.95	19.98	19.91
		50	50	21.00	19.95	20.00	19.91
		100	0	21.00	19.97	19.95	19.90

Table 40: Conducted power measurement results of LTE Band 2 (Hotspot ON+Receiver ON)

### 7.1.12 Conducted power measurements of LTE Band 4 (Main Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	24.00	23.06	22.95	23.09
		1	3	24.00	23.09	23.01	23.06
		1	5	24.00	23.08	23.04	22.99
		3	0	24.00	22.93	22.93	22.89
		3	2	24.00	22.96	22.97	23.00
		3	3	24.00	23.03	23.00	22.92
		6	0	23.00	21.95	21.96	22.08
	16QAM	1	0	23.00	22.22	22.00	22.04
		1	3	23.00	22.22	21.98	22.13
		1	5	23.00	22.30	21.93	22.07
		3	0	23.00	22.05	22.05	21.91
		3	2	23.00	21.96	22.07	22.07
		3	3	23.00	22.04	21.89	21.95
		6	0	22.00	20.98	21.01	20.93
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19965CH	20175CH	20385CH
3MHz	QPSK	1	0	24.00	23.08	23.03	23.06
		1	7	24.00	23.16	23.02	23.03
		1	14	24.00	23.12	23.02	23.08
		8	0	23.00	22.05	22.00	21.95
		8	4	23.00	22.05	21.94	22.01
		8	7	23.00	22.02	21.97	22.06
		15	0	23.00	22.04	21.98	22.09
	16QAM	1	0	23.00	22.18	22.10	22.18
		1	7	23.00	22.15	22.09	22.41
		1	14	23.00	22.15	22.18	22.16
		8	0	22.00	21.02	20.84	20.94
		8	4	22.00	20.94	20.97	20.92
		8	7	22.00	20.92	20.89	21.00
		15	0	22.00	20.90	20.93	20.91

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19975CH	20175CH	20375CH
5MHz	QPSK	1	0	24.00	23.11	23.02	23.06
		1	13	24.00	23.09	23.02	23.03
		1	24	24.00	23.11	23.05	23.06
		12	0	23.00	22.09	22.07	22.08
		12	6	23.00	22.16	22.07	22.09
		12	13	23.00	22.13	22.06	22.09
		25	0	23.00	22.04	21.99	22.08
	16QAM	1	0	23.00	22.06	22.09	22.32
		1	13	23.00	22.07	22.20	22.15
		1	24	23.00	22.14	22.20	22.24
		12	0	22.00	21.03	20.98	20.96
		12	6	22.00	21.02	20.98	20.99
		12	13	22.00	20.99	20.99	20.98
		25	0	22.00	20.99	20.91	20.97
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20000CH	20175CH	20350CH
10MHz	QPSK	1	0	24.00	23.19	23.01	22.95
		1	25	24.00	23.01	22.98	23.04
		1	49	24.00	23.01	23.15	23.03
		25	0	23.00	22.06	22.05	22.02
		25	13	23.00	22.05	22.04	22.02
		25	25	23.00	22.05	22.03	22.04
		50	0	23.00	22.08	22.01	22.09
	16QAM	1	0	23.00	22.02	22.08	22.08
		1	25	23.00	22.14	21.97	22.12
		1	49	23.00	22.17	22.02	22.02
		25	0	22.00	21.00	20.93	20.99
		25	13	22.00	21.00	20.89	20.98
		25	25	22.00	21.00	20.91	20.95
		50	0	22.00	20.93	20.95	20.97

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20025CH	20175CH	20325CH
15MHz	QPSK	1	0	24.00	23.05	23.02	23.06
		1	38	24.00	23.05	23.02	22.95
		1	74	24.00	23.06	23.02	22.98
		36	0	23.00	22.06	22.07	22.01
		36	18	23.00	22.05	22.13	22.01
		36	39	23.00	22.05	22.12	22.01
		75	0	23.00	22.04	22.07	22.06
	16QAM	1	0	23.00	22.06	22.16	22.12
		1	38	23.00	22.25	22.13	22.17
		1	74	23.00	22.20	22.01	22.18
		36	0	22.00	21.03	21.04	21.02
		36	18	22.00	21.01	20.99	21.01
		36	39	22.00	21.06	21.02	20.97
		75	0	22.00	21.00	21.00	20.98
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20050CH	20175CH	20300CH
20MHz	QPSK	1	0	24.00	23.02	<b>23.13</b>	23.07
		1	50	24.00	23.05	23.10	23.08
		1	99	24.00	23.07	23.11	23.07
		50	0	23.00	22.07	<b>22.08</b>	22.02
		50	25	23.00	22.07	22.08	22.03
		50	50	23.00	22.07	22.07	22.02
		100	0	23.00	22.10	22.07	22.05
	16QAM	1	0	23.00	22.21	22.19	22.24
		1	50	23.00	22.12	22.23	22.22
		1	99	23.00	22.14	22.22	22.17
		50	0	22.00	20.98	21.04	20.97
		50	25	22.00	20.99	21.00	20.97
		50	50	22.00	21.00	21.01	20.97
		100	0	22.00	20.99	21.00	20.90

Table 41: Conducted power measurement results of LTE Band 4(Full Power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	23.00	21.99	21.92	22.01
		1	3	23.00	22.04	21.95	21.98
		1	5	23.00	22.00	21.92	21.97
		3	0	23.00	22.03	21.80	21.92
		3	2	23.00	21.94	21.89	21.91
		3	3	23.00	21.86	21.86	21.91
		6	0	23.00	21.91	21.85	21.79
	16QAM	1	0	23.00	22.03	22.00	22.21
		1	3	23.00	22.10	22.04	22.01
		1	5	23.00	22.10	22.07	22.06
		3	0	23.00	22.08	21.87	22.00
		3	2	23.00	22.08	21.98	21.93
		3	3	23.00	21.98	21.89	21.92
		6	0	22.00	20.94	20.82	20.74
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19965CH	20175CH	20385CH
3MHz	QPSK	1	0	23.00	22.05	21.93	21.98
		1	7	23.00	22.01	21.94	21.95
		1	14	23.00	22.06	22.00	21.97
		8	0	23.00	21.98	21.94	22.01
		8	4	23.00	21.95	21.91	21.94
		8	7	23.00	21.98	21.85	21.84
		15	0	23.00	21.98	21.97	21.95
	16QAM	1	0	23.00	22.23	22.25	22.21
		1	7	23.00	22.19	22.05	22.10
		1	14	23.00	22.20	22.27	22.27
		8	0	22.00	20.89	20.82	20.92
		8	4	22.00	20.86	20.88	20.86
		8	7	22.00	20.89	20.91	20.86
		15	0	22.00	20.92	20.91	20.95

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19975CH	20175CH	20375CH
5MHz	QPSK	1	0	23.00	21.98	21.94	22.02
		1	13	23.00	21.98	21.93	22.01
		1	24	23.00	22.01	21.95	21.99
		12	0	23.00	22.04	22.00	22.01
		12	6	23.00	22.03	22.00	22.02
		12	13	23.00	22.04	21.99	22.02
		25	0	23.00	21.99	21.95	22.02
	16QAM	1	0	23.00	22.13	22.23	22.24
		1	13	23.00	22.08	22.08	22.14
		1	24	23.00	22.03	21.90	22.03
		12	0	22.00	20.98	21.04	21.05
		12	6	22.00	20.92	21.00	21.05
		12	13	22.00	20.96	21.02	20.97
		25	0	22.00	20.93	20.95	20.90
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20000CH	20175CH	20350CH
10MHz	QPSK	1	0	23.00	22.04	21.88	21.95
		1	25	23.00	22.00	21.90	21.97
		1	49	23.00	21.99	21.89	21.96
		25	0	23.00	22.01	21.96	21.99
		25	13	23.00	22.01	21.99	22.01
		25	25	23.00	22.00	22.03	21.98
		50	0	23.00	21.96	21.96	21.96
	16QAM	1	0	23.00	22.14	21.86	22.03
		1	25	23.00	22.08	22.03	22.08
		1	49	23.00	22.15	22.02	22.09
		25	0	22.00	20.95	20.88	20.89
		25	13	22.00	20.90	20.86	20.89
		25	25	22.00	20.91	20.86	20.89
		50	0	22.00	20.92	20.91	20.95

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20025CH	20175CH	20325CH
15MHz	QPSK	1	0	23.00	21.96	21.86	21.89
		1	38	23.00	21.94	21.88	21.88
		1	74	23.00	21.97	21.87	21.93
		36	0	23.00	22.06	21.99	21.94
		36	18	23.00	22.06	22.00	21.91
		36	39	23.00	22.05	21.99	21.95
		75	0	23.00	22.00	21.96	21.97
	16QAM	1	0	23.00	22.11	22.06	22.13
		1	38	23.00	22.12	21.97	22.00
		1	74	23.00	21.98	22.19	22.07
		36	0	22.00	20.92	20.98	20.94
		36	18	22.00	20.93	20.94	20.93
		36	39	22.00	20.93	20.94	20.92
		75	0	22.00	20.91	20.93	20.90
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20050CH	20175CH	20300CH
20MHz	QPSK	1	0	23.00	21.96	21.99	21.96
		1	50	23.00	21.99	21.99	<b>22.05</b>
		1	99	23.00	21.96	22.00	22.02
		50	0	23.00	21.99	<b>21.99</b>	21.94
		50	25	23.00	21.98	21.98	21.95
		50	50	23.00	21.98	21.98	21.95
		100	0	23.00	21.97	21.99	21.95
	16QAM	1	0	23.00	22.22	22.39	21.92
		1	50	23.00	22.23	22.31	22.20
		1	99	23.00	22.10	22.28	22.15
		50	0	22.00	20.90	20.91	20.87
		50	25	22.00	20.94	20.88	20.90
		50	50	22.00	20.92	20.91	20.88
		100	0	22.00	20.87	20.93	20.84

Table 42: Conducted power measurement results of LTE Band 4 (Hotspot OFF+Receiver OFF)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	20.00	18.96	18.90	18.97
		1	3	20.00	18.93	18.96	18.93
		1	5	20.00	18.97	18.95	18.95
		3	0	20.00	18.89	18.76	18.83
		3	2	20.00	18.90	18.88	18.77
		3	3	20.00	18.97	18.81	18.82
		6	0	20.00	18.93	18.89	18.96
	16QAM	1	0	20.00	19.10	18.88	18.91
		1	3	20.00	18.87	18.91	19.03
		1	5	20.00	19.07	18.88	19.13
		3	0	20.00	18.89	18.81	18.91
		3	2	20.00	19.05	18.92	18.91
		3	3	20.00	19.02	18.95	18.90
		6	0	20.00	18.77	18.73	18.69
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19965CH	20175CH	20385CH
3MHz	QPSK	1	0	20.00	18.93	18.97	18.96
		1	7	20.00	18.95	18.95	18.93
		1	14	20.00	18.96	18.96	18.96
		8	0	20.00	18.98	18.61	18.89
		8	4	20.00	18.95	18.73	18.91
		8	7	20.00	18.94	18.81	18.89
		15	0	20.00	18.95	18.89	18.89
	16QAM	1	0	20.00	19.06	18.88	18.95
		1	7	20.00	19.12	19.04	19.16
		1	14	20.00	19.08	19.01	18.93
		8	0	20.00	18.95	18.84	18.82
		8	4	20.00	18.92	18.86	18.96
		8	7	20.00	18.89	18.73	18.73
		15	0	20.00	18.93	18.92	18.89

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19975CH	20175CH	20375CH
5MHz	QPSK	1	0	20.00	18.95	18.91	18.91
		1	13	20.00	18.93	18.90	18.93
		1	24	20.00	18.93	18.89	18.92
		12	0	20.00	19.02	19.01	19.03
		12	6	20.00	19.03	19.01	19.03
		12	13	20.00	19.02	19.01	19.01
		25	0	20.00	18.95	18.96	18.91
	16QAM	1	0	20.00	19.20	19.09	19.18
		1	13	20.00	19.26	19.16	19.10
		1	24	20.00	19.25	19.08	19.02
		12	0	20.00	18.90	18.89	18.89
		12	6	20.00	18.91	18.89	18.88
		12	13	20.00	18.90	18.86	18.88
		25	0	20.00	18.93	18.87	18.88
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20000CH	20175CH	20350CH
10MHz	QPSK	1	0	20.00	18.89	18.91	18.88
		1	25	20.00	18.91	18.90	18.90
		1	49	20.00	18.91	18.91	18.90
		25	0	20.00	18.99	18.93	19.00
		25	13	20.00	18.99	18.93	19.00
		25	25	20.00	18.99	18.94	18.98
		50	0	20.00	18.91	18.84	18.95
	16QAM	1	0	20.00	18.99	18.95	18.99
		1	25	20.00	18.99	19.01	18.89
		1	49	20.00	19.10	18.95	18.94
		25	0	20.00	18.80	18.89	18.85
		25	13	20.00	18.84	18.84	18.84
		25	25	20.00	18.86	18.88	18.85
		50	0	20.00	18.85	18.78	18.86

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20025CH	20175CH	20325CH
15MHz	QPSK	1	0	20.00	18.86	18.85	18.91
		1	38	20.00	18.83	18.83	18.90
		1	74	20.00	18.90	18.85	18.91
		36	0	20.00	19.04	18.90	18.98
		36	18	20.00	19.04	19.02	18.98
		36	39	20.00	19.03	18.90	18.98
		75	0	20.00	18.90	18.97	18.90
	16QAM	1	0	20.00	19.10	19.08	18.98
		1	38	20.00	18.92	19.18	18.82
		1	74	20.00	18.95	18.89	18.84
		36	0	20.00	18.88	18.89	18.95
		36	18	20.00	18.88	18.84	18.94
		36	39	20.00	18.84	18.89	18.94
		75	0	20.00	18.84	18.89	18.91
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20050CH	20175CH	20300CH
20MHz	QPSK	1	0	20.00	19.02	19.02	18.97
		1	50	20.00	19.01	<b>19.06</b>	18.97
		1	99	20.00	19.04	18.96	18.96
		50	0	20.00	18.94	<b>18.99</b>	18.94
		50	25	20.00	18.93	18.88	18.95
		50	50	20.00	18.93	18.94	18.95
		100	0	20.00	18.99	18.94	18.94
	16QAM	1	0	20.00	19.18	19.21	19.23
		1	50	20.00	19.02	19.15	19.15
		1	99	20.00	19.23	19.32	19.14
		50	0	20.00	18.90	18.83	18.88
		50	25	20.00	18.91	18.80	18.89
		50	50	20.00	18.92	18.85	18.89
		100	0	20.00	18.86	18.80	18.82

Table 43: Conducted power measurement results of LTE Band 4 (Hotspot ON+Receiver OFF)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	21.00	19.98	19.90	19.93
		1	3	21.00	19.95	19.88	19.92
		1	5	21.00	19.99	19.89	19.94
		3	0	21.00	19.95	19.92	20.03
		3	2	21.00	19.89	20.00	20.00
		3	3	21.00	19.96	20.01	19.87
		6	0	21.00	19.93	19.92	19.84
	16QAM	1	0	21.00	20.23	19.93	19.98
		1	3	21.00	20.10	19.88	19.98
		1	5	21.00	20.03	19.93	19.93
		3	0	21.00	19.87	19.87	19.87
		3	2	21.00	20.03	19.83	19.84
		3	3	21.00	19.96	19.98	19.94
		6	0	21.00	19.83	19.79	19.70
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19965CH	20175CH	20385CH
3MHz	QPSK	1	0	21.00	19.99	19.93	19.95
		1	7	21.00	19.95	19.92	19.96
		1	14	21.00	19.96	19.94	19.96
		8	0	21.00	19.94	19.89	19.95
		8	4	21.00	19.93	19.81	19.97
		8	7	21.00	19.95	19.87	19.86
		15	0	21.00	19.91	19.92	19.89
	16QAM	1	0	21.00	19.89	19.92	19.90
		1	7	21.00	20.06	20.23	20.04
		1	14	21.00	20.03	20.02	20.10
		8	0	21.00	19.89	19.82	19.82
		8	4	21.00	19.94	19.86	19.85
		8	7	21.00	19.92	19.82	19.84
		15	0	21.00	19.89	19.79	19.89

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	19975CH	20175CH	20375CH
5MHz	QPSK	1	0	21.00	19.94	19.96	19.90
		1	13	21.00	19.96	19.94	19.91
		1	24	21.00	19.96	19.95	19.91
		12	0	21.00	20.03	19.96	20.00
		12	6	21.00	20.03	19.96	20.00
		12	13	21.00	20.03	19.97	20.01
		25	0	21.00	19.95	19.91	19.89
	16QAM	1	0	21.00	20.18	20.07	20.19
		1	13	21.00	20.31	20.08	20.20
		1	24	21.00	20.25	20.17	20.01
		12	0	21.00	19.92	19.95	19.97
		12	6	21.00	19.93	19.97	19.95
		12	13	21.00	19.85	19.94	19.95
		25	0	21.00	19.92	19.87	19.82
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20000CH	20175CH	20350CH
10MHz	QPSK	1	0	21.00	19.97	19.88	19.95
		1	25	21.00	19.96	19.84	19.93
		1	49	21.00	19.97	19.89	19.95
		25	0	21.00	20.00	19.92	19.93
		25	13	21.00	20.00	19.92	19.92
		25	25	21.00	20.00	19.88	19.93
		50	0	21.00	19.92	19.92	19.95
	16QAM	1	0	21.00	19.96	19.90	19.86
		1	25	21.00	19.89	19.88	19.99
		1	49	21.00	20.07	19.88	20.05
		25	0	21.00	19.81	19.80	19.87
		25	13	21.00	19.87	19.82	19.87
		25	25	21.00	19.81	19.80	19.91
		50	0	21.00	19.87	19.86	19.84

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20025CH	20175CH	20325CH
15MHz	QPSK	1	0	21.00	19.90	19.89	19.81
		1	38	21.00	19.91	19.87	19.85
		1	74	21.00	19.91	19.87	19.85
		36	0	21.00	19.93	19.95	19.92
		36	18	21.00	19.93	19.96	19.95
		36	39	21.00	19.92	19.96	19.93
		75	0	21.00	19.91	19.91	19.87
	16QAM	1	0	21.00	20.01	20.06	19.97
		1	38	21.00	20.03	20.12	19.99
		1	74	21.00	20.04	20.00	19.91
		36	0	21.00	19.87	19.86	19.88
		36	18	21.00	19.88	19.89	19.84
		36	39	21.00	19.93	19.87	19.84
		75	0	21.00	19.83	19.80	19.87
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20050CH	20175CH	20300CH
20MHz	QPSK	1	0	21.00	19.99	20.03	19.93
		1	50	21.00	20.00	20.00	19.94
		1	99	21.00	20.00	20.03	19.92
		50	0	21.00	19.94	19.92	19.90
		50	25	21.00	19.94	19.93	19.90
		50	50	21.00	19.93	19.93	19.90
		100	0	21.00	20.01	19.91	19.90
	16QAM	1	0	21.00	19.99	20.35	20.13
		1	50	21.00	20.27	20.15	20.31
		1	99	21.00	20.02	20.21	20.27
		50	0	21.00	19.89	19.87	19.85
		50	25	21.00	19.90	19.89	19.85
		50	50	21.00	19.91	19.86	19.87
		100	0	21.00	19.85	19.84	19.82

Table 44: Conducted power measurement results of LTE Band 4 (Hotspot ON+Receiver ON)

### 7.1.13 Conducted power measurements of LTE Band 5 (Second Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.50	23.87	23.99	23.92
		1	3	24.50	23.94	24.02	23.94
		1	5	24.50	23.93	23.96	23.94
		3	0	24.50	23.70	23.94	23.75
		3	2	24.50	23.78	23.85	23.80
		3	3	24.50	23.83	23.79	23.78
		6	0	23.50	22.93	22.87	22.78
	16QAM	1	0	23.50	22.90	23.00	22.94
		1	3	23.50	23.12	22.93	22.95
		1	5	23.50	22.93	23.11	23.10
		3	0	23.50	22.84	22.89	22.80
		3	2	23.50	22.88	22.79	22.84
		3	3	23.50	22.86	22.86	22.79
		6	0	22.50	21.71	21.90	21.71
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20415CH	20525CH	20635CH
3MHz	QPSK	1	0	24.50	23.90	23.98	23.86
		1	7	24.50	23.96	23.95	23.88
		1	14	24.50	23.95	23.96	23.89
		8	0	23.50	22.88	22.93	22.76
		8	4	23.50	22.89	22.90	22.80
		8	7	23.50	22.90	22.88	22.83
		15	0	23.50	22.88	22.93	22.90
	16QAM	1	0	23.50	22.95	23.05	22.98
		1	7	23.50	22.98	23.21	23.00
		1	14	23.50	22.92	23.11	22.95
		8	0	22.50	21.81	21.96	21.74
		8	4	22.50	21.91	21.81	21.86
		8	7	22.50	21.85	21.91	21.80
		15	0	22.50	21.88	21.85	21.82

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.50	23.85	23.90	23.90
		1	13	24.50	23.90	23.92	23.88
		1	24	24.50	23.85	23.92	23.88
		12	0	23.50	22.93	22.98	22.98
		12	6	23.50	22.93	22.98	22.98
		12	13	23.50	22.93	22.98	22.98
		25	0	23.50	22.93	22.93	22.85
	16QAM	1	0	23.50	22.91	23.18	22.99
		1	13	23.50	22.98	23.16	23.12
		1	24	23.50	23.10	23.00	23.00
		12	0	22.50	21.92	21.93	21.96
		12	6	22.50	21.83	21.97	21.98
		12	13	22.50	21.92	22.01	21.91
		25	0	22.50	21.85	21.87	21.84
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.50	23.91	23.88	<b>23.98</b>
		1	25	24.50	23.91	23.88	23.97
		1	49	24.50	23.98	23.97	23.93
		25	0	23.50	22.88	22.96	<b>22.98</b>
		25	13	23.50	22.88	22.97	22.97
		25	25	23.50	22.88	22.94	22.95
		50	0	23.50	22.90	22.98	22.91
	16QAM	1	0	23.50	23.03	22.84	22.90
		1	25	23.50	22.91	23.00	22.91
		1	49	23.50	22.86	22.84	22.96
		25	0	22.50	21.87	21.88	21.90
		25	13	22.50	21.88	21.89	21.92
		25	25	22.50	21.87	21.92	21.93
		50	0	22.50	21.82	21.91	21.81

Table 45: Conducted power measurement results of LTE Band 5 (Full power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	22.00	21.39	21.41	21.42
		1	3	22.00	21.38	21.43	21.45
		1	5	22.00	21.42	21.41	21.42
		3	0	22.00	21.33	21.34	21.34
		3	2	22.00	21.35	21.37	21.31
		3	3	22.00	21.22	21.34	21.35
		6	0	22.00	21.22	21.39	21.32
	16QAM	1	0	22.00	21.49	21.45	21.41
		1	3	22.00	21.40	21.49	21.41
		1	5	22.00	21.47	21.41	21.54
		3	0	22.00	21.48	21.37	21.41
		3	2	22.00	21.36	21.31	21.41
		3	3	22.00	21.37	21.41	21.24
		6	0	22.00	21.27	21.22	21.37
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20415CH	20525CH	20635CH
3MHz	QPSK	1	0	22.00	21.43	21.38	21.34
		1	7	22.00	21.42	21.46	21.37
		1	14	22.00	21.40	21.50	21.32
		8	0	22.00	21.42	21.42	21.35
		8	4	22.00	21.38	21.45	21.37
		8	7	22.00	21.34	21.39	21.32
		15	0	22.00	21.41	21.41	21.39
	16QAM	1	0	22.00	21.58	21.52	21.38
		1	7	22.00	21.48	21.68	21.43
		1	14	22.00	21.49	21.65	21.40
		8	0	22.00	21.37	21.24	21.23
		8	4	22.00	21.38	21.44	21.20
		8	7	22.00	21.42	21.42	21.32
		15	0	22.00	21.31	21.43	21.32

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20425CH	20525CH	20625CH
5MHz	QPSK	1	0	22.00	21.36	21.49	21.38
		1	13	22.00	21.47	21.46	21.38
		1	24	22.00	21.44	21.48	21.46
		12	0	22.00	21.43	21.49	21.46
		12	6	22.00	21.42	21.49	21.47
		12	13	22.00	21.43	21.49	21.46
		25	0	22.00	21.44	21.44	21.36
	16QAM	1	0	22.00	21.62	21.66	21.66
		1	13	22.00	21.66	21.64	21.70
		1	24	22.00	21.46	21.59	21.52
		12	0	22.00	21.40	21.52	21.43
		12	6	22.00	21.38	21.45	21.39
		12	13	22.00	21.36	21.48	21.43
		25	0	22.00	21.34	21.38	21.29
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20450CH	20525CH	20600CH
10MHz	QPSK	1	0	22.00	21.41	21.39	21.36
		1	25	22.00	21.41	21.38	21.38
		1	49	22.00	21.38	<b>21.43</b>	21.37
		25	0	22.00	21.39	21.43	21.41
		25	13	22.00	21.41	21.43	<b>21.49</b>
		25	25	22.00	21.38	21.43	21.41
		50	0	22.00	21.42	21.40	21.39
	16QAM	1	0	22.00	21.35	21.57	21.49
		1	25	22.00	21.39	21.55	21.56
		1	49	22.00	21.50	21.56	21.37
		25	0	22.00	21.35	21.38	21.43
		25	13	22.00	21.34	21.38	21.36
		25	25	22.00	21.33	21.40	21.38
		50	0	22.00	21.36	21.33	21.32

Table 46: Conducted power measurement results of LTE Band 5 (Receiver ON)

### 7.1.14 Conducted power measurements of LTE Band 5 (Main Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.50	23.39	23.41	23.46
		1	3	24.50	22.40	23.45	23.45
		1	5	24.50	23.44	23.46	23.44
		3	0	24.50	23.32	23.44	23.39
		3	2	24.50	23.29	23.28	23.46
		3	3	24.50	23.16	23.33	23.38
		6	0	23.50	22.33	22.41	22.30
	16QAM	1	0	23.50	22.53	22.63	22.61
		1	3	23.50	22.31	22.50	22.63
		1	5	23.50	22.43	22.55	22.54
		3	0	23.50	22.43	22.40	22.39
		3	2	23.50	22.22	22.43	22.31
		3	3	23.50	22.50	22.38	22.42
		6	0	22.50	21.26	21.40	21.30
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20415CH	20525CH	20635CH
3MHz	QPSK	1	0	24.50	23.44	23.55	23.49
		1	7	24.50	23.39	23.53	23.48
		1	14	24.50	23.47	23.45	23.48
		8	0	23.50	22.46	22.45	22.35
		8	4	23.50	22.38	22.46	22.32
		8	7	23.50	22.40	22.45	22.38
		15	0	23.50	22.44	22.50	22.41
	16QAM	1	0	23.50	22.38	22.60	22.66
		1	7	23.50	22.54	22.60	22.62
		1	14	23.50	22.52	22.55	22.70
		8	0	22.50	21.32	21.41	21.36
		8	4	22.50	21.30	21.47	21.35
		8	7	22.50	21.40	21.45	21.33
		15	0	22.50	21.36	21.46	21.39

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.50	23.42	23.44	23.43
		1	13	24.50	23.43	23.43	23.43
		1	24	24.50	23.43	23.46	23.43
		12	0	23.50	22.48	22.52	22.49
		12	6	23.50	22.48	22.53	22.48
		12	13	23.50	22.48	22.51	22.48
		25	0	23.50	22.45	22.53	22.44
	16QAM	1	0	23.50	22.72	22.70	22.47
		1	13	23.50	22.68	22.61	22.58
		1	24	23.50	22.63	22.69	22.49
		12	0	22.50	21.48	21.51	21.46
		12	6	22.50	21.47	21.49	21.42
		12	13	22.50	21.46	21.53	21.42
		25	0	22.50	21.44	21.43	21.31
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.50	23.42	23.44	23.48
		1	25	24.50	23.48	<b>23.52</b>	23.49
		1	49	24.50	23.45	23.46	23.44
		25	0	23.50	22.46	22.45	<b>22.51</b>
		25	13	23.50	22.46	22.45	22.49
		25	25	23.50	22.45	22.45	22.47
		50	0	23.50	22.44	22.53	22.49
	16QAM	1	0	23.50	22.48	22.64	22.53
		1	25	23.50	22.56	22.59	22.34
		1	49	23.50	22.61	22.57	22.60
		25	0	22.50	21.39	21.43	21.39
		25	13	22.50	21.44	21.42	21.44
		25	25	22.50	21.42	21.41	21.38
		50	0	22.50	21.34	21.45	21.44

Table 47: Conducted power measurement results of LTE Band 5

### 7.1.15 Conducted power measurements of LTE Band 7 (Main Antenna)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	23.80	23.06	23.26	23.22
		1	13	23.80	23.09	23.21	23.21
		1	24	23.80	23.02	23.21	23.19
		12	0	22.80	22.11	22.15	22.22
		12	6	22.80	22.07	22.29	22.31
		12	13	22.80	22.05	22.33	22.31
		25	0	22.80	22.09	22.31	22.20
	16QAM	1	0	22.80	22.19	22.48	22.32
		1	13	22.80	22.21	22.44	22.39
		1	24	22.80	22.45	22.34	22.44
		12	0	21.80	21.05	21.32	21.22
		12	6	21.80	21.03	21.33	21.18
		12	13	21.80	21.02	21.29	21.24
		25	0	21.80	20.99	21.25	21.14
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	23.80	23.05	23.28	23.22
		1	25	23.80	23.05	23.26	23.22
		1	49	23.80	23.04	23.26	23.26
		25	0	22.80	22.07	22.36	22.23
		25	13	22.80	22.05	22.28	22.22
		25	25	22.80	22.08	22.23	22.21
		50	0	22.80	22.06	22.24	22.16
	16QAM	1	0	22.80	21.95	22.35	22.21
		1	25	22.80	22.29	22.18	22.26
		1	49	22.80	22.31	22.14	22.10
		25	0	21.80	21.01	21.23	21.13
		25	13	21.80	21.01	21.22	21.13
		25	25	21.80	20.97	21.20	21.09
		50	0	21.80	20.99	21.03	21.07

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	23.80	23.12	23.32	23.40
		1	38	23.80	23.11	23.31	23.38
		1	74	23.80	23.13	23.31	23.37
		36	0	22.80	22.12	22.31	22.38
		36	18	22.80	22.11	22.31	22.37
		36	39	22.80	22.20	22.31	22.37
		75	0	22.80	22.11	22.35	22.27
	16QAM	1	0	22.80	22.21	22.30	22.47
		1	38	22.80	22.25	22.30	22.40
		1	74	22.80	22.16	22.30	22.34
		36	0	21.80	21.13	21.35	21.33
		36	18	21.80	21.12	21.36	21.30
		36	39	21.80	21.14	21.34	21.35
		75	0	21.80	21.08	21.24	21.26
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	23.80	23.16	23.31	<b>23.41</b>
		1	50	23.80	23.13	23.28	23.37
		1	99	23.80	23.14	23.27	23.39
		50	0	22.80	22.08	22.26	22.29
		50	25	22.80	22.16	22.26	<b>22.39</b>
		50	50	22.80	22.14	22.33	22.37
		100	0	22.80	22.13	22.30	22.32
	16QAM	1	0	22.80	22.27	22.43	22.58
		1	50	22.80	22.33	22.37	22.45
		1	99	22.80	22.31	22.43	22.49
		50	0	21.80	21.05	21.22	21.23
		50	25	21.80	21.04	21.24	21.22
		50	50	21.80	21.06	21.26	21.31
		100	0	21.80	21.15	21.25	21.22

Table 48: Conducted power measurement results of LTE Band 7 (Full Power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	22.00	21.18	21.32	21.31
		1	13	22.00	21.15	21.33	21.41
		1	24	22.00	21.12	21.34	21.39
		12	0	22.00	21.19	21.38	21.35
		12	6	22.00	21.20	21.37	21.33
		12	13	22.00	21.17	21.36	21.33
		25	0	22.00	21.17	21.32	21.28
	16QAM	1	0	22.00	21.63	21.49	21.58
		1	13	22.00	21.22	21.47	21.61
		1	24	22.00	21.39	21.56	21.49
		12	0	21.80	20.93	21.15	21.06
		12	6	21.80	21.00	21.16	21.07
		12	13	21.80	20.90	21.16	21.07
		25	0	21.80	20.87	21.10	20.96
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	22.00	21.13	21.36	21.40
		1	25	22.00	21.23	21.31	21.45
		1	49	22.00	21.25	21.38	21.39
		25	0	22.00	21.21	21.42	21.37
		25	13	22.00	21.20	21.38	21.37
		25	25	22.00	21.20	21.42	21.36
		50	0	22.00	21.18	21.37	21.32
	16QAM	1	0	22.00	21.25	21.48	21.38
		1	25	22.00	21.27	21.46	21.54
		1	49	22.00	21.24	21.38	21.33
		25	0	21.80	20.92	21.05	21.01
		25	13	21.80	20.94	21.11	21.00
		25	25	21.80	20.92	21.09	21.02
		50	0	21.80	20.91	21.02	21.04

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	22.00	21.18	21.28	21.46
		1	38	22.00	21.12	21.29	21.43
		1	74	22.00	21.18	21.31	21.42
		36	0	22.00	21.28	21.38	21.46
		36	18	22.00	21.28	21.38	21.45
		36	39	22.00	21.30	21.38	21.45
		75	0	22.00	21.19	21.44	21.35
	16QAM	1	0	22.00	21.30	21.38	21.66
		1	38	22.00	21.27	21.42	21.51
		1	74	22.00	21.32	21.54	21.59
		36	0	21.80	20.93	21.13	21.13
		36	18	21.80	20.95	21.13	21.15
		36	39	21.80	20.94	21.12	21.14
		75	0	21.80	20.88	21.08	21.09
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	22.00	21.21	21.37	21.43
		1	50	22.00	21.18	21.42	21.42
		1	99	22.00	21.29	21.40	<b>21.49</b>
		50	0	22.00	21.19	21.40	21.39
		50	25	22.00	21.16	21.42	21.38
		50	50	22.00	21.22	<b>21.43</b>	21.37
		100	0	22.00	21.22	21.33	21.35
	16QAM	1	0	22.00	21.52	21.61	21.72
		1	50	22.00	21.50	21.83	21.59
		1	99	22.00	21.34	21.54	21.73
		50	0	21.80	20.89	21.07	21.09
		50	25	21.80	20.90	21.06	21.09
		50	50	21.80	20.89	21.09	21.09
		100	0	21.80	20.93	21.04	21.05

Table 49: Conducted power measurement results of LTE Band 7 (Hotspot OFF+Receiver OFF)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	19.00	18.15	18.35	18.32
		1	13	19.00	18.12	18.35	18.32
		1	24	19.00	18.11	18.37	18.29
		12	0	19.00	18.14	18.40	18.34
		12	6	19.00	18.14	18.42	18.33
		12	13	19.00	18.21	18.41	18.34
		25	0	19.00	18.12	18.35	18.29
	16QAM	1	0	19.00	18.19	18.53	18.42
		1	13	19.00	18.26	18.55	18.55
		1	24	19.00	18.21	18.50	18.49
		12	0	19.00	18.15	18.33	18.35
		12	6	19.00	18.17	18.37	18.38
		12	13	19.00	18.10	18.34	18.34
		25	0	19.00	18.11	18.25	18.28
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	19.00	18.13	18.30	18.40
		1	25	19.00	18.20	18.31	18.40
		1	49	19.00	18.19	18.28	18.38
		25	0	19.00	18.15	18.41	18.37
		25	13	19.00	18.26	18.41	18.36
		25	25	19.00	18.19	18.40	18.36
		50	0	19.00	18.13	18.34	18.31
	16QAM	1	0	19.00	18.21	18.38	18.34
		1	25	19.00	18.15	18.41	18.56
		1	49	19.00	18.19	18.49	18.34
		25	0	19.00	18.13	18.27	18.28
		25	13	19.00	18.11	18.29	18.23
		25	25	19.00	18.11	18.29	18.24
		50	0	19.00	18.08	18.30	18.29

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	19.00	18.19	18.29	18.32
		1	38	19.00	18.17	18.27	18.39
		1	74	19.00	18.15	18.26	18.43
		36	0	19.00	18.25	18.41	18.43
		36	18	19.00	18.25	18.42	18.42
		36	39	19.00	18.24	18.41	18.42
		75	0	19.00	18.17	18.39	18.40
	16QAM	1	0	19.00	18.19	18.49	18.46
		1	38	19.00	18.37	18.41	18.41
		1	74	19.00	18.29	18.41	18.42
		36	0	19.00	18.20	18.28	18.35
		36	18	19.00	18.23	18.34	18.36
		36	39	19.00	18.25	18.31	18.33
		75	0	19.00	18.18	18.33	18.31
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	19.00	18.33	18.45	<b>18.57</b>
		1	50	19.00	18.34	18.46	18.53
		1	99	19.00	18.31	18.46	18.54
		50	0	19.00	18.27	<b>18.43</b>	18.41
		50	25	19.00	18.27	18.42	18.41
		50	50	19.00	18.27	18.42	18.40
		100	0	19.00	18.25	18.37	18.37
	16QAM	1	0	19.00	18.35	18.70	18.69
		1	50	19.00	18.32	18.66	18.76
		1	99	19.00	18.49	18.65	18.76
		50	0	19.00	18.17	18.33	18.39
		50	25	19.00	18.18	18.33	18.39
		50	50	19.00	18.18	18.33	18.40
		100	0	19.00	18.22	18.40	18.28

Table 50: Conducted power measurement results of LTE Band 7 (Hotspot ON+Receiver OFF)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	20.80	19.84	20.07	20.10
		1	13	20.80	19.95	20.17	20.08
		1	24	20.80	19.90	20.13	20.07
		12	0	20.80	19.95	20.11	20.14
		12	6	20.80	19.94	20.10	20.14
		12	13	20.80	19.91	20.09	20.14
		25	0	20.80	19.86	20.04	20.00
	16QAM	1	0	20.80	19.94	20.15	20.18
		1	13	20.80	19.92	20.36	20.07
		1	24	20.80	19.90	20.16	20.24
		12	0	20.80	19.94	20.13	20.05
		12	6	20.80	19.91	20.19	20.02
		12	13	20.80	19.92	20.16	20.06
		25	0	20.80	19.83	20.04	19.99
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	20.80	19.89	20.08	20.15
		1	25	20.80	19.89	20.12	20.11
		1	49	20.80	19.86	20.07	20.12
		25	0	20.80	19.92	20.07	20.12
		25	13	20.80	19.91	20.11	20.12
		25	25	20.80	19.90	20.18	20.12
		50	0	20.80	19.90	20.11	20.05
	16QAM	1	0	20.80	20.01	20.20	20.25
		1	25	20.80	20.01	20.24	20.27
		1	49	20.80	19.95	20.15	20.03
		25	0	20.80	19.86	20.03	20.03
		25	13	20.80	19.88	19.99	20.02
		25	25	20.80	19.92	20.02	20.05
		50	0	20.80	19.83	20.08	20.04

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	20.80	19.92	20.05	20.15
		1	38	20.80	19.90	20.08	20.15
		1	74	20.80	19.92	20.08	20.14
		36	0	20.80	20.01	20.18	20.12
		36	18	20.80	20.01	20.18	20.11
		36	39	20.80	20.00	20.17	20.11
		75	0	20.80	19.93	20.14	20.15
	16QAM	1	0	20.80	20.03	20.24	20.20
		1	38	20.80	20.01	20.23	20.28
		1	74	20.80	19.88	20.30	20.16
		36	0	20.80	19.97	20.08	20.07
		36	18	20.80	19.96	20.08	20.09
		36	39	20.80	19.95	20.08	20.11
		75	0	20.80	19.86	20.04	20.07
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	20.80	20.01	20.10	20.24
		1	50	20.80	20.02	20.23	20.24
		1	99	20.80	20.06	20.21	20.24
		50	0	20.80	20.03	20.19	20.14
		50	25	20.80	19.99	20.19	20.13
		50	50	20.80	20.02	20.19	20.13
		100	0	20.80	19.96	20.12	20.06
	16QAM	1	0	20.80	20.13	20.41	20.41
		1	50	20.80	20.18	20.24	20.29
		1	99	20.80	20.19	20.41	20.51
		50	0	20.80	19.86	20.02	20.11
		50	25	20.80	19.85	20.06	20.11
		50	50	20.80	19.89	20.05	20.13
		100	0	20.80	19.91	20.00	20.01

Table 51: Conducted power measurement results of LTE Band 7 (Hotspot ON+Receiver ON)

### 7.1.16 Conducted power measurements of WiFi 2.4G

The output power of WiFi antenna is as following:

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1Mbps	19.00	17.08	No
	6	2437		19.00	<b>17.80</b>	Yes
	11	2462		19.00	16.96	No
802.11g	1	2412	6Mbps	16.00	13.02	No
	2	2417		18.00	15.20	No
	6	2437		18.00	15.78	No
	10	2457		18.00	15.04	No
	11	2462		16.00	13.20	No
802.11n 20M	1	2412	MCS0	14.00	11.53	No
	2	2417		16.00	13.77	No
	6	2437		16.00	14.34	No
	10	2457		16.00	13.60	No
	11	2462		14.00	11.75	No
802.11n 40M	3	2422	MCS0	14.00	11.70	No
	4	2427		16.00	14.41	No
	6	2437		16.00	14.21	No
	8	2447		16.00	13.26	No
	9	2452		14.00	11.16	No

Table 52: Conducted power measurement results of WiFi 2.4G (Receiver OFF)

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1Mbps	11.50	9.79	No
	6	2437		11.50	9.95	No
	11	2462		11.50	<b>10.22</b>	Yes
802.11g	1	2412	6Mbps	11.50	8.77	No
	6	2437		11.50	9.04	No
	11	2462		11.50	8.72	No
802.11n 20M	1	2412	MCS0	11.50	8.73	No
	6	2437		11.50	9.22	No
	11	2462		11.50	9.09	No
802.11n 40M	3	2422	MCS0	11.50	8.65	No
	6	2437		11.50	9.07	No
	9	2452		11.50	8.32	No

Table 53: Conducted power measurement results of WiFi 2.4G (Receiver ON)

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

### 7.1.17 Conducted power measurements of BT

The output power of BT antenna is as the following:

BT	Tune-up	Average Conducted Power (dBm)		
	Max.	0CH	39CH	78CH
DH5	9.50	9.09	8.85	8.01
2DH5	8.50	7.13	6.90	6.08
3DH5	7.50	7.12	6.88	6.06
BT	Tune-up	Average Conducted Power (dBm)		
	Max.	0CH	19CH	39CH
BLE	8.00	5.61	5.24	4.21

Table 54: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

## 7.2 SAR measurement Results

### General Notes:

- 1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$ .
- When the maximum output power variation across the required test channels is  $> \frac{1}{2} \text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/kg}$ ; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45\text{W/kg}$ , only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than  $9 \text{ cm} \times 5 \text{ cm}$ , so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is  $\leq 1.2 \text{ W/kg}$ , no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5 \text{ W/kg}$ , or  $> 7.0 \text{ W/kg}$  for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

### GSM Notes:

- 1) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
- 2) Per KDB648474 D04, the device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

**UMTS Notes:**

1) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

**LTE Notes:**

- 1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices. The general test procedures used for SAR testing can be found in Section 6.5.
- 2) A-MPR was disabled for all SAR test by setting NS\_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames(maximum TTI)

**WiFi Notes:**

Per KDB248227D01:

- 1) When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is  $\leq 1.2$  W/kg or all required channels are tested..
- 2) When the DSSS *reported* SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 3) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations
- 4) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

### 7.2.1 SAR measurement Result of GSM850

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Second Antenna										
Left cheek	190/836.6	GSM	0.219	0.155	-0.06	30.32	31.20	0.268	Battery 1#	/
Left tilt	190/836.6	GSM	0.142	0.100	0.01	30.32	31.20	0.174	Battery 1#	/
Right cheek	190/836.6	GSM	0.424	0.252	0.12	30.32	31.20	0.519	Battery 1#	/
Right tilt	190/836.6	GSM	0.211	0.138	0.00	30.32	31.20	0.258	Battery 1#	/
Right cheek	190/836.6	GSM	0.437	0.259	0.04	30.32	31.20	0.535	Battery 2#	/
Right cheek	190/836.6	GSM	0.453	0.272	0.02	30.32	31.20	0.555	Battery 3#	Yes
Right cheek	190/836.6	GSM	0.393	0.231	0.03	30.32	31.20	0.481	Battery 4#	/
Right cheek	190/836.6	GSM	0.409	0.250	0.03	30.32	31.20	0.501	With SIM2	/
Main Antenna										
Left cheek	190/836.6	GSM	0.018	0.014	0.14	32.66	33.70	0.022	Battery 1#	/
Left tilt	190/836.6	GSM	0.015	0.009	0.12	32.66	33.70	0.019	Battery 1#	/
Right cheek	190/836.6	GSM	0.018	0.014	0.06	32.66	33.70	0.023	Battery 1#	/
Right tilt	190/836.6	GSM	0.012	0.009	0.09	32.66	33.70	0.015	Battery 1#	/
Right cheek	190/836.6	GSM	0.024	0.019	-0.15	32.66	33.70	0.031	Battery 2#	Yes
Right cheek	190/836.6	GSM	0.024	0.019	-0.03	32.66	33.70	0.030	Battery 3#	/
Right cheek	190/836.6	GSM	0.021	0.017	0.01	32.66	33.70	0.027	Battery 4#	/
Right cheek	190/836.6	GSM	0.020	0.014	0.04	32.66	33.70	0.026	With SIM2	/

Table 55: Head SAR test results of GSM850

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	15mm	190/836.6	GSM	0.091	0.060	-0.11	32.82	33.70	0.111	Battery 1#	/
Back Side	15mm	190/836.6	GSM	0.141	0.102	-0.05	32.82	33.70	0.173	Battery 1#	/
Back Side	15mm	190/836.6	GSM	0.149	0.108	-0.09	32.82	33.70	0.182	Battery 2#	Yes
Back Side	15mm	190/836.6	GSM	0.148	0.107	-0.14	32.82	33.70	0.181	Battery 3#	/
Back Side	15mm	190/836.6	GSM	0.145	0.105	-0.10	32.82	33.70	0.178	Battery 4#	/
Back Side	15mm	190/836.6	GSM	0.137	0.100	-0.14	32.82	33.70	0.168	With SIM2	/
Main Antenna											
Front Side	15mm	190/836.6	GSM	0.098	0.065	-0.19	32.66	33.70	0.125	Battery 1#	/
Back Side	15mm	190/836.6	GSM	0.176	0.134	-0.17	32.66	33.70	0.224	Battery 1#	Yes
Back Side	15mm	190/836.6	GSM	0.171	0.132	-0.09	32.66	33.70	0.217	Battery 2#	/
Back Side	15mm	190/836.6	GSM	0.170	0.130	0.08	32.66	33.70	0.216	Battery 3#	/
Back Side	15mm	190/836.6	GSM	0.168	0.128	-0.08	32.66	33.70	0.213	Battery 4#	/
Back Side	15mm	190/836.6	GSM	0.172	0.114	-0.03	32.66	33.70	0.219	With SIM2	/

Table 56: Body-Worn SAR test results of GSM850

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	10mm	190/836.6	GPRS 2TS	0.261	0.168	-0.10	29.80	30.70	0.321	Battery 1#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.438	0.298	-0.06	29.80	30.70	0.539	Battery 1#	/
Left Side	10mm	190/836.6	GPRS 2TS	0.455	0.287	-0.12	29.80	30.70	0.560	Battery 1#	/
Top Side	10mm	190/836.6	GPRS 2TS	0.059	0.039	0.02	29.80	30.70	0.073	Battery 1#	/
Left Side	10mm	190/836.6	GPRS 2TS	0.467	0.293	-0.19	29.80	30.70	0.575	Battery 2#	/
Left Side	10mm	190/836.6	GPRS 2TS	0.445	0.282	-0.10	29.80	30.70	0.547	Battery 3#	/
Left Side	10mm	190/836.6	GPRS 2TS	0.478	0.300	-0.13	29.80	30.70	0.588	Battery 4#	Yes
Left Side	10mm	190/836.6	GPRS 2TS	0.428	0.273	-0.15	29.80	30.70	0.527	With SIM2	/
Main Antenna											
Front Side	10mm	190/836.6	GPRS 2TS	0.148	0.097	-0.18	29.58	30.70	0.192	Battery 1#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.277	0.197	-0.16	29.58	30.70	0.358	Battery 1#	Yes
Left Side	10mm	190/836.6	GPRS 2TS	0.064	0.038	-0.15	29.58	30.70	0.082	Battery 1#	/
Right Side	10mm	190/836.6	GPRS 2TS	0.003	0.002	-0.15	29.58	30.70	0.004	Battery 1#	/
Bottom Side	10mm	190/836.6	GPRS 2TS	0.108	0.072	-0.15	29.58	30.70	0.140	Battery 1#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.237	0.173	-0.17	29.58	30.70	0.307	Battery 2#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.265	0.191	-0.18	29.58	30.70	0.343	Battery 3#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.247	0.186	0.09	29.58	30.70	0.320	Battery 4#	/
Back Side	10mm	190/836.6	GPRS 2TS	0.245	0.163	-0.06	29.58	30.70	0.317	With SIM2	/

Table 57: Hotspot SAR test results of GSM850

Note: Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.2.2 SAR measurement Result of GSM1900

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Second Antenna										
Left cheek	661/1880	GSM	0.122	0.078	0.06	27.48	29.00	0.173	Battery 1#	/
Left tilt	661/1880	GSM	0.163	0.087	0.06	27.48	29.00	0.231	Battery 1#	/
Right cheek	661/1880	GSM	0.307	0.160	-0.01	27.48	29.00	0.436	Battery 1#	Yes
Right tilt	661/1880	GSM	0.171	0.095	0.02	27.48	29.00	0.243	Battery 1#	/
Right cheek	661/1880	GSM	0.248	0.134	-0.10	27.48	29.00	0.352	Battery 2#	/
Right cheek	661/1880	GSM	0.292	0.149	0.05	27.48	29.00	0.414	Battery 3#	/
Right cheek	661/1880	GSM	0.298	0.153	0.17	27.48	29.00	0.423	Battery 4#	/
Right cheek	661/1880	GSM	0.288	0.148	0.08	27.48	29.00	0.409	With SIM2	/
Main Antenna										
Left cheek	661/1880	GSM	0.095	0.062	0.10	29.43	31.00	0.136	Battery 1#	/
Left tilt	661/1880	GSM	0.052	0.031	0.04	29.43	31.00	0.075	Battery 1#	/
Right cheek	661/1880	GSM	0.070	0.045	-0.17	29.43	31.00	0.100	Battery 1#	/
Right tilt	661/1880	GSM	0.044	0.025	0.00	29.43	31.00	0.063	Battery 1#	/
Left cheek	661/1880	GSM	0.102	0.066	0.18	29.43	31.00	0.146	Battery 2#	Yes
Left cheek	661/1880	GSM	0.094	0.061	0.17	29.43	31.00	0.135	Battery 3#	/
Left cheek	661/1880	GSM	0.094	0.062	0.16	29.43	31.00	0.135	Battery 4#	/
Left cheek	661/1880	GSM	0.086	0.057	0.11	29.43	31.00	0.124	With SIM2	/

Table 58: Head SAR test results of GSM1900

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	15mm	661/1880	GSM	0.029	0.018	0.06	27.48	29.00	0.042	Battery 1#	/
Back Side	15mm	661/1880	GSM	0.042	0.026	0.13	27.48	29.00	0.059	Battery 1#	/
Back Side	15mm	661/1880	GSM	0.040	0.025	0.02	27.48	29.00	0.057	Battery 2#	/
Back Side	15mm	661/1880	GSM	0.039	0.024	-0.15	27.48	29.00	0.056	Battery 3#	/
Back Side	15mm	661/1880	GSM	0.047	0.029	-0.13	27.48	29.00	0.066	Battery 4#	Yes
Back Side	15mm	661/1880	GSM	0.046	0.028	-0.06	27.48	29.00	0.065	With SIM2	/
Main Antenna											
Front Side	15mm	661/1880	GSM	0.101	0.061	-0.05	29.43	31.00	0.145	Battery 1#	/
Back Side	15mm	661/1880	GSM	0.180	0.105	-0.04	29.43	31.00	0.258	Battery 1#	Yes
Back Side	15mm	661/1880	GSM	0.177	0.102	0.02	29.43	31.00	0.254	Battery 2#	/
Back Side	15mm	661/1880	GSM	0.165	0.096	-0.07	29.43	31.00	0.237	Battery 3#	/
Back Side	15mm	661/1880	GSM	0.173	0.100	-0.13	29.43	31.00	0.248	Battery 4#	/
Back Side	15mm	661/1880	GSM	0.168	0.098	-0.09	29.43	31.00	0.241	With SIM2	/

Table 59: Body-Worn SAR test results of GSM1900

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	10mm	661/1880	GPRS 2TS	0.023	0.014	-0.06	21.46	22.80	0.032	Battery 1#	/
Back Side	10mm	661/1880	GPRS 2TS	0.048	0.024	-0.19	21.46	22.80	0.066	Battery 1#	/
Left Side	10mm	661/1880	GPRS 2TS	0.049	0.025	-0.12	21.46	22.80	0.066	Battery 1#	/
Top Side	10mm	661/1880	GPRS 2TS	0.030	0.017	0.19	21.46	22.80	0.040	Battery 1#	/
Left Side	10mm	661/1880	GPRS 2TS	0.047	0.024	0.09	21.46	22.80	0.063	Battery 2#	/
Left Side	10mm	661/1880	GPRS 2TS	0.047	0.024	0.04	21.46	22.80	0.064	Battery 3#	/
Left Side	10mm	661/1880	GPRS 2TS	0.050	0.025	0.02	21.46	22.80	0.068	Battery 4#	/
Left Side	10mm	661/1880	GPRS 2TS	0.054	0.027	0.16	21.46	22.80	0.074	With SIM2	Yes
Main Antenna											
Front Side	10mm	661/1880	GPRS 2TS	0.079	0.047	-0.05	23.02	24.80	0.119	Battery 1#	/
Back Side	10mm	661/1880	GPRS 2TS	0.116	0.065	-0.17	23.02	24.80	0.175	Battery 1#	/
Left Side	10mm	661/1880	GPRS 2TS	0.045	0.026	-0.14	23.02	24.80	0.067	Battery 1#	/
Right Side	10mm	661/1880	GPRS 2TS	0.029	0.017	0.14	23.02	24.80	0.043	Battery 1#	/
Bottom Side	10mm	661/1880	GPRS 2TS	0.178	0.097	-0.05	23.02	24.80	0.268	Battery 1#	/
Bottom Side	10mm	661/1880	GPRS 2TS	0.185	0.100	-0.03	23.02	24.80	0.279	Battery 2#	/
Bottom Side	10mm	661/1880	GPRS 2TS	0.186	0.102	-0.10	23.02	24.80	0.280	Battery 3#	Yes
Bottom Side	10mm	661/1880	GPRS 2TS	0.155	0.084	0.01	23.02	24.80	0.234	Battery 4#	/
Bottom Side	10mm	661/1880	GPRS 2TS	0.164	0.088	0.12	23.02	24.80	0.247	With SIM2	/

Table 60: Hotspot SAR test results of GSM1900

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Second Antenna										
Front Side	10mm	661/1880	GPRS 2TS	0.023	0.014	-0.06	21.46	24.80	0.050	Yes
Back Side	10mm	661/1880	GPRS 2TS	0.048	0.024	-0.19	21.46	24.80	0.104	Yes
Left Side	10mm	661/1880	GPRS 2TS	0.049	0.025	-0.12	21.46	24.80	0.105	Yes
Top Side	10mm	661/1880	GPRS 2TS	0.030	0.017	0.19	21.46	24.80	0.064	Yes
Left Side	10mm	661/1880	GPRS 2TS	0.047	0.024	0.09	21.46	24.80	0.101	Yes
Left Side	10mm	661/1880	GPRS 2TS	0.047	0.024	0.04	21.46	24.80	0.102	Yes
Left Side	10mm	661/1880	GPRS 2TS	0.050	0.025	0.02	21.46	24.80	0.109	Yes
Left Side	10mm	661/1880	GPRS 2TS	0.054	0.027	0.16	21.46	24.80	0.117	Yes
Main Antenna										
Front Side	10mm	661/1880	GPRS 2TS	0.079	0.047	-0.05	23.02	27.80	0.237	Yes
Back Side	10mm	661/1880	GPRS 2TS	0.116	0.065	-0.17	23.02	27.80	0.349	Yes
Left Side	10mm	661/1880	GPRS 2TS	0.045	0.026	-0.14	23.02	27.80	0.134	Yes
Right Side	10mm	661/1880	GPRS 2TS	0.029	0.017	0.14	23.02	27.80	0.087	Yes
Bottom Side	10mm	661/1880	GPRS 2TS	0.178	0.097	-0.05	23.02	27.80	0.535	Yes
Bottom Side	10mm	661/1880	GPRS 2TS	0.185	0.100	-0.03	23.02	27.80	0.556	Yes
Bottom Side	10mm	661/1880	GPRS 2TS	0.186	0.102	-0.10	23.02	27.80	0.559	Yes
Bottom Side	10mm	661/1880	GPRS 2TS	0.155	0.084	0.01	23.02	27.80	0.466	Yes
Bottom Side	10mm	661/1880	GPRS 2TS	0.164	0.088	0.12	23.02	27.80	0.493	Yes

Table 61: Product Specific 10-g SAR test reduction evaluation of GSM1900

Note : According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

### 7.2.3 SAR measurement Result of UMTS Band II

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Second Antenna										
Left cheek	9400/1880	RMC	0.149	0.094	-0.15	19.02	20.00	0.187	Battery 1#	/
Left tilt	9400/1880	RMC	0.216	0.126	-0.01	19.02	20.00	0.271	Battery 1#	/
Right cheek	9400/1880	RMC	0.344	0.172	0.13	19.02	20.00	0.431	Battery 1#	/
Right tilt	9400/1880	RMC	0.223	0.134	0.04	19.02	20.00	0.279	Battery 1#	/
Right cheek	9400/1880	RMC	0.362	0.181	0.18	19.02	20.00	0.454	Battery 2#	/
Right cheek	9400/1880	RMC	0.363	0.182	-0.02	19.02	20.00	0.455	Battery 3#	Yes
Right cheek	9400/1880	RMC	0.341	0.173	-0.01	19.02	20.00	0.427	Battery 4#	/
Right cheek	9400/1880	RMC	0.361	0.182	-0.04	19.02	20.00	0.452	With SIM2	/
Main Antenna										
Left cheek	9400/1880	RMC	0.155	0.100	0.09	23.12	24.00	0.190	Battery 1#	/
Left tilt	9400/1880	RMC	0.090	0.051	0.11	23.12	24.00	0.110	Battery 1#	/
Right cheek	9400/1880	RMC	0.103	0.066	0.17	23.12	24.00	0.126	Battery 1#	/
Right tilt	9400/1880	RMC	0.080	0.045	0.00	23.12	24.00	0.098	Battery 1#	/
Left cheek	9400/1880	RMC	0.161	0.102	-0.06	23.12	24.00	0.197	Battery 2#	Yes
Left cheek	9400/1880	RMC	0.156	0.100	0.12	23.12	24.00	0.191	Battery 3#	/
Left cheek	9400/1880	RMC	0.157	0.101	0.04	23.12	24.00	0.192	Battery 4#	/
Left cheek	9400/1880	RMC	0.155	0.099	0.18	23.12	24.00	0.190	With SIM2	/

Table 62: Head SAR test results of UMTS Band II

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	15mm	9400/1880	RMC	0.051	0.031	-0.05	19.02	20.00	0.064	Battery 1#	/
Back Side	15mm	9400/1880	RMC	0.064	0.040	-0.16	19.02	20.00	0.080	Battery 1#	/
Back Side	15mm	9400/1880	RMC	0.064	0.039	0.01	19.02	20.00	0.080	Battery 2#	/
Back Side	15mm	9400/1880	RMC	0.067	0.041	-0.05	19.02	20.00	0.084	Battery 3#	/
Back Side	15mm	9400/1880	RMC	0.071	0.044	0.02	19.02	20.00	0.088	Battery 4#	Yes
Back Side	15mm	9400/1880	RMC	0.060	0.037	0.08	19.02	20.00	0.075	With SIM2	/
Main Antenna											
Front Side	15mm	9400/1880	RMC	0.124	0.074	0.02	22.52	23.30	0.148	Battery 1#	/
Back Side	15mm	9400/1880	RMC	0.216	0.125	0.08	22.52	23.30	0.258	Battery 1#	/
Back Side	15mm	9400/1880	RMC	0.220	0.127	-0.04	22.52	23.30	0.263	Battery 2#	Yes
Back Side	15mm	9400/1880	RMC	0.219	0.127	0.01	22.52	23.30	0.262	Battery 3#	/
Back Side	15mm	9400/1880	RMC	0.204	0.119	0.05	22.52	23.30	0.244	Battery 4#	/
Back Side	15mm	9400/1880	RMC	0.209	0.121	0.04	22.52	23.30	0.250	With SIM2	/

Table 63: Body-Worn SAR test results of UMTS Band II

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	10mm	9400/1880	RMC	0.047	0.029	0.10	15.88	17.00	0.061	Battery 1#	/
Back Side	10mm	9400/1880	RMC	0.087	0.043	-0.01	15.88	17.00	0.112	Battery 1#	/
Left Side	10mm	9400/1880	RMC	0.096	0.049	0.13	15.88	17.00	0.125	Battery 1#	Yes
Top Side	10mm	9400/1880	RMC	0.053	0.031	0.08	15.88	17.00	0.069	Battery 1#	/
Left Side	10mm	9400/1880	RMC	0.078	0.040	-0.11	15.88	17.00	0.101	Battery 2#	/
Left Side	10mm	9400/1880	RMC	0.084	0.042	-0.11	15.88	17.00	0.109	Battery 3#	/
Left Side	10mm	9400/1880	RMC	0.085	0.043	-0.11	15.88	17.00	0.110	Battery 4#	/
Left Side	10mm	9400/1880	RMC	0.087	0.044	0.12	15.88	17.00	0.112	With SIM2	/
Main Antenna											
Front Side	10mm	9400/1880	RMC	0.127	0.074	0.05	19.65	20.30	0.148	Battery 1#	/
Back Side	10mm	9400/1880	RMC	0.266	0.145	0.05	19.65	20.30	0.309	Battery 1#	/
Left Side	10mm	9400/1880	RMC	0.071	0.041	0.00	19.65	20.30	0.083	Battery 1#	/
Right Side	10mm	9400/1880	RMC	0.052	0.029	0.10	19.65	20.30	0.061	Battery 1#	/
Bottom Side	10mm	9400/1880	RMC	0.298	0.162	0.13	19.65	20.30	0.346	Battery 1#	/
Bottom Side	10mm	9400/1880	RMC	0.303	0.164	0.00	19.65	20.30	0.352	Battery 2#	Yes
Bottom Side	10mm	9400/1880	RMC	0.284	0.155	0.15	19.65	20.30	0.330	Battery 3#	/
Bottom Side	10mm	9400/1880	RMC	0.280	0.154	0.06	19.65	20.30	0.325	Battery 4#	/
Bottom Side	10mm	9400/1880	RMC	0.295	0.161	-0.03	19.65	20.30	0.343	With SIM2	/

Table 64: Hotspot SAR test results of UMTS Band II

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Second Antenna										
Front Side	10mm	9400/1880	RMC	0.047	0.029	0.10	15.88	20.00	0.122	Yes
Back Side	10mm	9400/1880	RMC	0.087	0.043	-0.01	15.88	20.00	0.224	Yes
Left Side	10mm	9400/1880	RMC	0.096	0.049	0.13	15.88	20.00	0.249	Yes
Top Side	10mm	9400/1880	RMC	0.053	0.031	0.08	15.88	20.00	0.137	Yes
Left Side	10mm	9400/1880	RMC	0.078	0.040	-0.11	15.88	20.00	0.202	Yes
Left Side	10mm	9400/1880	RMC	0.084	0.042	-0.11	15.88	20.00	0.217	Yes
Left Side	10mm	9400/1880	RMC	0.085	0.043	-0.11	15.88	20.00	0.220	Yes
Left Side	10mm	9400/1880	RMC	0.087	0.044	0.12	15.88	20.00	0.224	Yes
Main Antenna										
Front Side	10mm	9400/1880	RMC	0.127	0.074	0.05	19.65	24.00	0.346	Yes
Back Side	10mm	9400/1880	RMC	0.266	0.145	0.05	19.65	24.00	0.724	Yes
Left Side	10mm	9400/1880	RMC	0.071	0.041	0.00	19.65	24.00	0.194	Yes
Right Side	10mm	9400/1880	RMC	0.052	0.029	0.10	19.65	24.00	0.142	Yes
Bottom Side	10mm	9400/1880	RMC	0.298	0.162	0.13	19.65	24.00	0.811	Yes
Bottom Side	10mm	9400/1880	RMC	0.303	0.164	0.00	19.65	24.00	0.825	Yes
Bottom Side	10mm	9400/1880	RMC	0.284	0.155	0.15	19.65	24.00	0.773	Yes
Bottom Side	10mm	9400/1880	RMC	0.280	0.154	0.06	19.65	24.00	0.762	Yes
Bottom Side	10mm	9400/1880	RMC	0.295	0.161	-0.03	19.65	24.00	0.803	Yes

Table 65: Product Specific 10-g SAR test reduction evaluation of UMTS Band II

Note : According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

### 7.2.4 SAR measurement Result of UMTS Band IV

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Second Antenna										
Left cheek	1413/1732.6	RMC	0.089	0.053	0.07	19.22	20.50	0.119	Battery 1#	/
Left tilt	1413/1732.6	RMC	0.144	0.087	-0.02	19.22	20.50	0.193	Battery 1#	/
Right cheek	1413/1732.6	RMC	0.265	0.133	0.18	19.22	20.50	0.356	Battery 1#	/
Right tilt	1413/1732.6	RMC	0.158	0.089	0.14	19.22	20.50	0.212	Battery 1#	/
Right cheek	1413/1732.6	RMC	0.256	0.127	0.02	19.22	20.50	0.344	Battery 2#	/
Right cheek	1413/1732.6	RMC	0.261	0.128	0.02	19.22	20.50	0.350	Battery 3#	/
Right cheek	1413/1732.6	RMC	0.283	0.142	-0.03	19.22	20.50	0.380	Battery 4#	Yes
Right cheek	1413/1732.6	RMC	0.245	0.123	0.00	19.22	20.50	0.329	With SIM2	/
Main Antenna										
Left cheek	1413/1732.6	RMC	0.194	0.131	0.12	23.42	24.50	0.249	Battery 1#	/
Left tilt	1413/1732.6	RMC	0.072	0.041	0.15	23.42	24.50	0.093	Battery 1#	/
Right cheek	1413/1732.6	RMC	0.119	0.076	0.14	23.42	24.50	0.153	Battery 1#	/
Right tilt	1413/1732.6	RMC	0.079	0.045	-0.12	23.42	24.50	0.101	Battery 1#	/
Left cheek	1413/1732.6	RMC	0.197	0.133	0.14	23.42	24.50	0.253	Battery 2#	/
Left cheek	1413/1732.6	RMC	0.198	0.133	0.10	23.42	24.50	0.254	Battery 3#	/
Left cheek	1413/1732.6	RMC	0.198	0.135	0.12	23.42	24.50	0.254	Battery 4#	Yes
Left cheek	1413/1732.6	RMC	0.173	0.100	0.11	23.42	24.50	0.222	With SIM2	/

Table 66: Head SAR test results of UMTS Band IV

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	15mm	1413/1732.6	RMC	0.036	0.026	0.04	19.22	20.50	0.049	Battery 1#	/
Back Side	15mm	1413/1732.6	RMC	0.057	0.032	0.11	19.22	20.50	0.077	Battery 1#	/
Back Side	15mm	1413/1732.6	RMC	0.070	0.039	0.00	19.22	20.50	0.095	Battery 2#	/
Back Side	15mm	1413/1732.6	RMC	0.077	0.043	0.09	19.22	20.50	0.103	Battery 3#	Yes
Back Side	15mm	1413/1732.6	RMC	0.064	0.035	0.19	19.22	20.50	0.085	Battery 4#	/
Back Side	15mm	1413/1732.6	RMC	0.063	0.037	-0.02	19.22	20.50	0.084	With SIM2	/
Main Antenna											
Front Side	15mm	1413/1732.6	RMC	0.163	0.106	0.03	22.90	24.00	0.210	Battery 1#	/
Back Side	15mm	1413/1732.6	RMC	0.254	0.161	-0.03	22.90	24.00	0.327	Battery 1#	/
Back Side	15mm	1413/1732.6	RMC	0.233	0.146	-0.13	22.90	24.00	0.300	Battery 2#	/
Back Side	15mm	1413/1732.6	RMC	0.279	0.175	0.07	22.90	24.00	0.359	Battery 3#	Yes
Back Side	15mm	1413/1732.6	RMC	0.257	0.161	-0.06	22.90	24.00	0.331	Battery 4#	/
Back Side	15mm	1413/1732.6	RMC	0.242	0.153	-0.07	22.90	24.00	0.312	With SIM2	/

Table 67: Body-Worn SAR test results of UMTS Band II

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot
				1-g	10-g						
Second Antenna											
Front Side	10mm	1413/1732.6	RMC	0.030	0.021	0.15	16.42	17.50	0.039	Battery 1#	/
Back Side	10mm	1413/1732.6	RMC	0.086	0.046	0.18	16.42	17.50	0.110	Battery 1#	/
Left Side	10mm	1413/1732.6	RMC	0.107	0.055	0.11	16.42	17.50	0.137	Battery 1#	Yes
Top Side	10mm	1413/1732.6	RMC	0.035	0.021	0.03	16.42	17.50	0.045	Battery 1#	/
Left Side	10mm	1413/1732.6	RMC	0.097	0.050	0.16	16.42	17.50	0.124	Battery 2#	/
Left Side	10mm	1413/1732.6	RMC	0.091	0.047	0.17	16.42	17.50	0.117	Battery 3#	/
Left Side	10mm	1413/1732.6	RMC	0.095	0.049	0.15	16.42	17.50	0.121	Battery 4#	/
Left Side	10mm	1413/1732.6	RMC	0.088	0.046	0.19	16.42	17.50	0.113	With SIM2	/
Main Antenna											
Front Side	10mm	1413/1732.6	RMC	0.138	0.088	0.04	20.11	21.00	0.169	Battery 1#	/
Back Side	10mm	1413/1732.6	RMC	0.257	0.153	0.08	20.11	21.00	0.315	Battery 1#	/
Left Side	10mm	1413/1732.6	RMC	0.087	0.049	0.15	20.11	21.00	0.107	Battery 1#	/
Right Side	10mm	1413/1732.6	RMC	0.050	0.029	0.12	20.11	21.00	0.062	Battery 1#	/
Bottom Side	10mm	1413/1732.6	RMC	0.298	0.171	0.00	20.11	21.00	0.366	Battery 1#	Yes
Bottom Side	10mm	1413/1732.6	RMC	0.286	0.165	-0.16	20.11	21.00	0.351	Battery 2#	/
Bottom Side	10mm	1413/1732.6	RMC	0.295	0.170	-0.19	20.11	21.00	0.362	Battery 3#	/
Bottom Side	10mm	1413/1732.6	RMC	0.283	0.164	0.10	20.11	21.00	0.347	Battery 4#	/
Bottom Side	10mm	1413/1732.6	RMC	0.249	0.145	0.11	20.11	21.00	0.306	With SIM2	/

Table 68: Hotspot SAR test results of UMTS Band II

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Second Antenna										
Front Side	10mm	1413/1732.6	RMC	0.030	0.021	0.15	16.42	20.50	0.078	Yes
Back Side	10mm	1413/1732.6	RMC	0.086	0.046	0.18	16.42	20.50	0.220	Yes
Left Side	10mm	1413/1732.6	RMC	0.107	0.055	0.11	16.42	20.50	0.274	Yes
Top Side	10mm	1413/1732.6	RMC	0.035	0.021	0.03	16.42	20.50	0.091	Yes
Left Side	10mm	1413/1732.6	RMC	0.097	0.050	0.16	16.42	20.50	0.247	Yes
Left Side	10mm	1413/1732.6	RMC	0.091	0.047	0.17	16.42	20.50	0.233	Yes
Left Side	10mm	1413/1732.6	RMC	0.095	0.049	0.15	16.42	20.50	0.242	Yes
Left Side	10mm	1413/1732.6	RMC	0.088	0.046	0.19	16.42	20.50	0.226	Yes
Main Antenna										
Front Side	10mm	1413/1732.6	RMC	0.138	0.088	0.04	20.11	24.50	0.379	Yes
Back Side	10mm	1413/1732.6	RMC	0.257	0.153	0.08	20.11	24.50	0.706	Yes
Left Side	10mm	1413/1732.6	RMC	0.087	0.049	0.15	20.11	24.50	0.239	Yes
Right Side	10mm	1413/1732.6	RMC	0.050	0.029	0.12	20.11	24.50	0.138	Yes
Bottom Side	10mm	1413/1732.6	RMC	0.298	0.171	0.00	20.11	24.50	0.819	Yes
Bottom Side	10mm	1413/1732.6	RMC	0.286	0.165	-0.16	20.11	24.50	0.786	Yes
Bottom Side	10mm	1413/1732.6	RMC	0.295	0.170	-0.19	20.11	24.50	0.811	Yes
Bottom Side	10mm	1413/1732.6	RMC	0.283	0.164	0.10	20.11	24.50	0.778	Yes
Bottom Side	10mm	1413/1732.6	RMC	0.249	0.145	0.11	20.11	24.50	0.684	Yes

Table 69: Product Specific 10-g SAR test reduction evaluation of UMTS Band IV

Note : According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

### 7.2.5 SAR measurement Result of UMTS Band V

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Second Antenna										
Left cheek	4182/836.4	RMC	0.174	0.123	0.02	20.34	21.50	0.227	Battery 1#	/
Left tilt	4182/836.4	RMC	0.109	0.073	-0.02	20.34	21.50	0.142	Battery 1#	/
Right cheek	4182/836.4	RMC	0.345	0.207	-0.14	20.34	21.50	0.451	Battery 1#	/
Right tilt	4182/836.4	RMC	0.171	0.111	0.11	20.34	21.50	0.223	Battery 1#	/
Right cheek	4182/836.4	RMC	0.322	0.196	-0.02	20.34	21.50	0.421	Battery 2#	/
Right cheek	4182/836.4	RMC	0.406	0.219	-0.06	20.34	21.50	0.530	Battery 3#	Yes
Right cheek	4182/836.4	RMC	0.347	0.210	0.05	20.34	21.50	0.453	Battery 4#	/
Right cheek	4182/836.4	RMC	0.364	0.219	0.05	20.34	21.50	0.475	With SIM2	/
Main Antenna										
Left cheek	4182/836.4	RMC	0.025	0.018	0.02	23.75	25.00	0.034	Battery 1#	/
Left tilt	4182/836.4	RMC	0.008	0.005	0.11	23.75	25.00	0.010	Battery 1#	/
Right cheek	4182/836.4	RMC	0.023	0.018	0.09	23.75	25.00	0.031	Battery 1#	/
Right tilt	4182/836.4	RMC	0.010	0.007	0.16	23.75	25.00	0.013	Battery 1#	/
Left cheek	4182/836.4	RMC	0.024	0.019	0.04	23.75	25.00	0.032	Battery 2#	/
Left cheek	4182/836.4	RMC	0.032	0.024	0.16	23.75	25.00	0.043	Battery 3#	Yes
Left cheek	4182/836.4	RMC	0.031	0.024	0.05	23.75	25.00	0.041	Battery 4#	/
Left cheek	4182/836.4	RMC	0.030	0.023	0.02	23.75	25.00	0.041	With SIM2	/

Table 70: Head SAR test results of UMTS Band V

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	15mm	4182/836.4	RMC	0.212	0.143	-0.02	23.84	25.00	0.277	Battery 1#	/
Back Side	15mm	4182/836.4	RMC	0.307	0.203	0.06	23.84	25.00	0.401	Battery 1#	/
Back Side	15mm	4182/836.4	RMC	0.367	0.238	0.05	23.84	25.00	0.479	Battery 2#	/
Back Side	15mm	4182/836.4	RMC	0.369	0.239	0.04	23.84	25.00	0.482	Battery 3#	Yes
Back Side	15mm	4182/836.4	RMC	0.326	0.214	0.04	23.84	25.00	0.426	Battery 4#	/
Back Side	15mm	4182/836.4	RMC	0.331	0.217	0.04	23.84	25.00	0.432	With SIM2	/
Main Antenna											
Front Side	15mm	4182/836.4	RMC	0.138	0.093	0.12	23.75	25.00	0.184	Battery 1#	/
Back Side	15mm	4182/836.4	RMC	0.235	0.160	-0.01	23.75	25.00	0.313	Battery 1#	Yes
Back Side	15mm	4182/836.4	RMC	0.231	0.156	0.05	23.75	25.00	0.308	Battery 2#	/
Back Side	15mm	4182/836.4	RMC	0.233	0.159	-0.02	23.75	25.00	0.311	Battery 3#	/
Back Side	15mm	4182/836.4	RMC	0.234	0.159	-0.02	23.75	25.00	0.312	Battery 4#	/
Back Side	15mm	4182/836.4	RMC	0.216	0.147	-0.05	23.75	25.00	0.288	With SIM2	/

Table 71: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	10mm	4182/836.4	RMC	0.174	0.112	-0.02	20.83	22.00	0.228	Battery 1#	/
Back Side	10mm	4182/836.4	RMC	0.288	0.179	0.07	20.83	22.00	0.377	Battery 1#	/
Left Side	10mm	4182/836.4	RMC	0.306	0.181	0.14	20.83	22.00	0.401	Battery 1#	/
Top Side	10mm	4182/836.4	RMC	0.044	0.029	0.13	20.83	22.00	0.058	Battery 1#	/
Left Side	10mm	4182/836.4	RMC	0.296	0.176	0.05	20.83	22.00	0.388	Battery 2#	/
Left Side	10mm	4182/836.4	RMC	0.284	0.170	0.05	20.83	22.00	0.372	Battery 3#	/
Left Side	10mm	4182/836.4	RMC	0.306	0.181	0.05	20.83	22.00	0.401	Battery 4#	Yes
Left Side	10mm	4182/836.4	RMC	0.285	0.171	0.04	20.83	22.00	0.373	With SIM2	/
Main Antenna											
Front Side	10mm	4182/836.4	RMC	0.209	0.139	0.09	23.75	25.00	0.279	Battery 1#	/
Back Side	10mm	4182/836.4	RMC	0.373	0.250	-0.03	23.75	25.00	0.497	Battery 1#	/
Left Side	10mm	4182/836.4	RMC	0.096	0.058	0.13	23.75	25.00	0.128	Battery 1#	/
Right Side	10mm	4182/836.4	RMC	0.069	0.041	0.18	23.75	25.00	0.092	Battery 1#	/
Bottom Side	10mm	4182/836.4	RMC	0.162	0.098	0.16	23.75	25.00	0.216	Battery 1#	/
Back Side	10mm	4182/836.4	RMC	0.380	0.250	0.01	23.75	25.00	0.507	Battery 2#	Yes
Back Side	10mm	4182/836.4	RMC	0.338	0.226	-0.02	23.75	25.00	0.451	Battery 3#	/
Back Side	10mm	4182/836.4	RMC	0.366	0.244	-0.08	23.75	25.00	0.488	Battery 4#	/
Back Side	10mm	4182/836.4	RMC	0.330	0.221	-0.04	23.75	25.00	0.440	With SIM2	/

Table 72: Hotspot SAR test results of UMTS Band V

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Second Antenna										
Front Side	10mm	4182/836.4	RMC	0.174	0.112	-0.02	20.83	25.00	0.455	Yes
Back Side	10mm	4182/836.4	RMC	0.288	0.179	0.07	20.83	25.00	0.752	Yes
Left Side	10mm	4182/836.4	RMC	0.306	0.182	0.05	20.83	25.00	0.799	Yes
Top Side	10mm	4182/836.4	RMC	0.044	0.029	0.13	20.83	25.00	0.116	Yes
Left Side	10mm	4182/836.4	RMC	0.296	0.176	0.05	20.83	25.00	0.773	Yes
Left Side	10mm	4182/836.4	RMC	0.284	0.170	0.05	20.83	25.00	0.742	Yes
Left Side	10mm	4182/836.4	RMC	0.306	0.181	0.05	20.83	25.00	0.799	Yes
Left Side	10mm	4182/836.4	RMC	0.285	0.171	0.04	20.83	25.00	0.744	Yes
Main Antenna										
Front Side	10mm	4182/836.4	RMC	0.209	0.139	0.09	23.75	25.00	0.279	Yes
Back Side	10mm	4182/836.4	RMC	0.373	0.250	-0.03	23.75	25.00	0.497	Yes
Left Side	10mm	4182/836.4	RMC	0.096	0.058	0.13	23.75	25.00	0.128	Yes
Right Side	10mm	4182/836.4	RMC	0.069	0.041	0.18	23.75	25.00	0.092	Yes
Bottom Side	10mm	4182/836.4	RMC	0.162	0.098	0.16	23.75	25.00	0.216	Yes
Back Side	10mm	4182/836.4	RMC	0.380	0.250	0.01	23.75	25.00	0.507	Yes
Back Side	10mm	4182/836.4	RMC	0.338	0.226	-0.02	23.75	25.00	0.451	Yes
Back Side	10mm	4182/836.4	RMC	0.366	0.244	-0.08	23.75	25.00	0.488	Yes
Back Side	10mm	4182/836.4	RMC	0.330	0.221	-0.04	23.75	25.00	0.440	Yes

Table 73: Product Specific 10-g SAR test reduction evaluation of UMTS Band V

Note : According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

### 7.2.6 SAR measurement Result of LTE Band 2

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Main Antenna(Main Antenna)										
Left cheek	18700/1860	20M QPSK 1RB#99	0.148	0.097	0.18	23.12	24.00	0.181	Battery 1#	/
Left tilt	18700/1860	20M QPSK 1RB#99	0.099	0.057	-0.01	23.12	24.00	0.121	Battery 1#	/
Right cheek	18700/1860	20M QPSK 1RB#99	0.124	0.079	0.16	23.12	24.00	0.152	Battery 1#	/
Right tilt	18700/1860	20M QPSK 1RB#99	0.105	0.063	0.11	23.12	24.00	0.129	Battery 1#	/
Left cheek	18700/1860	20M QPSK 50%RB#0	0.105	0.062	0.15	22.02	23.00	0.132	Battery 1#	/
Left tilt	18700/1860	20M QPSK 50%RB#0	0.078	0.045	0.00	22.02	23.00	0.098	Battery 1#	/
Right cheek	18700/1860	20M QPSK 50%RB#0	0.098	0.063	-0.01	22.02	23.00	0.123	Battery 1#	/
Right tilt	18700/1860	20M QPSK 50%RB#0	0.084	0.050	0.18	22.02	23.00	0.105	Battery 1#	/
Left cheek	18700/1860	20M QPSK 1RB#99	0.105	0.070	0.14	23.12	24.00	0.129	Battery 2#	/
Left cheek	18700/1860	20M QPSK 1RB#99	0.129	0.074	0.00	23.12	24.00	0.158	Battery 3#	/
Left cheek	18700/1860	20M QPSK 1RB#99	0.169	0.108	-0.09	23.12	24.00	0.207	Battery 4#	Yes
Left cheek	18700/1860	20M QPSK 1RB#99	0.120	0.069	-0.16	23.12	24.00	0.147	With SIM2	/

Table 74: Head SAR test results of LTE Band 2

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Main Antenna											
Front Side	15mm	18700/1860	20M QPSK 1RB#99	0.135	0.086	0.05	22.29	23.00	0.159	Battery 1#	/
Back Side	15mm	18700/1860	20M QPSK 1RB#99	0.248	0.144	0.02	22.29	23.00	0.292	Battery 1#	/
Front Side	15mm	18700/1860	20M QPSK 50%RB#0	0.138	0.086	0.04	22.16	23.00	0.167	Battery 1#	/
Back Side	15mm	18700/1860	20M QPSK 50%RB#0	0.249	0.145	-0.01	22.16	23.00	0.302	Battery 1#	/
Back Side	15mm	18700/1860	20M QPSK 50%RB#0	0.256	0.149	-0.09	22.16	23.00	0.311	Battery 2#	Yes
Back Side	15mm	18700/1860	20M QPSK 50%RB#0	0.233	0.127	-0.17	22.16	23.00	0.283	Battery 3#	/
Back Side	15mm	18700/1860	20M QPSK 50%RB#0	0.253	0.147	-0.04	22.16	23.00	0.307	Battery 4#	/
Back Side	15mm	18700/1860	20M QPSK 50%RB#0	0.244	0.144	-0.08	22.16	23.00	0.296	With SIM2	/

Table 75: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Main Antenna(Main Antenna)											
Front Side	10mm	18700/1860	20M QPSK 1RB#50	0.111	0.066	-0.09	19.15	20.00	0.135	Battery 1#	/
Back Side	10mm	18700/1860	20M QPSK 1RB#50	0.195	0.108	-0.04	19.15	20.00	0.237	Battery 1#	/
Left Side	10mm	18700/1860	20M QPSK 1RB#50	0.057	0.033	-0.04	19.15	20.00	0.069	Battery 1#	/
Right Side	10mm	18700/1860	20M QPSK 1RB#50	0.038	0.023	-0.17	19.15	20.00	0.047	Battery 1#	/
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.268	0.147	-0.06	19.15	20.00	0.326	Battery 1#	/
Front Side	10mm	18900/1880	20M QPSK 50%RB#50	0.119	0.069	0.02	19.08	20.00	0.147	Battery 1#	/
Back Side	10mm	18900/1880	20M QPSK 50%RB#50	0.208	0.115	0.00	19.08	20.00	0.257	Battery 1#	/
Left Side	10mm	18900/1880	20M QPSK 50%RB#50	0.066	0.039	0.02	19.08	20.00	0.082	Battery 1#	/
Right Side	10mm	18900/1880	20M QPSK 50%RB#50	0.047	0.027	0.06	19.08	20.00	0.058	Battery 1#	/
Bottom Side	10mm	18900/1880	20M QPSK 50%RB#50	0.264	0.145	0.07	19.08	20.00	0.326	Battery 1#	/
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.246	0.136	-0.03	19.15	20.00	0.299	Battery 2#	/
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.263	0.144	-0.05	19.15	20.00	0.320	Battery 3#	/
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.285	0.156	0.00	19.15	20.00	0.347	Battery 4#	Yes
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.265	0.145	0.09	19.15	20.00	0.322	With SIM2	/

Table 76: Hotspot SAR test results of LTE Band 2

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Main Antenna(Main Antenna)										
Front Side	10mm	18700/1860	20M QPSK 1RB#50	0.111	0.066	-0.09	19.15	24.00	0.339	Yes
Back Side	10mm	18700/1860	20M QPSK 1RB#50	0.195	0.108	-0.04	19.15	24.00	0.596	Yes
Left Side	10mm	18700/1860	20M QPSK 1RB#50	0.057	0.033	-0.04	19.15	24.00	0.173	Yes
Right Side	10mm	18700/1860	20M QPSK 1RB#50	0.038	0.023	-0.17	19.15	24.00	0.117	Yes
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.268	0.147	-0.06	19.15	24.00	0.819	Yes
Front Side	10mm	18900/1880	20M QPSK 50%RB#50	0.119	0.069	0.02	19.08	23.00	0.293	Yes
Back Side	10mm	18900/1880	20M QPSK 50%RB#50	0.208	0.115	0.00	19.08	23.00	0.513	Yes
Left Side	10mm	18900/1880	20M QPSK 50%RB#50	0.066	0.039	0.02	19.08	23.00	0.163	Yes
Right Side	10mm	18900/1880	20M QPSK 50%RB#50	0.047	0.027	0.06	19.08	23.00	0.115	Yes
Bottom Side	10mm	18900/1880	20M QPSK 50%RB#50	0.264	0.145	0.07	19.08	23.00	0.651	Yes
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.246	0.136	-0.03	19.15	24.00	0.752	Yes
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.263	0.144	-0.05	19.15	24.00	0.803	Yes
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.285	0.156	0.00	19.15	24.00	0.871	Yes
Bottom Side	10mm	18700/1860	20M QPSK 1RB#50	0.265	0.145	0.09	19.15	24.00	0.810	Yes

Table 77: Product Specific 10-g SAR test reduction evaluation of LTE Band 2

Note : According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

### 7.2.7 SAR measurement Result of LTE Band 4

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Main Antenna										
Left cheek	20175/1732.5	20M QPSK 1RB#0	0.163	0.109	-0.13	23.13	24.00	0.199	Battery 1#	Yes
Left tilt	20175/1732.5	20M QPSK 1RB#0	0.077	0.047	0.10	23.13	24.00	0.094	Battery 1#	/
Right cheek	20175/1732.5	20M QPSK 1RB#0	0.132	0.088	0.07	23.13	24.00	0.161	Battery 1#	/
Right tilt	20175/1732.5	20M QPSK 1RB#0	0.079	0.044	0.19	23.13	24.00	0.096	Battery 1#	/
Left cheek	20175/1732.5	20M QPSK 50%RB#0	0.125	0.073	-0.10	22.08	23.00	0.154	Battery 1#	/
Left tilt	20175/1732.5	20M QPSK 50%RB#0	0.060	0.036	0.18	22.08	23.00	0.074	Battery 1#	/
Right cheek	20175/1732.5	20M QPSK 50%RB#0	0.106	0.065	0.13	22.08	23.00	0.131	Battery 1#	/
Right tilt	20175/1732.5	20M QPSK 50%RB#0	0.059	0.033	0.06	22.08	23.00	0.073	Battery 1#	/
Left cheek	20175/1732.5	20M QPSK 1RB#0	0.160	0.106	-0.01	23.13	24.00	0.195	Battery 2#	/
Left cheek	20175/1732.5	20M QPSK 1RB#0	0.144	0.095	-0.01	23.13	24.00	0.176	Battery 3#	/
Left cheek	20175/1732.5	20M QPSK 1RB#0	0.155	0.102	-0.04	23.13	24.00	0.189	Battery 4#	/
Left cheek	20175/1732.5	20M QPSK 1RB#0	0.157	0.104	-0.03	23.13	24.00	0.192	With SIM2	/

Table 78: Head SAR test results of LTE Band 4

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Main Antenna											
Front Side	15mm	20300/1745	20M QPSK 1RB#50	0.139	0.090	0.05	22.05	23.00	0.173	Battery 1#	/
Back Side	15mm	20300/1745	20M QPSK 1RB#50	0.220	0.138	-0.02	22.05	23.00	0.274	Battery 1#	/
Front Side	15mm	20175/1732.5	20M QPSK 50%RB#0	0.154	0.100	0.09	21.99	23.00	0.194	Battery 1#	/
Back Side	15mm	20175/1732.5	20M QPSK 50%RB#0	0.245	0.155	-0.02	21.99	23.00	0.309	Battery 1#	/
Back Side	15mm	20175/1732.5	20M QPSK 50%RB#0	0.258	0.162	0.02	21.99	23.00	0.326	Battery 2#	Yes
Back Side	15mm	20175/1732.5	20M QPSK 50%RB#0	0.248	0.157	-0.05	21.99	23.00	0.313	Battery 3#	/
Back Side	15mm	20175/1732.5	20M QPSK 50%RB#0	0.238	0.151	-0.07	21.99	23.00	0.300	Battery 4#	/
Back Side	15mm	20175/1732.5	20M QPSK 50%RB#0	0.243	0.154	0.00	21.99	23.00	0.307	With SIM2	/

Table 79: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Main Antenna											
Front Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.129	0.082	0.06	19.06	20.00	0.160	Battery 1#	/
Back Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.209	0.125	-0.16	19.06	20.00	0.260	Battery 1#	/
Left Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.067	0.039	0.19	19.06	20.00	0.083	Battery 1#	/
Right Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.039	0.023	0.16	19.06	20.00	0.048	Battery 1#	/
Bottom Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.280	0.160	0.17	19.06	20.00	0.348	Battery 1#	/
Front Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.138	0.087	0.05	18.99	20.00	0.174	Battery 1#	/
Back Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.226	0.131	0.02	18.99	20.00	0.285	Battery 1#	/
Left Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.074	0.042	0.11	18.99	20.00	0.093	Battery 1#	/
Right Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.042	0.025	-0.12	18.99	20.00	0.053	Battery 1#	/
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.292	0.168	0.12	18.99	20.00	0.368	Battery 1#	Yes
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.268	0.156	-0.17	18.99	20.00	0.338	Battery 2#	/
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.278	0.161	-0.05	18.99	20.00	0.351	Battery 3#	/
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.276	0.160	0.13	18.99	20.00	0.348	Battery 4#	/
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.273	0.158	0.11	18.99	20.00	0.344	With SIM2	/

Table 80: Hotspot SAR test results of LTE Band 4

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Main Antenna										
Front Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.129	0.082	0.06	19.06	24.00	0.402	Yes
Back Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.209	0.125	-0.16	19.06	24.00	0.652	Yes
Left Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.067	0.039	0.19	19.06	24.00	0.210	Yes
Right Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.039	0.023	0.16	19.06	24.00	0.121	Yes
Bottom Side	10mm	20175/1732.5	20M QPSK 1RB#50	0.280	0.160	0.17	19.06	24.00	0.873	Yes
Front Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.138	0.087	0.05	18.99	23.00	0.347	Yes
Back Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.226	0.131	0.02	18.99	23.00	0.569	Yes
Left Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.074	0.042	0.11	18.99	23.00	0.186	Yes
Right Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.042	0.025	-0.12	18.99	23.00	0.105	Yes
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.292	0.168	0.12	18.99	23.00	0.735	Yes
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.268	0.156	-0.17	18.99	23.00	0.675	Yes
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.278	0.161	-0.05	18.99	23.00	0.700	Yes
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.276	0.160	0.13	18.99	23.00	0.695	Yes
Bottom Side	10mm	20175/1732.5	20M QPSK 50%RB#0	0.273	0.158	0.11	18.99	23.00	0.687	Yes

Table 81: Product Specific 10-g SAR test reduction evaluation of LTE Band 4

Note : According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

### 7.2.8 SAR measurement Result of LTE Band 5

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Second Antenna										
Left cheek	20525/836.5	10M QPSK 1RB#49	0.196	0.140	0.05	21.43	22.00	0.223	Battery 1#	/
Left tilt	20525/836.5	10M QPSK 1RB#49	0.134	0.091	0.04	21.43	22.00	0.153	Battery 1#	/
Right cheek	20525/836.5	10M QPSK 1RB#49	0.394	0.237	0.05	21.43	22.00	0.449	Battery 1#	/
Right tilt	20525/836.5	10M QPSK 1RB#49	0.203	0.132	0.04	21.43	22.00	0.231	Battery 1#	/
Left cheek	20600/844	10M QPSK 50%RB#13	0.207	0.147	0.06	21.49	22.00	0.233	Battery 1#	/
Left tilt	20600/844	10M QPSK 50%RB#13	0.133	0.089	0.06	21.49	22.00	0.150	Battery 1#	/
Right cheek	20600/844	10M QPSK 50%RB#13	0.403	0.242	0.05	21.49	22.00	0.453	Battery 1#	/
Right tilt	20600/844	10M QPSK 50%RB#13	0.204	0.132	0.05	21.49	22.00	0.229	Battery 1#	/
Right tilt	20600/844	10M QPSK 50%RB#13	0.483	0.287	-0.07	21.49	22.00	0.543	Battery 2#	Yes
Right tilt	20600/844	10M QPSK 50%RB#13	0.416	0.248	-0.04	21.49	22.00	0.468	Battery 3#	/
Right tilt	20600/844	10M QPSK 50%RB#13	0.456	0.285	-0.03	21.49	22.00	0.513	Battery 4#	/
Right tilt	20600/844	10M QPSK 50%RB#13	0.457	0.282	0.17	21.49	22.00	0.514	With SIM2	/
Main Antenna										
Left cheek	20525/836.5	10M QPSK 1RB#25	0.034	0.026	0.15	23.52	24.50	0.043	Battery 1#	/
Left tilt	20525/836.5	10M QPSK 1RB#25	0.011	0.008	0.12	23.52	24.50	0.014	Battery 1#	/
Right cheek	20525/836.5	10M QPSK 1RB#25	0.022	0.017	0.18	23.52	24.50	0.028	Battery 1#	/
Right tilt	20525/836.5	10M QPSK 1RB#25	0.009	0.006	0.16	23.52	24.50	0.012	Battery 1#	/
Left cheek	20600/844	10M QPSK 50%RB#0	0.031	0.021	0.19	22.51	23.50	0.039	Battery 1#	/
Left tilt	20600/844	10M QPSK 50%RB#0	0.011	0.007	0.15	22.51	23.50	0.013	Battery 1#	/
Right cheek	20600/844	10M QPSK 50%RB#0	0.019	0.012	0.16	22.51	23.50	0.024	Battery 1#	/
Right tilt	20600/844	10M QPSK 50%RB#0	0.009	0.006	0.13	22.51	23.50	0.011	Battery 1#	/
Left cheek	20525/836.5	10M QPSK 1RB#25	0.034	0.026	0.12	23.52	24.50	0.043	Battery 2#	Yes
Left cheek	20525/836.5	10M QPSK 1RB#25	0.027	0.020	0.06	23.52	24.50	0.034	Battery 3#	/
Left cheek	20525/836.5	10M QPSK 1RB#25	0.029	0.021	0.06	23.52	24.50	0.037	Battery 4#	/
Left cheek	20525/836.5	10M QPSK 1RB#25	0.030	0.023	0.18	23.52	24.50	0.037	With SIM2	/

Table 82: Head SAR test results of LTE Band 5

Test Position of Body- Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	15mm	20600/844	10M QPSK 1RB#0	0.214	0.148	-0.07	23.98	24.50	0.241	Battery 1#	/
Back Side	15mm	20600/844	10M QPSK 1RB#0	0.359	0.234	0.04	23.98	24.50	0.405	Battery 1#	/
Front Side	15mm	20600/844	10M QPSK 50%RB#0	0.169	0.115	-0.02	22.98	23.50	0.190	Battery 1#	/
Back Side	15mm	20600/844	10M QPSK 50%RB#0	0.288	0.189	0.01	22.98	23.50	0.325	Battery 1#	/
Back Side	15mm	20600/844	10M QPSK 1RB#0	0.339	0.221	0.02	23.98	24.50	0.382	Battery 2#	/
Back Side	15mm	20600/844	10M QPSK 1RB#0	0.362	0.236	0.04	23.98	24.50	0.408	Battery 3#	Yes
Back Side	15mm	20600/844	10M QPSK 1RB#0	0.359	0.237	0.03	23.98	24.50	0.405	Battery 4#	/
Back Side	15mm	20600/844	10M QPSK 1RB#0	0.349	0.229	0.01	23.98	24.50	0.393	With SIM2	/
Main Antenna											
Front Side	15mm	20525/836.5	10M QPSK 1RB#25	0.115	0.077	0.10	23.52	24.50	0.144	Battery 1#	/
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.201	0.136	-0.05	23.52	24.50	0.252	Battery 1#	/
Front Side	15mm	20600/844	10M QPSK 50%RB#0	0.107	0.072	0.09	22.51	23.50	0.134	Battery 1#	/
Back Side	15mm	20600/844	10M QPSK 50%RB#0	0.179	0.122	-0.03	22.51	23.50	0.225	Battery 1#	/
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.209	0.143	0.00	23.52	24.50	0.262	Battery 2#	/
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.217	0.148	-0.01	23.52	24.50	0.272	Battery 3#	Yes
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.205	0.141	-0.01	23.52	24.50	0.257	Battery 4#	/
Back Side	15mm	20525/836.5	10M QPSK 1RB#25	0.210	0.144	-0.01	23.52	24.50	0.263	With SIM2	/

Table 83: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Second Antenna											
Front Side	10mm	20600/844	10M QPSK 1RB#0	0.267	0.178	-0.03	23.98	24.50	0.301	Battery 1#	/
Back Side	10mm	20600/844	10M QPSK 1RB#0	0.557	0.343	0.01	23.98	24.50	0.628	Battery 1#	/
Left Side	10mm	20600/844	10M QPSK 1RB#0	0.476	0.296	0.17	23.98	24.50	0.537	Battery 1#	/
Top Side	10mm	20600/844	10M QPSK 1RB#0	0.091	0.060	0.13	23.98	24.50	0.103	Battery 1#	/
Front Side	10mm	20600/844	10M QPSK 50%RB#0	0.212	0.141	-0.05	22.98	23.50	0.239	Battery 1#	/
Back Side	10mm	20600/844	10M QPSK 50%RB#0	0.455	0.290	0.08	22.98	23.50	0.513	Battery 1#	/
Left Side	10mm	20600/844	10M QPSK 50%RB#0	0.379	0.235	0.09	22.98	23.50	0.427	Battery 1#	/
Top Side	10mm	20600/844	10M QPSK 50%RB#0	0.073	0.048	0.12	22.98	23.50	0.082	Battery 1#	/
Back Side	10mm	20600/844	10M QPSK 1RB#0	0.565	0.349	0.04	23.98	24.50	0.637	Battery 2#	/
Back Side	10mm	20600/844	10M QPSK 1RB#0	0.546	0.337	-0.04	23.98	24.50	0.615	Battery 3#	/
Back Side	10mm	20600/844	10M QPSK 1RB#0	0.566	0.350	0.06	23.98	24.50	0.638	Battery 4#	Yes
Back Side	10mm	20600/844	10M QPSK 1RB#0	0.566	0.348	0.04	23.98	24.50	0.638	With SIM2	/
Main Antenna											
Front Side	10mm	20525/836.5	10M QPSK 1RB#25	0.180	0.120	0.03	23.52	24.50	0.226	Battery 1#	/
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.322	0.212	0.01	23.52	24.50	0.404	Battery 1#	/
Left Side	10mm	20525/836.5	10M QPSK 1RB#25	0.091	0.055	0.04	23.52	24.50	0.114	Battery 1#	/
Right Side	10mm	20525/836.5	10M QPSK 1RB#25	0.056	0.033	0.17	23.52	24.50	0.071	Battery 1#	/
Bottom Side	10mm	20525/836.5	10M QPSK 1RB#25	0.160	0.098	-0.06	23.52	24.50	0.201	Battery 1#	/
Front Side	10mm	20600/844	10M QPSK 50%RB#0	0.166	0.111	0.08	22.51	23.50	0.209	Battery 1#	/
Back Side	10mm	20600/844	10M QPSK 50%RB#0	0.290	0.187	0.01	22.51	23.50	0.364	Battery 1#	/
Left Side	10mm	20600/844	10M QPSK 50%RB#0	0.077	0.046	-0.03	22.51	23.50	0.096	Battery 1#	/
Right Side	10mm	20600/844	10M QPSK 50%RB#0	0.052	0.031	0.14	22.51	23.50	0.066	Battery 1#	/
Bottom Side	10mm	20600/844	10M QPSK 50%RB#0	0.134	0.082	-0.02	22.51	23.50	0.168	Battery 1#	/
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.336	0.225	-0.07	23.52	24.50	0.421	Battery 2#	Yes
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.327	0.220	-0.04	23.52	24.50	0.410	Battery 3#	/
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.331	0.222	-0.04	23.52	24.50	0.415	Battery 4#	/
Back Side	10mm	20525/836.5	10M QPSK 1RB#25	0.296	0.199	0.01	23.52	24.50	0.371	With SIM2	/

Table 84: Hotspot SAR test results of LTE Band 5

Note: Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.2.9 SAR measurement Result of LTE Band 7

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Main Antenna										
Left cheek	21350/2560	20M QPSK 1RB#0	0.170	0.089	0.12	23.41	23.80	0.186	Battery 1#	/
Left tilt	21350/2560	20M QPSK 1RB#0	0.058	0.030	-0.01	23.41	23.80	0.063	Battery 1#	/
Right cheek	21350/2560	20M QPSK 1RB#0	0.126	0.068	-0.14	23.41	23.80	0.138	Battery 1#	/
Right tilt	21350/2560	20M QPSK 1RB#0	0.087	0.042	0.15	23.41	23.80	0.095	Battery 1#	/
Left cheek	21350/2560	20M QPSK 50%RB#25	0.141	0.074	0.01	22.39	22.80	0.155	Battery 1#	/
Left tilt	21350/2560	20M QPSK 50%RB#25	0.045	0.023	0.19	22.39	22.80	0.050	Battery 1#	/
Right cheek	21350/2560	20M QPSK 50%RB#25	0.108	0.056	0.17	22.39	22.80	0.119	Battery 1#	/
Right tilt	21350/2560	20M QPSK 50%RB#25	0.081	0.039	0.00	22.39	22.80	0.089	Battery 1#	/
Left cheek	21350/2560	20M QPSK 1RB#0	0.193	0.102	-0.04	23.41	23.80	0.211	Battery 2#	/
Left cheek	21350/2560	20M QPSK 1RB#0	0.193	0.101	0.06	23.41	23.80	0.211	Battery 3#	/
Left cheek	21350/2560	20M QPSK 1RB#0	0.191	0.100	0.01	23.41	23.80	0.209	Battery 4#	/
Left cheek	21350/2560	20M QPSK 1RB#0	0.196	0.103	0.11	23.41	23.80	0.214	With SIM2	Yes

Table 85: Head SAR test results of LTE Band 7

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Main Antenna											
Front Side	15mm	21350/2560	20M QPSK 1RB#99	0.116	0.062	0.08	21.49	22.00	0.130	Battery 1#	/
Back Side	15mm	21350/2560	20M QPSK 1RB#99	0.246	0.128	-0.13	21.49	22.00	0.277	Battery 1#	Yes
Front Side	15mm	21100/2535	20M QPSK 50%RB#50	0.122	0.066	-0.06	21.43	22.00	0.139	Battery 1#	/
Back Side	15mm	21100/2535	20M QPSK 50%RB#50	0.241	0.126	-0.01	21.43	22.00	0.275	Battery 1#	/
Back Side	15mm	21350/2560	20M QPSK 1RB#99	0.234	0.122	0.09	21.49	22.00	0.263	Battery 2#	/
Back Side	15mm	21350/2560	20M QPSK 1RB#99	0.237	0.124	0.05	21.49	22.00	0.267	Battery 3#	/
Back Side	15mm	21350/2560	20M QPSK 1RB#99	0.223	0.117	0.00	21.49	22.00	0.251	Battery 4#	/
Back Side	15mm	21350/2560	20M QPSK 1RB#99	0.187	0.099	0.06	21.49	22.00	0.210	With SIM2	/

Table 86: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Main Antenna(Main Antenna)											
Front Side	10mm	21350/2560	20M QPSK 1RB#0	0.172	0.088	-0.01	18.57	19.00	0.190	Battery 1#	/
Back Side	10mm	21350/2560	20M QPSK 1RB#0	0.227	0.106	0.17	18.57	19.00	0.251	Battery 1#	/
Left Side	10mm	21350/2560	20M QPSK 1RB#0	0.036	0.019	0.19	18.57	19.00	0.039	Battery 1#	/
Right Side	10mm	21350/2560	20M QPSK 1RB#0	0.018	0.010	0.00	18.57	19.00	0.019	Battery 1#	/
Bottom Side	10mm	21350/2560	20M QPSK 1RB#0	0.268	0.129	0.03	18.57	19.00	0.296	Battery 1#	/
Front Side	10mm	21100/2535	20M QPSK 50%RB#0	0.175	0.090	-0.11	18.43	19.00	0.200	Battery 1#	/
Back Side	10mm	21100/2535	20M QPSK 50%RB#0	0.244	0.117	0.01	18.43	19.00	0.278	Battery 1#	/
Left Side	10mm	21100/2535	20M QPSK 50%RB#0	0.039	0.021	0.13	18.43	19.00	0.044	Battery 1#	/
Right Side	10mm	21100/2535	20M QPSK 50%RB#0	0.018	0.010	0.18	18.43	19.00	0.021	Battery 1#	/
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.264	0.128	0.13	18.43	19.00	0.301	Battery 1#	/
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.274	0.130	0.05	18.43	19.00	0.312	Battery 2#	Yes
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.270	0.128	-0.02	18.43	19.00	0.308	Battery 3#	/
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.269	0.128	-0.02	18.43	19.00	0.307	Battery 4#	/
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.269	0.128	0.04	18.43	19.00	0.307	With SIM2	/

Table 87: Hotspot SAR test results of LTE Band 7

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Product Specific 10-g SAR Exclusion
				1-g	10-g					
Main Antenna(Main Antenna)										
Front Side	10mm	21350/2560	20M QPSK 1RB#0	0.172	0.088	-0.01	18.57	23.80	0.573	Yes
Back Side	10mm	21350/2560	20M QPSK 1RB#0	0.227	0.106	0.17	18.57	23.80	0.757	Yes
Left Side	10mm	21350/2560	20M QPSK 1RB#0	0.036	0.019	0.19	18.57	23.80	0.118	Yes
Right Side	10mm	21350/2560	20M QPSK 1RB#0	0.018	0.010	0.00	18.57	23.80	0.059	Yes
Bottom Side	10mm	21350/2560	20M QPSK 1RB#0	0.268	0.129	0.03	18.57	23.80	0.894	Yes
Front Side	10mm	21100/2535	20M QPSK 50%RB#0	0.175	0.090	-0.11	18.43	22.80	0.479	Yes
Back Side	10mm	21100/2535	20M QPSK 50%RB#0	0.244	0.117	0.01	18.43	22.80	0.667	Yes
Left Side	10mm	21100/2535	20M QPSK 50%RB#0	0.039	0.021	0.13	18.43	22.80	0.105	Yes
Right Side	10mm	21100/2535	20M QPSK 50%RB#0	0.018	0.010	0.18	18.43	22.80	0.050	Yes
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.264	0.128	0.13	18.43	22.80	0.722	Yes
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.274	0.130	0.05	18.43	22.80	0.749	Yes
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.270	0.128	-0.02	18.43	22.80	0.739	Yes
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.269	0.128	-0.02	18.43	22.80	0.736	Yes
Bottom Side	10mm	21100/2535	20M QPSK 50%RB#0	0.269	0.128	0.04	18.43	22.80	0.736	Yes

Table 88: Product Specific 10-g SAR test reduction evaluation of LTE Band 7

Note : According to the table above , Product Specific 10-g SAR test is not required for this frequency band.

### 7.2.10 SAR measurement Result of WiFi 2.4G

Test Position of Head	Test Channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty cycle	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g								
ANT1													
Left cheek	11/2462	802.11b	0.080	0.087	0.041	0.04	99%	0.088	10.22	11.50	0.118	Battery 1#	/
Left tilt	11/2462	802.11 b	0.043	/	/	0.18	99%	/	10.22	11.50	/	Battery 1#	/
Right cheek	11/2462	802.11 b	0.031	0.028	0.015	0.14	99%	0.028	10.22	11.50	0.038	Battery 1#	/
Right tilt	11/2462	802.11 b	0.037	0.041	0.019	0.18	99%	0.041	10.22	11.50	0.055	Battery 1#	/
Left cheek	11/2462	802.11 b	0.078	0.083	0.039	0.18	99%	0.084	10.22	11.50	0.112	Battery 2#	/
Left cheek	11/2462	802.11 b	0.102	0.113	0.053	-0.02	99%	0.114	10.22	11.50	0.153	Battery 3#	Yes
Left cheek	11/2462	802.11 b	0.085	0.094	0.045	0.15	99%	0.095	10.22	11.50	0.127	Battery 4#	/

Table 89: Head SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	11.50	14.13	0.153	/	Yes
802.11g	11.50	14.13	/	0.153	No
802.11n 20M	11.50	14.13	/	0.153	No
802.11n 40M	11.50	14.13	/	0.153	No

Note: Per KDB248227D01, for Head SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty cycle	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g								
ANT1														
Front Side	15mm	6/2437	802.11 b	0.077	0.079	0.041	0.01	99%	0.080	17.80	19.00	0.105	Battery 1#	/
Back Side	15mm	6/2437	802.11 b	0.177	0.185	0.091	0.18	99%	0.187	17.80	19.00	0.246	Battery 1#	Yes
Back Side	15mm	6/2437	802.11 b	0.139	0.143	0.073	0.14	99%	0.144	17.80	19.00	0.190	Battery 2#	/
Back Side	15mm	6/2437	802.11 b	0.117	0.121	0.062	-0.05	99%	0.122	17.80	19.00	0.161	Battery 3#	/
Back Side	15mm	6/2437	802.11 b	0.127	0.131	0.067	0.19	99%	0.132	17.80	19.00	0.174	Battery 4#	/

Table 90: Body-Worn SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	19.00	79.43	0.246	/	Yes
802.11g	18.00	63.10	/	0.195	No
802.11n 20M	16.00	39.81	/	0.123	No
802.11n 40M	16.00	39.81	/	0.123	No

Note: Per KDB248227D01, for Body-worn SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty cycle	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g								
ANT1														
Front Side	10mm	6/2437	802.11 b	0.099	/	/	0.07	99%	/	17.80	19.00	/	Battery 1#	/
Back Side	10mm	6/2437	802.11 b	0.178	0.188	0.087	0.12	99%	0.190	17.80	19.00	0.250	Battery 1#	/
Right Side	10mm	6/2437	802.11 b	0.091	/	/	0.01	99%	/	17.80	19.00	/	Battery 1#	/
Top Side	10mm	6/2437	802.11 b	0.125	/	/	0.02	99%	/	17.80	19.00	/	Battery 1#	/
Back Side	10mm	6/2437	802.11 b	0.215	0.234	0.106	-0.08	99%	0.236	17.80	19.00	0.312	Battery 2#	Yes
Back Side	10mm	6/2437	802.11 b	0.154	0.160	0.074	-0.11	99%	0.162	17.80	19.00	0.213	Battery 3#	/
Back Side	10mm	6/2437	802.11 b	0.200	0.213	0.097	-0.18	99%	0.215	17.80	19.00	0.284	Battery 4#	/

Table 91: Hotspot SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	19.00	79.43	0.312	/	Yes
802.11g	18.00	63.10	/	0.248	No
802.11n 20M	16.00	39.81	/	0.156	No
802.11n 40M	16.00	39.81	/	0.156	No

Table 92: Hotspot SAR test results of WiFi 2.4G


Note:

- 1) Per KDB248227D01, for Hotspot SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.
- 2) Note: For second antenna, per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside the device is shown as below picture(unit:mm):

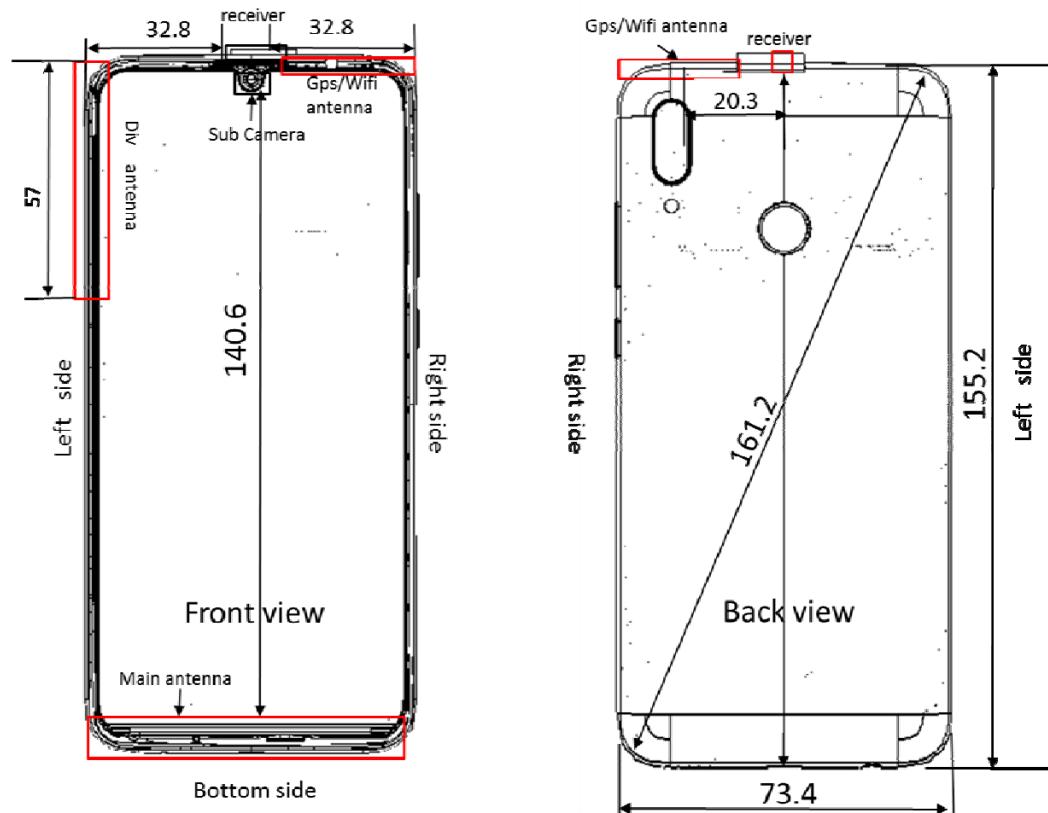

Note:

- 1) Per KDB 648474 D04, because the diagonal distance of this device is  $\geq 160\text{mm}$ , so it is a phablet .
- 2) Main antenna and Second antenna(Div antenna) can't transmit simultaneously

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main antenna	Hotspot/ Product specific 10g SAR	Yes	Yes	Yes	Yes	No	Yes
Second antenna	Hotspot/ Product specific 10g SAR	Yes	Yes	Yes	No	Yes	No
WiFi/BT antenna	Hotspot/ Product specific 10g SAR	Yes	Yes	No	Yes	Yes	No

Table 93: Sides for Hotspot/ Product specific 10g SAR testing

Note:

- 1) Per KDB 941225 D06 and KDB 648474 D04, particular DUT edges were not required to be evaluated for Hotspot/ Product specific 10g SAR SAR if the antenna-to-edge distance is greater than 2.5cm;

### 7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v06, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	$f$ (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Head	9.50	8.91	5	2.480	2.81	3.00	Yes
BT	Body-Worn	9.50	8.91	15	2.480	0.94	3.00	Yes
BT	Product specific 10g SAR	9.50	8.91	5	2.480	2.81	7.50	Yes

Table 94: Standalone SAR test exclusion for BT

Note:

1)\* - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}/x]$  W/kg for test separation distances  $\leq 50$  mm, where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR.

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	$f$ (GHz)	$x$	Estimated SAR (W/kg)*
BT	Head	9.50	8.91	5	2.480	7.50	0.374
BT	Body-worn	9.50	8.91	15	2.480	7.50	0.125
BT	Hotspot	9.50	8.91	10	2.480	7.50	0.186
BT	Product specific 10g SAR	9.50	8.91	5	2.480	18.75	0.150

Table 95: Estimated SAR calculation for BT

Note:

1)\* - maximum possible output power declared by manufacturer

### 7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Simultaneous Tx Combination	Head	Body	Hotspot (10mm)	Product Specific 10-g (0mm)
1	GSM Voice(Ant 1) + BT	Yes	Yes	NA	Yes
2	GSM DATA(Ant 1) + BT	N/A	Yes	NA	Yes
3	GSM Voice(Ant 2) + BT	Yes	Yes	NA	Yes
4	GSM DATA (Ant 2)+ BT	N/A	Yes	NA	Yes
5	GSM Voice(Ant 1) + WiFi2.4G	Yes	Yes	NA	Yes
6	GSM DATA(Ant 1) + WiFi2.4G	N/A	Yes	Yes	Yes
7	GSM Voice(Ant 2) + WiFi2.4G	Yes	Yes	NA	Yes
8	GSM DATA(Ant 2) + WiFi2.4G	N/A	Yes	Yes	Yes
9	UMTS (Ant 1) + BT	Yes	Yes	NA	Yes
10	UMTS (Ant 2) + BT	Yes	Yes	NA	Yes
11	UMTS (Ant 1) + WiFi2.4G	Yes	Yes	Yes	Yes
12	UMTS (Ant 2) + WiFi2.4G	Yes	Yes	Yes	Yes
13	LTE (Ant 1) + WiFi2.4G	Yes*	Yes*	Yes	Yes
14	LTE (Ant 1) + BT	Yes*	Yes*	NA	Yes
15	LTE (Ant 2) + WiFi2.4G	Yes*	Yes*	Yes	Yes
16	LTE (Ant 2) + BT	Yes*	Yes*	NA	Yes

Table 96: Simultaneous Transmission Possibilities

Note:

- 1) WiFi 2.4G and Bluetooth can't transmit simultaneously.
- 2) 2G&3G&4G main antenna(Ant1) and second antenna(Ant 2) can't transmit simultaneously
- 3) The device supports WiFi VOIP function.
- 4) The device supports VOLTE function.
- 5) VOIP 3rd party applications may possibly be installed and used by the user.
- 6) The device does not support DTM function.

### 7.3.3 SAR Summation Scenario

Test Position		Second antenna SARMax									WiFi/BT antenna SARMax		ΣSAR
		GSM850	GSM1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE B2	LTE B4	LTE B5	LTE B7	WiFi 2.4G	BT	
Head	Left cheek	0.268	0.173	0.187	0.119	0.227	/	/	0.233	/	0.153	0.374	0.642
	Left tilt	0.174	0.231	0.271	0.193	0.142	/	/	0.153	/	0.153	0.374	0.645
	Right cheek	0.555	0.436	0.455	0.380	0.530	/	/	0.453	/	0.038	0.374	0.929
	Right tilt	0.258	0.243	0.279	0.212	0.223	/	/	0.543	/	0.055	0.374	0.917
Body Worn	Front Side	0.111	0.042	0.064	0.049	0.277	/	/	0.241	/	0.107	0.125	0.402
	Back Side	0.182	0.066	0.088	0.103	0.482	/	/	0.408	/	0.249	0.125	0.731
Hotspot	Front Side	0.321	0.032	0.061	0.039	0.228	/	/	0.301	/	0.312	0.186	0.633
	Back Side	0.539	0.066	0.112	0.110	0.377	/	/	0.638	/	0.312	0.186	0.950
	Left Side	0.588	0.074	0.125	0.137	0.401	/	/	0.537	/	/	/	0.588
	Right Side	/	/	/	/	/	/	/	/	/	0.312	0.186	0.312
	Top Side	0.073	0.040	0.069	0.045	0.058	/	/	0.103	/	0.312	0.186	0.415
	Bottom Side	/	/	/	/	/	/	/	/	/	/	/	/

Table 97: SAR Simultaneous Tx Combination of Second antenna and WiFi/BT antenna.

Test Position		Main antenna SARMax								WiFi/BT antenna SARMax		ΣSAR	
		GSM850	GSM1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE B2	LTE B4	LTE B5	LTE B7	WiFi 2.4G	BT	
Head	Left cheek	0.022	0.146	0.197	0.254	0.043	0.207	0.199	0.043	0.214	0.153	0.374	0.628
	Left tilt	0.019	0.075	0.110	0.093	0.010	0.121	0.094	0.014	0.063	0.153	0.374	0.495
	Right cheek	0.031	0.100	0.126	0.153	0.031	0.152	0.161	0.028	0.138	0.038	0.374	0.535
	Right tilt	0.015	0.063	0.098	0.101	0.013	0.129	0.096	0.012	0.095	0.055	0.374	0.503
Body Worn	Front Side	0.125	0.145	0.148	0.210	0.184	0.167	0.194	0.144	0.139	0.107	0.125	0.335
	Back Side	0.224	0.258	0.263	0.359	0.313	0.311	0.326	0.272	0.277	0.249	0.125	0.608
Hotspot	Front Side	0.192	0.119	0.148	0.169	0.279	0.147	0.174	0.226	0.200	0.312	0.186	0.591
	Back Side	0.358	0.175	0.309	0.315	0.507	0.257	0.285	0.421	0.278	0.312	0.186	0.819
	Left Side	0.082	0.067	0.083	0.107	0.128	0.082	0.093	0.114	0.044	/	/	0.128
	Right Side	0.004	0.043	0.061	0.062	0.092	0.058	0.053	0.071	0.021	0.312	0.186	0.404
	Top Side	/	/	/	/	/	/	/	/	0.312	0.186	0.312	
	Bottom Side	0.140	0.280	0.352	0.366	0.216	0.347	0.368	0.201	0.312	/	/	0.368

Table 98: SAR Simultaneous Tx Combination of Main antenna and WiFi/BT antenna.

### 7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01.

**Appendix A. System Check Plots**

(Please See Appendix No.: SYBH(Z-SAR) 20180917016002-2A, total: 20 pages)

**Appendix B. SAR Measurement Plots**

(Please See Appendix No.: SYBH(Z-SAR) 20180917016002-2B, total: 51 pages)

**Appendix C. Calibration Certificate**

(Please See Appendix No.: SYBH(Z-SAR) 20180917016002-2C, total: 213 pages)

**Appendix D. Photo documentation**

(Please See Appendix No.: SYBH(Z-SAR) 20180917016002-2D, total: 6 pages)

---

**End**