



**Appendix A. System Check Plots**

<b>Table of contents</b>
SystemPerformanceCheck-D835-ES-Head
SystemPerformanceCheck-D835- ES-Body
SystemPerformanceCheck-D1900- ES-Head
SystemPerformanceCheck-D1900- ES-Body
SystemPerformanceCheck-D2450- ES-Head
SystemPerformanceCheck-D2450- ES-Body
SystemPerformanceCheck-D2600- ES-Head
SystemPerformanceCheck-D2600- ES-Body

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D835-ES-Head

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 39.931$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.68, 6.68, 6.68); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.47 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 55.04 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.35 W/kg

**SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.46 W/kg**

Maximum value of SAR (measured) = 2.64 W/kg

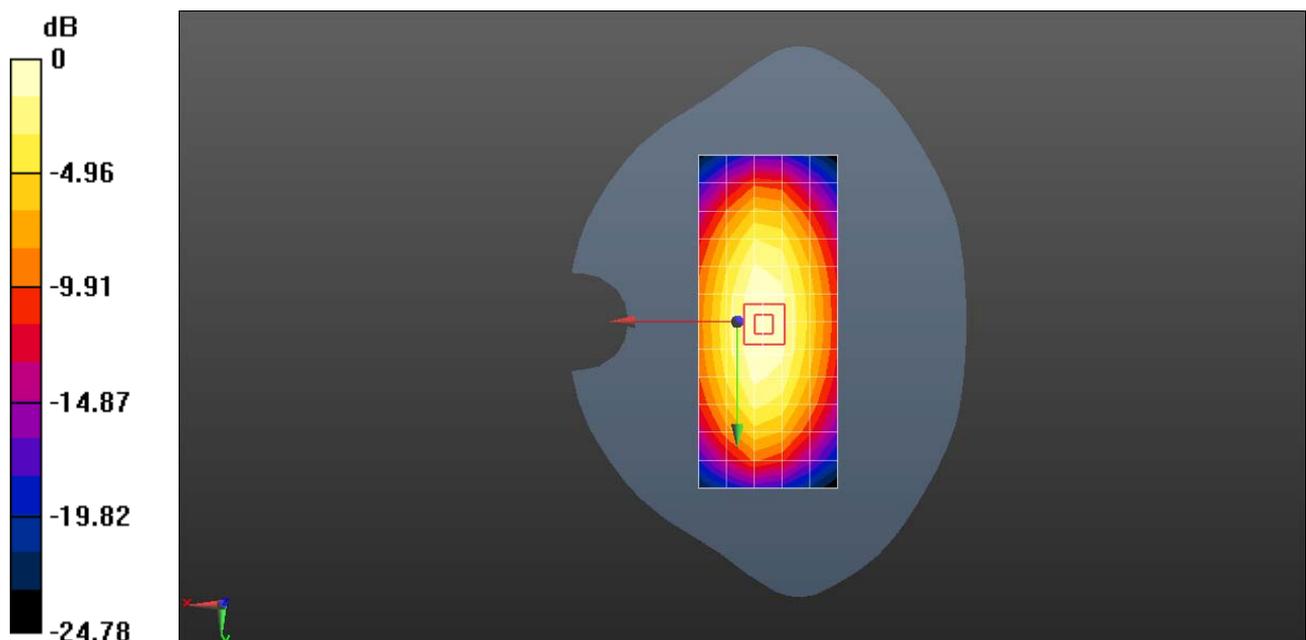

0 dB = 2.47 W/kg = 3.93 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D835-ES-Body

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.002$  S/m;  $\epsilon_r = 56.004$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.33, 6.33, 6.33); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.43 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 52.42 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.33 W/kg

**SAR(1 g) = 2.26 W/kg; SAR(10 g) = 1.47 W/kg**

Maximum value of SAR (measured) = 2.64 W/kg

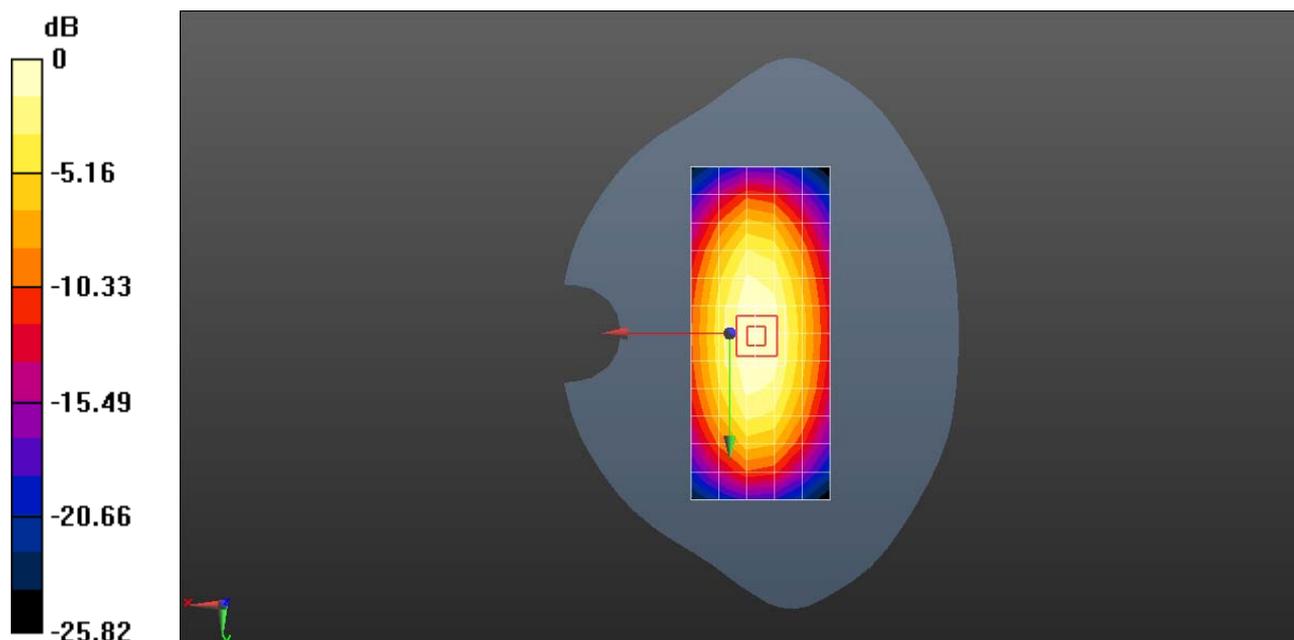

0 dB = 2.43 W/kg = 3.86 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D1900-ES-Head

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 38.552$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.33, 5.33, 5.33); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 10.1 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 91.40 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 18.7 W/kg

**SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.38 W/kg**

Maximum value of SAR (measured) = 13.2 W/kg

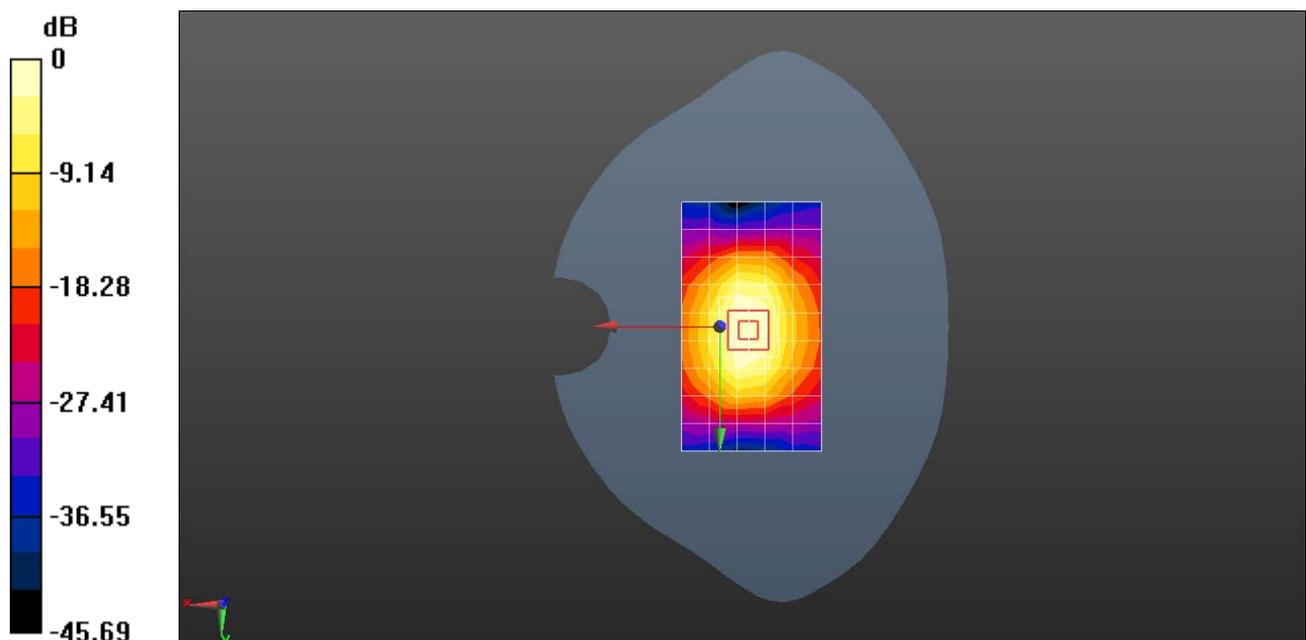

0 dB = 10.1 W/kg = 10.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D1900-ES-Body

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.564$  S/m;  $\epsilon_r = 52.908$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 12.2 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 81.28 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 18.8 W/kg

**SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.52 W/kg**

Maximum value of SAR (measured) = 13.5 W/kg

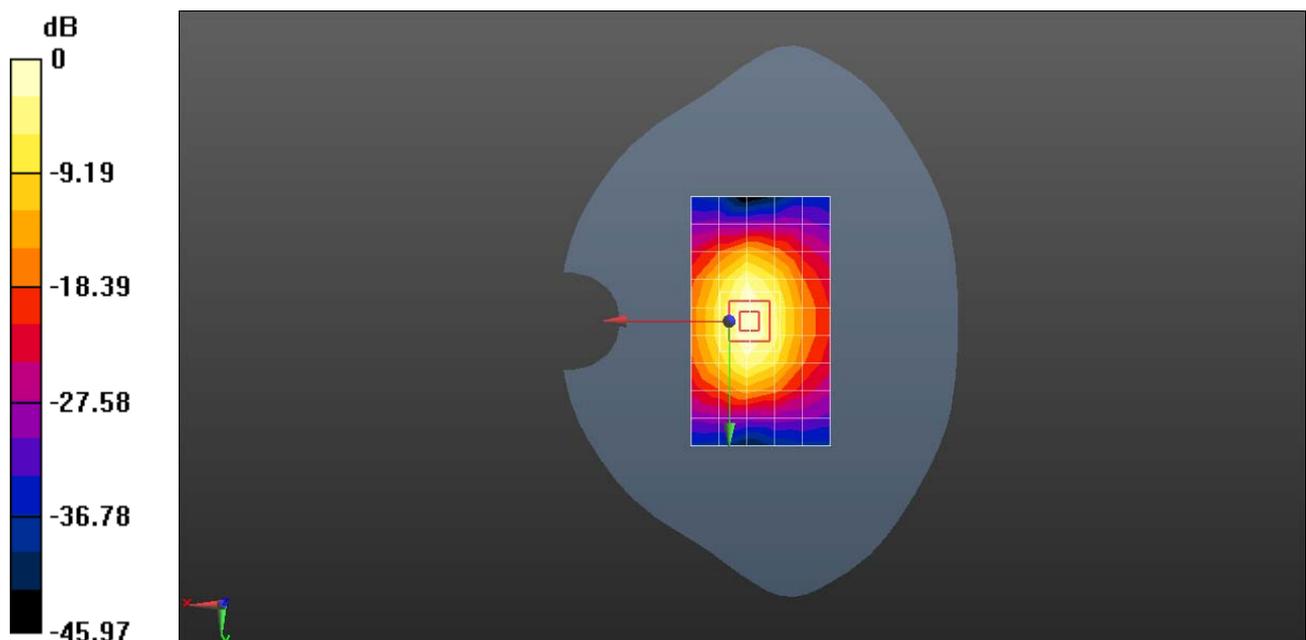

0 dB = 12.2 W/kg = 10.86 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2450-ES-Head

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:835**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.83$  S/m;  $\epsilon_r = 39.269$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.73, 4.73, 4.73); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 16.5 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 75.21 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.2 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.14 W/kg**

Maximum value of SAR (measured) = 17.4 W/kg

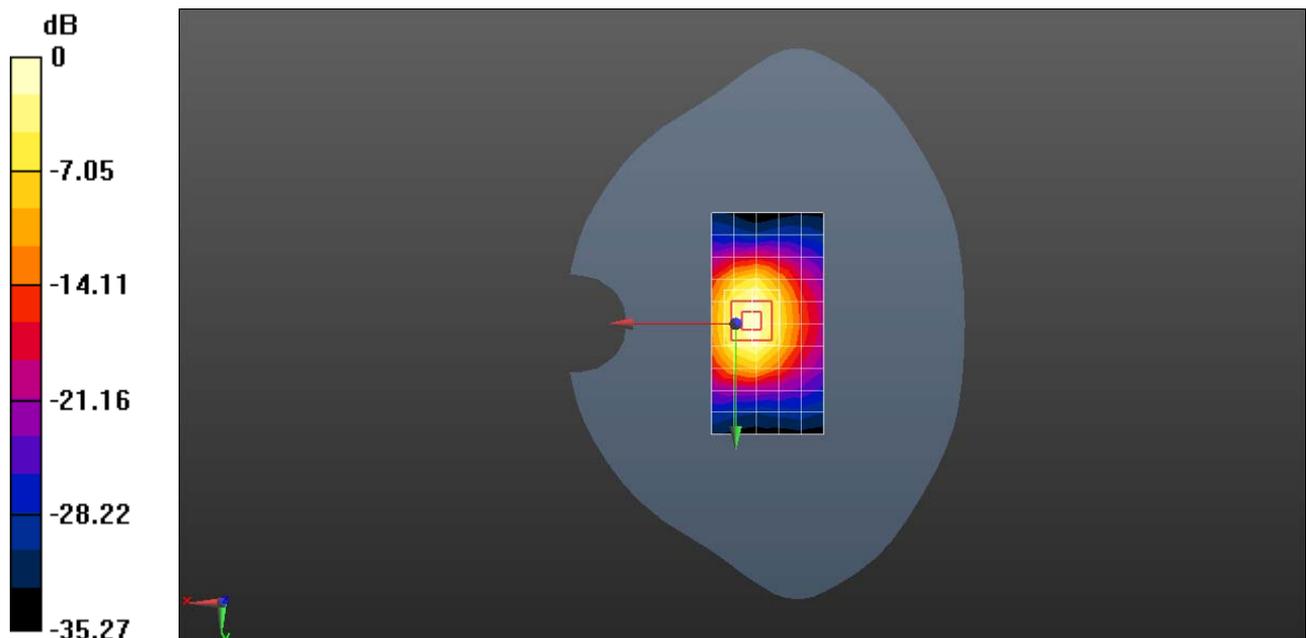

0 dB = 16.5 W/kg = 12.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2450-ES-Body

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:835**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.02$  S/m;  $\epsilon_r = 52.873$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.57, 4.57, 4.57); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 14.5 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 91.49 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 26.3 W/kg

**SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.79 W/kg**

Maximum value of SAR (measured) = 16.7 W/kg

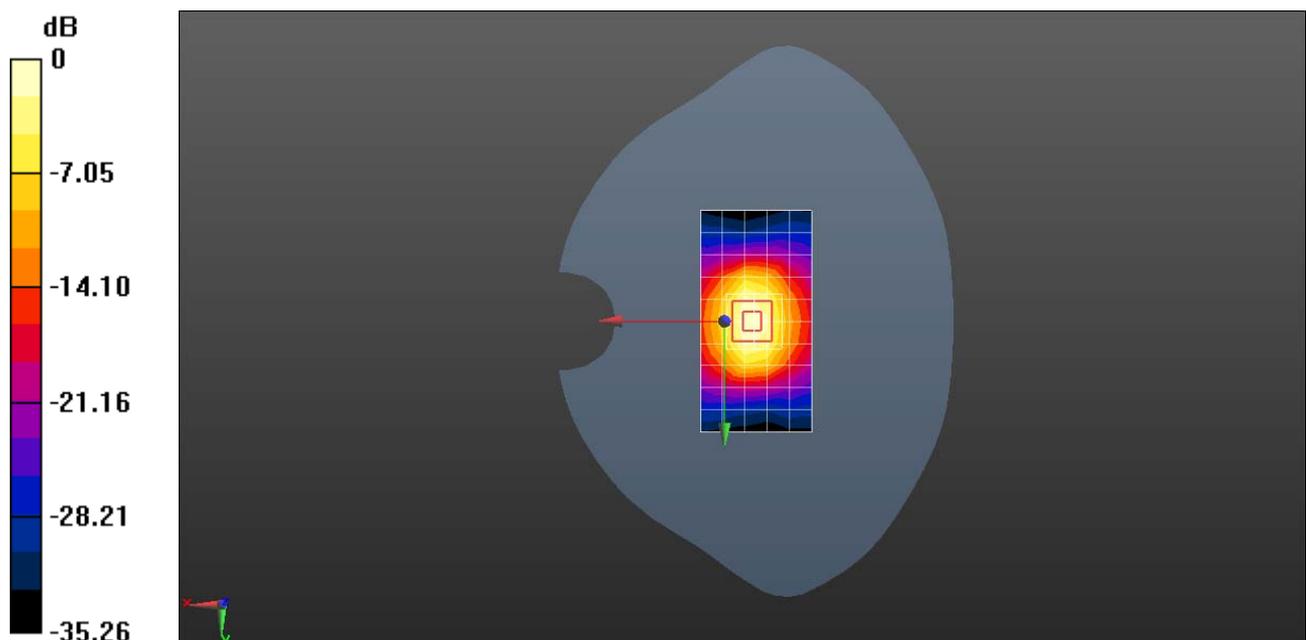

0 dB = 14.5 W/kg = 11.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2600-ES-Head

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.998$  S/m;  $\epsilon_r = 38.374$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.69, 4.69, 4.69); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 20.2 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 85.04 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 32.0 W/kg

**SAR(1 g) = 15.2 W/kg; SAR(10 g) = 6.85 W/kg**

Maximum value of SAR (measured) = 20.3 W/kg

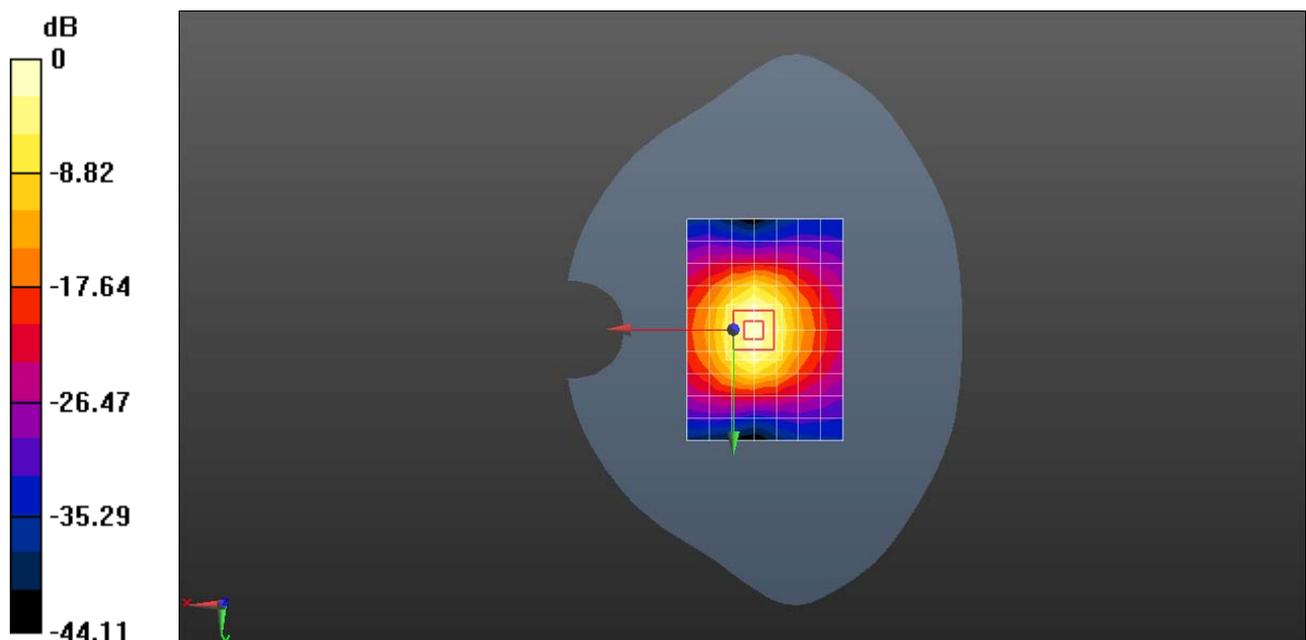

0 dB = 20.2 W/kg = 13.05 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D2600-ES-Body

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.201$  S/m;  $\epsilon_r = 52.091$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.31, 4.31, 4.31); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 17.2 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 83.48 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 31.4 W/kg

**SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.27 W/kg**

Maximum value of SAR (measured) = 19.0 W/kg

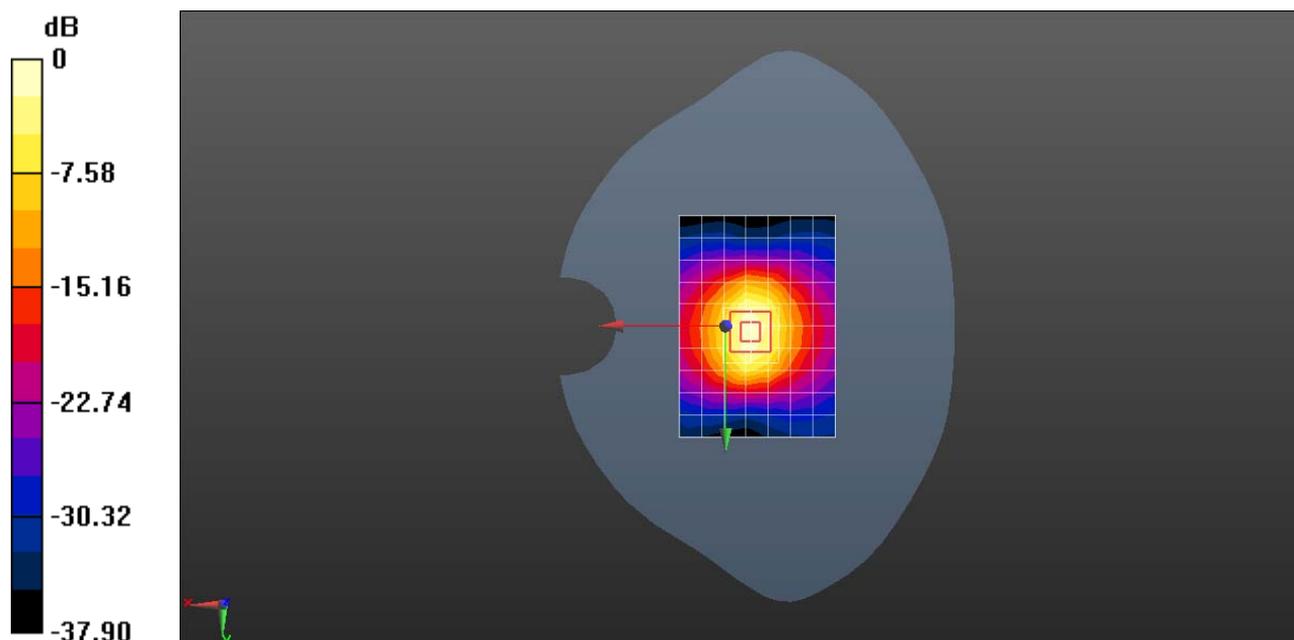

0 dB = 17.2 W/kg = 12.36 dBW/kg