

# FCC Test Report

## FCC ID: QISPRA-LX3


**Project No.** : 1610C129  
**Equipment** : Smart Phone  
**Test Model** : PRA-LX3  
**Series Model** : N/A  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt** : Oct. 24, 2016  
**Date of Test** : Oct. 24, 2016 ~ Nov. 02, 2016  
**Issued Date** : Nov. 03, 2016  
**Tested by** : BTL Inc.


**Testing Engineer** :

  
\_\_\_\_\_  
(Kevin Li)

**Technical Manager** :

  
\_\_\_\_\_  
(Bill Zhang)

**Authorized Signatory** :

  
\_\_\_\_\_  
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>4</b>
<b>1 . CERIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
<b>4 . EMC EMISSION TEST</b>	<b>12</b>
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 MEASUREMENT INSTRUMENTS LIST	12
4.1.3 TEST PROCEDURE	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	13
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	43
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	43
4.2.2 MEASUREMENT INSTRUMENTS LIST	44
4.2.3 TEST PROCEDURE	45
4.2.4 DEVIATION FROM TEST STANDARD	45
4.2.5 TEST SETUP	46
4.2.6 EUT OPERATING CONDITIONS	47
4.2.7 TEST RESULTS-BELOW 1GHZ	47
4.2.8 TEST RESULTS-ABOVE 1GHZ	76

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1610C129	Original Issue.	Nov. 03, 2016

## 1. CERIFICATION

Equipment : Smart phone  
Brand Name : HUAWEI  
Test Model : PRA-LX3  
Series Model : N/A  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Date of Test : Oct. 24, 2016 ~ Nov. 02, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1610C129) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{CISPR}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart phone
Brand Name	HUAWEI
Test Model	PRA-LX3
Series Model	N/A
Model Difference	N/A
Frequency	GSM850/1900 WCDMA B2/4/5 LTE B2/4/5/7/12/17 BT /Wi-Fi
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Battery Supplied.
Power Rating	#1 (1) AC 100–240V 60Hz/50Hz,0.5A DC 5V1A (2) AC 100–240V 60Hz/50Hz,0.5A DC 5V2A #2 DC 3.82V 2900mAh
HW Version	HL2PRAM
SW Version	PRA-LX3C900B017

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

- | Item      | Mfr/Brand                                       | Model.                       |
|-----------|---|------------------------------|
| Battery   | Sunwoda Electronic Co., LTD                     | HB366481ECW-                 |
|           | SCUD (FUJIAN) Electronics Co., Ltd              |                              |
|           | DESAY CORPORATION                               |                              |
| USB Cable | FOXCONN INTERCONNECT TECHNOLOGY                 | CUBB01M-HC304-DH             |
|           | Shenzhen Luxshare Precision Industry Co., Ltd   | L99U2017-CS-H                |
|           | SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD.        | H09-000577                   |
|           | CONNREX (SHEN ZHEN) INDUSTRIAL.,LTD.            | CD-U0405-1143                |
| Earphone  | Jiangxi Lianchuang Hongsheng Electronic Co.,LTD | MEMD1632B580C00              |
|           | BOLUO COUNTY QUANCHENG ELECTRONIC               | 1311-3291-3.5mm-229          |
|           | GoerTek Inc                                     | HA1-3, HG-04A                |
| Adapter   | Dongguan Phitek Electronics Co., Ltd            | HW-050100U01<br>HW-050200U01 |
|           | HUIZHOU BYD ELECTRONIC CO., LTD.                |                              |
|           | Shenzhen Huntkey Electric Co., Ltd.             |                              |

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)

For Conducted Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)

**3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

**Mode 1**

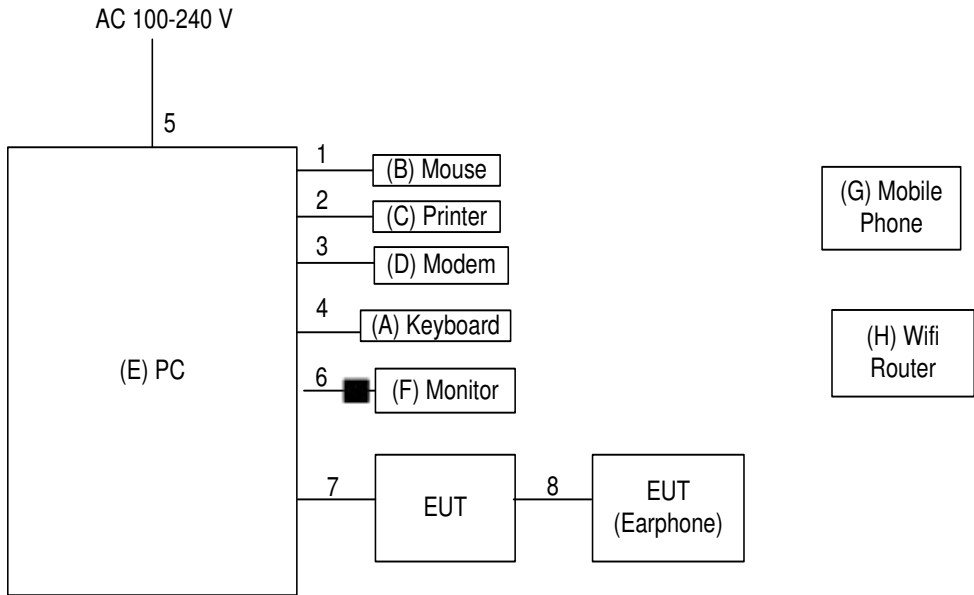


Ground plane

Remote System

■ Ferrite core

**Mode 2-6**

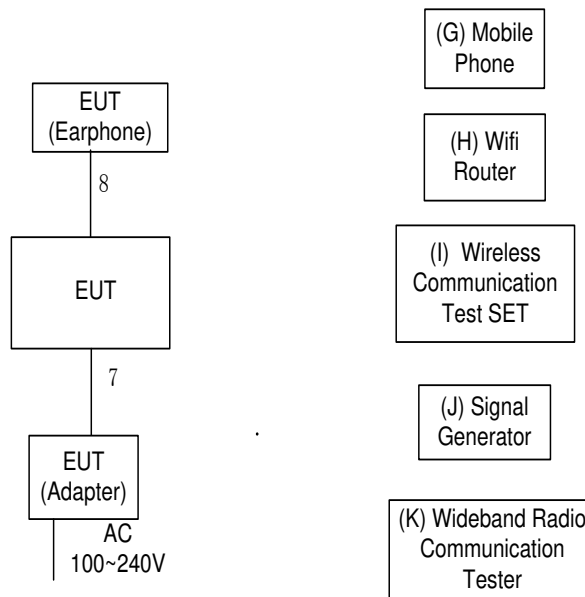

Ground plane

Remote System

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	Dell	DCSM 745	DOC	G7K832X
F	LCD monitor	Dell	E177FPC	DOC	CNOFJ179-64180-6AG-1WNS
G	Mobile phone	samsung	SGH-1747	A3LSGH1747	R31C208VLDB
H	Router	TP-LINK	TL-WR1041N	N/A	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series)	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316
K	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
 All calibration period of equipment list is one year.


### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

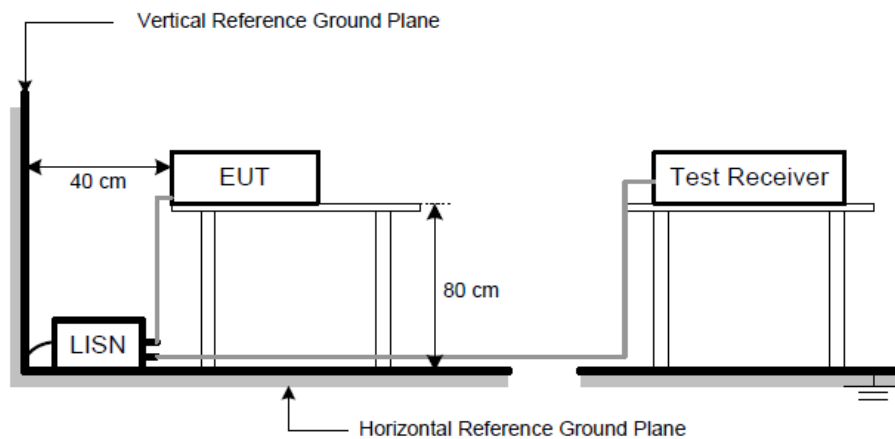

### 4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.7 TEST RESULTS

##### Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz.  
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

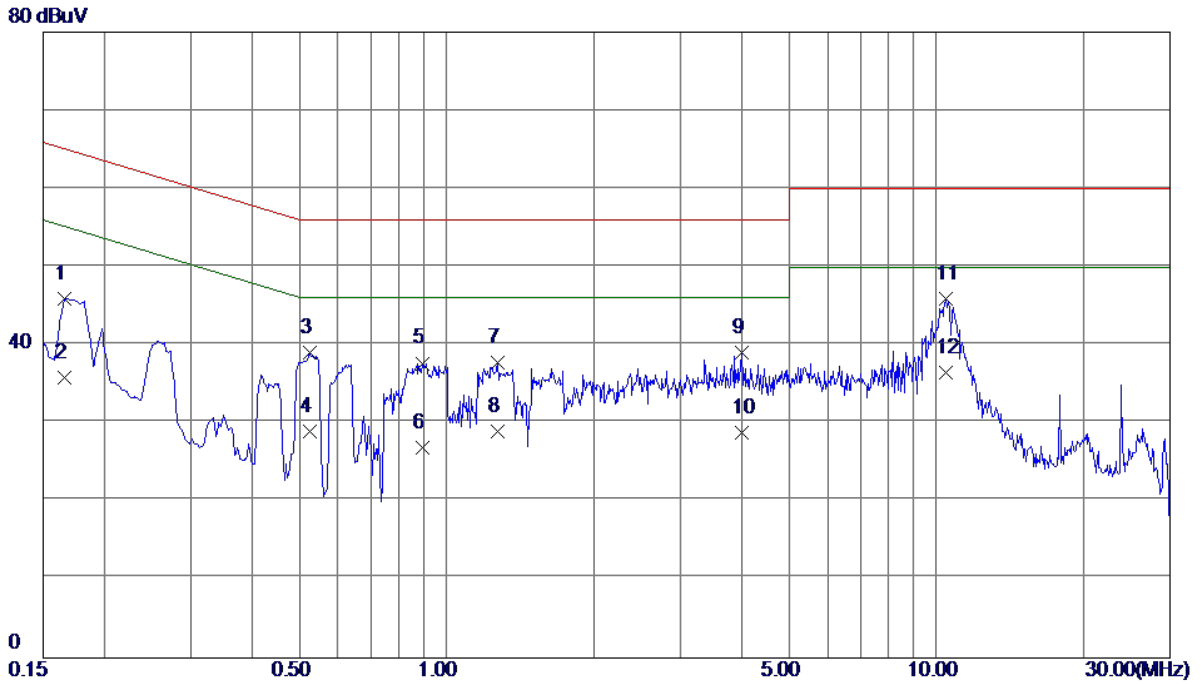


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	36.44	9.52	45.96	65.16	-19.20	QP
2	0.1660	26.40	9.52	35.92	55.16	-19.24	AVG
3	0.5260	29.38	9.64	39.02	56.00	-16.98	QP
4	0.5260	19.30	9.64	28.94	46.00	-17.06	AVG
5	0.8940	27.93	9.75	37.68	56.00	-18.32	QP
6	0.8940	17.20	9.75	26.95	46.00	-19.05	AVG
7	1.2740	28.01	9.79	37.80	56.00	-18.20	QP
8	1.2740	19.20	9.79	28.99	46.00	-17.01	AVG
9	4.0020	28.85	10.19	39.04	56.00	-16.96	QP
10	4.0020	18.60	10.19	28.79	46.00	-17.21	AVG
11	10.4780	35.72	10.22	45.94	60.00	-14.06	QP
12 *	10.4780	26.30	10.22	36.52	50.00	-13.48	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

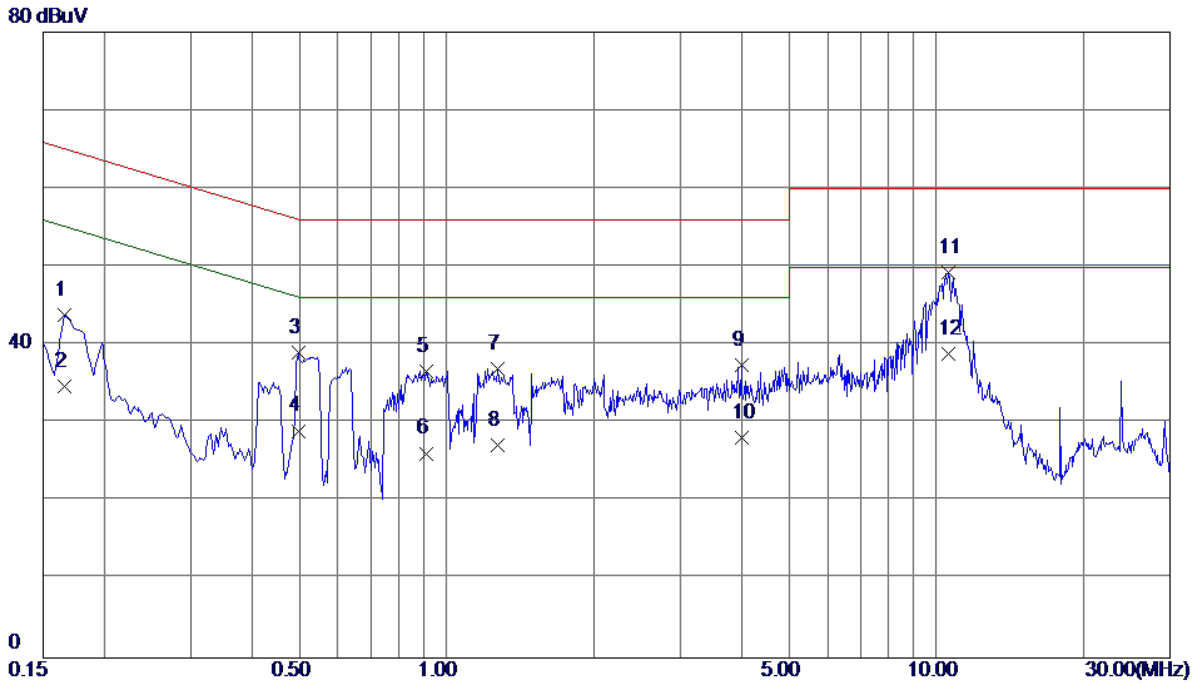


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	34.46	9.44	43.90	65.16	-21.26	QP
2	0.1660	25.30	9.44	34.74	55.16	-20.42	AVG
3	0.4980	29.55	9.44	38.99	56.03	-17.04	QP
4	0.4980	19.60	9.44	29.04	46.03	-16.99	AVG
5	0.9100	27.05	9.66	36.71	56.00	-19.29	QP
6	0.9100	16.50	9.66	26.16	46.00	-19.84	AVG
7	1.2740	27.30	9.67	36.97	56.00	-19.03	QP
8	1.2740	17.60	9.67	27.27	46.00	-18.73	AVG
9	4.0020	27.58	9.89	37.47	56.00	-18.53	QP
10	4.0020	18.30	9.89	28.19	46.00	-17.81	AVG
11 *	10.6100	38.91	10.32	49.23	60.00	-10.77	QP
12	10.6100	28.60	10.32	38.92	50.00	-11.08	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:CONNREX+Battery:SCUD+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

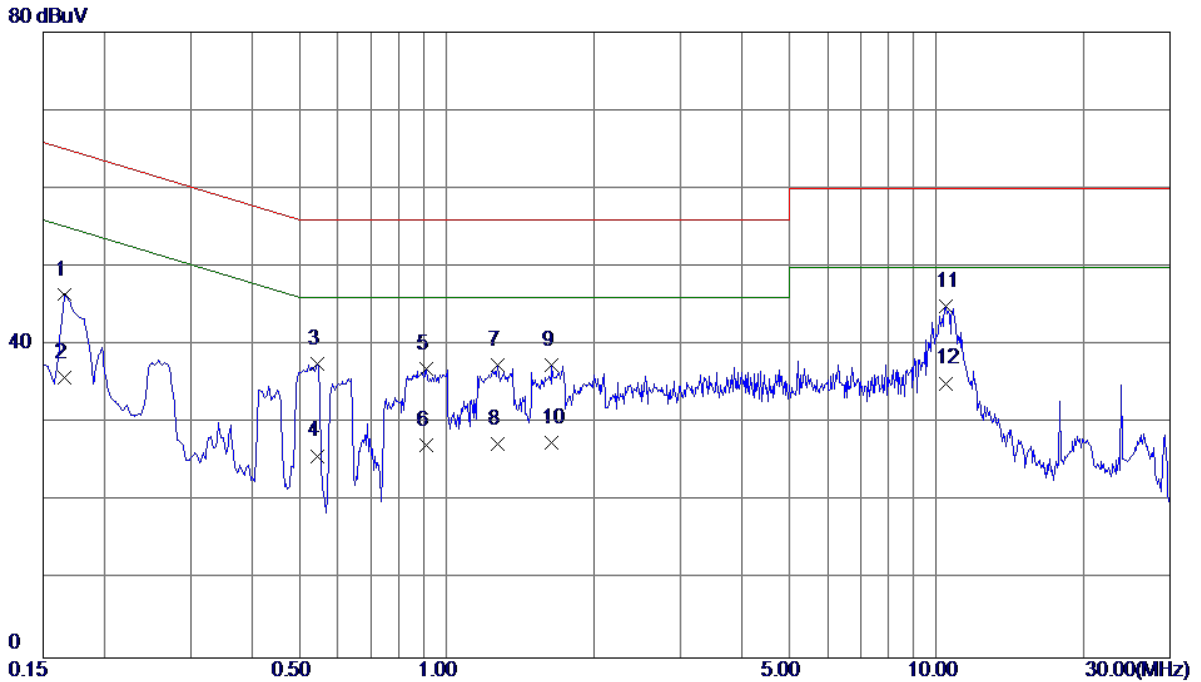


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	36.96	9.52	46.48	65.16	-18.68	QP
2	0.1660	26.30	9.52	35.82	55.16	-19.34	AVG
3	0.5460	27.89	9.64	37.53	56.00	-18.47	QP
4	0.5460	16.20	9.64	25.84	46.00	-20.16	AVG
5	0.9100	27.20	9.76	36.96	56.00	-19.04	QP
6	0.9100	17.50	9.76	27.26	46.00	-18.74	AVG
7	1.2740	27.60	9.79	37.39	56.00	-18.61	QP
8	1.2740	17.60	9.79	27.39	46.00	-18.61	AVG
9	1.6380	27.54	9.88	37.42	56.00	-18.58	QP
10	1.6380	17.60	9.88	27.48	46.00	-18.52	AVG
11	10.4780	34.81	10.22	45.03	60.00	-14.97	QP
12 *	10.4780	24.90	10.22	35.12	50.00	-14.88	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:CONNREX+Battery:SCUD+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

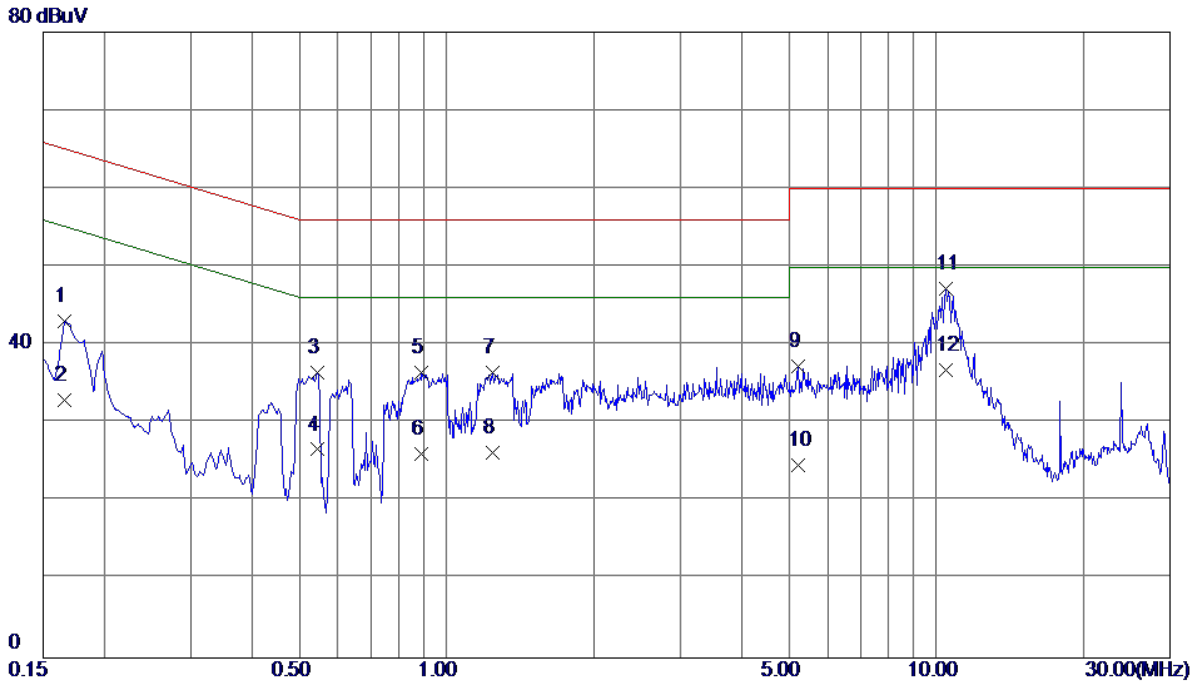


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	33.60	9.44	43.04	65.16	-22.12	QP
2	0.1660	23.50	9.44	32.94	55.16	-22.22	AVG
3	0.5460	27.08	9.44	36.52	56.00	-19.48	QP
4	0.5460	17.20	9.44	26.64	46.00	-19.36	AVG
5	0.8900	26.79	9.64	36.43	56.00	-19.57	QP
6	0.8900	16.50	9.64	26.14	46.00	-19.86	AVG
7	1.2420	26.79	9.67	36.46	56.00	-19.54	QP
8	1.2420	16.50	9.67	26.17	46.00	-19.83	AVG
9	5.2100	27.24	9.99	37.23	60.00	-22.77	QP
10	5.2100	14.60	9.99	24.59	50.00	-25.41	AVG
11 *	10.4819	36.93	10.31	47.24	60.00	-12.76	QP
12	10.4819	26.50	10.31	36.81	50.00	-13.19	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone: Goer		
Test Engineer	Kevin Li		

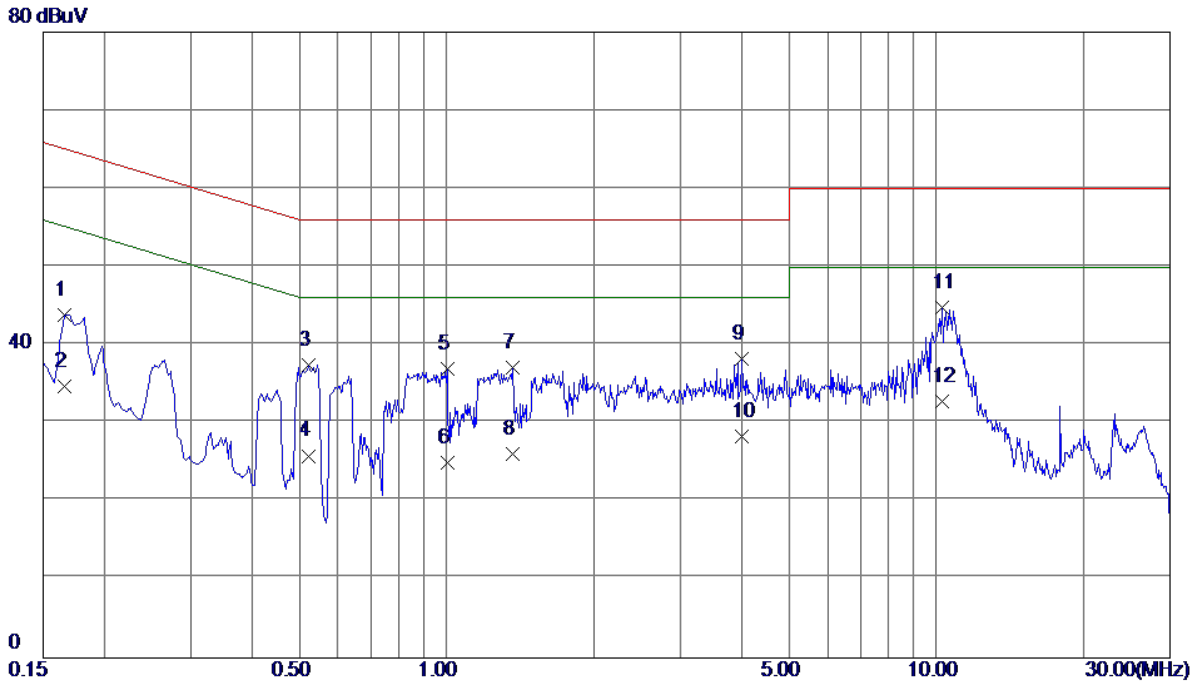


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	34.35	9.52	43.87	65.16	-21.29	QP
2	0.1660	25.20	9.52	34.72	55.16	-20.44	AVG
3	0.5220	27.76	9.64	37.40	56.00	-18.60	QP
4	0.5220	16.20	9.64	25.84	46.00	-20.16	AVG
5	1.0020	27.24	9.76	37.00	56.00	-19.00	QP
6	1.0020	15.20	9.76	24.96	46.00	-21.04	AVG
7	1.3660	27.22	9.83	37.05	56.00	-18.95	QP
8	1.3660	16.20	9.83	26.03	46.00	-19.97	AVG
9	4.0020	28.07	10.19	38.26	56.00	-17.74	QP
10	4.0020	18.20	10.19	28.39	46.00	-17.61	AVG
11 *	10.2860	34.62	10.22	44.84	60.00	-15.16	QP
12	10.2860	22.60	10.22	32.82	50.00	-17.18	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone: Goer		
Test Engineer	Kevin Li		

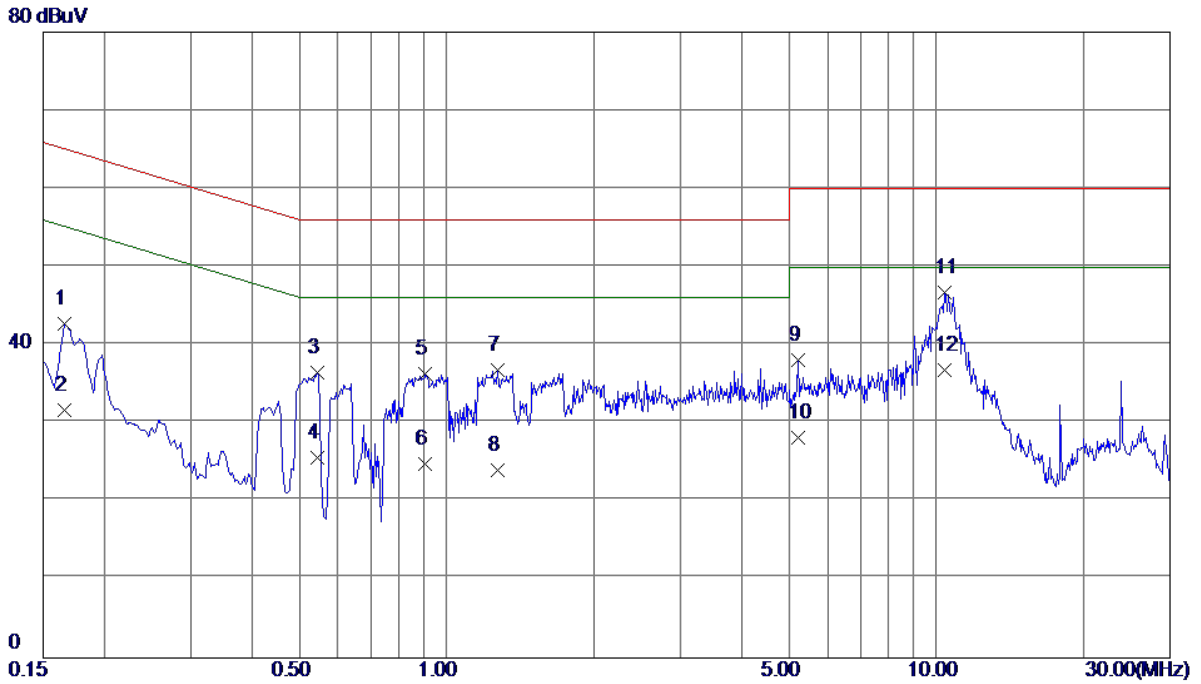


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	33.24	9.44	42.68	65.16	-22.48	QP
2	0.1660	22.20	9.44	31.64	55.16	-23.52	AVG
3	0.5460	27.03	9.44	36.47	56.00	-19.53	QP
4	0.5460	16.20	9.44	25.64	46.00	-20.36	AVG
5	0.9060	26.72	9.66	36.38	56.00	-19.62	QP
6	0.9060	15.20	9.66	24.86	46.00	-21.14	AVG
7	1.2740	27.16	9.67	36.83	56.00	-19.17	QP
8	1.2740	14.30	9.67	23.97	46.00	-22.03	AVG
9	5.2100	28.03	9.99	38.02	60.00	-21.98	QP
10	5.2100	18.20	9.99	28.19	50.00	-21.81	AVG
11	10.4100	36.42	10.31	46.73	60.00	-13.27	QP
12 *	10.4100	26.50	10.31	36.81	50.00	-13.19	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:FOXCONN+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

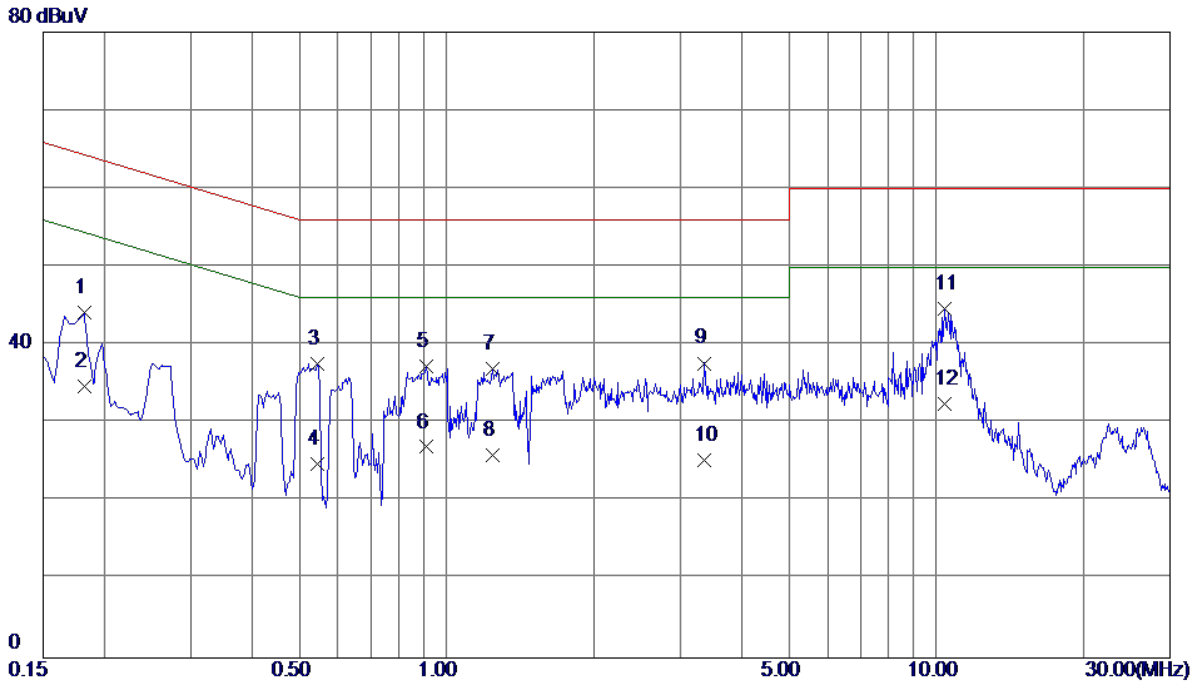


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	34.68	9.53	44.21	64.40	-20.19	QP
2	0.1819	25.20	9.53	34.73	54.40	-19.67	AVG
3	0.5460	27.99	9.64	37.63	56.00	-18.37	QP
4	0.5460	15.20	9.64	24.84	46.00	-21.16	AVG
5	0.9100	27.53	9.76	37.29	56.00	-18.71	QP
6	0.9100	17.20	9.76	26.96	46.00	-19.04	AVG
7	1.2420	27.23	9.78	37.01	56.00	-18.99	QP
8	1.2420	16.20	9.78	25.98	46.00	-20.02	AVG
9	3.3660	27.55	10.13	37.68	56.00	-18.32	QP
10	3.3660	15.20	10.13	25.33	46.00	-20.67	AVG
11 *	10.4140	34.38	10.22	44.60	60.00	-15.40	QP
12	10.4140	22.20	10.22	32.42	50.00	-17.58	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:FOXCONN+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

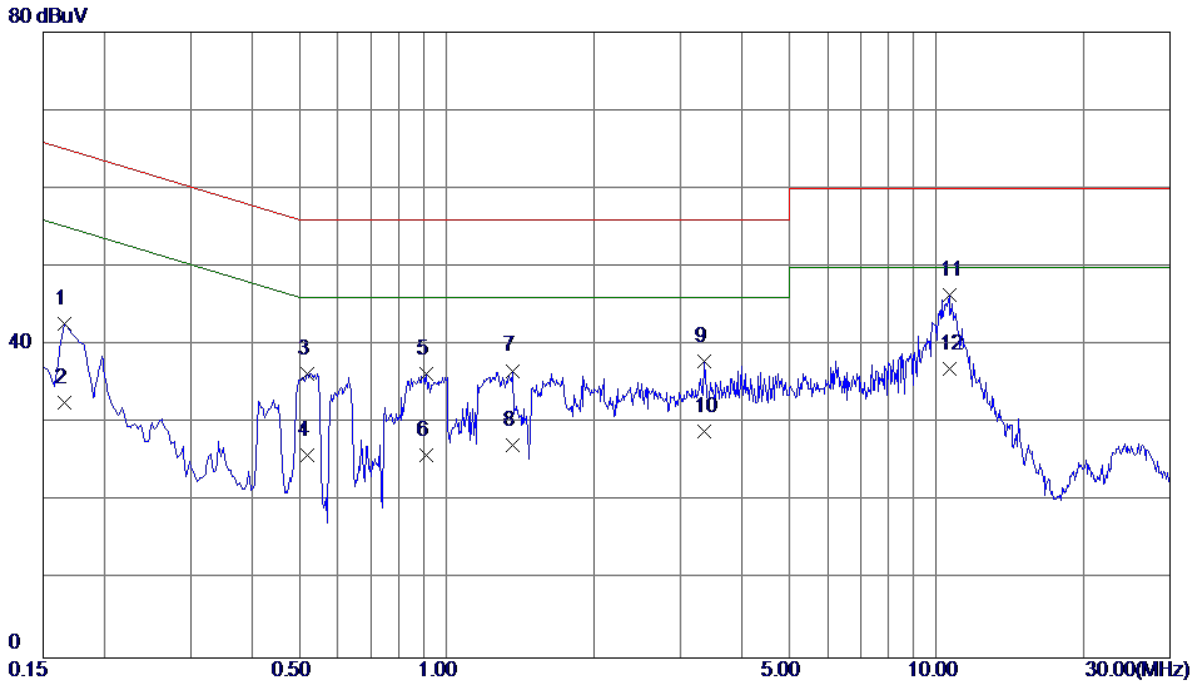


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	33.33	9.44	42.77	65.16	-22.39	QP
2	0.1660	23.20	9.44	32.64	55.16	-22.52	AVG
3	0.5180	26.88	9.44	36.32	56.00	-19.68	QP
4	0.5180	16.50	9.44	25.94	46.00	-20.06	AVG
5	0.9100	26.70	9.66	36.36	56.00	-19.64	QP
6	0.9100	16.30	9.66	25.96	46.00	-20.04	AVG
7	1.3660	27.05	9.67	36.72	56.00	-19.28	QP
8	1.3660	17.50	9.67	27.17	46.00	-18.83	AVG
9	3.3660	28.05	9.83	37.88	56.00	-18.12	QP
10	3.3660	19.20	9.83	29.03	46.00	-16.97	AVG
11	10.6140	36.03	10.32	46.35	60.00	-13.65	QP
12 *	10.6140	26.60	10.32	36.92	50.00	-13.08	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

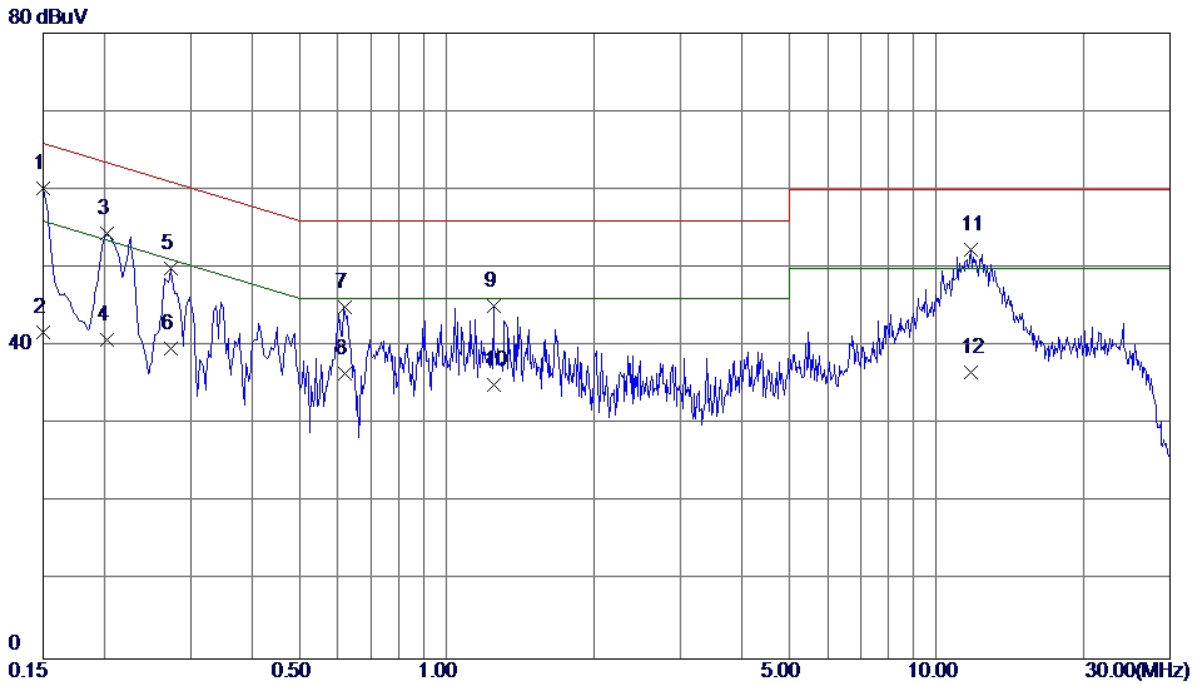


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	50.67	9.52	60.19	66.00	-5.81	QP
2	0.1500	32.30	9.52	41.82	56.00	-14.18	AVG
3	0.2020	44.82	9.53	54.35	63.53	-9.18	QP
4	0.2020	31.20	9.53	40.73	53.53	-12.80	AVG
5	0.2740	40.42	9.53	49.95	61.00	-11.05	QP
6	0.2740	30.20	9.53	39.73	51.00	-11.27	AVG
7	0.6180	35.32	9.64	44.96	56.00	-11.04	QP
8	0.6180	26.90	9.64	36.54	46.00	-9.46	AVG
9	1.2460	35.34	9.78	45.12	56.00	-10.88	QP
10	1.2460	25.31	9.78	35.09	46.00	-10.91	AVG
11	11.7540	42.00	10.26	52.26	60.00	-7.74	QP
12	11.7540	26.31	10.26	36.57	50.00	-13.43	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

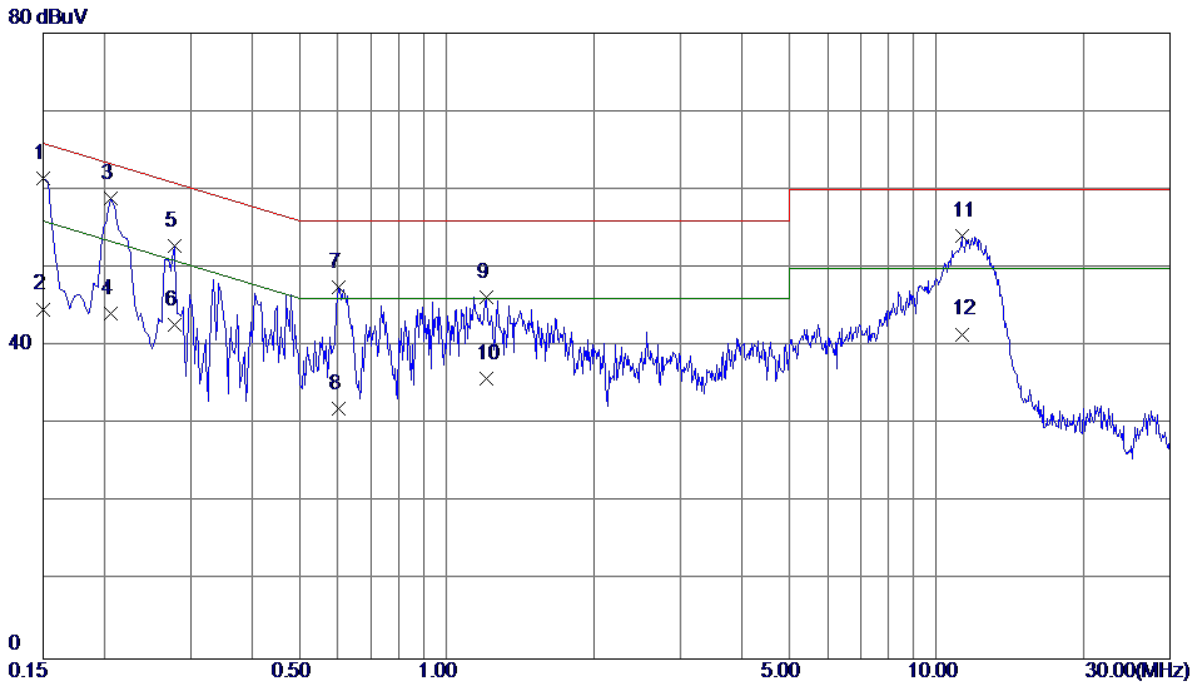


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	51.92	9.52	61.44	66.00	-4.56	QP
2	0.1500	35.20	9.52	44.72	56.00	-11.28	AVG
3 *	0.2060	49.33	9.53	58.86	63.37	-4.51	QP
4	0.2060	34.60	9.53	44.13	53.37	-9.24	AVG
5	0.2779	43.32	9.53	52.85	60.88	-8.03	QP
6	0.2779	33.20	9.53	42.73	50.88	-8.15	AVG
7	0.6020	38.07	9.44	47.51	56.00	-8.49	QP
8	0.6020	22.50	9.44	31.94	46.00	-14.06	AVG
9	1.2059	36.60	9.67	46.27	56.00	-9.73	QP
10	1.2059	26.20	9.67	35.87	46.00	-10.13	AVG
11	11.3060	43.69	10.32	54.01	60.00	-5.99	QP
12	11.3060	31.20	10.32	41.52	50.00	-8.48	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

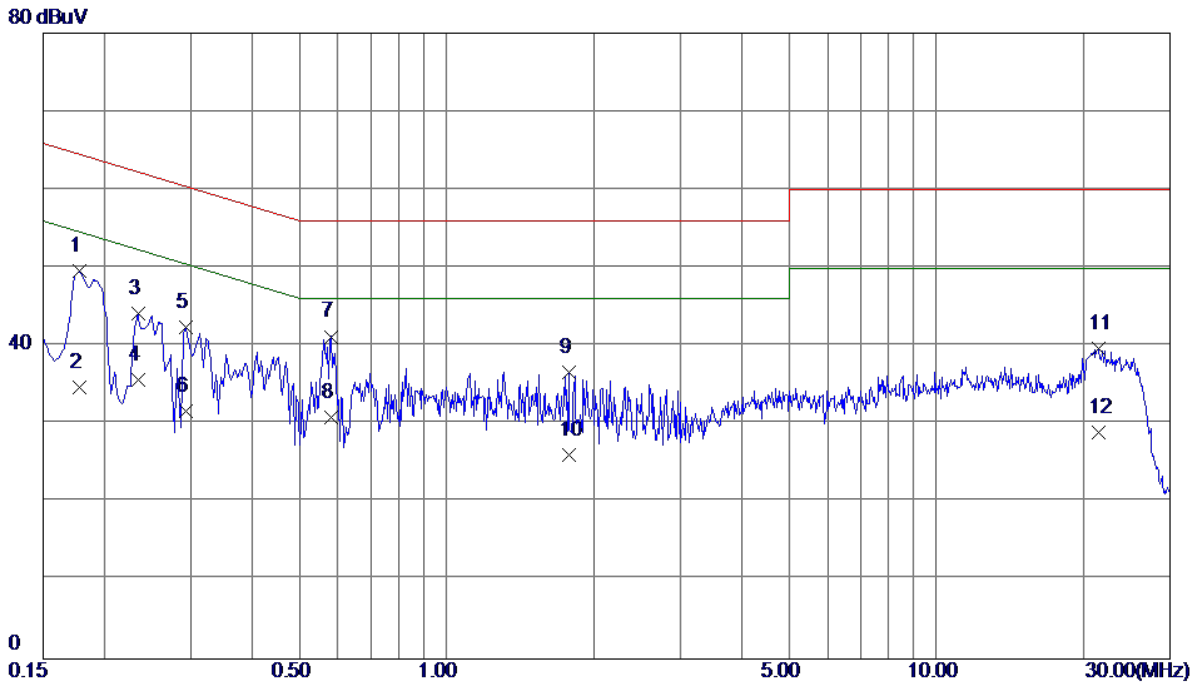


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	39.99	9.53	49.52	64.58	-15.06	QP
2	0.1780	25.20	9.53	34.73	54.58	-19.85	AVG
3	0.2340	34.61	9.53	44.14	62.31	-18.17	QP
4	0.2340	26.20	9.53	35.73	52.31	-16.58	AVG
5	0.2940	32.81	9.53	42.34	60.41	-18.07	QP
6	0.2940	22.10	9.53	31.63	50.41	-18.78	AVG
7 *	0.5820	31.56	9.64	41.20	56.00	-14.80	QP
8	0.5820	21.30	9.64	30.94	46.00	-15.06	AVG
9	1.7740	26.77	9.88	36.65	56.00	-19.35	QP
10	1.7740	16.20	9.88	26.08	46.00	-19.92	AVG
11	21.4700	29.34	10.40	39.74	60.00	-20.26	QP
12	21.4700	18.50	10.40	28.90	50.00	-21.10	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

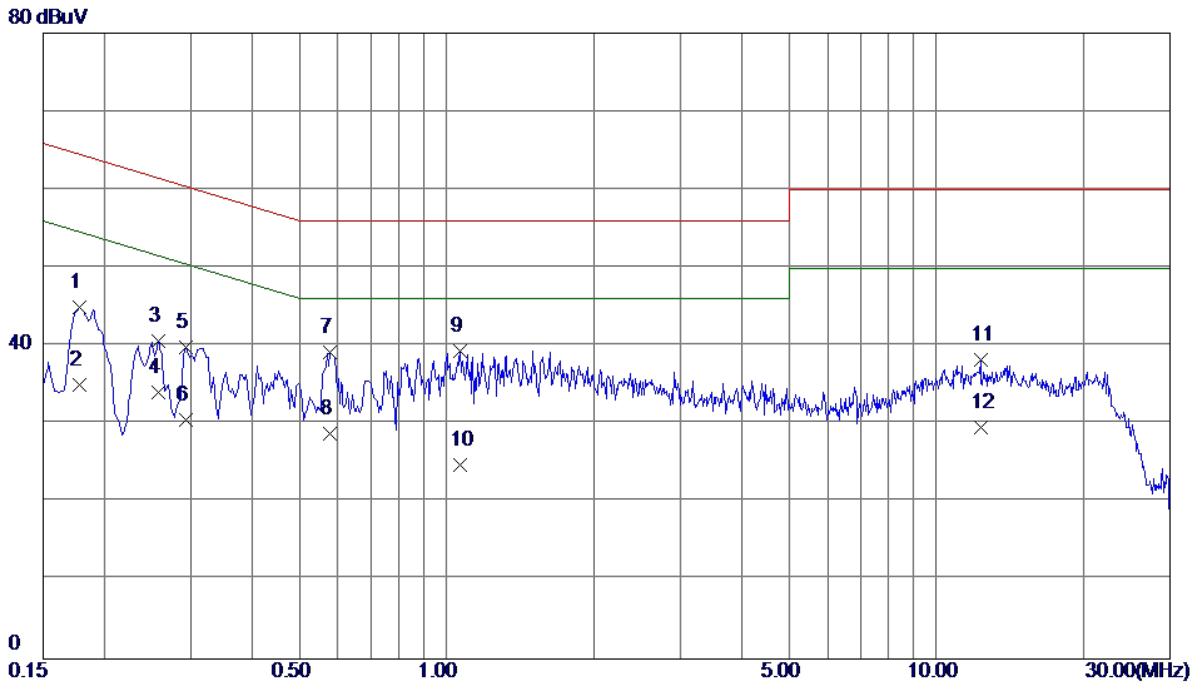


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	35.53	9.45	44.98	64.58	-19.60	QP
2	0.1780	25.61	9.45	35.06	54.58	-19.52	AVG
3	0.2580	31.10	9.53	40.63	61.50	-20.87	QP
4	0.2580	24.50	9.53	34.03	51.50	-17.47	AVG
5	0.2940	30.35	9.53	39.88	60.41	-20.53	QP
6	0.2940	21.10	9.53	30.63	50.41	-19.78	AVG
7	0.5780	29.74	9.44	39.18	56.00	-16.82	QP
8	0.5780	19.40	9.44	28.84	46.00	-17.16	AVG
9 *	1.0660	29.77	9.66	39.43	56.00	-16.57	QP
10	1.0660	15.20	9.66	24.86	46.00	-21.14	AVG
11	12.3060	27.98	10.33	38.31	60.00	-21.69	QP
12	12.3060	19.20	10.33	29.53	50.00	-20.47	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

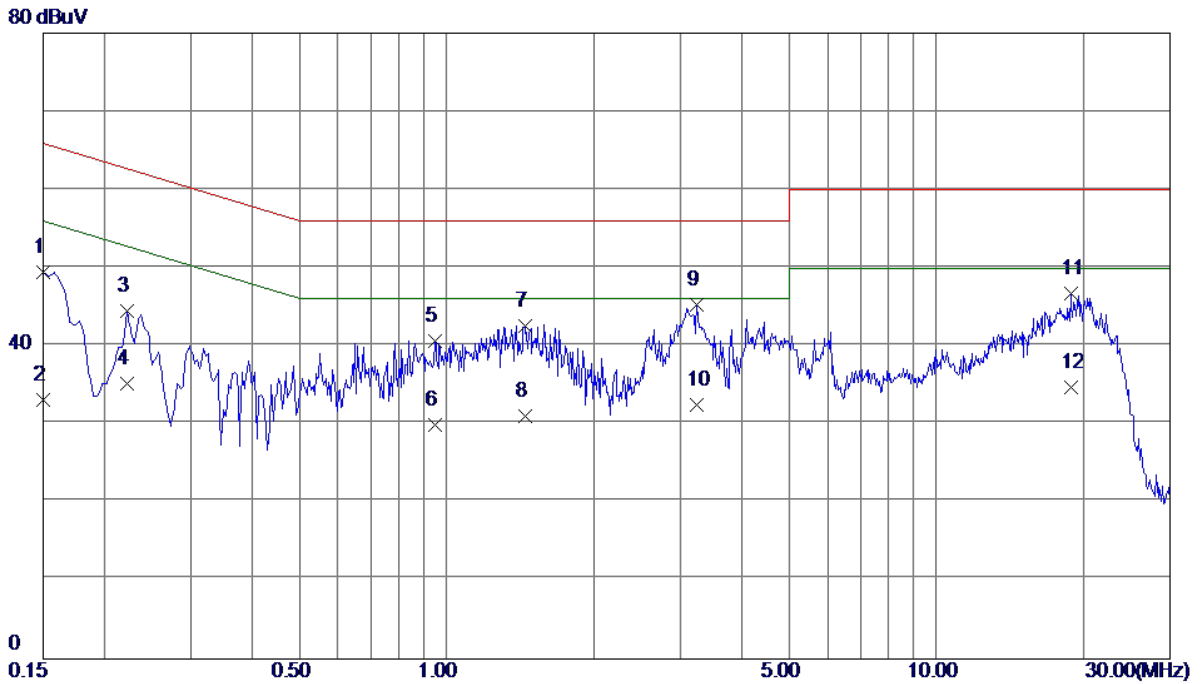


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	39.97	9.52	49.49	66.00	-16.51	QP
2	0.1500	23.60	9.52	33.12	56.00	-22.88	AVG
3	0.2220	34.98	9.53	44.51	62.74	-18.23	QP
4	0.2220	25.60	9.53	35.13	52.74	-17.61	AVG
5	0.9460	30.94	9.76	40.70	56.00	-15.30	QP
6	0.9460	20.10	9.76	29.86	46.00	-16.14	AVG
7	1.4460	32.73	9.86	42.59	56.00	-13.41	QP
8	1.4460	21.19	9.86	31.05	46.00	-14.95	AVG
9 *	3.2500	35.16	10.11	45.27	56.00	-10.73	QP
10	3.2500	22.31	10.11	32.42	46.00	-13.58	AVG
11	18.8140	36.37	10.39	46.76	60.00	-13.24	QP
12	18.8140	24.30	10.39	34.69	50.00	-15.31	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

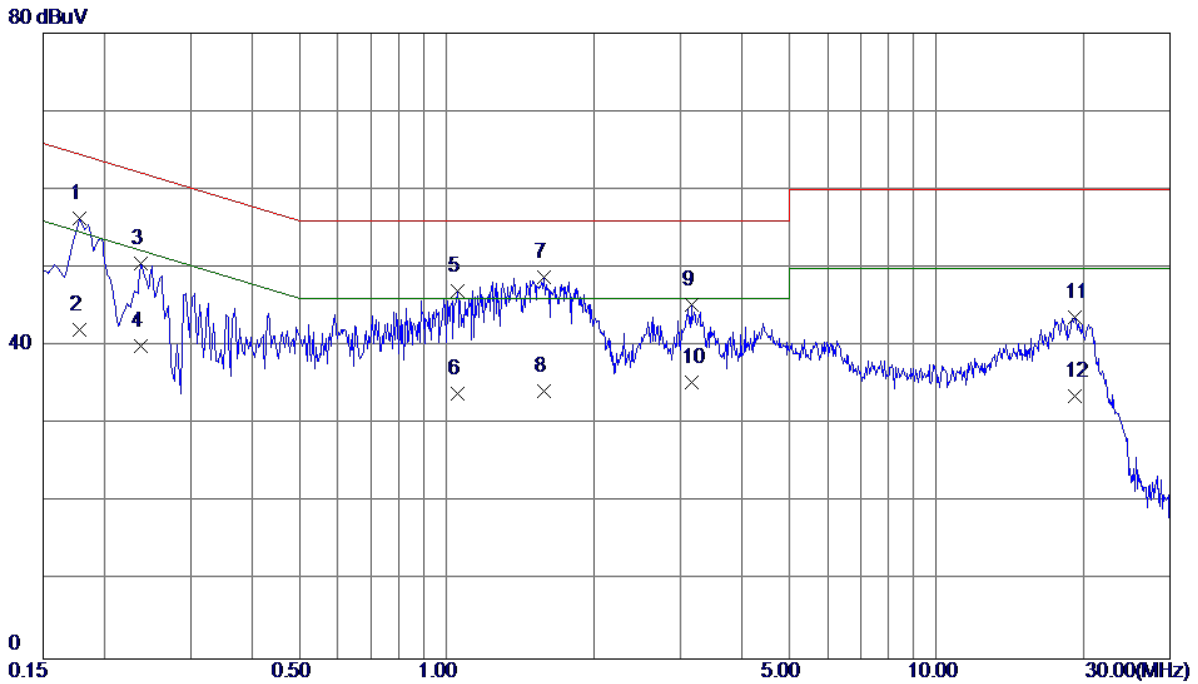


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	46.81	9.45	56.26	64.58	-8.32	QP
2	0.1780	32.61	9.45	42.06	54.58	-12.52	AVG
3	0.2380	40.99	9.53	50.52	62.17	-11.65	QP
4	0.2380	30.40	9.53	39.93	52.17	-12.24	AVG
5	1.0500	37.36	9.66	47.02	56.00	-8.98	QP
6	1.0500	24.20	9.66	33.86	46.00	-12.14	AVG
7 *	1.5780	39.06	9.68	48.74	56.00	-7.26	QP
8	1.5780	24.60	9.68	34.28	46.00	-11.72	AVG
9	3.1700	35.45	9.81	45.26	56.00	-10.74	QP
10	3.1700	25.60	9.81	35.41	46.00	-10.59	AVG
11	19.1420	33.16	10.48	43.64	60.00	-16.36	QP
12	19.1420	23.19	10.48	33.67	50.00	-16.33	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

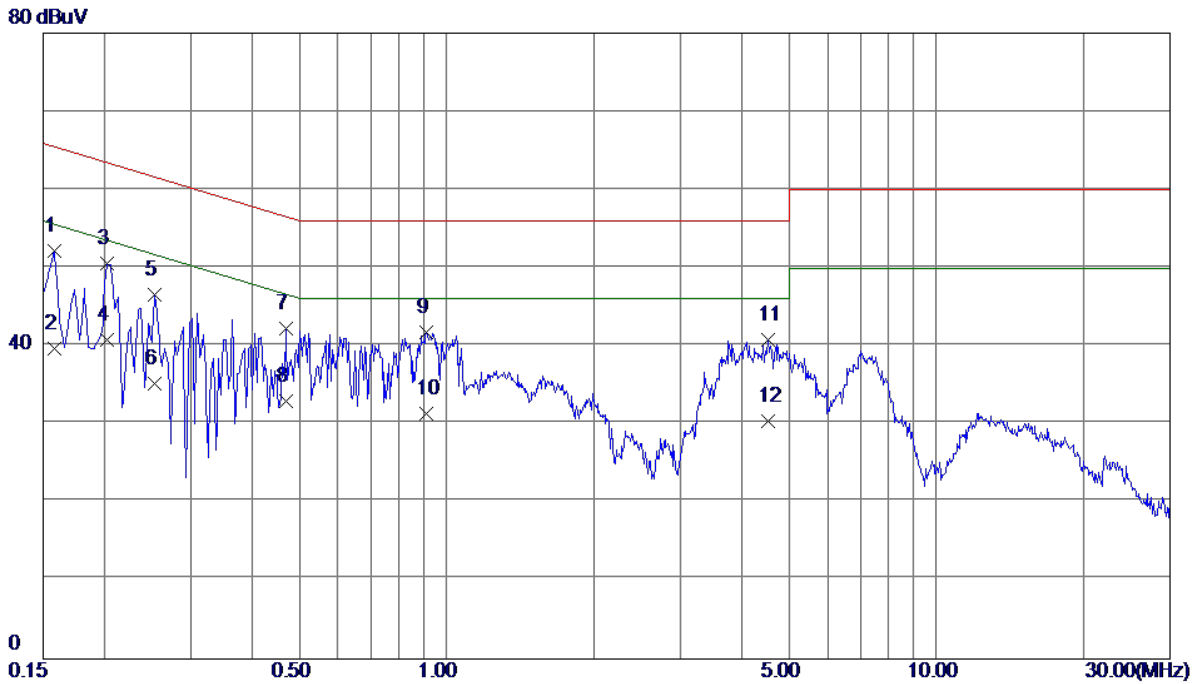


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1580	42.62	9.52	52.14	65.57	-13.43	QP
2	0.1580	30.20	9.52	39.72	55.57	-15.85	AVG
3	0.2020	41.10	9.53	50.63	63.53	-12.90	QP
4 *	0.2020	31.20	9.53	40.73	53.53	-12.80	AVG
5	0.2540	37.02	9.53	46.55	61.63	-15.08	QP
6	0.2540	25.60	9.53	35.13	51.63	-16.50	AVG
7	0.4700	32.69	9.61	42.30	56.51	-14.21	QP
8	0.4700	23.30	9.61	32.91	46.51	-13.60	AVG
9	0.9100	31.97	9.76	41.73	56.00	-14.27	QP
10	0.9100	21.60	9.76	31.36	46.00	-14.64	AVG
11	4.5380	30.74	10.08	40.82	56.00	-15.18	QP
12	4.5380	20.30	10.08	30.38	46.00	-15.62	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

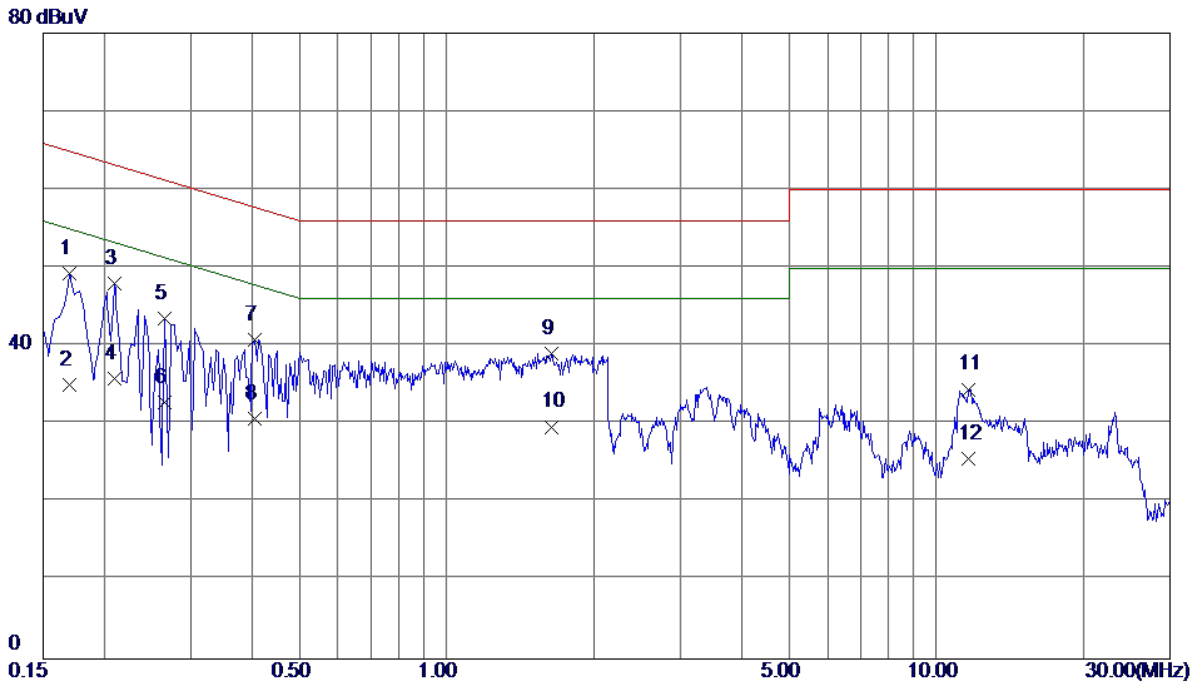


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	39.89	9.42	49.31	64.96	-15.65	QP
2	0.1700	25.60	9.42	35.02	54.96	-19.94	AVG
3 *	0.2100	38.52	9.53	48.05	63.21	-15.16	QP
4	0.2100	26.30	9.53	35.83	53.21	-17.38	AVG
5	0.2660	33.97	9.53	43.50	61.24	-17.74	QP
6	0.2660	23.20	9.53	32.73	51.24	-18.51	AVG
7	0.4060	31.36	9.44	40.80	57.73	-16.93	QP
8	0.4060	21.30	9.44	30.74	47.73	-16.99	AVG
9	1.6420	29.32	9.68	39.00	56.00	-17.00	QP
10	1.6420	20.00	9.68	29.68	46.00	-16.32	AVG
11	11.6580	24.15	10.33	34.48	60.00	-25.52	QP
12	11.6580	15.30	10.33	25.63	50.00	-24.37	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

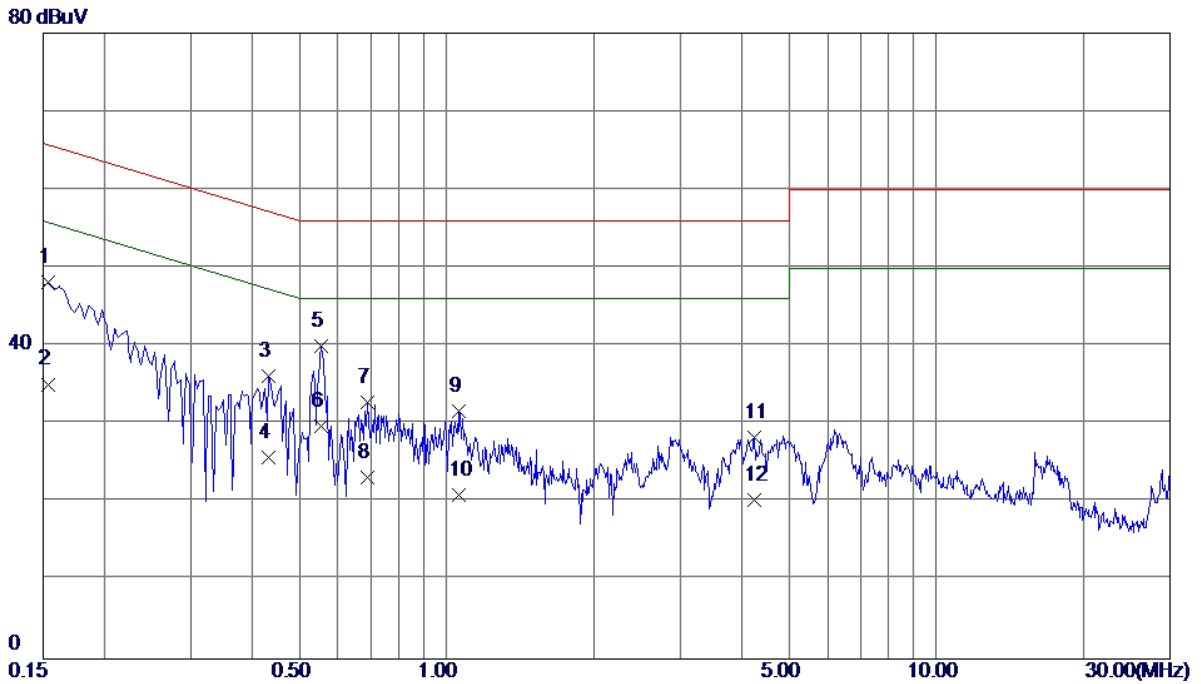


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	38.61	9.52	48.13	65.79	-17.66	QP
2	0.1539	25.60	9.52	35.12	55.79	-20.67	AVG
3	0.4340	26.60	9.57	36.17	57.18	-21.01	QP
4	0.4340	16.20	9.57	25.77	47.18	-21.41	AVG
5 *	0.5540	30.37	9.64	40.01	56.00	-15.99	QP
6	0.5540	20.10	9.64	29.74	46.00	-16.26	AVG
7	0.6900	23.12	9.65	32.77	56.00	-23.23	QP
8	0.6900	13.60	9.65	23.25	46.00	-22.75	AVG
9	1.0580	21.98	9.76	31.74	56.00	-24.26	QP
10	1.0580	11.20	9.76	20.96	46.00	-25.04	AVG
11	4.2580	18.19	10.14	28.33	56.00	-27.67	QP
12	4.2580	10.20	10.14	20.34	46.00	-25.66	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

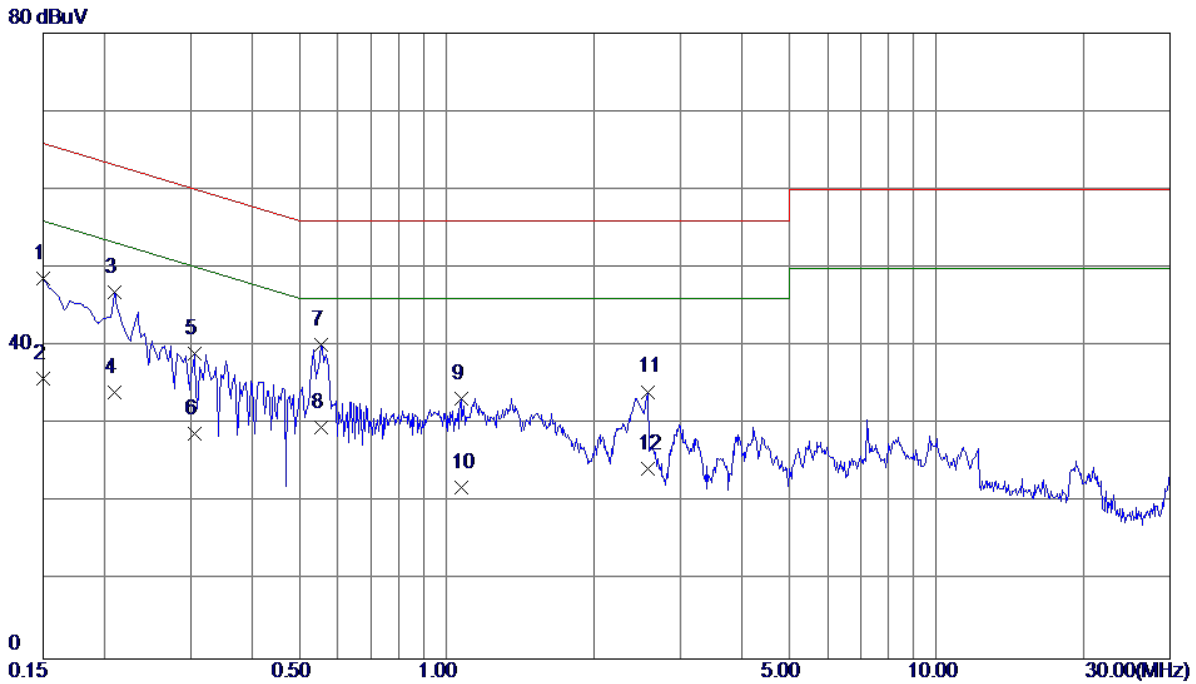


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	39.07	9.52	48.59	66.00	-17.41	QP
2	0.1500	26.30	9.52	35.82	56.00	-20.18	AVG
3	0.2100	37.30	9.53	46.83	63.21	-16.38	QP
4	0.2100	24.60	9.53	34.13	53.21	-19.08	AVG
5	0.3060	29.45	9.53	38.98	60.08	-21.10	QP
6	0.3060	19.20	9.53	28.73	50.08	-21.35	AVG
7 *	0.5540	30.79	9.44	40.23	56.00	-15.77	QP
8	0.5540	20.20	9.44	29.64	46.00	-16.36	AVG
9	1.0700	23.67	9.66	33.33	56.00	-22.67	QP
10	1.0700	12.30	9.66	21.96	46.00	-24.04	AVG
11	2.5700	24.37	9.79	34.16	56.00	-21.84	QP
12	2.5700	14.60	9.79	24.39	46.00	-21.61	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

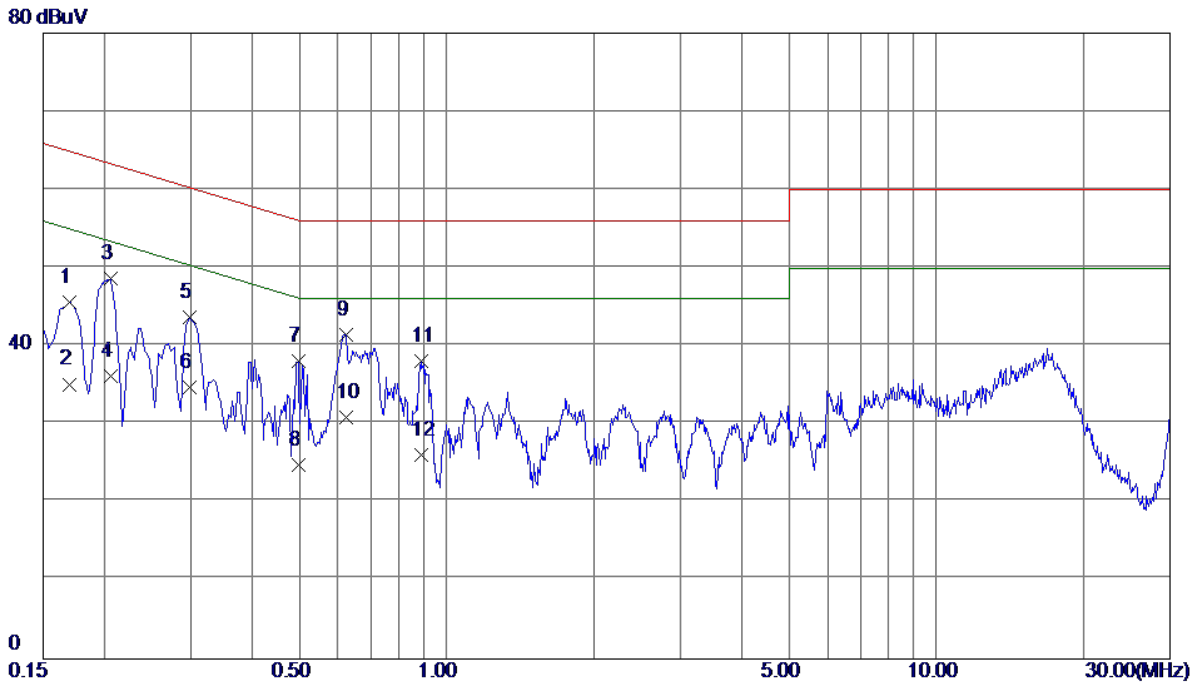


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	36.07	9.52	45.59	64.96	-19.37	QP
2	0.1700	25.60	9.52	35.12	54.96	-19.84	AVG
3	0.2060	39.10	9.53	48.63	63.37	-14.74	QP
4	0.2060	26.60	9.53	36.13	53.37	-17.24	AVG
5	0.2980	34.22	9.53	43.75	60.30	-16.55	QP
6	0.2980	25.20	9.53	34.73	50.30	-15.57	AVG
7	0.4980	28.51	9.64	38.15	56.03	-17.88	QP
8	0.4980	15.20	9.64	24.84	46.03	-21.19	AVG
9 *	0.6220	31.76	9.64	41.40	56.00	-14.60	QP
10	0.6220	21.20	9.64	30.84	46.00	-15.16	AVG
11	0.8860	28.37	9.75	38.12	56.00	-17.88	QP
12	0.8860	16.30	9.75	26.05	46.00	-19.95	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

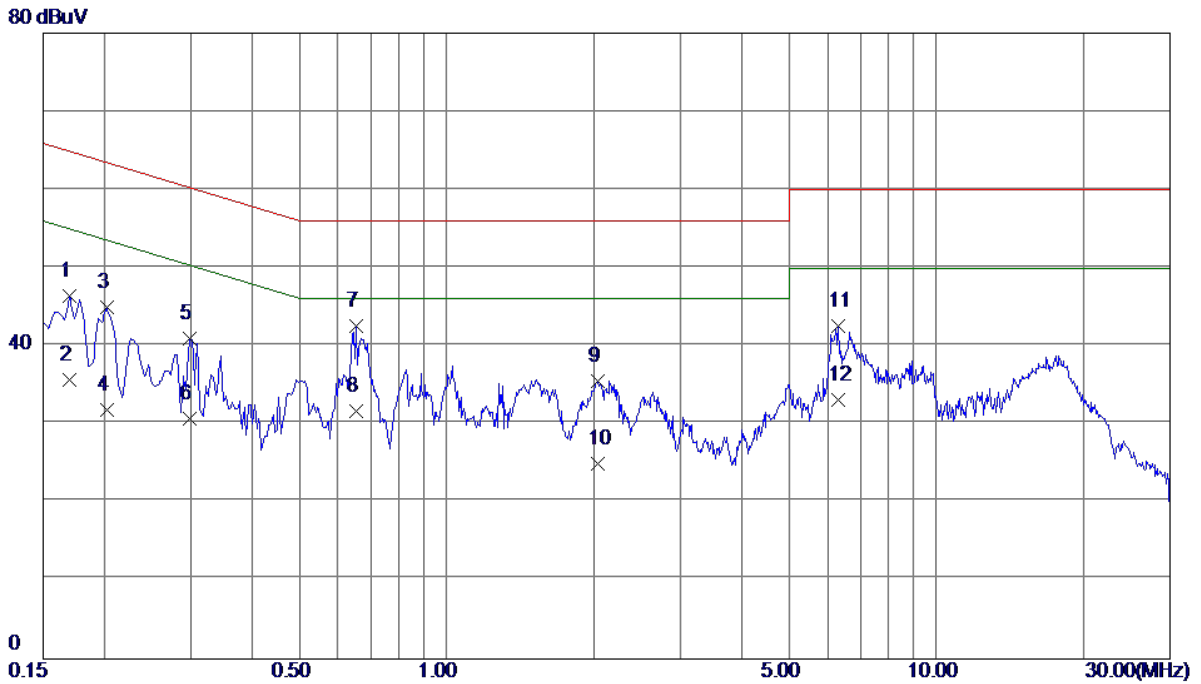


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	36.93	9.42	46.35	64.96	-18.61	QP
2	0.1700	26.20	9.42	35.62	54.96	-19.34	AVG
3	0.2020	35.45	9.53	44.98	63.53	-18.55	QP
4	0.2020	22.30	9.53	31.83	53.53	-21.70	AVG
5	0.2980	31.39	9.53	40.92	60.30	-19.38	QP
6	0.2980	21.20	9.53	30.73	50.30	-19.57	AVG
7 *	0.6540	33.04	9.45	42.49	56.00	-13.51	QP
8	0.6540	22.30	9.45	31.75	46.00	-14.25	AVG
9	2.0340	25.76	9.70	35.46	56.00	-20.54	QP
10	2.0340	15.20	9.70	24.90	46.00	-21.10	AVG
11	6.2940	32.63	9.96	42.59	60.00	-17.41	QP
12	6.2940	23.21	9.96	33.17	50.00	-16.83	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

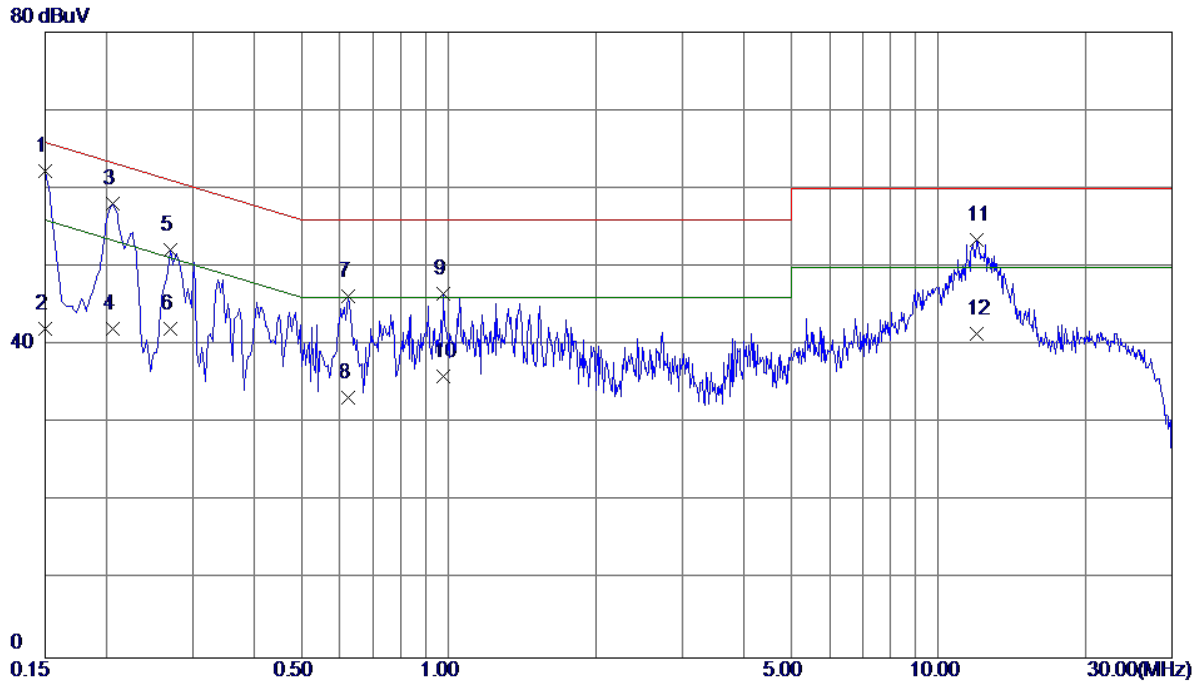


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	52.73	9.52	62.25	66.00	-3.75	QP
2	0.1500	32.60	9.52	42.12	56.00	-13.88	AVG
3	0.2060	48.49	9.53	58.02	63.37	-5.35	QP
4	0.2060	32.50	9.53	42.03	53.37	-11.34	AVG
5	0.2700	42.70	9.53	52.23	61.12	-8.89	QP
6	0.2700	32.60	9.53	42.13	51.12	-8.99	AVG
7	0.6220	36.55	9.64	46.19	56.00	-9.81	QP
8	0.6220	23.60	9.64	33.24	46.00	-12.76	AVG
9	0.9780	36.87	9.76	46.63	56.00	-9.37	QP
10	0.9780	26.20	9.76	35.96	46.00	-10.04	AVG
11	11.9540	43.11	10.27	53.38	60.00	-6.62	QP
12	11.9540	31.20	10.27	41.47	50.00	-8.53	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

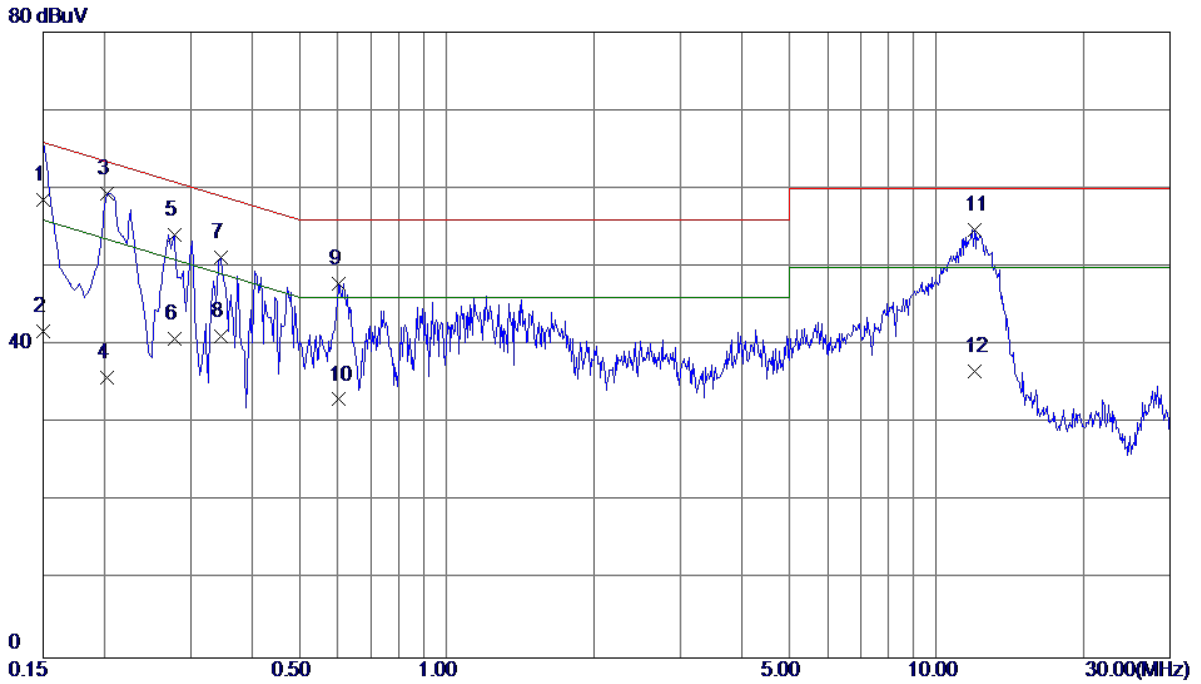


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	49.10	9.52	58.62	66.00	-7.38	QP
2	0.1500	32.20	9.52	41.72	56.00	-14.28	AVG
3 *	0.2020	49.88	9.53	59.41	63.53	-4.12	QP
4	0.2020	26.30	9.53	35.83	53.53	-17.70	AVG
5	0.2779	44.57	9.53	54.10	60.88	-6.78	QP
6	0.2779	31.20	9.53	40.73	50.88	-10.15	AVG
7	0.3460	41.67	9.53	51.20	59.06	-7.86	QP
8	0.3460	31.60	9.53	41.13	49.06	-7.93	AVG
9	0.6020	38.38	9.44	47.82	56.00	-8.18	QP
10	0.6020	23.60	9.44	33.04	46.00	-12.96	AVG
11	11.9860	44.41	10.33	54.74	60.00	-5.26	QP
12	11.9860	26.30	10.33	36.63	50.00	-13.37	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

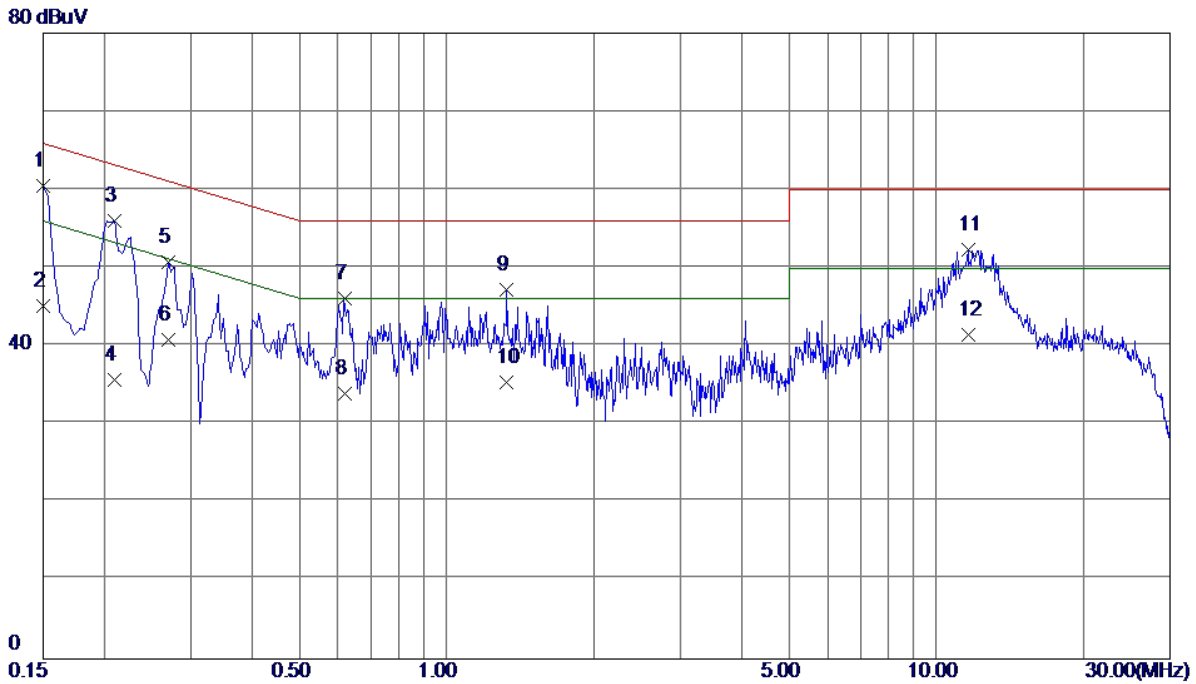


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	50.93	9.52	60.45	66.00	-5.55	QP
2	0.1500	35.60	9.52	45.12	56.00	-10.88	AVG
3	0.2100	46.47	9.53	56.00	63.21	-7.21	QP
4	0.2100	26.20	9.53	35.73	53.21	-17.48	AVG
5	0.2700	41.25	9.53	50.78	61.12	-10.34	QP
6	0.2700	31.20	9.53	40.73	51.12	-10.39	AVG
7	0.6180	36.49	9.64	46.13	56.00	-9.87	QP
8	0.6180	24.30	9.64	33.94	46.00	-12.06	AVG
9	1.3260	37.38	9.81	47.19	56.00	-8.81	QP
10	1.3260	25.60	9.81	35.41	46.00	-10.59	AVG
11	11.6140	42.01	10.26	52.27	60.00	-7.73	QP
12	11.6140	31.20	10.26	41.46	50.00	-8.54	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

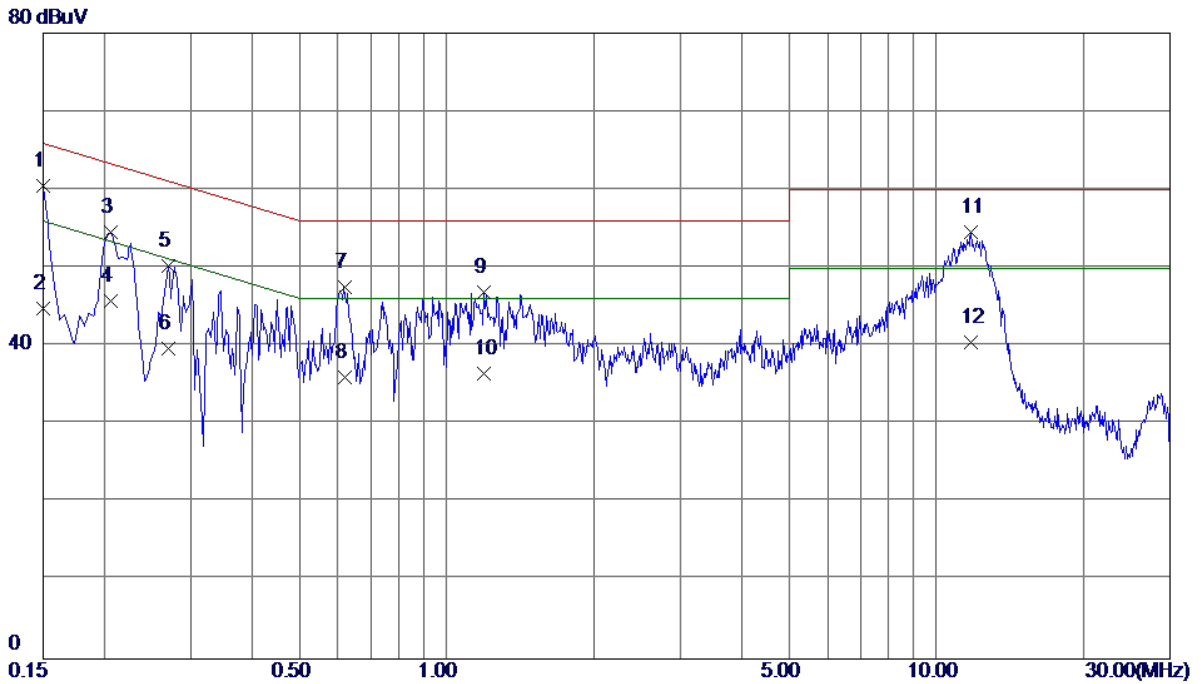


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	50.96	9.52	60.48	66.00	-5.52	QP
2	0.1500	35.30	9.52	44.82	56.00	-11.18	AVG
3	0.2060	45.09	9.53	54.62	63.37	-8.75	QP
4	0.2060	36.20	9.53	45.73	53.37	-7.64	AVG
5	0.2700	40.77	9.53	50.30	61.12	-10.82	QP
6	0.2700	30.20	9.53	39.73	51.12	-11.39	AVG
7	0.6180	38.13	9.44	47.57	56.00	-8.43	QP
8	0.6180	26.50	9.44	35.94	46.00	-10.06	AVG
9	1.1940	37.14	9.67	46.81	56.00	-9.19	QP
10	1.1940	26.80	9.67	36.47	46.00	-9.53	AVG
11 *	11.7860	44.18	10.33	54.51	60.00	-5.49	QP
12	11.7860	30.20	10.33	40.53	50.00	-9.47	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

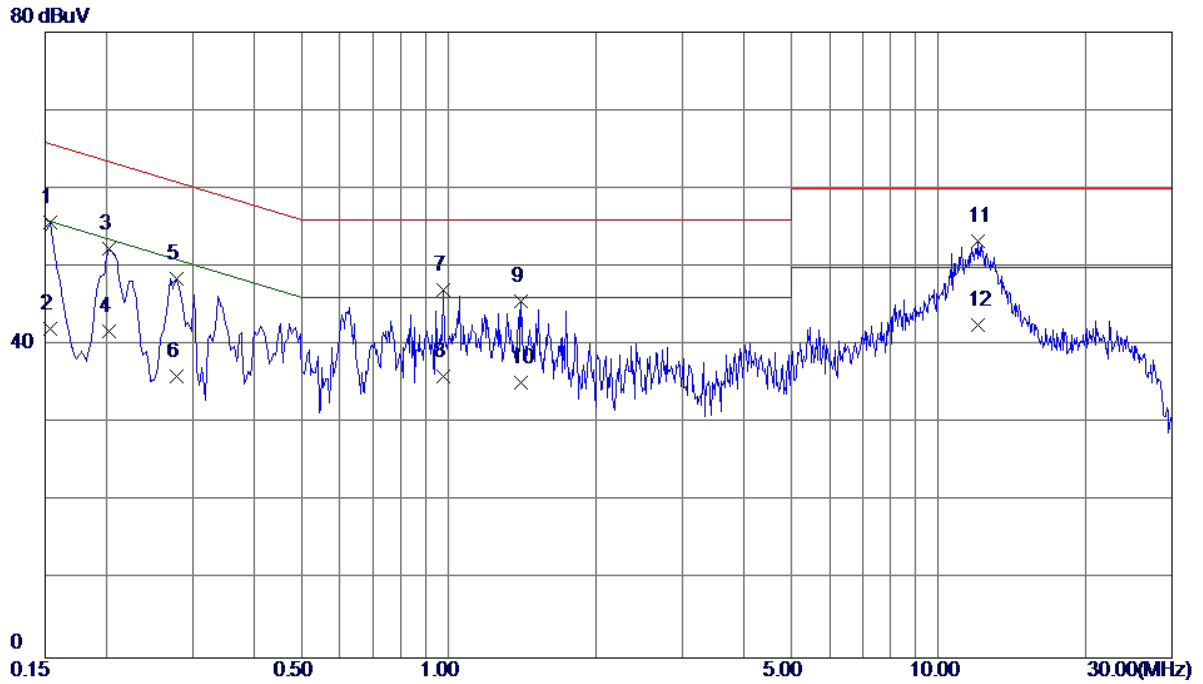


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	46.16	9.52	55.68	65.79	-10.11	QP
2	0.1539	32.50	9.52	42.02	55.79	-13.77	AVG
3	0.2020	42.78	9.53	52.31	63.53	-11.22	QP
4	0.2020	32.30	9.53	41.83	53.53	-11.70	AVG
5	0.2779	39.02	9.53	48.55	60.88	-12.33	QP
6	0.2779	26.50	9.53	36.03	50.88	-14.85	AVG
7	0.9740	37.32	9.76	47.08	56.00	-8.92	QP
8	0.9740	26.30	9.76	36.06	46.00	-9.94	AVG
9	1.4060	35.82	9.84	45.66	56.00	-10.34	QP
10	1.4060	25.40	9.84	35.24	46.00	-10.76	AVG
11 *	12.0260	43.05	10.27	53.32	60.00	-6.68	QP
12	12.0260	32.30	10.27	42.57	50.00	-7.43	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

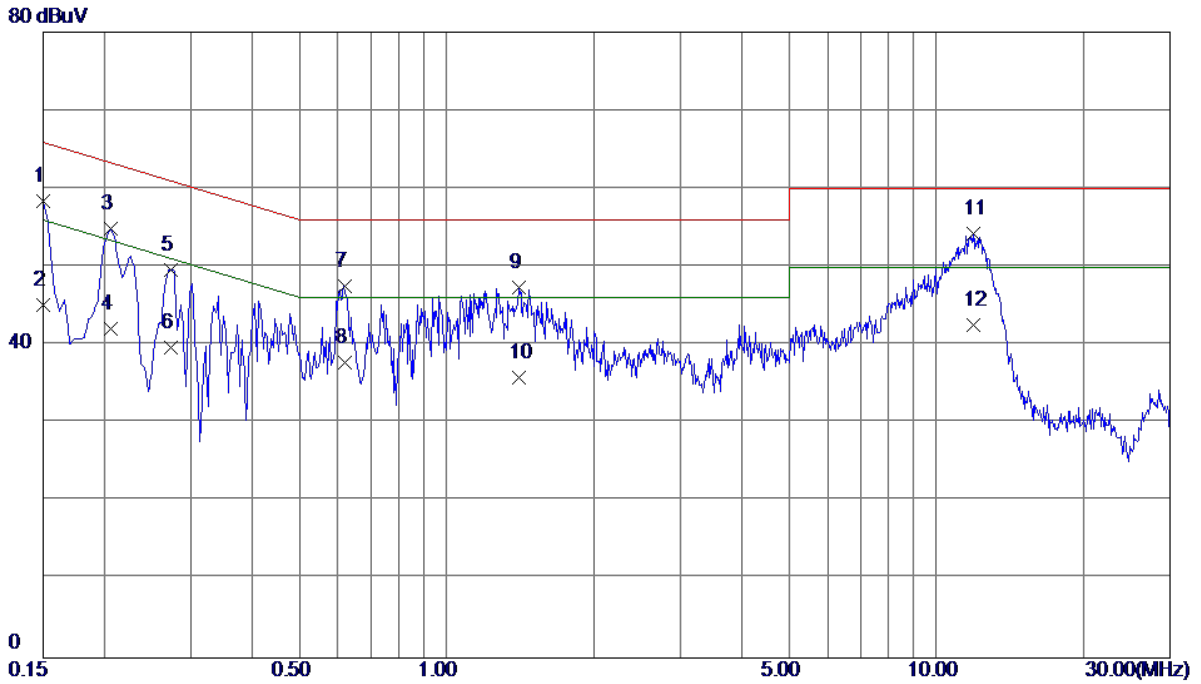


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	48.93	9.52	58.45	66.00	-7.55	QP
2	0.1500	35.60	9.52	45.12	56.00	-10.88	AVG
3	0.2060	45.36	9.53	54.89	63.37	-8.48	QP
4	0.2060	32.60	9.53	42.13	53.37	-11.24	AVG
5	0.2740	40.08	9.53	49.61	61.00	-11.39	QP
6	0.2740	30.20	9.53	39.73	51.00	-11.27	AVG
7	0.6180	38.02	9.44	47.46	56.00	-8.54	QP
8	0.6180	28.30	9.44	37.74	46.00	-8.26	AVG
9	1.4020	37.68	9.67	47.35	56.00	-8.65	QP
10	1.4020	26.20	9.67	35.87	46.00	-10.13	AVG
11 *	11.9140	43.93	10.33	54.26	60.00	-5.74	QP
12	11.9140	32.30	10.33	42.63	50.00	-7.37	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

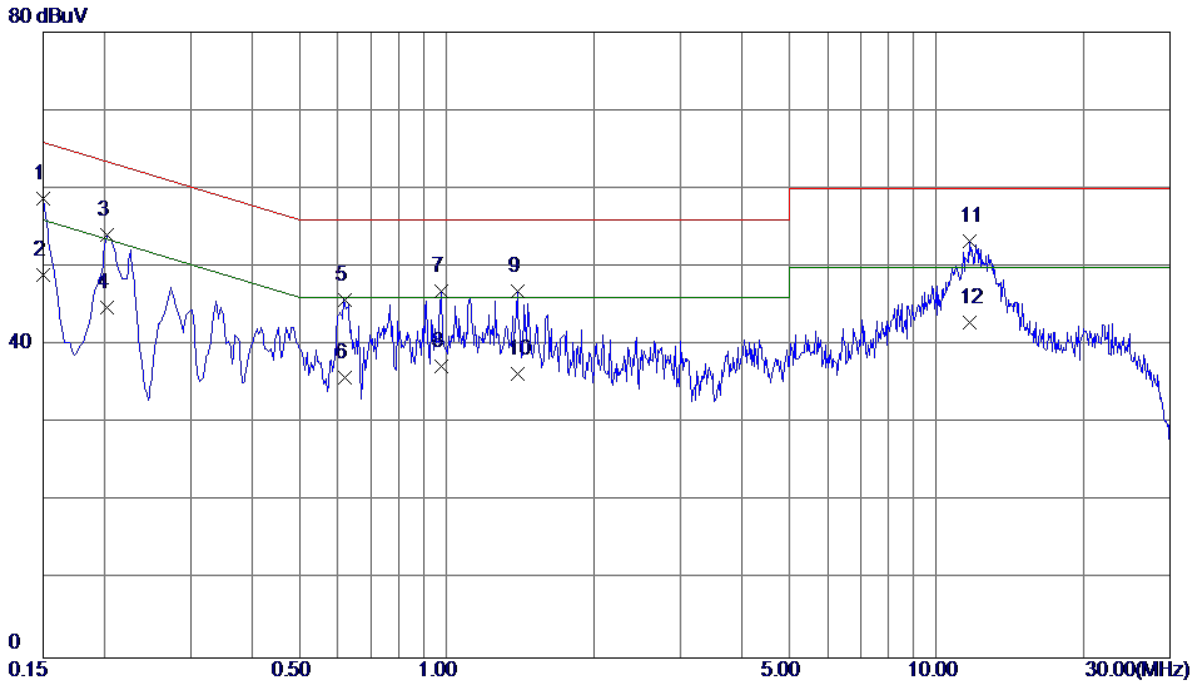

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	49.24	9.52	58.76	66.00	-7.24	QP
2	0.1500	39.50	9.52	49.02	56.00	-6.98	AVG
3	0.2020	44.62	9.53	54.15	63.53	-9.38	QP
4	0.2020	35.20	9.53	44.73	53.53	-8.80	AVG
5	0.6180	36.13	9.64	45.77	56.00	-10.23	QP
6	0.6180	26.20	9.64	35.84	46.00	-10.16	AVG
7	0.9780	37.11	9.76	46.87	56.00	-9.13	QP
8	0.9780	27.50	9.76	37.26	46.00	-8.74	AVG
9	1.3940	37.03	9.84	46.87	56.00	-9.13	QP
10	1.3940	26.49	9.84	36.33	46.00	-9.67	AVG
11 *	11.6820	43.04	10.26	53.30	60.00	-6.70	QP
12	11.6820	32.60	10.26	42.86	50.00	-7.14	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

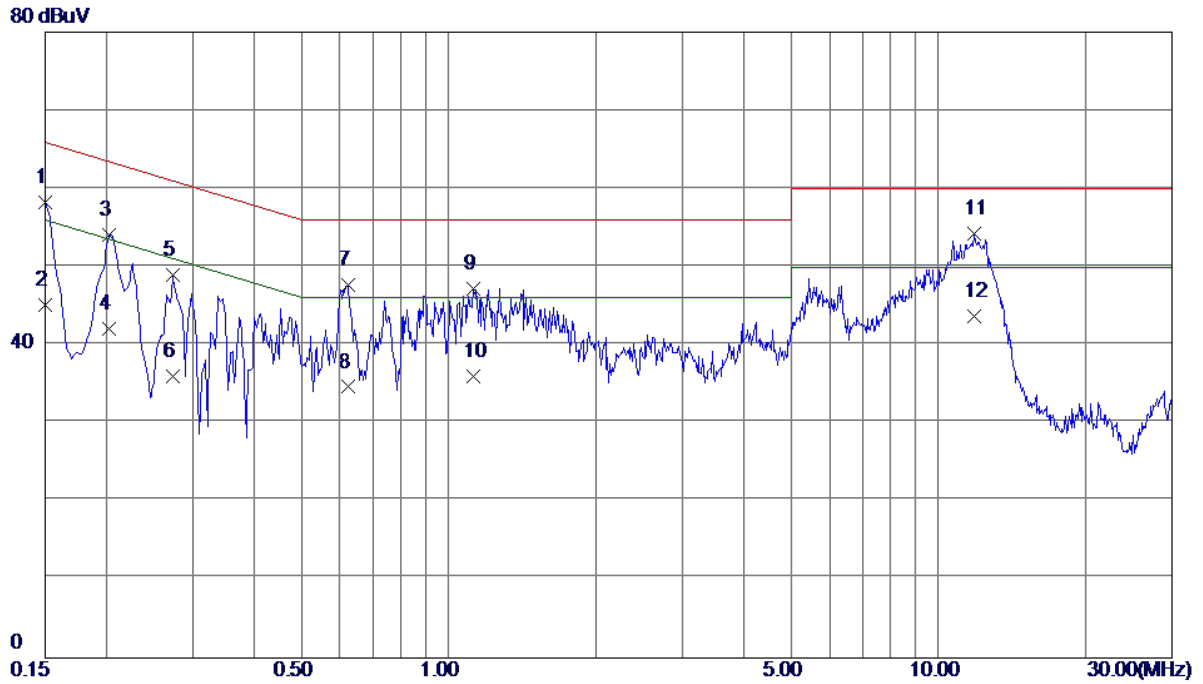

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	48.66	9.52	58.18	66.00	-7.82	QP
2	0.1500	35.60	9.52	45.12	56.00	-10.88	AVG
3	0.2020	44.62	9.53	54.15	63.53	-9.38	QP
4	0.2020	32.50	9.53	42.03	53.53	-11.50	AVG
5	0.2740	39.42	9.53	48.95	61.00	-12.05	QP
6	0.2740	26.50	9.53	36.03	51.00	-14.97	AVG
7	0.6220	38.28	9.44	47.72	56.00	-8.28	QP
8	0.6220	25.20	9.44	34.64	46.00	-11.36	AVG
9	1.1220	37.56	9.66	47.22	56.00	-8.78	QP
10	1.1220	26.30	9.66	35.96	46.00	-10.04	AVG
11 *	11.8580	43.87	10.33	54.20	60.00	-5.80	QP
12	11.8580	33.30	10.33	43.63	50.00	-6.37	AVG

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

**CISPR 22 or CAN/CSA-CISPR 22-10:**

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
4	Test Cable	emci	LMR-400(30 MHz-1GHz)	C-01	Jun. 27, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Amplifier	Agilent	8449B	3008A02274	Oct. 31, 2017
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
10	Test Cable	emci	EMC104-SM-SM-10000(1 GHz-26.5GHz)	C-68	Jun. 27, 2017
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

#### 4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.5 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

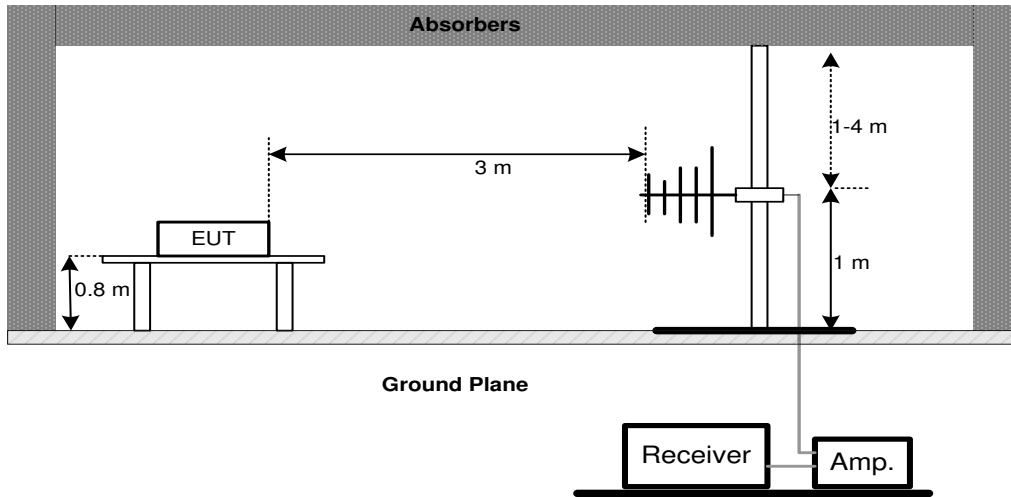

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

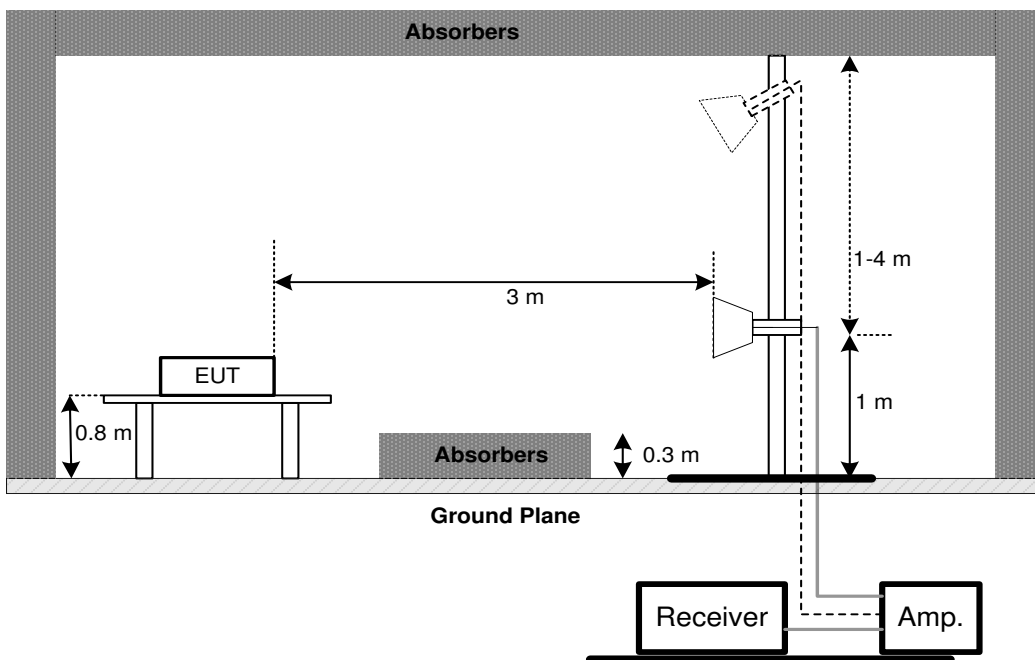

#### 4.2.6 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of **4.1.6** unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.7 TEST RESULTS-BELOW 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

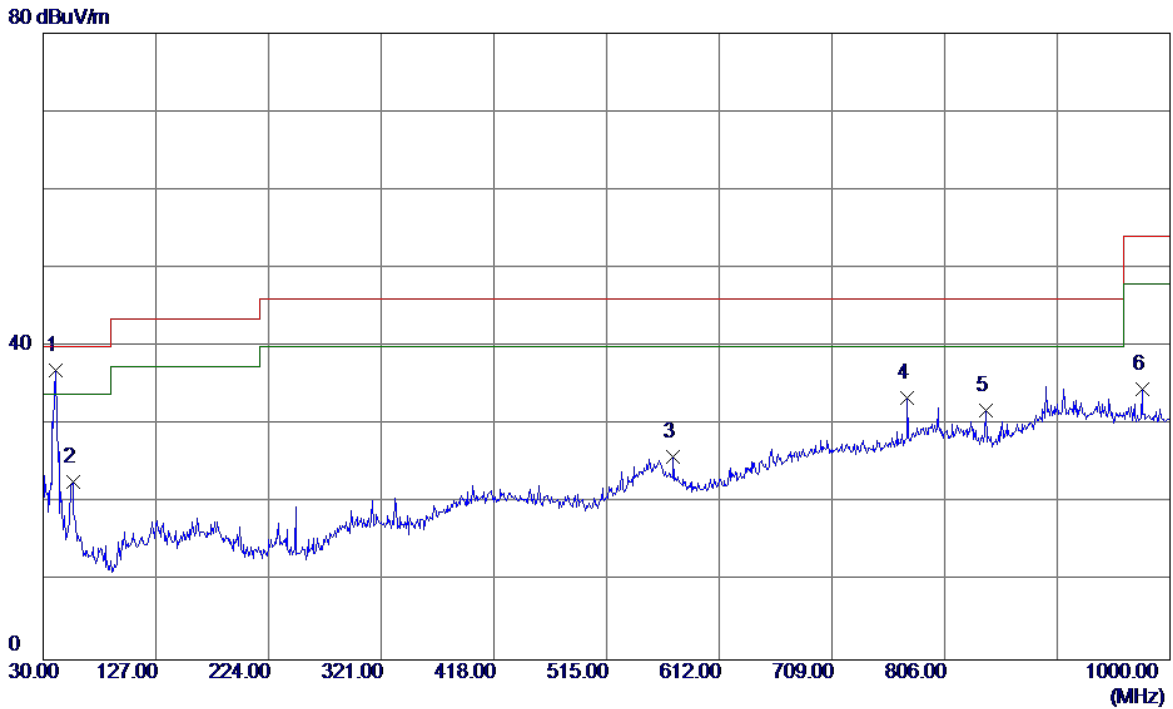


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	40.6699	50.68	-13.77	36.91	40.00	-3.09	QP
2	55.7050	36.01	-13.30	22.71	40.00	-17.29	QP
3	572.2300	31.55	-5.66	25.89	46.00	-20.11	QP
4	773.9900	34.29	-0.90	33.39	46.00	-12.61	QP
5	841.4050	32.83	-0.99	31.84	46.00	-14.16	QP
6	976.2350	32.49	2.07	34.56	54.00	-19.44	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

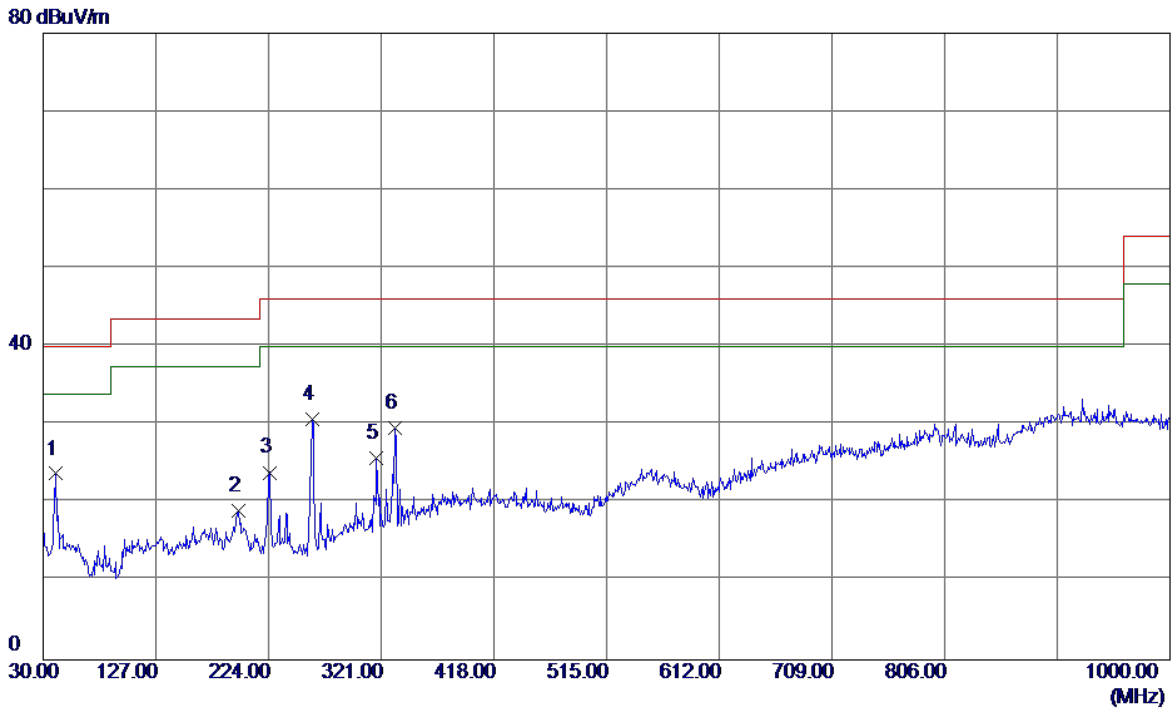


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.1550	37.43	-13.67	23.76	40.00	-16.24	QP
2	197.8100	33.30	-14.32	18.98	43.50	-24.52	QP
3	224.9700	37.74	-13.82	23.92	46.00	-22.08	QP
4 *	261.3450	44.87	-14.10	30.77	46.00	-15.23	QP
5	317.1200	36.35	-10.52	25.83	46.00	-20.17	QP
6	333.1250	40.50	-10.86	29.64	46.00	-16.36	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:CONNREX+Battery:SCUD+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

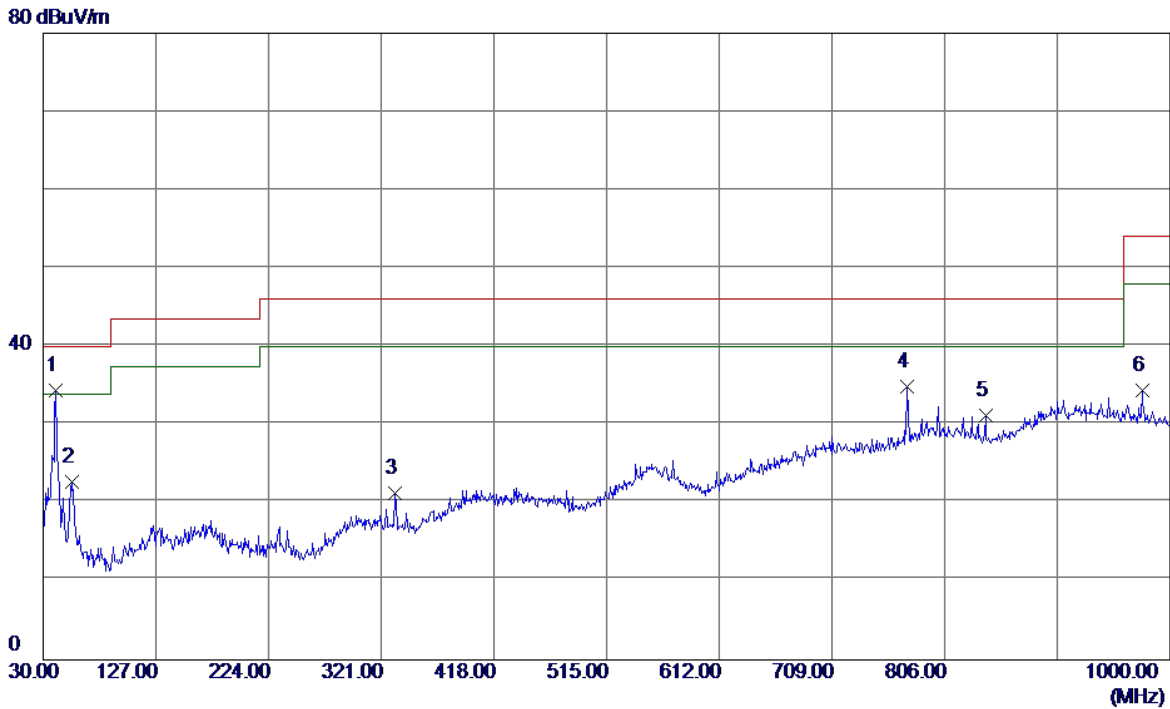


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	41.1550	48.02	-13.67	34.35	40.00	-5.65	QP
2	54.7350	36.22	-13.46	22.76	40.00	-17.24	QP
3	333.1250	32.10	-10.86	21.24	46.00	-24.76	QP
4	773.9900	35.84	-0.90	34.94	46.00	-11.06	QP
5	841.4050	32.20	-0.99	31.21	46.00	-14.79	QP
6	976.2350	32.33	2.07	34.40	54.00	-19.60	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:CONNREX+Battery:SCUD+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

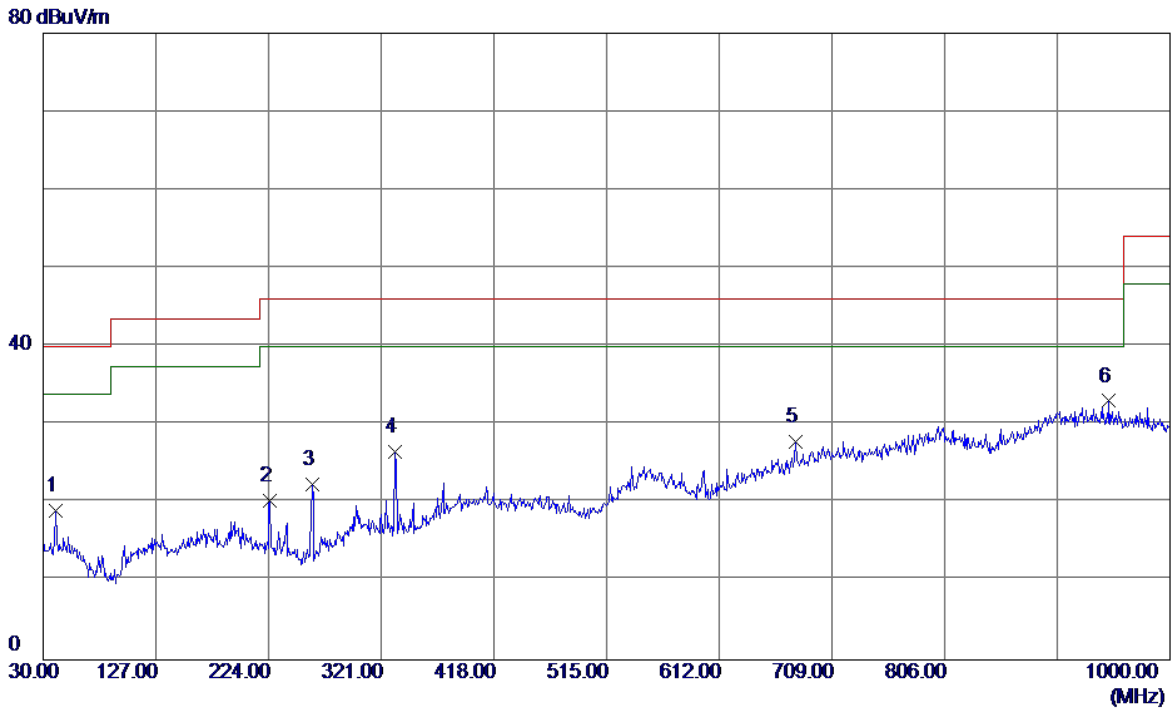


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	40.6699	32.75	-13.77	18.98	40.00	-21.02	QP
2	224.9700	34.15	-13.82	20.33	46.00	-25.67	QP
3	261.3450	36.47	-14.10	22.37	46.00	-23.63	QP
4	333.1250	37.44	-10.86	26.58	46.00	-19.42	QP
5	677.9600	30.93	-3.02	27.91	46.00	-18.09	QP
6 *	947.6200	30.59	2.45	33.04	46.00	-12.96	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone: Goer		
Test Engineer	Kevin Li		

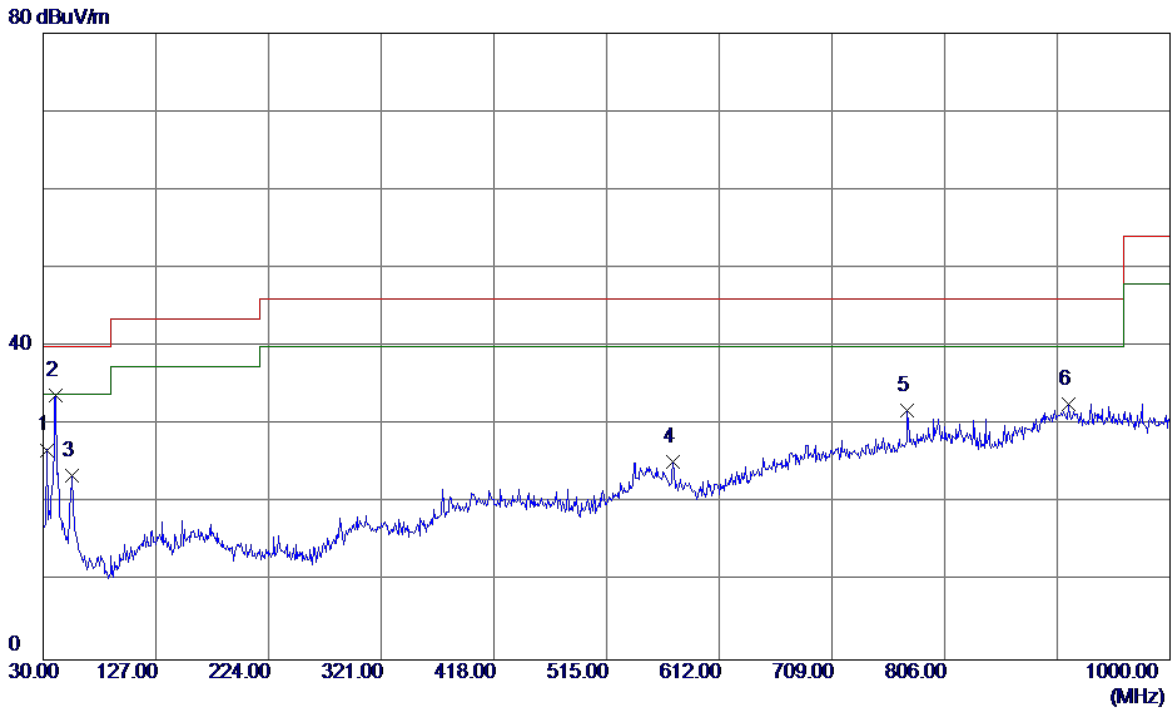


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	32.9100	40.95	-14.15	26.80	40.00	-13.20	QP
2 *	40.6699	47.52	-13.77	33.75	40.00	-6.25	QP
3	55.2200	36.90	-13.38	23.52	40.00	-16.48	QP
4	572.2300	30.96	-5.66	25.30	46.00	-20.70	QP
5	773.9900	32.73	-0.90	31.83	46.00	-14.17	QP
6	912.2150	30.09	2.59	32.68	46.00	-13.32	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone: Goer		
Test Engineer	Kevin Li		

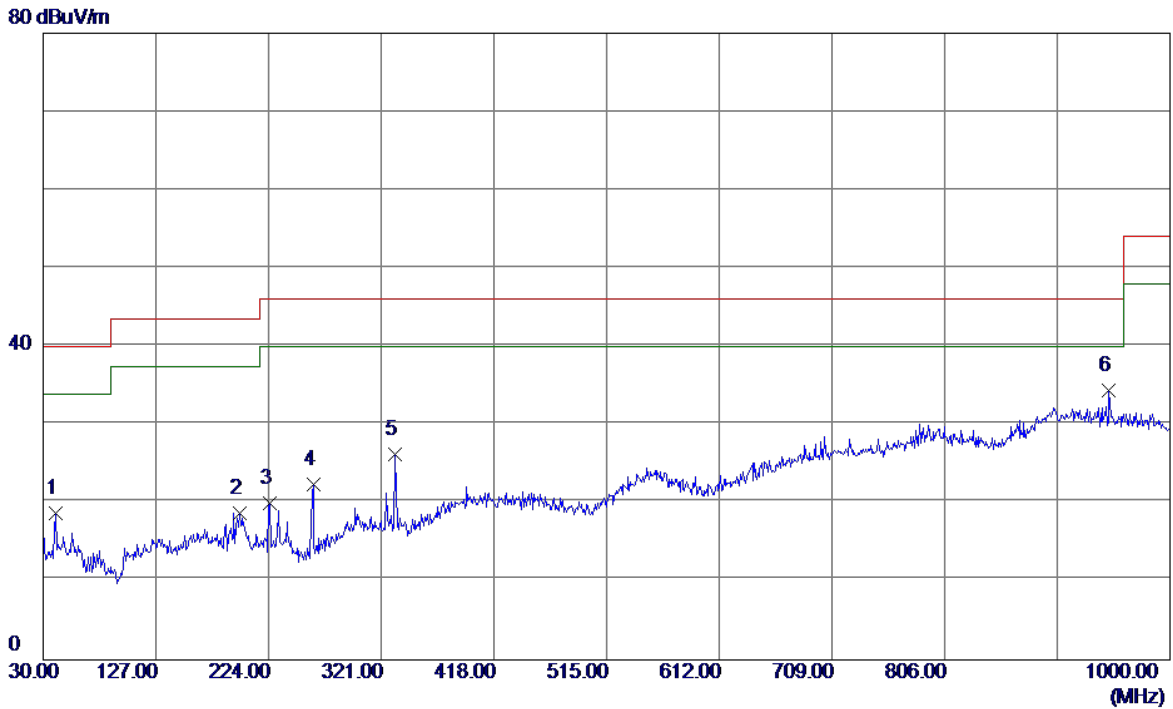


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	40.6699	32.49	-13.77	18.72	40.00	-21.28	QP
2	198.7800	33.04	-14.37	18.67	43.50	-24.83	QP
3	224.9700	33.86	-13.82	20.04	46.00	-25.96	QP
4	262.3150	36.49	-14.03	22.46	46.00	-23.54	QP
5	333.1250	37.16	-10.86	26.30	46.00	-19.70	QP
6 *	947.6200	31.91	2.45	34.36	46.00	-11.64	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:FOXCONN+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

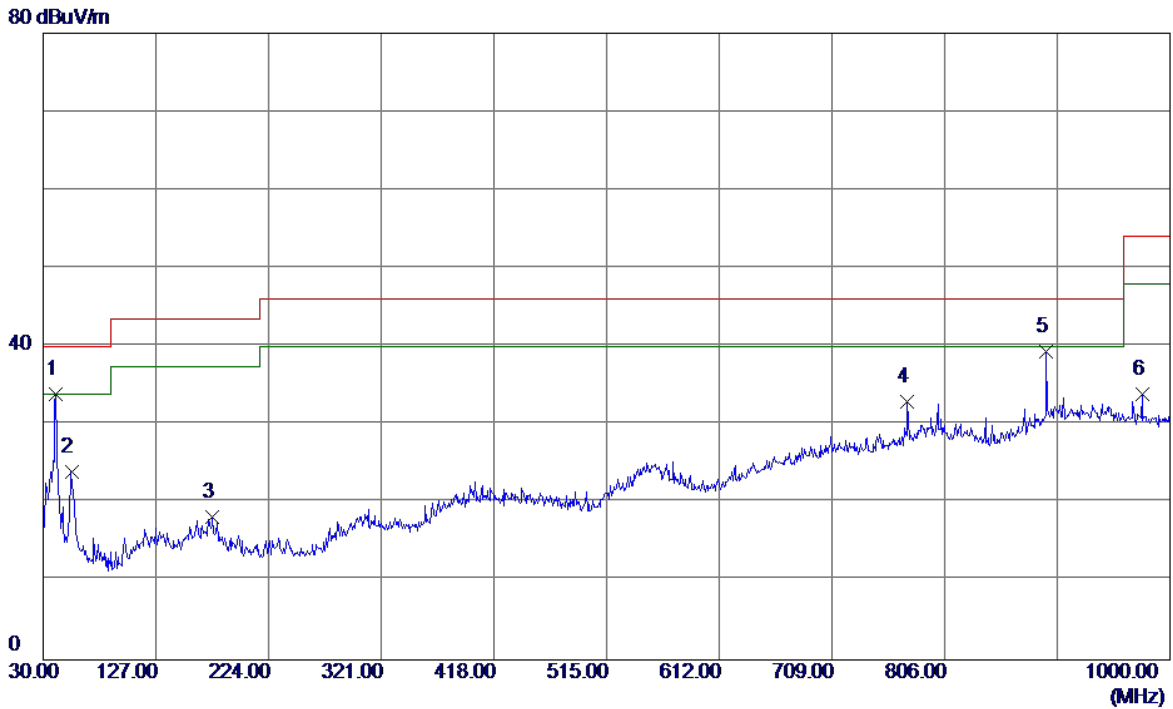


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	40.6699	47.65	-13.77	33.88	40.00	-6.12	QP
2	54.2500	37.60	-13.53	24.07	40.00	-15.93	QP
3	175.5000	30.84	-12.57	18.27	43.50	-25.23	QP
4	773.9900	33.88	-0.90	32.98	46.00	-13.02	QP
5	893.7850	37.13	2.16	39.29	46.00	-6.71	QP
6	976.2350	31.79	2.07	33.86	54.00	-20.14	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:FOXCONN+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

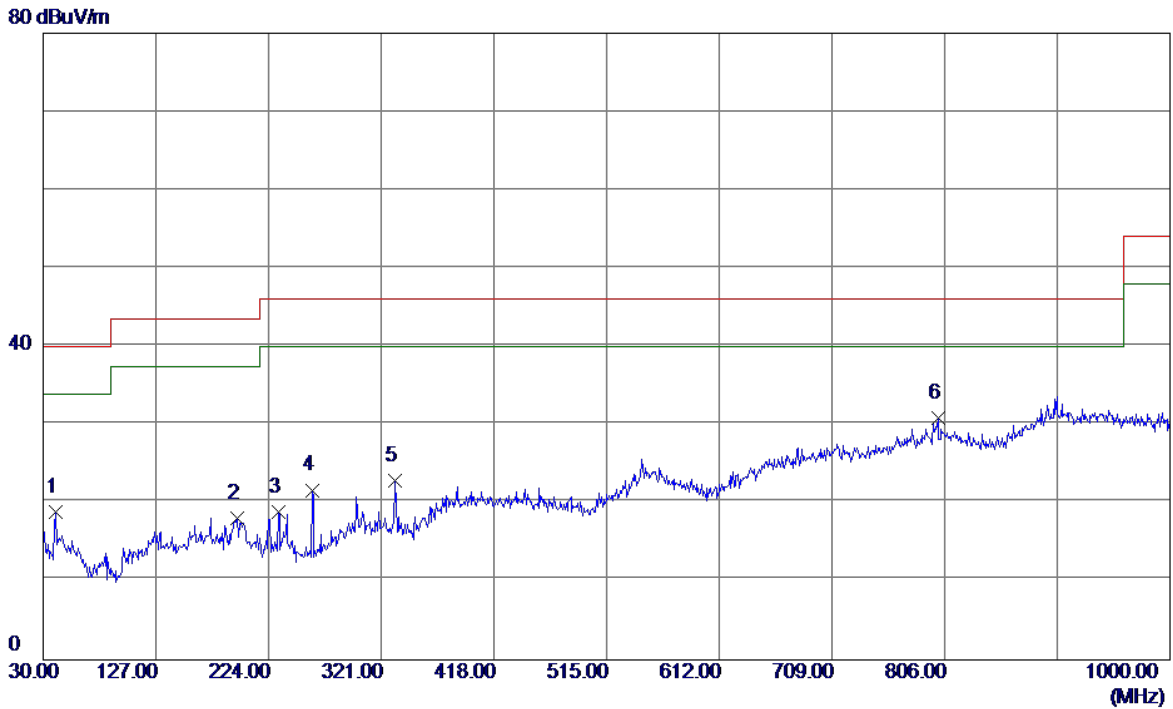


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.1550	32.56	-13.67	18.89	40.00	-21.11	QP
2	196.8400	32.37	-14.27	18.10	43.50	-25.40	QP
3	232.2450	32.37	-13.46	18.91	46.00	-27.09	QP
4	261.3450	35.78	-14.10	21.68	46.00	-24.32	QP
5	333.1250	33.81	-10.86	22.95	46.00	-23.05	QP
6 *	800.1800	30.63	0.25	30.88	46.00	-15.12	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

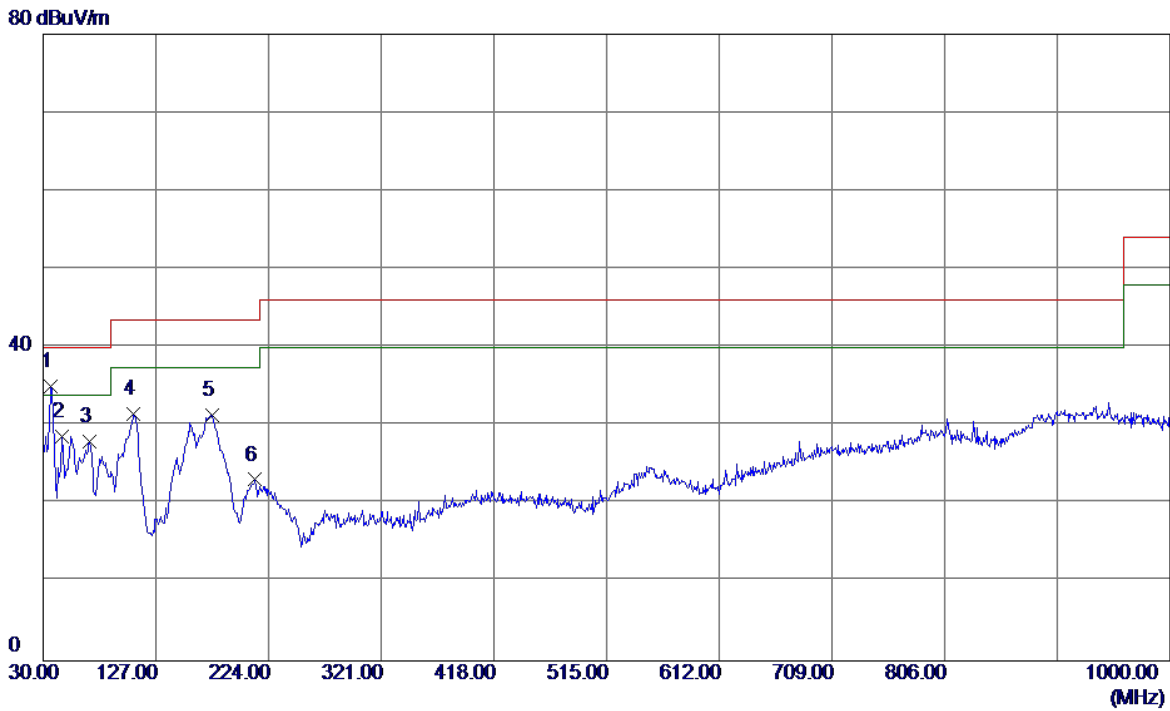


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	36.7900	48.88	-13.91	34.97	40.00	-5.03	QP
2	46.4900	41.27	-12.59	28.68	40.00	-11.32	QP
3	70.2550	44.54	-16.53	28.01	40.00	-11.99	QP
4	108.0850	46.31	-14.81	31.50	43.50	-12.00	QP
5	175.5000	43.99	-12.57	31.42	43.50	-12.08	QP
6	212.3600	37.67	-14.55	23.12	43.50	-20.38	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

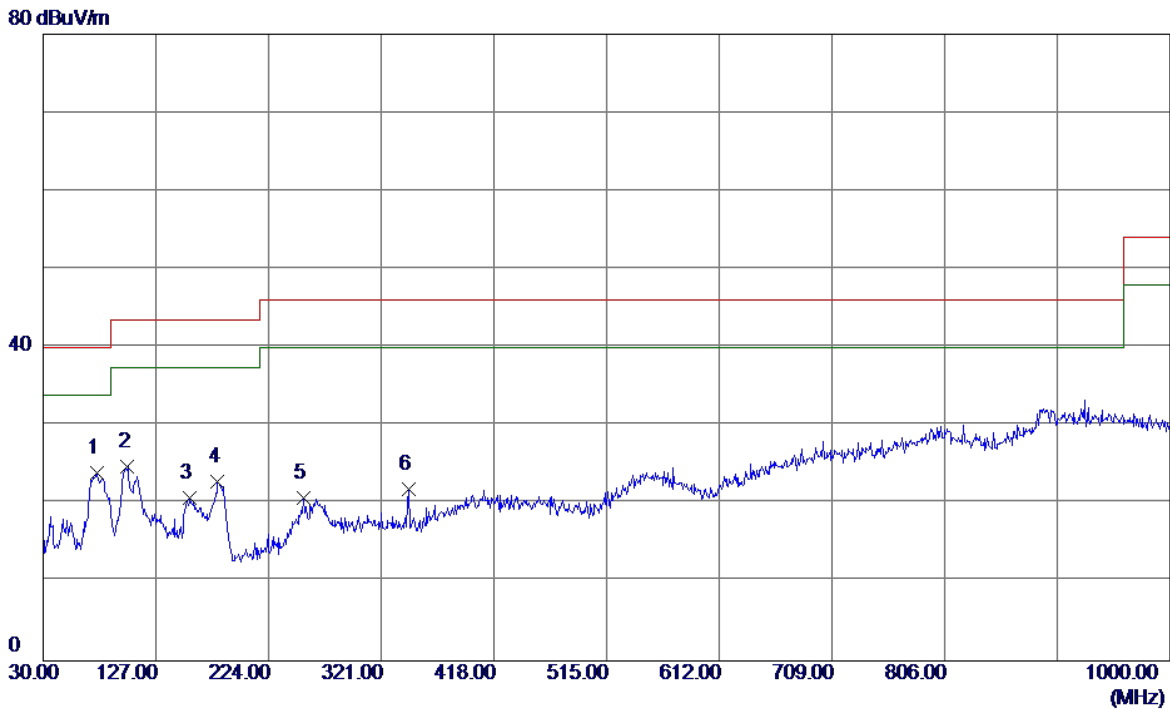


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	76.0750	40.44	-16.47	23.97	40.00	-16.03	QP
2	102.7500	40.05	-15.24	24.81	43.50	-18.69	QP
3	156.5850	33.18	-12.42	20.76	43.50	-22.74	QP
4	180.3500	35.73	-12.88	22.85	43.50	-20.65	QP
5	254.0700	34.98	-14.20	20.78	46.00	-25.22	QP
6	344.2800	33.07	-11.10	21.97	46.00	-24.03	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

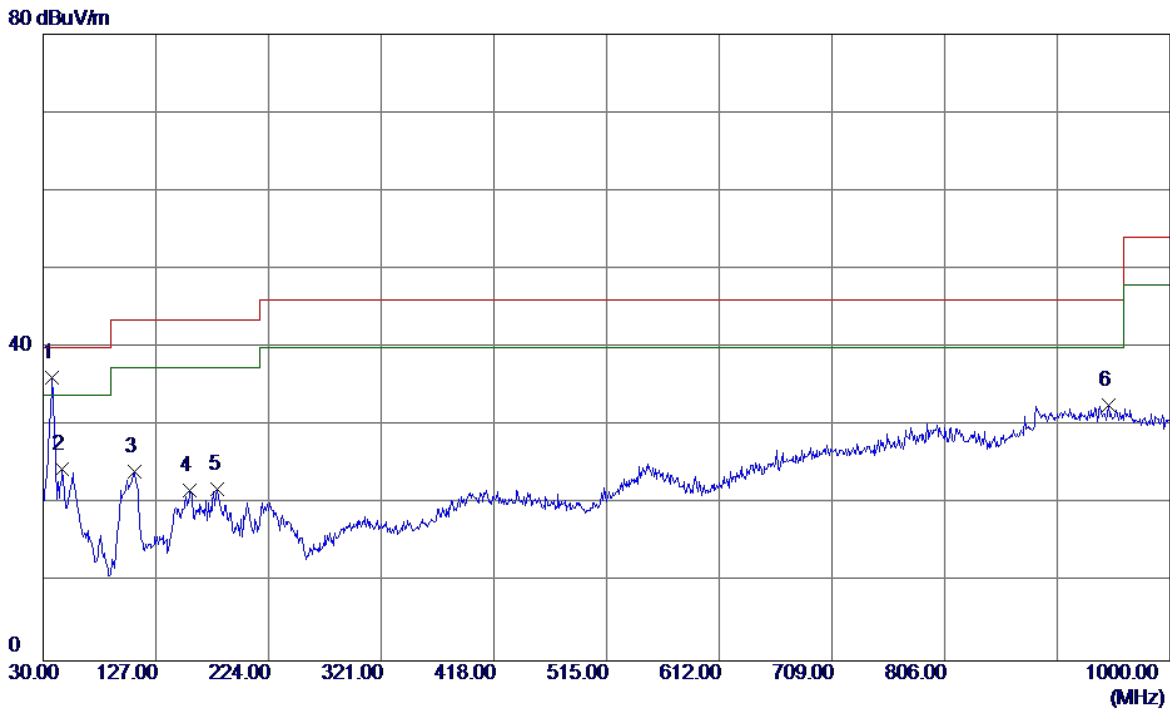


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	50.27	-14.09	36.18	40.00	-3.82	QP
2	46.4900	37.04	-12.59	24.45	40.00	-15.55	QP
3	108.5700	39.00	-14.77	24.23	43.50	-19.27	QP
4	156.1000	34.16	-12.46	21.70	43.50	-21.80	QP
5	180.3500	34.79	-12.88	21.91	43.50	-21.59	QP
6	947.6200	30.15	2.45	32.60	46.00	-13.40	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

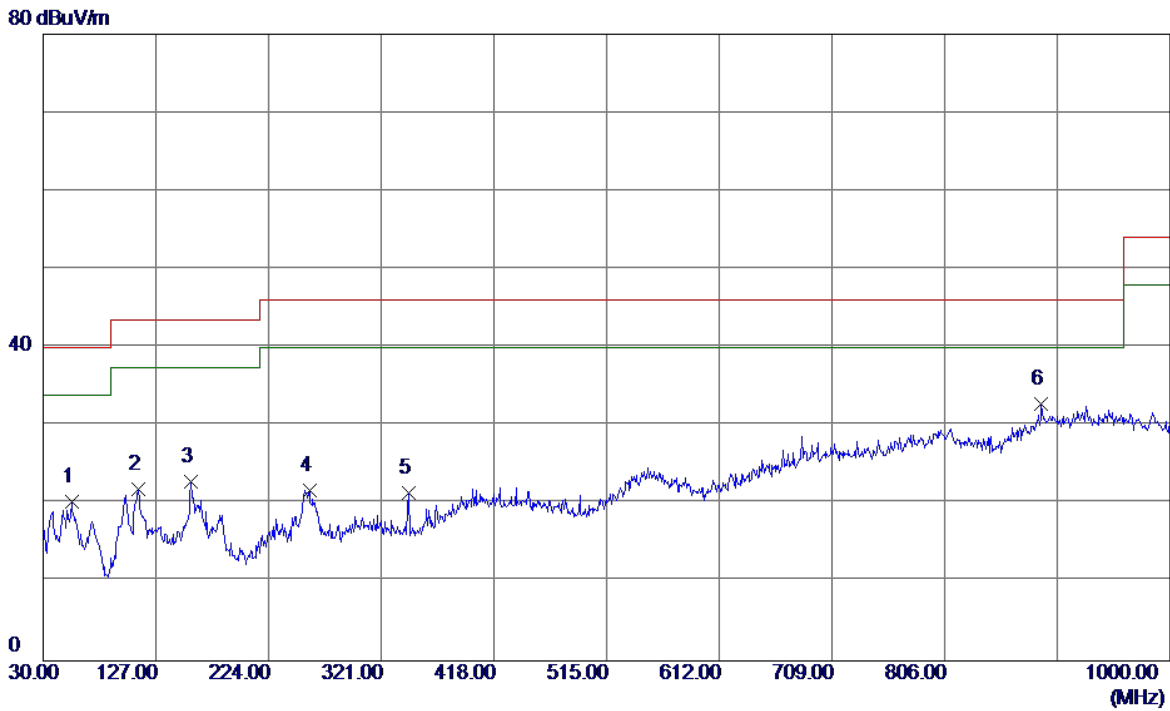

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	54.7350	33.81	-13.46	20.35	40.00	-19.65	QP
2	111.9650	36.36	-14.42	21.94	43.50	-21.56	QP
3	157.5549	35.16	-12.34	22.82	43.50	-20.68	QP
4	259.4050	35.99	-14.21	21.78	46.00	-24.22	QP
5	344.2800	32.59	-11.10	21.49	46.00	-24.51	QP
6 *	889.4200	30.94	1.82	32.76	46.00	-13.24	QP


EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

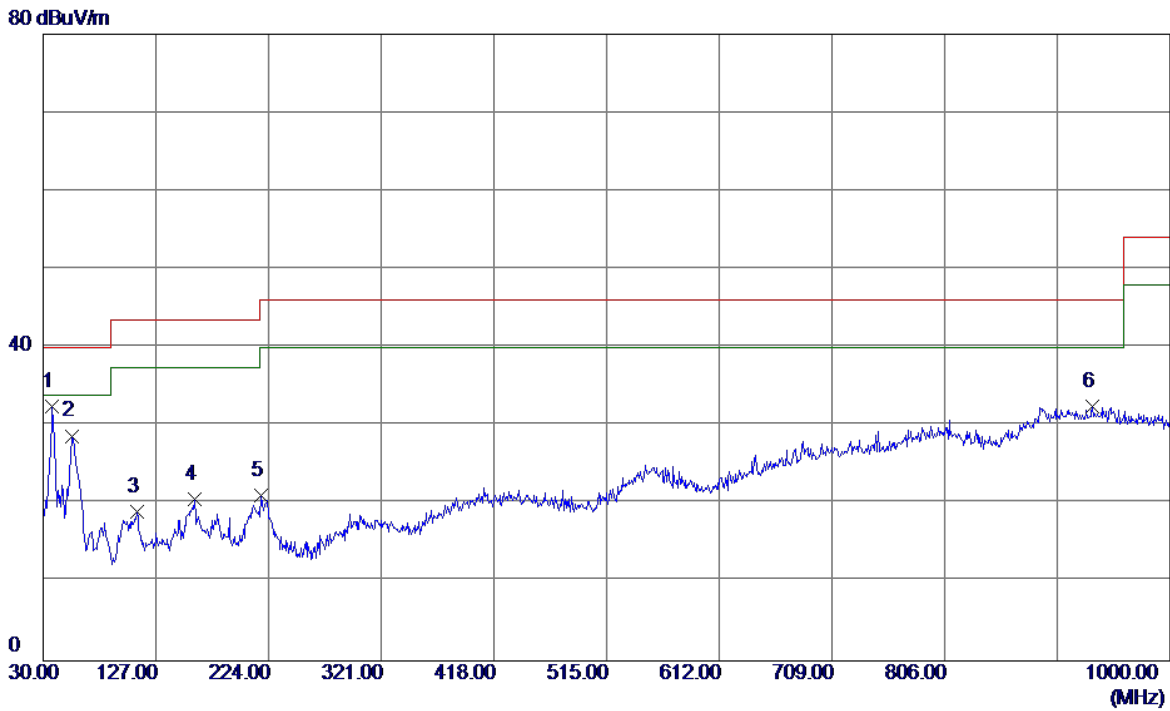

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	46.62	-14.09	32.53	40.00	-7.47	QP
2	55.2200	42.10	-13.38	28.72	40.00	-11.28	QP
3	110.5100	33.68	-14.60	19.08	43.50	-24.42	QP
4	159.9800	32.76	-12.15	20.61	43.50	-22.89	QP
5	217.6950	35.44	-14.35	21.09	46.00	-24.91	QP
6	933.0700	29.94	2.51	32.45	46.00	-13.55	QP


EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

80 dBuV/m

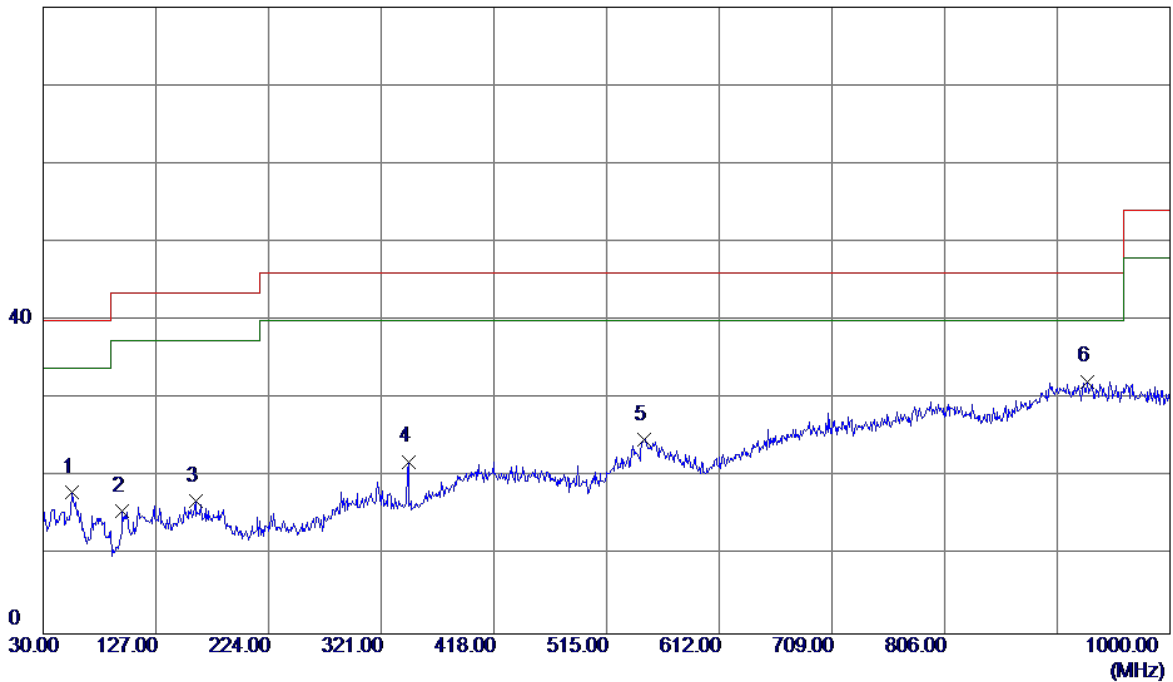


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	54.7350	31.60	-13.46	18.14	40.00	-21.86	QP
2	98.3850	31.70	-16.06	15.64	43.50	-27.86	QP
3	161.4350	29.06	-12.16	16.90	43.50	-26.60	QP
4	344.2800	33.10	-11.10	22.00	46.00	-24.00	QP
5	547.4950	29.59	-4.80	24.79	46.00	-21.21	QP
6 *	929.1900	29.72	2.52	32.24	46.00	-13.76	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

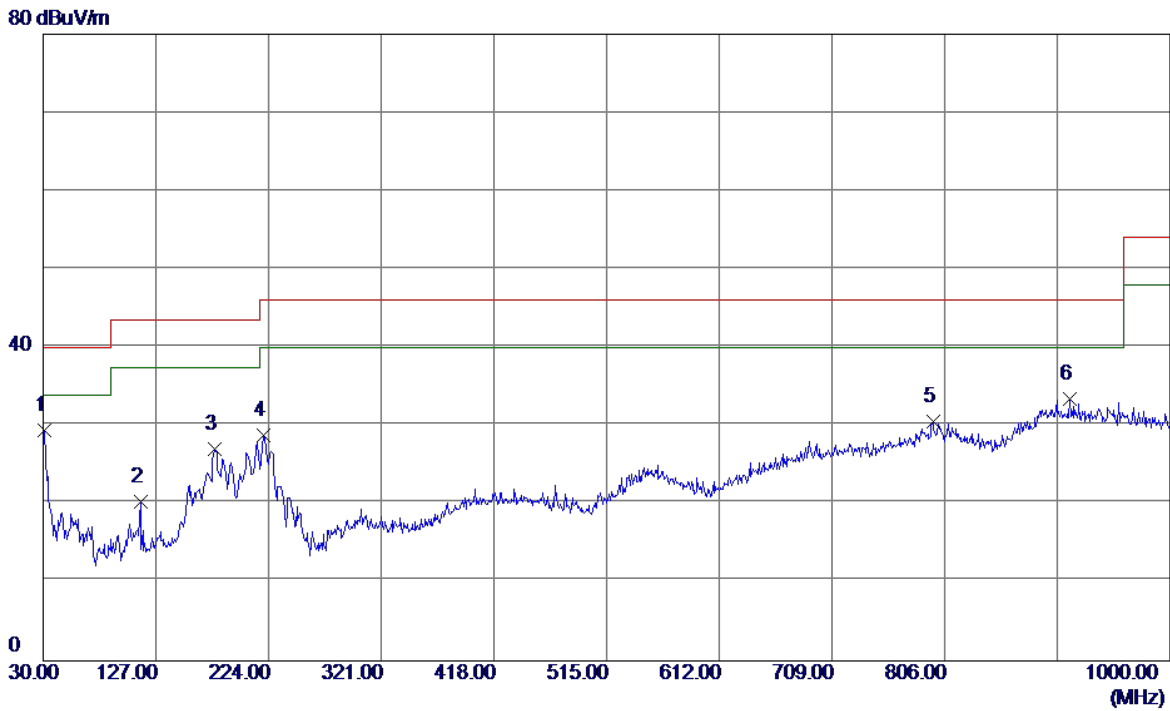


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.4550	43.64	-14.16	29.48	40.00	-10.52	QP
2	113.9050	34.48	-14.19	20.29	43.50	-23.21	QP
3	177.4400	39.77	-12.69	27.08	43.50	-16.42	QP
4	220.1200	43.09	-14.25	28.84	46.00	-17.16	QP
5	795.8150	30.49	0.07	30.56	46.00	-15.44	QP
6	913.6700	30.86	2.59	33.45	46.00	-12.55	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

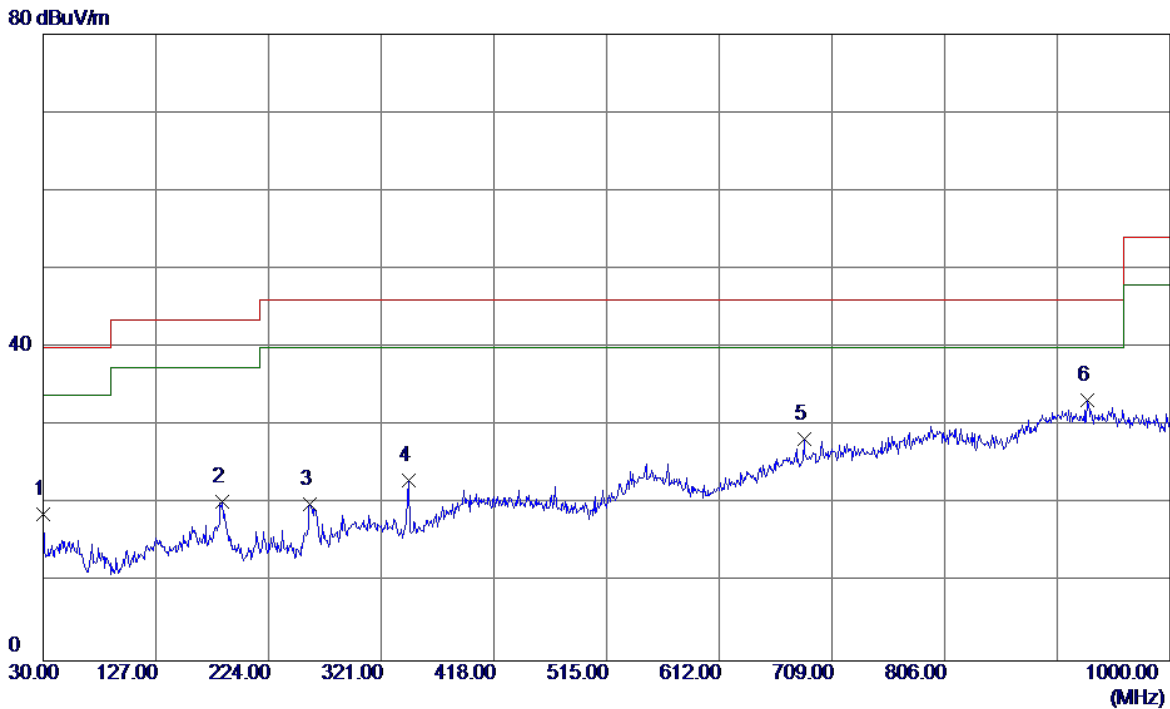


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	32.74	-14.03	18.71	40.00	-21.29	QP
2	184.2300	33.58	-13.30	20.28	43.50	-23.22	QP
3	259.8900	34.20	-14.21	19.99	46.00	-26.01	QP
4	344.2800	34.12	-11.10	23.02	46.00	-22.98	QP
5	685.2350	30.98	-2.71	28.27	46.00	-17.73	QP
6 *	929.1900	30.83	2.52	33.35	46.00	-12.65	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

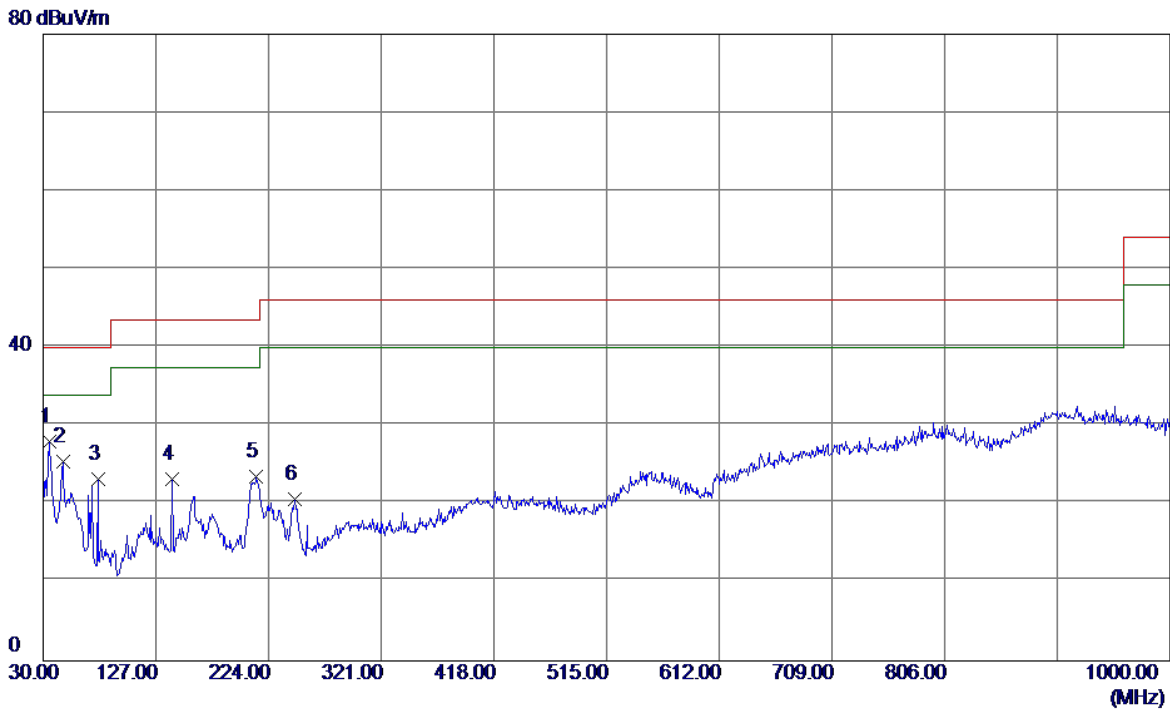


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	35.3350	41.92	-13.87	28.05	40.00	-11.95	QP
2	46.9750	38.21	-12.73	25.48	40.00	-14.52	QP
3	77.0450	39.59	-16.36	23.23	40.00	-16.77	QP
4	141.0650	36.92	-13.67	23.25	43.50	-20.25	QP
5	213.3300	38.09	-14.51	23.58	43.50	-19.92	QP
6	246.7950	34.70	-14.06	20.64	46.00	-25.36	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

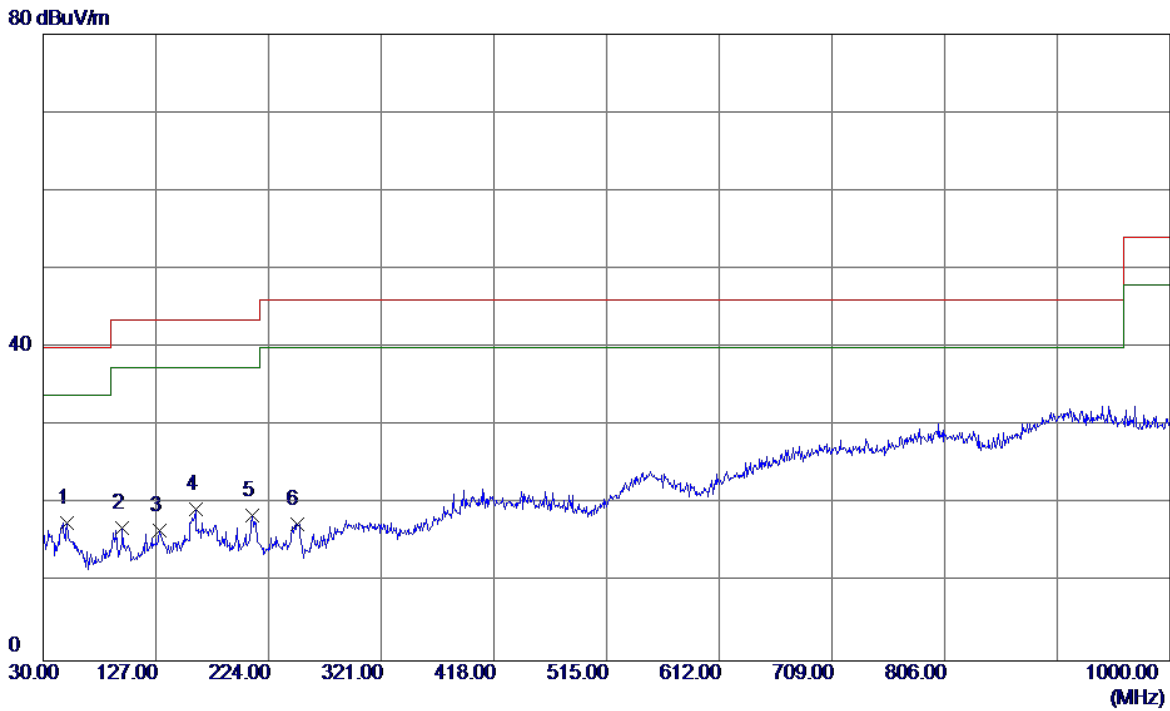


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	50.8550	31.23	-13.62	17.61	40.00	-22.39	QP
2	97.9000	33.18	-16.24	16.94	43.50	-26.56	QP
3	130.3950	29.02	-12.41	16.61	43.50	-26.89	QP
4	161.4350	31.56	-12.16	19.40	43.50	-24.10	QP
5	210.4200	33.26	-14.63	18.63	43.50	-24.87	QP
6	248.2500	31.58	-14.12	17.46	46.00	-28.54	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

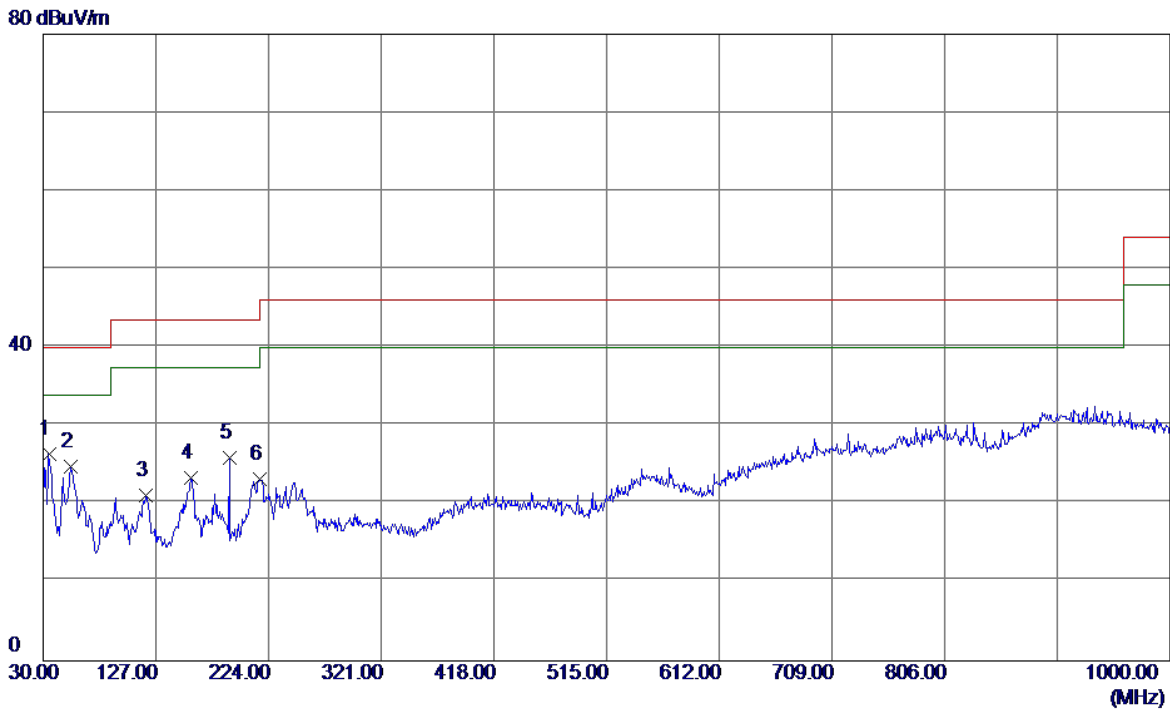


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	34.8500	40.36	-13.95	26.41	40.00	-13.59	QP
2	53.2800	38.51	-13.69	24.82	40.00	-15.18	QP
3	118.7550	34.76	-13.61	21.15	43.50	-22.35	QP
4	157.0700	35.68	-12.38	23.30	43.50	-20.20	QP
5	190.0500	39.84	-13.94	25.90	43.50	-17.60	QP
6	216.7250	37.63	-14.38	23.25	46.00	-22.75	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

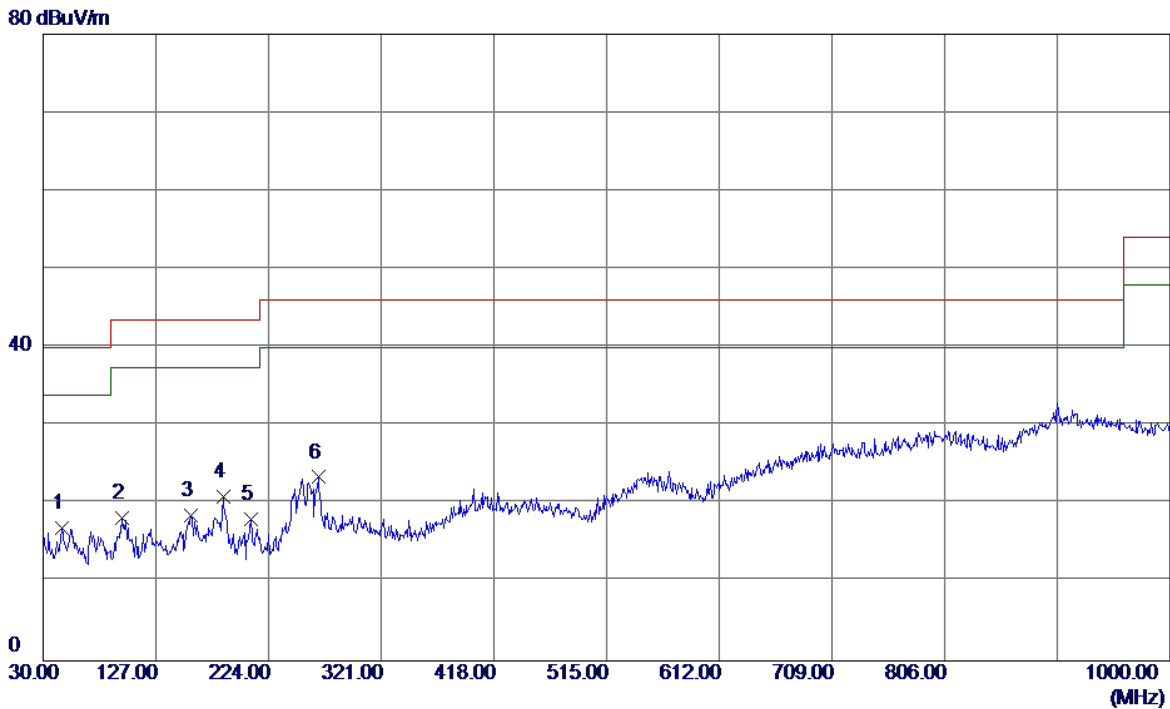


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	46.0050	29.39	-12.45	16.94	40.00	-23.06	QP
2	98.3850	34.25	-16.06	18.19	43.50	-25.31	QP
3	157.5549	30.85	-12.34	18.51	43.50	-24.99	QP
4 *	184.7150	34.36	-13.35	21.01	43.50	-22.49	QP
5	208.4800	32.67	-14.61	18.06	43.50	-25.44	QP
6	266.6800	37.12	-13.68	23.44	46.00	-22.56	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

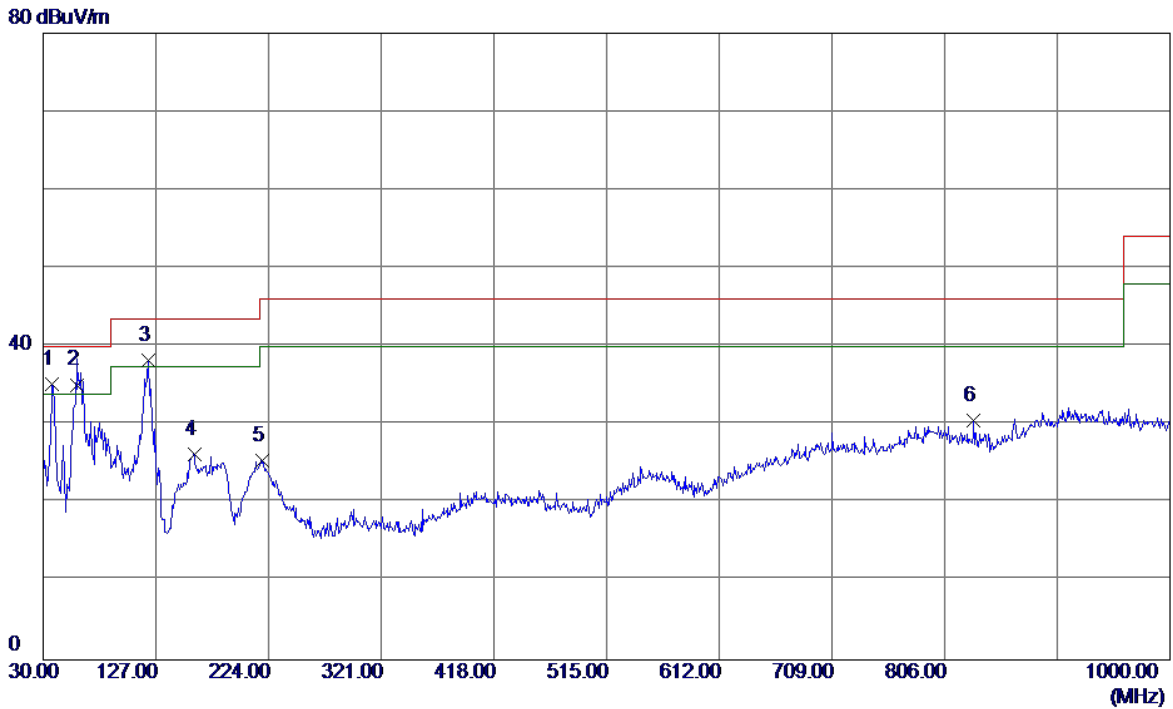


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	49.24	-14.09	35.15	40.00	-4.85	QP
2	58.6150	48.92	-13.80	35.12	40.00	-4.88	QP
3	120.6950	51.55	-13.38	38.17	43.50	-5.33	QP
4	160.4650	38.39	-12.15	26.24	43.50	-17.26	QP
5	218.6650	39.73	-14.31	25.42	46.00	-20.58	QP
6	831.2199	31.17	-0.68	30.49	46.00	-15.51	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

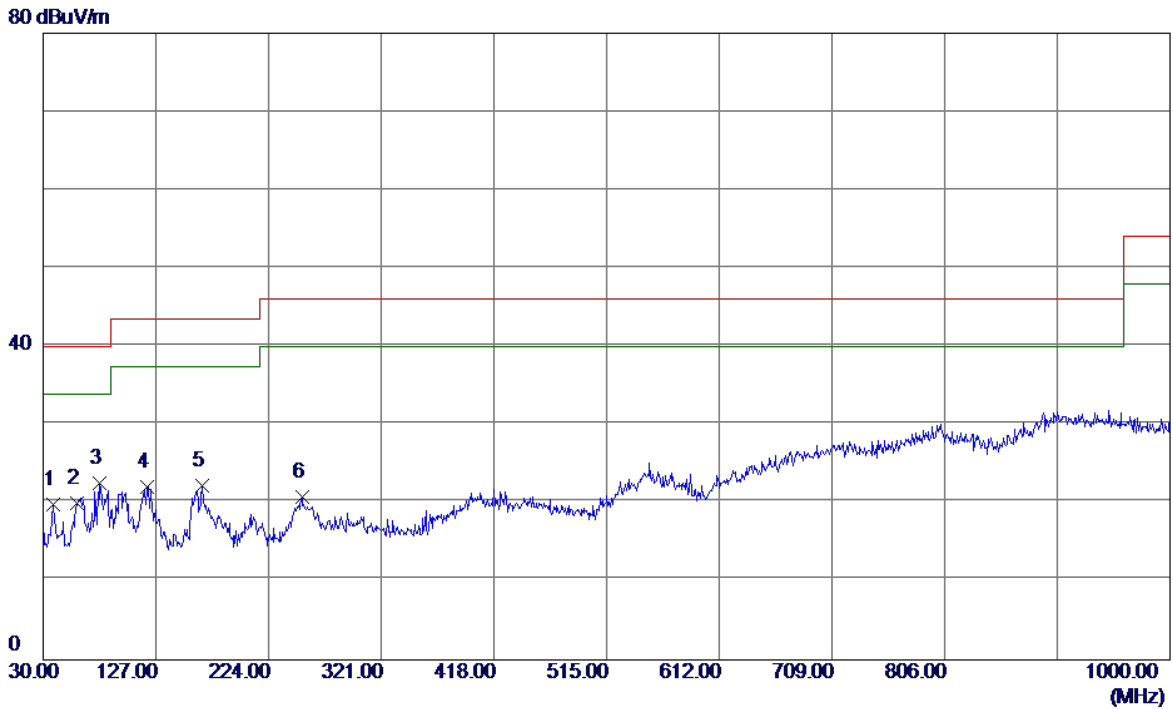


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.2450	33.97	-14.11	19.86	40.00	-20.14	QP
2	58.6150	33.82	-13.80	20.02	40.00	-19.98	QP
3 *	78.0150	38.81	-16.26	22.55	40.00	-17.45	QP
4	119.7250	35.54	-13.49	22.05	43.50	-21.45	QP
5	166.7700	34.40	-12.21	22.19	43.50	-21.31	QP
6	252.6150	35.02	-14.20	20.82	46.00	-25.18	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

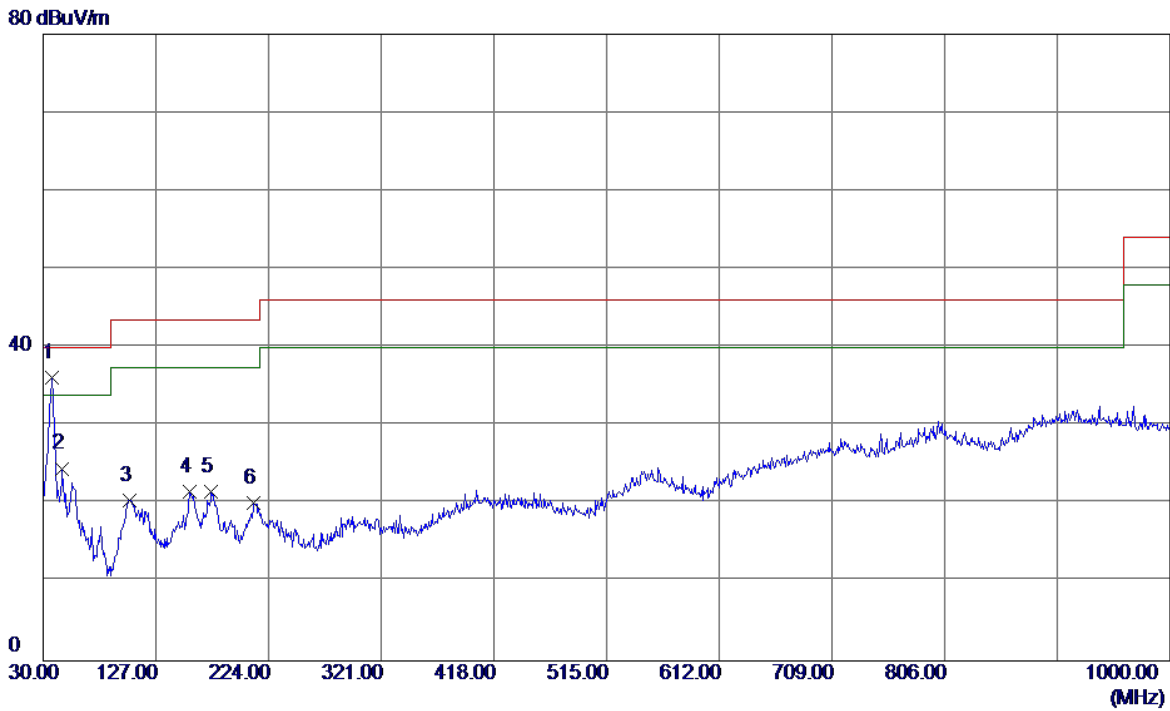


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	50.31	-14.09	36.22	40.00	-3.78	QP
2	46.4900	37.15	-12.59	24.56	40.00	-15.44	QP
3	104.6900	35.51	-15.08	20.43	43.50	-23.07	QP
4	156.1000	34.00	-12.46	21.54	43.50	-21.96	QP
5	174.5300	34.17	-12.51	21.66	43.50	-21.84	QP
6	211.3900	34.79	-14.59	20.20	43.50	-23.30	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:Lianchuang		
Test Engineer	Kevin Li		

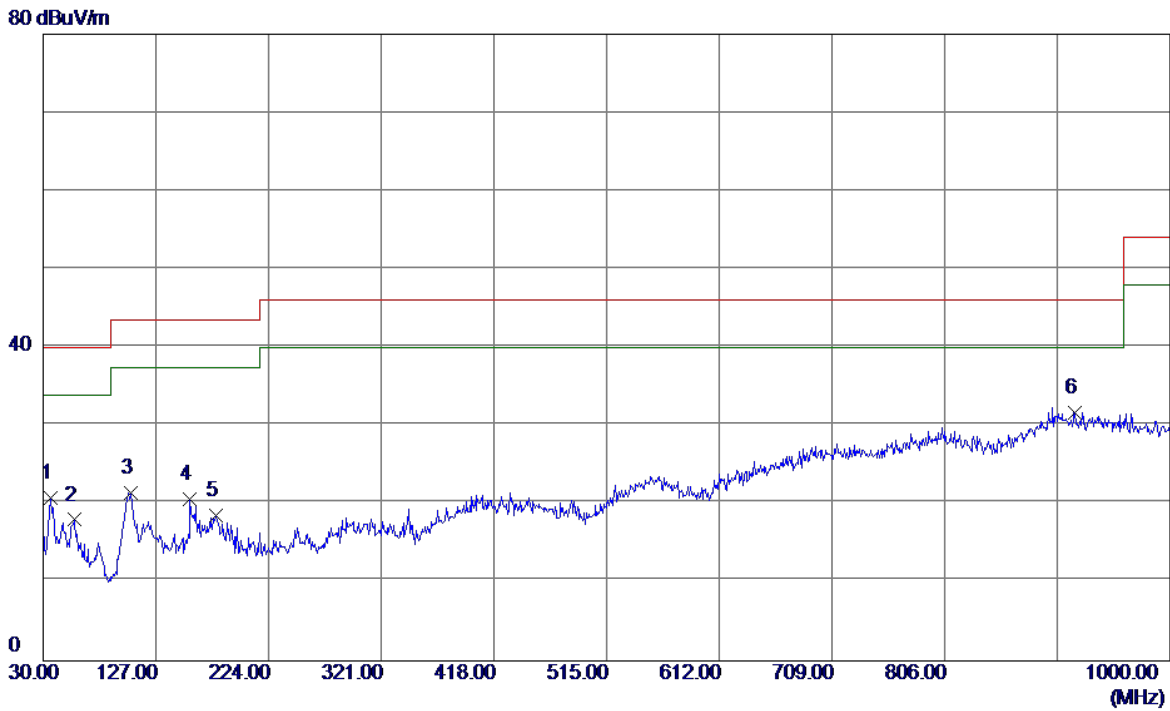


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	36.3050	34.65	-13.82	20.83	40.00	-19.17	QP
2	56.6750	31.45	-13.45	18.00	40.00	-22.00	QP
3	105.1750	36.54	-15.05	21.49	43.50	-22.01	QP
4	156.5850	33.11	-12.42	20.69	43.50	-22.81	QP
5	178.4100	31.25	-12.74	18.51	43.50	-24.99	QP
6 *	918.5200	29.08	2.57	31.65	46.00	-14.35	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

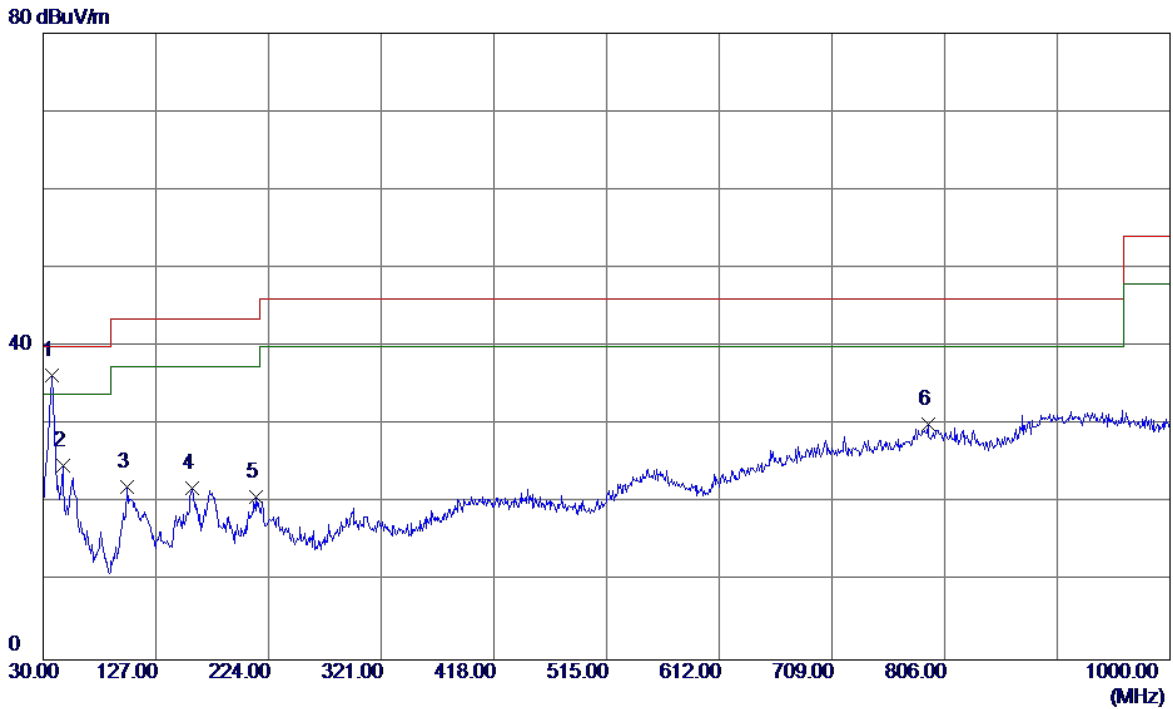


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.2750	50.32	-14.00	36.32	40.00	-3.68	QP
2	46.9750	37.61	-12.73	24.88	40.00	-15.12	QP
3	101.7800	37.35	-15.32	22.03	43.50	-21.47	QP
4	158.5250	34.12	-12.26	21.86	43.50	-21.64	QP
5	213.3300	35.30	-14.51	20.79	43.50	-22.71	QP
6	791.9350	30.13	-0.10	30.03	46.00	-15.97	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

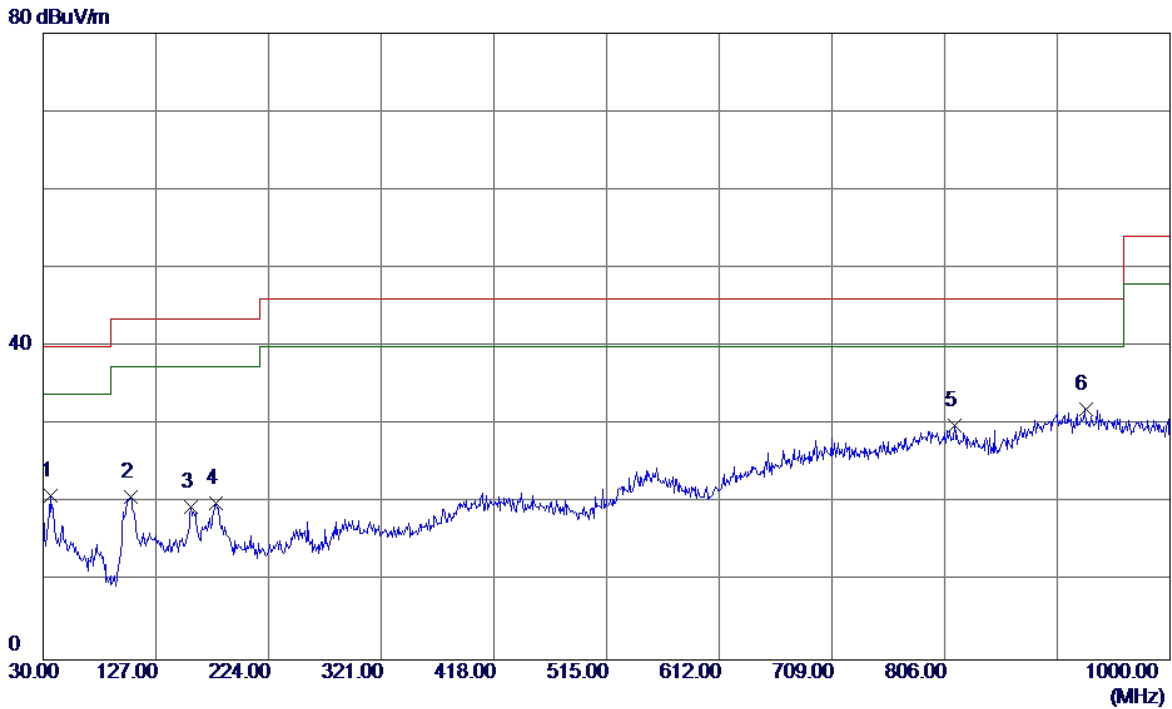


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	36.3050	34.72	-13.82	20.90	40.00	-19.10	QP
2	105.1750	35.92	-15.05	20.87	43.50	-22.63	QP
3	157.0700	31.92	-12.38	19.54	43.50	-23.96	QP
4	178.4100	32.74	-12.74	20.00	43.50	-23.50	QP
5	814.2450	30.09	-0.17	29.92	46.00	-16.08	QP
6 *	927.2500	29.42	2.53	31.95	46.00	-14.05	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

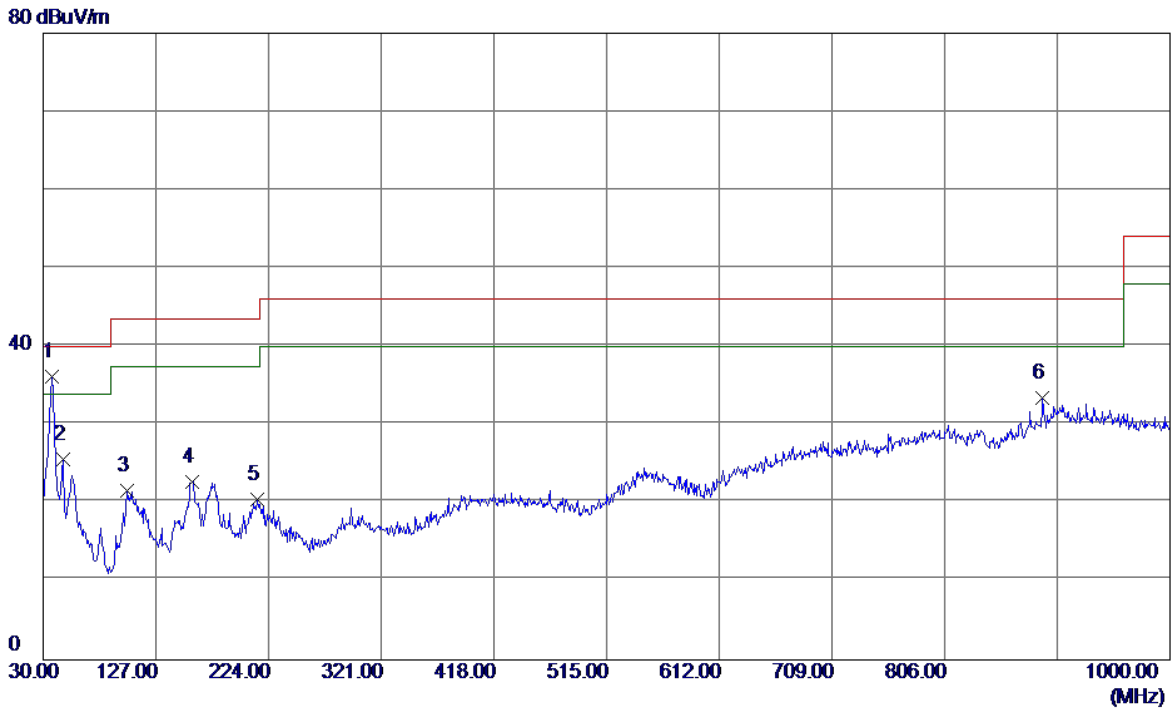

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	50.28	-14.09	36.19	40.00	-3.81	QP
2	46.9750	38.28	-12.73	25.55	40.00	-14.45	QP
3	101.7800	36.90	-15.32	21.58	43.50	-21.92	QP
4	158.0399	35.09	-12.30	22.79	43.50	-20.71	QP
5	213.8150	35.01	-14.50	20.51	43.50	-22.99	QP
6	890.3900	31.49	1.89	33.38	46.00	-12.62	QP

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

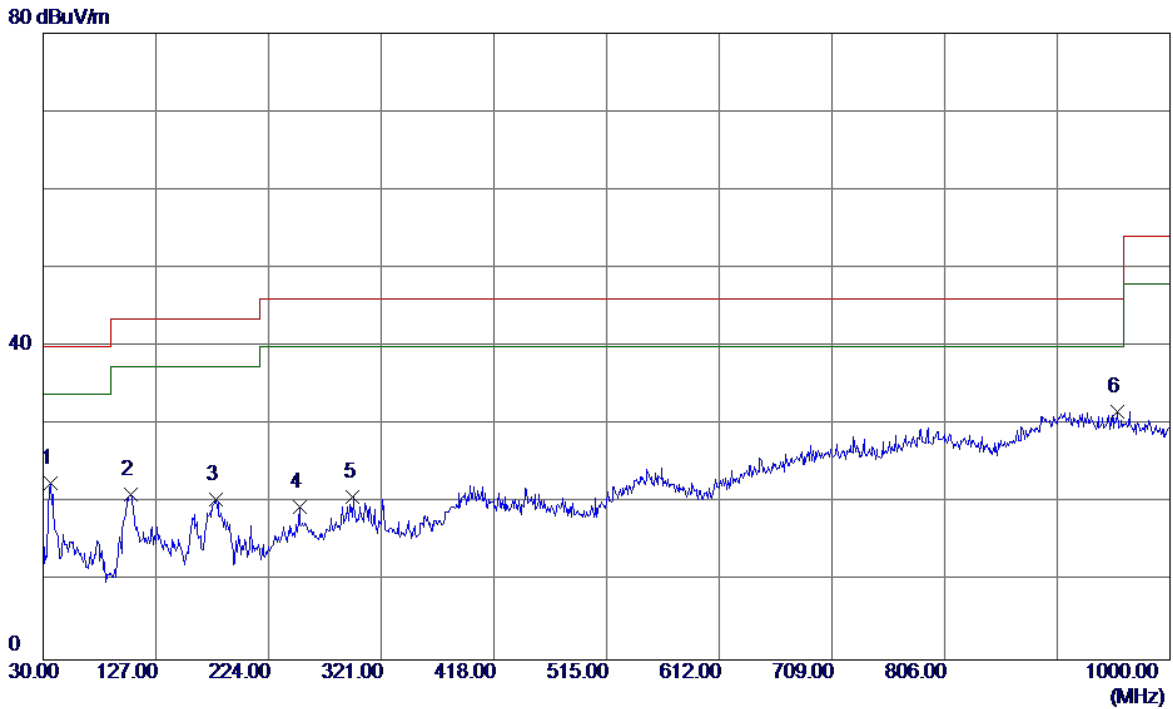


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	36.3050	36.33	-13.82	22.51	40.00	-17.49	QP
2	105.1750	36.19	-15.05	21.14	43.50	-22.36	QP
3	178.8950	33.30	-12.77	20.53	43.50	-22.97	QP
4	250.6750	33.65	-14.20	19.45	46.00	-26.55	QP
5	296.7500	31.31	-10.51	20.80	46.00	-25.20	QP
6 *	954.4100	29.31	2.38	31.69	46.00	-14.31	QP

#### 4.2.8 TEST RESULTS-ABOVE 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

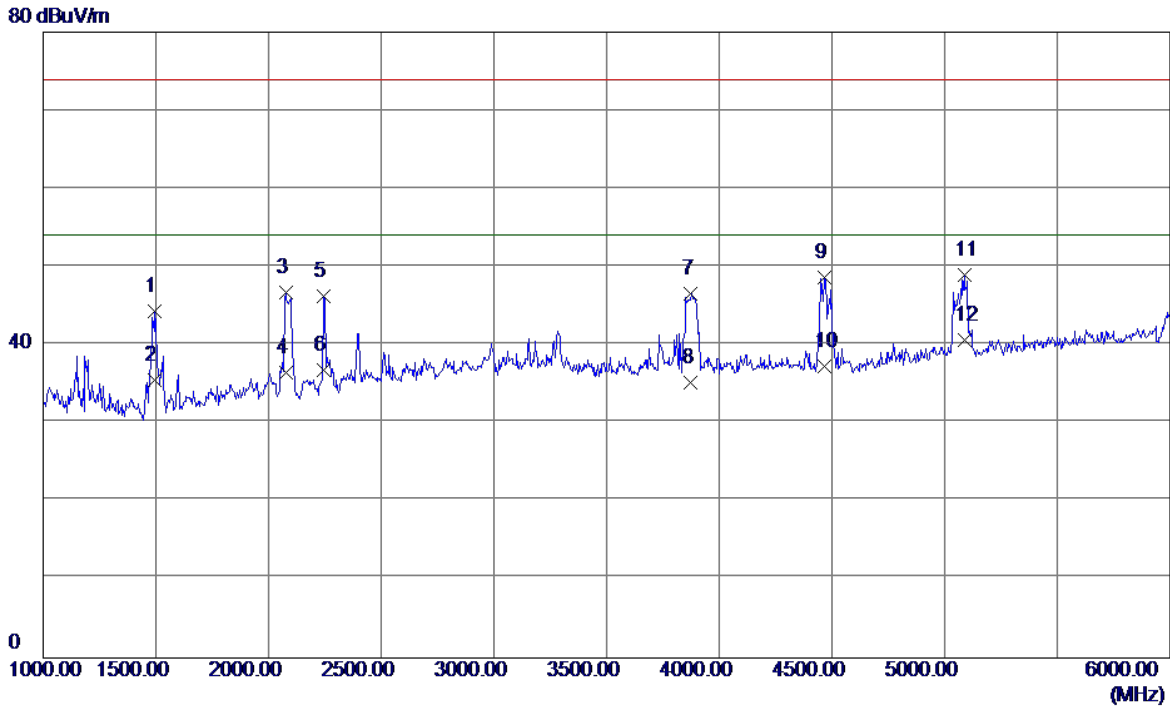


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	51.02	-6.66	44.36	74.00	-29.64	Peak
2	1495.0000	42.12	-6.66	35.46	54.00	-18.54	AVG
3	2077.5000	49.25	-2.53	46.72	74.00	-27.28	Peak
4	2077.5000	39.07	-2.53	36.54	54.00	-17.46	AVG
5	2242.5000	48.19	-1.92	46.27	74.00	-27.73	Peak
6	2242.5000	38.73	-1.92	36.81	54.00	-17.19	AVG
7	3875.0000	44.08	2.54	46.62	74.00	-27.38	Peak
8	3875.0000	32.69	2.54	35.23	54.00	-18.77	AVG
9	4465.0000	45.22	3.44	48.66	74.00	-25.34	Peak
10	4465.0000	33.77	3.44	37.21	54.00	-16.79	AVG
11	5087.5000	43.13	5.89	49.02	74.00	-24.98	Peak
12 *	5087.5000	34.82	5.89	40.71	54.00	-13.29	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

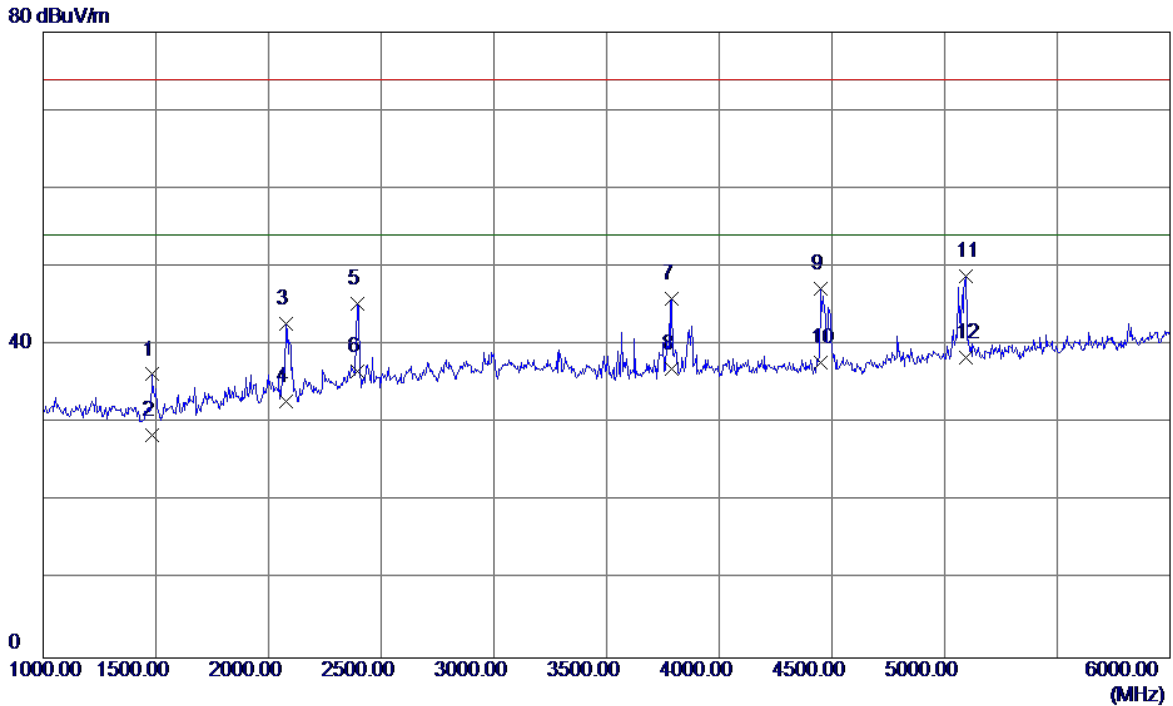


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1482.5000	42.93	-6.69	36.24	74.00	-37.76	Peak
2	1482.5000	35.15	-6.69	28.46	54.00	-25.54	AVG
3	2077.5000	45.26	-2.53	42.73	74.00	-31.27	Peak
4	2077.5000	35.34	-2.53	32.81	54.00	-21.19	AVG
5	2392.5000	46.63	-1.37	45.26	74.00	-28.74	Peak
6	2392.5000	38.01	-1.37	36.64	54.00	-17.36	AVG
7	3790.0000	43.58	2.26	45.84	74.00	-28.16	Peak
8	3790.0000	34.65	2.26	36.91	54.00	-17.09	AVG
9	4452.5000	43.74	3.43	47.17	74.00	-26.83	Peak
10	4452.5000	34.30	3.43	37.73	54.00	-16.27	AVG
11	5092.5000	42.89	5.90	48.79	74.00	-25.21	Peak
12 *	5092.5000	32.51	5.90	38.41	54.00	-15.59	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:CONNREX+Battery:SCUD		
Test Engineer	Kevin Li		

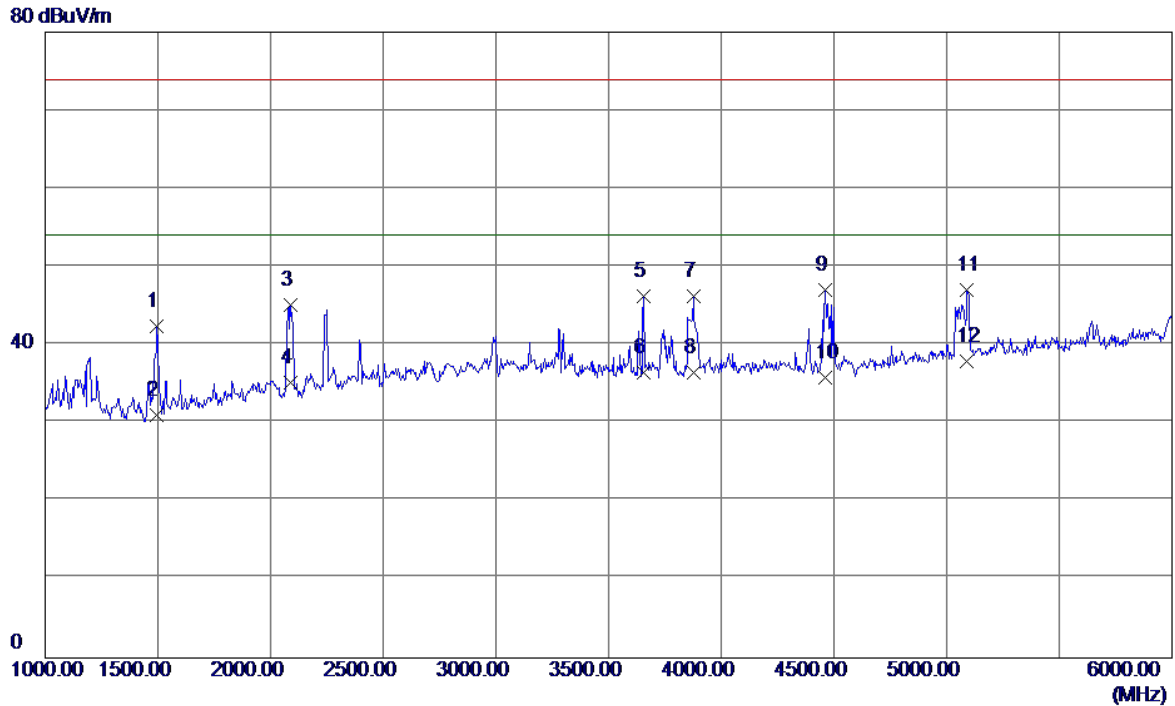


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	49.03	-6.66	42.37	74.00	-31.63	Peak
2	1495.0000	37.74	-6.66	31.08	54.00	-22.92	AVG
3	2090.0000	47.63	-2.49	45.14	74.00	-28.86	Peak
4	2090.0000	37.68	-2.49	35.19	54.00	-18.81	AVG
5	3655.0000	44.40	1.82	46.22	74.00	-27.78	Peak
6	3655.0000	34.67	1.82	36.49	54.00	-17.51	AVG
7	3877.5000	43.70	2.55	46.25	74.00	-27.75	Peak
8	3877.5000	33.86	2.55	36.41	54.00	-17.59	AVG
9	4460.0000	43.63	3.44	47.07	74.00	-26.93	Peak
10	4460.0000	32.37	3.44	35.81	54.00	-18.19	AVG
11	5090.0000	41.13	5.89	47.02	74.00	-26.98	Peak
12 *	5090.0000	32.05	5.89	37.94	54.00	-16.06	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:CONNREX+Battery:SCUD		
Test Engineer	Kevin Li		

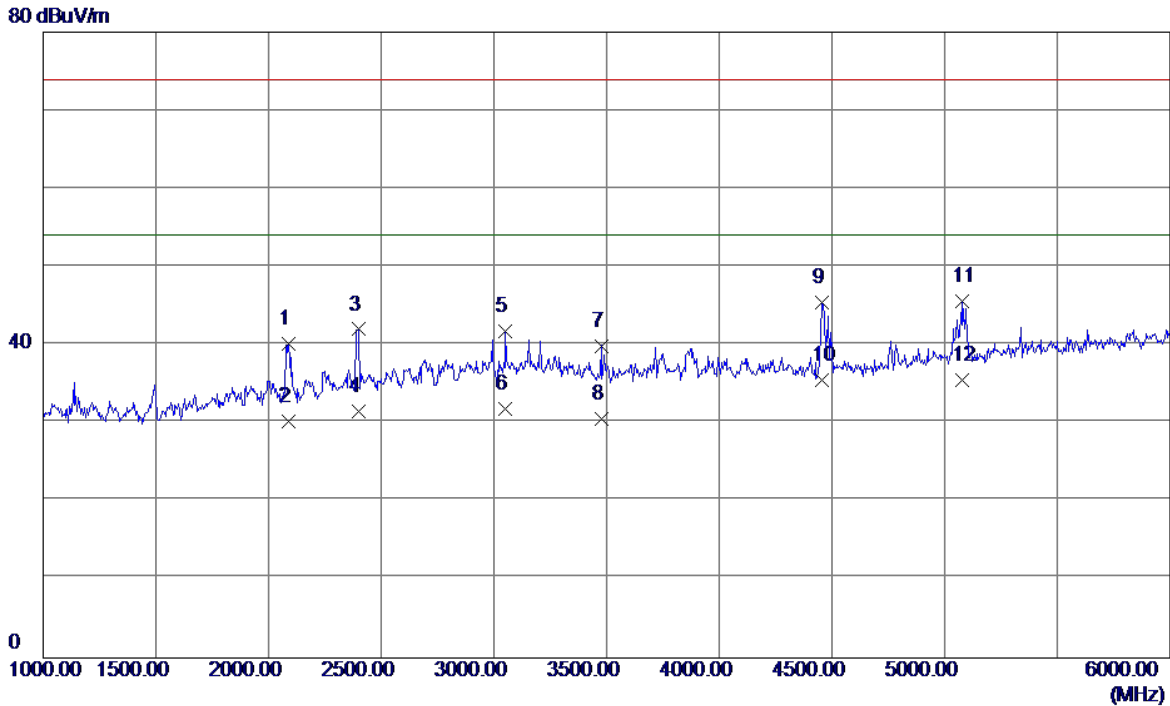


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2090.0000	42.71	-2.49	40.22	74.00	-33.78	Peak
2	2090.0000	32.68	-2.49	30.19	54.00	-23.81	AVG
3	2397.5000	43.35	-1.35	42.00	74.00	-32.00	Peak
4	2397.5000	32.81	-1.35	31.46	54.00	-22.54	AVG
5	3050.0000	40.20	1.51	41.71	74.00	-32.29	Peak
6	3050.0000	30.29	1.51	31.80	54.00	-22.20	AVG
7	3477.5000	38.60	1.32	39.92	74.00	-34.08	Peak
8	3477.5000	29.19	1.32	30.51	54.00	-23.49	AVG
9	4455.0000	41.95	3.43	45.38	74.00	-28.62	Peak
10	4455.0000	32.03	3.43	35.46	54.00	-18.54	AVG
11	5080.0000	39.81	5.86	45.67	74.00	-28.33	Peak
12 *	5080.0000	29.63	5.86	35.49	54.00	-18.51	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda		
Test Engineer	Kevin Li		

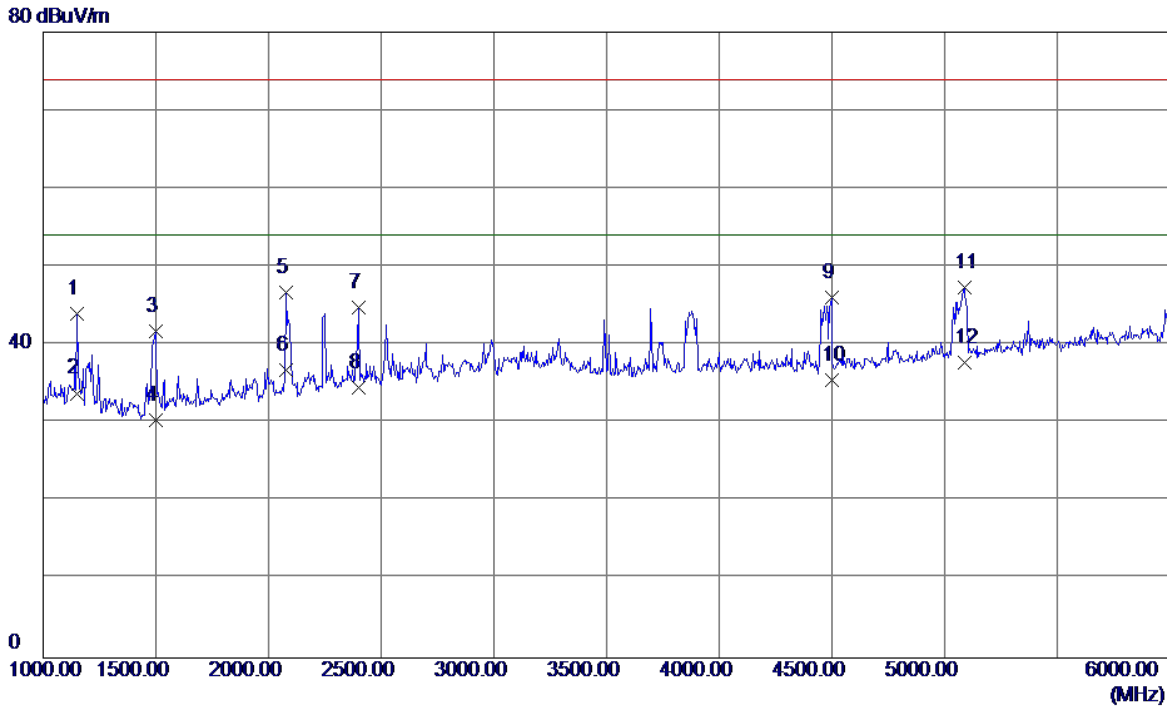


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1150.0000	51.49	-7.55	43.94	74.00	-30.06	Peak
2	1150.0000	41.39	-7.55	33.84	54.00	-20.16	AVG
3	1497.5000	48.37	-6.66	41.71	74.00	-32.29	Peak
4	1497.5000	37.12	-6.66	30.46	54.00	-23.54	AVG
5	2077.5000	49.20	-2.53	46.67	74.00	-27.33	Peak
6	2077.5000	39.32	-2.53	36.79	54.00	-17.21	AVG
7	2397.5000	46.14	-1.35	44.79	74.00	-29.21	Peak
8	2397.5000	35.86	-1.35	34.51	54.00	-19.49	AVG
9	4497.5000	42.53	3.48	46.01	74.00	-27.99	Peak
10	4497.5000	32.01	3.48	35.49	54.00	-18.51	AVG
11	5087.5000	41.47	5.89	47.36	74.00	-26.64	Peak
12 *	5087.5000	31.92	5.89	37.81	54.00	-16.19	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda		
Test Engineer	Kevin Li		

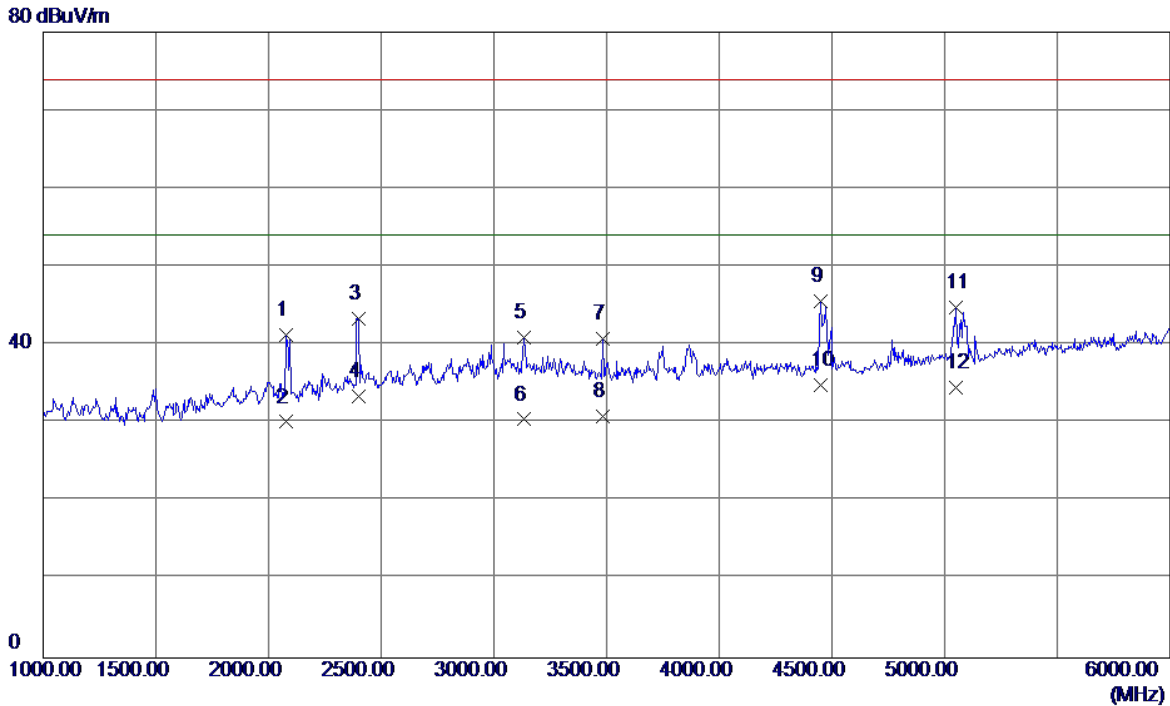


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2080.0000	43.73	-2.52	41.21	74.00	-32.79	Peak
2	2080.0000	32.68	-2.52	30.16	54.00	-23.84	AVG
3	2397.5000	44.71	-1.35	43.36	74.00	-30.64	Peak
4	2397.5000	34.81	-1.35	33.46	54.00	-20.54	AVG
5	3132.5000	39.44	1.47	40.91	74.00	-33.09	Peak
6	3132.5000	29.01	1.47	30.48	54.00	-23.52	AVG
7	3482.5000	39.44	1.32	40.76	74.00	-33.24	Peak
8	3482.5000	29.59	1.32	30.91	54.00	-23.09	AVG
9	4450.0000	42.23	3.43	45.66	74.00	-28.34	Peak
10 *	4450.0000	31.38	3.43	34.81	54.00	-19.19	AVG
11	5052.5000	39.02	5.77	44.79	74.00	-29.21	Peak
12	5052.5000	28.74	5.77	34.51	54.00	-19.49	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:FOXCONN+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

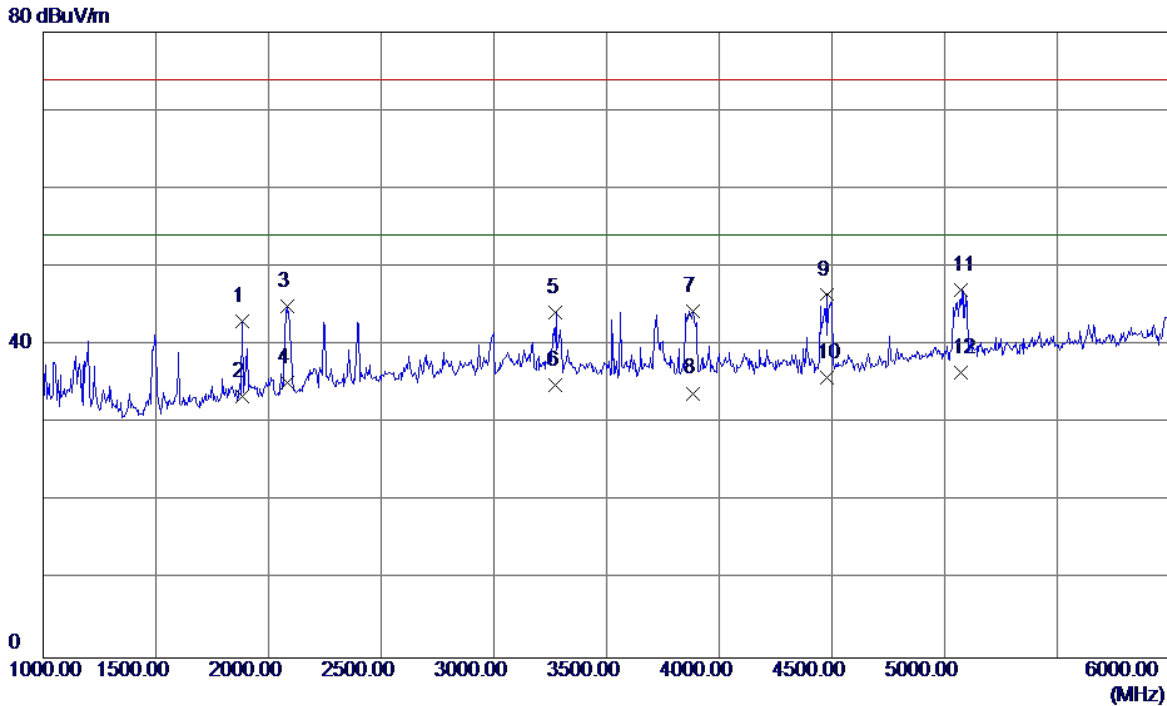


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1885.0000	46.75	-3.70	43.05	74.00	-30.95	Peak
2	1885.0000	37.19	-3.70	33.49	54.00	-20.51	AVG
3	2085.0000	47.53	-2.51	45.02	74.00	-28.98	Peak
4	2085.0000	37.69	-2.51	35.18	54.00	-18.82	AVG
5	3275.0000	42.68	1.41	44.09	74.00	-29.91	Peak
6	3275.0000	33.40	1.41	34.81	54.00	-19.19	AVG
7	3885.0000	41.80	2.57	44.37	74.00	-29.63	Peak
8	3885.0000	31.27	2.57	33.84	54.00	-20.16	AVG
9	4477.5000	43.02	3.46	46.48	74.00	-27.52	Peak
10	4477.5000	32.46	3.46	35.92	54.00	-18.08	AVG
11	5075.0000	41.17	5.84	47.01	74.00	-26.99	Peak
12 *	5075.0000	30.57	5.84	36.41	54.00	-17.59	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:FOXCONN+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

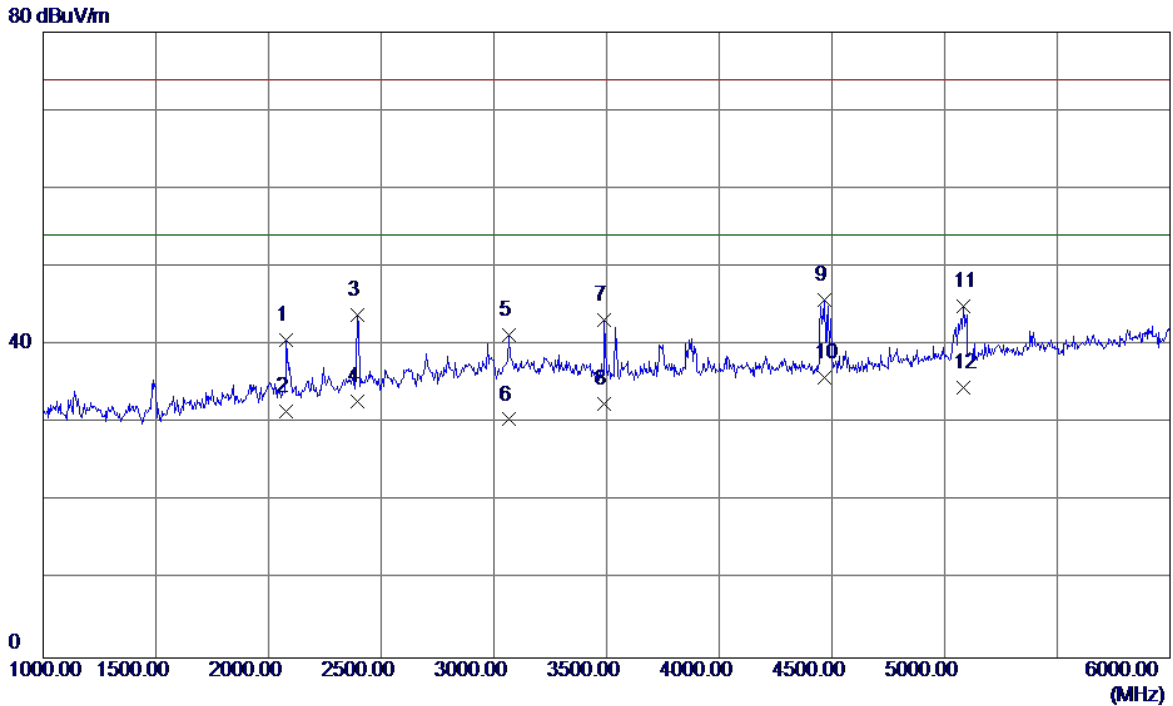


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2080.0000	43.17	-2.52	40.65	74.00	-33.35	Peak
2	2080.0000	34.03	-2.52	31.51	54.00	-22.49	AVG
3	2395.0000	45.18	-1.36	43.82	74.00	-30.18	Peak
4	2395.0000	34.17	-1.36	32.81	54.00	-21.19	AVG
5	3065.0000	39.78	1.50	41.28	74.00	-32.72	Peak
6	3065.0000	28.98	1.50	30.48	54.00	-23.52	AVG
7	3490.0000	41.85	1.32	43.17	74.00	-30.83	Peak
8	3490.0000	31.10	1.32	32.42	54.00	-21.58	AVG
9	4465.0000	42.25	3.44	45.69	74.00	-28.31	Peak
10 *	4465.0000	32.38	3.44	35.82	54.00	-18.18	AVG
11	5082.5000	39.05	5.87	44.92	74.00	-29.08	Peak
12	5082.5000	28.62	5.87	34.49	54.00	-19.51	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

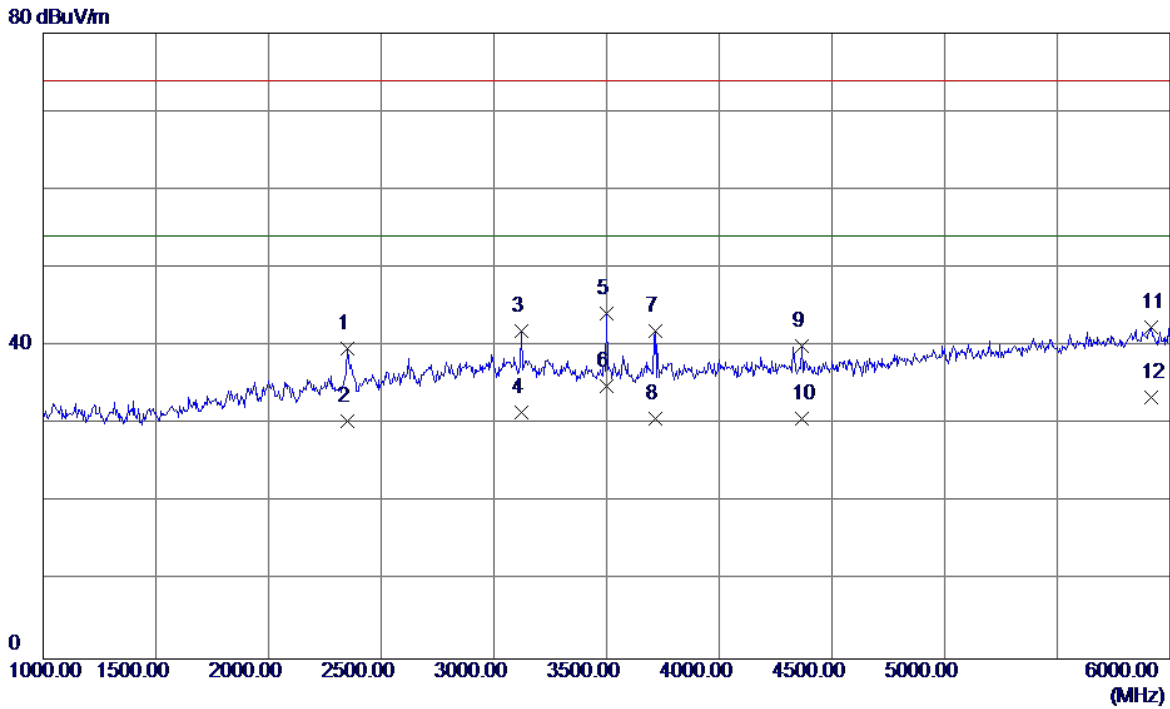


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2352.5000	41.22	-1.52	39.70	74.00	-34.30	Peak
2	2352.5000	31.98	-1.52	30.46	54.00	-23.54	AVG
3	3120.0000	40.43	1.48	41.91	74.00	-32.09	Peak
4	3120.0000	30.06	1.48	31.54	54.00	-22.46	AVG
5	3500.0000	42.87	1.32	44.19	74.00	-29.81	Peak
6 *	3500.0000	33.49	1.32	34.81	54.00	-19.19	AVG
7	3715.0000	39.86	2.02	41.88	74.00	-32.12	Peak
8	3715.0000	28.71	2.02	30.73	54.00	-23.27	AVG
9	4367.5000	36.60	3.34	39.94	74.00	-34.06	Peak
10	4367.5000	27.41	3.34	30.75	54.00	-23.25	AVG
11	5917.5000	33.76	8.70	42.46	74.00	-31.54	Peak
12	5917.5000	24.78	8.70	33.48	54.00	-20.52	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

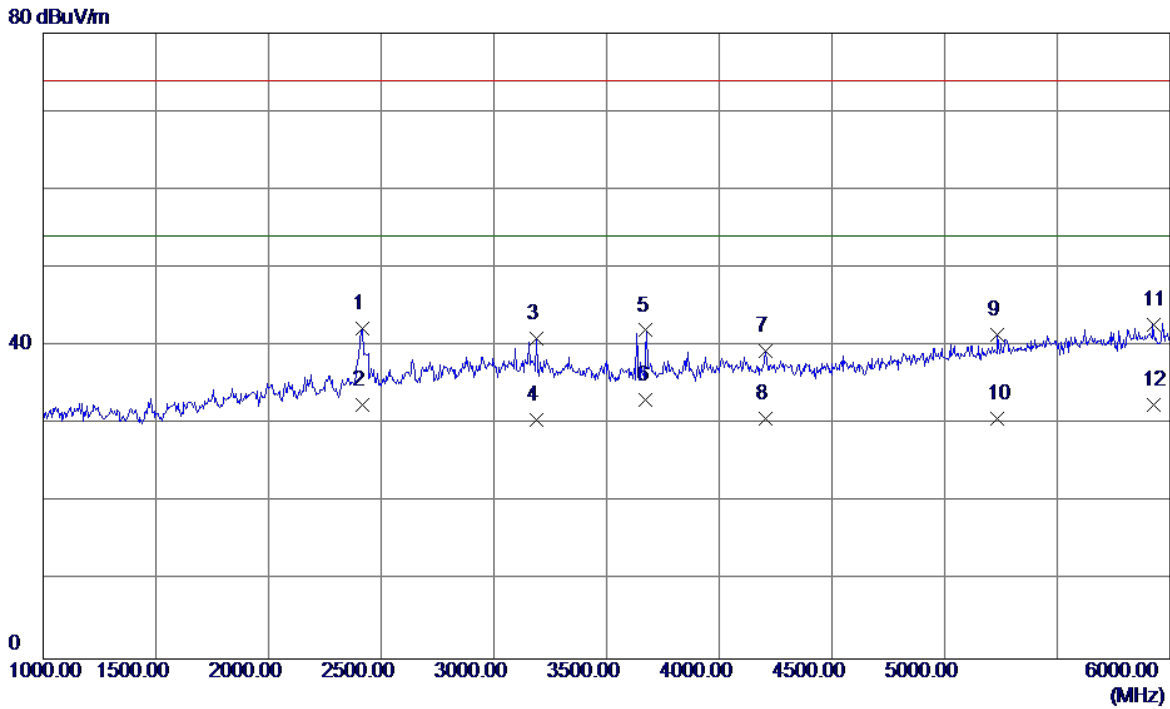


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	43.57	-1.28	42.29	74.00	-31.71	Peak
2	2415.0000	33.74	-1.28	32.46	54.00	-21.54	AVG
3	3190.0000	39.45	1.45	40.90	74.00	-33.10	Peak
4	3190.0000	29.16	1.45	30.61	54.00	-23.39	AVG
5	3675.0000	40.11	1.89	42.00	74.00	-32.00	Peak
6 *	3675.0000	31.25	1.89	33.14	54.00	-20.86	AVG
7	4207.5000	36.23	3.17	39.40	74.00	-34.60	Peak
8	4207.5000	27.59	3.17	30.76	54.00	-23.24	AVG
9	5235.0000	35.05	6.37	41.42	74.00	-32.58	Peak
10	5235.0000	24.36	6.37	30.73	54.00	-23.27	AVG
11	5925.0000	34.03	8.73	42.76	74.00	-31.24	Peak
12	5925.0000	23.81	8.73	32.54	54.00	-21.46	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

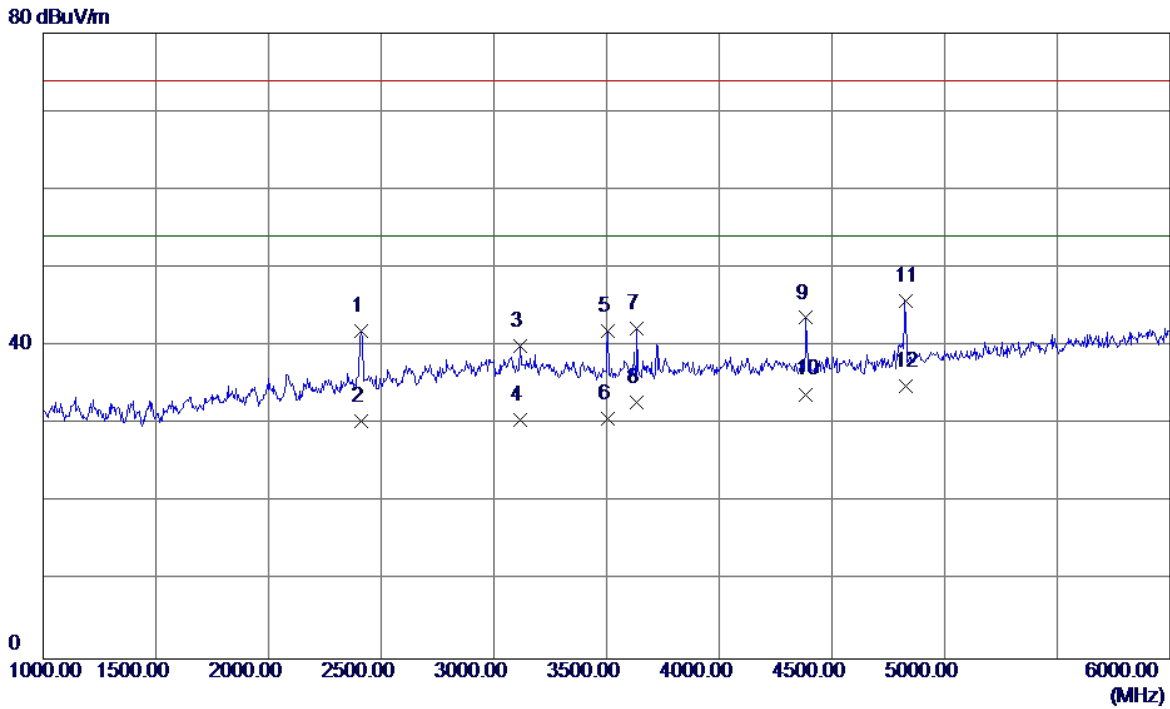


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2412.5000	43.24	-1.29	41.95	74.00	-32.05	Peak
2	2412.5000	31.70	-1.29	30.41	54.00	-23.59	AVG
3	3117.5000	38.56	1.48	40.04	74.00	-33.96	Peak
4	3117.5000	29.03	1.48	30.51	54.00	-23.49	AVG
5	3505.0000	40.52	1.33	41.85	74.00	-32.15	Peak
6	3505.0000	29.43	1.33	30.76	54.00	-23.24	AVG
7	3635.0000	40.52	1.76	42.28	74.00	-31.72	Peak
8	3635.0000	30.99	1.76	32.75	54.00	-21.25	AVG
9	4385.0000	40.24	3.36	43.60	74.00	-30.40	Peak
10	4385.0000	30.48	3.36	33.84	54.00	-20.16	AVG
11	4825.0000	40.96	4.86	45.82	74.00	-28.18	Peak
12 *	4825.0000	29.98	4.86	34.84	54.00	-19.16	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

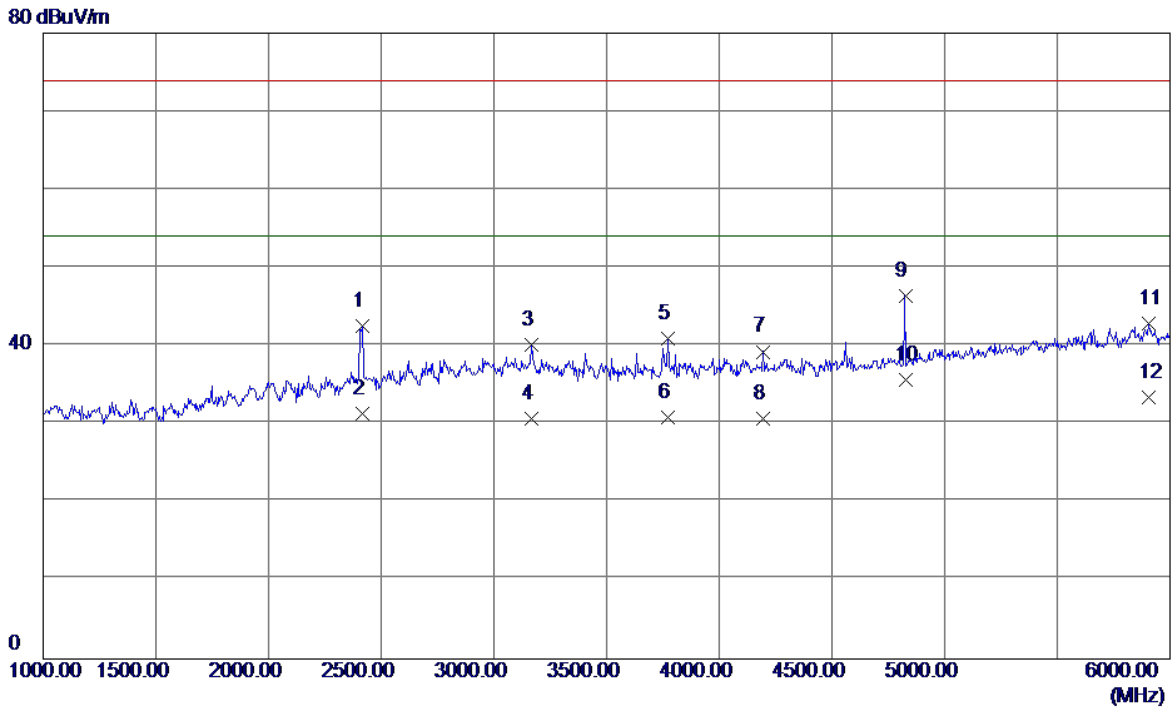


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	43.89	-1.28	42.61	74.00	-31.39	Peak
2	2415.0000	32.70	-1.28	31.42	54.00	-22.58	AVG
3	3165.0000	38.63	1.46	40.09	74.00	-33.91	Peak
4	3165.0000	29.30	1.46	30.76	54.00	-23.24	AVG
5	3770.0000	38.77	2.20	40.97	74.00	-33.03	Peak
6	3770.0000	28.74	2.20	30.94	54.00	-23.06	AVG
7	4195.0000	36.12	3.16	39.28	74.00	-34.72	Peak
8	4195.0000	27.60	3.16	30.76	54.00	-23.24	AVG
9	4825.0000	41.61	4.86	46.47	74.00	-27.53	Peak
10 *	4825.0000	30.86	4.86	35.72	54.00	-18.28	AVG
11	5905.0000	34.19	8.66	42.85	74.00	-31.15	Peak
12	5905.0000	24.85	8.66	33.51	54.00	-20.49	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

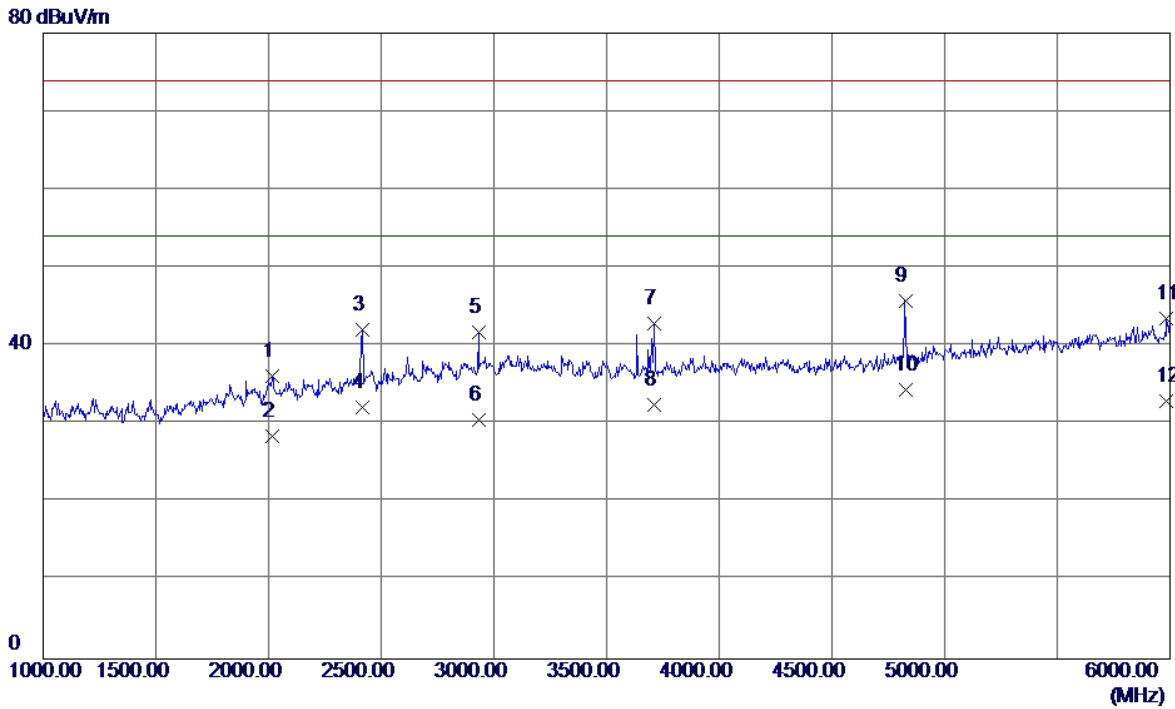


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2017.5000	38.98	-2.76	36.22	74.00	-37.78	Peak
2	2017.5000	31.19	-2.76	28.43	54.00	-25.57	AVG
3	2415.0000	43.29	-1.28	42.01	74.00	-31.99	Peak
4	2415.0000	33.44	-1.28	32.16	54.00	-21.84	AVG
5	2932.5000	40.54	1.19	41.73	74.00	-32.27	Peak
6	2932.5000	29.30	1.19	30.49	54.00	-23.51	AVG
7	3710.0000	40.85	2.00	42.85	74.00	-31.15	Peak
8	3710.0000	30.51	2.00	32.51	54.00	-21.49	AVG
9	4825.0000	40.84	4.86	45.70	74.00	-28.30	Peak
10 *	4825.0000	29.60	4.86	34.46	54.00	-19.54	AVG
11	5985.0000	34.55	8.94	43.49	74.00	-30.51	Peak
12	5985.0000	23.97	8.94	32.91	54.00	-21.09	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

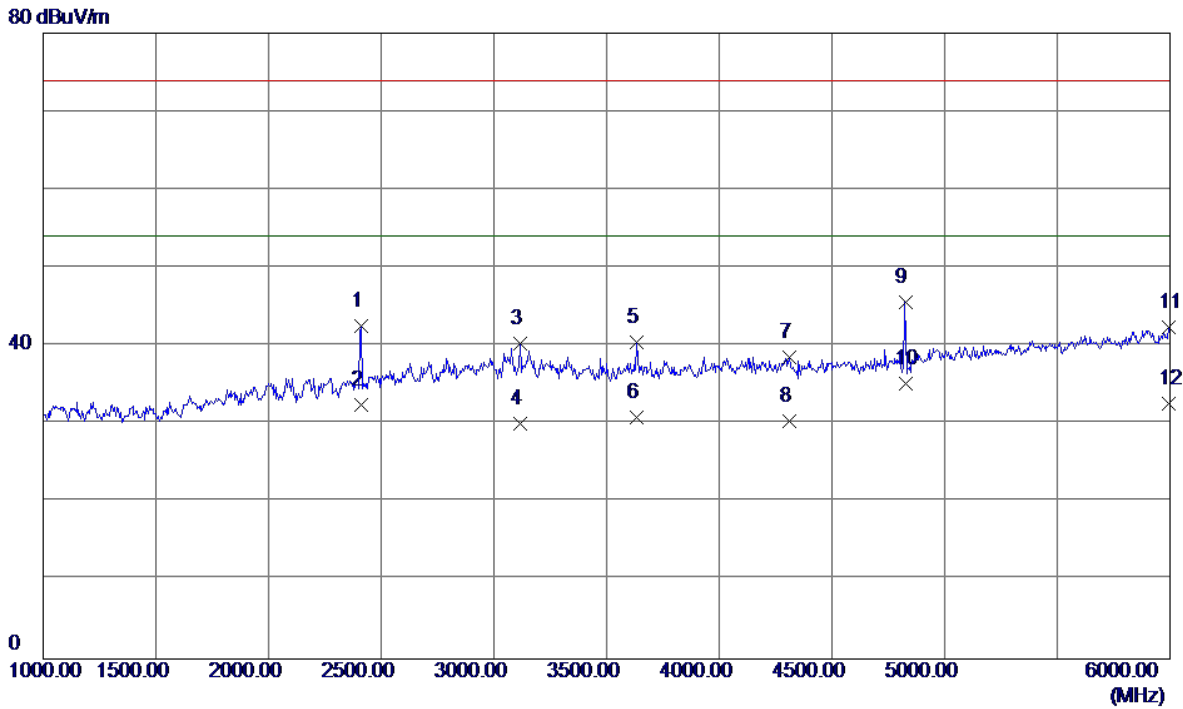


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2410.0000	43.85	-1.30	42.55	74.00	-31.45	Peak
2	2410.0000	33.76	-1.30	32.46	54.00	-21.54	AVG
3	3115.0000	38.88	1.48	40.36	74.00	-33.64	Peak
4	3115.0000	28.64	1.48	30.12	54.00	-23.88	AVG
5	3635.0000	38.76	1.76	40.52	74.00	-33.48	Peak
6	3635.0000	29.19	1.76	30.95	54.00	-23.05	AVG
7	4310.0000	35.22	3.28	38.50	74.00	-35.50	Peak
8	4310.0000	27.14	3.28	30.42	54.00	-23.58	AVG
9	4825.0000	40.78	4.86	45.64	74.00	-28.36	Peak
10 *	4825.0000	30.33	4.86	35.19	54.00	-18.81	AVG
11	5992.5000	33.42	8.96	42.38	74.00	-31.62	Peak
12	5992.5000	23.75	8.96	32.71	54.00	-21.29	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

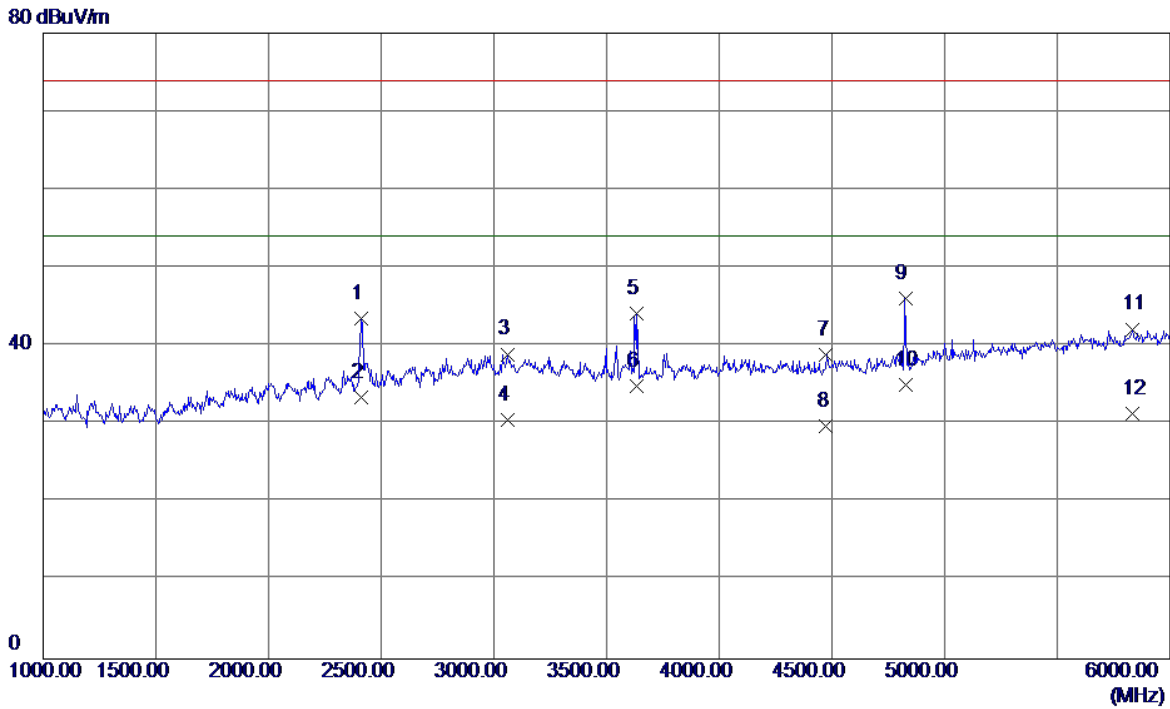


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2412.5000	44.87	-1.29	43.58	74.00	-30.42	Peak
2	2412.5000	34.74	-1.29	33.45	54.00	-20.55	AVG
3	3060.0000	37.46	1.50	38.96	74.00	-35.04	Peak
4	3060.0000	29.00	1.50	30.50	54.00	-23.50	AVG
5	3635.0000	42.46	1.76	44.22	74.00	-29.78	Peak
6	3635.0000	33.05	1.76	34.81	54.00	-19.19	AVG
7	4475.0000	35.40	3.45	38.85	74.00	-35.15	Peak
8	4475.0000	26.31	3.45	29.76	54.00	-24.24	AVG
9	4825.0000	41.26	4.86	46.12	74.00	-27.88	Peak
10 *	4825.0000	30.25	4.86	35.11	54.00	-18.89	AVG
11	5832.5000	33.76	8.40	42.16	74.00	-31.84	Peak
12	5832.5000	23.03	8.40	31.43	54.00	-22.57	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

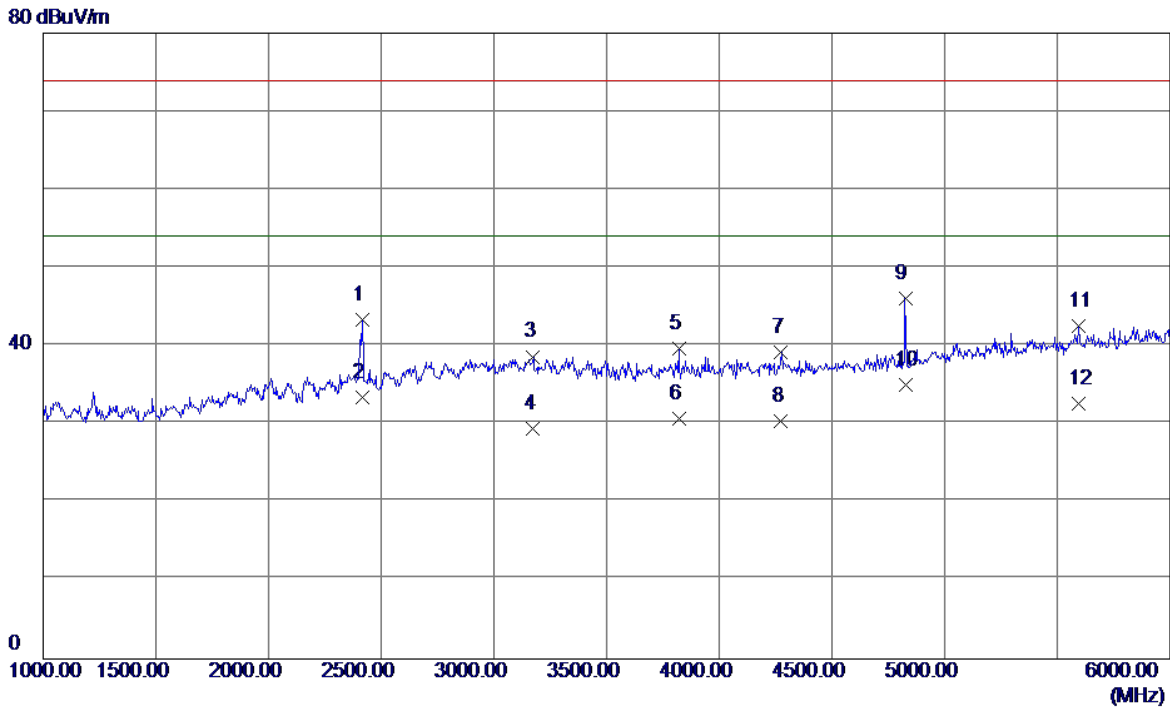


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	44.58	-1.28	43.30	74.00	-30.70	Peak
2	2415.0000	34.74	-1.28	33.46	54.00	-20.54	AVG
3	3175.0000	37.19	1.45	38.64	74.00	-35.36	Peak
4	3175.0000	27.96	1.45	29.41	54.00	-24.59	AVG
5	3822.5000	37.33	2.37	39.70	74.00	-34.30	Peak
6	3822.5000	28.39	2.37	30.76	54.00	-23.24	AVG
7	4275.0000	35.90	3.24	39.14	74.00	-34.86	Peak
8	4275.0000	27.18	3.24	30.42	54.00	-23.58	AVG
9	4825.0000	41.29	4.86	46.15	74.00	-27.85	Peak
10 *	4825.0000	30.23	4.86	35.09	54.00	-18.91	AVG
11	5592.5000	35.02	7.56	42.58	74.00	-31.42	Peak
12	5592.5000	25.06	7.56	32.62	54.00	-21.38	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

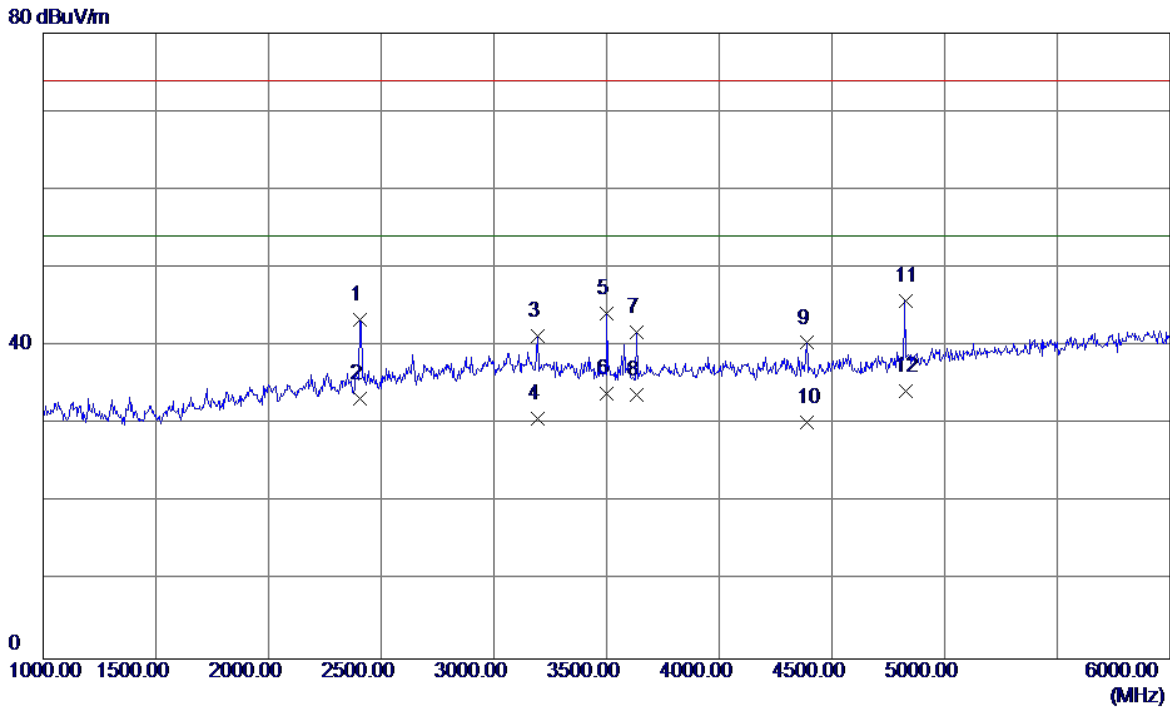


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2407.5000	44.60	-1.31	43.29	74.00	-30.71	Peak
2	2407.5000	34.57	-1.31	33.26	54.00	-20.74	AVG
3	3192.5000	39.83	1.45	41.28	74.00	-32.72	Peak
4	3192.5000	29.31	1.45	30.76	54.00	-23.24	AVG
5	3502.5000	42.89	1.32	44.21	74.00	-29.79	Peak
6	3502.5000	32.60	1.32	33.92	54.00	-20.08	AVG
7	3635.0000	39.93	1.76	41.69	74.00	-32.31	Peak
8	3635.0000	32.00	1.76	33.76	54.00	-20.24	AVG
9	4387.5000	37.04	3.36	40.40	74.00	-33.60	Peak
10	4387.5000	26.81	3.36	30.17	54.00	-23.83	AVG
11	4825.0000	40.95	4.86	45.81	74.00	-28.19	Peak
12 *	4825.0000	29.43	4.86	34.29	54.00	-19.71	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

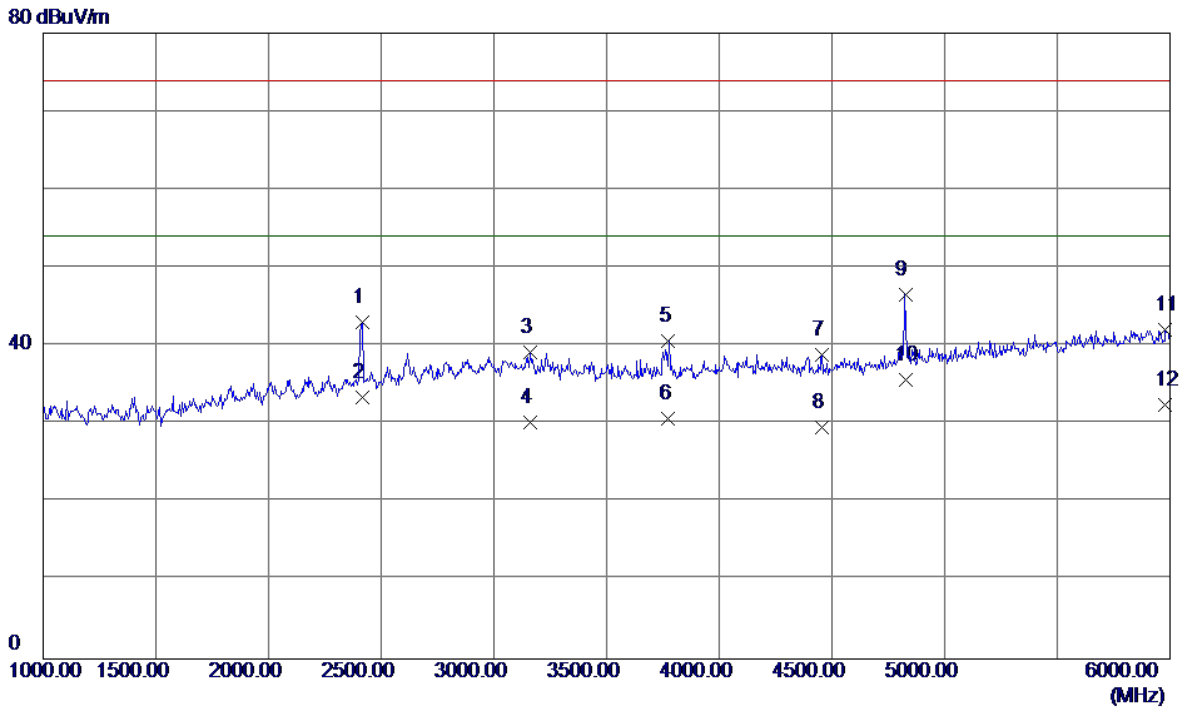


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	44.36	-1.28	43.08	74.00	-30.92	Peak
2	2415.0000	34.74	-1.28	33.46	54.00	-20.54	AVG
3	3160.0000	37.67	1.46	39.13	74.00	-34.87	Peak
4	3160.0000	28.80	1.46	30.26	54.00	-23.74	AVG
5	3775.0000	38.40	2.21	40.61	74.00	-33.39	Peak
6	3775.0000	28.55	2.21	30.76	54.00	-23.24	AVG
7	4457.5000	35.38	3.43	38.81	74.00	-35.19	Peak
8	4457.5000	26.18	3.43	29.61	54.00	-24.39	AVG
9	4825.0000	41.77	4.86	46.63	74.00	-27.37	Peak
10 *	4825.0000	30.76	4.86	35.62	54.00	-18.38	AVG
11	5980.0000	33.21	8.92	42.13	74.00	-31.87	Peak
12	5980.0000	23.50	8.92	32.42	54.00	-21.58	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

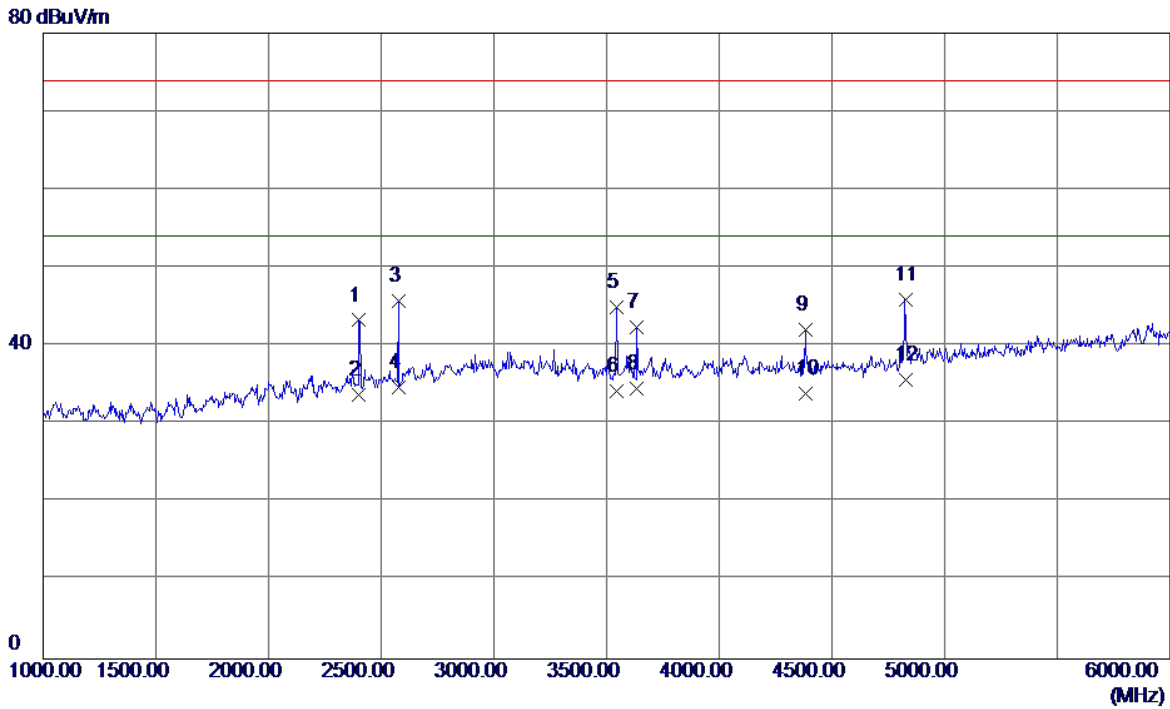


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2402.5000	44.61	-1.33	43.28	74.00	-30.72	Peak
2	2402.5000	35.06	-1.33	33.73	54.00	-20.27	AVG
3	2577.5000	46.34	-0.58	45.76	74.00	-28.24	Peak
4	2577.5000	35.34	-0.58	34.76	54.00	-19.24	AVG
5	3545.0000	43.45	1.46	44.91	74.00	-29.09	Peak
6	3545.0000	32.73	1.46	34.19	54.00	-19.81	AVG
7	3635.0000	40.65	1.76	42.41	74.00	-31.59	Peak
8	3635.0000	32.75	1.76	34.51	54.00	-19.49	AVG
9	4382.5000	38.73	3.36	42.09	74.00	-31.91	Peak
10	4382.5000	30.55	3.36	33.91	54.00	-20.09	AVG
11	4825.0000	41.05	4.86	45.91	74.00	-28.09	Peak
12 *	4825.0000	30.80	4.86	35.66	54.00	-18.34	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey(5V2A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

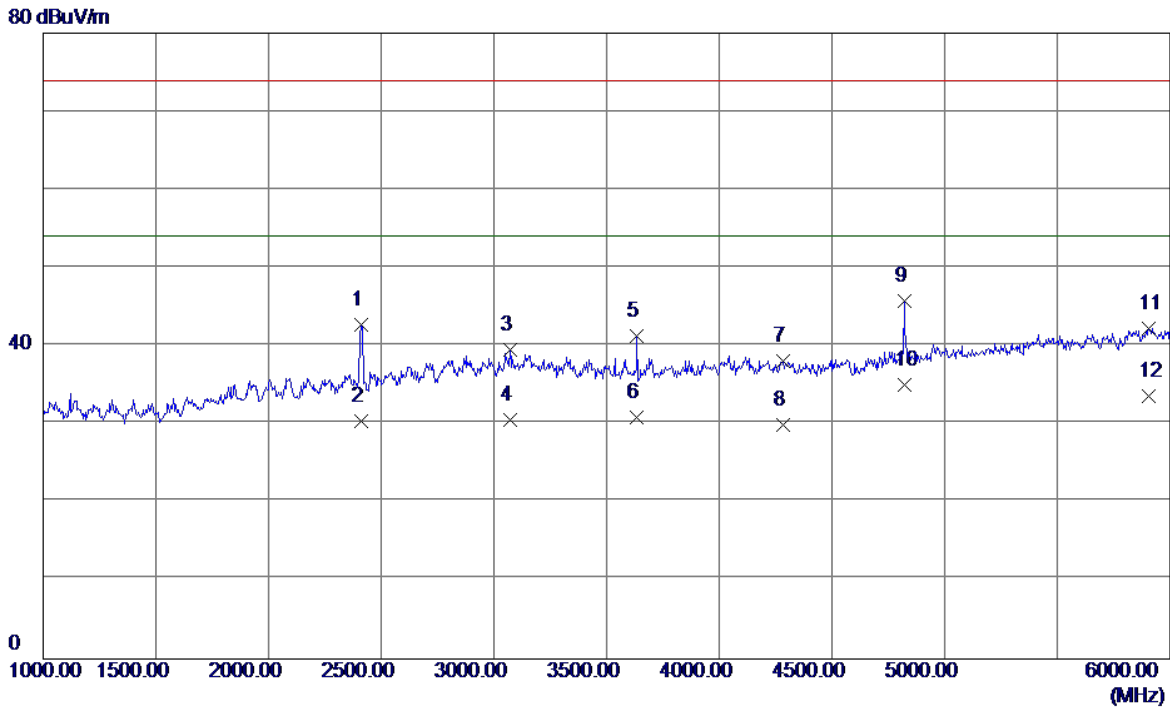


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2412.5000	44.08	-1.29	42.79	74.00	-31.21	Peak
2	2412.5000	31.74	-1.29	30.45	54.00	-23.55	AVG
3	3070.0000	38.04	1.50	39.54	74.00	-34.46	Peak
4	3070.0000	28.99	1.50	30.49	54.00	-23.51	AVG
5	3635.0000	39.57	1.76	41.33	74.00	-32.67	Peak
6	3635.0000	29.16	1.76	30.92	54.00	-23.08	AVG
7	4282.5000	34.90	3.25	38.15	74.00	-35.85	Peak
8	4282.5000	26.61	3.25	29.86	54.00	-24.14	AVG
9	4822.5000	40.87	4.85	45.72	74.00	-28.28	Peak
10 *	4822.5000	30.21	4.85	35.06	54.00	-18.94	AVG
11	5907.5000	33.53	8.66	42.19	74.00	-31.81	Peak
12	5907.5000	24.91	8.66	33.57	54.00	-20.43	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

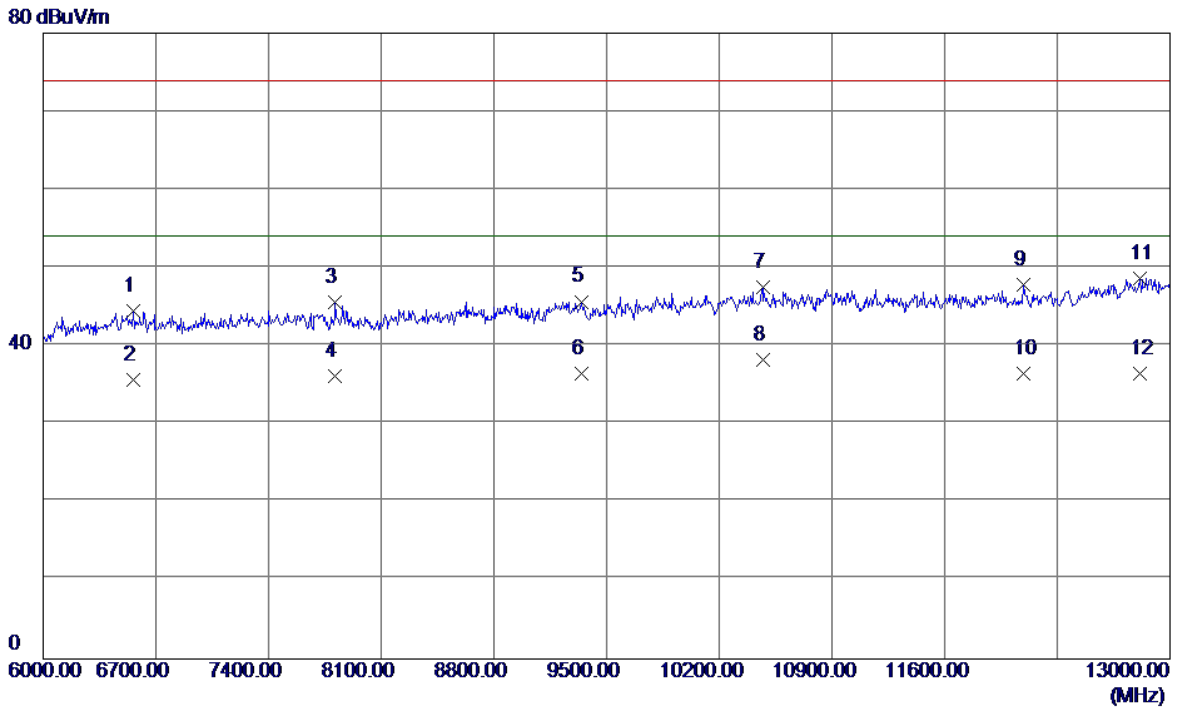


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6560.0000	33.54	10.89	44.43	74.00	-29.57	Peak
2	6560.0000	24.87	10.89	35.76	54.00	-18.24	AVG
3	7813.0000	33.85	11.73	45.58	74.00	-28.42	Peak
4	7813.0000	24.46	11.73	36.19	54.00	-17.81	AVG
5	9346.0000	32.42	13.26	45.68	74.00	-28.32	Peak
6	9346.0000	23.20	13.26	36.46	54.00	-17.54	AVG
7	10469.5000	32.26	15.22	47.48	74.00	-26.52	Peak
8 *	10469.5000	22.97	15.22	38.19	54.00	-15.81	AVG
9	12093.5000	32.16	15.67	47.83	74.00	-26.17	Peak
10	12093.5000	20.84	15.67	36.51	54.00	-17.49	AVG
11	12814.5000	31.15	17.52	48.67	74.00	-25.33	Peak
12	12814.5000	18.96	17.52	36.48	54.00	-17.52	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

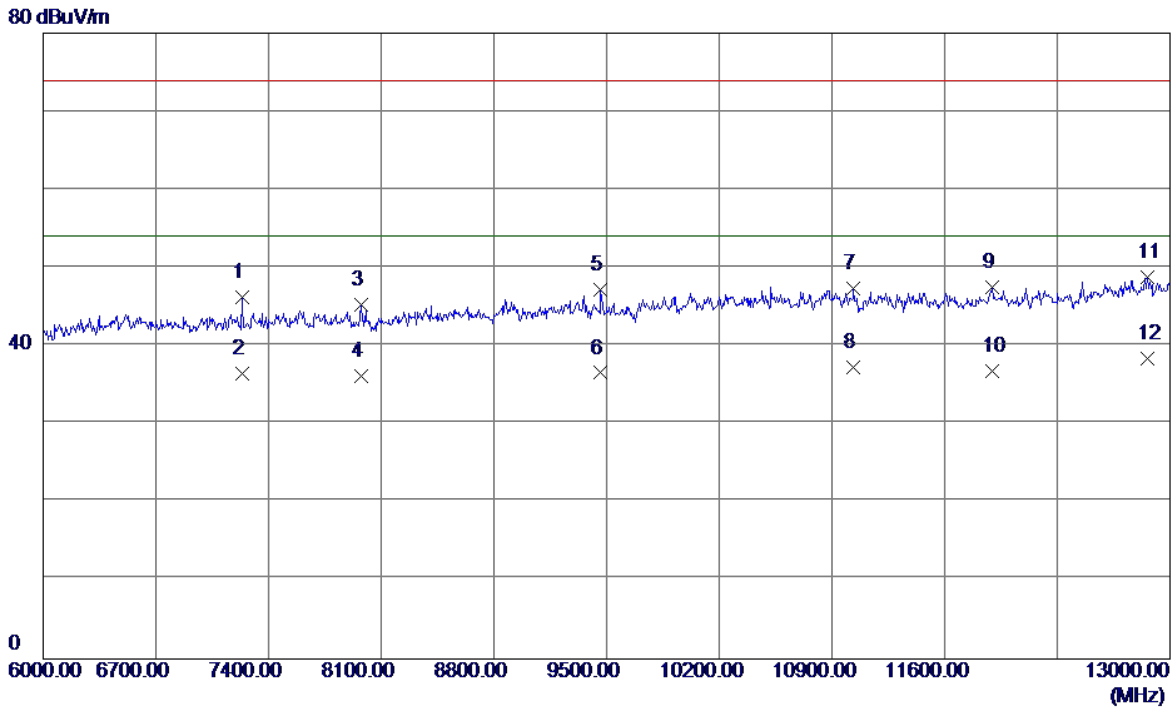


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7235.5000	35.04	11.22	46.26	74.00	-27.74	Peak
2	7235.5000	25.24	11.22	36.46	54.00	-17.54	AVG
3	7974.0000	33.54	11.72	45.26	74.00	-28.74	Peak
4	7974.0000	24.46	11.72	36.18	54.00	-17.82	AVG
5	9465.0000	34.03	13.22	47.25	74.00	-26.75	Peak
6	9465.0000	23.34	13.22	36.56	54.00	-17.44	AVG
7	11033.0000	31.39	15.90	47.29	74.00	-26.71	Peak
8	11033.0000	21.35	15.90	37.25	54.00	-16.75	AVG
9	11894.0000	32.06	15.48	47.54	74.00	-26.46	Peak
10	11894.0000	21.27	15.48	36.75	54.00	-17.25	AVG
11	12863.5000	31.13	17.68	48.81	74.00	-25.19	Peak
12 *	12863.5000	20.73	17.68	38.41	54.00	-15.59	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

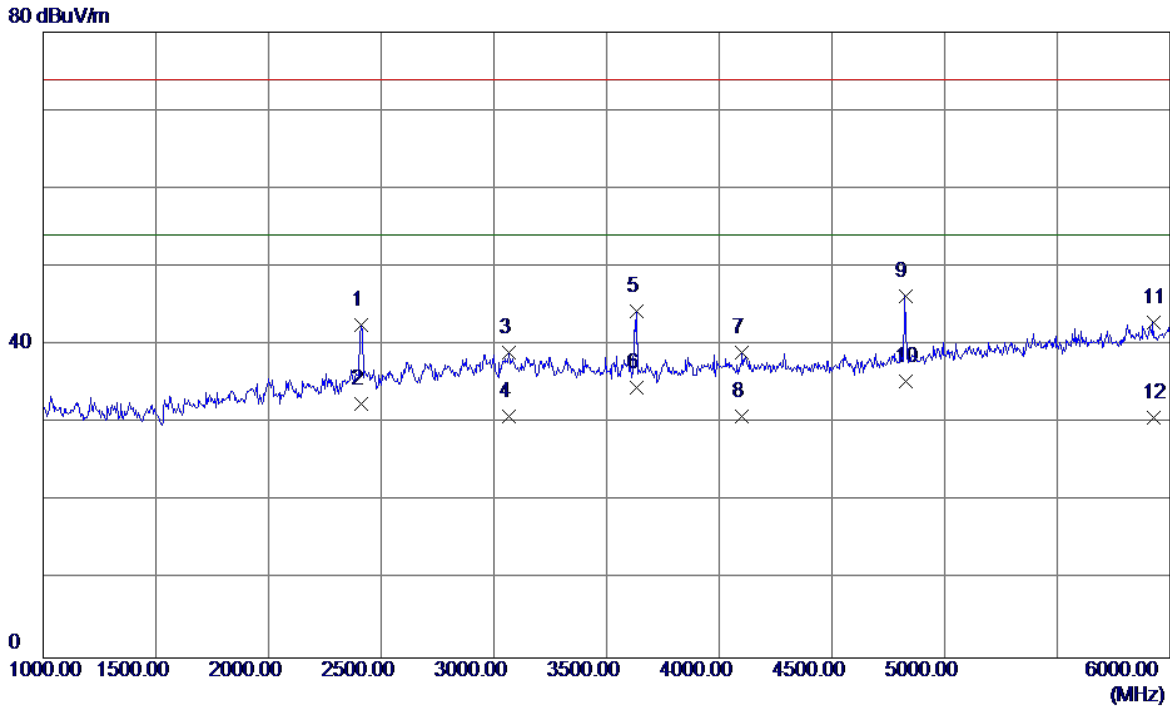


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2412.5000	43.86	-1.29	42.57	74.00	-31.43	Peak
2	2412.5000	33.75	-1.29	32.46	54.00	-21.54	AVG
3	3065.0000	37.51	1.50	39.01	74.00	-34.99	Peak
4	3065.0000	29.42	1.50	30.92	54.00	-23.08	AVG
5	3635.0000	42.54	1.76	44.30	74.00	-29.70	Peak
6	3635.0000	32.75	1.76	34.51	54.00	-19.49	AVG
7	4100.0000	36.02	3.06	39.08	74.00	-34.92	Peak
8	4100.0000	27.75	3.06	30.81	54.00	-23.19	AVG
9	4825.0000	41.44	4.86	46.30	74.00	-27.70	Peak
10 *	4825.0000	30.43	4.86	35.29	54.00	-18.71	AVG
11	5925.0000	34.17	8.73	42.90	74.00	-31.10	Peak
12	5925.0000	22.02	8.73	30.75	54.00	-23.25	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

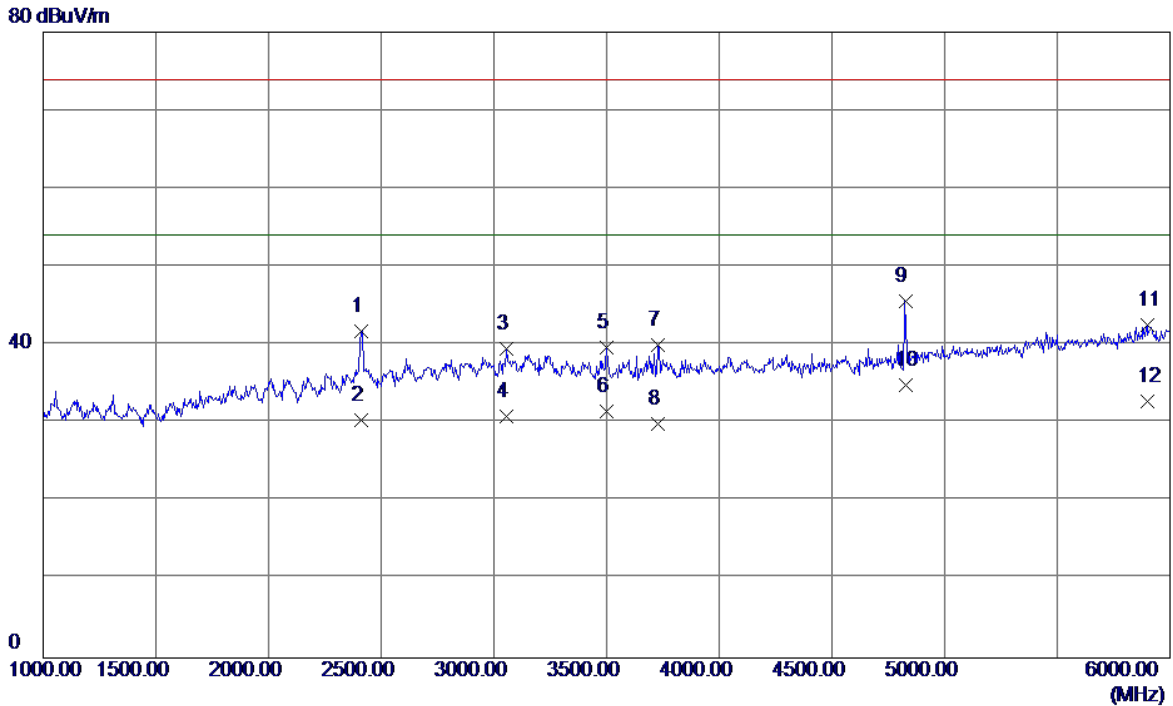


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2412.5000	43.02	-1.29	41.73	74.00	-32.27	Peak
2	2412.5000	31.75	-1.29	30.46	54.00	-23.54	AVG
3	3055.0000	38.02	1.51	39.53	74.00	-34.47	Peak
4	3055.0000	29.41	1.51	30.92	54.00	-23.08	AVG
5	3500.0000	38.32	1.32	39.64	74.00	-34.36	Peak
6	3500.0000	30.22	1.32	31.54	54.00	-22.46	AVG
7	3730.0000	37.97	2.07	40.04	74.00	-33.96	Peak
8	3730.0000	27.84	2.07	29.91	54.00	-24.09	AVG
9	4825.0000	40.81	4.86	45.67	74.00	-28.33	Peak
10 *	4825.0000	29.96	4.86	34.82	54.00	-19.18	AVG
11	5897.5000	33.94	8.63	42.57	74.00	-31.43	Peak
12	5897.5000	24.10	8.63	32.73	54.00	-21.27	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

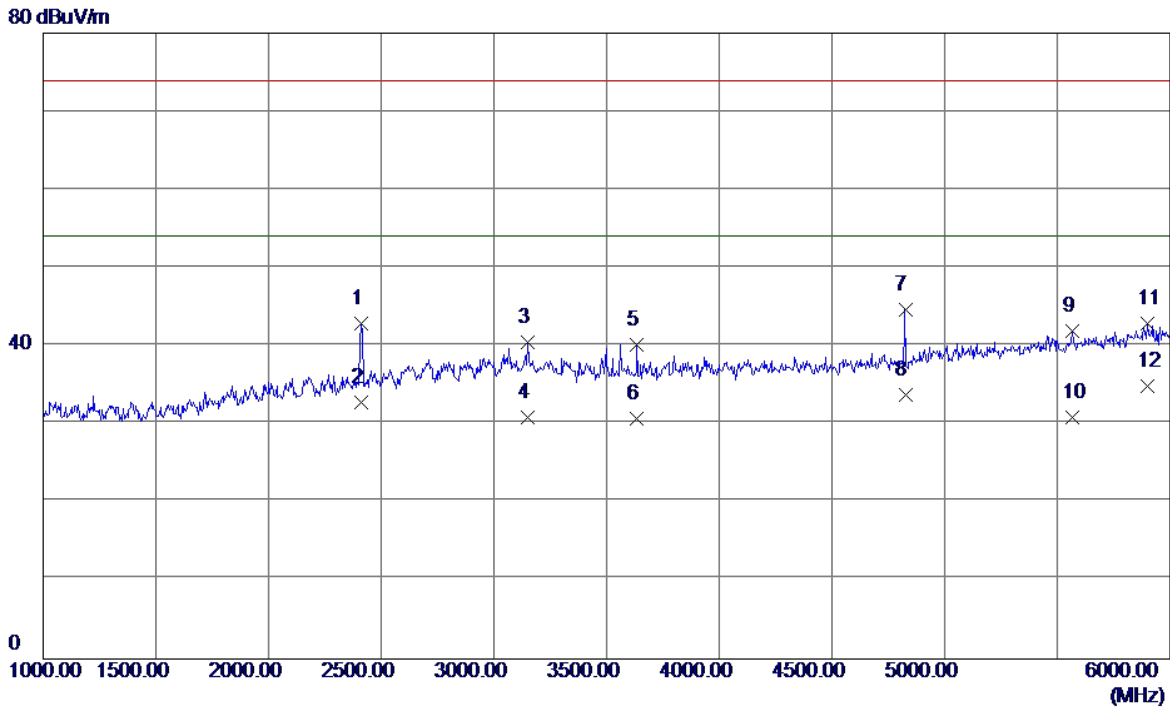


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2410.0000	44.17	-1.30	42.87	74.00	-31.13	Peak
2	2410.0000	34.06	-1.30	32.76	54.00	-21.24	AVG
3	3152.5000	39.00	1.46	40.46	74.00	-33.54	Peak
4	3152.5000	29.48	1.46	30.94	54.00	-23.06	AVG
5	3635.0000	38.42	1.76	40.18	74.00	-33.82	Peak
6	3635.0000	28.96	1.76	30.72	54.00	-23.28	AVG
7	4825.0000	39.85	4.86	44.71	74.00	-29.29	Peak
8	4825.0000	28.86	4.86	33.72	54.00	-20.28	AVG
9	5565.0000	34.43	7.46	41.89	74.00	-32.11	Peak
10	5565.0000	23.38	7.46	30.84	54.00	-23.16	AVG
11	5900.0000	34.24	8.64	42.88	74.00	-31.12	Peak
12 *	5900.0000	26.17	8.64	34.81	54.00	-19.19	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

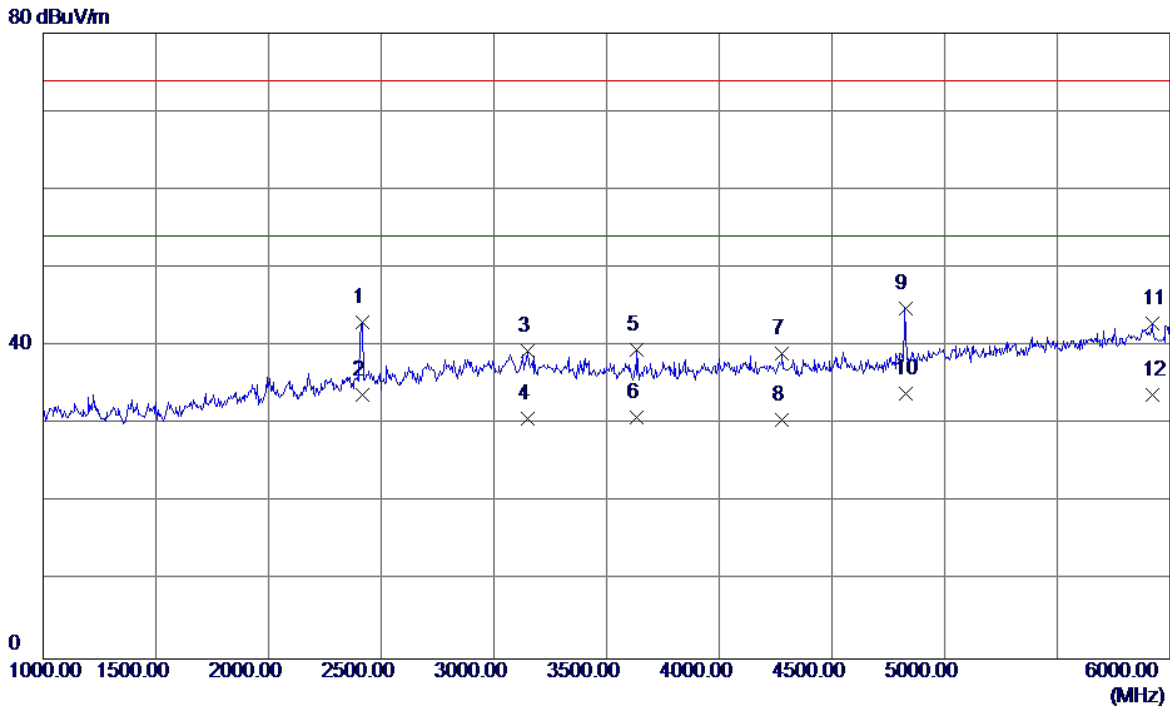


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	44.36	-1.28	43.08	74.00	-30.92	Peak
2	2415.0000	35.00	-1.28	33.72	54.00	-20.28	AVG
3	3150.0000	37.96	1.47	39.43	74.00	-34.57	Peak
4	3150.0000	29.29	1.47	30.76	54.00	-23.24	AVG
5	3635.0000	37.79	1.76	39.55	74.00	-34.45	Peak
6	3635.0000	29.15	1.76	30.91	54.00	-23.09	AVG
7	4280.0000	35.83	3.25	39.08	74.00	-34.92	Peak
8	4280.0000	27.29	3.25	30.54	54.00	-23.46	AVG
9	4825.0000	39.97	4.86	44.83	74.00	-29.17	Peak
10 *	4825.0000	29.02	4.86	33.88	54.00	-20.12	AVG
11	5922.5000	34.19	8.72	42.91	74.00	-31.09	Peak
12	5922.5000	25.00	8.72	33.72	54.00	-20.28	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

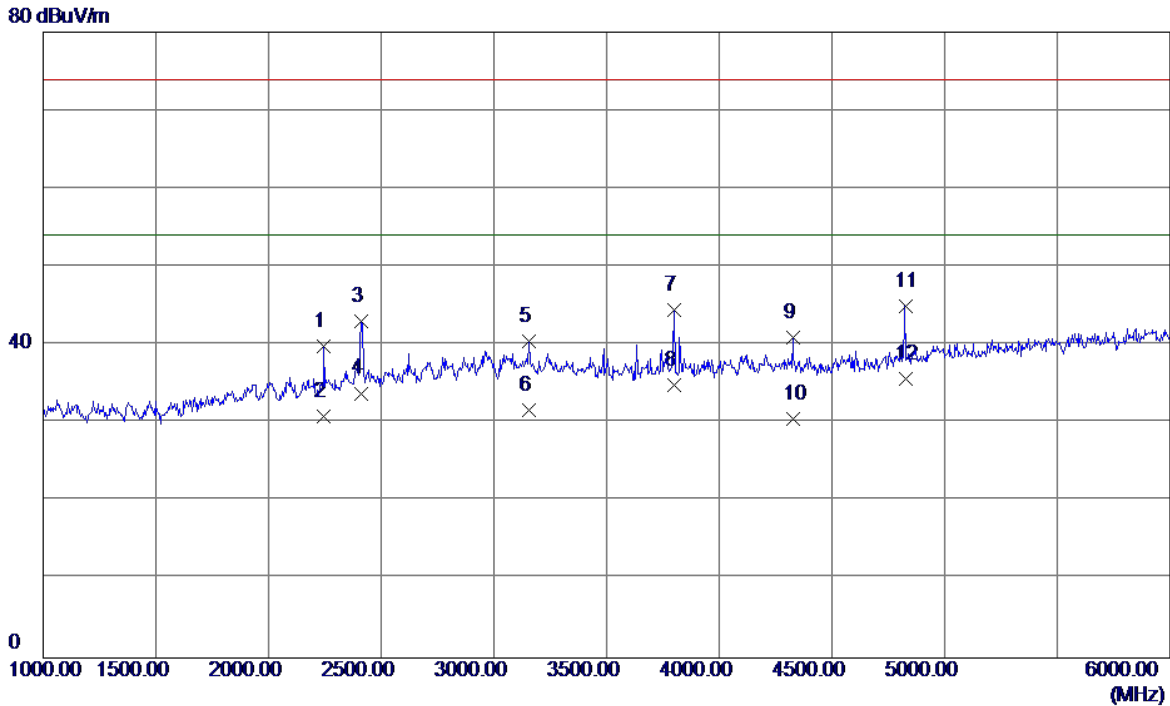


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2245.0000	41.82	-1.91	39.91	74.00	-34.09	Peak
2	2245.0000	32.75	-1.91	30.84	54.00	-23.16	AVG
3	2412.5000	44.32	-1.29	43.03	74.00	-30.97	Peak
4	2412.5000	35.13	-1.29	33.84	54.00	-20.16	AVG
5	3157.5000	38.96	1.46	40.42	74.00	-33.58	Peak
6	3157.5000	30.28	1.46	31.74	54.00	-22.26	AVG
7	3800.0000	42.16	2.30	44.46	74.00	-29.54	Peak
8	3800.0000	32.54	2.30	34.84	54.00	-19.16	AVG
9	4327.5000	37.65	3.30	40.95	74.00	-33.05	Peak
10	4327.5000	27.21	3.30	30.51	54.00	-23.49	AVG
11	4825.0000	40.03	4.86	44.89	74.00	-29.11	Peak
12 *	4825.0000	30.85	4.86	35.71	54.00	-18.29	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

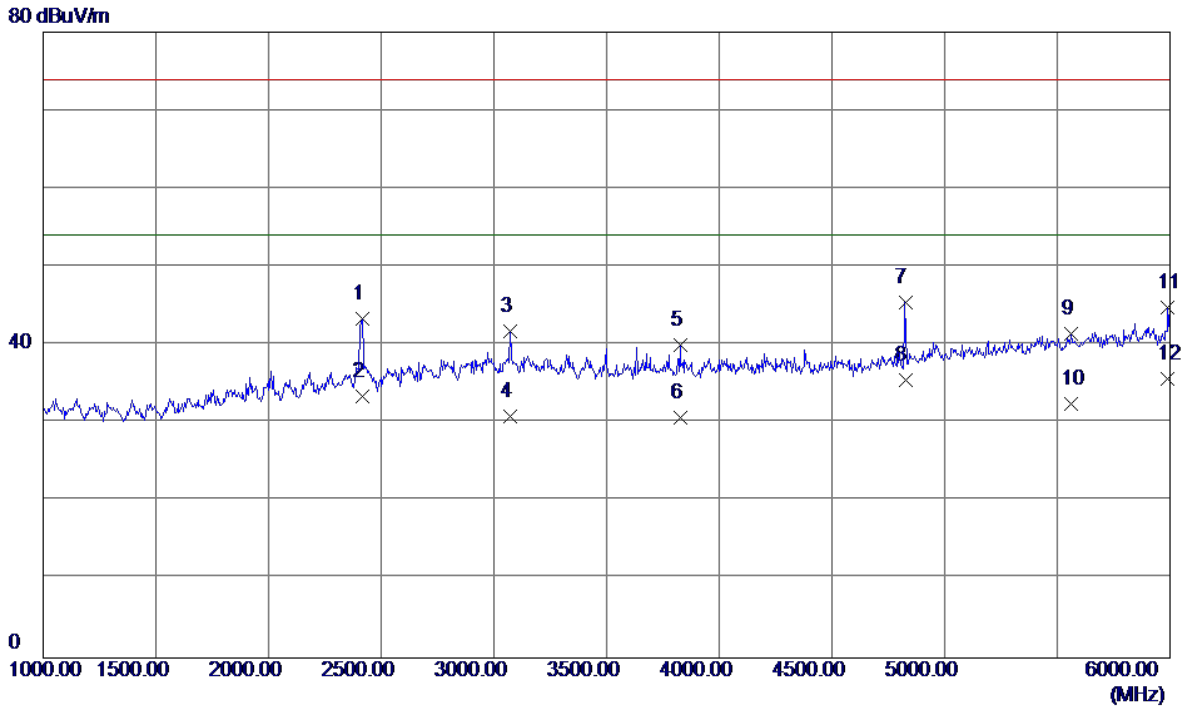


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	44.67	-1.28	43.39	74.00	-30.61	Peak
2	2415.0000	34.73	-1.28	33.45	54.00	-20.55	AVG
3	3070.0000	40.33	1.50	41.83	74.00	-32.17	Peak
4	3070.0000	29.34	1.50	30.84	54.00	-23.16	AVG
5	3827.5000	37.62	2.39	40.01	74.00	-33.99	Peak
6	3827.5000	28.36	2.39	30.75	54.00	-23.25	AVG
7	4825.0000	40.55	4.86	45.41	74.00	-28.59	Peak
8	4825.0000	30.70	4.86	35.56	54.00	-18.44	AVG
9	5562.5000	33.98	7.45	41.43	74.00	-32.57	Peak
10	5562.5000	24.97	7.45	32.42	54.00	-21.58	AVG
11	5990.0000	35.92	8.95	44.87	74.00	-29.13	Peak
12 *	5990.0000	26.76	8.95	35.71	54.00	-18.29	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

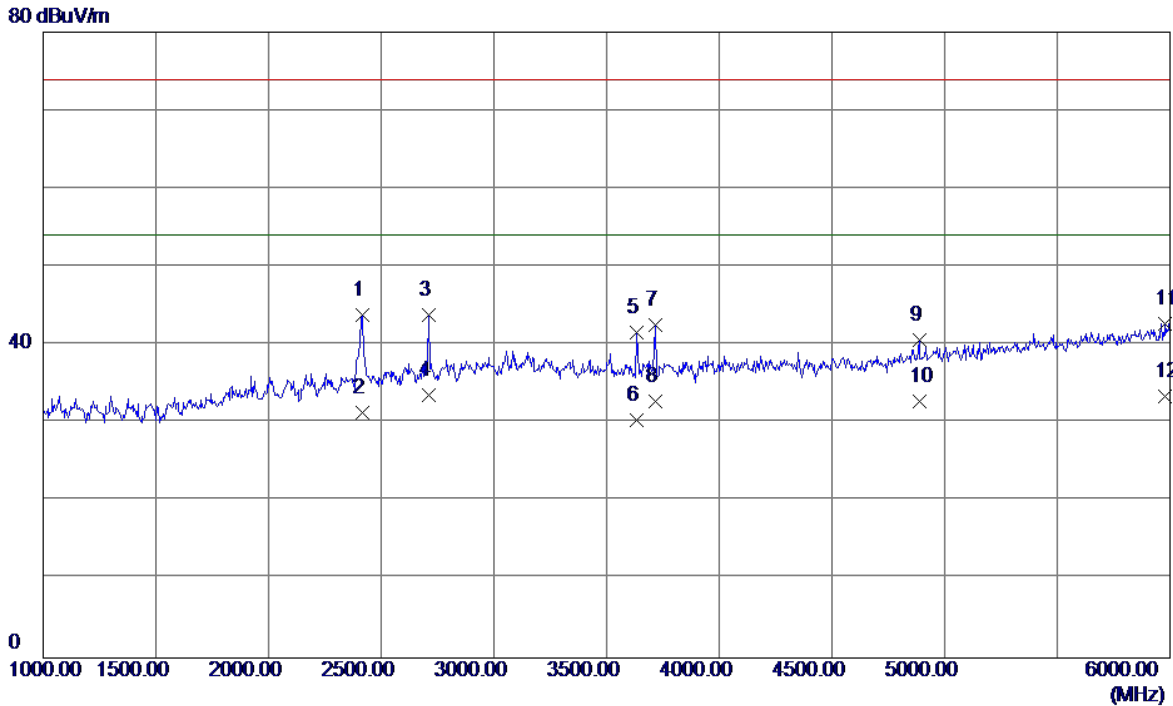

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	45.11	-1.28	43.83	74.00	-30.17	Peak
2	2415.0000	32.71	-1.28	31.43	54.00	-22.57	AVG
3	2710.0000	43.83	0.08	43.91	74.00	-30.09	Peak
4 *	2710.0000	33.53	0.08	33.61	54.00	-20.39	AVG
5	3635.0000	39.80	1.76	41.56	74.00	-32.44	Peak
6	3635.0000	28.70	1.76	30.46	54.00	-23.54	AVG
7	3715.0000	40.48	2.02	42.50	74.00	-31.50	Peak
8	3715.0000	30.72	2.02	32.74	54.00	-21.26	AVG
9	4887.5000	35.49	5.12	40.61	74.00	-33.39	Peak
10	4887.5000	27.64	5.12	32.76	54.00	-21.24	AVG
11	5980.0000	33.75	8.92	42.67	74.00	-31.33	Peak
12	5980.0000	24.54	8.92	33.46	54.00	-20.54	AVG

EUT	Smart phone	Model Name	PRA-LX3
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:BYD(5V1A)+USB Cable:PANG NGAI+Battery:DESAY		
Test Engineer	Kevin Li		

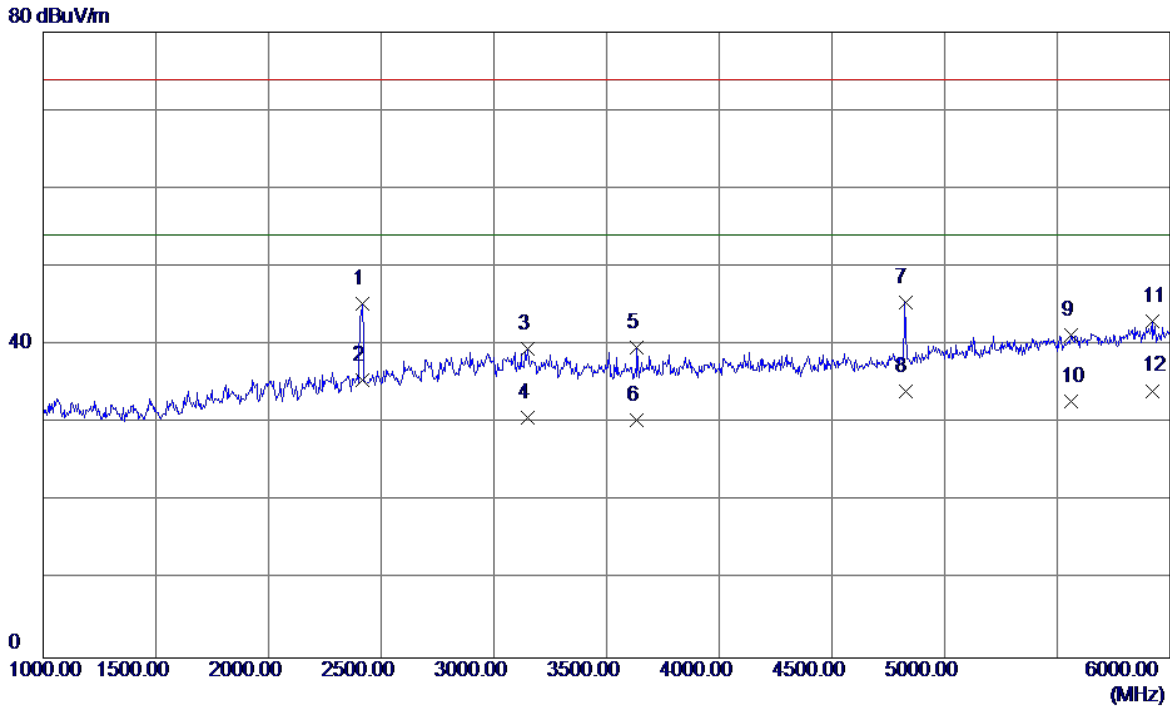

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	46.50	-1.28	45.22	74.00	-28.78	Peak
2 *	2415.0000	36.74	-1.28	35.46	54.00	-18.54	AVG
3	3152.5000	38.06	1.46	39.52	74.00	-34.48	Peak
4	3152.5000	29.30	1.46	30.76	54.00	-23.24	AVG
5	3635.0000	37.96	1.76	39.72	74.00	-34.28	Peak
6	3635.0000	28.70	1.76	30.46	54.00	-23.54	AVG
7	4825.0000	40.62	4.86	45.48	74.00	-28.52	Peak
8	4825.0000	29.15	4.86	34.01	54.00	-19.99	AVG
9	5562.5000	33.84	7.45	41.29	74.00	-32.71	Peak
10	5562.5000	25.31	7.45	32.76	54.00	-21.24	AVG
11	5922.5000	34.31	8.72	43.03	74.00	-30.97	Peak
12	5922.5000	25.44	8.72	34.16	54.00	-19.84	AVG