



Appendix A: 20dB Emission Bandwidth (EBW)




1 Result Table


EUT Conf.	EBW [MHz]	Verdict
TM1_DH5_Ch0	1.018	Pass
TM1_DH5_Ch39	1.016	Pass
TM1_DH5_Ch78	1.017	Pass
TM2_2DH5_Ch0	1.333	Pass
TM2_2DH5_Ch39	1.333	Pass
TM2_2DH5_Ch78	1.333	Pass
TM3_3DH5_Ch0	1.310	Pass
TM3_3DH5_Ch39	1.317	Pass
TM3_3DH5_Ch78	1.320	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

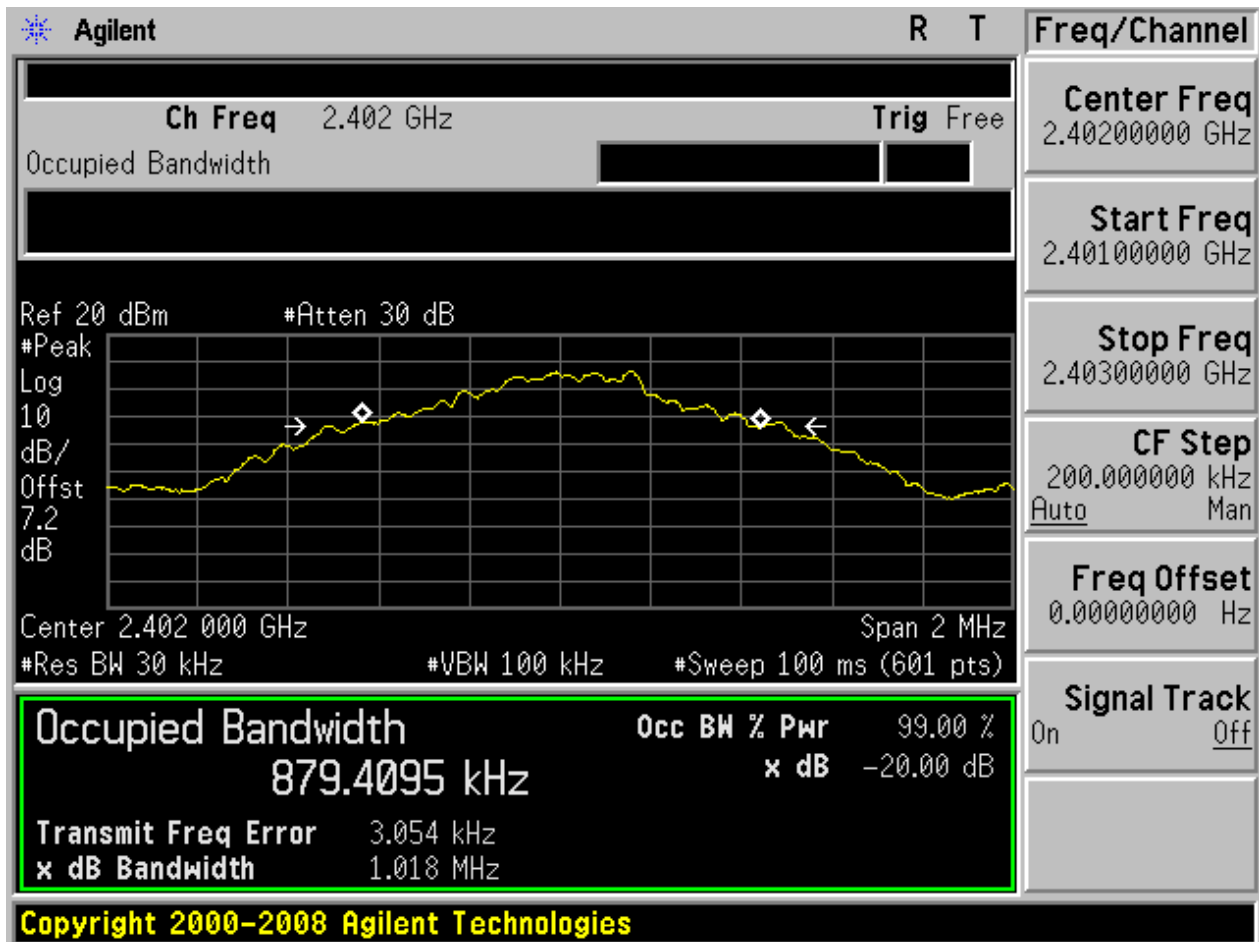


2.2 TM1_DH5_Ch39

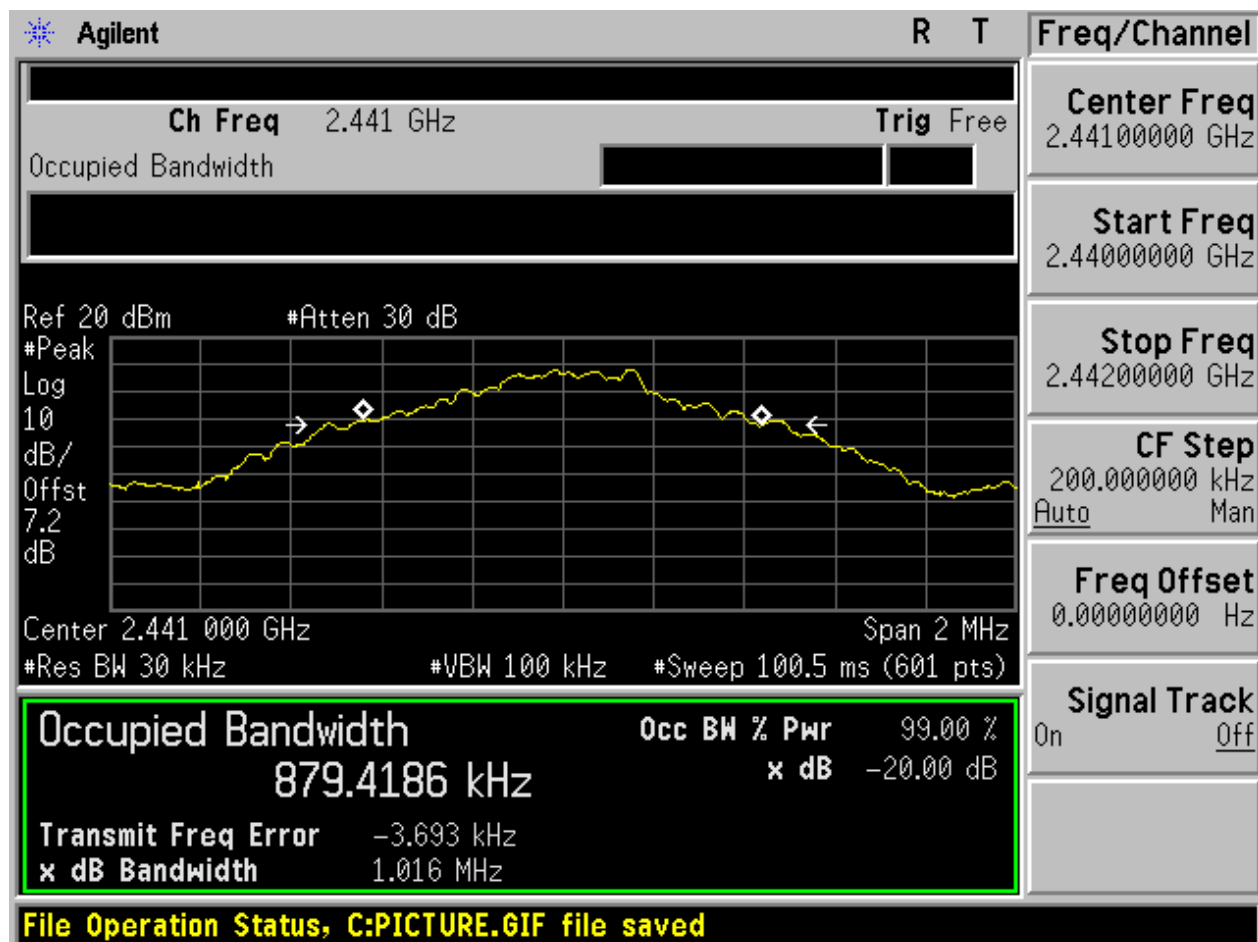


2.3 TM1_DH5_Ch78

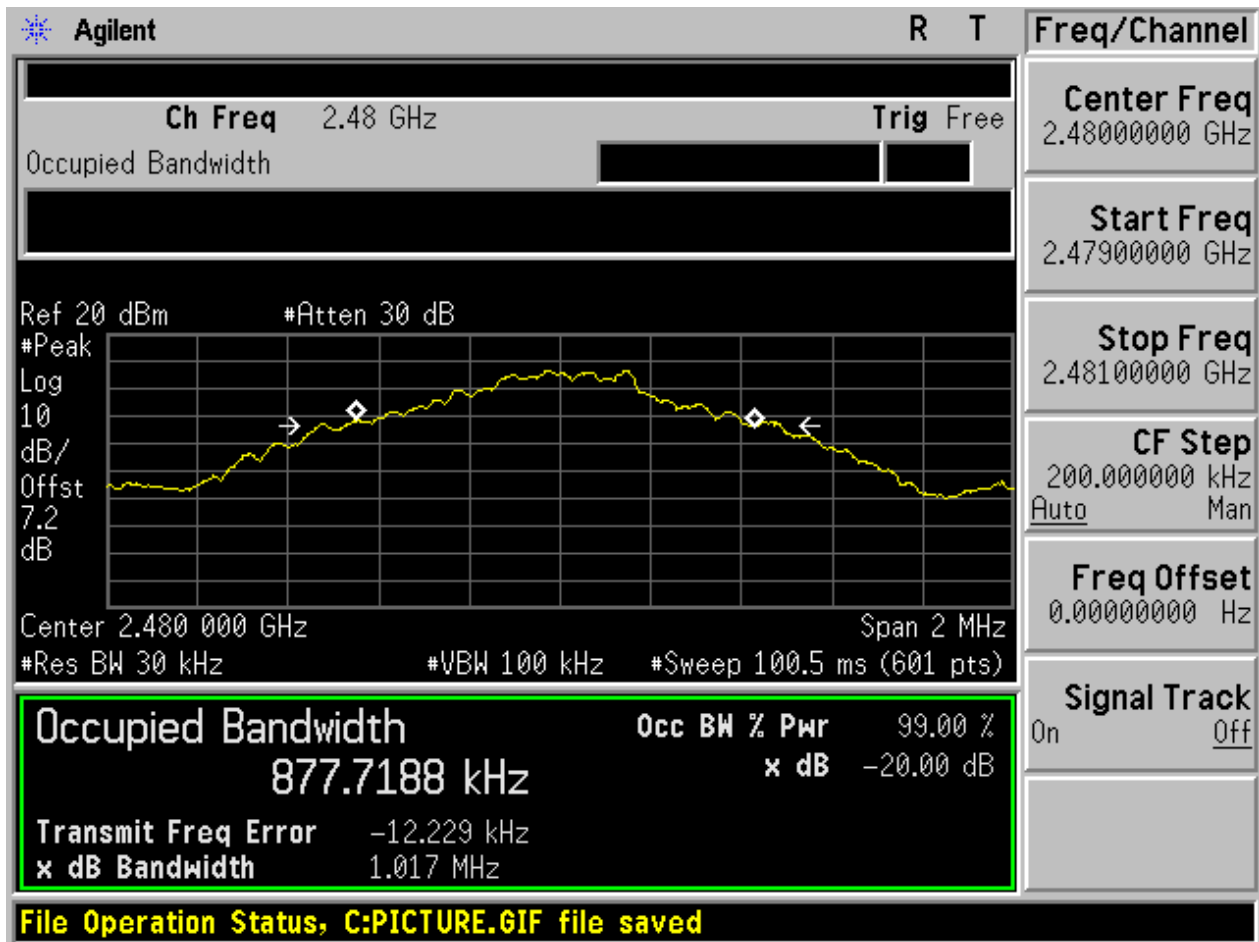


2.4 TM2_2DH5_Ch0

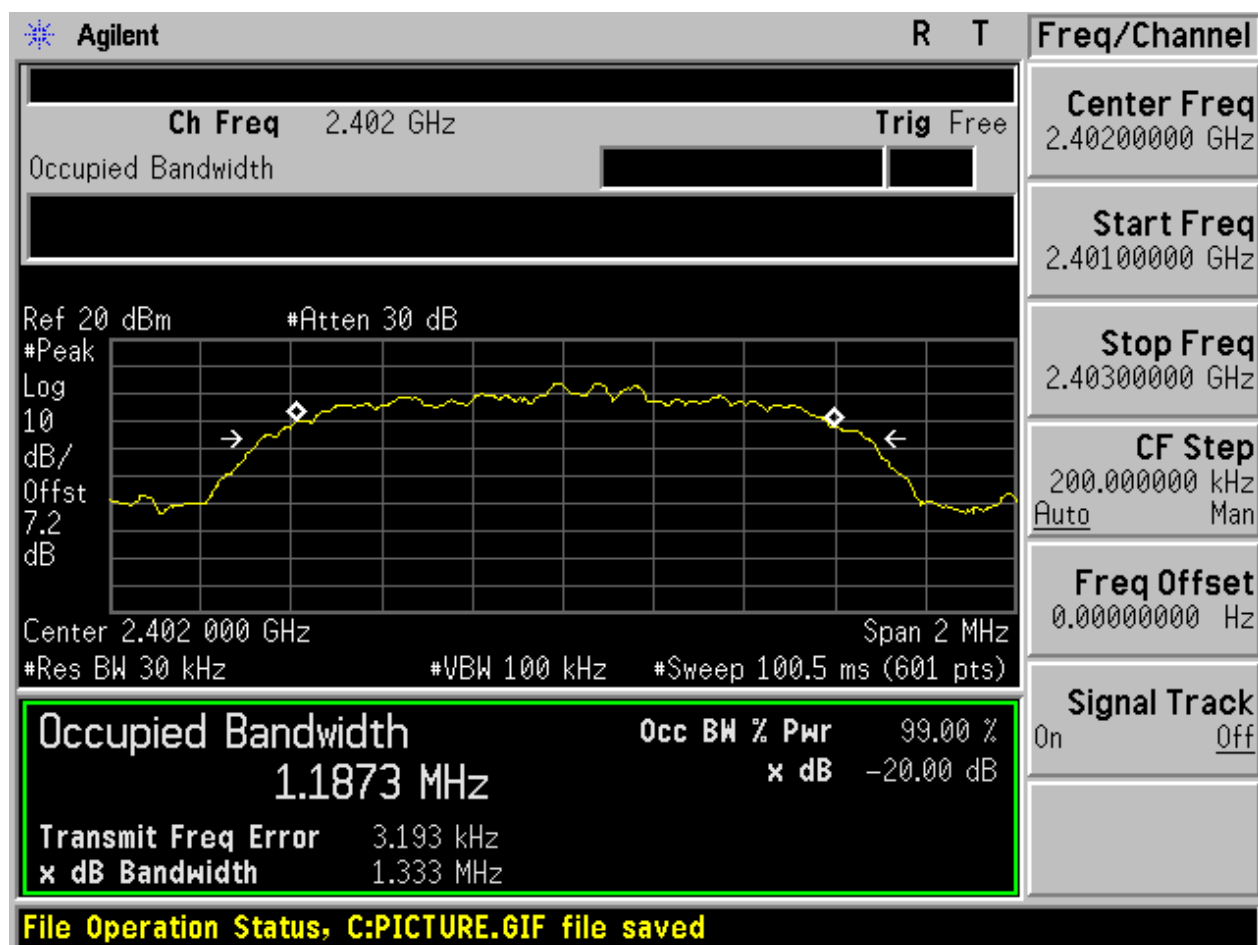


2.5 TM2_2DH5_Ch39

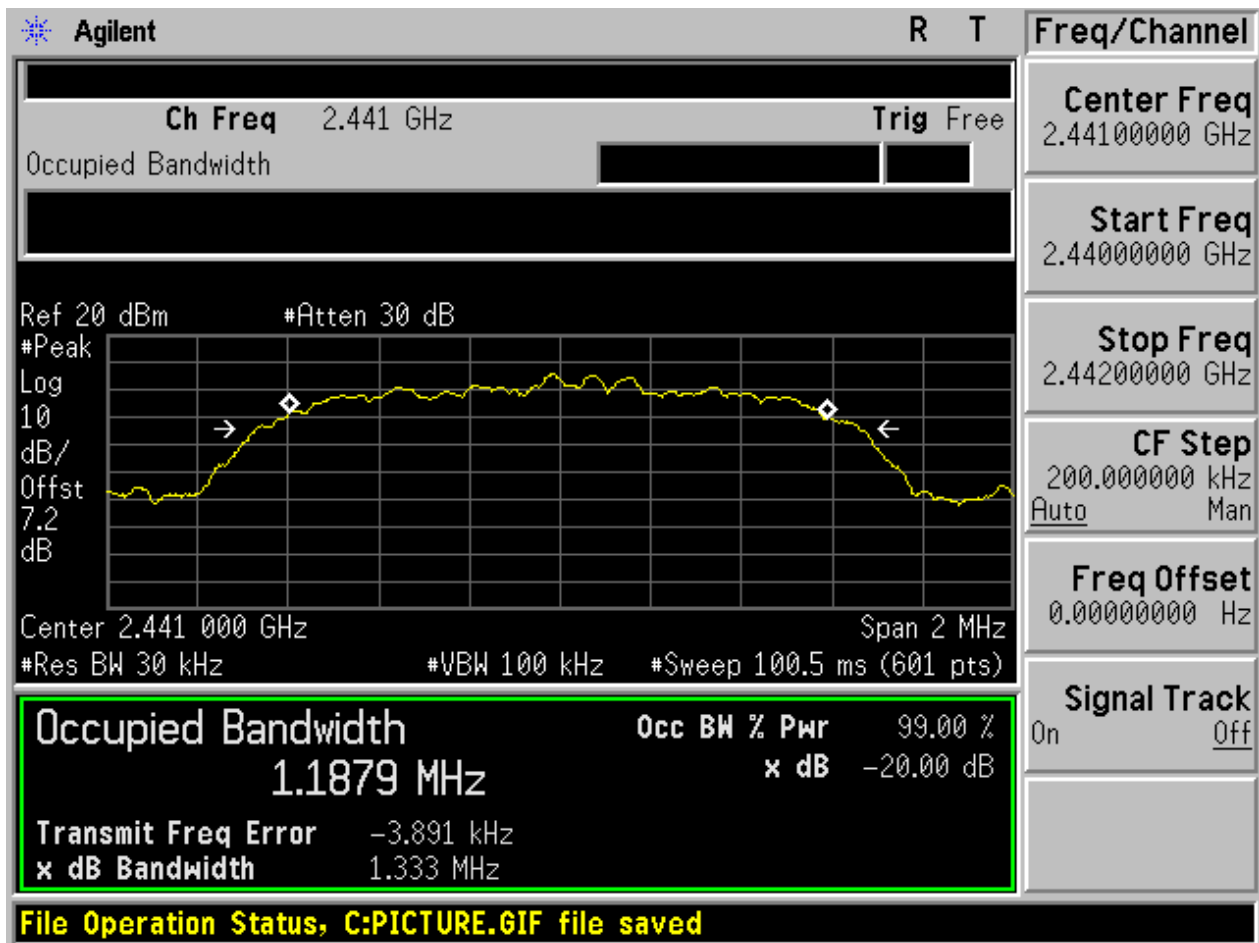


2.6 TM2_2DH5_Ch78

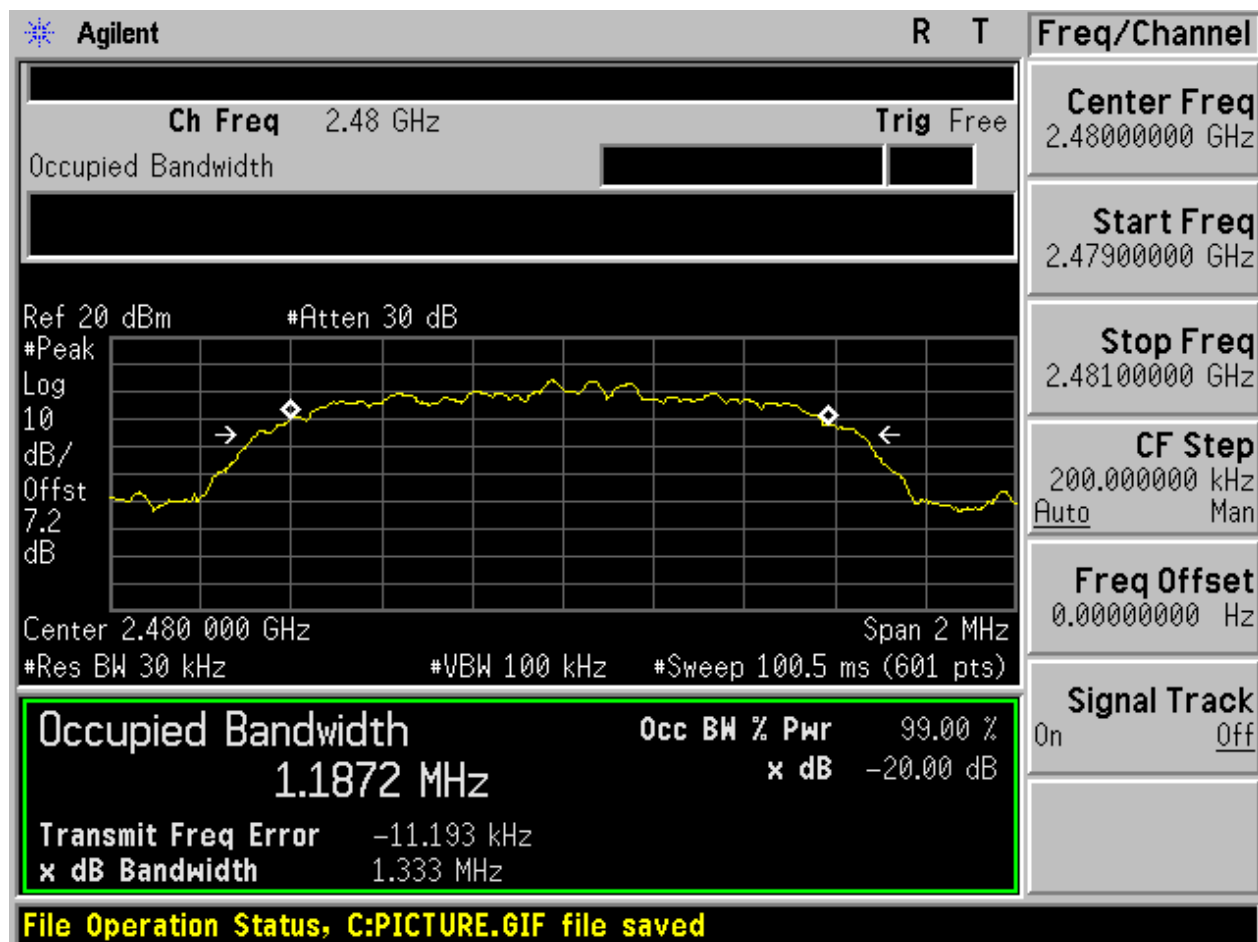


2.7 TM3_3DH5_Ch0

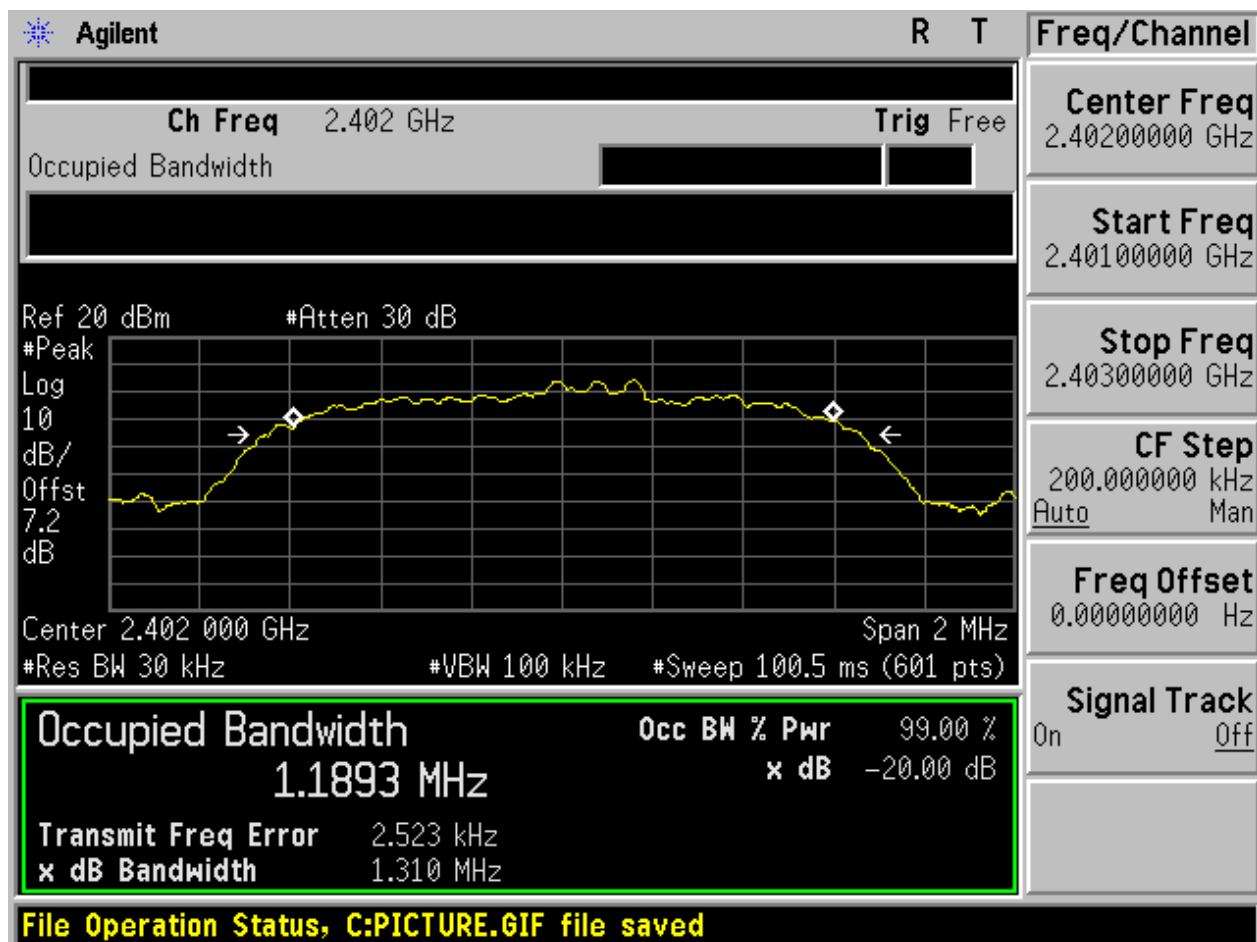

2.8 TM3_3DH5_Ch39

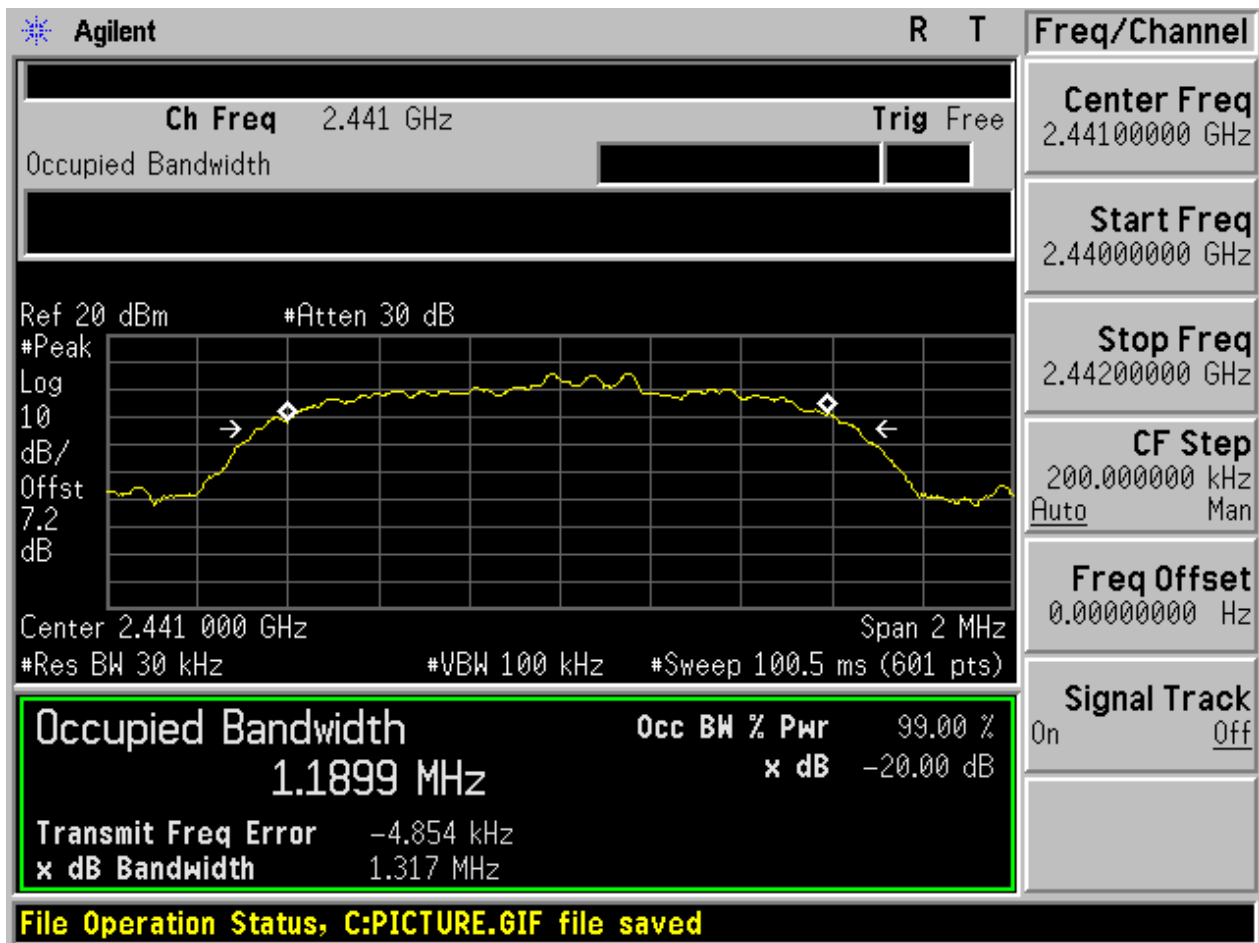

2.9 TM3_3DH5_Ch78

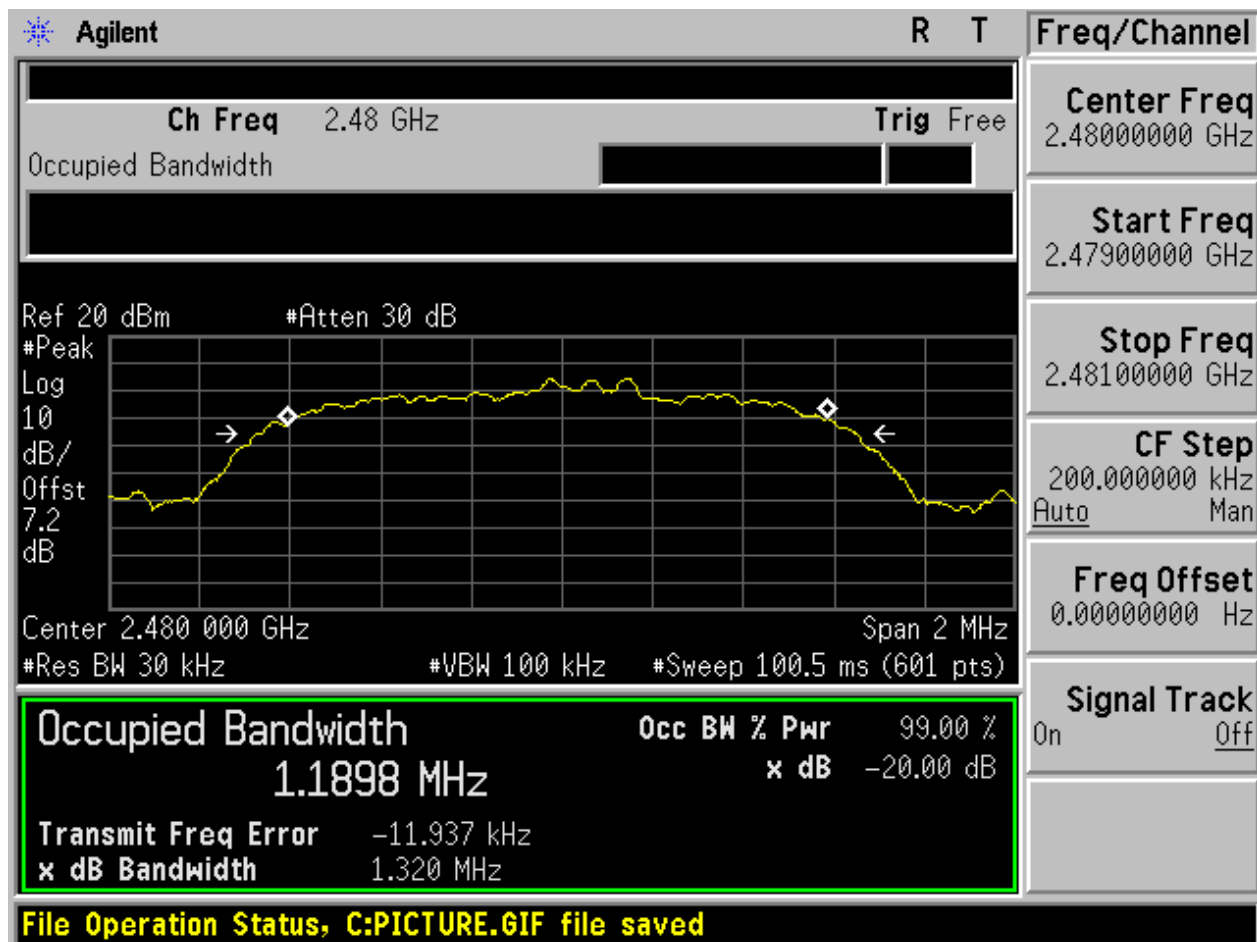



Appendix B: Carrier Frequency Separation




1 Result Table


EUT Conf.	Carrier Frequency Separation [MHz]	Verdict
TM1_DH5_Hop	0.950	Pass
TM2_2DH5_Hop	1.000	Pass
TM3_3DH5_Hop	1.400	Pass

2 Test Plot


2.1 TM1_DH5_Hop

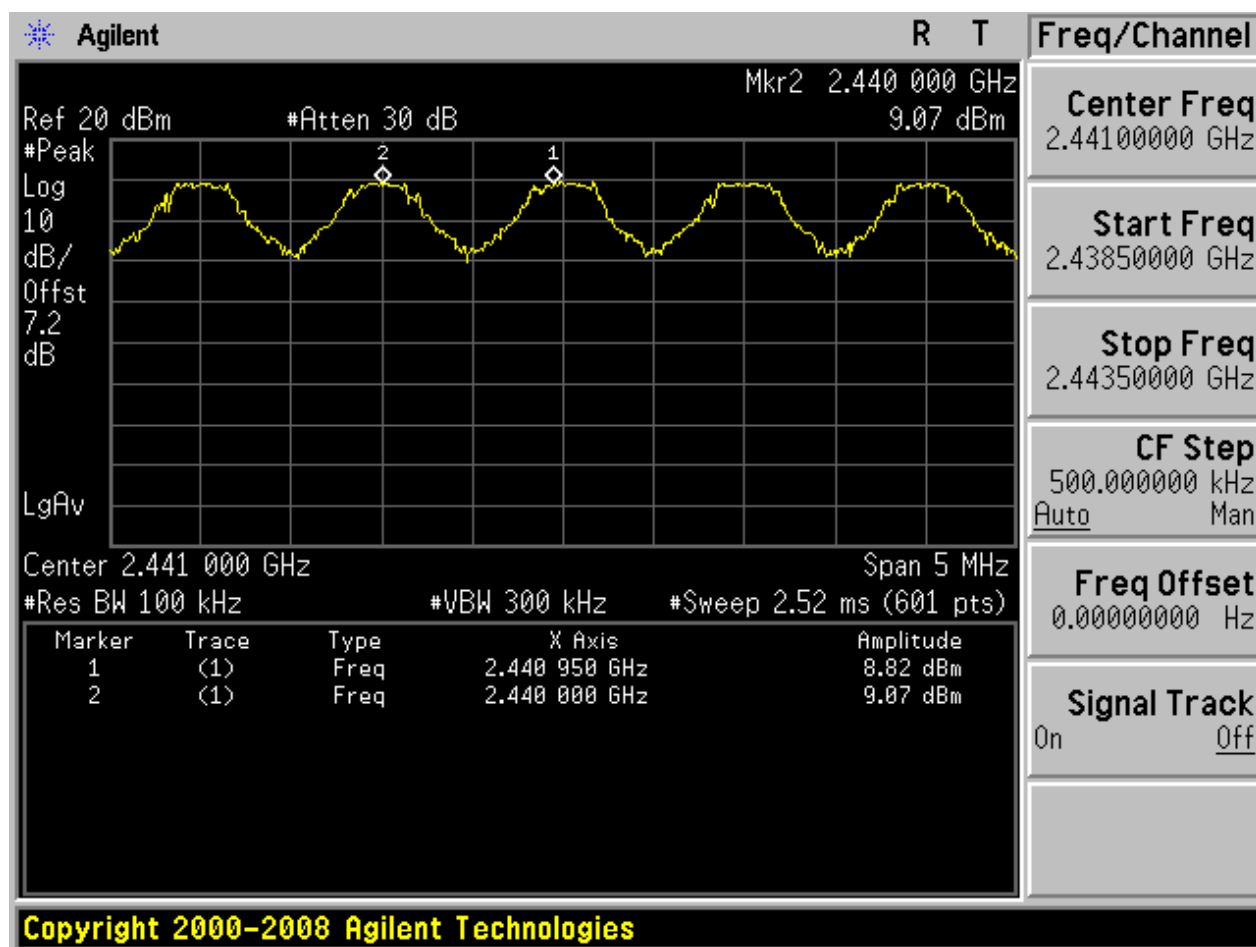

2.2 TM2_2DH5_Hop

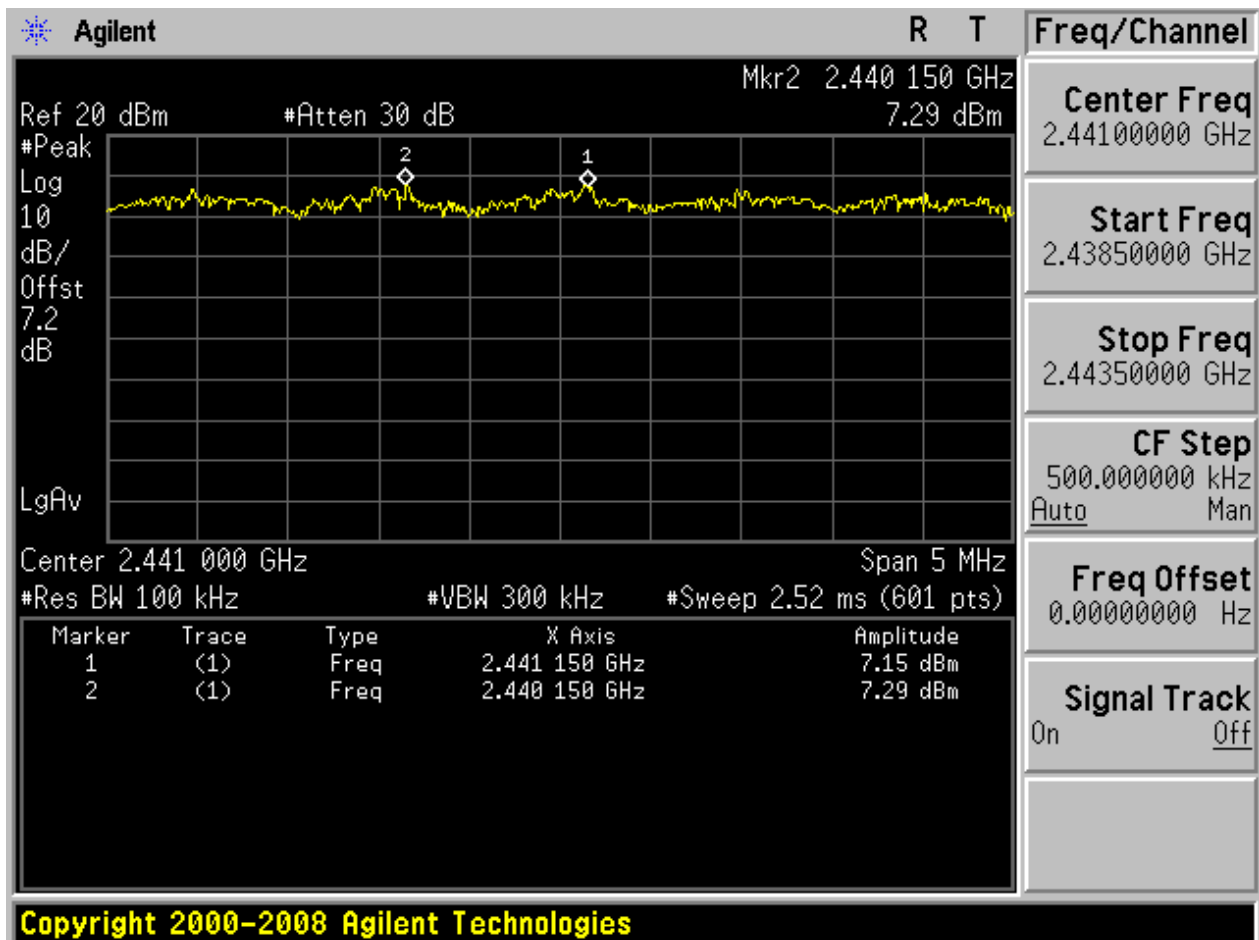

2.3 TM3_3DH5_Hop

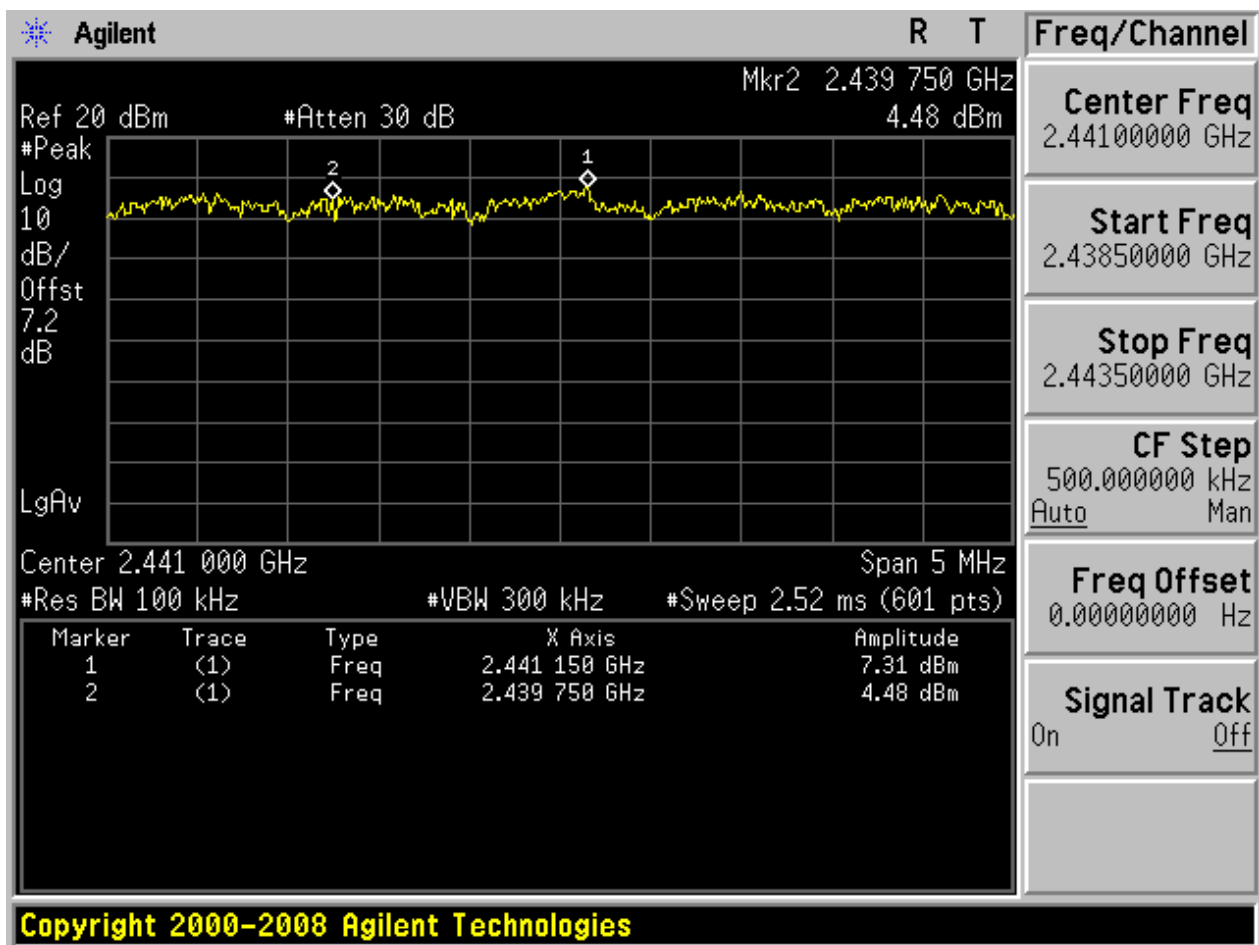



Appendix C: Number of Hopping Channel




1 Result Table


EUT Conf.	Number of Hopping Channel	Verdict
TM1_DH5_Hop	79	Pass
TM2_2DH5_Hop	79	Pass
TM3_3DH5_Hop	79	Pass

2 Test Plot


2.1 TM1_DH5_Hop

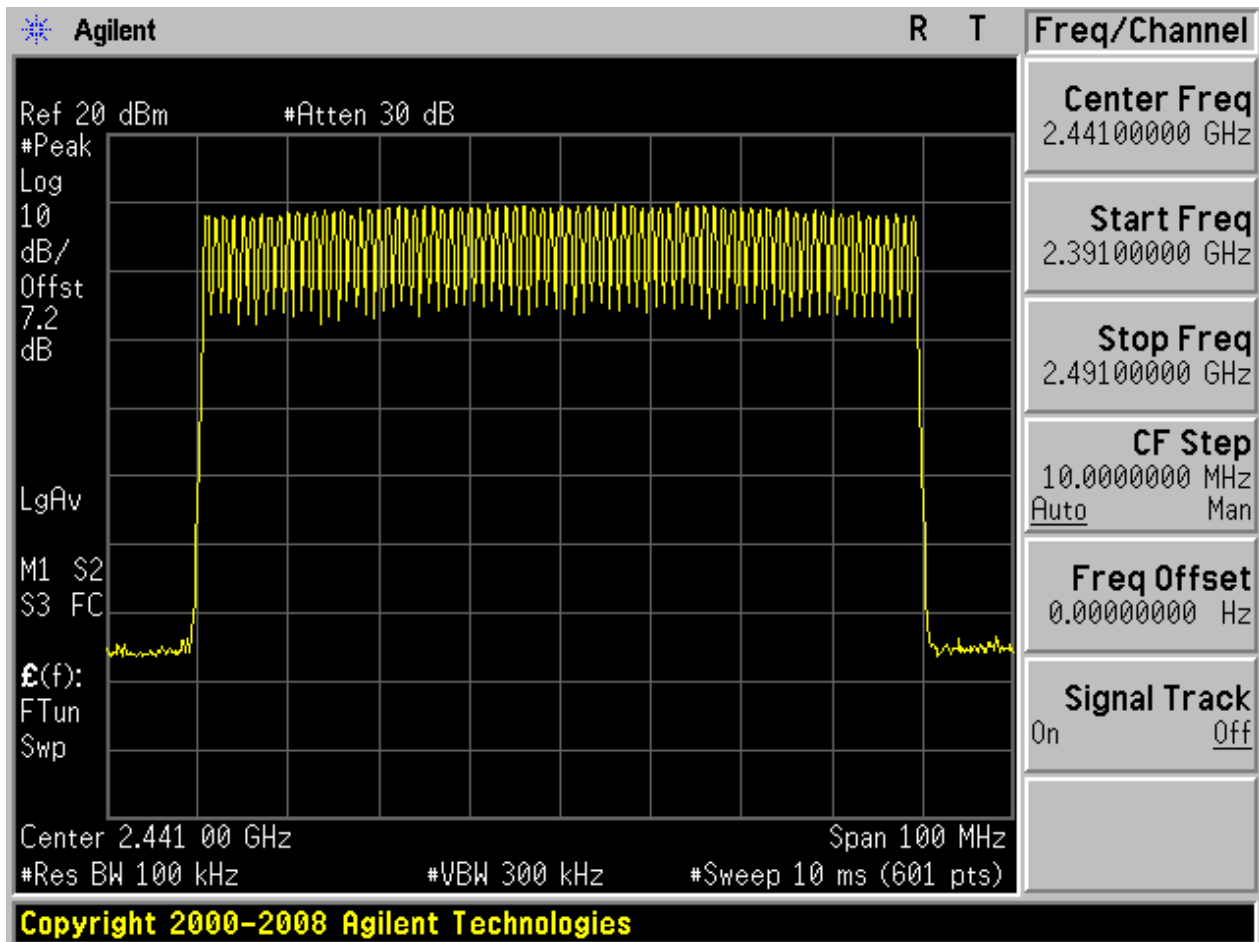

2.2 TM2_2DH5_Hop

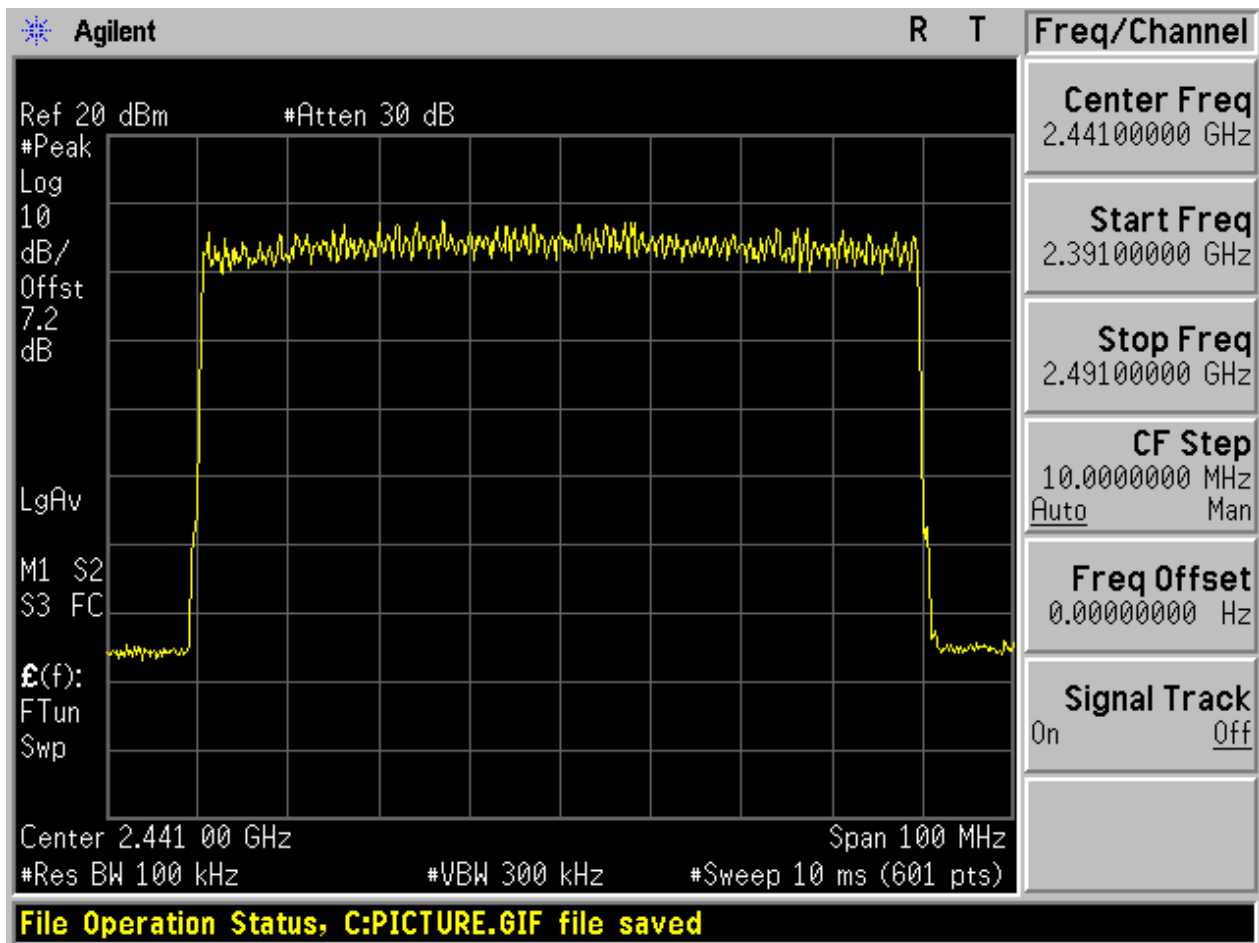

2.3 TM3_3DH5_Hop

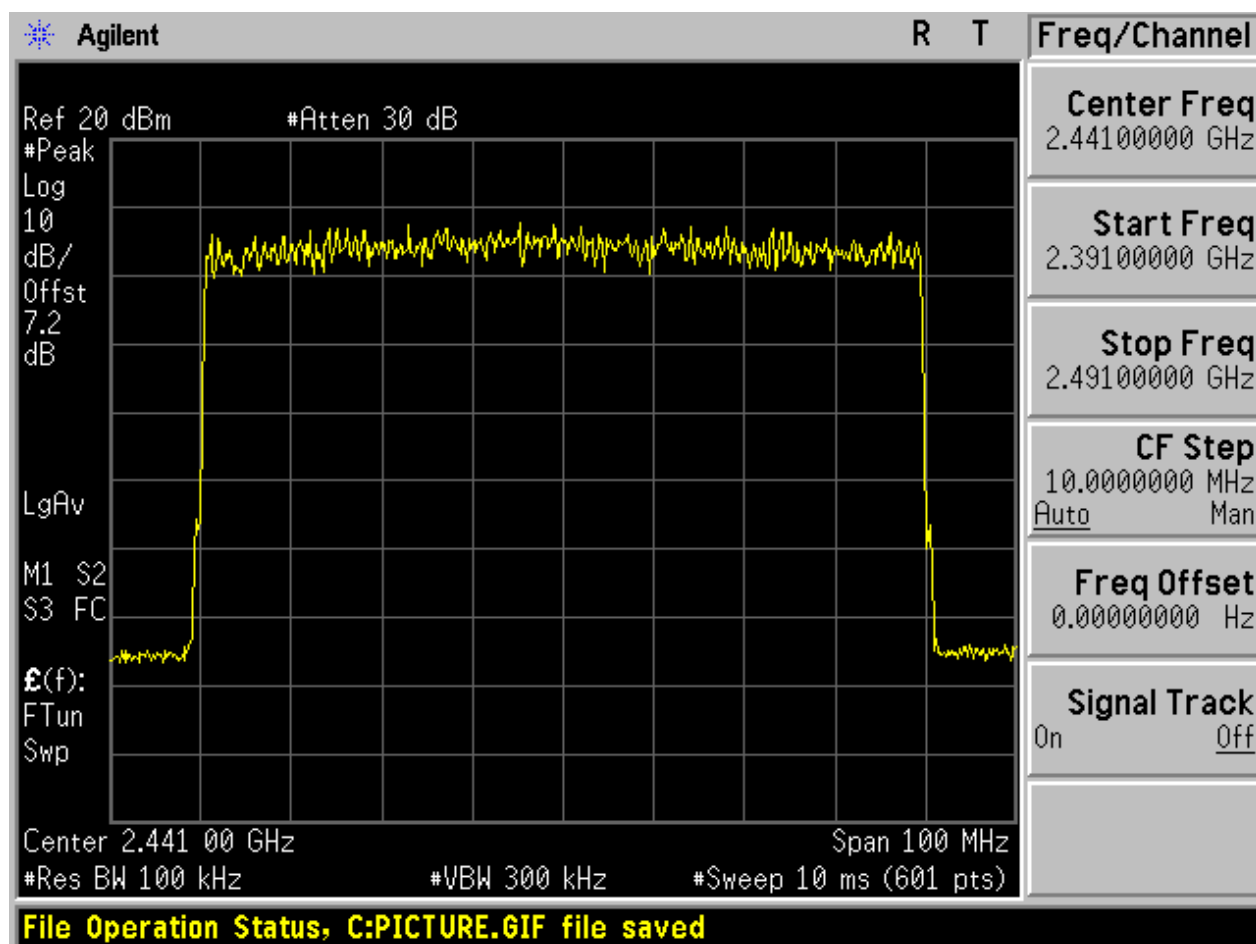



Appendix D: Time of Occupancy (Dwell Time)

1 Result Table

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:


- The duration for dwell time calculation: $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600 / 6 = 266.67 \text{ [ch*hop/s]}$;
- The hops per second on one channel: $266.67 \text{ [ch*hop/s]} / 79 \text{ [ch]} = 3.38 \text{ [hop/s]}$;
- The total hops for all channels within the dwell time calculation duration: $3.38 \text{ [hop/s]} * 31.6 \text{ [s*ch]} = 106.67 \text{ [hop*ch]}$;
- The dwell time for all channels hopping: $106.67 \text{ [hop*ch]} * \text{Burst Width [ms/hop/ch]}$.

EUT Conf.	Burst Width [ms/hop/ch]	Total Hops [hop*ch]	Dwell Time [ms]	Verdict
TM1_DH5_Ch39	2.900	106.67	0.309	Pass
TM2_2DH5_Ch39	2.900	106.67	0.309	Pass
TM3_3DH5_Ch39	2.900	106.67	0.309	Pass


2 Test Plot

NOTE: The test plots are only for Burst Width measurements.


2.1 TM1_DH5_Ch39

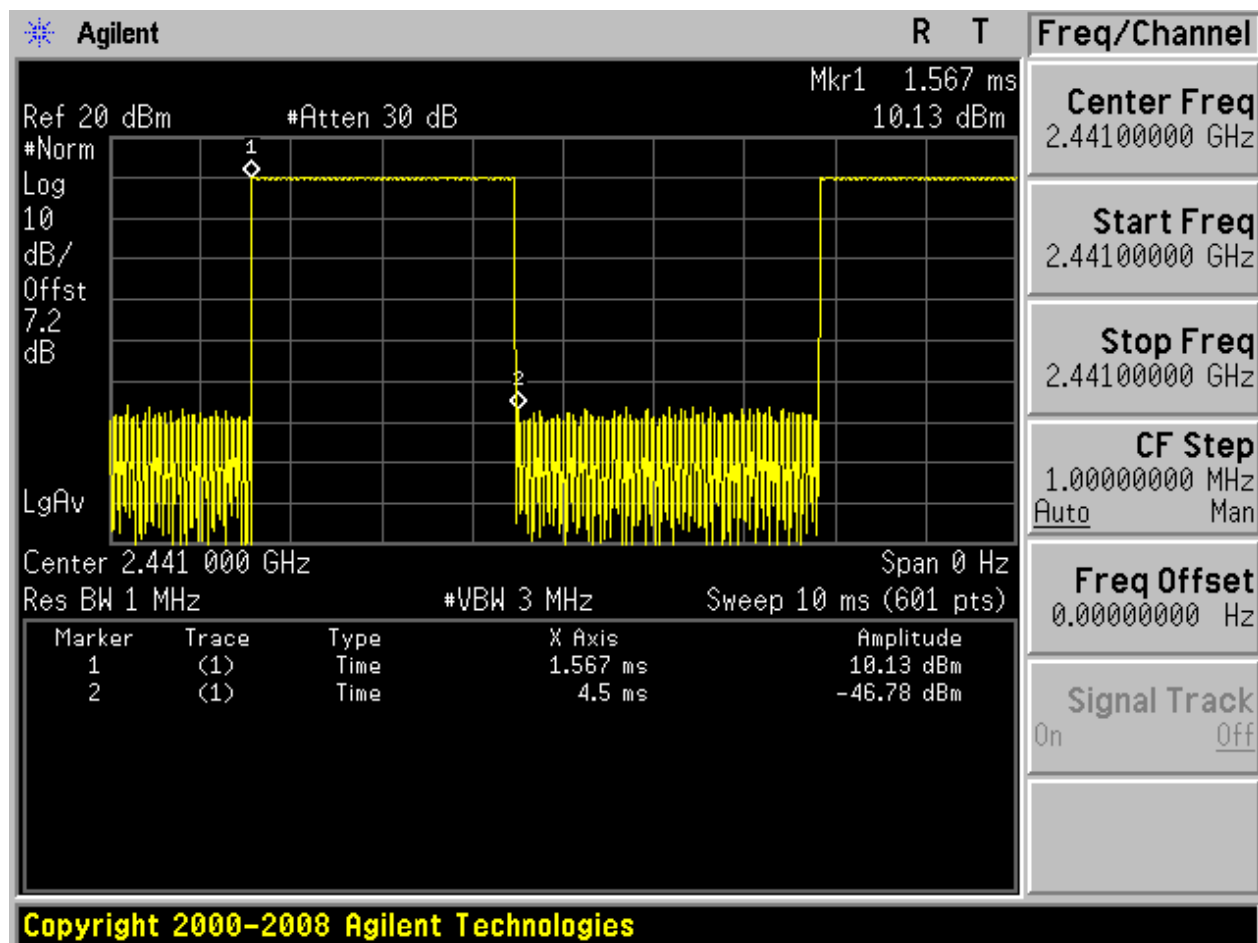

2.2 TM2_2DH5_Ch39

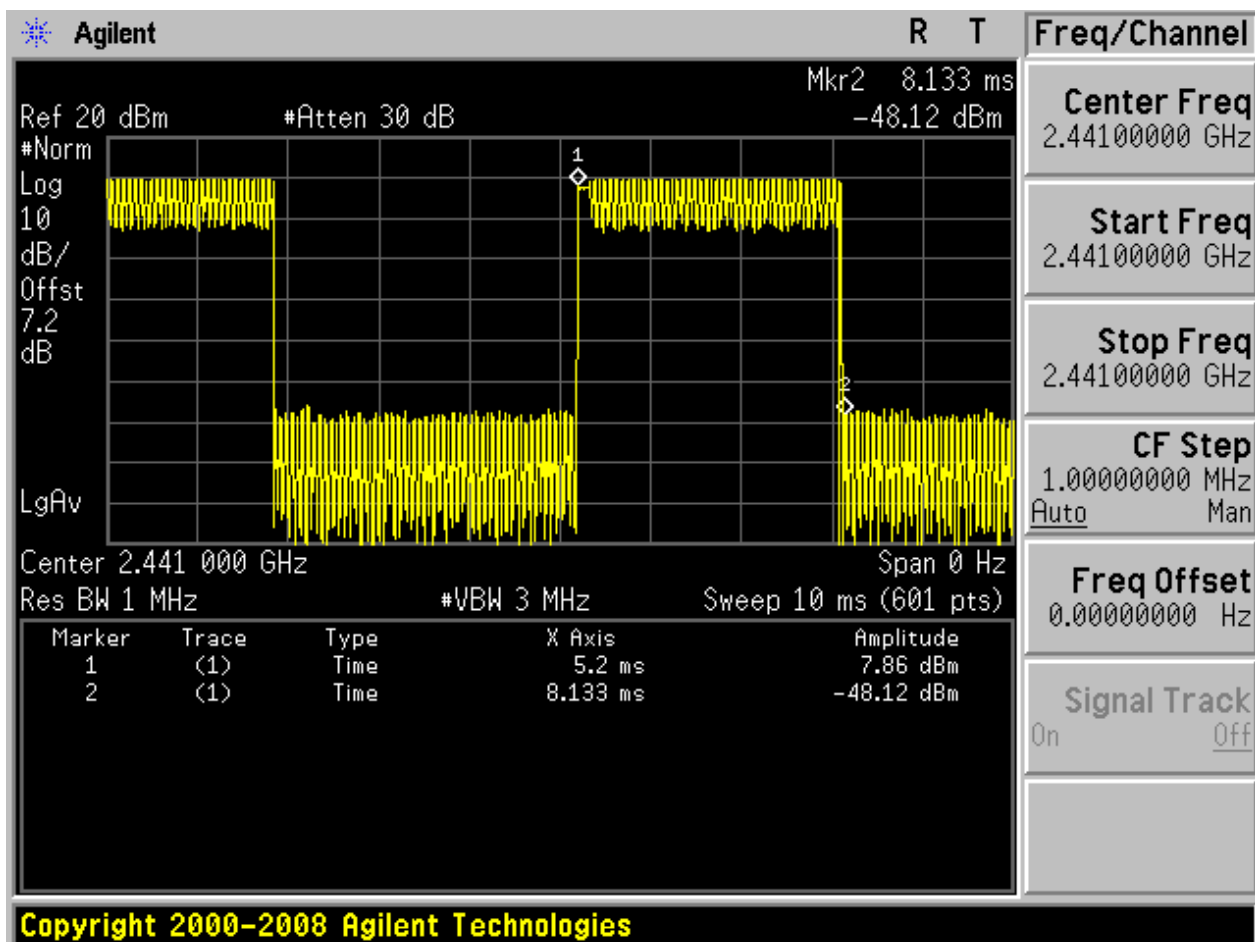

2.3 TM3_3DH5_Ch39

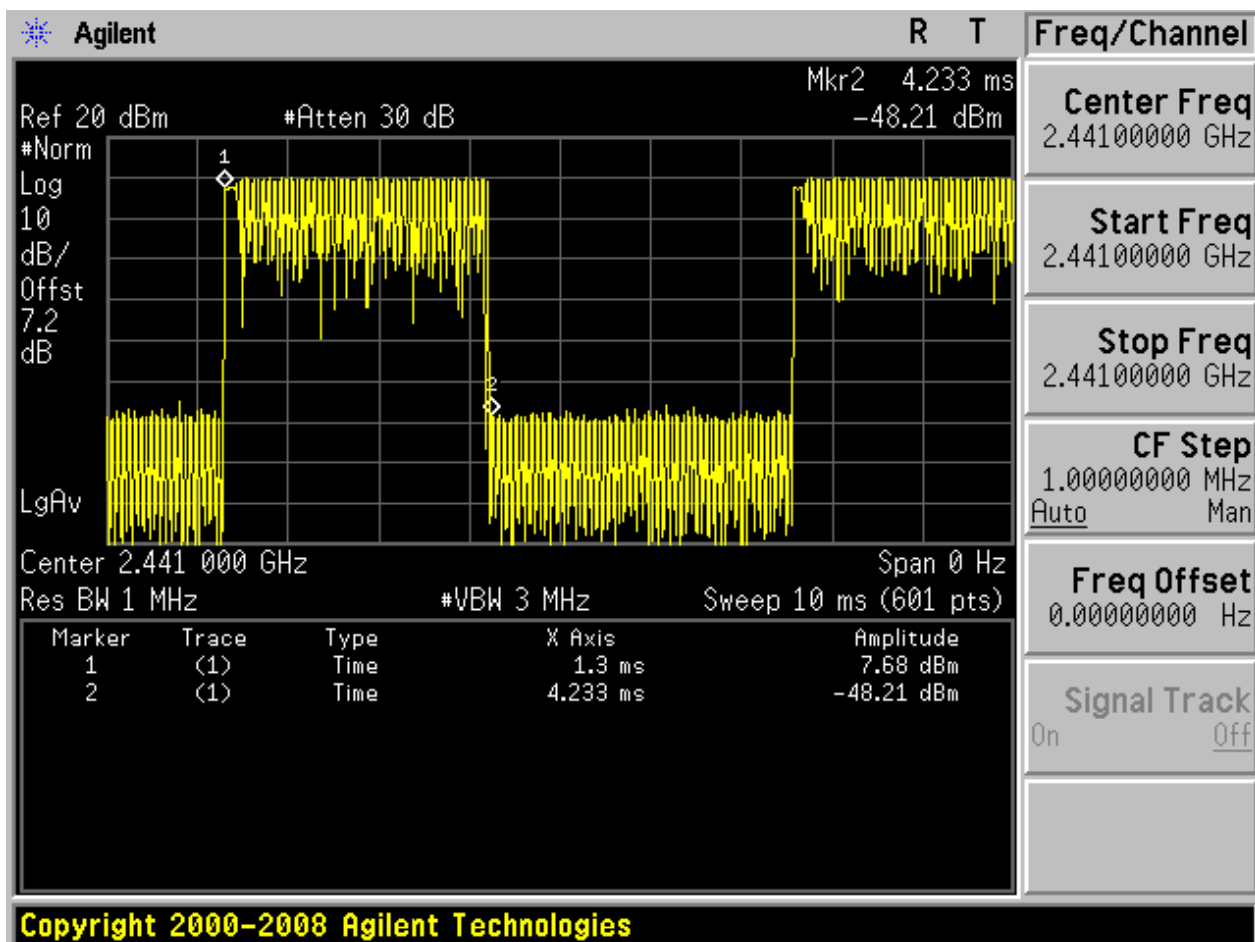




Appendix E: Maximum Peak Conducted Output Power

1 Result Table


EUT Conf.	Max. Peak Power [dBm]	Verdict
TM1_DH5_Ch0	8.52	Pass
TM1_DH5_Ch39	10.17	Pass
TM1_DH5_Ch78	8.77	Pass
TM2_2DH5_Ch0	8.1	Pass
TM2_2DH5_Ch39	9.93	Pass
TM2_2DH5_Ch78	8.56	Pass
TM3_3DH5_Ch0	8.74	Pass
TM3_3DH5_Ch39	10.18	Pass
TM3_3DH5_Ch78	8.99	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

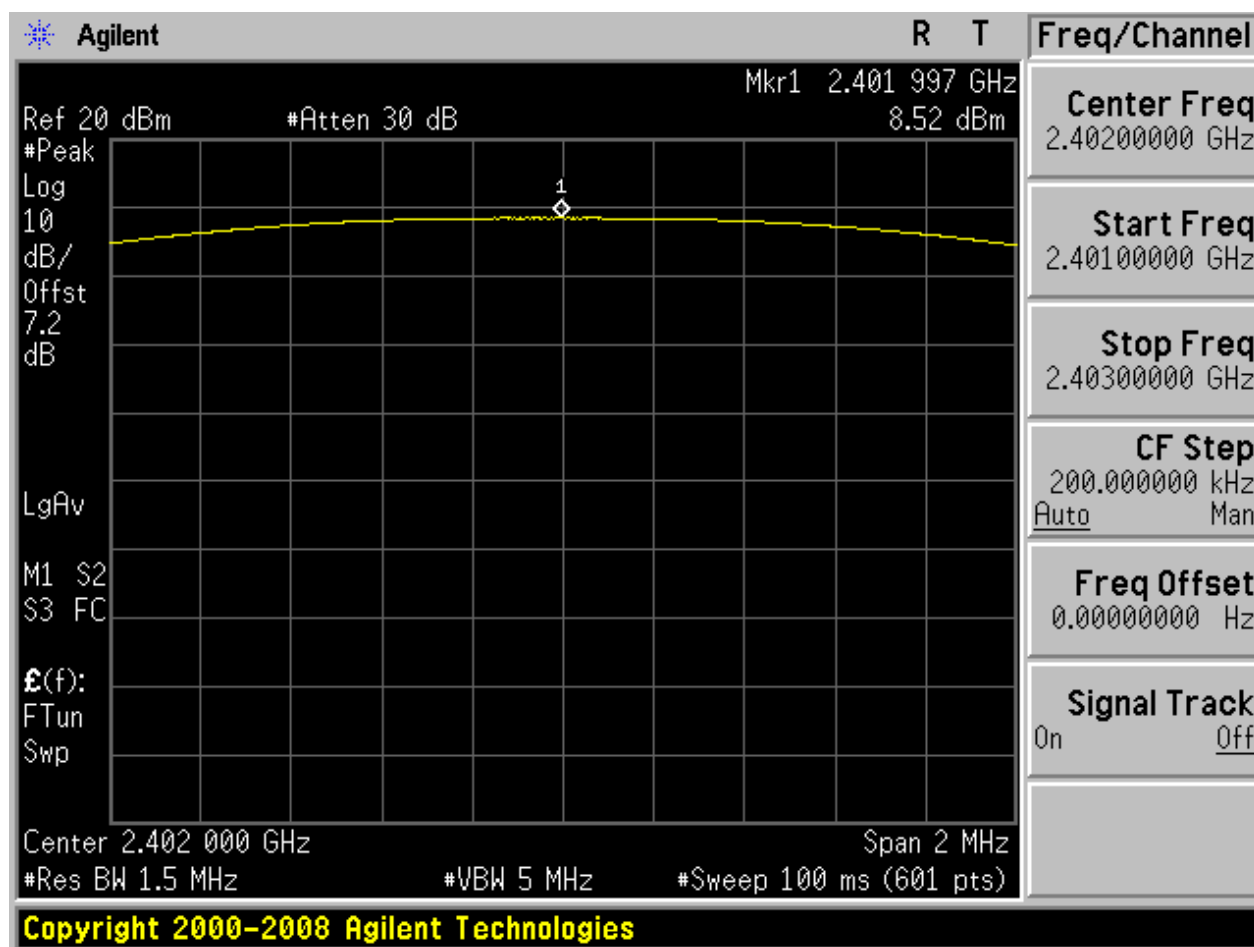


2.2 TM1_DH5_Ch39

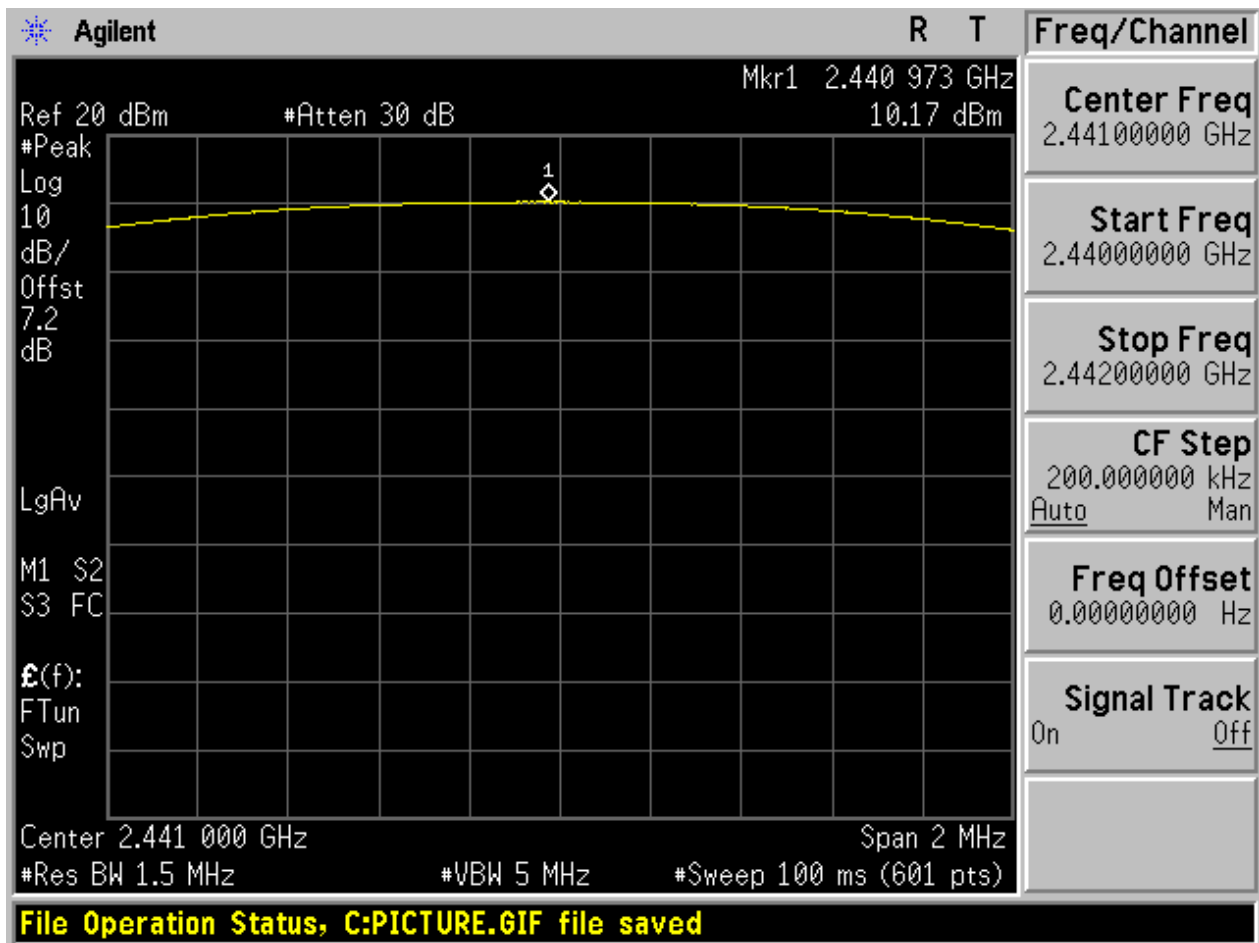

2.3 TM1_DH5_Ch78

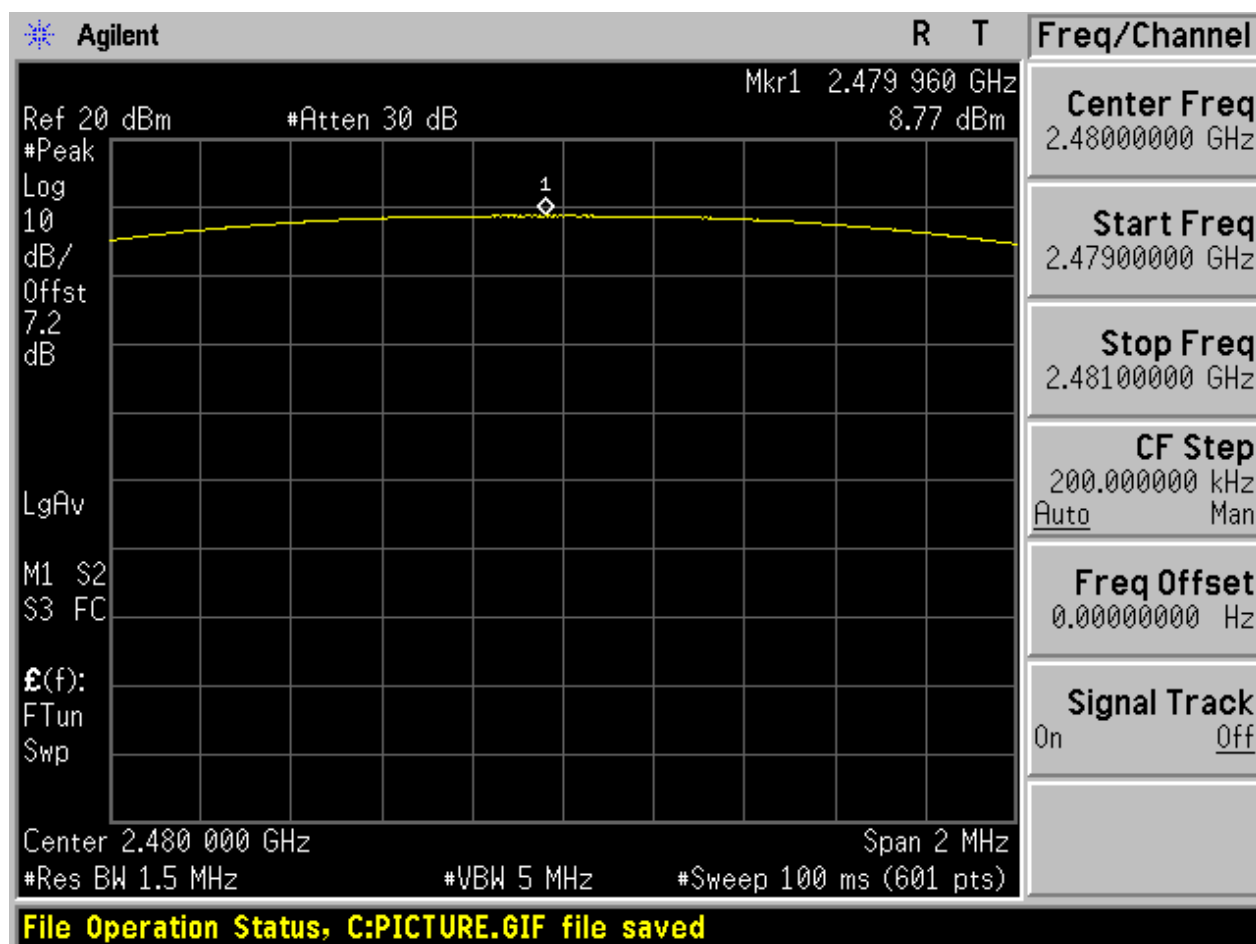


2.4 TM2_2DH5_Ch0

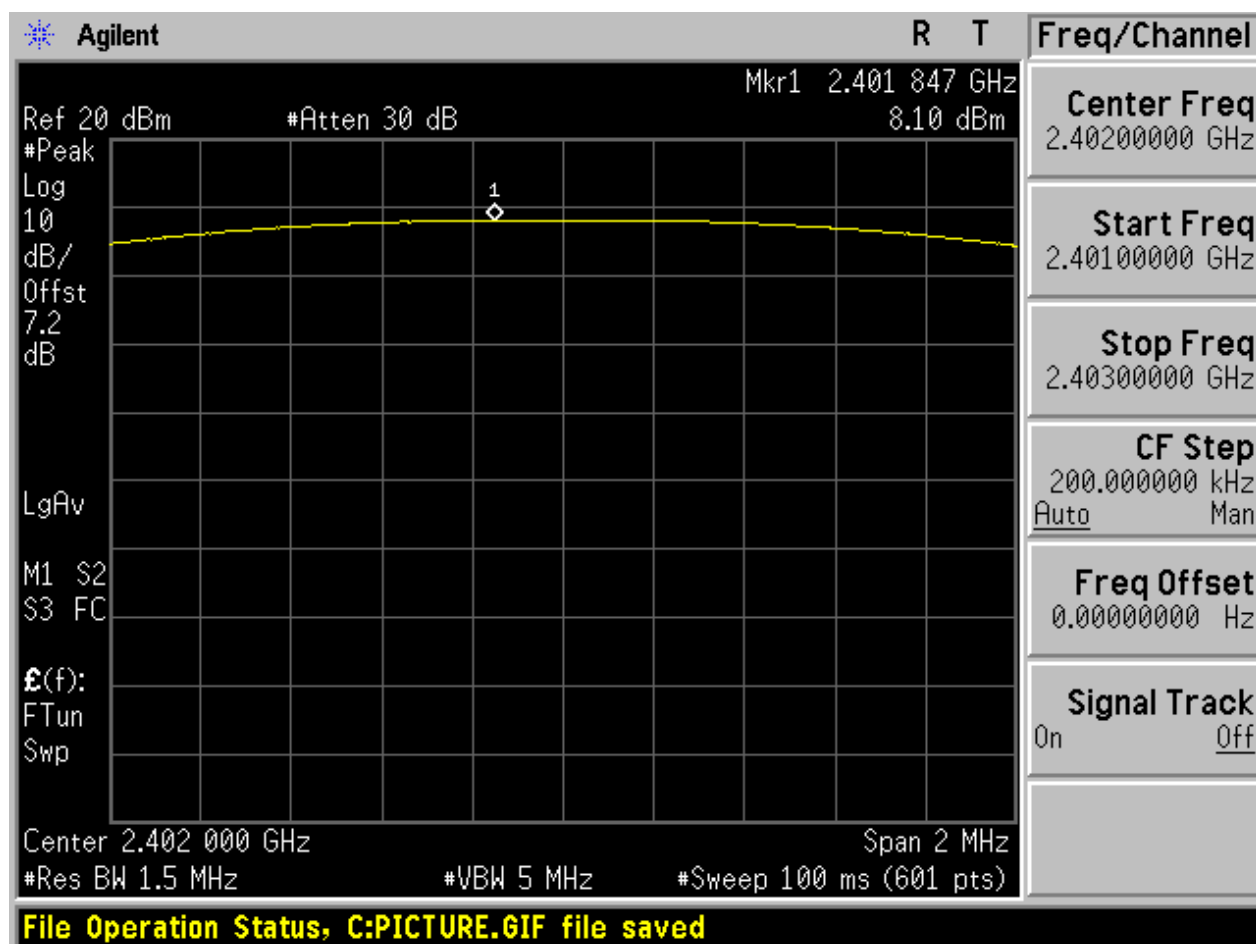




2.5 TM2_2DH5_Ch39

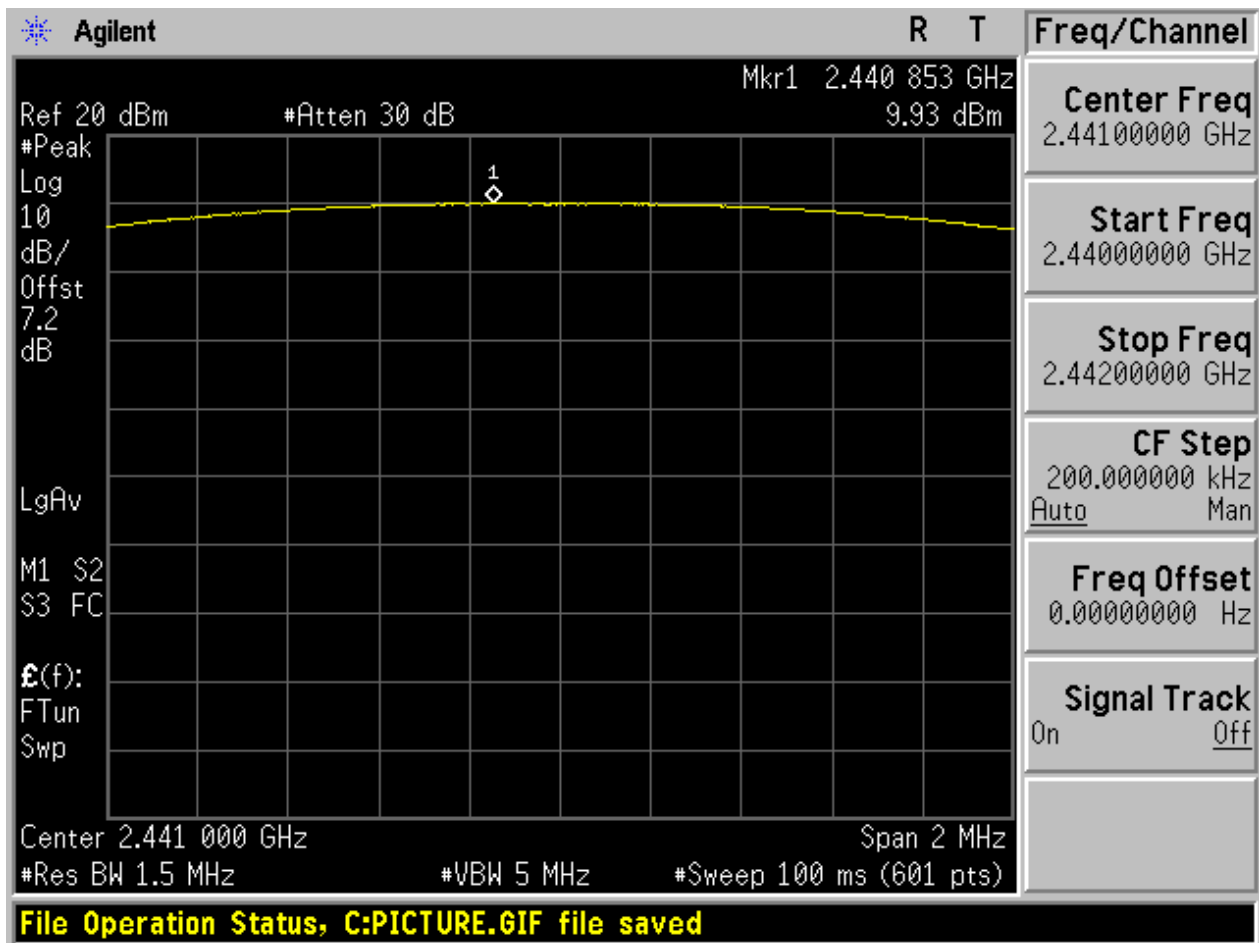





2.6 TM2_2DH5_Ch78

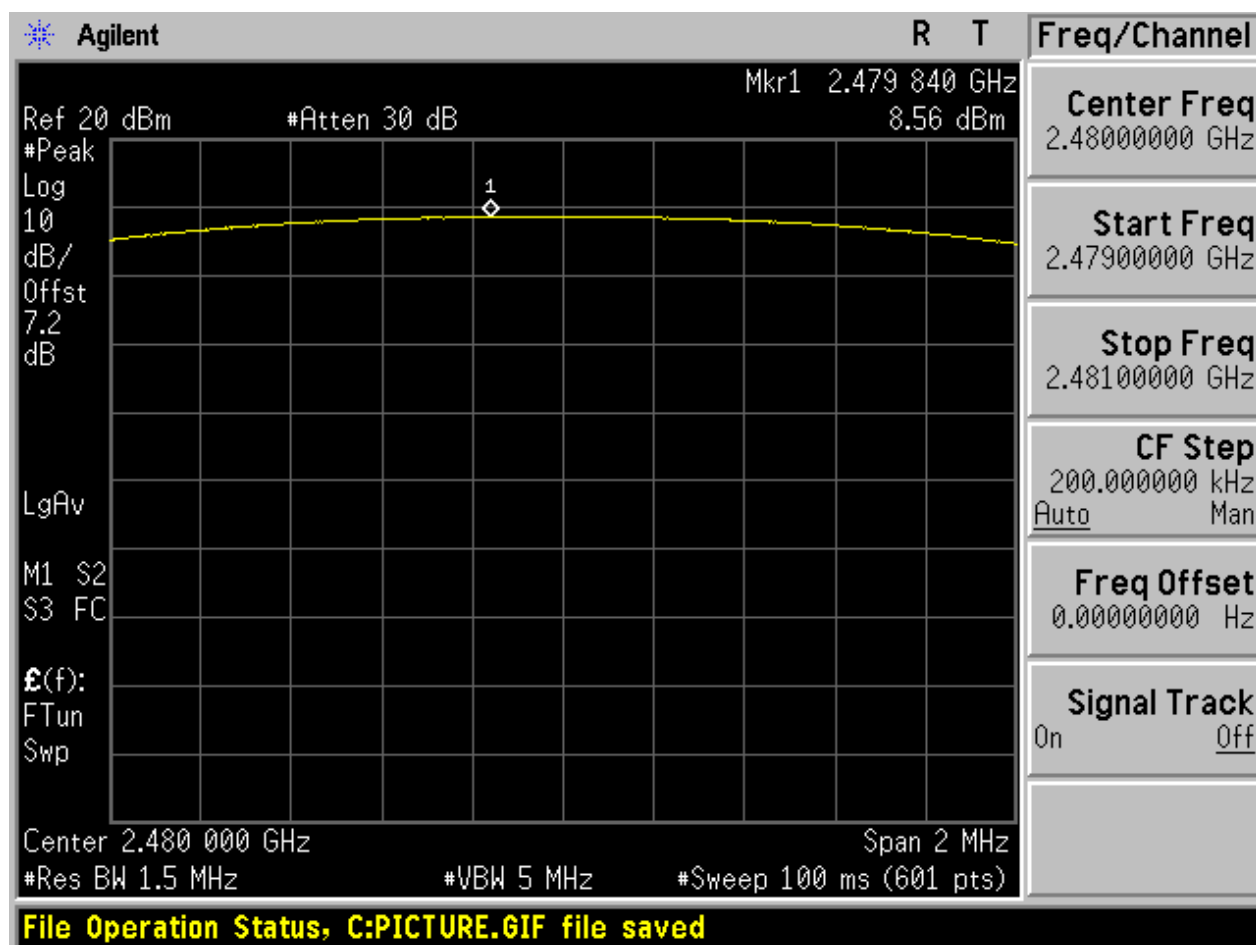


2.7 TM3_3DH5_Ch0

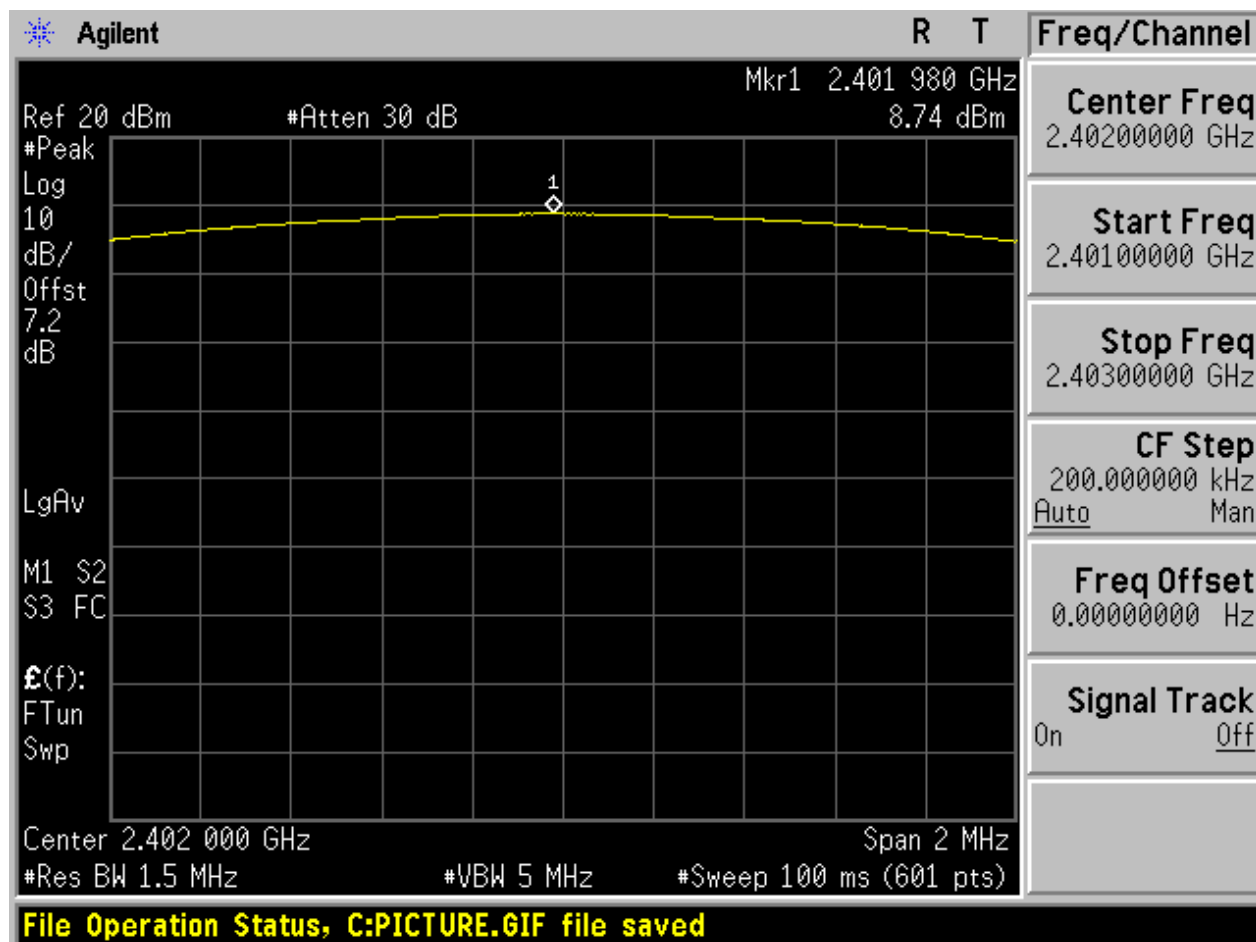

2.8 TM3_3DH5_Ch39

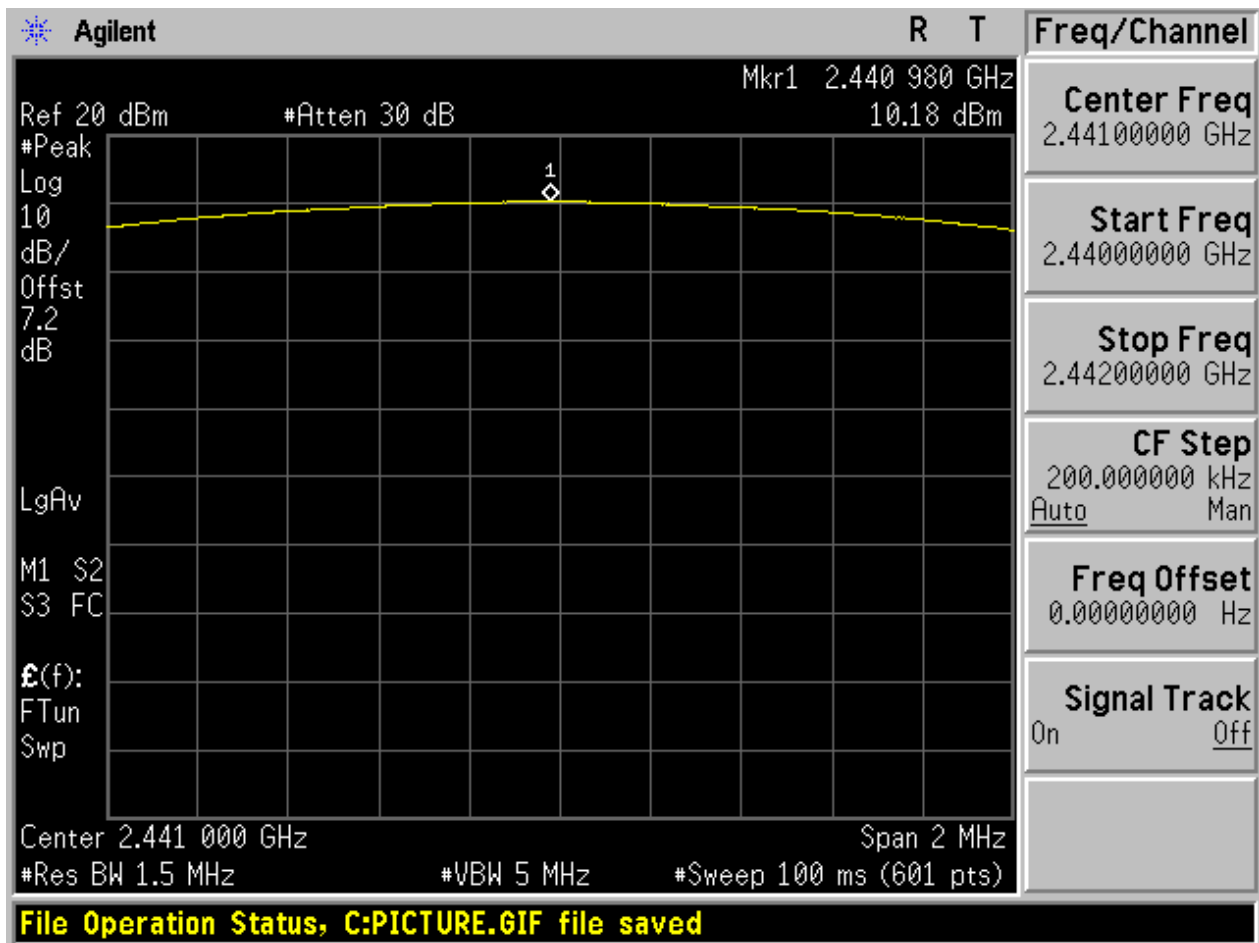

2.9 TM3_3DH5_Ch78

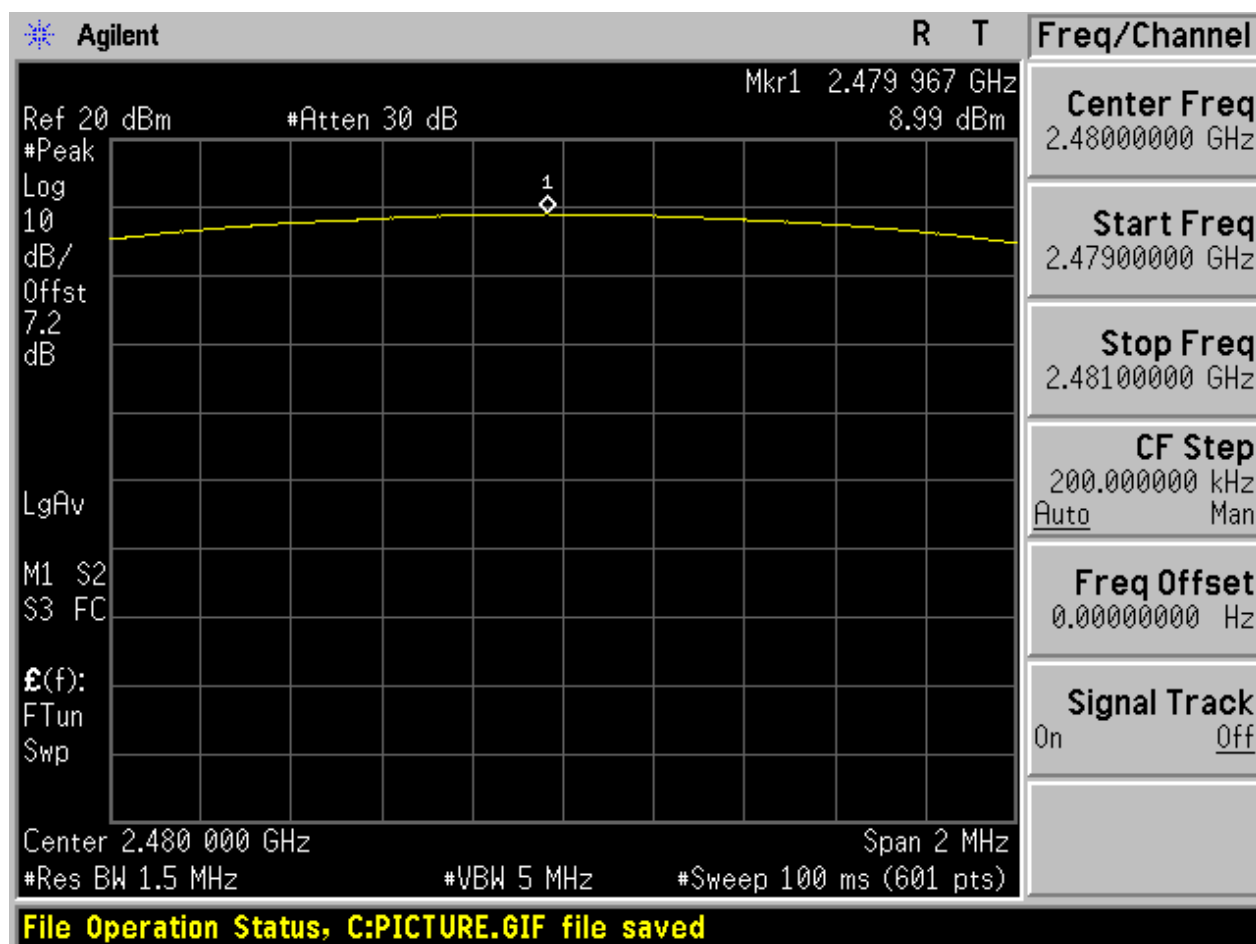

Appendix F: Band edge spurious emission


1 Result Table

EUT Conf.	Channel No.	Carrier Frequency [MHz]	Max. Spurious Level [dBm]	Frequency Hopping	Carrier Power [dBm]	Limit [dBm]	Result
TM1_DH5_Ch0	0	2402	-51.16	Off	8.21	-11.79	Pass
	-	-	-54.26	On	7.99	-12.01	Pass
TM1_DH5_Ch78	78	2480	-52.55	Off	8.46	-11.54	Pass
	-	-	-54.8	On	7.88	-12.12	Pass
TM2_2DH5_Ch0	0	2402	-50.86	Off	5.91	-14.09	Pass
	-	-	-54.06	On	5.59	-14.41	Pass
TM2_2DH5_Ch78	78	2480	-53.58	Off	6.11	-13.89	Pass
	-	-	-54.13	On	4.71	-15.29	Pass
TM3_3DH5_Ch0	0	2402	-50	Off	5.92	-14.08	Pass
	-	-	-53.47	On	5.69	-14.31	Pass
TM3_3DH5_Ch78	78	2480	-53.39	Off	6.10	-13.9	Pass
	-	-	-54.78	On	5.40	-14.6	Pass


2 Test Plot

2.1 TM1_DH5_Ch0

No hopping

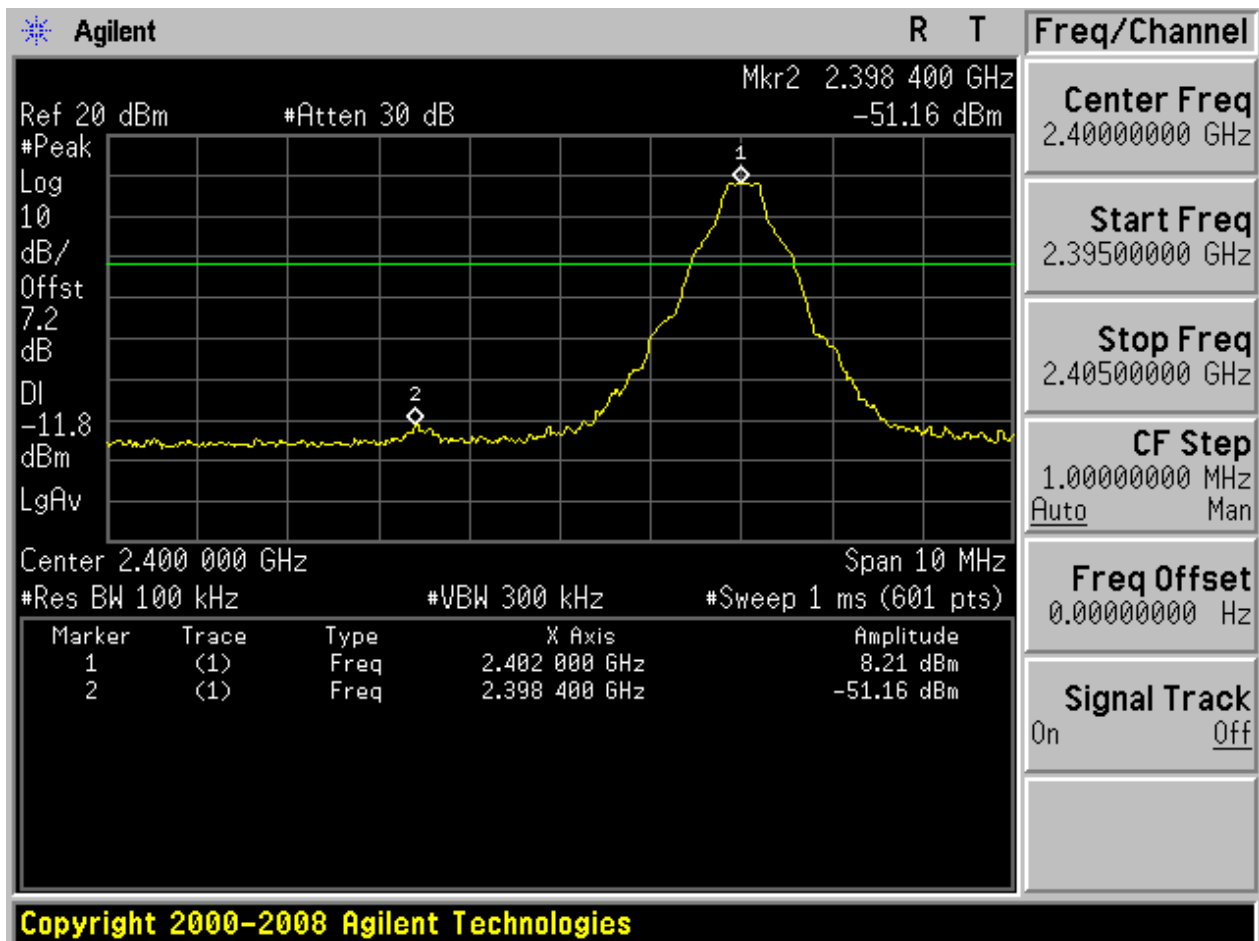


With hopping

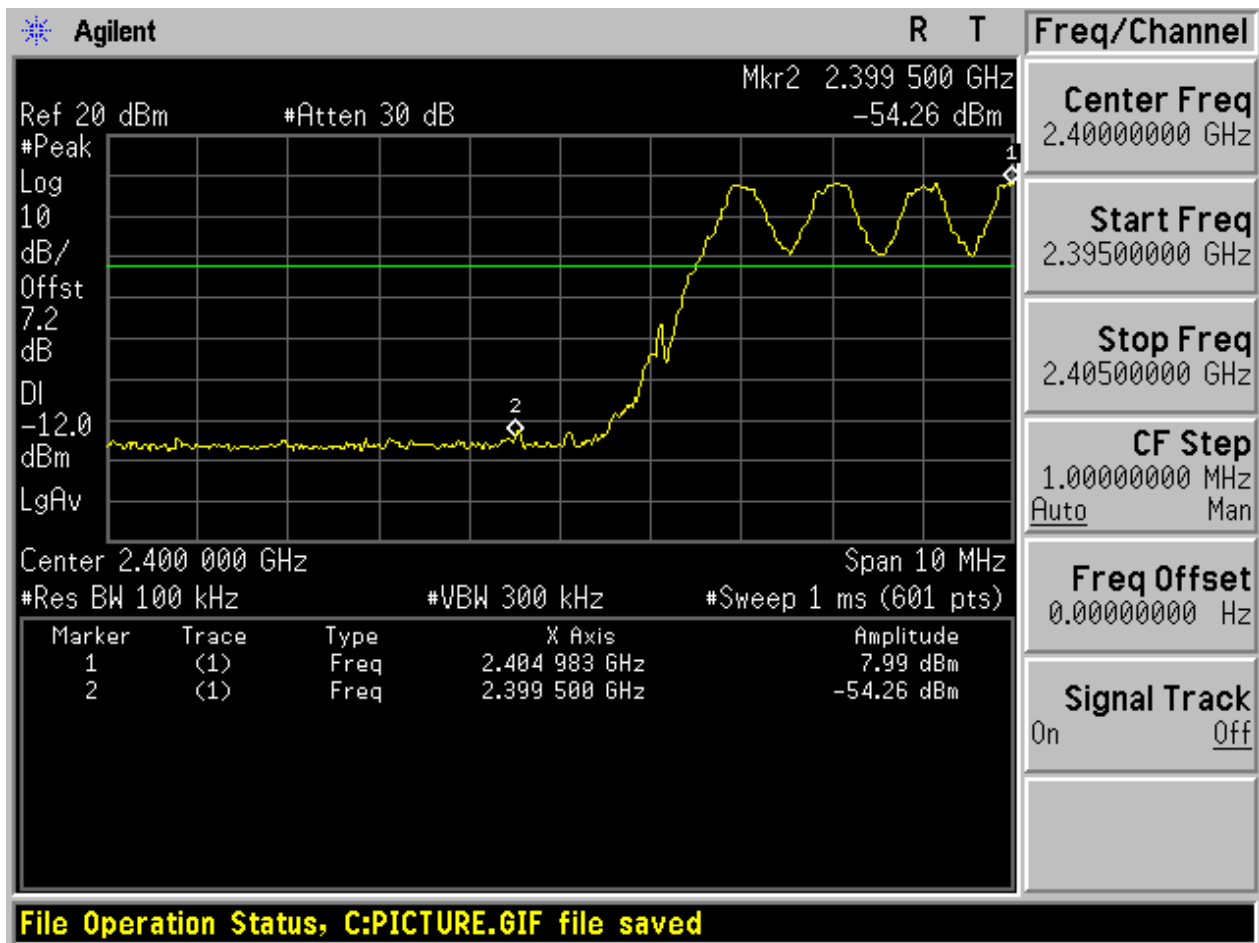


2.2 TM1_DH5_Ch78

No hopping

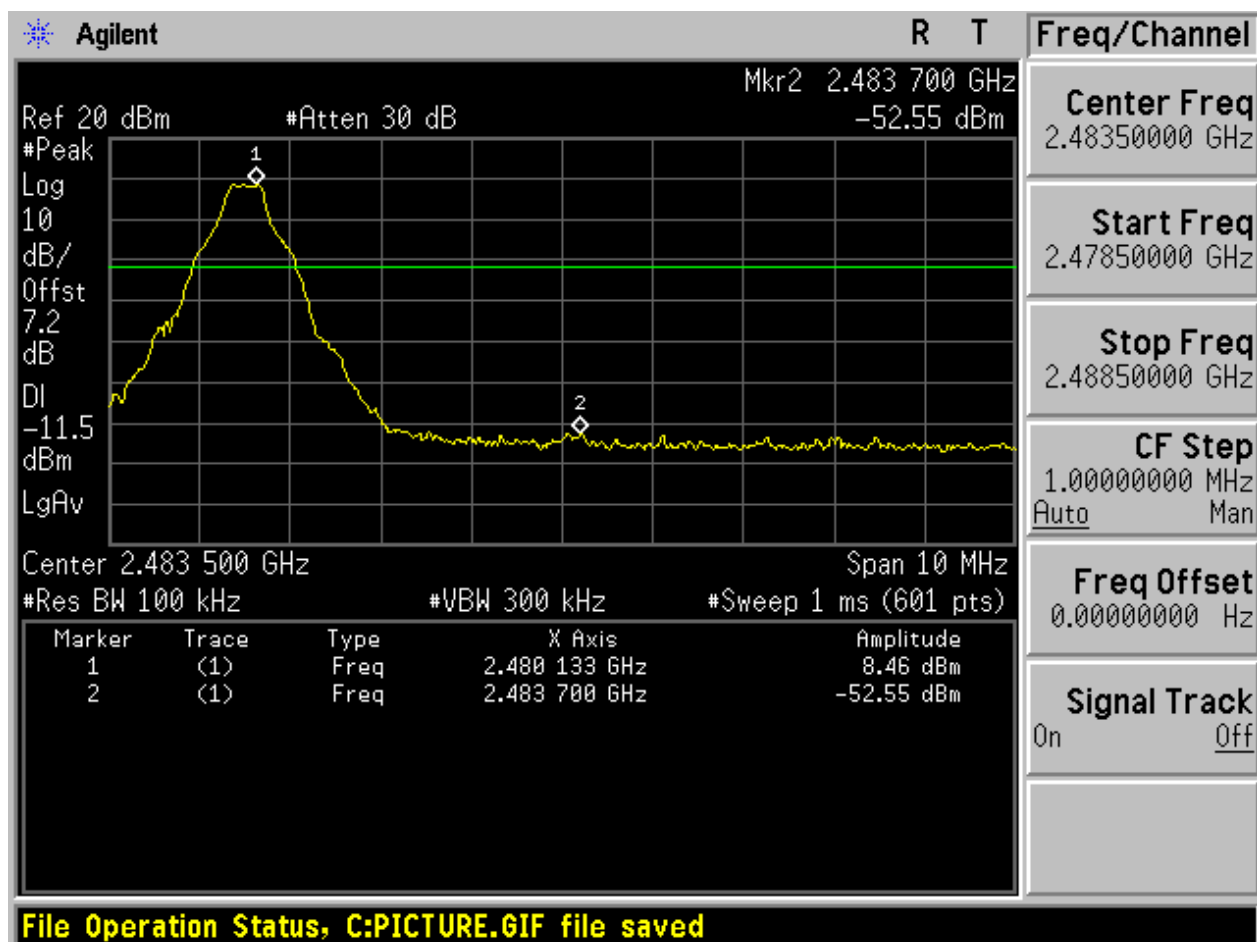


With hopping

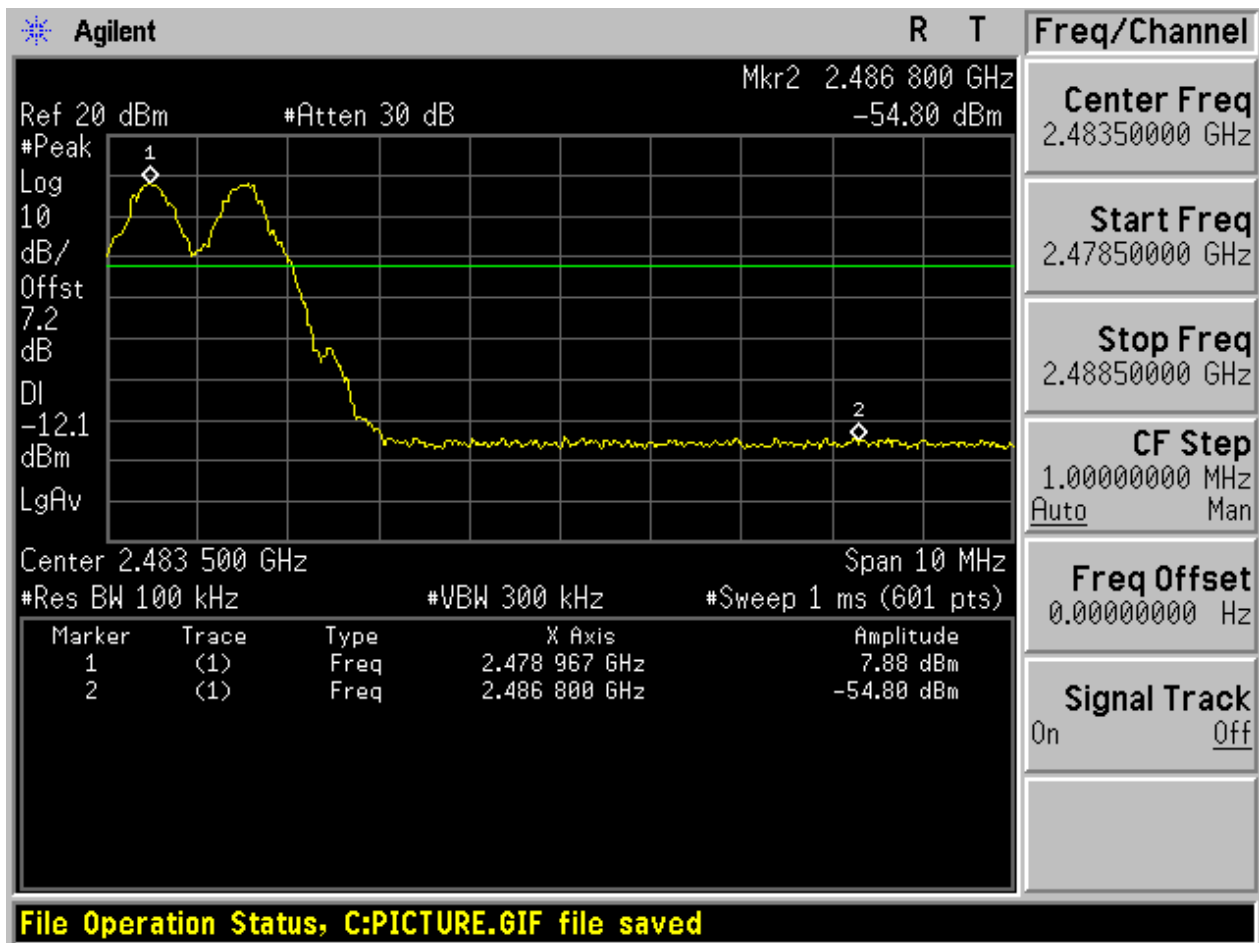


2.3 TM2_2DH5_Ch0

No hopping

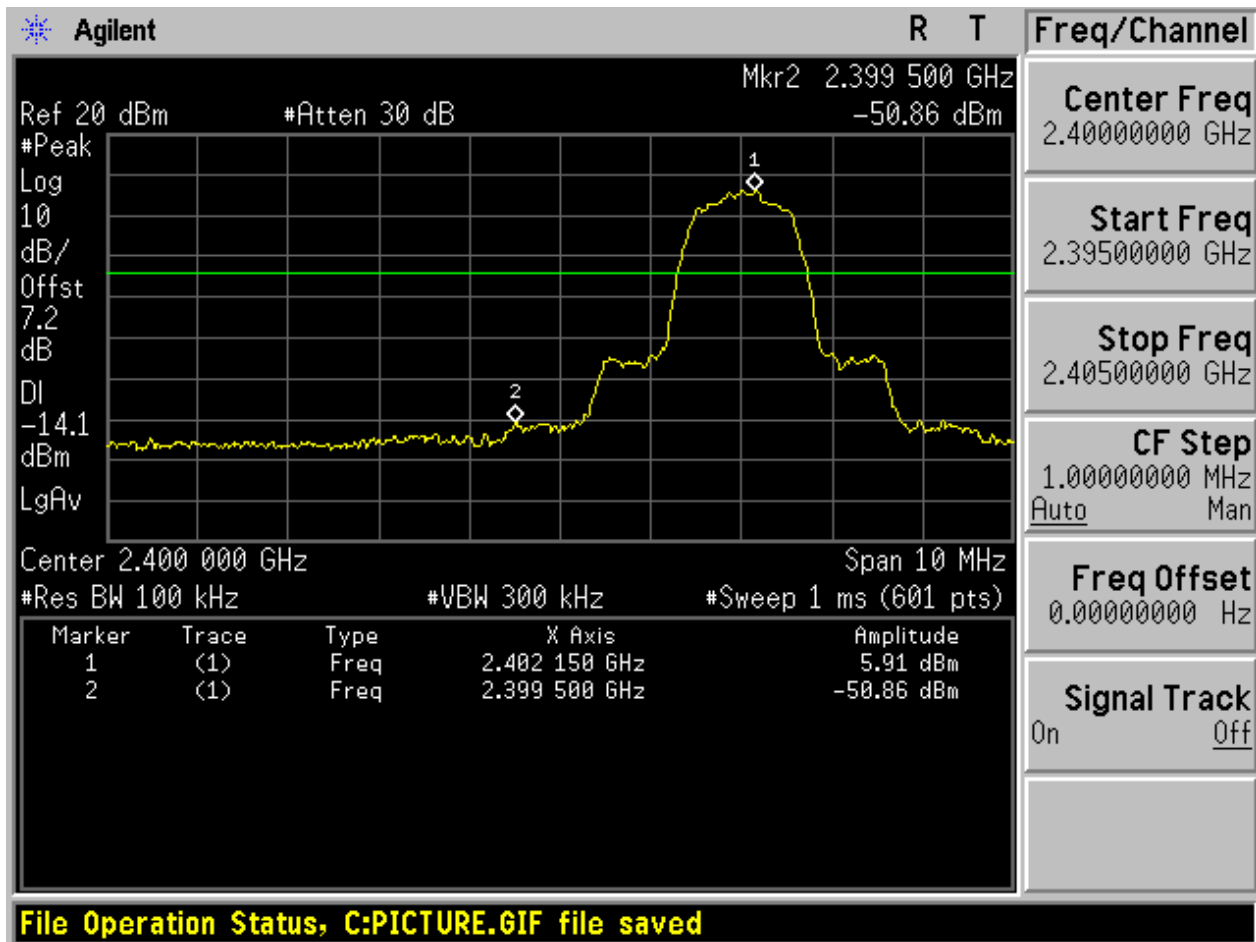


With hopping

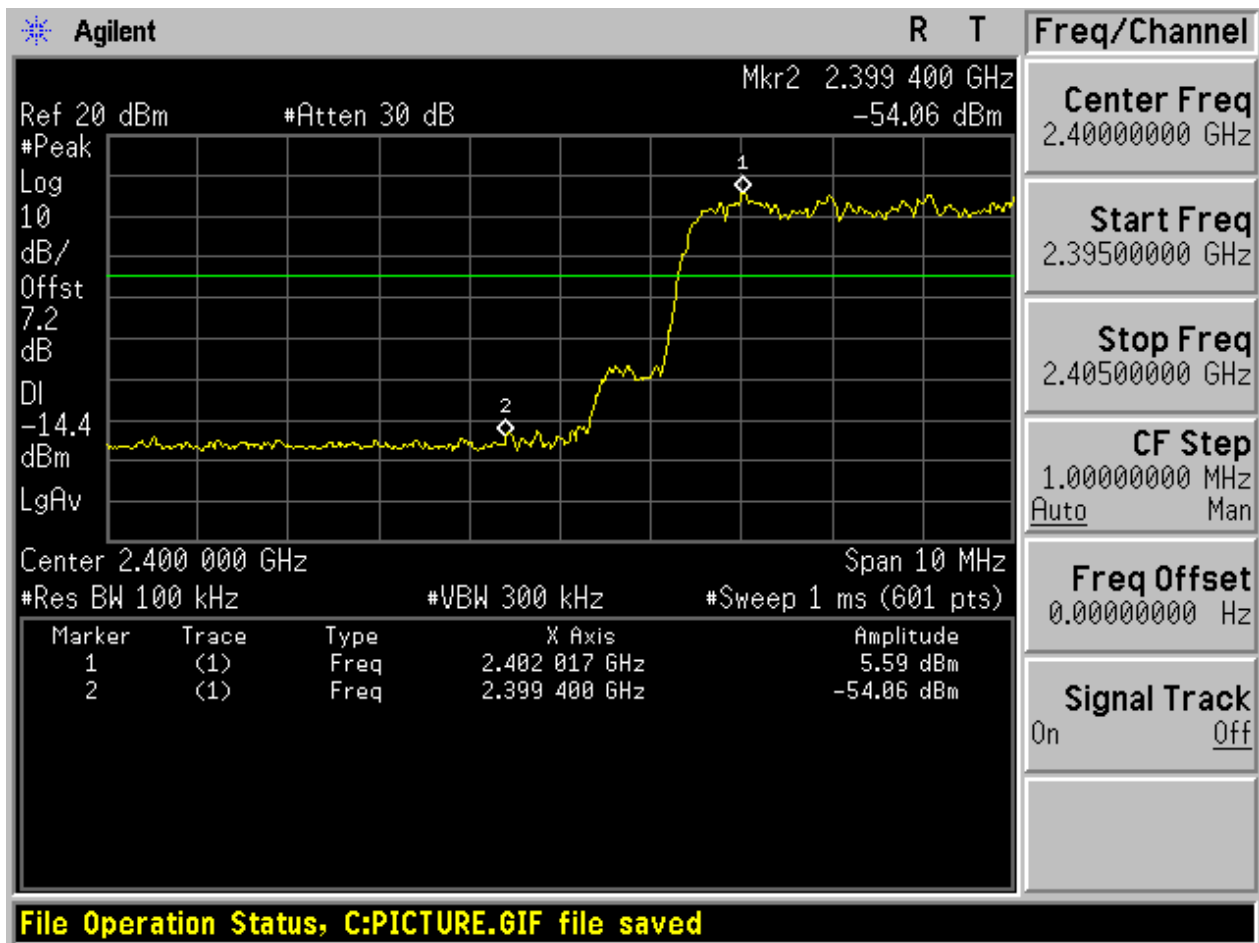


2.4 TM2_2DH5_Ch78

No hopping

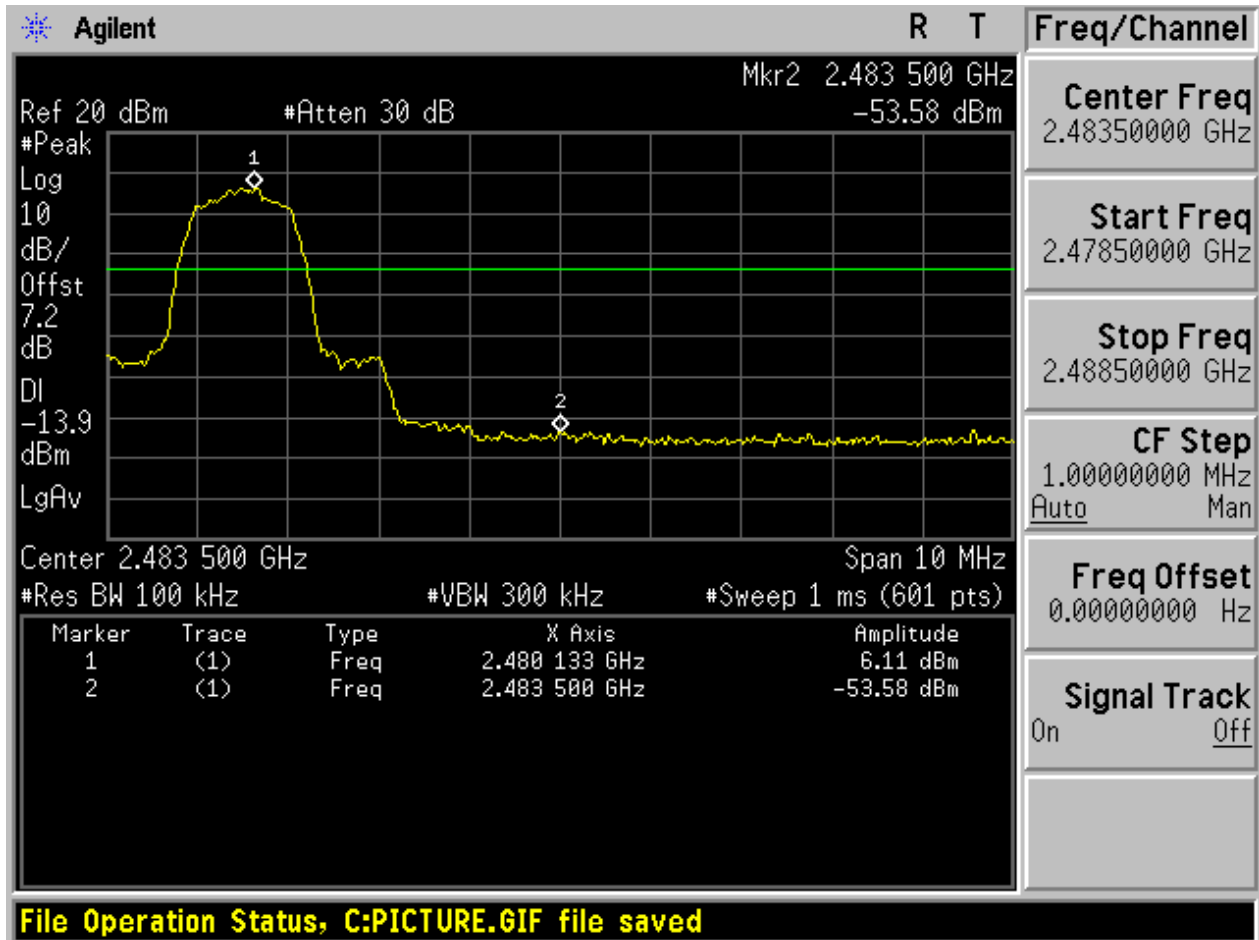


With hopping

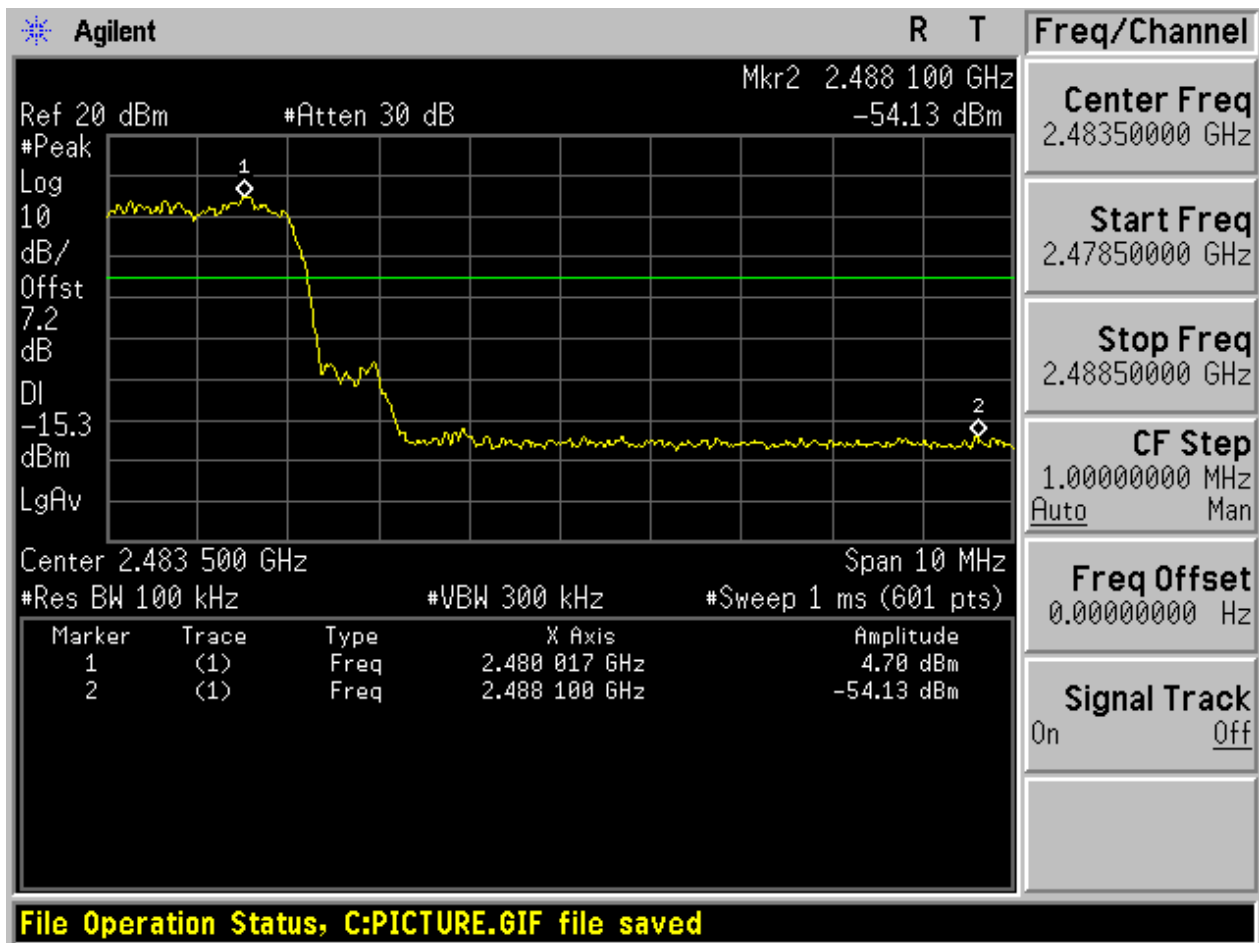


2.5 TM3_3DH5_Ch0

No hopping

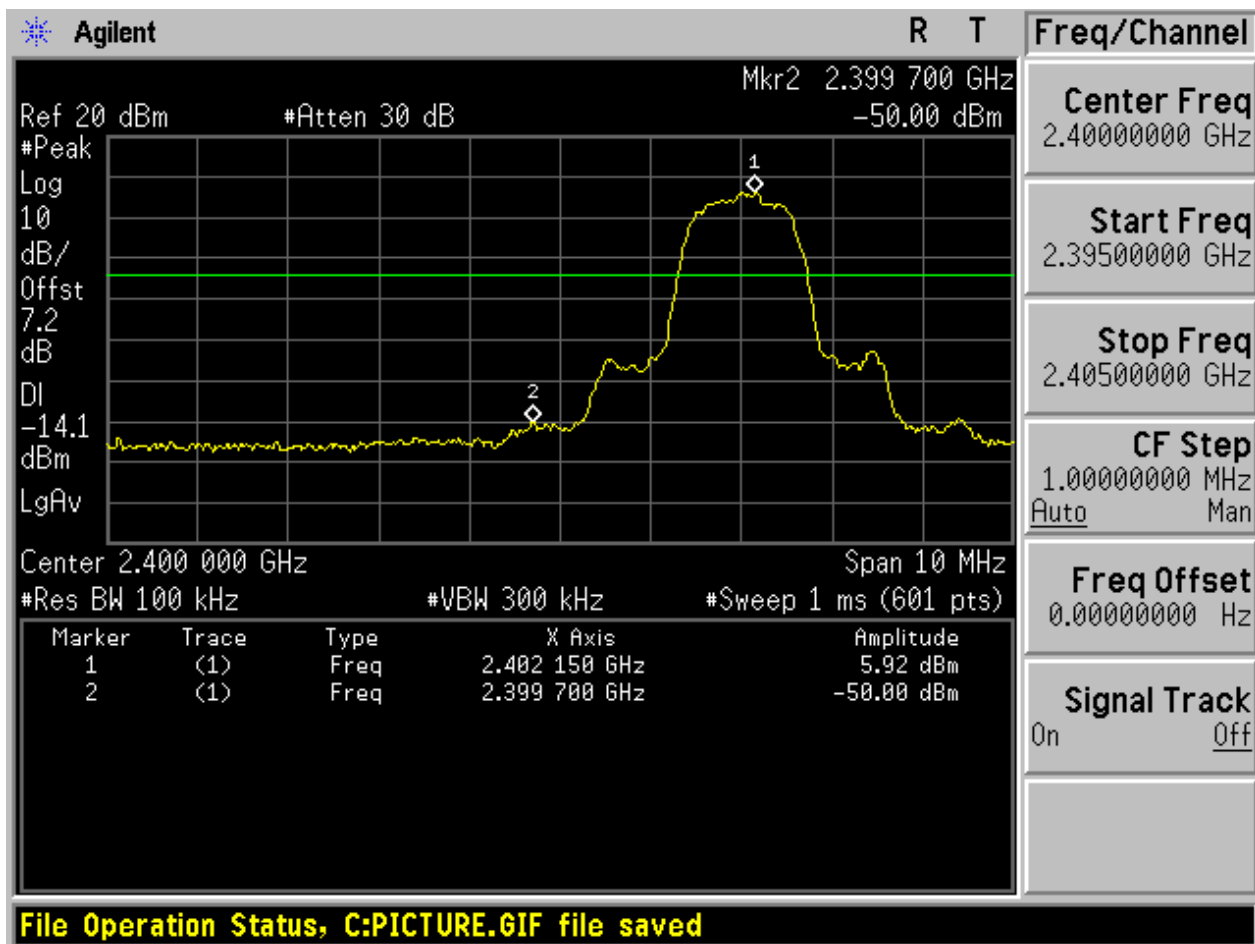


With hopping

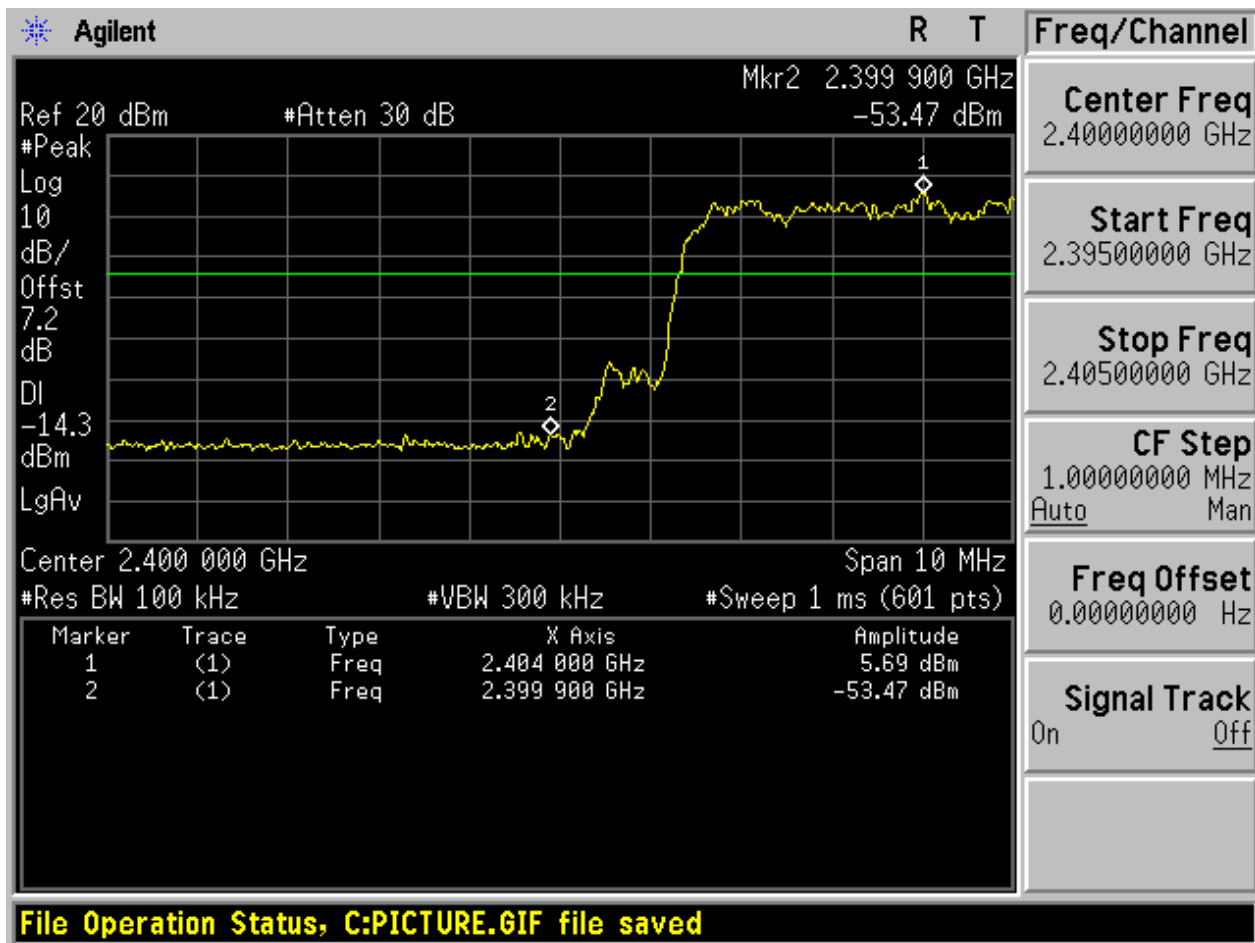


2.6 TM3_3DH5_Ch78

No hopping

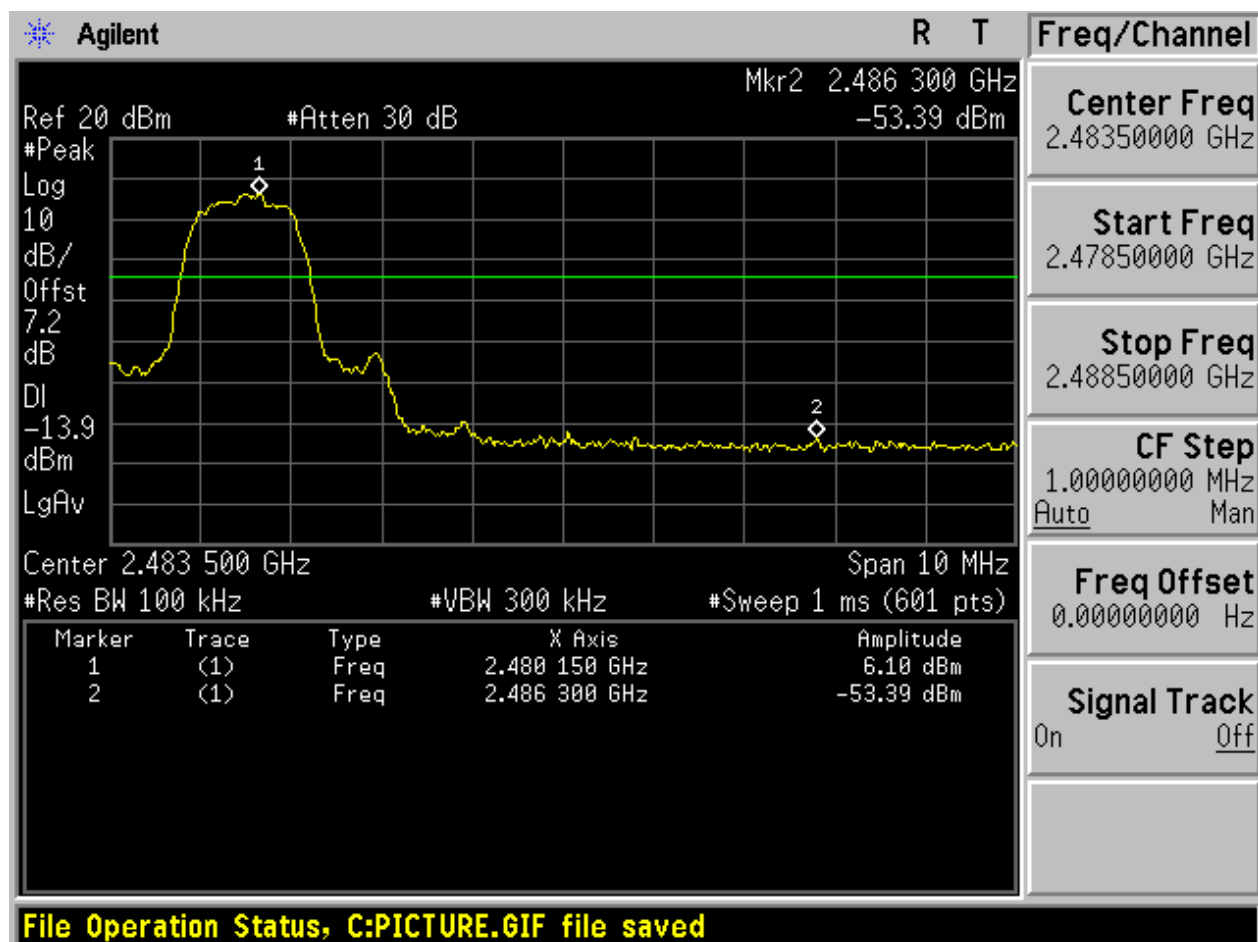

With hopping

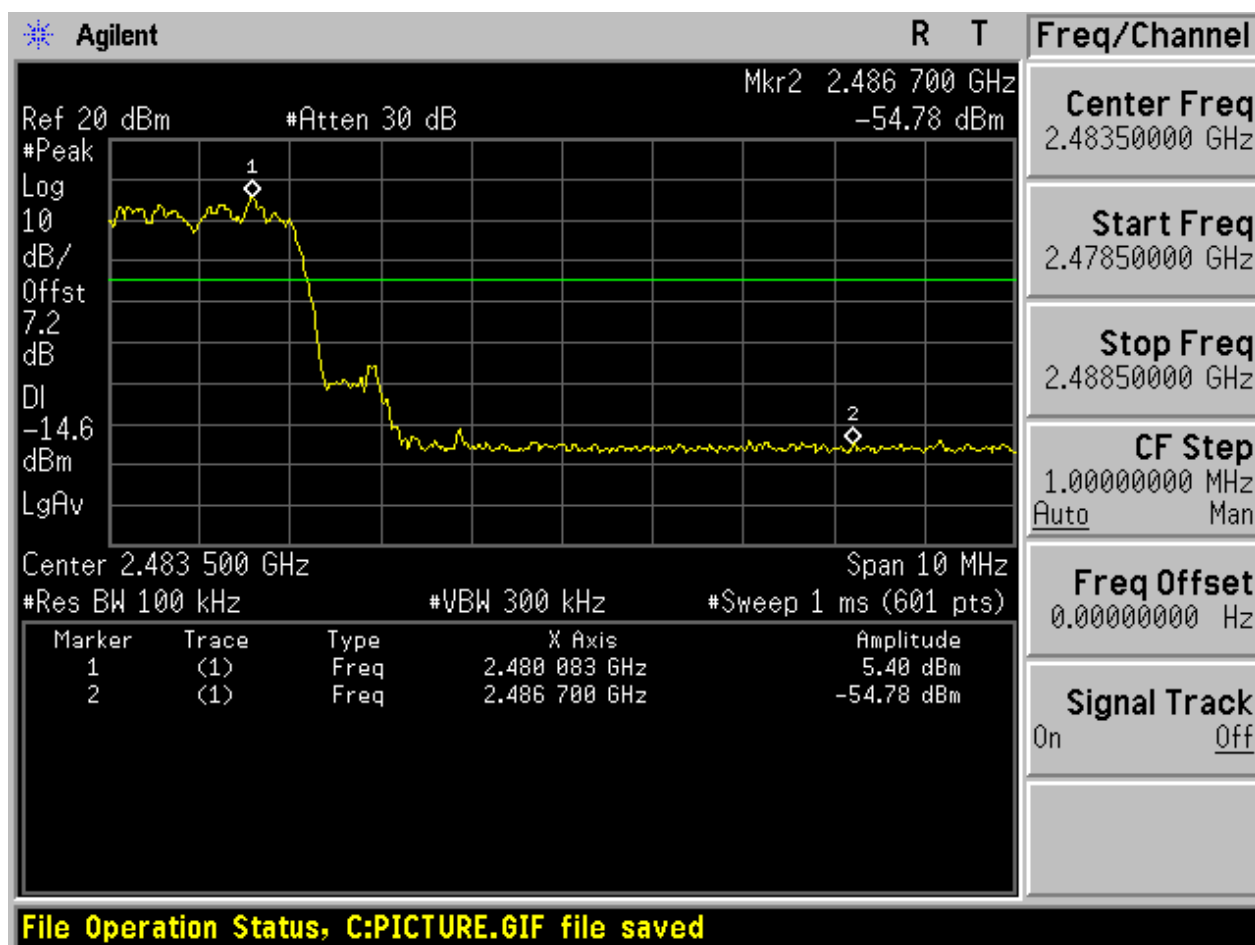



Appendix G: Conducted RF Spurious Emission

1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.


In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.

EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	8.15	< Limit	Pass
TM1_DH5_Ch39	9.84	< Limit	Pass
TM1_DH5_Ch78	8.43	< Limit	Pass
TM2_2DH5_Ch0	5.80	< Limit	Pass
TM2_2DH5_Ch39	7.34	< Limit	Pass
TM2_2DH5_Ch78	6.10	< Limit	Pass
TM3_3DH5_Ch0	5.66	< Limit	Pass
TM3_3DH5_Ch39	7.52	< Limit	Pass
TM3_3DH5_Ch78	6.10	< Limit	Pass


2 Test Plot


2.1 TM1_DH5_Ch0


2.1.1 Pref

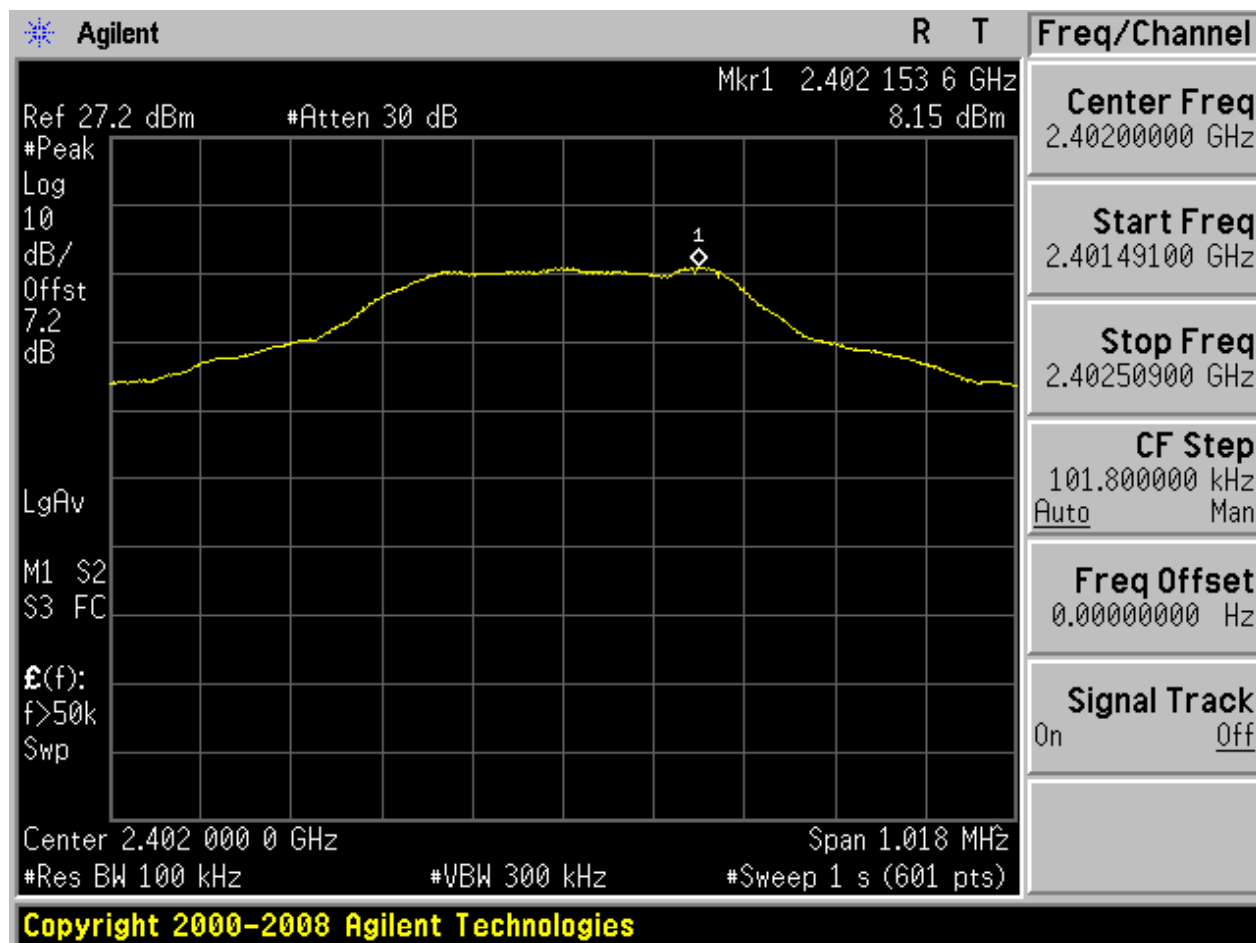



2.1.2 Puw

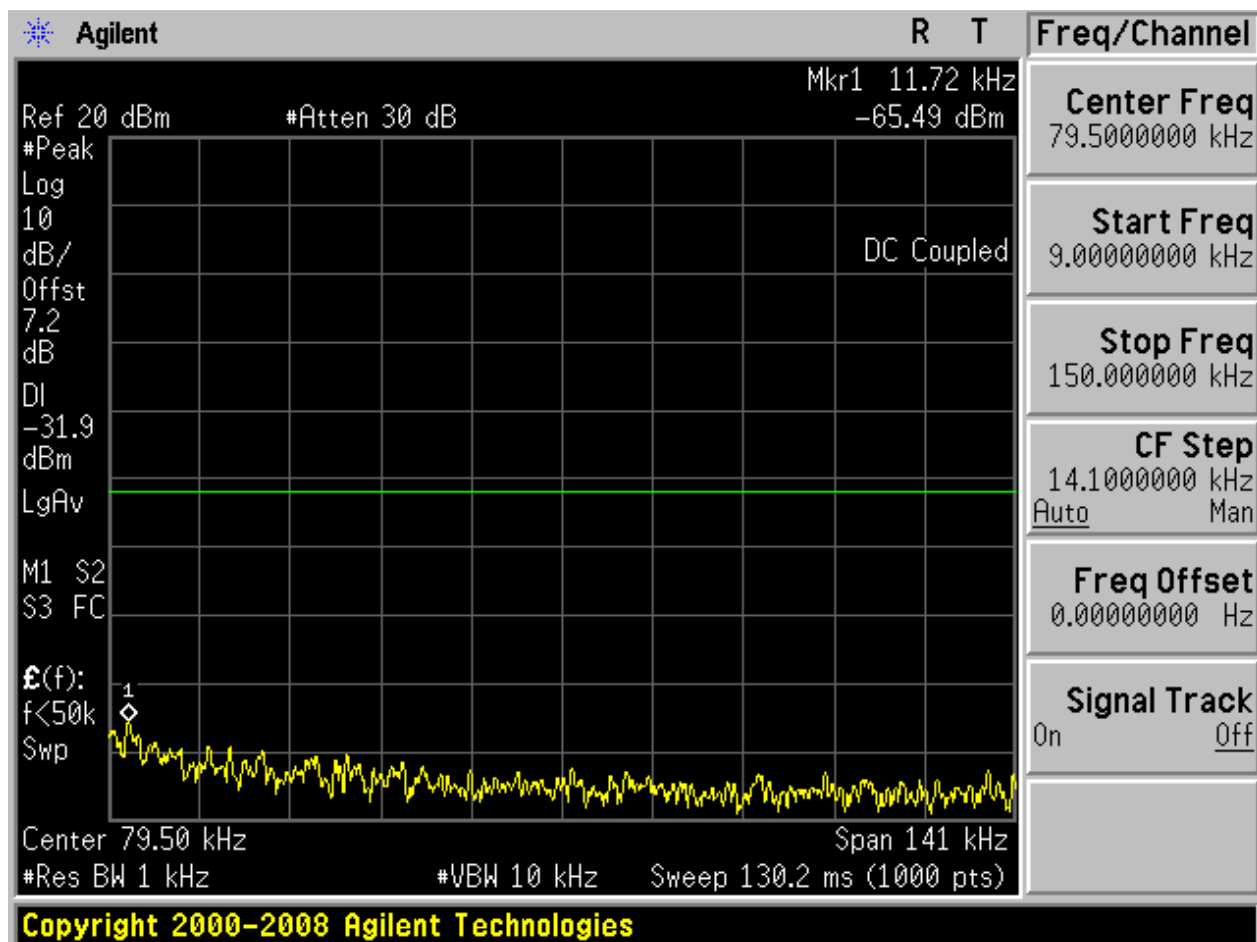


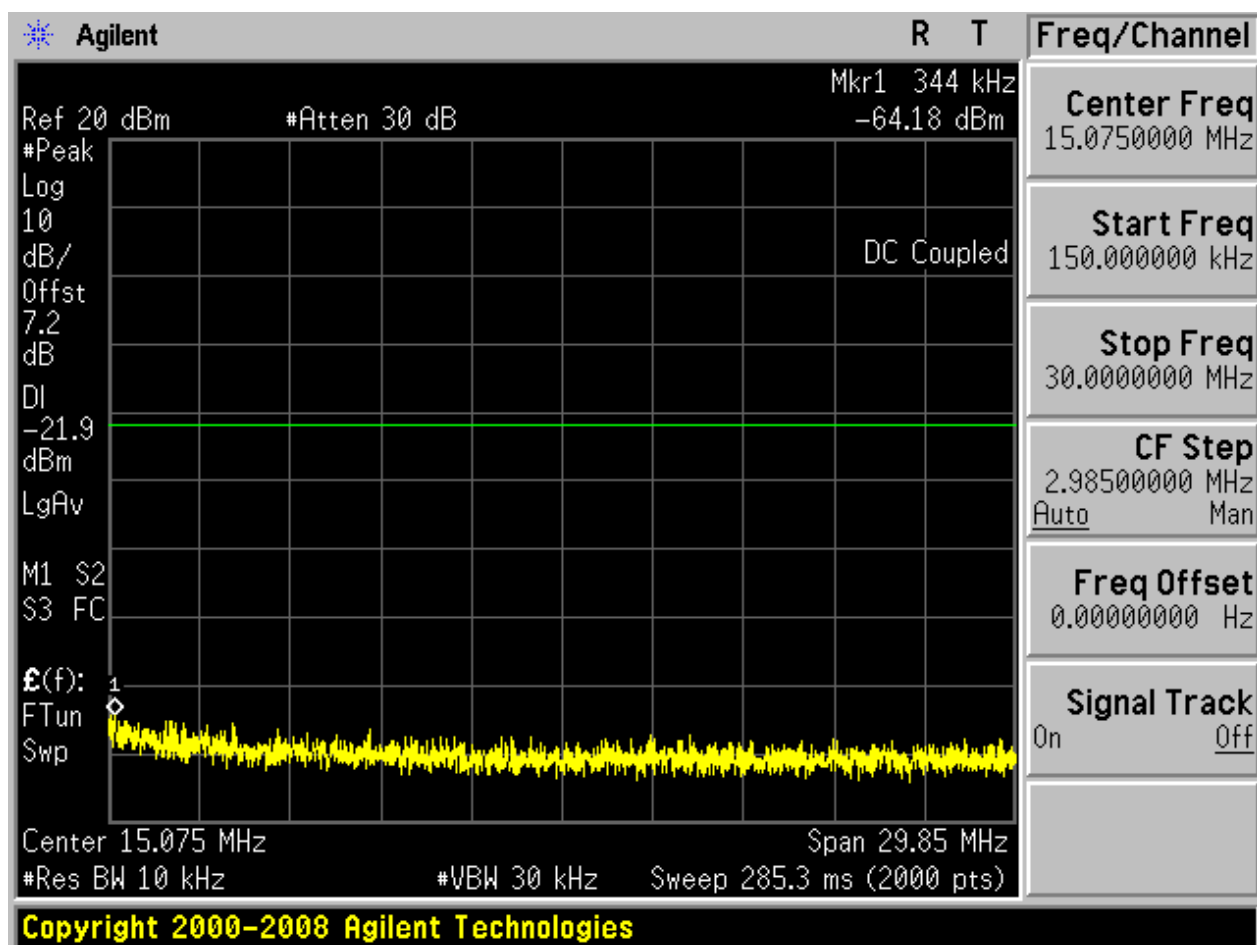

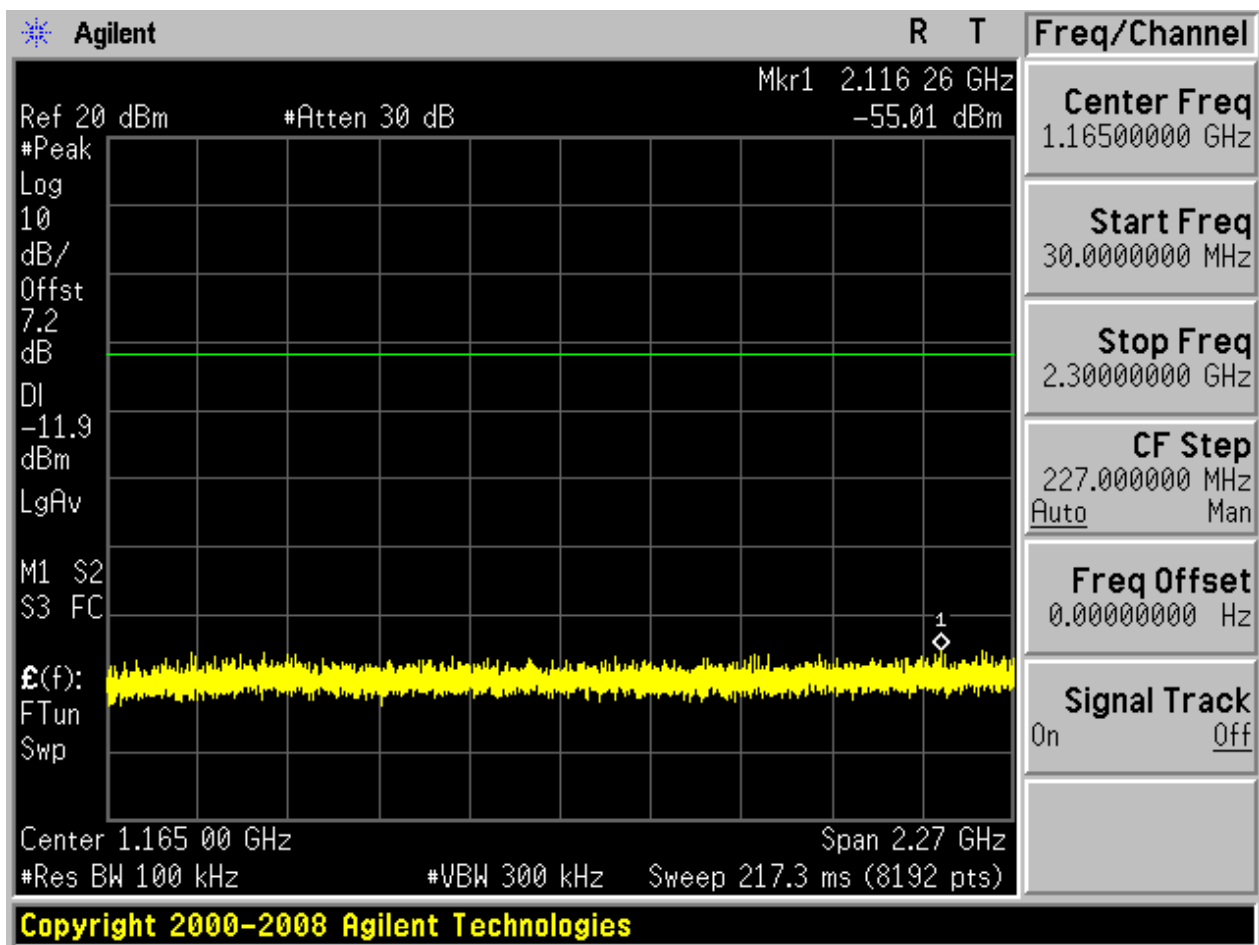

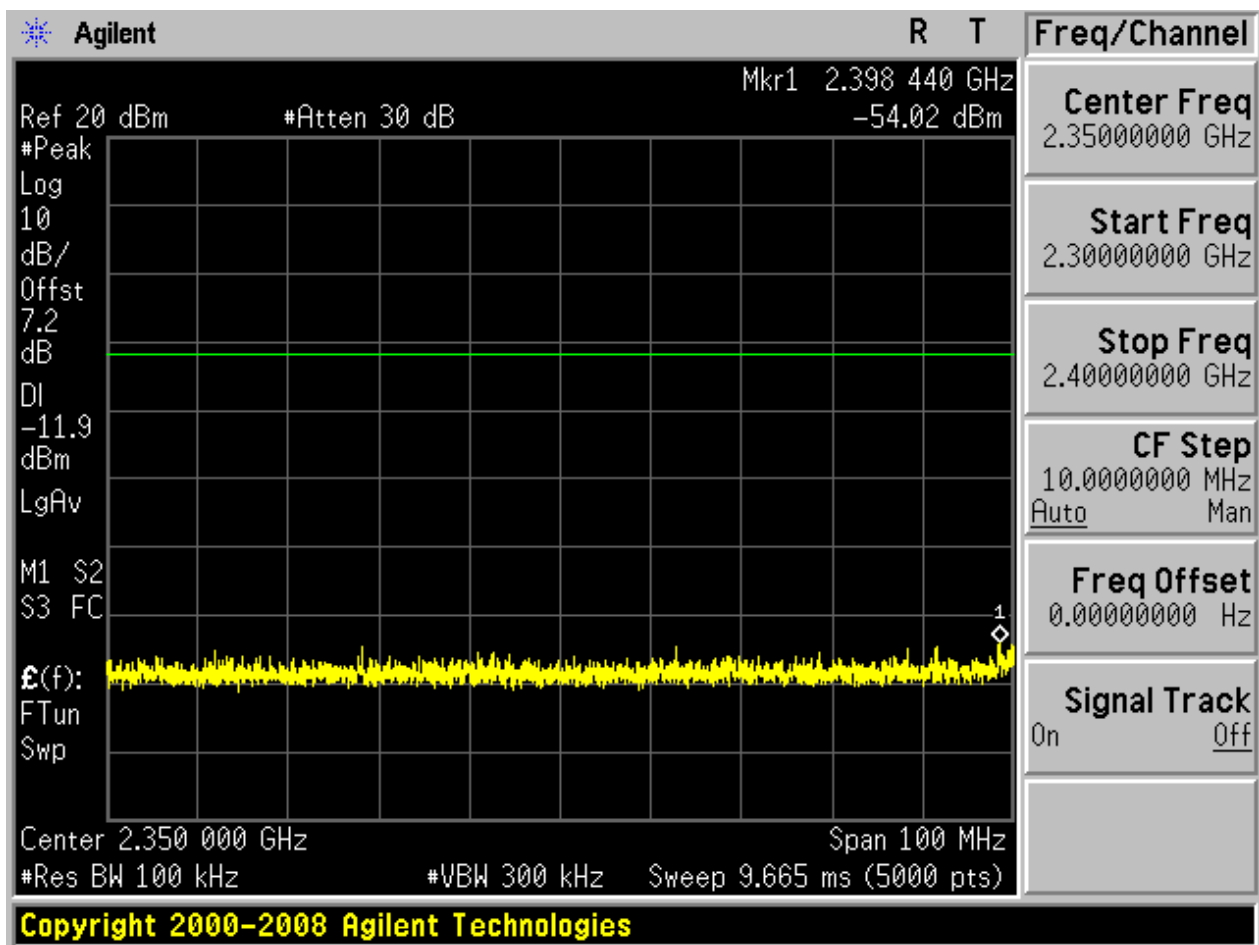


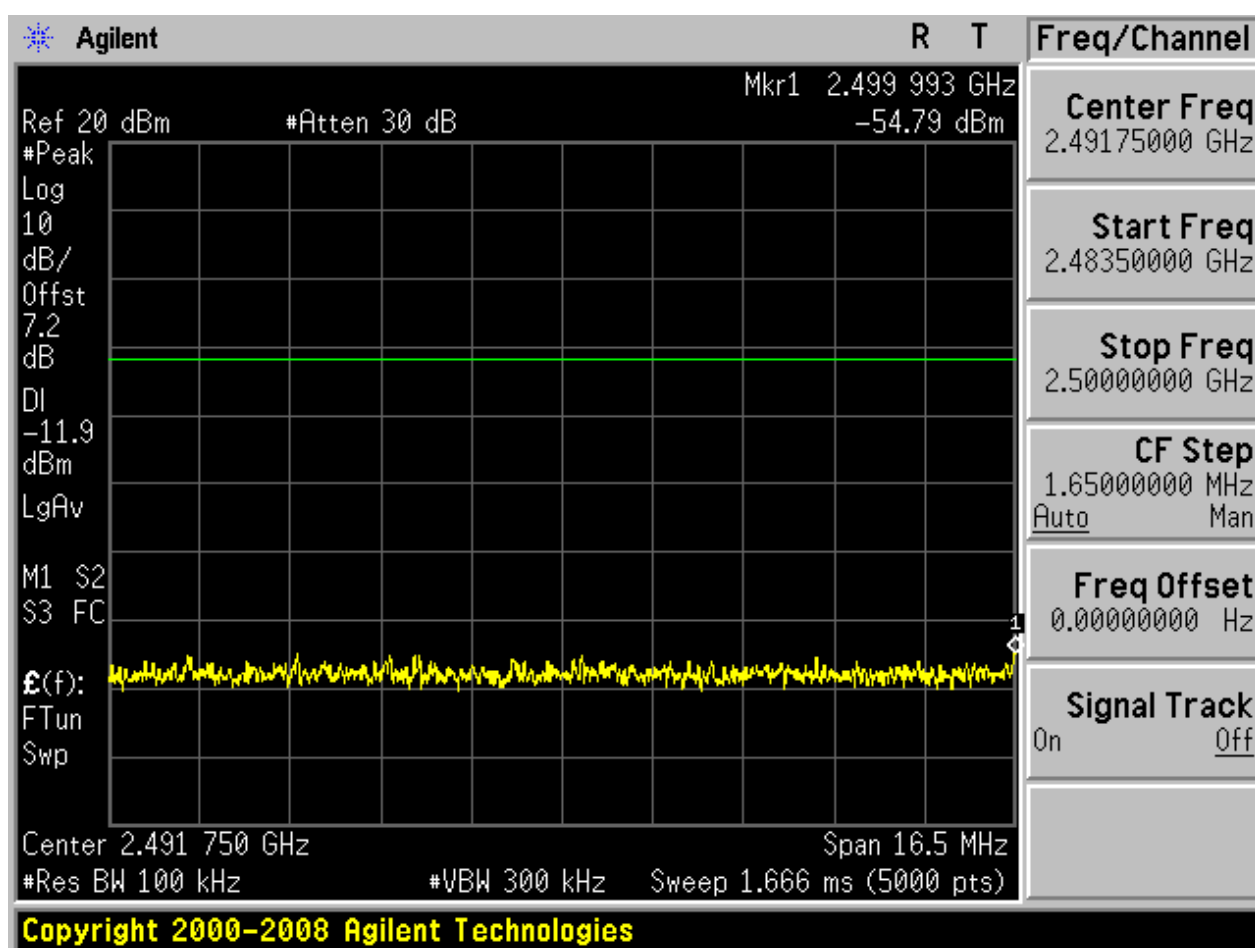

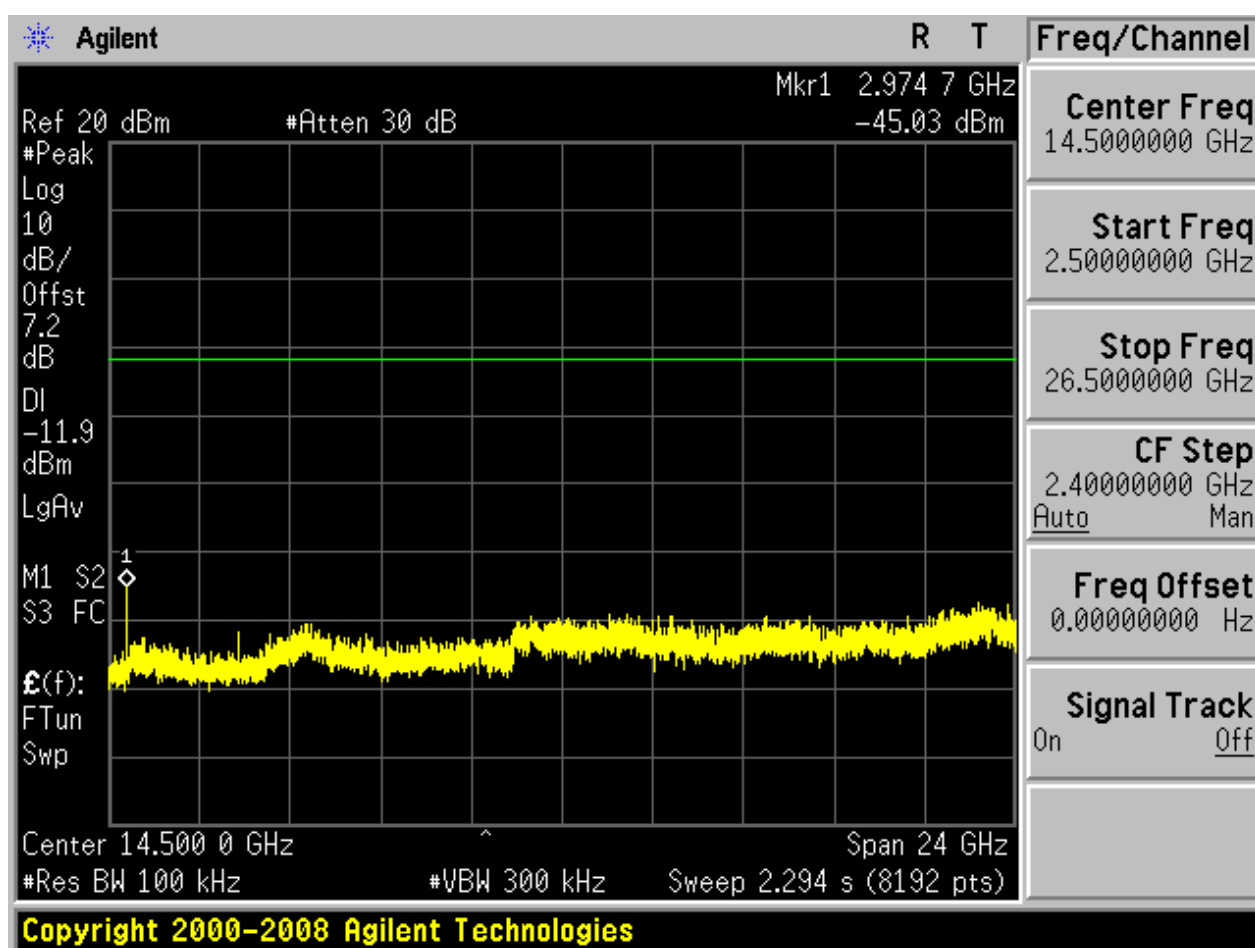



2.2 TM1_DH5_Ch39


2.2.1 Pref

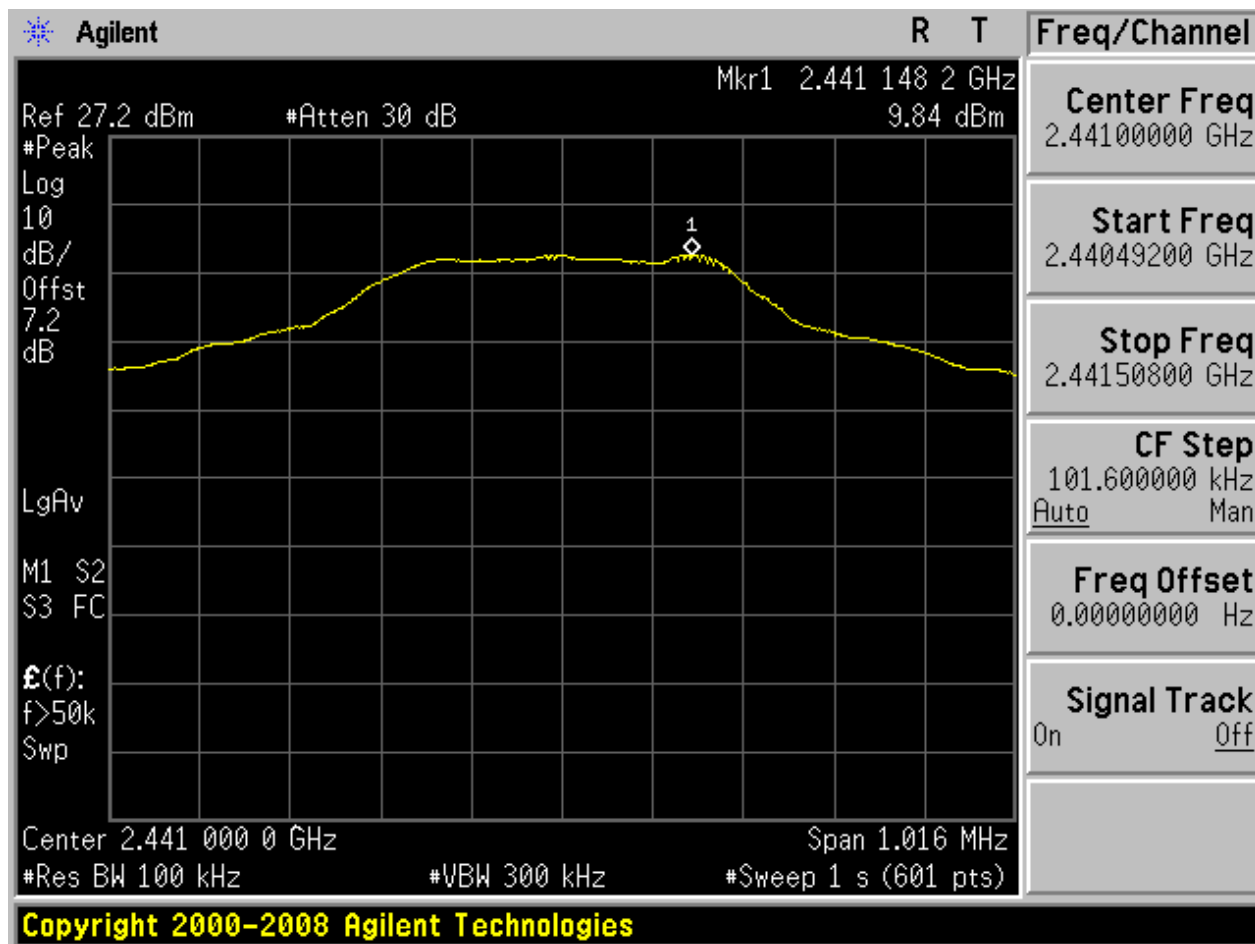



2.2.2 Puw

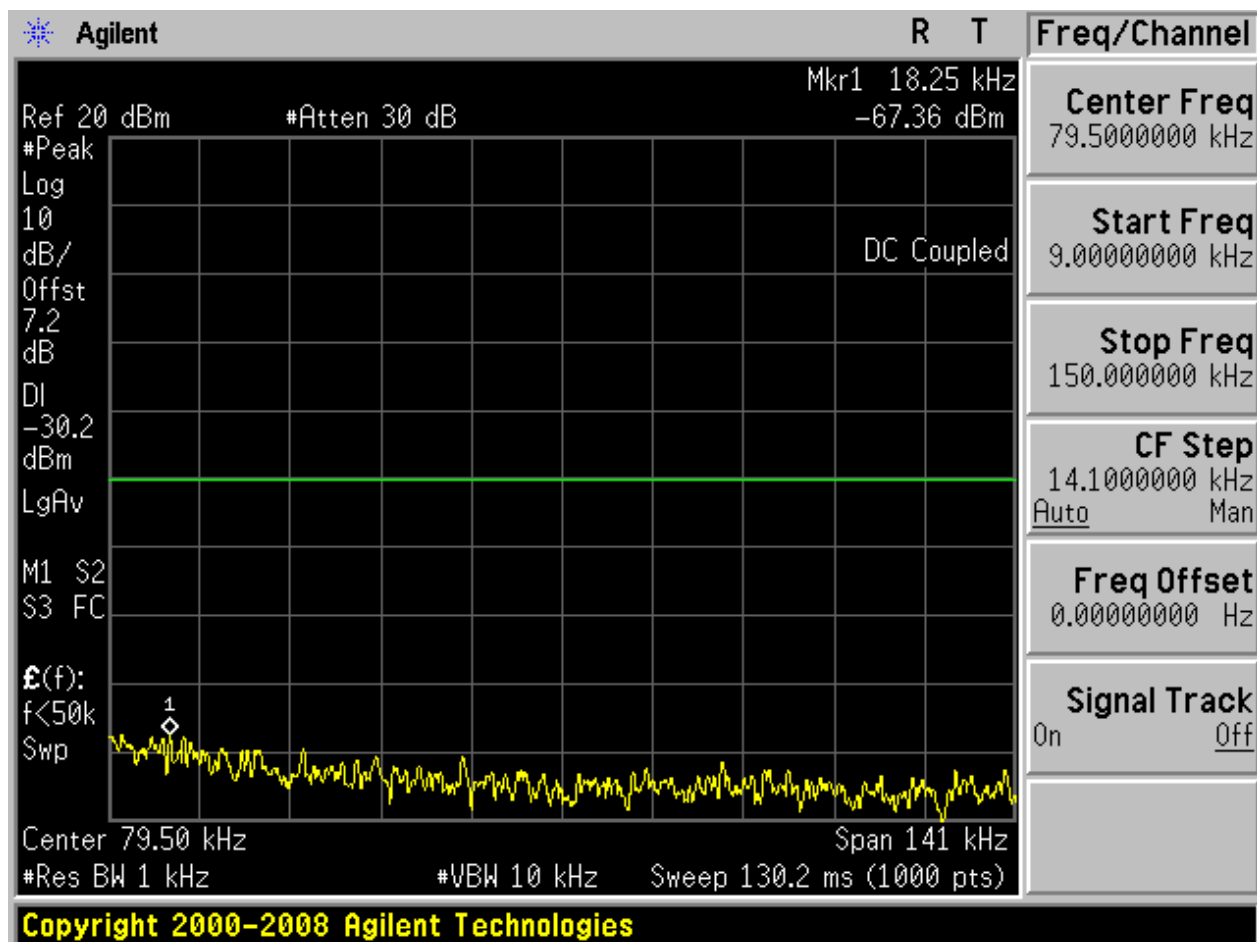


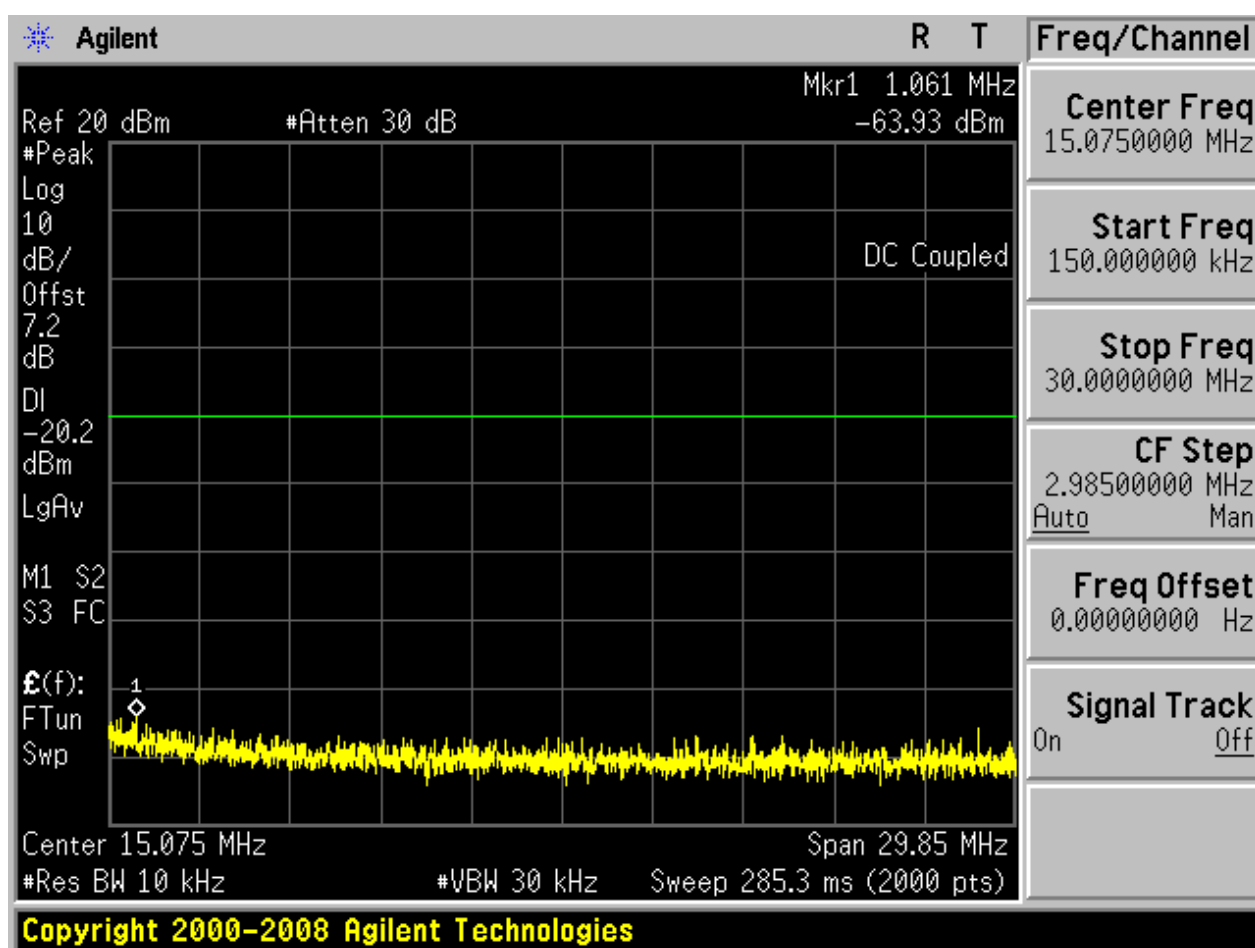

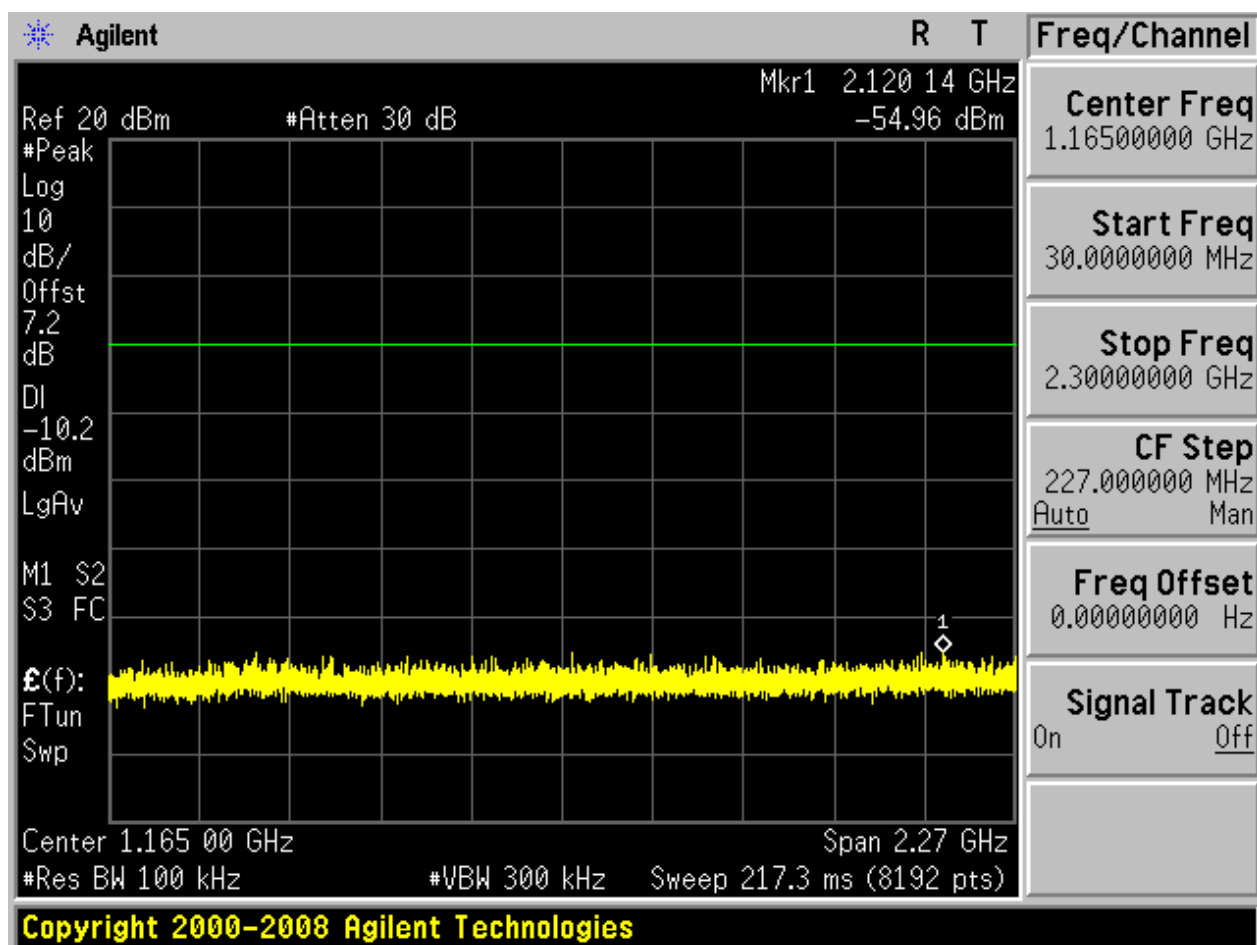

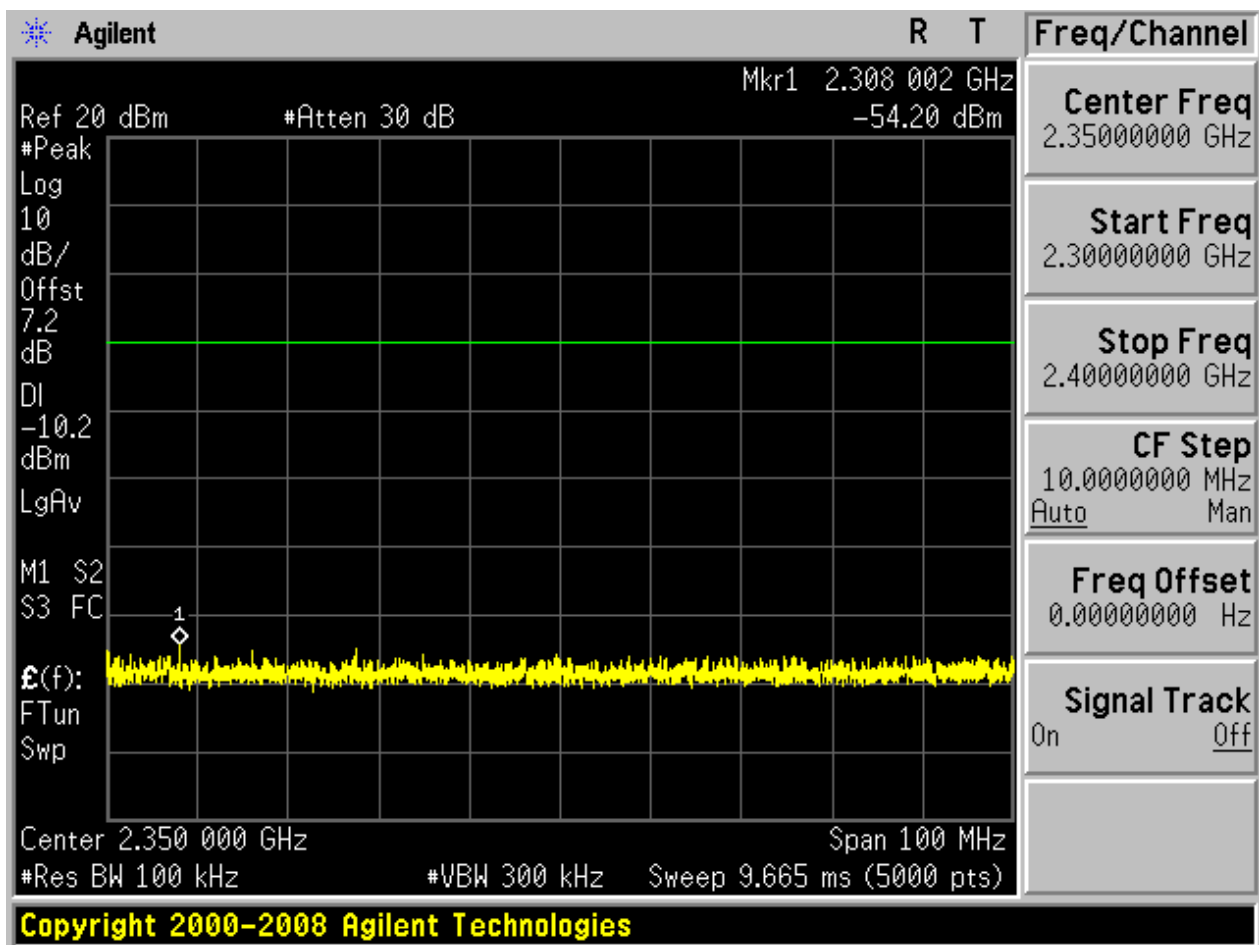

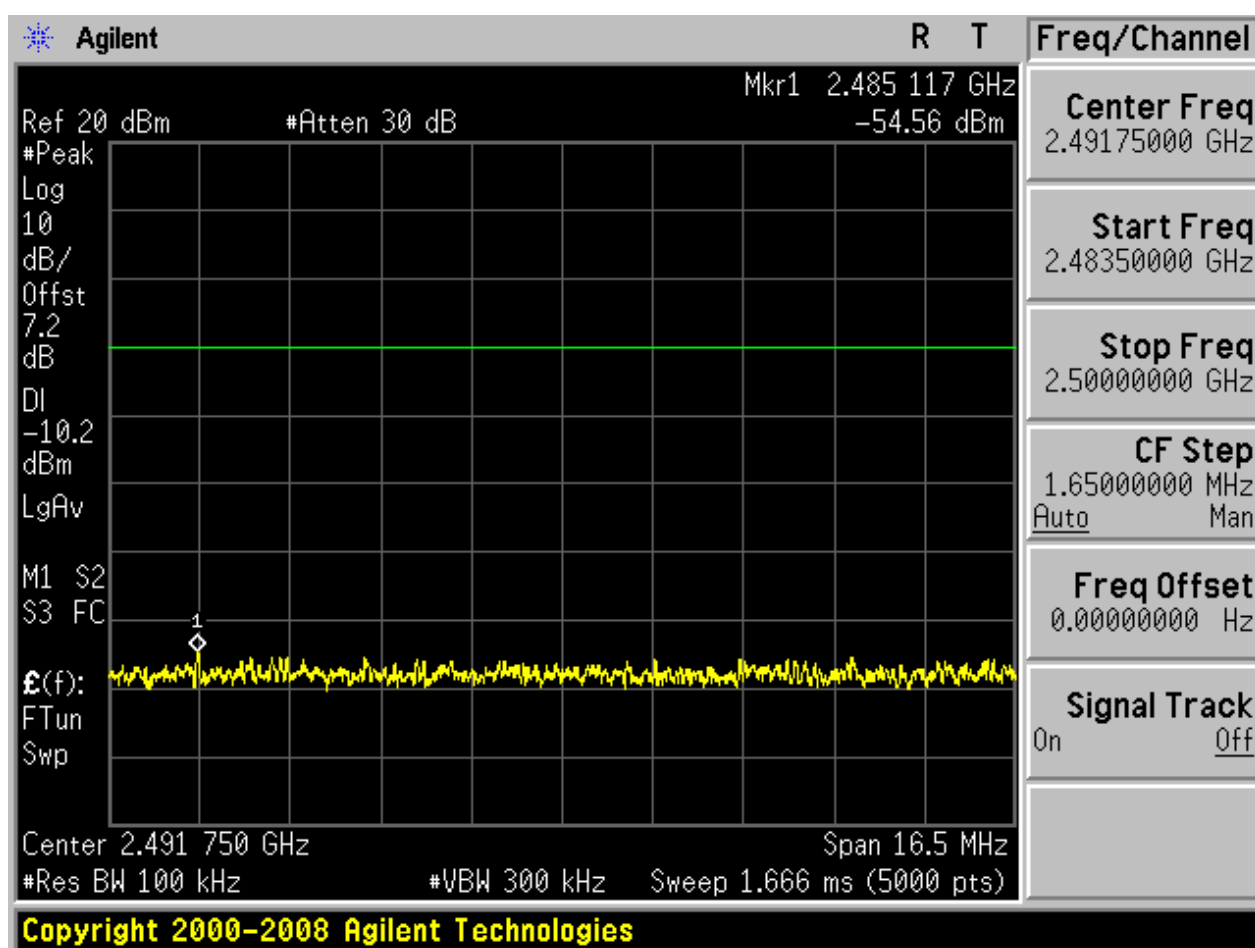


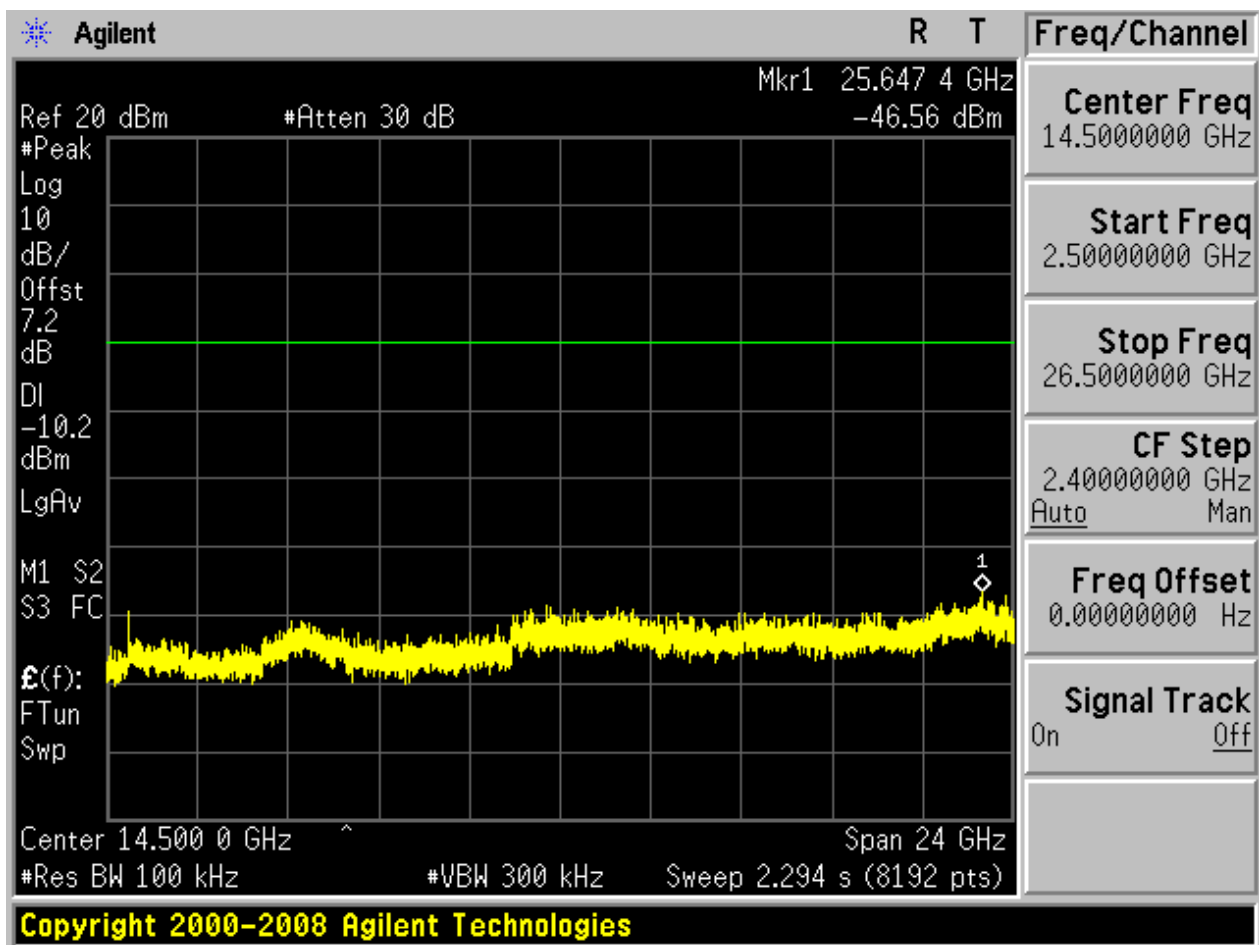




2.3 TM1_DH5_Ch78


2.3.1 Pref

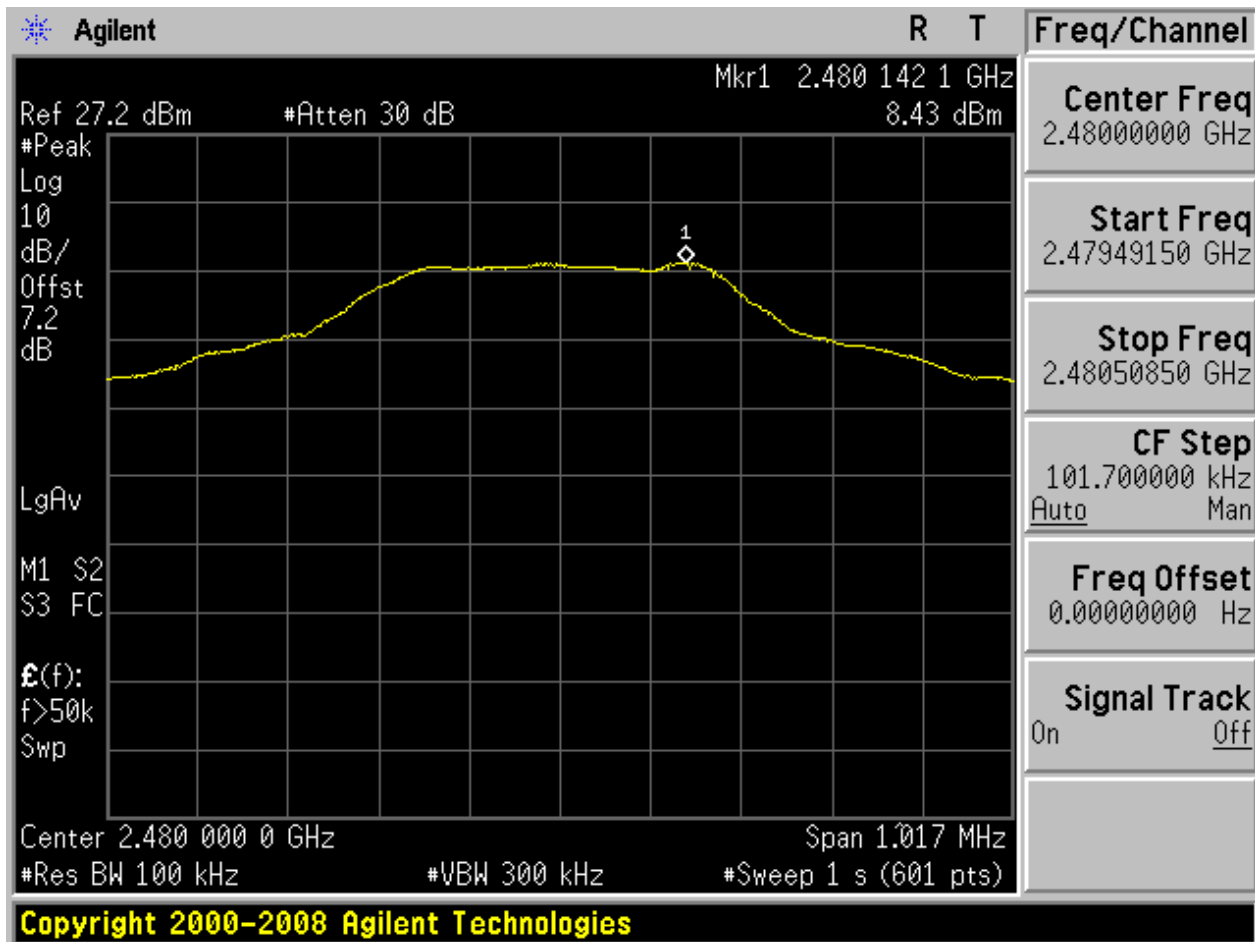






2.3.2 Puw

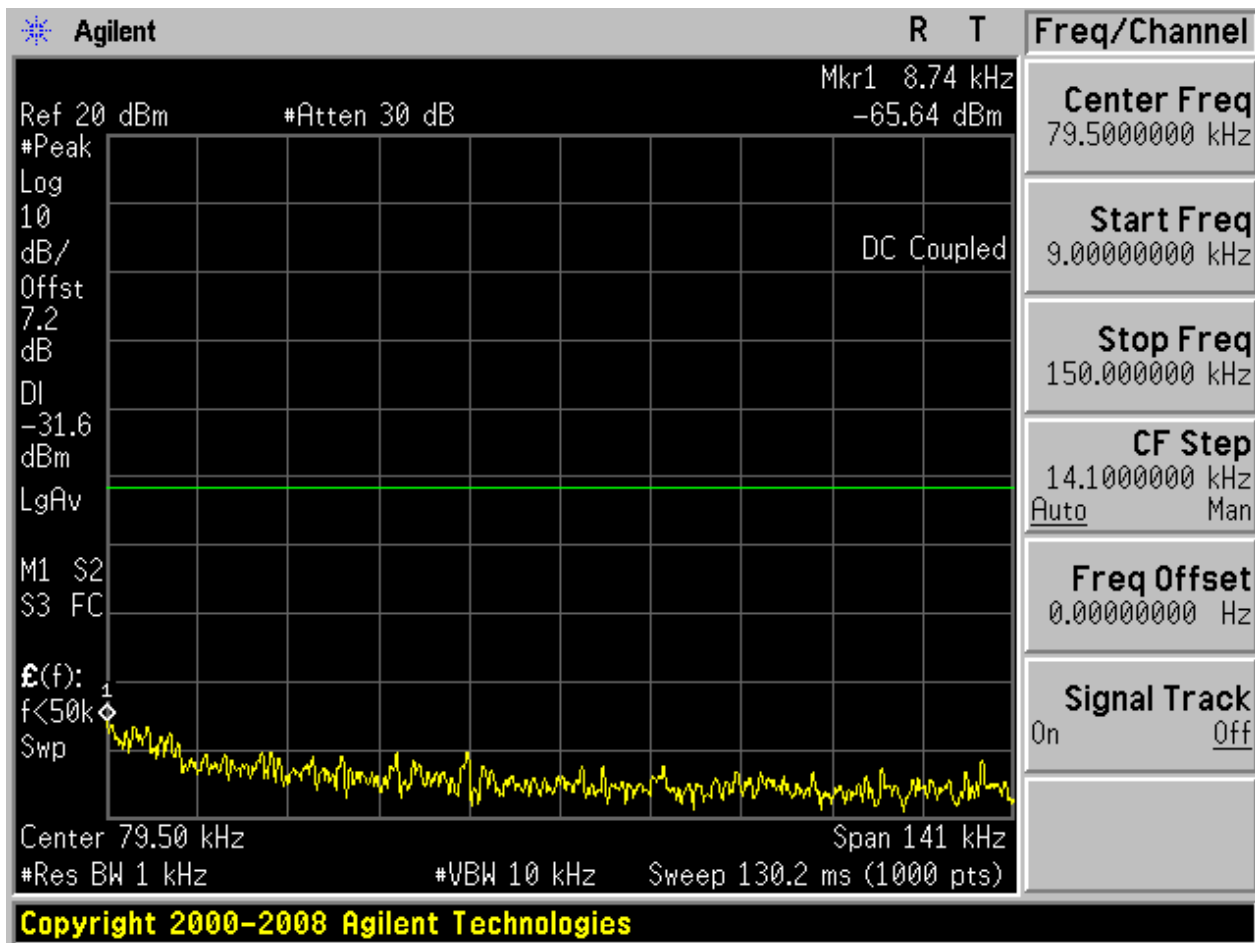


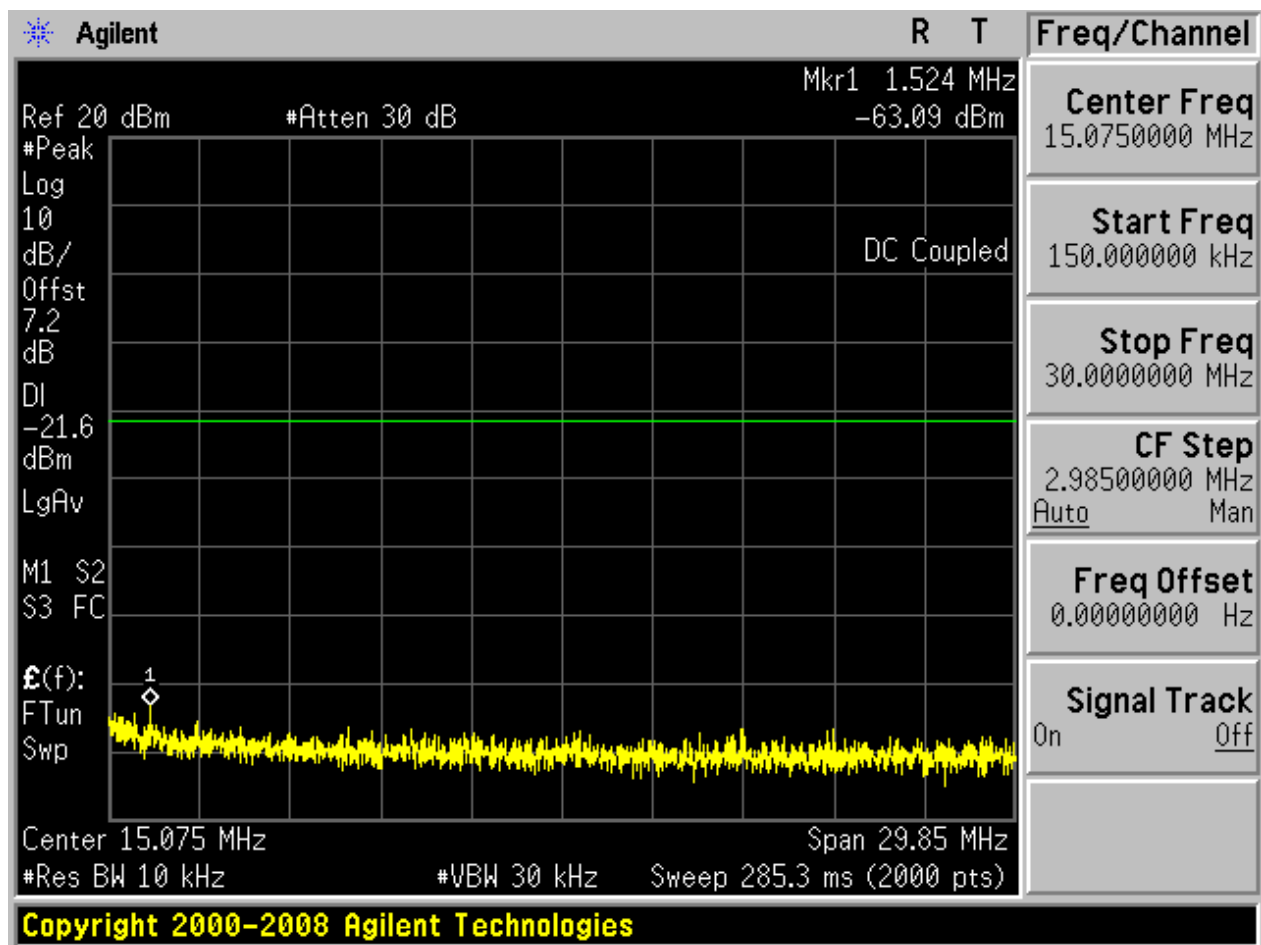

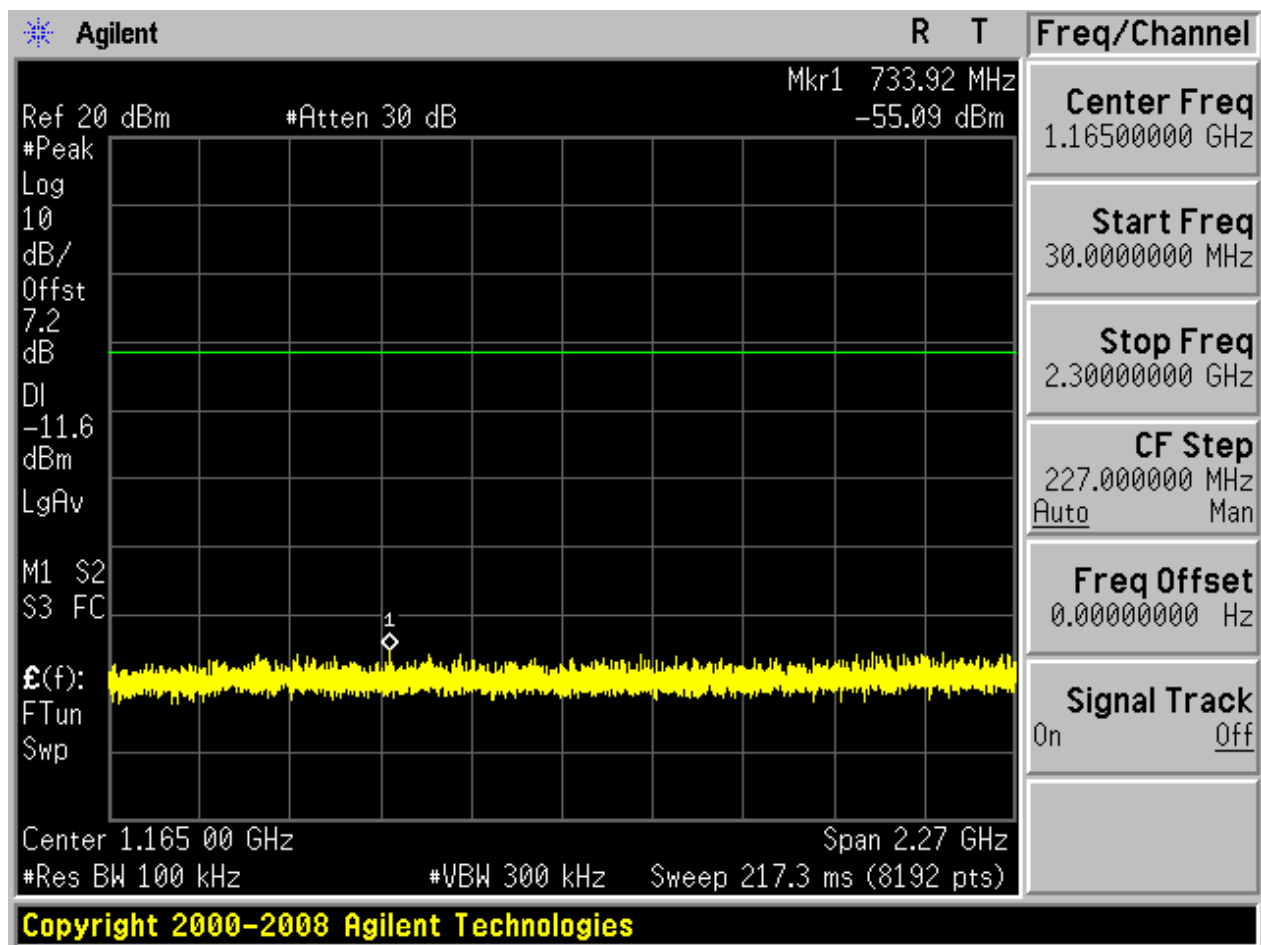

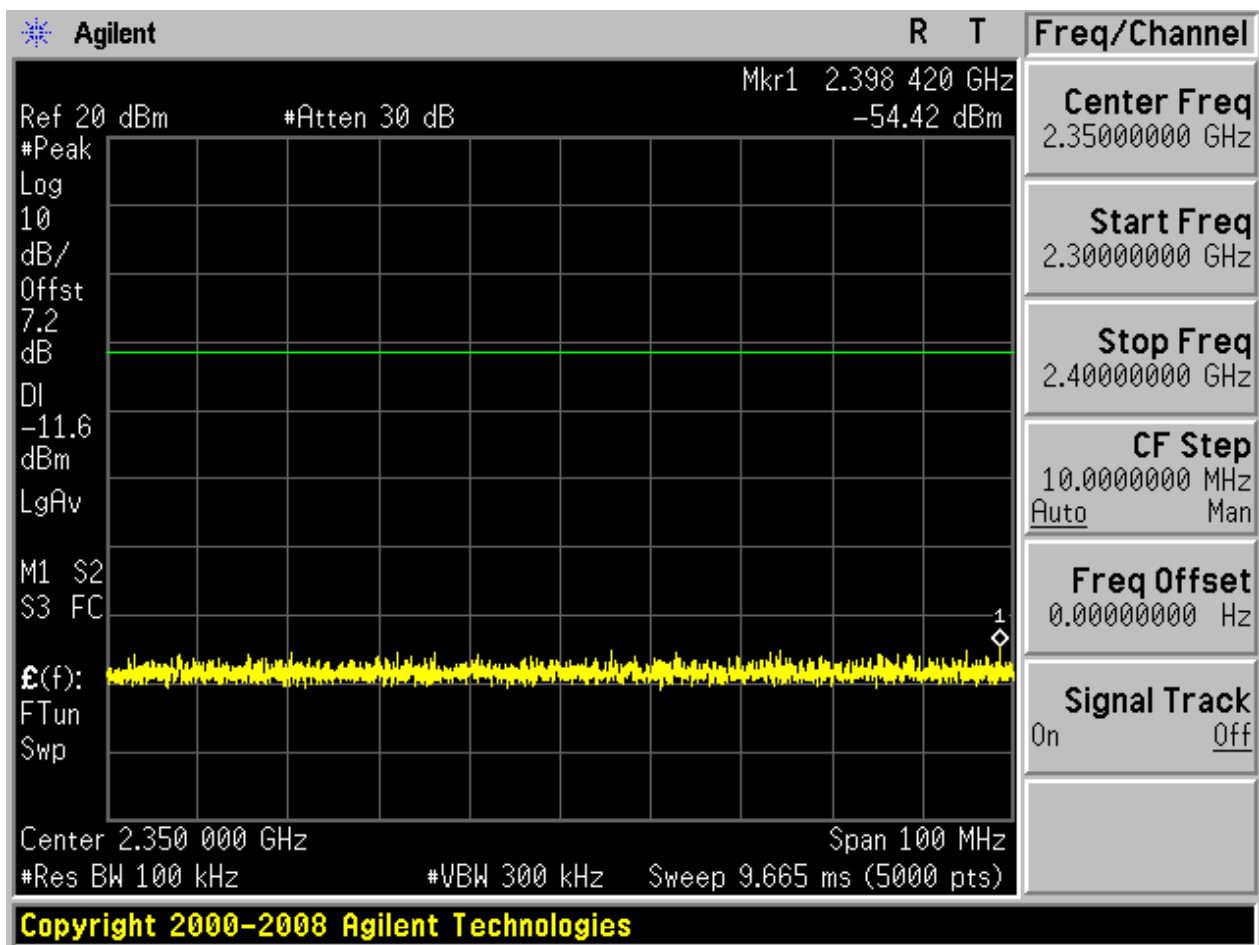


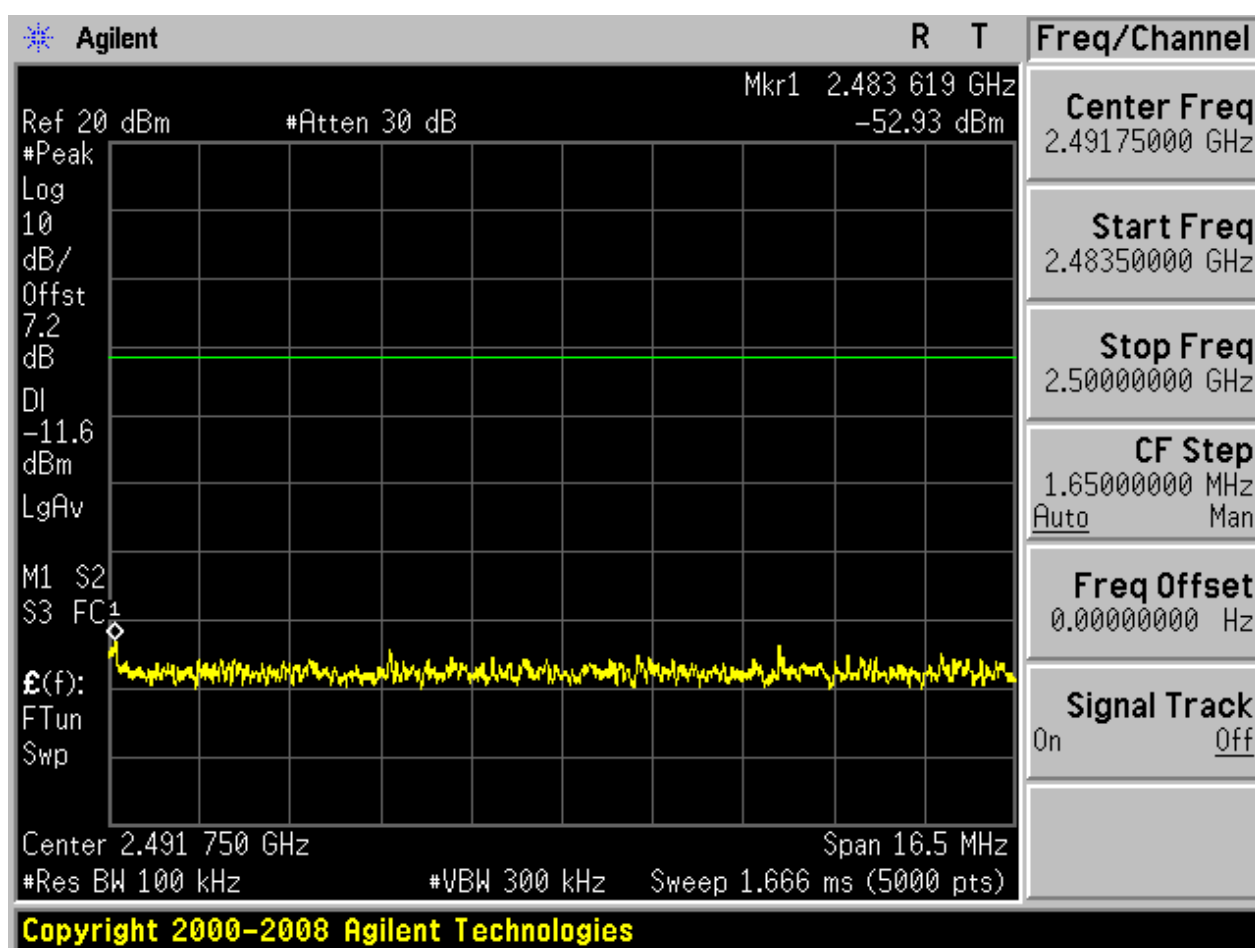

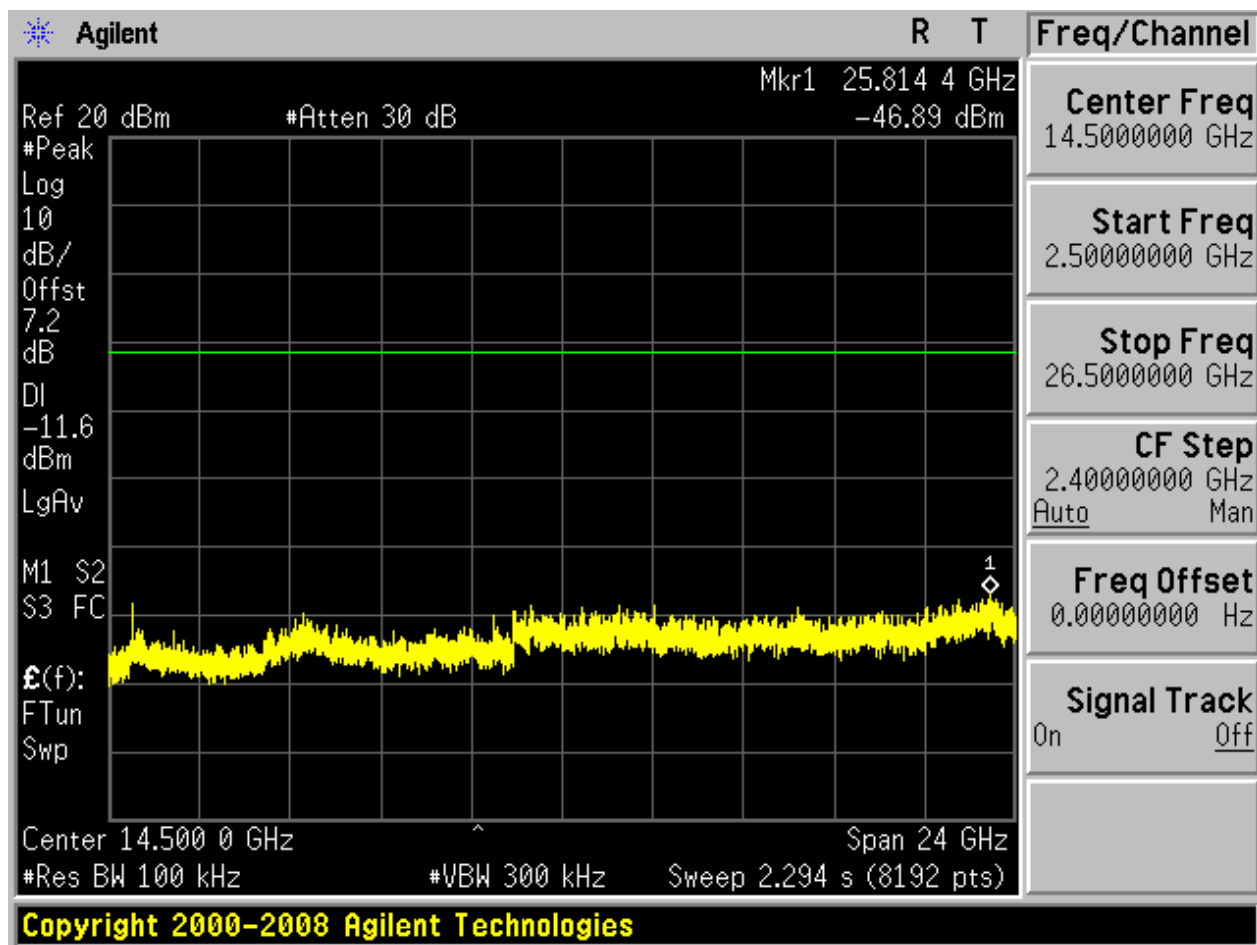



2.4 TM2_2DH5_Ch0


2.4.1 Pref

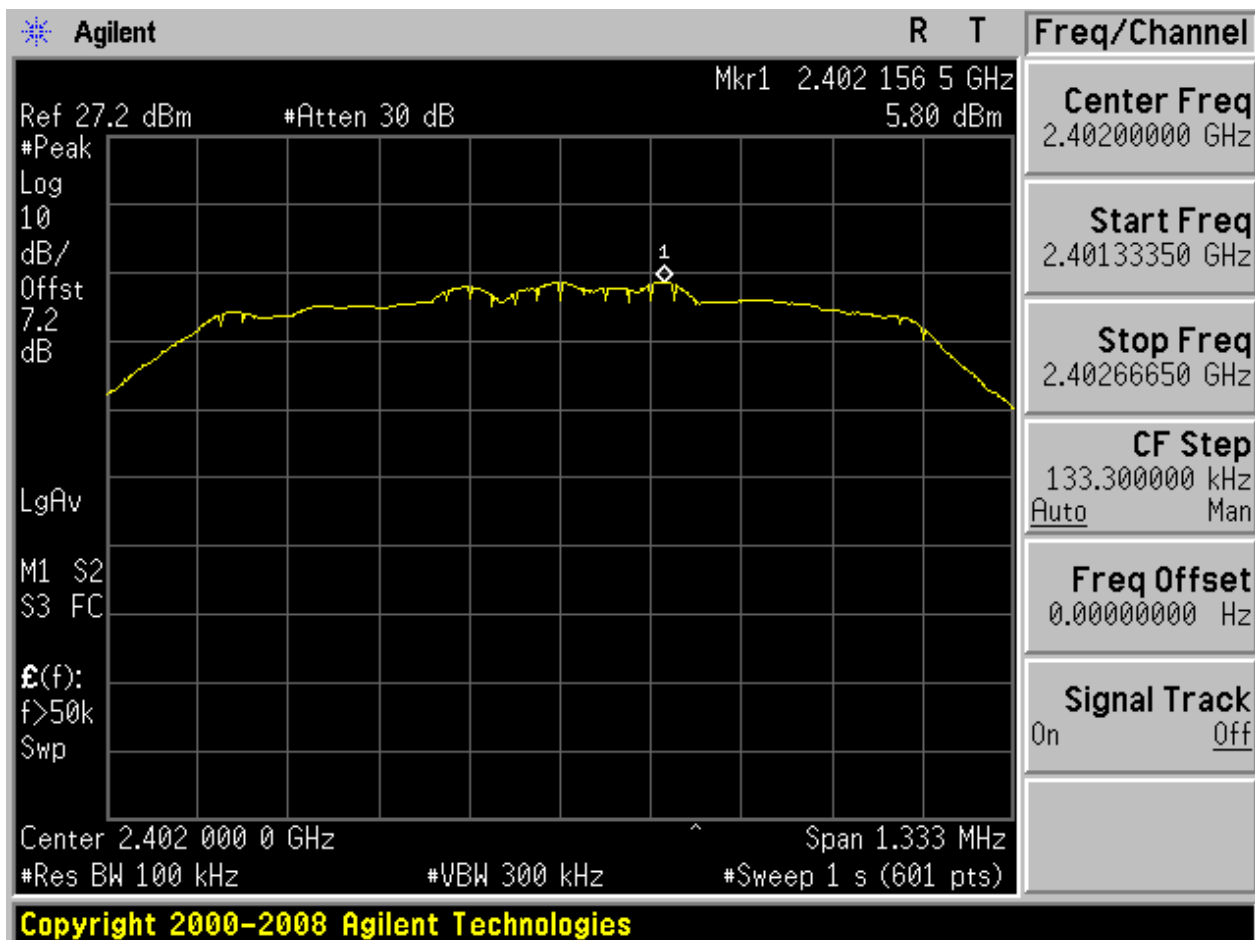



2.4.2 Puw

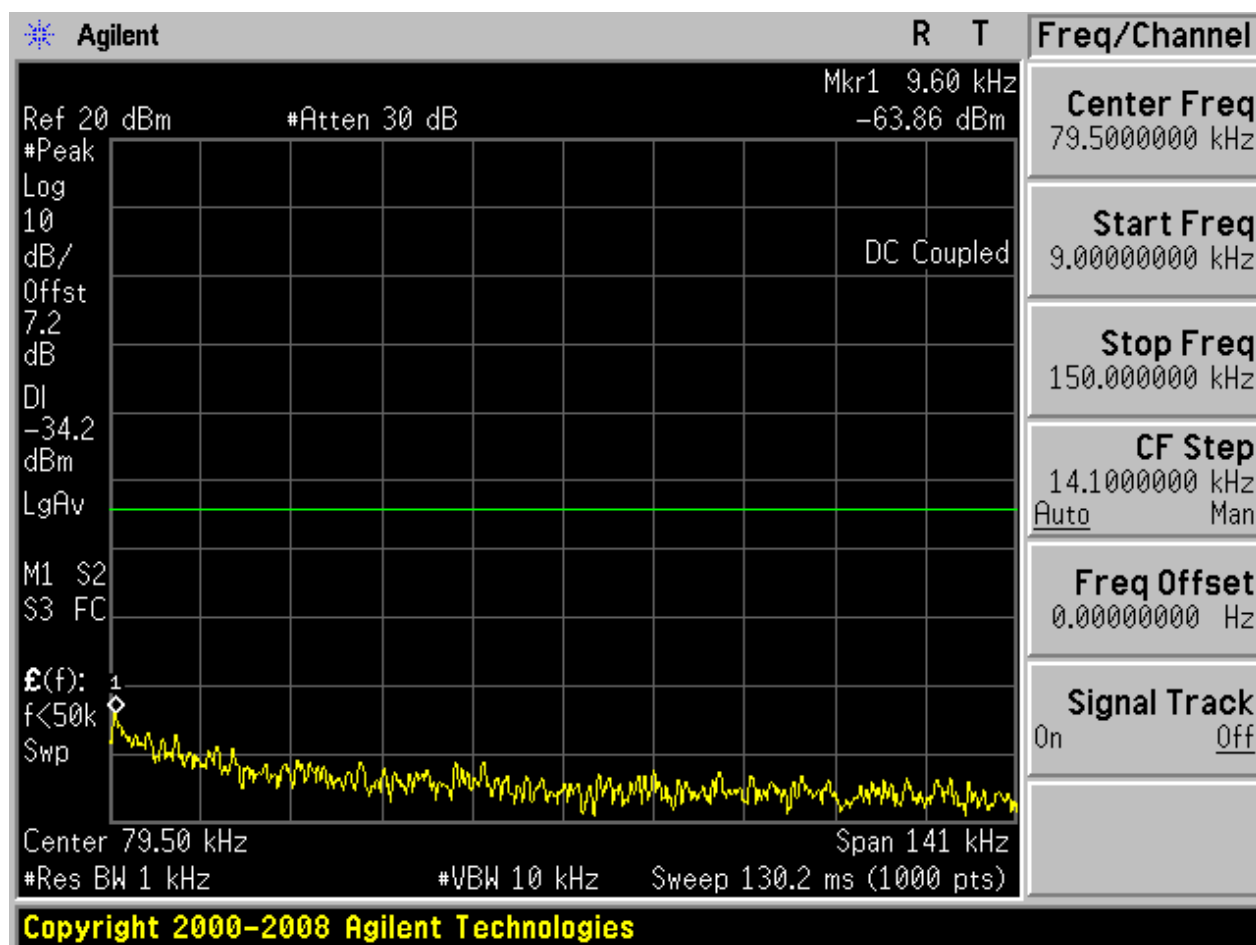


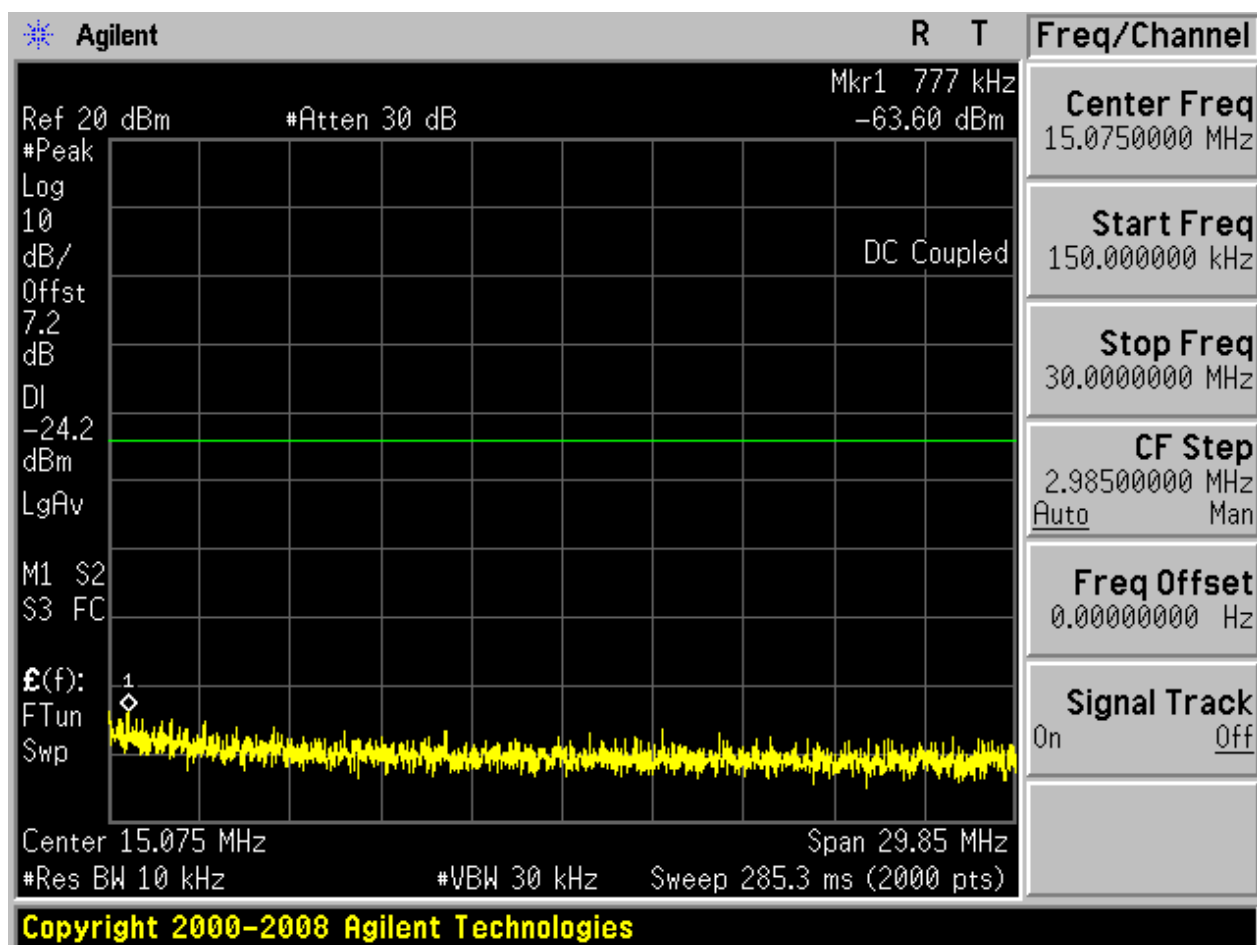

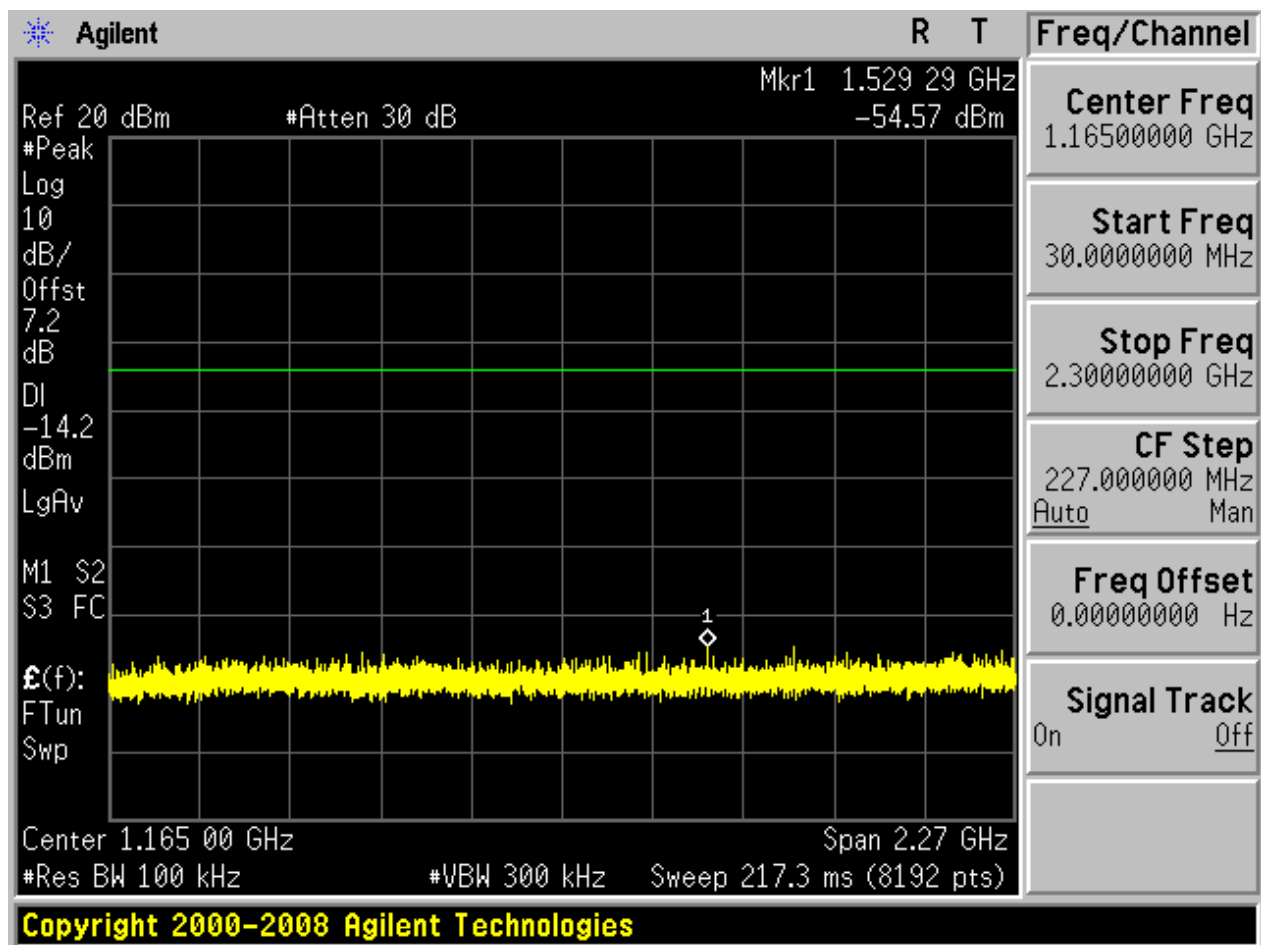

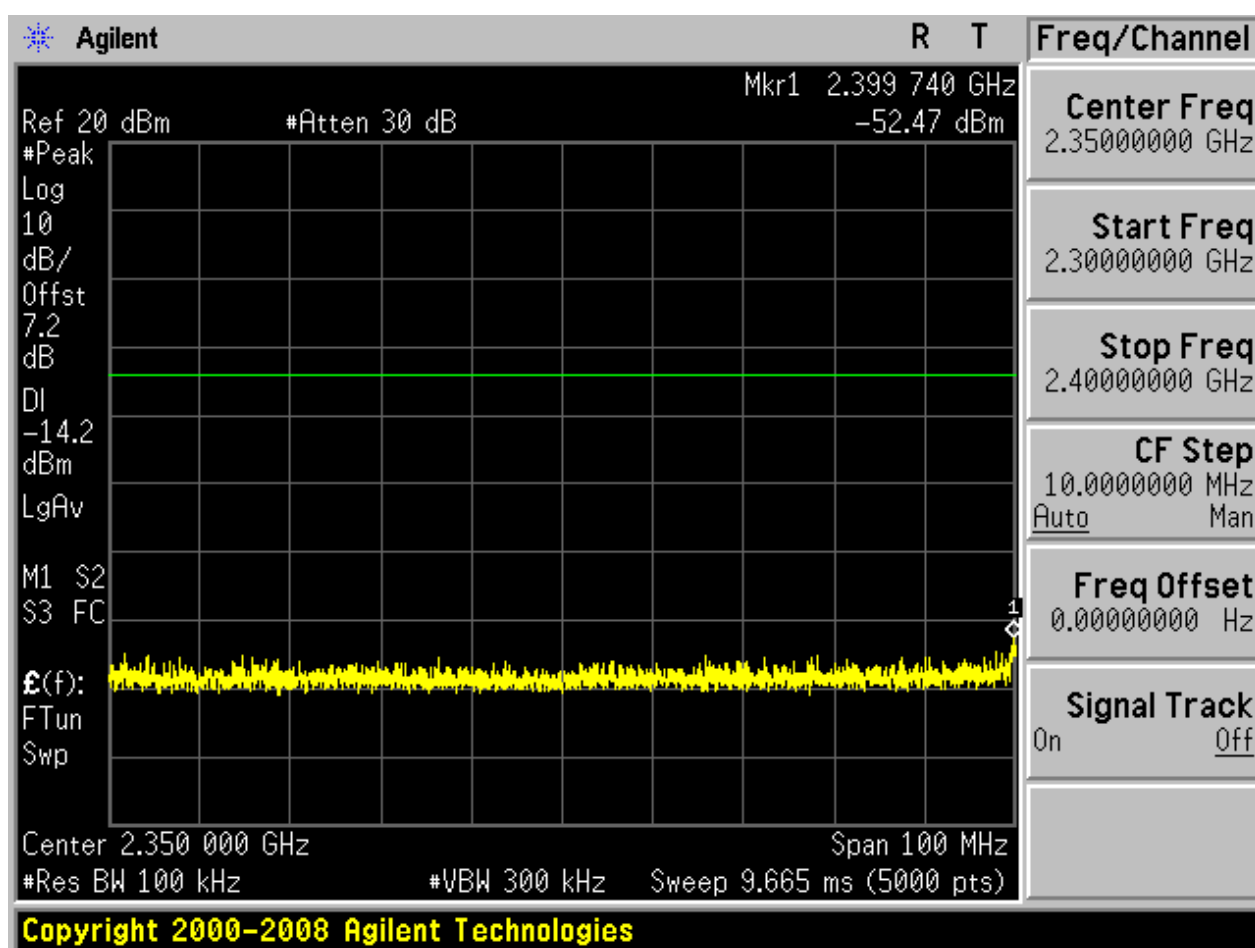


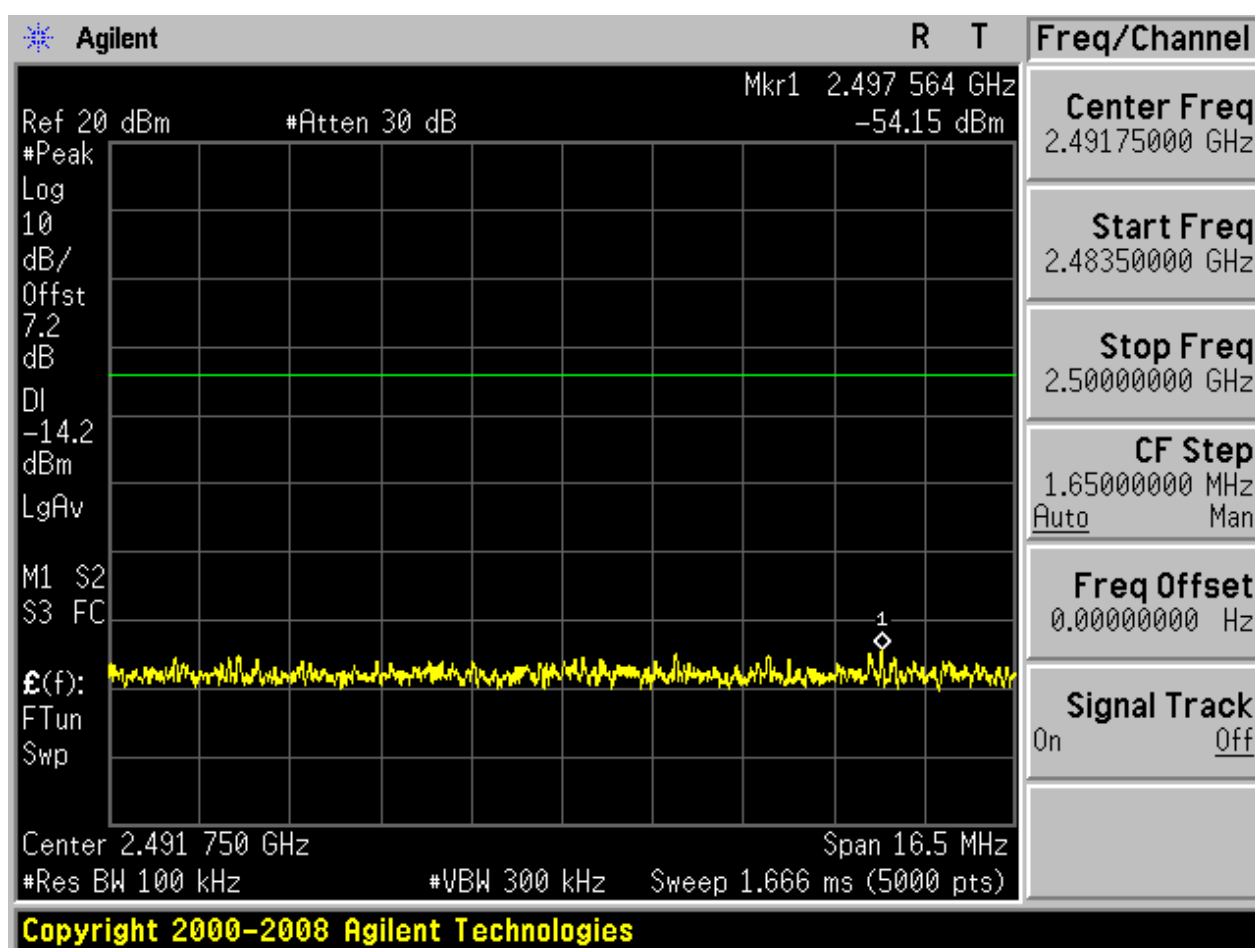

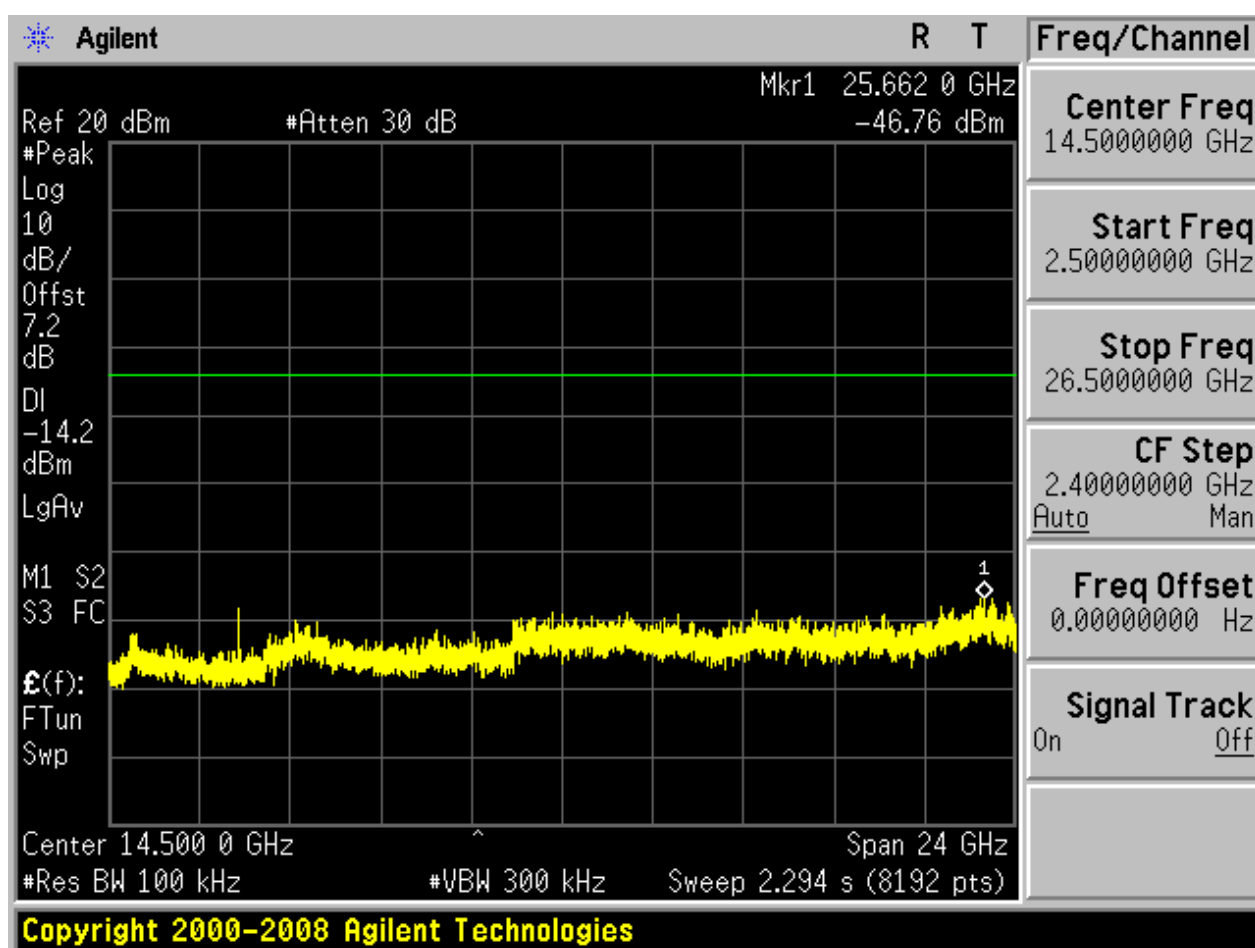



2.5 TM2_2DH5_Ch39


2.5.1 Pref

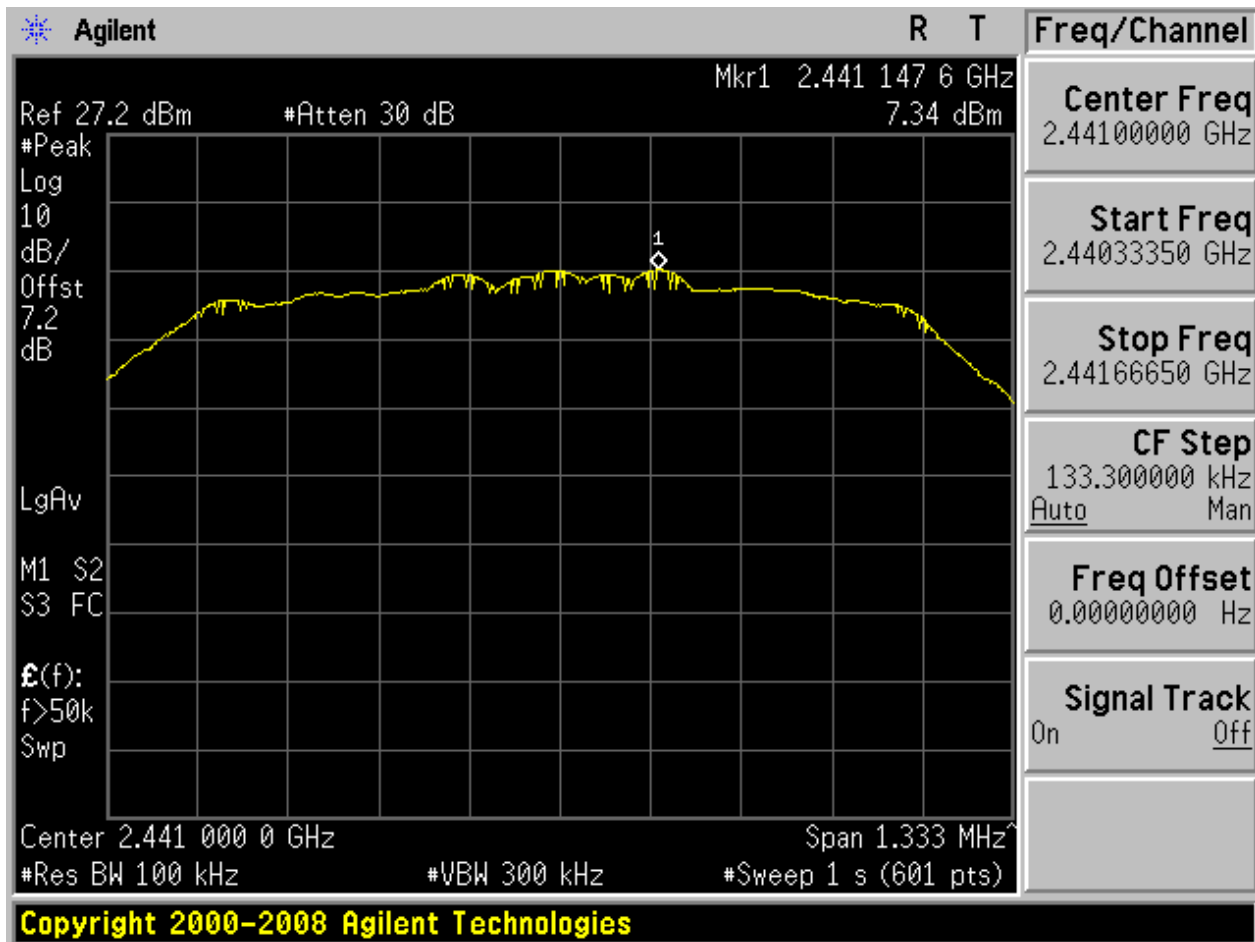



2.5.2 Puw

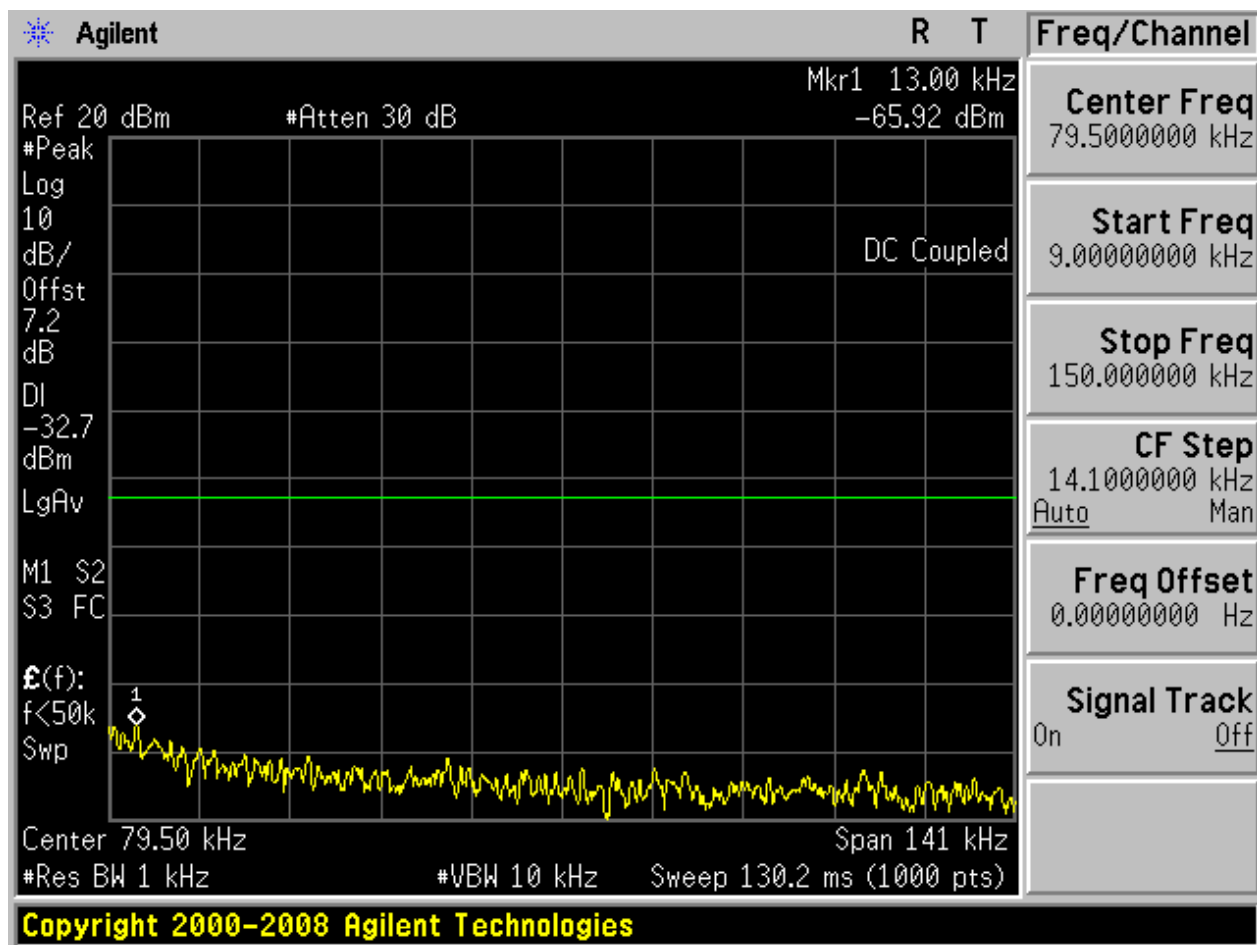


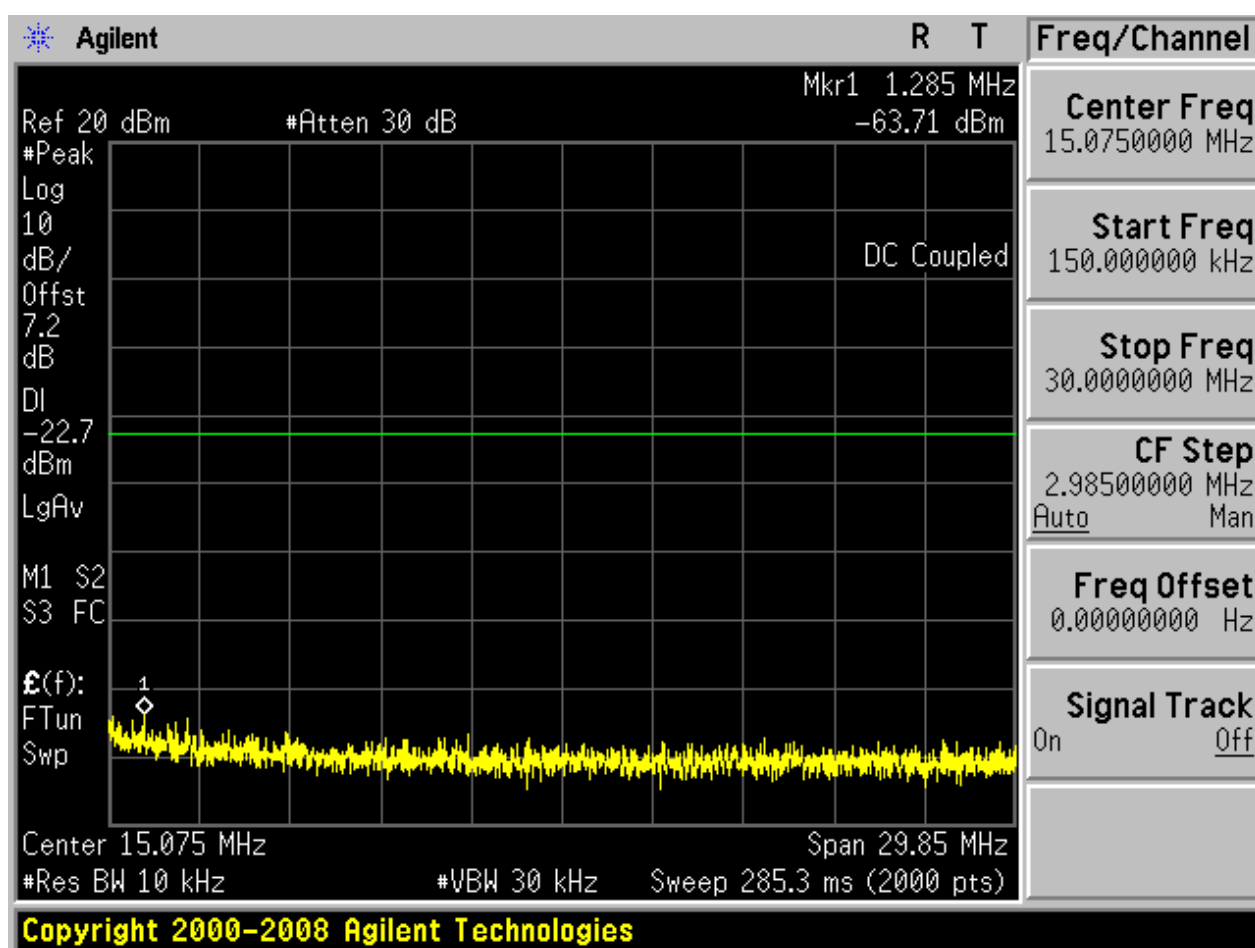

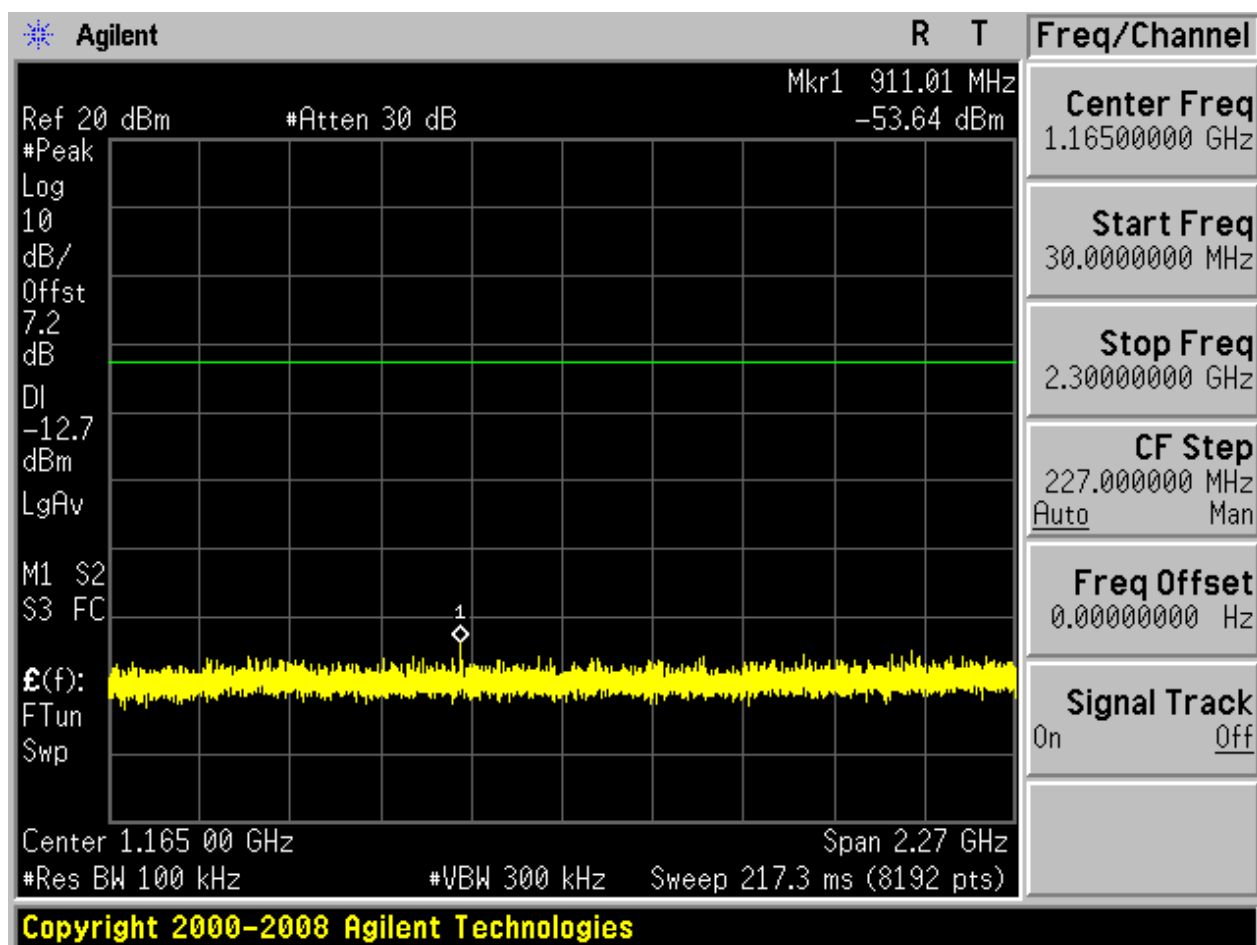

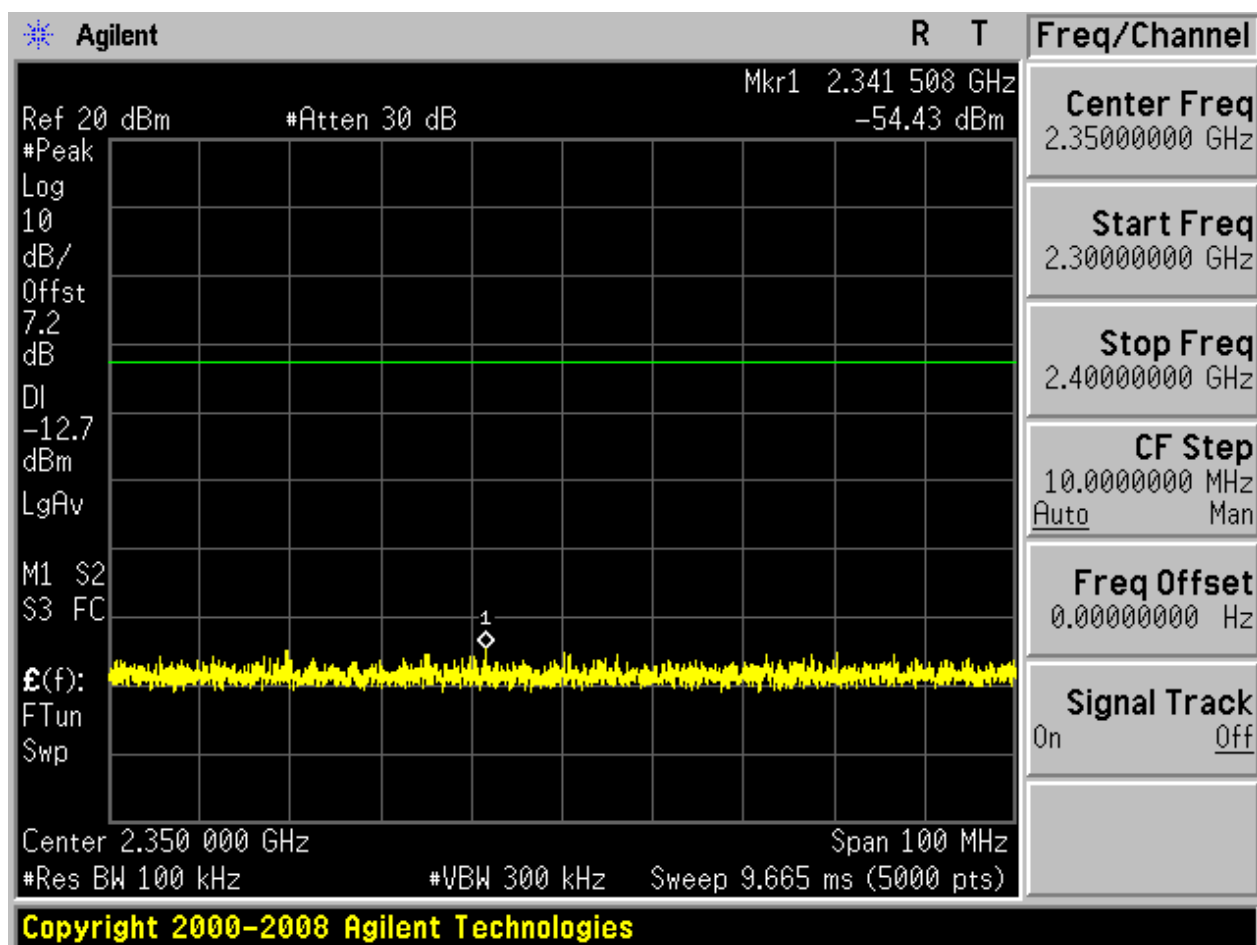


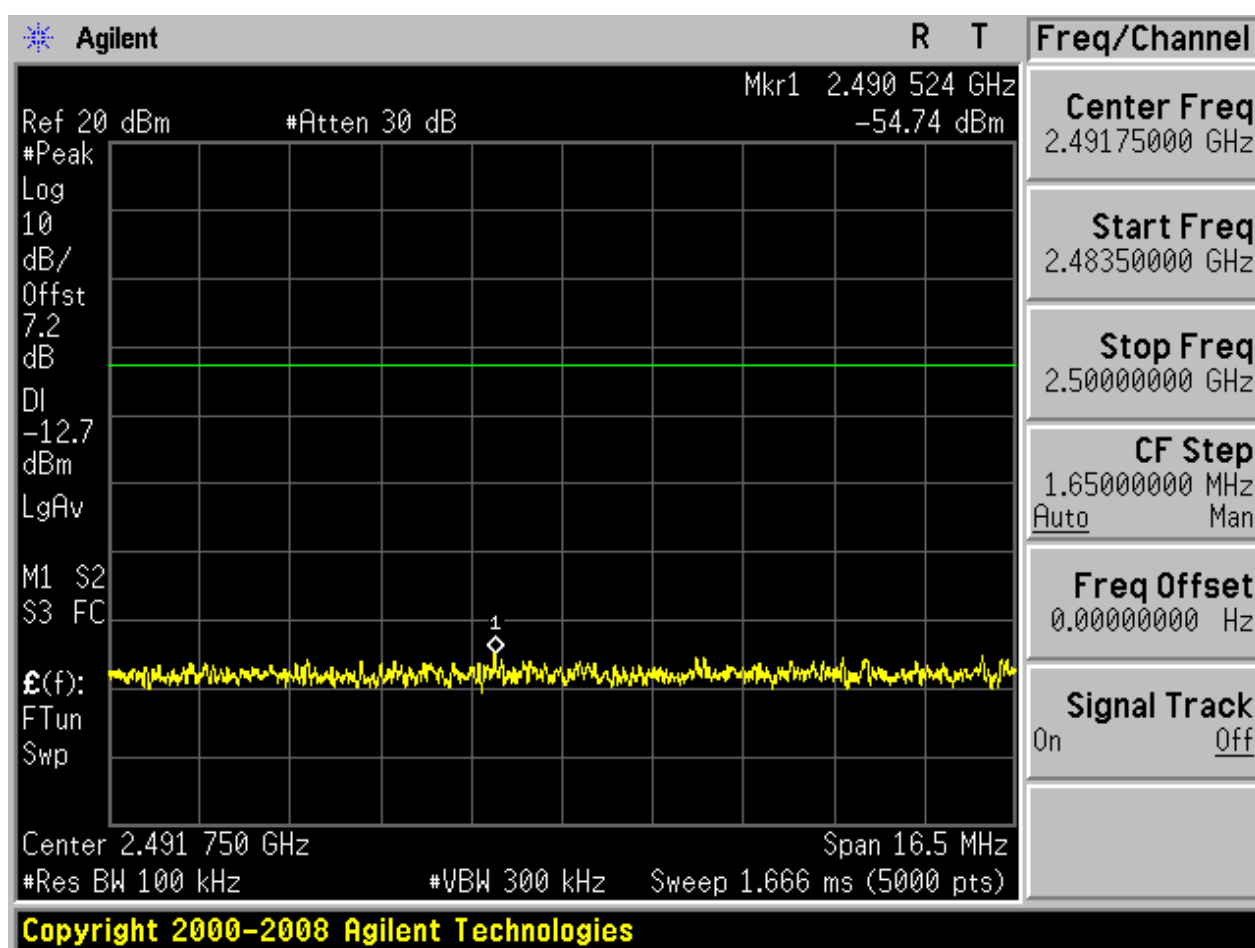

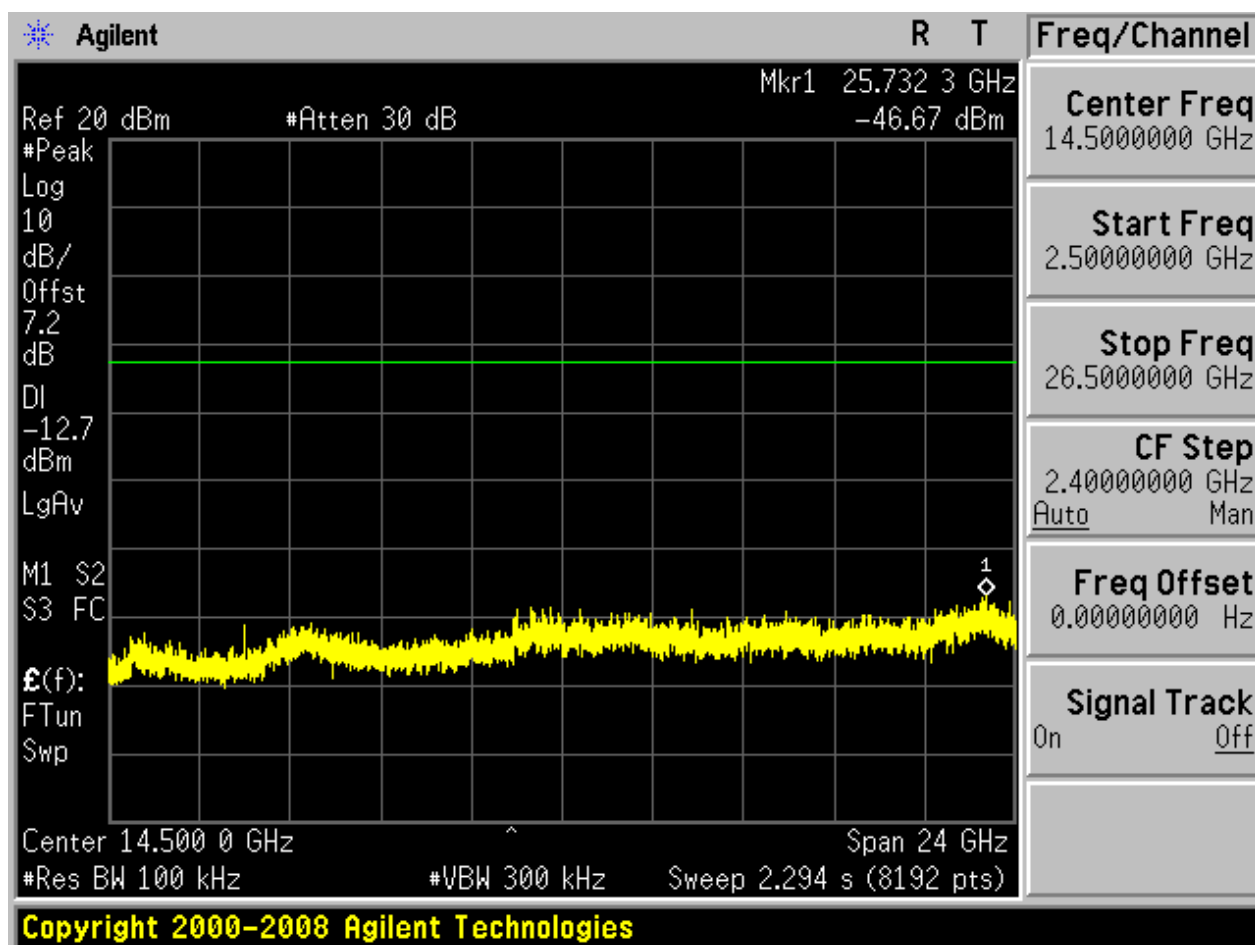



2.6 TM2_2DH5_Ch78


2.6.1 Pref

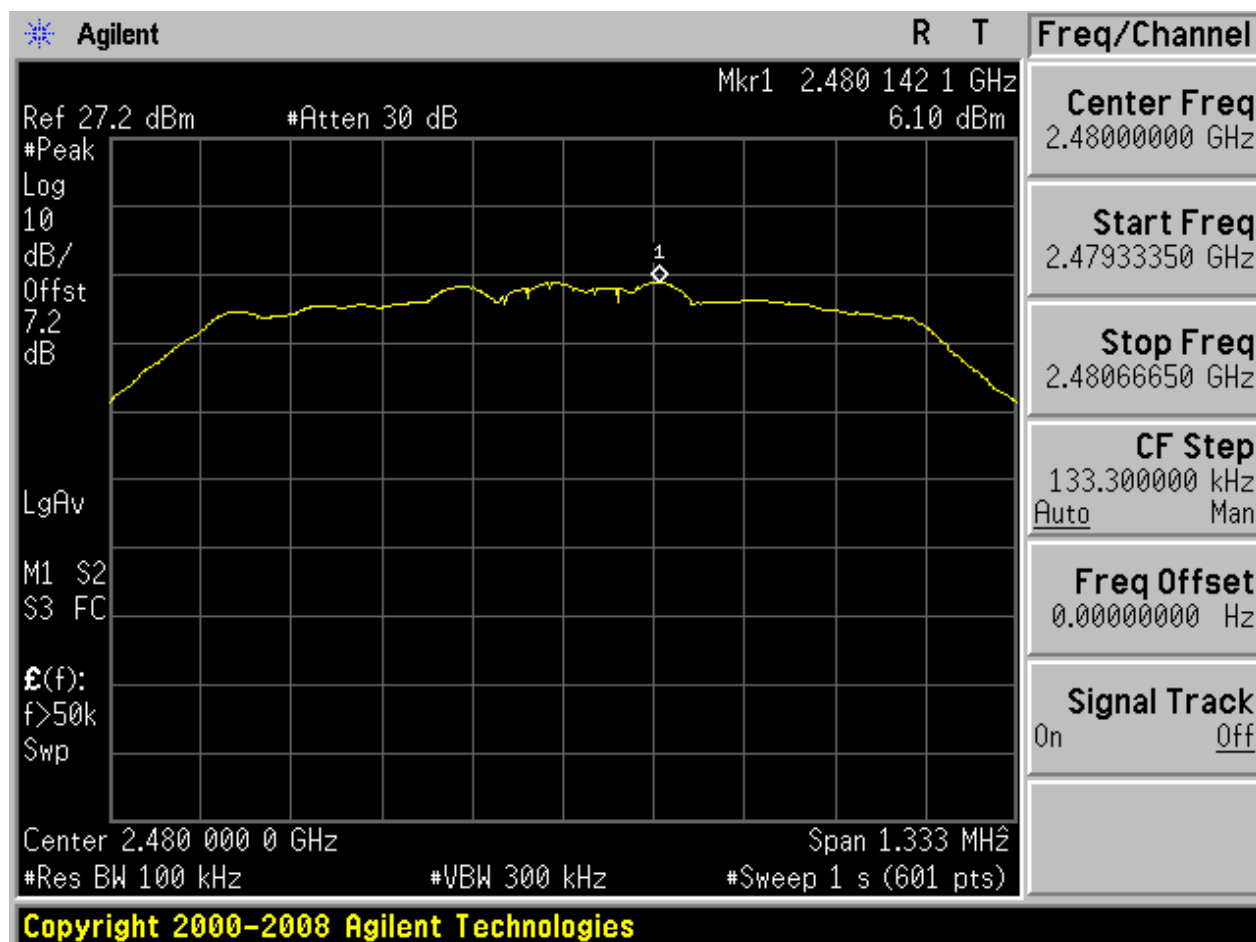



2.6.2 Puw

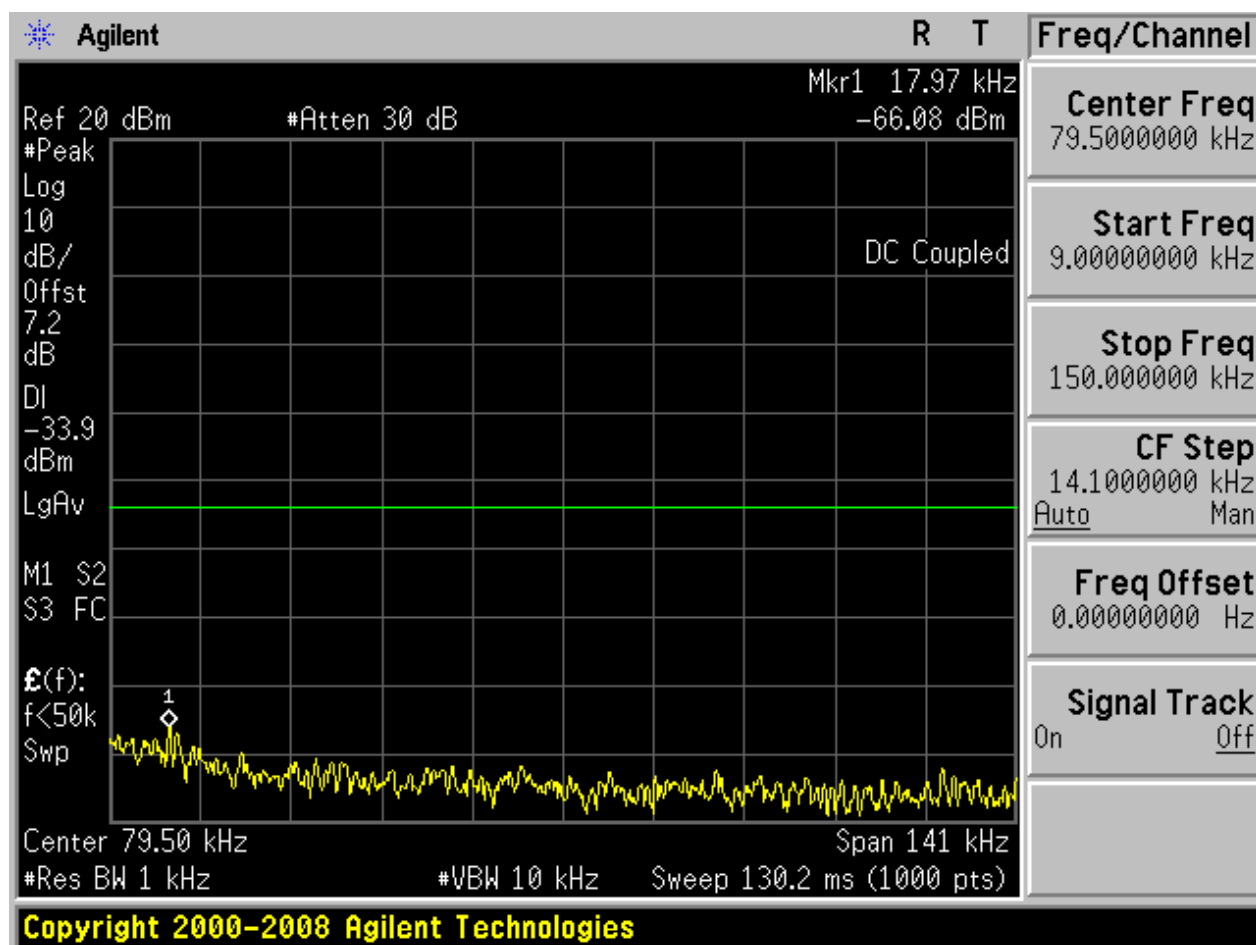


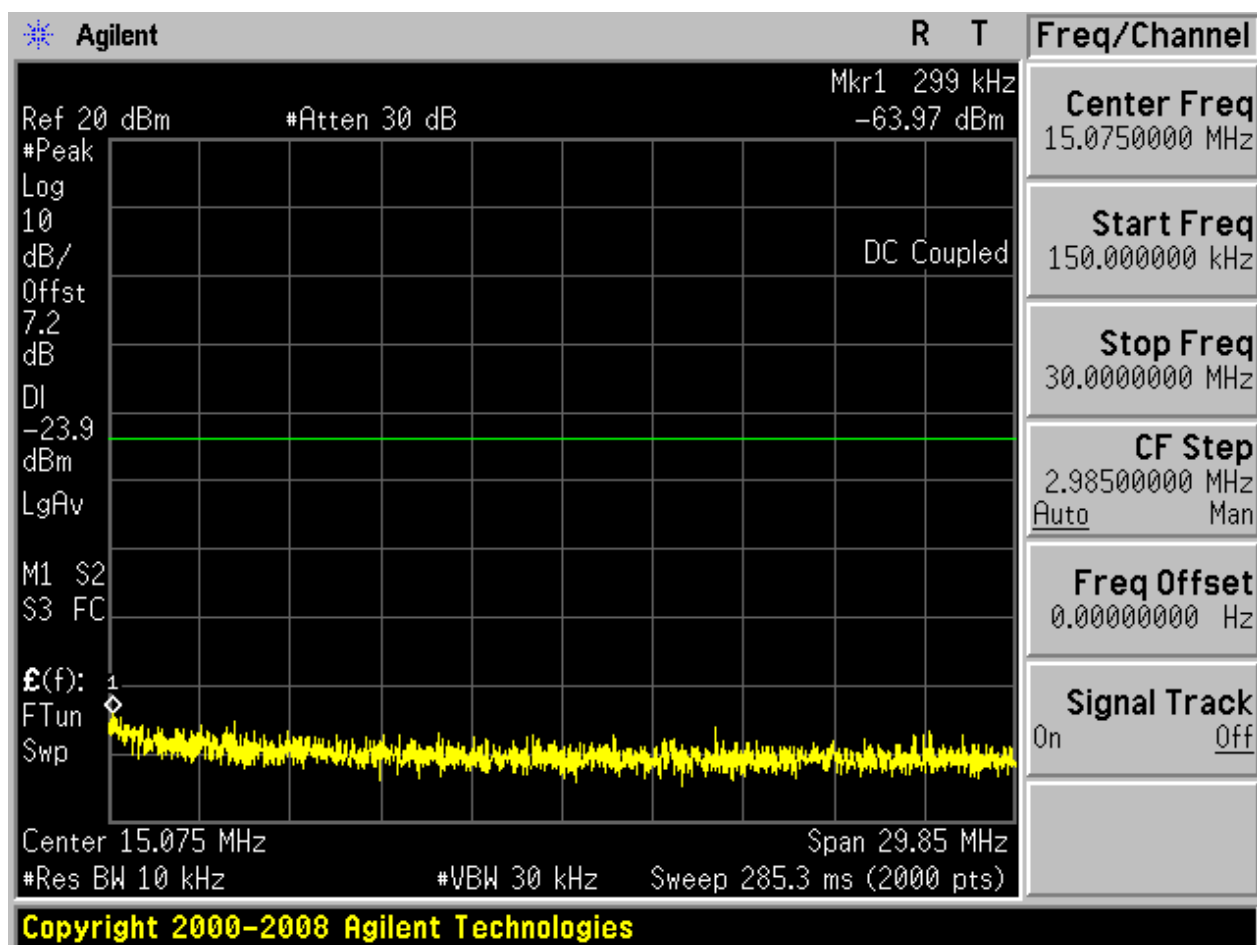

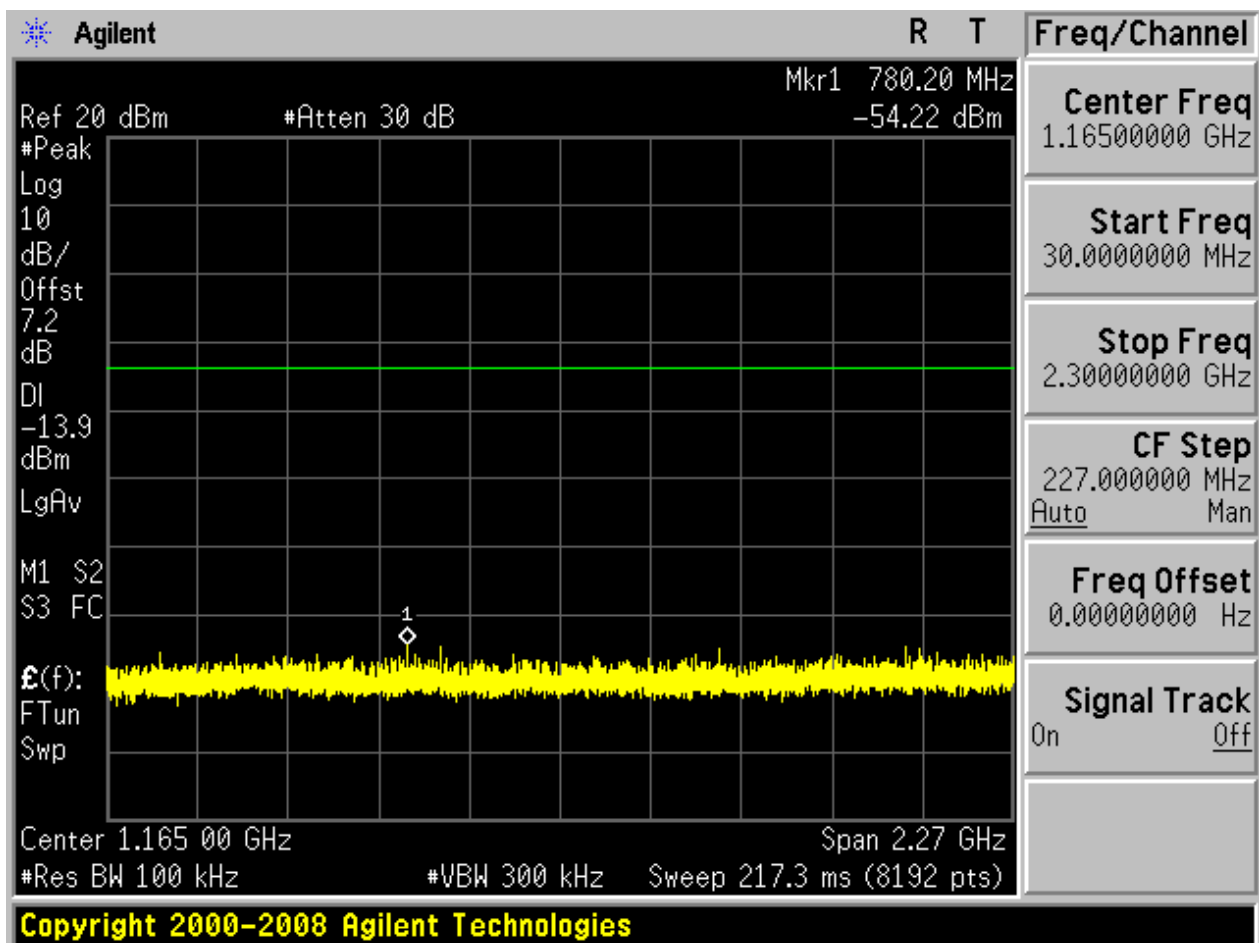

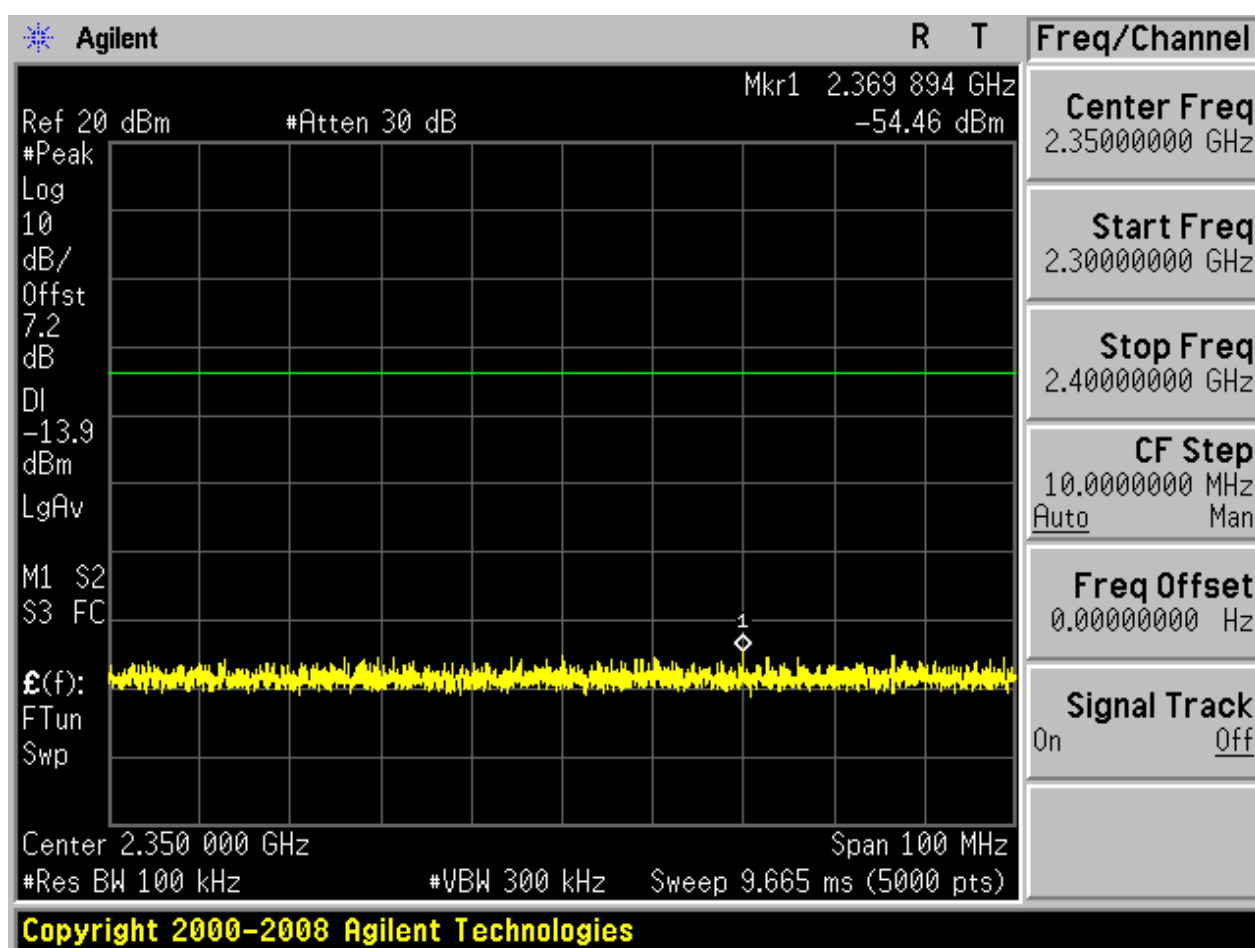


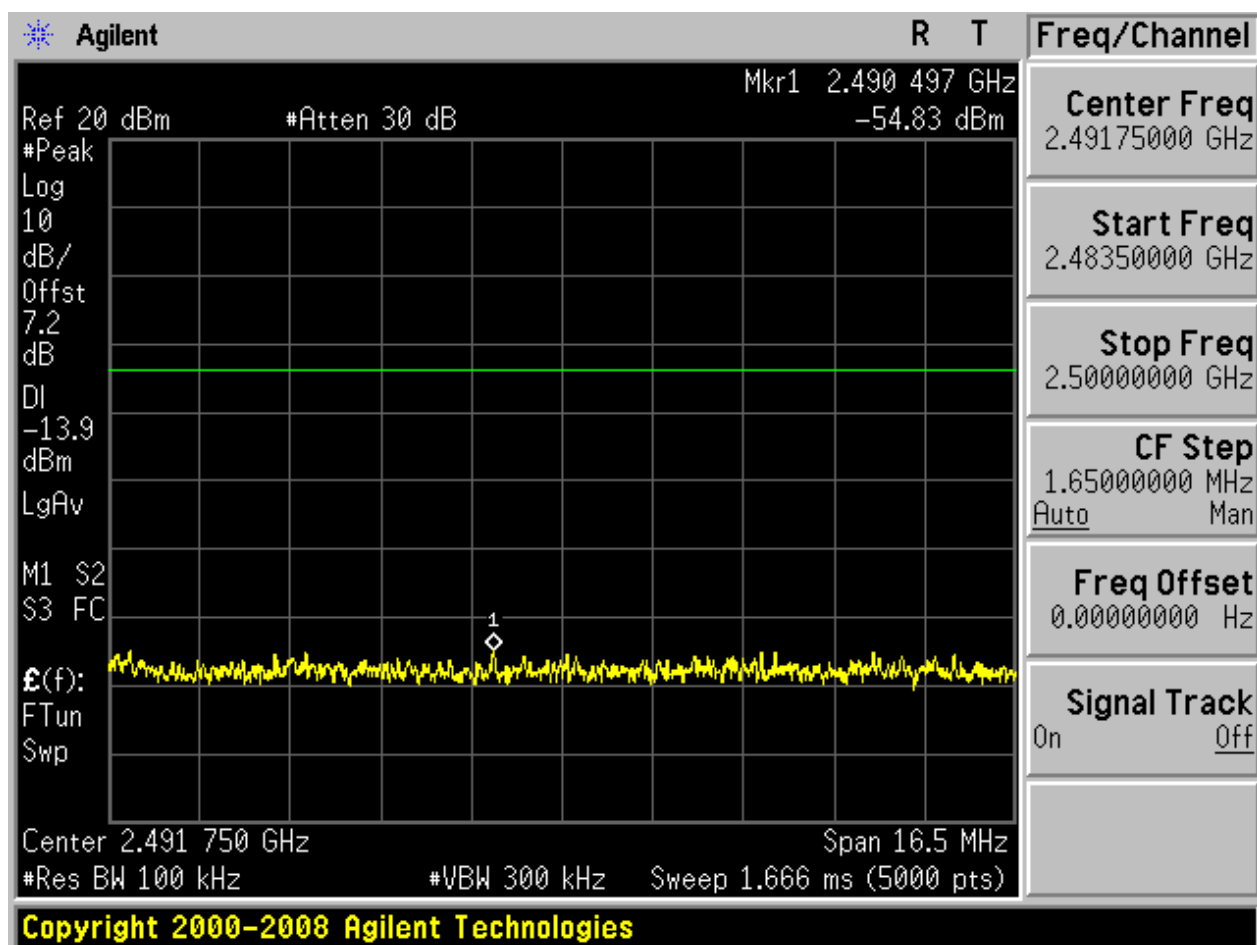

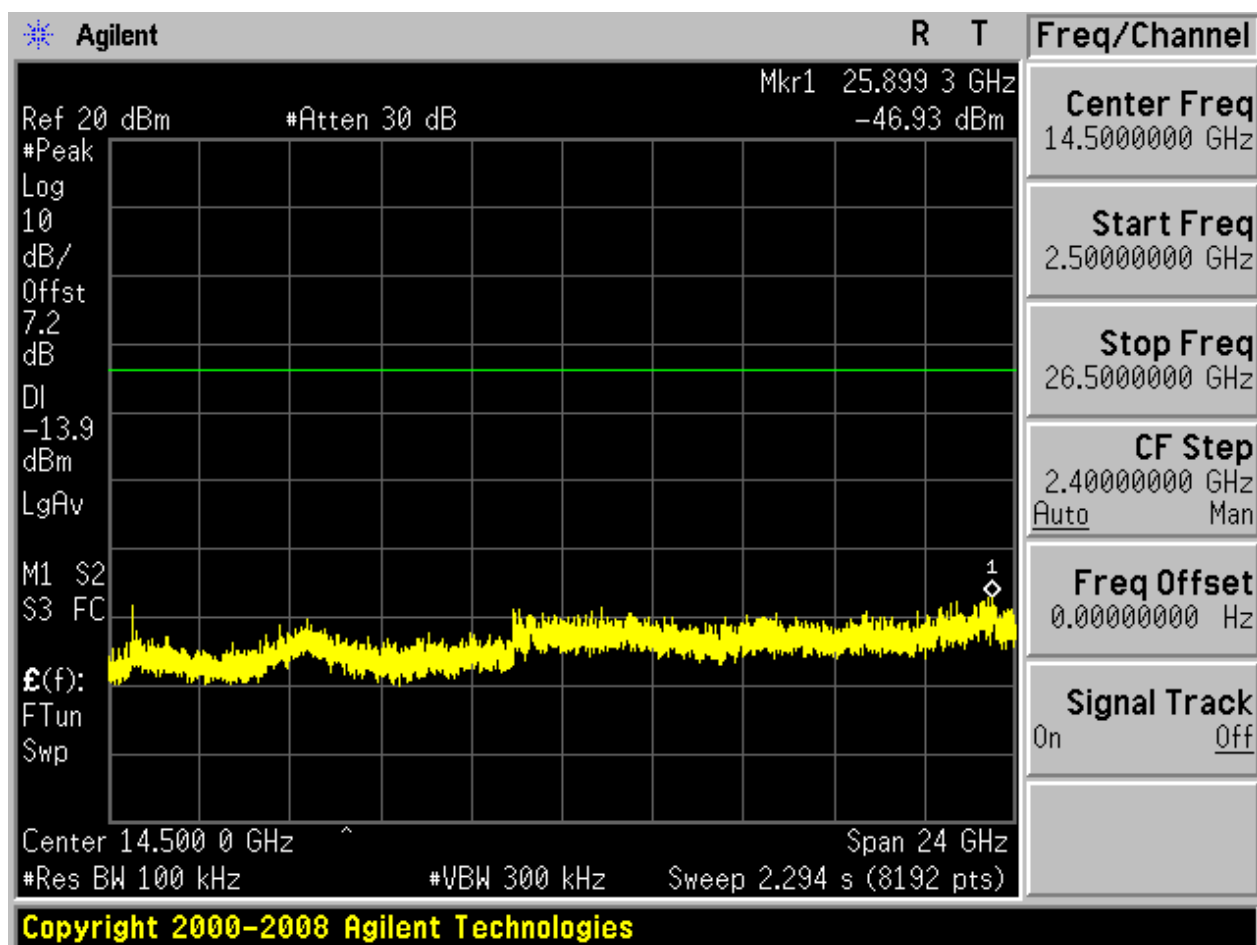



2.7 TM3_3DH5_Ch0


2.7.1 Pref

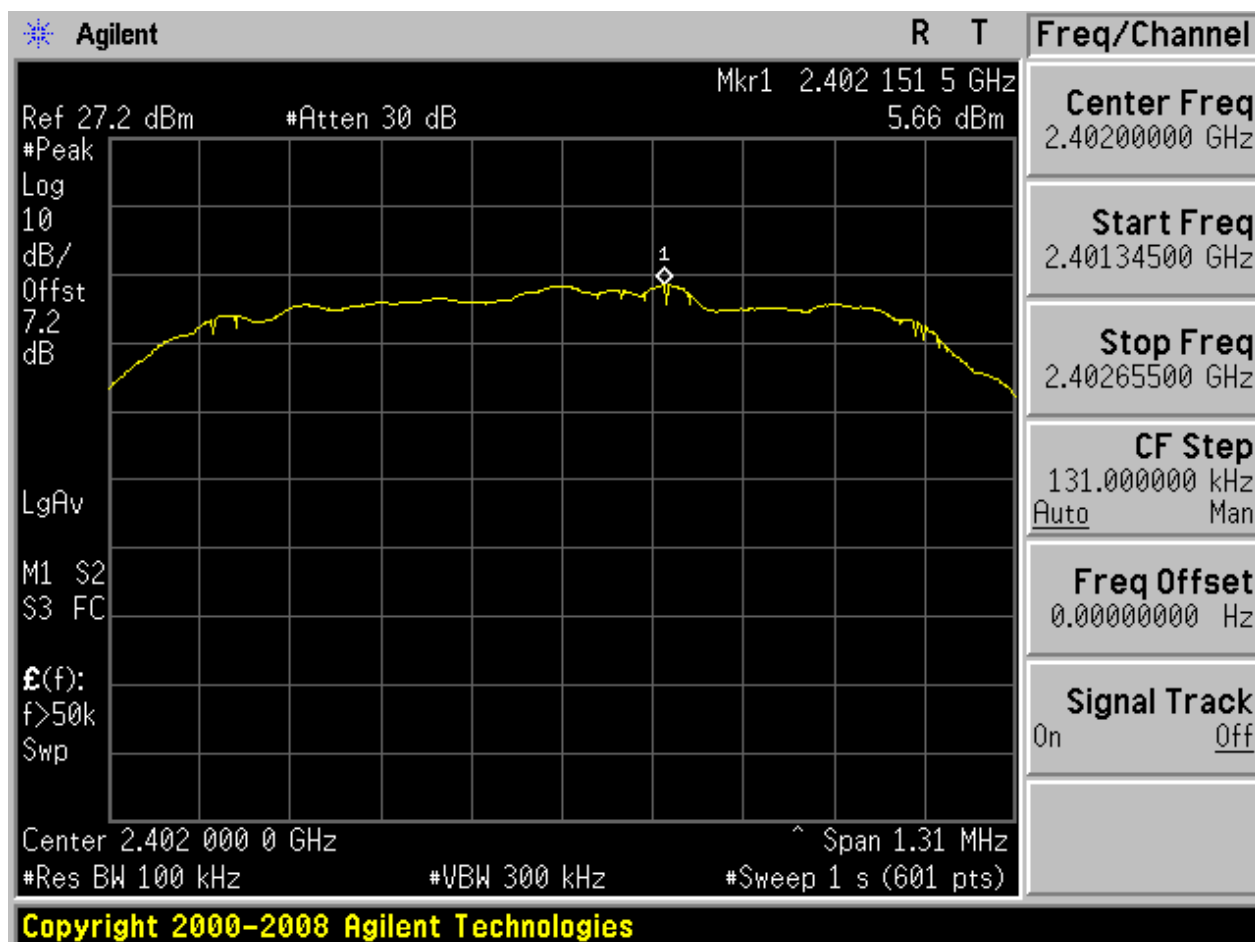



2.7.2 Puw

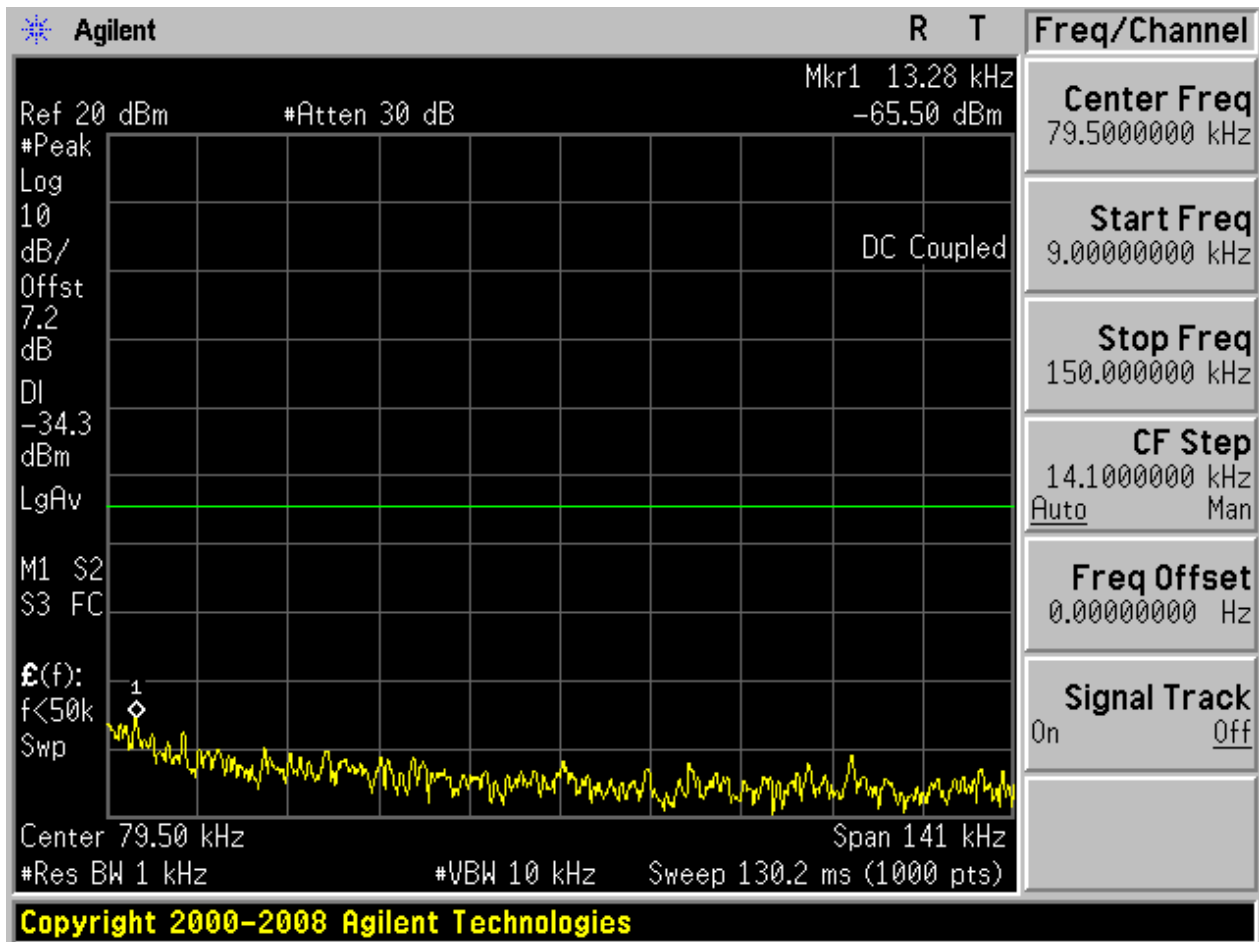


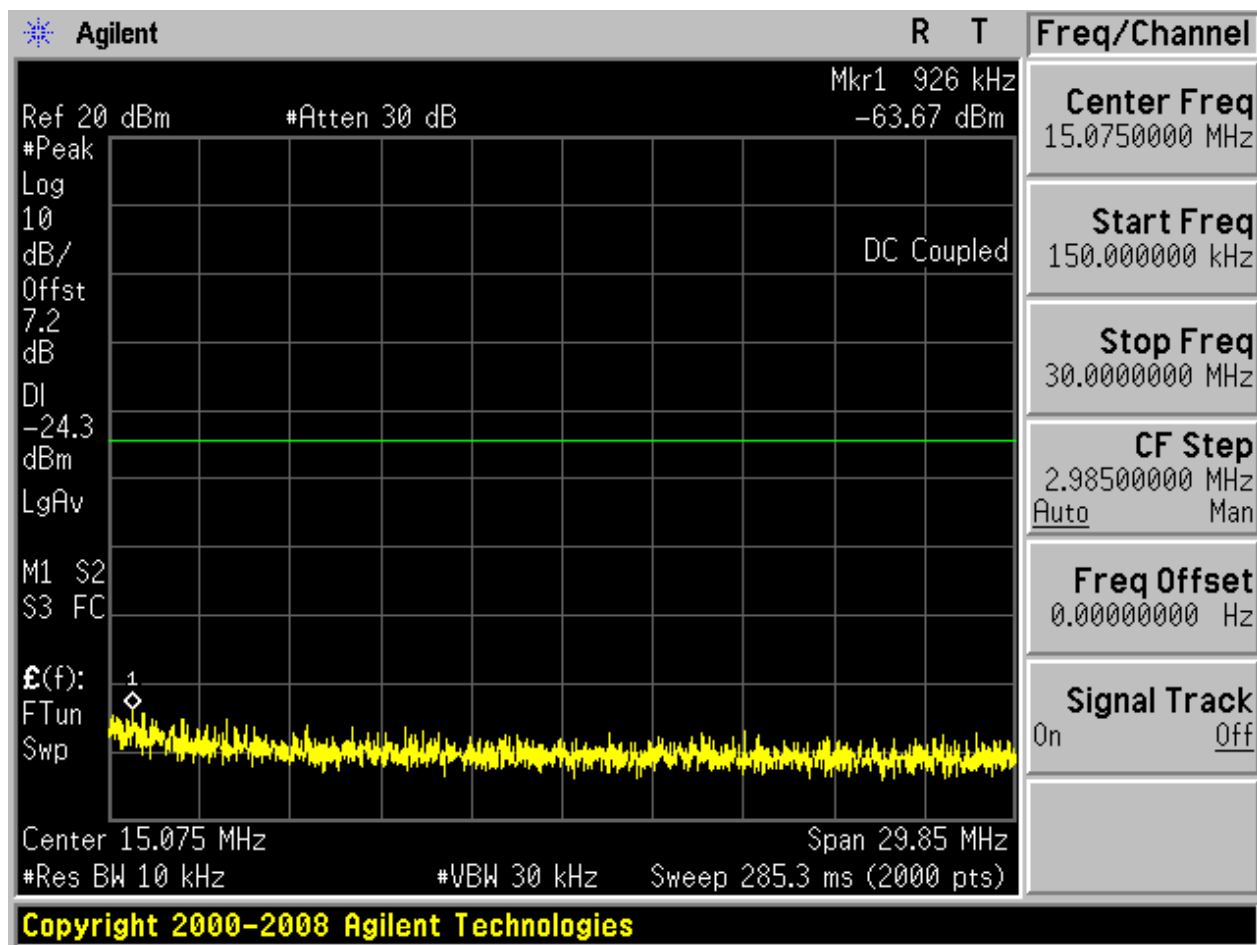

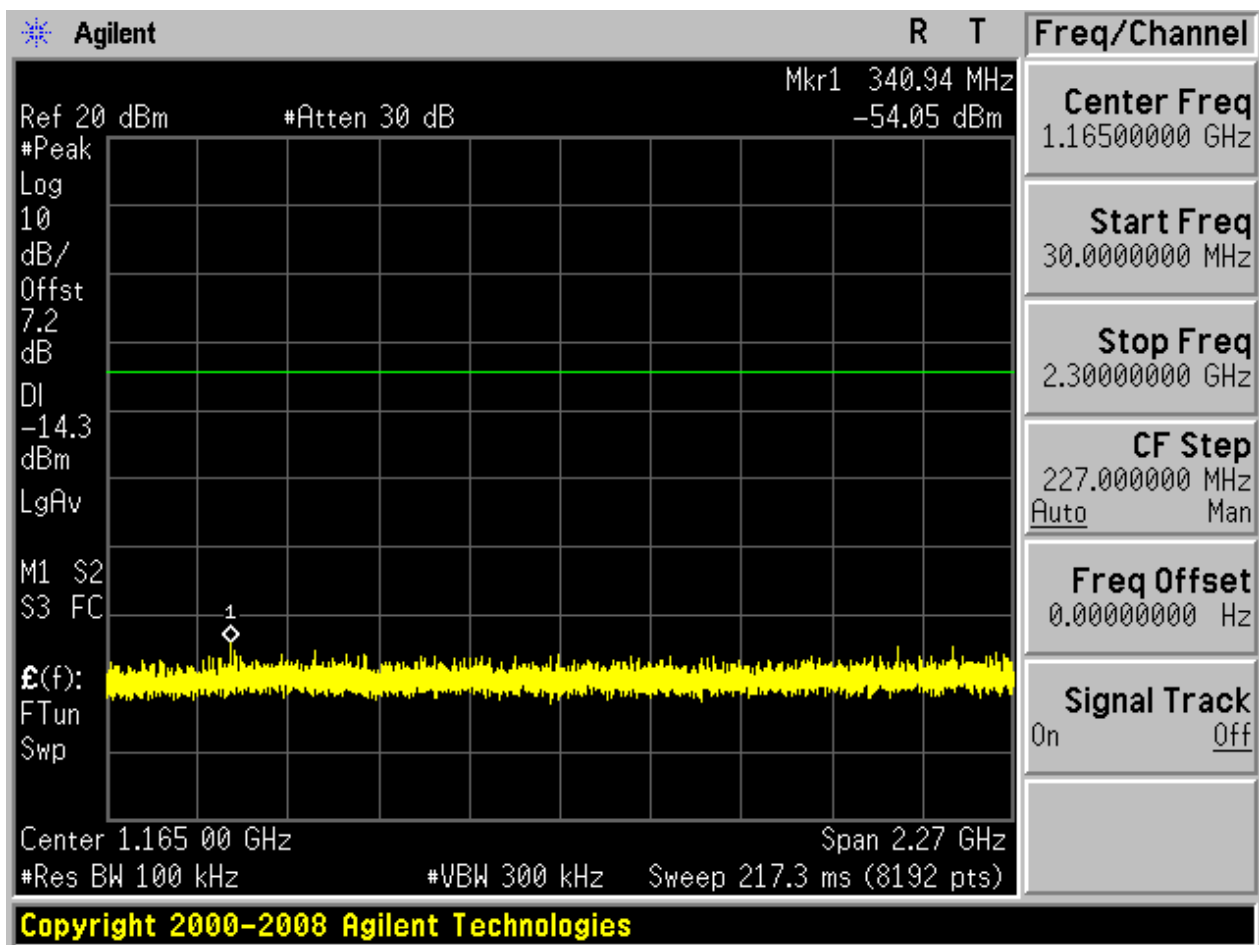

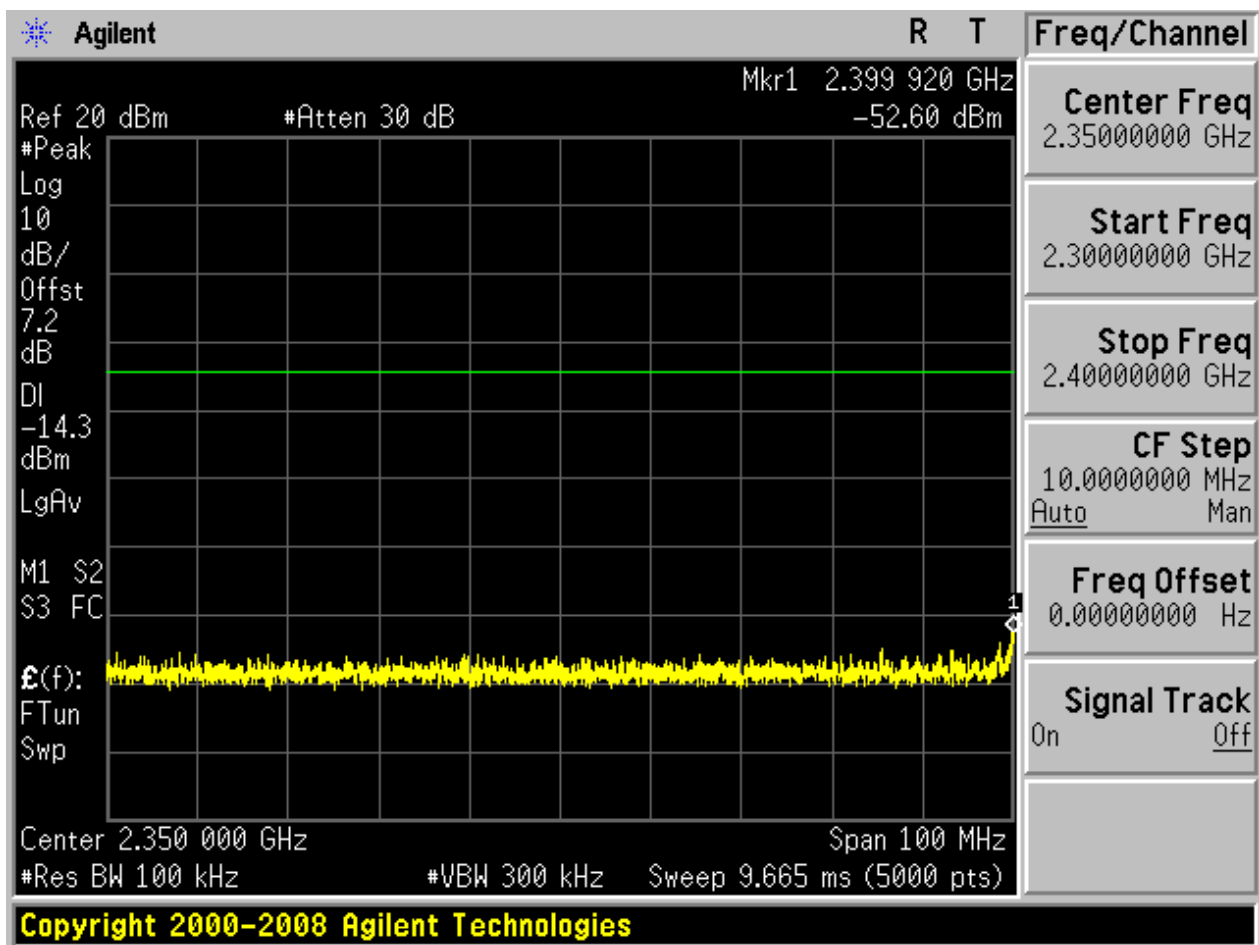


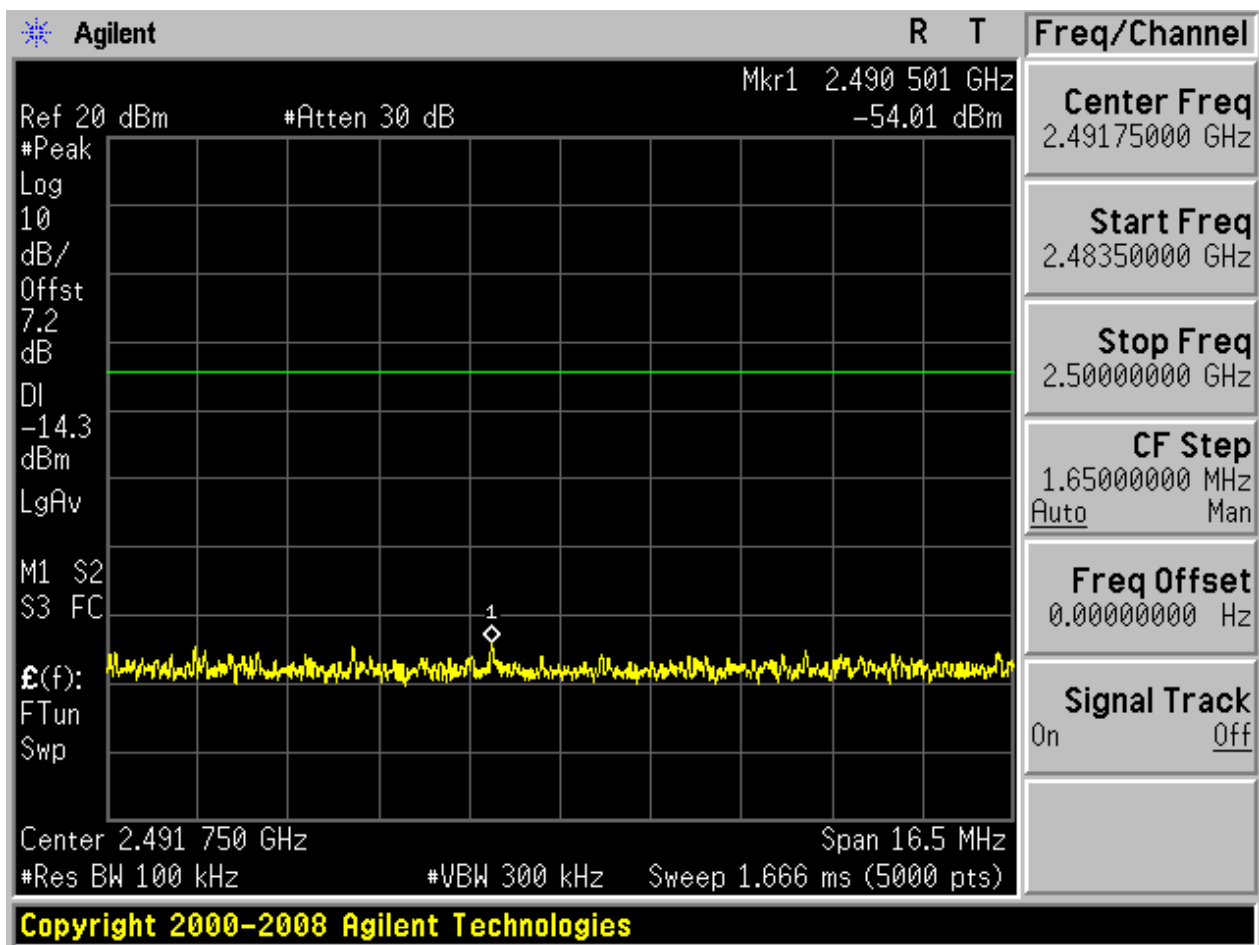

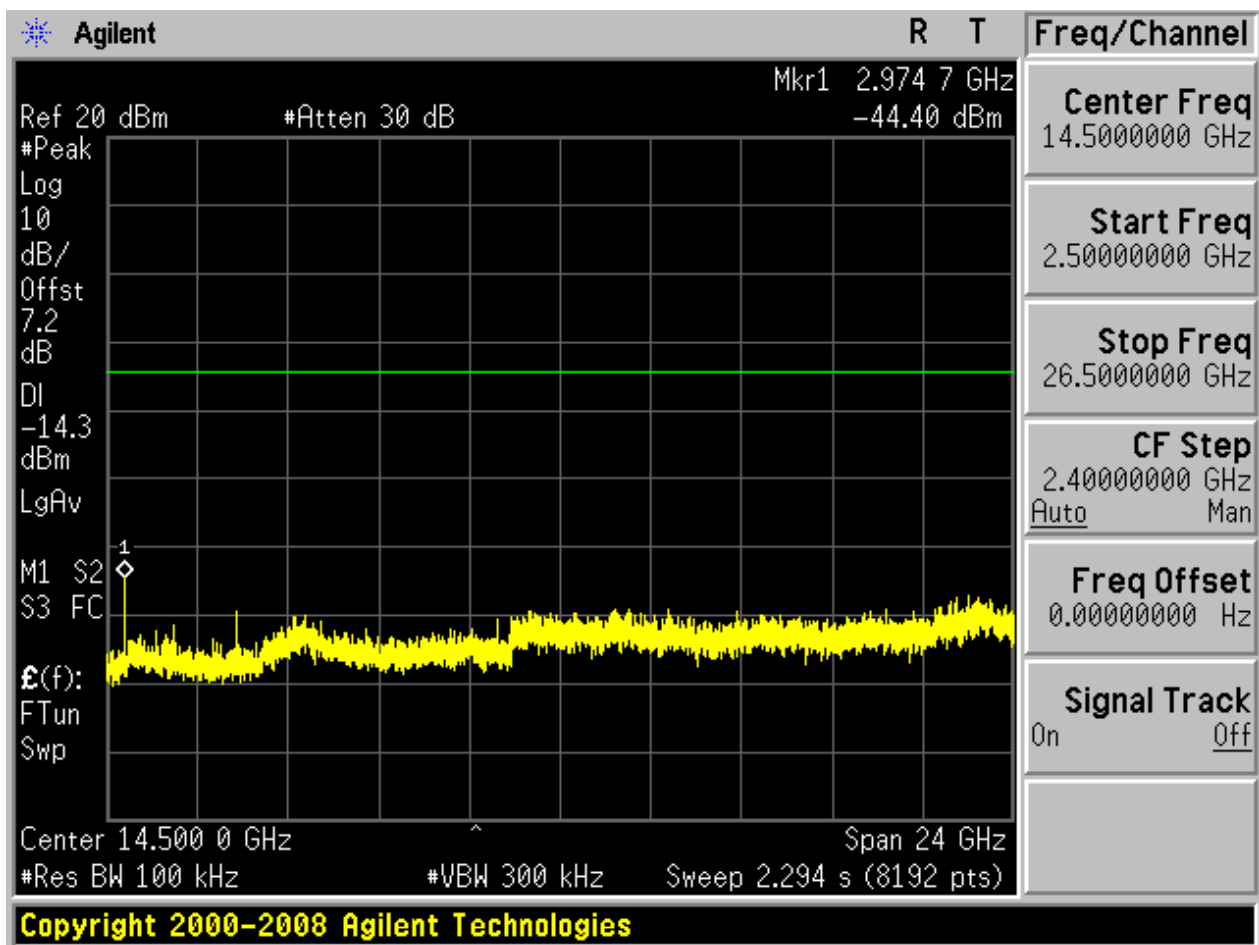



2.8 TM3_3DH5_Ch39


2.8.1 Pref

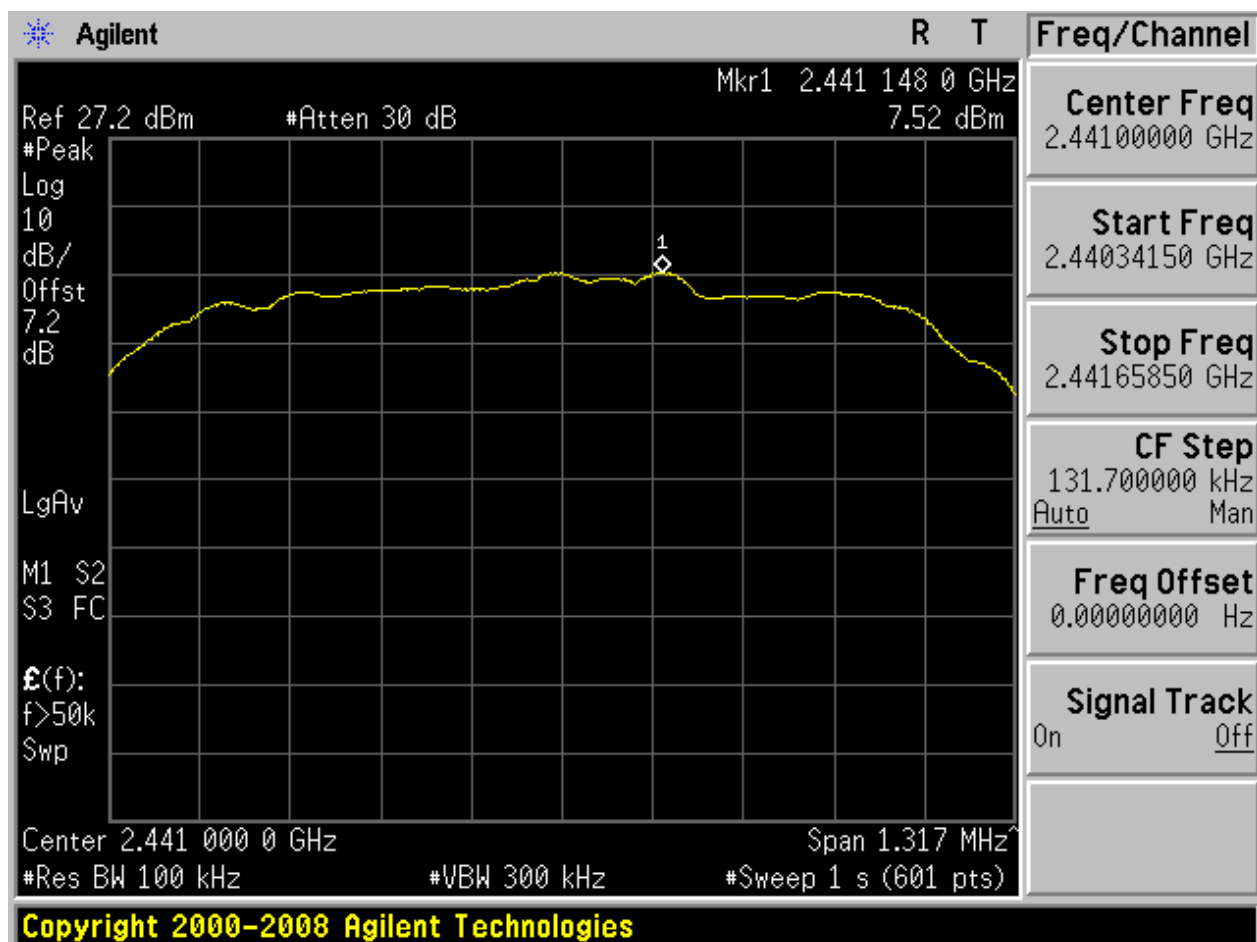



2.8.2 Puw

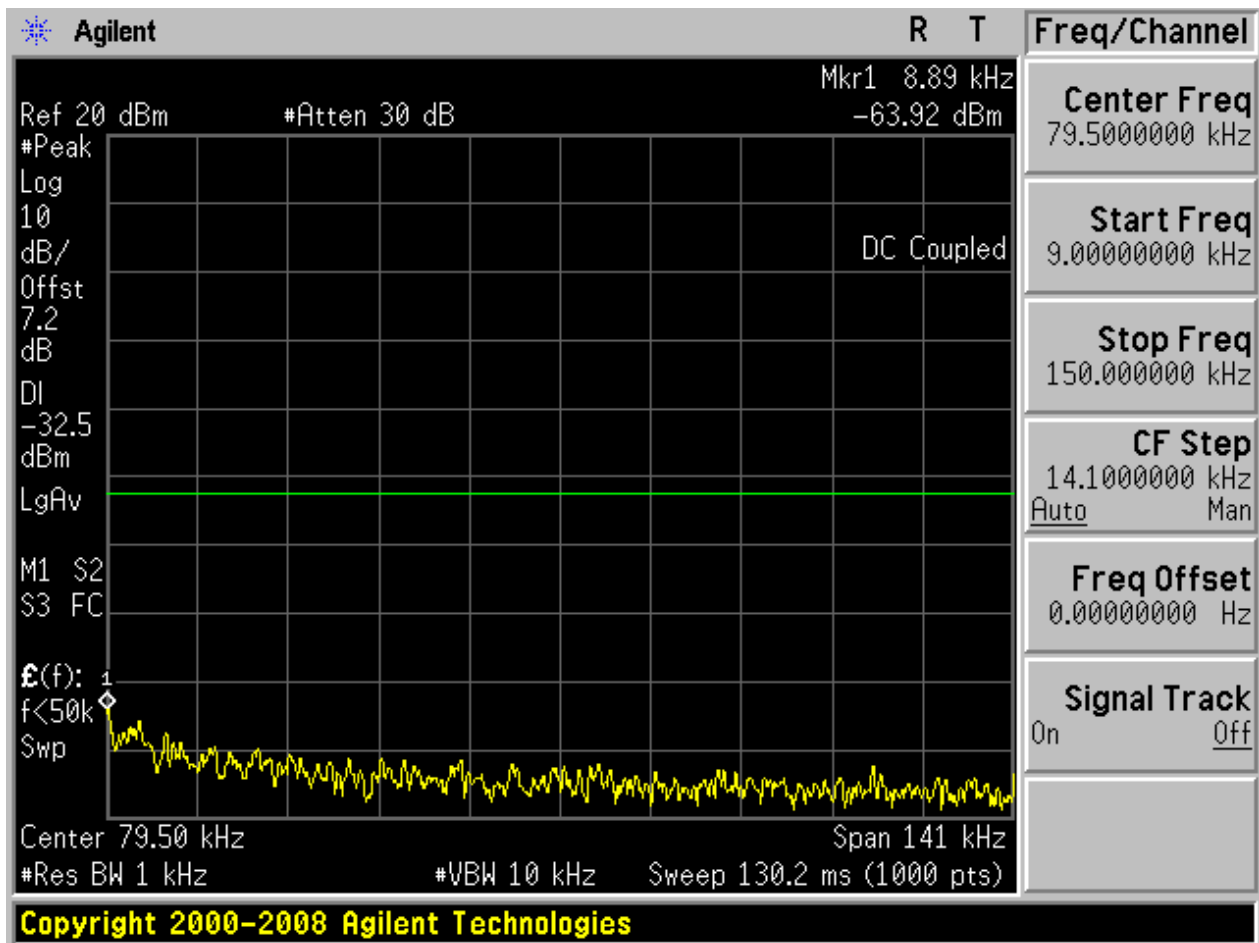


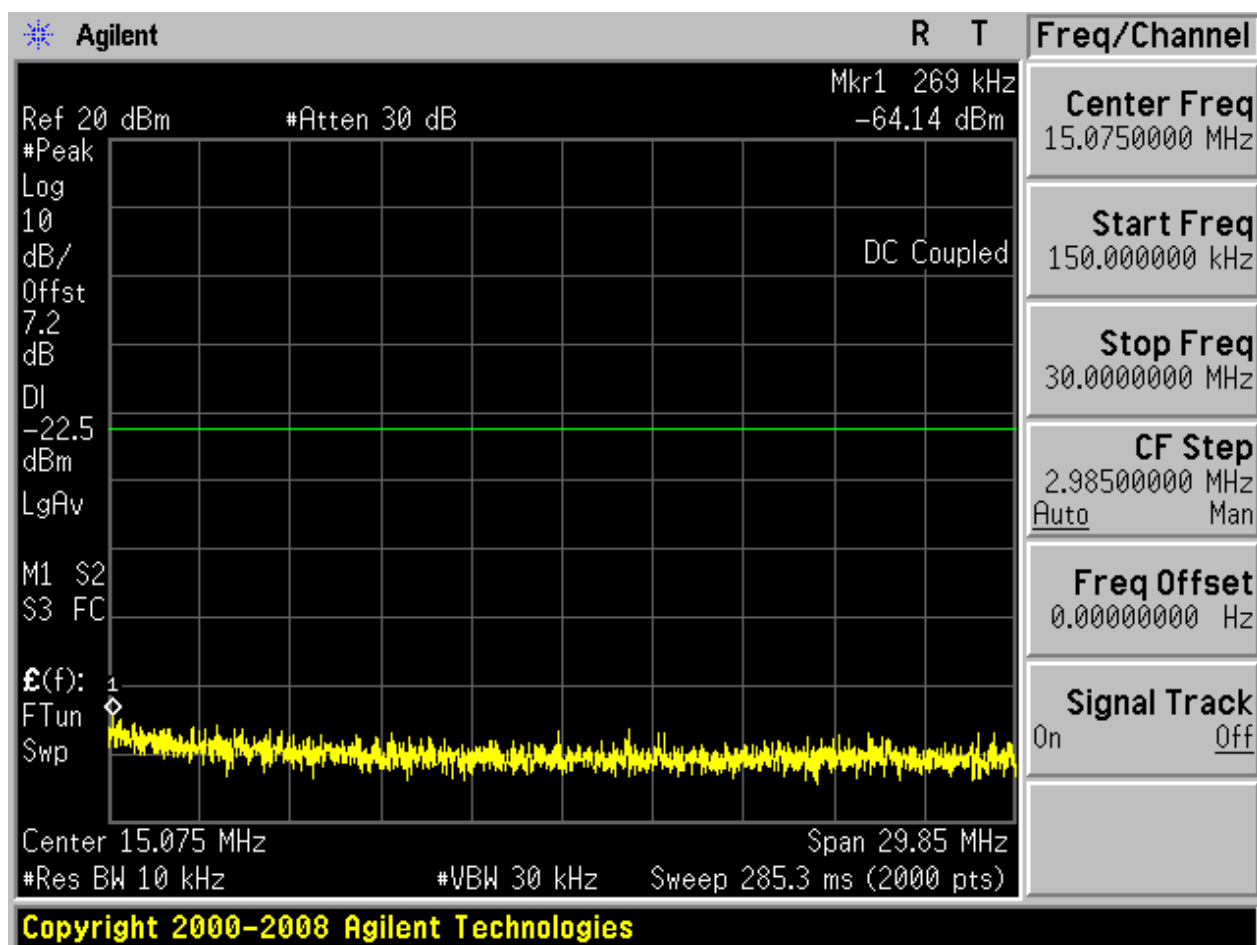

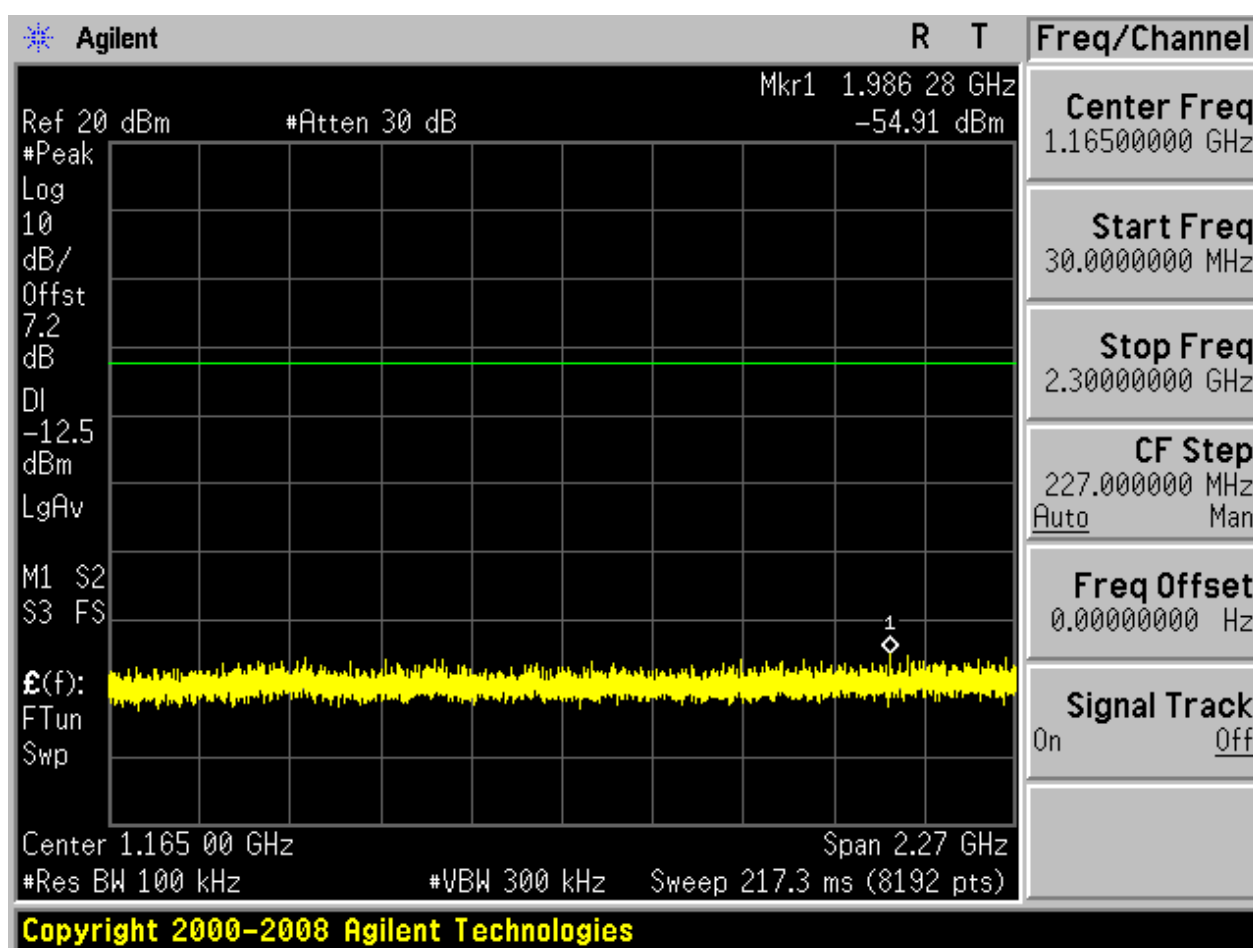

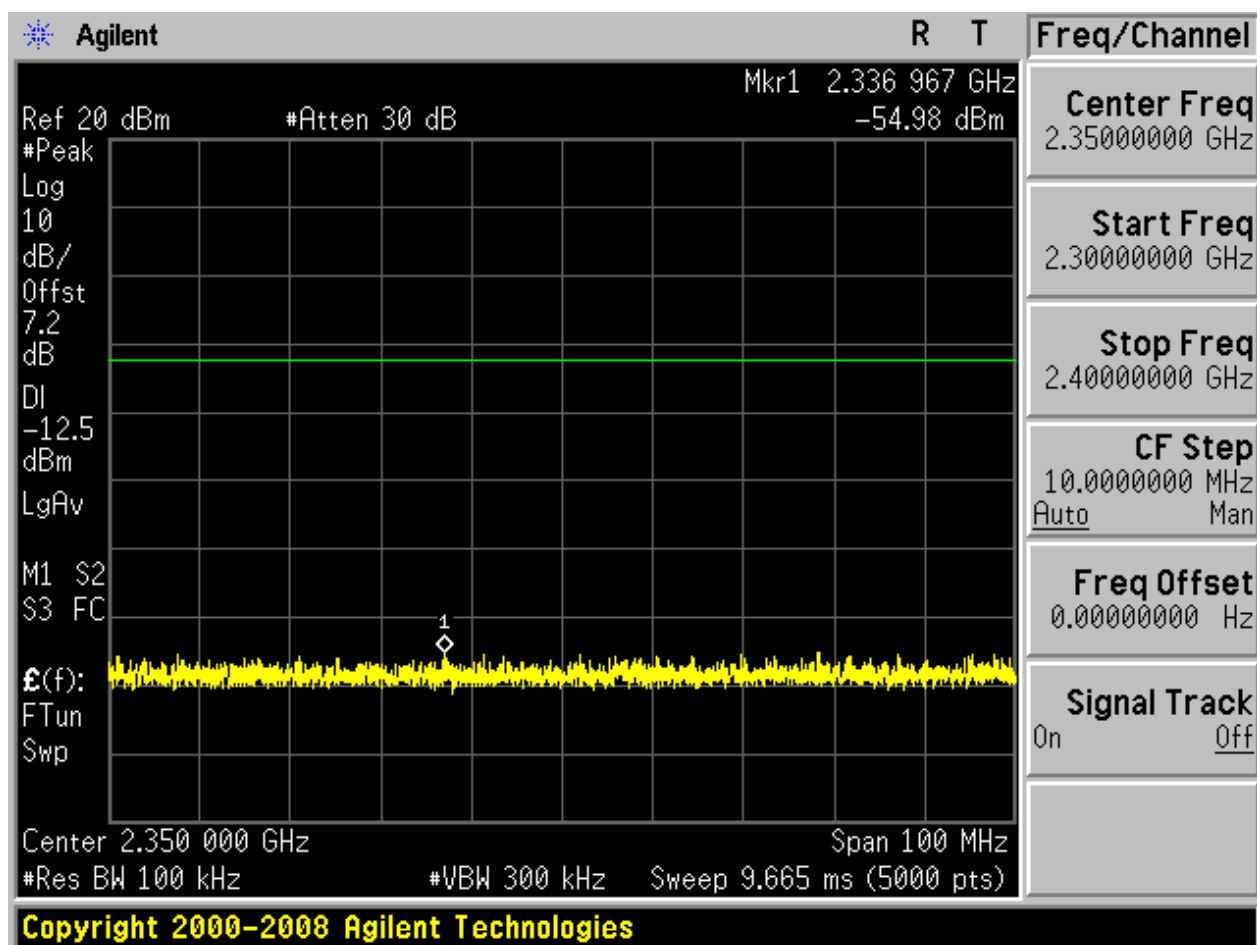


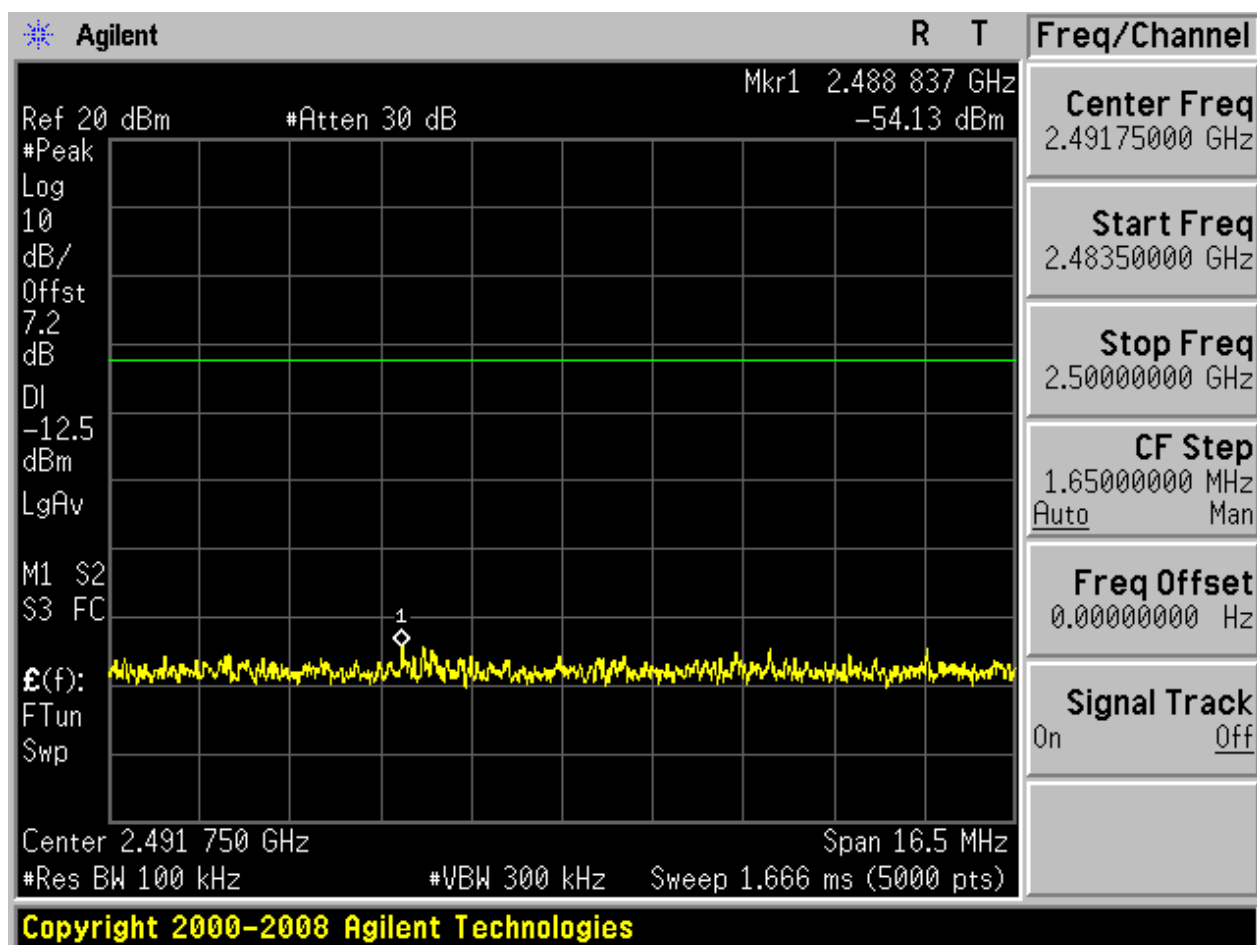

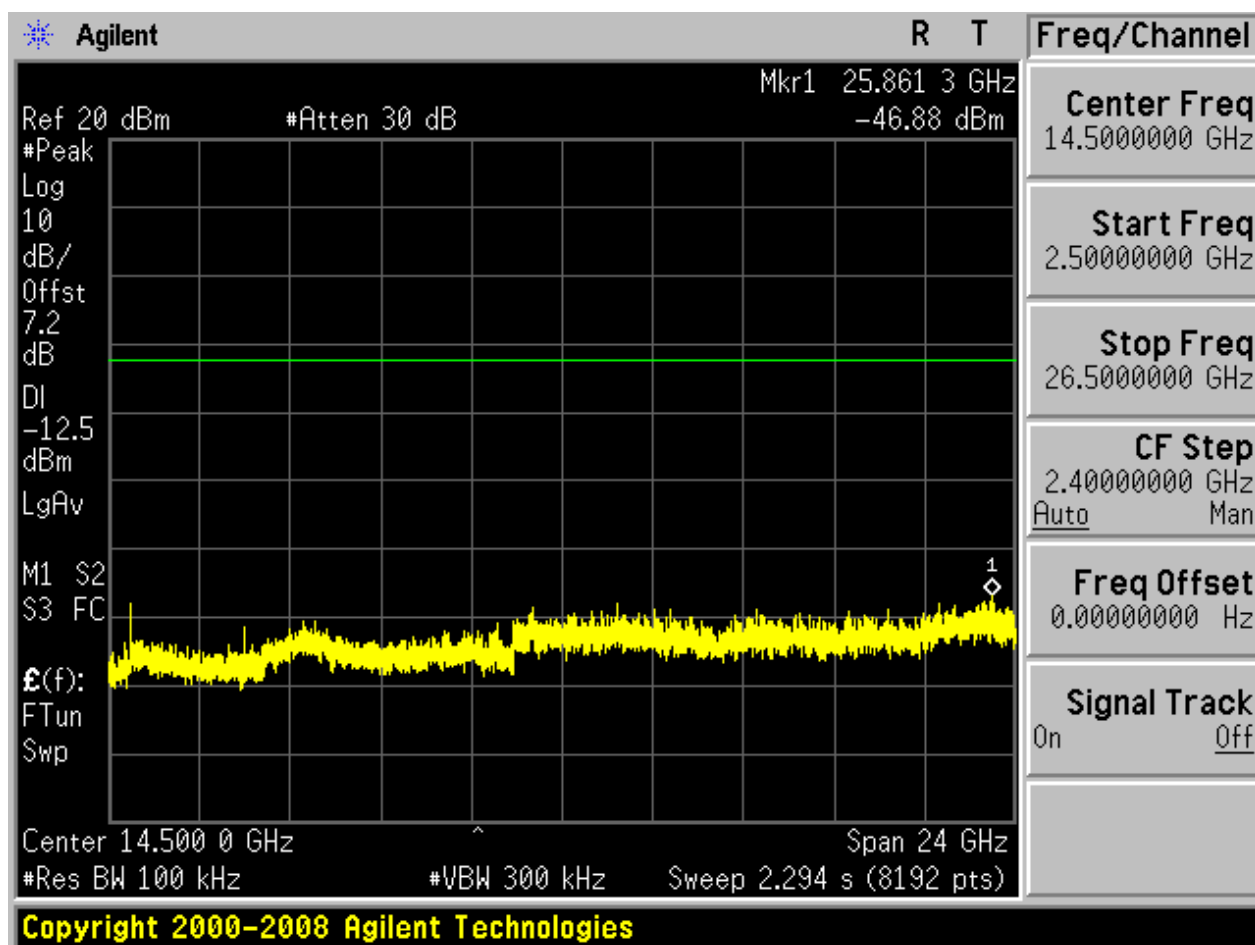



2.9 TM3_3DH5_Ch78


2.9.1 Pref

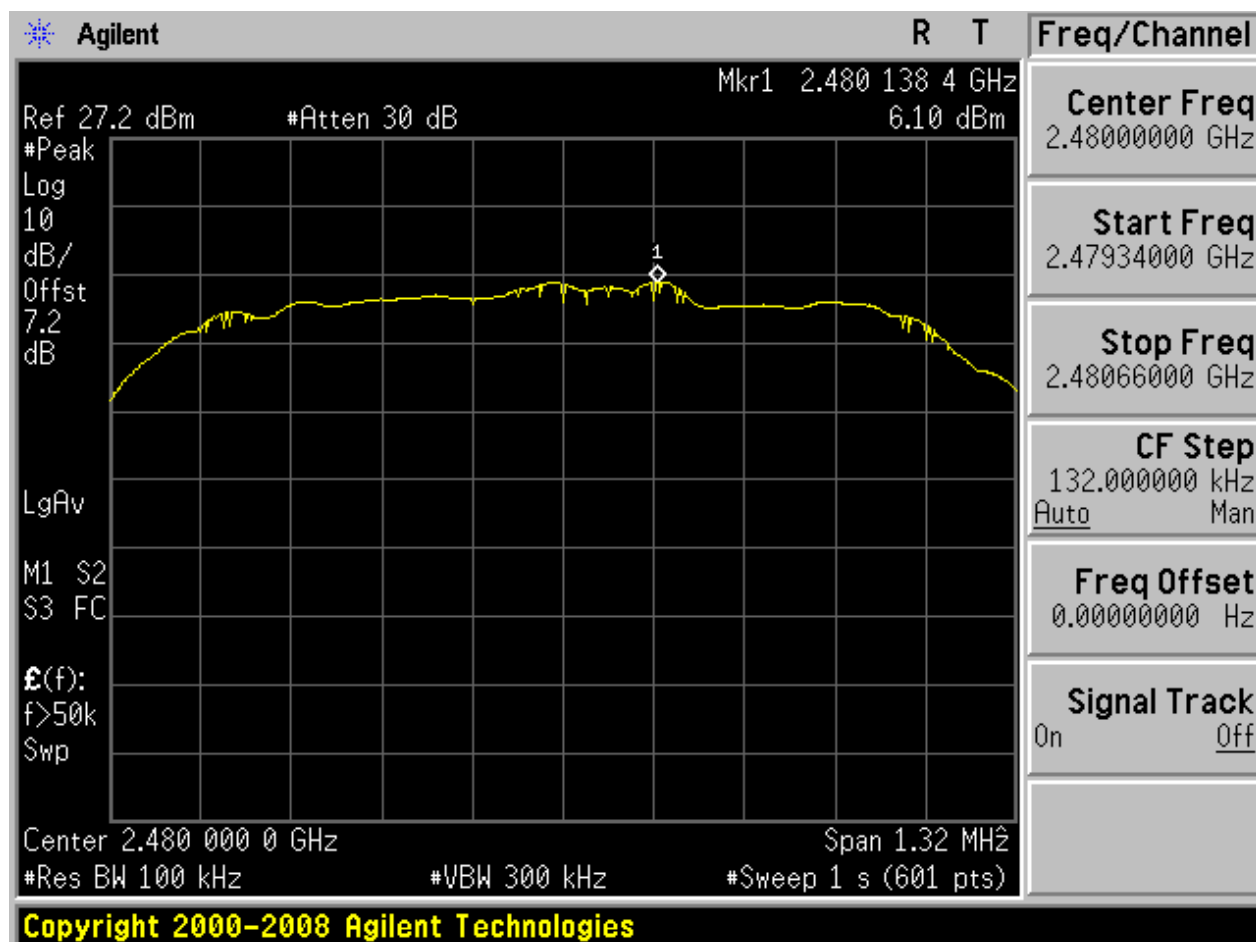



2.9.2 Puw

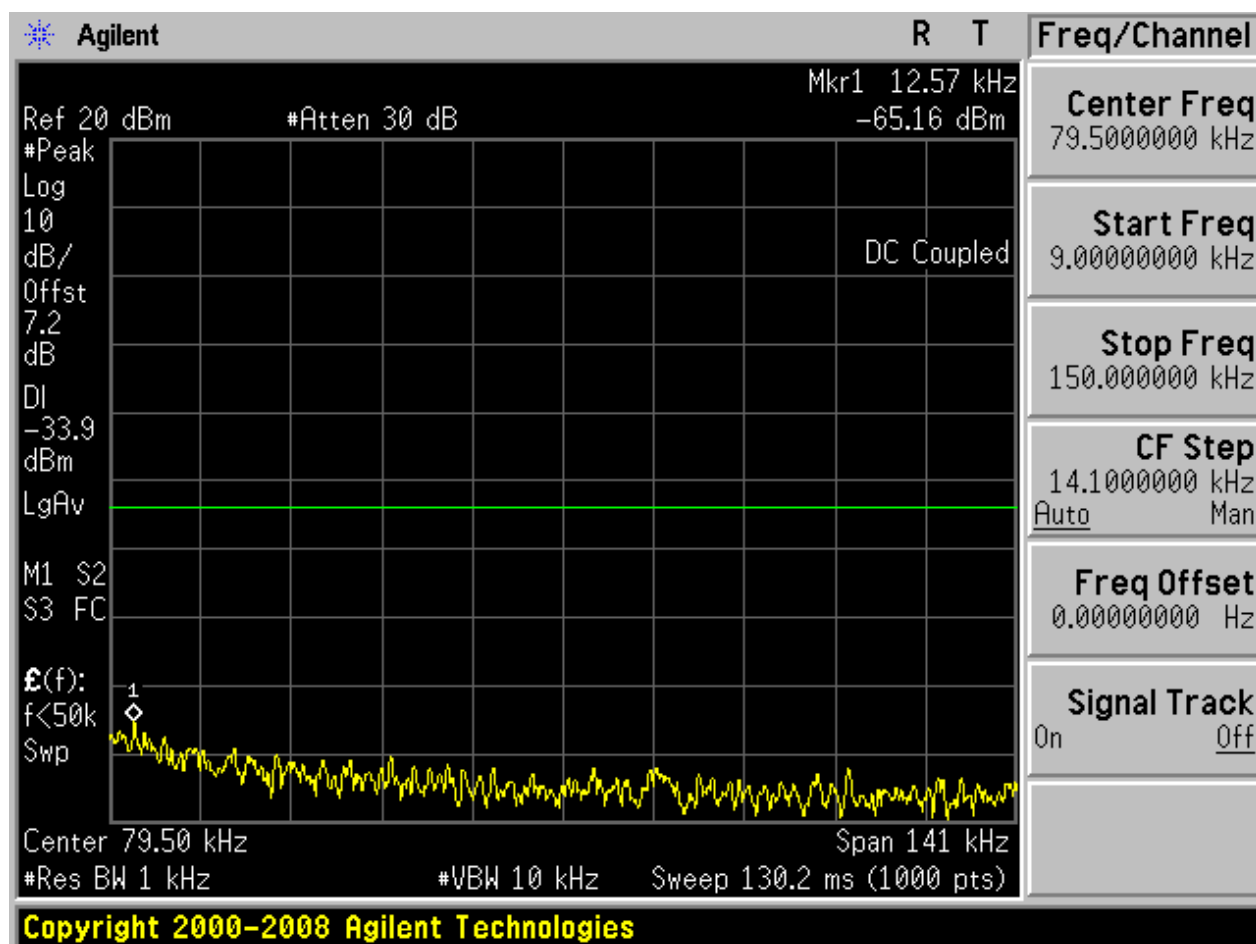


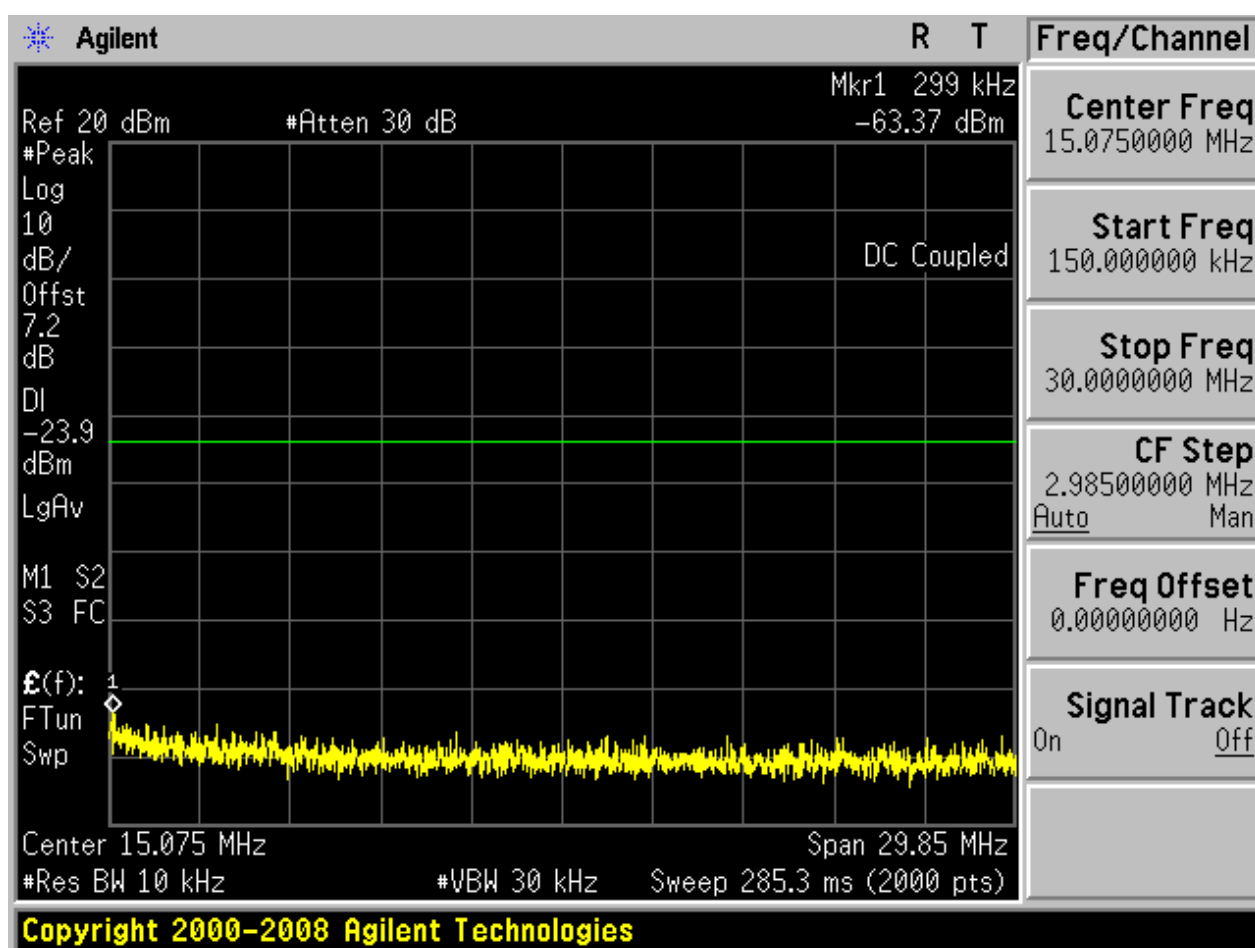

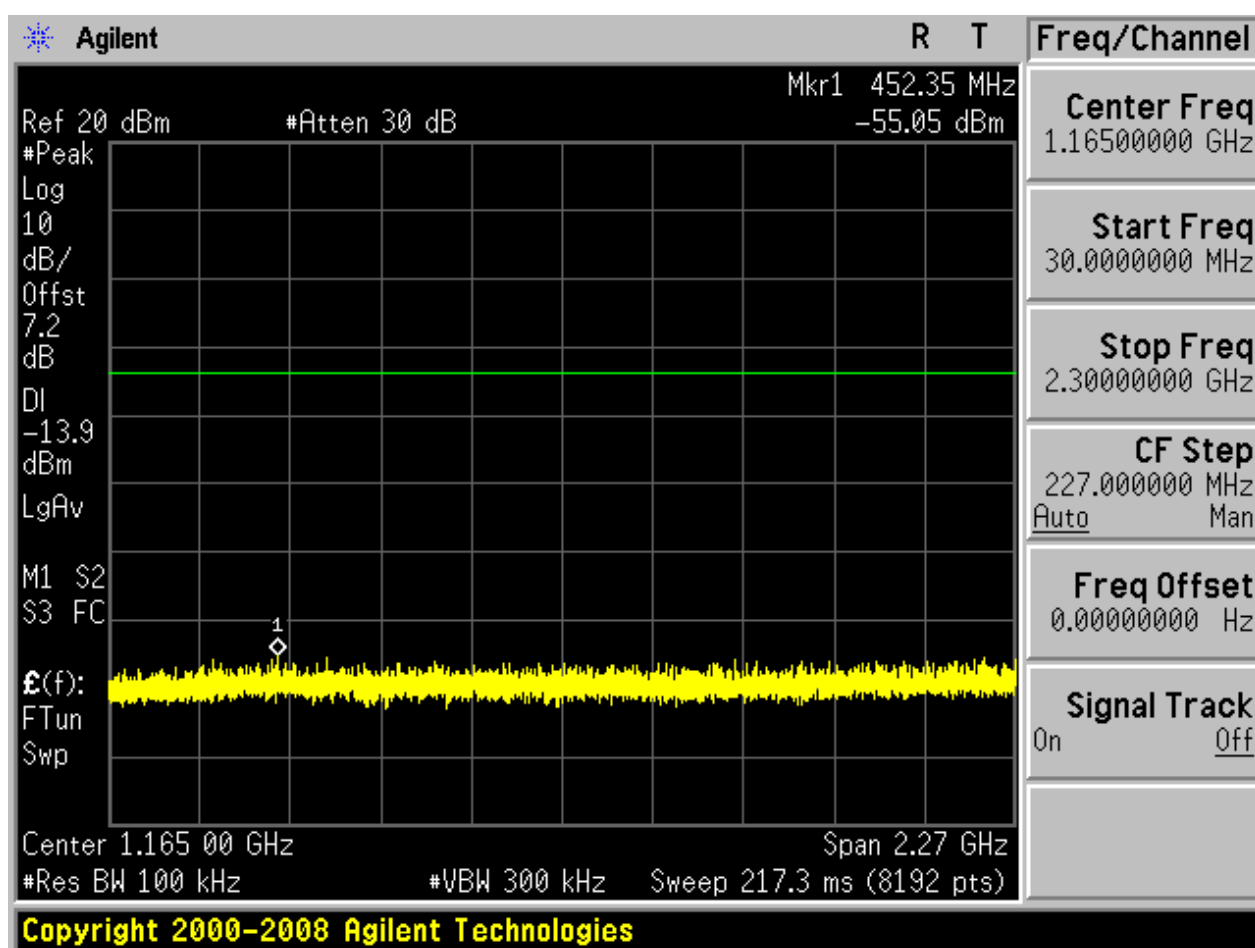

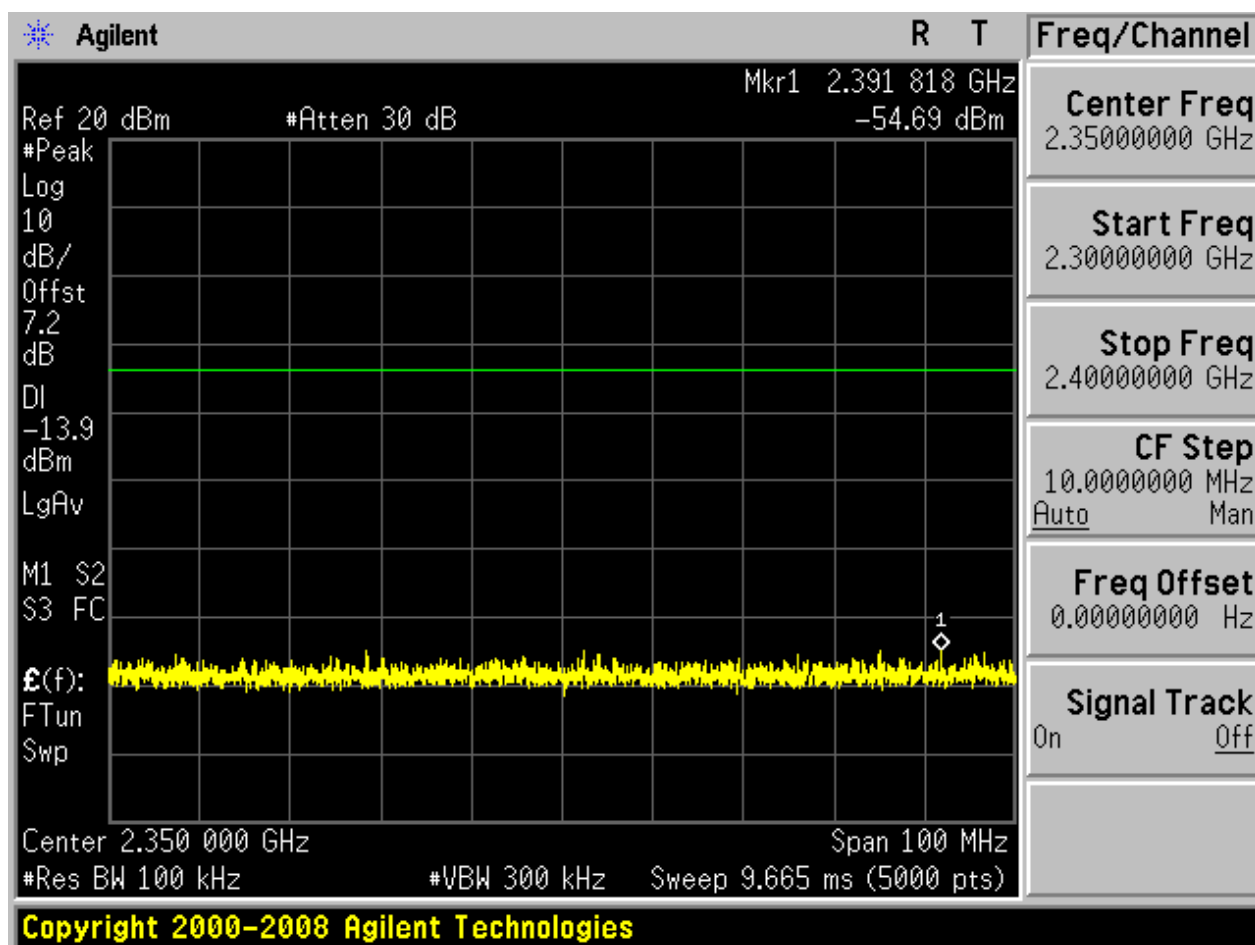

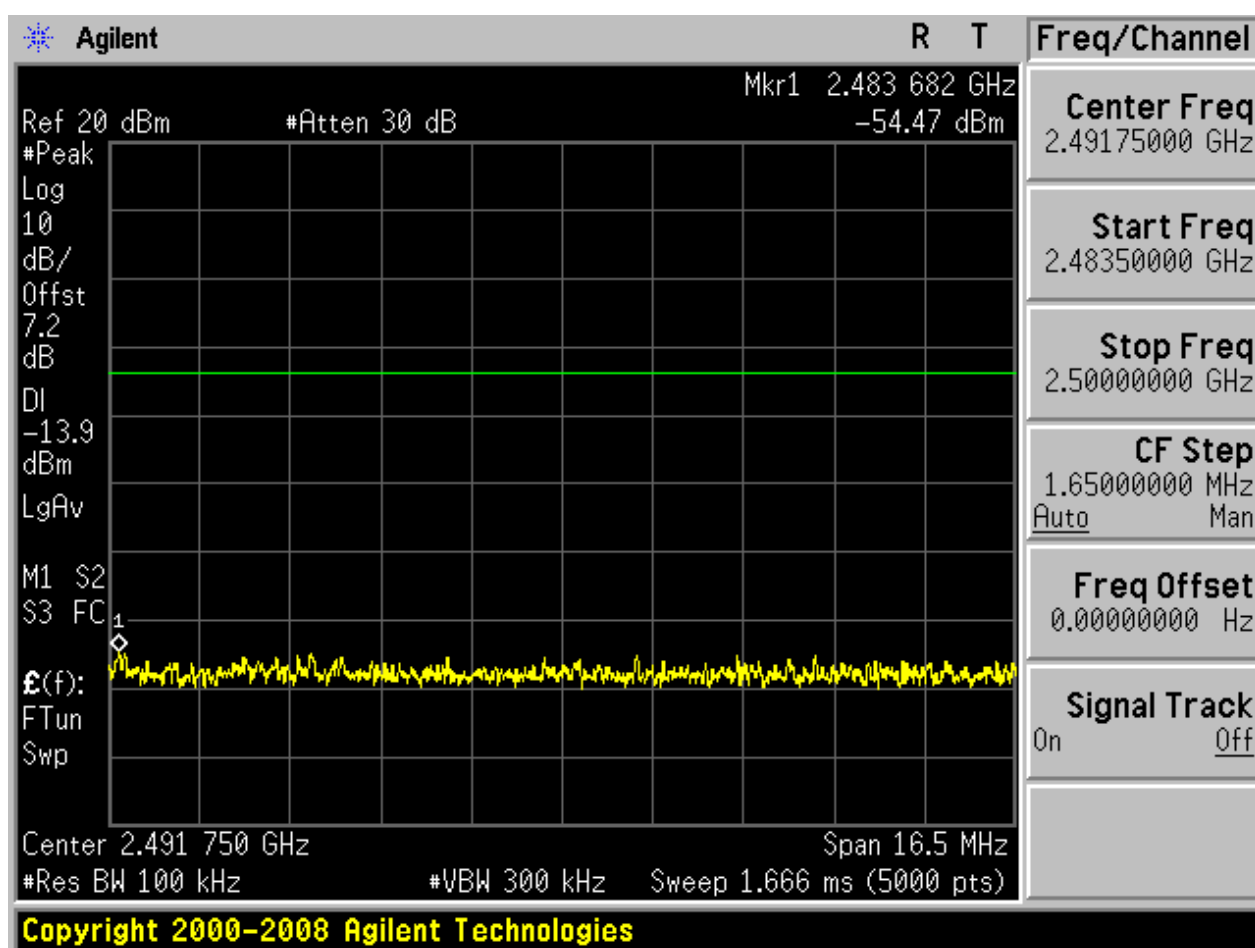

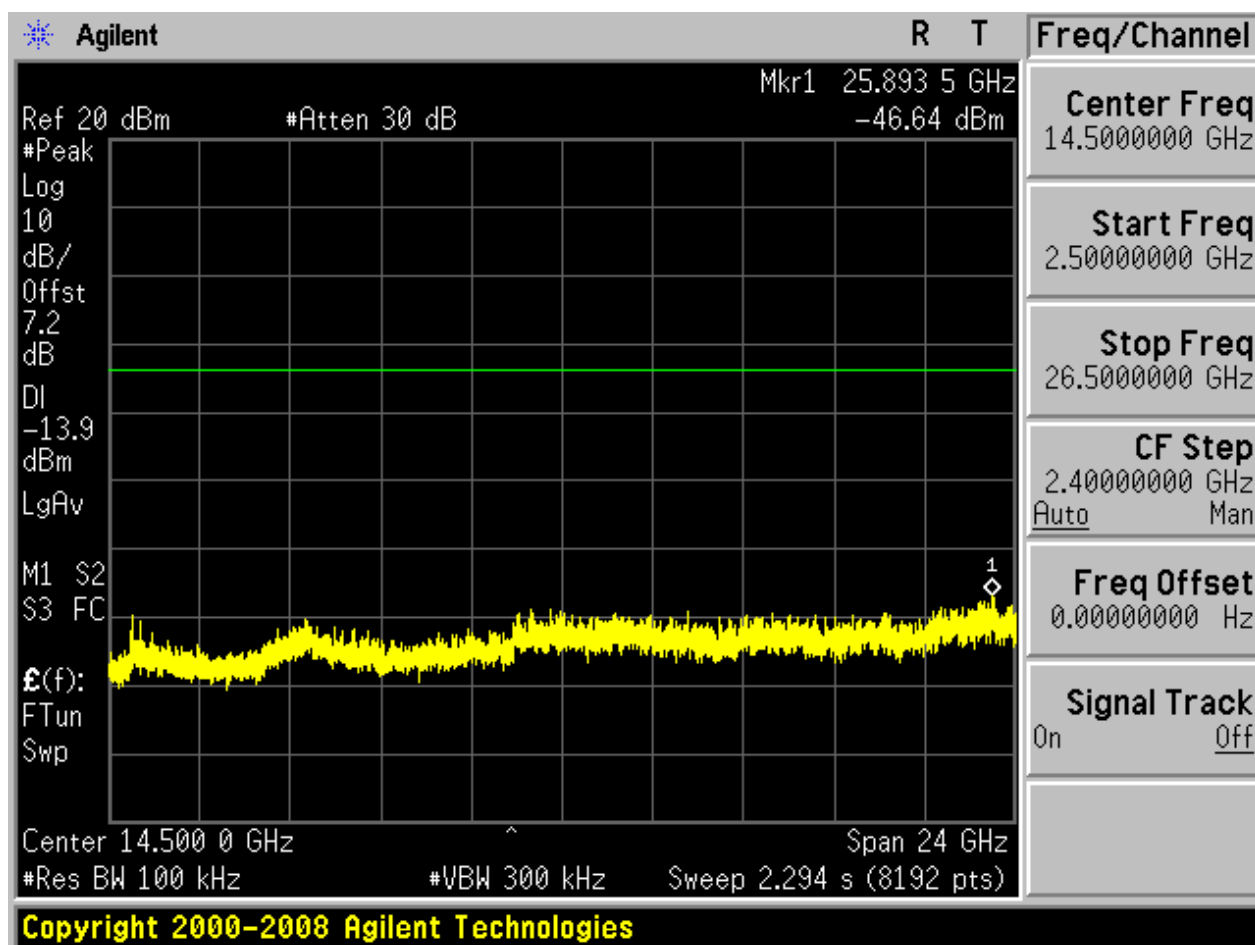



Appendix H: Radiated spurious emission

3 Result Table

The whole testing range is from “30 MHz to 26.5 GHz (10th harmonics)” is divided into 4 parts according to the test site settings, which are:

- (Part 1): Test range of “30 MHz to 1 GHz”,
- (Part 2): Test range of “1 GHz to 3 GHz”,
- (Part 3): Test range of “3 GHz to 18 GHz”, and
- (Part 4): Test range of “18 GHz to 26.5 GHz”.


In this Appendix, only the test results and plots under the worst case can be reported. In the result table, the “< Limit” denotes that “Not found obvious spikes or see marked spikes on plots and listed emissions records”.

Test Range	EUT Conf.	Emissions	Verdict
30 MHz to 1 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
1 GHz to 3 GHz	TM1_DH5_Ch0	< Limit	Pass
	TM1_DH5_Ch39	< Limit	Pass
	TM1_DH5_Ch78	< Limit	Pass
	TM2_2DH5_Ch0	< Limit	Pass
	TM2_2DH5_Ch39	< Limit	Pass
	TM2_2DH5_Ch78	< Limit	Pass
	TM3_3DH5_Ch0	< Limit	Pass
	TM3_3DH5_Ch39	< Limit	Pass
	TM3_3DH5_Ch78	< Limit	Pass
3 GHz to 18 GHz	TM1_DH5_Ch0 (Worse Conf.)	< Limit	Pass
	TM1_DH5_Ch39 (Worse Conf.)	< Limit	Pass
	TM1_DH5_Ch78 (Worse Conf.)	< Limit	Pass
18 GHz to 26.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass

4 Result Plot

Part 1: Testing Range of “30 MHz to 1 GHz”


- Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is [the WORST case for all Test Modes and Channels](#). This range will not be presented for each Test Mode and each Channel.
- Note 2: [The emissions in this range are mainly from the Platform Device \(Notepad PC and its ancillary components\)](#).

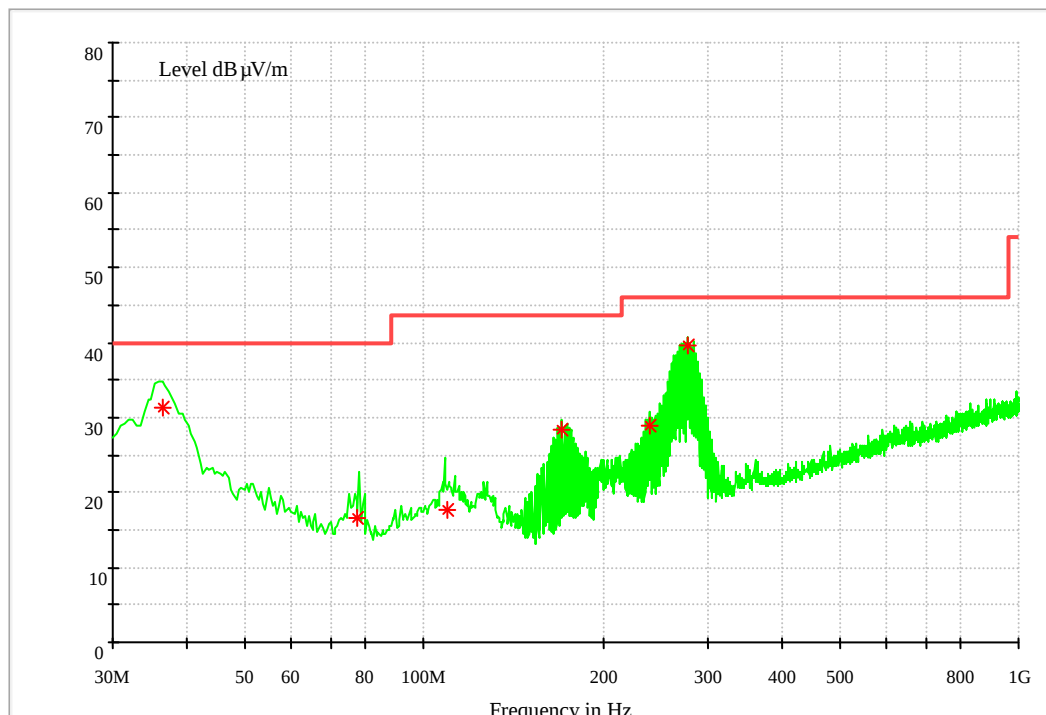

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV/m	Transducer dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
36.314600	31.2	12.4	40.0	8.8	100.0	324.0	VERTICAL
77.009400	16.5	8.7	40.0	23.5	240.0	125.0	HORIZONTAL
109.375200	17.8	12.7	43.5	25.7	100.0	89.0	VERTICAL
171.061800	28.4	10.6	43.5	15.1	189.0	99.0	HORIZONTAL
239.243800	28.9	14.2	46.0	17.1	100.0	247.0	HORIZONTAL
278.354800	39.7	15.4	46.0	6.3	100.0	58.0	HORIZONTAL

Part 2: Testing Range of “18GHz to 26.5 GHz”

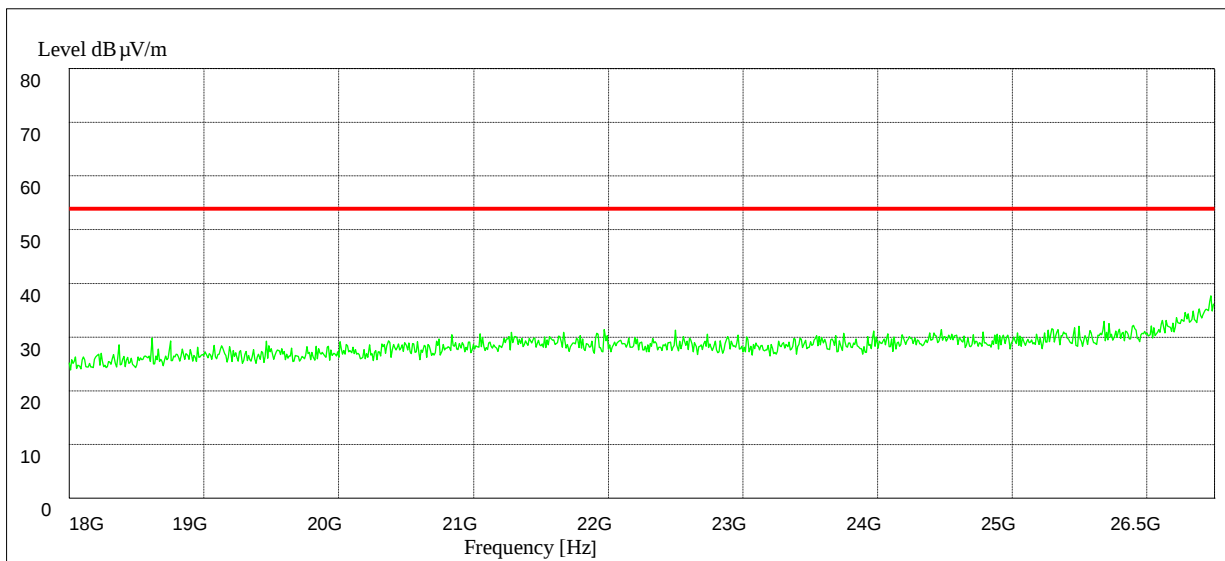


Note: No peak found in pre- test.

Part 3: Testing Range of “1GHz to 3GHz”

- Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

4.1 Channel 0

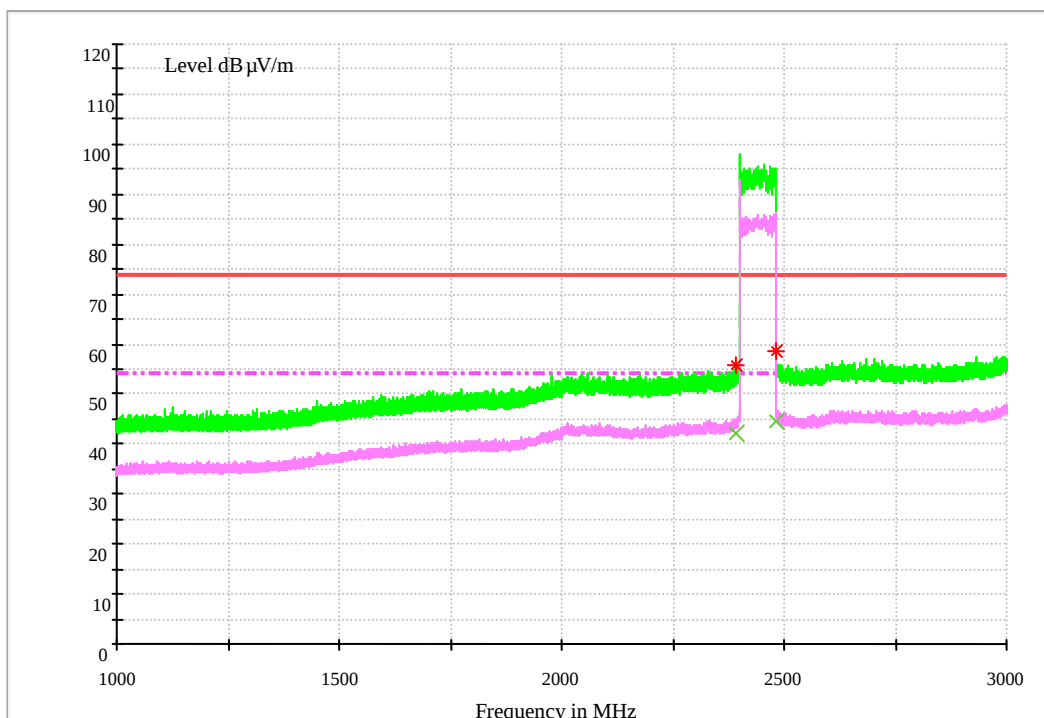

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	55.8	38.3	74.0	18.2	100.0	104.0	HORIZONTAL
2483.500000	58.7	40.7	74.0	15.3	100.0	206.0	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.1	38.3	54.0	11.9	100.0	303.0	HORIZONTAL
2483.500000	44.5	40.3	54.0	9.5	100.0	251.0	HORIZONTAL

4.2 Channel 78

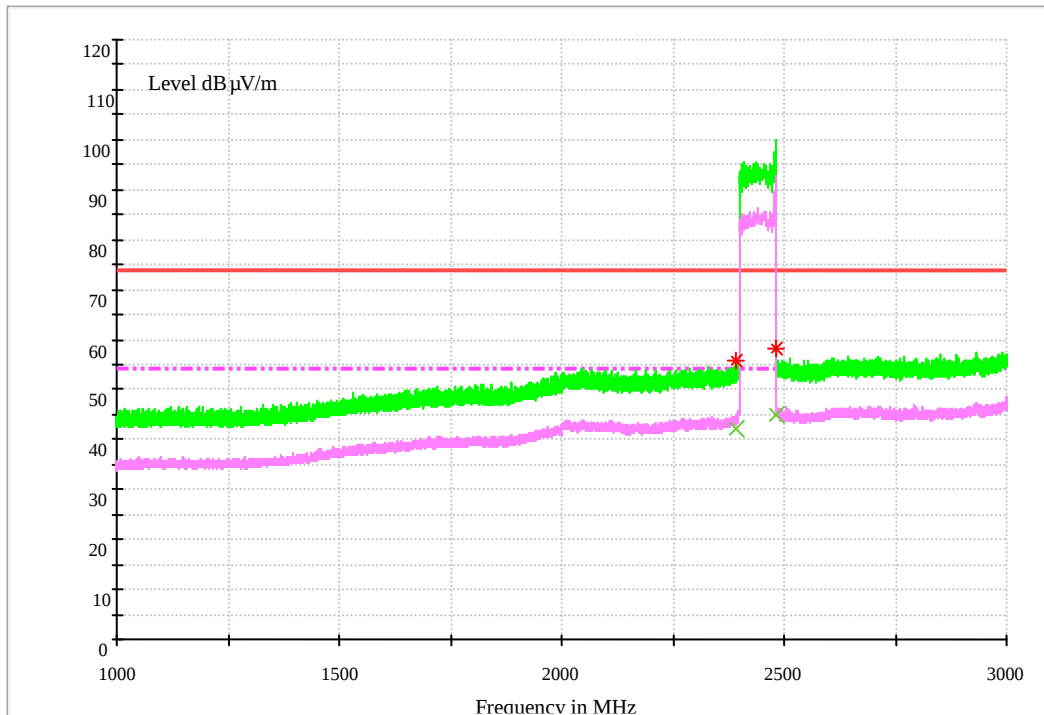

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	55.8	38.3	74.0	18.2	100.0	174.0	VERTICAL
2483.500000	58.4	40.3	74.0	15.6	100.0	241.0	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.0	38.3	54.0	12.0	100.0	152.0	HORIZONTAL
2483.500000	44.9	40.3	54.0	9.1	100.0	0.0	HORIZONTAL

Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands far away from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

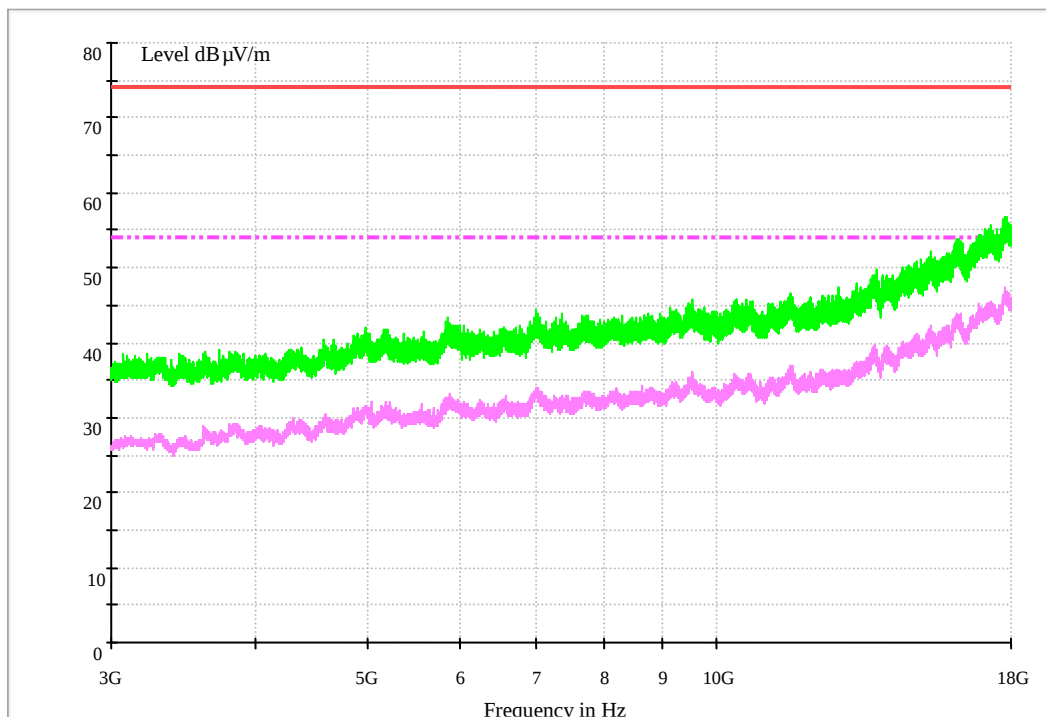



Appendix I: AC Power Line Conducted Emissions




5 Result Table

In this Appendix, only the test results and plots under the worst case can be reported.

EUT Conf.	Maximum Emissions	Verdict
TM1_DH5_Ch39	Not found obvious spikes or see marked spikes on plots and listed emissions records.	Pass

6 Result Plot

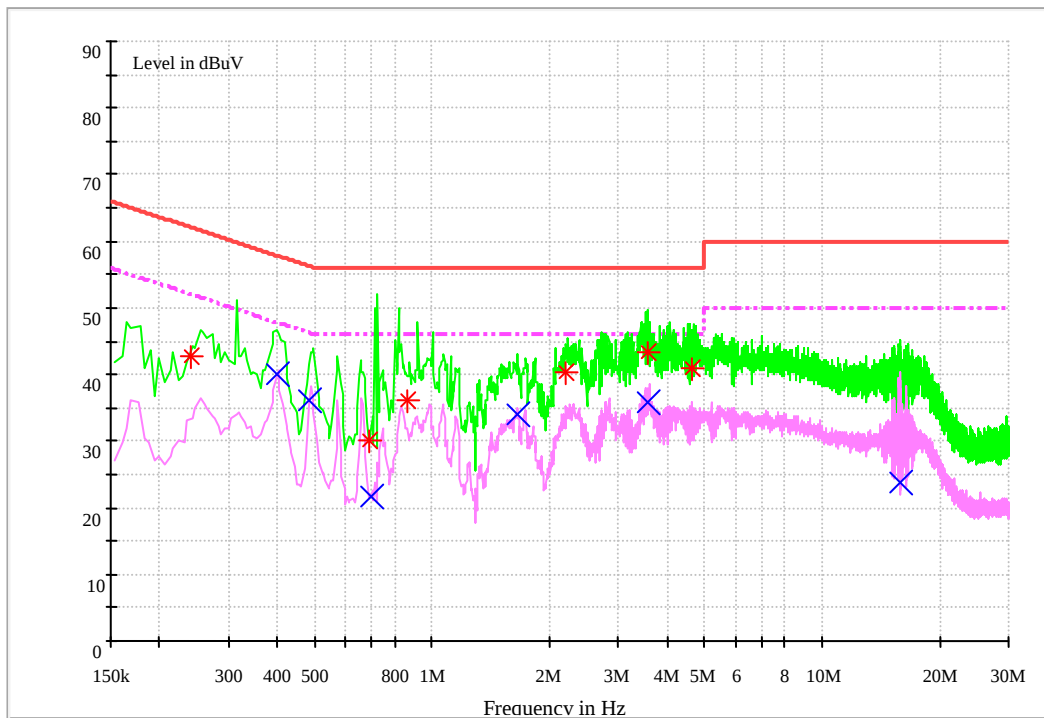

MEASUREMENT RESULT: QP Detector

Frequency	Level	Transducer	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.239385	42.7	9.7	62.1	19.4	L1	FLO
0.693067	30.0	9.7	56.0	26.0	N	FLO
0.868312	36.2	9.7	56.0	19.8	N	FLO
2.208972	40.4	9.7	56.0	15.6	N	FLO
3.563633	43.3	9.7	56.0	12.7	N	FLO
4.645552	41.0	9.8	56.0	15.0	L1	FLO

MEASUREMENT RESULT: AV Detector

Frequency	Level	Transducer	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.400444	40.1	9.7	47.8	7.7	N	FLO
0.484860	36.0	9.7	46.3	10.3	N	FLO
0.699386	21.7	9.7	46.0	24.3	N	FLO
1.653360	34.0	9.7	46.0	12.0	N	FLO
3.561630	35.8	9.7	46.0	10.2	N	FLO
15.81354	23.9	10.1	50.0	26.1	N	FLO

END