

# FCC Test Report

## FCC ID: QIST1-701W

**Project No.** : 1612C023  
**Equipment** : HUAWEI MediaPad T1 7.0  
**Model Name** : T1-701w  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Dec. 09, 2016  
**Date of Test** : Dec. 09, 2016 ~ Apr. 28, 2017  
**Issued Date** : May. 03, 2017  
**Tested by** : BTL Inc.

**Testing Engineer** : Treey Chen  
(Treey Chen)

**Technical Manager** : Bill Zhang  
(Bill Zhang)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

## B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



### Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

## Table of Contents

	Page
<b>REPORT ISSUED HISTORY</b>	4
<b>1 . CERIFICATION</b>	5
<b>2 . SUMMARY OF TEST RESULTS</b>	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 EUT OPERATING CONDITIONS	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	12
<b>4 . EMC EMISSION TEST</b>	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	37
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	37
4.2.2 MEASUREMENT INSTRUMENTS LIST	38
4.2.3 TEST PROCEDURE	39
4.2.4 DEVIATION FROM TEST STANDARD	39
4.2.5 TEST SETUP	40
4.2.6 TEST RESULTS-BELOW 1GHZ	40
4.2.7 TEST RESULTS-ABOVE 1GHZ	63

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCE-1-1612C023	Original Issue.	May. 03, 2017

## 1. CERTIFICATION

Equipment : HUAWEI MediaPad T1 7.0  
Brand Name : HUAWEI  
Model Name : T1-701w  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Dec. 09, 2016 ~ Apr. 28, 2017  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1612C023) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report are located at No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, China.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{cisp}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	$U$ , (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ , (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ , (dB)
DG-CB03	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad T1 7.0
Brand Name	HUAWEI
Model Name	T1-701w
Model Difference	N/A
Frequency	GMSK,8PSK,QPSK
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Battery Supplied.
Power Rating	#1 Input: 100–240V~ 50/60Hz 0.2A Output:5V == 1A #2 DC 3.7V 4000mAh
HW Version	SH1T1701UM
SW Version	T1-701wV100R001C001

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT contains following accessory devices

Item	Mfr/Brand	Model.
Battery	Huawei Technologies Co.,Ltd.	HB4269B6EAW
	Huawei Technologies Co.,Ltd.	HB3G1
USB Cable	HONGLIN TECHNOLOGY CO.,LTD	N/A
	CONNREX (SHEN ZHEN) INDUSTRIAL, LTD	N/A
	Unirise Communication Technology Co.,Ltd.	N/A
	SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD	N/A
Earphone	GOERTEK INC	N/A
	Jiangxi Lianchuang Hongsheng Electronic Co.,LTD	N/A
Adapter	HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050100U01
	Shenzhen Huntkey Electric Co., Ltd.	
	Dongguan Phitek Electronics Co., Ltd	
	HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050100U2W
	Shenzhen Huntkey Electric Co., Ltd.	

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB COPY
Mode 2	Adapter+WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earpone


For Conducted Test	
Final Test Mode	Description
Mode 1	USB COPY
Mode 2	Adapter+WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earpone


For Radiated Test	
Final Test Mode	Description
Mode 1	USB COPY
Mode 2	Adapter+WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earpone

### 3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

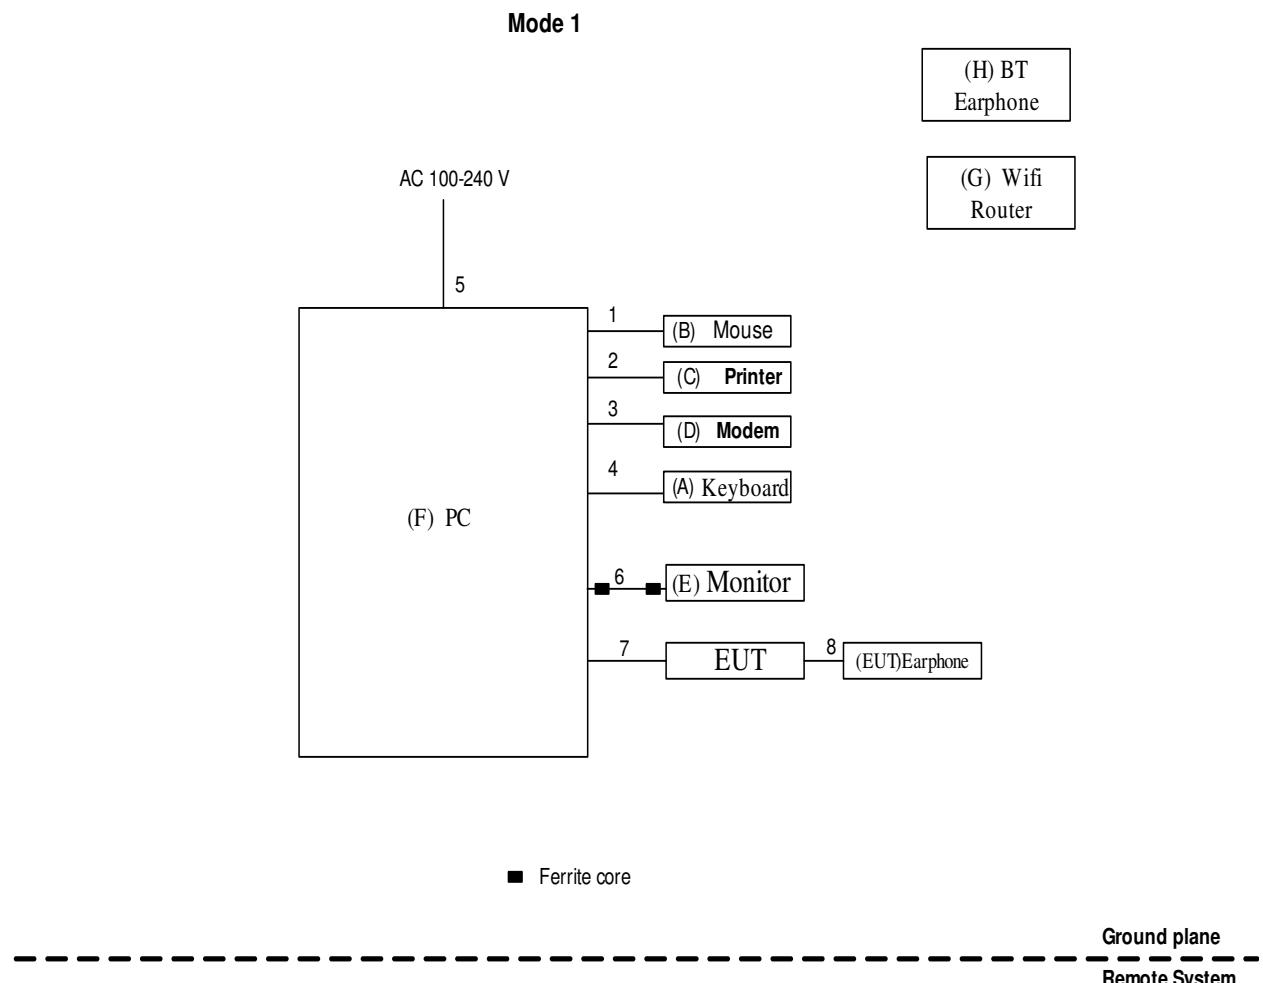

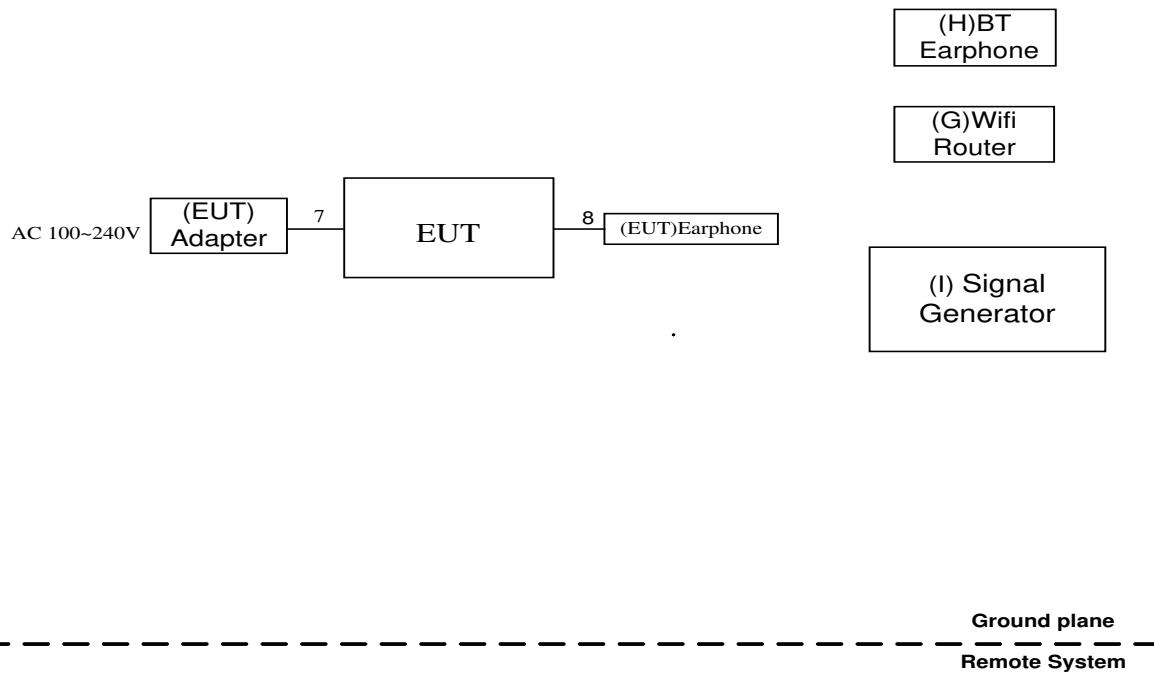**Mode 2-4**

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
F	PC	Dell	DCSM	DOC	G7K832X
G	wireless router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
H	BT earphone	N/A	N/A	N/A	N/A
I	Signal Generator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Audio Cable

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9K Hz-30MHz) (5m)	N/A	Mar. 07, 2018
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


#### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

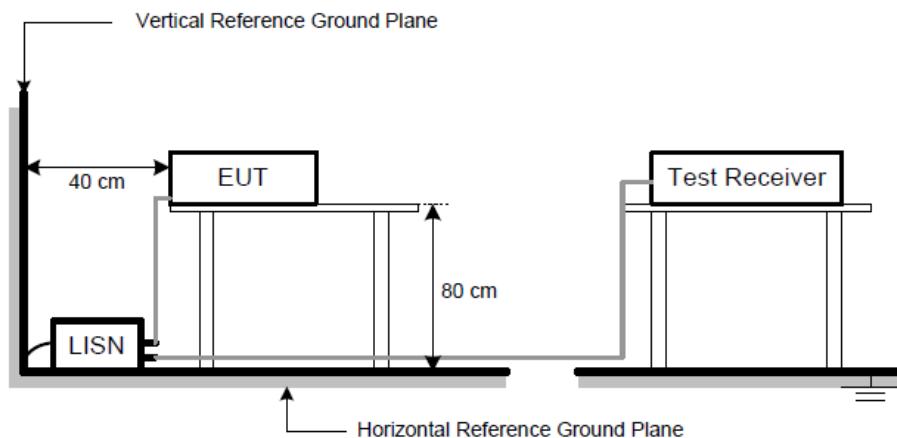


#### 4.1.6 TEST RESULTS

##### Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY		
Note	USB Cable:HONGLIN		
Test Engineer	Treey Chen		

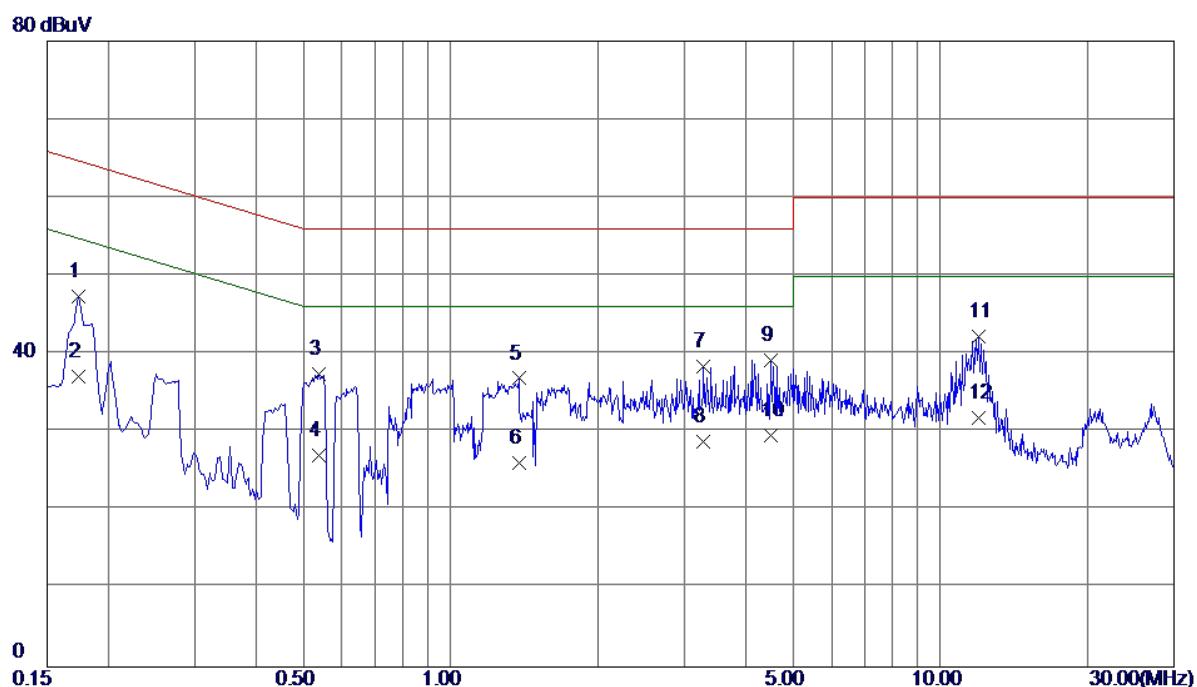


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	37.81	9.57	47.38	64.77	-17.39	QP
2	0.1740	27.60	9.57	37.17	54.77	-17.60	AVG
3	0.5380	27.80	9.69	37.49	56.00	-18.51	QP
4	0.5380	17.40	9.69	27.09	46.00	-18.91	AVG
5	1.3779	26.95	9.93	36.88	56.00	-19.12	QP
6	1.3779	16.20	9.93	26.13	46.00	-19.87	AVG
7	3.2820	28.08	10.30	38.38	56.00	-17.62	QP
8	3.2820	18.50	10.30	28.80	46.00	-17.20	AVG
9	4.5020	28.94	10.31	39.25	56.00	-16.75	QP
10 *	4.5020	19.31	10.31	29.62	46.00	-16.38	AVG
11	11.9460	31.73	10.57	42.30	60.00	-17.70	QP
12	11.9460	21.30	10.57	31.87	50.00	-18.13	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY		
Note	USB Cable:HONGLIN		
Test Engineer	Treey Chen		

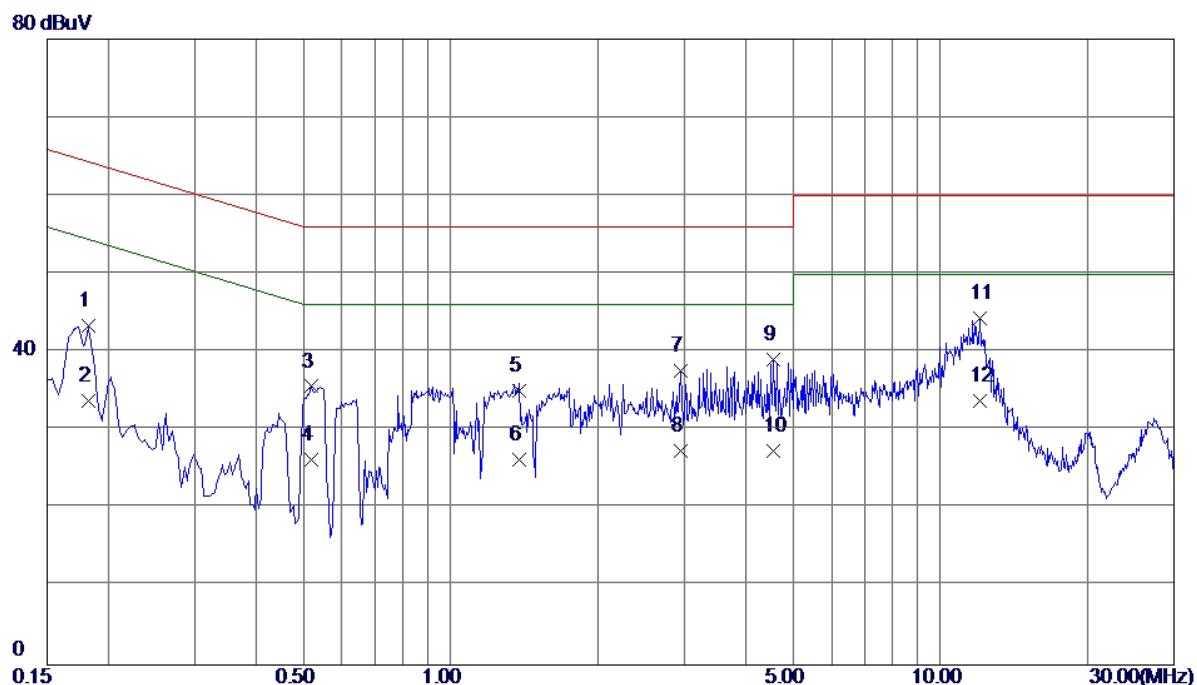


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	33.85	9.51	43.36	64.40	-21.04	QP
2	0.1819	24.30	9.51	33.81	54.40	-20.59	AVG
3	0.5180	26.11	9.49	35.60	56.00	-20.40	QP
4	0.5180	16.80	9.49	26.29	46.00	-19.71	AVG
5	1.3779	25.30	9.77	35.07	56.00	-20.93	QP
6	1.3779	16.40	9.77	26.17	46.00	-19.83	AVG
7	2.9580	27.71	9.96	37.67	56.00	-18.33	QP
8	2.9580	17.40	9.96	27.36	46.00	-18.64	AVG
9	4.5660	28.86	10.17	39.03	56.00	-16.97	QP
10	4.5660	17.21	10.17	27.38	46.00	-18.62	AVG
11 *	12.0300	33.71	10.63	44.34	60.00	-15.66	QP
12	12.0300	23.10	10.63	33.73	50.00	-16.27	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY		
Note	USB Cable:PANG NGAI		
Test Engineer	Treey Chen		

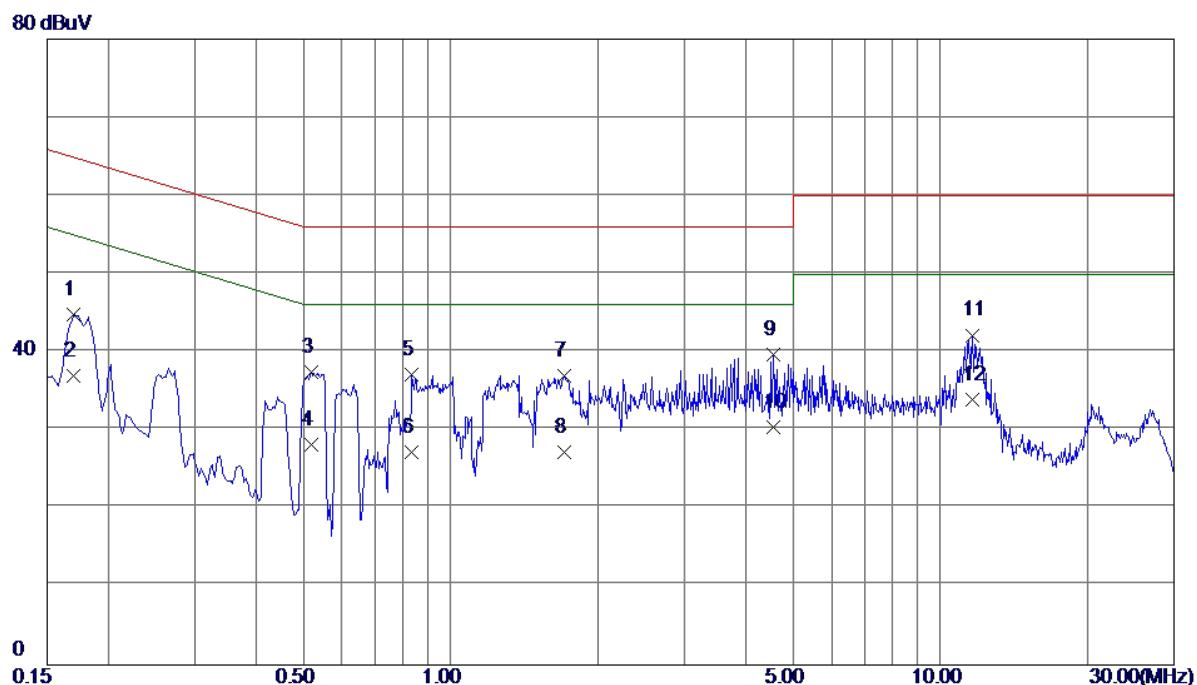


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1700	35. 18	9. 57	44. 75	64. 96	-20. 21	QP
2	0. 1700	27. 40	9. 57	36. 97	54. 96	-17. 99	AVG
3	0. 5180	27. 81	9. 69	37. 50	56. 00	-18. 50	QP
4	0. 5180	18. 50	9. 69	28. 19	46. 00	-17. 81	AVG
5	0. 8340	27. 32	9. 82	37. 14	56. 00	-18. 86	QP
6	0. 8340	17. 40	9. 82	27. 22	46. 00	-18. 78	AVG
7	1. 7100	27. 00	9. 99	36. 99	56. 00	-19. 01	QP
8	1. 7100	17. 20	9. 99	27. 19	46. 00	-18. 81	AVG
9	4. 5660	29. 31	10. 31	39. 62	56. 00	-16. 38	QP
10 *	4. 5660	20. 10	10. 31	30. 41	46. 00	-15. 59	AVG
11	11. 6380	31. 60	10. 56	42. 16	60. 00	-17. 84	QP
12	11. 6380	23. 40	10. 56	33. 96	50. 00	-16. 04	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY		
Note	USB Cable:PANG NGAI		
Test Engineer	Treey Chen		

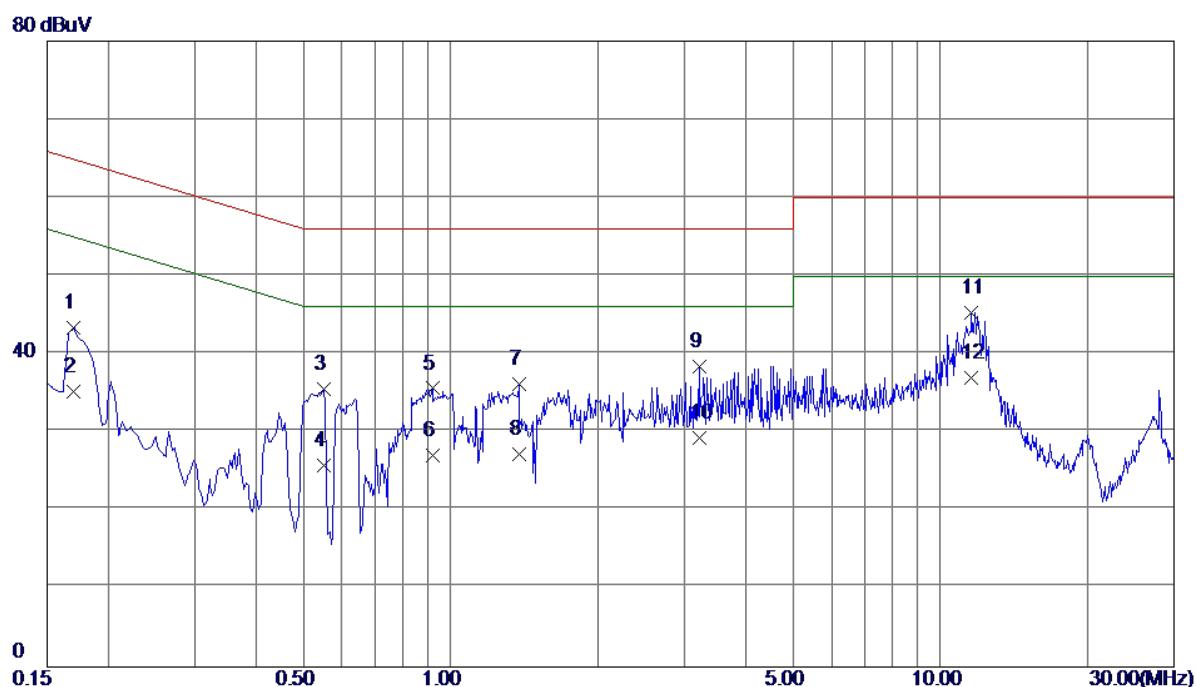


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	33.92	9.47	43.39	64.96	-21.57	QP
2	0.1700	25.70	9.47	35.17	54.96	-19.79	AVG
3	0.5500	26.00	9.49	35.49	56.00	-20.51	QP
4	0.5500	16.31	9.49	25.80	46.00	-20.20	AVG
5	0.9180	25.87	9.73	35.60	56.00	-20.40	QP
6	0.9180	17.30	9.73	27.03	46.00	-18.97	AVG
7	1.3779	26.40	9.77	36.17	56.00	-19.83	QP
8	1.3779	17.40	9.77	27.17	46.00	-18.83	AVG
9	3.2139	28.41	9.99	38.40	56.00	-17.60	QP
10	3.2139	19.30	9.99	29.29	46.00	-16.71	AVG
11	11.5659	34.70	10.62	45.32	60.00	-14.68	QP
12 *	11.5659	26.30	10.62	36.92	50.00	-13.08	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY		
Note	USB Cable:CONNREX		
Test Engineer	Treey Chen		

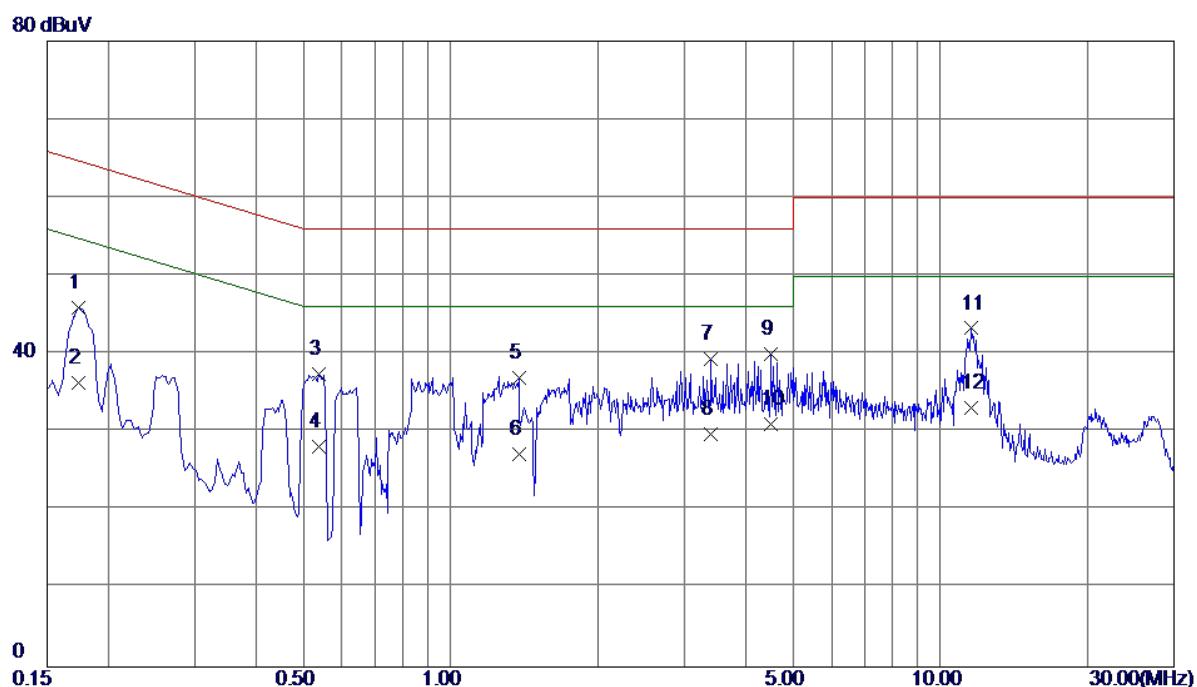


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	36.41	9.57	45.98	64.77	-18.79	QP
2	0.1740	26.80	9.57	36.37	54.77	-18.40	AVG
3	0.5380	27.72	9.69	37.41	56.00	-18.59	QP
4	0.5380	18.40	9.69	28.09	46.00	-17.91	AVG
5	1.3779	27.06	9.93	36.99	56.00	-19.01	QP
6	1.3779	17.30	9.93	27.23	46.00	-18.77	AVG
7	3.4060	29.04	10.31	39.35	56.00	-16.65	QP
8	3.4060	19.40	10.31	29.71	46.00	-16.29	AVG
9	4.5020	29.62	10.31	39.93	56.00	-16.07	QP
10 *	4.5020	20.71	10.31	31.02	46.00	-14.98	AVG
11	11.5700	32.72	10.56	43.28	60.00	-16.72	QP
12	11.5700	22.49	10.56	33.05	50.00	-16.95	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY		
Note	USB Cable:CONNEX		
Test Engineer	Treey Chen		

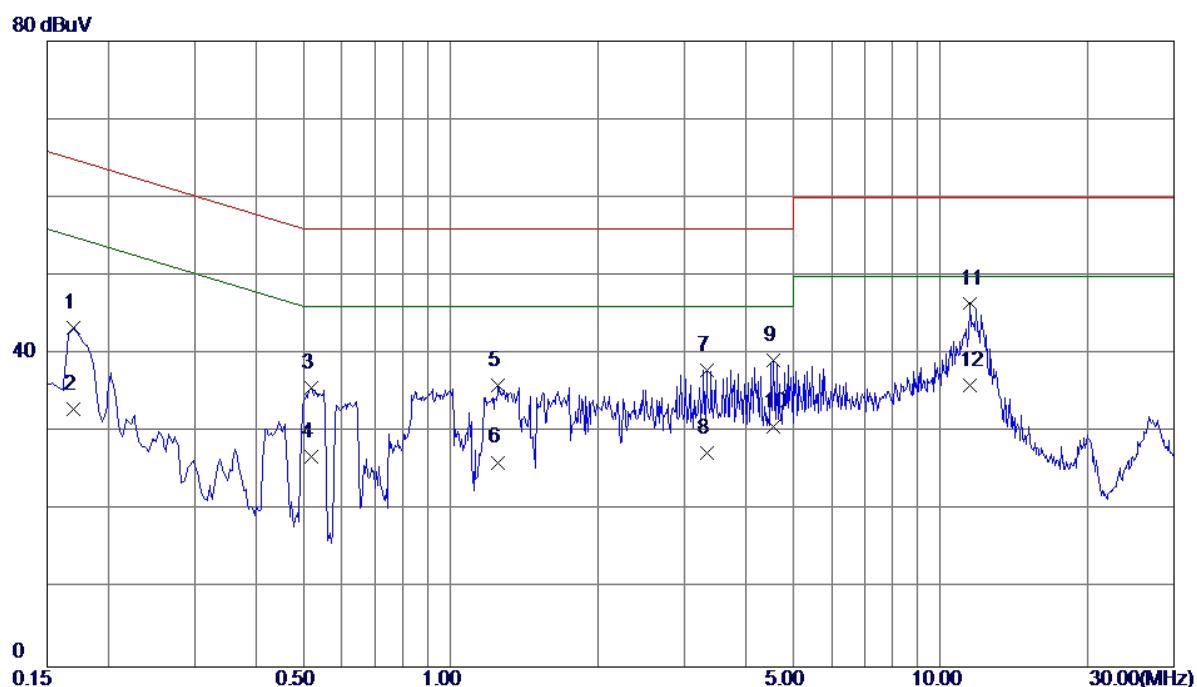


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	33.88	9.47	43.35	64.96	-21.61	QP
2	0.1700	23.50	9.47	32.97	54.96	-21.99	AVG
3	0.5180	26.17	9.49	35.66	56.00	-20.34	QP
4	0.5180	17.40	9.49	26.89	46.00	-19.11	AVG
5	1.2500	26.26	9.76	36.02	56.00	-19.98	QP
6	1.2500	16.40	9.76	26.16	46.00	-19.84	AVG
7	3.3420	27.95	10.00	37.95	56.00	-18.05	QP
8	3.3420	17.40	10.00	27.40	46.00	-18.60	AVG
9	4.5660	29.01	10.17	39.18	56.00	-16.82	QP
10	4.5660	20.61	10.17	30.78	46.00	-15.22	AVG
11 *	11.5100	35.86	10.62	46.48	60.00	-13.52	QP
12	11.5100	25.40	10.62	36.02	50.00	-13.98	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD(HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

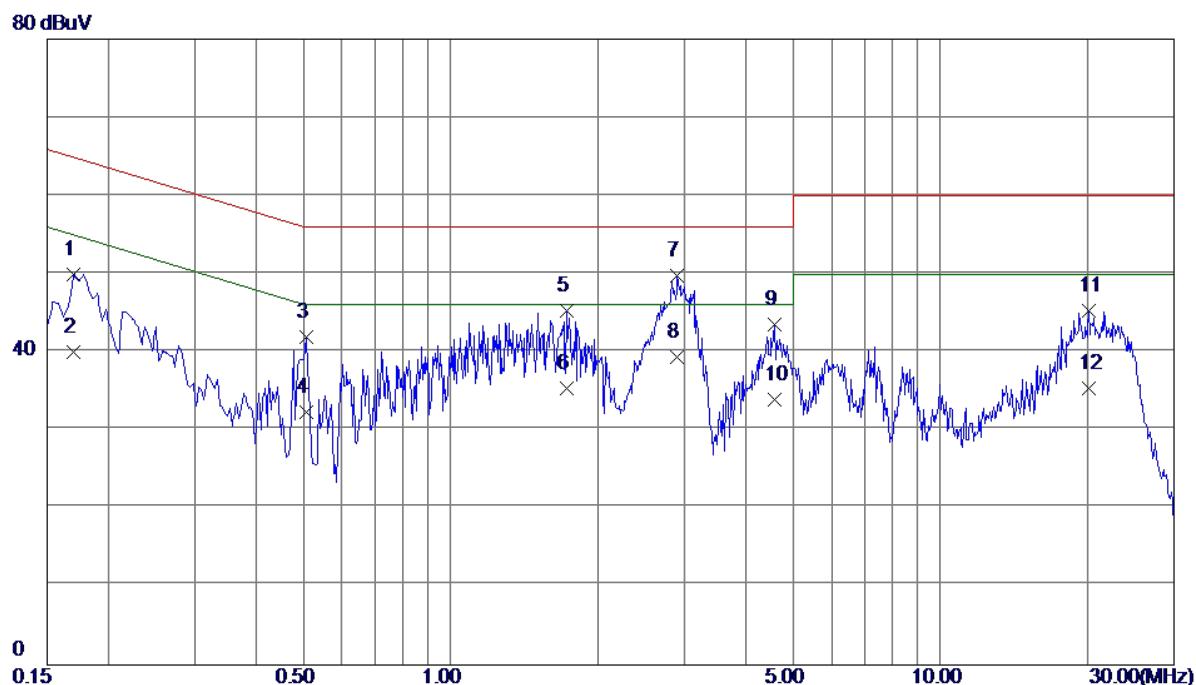


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	40.38	9.57	49.95	64.96	-15.01	QP
2	0.1700	30.50	9.57	40.07	54.96	-14.89	AVG
3	0.5060	32.24	9.69	41.93	56.00	-14.07	QP
4	0.5060	22.60	9.69	32.29	46.00	-13.71	AVG
5	1.7260	35.24	9.99	45.23	56.00	-10.77	QP
6	1.7260	25.40	9.99	35.39	46.00	-10.61	AVG
7 *	2.9020	39.56	10.26	49.82	56.00	-6.18	QP
8	2.9020	29.10	10.26	39.36	46.00	-6.64	AVG
9	4.5820	33.20	10.30	43.50	56.00	-12.50	QP
10	4.5820	23.60	10.30	33.90	46.00	-12.10	AVG
11	20.1420	34.41	10.80	45.21	60.00	-14.79	QP
12	20.1420	24.60	10.80	35.40	50.00	-14.60	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD(HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

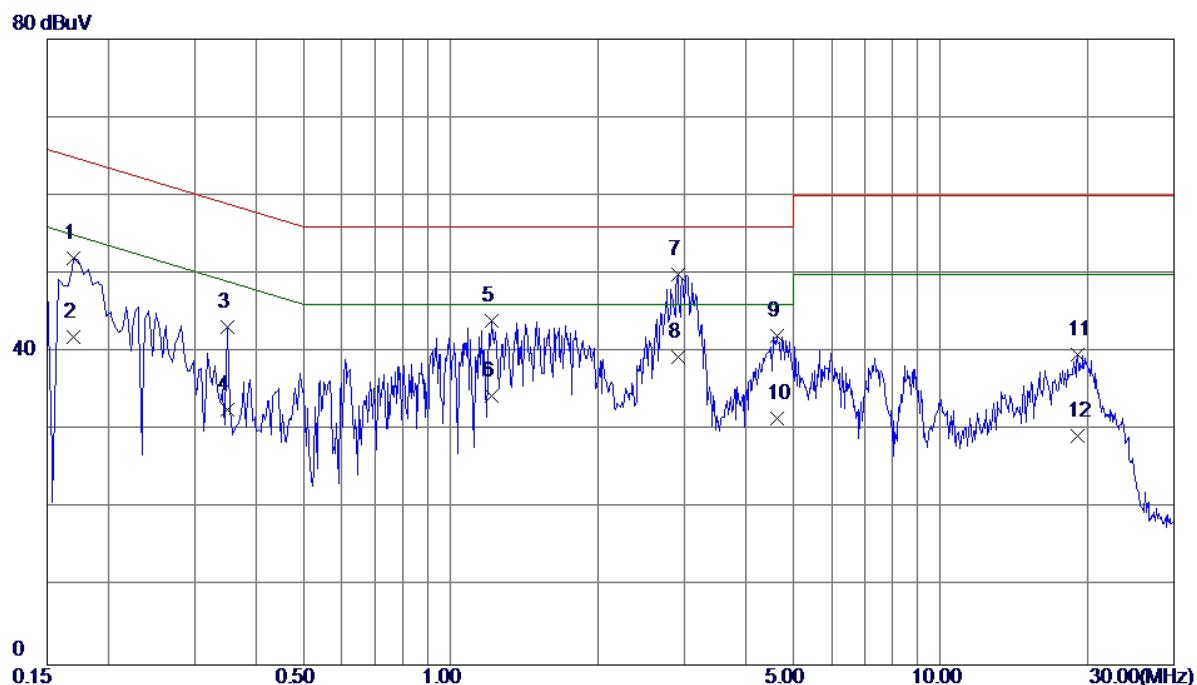


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1700	42. 59	9. 47	52. 06	64. 96	-12. 90	QP
2	0. 1700	32. 50	9. 47	41. 97	54. 96	-12. 99	AVG
3	0. 3500	33. 57	9. 58	43. 15	58. 96	-15. 81	QP
4	0. 3500	23. 10	9. 58	32. 68	48. 96	-16. 28	AVG
5	1. 2140	34. 24	9. 75	43. 99	56. 00	-12. 01	QP
6	1. 2140	24. 70	9. 75	34. 45	46. 00	-11. 55	AVG
7 *	2. 9140	39. 96	9. 96	49. 92	56. 00	-6. 08	QP
8	2. 9140	29. 40	9. 96	39. 36	46. 00	-6. 64	AVG
9	4. 6380	31. 90	10. 19	42. 09	56. 00	-13. 91	QP
10	4. 6380	21. 39	10. 19	31. 58	46. 00	-14. 42	AVG
11	19. 0500	28. 88	10. 86	39. 74	60. 00	-20. 26	QP
12	19. 0500	18. 40	10. 86	29. 26	50. 00	-20. 74	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD(HW-050100U01)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

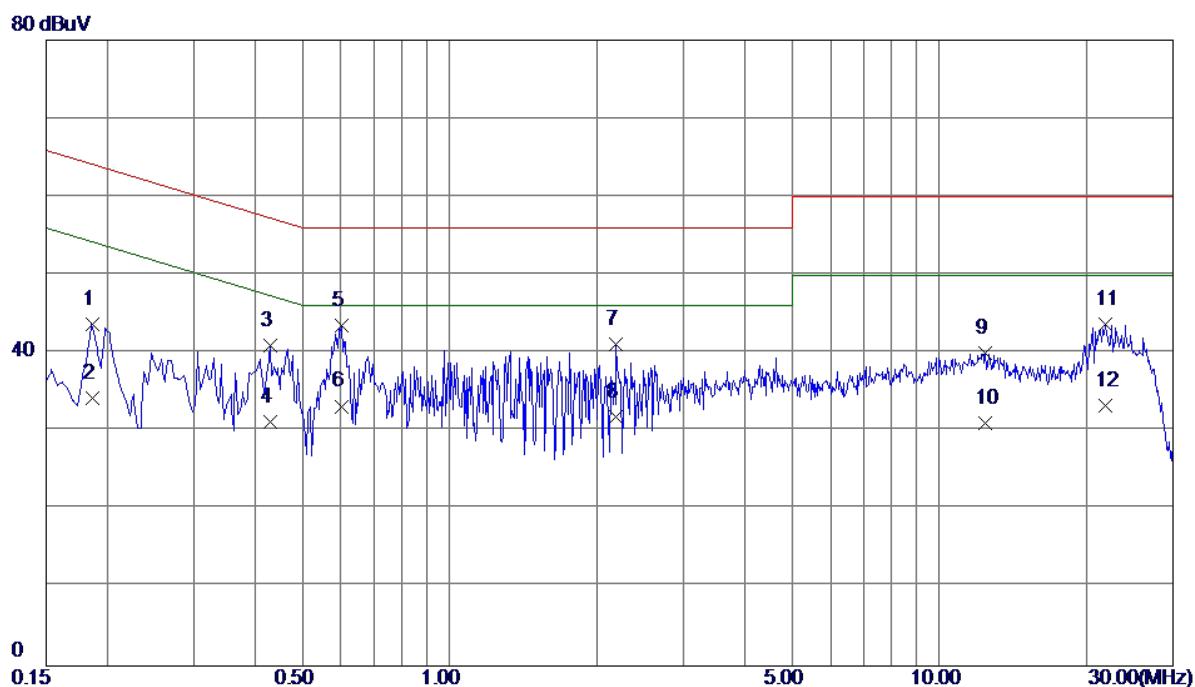


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0. 1860	34. 04	9. 57	43. 61	64. 21	-20. 60	QP
2	0. 1860	24. 60	9. 57	34. 17	54. 21	-20. 04	AVG
3	0. 4300	31. 33	9. 62	40. 95	57. 25	-16. 30	QP
4	0. 4300	21. 60	9. 62	31. 22	47. 25	-16. 03	AVG
5 *	0. 6020	33. 77	9. 70	43. 47	56. 00	-12. 53	QP
6	0. 6020	23. 50	9. 70	33. 20	46. 00	-12. 80	AVG
7	2. 1900	31. 03	10. 10	41. 13	56. 00	-14. 87	QP
8	2. 1900	21. 80	10. 10	31. 90	46. 00	-14. 10	AVG
9	12. 3900	29. 42	10. 59	40. 01	60. 00	-19. 99	QP
10	12. 3900	20. 40	10. 59	30. 99	50. 00	-19. 01	AVG
11	21. 8660	32. 94	10. 81	43. 75	60. 00	-16. 25	QP
12	21. 8660	22. 50	10. 81	33. 31	50. 00	-16. 69	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD(HW-050100U01)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

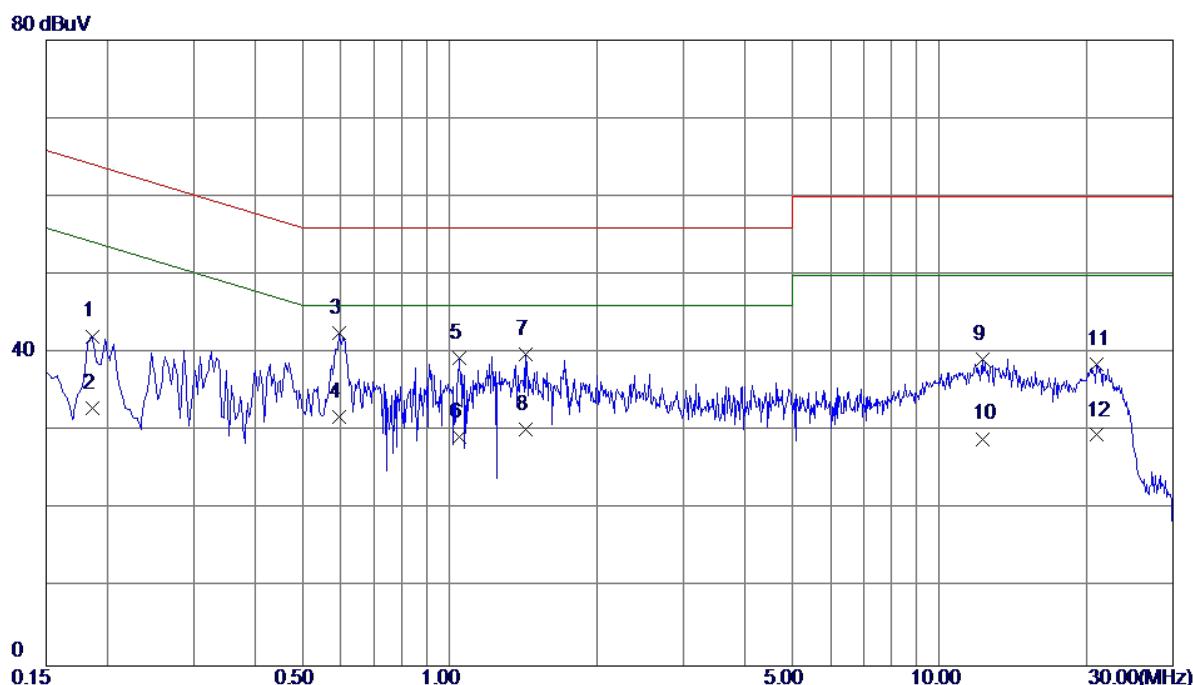


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1860	32. 64	9. 52	42. 16	64. 21	-22. 05	QP
2	0. 1860	23. 50	9. 52	33. 02	54. 21	-21. 19	AVG
3 *	0. 5940	33. 03	9. 50	42. 53	56. 00	-13. 47	QP
4	0. 5940	22. 40	9. 50	31. 90	46. 00	-14. 10	AVG
5	1. 0460	29. 60	9. 74	39. 34	56. 00	-16. 66	QP
6	1. 0460	19. 50	9. 74	29. 24	46. 00	-16. 76	AVG
7	1. 4340	30. 00	9. 77	39. 77	56. 00	-16. 23	QP
8	1. 4340	20. 50	9. 77	30. 27	46. 00	-15. 73	AVG
9	12. 2380	28. 54	10. 64	39. 18	60. 00	-20. 82	QP
10	12. 2380	18. 40	10. 64	29. 04	50. 00	-20. 96	AVG
11	21. 0100	27. 64	10. 92	38. 56	60. 00	-21. 44	QP
12	21. 0100	18. 60	10. 92	29. 52	50. 00	-20. 48	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

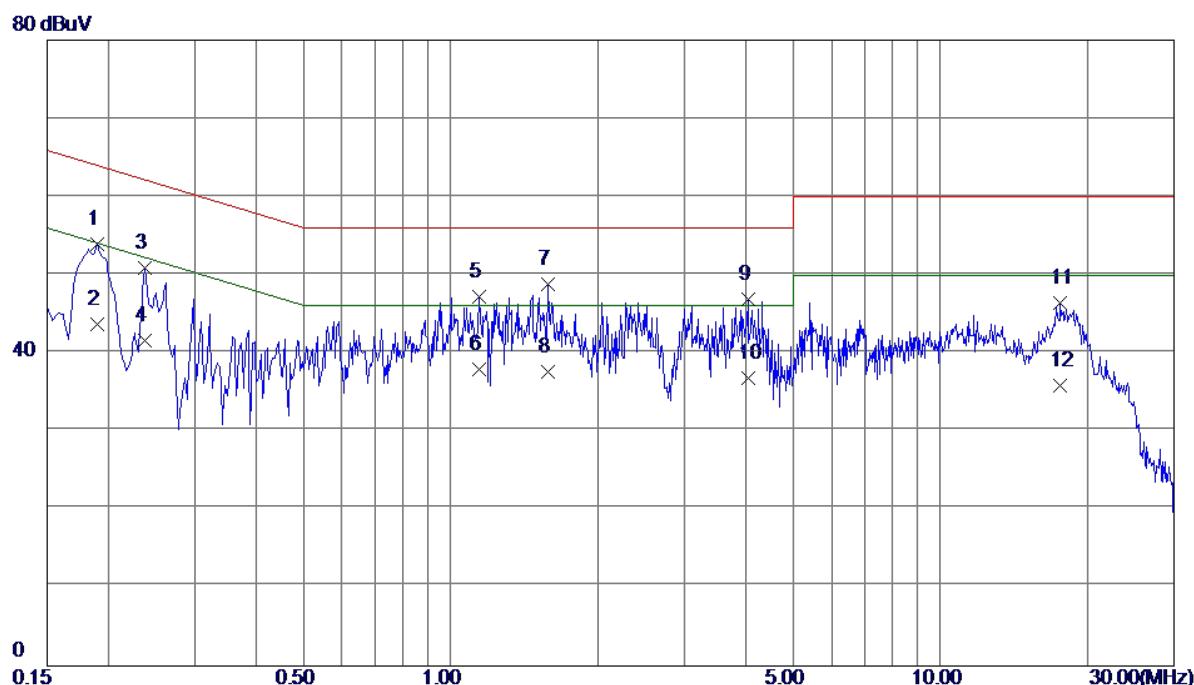


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1900	44. 31	9. 57	53. 88	64. 04	-10. 16	QP
2	0. 1900	34. 10	9. 57	43. 67	54. 04	-10. 37	AVG
3	0. 2380	41. 30	9. 57	50. 87	62. 17	-11. 30	QP
4	0. 2380	32. 00	9. 57	41. 57	52. 17	-10. 60	AVG
5	1. 1420	37. 37	9. 85	47. 22	56. 00	-8. 78	QP
6	1. 1420	28. 10	9. 85	37. 95	46. 00	-8. 05	AVG
7 *	1. 5780	38. 81	9. 98	48. 79	56. 00	-7. 21	QP
8	1. 5780	27. 60	9. 98	37. 58	46. 00	-8. 42	AVG
9	4. 0420	36. 55	10. 38	46. 93	56. 00	-9. 07	QP
10	4. 0420	26. 40	10. 38	36. 78	46. 00	-9. 22	AVG
11	17. 6020	35. 64	10. 75	46. 39	60. 00	-13. 61	QP
12	17. 6020	25. 10	10. 75	35. 85	50. 00	-14. 15	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

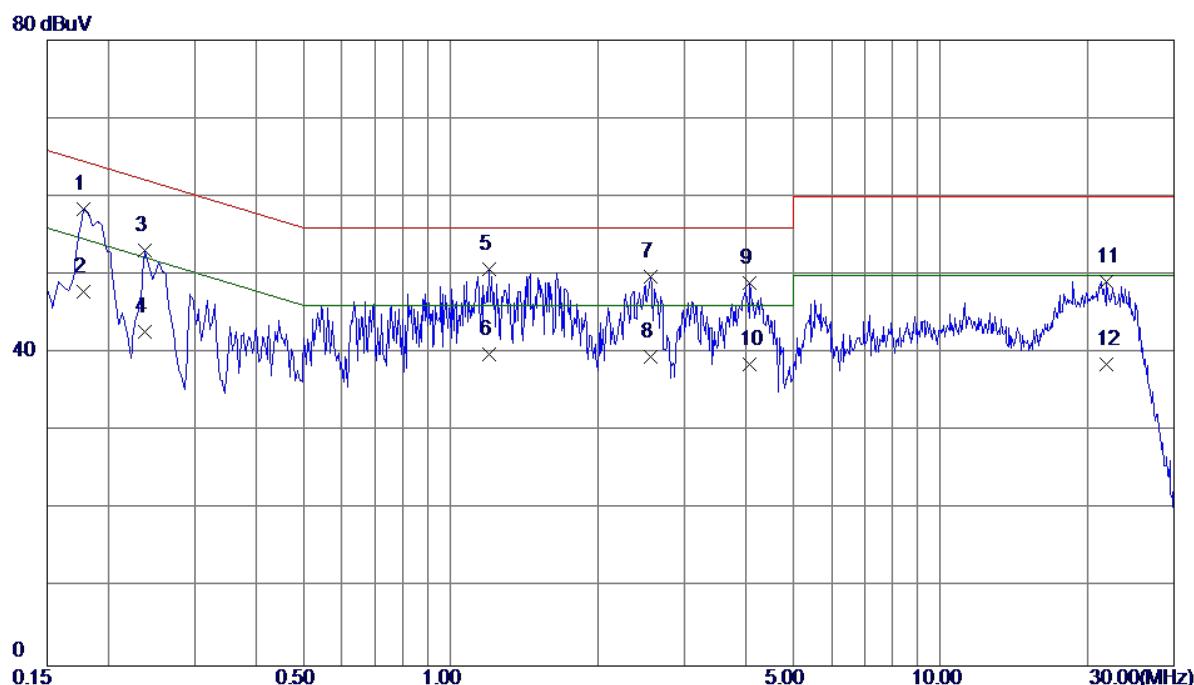


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1780	48. 94	9. 50	58. 44	64. 58	-6. 14	QP
2	0. 1780	38. 40	9. 50	47. 90	54. 58	-6. 68	AVG
3	0. 2380	43. 48	9. 57	53. 05	62. 17	-9. 12	QP
4	0. 2380	33. 20	9. 57	42. 77	52. 17	-9. 40	AVG
5 *	1. 1980	40. 91	9. 75	50. 66	56. 00	-5. 34	QP
6	1. 1980	30. 10	9. 75	39. 85	46. 00	-6. 15	AVG
7	2. 5660	39. 80	9. 94	49. 74	56. 00	-6. 26	QP
8	2. 5660	29. 60	9. 94	39. 54	46. 00	-6. 46	AVG
9	4. 0860	38. 81	10. 10	48. 91	56. 00	-7. 09	QP
10	4. 0860	28. 40	10. 10	38. 50	46. 00	-7. 50	AVG
11	21. 8460	38. 19	10. 93	49. 12	60. 00	-10. 88	QP
12	21. 8460	27. 60	10. 93	38. 53	50. 00	-11. 47	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

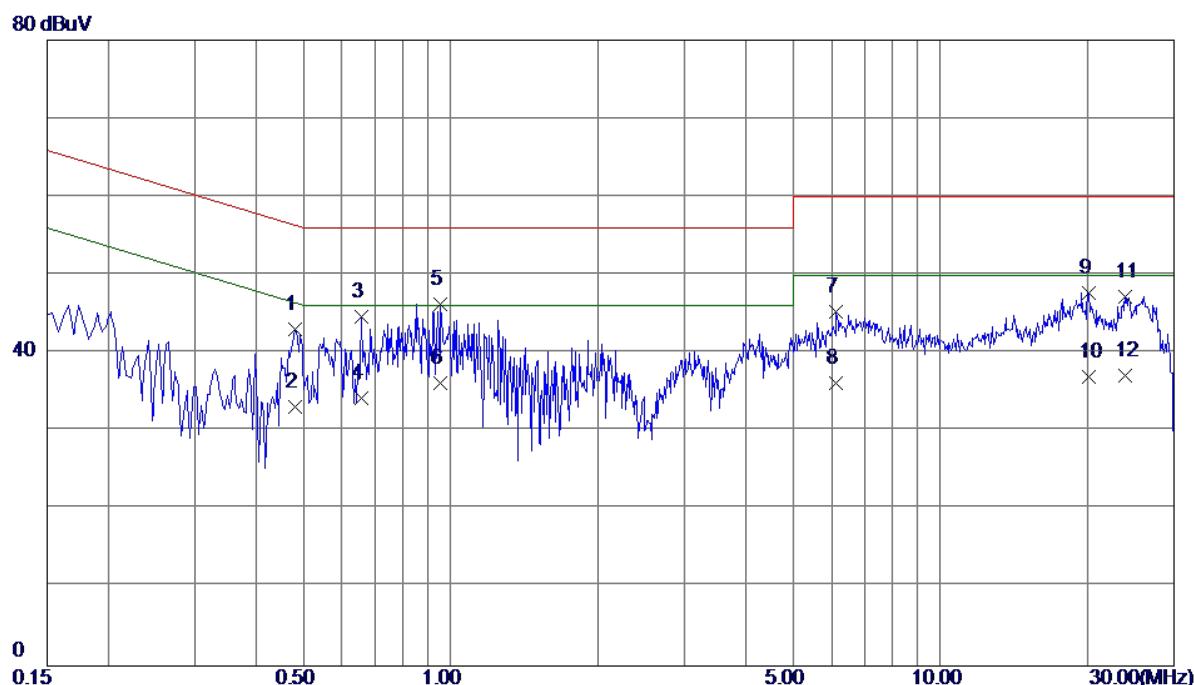


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.4820	33.36	9.67	43.03	56.30	-13.27	QP
2	0.4820	23.40	9.67	33.07	46.30	-13.23	AVG
3	0.6580	34.92	9.71	44.63	56.00	-11.37	QP
4	0.6580	24.60	9.71	34.31	46.00	-11.69	AVG
5 *	0.9540	36.43	9.84	46.27	56.00	-9.73	QP
6	0.9540	26.30	9.84	36.14	46.00	-9.86	AVG
7	6.1380	35.00	10.34	45.34	60.00	-14.66	QP
8	6.1380	25.80	10.34	36.14	50.00	-13.86	AVG
9	20.0620	36.96	10.80	47.76	60.00	-12.24	QP
10	20.0620	26.10	10.80	36.90	50.00	-13.10	AVG
11	23.9100	36.39	10.83	47.22	60.00	-12.78	QP
12	23.9100	26.30	10.83	37.13	50.00	-12.87	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

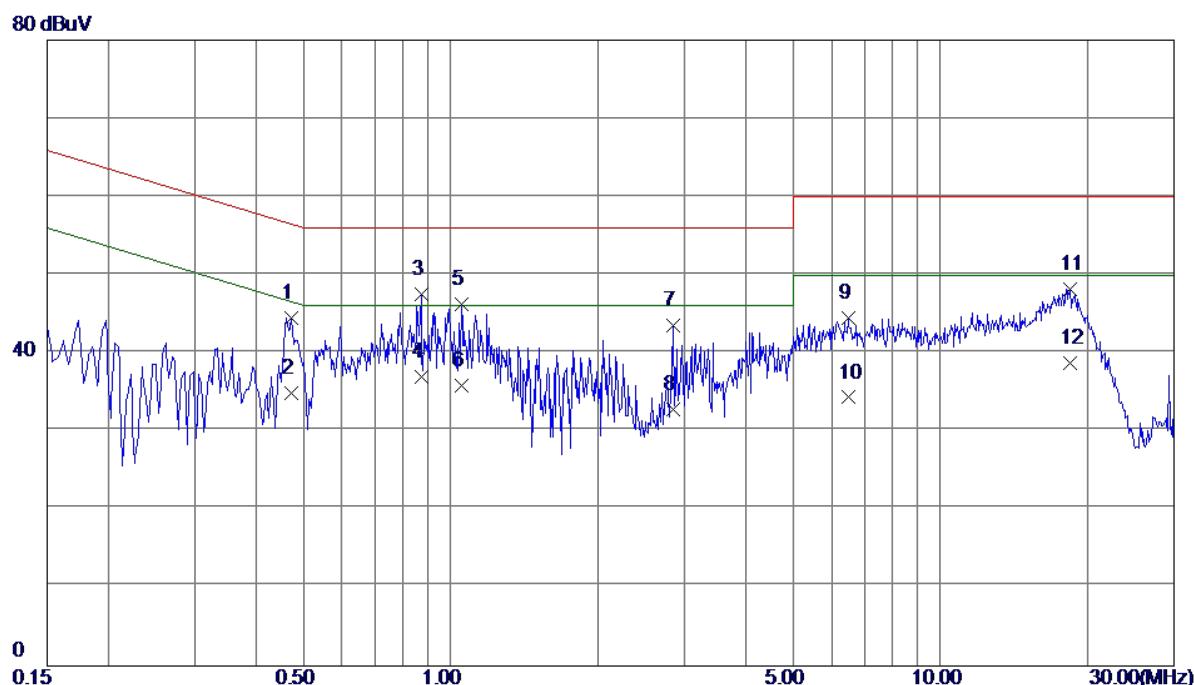


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.4740	35.06	9.49	44.55	56.44	-11.89	QP
2	0.4740	25.40	9.49	34.89	46.44	-11.55	AVG
3 *	0.8700	37.84	9.70	47.54	56.00	-8.46	QP
4	0.8700	27.30	9.70	37.00	46.00	-9.00	AVG
5	1.0500	36.43	9.74	46.17	56.00	-9.83	QP
6	1.0500	26.10	9.74	35.84	46.00	-10.16	AVG
7	2.8420	33.63	9.95	43.58	56.00	-12.42	QP
8	2.8420	22.80	9.95	32.75	46.00	-13.25	AVG
9	6.4820	34.26	10.22	44.48	60.00	-15.52	QP
10	6.4820	24.10	10.22	34.32	50.00	-15.68	AVG
11	18.4420	37.34	10.84	48.18	60.00	-11.82	QP
12	18.4420	27.90	10.84	38.74	50.00	-11.26	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter: Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

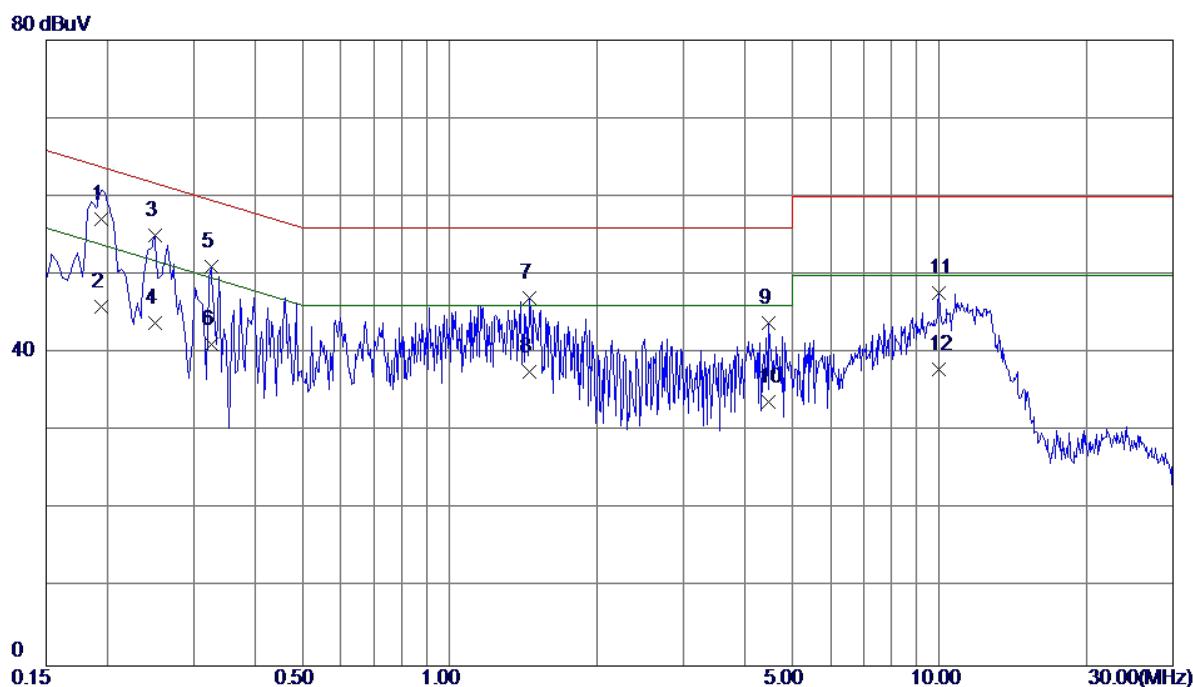


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.1940	47.60	9.57	57.17	63.86	-6.69	QP
2	0.1940	36.40	9.57	45.97	53.86	-7.89	AVG
3 *	0.2500	45.52	9.57	55.09	61.76	-6.67	QP
4	0.2500	34.20	9.57	43.77	51.76	-7.99	AVG
5	0.3260	41.47	9.58	51.05	59.55	-8.50	QP
6	0.3260	31.60	9.58	41.18	49.55	-8.37	AVG
7	1.4540	37.07	9.96	47.03	56.00	-8.97	QP
8	1.4540	27.59	9.96	37.55	46.00	-8.45	AVG
9	4.4899	33.50	10.32	43.82	56.00	-12.18	QP
10	4.4899	23.39	10.32	33.71	46.00	-12.29	AVG
11	9.9780	37.24	10.49	47.73	60.00	-12.27	QP
12	9.9780	27.40	10.49	37.89	50.00	-12.11	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter: Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

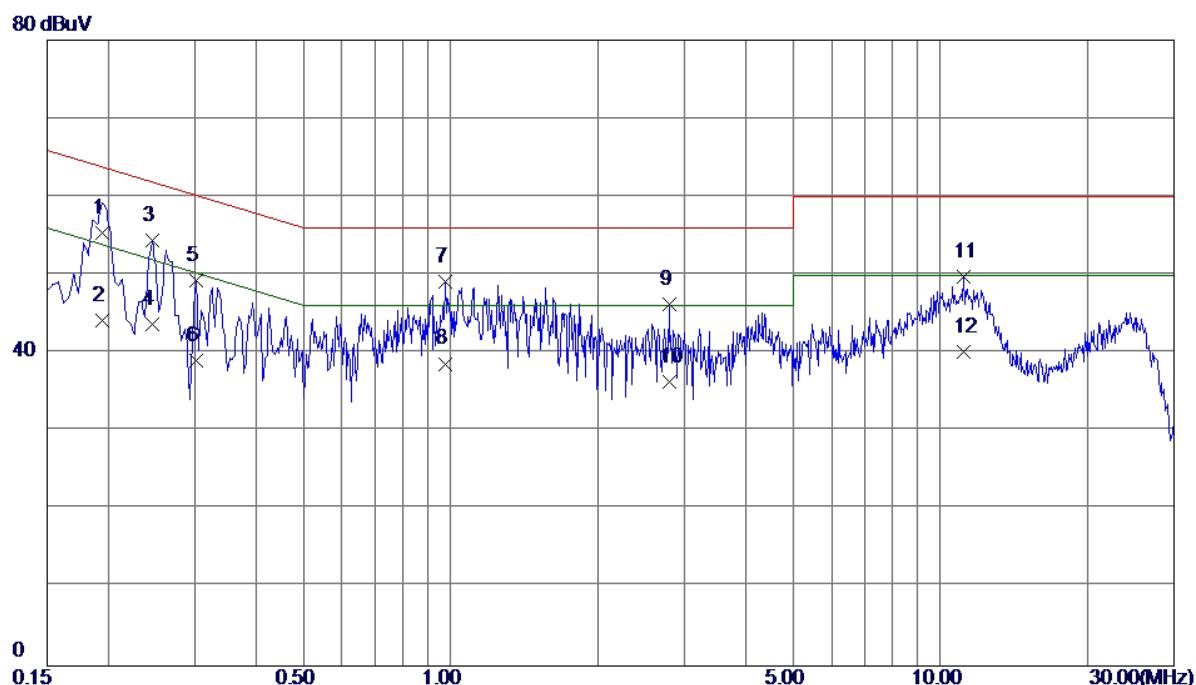


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.1940	45.80	9.55	55.35	63.86	-8.51	QP
2	0.1940	34.60	9.55	44.15	53.86	-9.71	AVG
3	0.2460	44.88	9.57	54.45	61.89	-7.44	QP
4	0.2460	34.10	9.57	43.67	51.89	-8.22	AVG
5	0.3020	39.70	9.58	49.28	60.19	-10.91	QP
6	0.3020	29.50	9.58	39.08	50.19	-11.11	AVG
7 *	0.9780	39.35	9.74	49.09	56.00	-6.91	QP
8	0.9780	28.90	9.74	38.64	46.00	-7.36	AVG
9	2.7900	36.28	9.95	46.23	56.00	-9.77	QP
10	2.7900	26.40	9.95	36.35	46.00	-9.65	AVG
11	11.1420	39.15	10.61	49.76	60.00	-10.24	QP
12	11.1420	29.51	10.61	40.12	50.00	-9.88	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Speaker		
Note	Adapter: Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

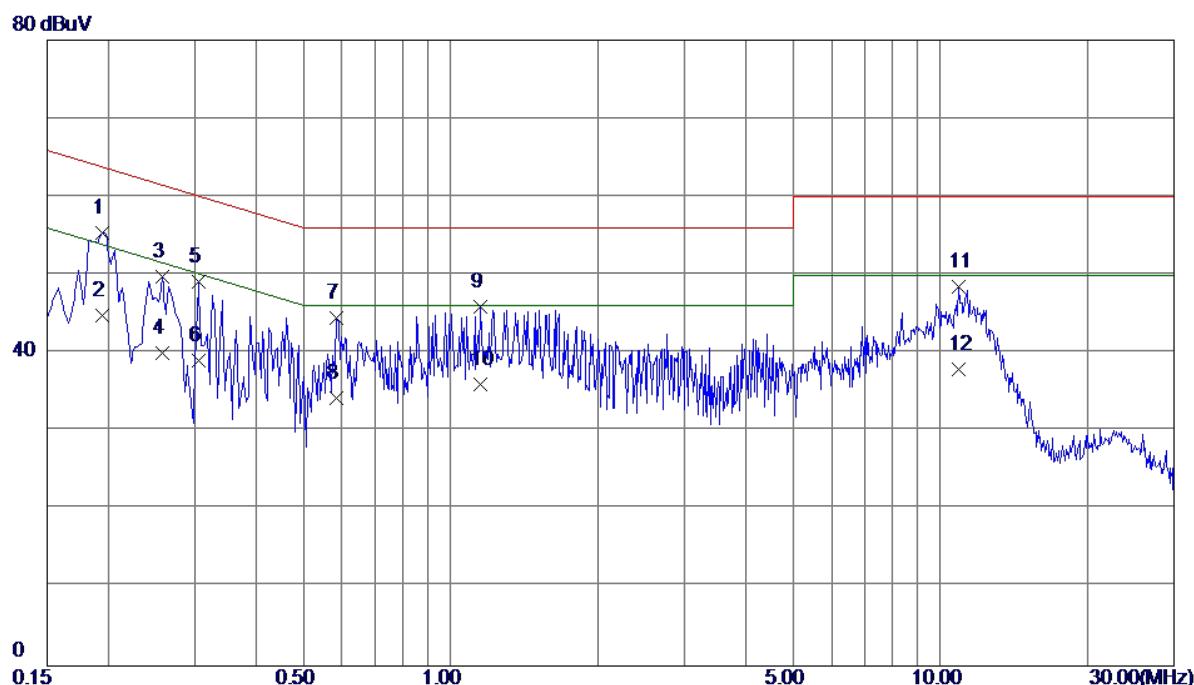


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1 *	0.1940	45.83	9.57	55.40	63.86	-8.46	QP
2	0.1940	35.20	9.57	44.77	53.86	-9.09	AVG
3	0.2580	40.23	9.57	49.80	61.50	-11.70	QP
4	0.2580	30.40	9.57	39.97	51.50	-11.53	AVG
5	0.3060	39.60	9.58	49.18	60.08	-10.90	QP
6	0.3060	29.40	9.58	38.98	50.08	-11.10	AVG
7	0.5860	34.81	9.70	44.51	56.00	-11.49	QP
8	0.5860	24.60	9.70	34.30	46.00	-11.70	AVG
9	1.1500	36.05	9.85	45.90	56.00	-10.10	QP
10	1.1500	26.10	9.85	35.95	46.00	-10.05	AVG
11	10.9100	37.97	10.53	48.50	60.00	-11.50	QP
12	10.9100	27.40	10.53	37.93	50.00	-12.07	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Speaker		
Note	Adapter: Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

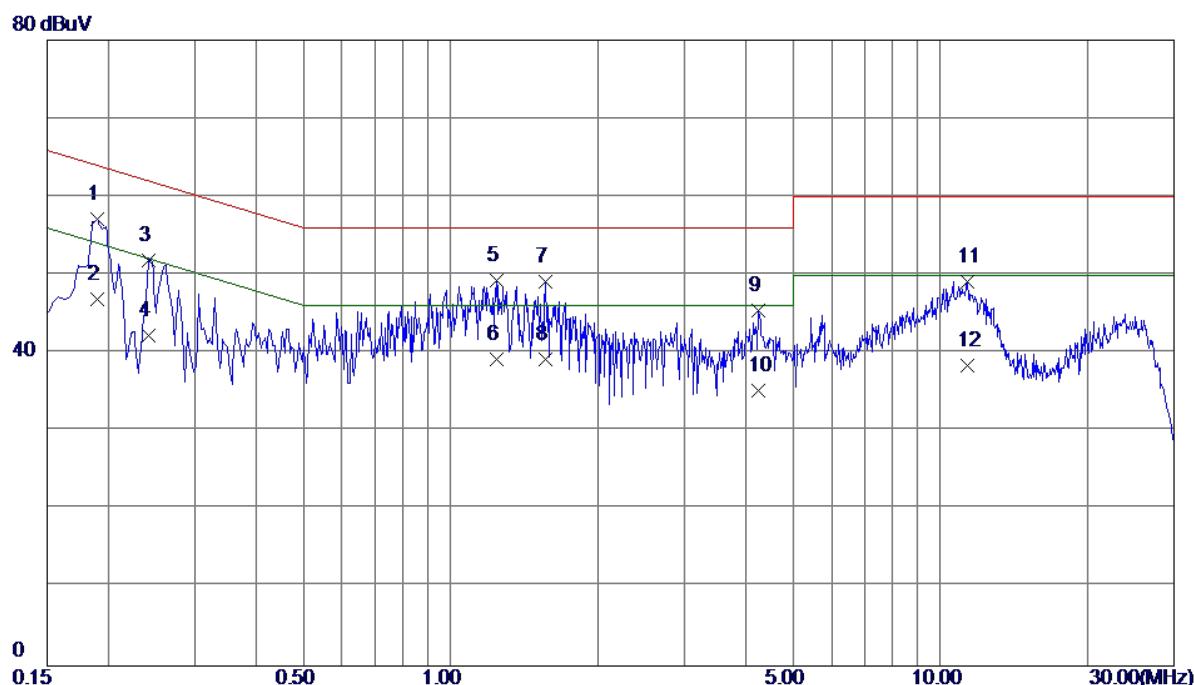


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1900	47. 59	9. 54	57. 13	64. 04	-6. 91	QP
2	0. 1900	37. 40	9. 54	46. 94	54. 04	-7. 10	AVG
3	0. 2420	42. 35	9. 57	51. 92	62. 03	-10. 11	QP
4	0. 2420	32. 60	9. 57	42. 17	52. 03	-9. 86	AVG
5	1. 2380	39. 45	9. 76	49. 21	56. 00	-6. 79	QP
6 *	1. 2380	29. 50	9. 76	39. 26	46. 00	-6. 74	AVG
7	1. 5660	39. 31	9. 78	49. 09	56. 00	-6. 91	QP
8	1. 5660	29. 40	9. 78	39. 18	46. 00	-6. 82	AVG
9	4. 2540	35. 28	10. 13	45. 41	56. 00	-10. 59	QP
10	4. 2540	25. 10	10. 13	35. 23	46. 00	-10. 77	AVG
11	11. 3380	38. 47	10. 62	49. 09	60. 00	-10. 91	QP
12	11. 3380	27. 80	10. 62	38. 42	50. 00	-11. 58	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earpone		
Note	Adapter: Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1+EARPHONE:GOERTEK		
Test Engineer	Treey Chen		

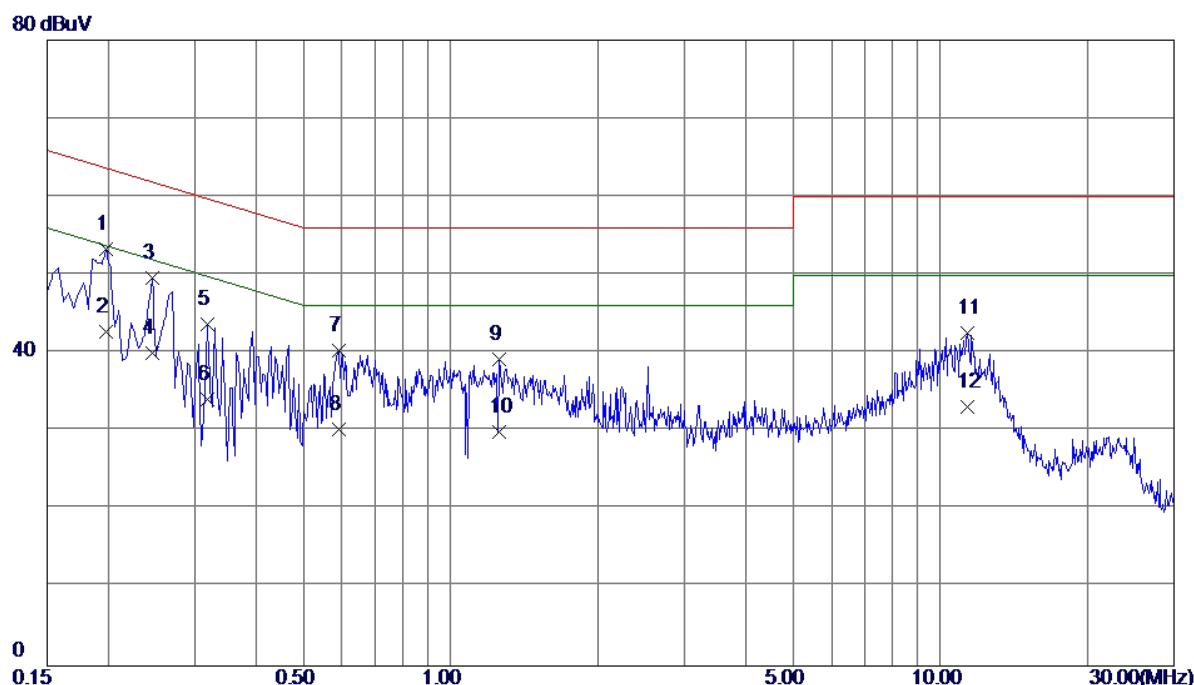


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1 *	0. 1980	43. 69	9. 57	53. 26	63. 69	-10. 43	QP
2	0. 1980	33. 20	9. 57	42. 77	53. 69	-10. 92	AVG
3	0. 2460	40. 02	9. 57	49. 59	61. 89	-12. 30	QP
4	0. 2460	30. 40	9. 57	39. 97	51. 89	-11. 92	AVG
5	0. 3180	34. 05	9. 58	43. 63	59. 76	-16. 13	QP
6	0. 3180	24. 50	9. 58	34. 08	49. 76	-15. 68	AVG
7	0. 5899	30. 57	9. 70	40. 27	56. 00	-15. 73	QP
8	0. 5899	20. 60	9. 70	30. 30	46. 00	-15. 70	AVG
9	1. 2540	29. 38	9. 88	39. 26	56. 00	-16. 74	QP
10	1. 2540	20. 10	9. 88	29. 98	46. 00	-16. 02	AVG
11	11. 3740	32. 03	10. 55	42. 58	60. 00	-17. 42	QP
12	11. 3740	22. 60	10. 55	33. 15	50. 00	-16. 85	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earpone		
Note	Adapter: Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1+EARPHONE:GOERTEK		
Test Engineer	Treey Chen		

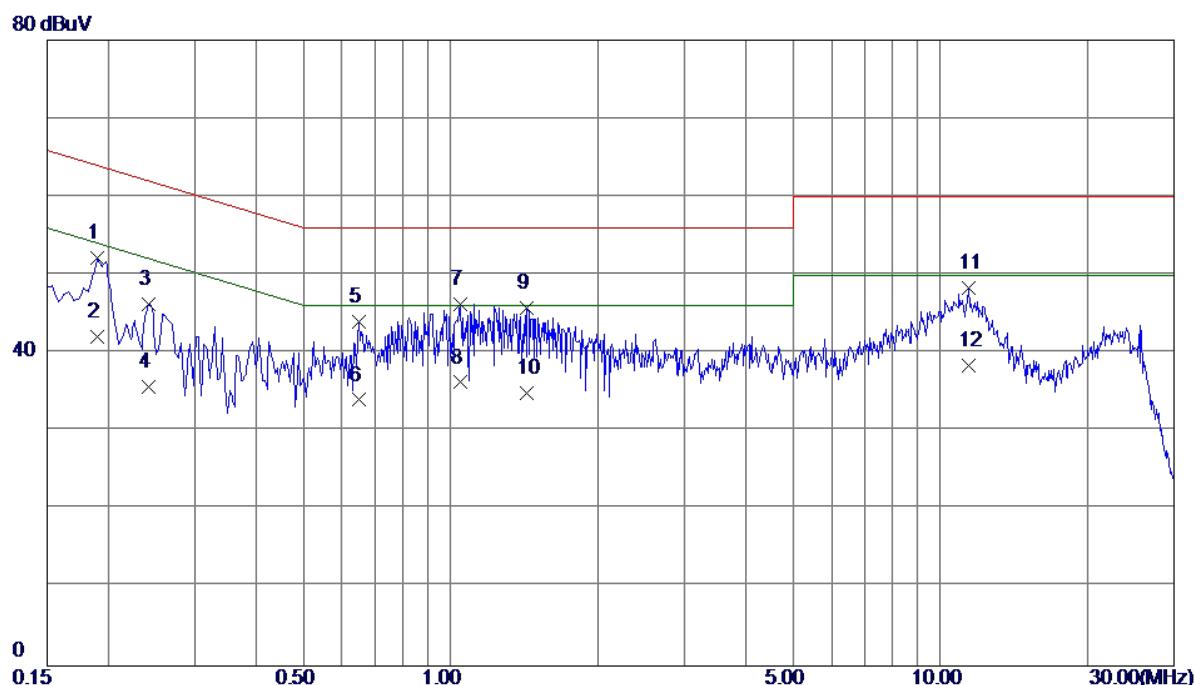


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1900	42. 57	9. 54	52. 11	64. 04	-11. 93	QP
2	0. 1900	32. 50	9. 54	42. 04	54. 04	-12. 00	AVG
3	0. 2420	36. 74	9. 57	46. 31	62. 03	-15. 72	QP
4	0. 2420	26. 10	9. 57	35. 67	52. 03	-16. 36	AVG
5	0. 6500	34. 44	9. 50	43. 94	56. 00	-12. 06	QP
6	0. 6500	24. 50	9. 50	34. 00	46. 00	-12. 00	AVG
7	1. 0460	36. 43	9. 74	46. 17	56. 00	-9. 83	QP
8 *	1. 0460	26. 50	9. 74	36. 24	46. 00	-9. 76	AVG
9	1. 4340	35. 97	9. 77	45. 74	56. 00	-10. 26	QP
10	1. 4340	25. 10	9. 77	34. 87	46. 00	-11. 13	AVG
11	11. 4140	37. 76	10. 62	48. 38	60. 00	-11. 62	QP
12	11. 4140	27. 80	10. 62	38. 42	50. 00	-11. 58	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earpone		
Note	Adapter: Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1+EARPHONE:Lianchuang		
Test Engineer	Treey Chen		

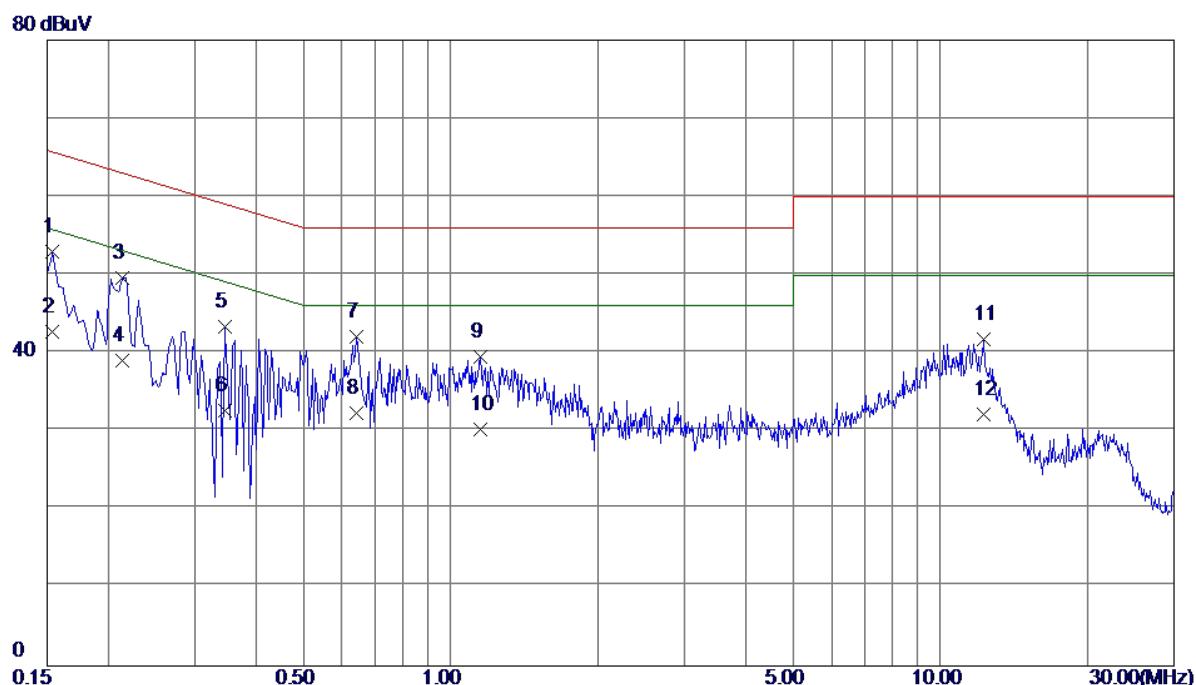

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1 *	0. 1539	43. 44	9. 57	53. 01	65. 79	-12. 78	QP
2	0. 1539	33. 20	9. 57	42. 77	55. 79	-13. 02	AVG
3	0. 2140	39. 99	9. 57	49. 56	63. 05	-13. 49	QP
4	0. 2140	29. 50	9. 57	39. 07	53. 05	-13. 98	AVG
5	0. 3460	33. 80	9. 58	43. 38	59. 06	-15. 68	QP
6	0. 3460	23. 10	9. 58	32. 68	49. 06	-16. 38	AVG
7	0. 6419	32. 38	9. 70	42. 08	56. 00	-13. 92	QP
8	0. 6419	22. 60	9. 70	32. 30	46. 00	-13. 70	AVG
9	1. 1500	29. 60	9. 85	39. 45	56. 00	-16. 55	QP
10	1. 1500	20. 40	9. 85	30. 25	46. 00	-15. 75	AVG
11	12. 2900	31. 21	10. 59	41. 80	60. 00	-18. 20	QP
12	12. 2900	21. 60	10. 59	32. 19	50. 00	-17. 81	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earpone		
Note	Adapter: Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB3G1+EARPHONE:Lianchuang		
Test Engineer	Treey Chen		

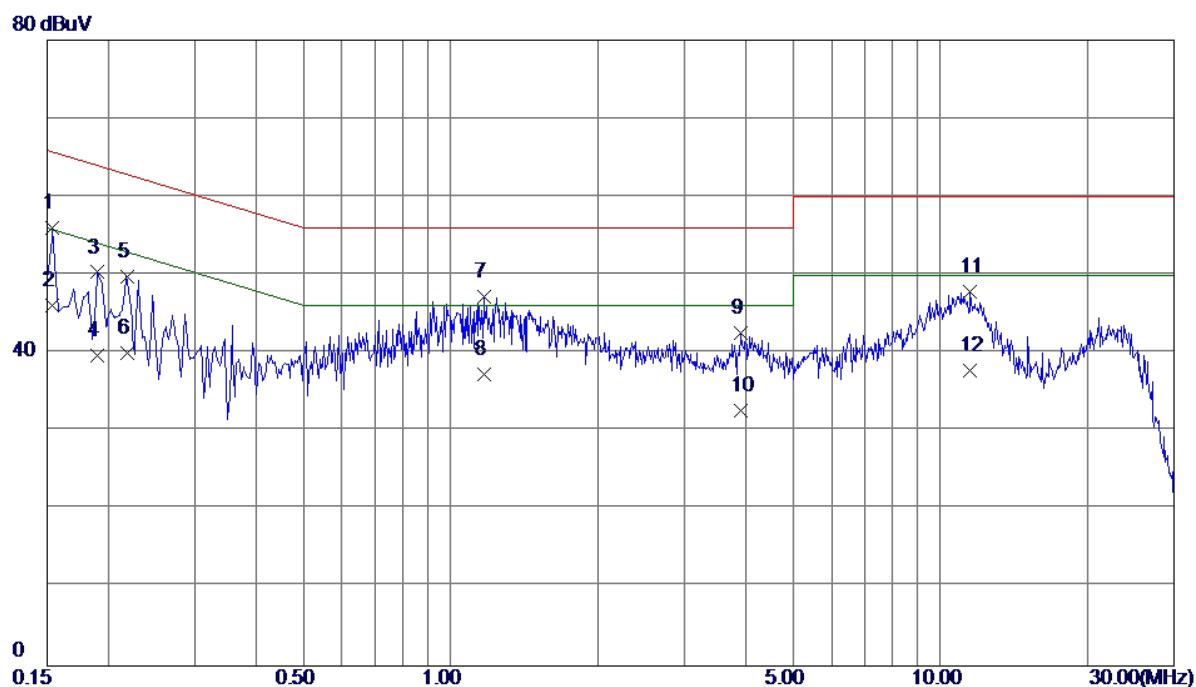

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.1539	46.51	9.55	56.06	65.79	-9.73	QP
2	0.1539	36.50	9.55	46.05	55.79	-9.74	AVG
3	0.1900	40.78	9.54	50.32	64.04	-13.72	QP
4	0.1900	30.10	9.54	39.64	54.04	-14.40	AVG
5	0.2180	40.13	9.57	49.70	62.89	-13.19	QP
6	0.2180	30.50	9.57	40.07	52.89	-12.82	AVG
7	1.1700	37.44	9.75	47.19	56.00	-8.81	QP
8 *	1.1700	27.50	9.75	37.25	46.00	-8.75	AVG
9	3.9100	32.53	10.08	42.61	56.00	-13.39	QP
10	3.9100	22.60	10.08	32.68	46.00	-13.32	AVG
11	11.5060	37.22	10.62	47.84	60.00	-12.16	QP
12	11.5060	27.10	10.62	37.72	50.00	-12.28	AVG

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### Below 1 GHz

##### Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

#### Above 1 GHz

##### Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

#### NOTE:

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	Amplifier	Agilent	8449B	3008A02274	Feb. 22, 2018
3	Receiver	Agilent	N9038A	MY5213003 9	Sep. 04, 2017
4	Antenna	EM	EM-6876-1	230	Jul. 08, 2017
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF7802084 16	N/A
7	Cable	emci	EMC104-S M-SM-1200 0(12m)	N/A	Jul. 06, 2017
8	Double Ridged Guide Antenna	ETS	3115	00075789	Mar. 26, 2018
9	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 22, 2018
10	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC26540 45	980039 & HA01	Mar. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

#### 4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

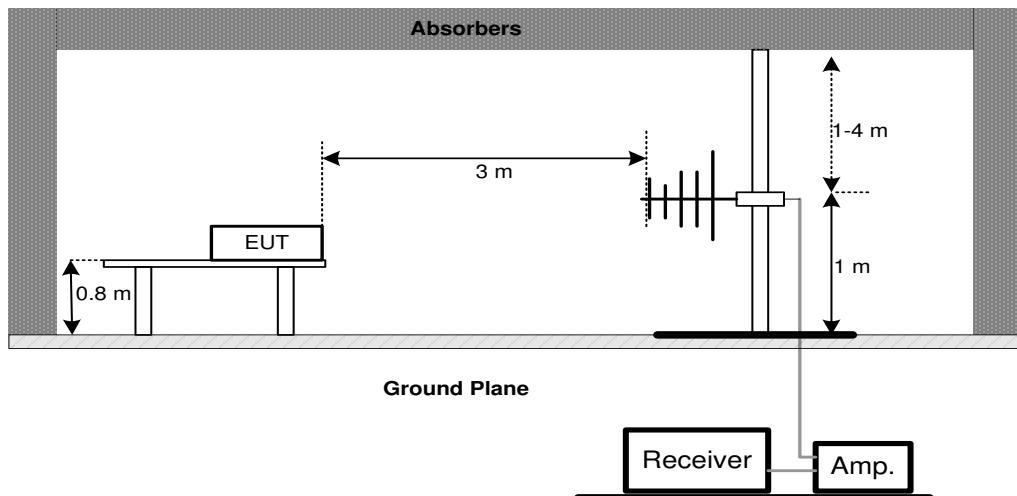

(B) Radiated Emission Test Set-Up Frequency 1 GHz

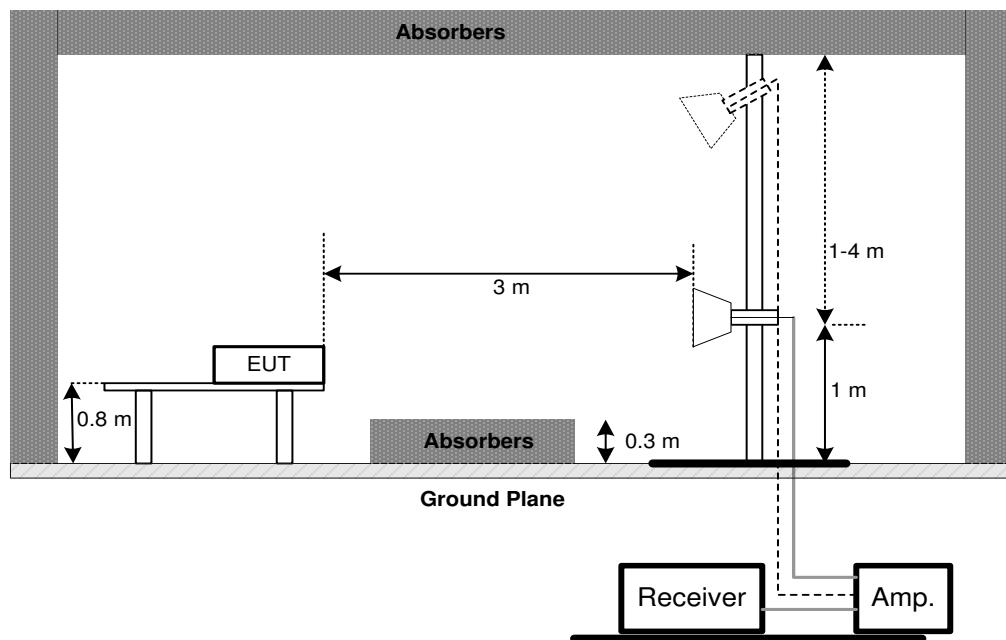


#### 4.2.6 TEST RESULTS-BELOW 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY		
Note	USB Cable:HONGLIN		
Test Engineer	Treey Chen		

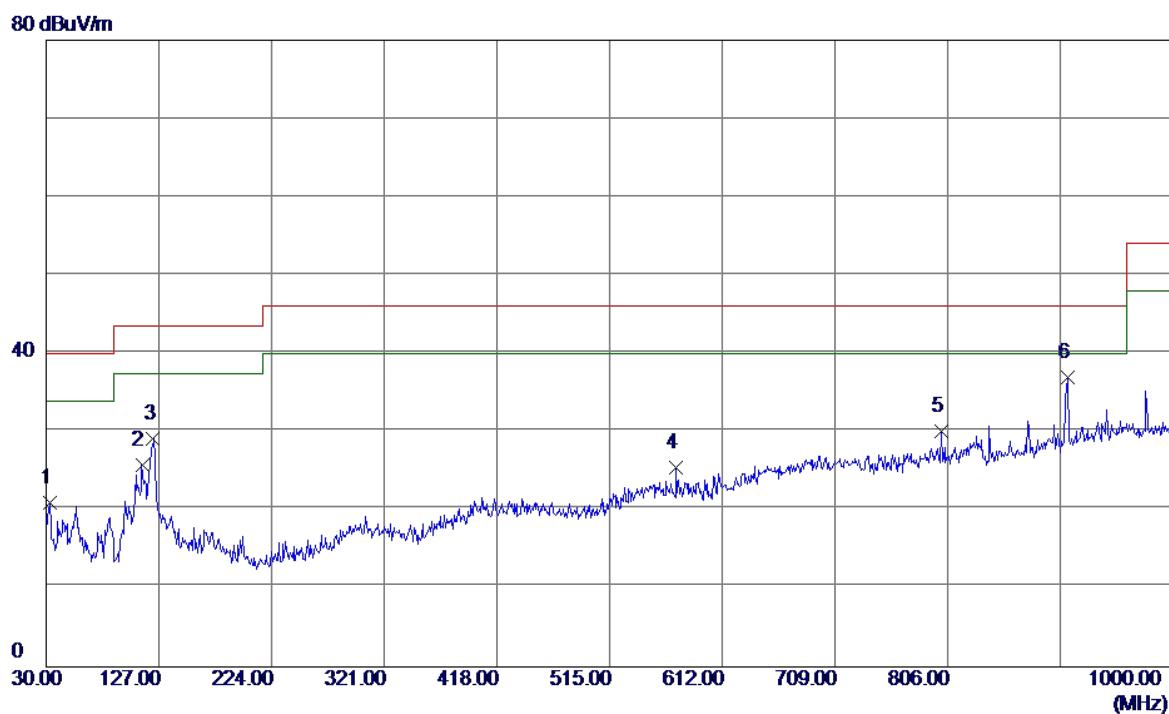

No.	Freq. MHz	Reading Level dB <sub>UV</sub> /m	Correct Factor dB	Measure ment dB <sub>UV</sub> /m	Limit dB	Margin dB	Detector
1	32. 9100	34. 36	-13. 36	21. 00	40. 00	-19. 00	QP
2	112. 4500	39. 34	-13. 56	25. 78	43. 50	-17. 72	QP
3	122. 1500	41. 41	-12. 29	29. 12	43. 50	-14. 38	QP
4	572. 2300	30. 01	-4. 61	25. 40	46. 00	-20. 60	QP
5	800. 1800	29. 44	0. 61	30. 05	46. 00	-15. 95	QP
6 *	909. 3050	34. 97	1. 96	36. 93	46. 00	-9. 07	QP


EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY		
Note	USB Cable:HONGLIN		
Test Engineer	Treey Chen		

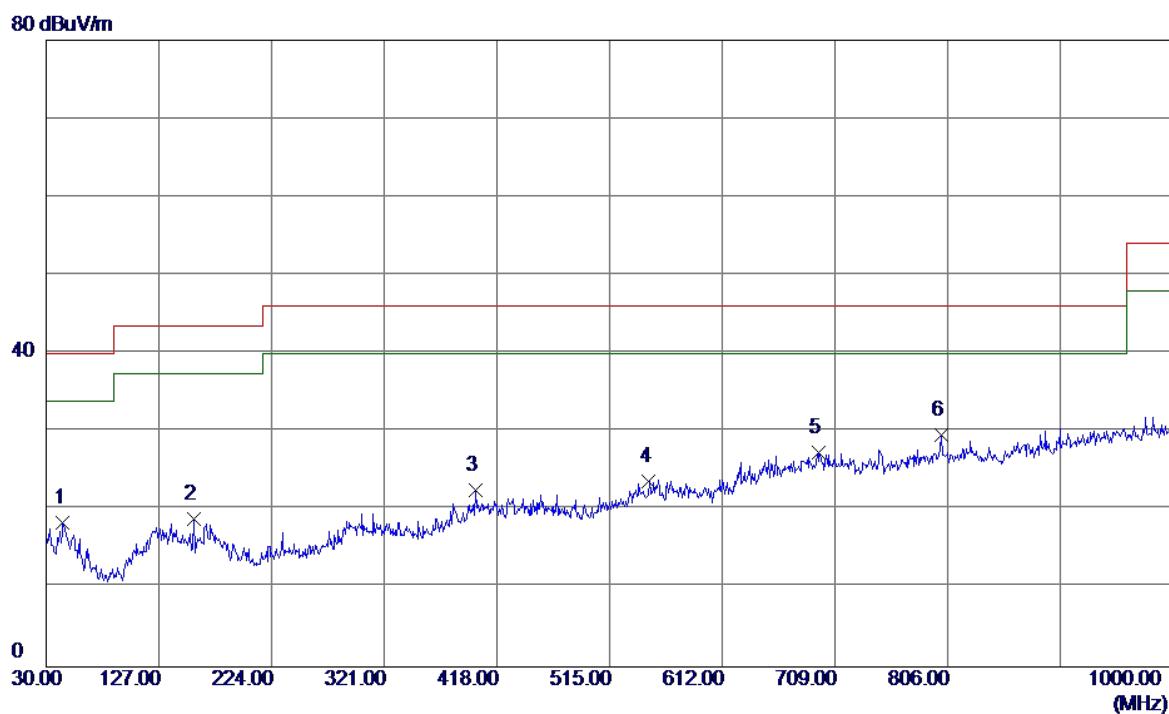

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	44.5500	30.13	-11.79	18.34	40.00	-21.66	QP
2	157.0700	31.18	-12.37	18.81	43.50	-24.69	QP
3	400.0550	29.69	-7.20	22.49	46.00	-23.51	QP
4	548.9500	28.14	-4.51	23.63	46.00	-22.37	QP
5	695.4200	28.18	-0.75	27.43	46.00	-18.57	QP
6 *	800.1800	28.93	0.61	29.54	46.00	-16.46	QP


EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY		
Note	USB Cable:PANG NGAI		
Test Engineer	Treey Chen		

80 dBuV/m

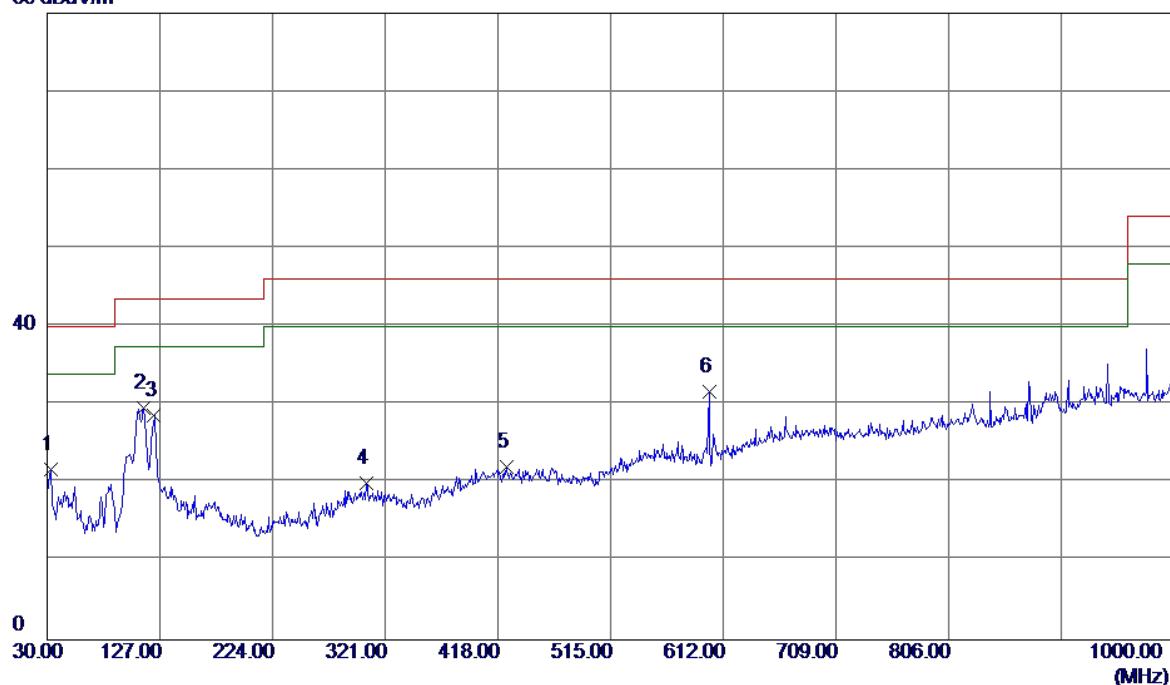


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	32.9100	35.16	-13.36	21.80	40.00	-18.20	QP
2 *	113.4200	43.02	-13.44	29.58	43.50	-13.92	QP
3	122.1500	40.92	-12.29	28.63	43.50	-14.87	QP
4	304.9950	29.97	-10.02	19.95	46.00	-26.05	QP
5	425.2750	29.27	-7.14	22.13	46.00	-23.87	QP
6	599.8750	36.47	-4.83	31.64	46.00	-14.36	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY		
Note	USB Cable:PANG NGAI		
Test Engineer	Treey Chen		

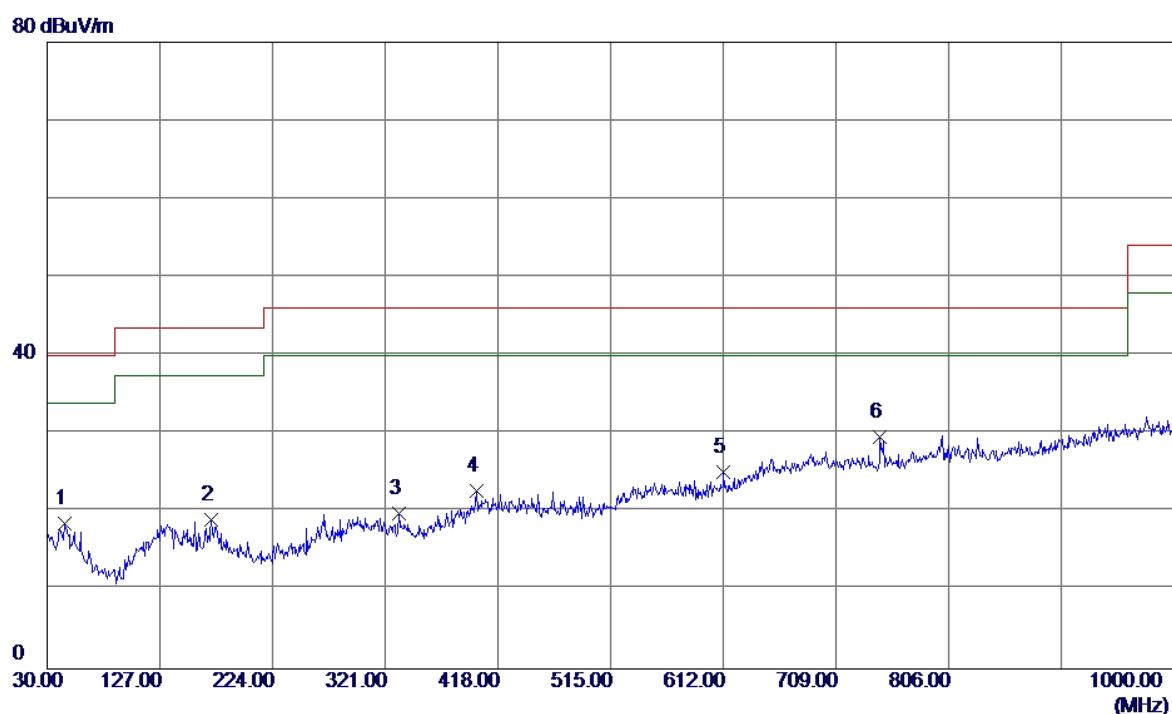


No.	Freq.	Reading Level	Correct Factor	Measurement	Margin		
					MHz	dBuV/m	dB
1	45.0350	30.47	-11.88	18.59	40.00	-21.41	QP
2	171.6200	29.96	-10.94	19.02	43.50	-24.48	QP
3	333.1250	30.34	-10.49	19.85	46.00	-26.15	QP
4	400.0550	29.97	-7.20	22.77	46.00	-23.23	QP
5	612.4850	29.19	-4.05	25.14	46.00	-20.86	QP
6 *	746.8300	30.46	-0.86	29.60	46.00	-16.40	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY		
Note	USB Cable:CONNREX		
Test Engineer	Treey Chen		

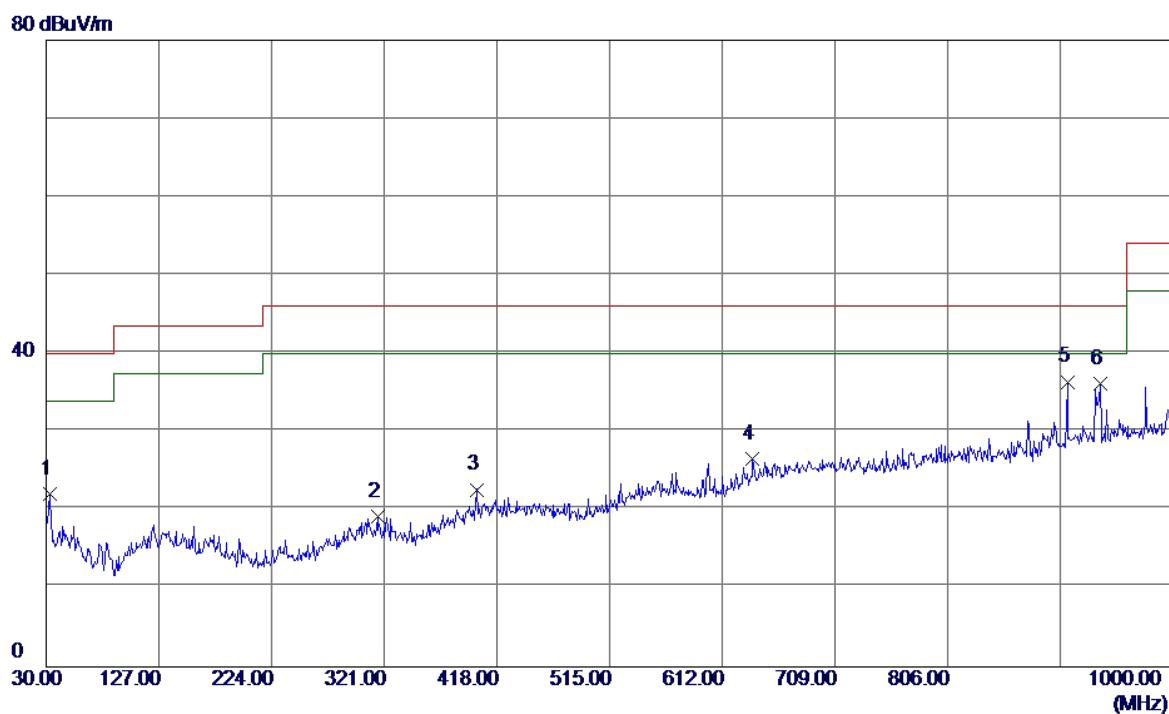


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	32.9100	35.44	-13.36	22.08	40.00	-17.92	QP
2	315.1800	29.44	-10.19	19.25	46.00	-26.75	QP
3	400.5400	29.84	-7.20	22.64	46.00	-23.36	QP
4	638.1900	28.99	-2.43	26.56	46.00	-19.44	QP
5 *	909.3050	34.44	1.96	36.40	46.00	-9.60	QP
6	937.4350	33.27	2.82	36.09	46.00	-9.91	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY		
Note	USB Cable:CONNREX		
Test Engineer	Treey Chen		

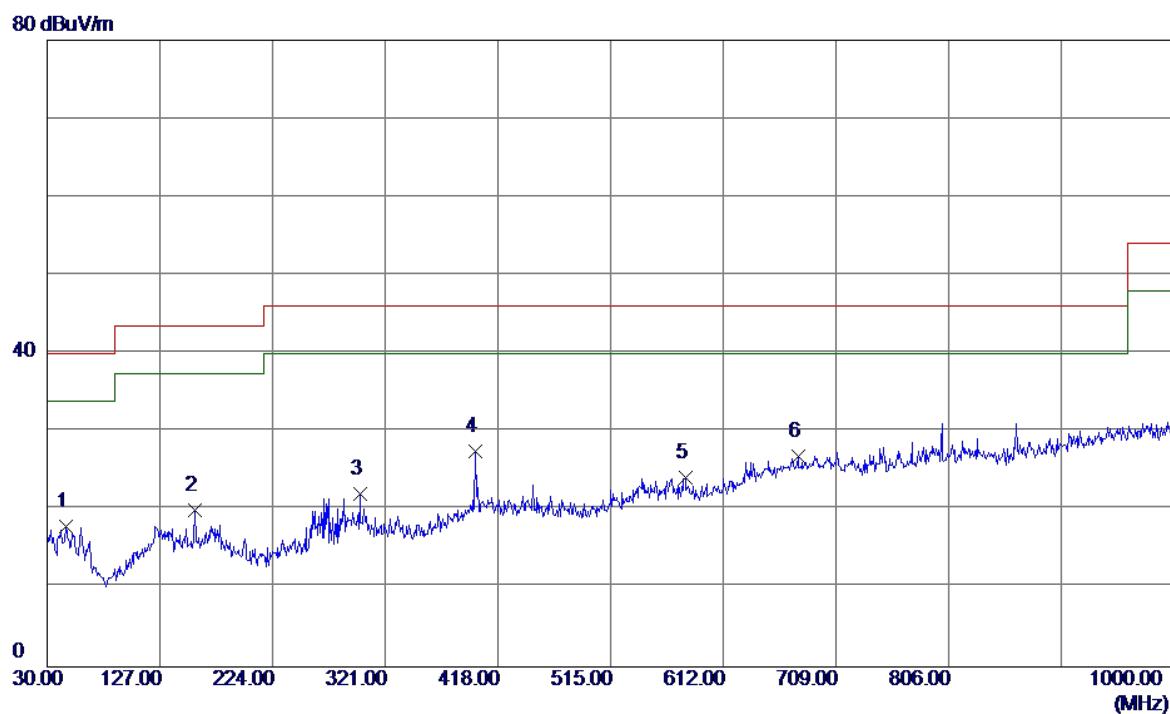


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
						dB	Detector
1	46. 0050	30. 05	-12. 07	17. 98	40. 00	-22. 02	QP
2	157. 0700	32. 36	-12. 37	19. 99	43. 50	-23. 51	QP
3	299. 1750	32. 00	-9. 94	22. 06	46. 00	-23. 94	QP
4 *	398. 6000	34. 76	-7. 30	27. 46	46. 00	-18. 54	QP
5	579. 5050	28. 85	-4. 67	24. 18	46. 00	-21. 82	QP
6	676. 5050	28. 01	-1. 14	26. 87	46. 00	-19. 13	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter :BYD(HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

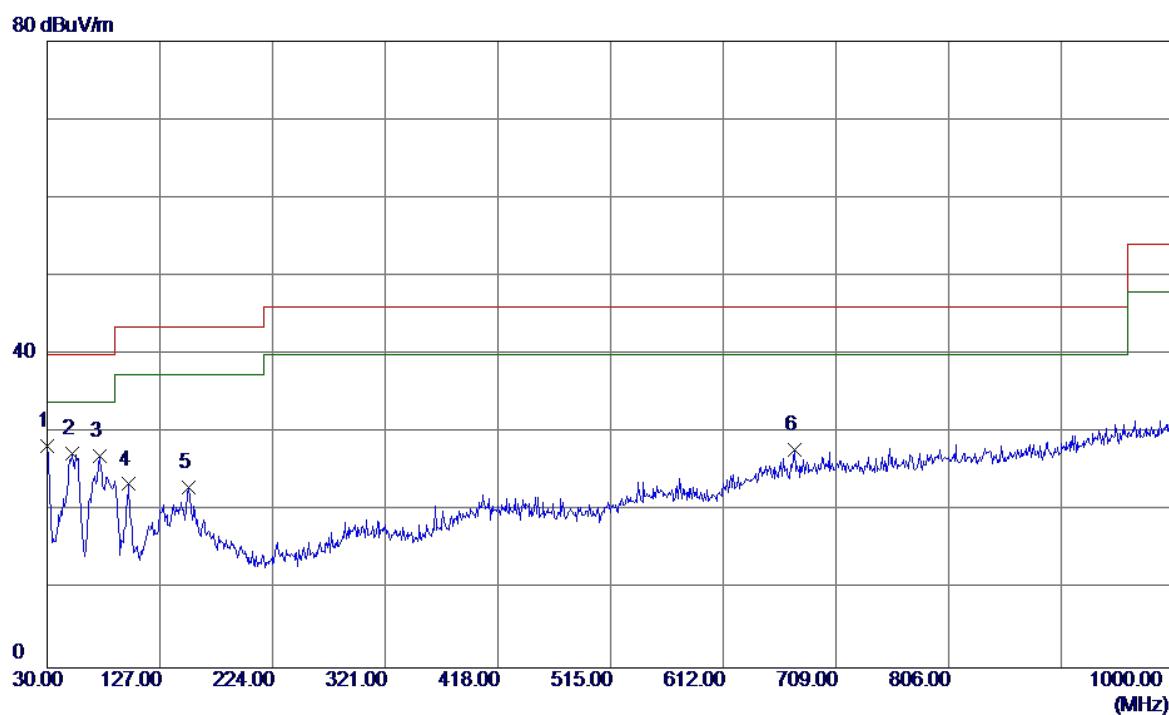


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1 *	30.0000	41.16	-12.80	28.36	40.00	-11.64	QP
2	51.3400	39.68	-12.36	27.32	40.00	-12.68	QP
3	75.1050	43.30	-16.20	27.10	40.00	-12.90	QP
4	99.8399	38.03	-14.59	23.44	43.50	-20.06	QP
5	152.2200	35.11	-12.06	23.05	43.50	-20.45	QP
6	673.5949	29.03	-1.20	27.83	46.00	-18.17	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter :BYD(HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB3G1		
Test Engineer	Treey Chen		

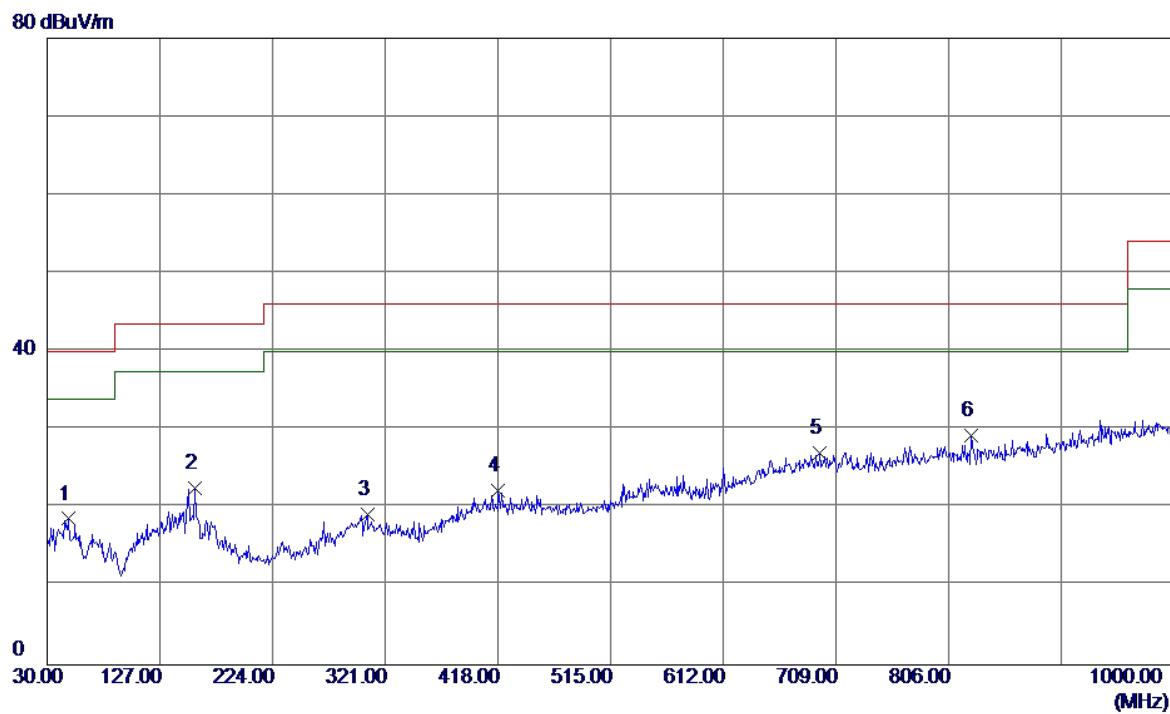


No.	Freq.	Reading	Correct	Measure	Limit	Margin
		Level	Factor	ment		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB
1	48.4300	31.00	-12.36	18.64	40.00	-21.36 QP
2	157.0700	34.87	-12.37	22.50	43.50	-21.00 QP
3	305.4800	29.24	-10.03	19.21	46.00	-26.79 QP
4	418.0000	29.35	-7.15	22.20	46.00	-23.80 QP
5	695.4200	27.85	-0.75	27.10	46.00	-18.90 QP
6 *	825.8850	28.62	0.60	29.22	46.00	-16.78 QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter :BYD(HW-050100U01)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

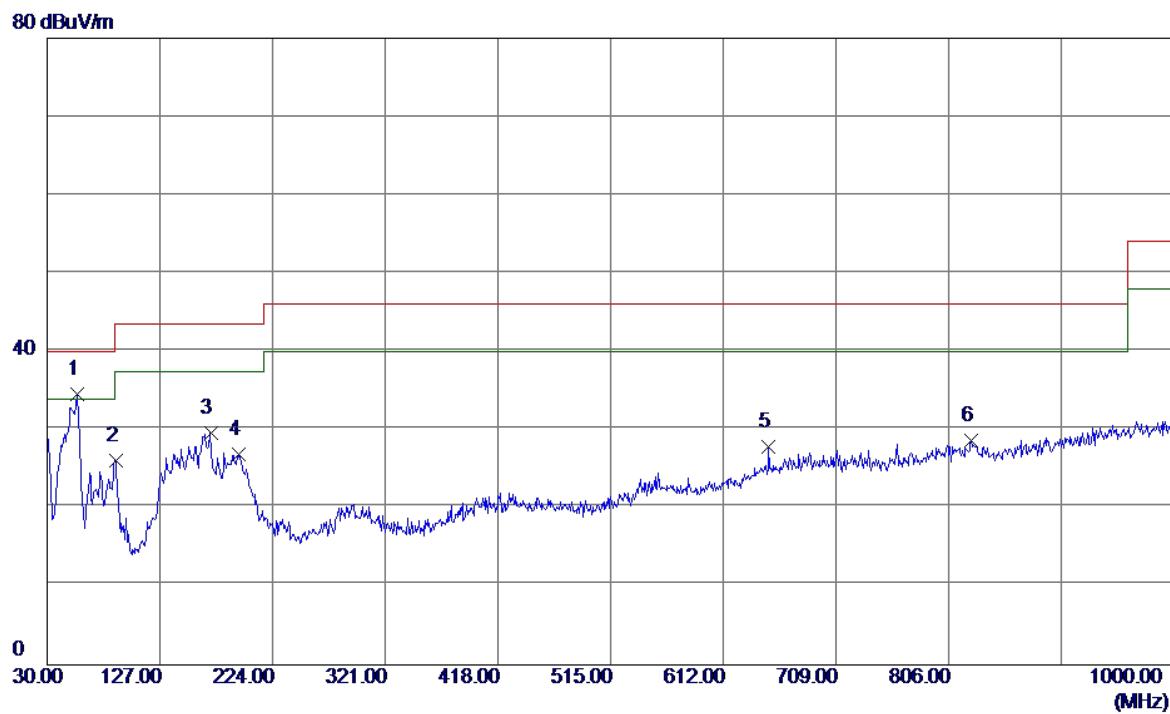


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dB		
1 *	56.1900	47.17	-12.60	34.57	40.00	-5.43	QP
2	89.1700	42.39	-16.37	26.02	43.50	-17.48	QP
3	170.6500	40.42	-10.80	29.62	43.50	-13.88	QP
4	194.4149	40.34	-13.39	26.95	43.50	-16.55	QP
5	651.2849	29.43	-1.66	27.77	46.00	-18.23	QP
6	825.8850	27.97	0.60	28.57	46.00	-17.43	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter :BYD(HW-050100U01)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

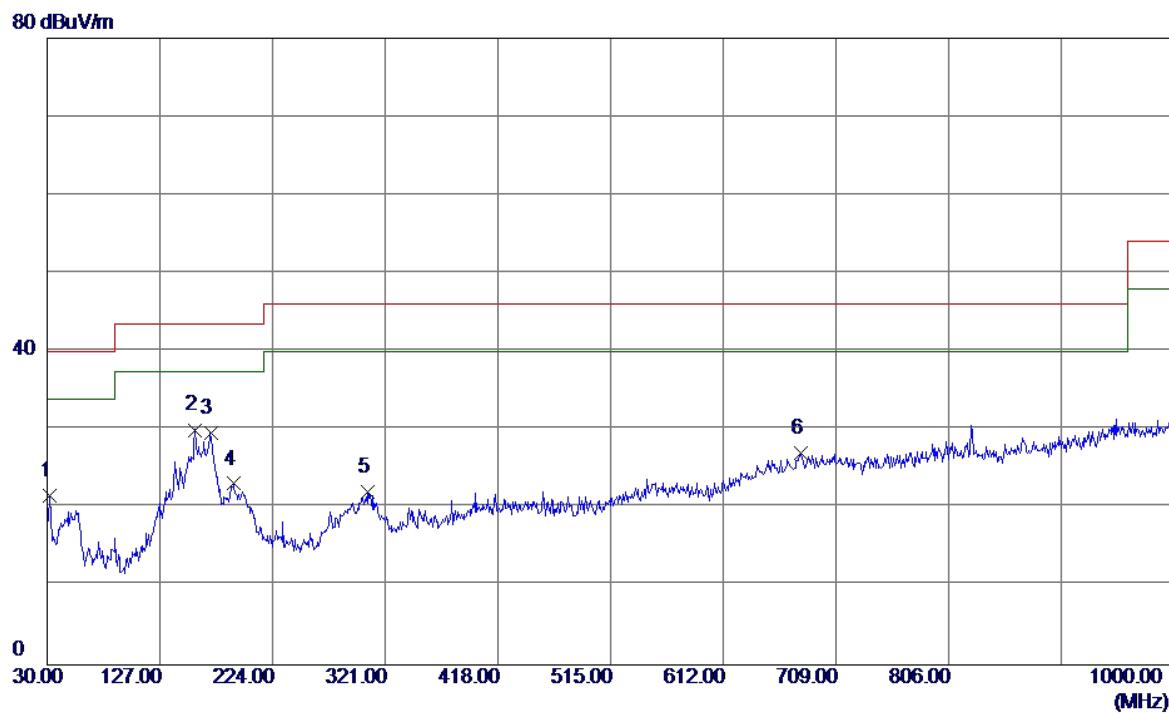


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
						dBuV/m	Detector
1	32.4250	34.82	-13.27	21.55	40.00	-18.45	QP
2 *	157.0700	42.37	-12.37	30.00	43.50	-13.50	QP
3	170.6500	40.39	-10.80	29.59	43.50	-13.91	QP
4	190.5350	36.34	-13.22	23.12	43.50	-20.38	QP
5	305.9650	32.11	-10.04	22.07	46.00	-23.93	QP
6	678.4450	28.11	-1.10	27.01	46.00	-18.99	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter : Huntkey (HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

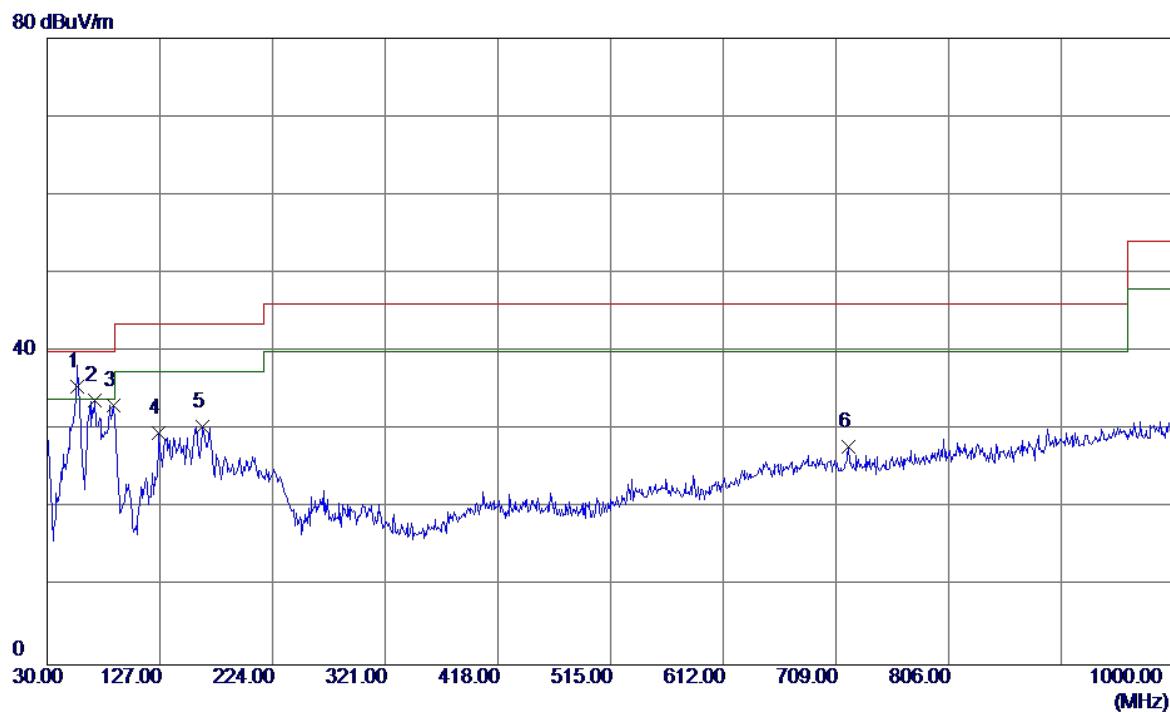


No.	Freq.	Reading	Correct	Measure	Limit	Margin
		Level	Factor	ment		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB
1 *	55.7075	48.00	-12.54	35.46	40.00	-4.54 QP
2	71.2250	49.23	-15.45	33.78	40.00	-6.22 QP
3	86.7450	49.42	-16.29	33.13	40.00	-6.87 QP
4	126.0300	41.34	-11.72	29.62	43.50	-13.88 QP
5	163.8600	42.31	-11.84	30.47	43.50	-13.03 QP
6	719.6700	28.58	-0.74	27.84	46.00	-18.16 QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter : Huntkey (HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

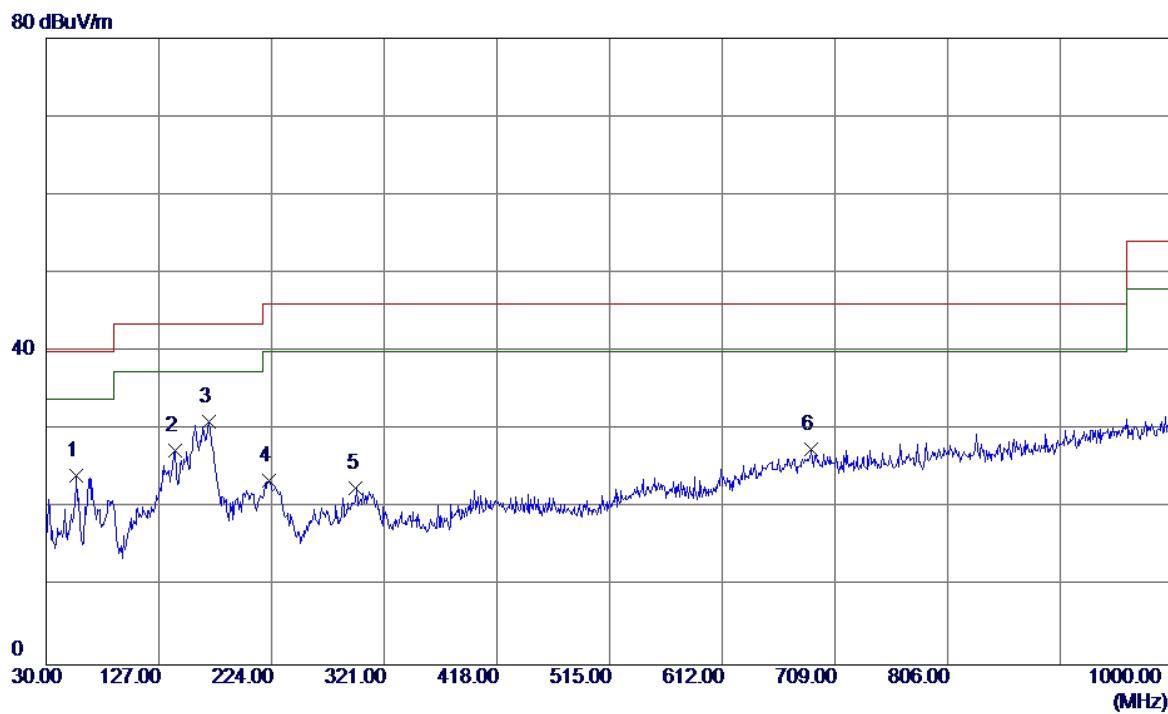


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
						dBuV/m	dB
1	56. 1900	36. 77	-12. 60	24. 17	40. 00	-15. 83	QP
2	140. 5800	39. 19	-11. 88	27. 31	43. 50	-16. 19	QP
3 *	170. 1649	41. 81	-10. 73	31. 08	43. 50	-12. 42	QP
4	222. 0600	37. 26	-13. 75	23. 51	46. 00	-22. 49	QP
5	296. 7500	32. 58	-9. 95	22. 63	46. 00	-23. 37	QP
6	688. 6300	28. 40	-0. 89	27. 51	46. 00	-18. 49	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter : Huntkey (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

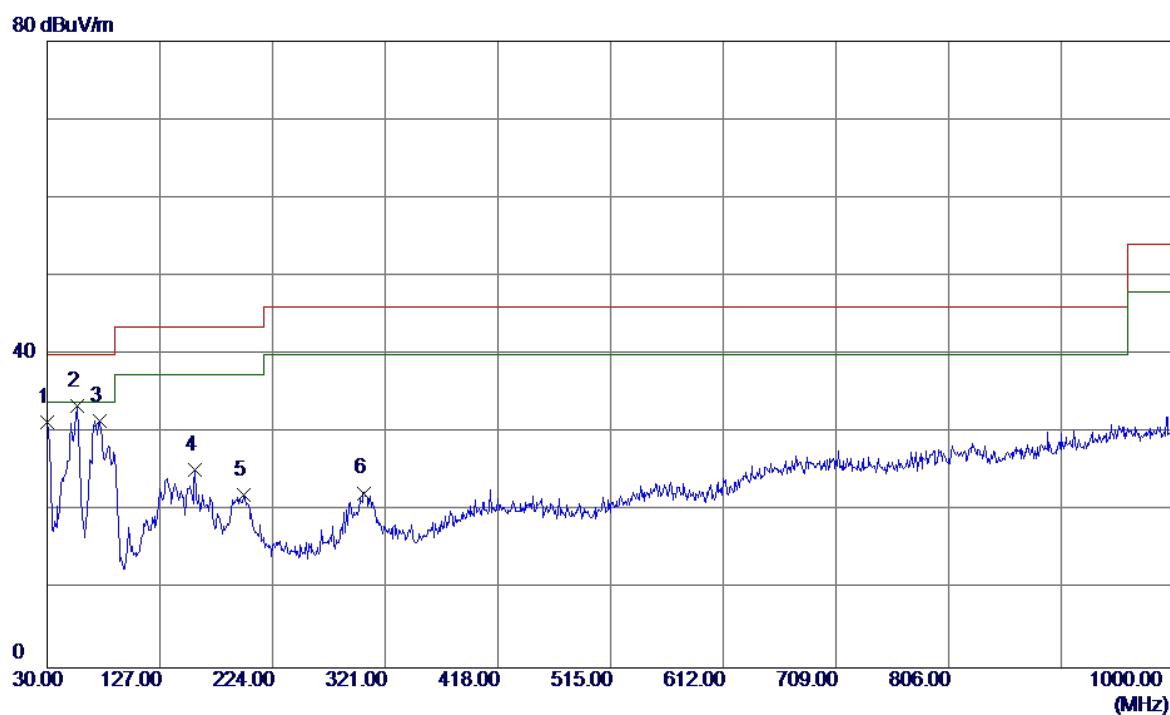


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector
		Level	Factor	ment	dBuV/m	dB	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	30.0000	44.14	-12.80	31.34	40.00	-8.66	QP
2 *	56.1900	46.05	-12.60	33.45	40.00	-6.55	QP
3	75.1050	47.76	-16.20	31.56	40.00	-8.44	QP
4	157.0700	37.62	-12.37	25.25	43.50	-18.25	QP
5	199.2650	35.66	-13.61	22.05	43.50	-21.45	QP
6	302.5700	32.30	-9.98	22.32	46.00	-23.68	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter : Huntkey (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

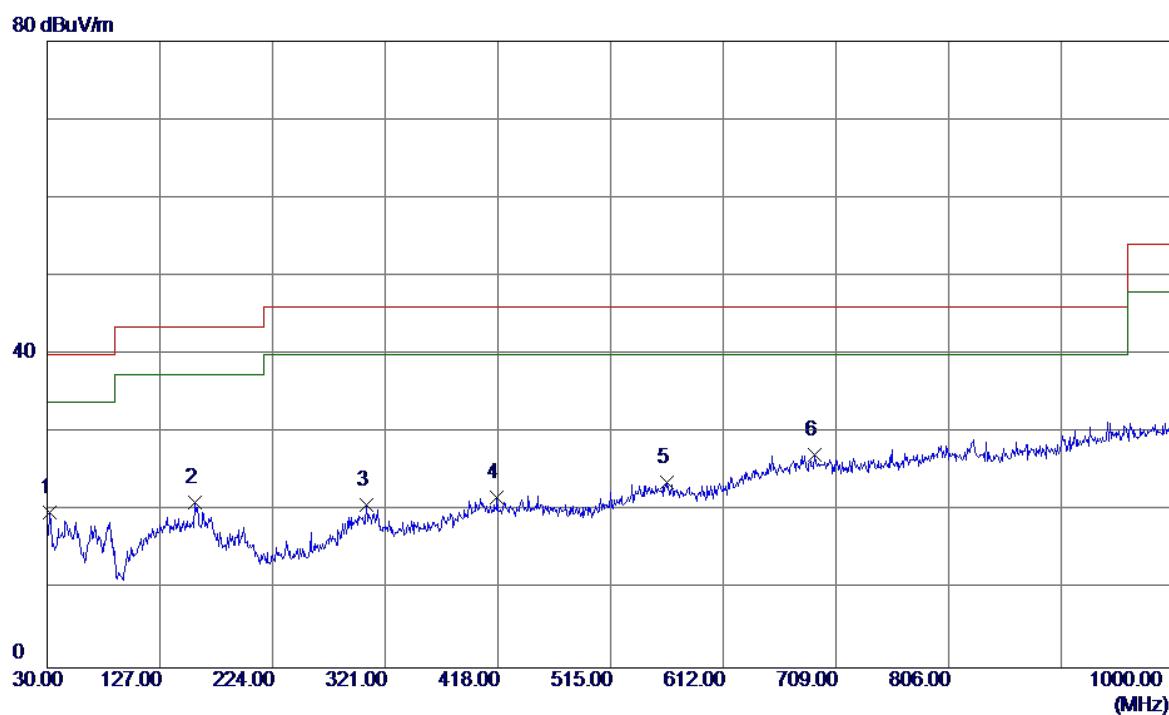


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	32.4250	33.09	-13.27	19.82	40.00	-20.18	QP
2	157.5549	33.56	-12.40	21.16	43.50	-22.34	QP
3	304.5100	30.75	-10.01	20.74	46.00	-25.26	QP
4	417.0300	28.94	-7.16	21.78	46.00	-24.22	QP
5	563.0150	28.25	-4.54	23.71	46.00	-22.29	QP
6 *	690.5700	27.98	-0.85	27.13	46.00	-18.87	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter : Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

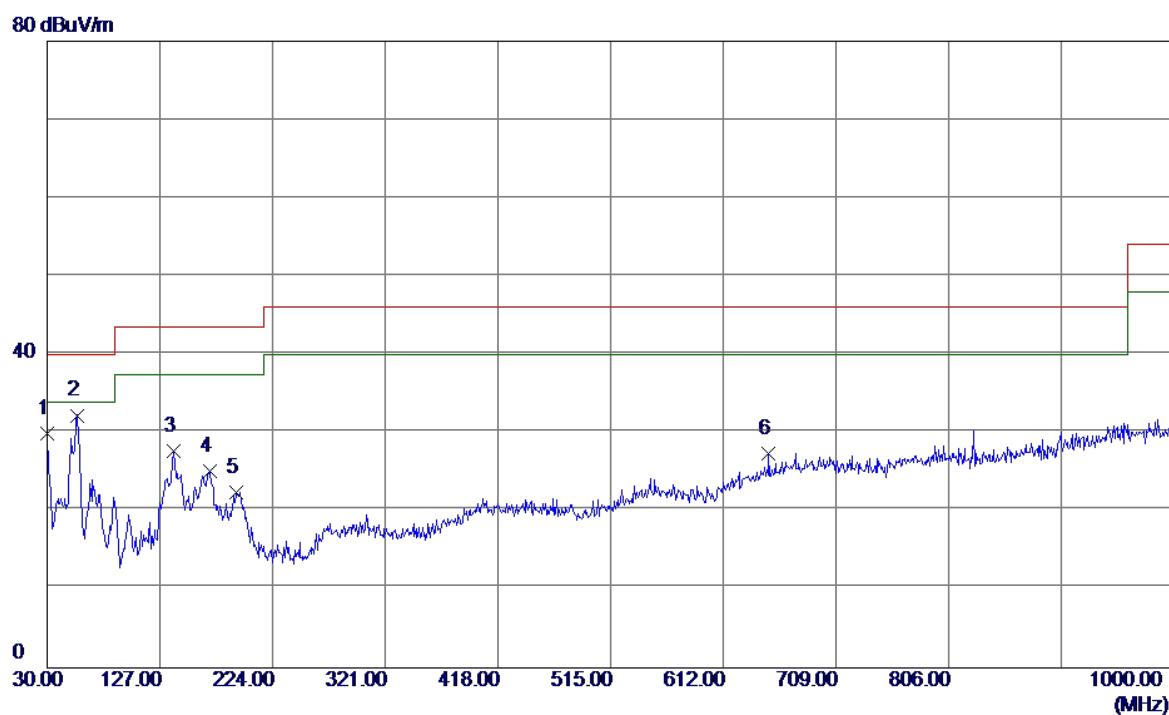


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
						dB	Detector
1	30.0000	42.74	-12.80	29.94	40.00	-10.06	QP
2 *	55.7050	44.78	-12.54	32.24	40.00	-7.76	QP
3	138.6400	39.40	-11.78	27.62	43.50	-15.88	QP
4	170.1649	35.90	-10.73	25.17	43.50	-18.33	QP
5	192.9600	35.77	-13.33	22.44	43.50	-21.06	QP
6	650.8000	28.99	-1.67	27.32	46.00	-18.68	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter : Phitek (HW-050100U01)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

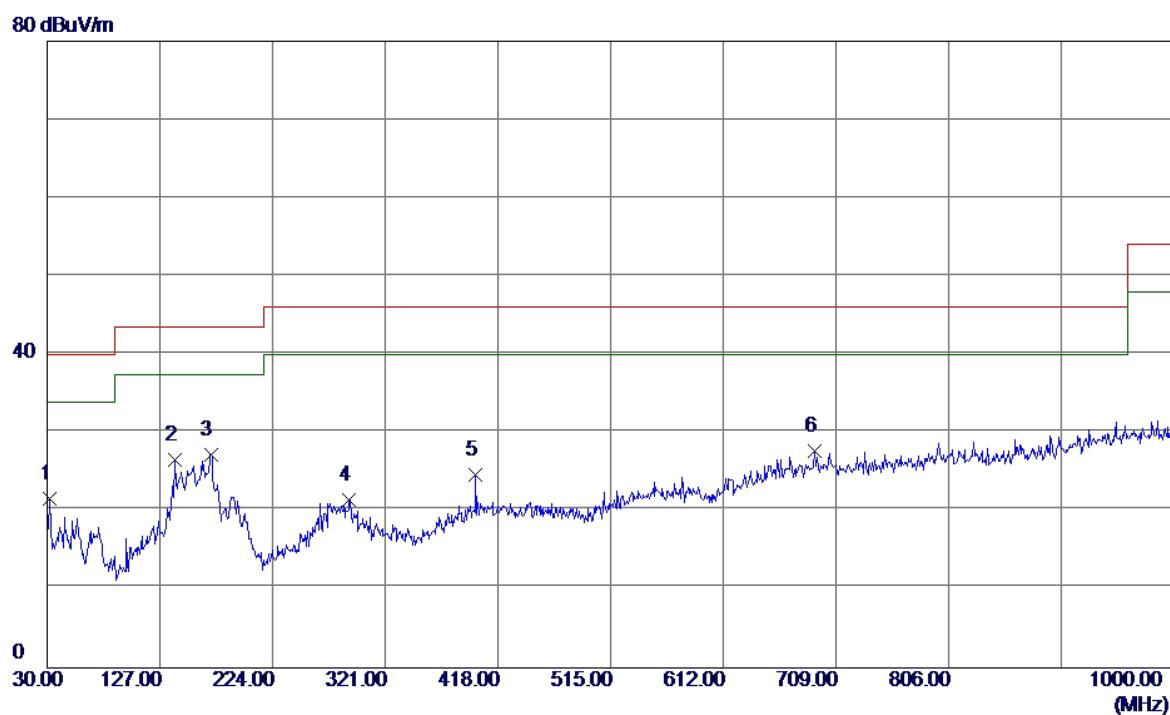


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	32.4250	34.84	-13.27	21.57	40.00	-18.43	QP
2	140.0950	38.51	-11.88	26.63	43.50	-16.87	QP
3 *	170.6500	38.00	-10.80	27.20	43.50	-16.30	QP
4	289.9600	31.48	-9.99	21.49	46.00	-24.51	QP
5	398.6000	31.95	-7.30	24.65	46.00	-21.35	QP
6	690.5700	28.49	-0.85	27.64	46.00	-18.36	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter : Huntkey (HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

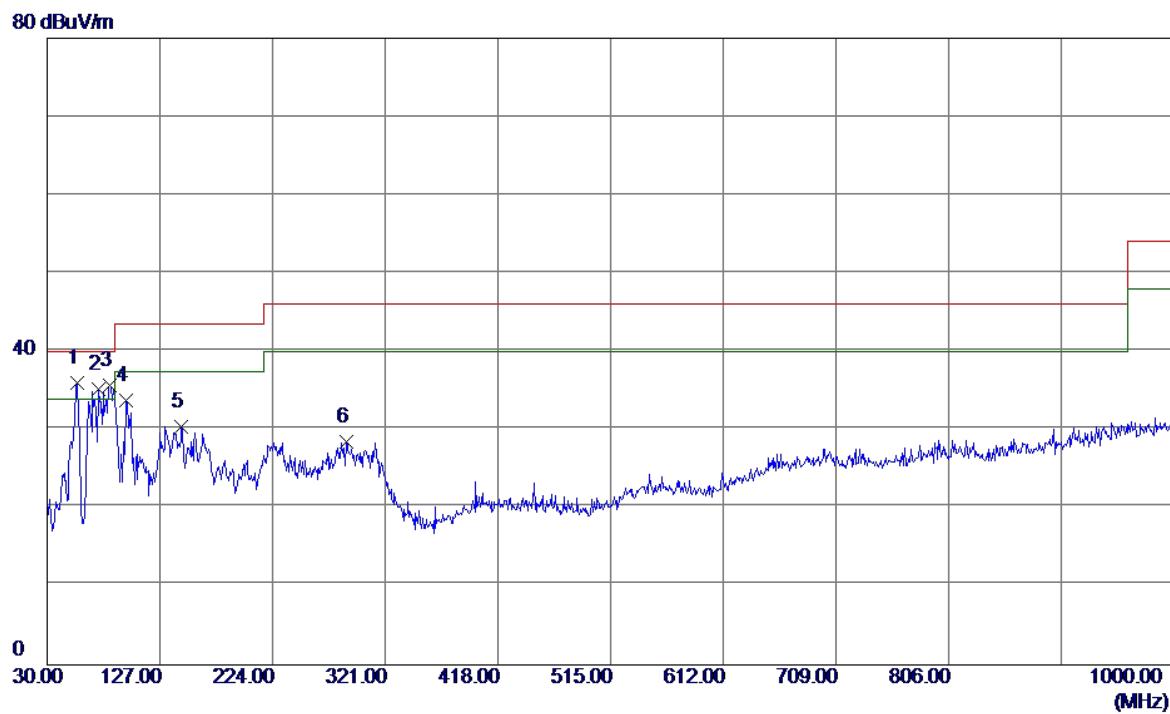


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1 *	55.7050	48.56	-12.54	36.02	40.00	-3.98	QP
2	74.1350	51.18	-16.02	35.16	40.00	-4.84	QP
3	83.8350	52.09	-16.36	35.73	40.00	-4.27	QP
4	97.4150	49.22	-15.43	33.79	43.50	-9.71	QP
5	145.4299	42.25	-11.90	30.35	43.50	-13.15	QP
6	287.5350	38.85	-10.41	28.44	46.00	-17.56	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter : Huntkey (HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

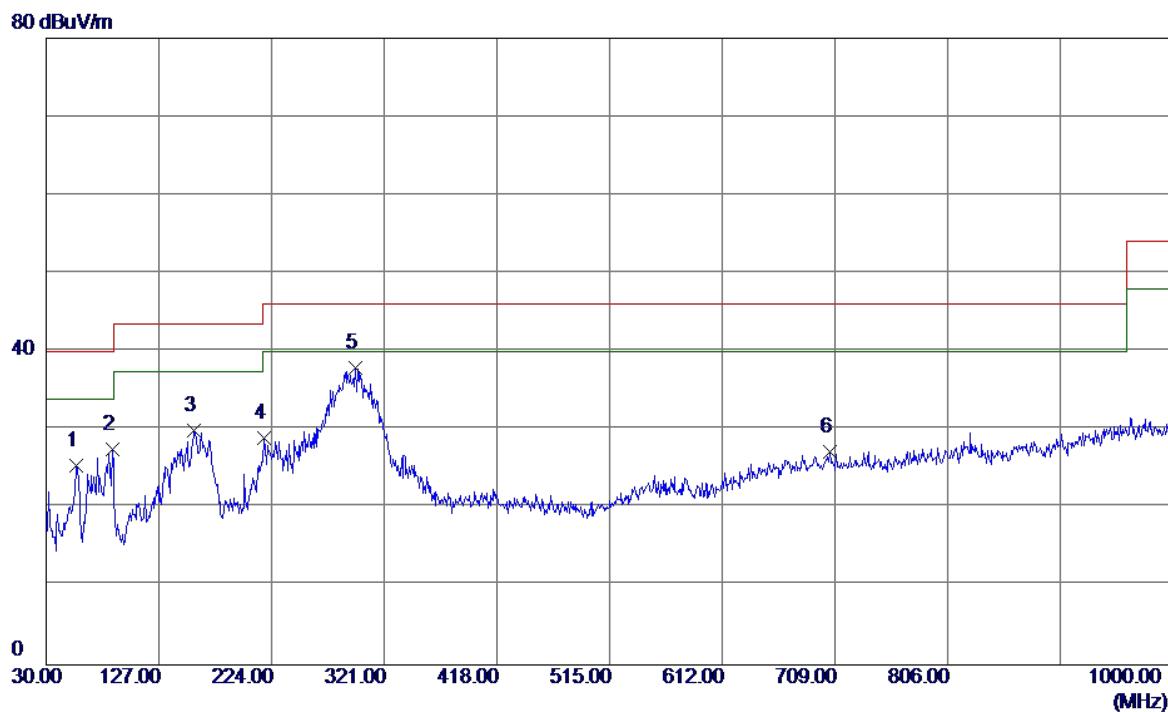


No.	Freq.	Reading	Correct	Measure	Limit	Margin
		Level	Factor	ment		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB
1	55.7050	37.91	-12.54	25.37	40.00	-14.63
2	86.7450	43.75	-16.29	27.46	40.00	-12.54
3	157.5549	42.25	-12.40	29.85	43.50	-13.65
4	217.6950	42.88	-13.99	28.89	46.00	-17.11
5 *	296.2650	47.81	-9.95	37.86	46.00	-8.14
6	704.6350	27.84	-0.67	27.17	46.00	-18.83

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter : Huntkey (HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB4269B6EAW+Earphone:GOERTEK		
Test Engineer	Treey Chen		

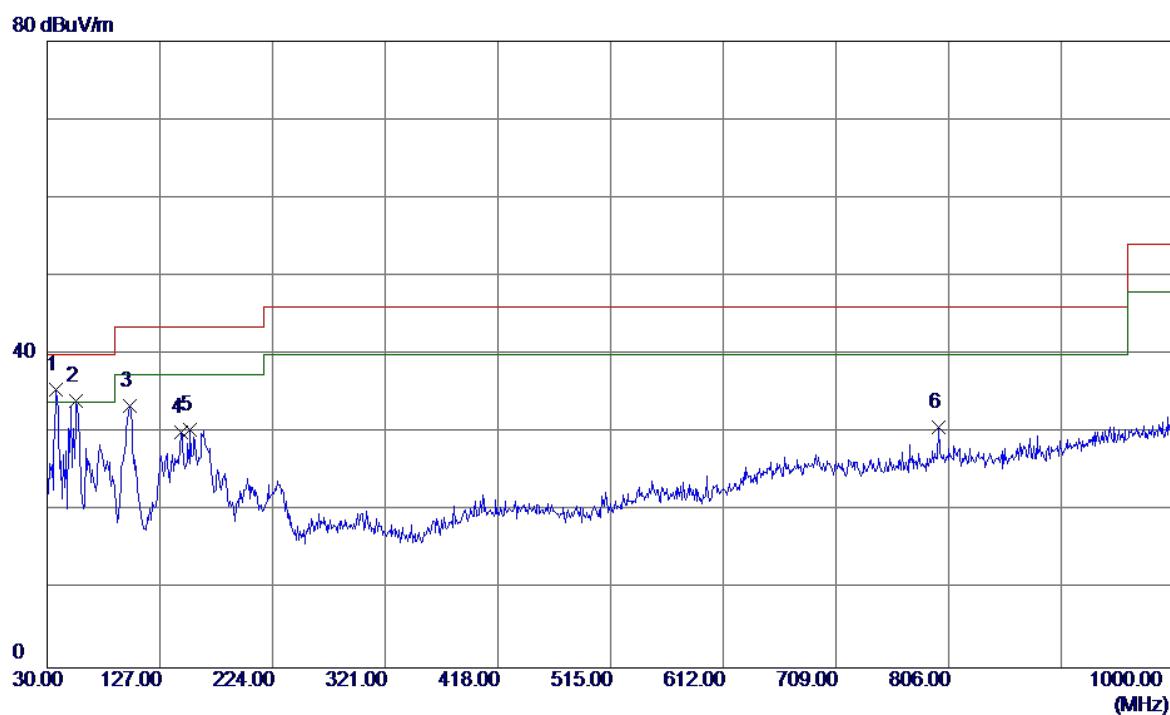


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
						dBuV/m	dB
1 *	37.7599	48.41	-12.88	35.53	40.00	-4.47	QP
2	55.2200	46.54	-12.44	34.10	40.00	-5.90	QP
3	101.2950	47.93	-14.44	33.49	43.50	-10.01	QP
4	144.9450	41.99	-11.90	30.09	43.50	-13.41	QP
5	153.1900	42.56	-12.12	30.44	43.50	-13.06	QP
6	797.2700	30.22	0.53	30.75	46.00	-15.25	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter : Huntkey (HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB4269B6EAW+Earphone:GOERTEK		
Test Engineer	Treey Chen		

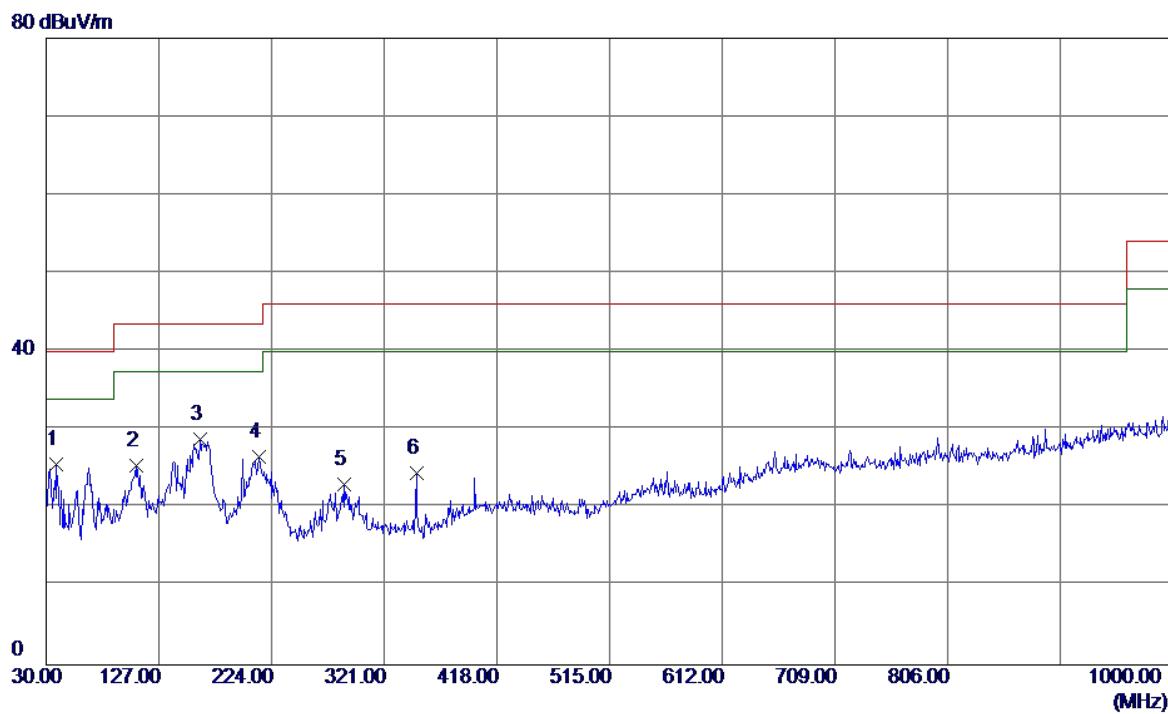


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
						dBuV/m	dB
1 *	38.7300	38.32	-12.72	25.60	40.00	-14.40	QP
2	107.1150	39.57	-14.06	25.51	43.50	-17.99	QP
3	162.4050	40.94	-12.11	28.83	43.50	-14.67	QP
4	213.3300	40.59	-14.05	26.54	43.50	-16.96	QP
5	286.0799	33.77	-10.66	23.11	46.00	-22.89	QP
6	348.6450	35.17	-10.75	24.42	46.00	-21.58	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter : Huntkey (HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB4269B6EAW+Earphone:Lianchuang		
Test Engineer	Treey Chen		

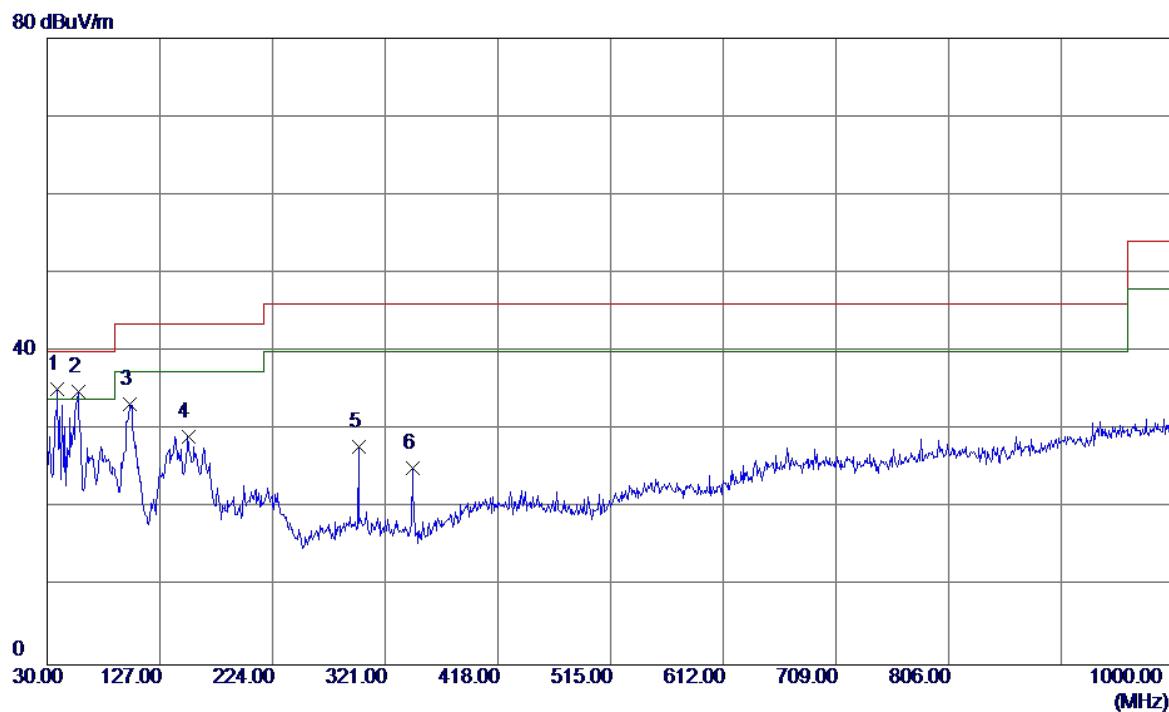

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1 *	38.7300	47.91	-12.72	35.19	40.00	-4.81	QP
2	56.6750	47.43	-12.62	34.81	40.00	-5.19	QP
3	100.8100	47.73	-14.48	33.25	43.50	-10.25	QP
4	151.2500	41.16	-12.00	29.16	43.50	-14.34	QP
5	298.2049	37.82	-9.95	27.87	46.00	-18.13	QP
6	344.7650	35.80	-10.68	25.12	46.00	-20.88	QP

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter : Huntkey (HW-050100U2W)+USB Cable:PANG NGAI+Battery:HB4269B6EAW+Earphone:Lianchuang		
Test Engineer	Treey Chen		

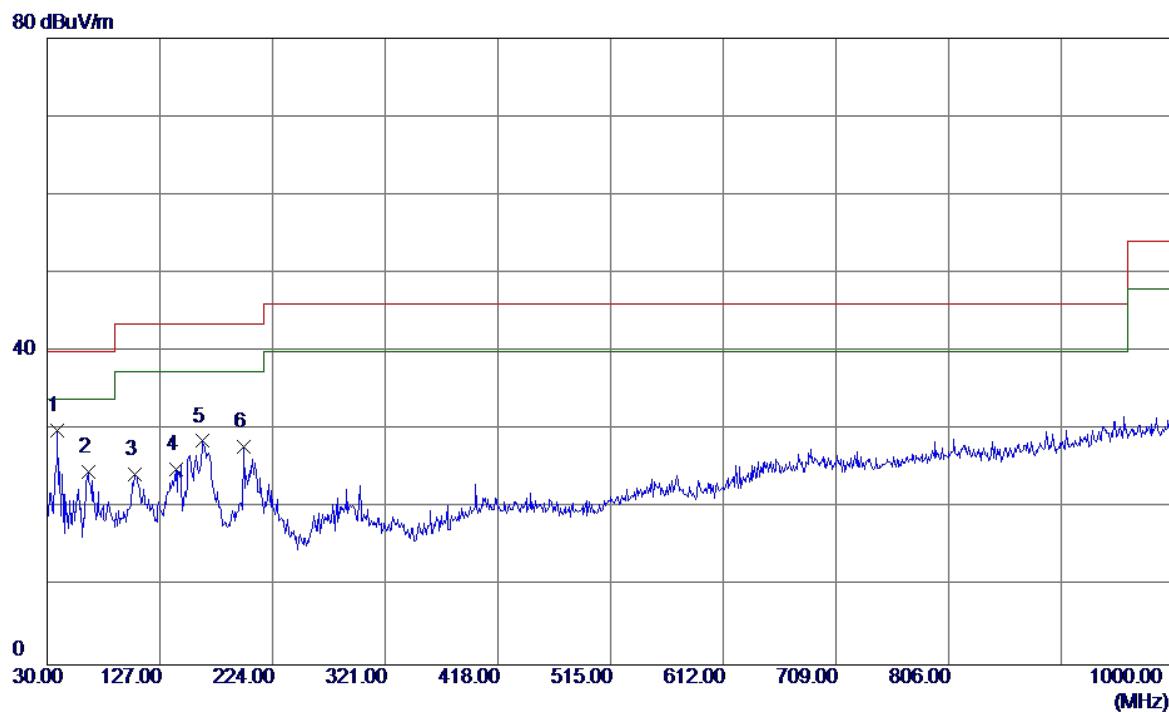


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1 *	38.7300	42.64	-12.72	29.92	40.00	-10.08	QP
2	65.4050	38.55	-13.86	24.69	40.00	-15.31	QP
3	105.6600	38.54	-14.15	24.39	43.50	-19.11	QP
4	140.5800	36.91	-11.88	25.03	43.50	-18.47	QP
5	163.8600	40.40	-11.84	28.56	43.50	-14.94	QP
6	199.2650	41.52	-13.61	27.91	43.50	-15.59	QP

#### 4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “\*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY		
Note	USB Cable:HONGLIN		
Test Engineer	Treey Chen		

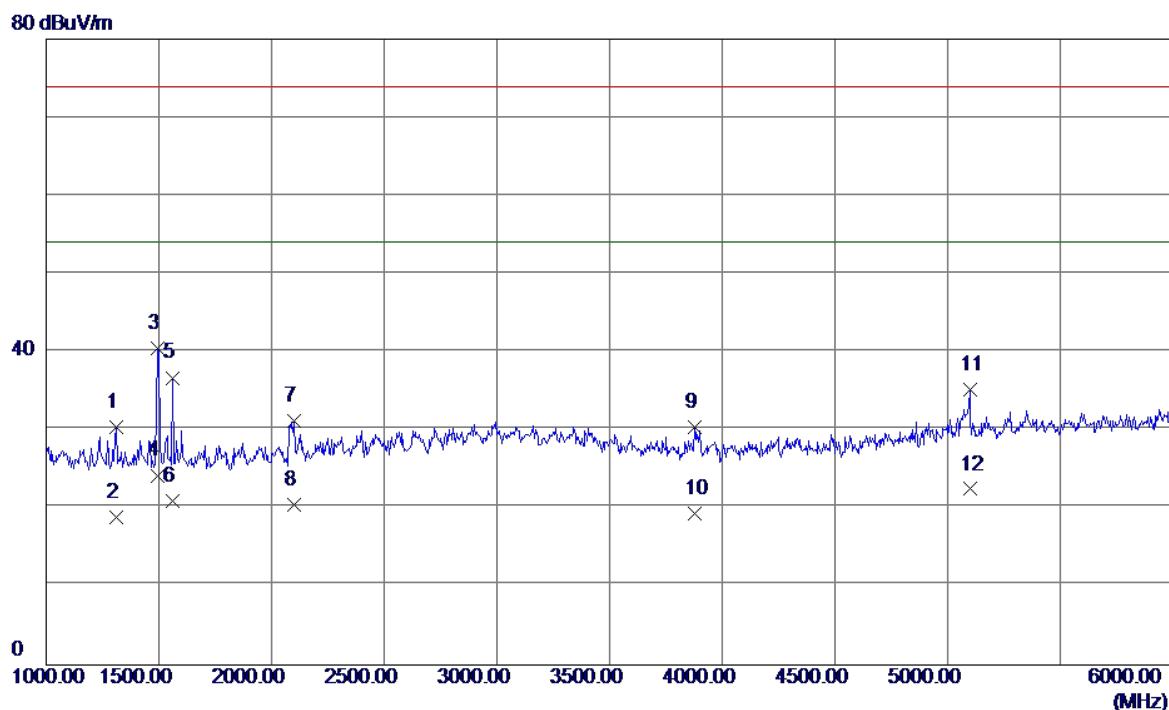

No.	Freq. MHz	Reading Level dB <sub>u</sub> V/m	Correct Factor dB	Measure ment dB <sub>u</sub> V/m	Limit dB <sub>u</sub> V/m	Margin dB	Detector
1	1312.5000	35.95	-5.62	30.33	74.00	-43.67	Peak
2	1312.5000	24.48	-5.62	18.86	54.00	-35.14	AVG
3	1492.5000	45.44	-4.98	40.46	74.00	-33.54	Peak
4 *	1492.5000	29.22	-4.98	24.24	54.00	-29.76	AVG
5	1560.0000	41.38	-4.66	36.72	74.00	-37.28	Peak
6	1560.0000	25.66	-4.66	21.00	54.00	-33.00	AVG
7	2100.0000	33.27	-2.02	31.25	74.00	-42.75	Peak
8	2100.0000	22.48	-2.02	20.46	54.00	-33.54	AVG
9	3877.5000	27.82	2.61	30.43	74.00	-43.57	Peak
10	3877.5000	16.71	2.61	19.32	54.00	-34.68	AVG
11	5097.5000	28.63	6.64	35.27	74.00	-38.73	Peak
12	5097.5000	15.84	6.64	22.48	54.00	-31.52	AVG


EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY		
Note	USB Cable:HONGLIN		
Test Engineer	Treey Chen		

80 dBuV/m

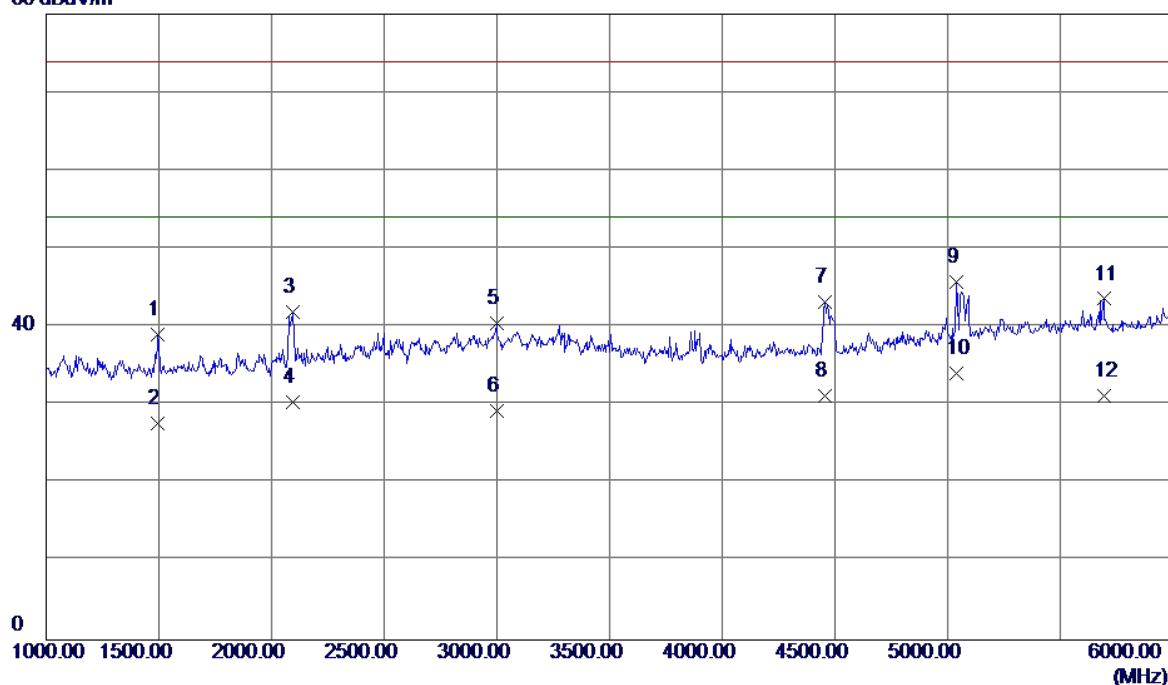

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	43.94	-4.97	38.97	74.00	-35.03	Peak
2	1495.0000	32.62	-4.97	27.65	54.00	-26.35	AVG
3	2092.5000	44.01	-2.06	41.95	74.00	-32.05	Peak
4	2092.5000	32.48	-2.06	30.42	54.00	-23.58	AVG
5	2997.5000	38.02	2.39	40.41	74.00	-33.59	Peak
6	2997.5000	26.95	2.39	29.34	54.00	-24.66	AVG
7	4457.5000	39.39	3.78	43.17	74.00	-30.83	Peak
8	4457.5000	27.48	3.78	31.26	54.00	-22.74	AVG
9	5040.0000	39.32	6.45	45.77	74.00	-28.23	Peak
10 *	5040.0000	27.68	6.45	34.13	54.00	-19.87	AVG
11	5692.5000	35.42	8.18	43.60	74.00	-30.40	Peak
12	5692.5000	22.95	8.18	31.13	54.00	-22.87	AVG


EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY		
Note	USB Cable:PANG NGAI		
Test Engineer	Treey Chen		

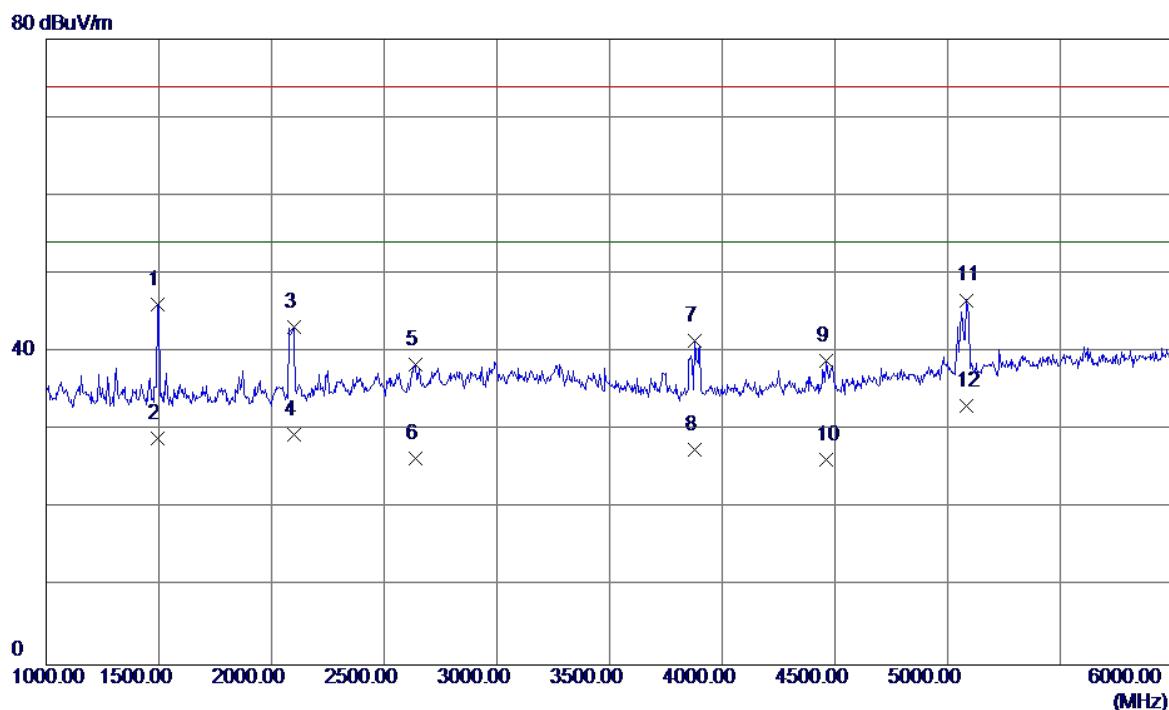

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1492.5000	51.02	-4.98	46.04	74.00	-27.96	Peak
2	1492.5000	33.94	-4.98	28.96	54.00	-25.04	AVG
3	2097.5000	45.19	-2.04	43.15	74.00	-30.85	Peak
4	2097.5000	31.48	-2.04	29.44	54.00	-24.56	AVG
5	2637.5000	37.62	0.78	38.40	74.00	-35.60	Peak
6	2637.5000	25.68	0.78	26.46	54.00	-27.54	AVG
7	3877.5000	38.83	2.61	41.44	74.00	-32.56	Peak
8	3877.5000	24.85	2.61	27.46	54.00	-26.54	AVG
9	4460.0000	35.04	3.79	38.83	74.00	-35.17	Peak
10	4460.0000	22.45	3.79	26.24	54.00	-27.76	AVG
11	5085.0000	40.04	6.60	46.64	74.00	-27.36	Peak
12 *	5085.0000	26.46	6.60	33.06	54.00	-20.94	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY		
Note	USB Cable:PANG NGAI		
Test Engineer	Treey Chen		


80 dBuV/m

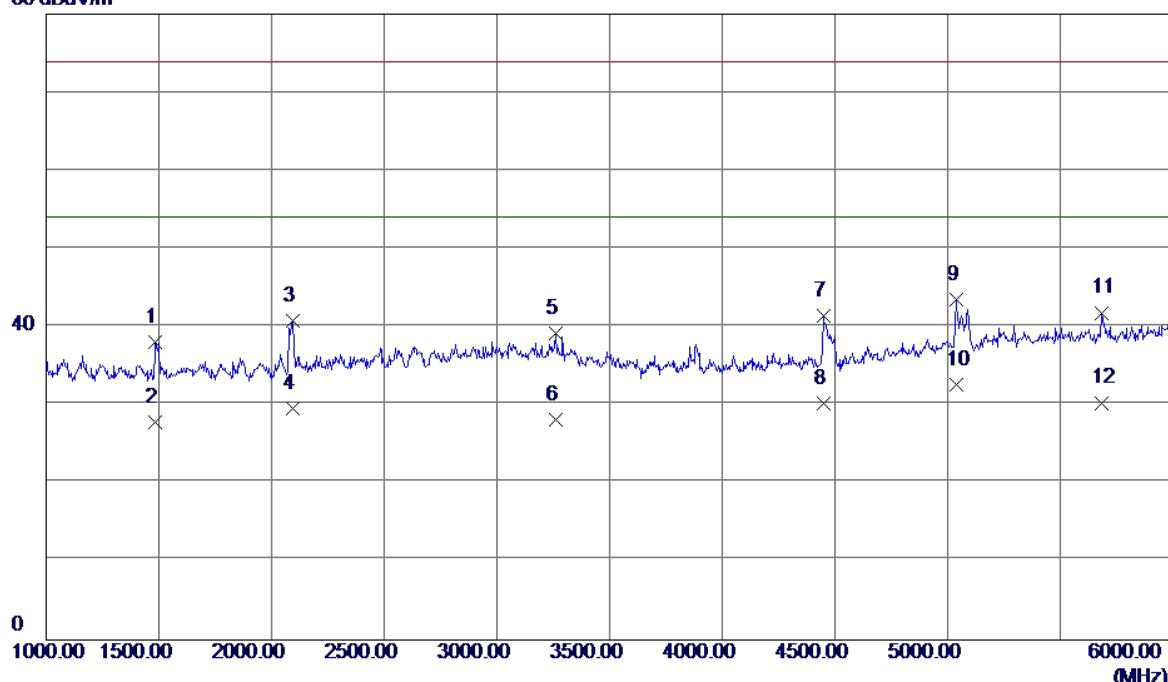

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1485.0000	43.03	-5.00	38.03	74.00	-35.97	Peak
2	1485.0000	32.83	-5.00	27.83	54.00	-26.17	AVG
3	2095.0000	42.78	-2.05	40.73	74.00	-33.27	Peak
4	2095.0000	31.65	-2.05	29.60	54.00	-24.40	AVG
5	3262.5000	36.84	2.32	39.16	74.00	-34.84	Peak
6	3262.5000	25.78	2.32	28.10	54.00	-25.90	AVG
7	4447.5000	37.67	3.76	41.43	74.00	-32.57	Peak
8	4447.5000	26.47	3.76	30.23	54.00	-23.77	AVG
9	5037.5000	37.12	6.44	43.56	74.00	-30.44	Peak
10 *	5037.5000	26.18	6.44	32.62	54.00	-21.38	AVG
11	5682.5000	33.67	8.17	41.84	74.00	-32.16	Peak
12	5682.5000	22.15	8.17	30.32	54.00	-23.68	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY		
Note	USB Cable:CONNREX		
Test Engineer	Treey Chen		


80 dBuV/m

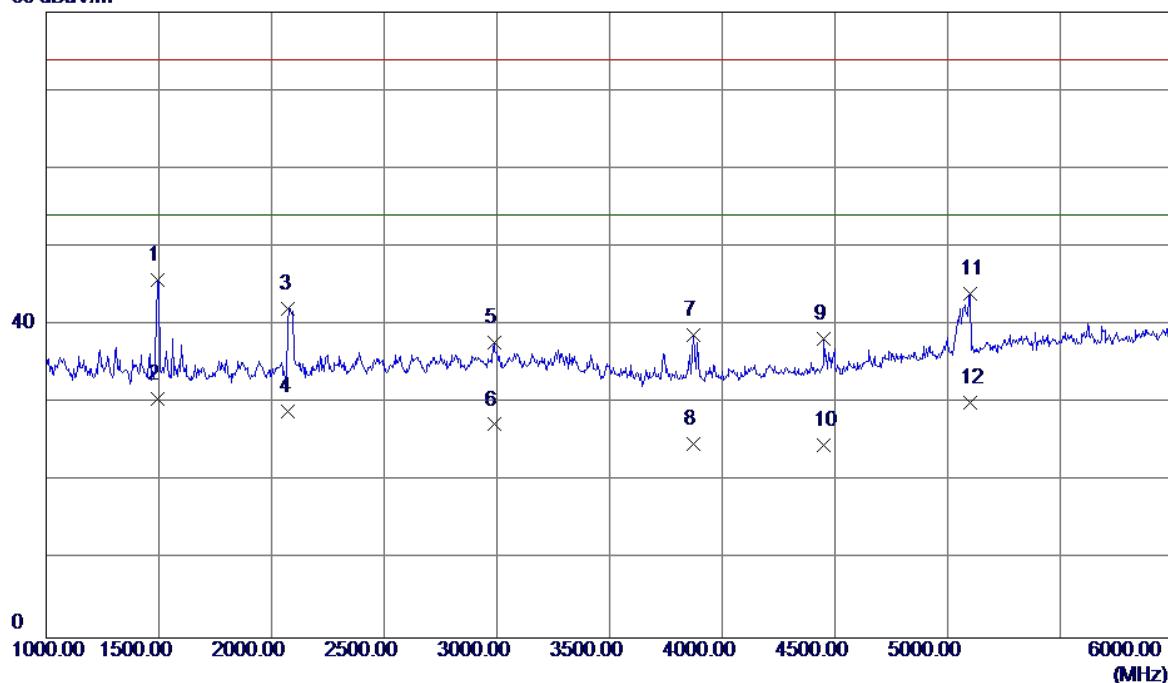

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1492.5000	50.74	-4.98	45.76	74.00	-28.24	Peak
2 *	1492.5000	35.50	-4.98	30.52	54.00	-23.48	AVG
3	2075.0000	44.22	-2.16	42.06	74.00	-31.94	Peak
4	2075.0000	31.19	-2.16	29.03	54.00	-24.97	AVG
5	2987.5000	35.39	2.34	37.73	74.00	-36.27	Peak
6	2987.5000	24.94	2.34	27.28	54.00	-26.72	AVG
7	3872.5000	36.13	2.60	38.73	74.00	-35.27	Peak
8	3872.5000	22.15	2.60	24.75	54.00	-29.25	AVG
9	4452.5000	34.42	3.77	38.19	74.00	-35.81	Peak
10	4452.5000	20.90	3.77	24.67	54.00	-29.33	AVG
11	5097.5000	37.34	6.64	43.98	74.00	-30.02	Peak
12	5097.5000	23.48	6.64	30.12	54.00	-23.88	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY		
Note	USB Cable:CONNEX		
Test Engineer	Treey Chen		


80 dBuV/m

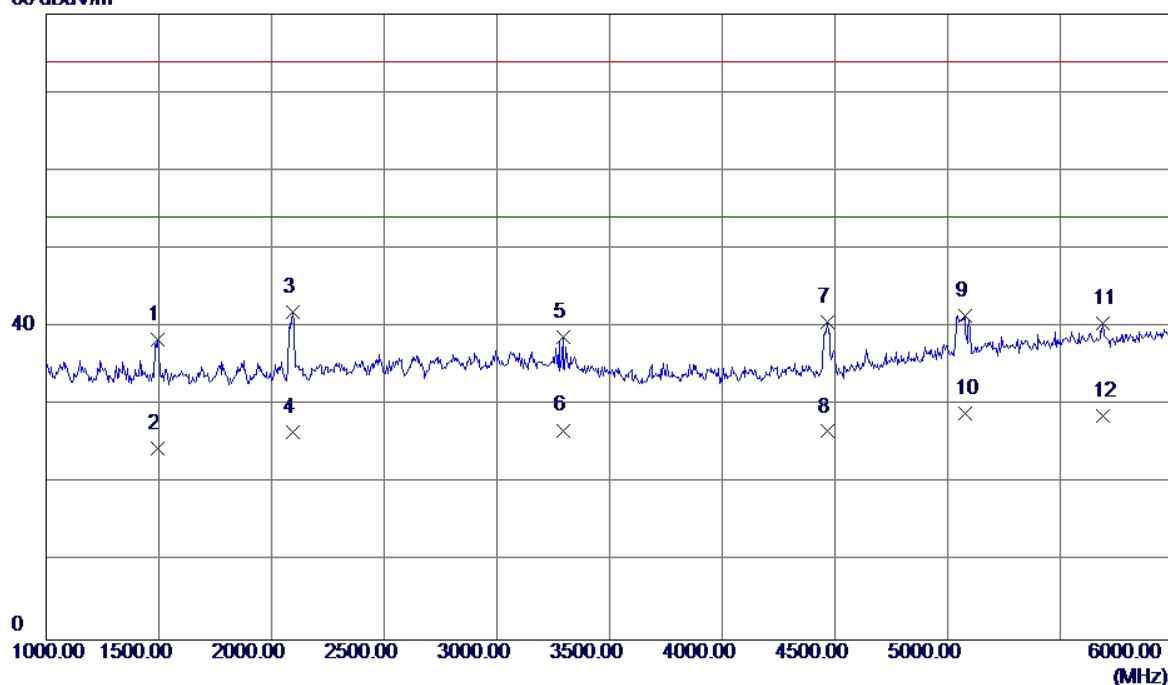

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1492.5000	43.34	-4.98	38.36	74.00	-35.64	Peak
2	1492.5000	29.48	-4.98	24.50	54.00	-29.50	AVG
3	2092.5000	43.91	-2.06	41.85	74.00	-32.15	Peak
4	2092.5000	28.67	-2.06	26.61	54.00	-27.39	AVG
5	3292.5000	36.42	2.32	38.74	74.00	-35.26	Peak
6	3292.5000	24.48	2.32	26.80	54.00	-27.20	AVG
7	4467.5000	36.78	3.80	40.58	74.00	-33.42	Peak
8	4467.5000	22.84	3.80	26.64	54.00	-27.36	AVG
9	5077.5000	34.91	6.57	41.48	74.00	-32.52	Peak
10 *	5077.5000	22.34	6.57	28.91	54.00	-25.09	AVG
11	5690.0000	32.26	8.18	40.44	74.00	-33.56	Peak
12	5690.0000	20.48	8.18	28.66	54.00	-25.34	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD(HW-050100U2W)+USB Cable: CONNREX+Battery:HB3G1		
Test Engineer	Treey Chen		


80 dBuV/m

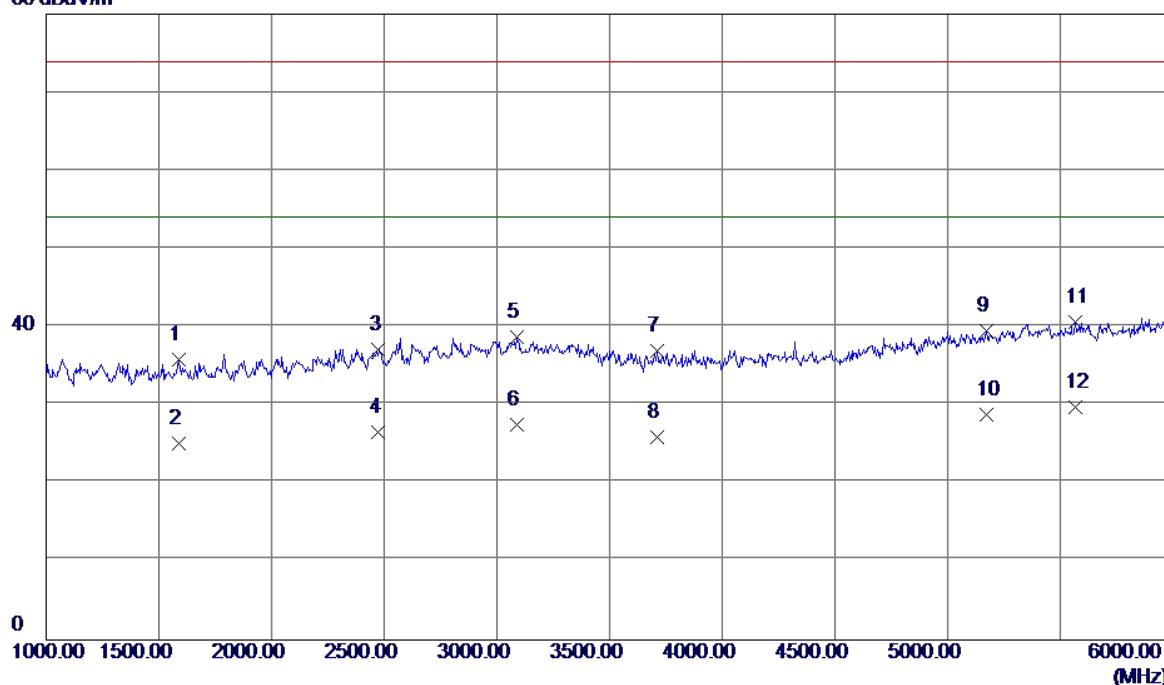

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1587.5000	40.35	-4.53	35.82	74.00	-38.18	Peak
2	1587.5000	29.64	-4.53	25.11	54.00	-28.89	AVG
3	2475.0000	37.13	0.03	37.16	74.00	-36.84	Peak
4	2475.0000	26.49	0.03	26.52	54.00	-27.48	AVG
5	3087.5000	36.34	2.37	38.71	74.00	-35.29	Peak
6	3087.5000	25.20	2.37	27.57	54.00	-26.43	AVG
7	3710.0000	34.48	2.45	36.93	74.00	-37.07	Peak
8	3710.0000	23.48	2.45	25.93	54.00	-28.07	AVG
9	5172.5000	32.56	6.90	39.46	74.00	-34.54	Peak
10	5172.5000	21.83	6.90	28.73	54.00	-25.27	AVG
11	5565.0000	32.58	8.07	40.65	74.00	-33.35	Peak
12 *	5565.0000	21.66	8.07	29.73	54.00	-24.27	AVG


EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD(HW-050100U2W)+USB Cable: CONNREX +Battery:HB3G1		
Test Engineer	Treey Chen		

80 dBuV/m

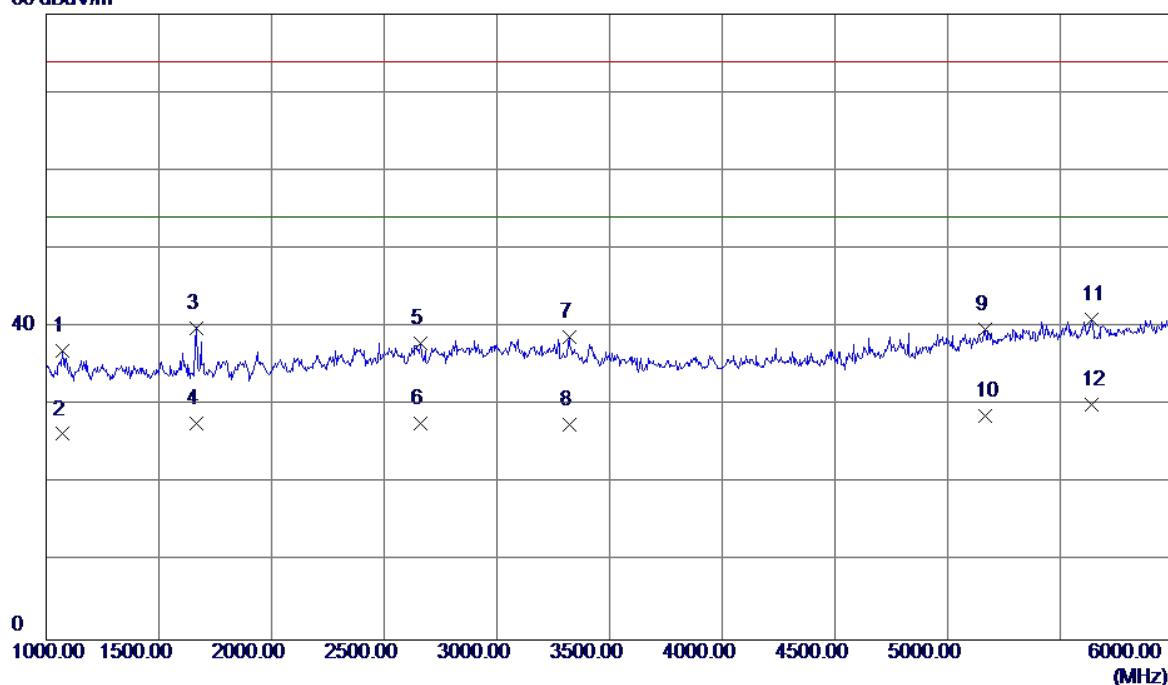


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1072.5000	43.41	-6.47	36.94	74.00	-37.06	Peak
2	1072.5000	32.79	-6.47	26.32	54.00	-27.68	AVG
3	1665.0000	44.08	-4.16	39.92	74.00	-34.08	Peak
4	1665.0000	31.83	-4.16	27.67	54.00	-26.33	AVG
5	2660.0000	37.10	0.88	37.98	74.00	-36.02	Peak
6	2660.0000	26.85	0.88	27.73	54.00	-26.27	AVG
7	3320.0000	36.45	2.31	38.76	74.00	-35.24	Peak
8	3320.0000	25.16	2.31	27.47	54.00	-26.53	AVG
9	5165.0000	32.78	6.87	39.65	74.00	-34.35	Peak
10	5165.0000	21.84	6.87	28.71	54.00	-25.29	AVG
11	5637.5000	32.89	8.13	41.02	74.00	-32.98	Peak
12 *	5637.5000	21.89	8.13	30.02	54.00	-23.98	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD(HW-050100U01)+USB Cable: CONNEX +Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

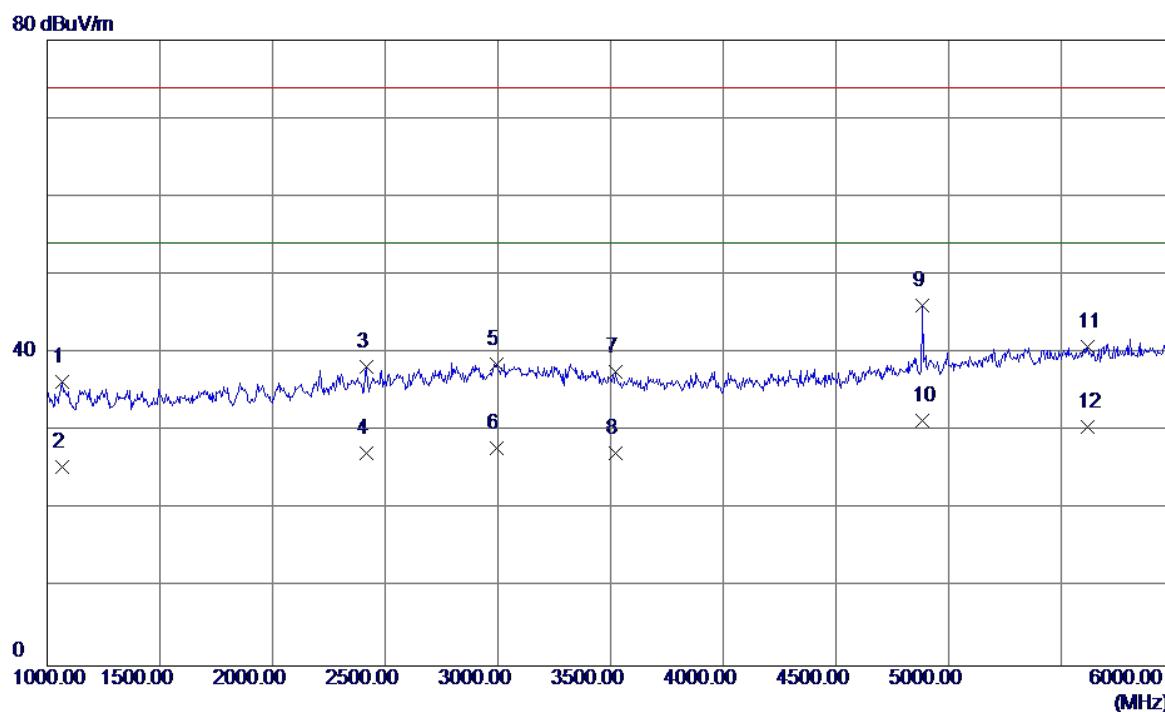


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	1067.5000	42.75	-6.49	36.26	74.00	-37.74	Peak
2	1067.5000	31.89	-6.49	25.40	54.00	-28.60	AVG
3	2415.0000	38.49	-0.30	38.19	74.00	-35.81	Peak
4	2415.0000	27.49	-0.30	27.19	54.00	-26.81	AVG
5	2995.0000	36.24	2.38	38.62	74.00	-35.38	Peak
6	2995.0000	25.49	2.38	27.87	54.00	-26.13	AVG
7	3520.0000	35.26	2.27	37.53	74.00	-36.47	Peak
8	3520.0000	24.94	2.27	27.21	54.00	-26.79	AVG
9	4885.0000	40.26	5.75	46.01	74.00	-27.99	Peak
10 *	4885.0000	25.61	5.75	31.36	54.00	-22.64	AVG
11	5617.5000	32.62	8.12	40.74	74.00	-33.26	Peak
12	5617.5000	22.47	8.12	30.59	54.00	-23.41	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD(HW-050100U01)+USB Cable: CONNEX +Battery:HB4269B6EAW		
Test Engineer	Treey Chen		

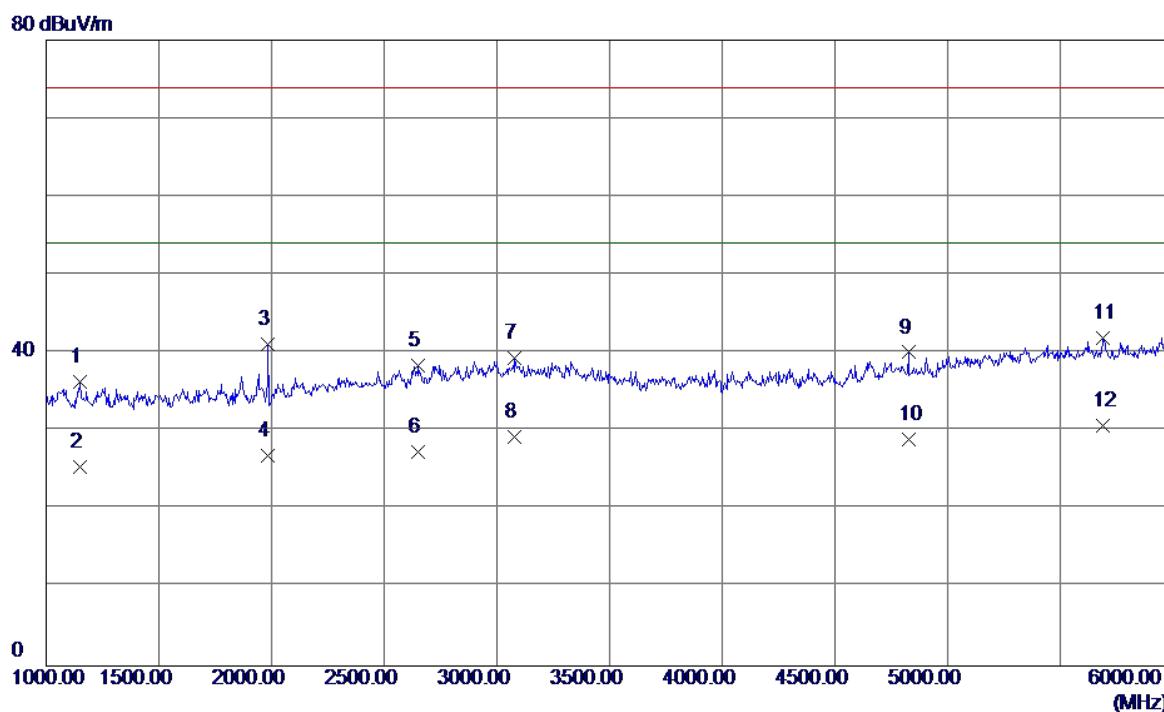


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dB	Margin	
						Margin	Detector
1	1152.5000	42.49	-6.19	36.30	74.00	-37.70	Peak
2	1152.5000	31.57	-6.19	25.38	54.00	-28.62	AVG
3	1985.0000	43.80	-2.64	41.16	74.00	-32.84	Peak
4	1985.0000	29.48	-2.64	26.84	54.00	-27.16	AVG
5	2652.5000	37.53	0.85	38.38	74.00	-35.62	Peak
6	2652.5000	26.47	0.85	27.32	54.00	-26.68	AVG
7	3080.0000	37.04	2.38	39.42	74.00	-34.58	Peak
8	3080.0000	26.94	2.38	29.32	54.00	-24.68	AVG
9	4827.5000	34.61	5.47	40.08	74.00	-33.92	Peak
10	4827.5000	23.49	5.47	28.96	54.00	-25.04	AVG
11	5690.0000	33.79	8.18	41.97	74.00	-32.03	Peak
12 *	5690.0000	22.48	8.18	30.66	54.00	-23.34	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter: Huntkey (HW-050100U2W)+USB Cable: CONNREX +Battery:HB3G1		
Test Engineer	Treey Chen		

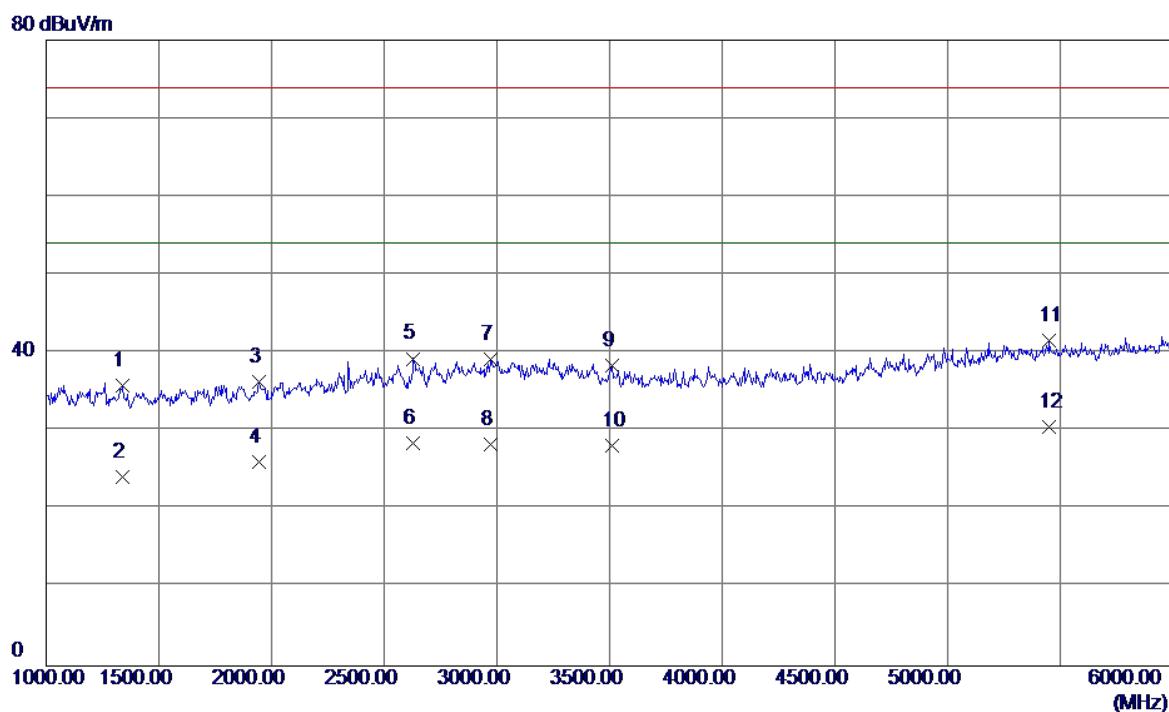


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	1340.0000	41.33	-5.52	35.81	74.00	-38.19	Peak
2	1340.0000	29.65	-5.52	24.13	54.00	-29.87	AVG
3	1945.0000	39.10	-2.83	36.27	74.00	-37.73	Peak
4	1945.0000	28.94	-2.83	26.11	54.00	-27.89	AVG
5	2630.0000	38.53	0.75	39.28	74.00	-34.72	Peak
6	2630.0000	27.67	0.75	28.42	54.00	-25.58	AVG
7	2970.0000	36.93	2.27	39.20	74.00	-34.80	Peak
8	2970.0000	25.99	2.27	28.26	54.00	-25.74	AVG
9	3510.0000	36.17	2.26	38.43	74.00	-35.57	Peak
10	3510.0000	25.95	2.26	28.21	54.00	-25.79	AVG
11	5450.0000	33.79	7.84	41.63	74.00	-32.37	Peak
12 *	5450.0000	22.68	7.84	30.52	54.00	-23.48	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U2W)+USB Cable: CONNEX +Battery:HB3G1		
Test Engineer	Treey Chen		

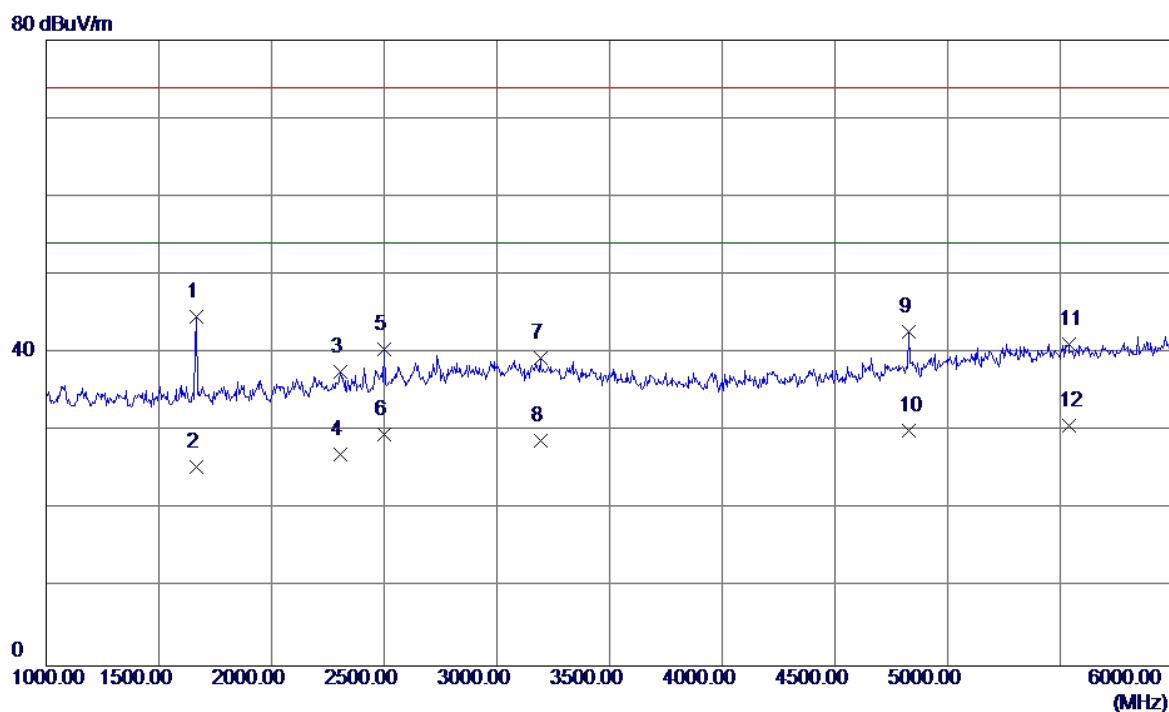


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	1665.0000	48.86	-4.16	44.70	74.00	-29.30	Peak
2	1665.0000	29.67	-4.16	25.51	54.00	-28.49	AVG
3	2305.0000	38.53	-0.90	37.63	74.00	-36.37	Peak
4	2305.0000	27.93	-0.90	27.03	54.00	-26.97	AVG
5	2502.5000	40.28	0.18	40.46	74.00	-33.54	Peak
6	2502.5000	29.48	0.18	29.66	54.00	-24.34	AVG
7	3192.5000	37.08	2.34	39.42	74.00	-34.58	Peak
8	3192.5000	26.49	2.34	28.83	54.00	-25.17	AVG
9	4827.5000	37.20	5.47	42.67	74.00	-31.33	Peak
10	4827.5000	24.64	5.47	30.11	54.00	-23.89	AVG
11	5537.5000	33.06	8.04	41.10	74.00	-32.90	Peak
12 *	5537.5000	22.66	8.04	30.70	54.00	-23.30	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U01)+USB Cable: CONNREX +Battery:HB3G1		
Test Engineer	Treey Chen		

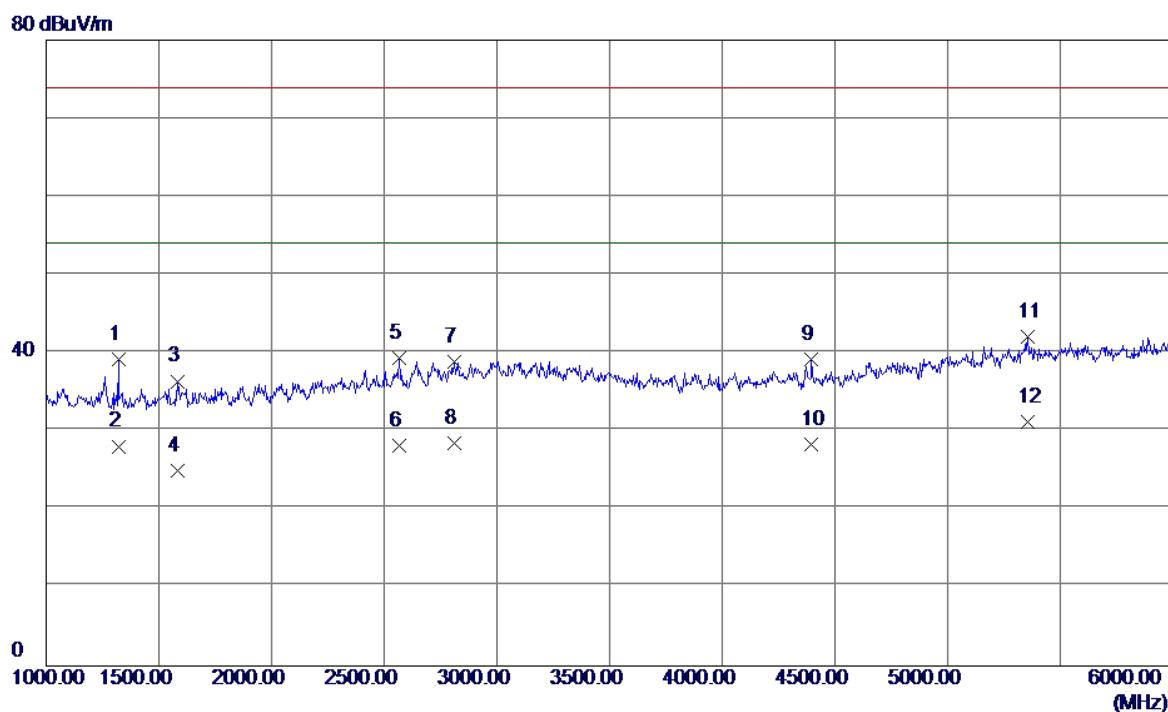


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
							MHz	dBuV/m
1	1322.5000	44.82	-5.58	39.24	74.00	-34.76	Peak	
2	1322.5000	33.66	-5.58	28.08	54.00	-25.92	AVG	
3	1585.0000	40.95	-4.55	36.40	74.00	-37.60	Peak	
4	1585.0000	29.50	-4.55	24.95	54.00	-29.05	AVG	
5	2565.0000	38.91	0.46	39.37	74.00	-34.63	Peak	
6	2565.0000	27.64	0.46	28.10	54.00	-25.90	AVG	
7	2810.0000	37.39	1.55	38.94	74.00	-35.06	Peak	
8	2810.0000	26.94	1.55	28.49	54.00	-25.51	AVG	
9	4395.0000	35.62	3.64	39.26	74.00	-34.74	Peak	
10	4395.0000	24.66	3.64	28.30	54.00	-25.70	AVG	
11	5357.5000	34.60	7.53	42.13	74.00	-31.87	Peak	
12 *	5357.5000	23.67	7.53	31.20	54.00	-22.80	AVG	

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U01)+USB Cable: CONNREX +Battery:HB3G1		
Test Engineer	Treey Chen		

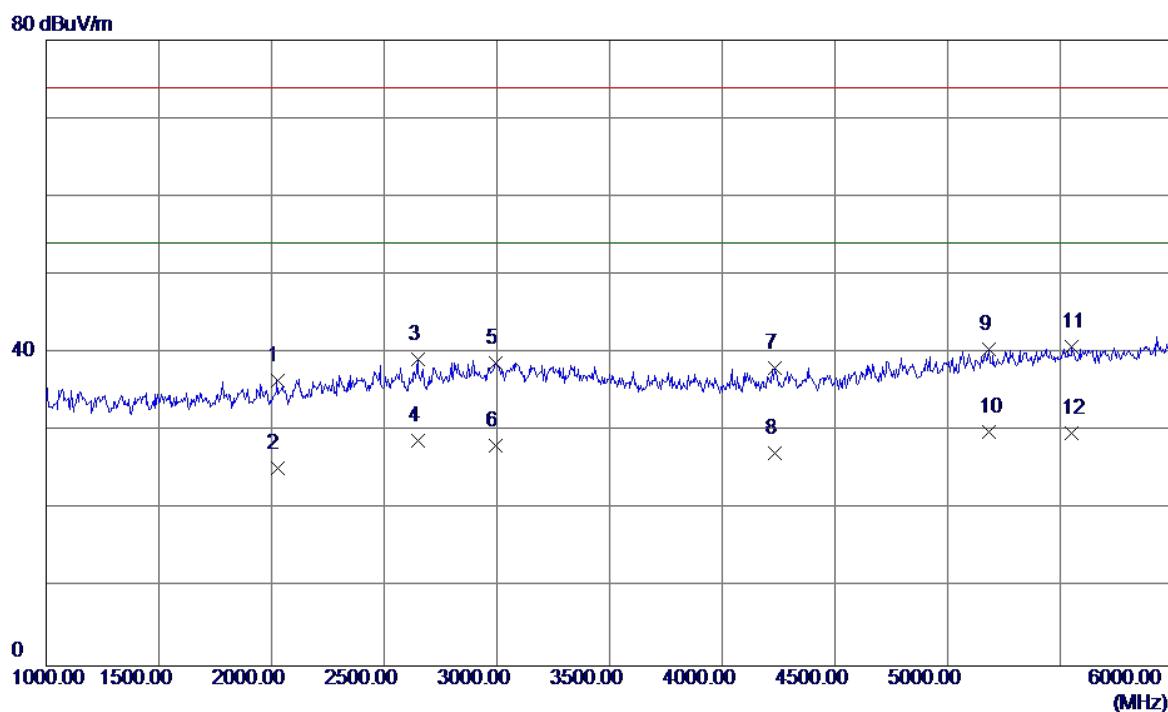


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	2025.0000	38.93	-2.43	36.50	74.00	-37.50	Peak
2	2025.0000	27.73	-2.43	25.30	54.00	-28.70	AVG
3	2647.5000	38.30	0.83	39.13	74.00	-34.87	Peak
4	2647.5000	27.95	0.83	28.78	54.00	-25.22	AVG
5	2995.0000	36.38	2.38	38.76	74.00	-35.24	Peak
6	2995.0000	25.71	2.38	28.09	54.00	-25.91	AVG
7	4235.0000	34.78	3.27	38.05	74.00	-35.95	Peak
8	4235.0000	23.90	3.27	27.17	54.00	-26.83	AVG
9	5182.5000	33.59	6.93	40.52	74.00	-33.48	Peak
10 *	5182.5000	22.94	6.93	29.87	54.00	-24.13	AVG
11	5552.5000	32.79	8.06	40.85	74.00	-33.15	Peak
12	5552.5000	21.68	8.06	29.74	54.00	-24.26	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter : Phitek(HW-050100U01)+USB Cable: CONNREX +Battery:HB3G1		
Test Engineer	Treey Chen		

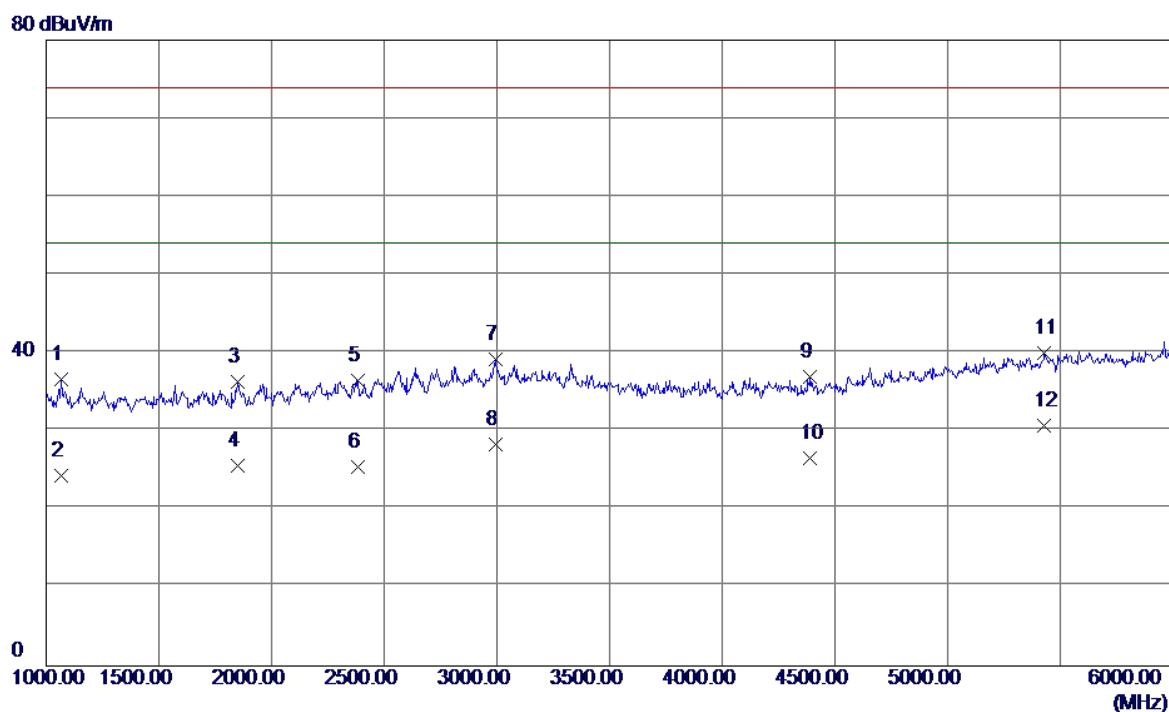

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin	
						Margin	Detector
1	1067.5000	43.20	-6.49	36.71	74.00	-37.29	Peak
2	1067.5000	30.87	-6.49	24.38	54.00	-29.62	AVG
3	1852.5000	39.57	-3.27	36.30	74.00	-37.70	Peak
4	1852.5000	28.94	-3.27	25.67	54.00	-28.33	AVG
5	2385.0000	36.94	-0.46	36.48	74.00	-37.52	Peak
6	2385.0000	25.95	-0.46	25.49	54.00	-28.51	AVG
7	2992.5000	36.79	2.37	39.16	74.00	-34.84	Peak
8	2992.5000	25.93	2.37	28.30	54.00	-25.70	AVG
9	4390.0000	33.31	3.62	36.93	74.00	-37.07	Peak
10	4390.0000	22.92	3.62	26.54	54.00	-27.46	AVG
11	5430.0000	32.26	7.77	40.03	74.00	-33.97	Peak
12 *	5430.0000	22.95	7.77	30.72	54.00	-23.28	AVG


EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter : Phitek(HW-050100U01)+USB Cable: CONNREX +Battery:HB3G1		
Test Engineer	Treey Chen		

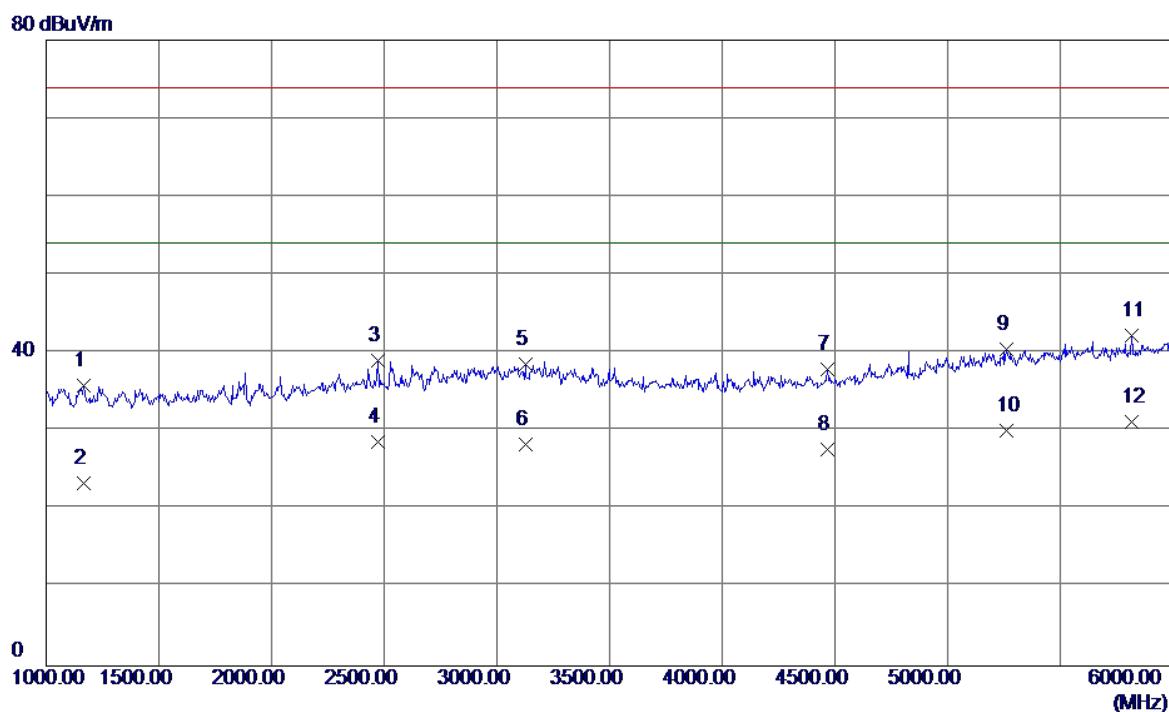

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	
							Limit dBuV/m	Detector
1	1165.0000	41.97	-6.14	35.83	74.00	-38.17	Peak	
2	1165.0000	29.46	-6.14	23.32	54.00	-30.68	AVG	
3	2470.0000	39.02	0.01	39.03	74.00	-34.97	Peak	
4	2470.0000	28.64	0.01	28.65	54.00	-25.35	AVG	
5	3127.5000	36.22	2.36	38.58	74.00	-35.42	Peak	
6	3127.5000	25.90	2.36	28.26	54.00	-25.74	AVG	
7	4465.0000	34.13	3.80	37.93	74.00	-36.07	Peak	
8	4465.0000	23.81	3.80	27.61	54.00	-26.39	AVG	
9	5262.5000	33.27	7.20	40.47	74.00	-33.53	Peak	
10	5262.5000	22.87	7.20	30.07	54.00	-23.93	AVG	
11	5817.5000	33.92	8.30	42.22	74.00	-31.78	Peak	
12 *	5817.5000	22.94	8.30	31.24	54.00	-22.76	AVG	

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U2W)+USB Cable: CONNEX		
Test Engineer	Treey Chen		


80 dBuV/m

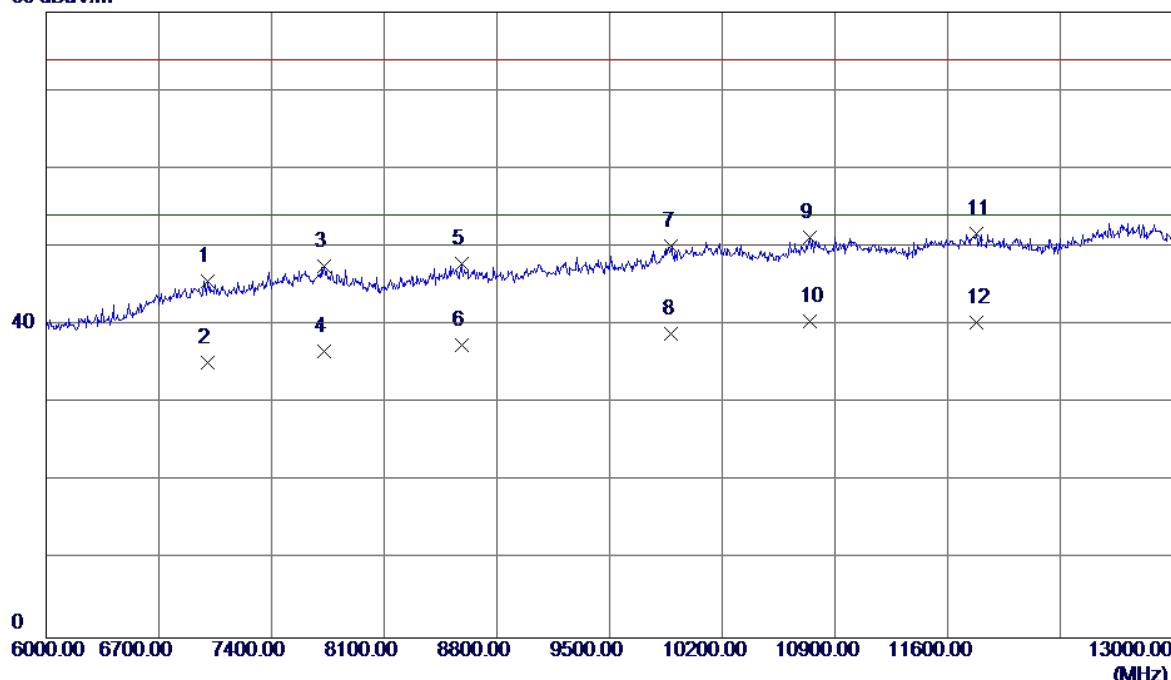

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7004.5000	34.23	11.43	45.66	74.00	-28.34	Peak
2	7004.5000	23.82	11.43	35.25	54.00	-18.75	AVG
3	7725.5000	35.01	12.58	47.59	74.00	-26.41	Peak
4	7725.5000	24.06	12.58	36.64	54.00	-17.36	AVG
5	8579.5000	34.29	13.56	47.85	74.00	-26.15	Peak
6	8579.5000	23.91	13.56	37.47	54.00	-16.53	AVG
7	9885.0000	34.82	15.32	50.14	74.00	-23.86	Peak
8	9885.0000	23.58	15.32	38.90	54.00	-15.10	AVG
9	10742.5000	34.34	16.92	51.26	74.00	-22.74	Peak
10 *	10742.5000	23.61	16.92	40.53	54.00	-13.47	AVG
11	11778.5000	33.94	17.68	51.62	74.00	-22.38	Peak
12	11778.5000	22.59	17.68	40.27	54.00	-13.73	AVG


EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey(HW-050100U2W)+USB Cable: CONNEX		
Test Engineer	Treey Chen		

80 dBuV/m

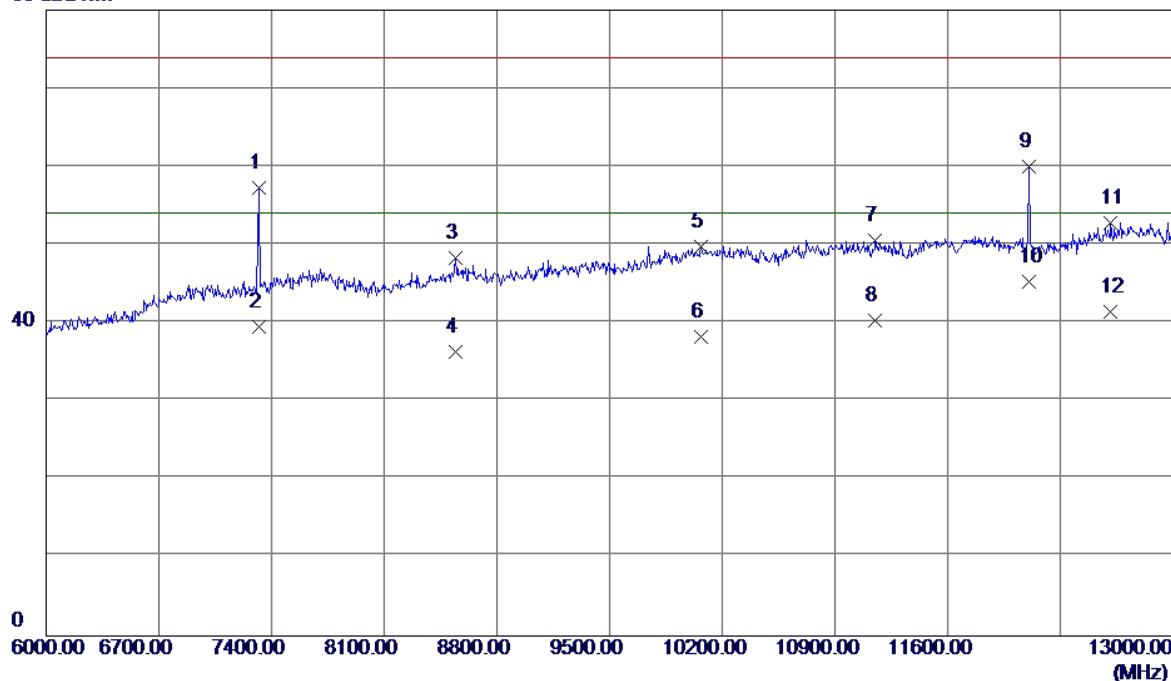


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7319.5000	45.03	12.20	57.23	74.00	-16.77	Peak
2	7319.5000	27.37	12.20	39.57	54.00	-14.43	AVG
3	8541.0000	34.85	13.47	48.32	74.00	-25.68	Peak
4	8541.0000	22.90	13.47	36.37	54.00	-17.63	AVG
5	10067.0000	34.01	15.71	49.72	74.00	-24.28	Peak
6	10067.0000	22.57	15.71	38.28	54.00	-15.72	AVG
7	11152.0000	33.22	17.40	50.62	74.00	-23.38	Peak
8	11152.0000	22.94	17.40	40.34	54.00	-13.66	AVG
9	12107.5000	42.36	17.63	59.99	74.00	-14.01	Peak
10 *	12107.5000	27.62	17.63	45.25	54.00	-8.75	AVG
11	12615.0000	34.57	18.26	52.83	74.00	-21.17	Peak
12	12615.0000	23.18	18.26	41.44	54.00	-12.56	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter : Phitek(HW-050100U01)+USB Cable: CONNREX +Battery:HB3G1		
Test Engineer	Treey Chen		

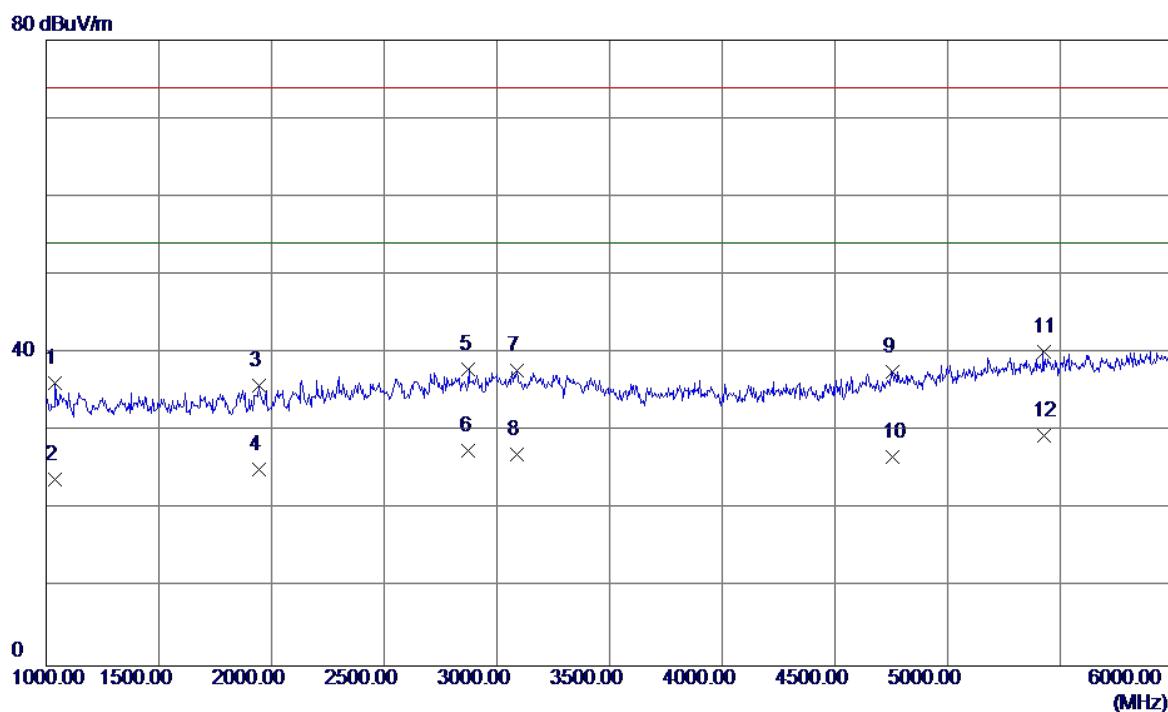


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1040.0000	42.81	-6.59	36.22	74.00	-37.78	Peak
2	1040.0000	30.49	-6.59	23.90	54.00	-30.10	AVG
3	1945.0000	38.74	-2.83	35.91	74.00	-38.09	Peak
4	1945.0000	27.95	-2.83	25.12	54.00	-28.88	AVG
5	2875.0000	36.05	1.84	37.89	74.00	-36.11	Peak
6	2875.0000	25.62	1.84	27.46	54.00	-26.54	AVG
7	3087.5000	35.40	2.37	37.77	74.00	-36.23	Peak
8	3087.5000	24.64	2.37	27.01	54.00	-26.99	AVG
9	4757.5000	32.45	5.13	37.58	74.00	-36.42	Peak
10	4757.5000	21.64	5.13	26.77	54.00	-27.23	AVG
11	5425.0000	32.46	7.75	40.21	74.00	-33.79	Peak
12 *	5425.0000	21.69	7.75	29.44	54.00	-24.56	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter : Phitek(HW-050100U01)+USB Cable: CONNREX+Battery:HB3G1		
Test Engineer	Treey Chen		

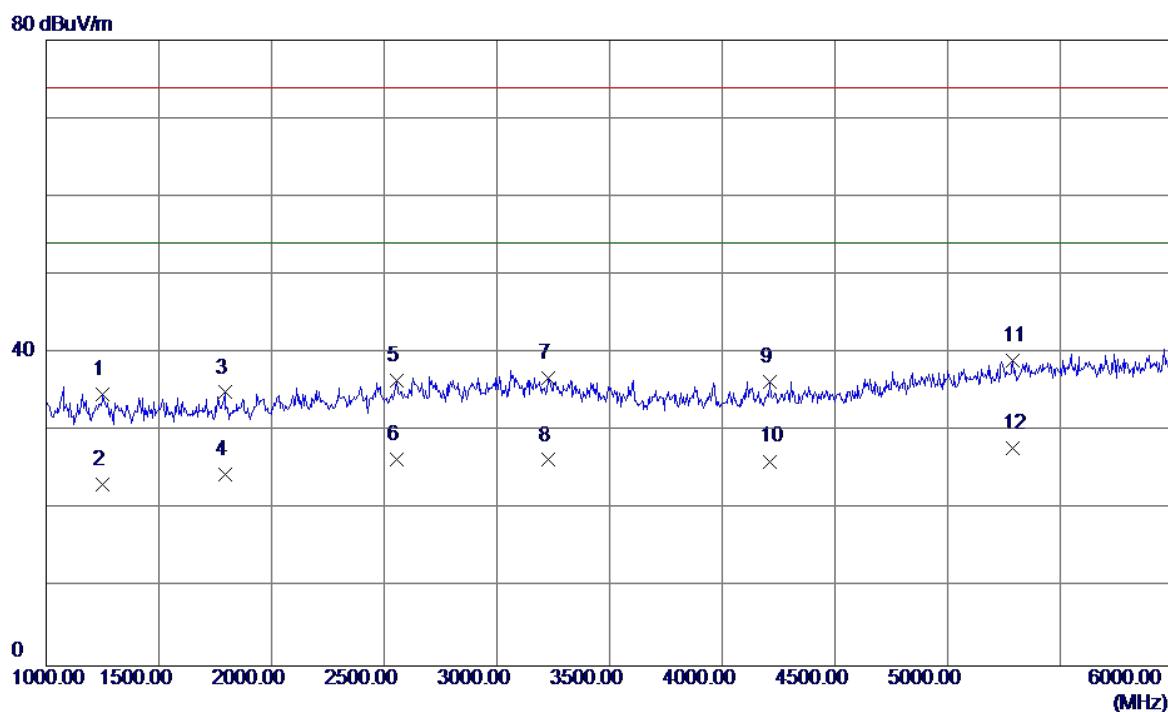


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin	
						Margin	Detector
1	1250.0000	40.61	-5.84	34.77	74.00	-39.23	Peak
2	1250.0000	29.00	-5.84	23.16	54.00	-30.84	AVG
3	1792.5000	38.52	-3.56	34.96	74.00	-39.04	Peak
4	1792.5000	27.97	-3.56	24.41	54.00	-29.59	AVG
5	2555.0000	36.02	0.42	36.44	74.00	-37.56	Peak
6	2555.0000	25.94	0.42	26.36	54.00	-27.64	AVG
7	3230.0000	34.50	2.33	36.83	74.00	-37.17	Peak
8	3230.0000	23.99	2.33	26.32	54.00	-27.68	AVG
9	4212.5000	33.15	3.21	36.36	74.00	-37.64	Peak
10	4212.5000	22.95	3.21	26.16	54.00	-27.84	AVG
11	5290.0000	31.73	7.30	39.03	74.00	-34.97	Peak
12 *	5290.0000	20.49	7.30	27.79	54.00	-26.21	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter : Phitek(HW-050100U01)+USB Cable: CONNREX +Battery:HB3G1+Earphone:GOERTEK		
Test Engineer	Treey Chen		

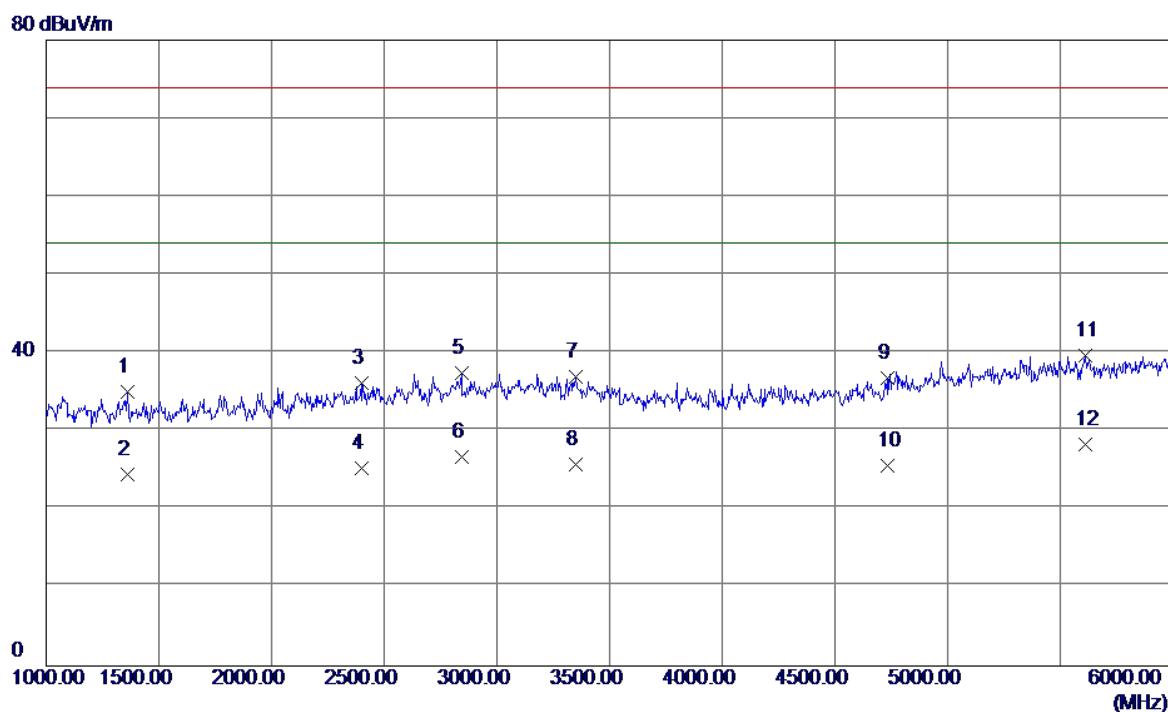


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	
							Limit dBuV/m	Detector
1	1360.0000	40.42	-5.45	34.97	74.00	-39.03	Peak	
2	1360.0000	29.95	-5.45	24.50	54.00	-29.50	AVG	
3	2397.5000	36.49	-0.39	36.10	74.00	-37.90	Peak	
4	2397.5000	25.64	-0.39	25.25	54.00	-28.75	AVG	
5	2842.5000	35.67	1.70	37.37	74.00	-36.63	Peak	
6	2842.5000	24.97	1.70	26.67	54.00	-27.33	AVG	
7	3352.5000	34.69	2.30	36.99	74.00	-37.01	Peak	
8	3352.5000	23.49	2.30	25.79	54.00	-28.21	AVG	
9	4732.5000	31.76	5.01	36.77	74.00	-37.23	Peak	
10	4732.5000	20.60	5.01	25.61	54.00	-28.39	AVG	
11	5612.5000	31.51	8.11	39.62	74.00	-34.38	Peak	
12 *	5612.5000	20.16	8.11	28.27	54.00	-25.73	AVG	

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter : Phitek(HW-050100U01)+USB Cable: CONNREX+Battery:HB3G1+Earphone:GOERTEK		
Test Engineer	Treey Chen		

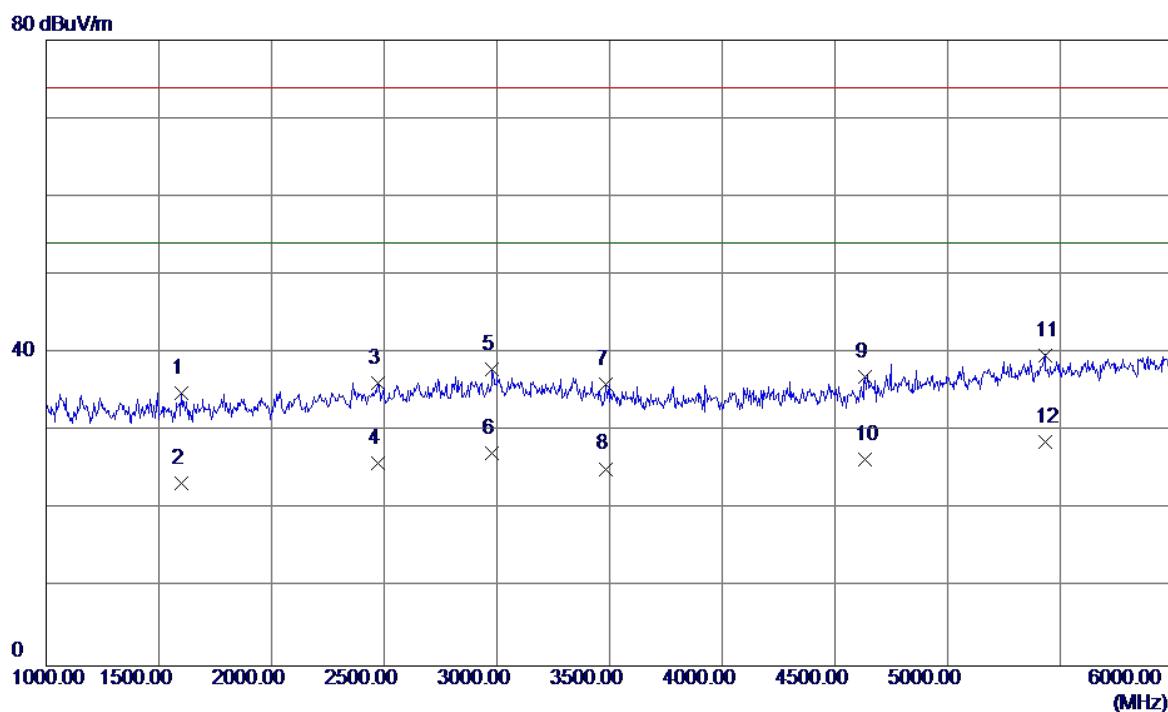


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	
							Limit dBuV/m	Detector
1	1602.5000	39.35	-4.46	34.89	74.00	-39.11	Peak	
2	1602.5000	27.88	-4.46	23.42	54.00	-30.58	AVG	
3	2472.5000	36.18	0.02	36.20	74.00	-37.80	Peak	
4	2472.5000	25.94	0.02	25.96	54.00	-28.04	AVG	
5	2980.0000	35.62	2.31	37.93	74.00	-36.07	Peak	
6	2980.0000	24.90	2.31	27.21	54.00	-26.79	AVG	
7	3482.5000	33.81	2.26	36.07	74.00	-37.93	Peak	
8	3482.5000	22.94	2.26	25.20	54.00	-28.80	AVG	
9	4635.0000	32.41	4.54	36.95	74.00	-37.05	Peak	
10	4635.0000	21.80	4.54	26.34	54.00	-27.66	AVG	
11	5432.5000	31.98	7.78	39.76	74.00	-34.24	Peak	
12 *	5432.5000	20.89	7.78	28.67	54.00	-25.33	AVG	

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter : Phitek(HW-050100U01)+USB Cable: CONNREX+Battery:HB3G1+Earphone:Lianchuang		
Test Engineer	Treey Chen		

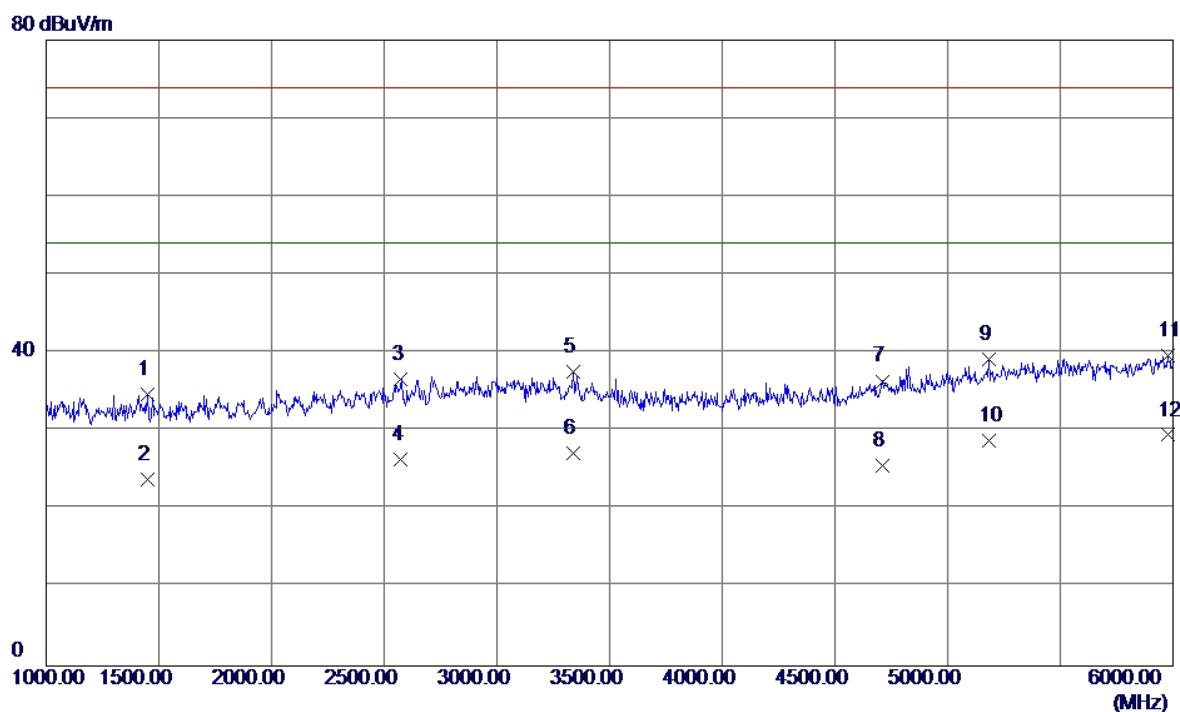

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dB	Margin	
						Margin	Detector
1	1452.5000	39.80	-5.12	34.68	74.00	-39.32	Peak
2	1452.5000	28.94	-5.12	23.82	54.00	-30.18	AVG
3	2575.0000	36.12	0.50	36.62	74.00	-37.38	Peak
4	2575.0000	25.95	0.50	26.45	54.00	-27.55	AVG
5	3337.5000	35.32	2.30	37.62	74.00	-36.38	Peak
6	3337.5000	24.89	2.30	27.19	54.00	-26.81	AVG
7	4712.5000	31.49	4.91	36.40	74.00	-37.60	Peak
8	4712.5000	20.65	4.91	25.56	54.00	-28.44	AVG
9	5182.5000	32.26	6.93	39.19	74.00	-34.81	Peak
10	5182.5000	21.94	6.93	28.87	54.00	-25.13	AVG
11	5977.5000	31.28	8.44	39.72	74.00	-34.28	Peak
12 *	5977.5000	21.08	8.44	29.52	54.00	-24.48	AVG

EUT	HUAWEI MediaPad T1 7.0	Model Name	T1-701w
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter : Phitek(HW-050100U01)+USB Cable: CONNREX+Battery:HB3G1+Earphone:Lianchuang		
Test Engineer	Treey Chen		

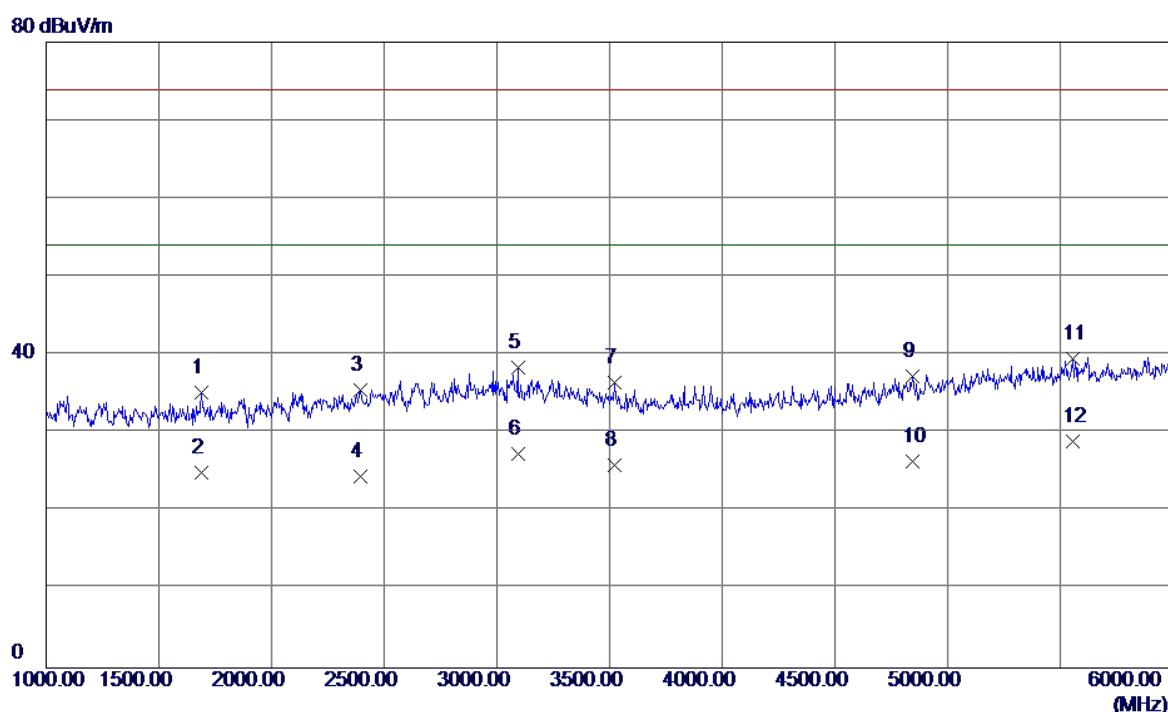

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dB	Margin	
						Detector	
1	1690.0000	39.28	-4.05	35.23	74.00	-38.77	Peak
2	1690.0000	28.96	-4.05	24.91	54.00	-29.09	AVG
3	2395.0000	35.90	-0.41	35.49	74.00	-38.51	Peak
4	2395.0000	24.96	-0.41	24.55	54.00	-29.45	AVG
5	3092.5000	35.97	2.37	38.34	74.00	-35.66	Peak
6	3092.5000	24.95	2.37	27.32	54.00	-26.68	AVG
7	3520.0000	34.27	2.27	36.54	74.00	-37.46	Peak
8	3520.0000	23.68	2.27	25.95	54.00	-28.05	AVG
9	4845.0000	31.67	5.56	37.23	74.00	-36.77	Peak
10	4845.0000	20.81	5.56	26.37	54.00	-27.63	AVG
11	5555.0000	31.48	8.06	39.54	74.00	-34.46	Peak
12 *	5555.0000	20.89	8.06	28.95	54.00	-25.05	AVG