



Appendix for test report



1Appendix_A: Effective (Isotropic) Radiated Power Output Data

Part I - Test Results

VOID



2Appendix_B: Peak-to-Average Ratio

Part I - Test Results

VOID



3Appendix_C: Modulation Characteristics

Part I - Test Plots

VOID



4Appendix_D: Bandwidth

Part I - Test Results

VOID



5Appendix_E: Band Edges Compliance

Part I - Test Plots

VOID



6Appendix_F: Spurious Emission at Antenna Terminal

Part I - Test Plots

VOID

7Appendix_G: Field Strength of Spurious Radiation

Note: We tested all modes, but the data presented below is the worst case.

9kHz~150kHz, VBW = 200Hz, VBW = 600 Hz, Detector: PK

150kHz~30MHz, VBW = 9kHz, VBW = 30k Hz, Detector: PK

30MHz~1GHz, RBW = 100 kHz, VBW = 300 kHz. Detector: PK


Above 1GHz, RBW = 1 MHz, VBW = 3 MHz. Detector: PK

Part I - Test Plots


7.1 For LTE

7.1.1 Test Band = BAND7


7.1.1.1 Test Bandwidth = 5

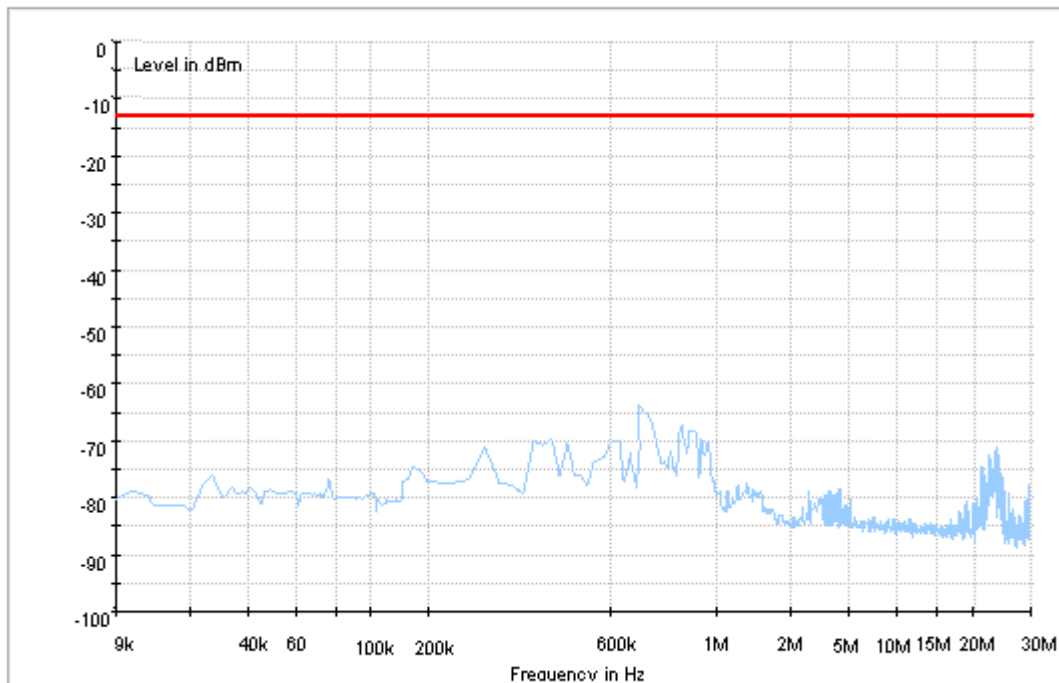


Copy of RSE-TX-DIRECTOR.ABOVE 1.5G_L

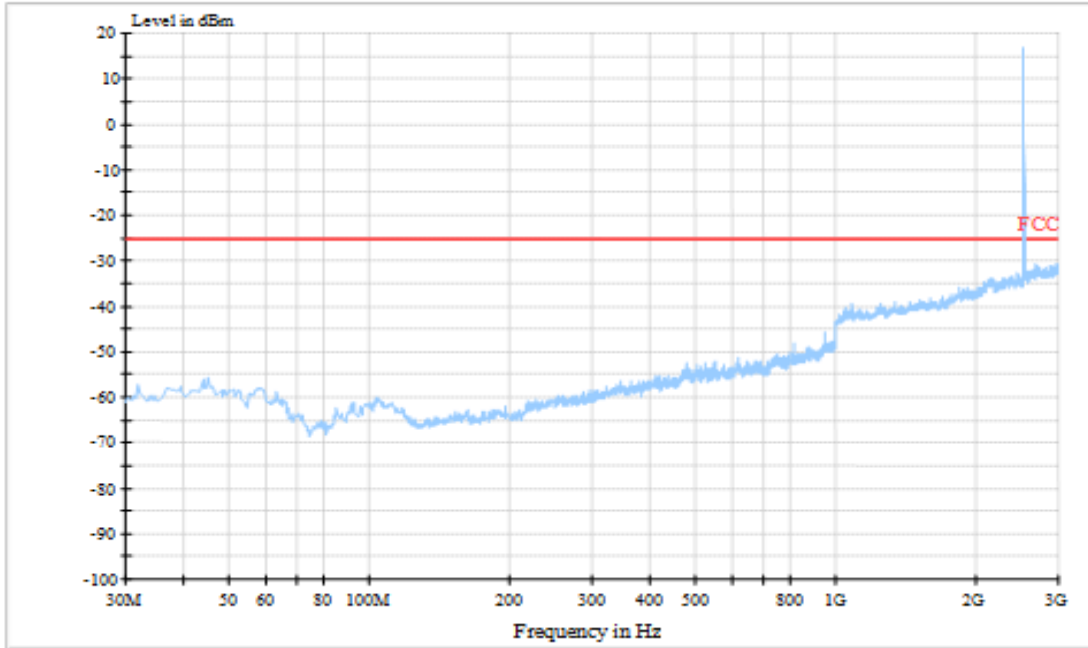


Copy of RSE-TX-DIRECTOR.ABOVE 1.5G_H

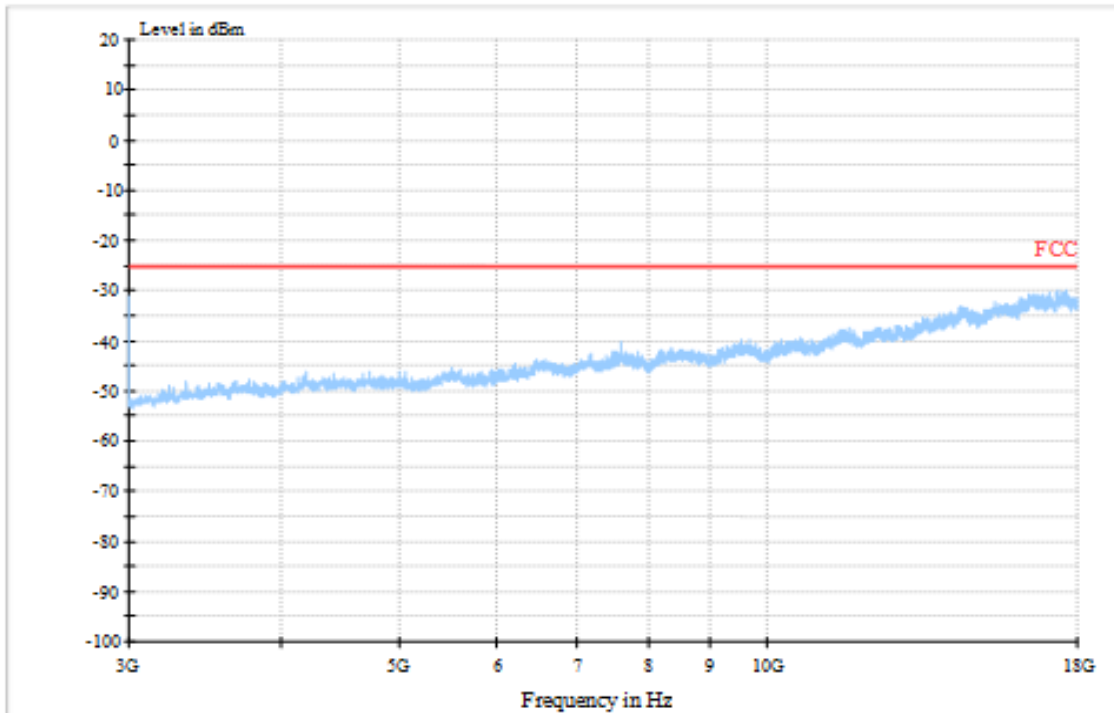


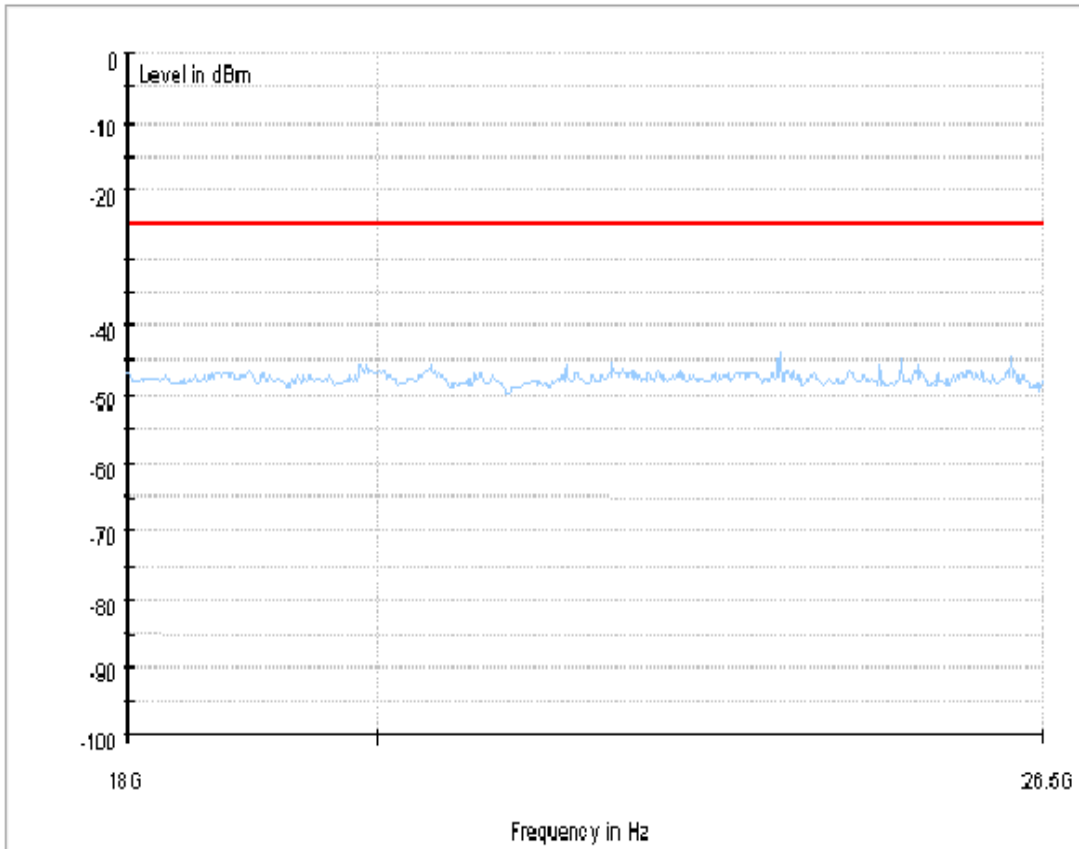



7.1.1.2 Test Bandwidth = 20

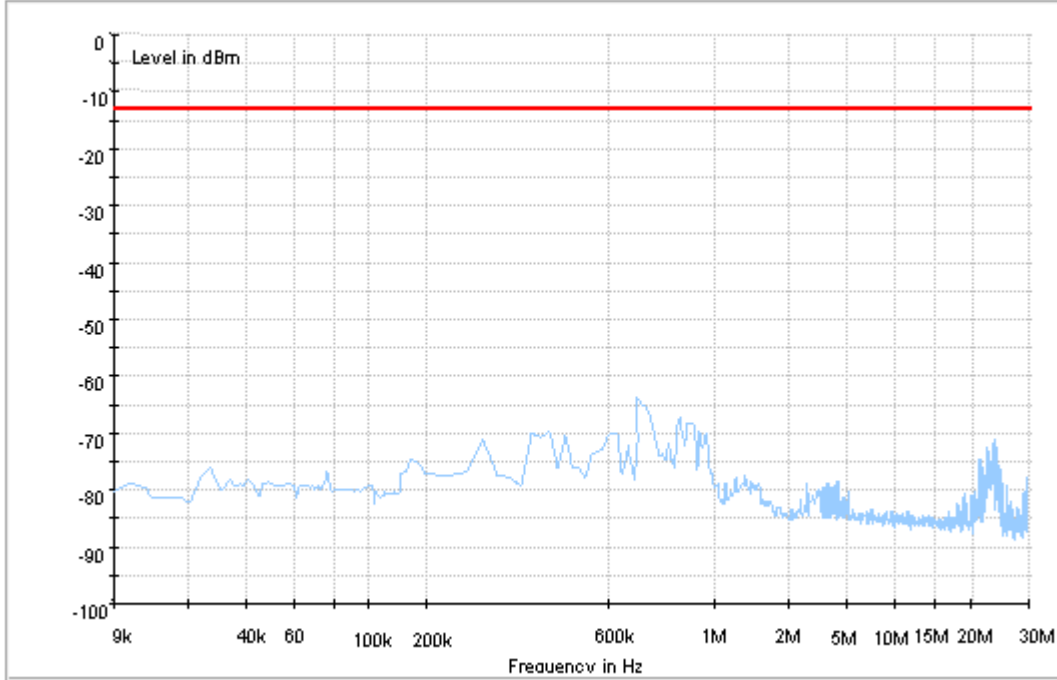

Copy of RSE-TX-DIRECTOR.ABOVE 1.5G.L

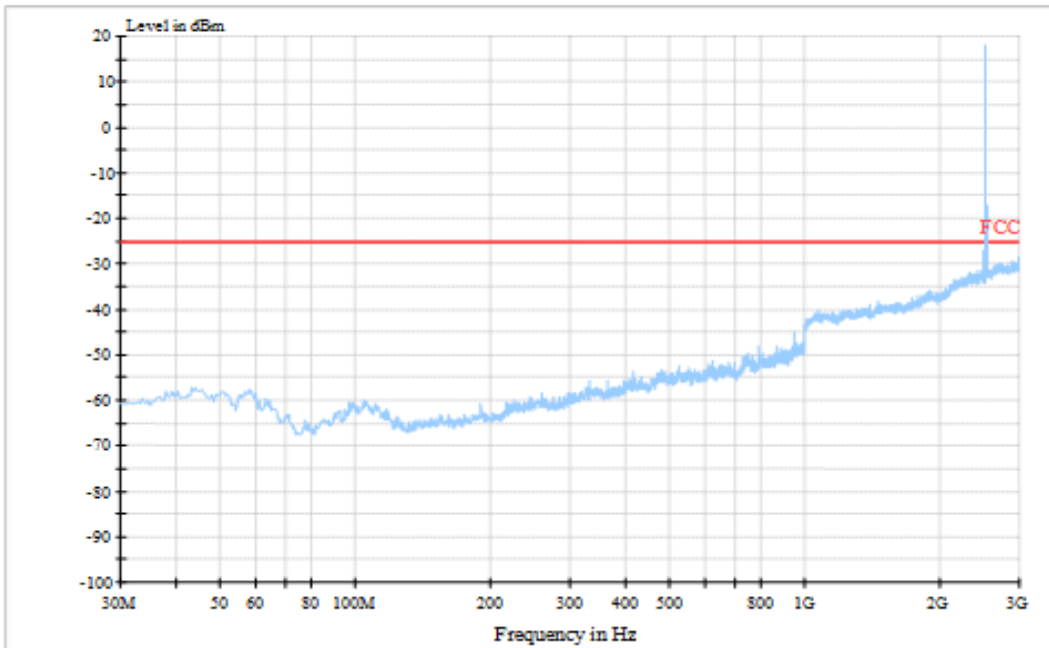

Copy of R.SE-TX-DIRECTOR.ABOVE 1.5G_H

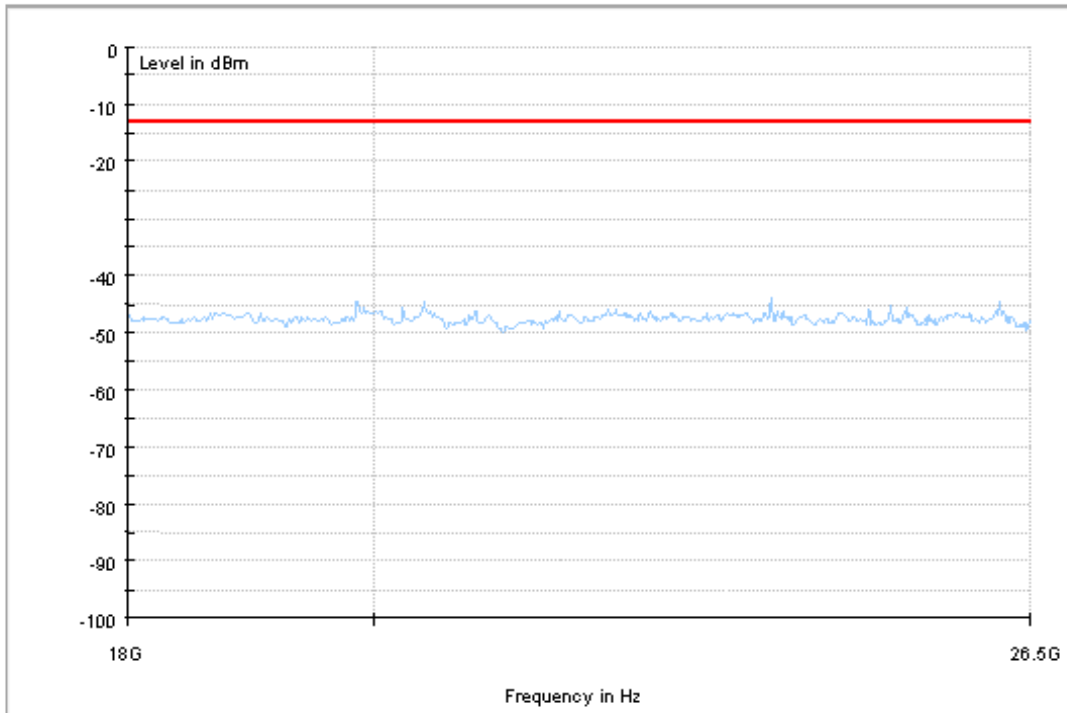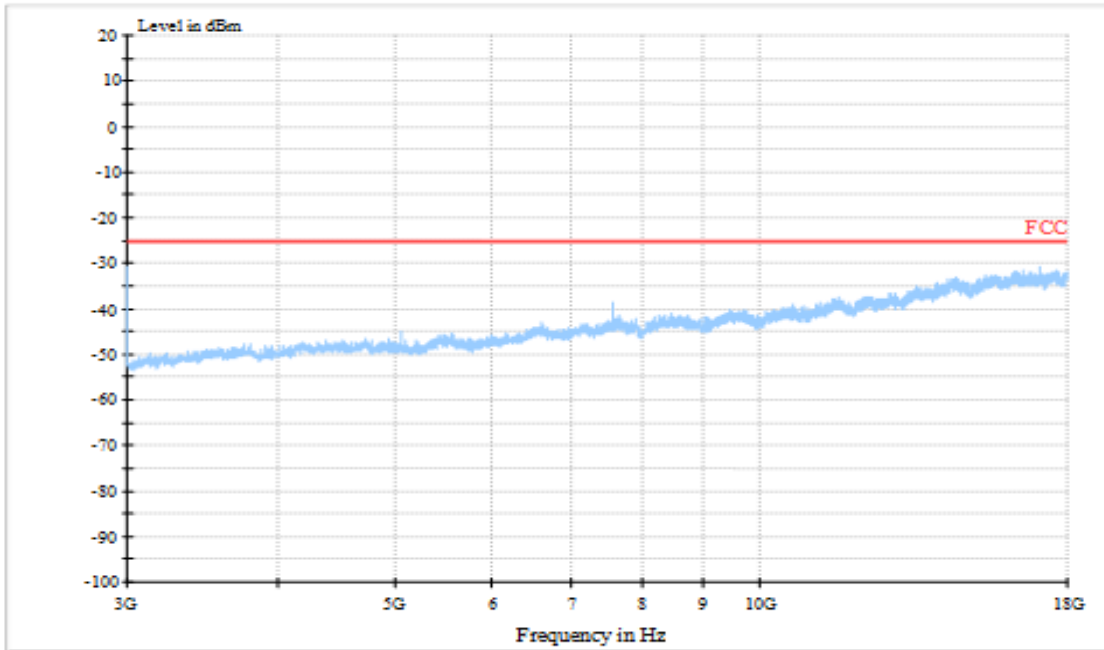



8Appendix_H: Frequency Stability

8.1 For LTE

VOID

END