







P_{uw}:



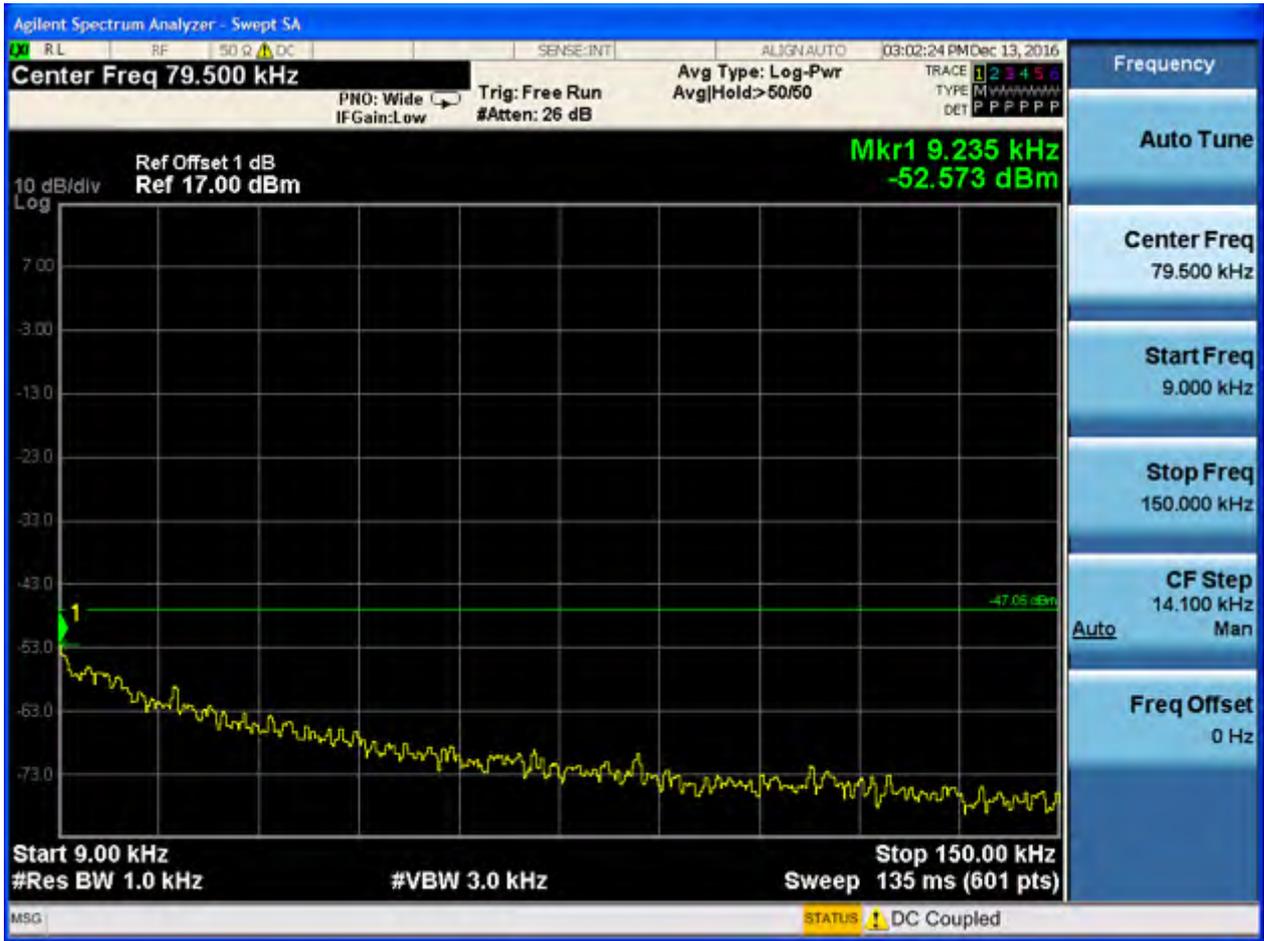

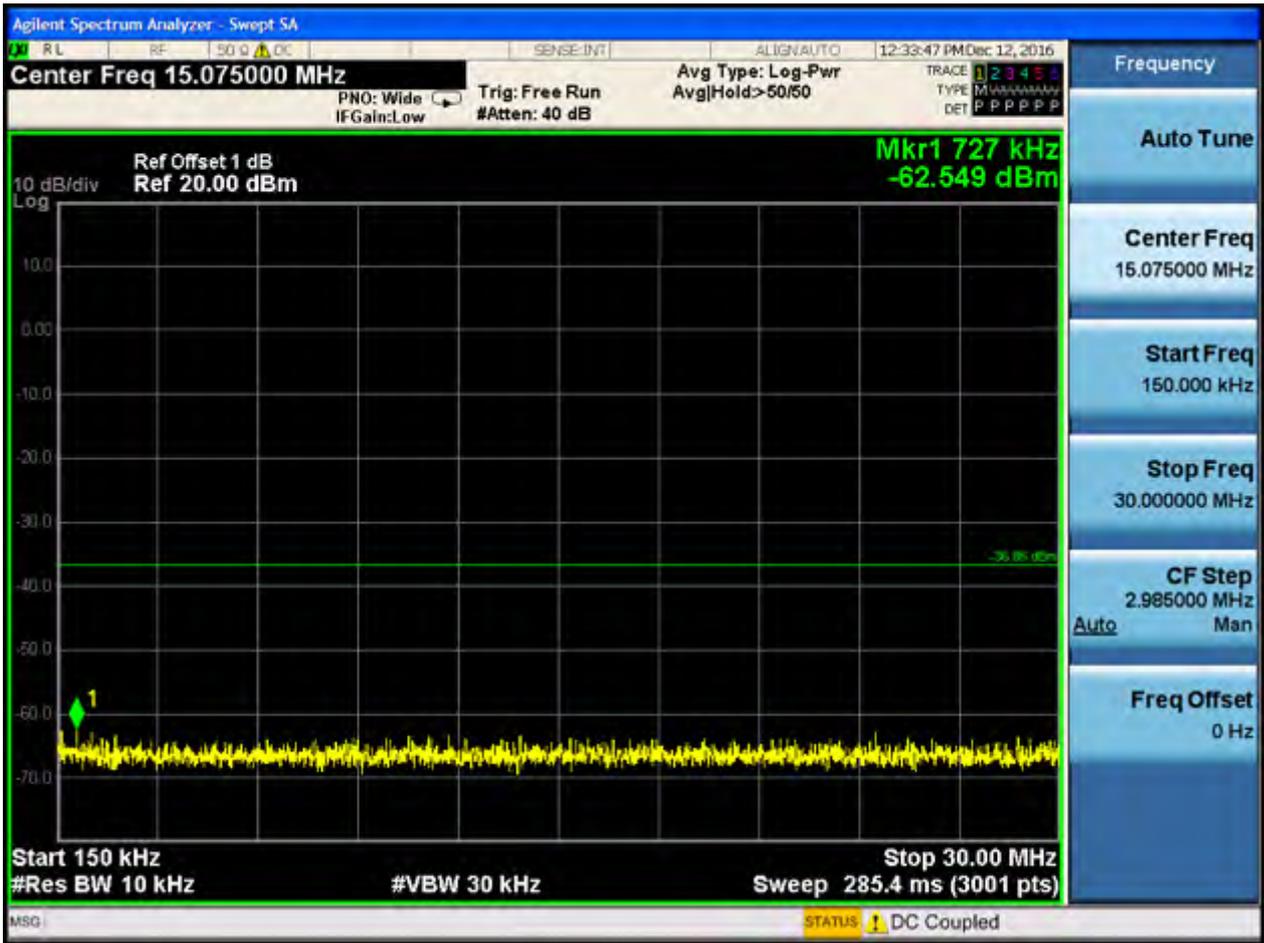

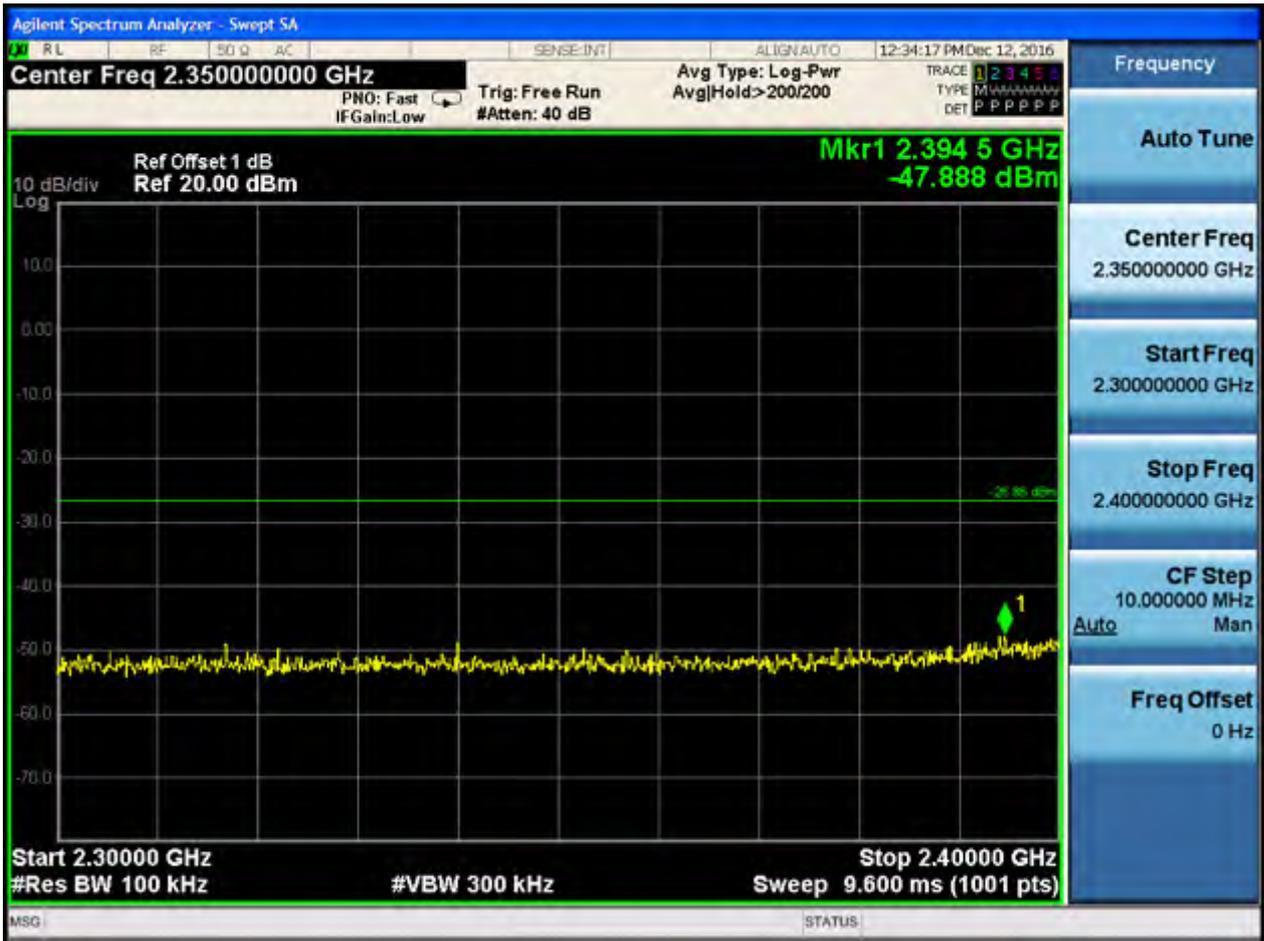


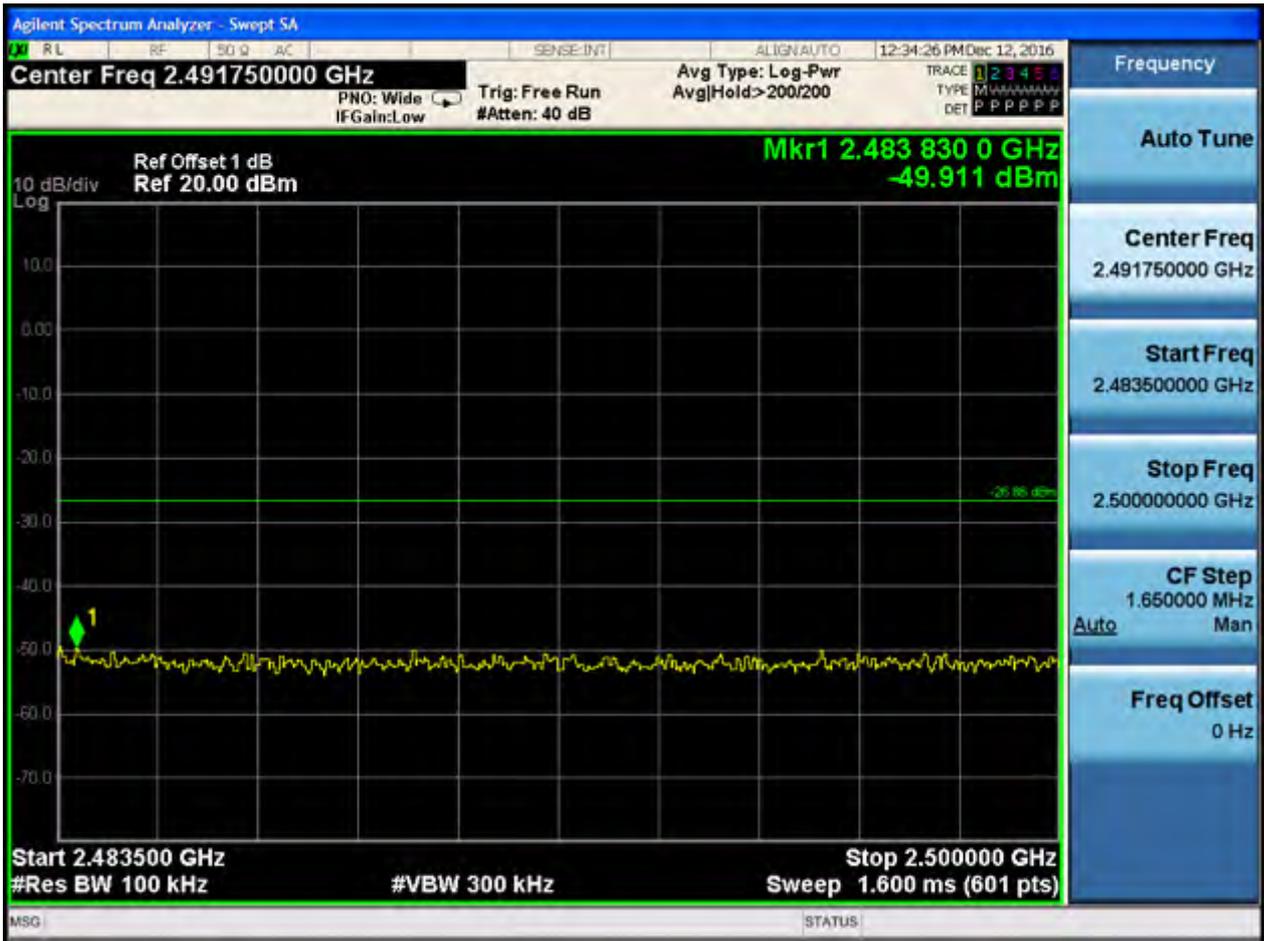




2.16 11N20_M@Ant 2


Pref:

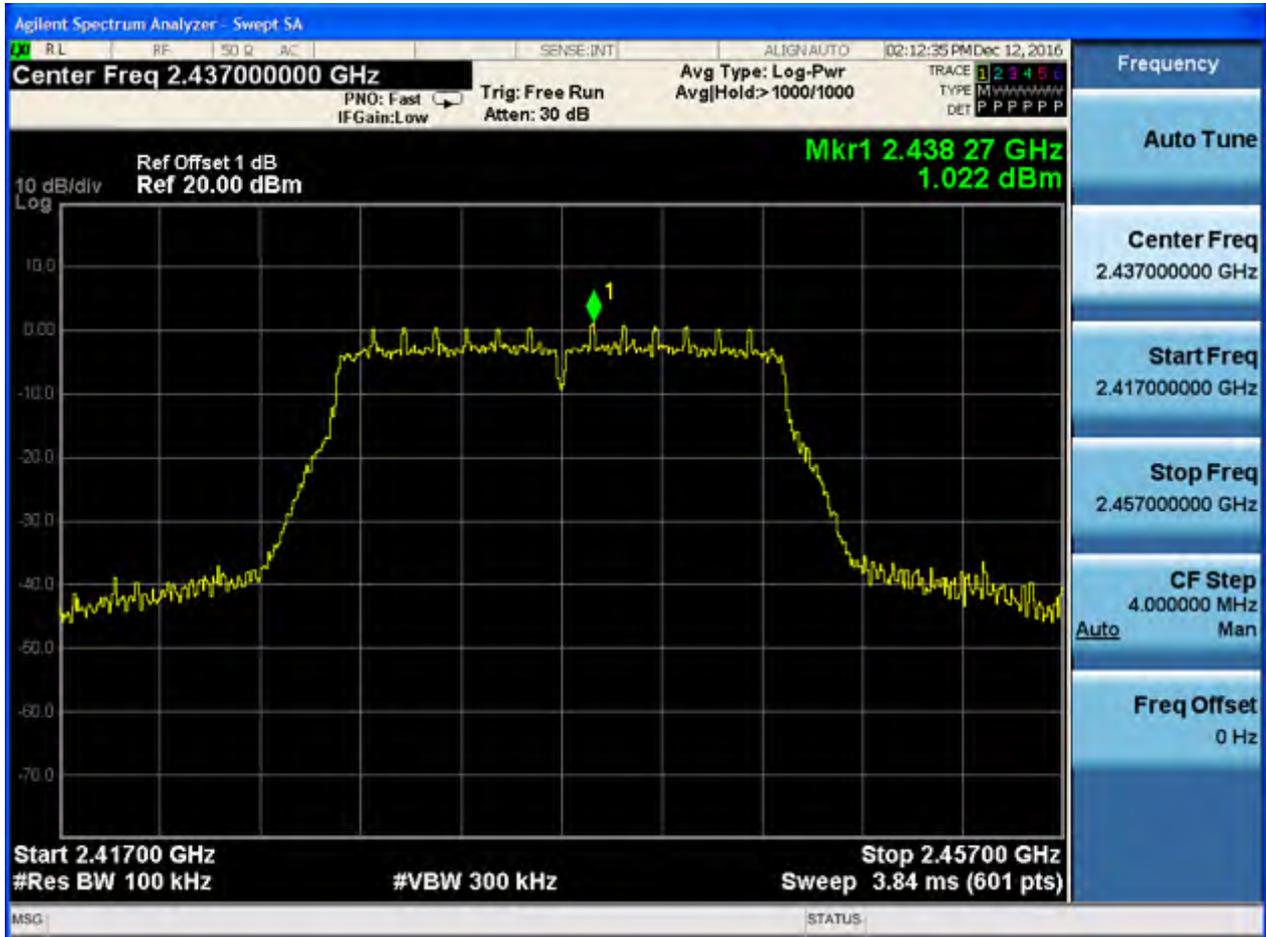






Puw:

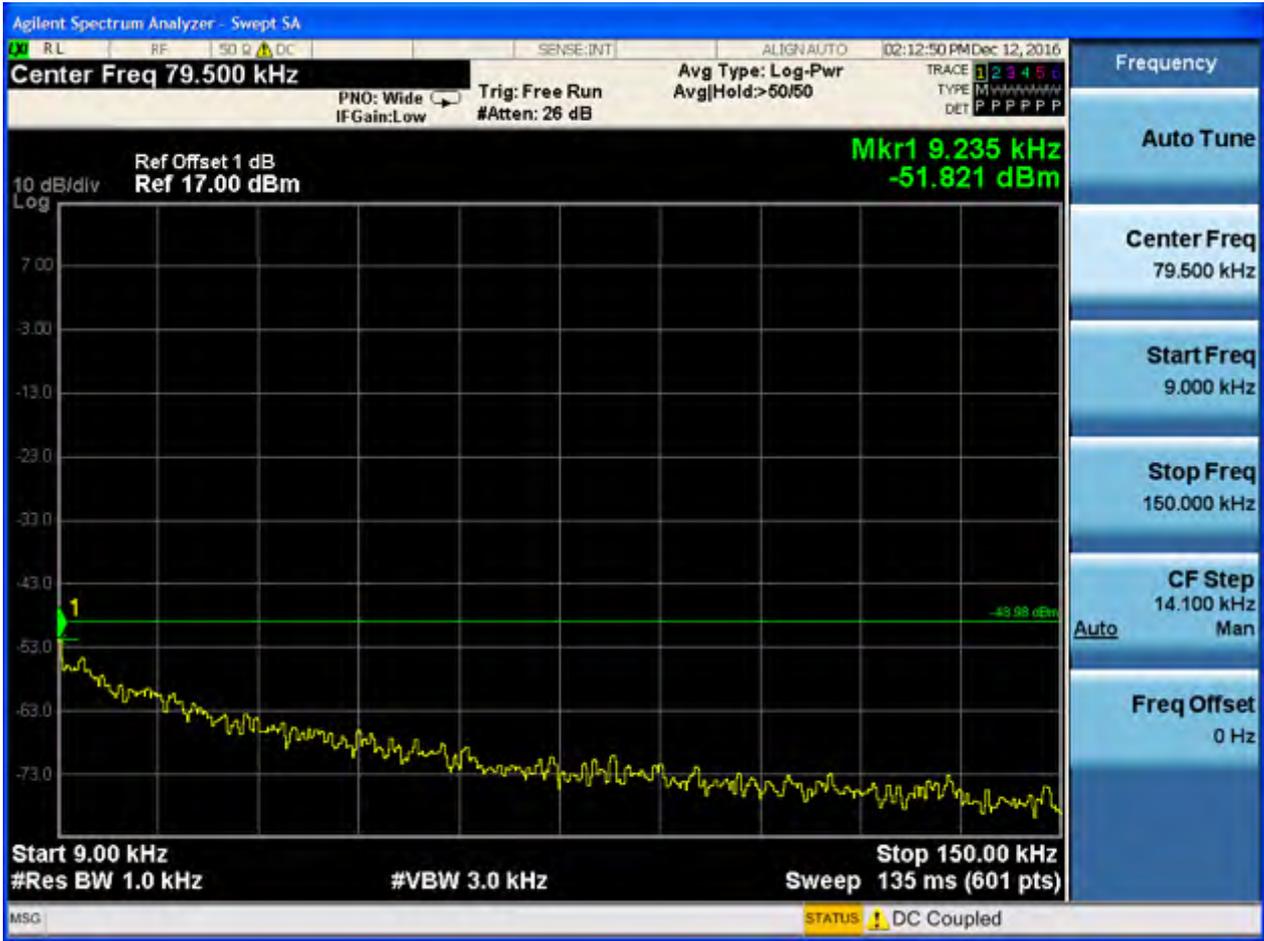

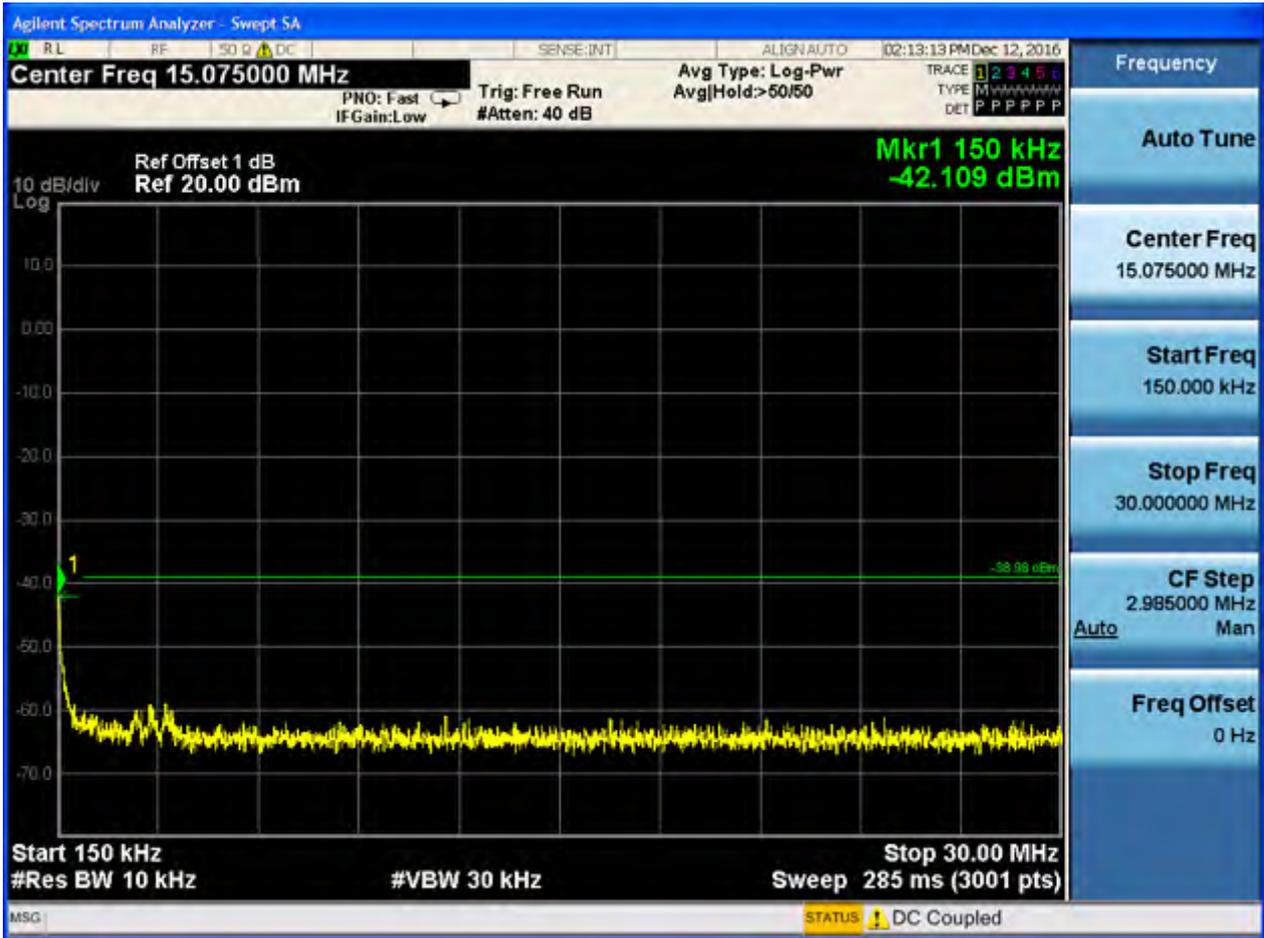

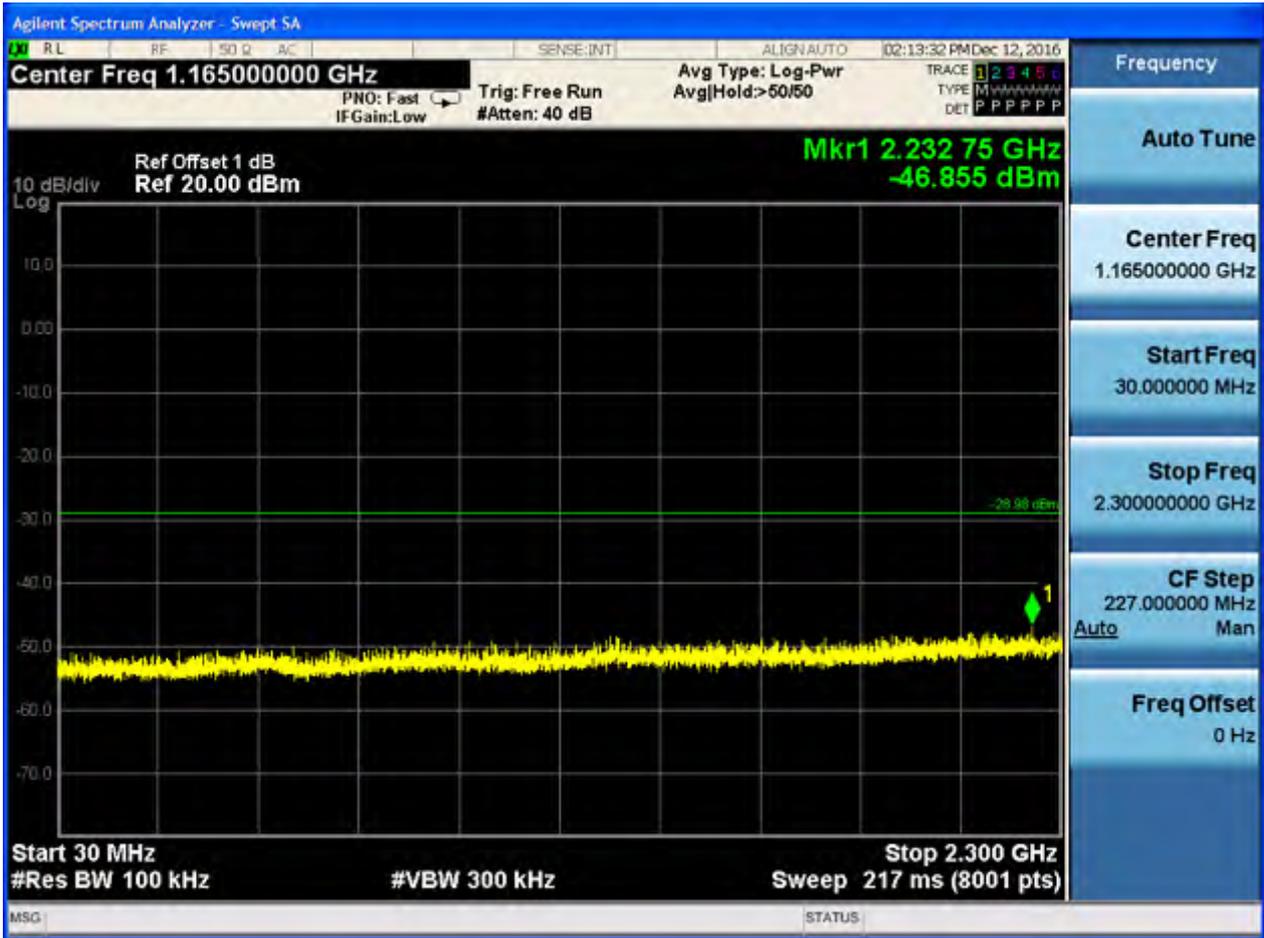

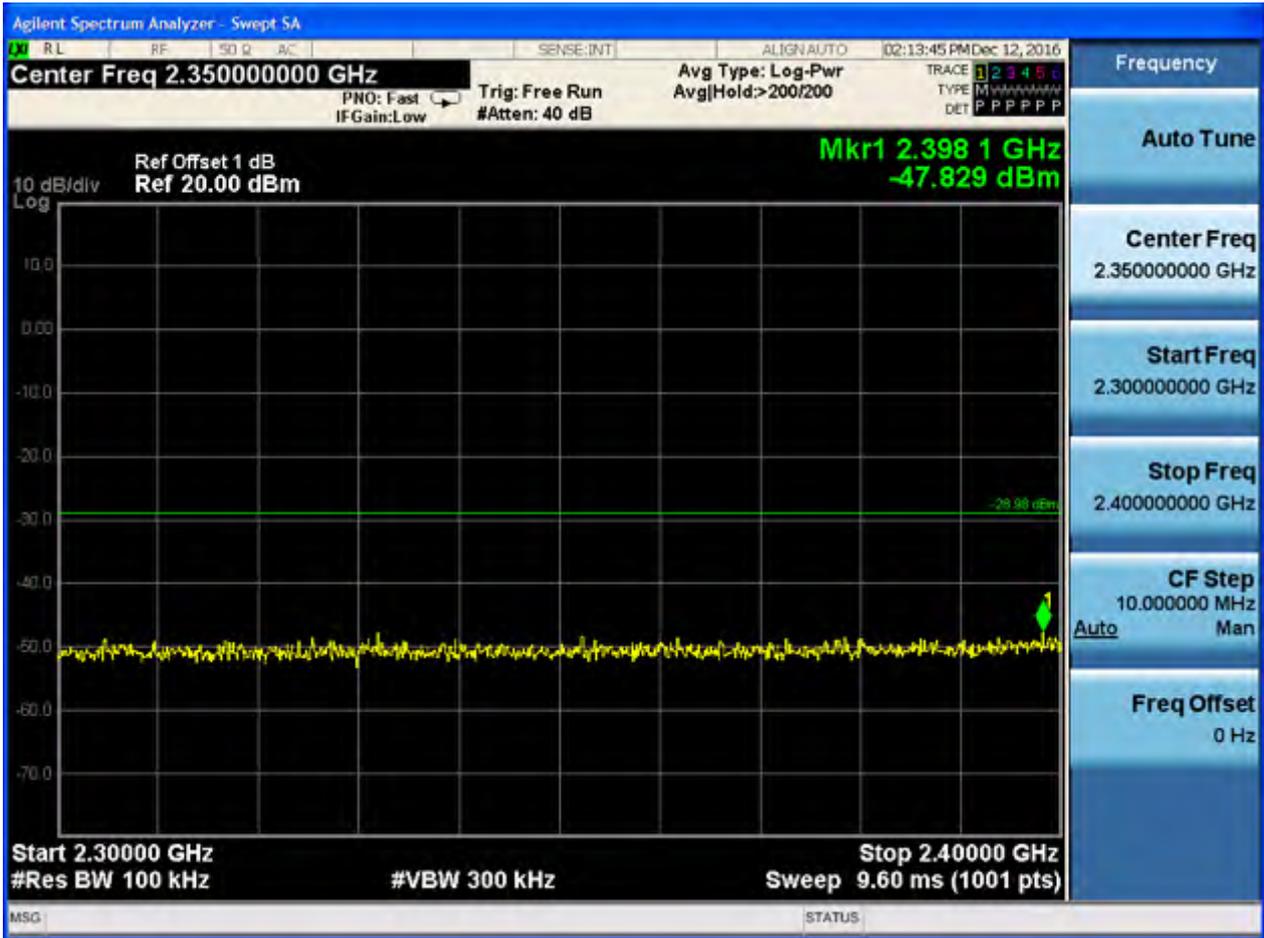

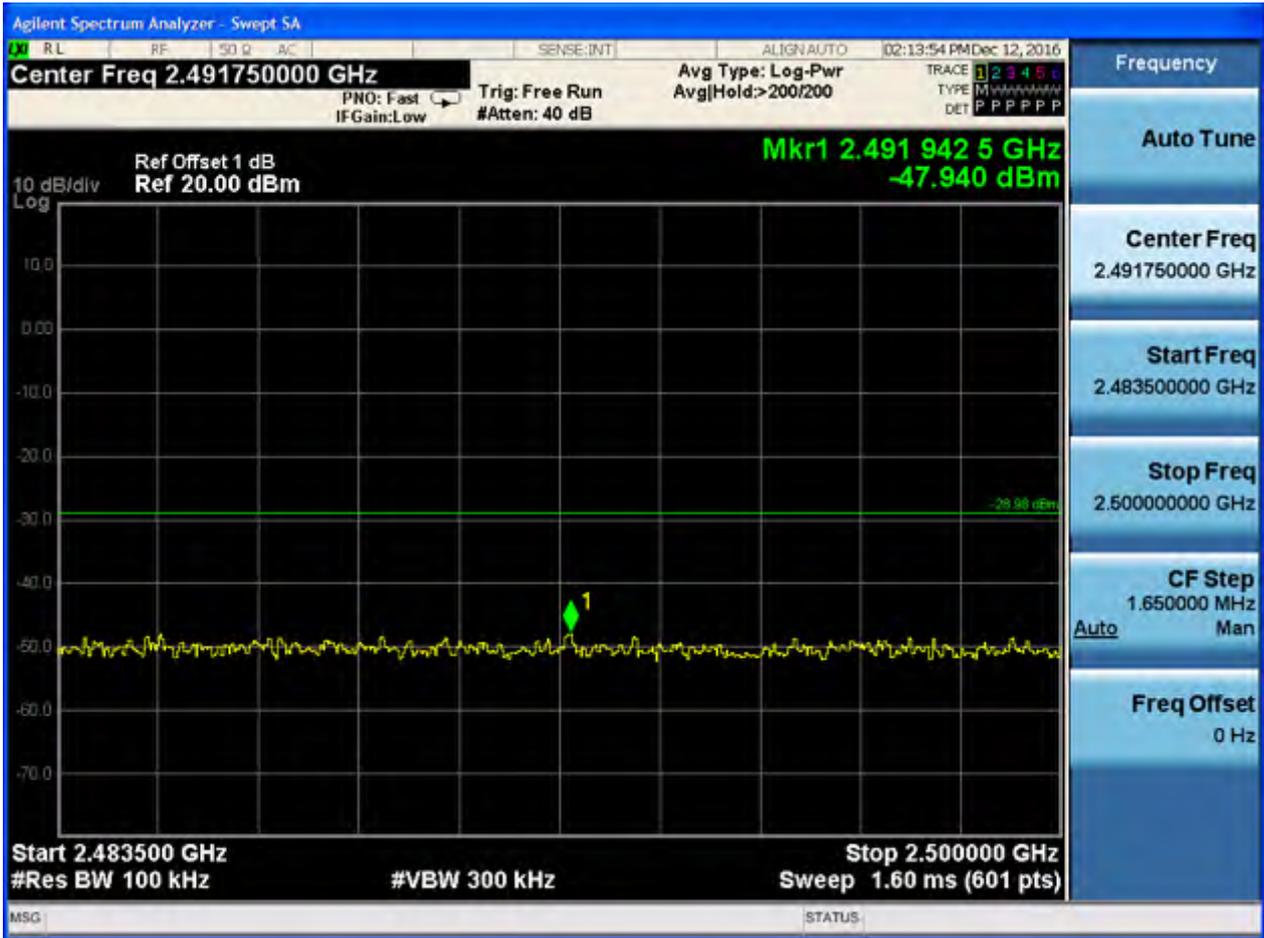






2.17 11N20_H@Ant 1


Pref:

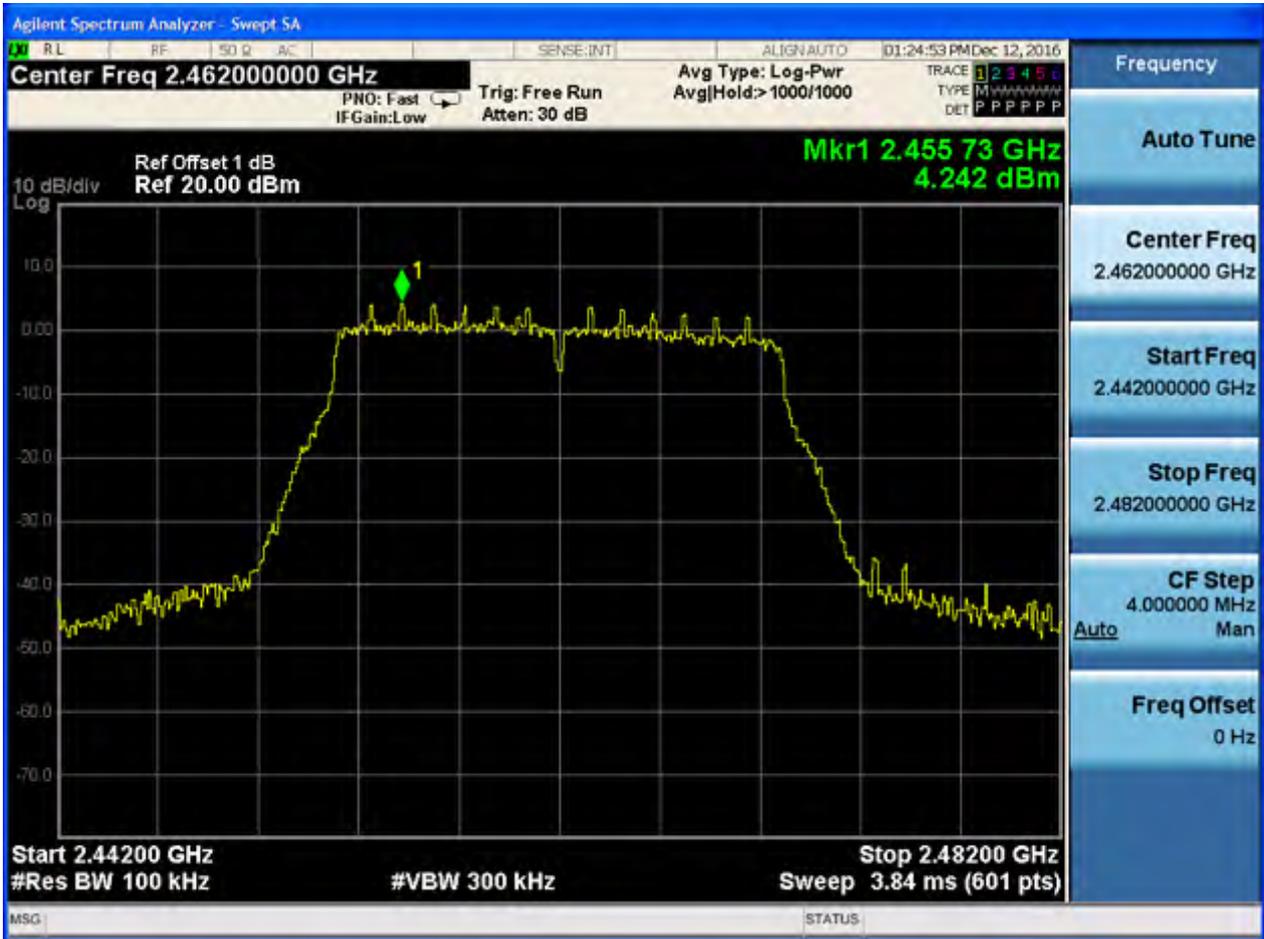






P_uw:



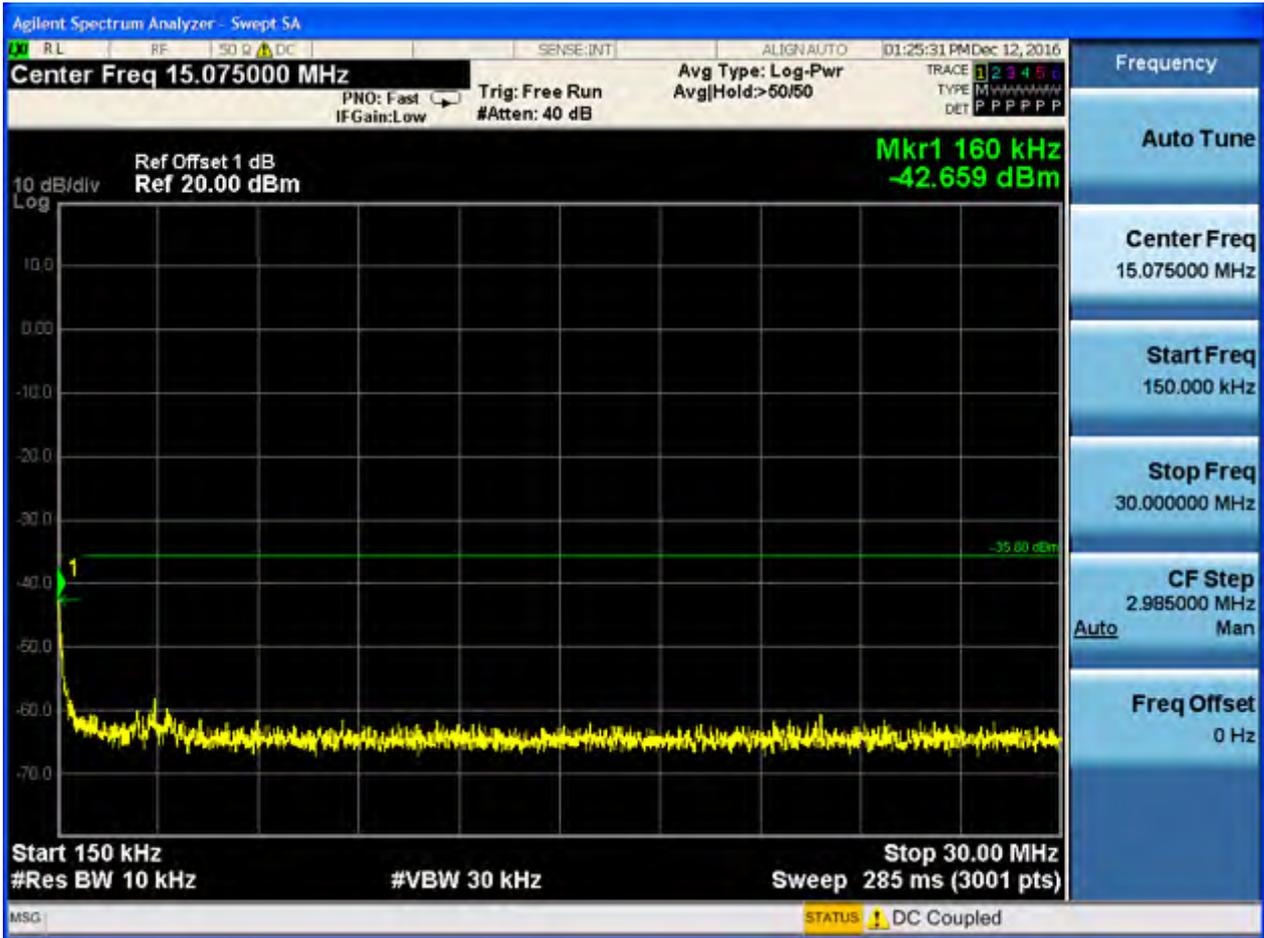

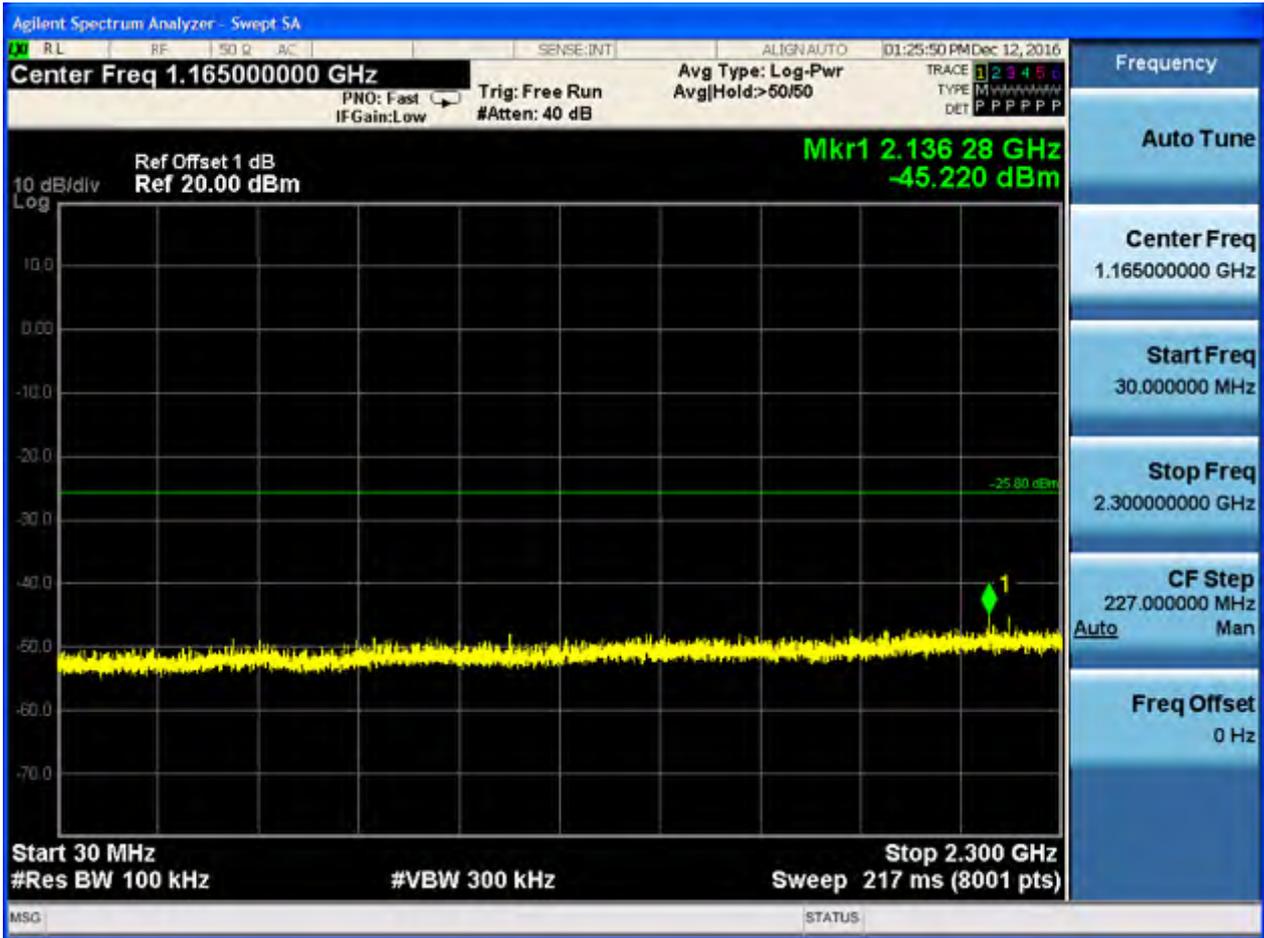

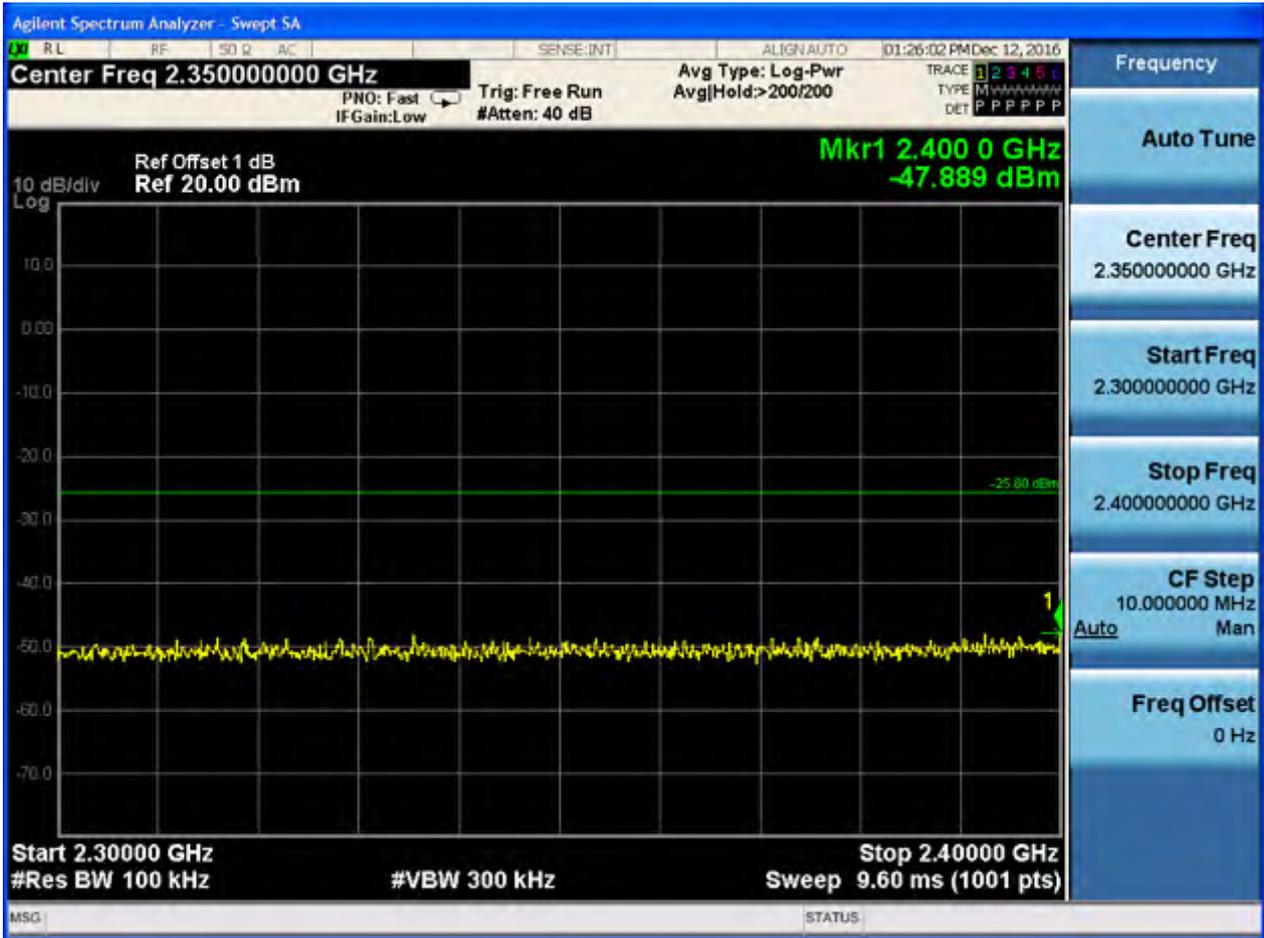


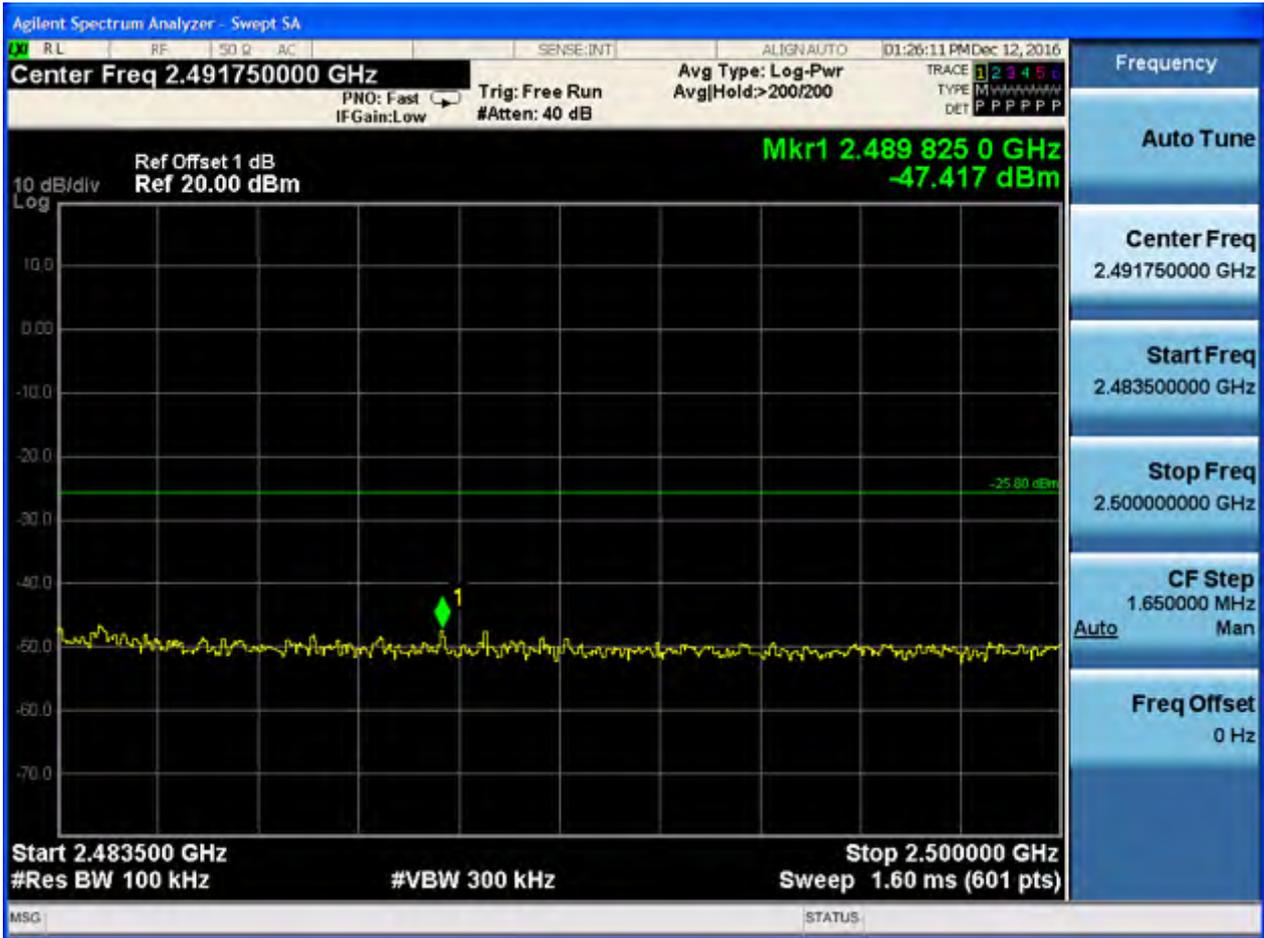



2.18 11N20_H@Ant 2


Pref:

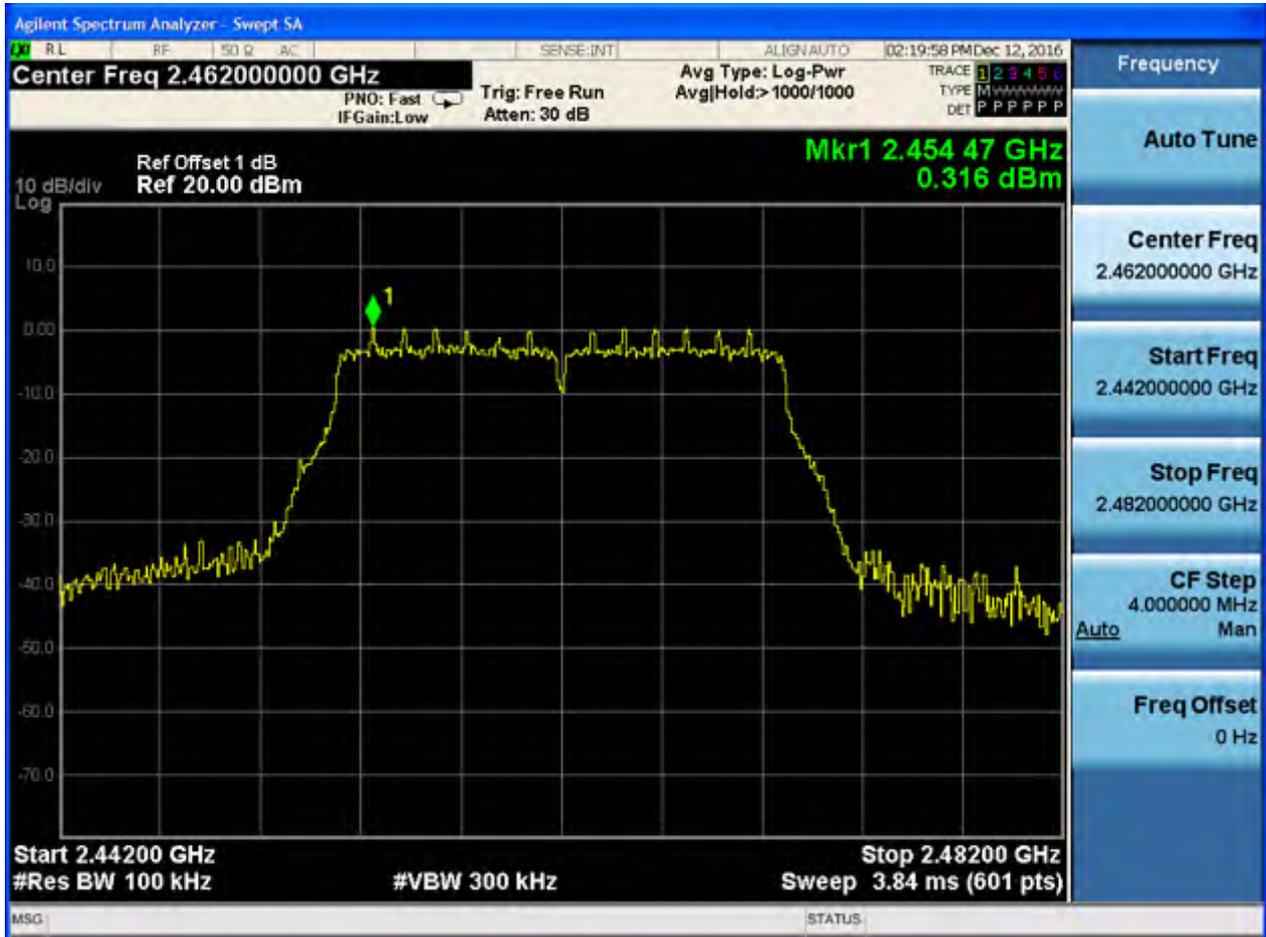






Puw:



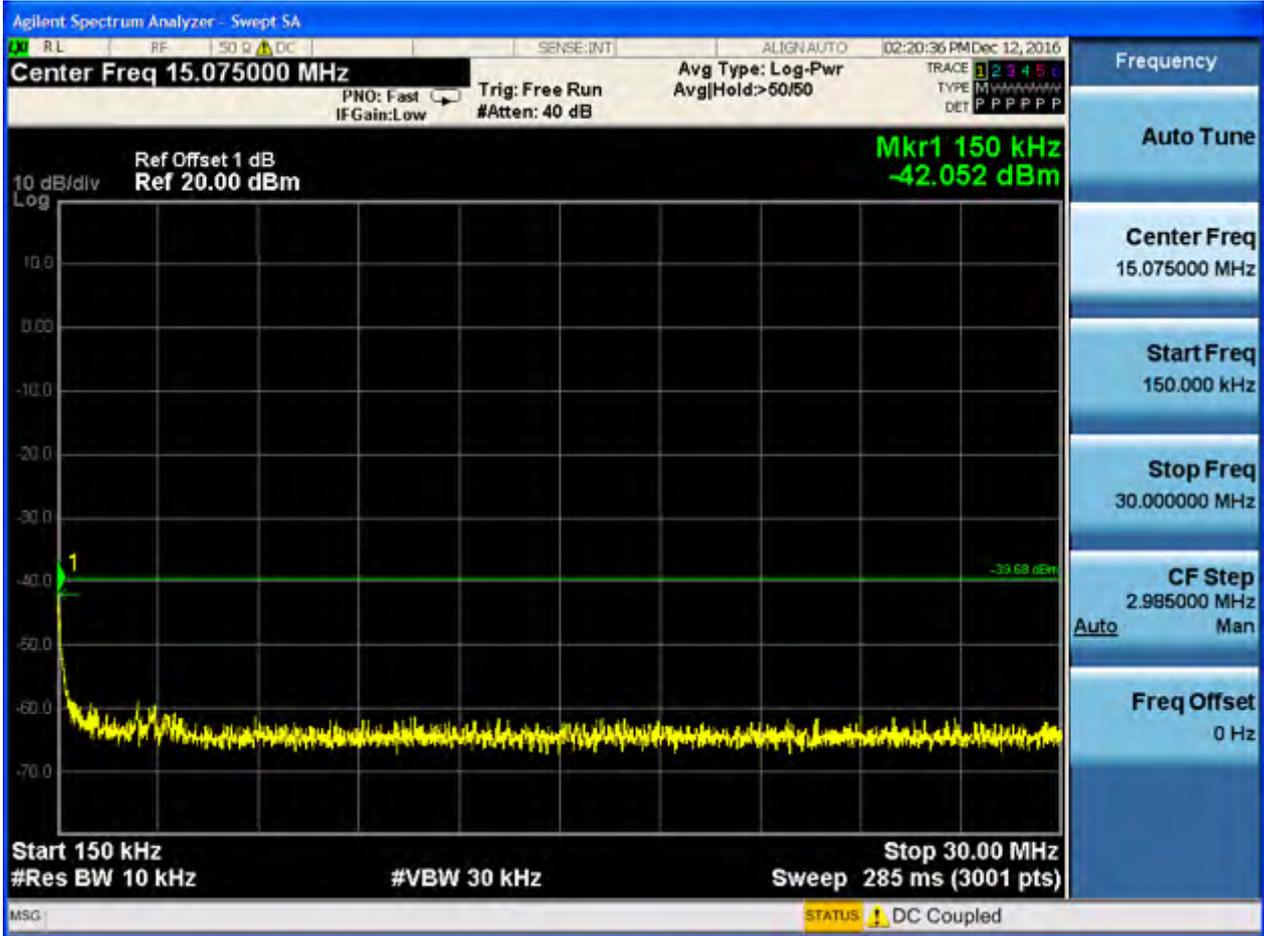

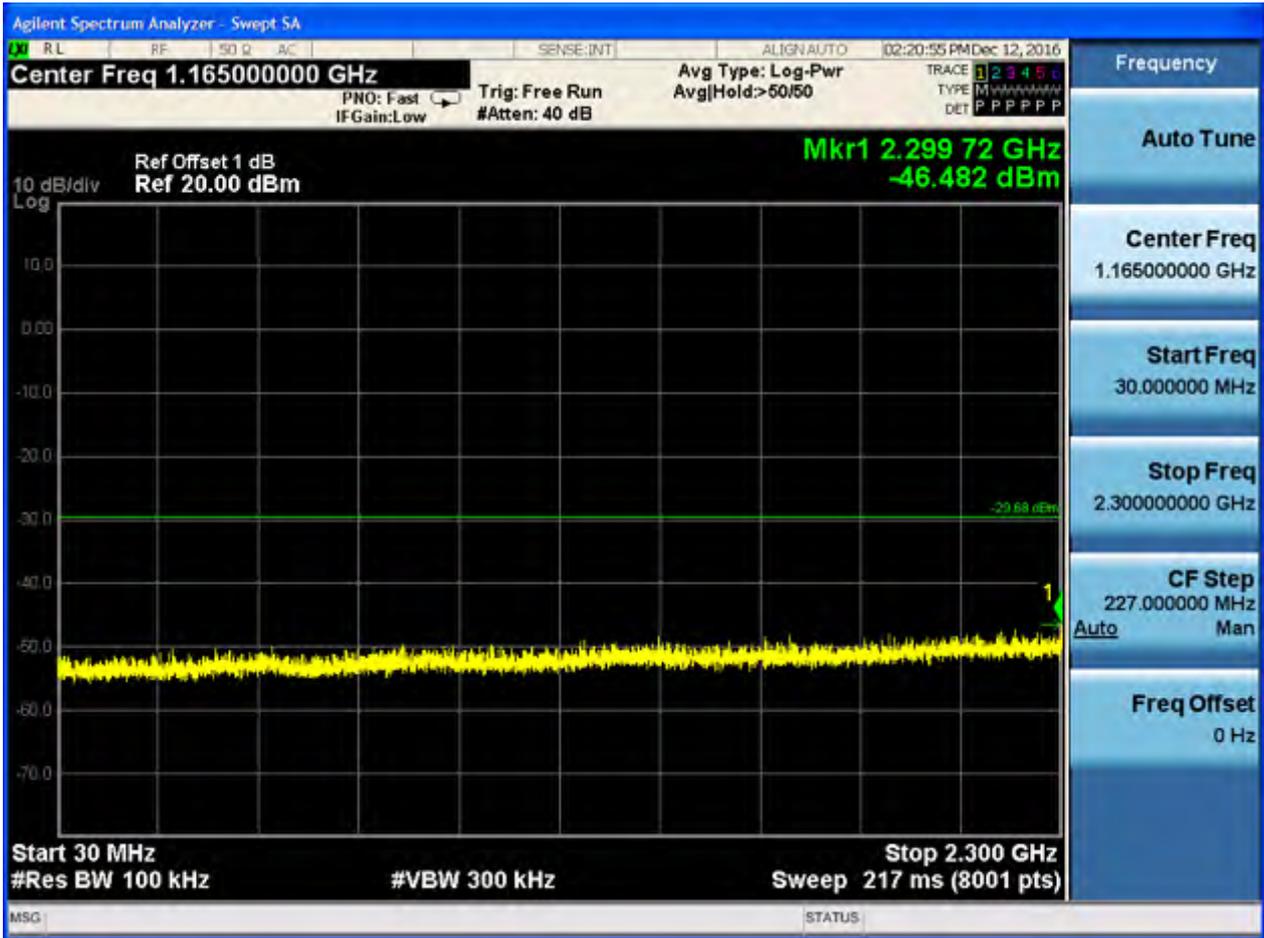

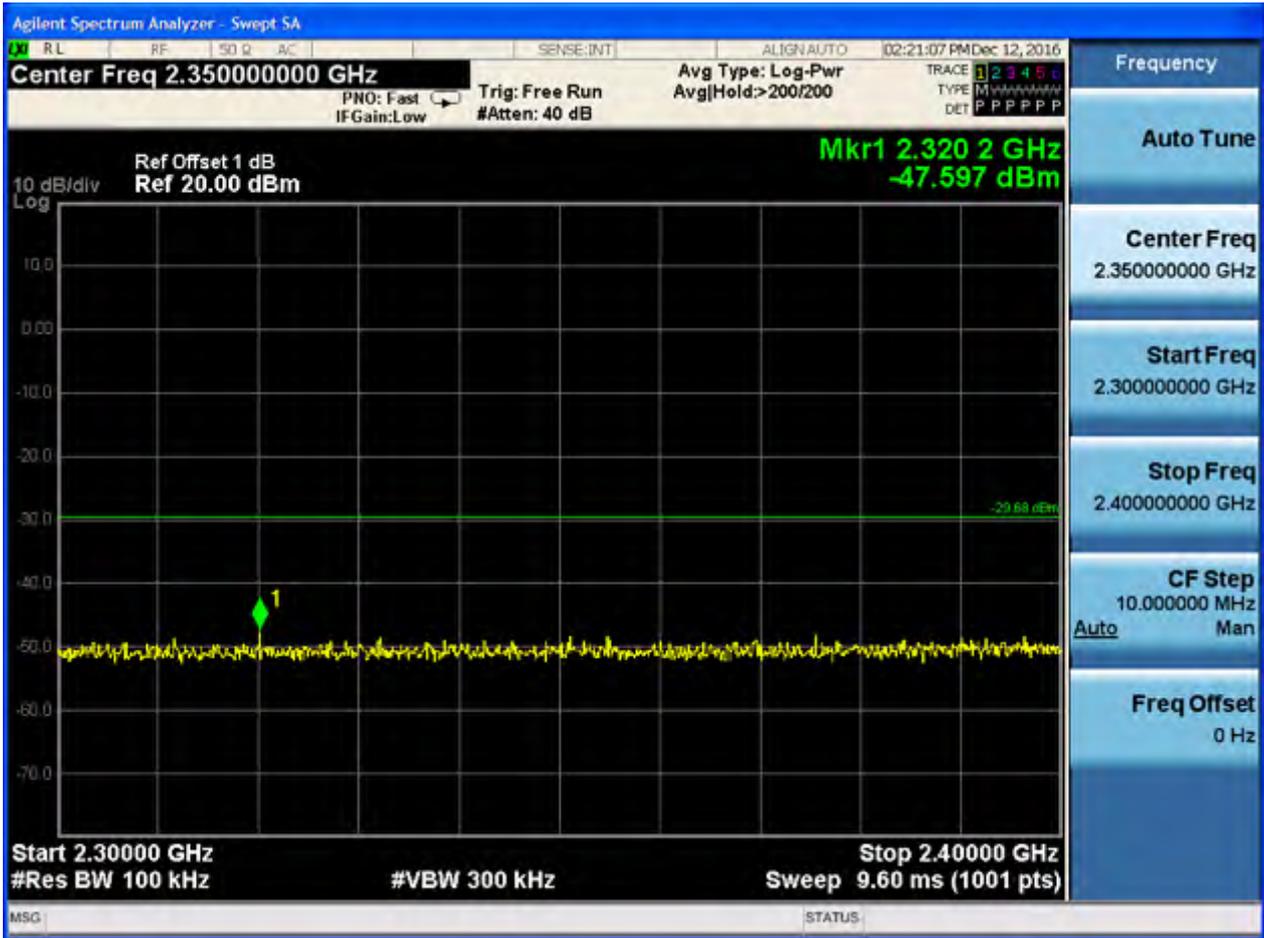

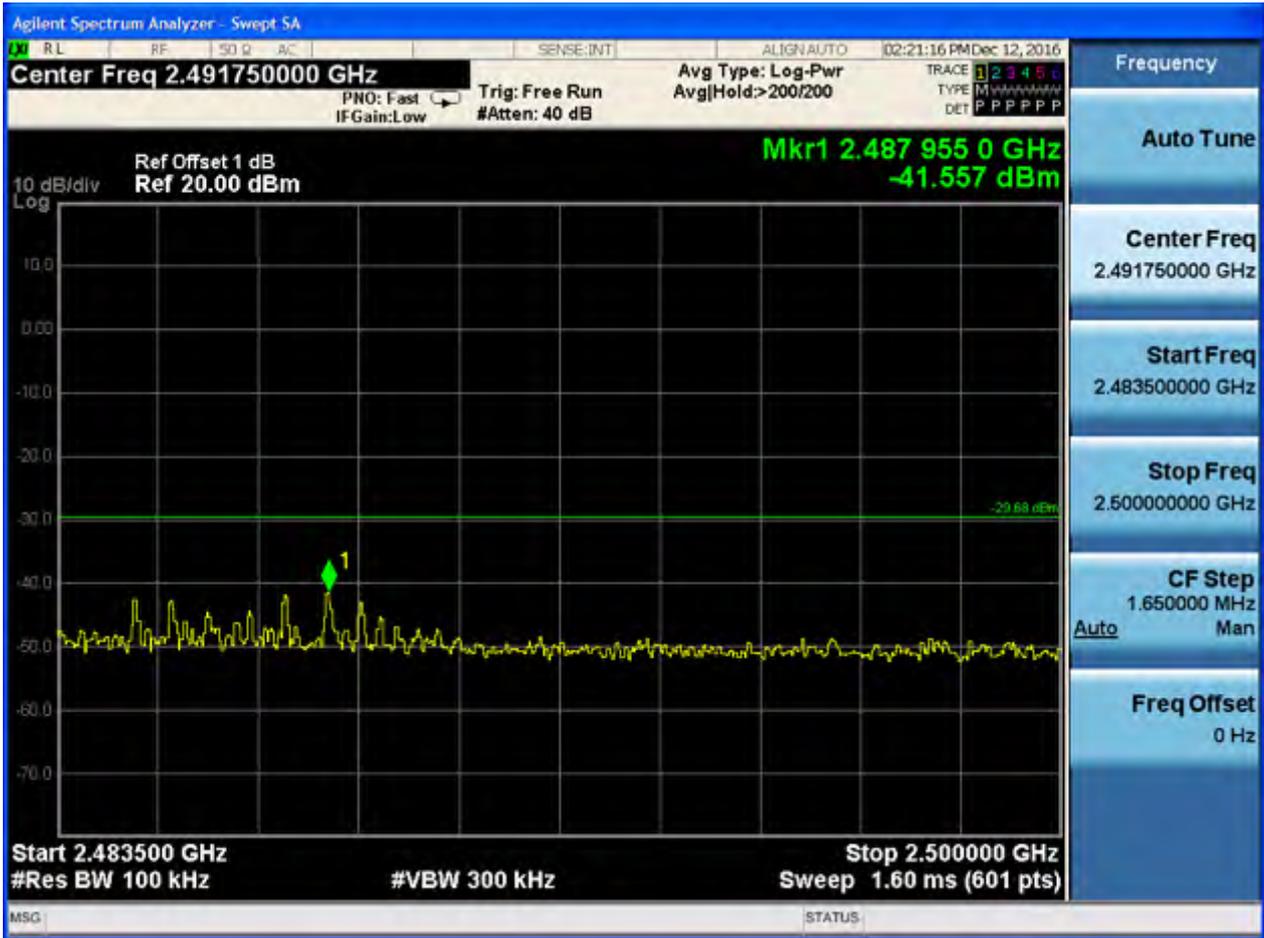






2.19 11N20m_L@Ant 2


Pref:

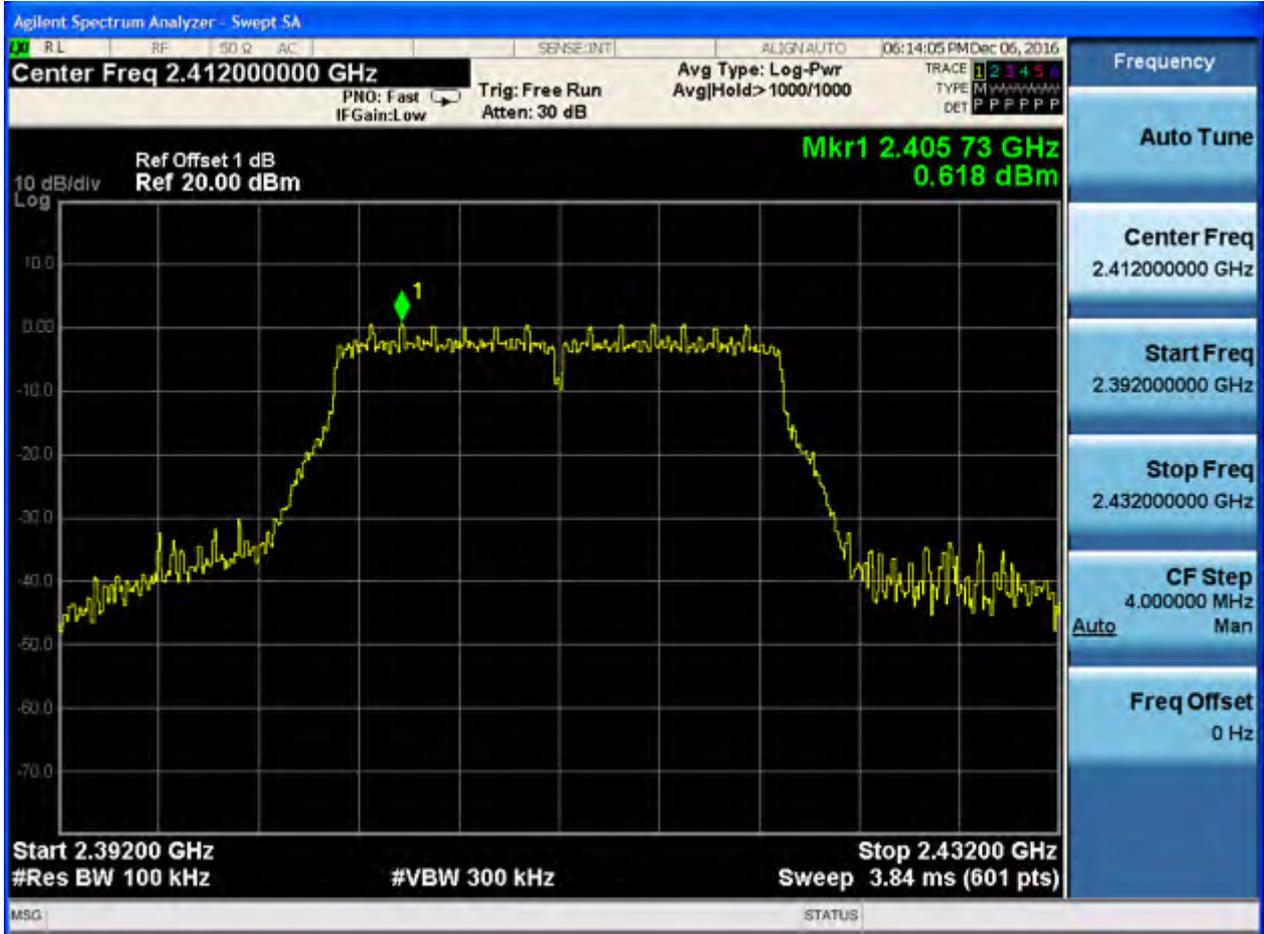





P_{uw}:



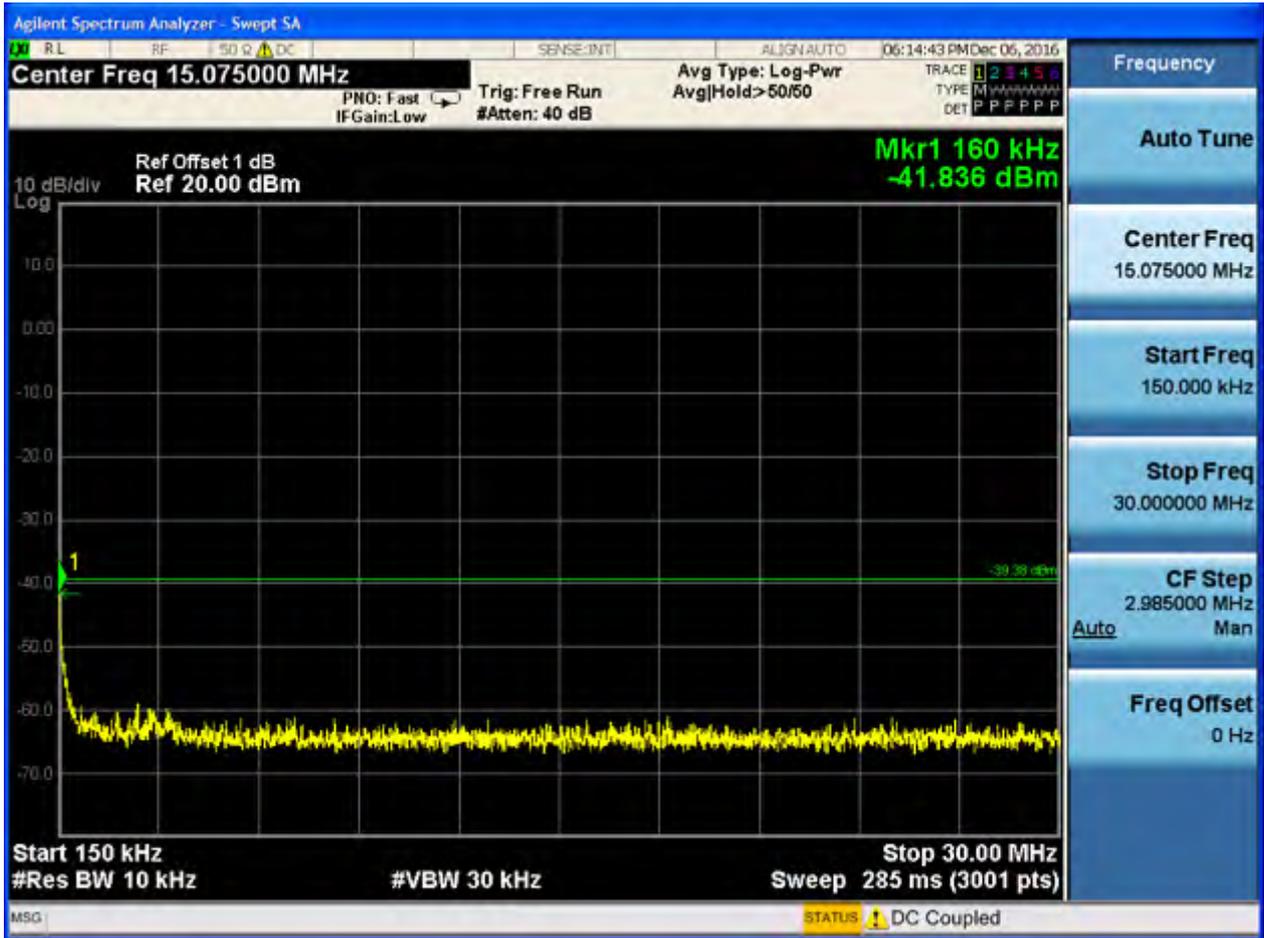

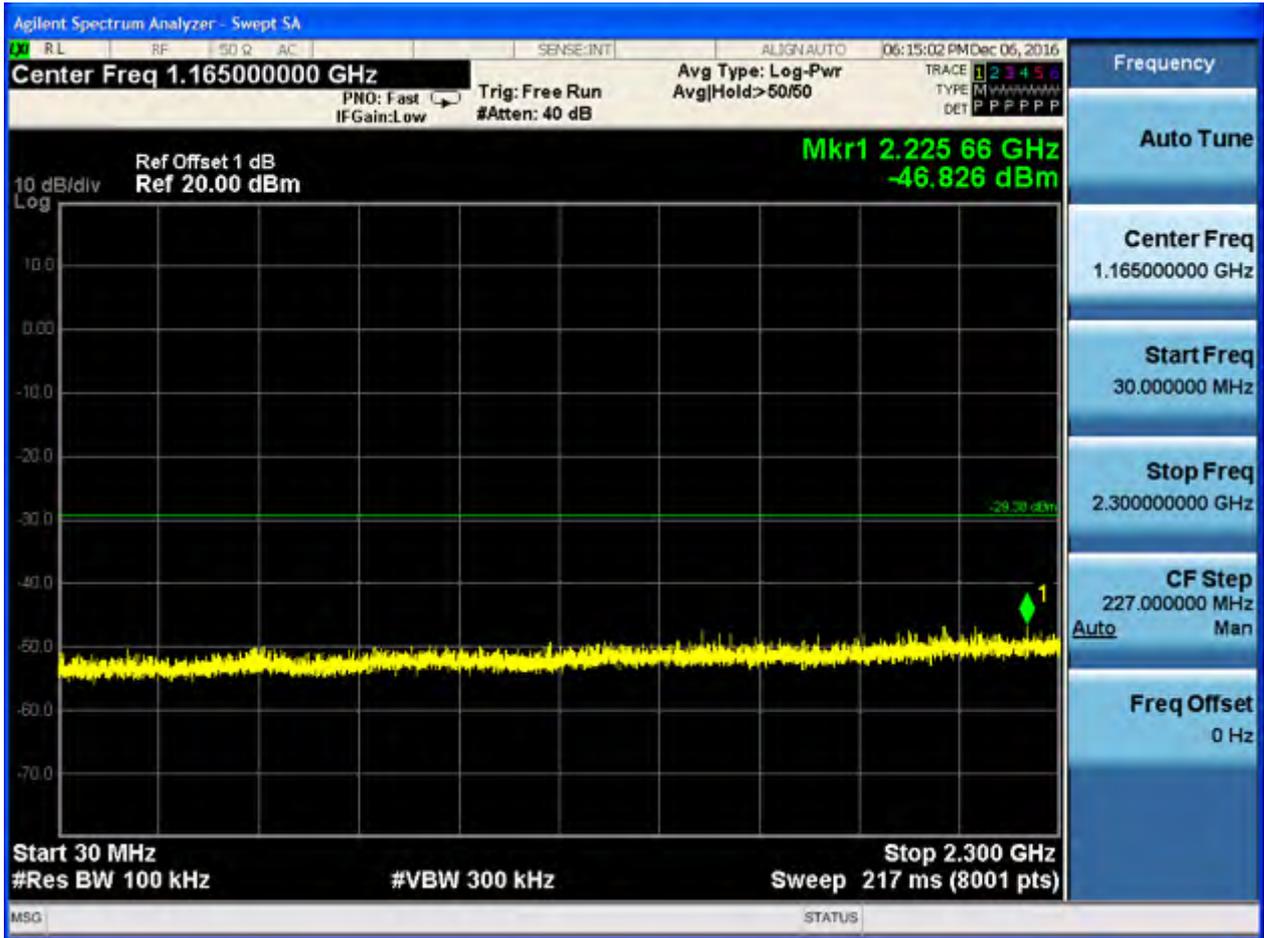




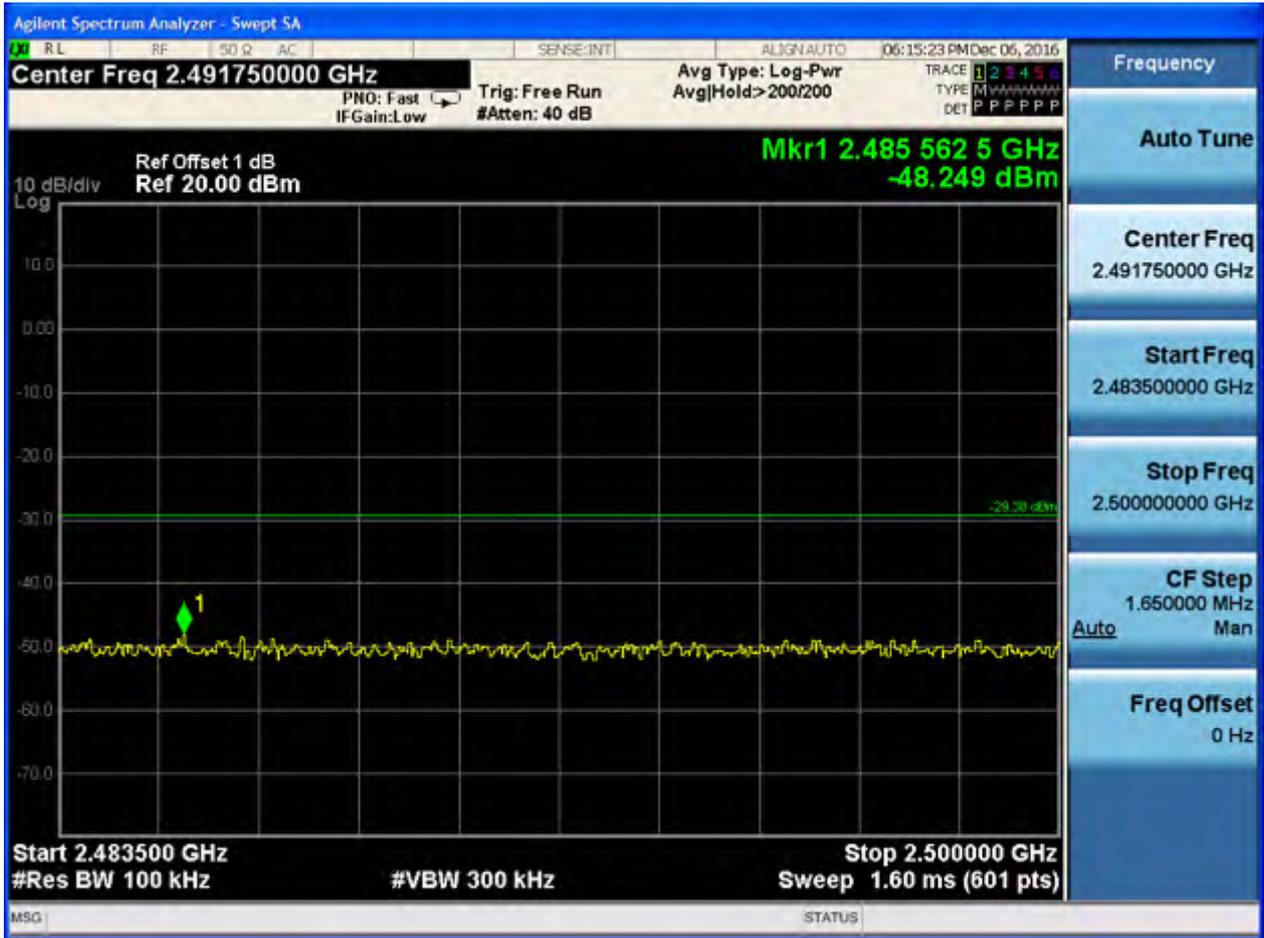








Puw:

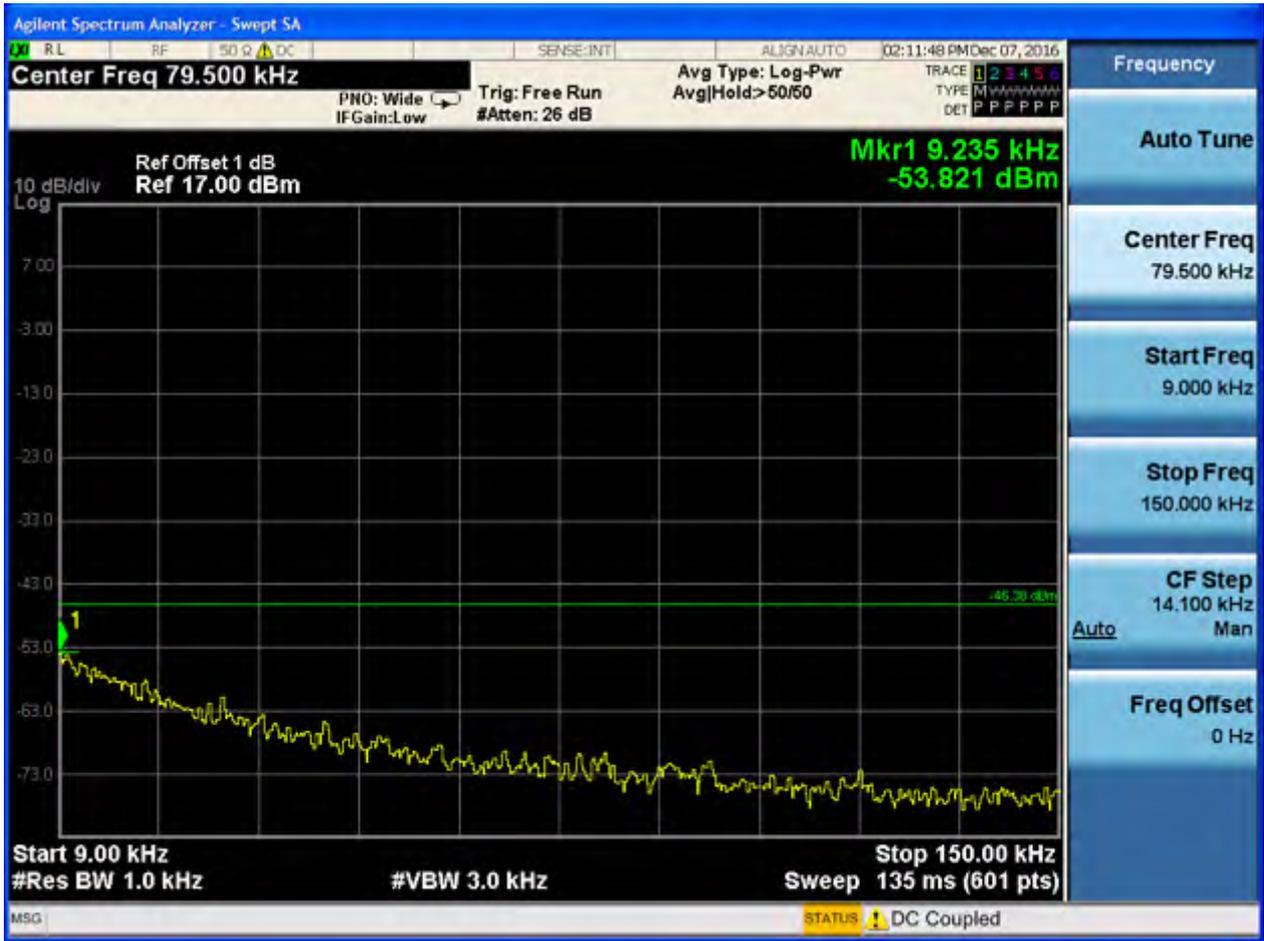


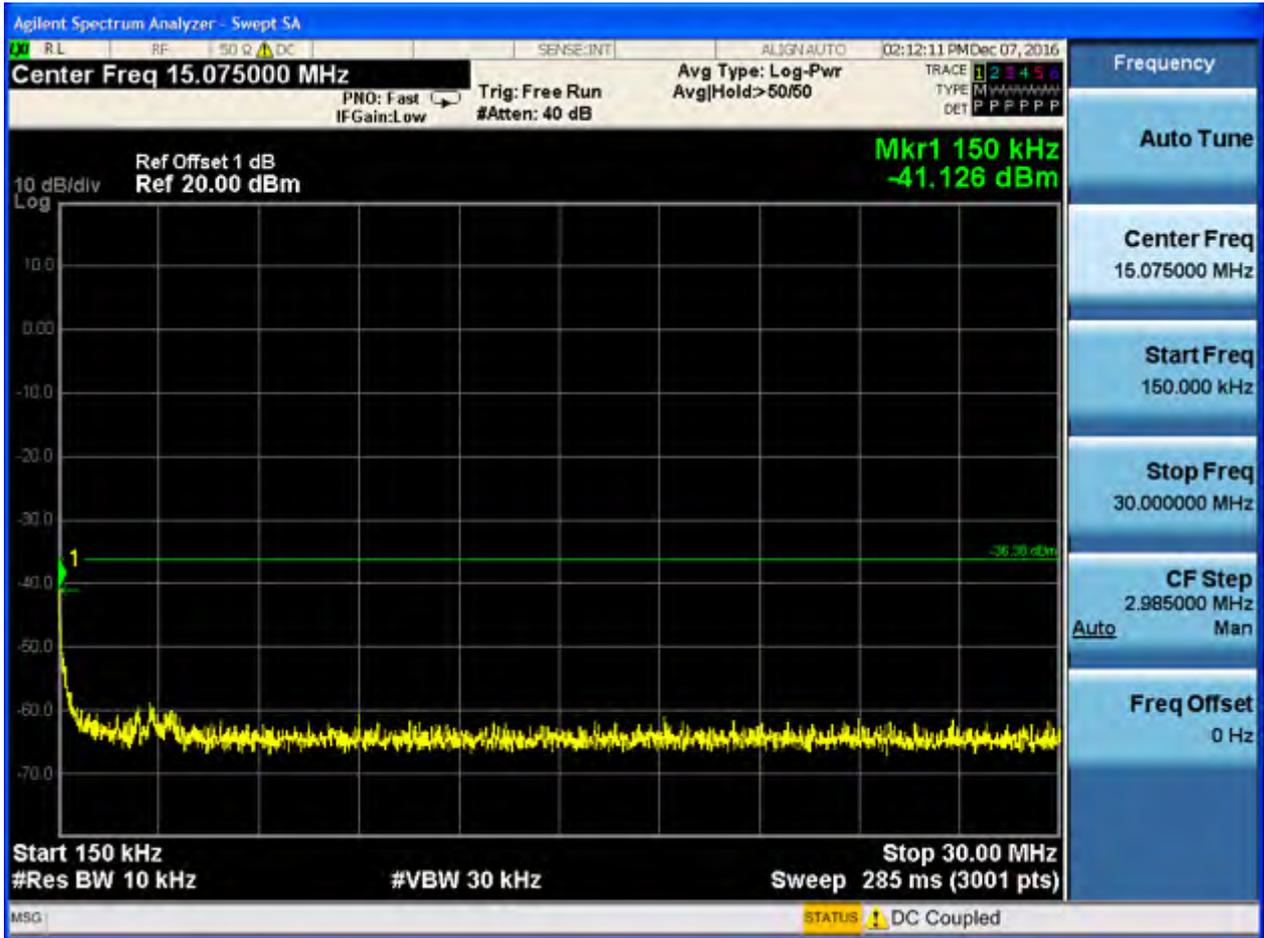

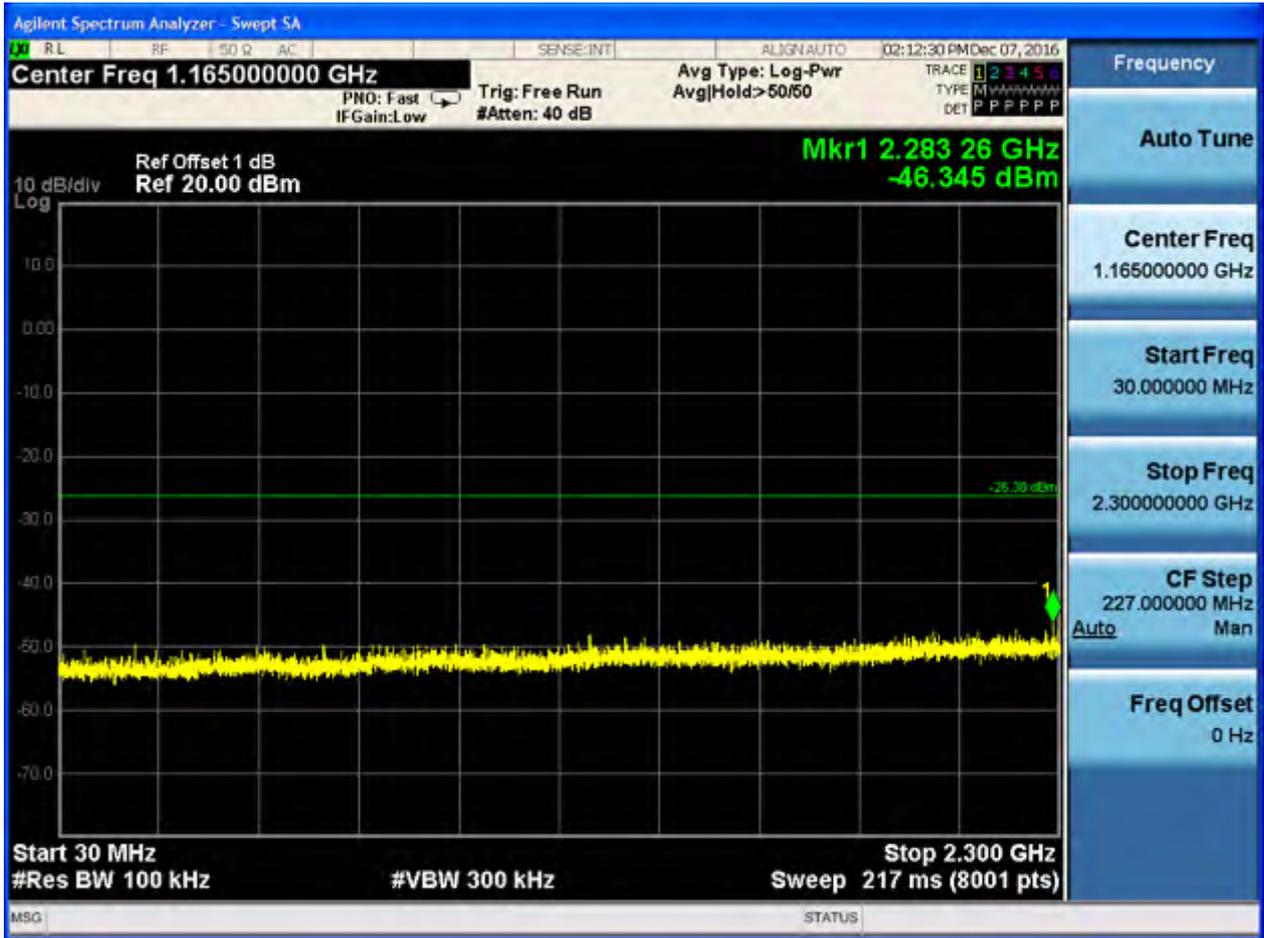



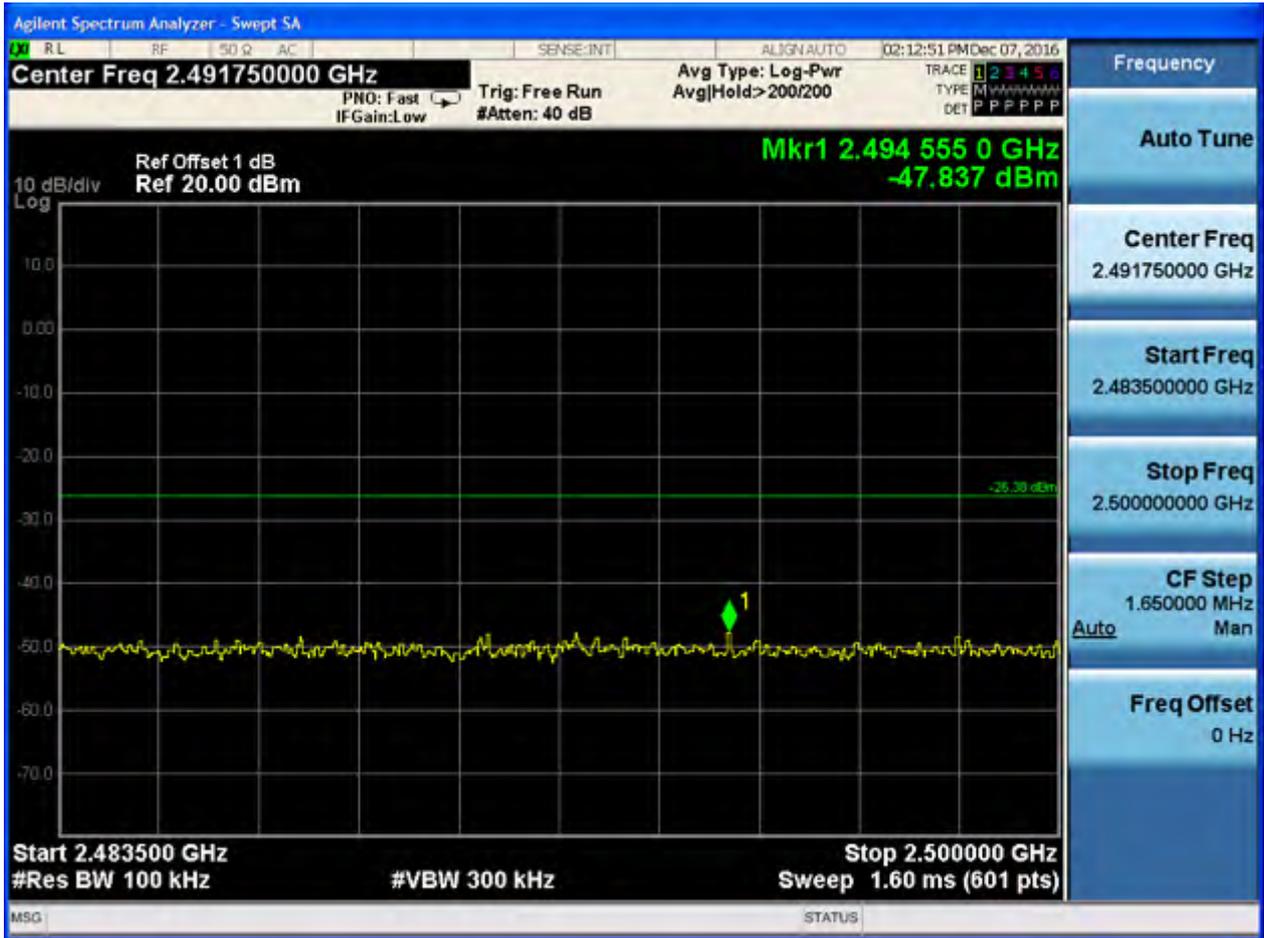

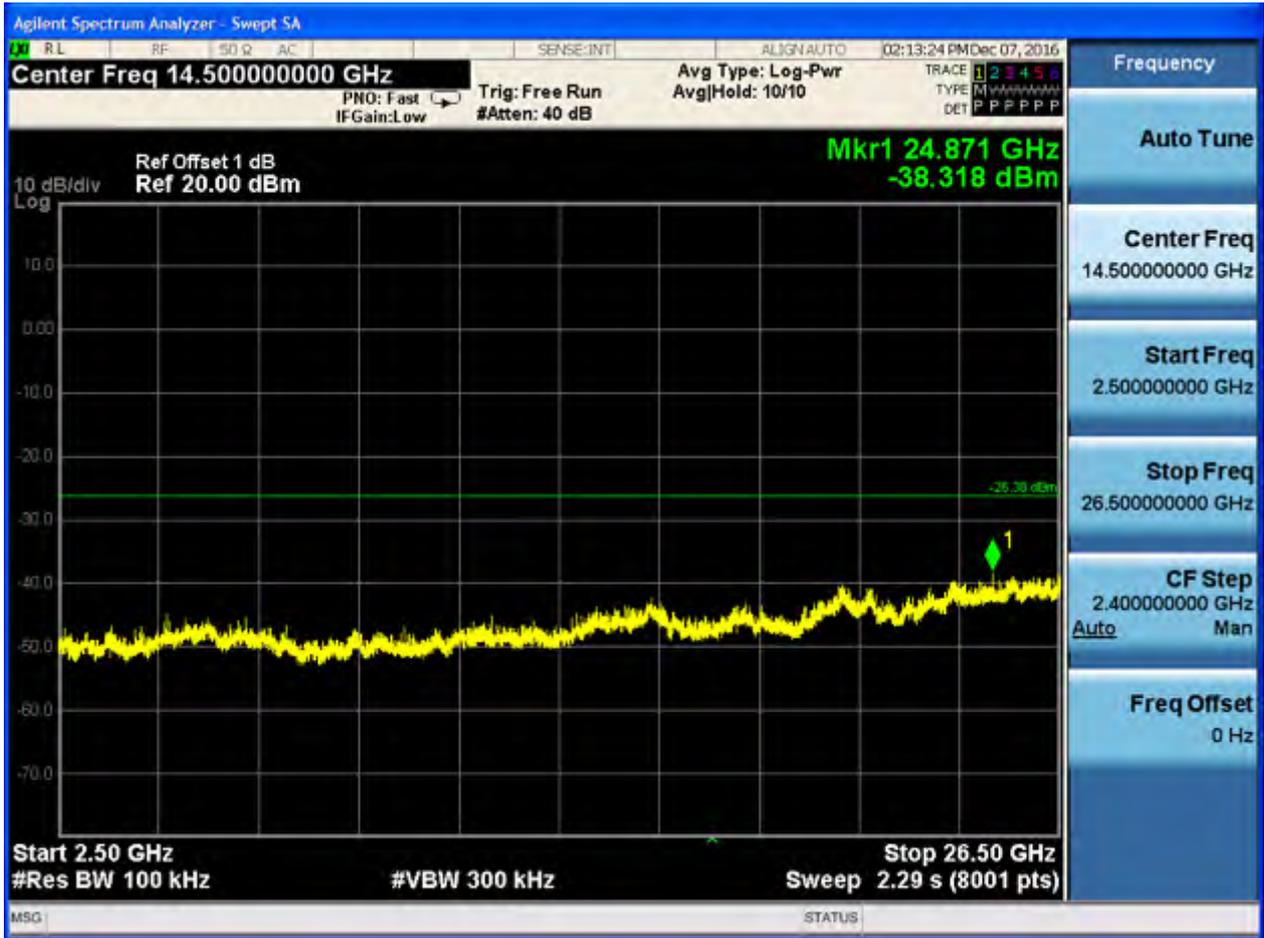






2.21 11N20m_M@Ant 2


Pref:



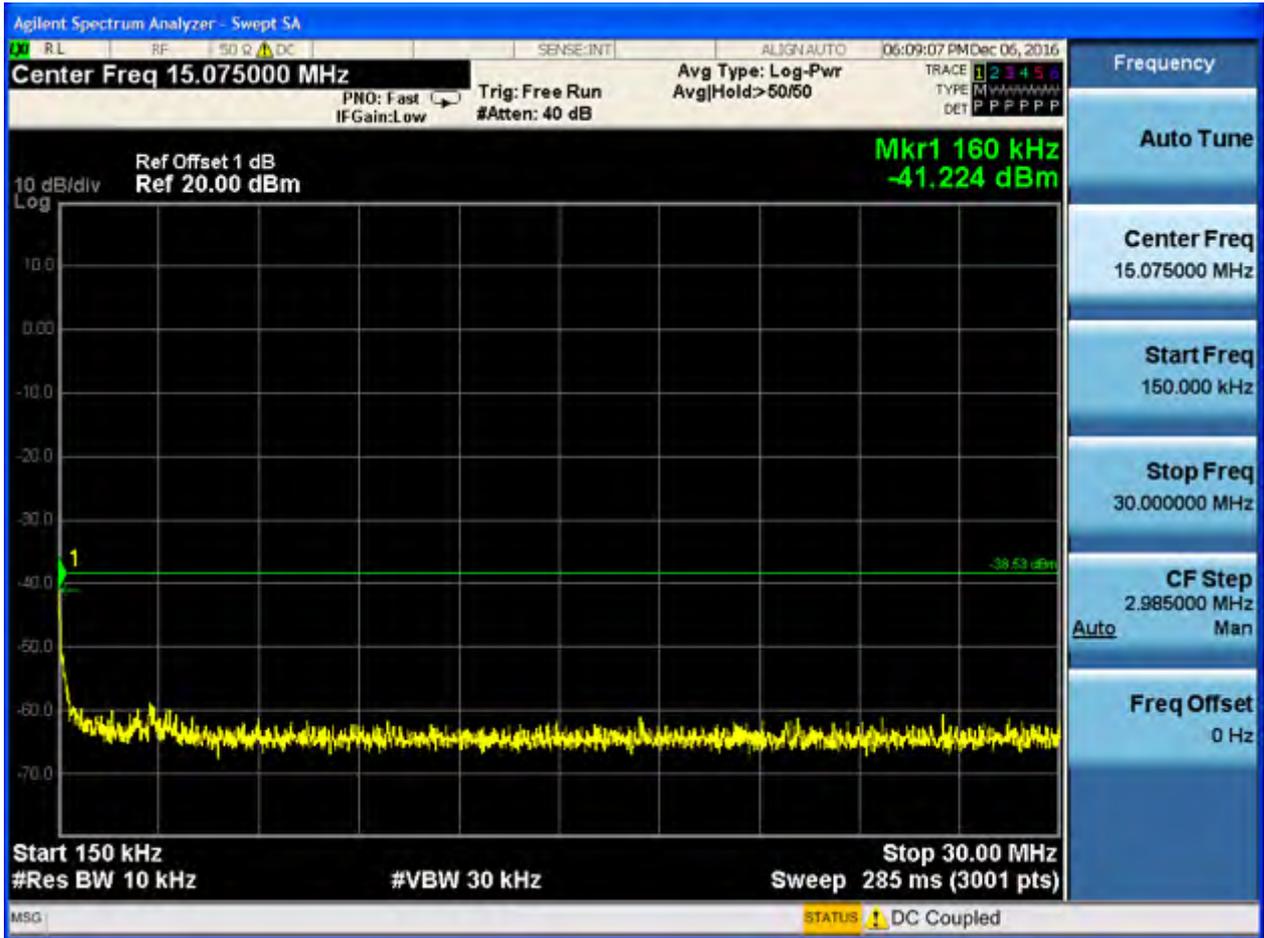

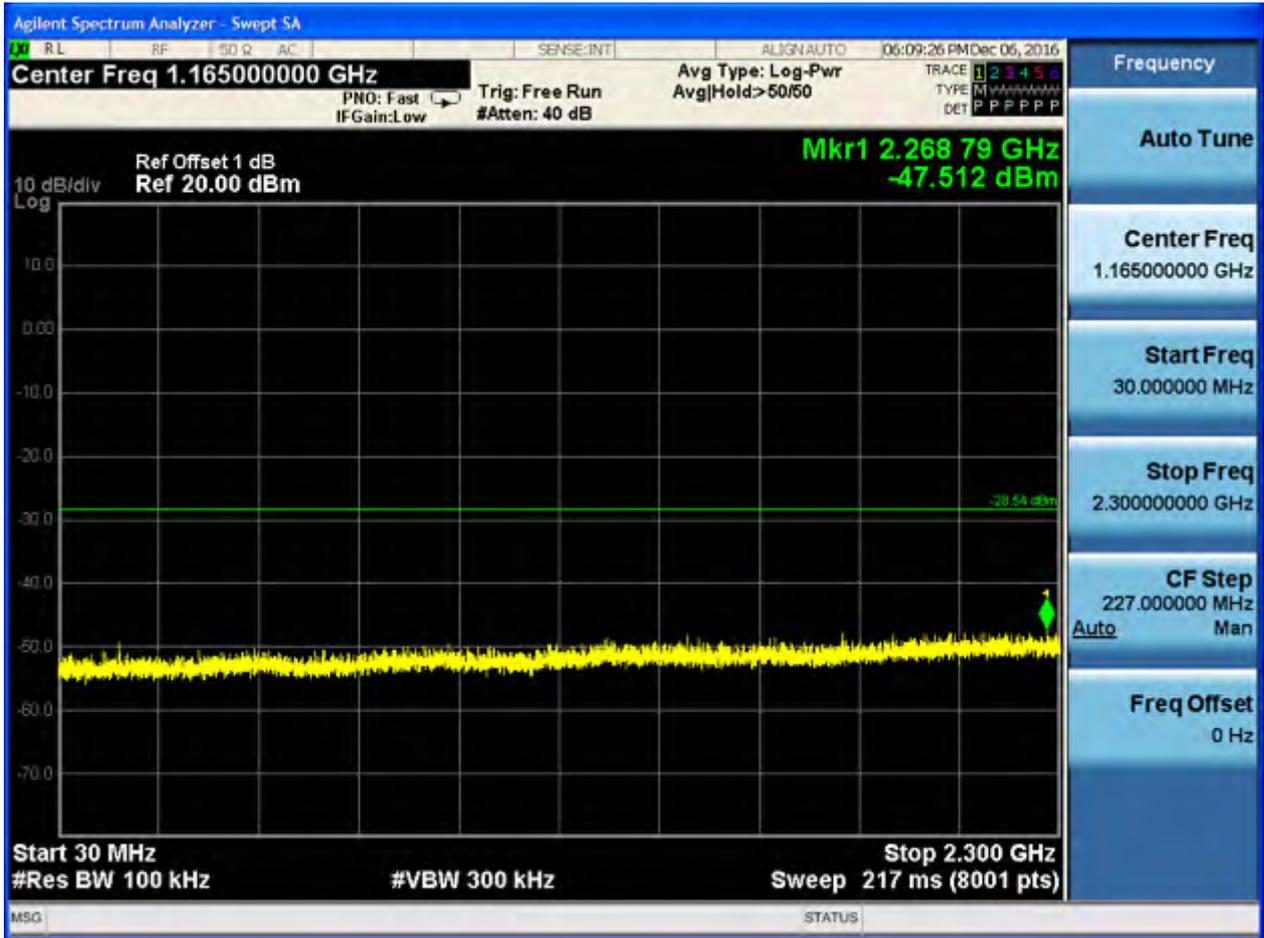

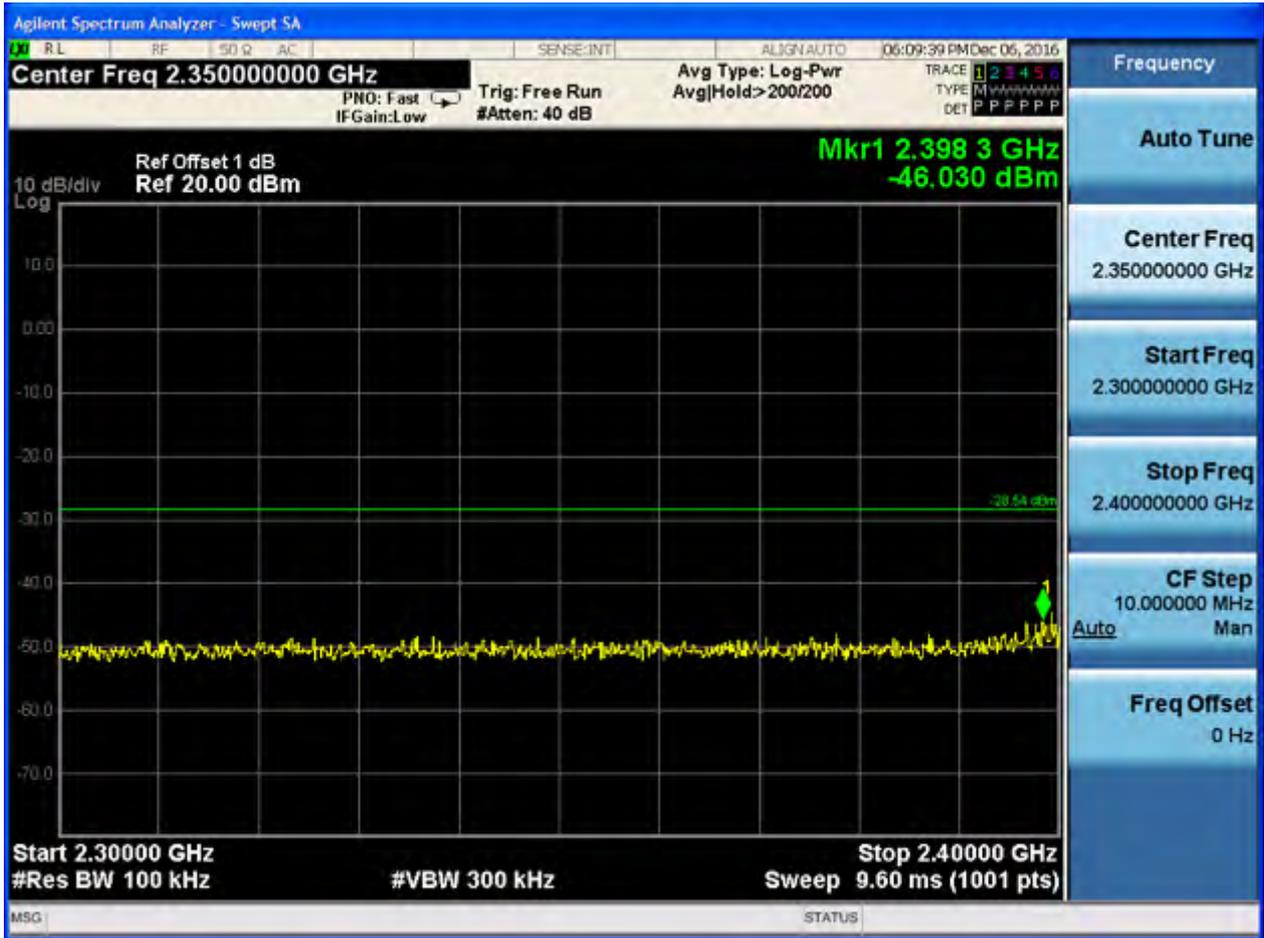

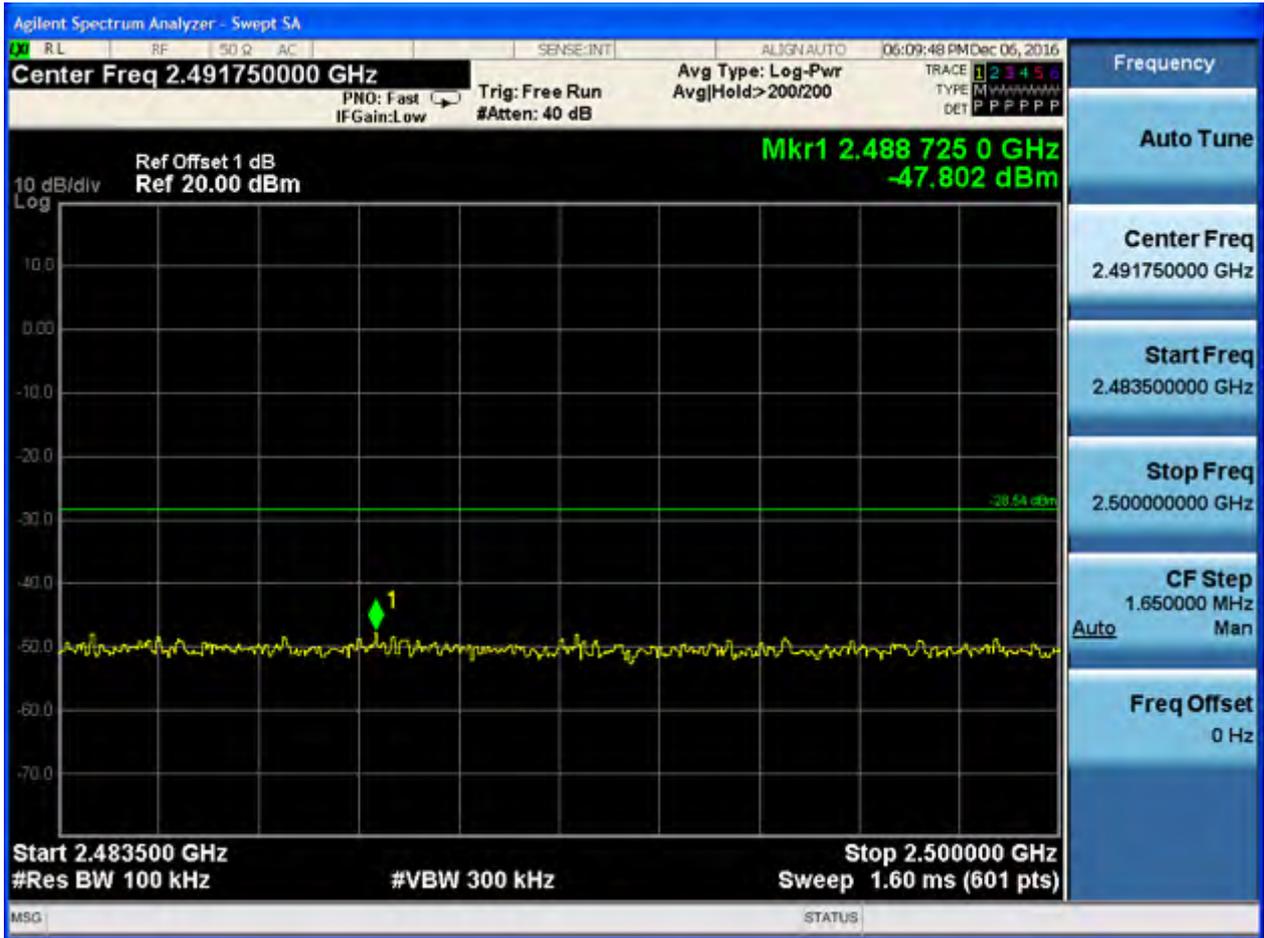



2.22 11N20m_M@Ant 1


Pref:








P_{uw}:



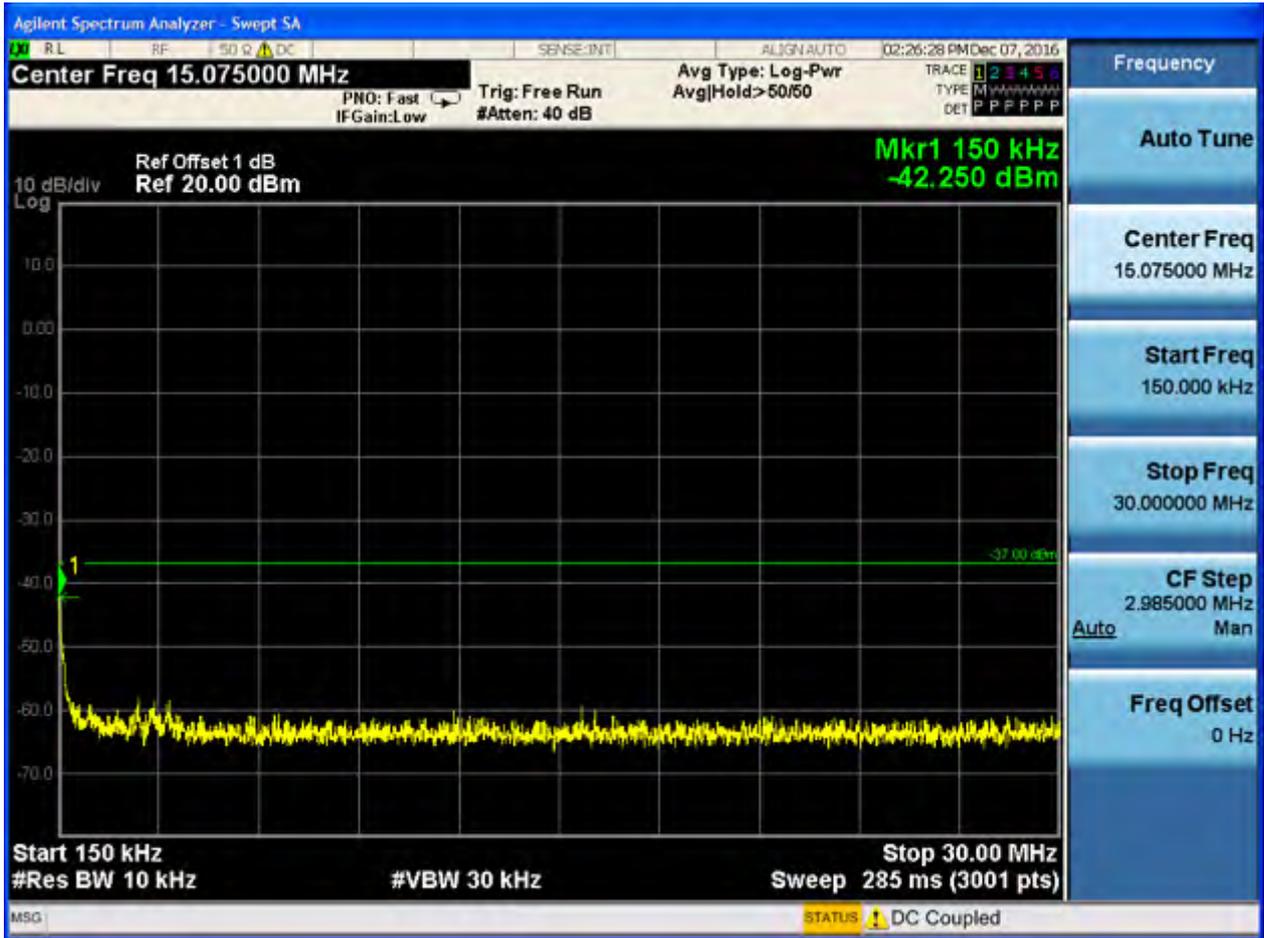

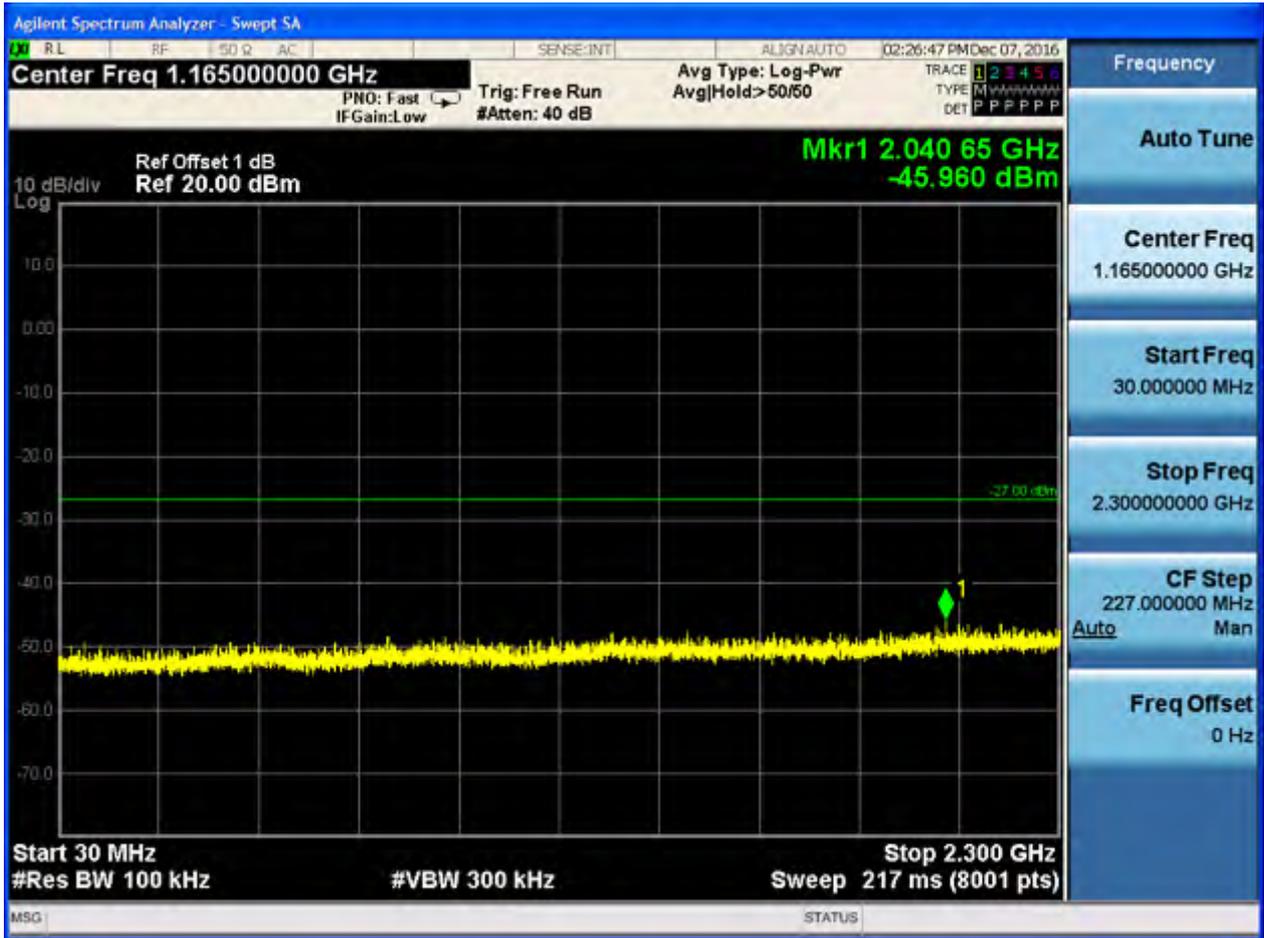

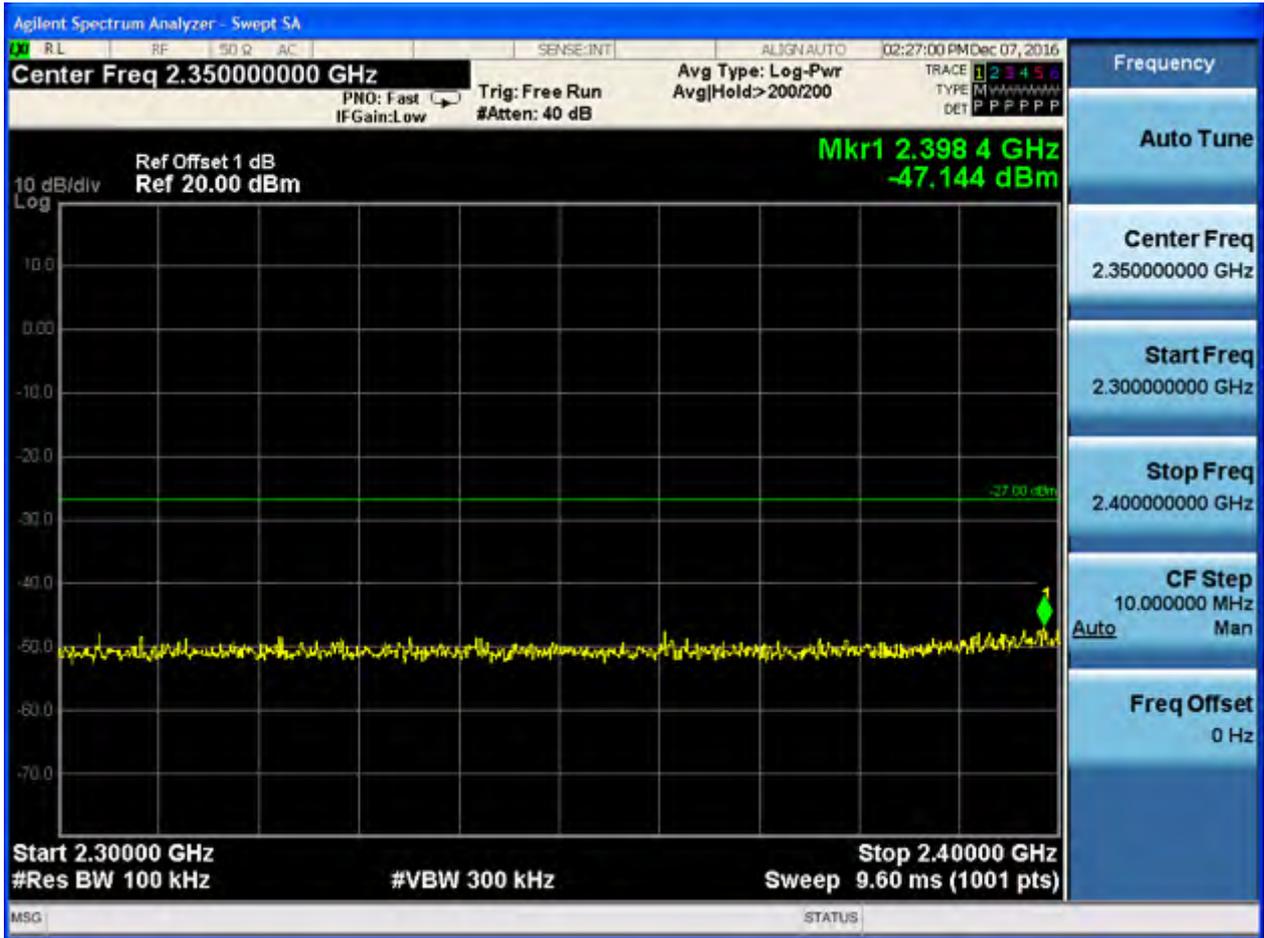


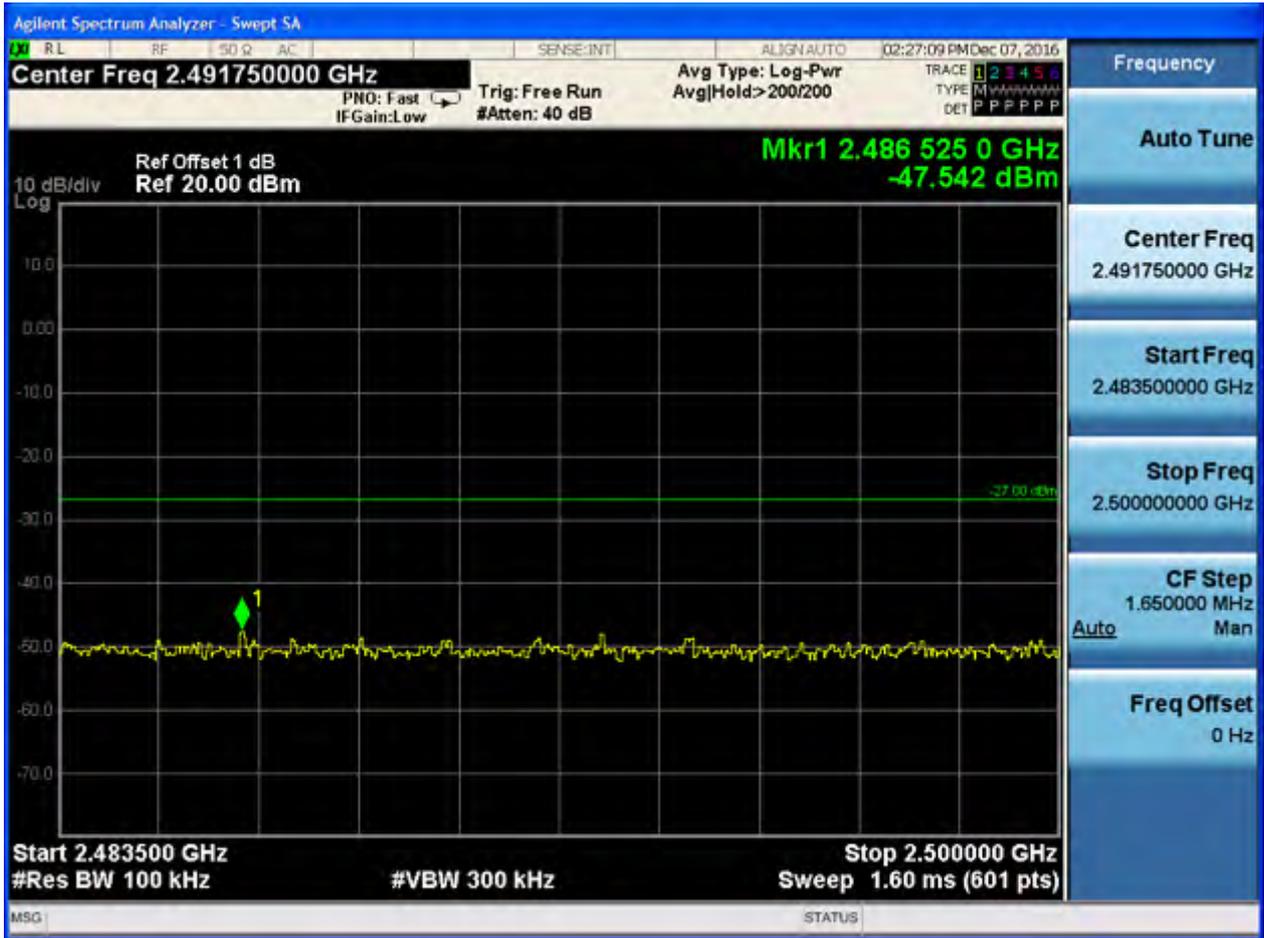



2.23 11N20m_H@Ant 2


Pref:

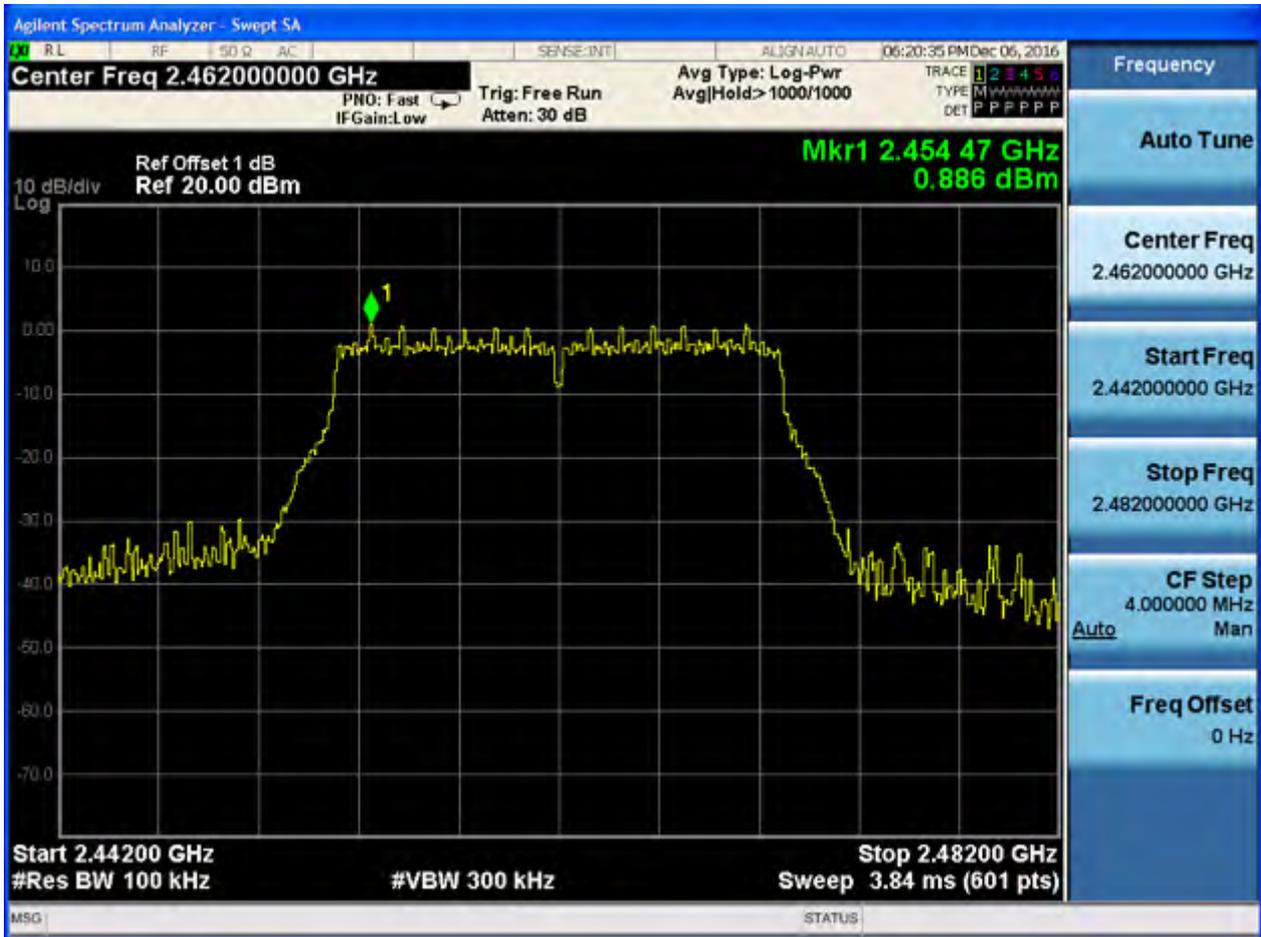






Puw:



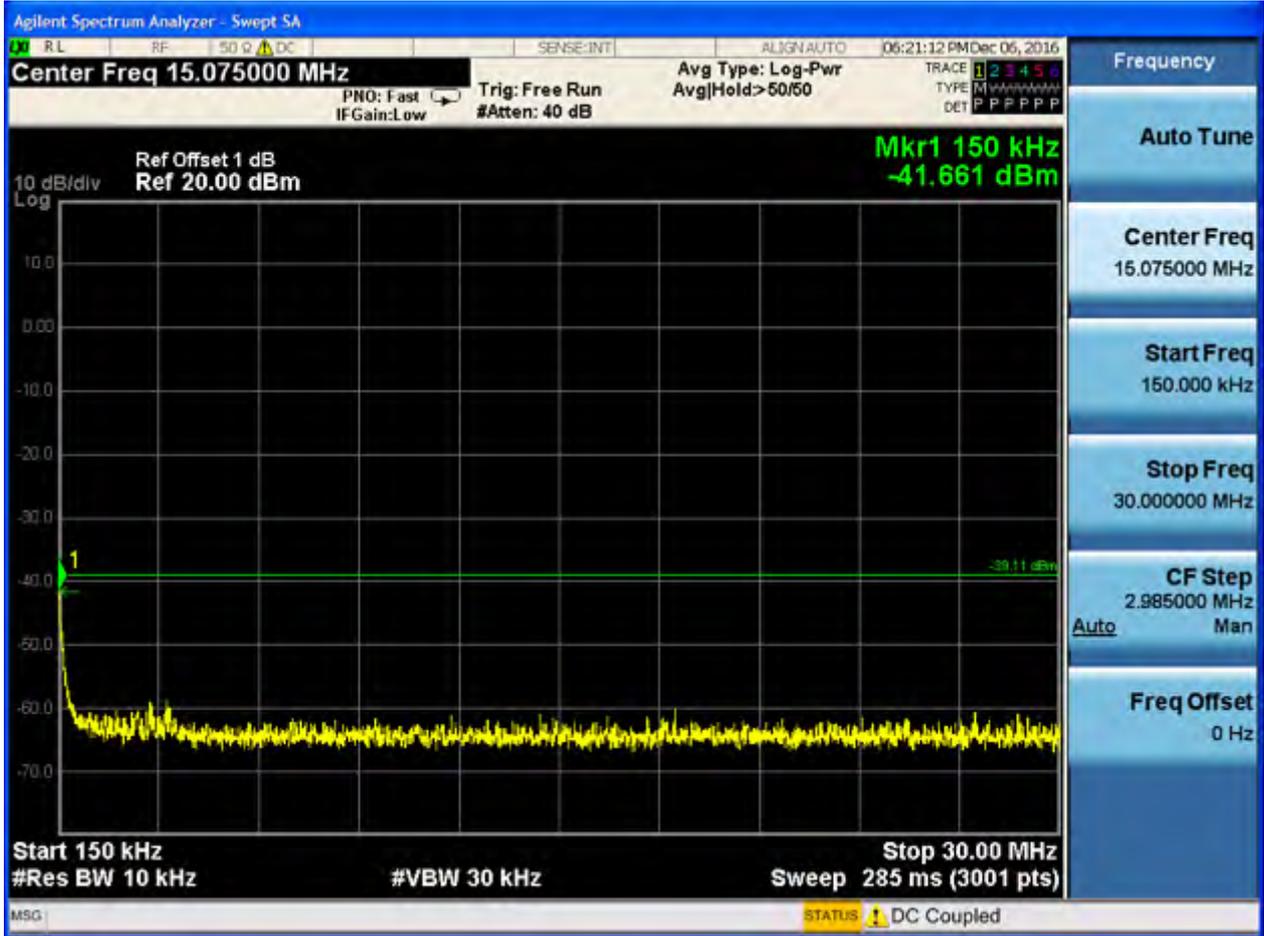

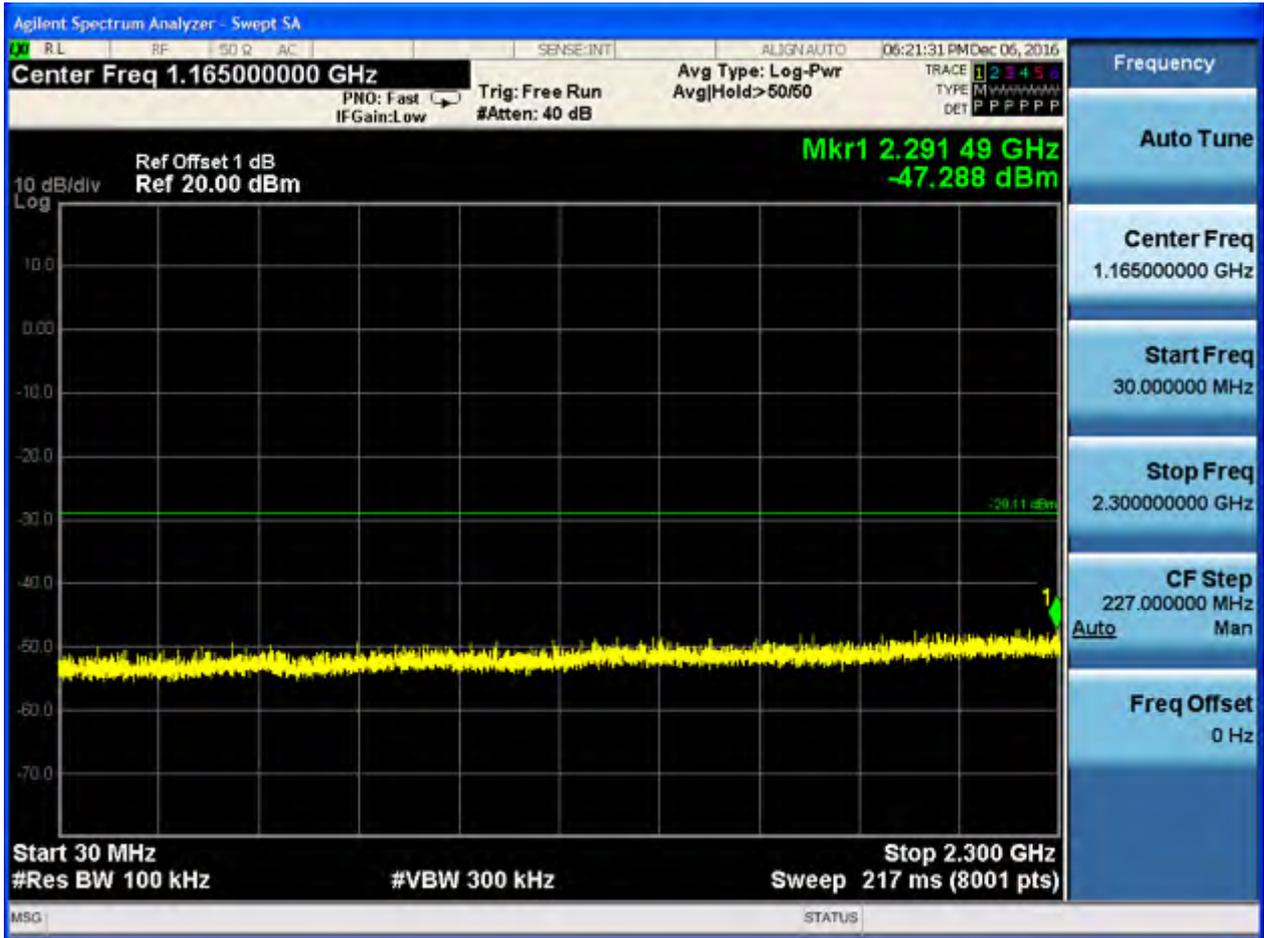

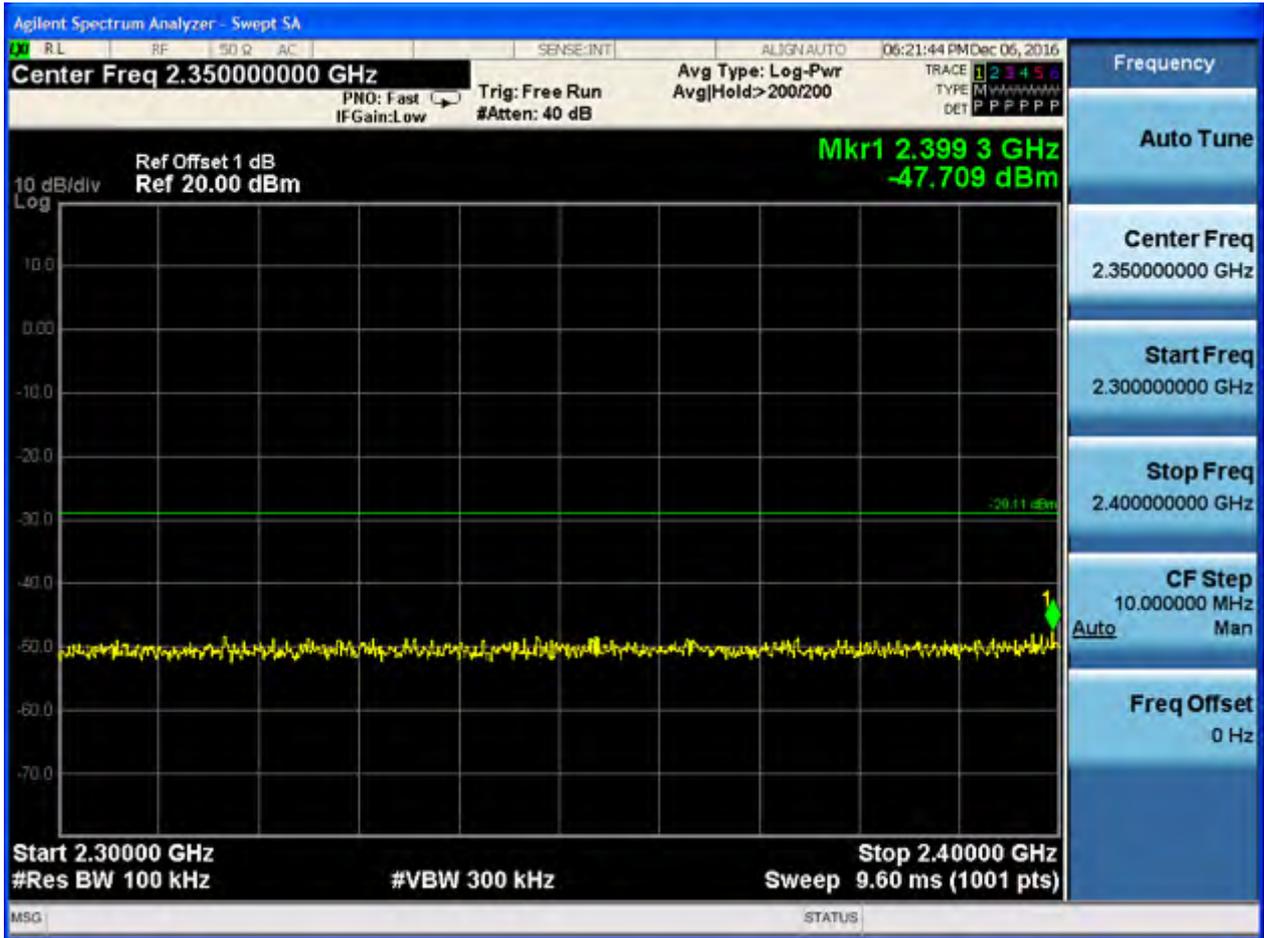

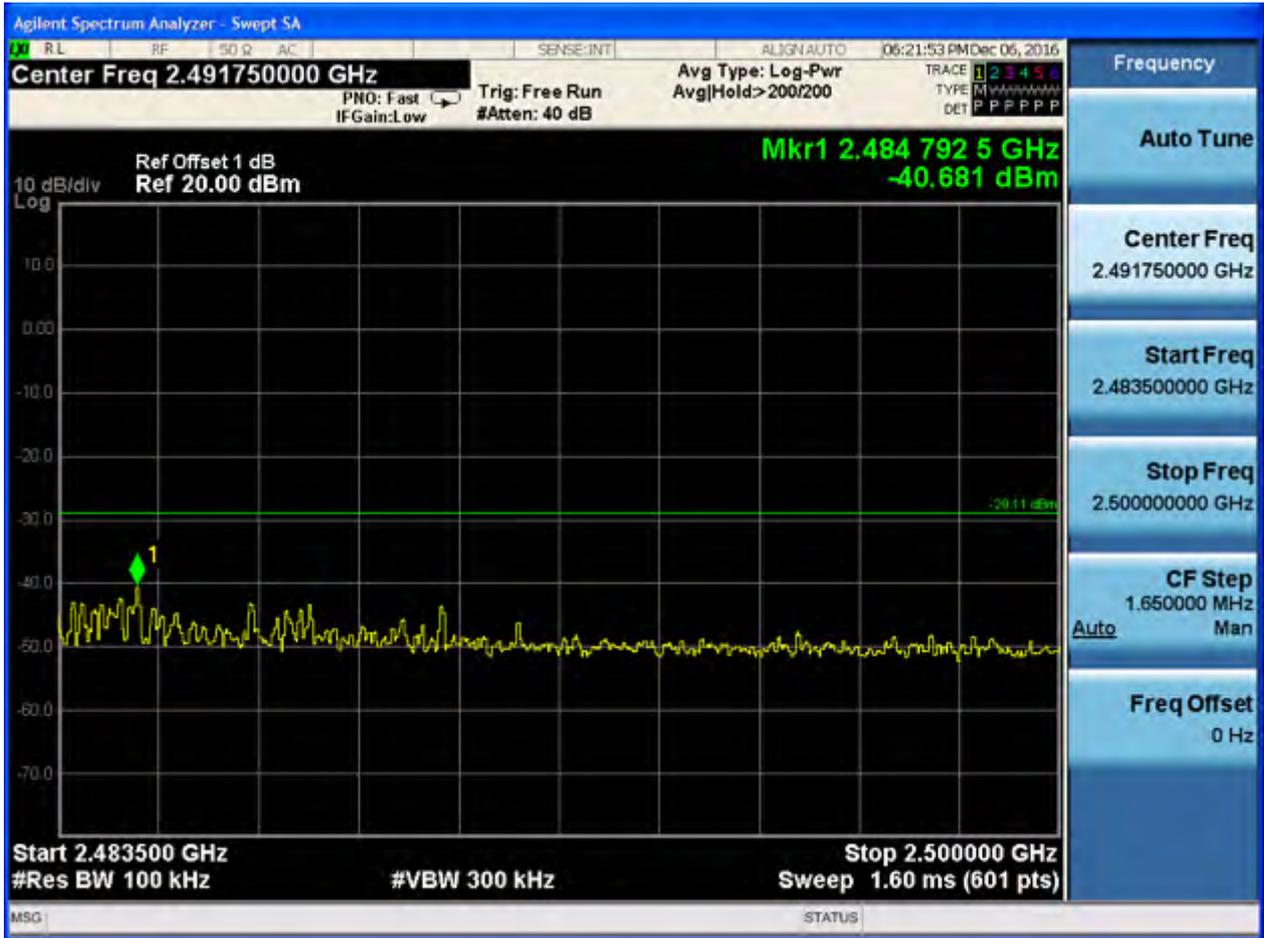






2.24 11N20m_H@Ant 1


Pref:








P_{uw}:

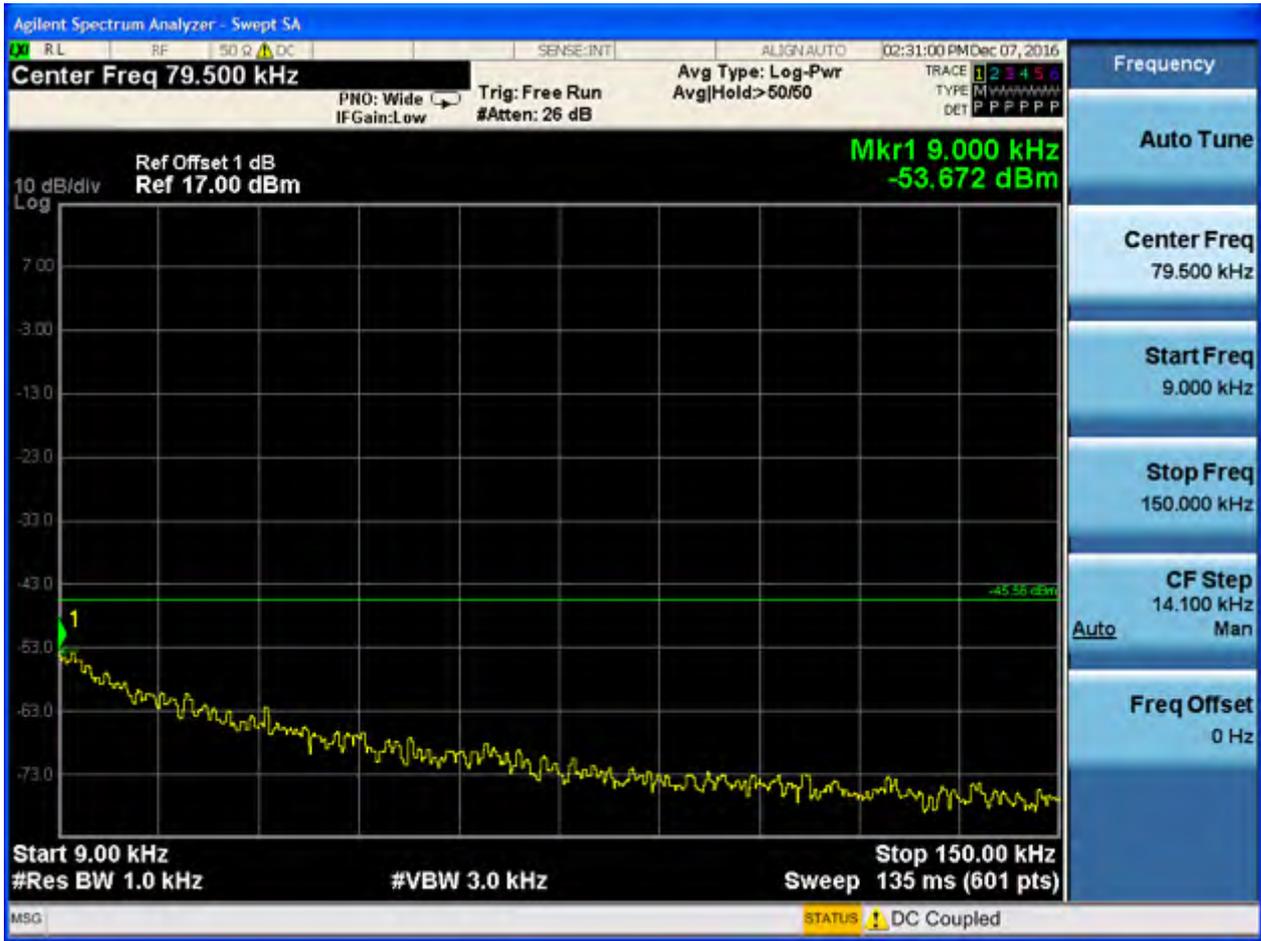


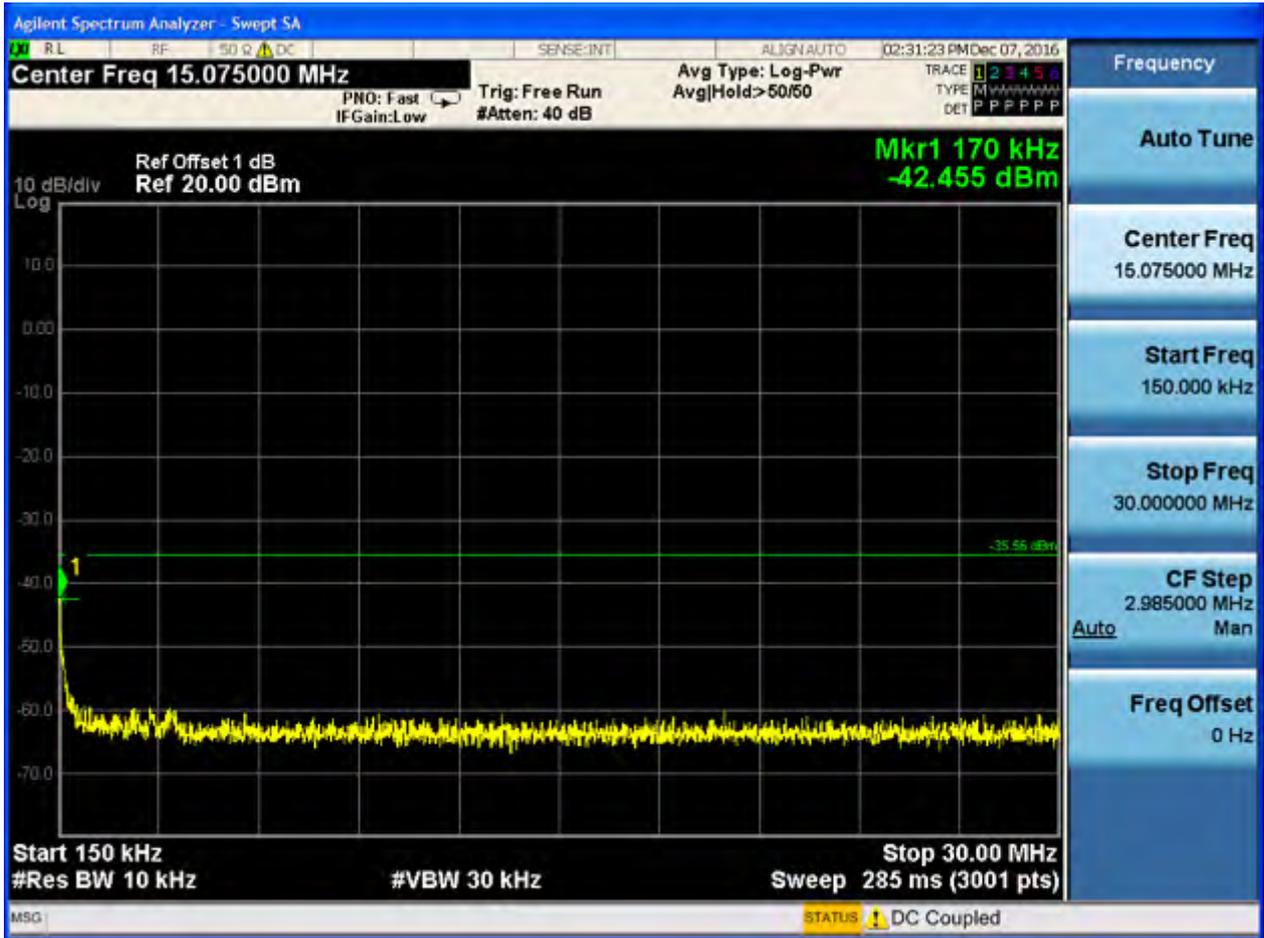

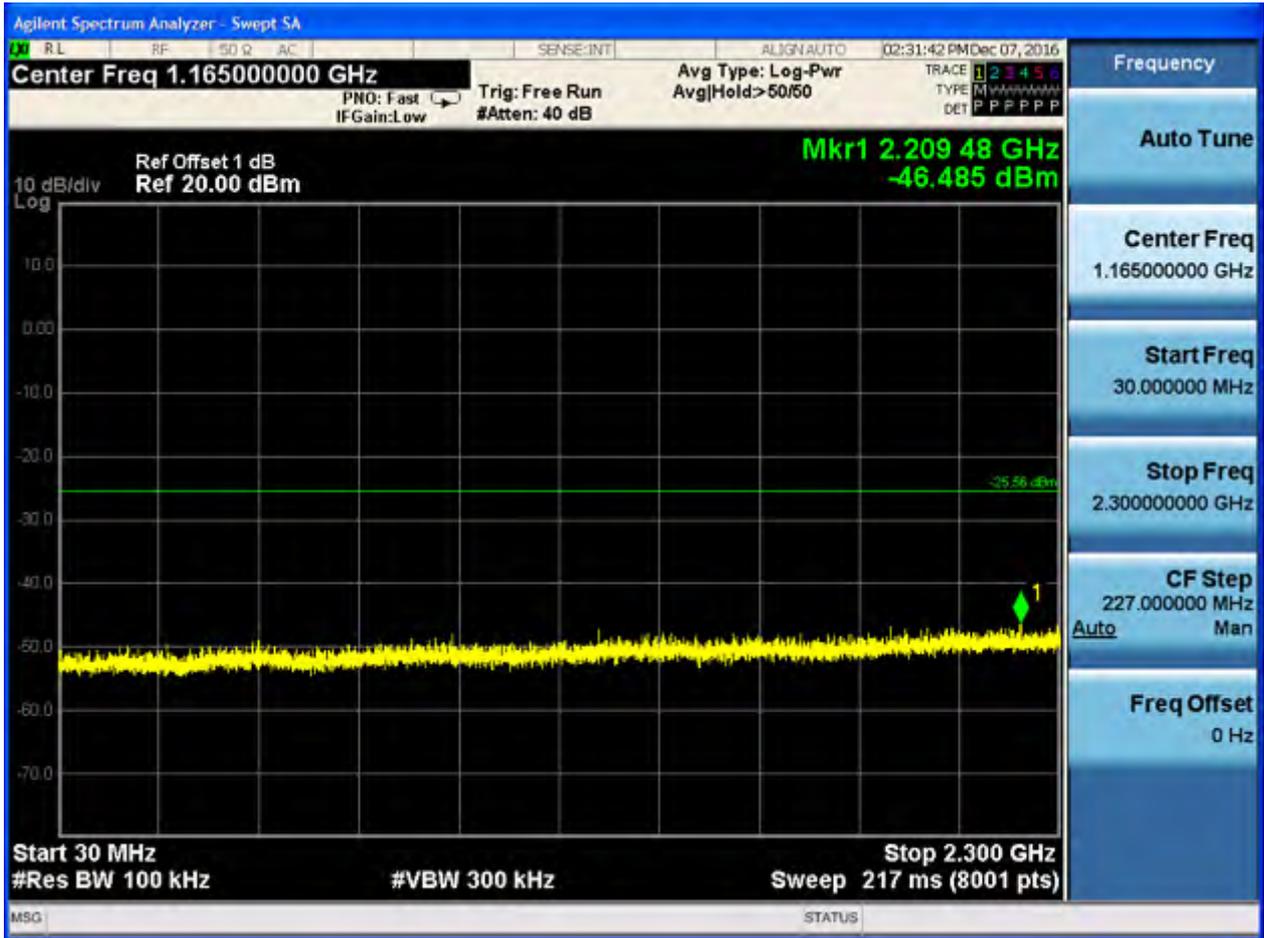

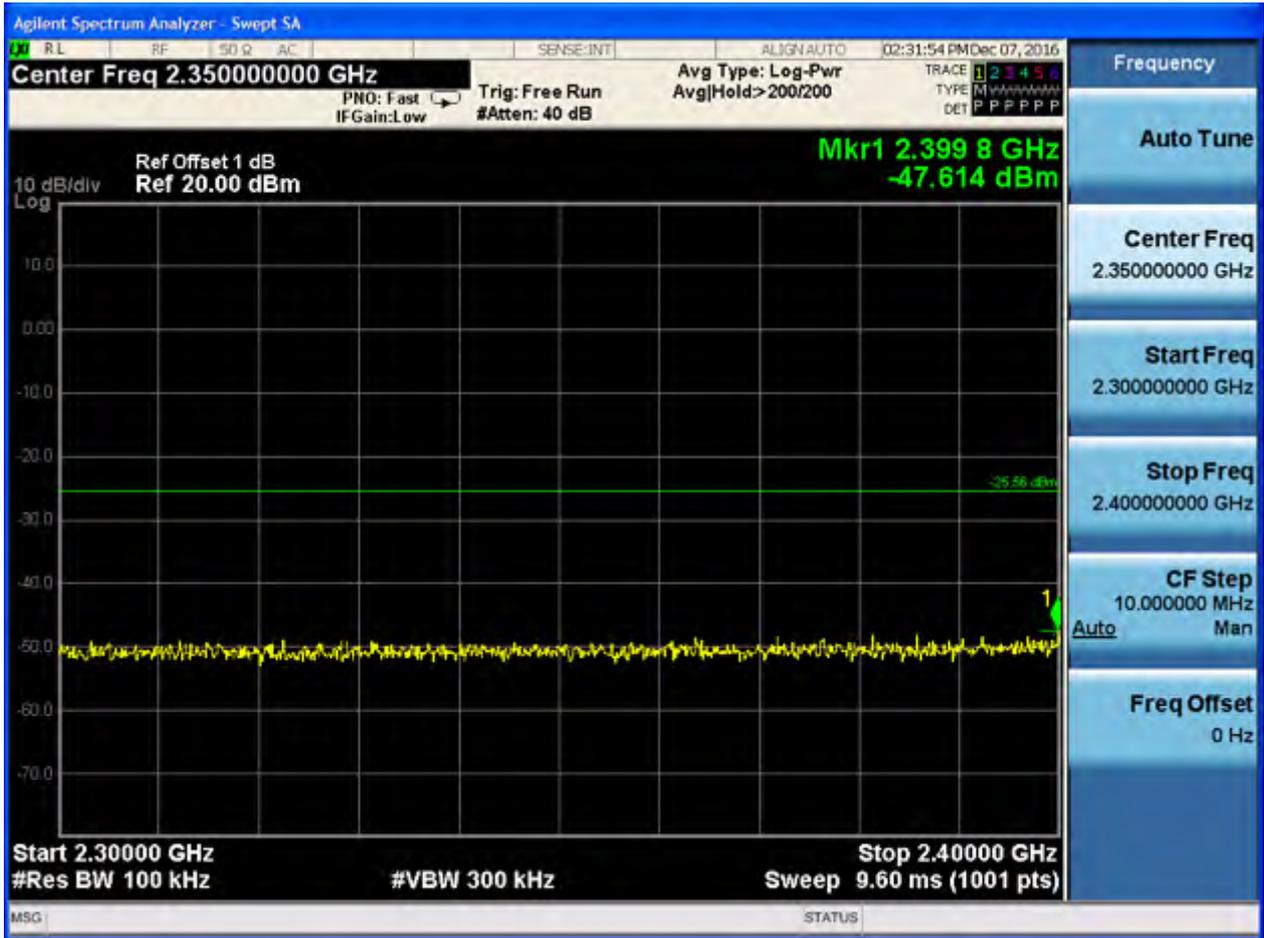


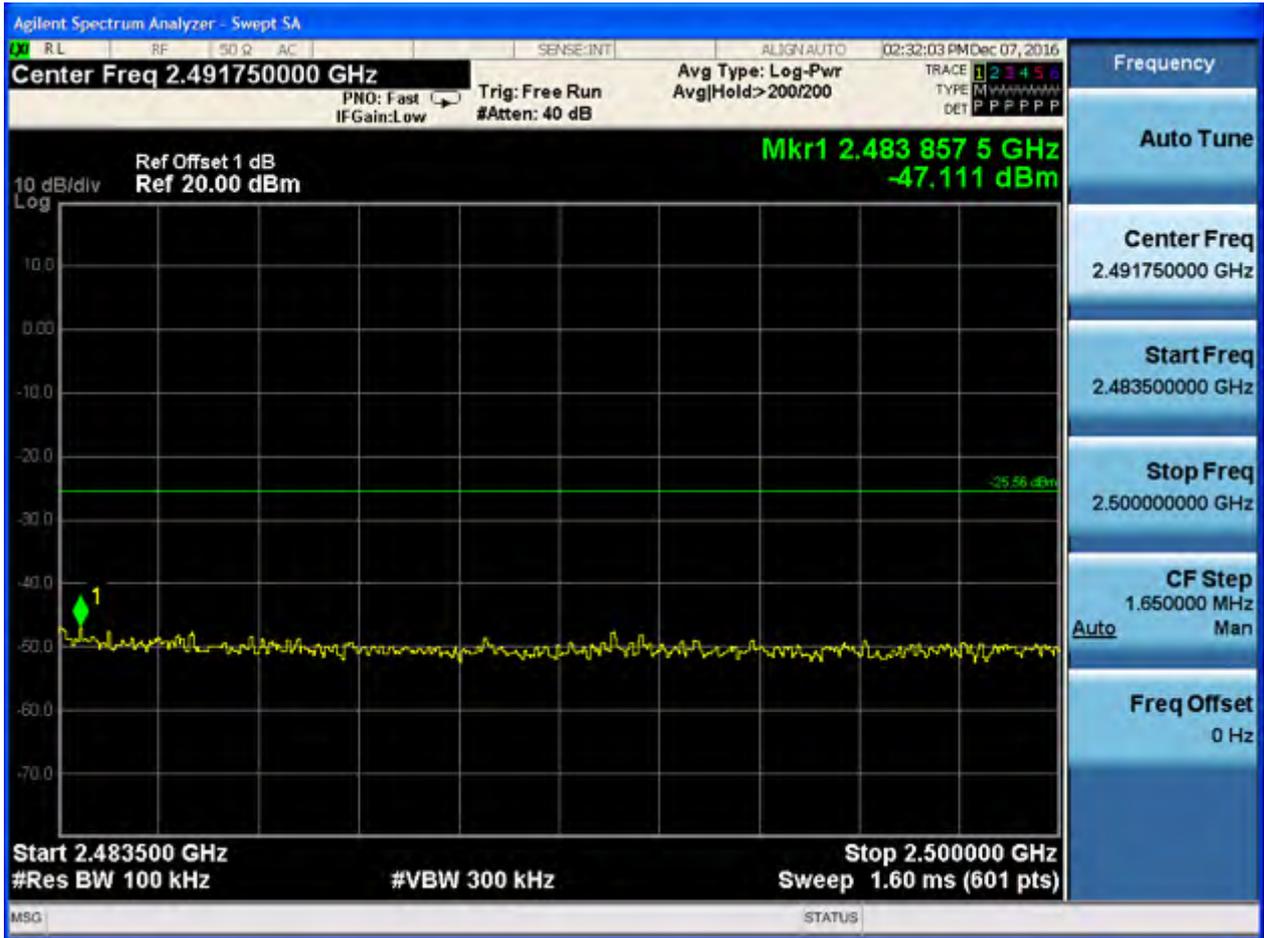

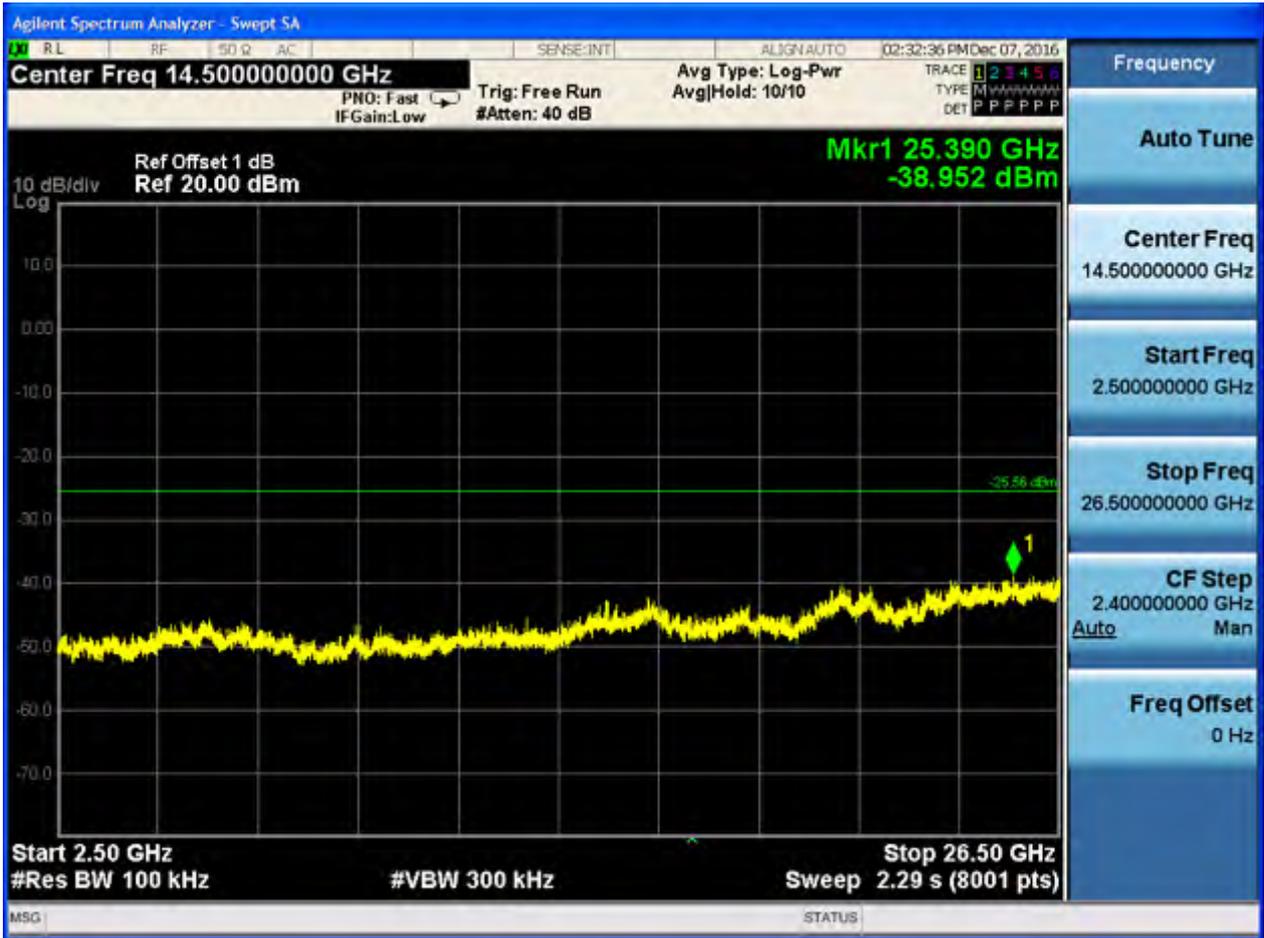

2.25 11G_CDD L@Ant 1


Pref:

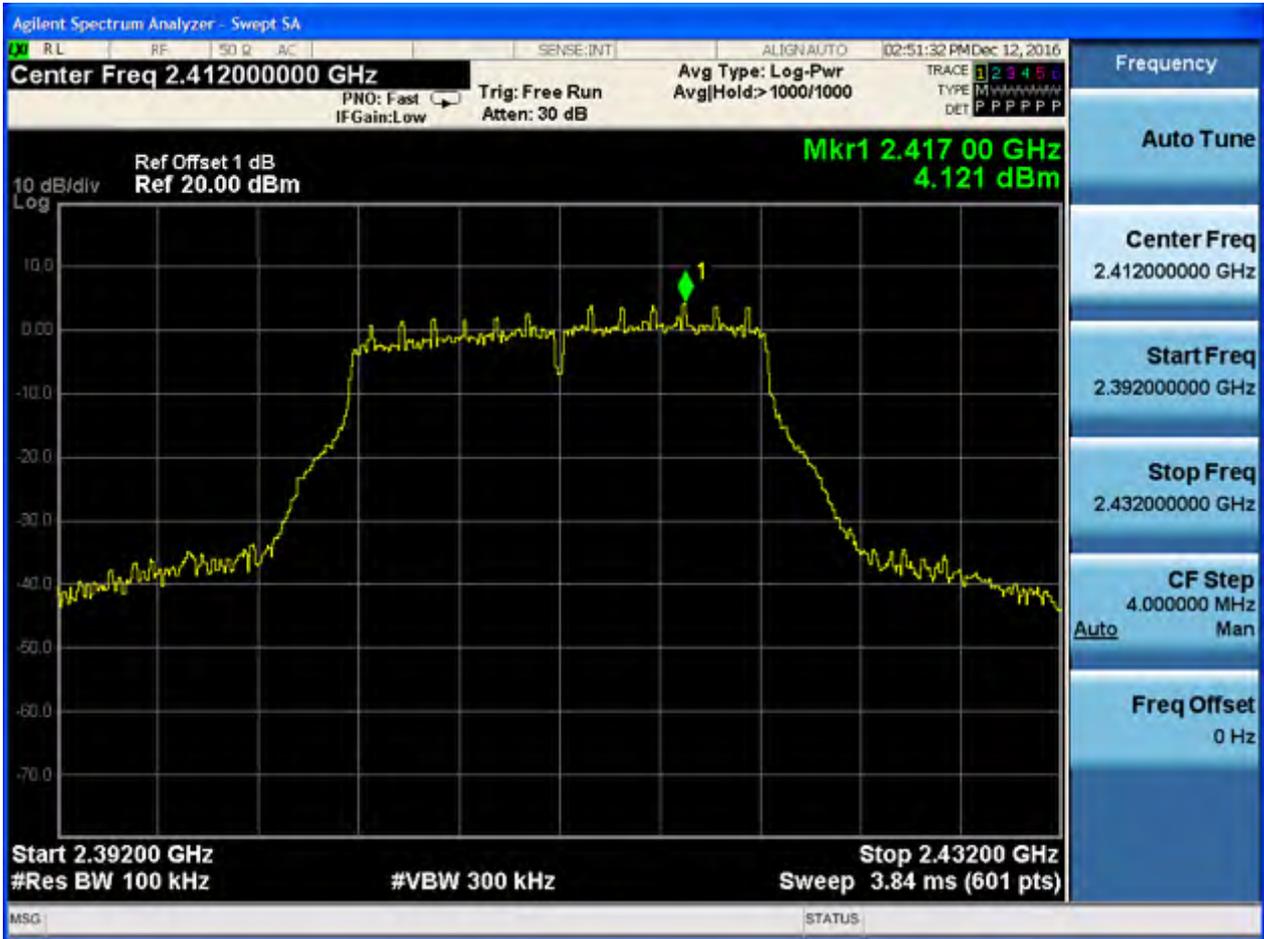






Puw:



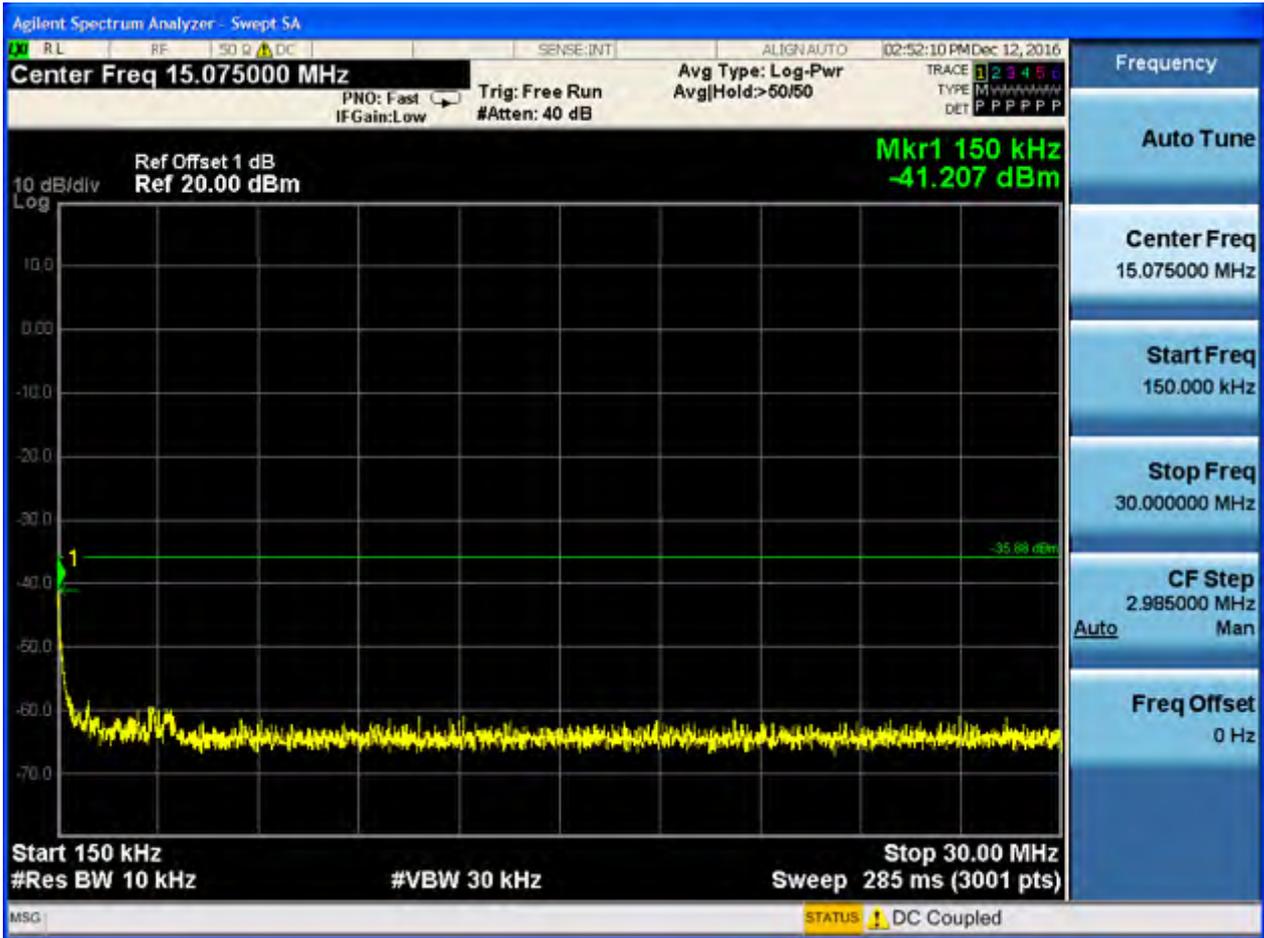

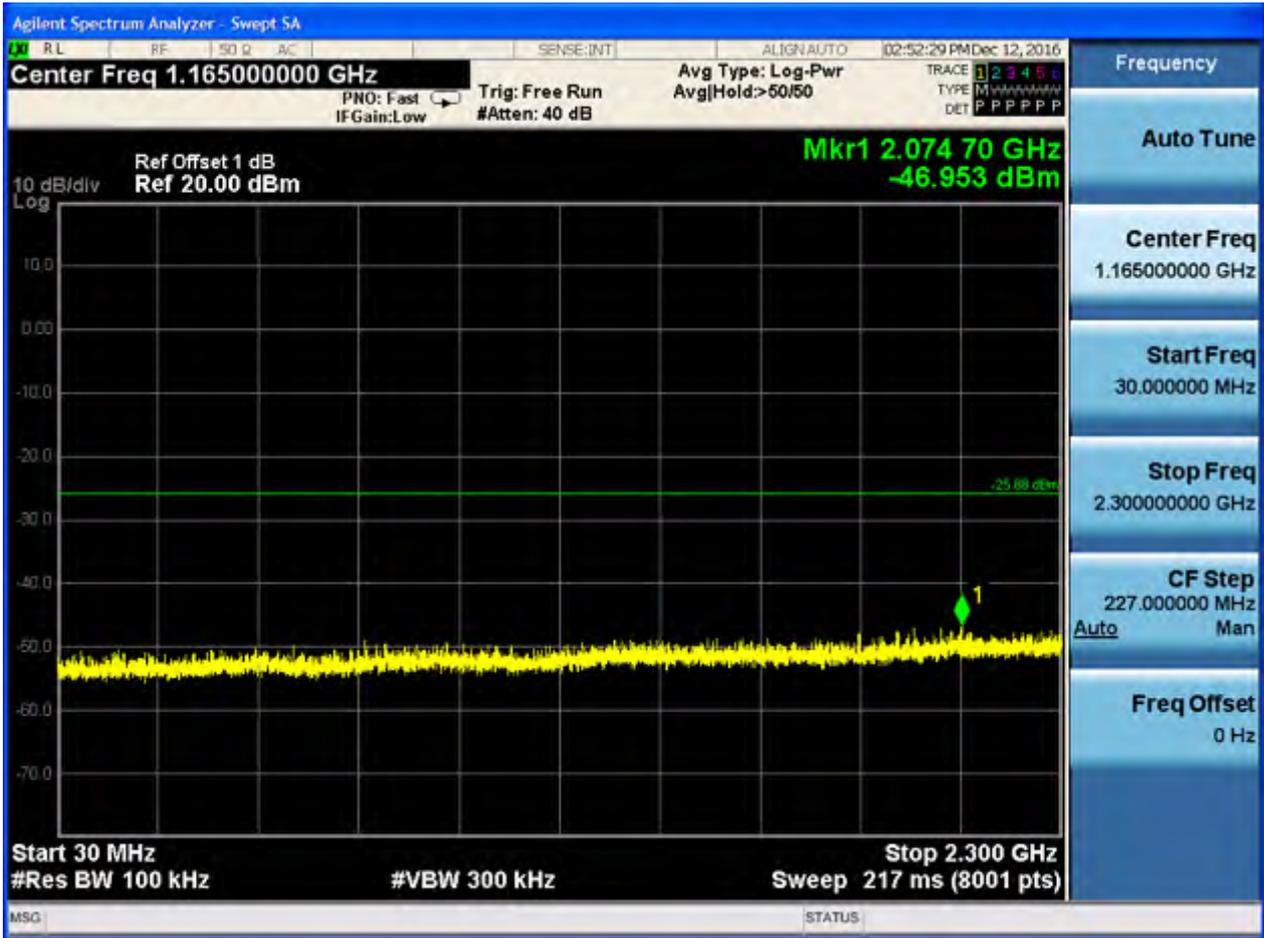

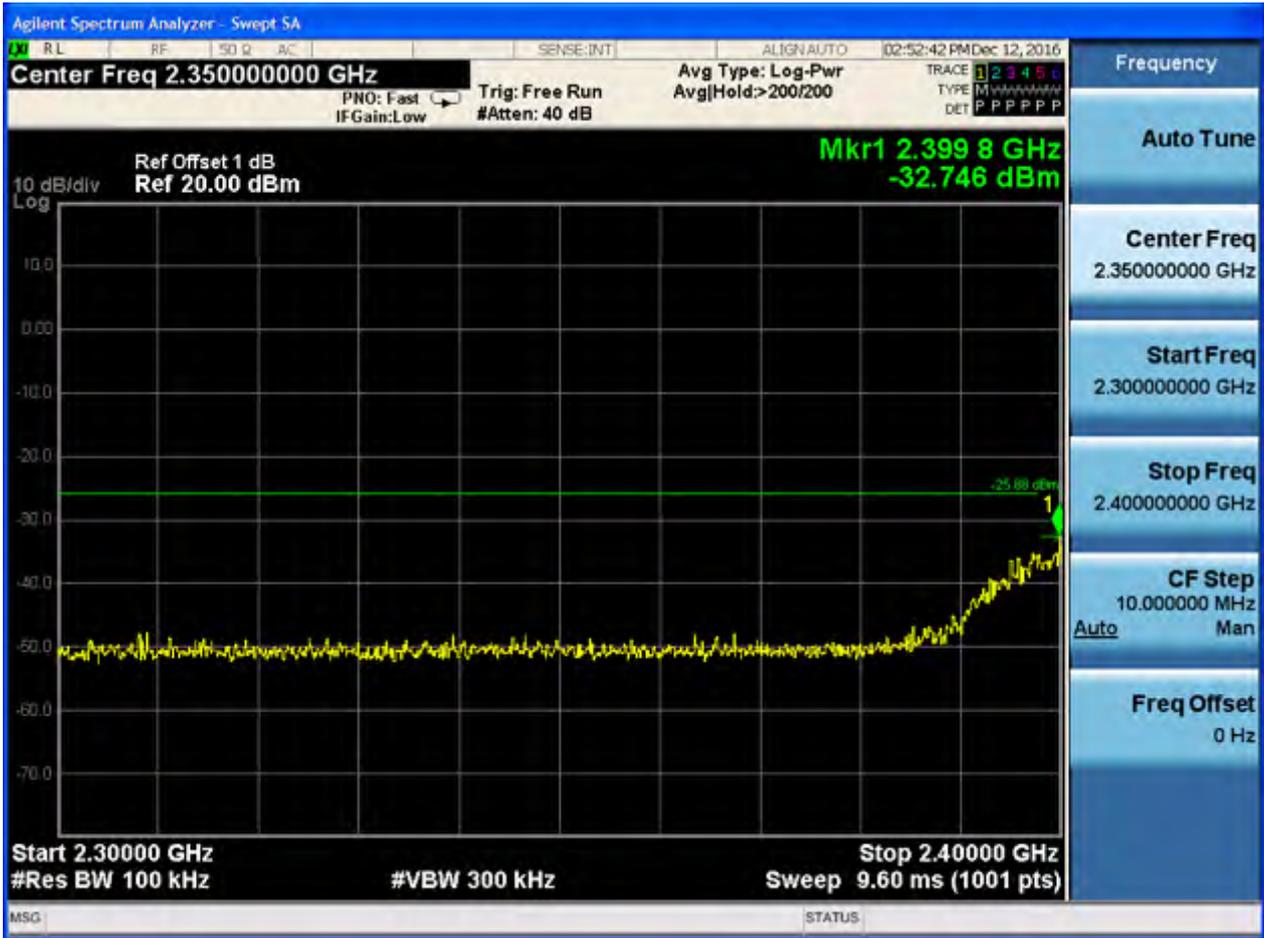


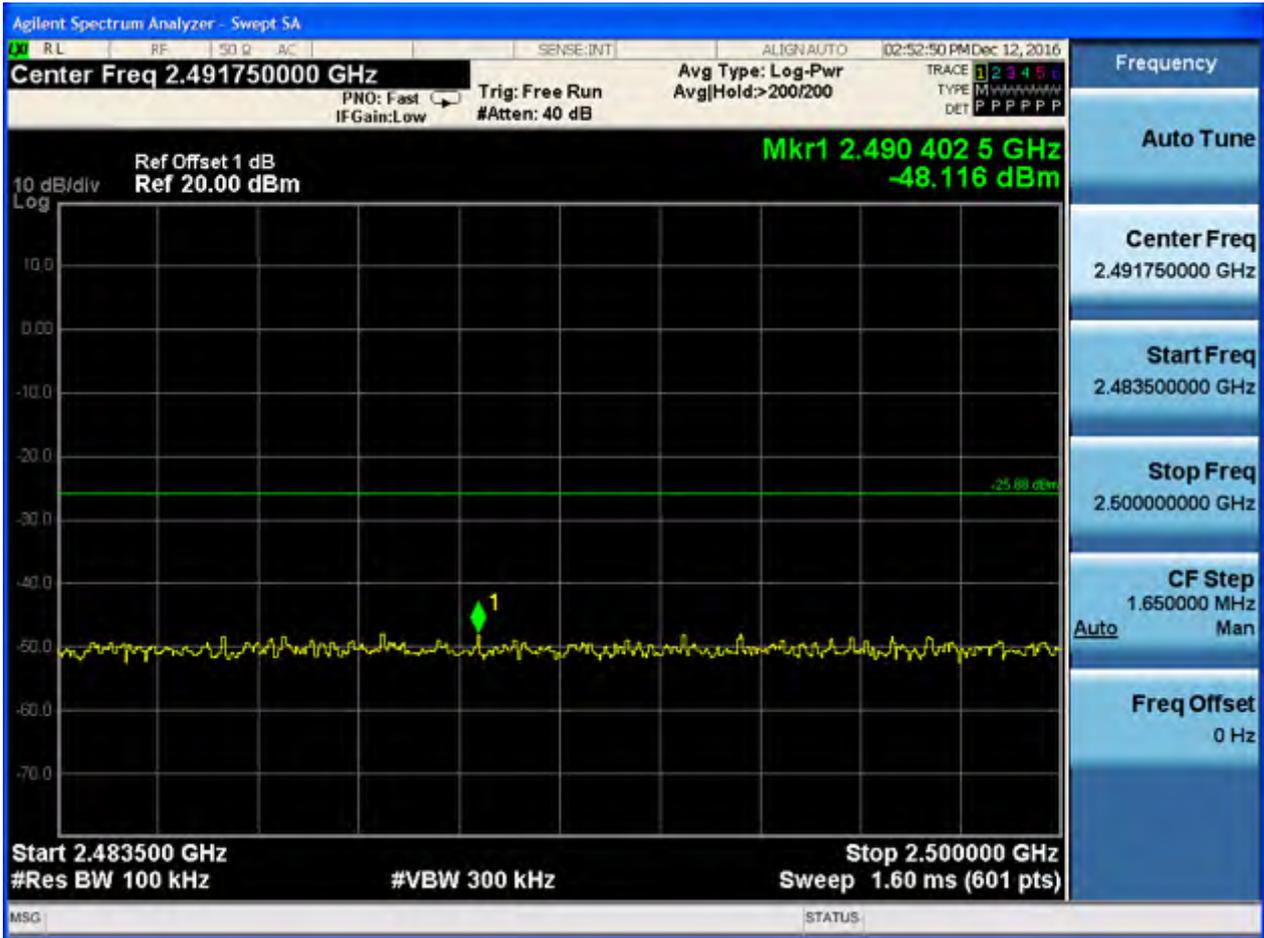



2.26 11G_CDD L@Ant 2


Pref:

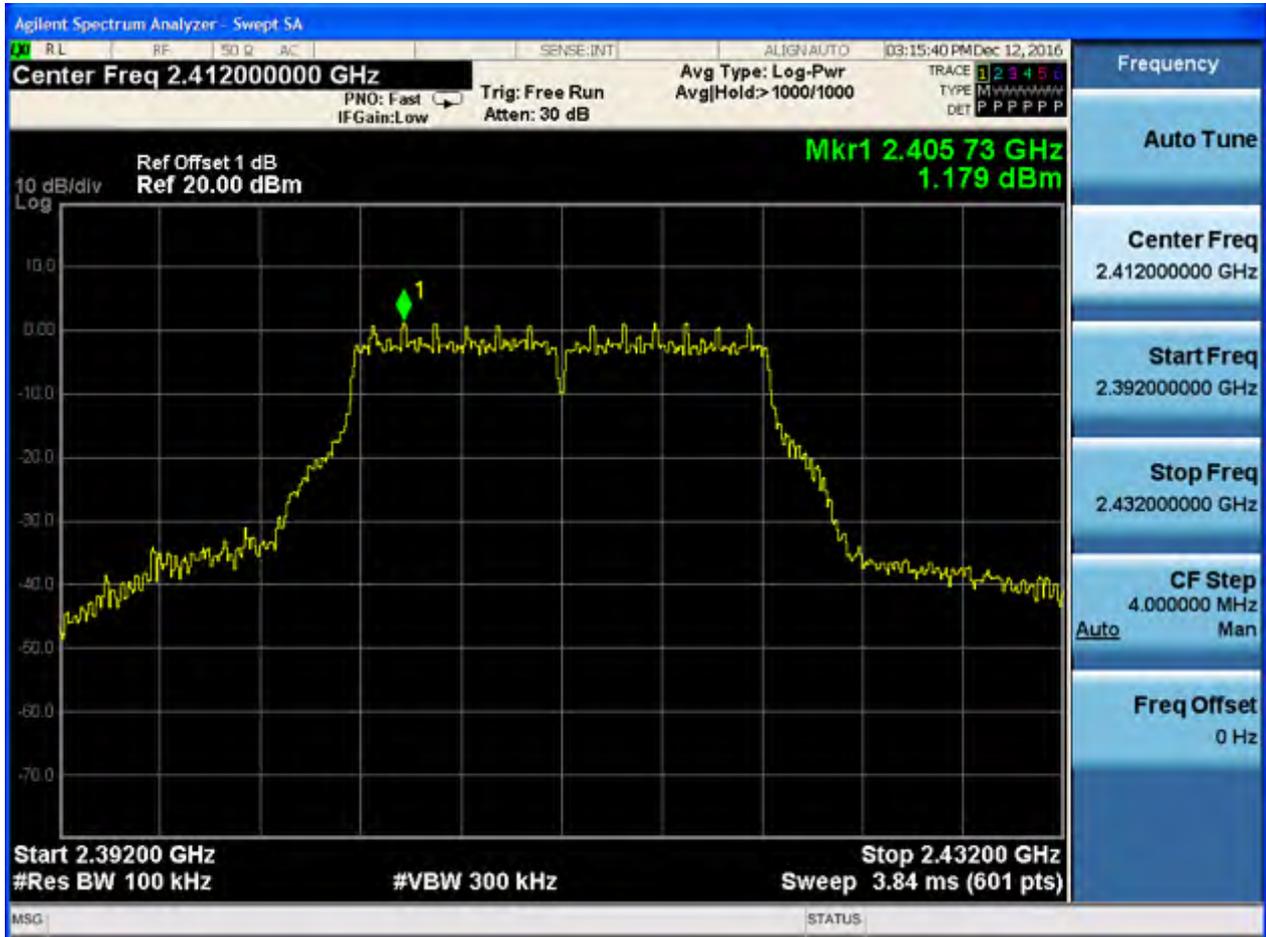






P_uw:



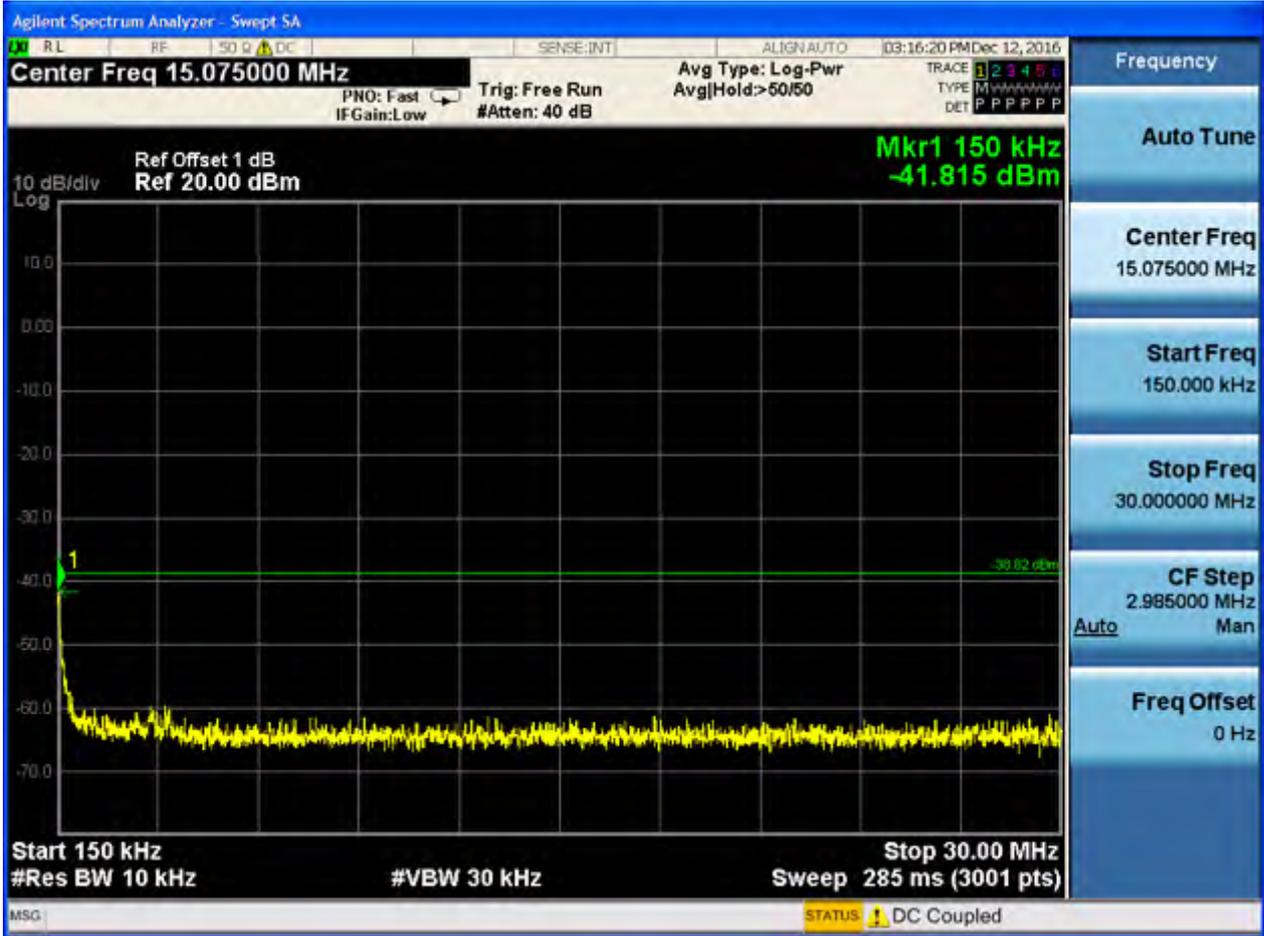

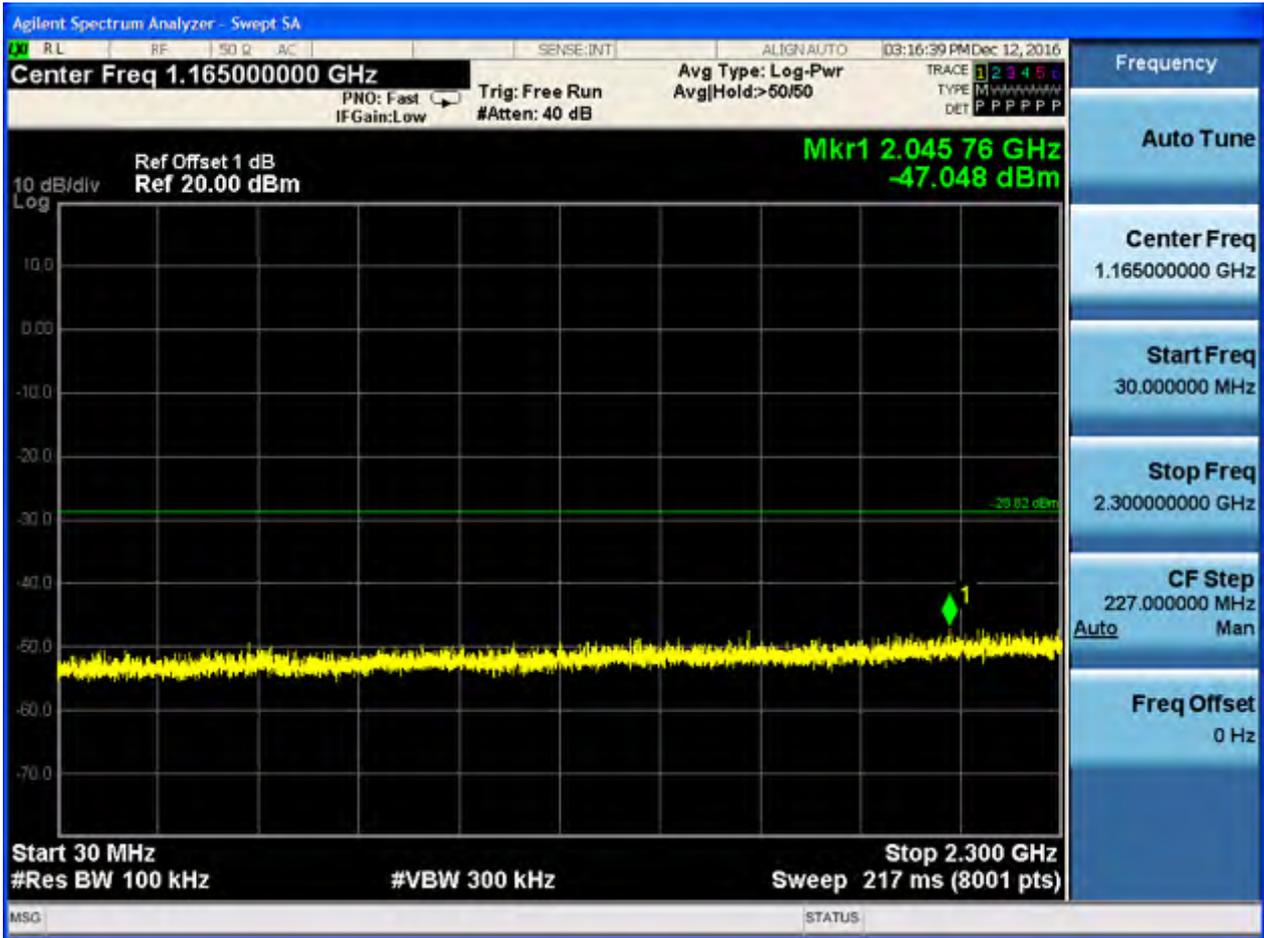

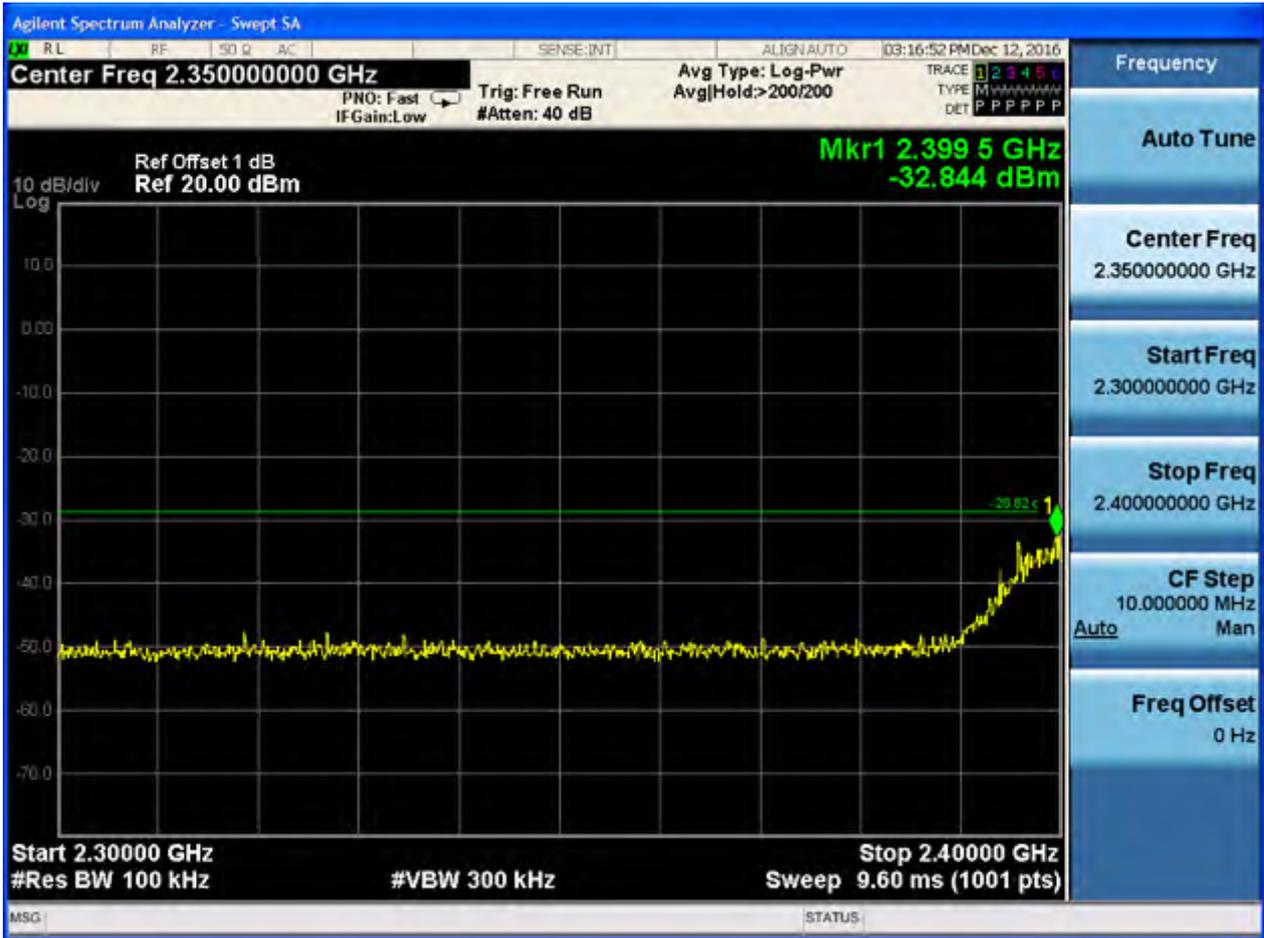


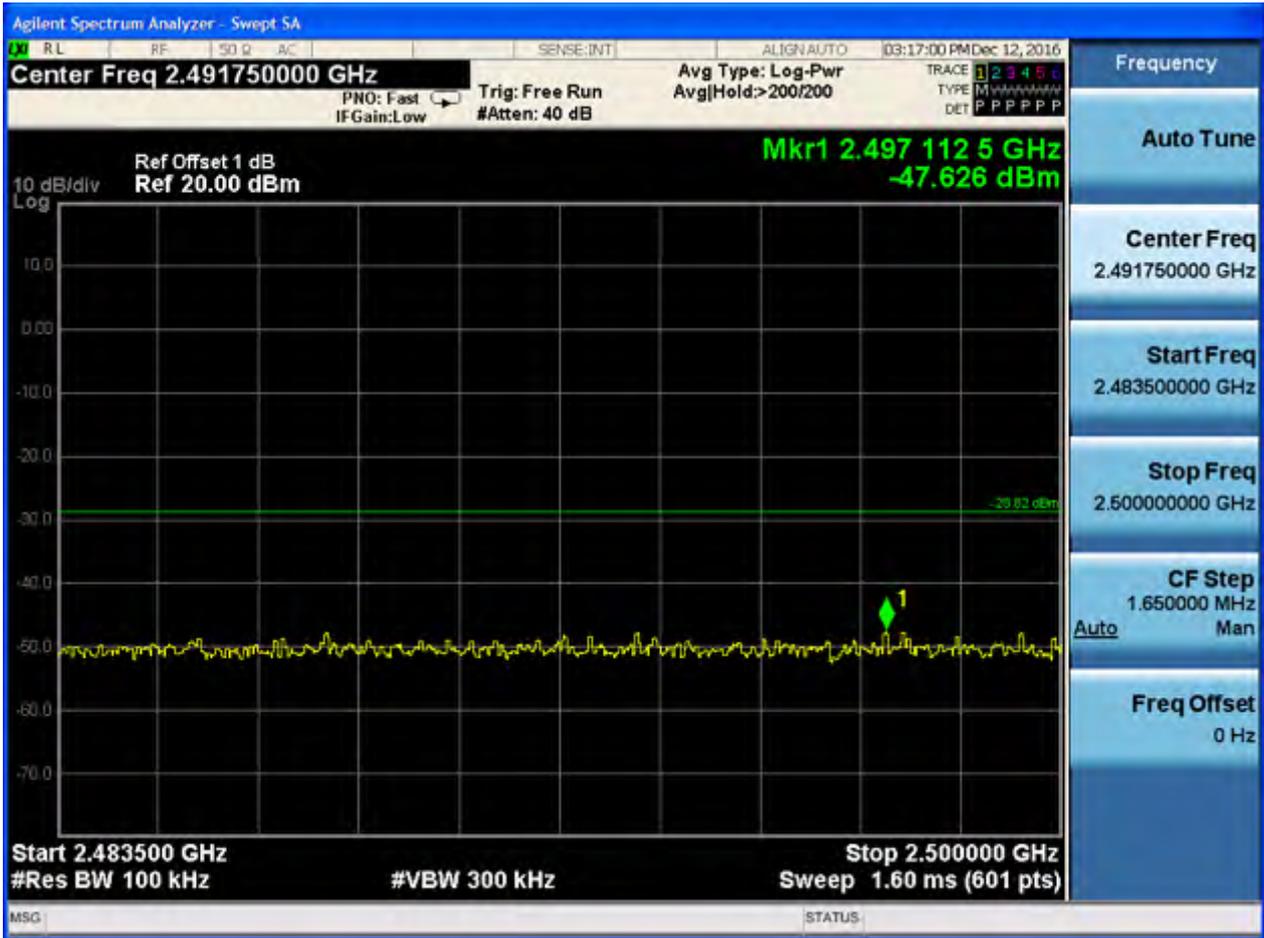



2.27 11G_CDD M@Ant 1


Pref:

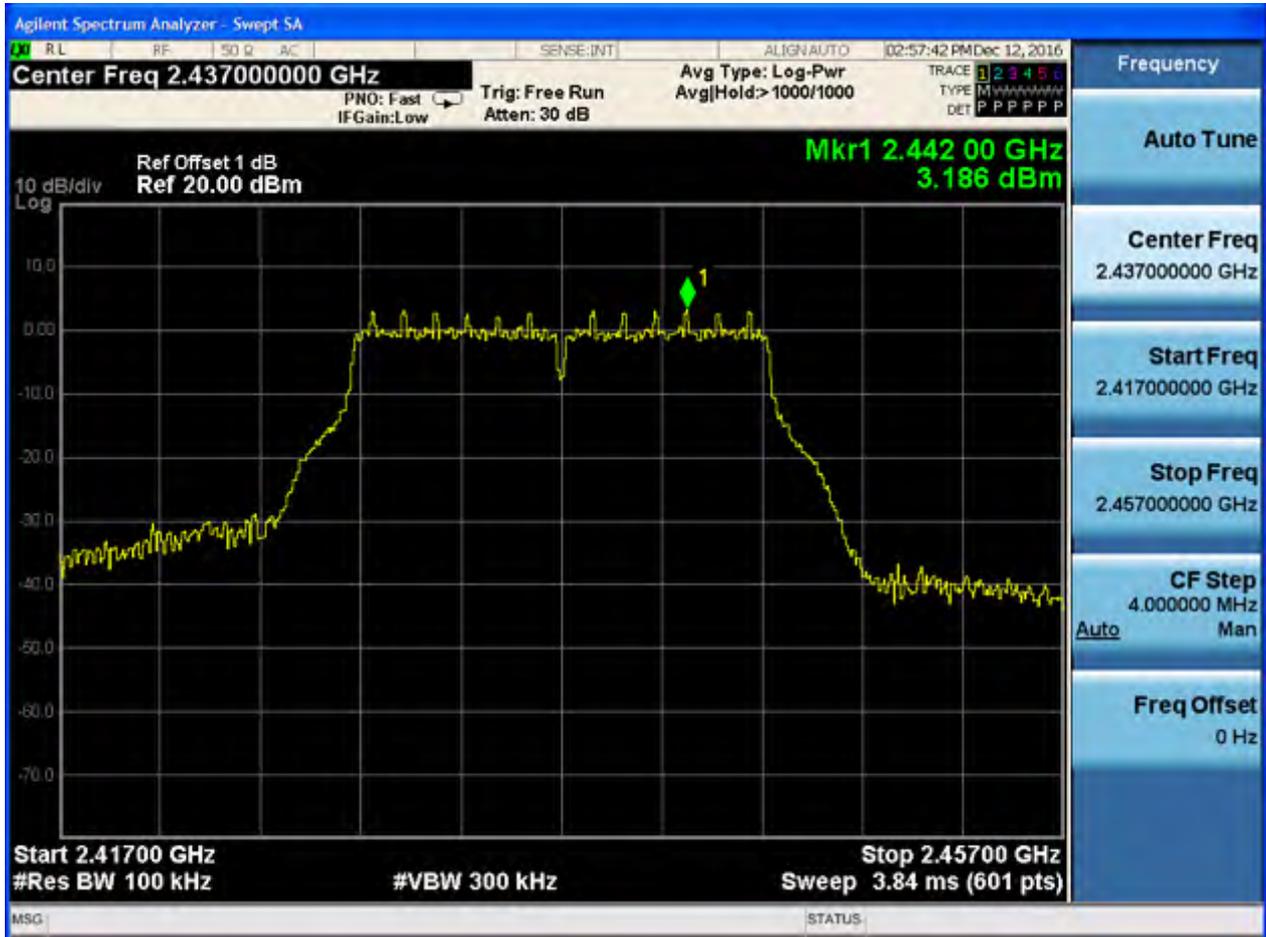






Puw:




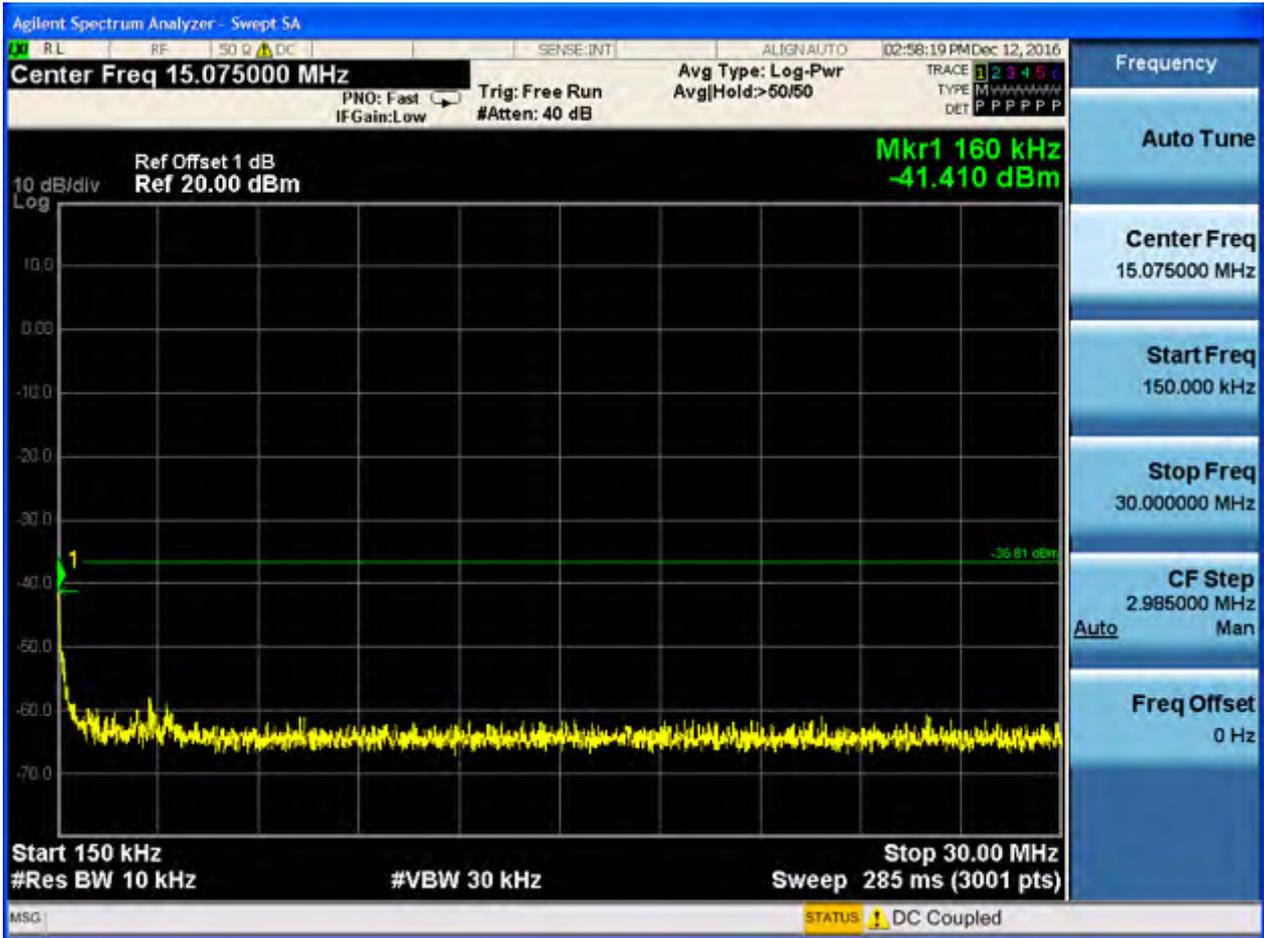

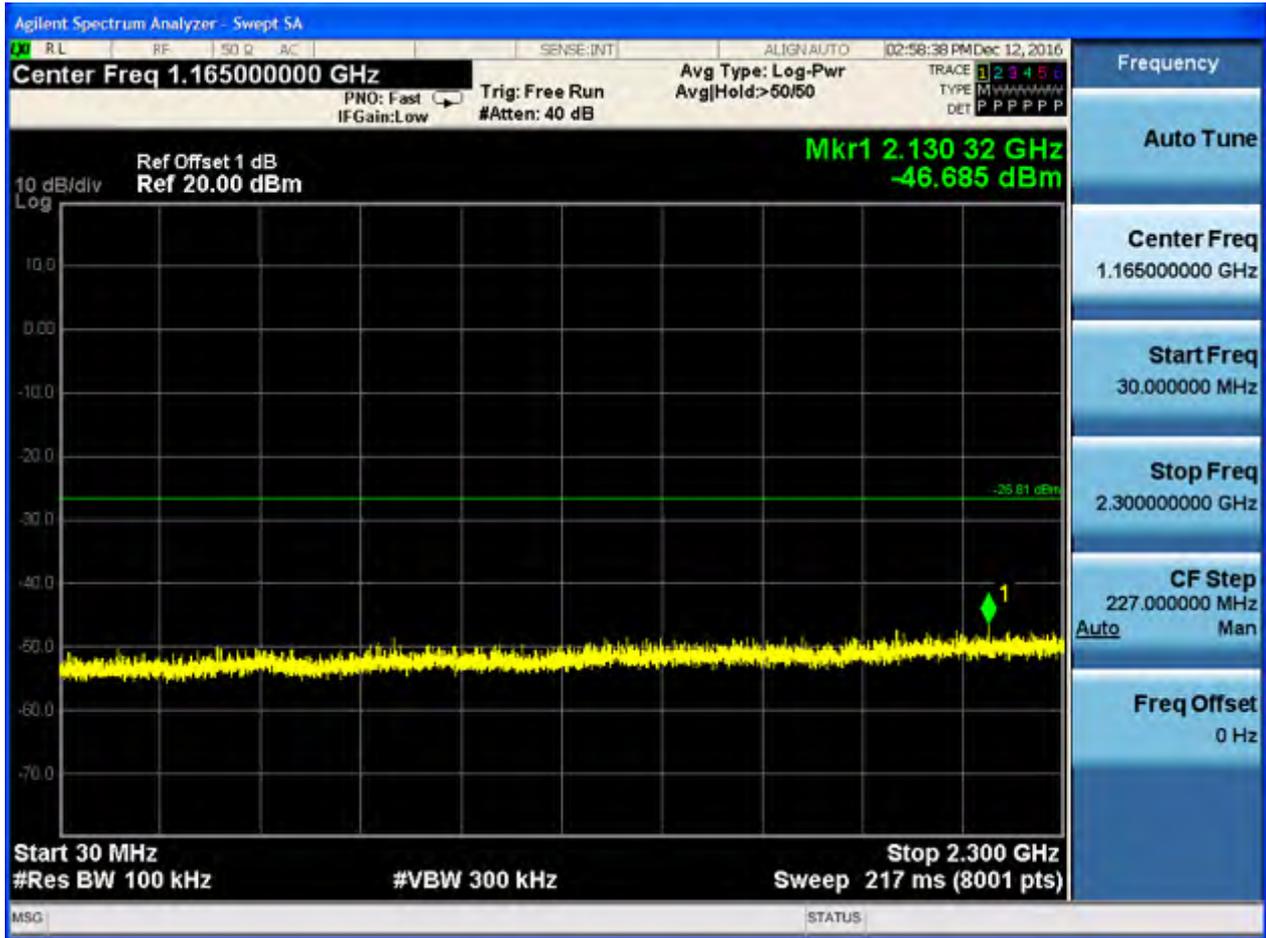

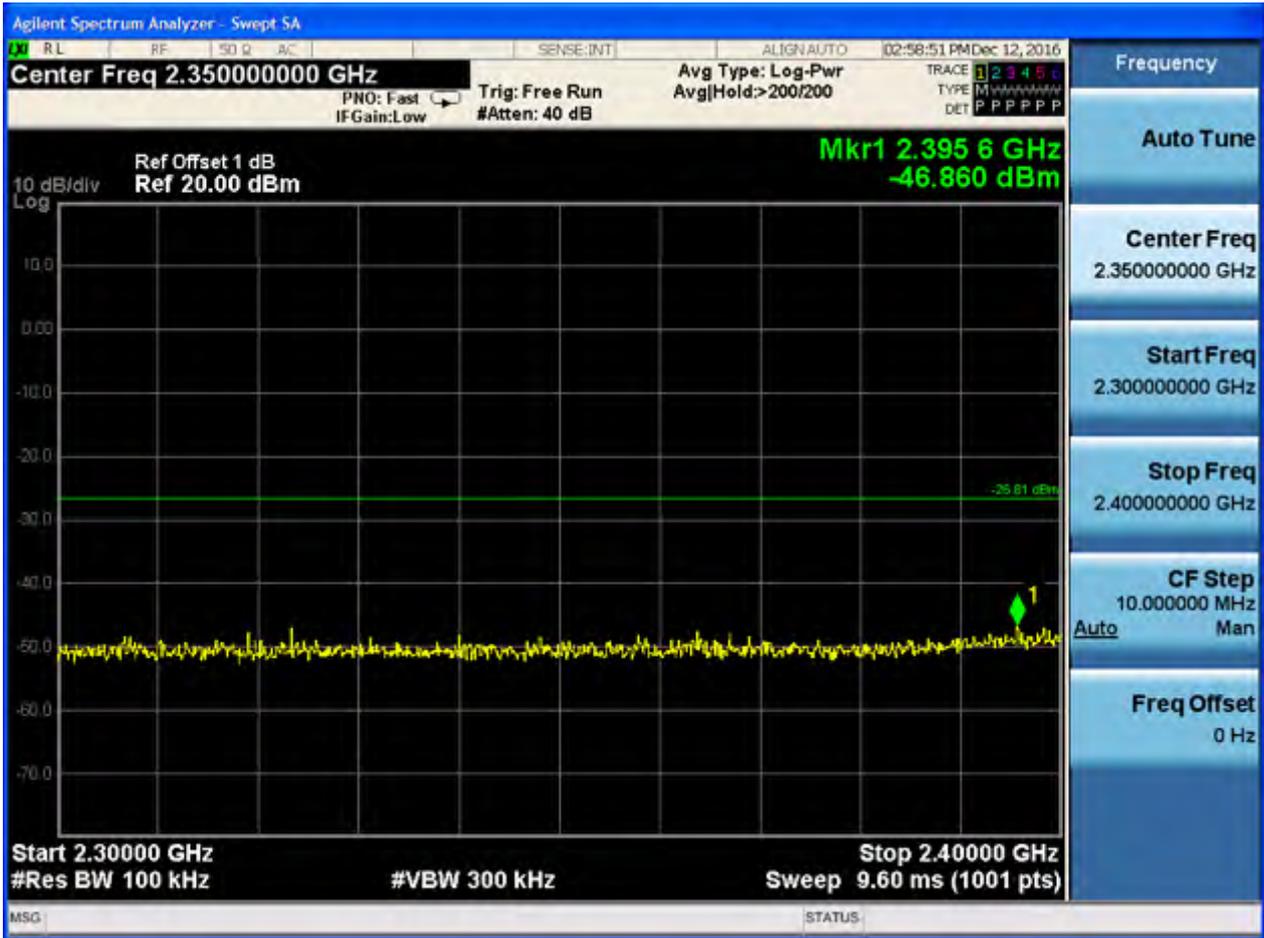

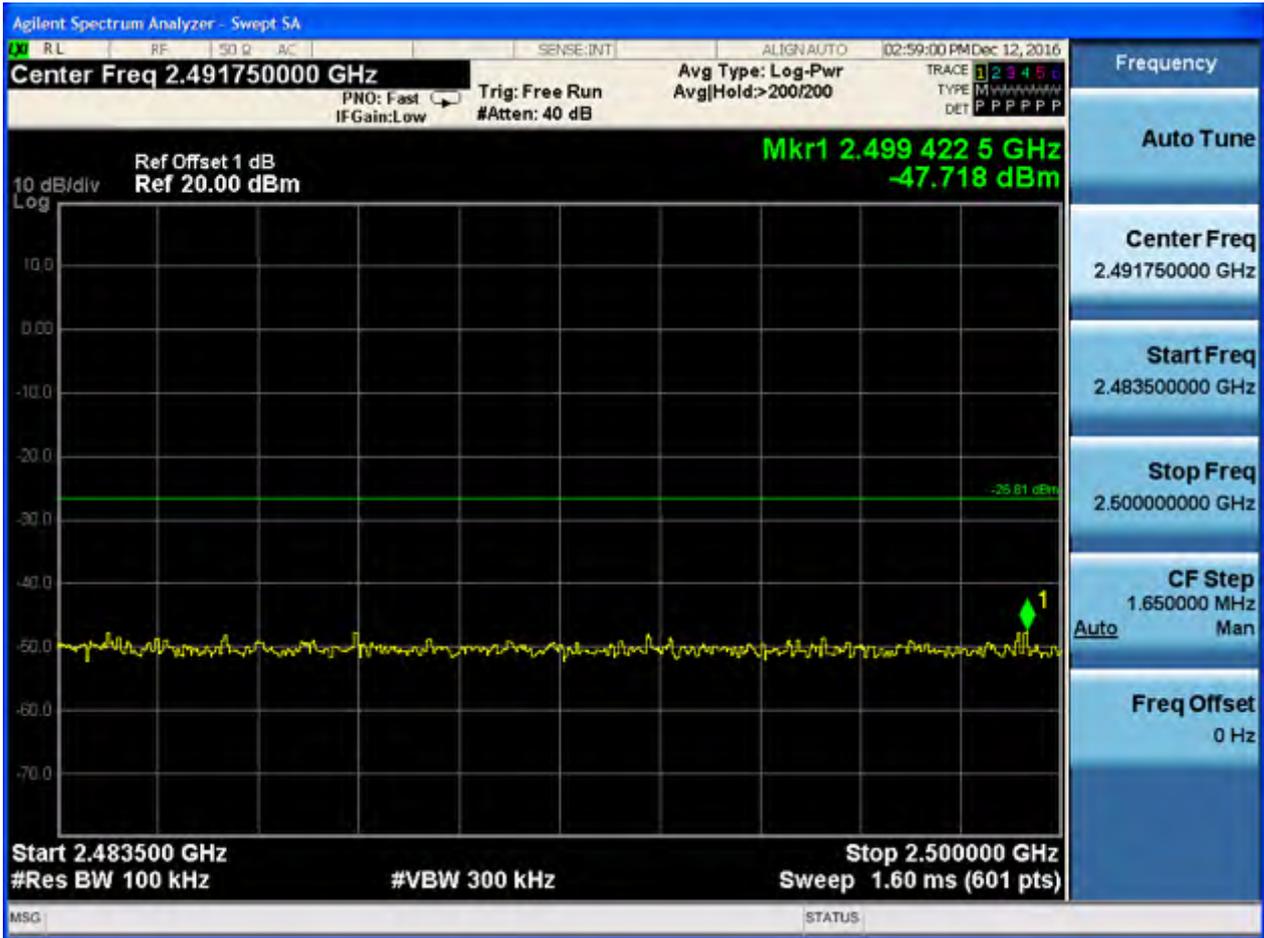


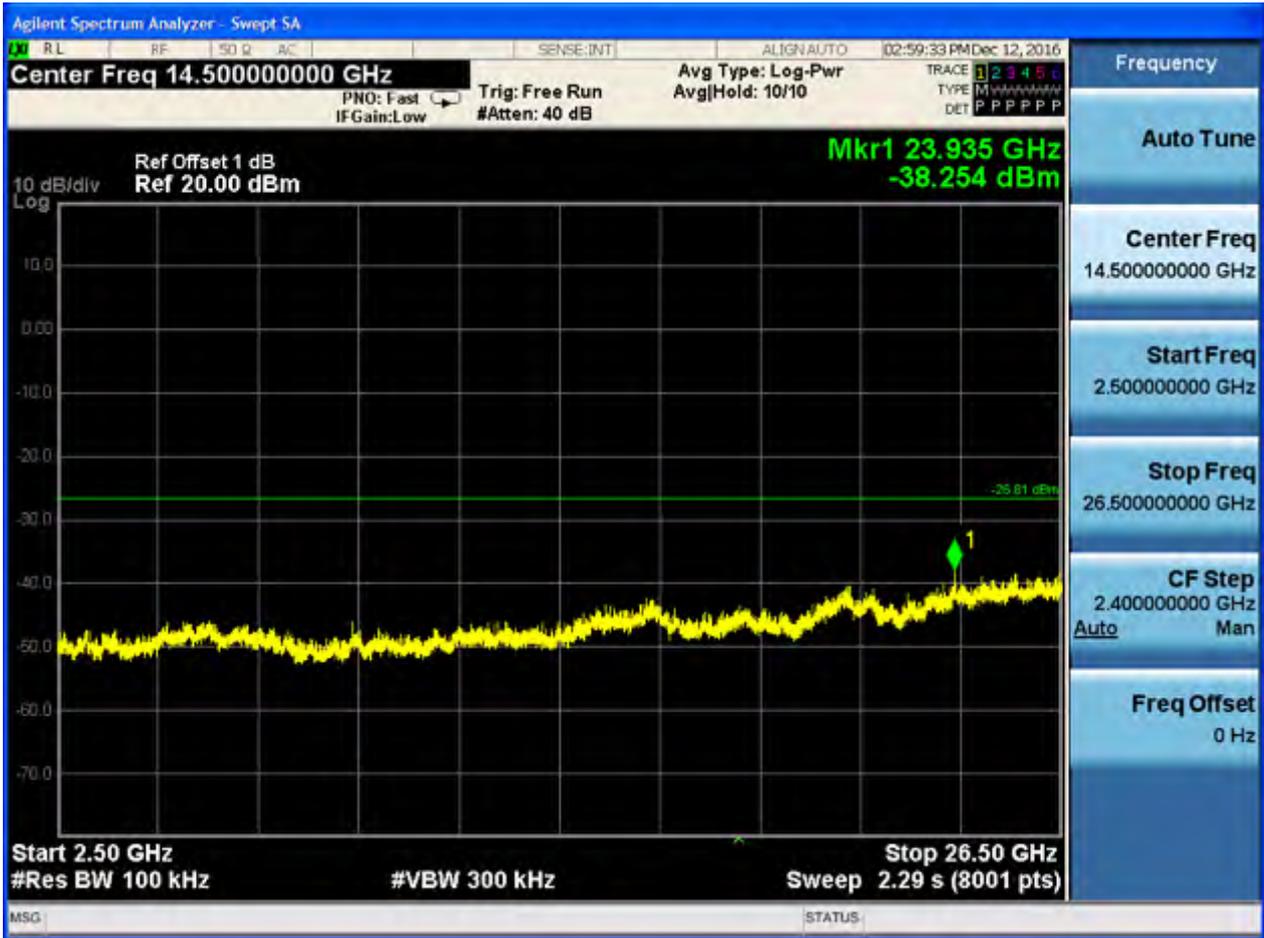



2.28 11G_CDD M@Ant 2


Pref:

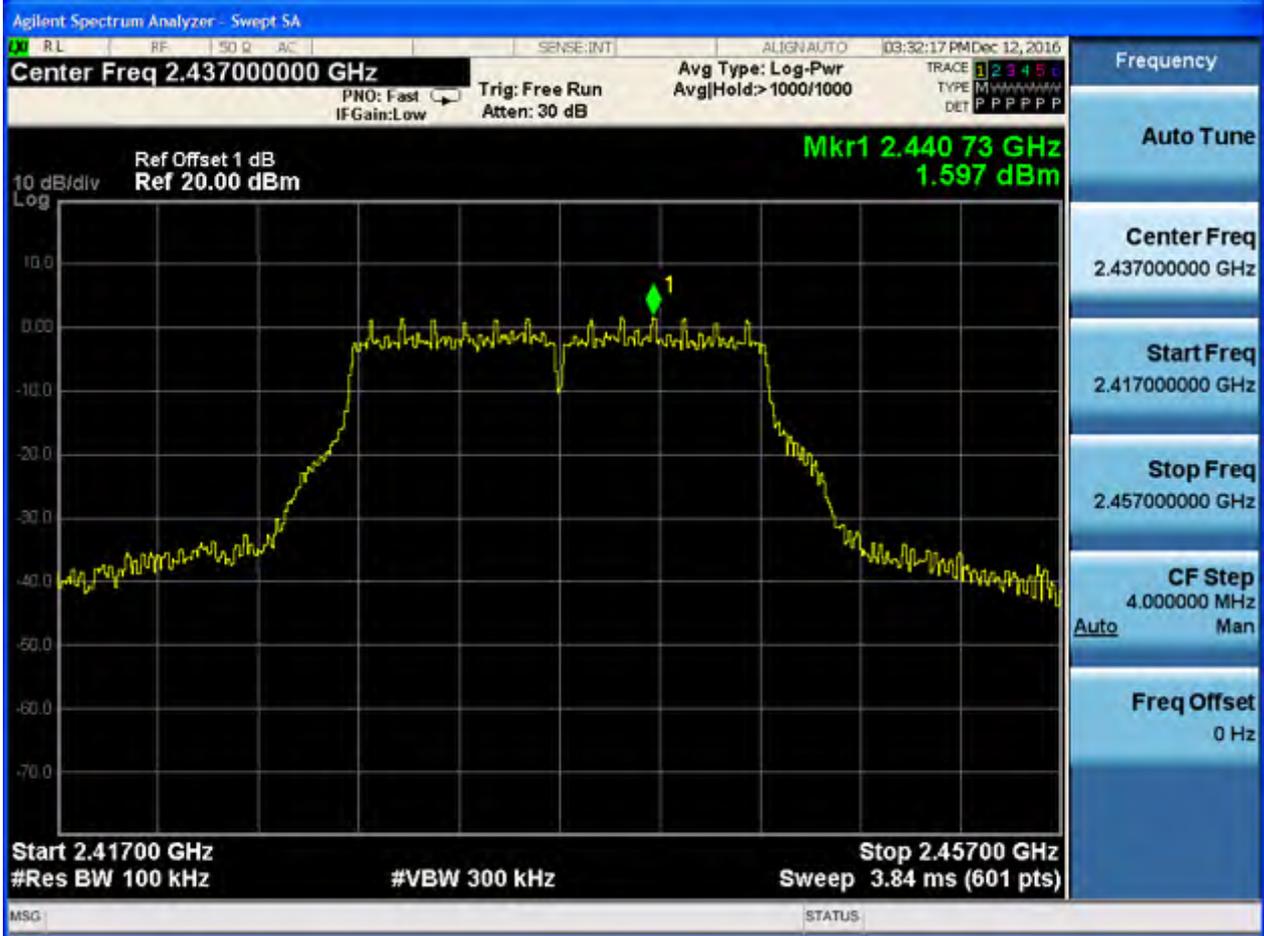






P_{uw}:




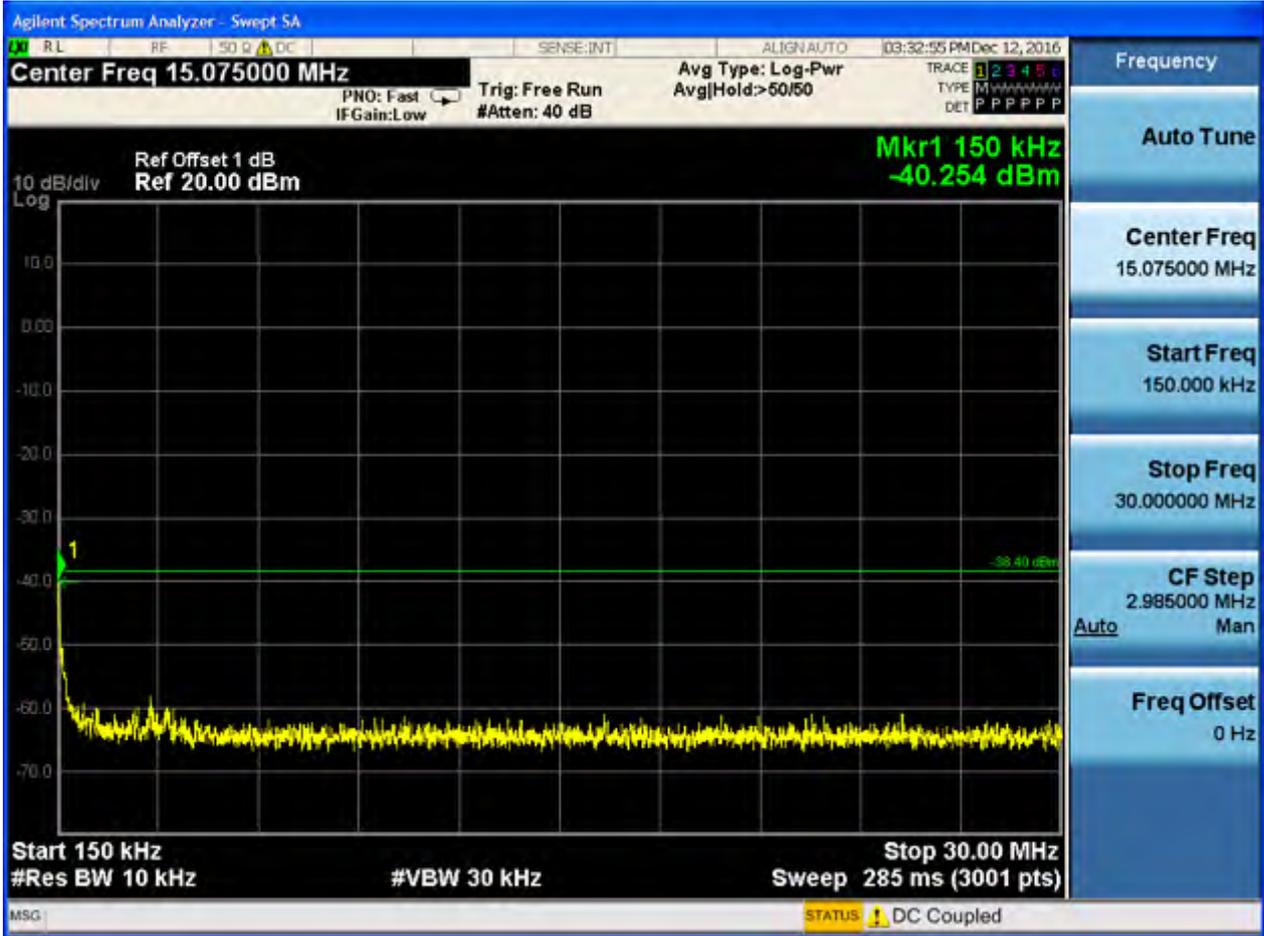

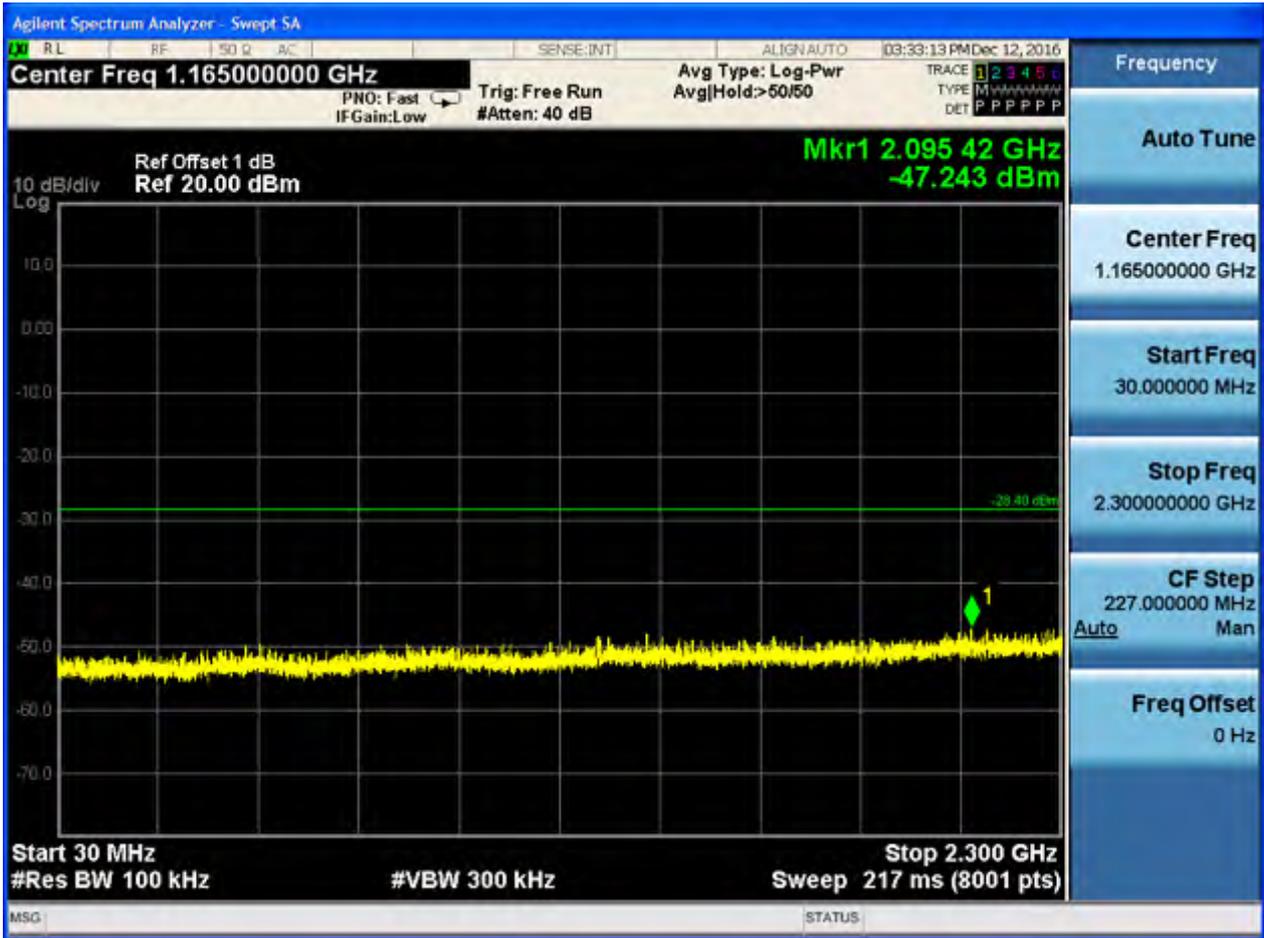

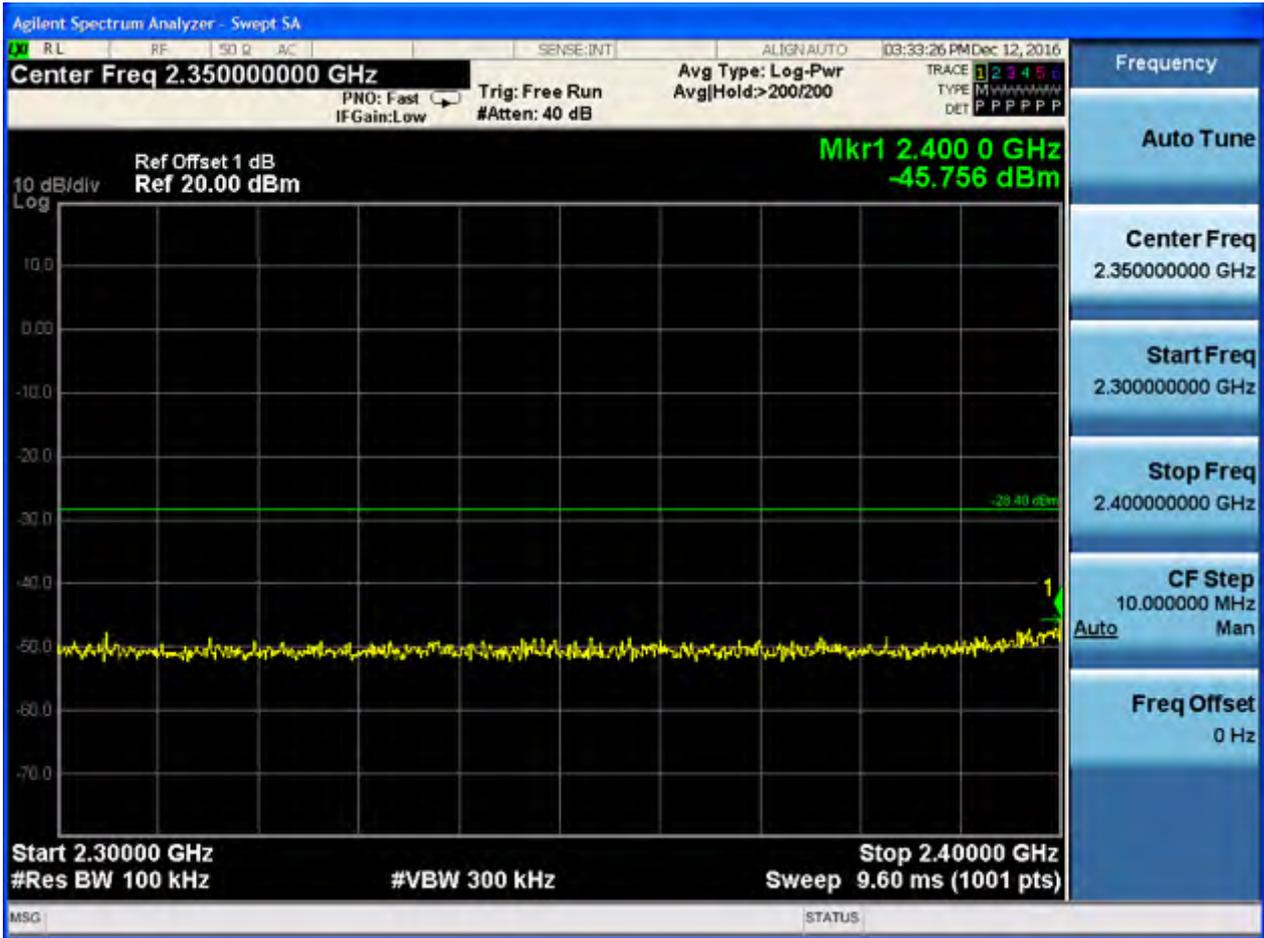


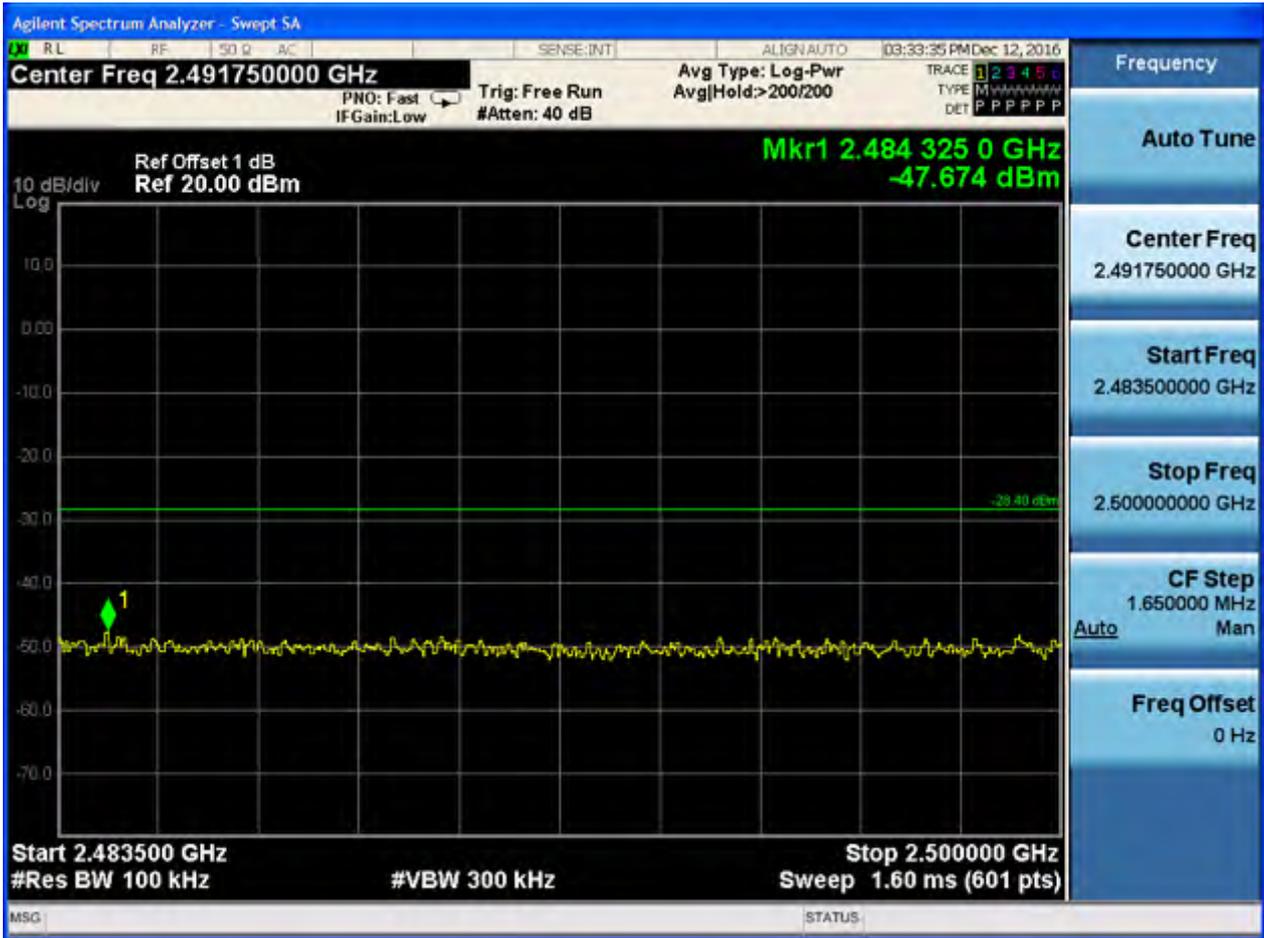

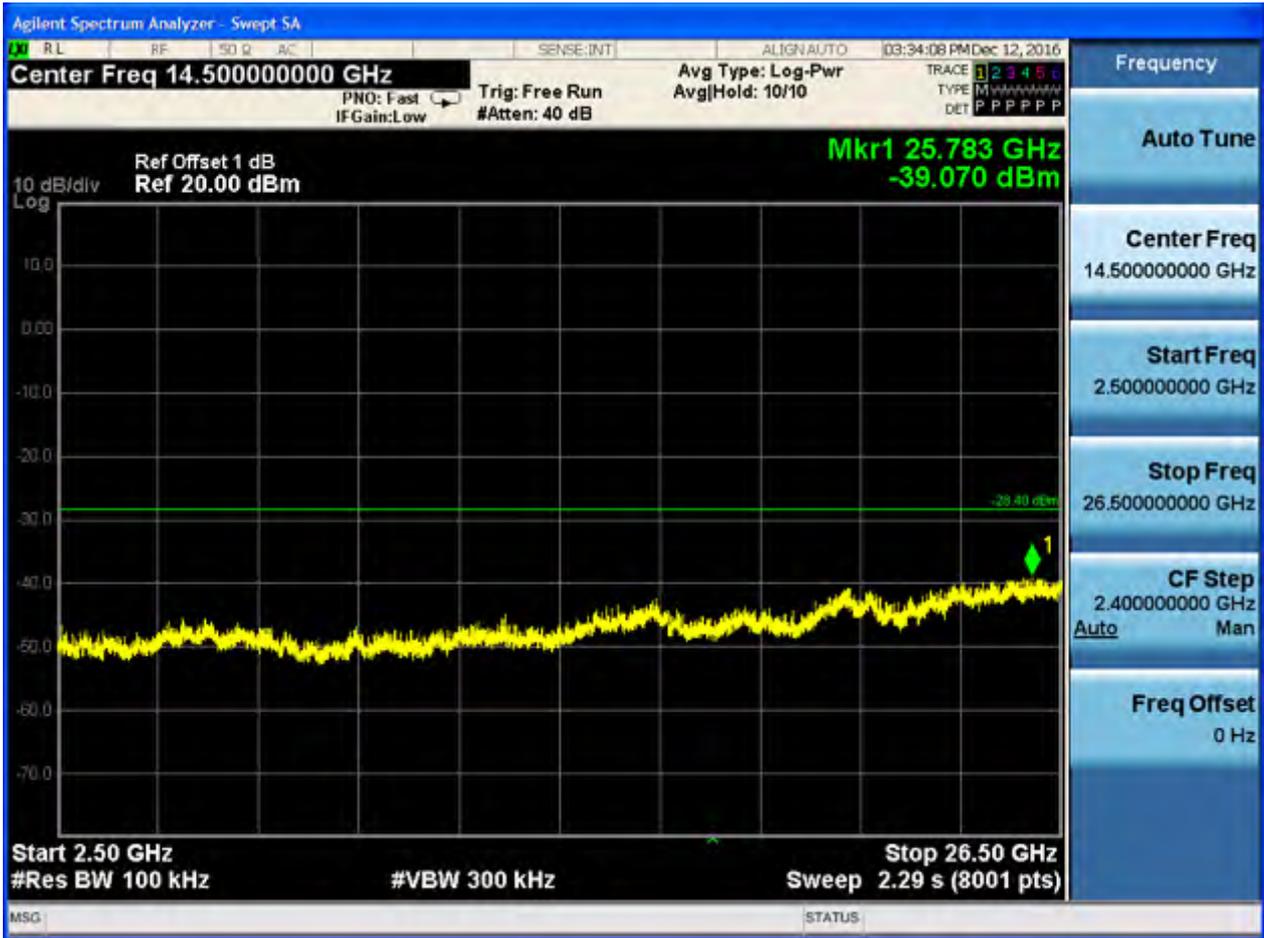

2.29 11G_CDD H@Ant 1


Pref:

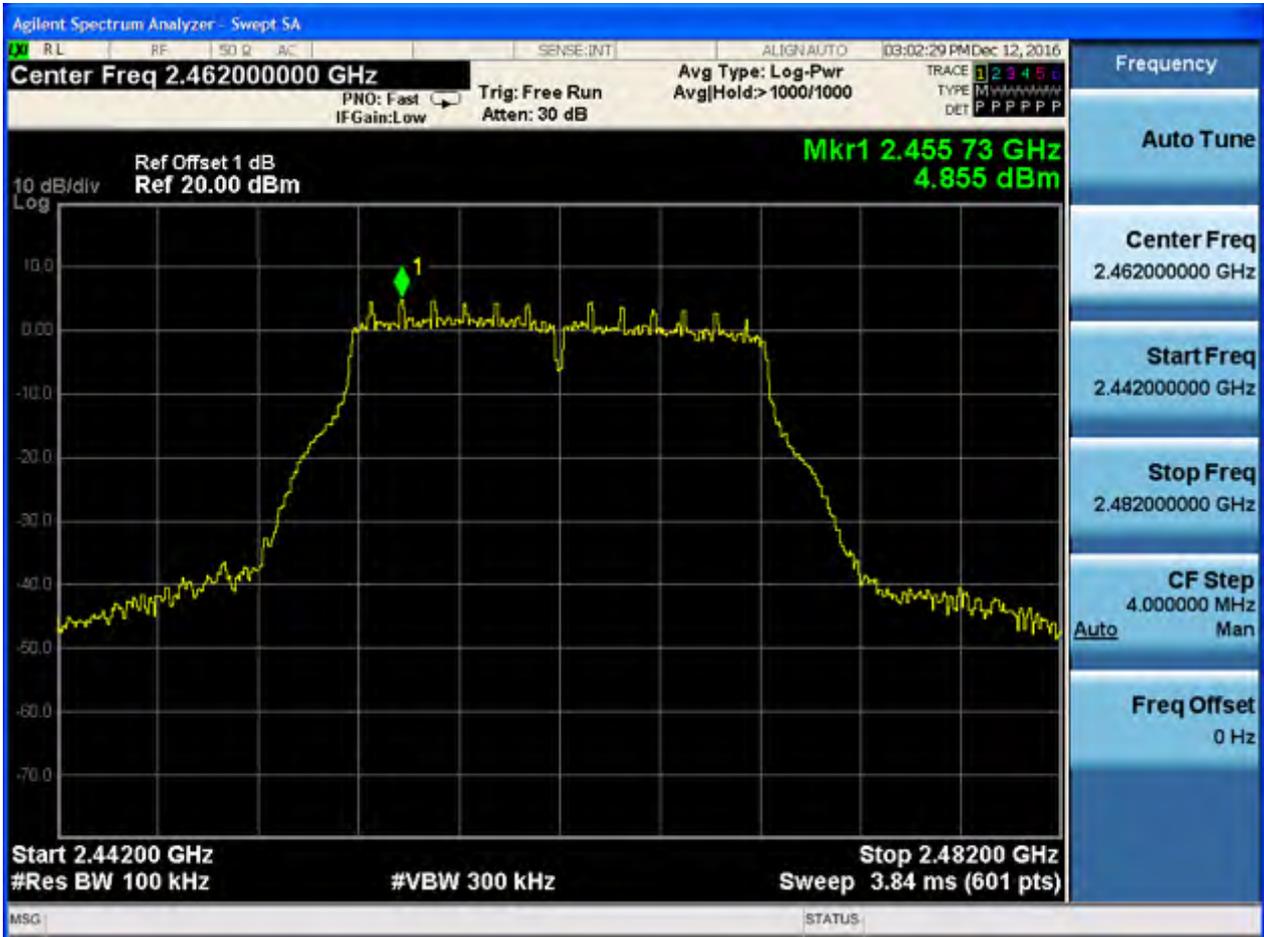






P_{uw}:



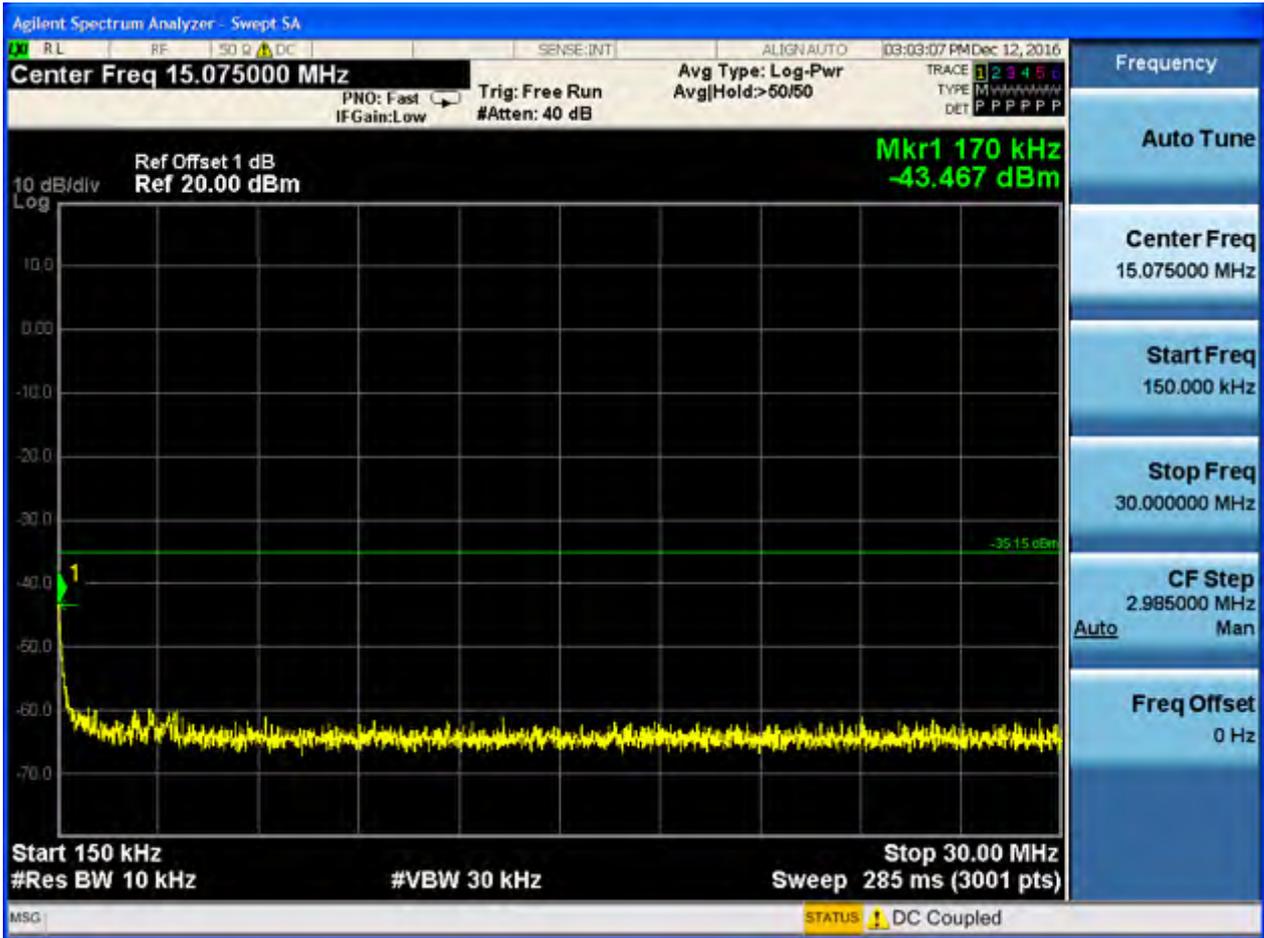

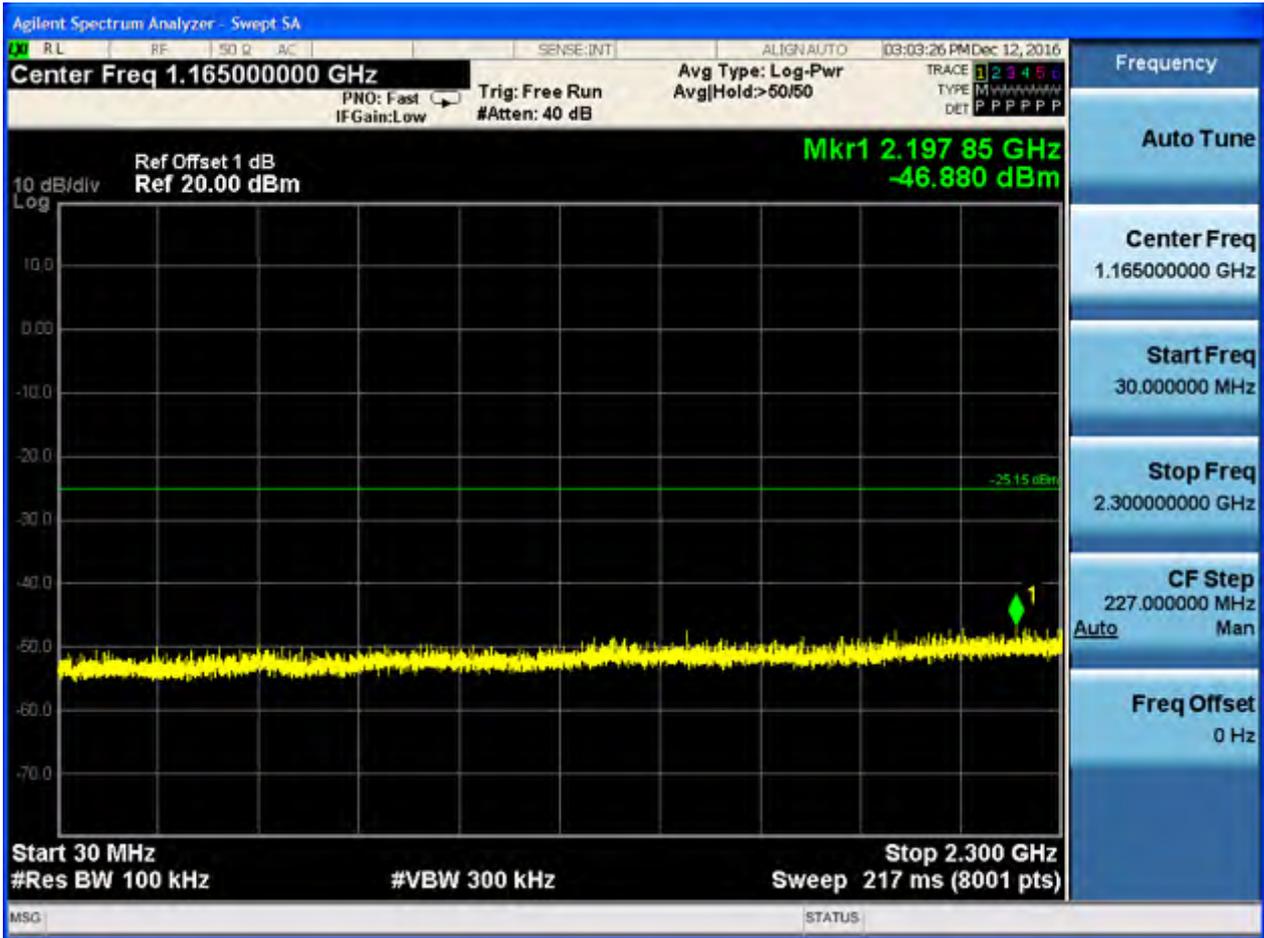

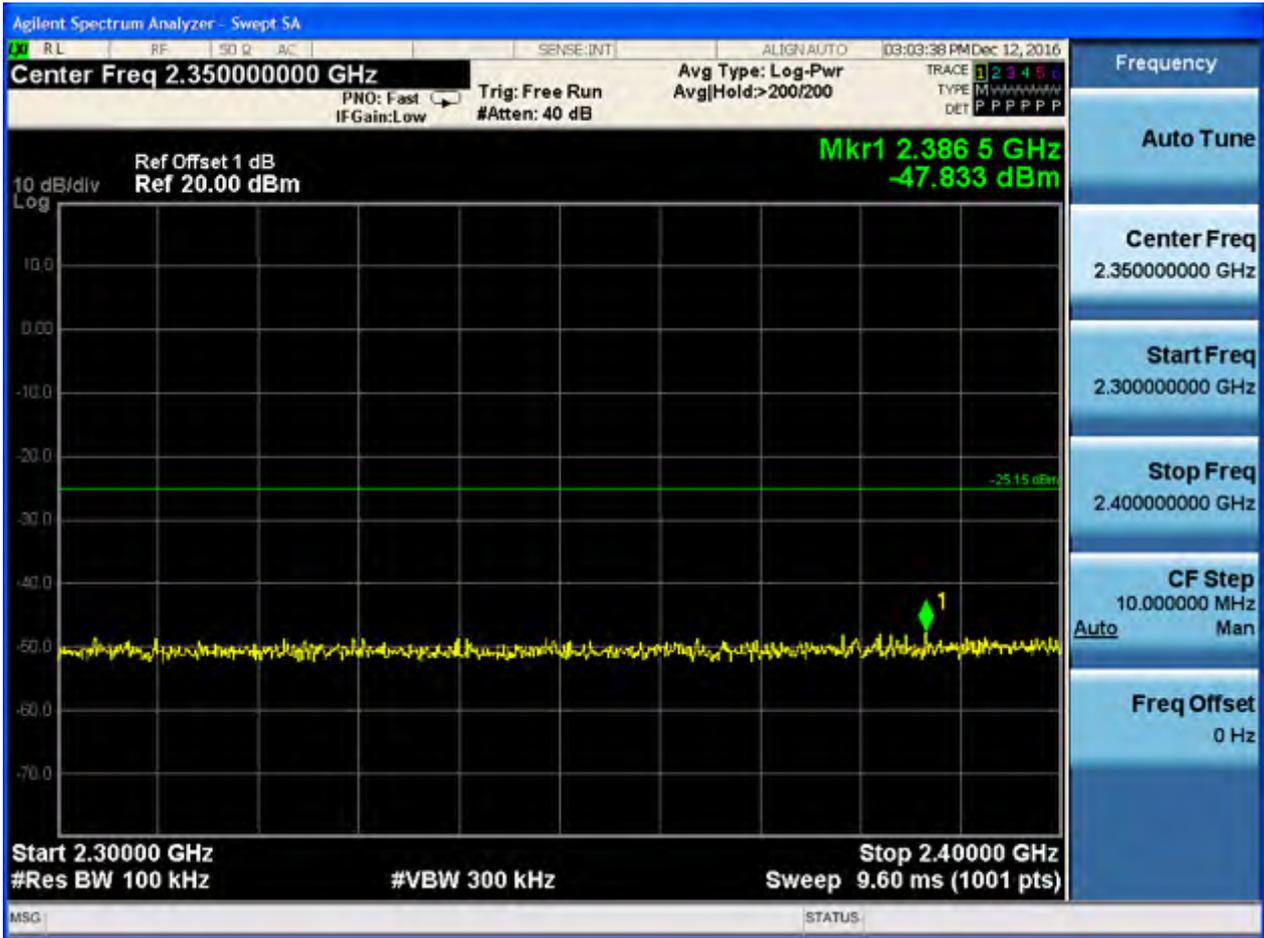

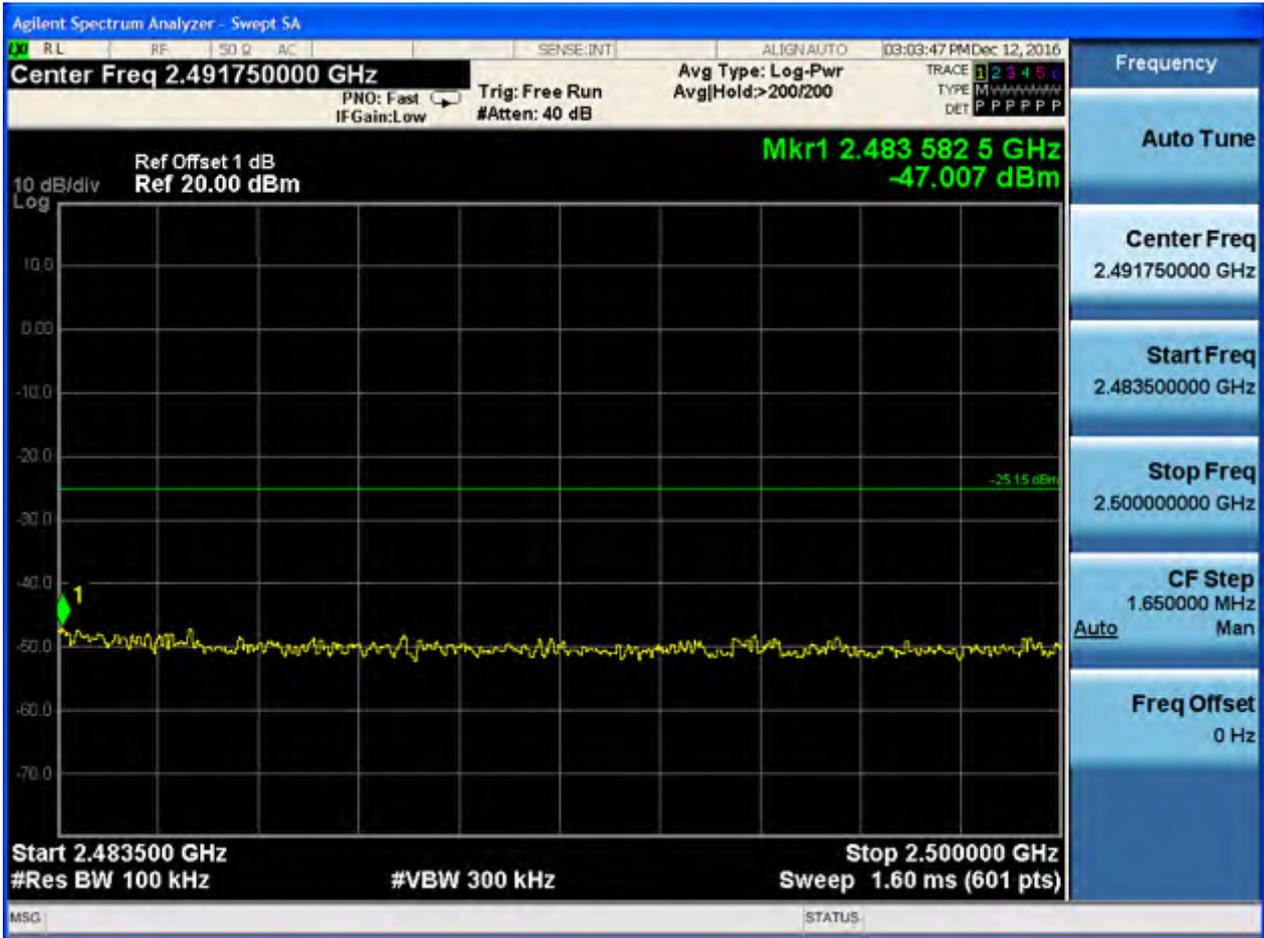






2.30 11G_CDD H@Ant 2


Pref:

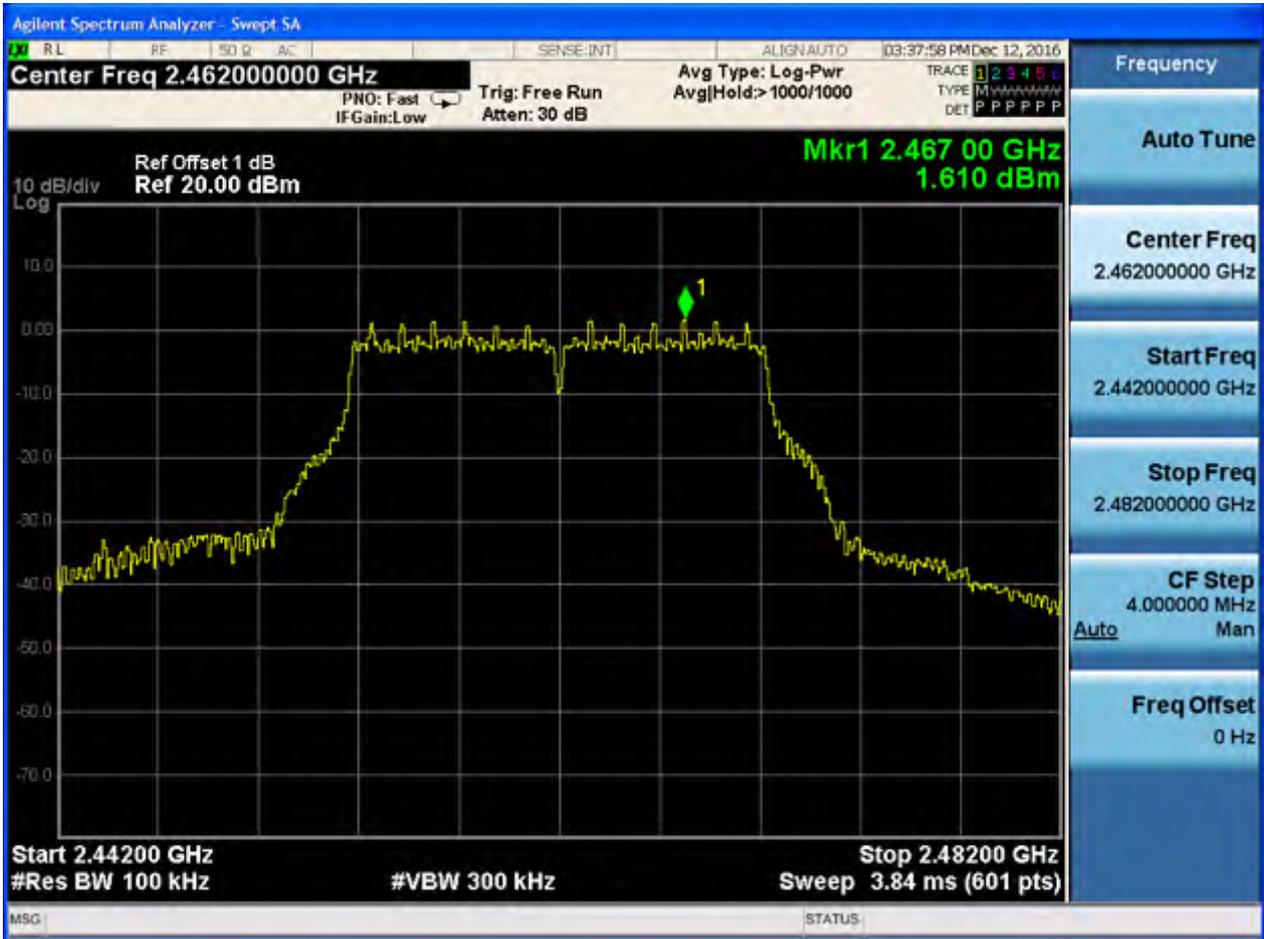






P_{uw}:



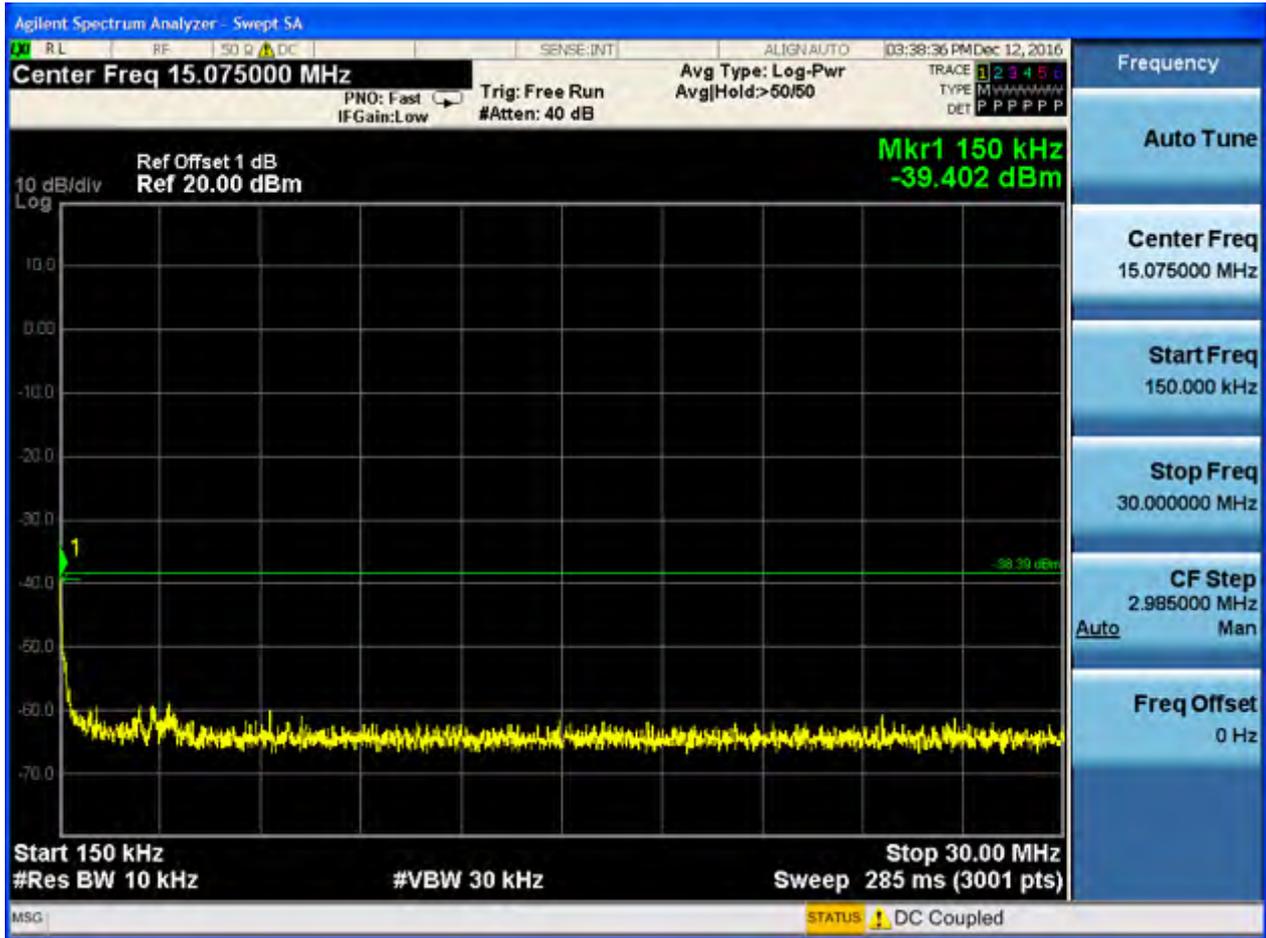

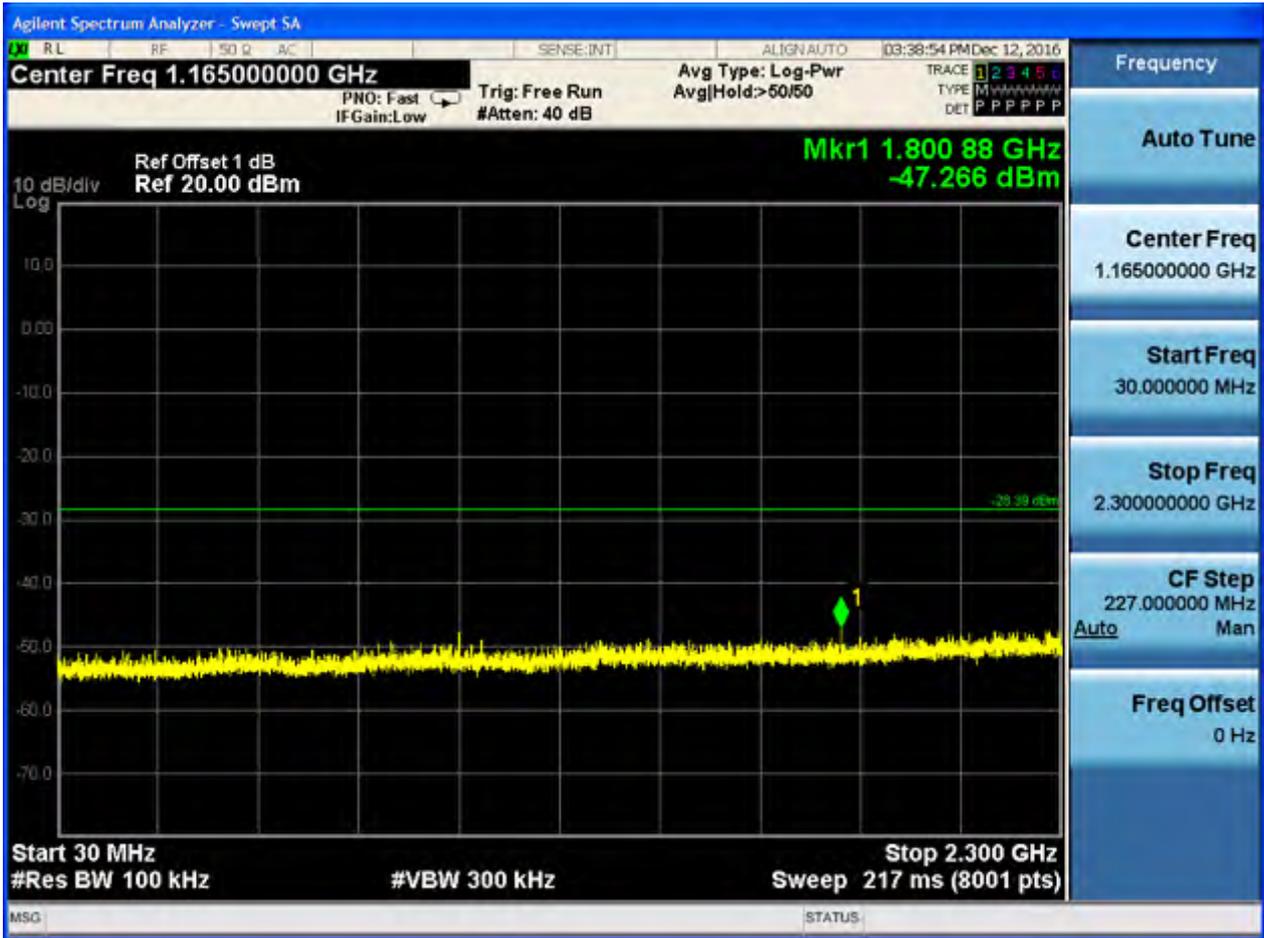

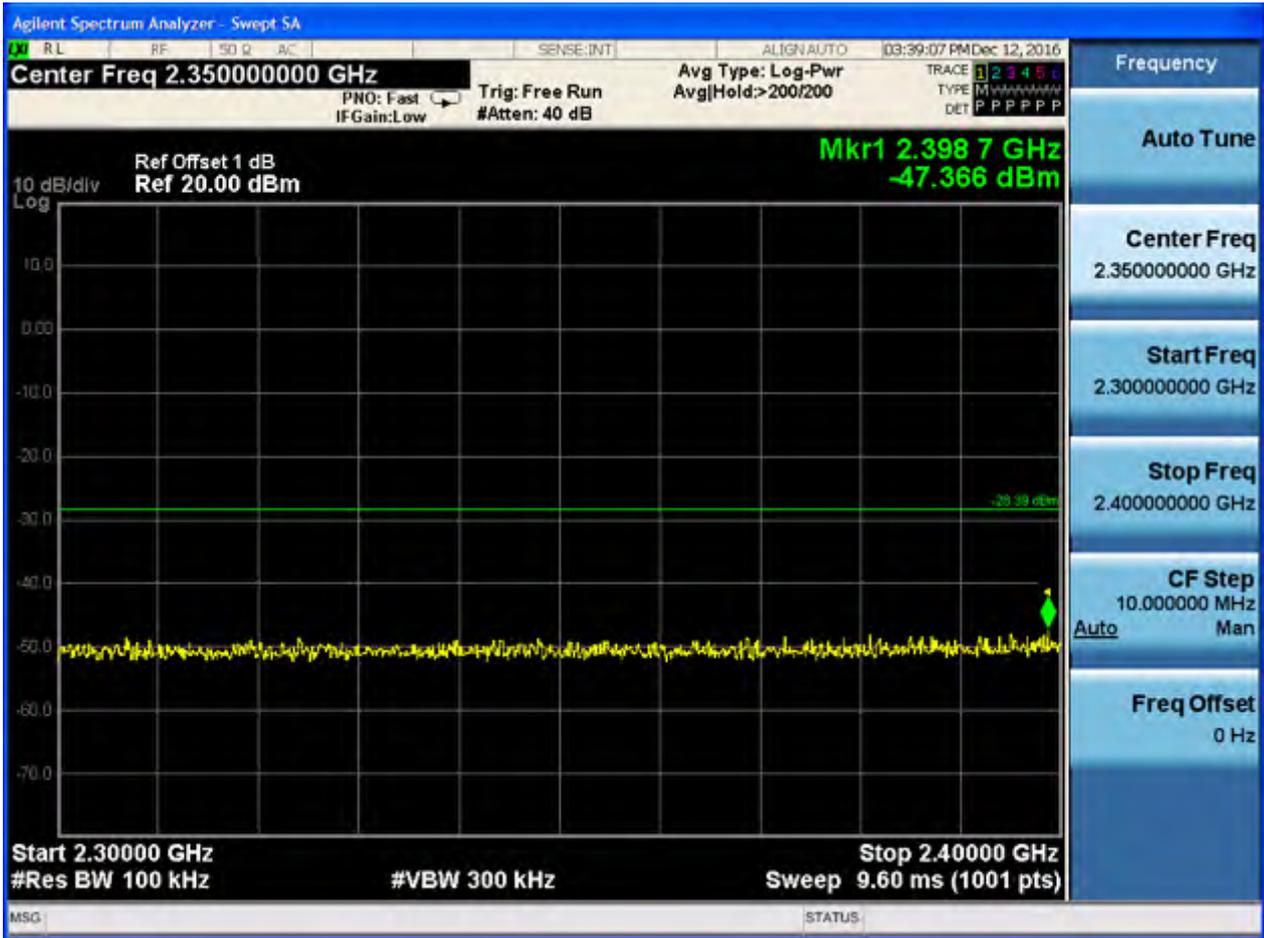

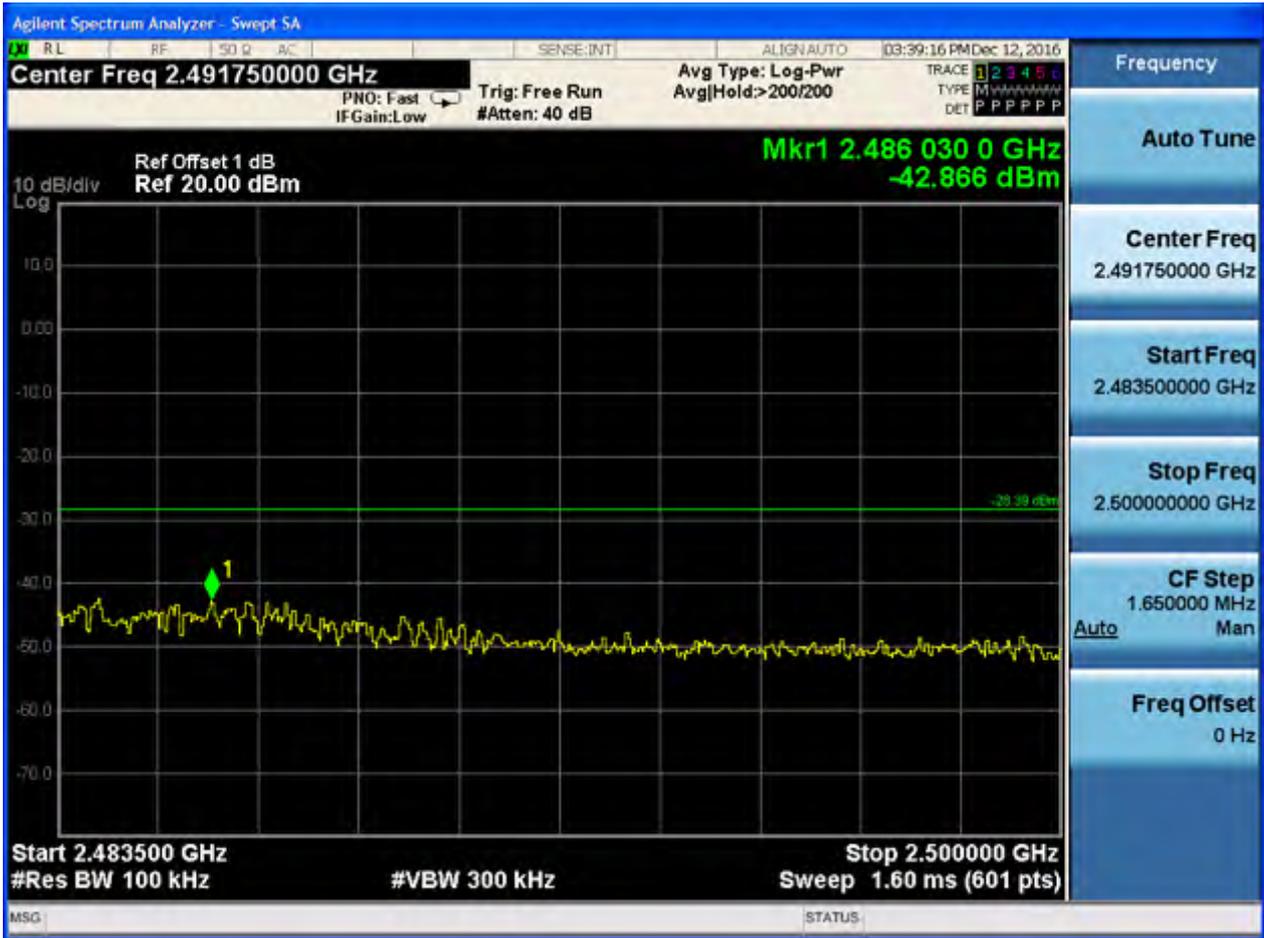





Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


1.1 Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

1.2 Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

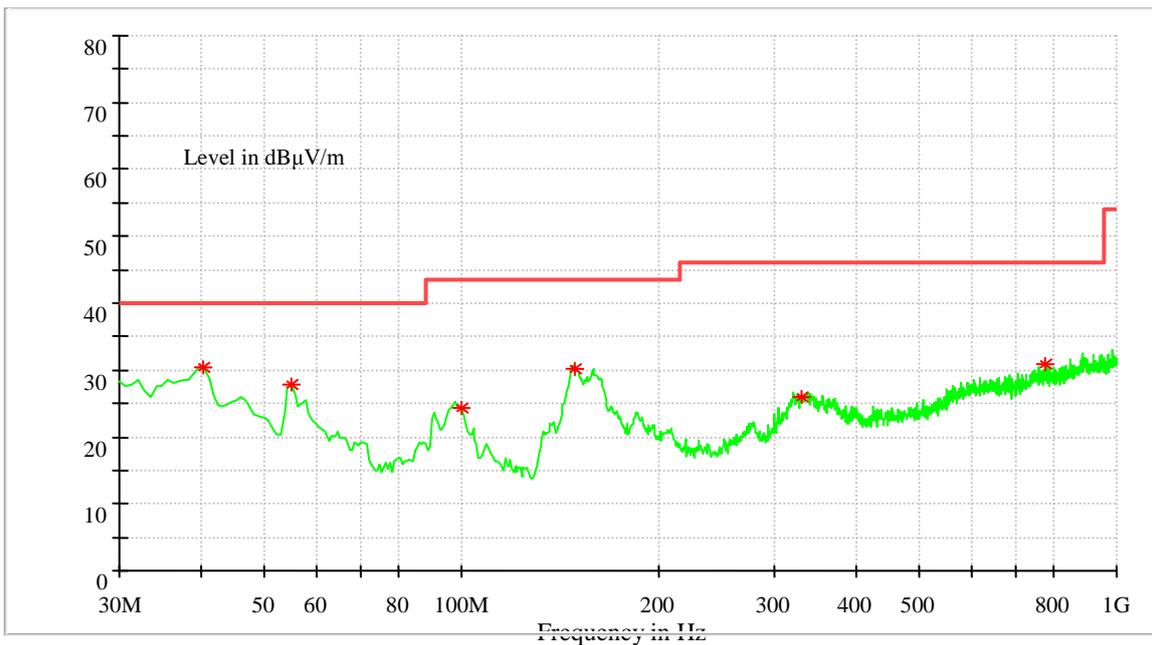

MEASUREMENT RESULT: QP Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
40.392857	30.44	40	9.56	100	V	201	15
54.942857	27.73	40	12.27	100	V	293	14.5
99.978571	24.24	43.5	19.26	100	V	231	13.4
149.171429	30.28	43.5	13.22	100	V	348	10.1
331.392857	25.92	46	20.08	100	H	97	16.3
780.364286	30.78	46	15.22	100	V	23	23.6

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3Part 3: Testing Range of “1 GHz to 3 GHz”

Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.


Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode:

1.4.1Test Mode: 11B

1.4.1.1 Channel 1 @Ant 1

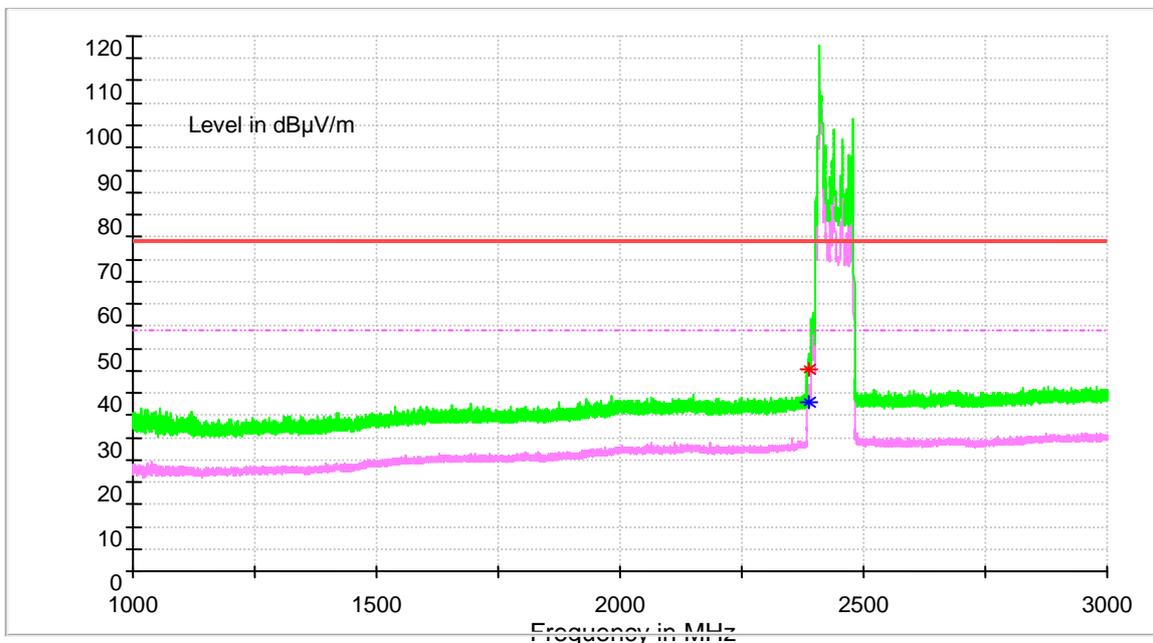

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	37.87	54	16.13	100	H	203	-2.1

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	45.31	74	28.69	100	H	203	-2.1


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.1.2 Channel 11@Ant 1

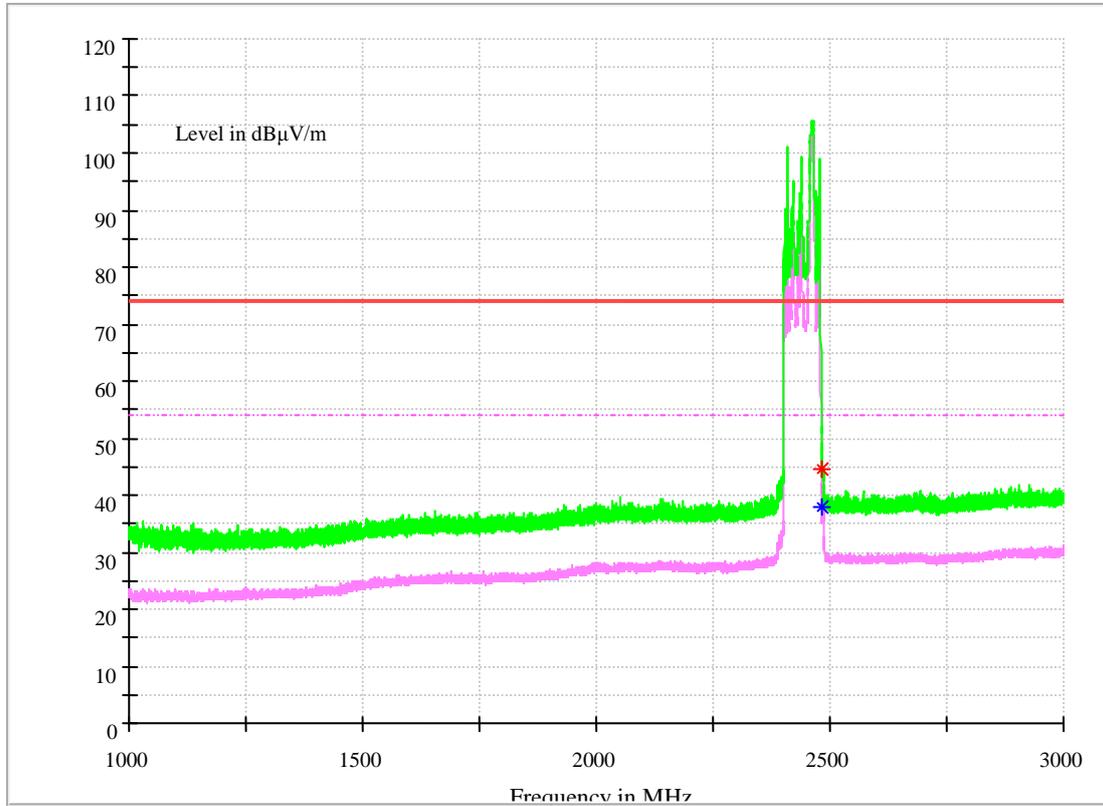

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	38.02	54	15.98	100	H	193	7.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	44.65	74	29.35	100	H	193	7.2

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.2 Test Mode: 11G

1.4.2.1 Channel 1 @Ant 1

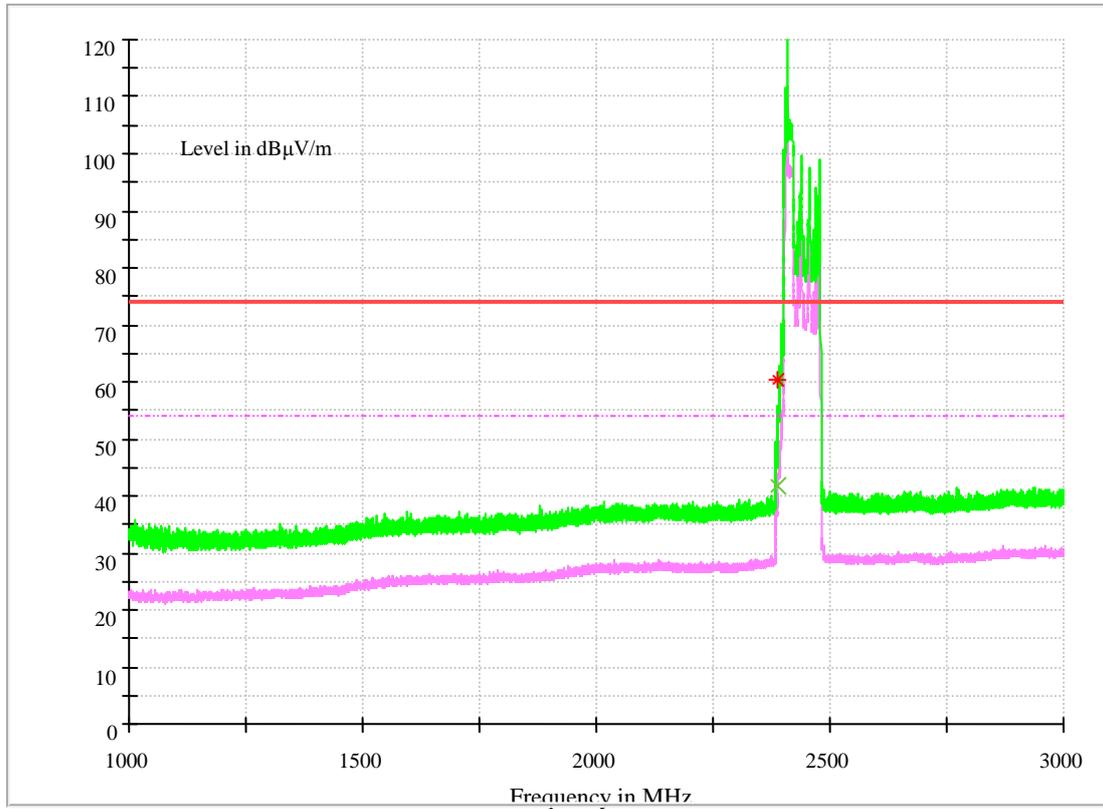

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	41.83	54	12.17	100	H	253	-2.1

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	60.37	74	13.63	115	H	261	-2.1


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.2.2 Channel 11@Ant 1

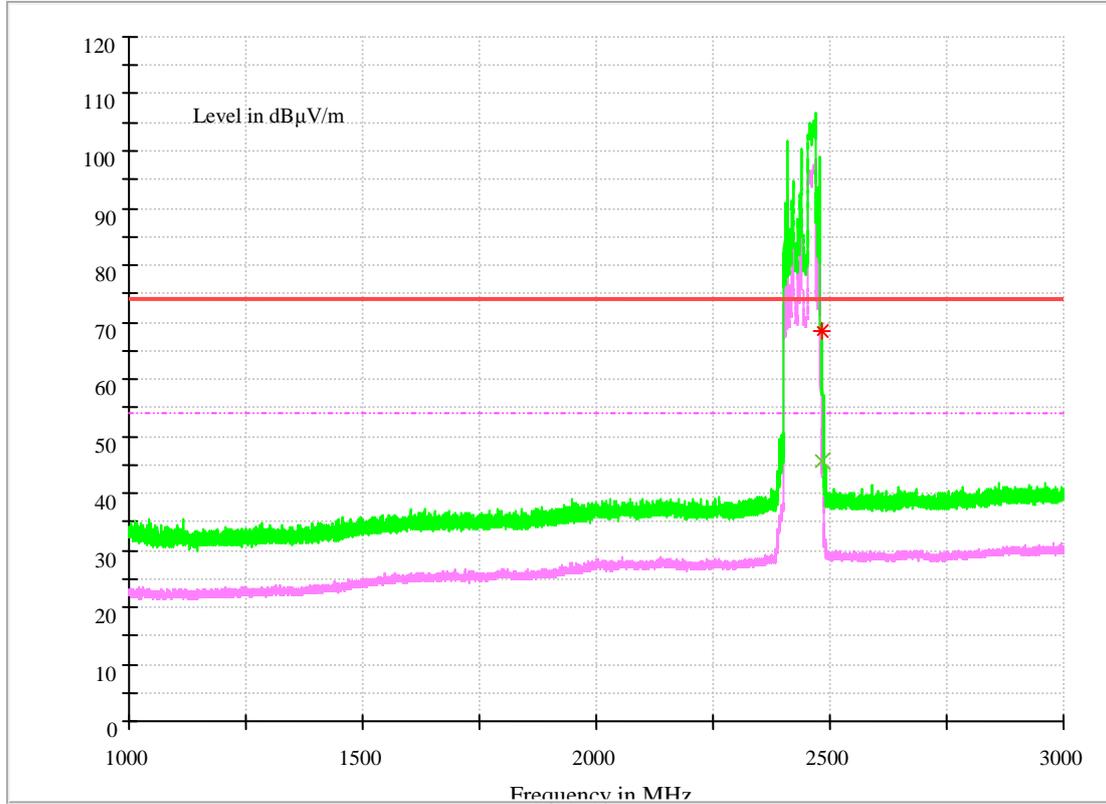

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	45.44	54	8.56	110	H	211	7.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	68.25	74	5.75	136	H	216	7.2

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.3 Test Mode: 11N20

1.4.3.1 Channel 1 @Ant 1

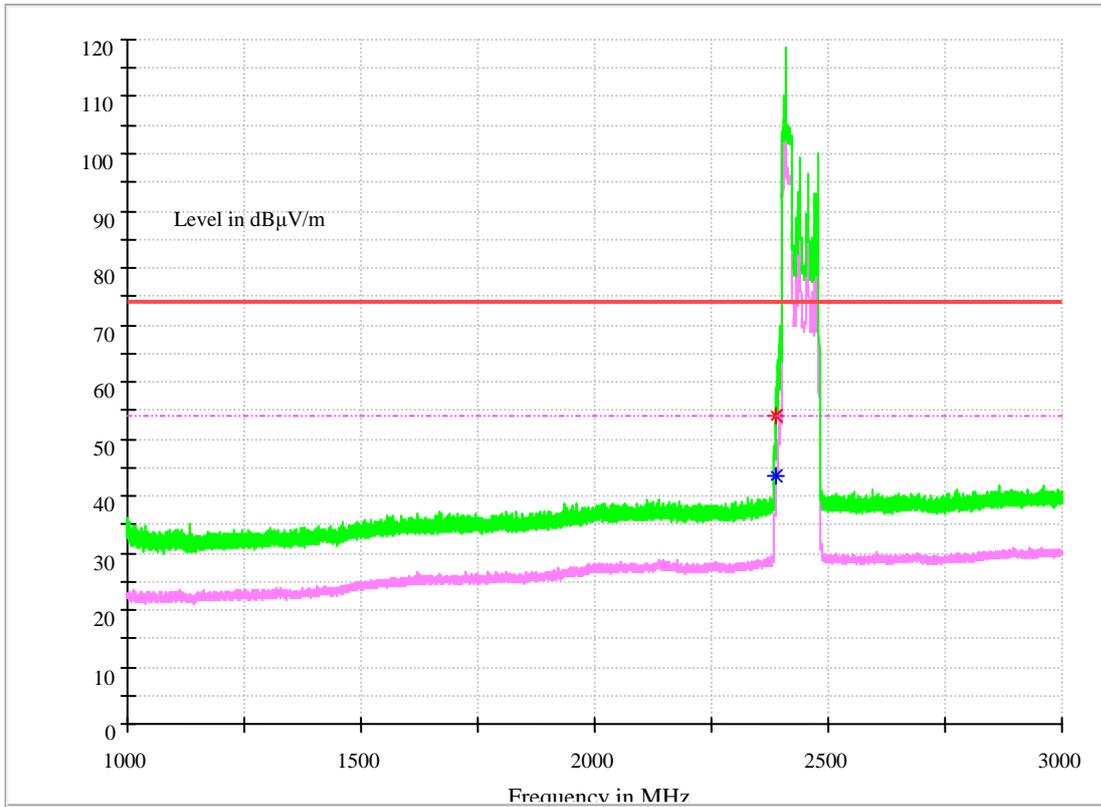

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	43.47	54	10.53	100	H	215	-2.1

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	54.07	74	19.93	100	H	215	-2.1


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.3.2 Channel 11@Ant 1

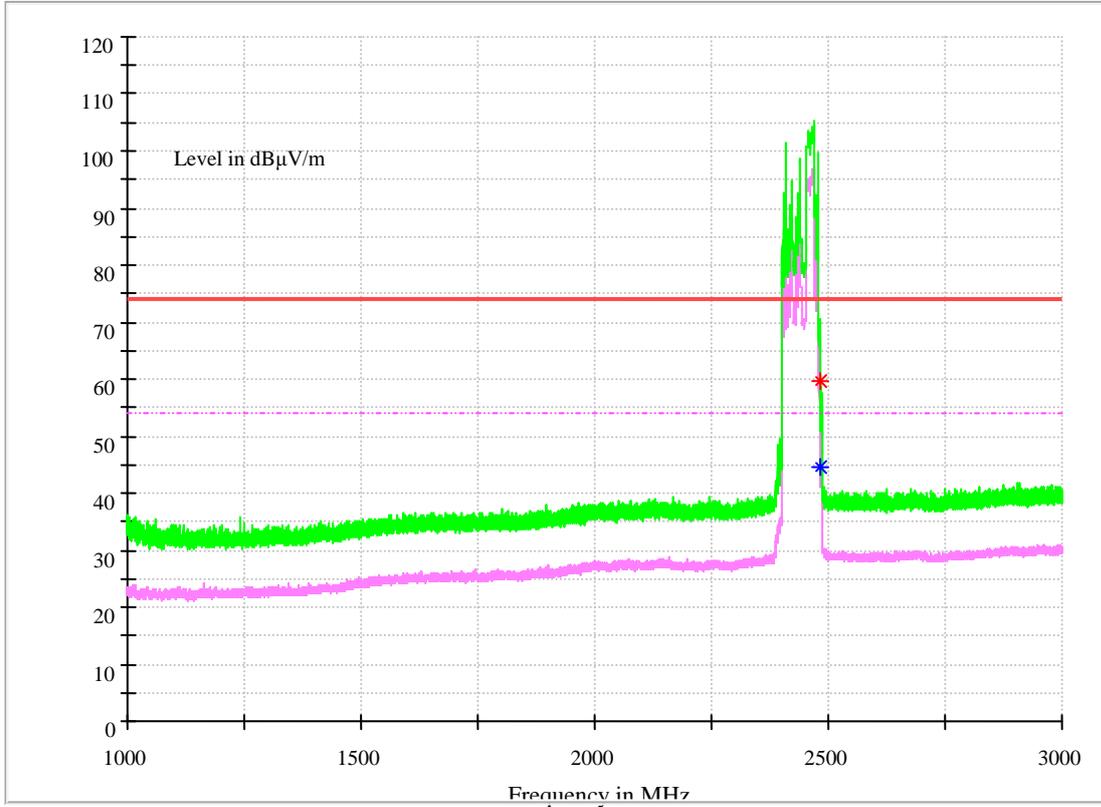

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.59	54	9.41	100	H	233	7.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	59.52	74	14.48	100	H	233	7.2

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.4.4 Test Mode: 11B

1.4.4.1 Channel 1 @Ant 2

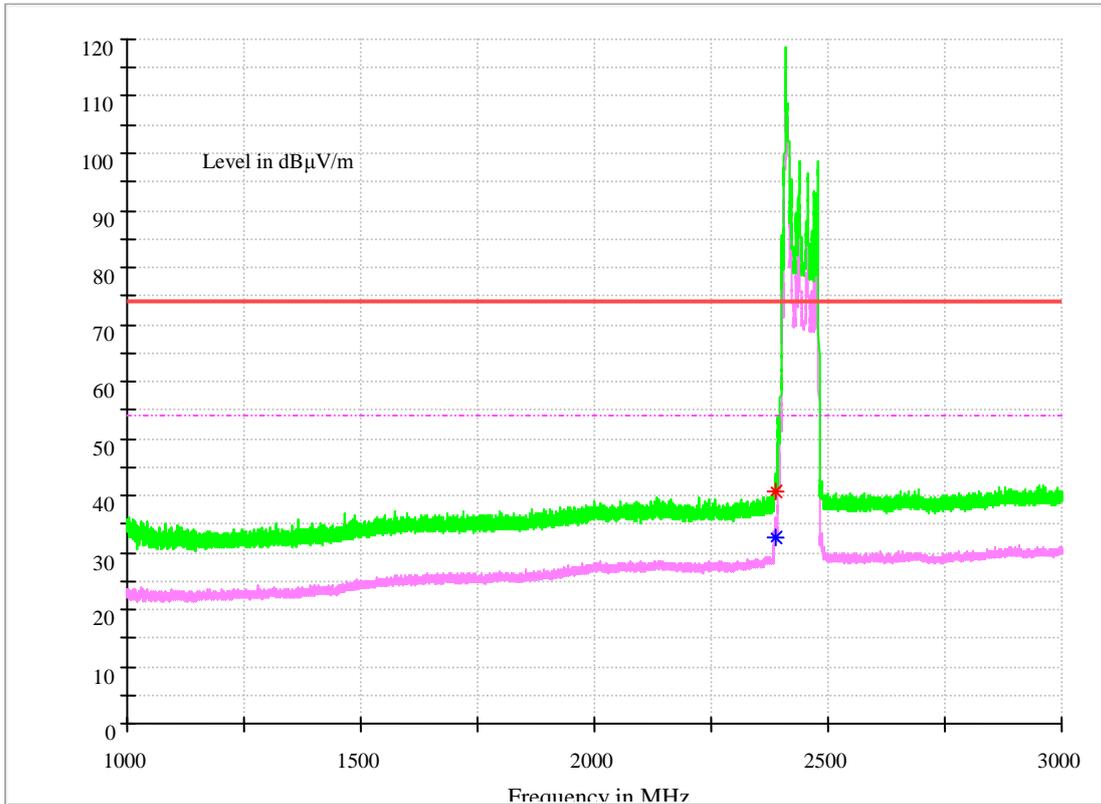

d

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	32.71	54	21.29	100	H	138	-2.1

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	40.61	74	33.39	100	H	138	-2.1

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level