

Puw:















1.74 11N40MIMO_Ant2_2432

Pref:

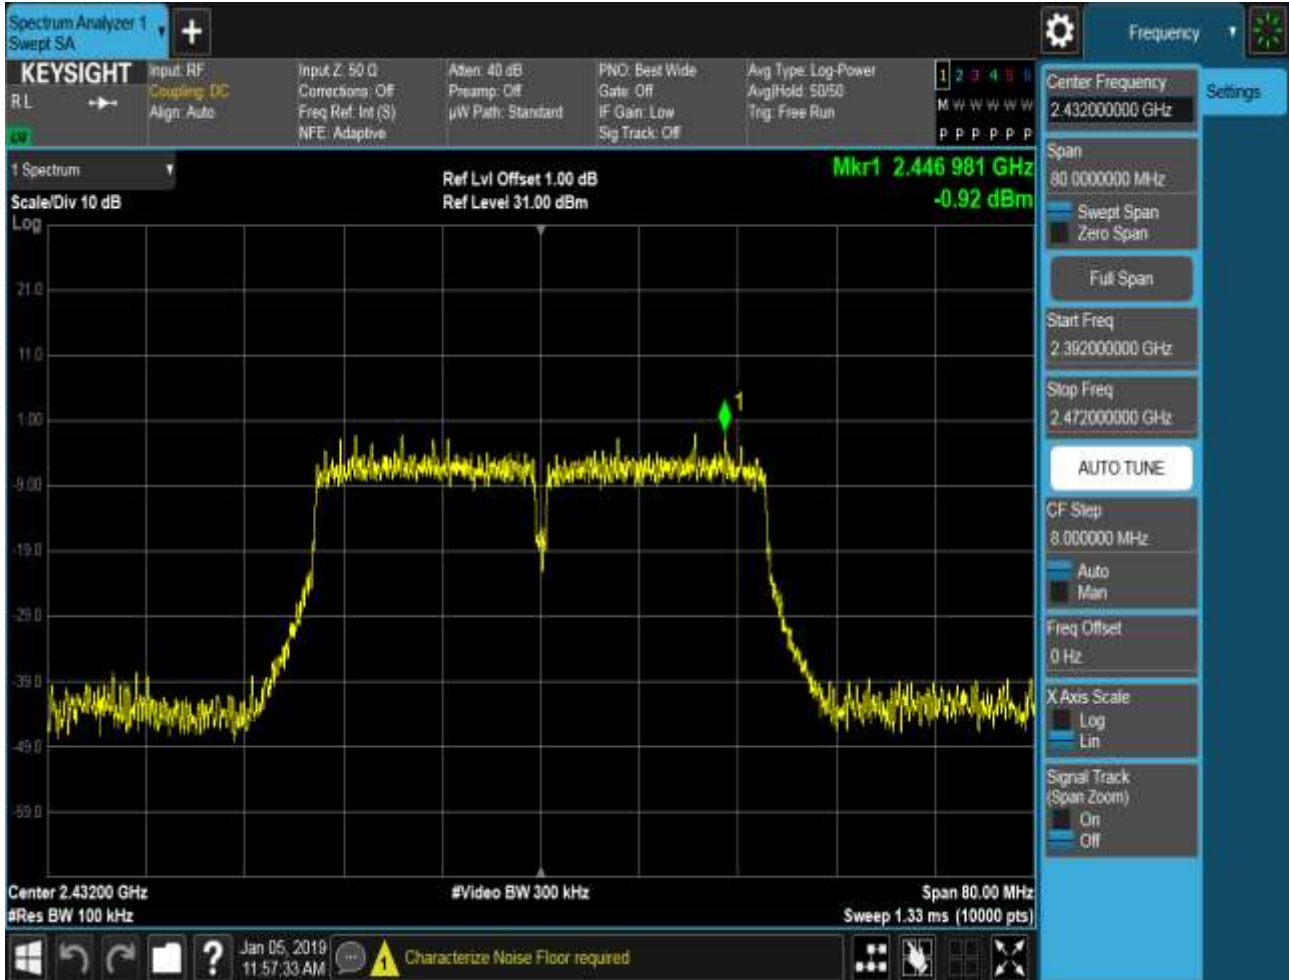

Puw:



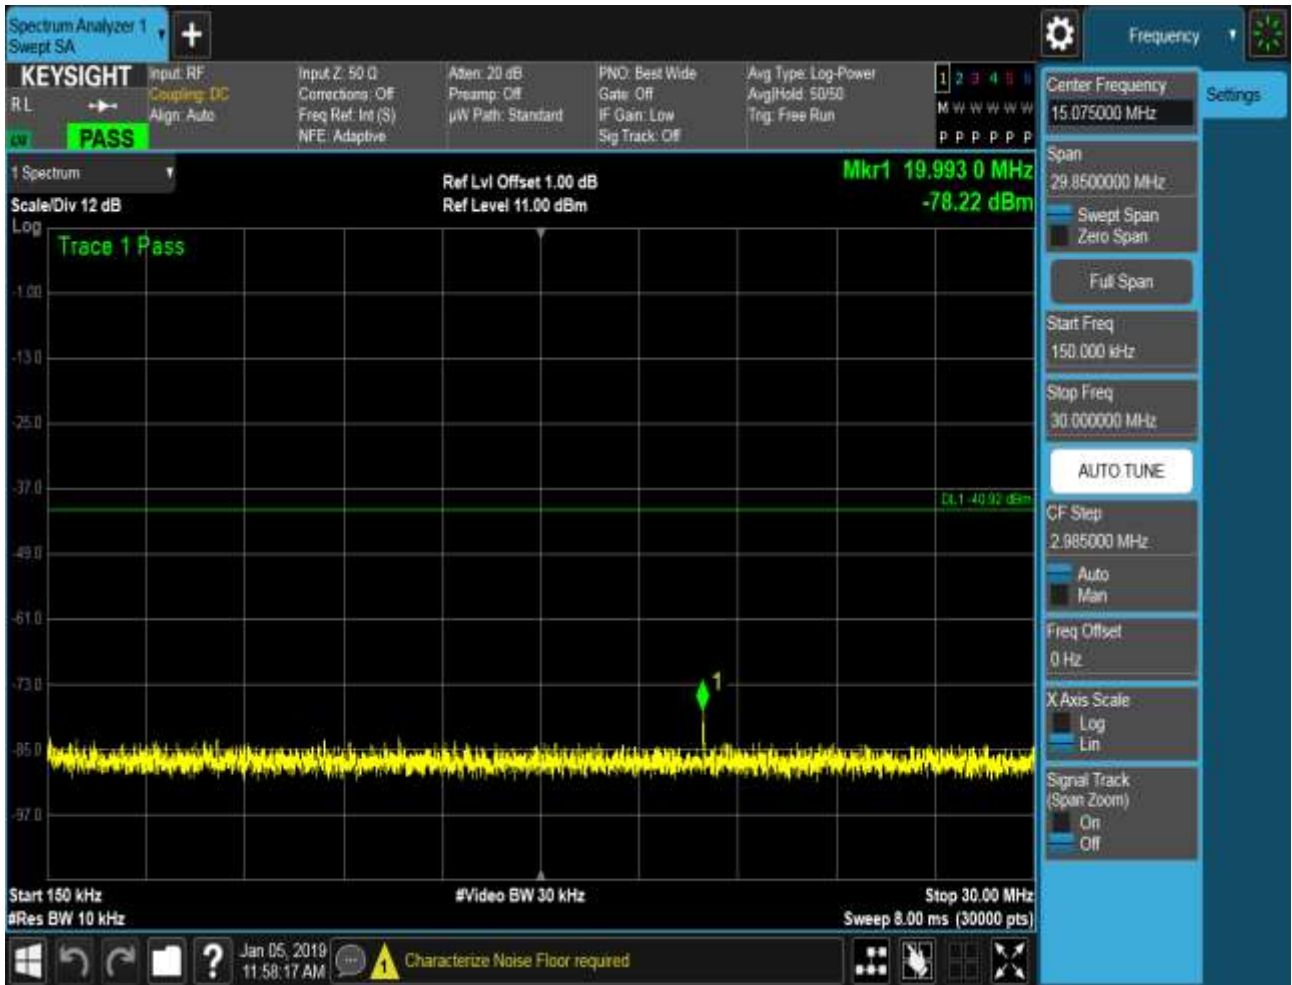










1.75 11N40MIMO_Ant1_2437

Pref:

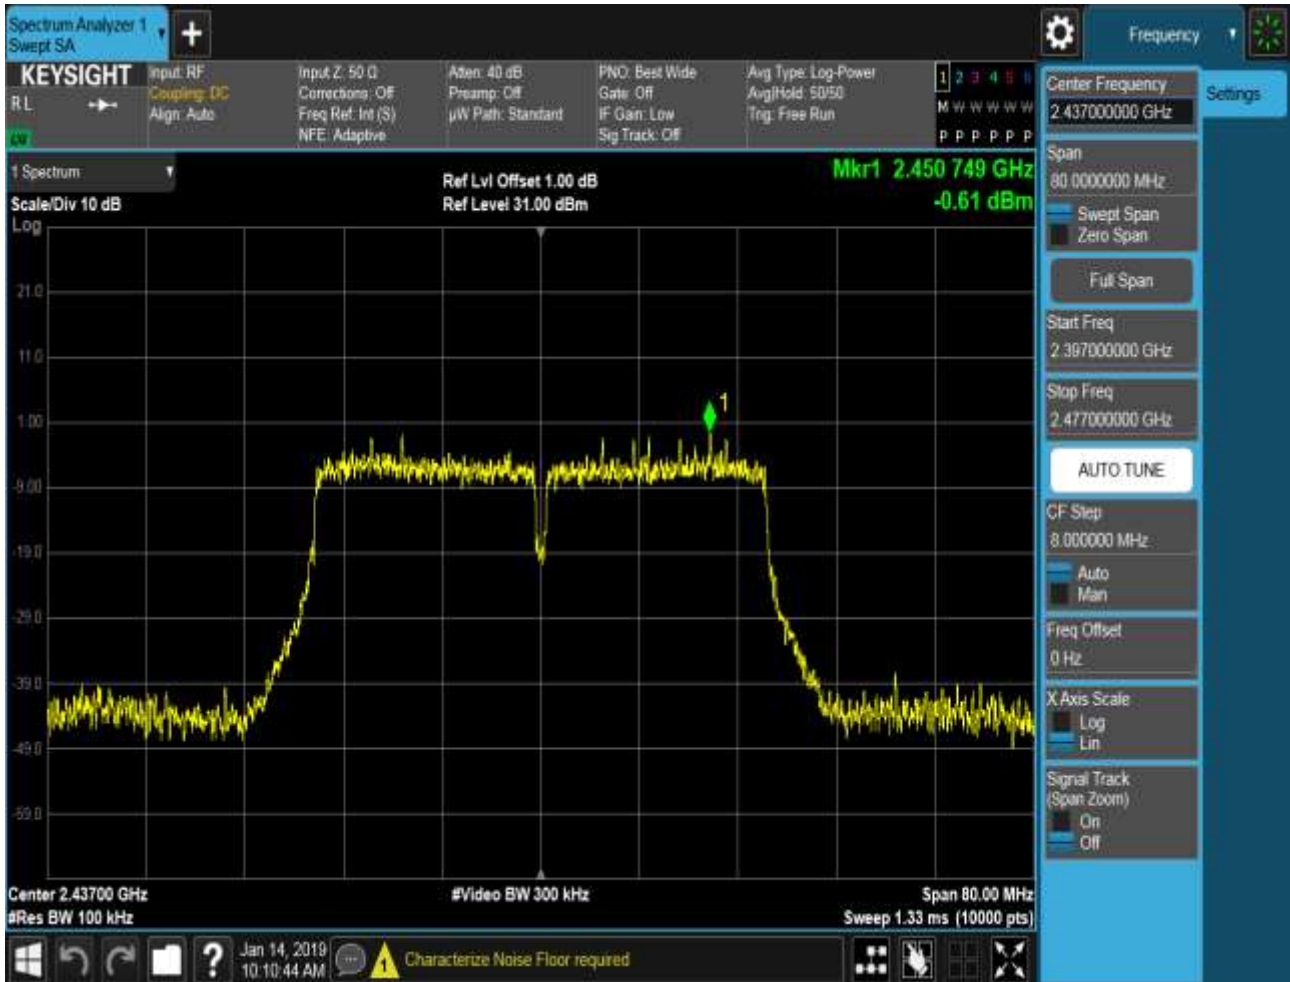

Puw:














1.76 11N40MIMO_Ant2_2437

Pref:

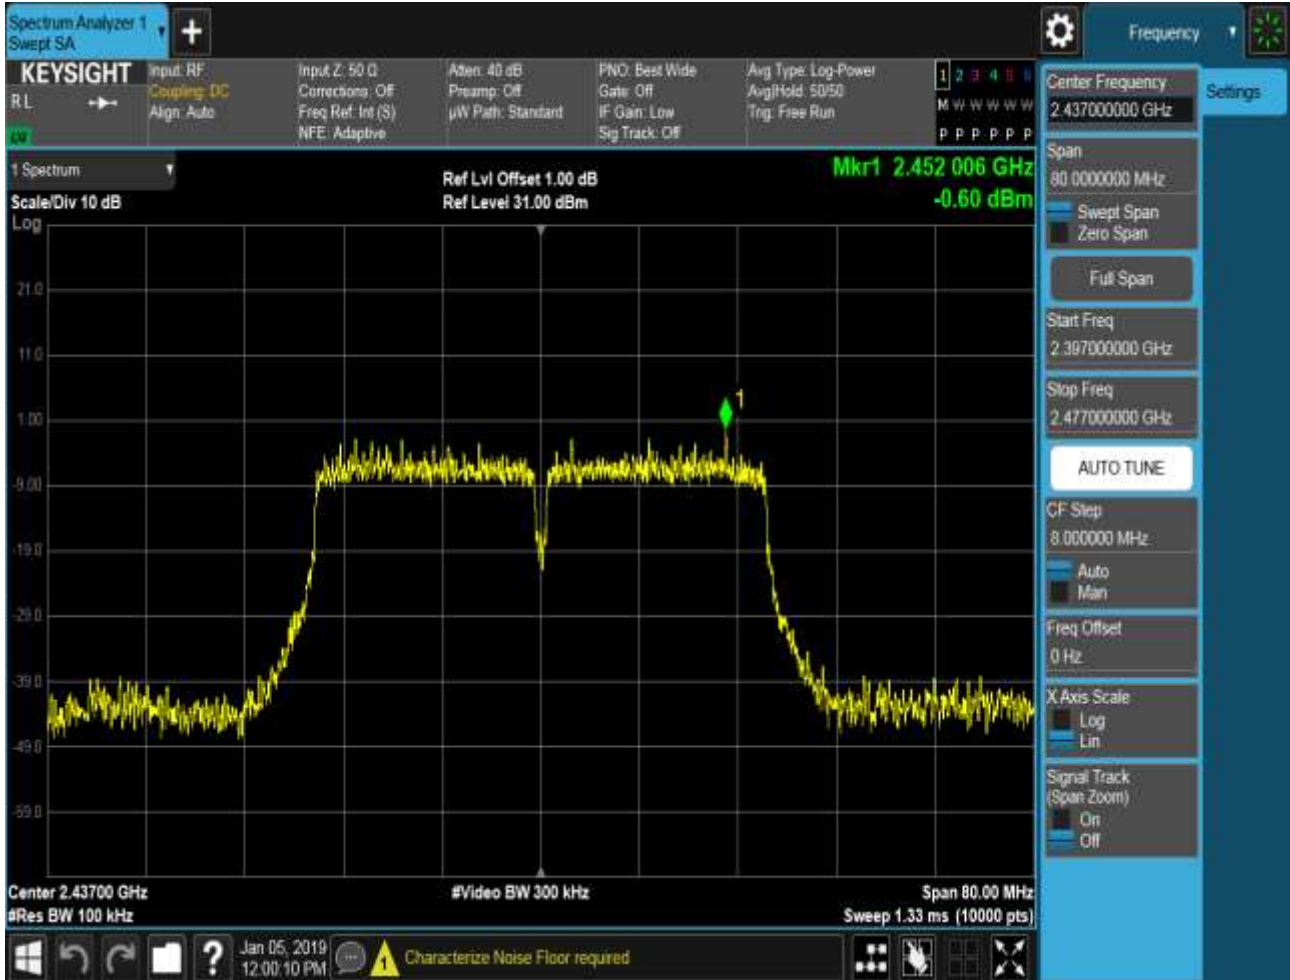


Puw:










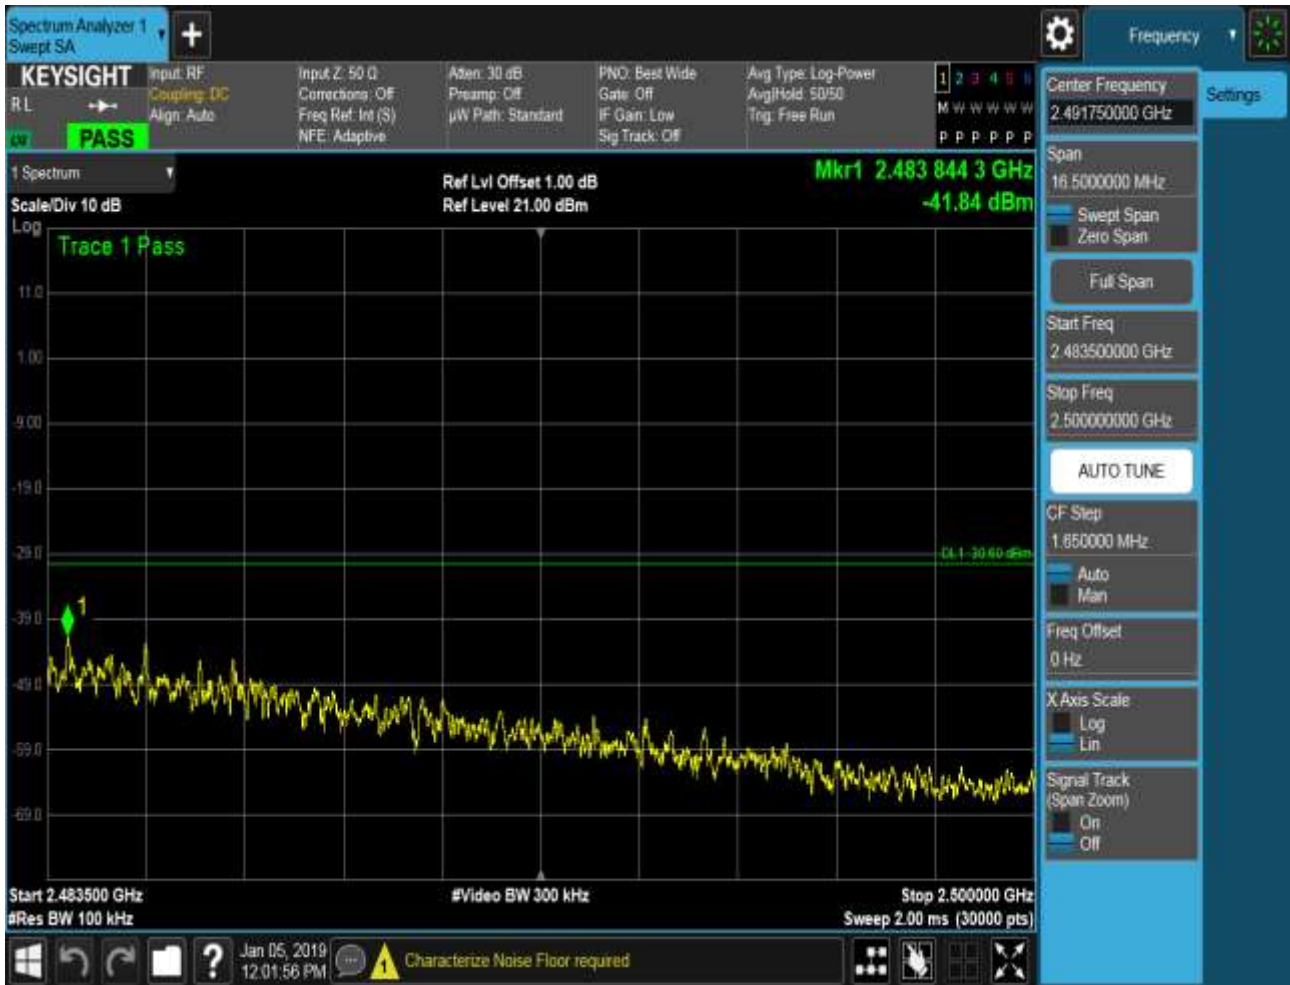

1.77 11N40MIMO_Ant1_2442

Pref:

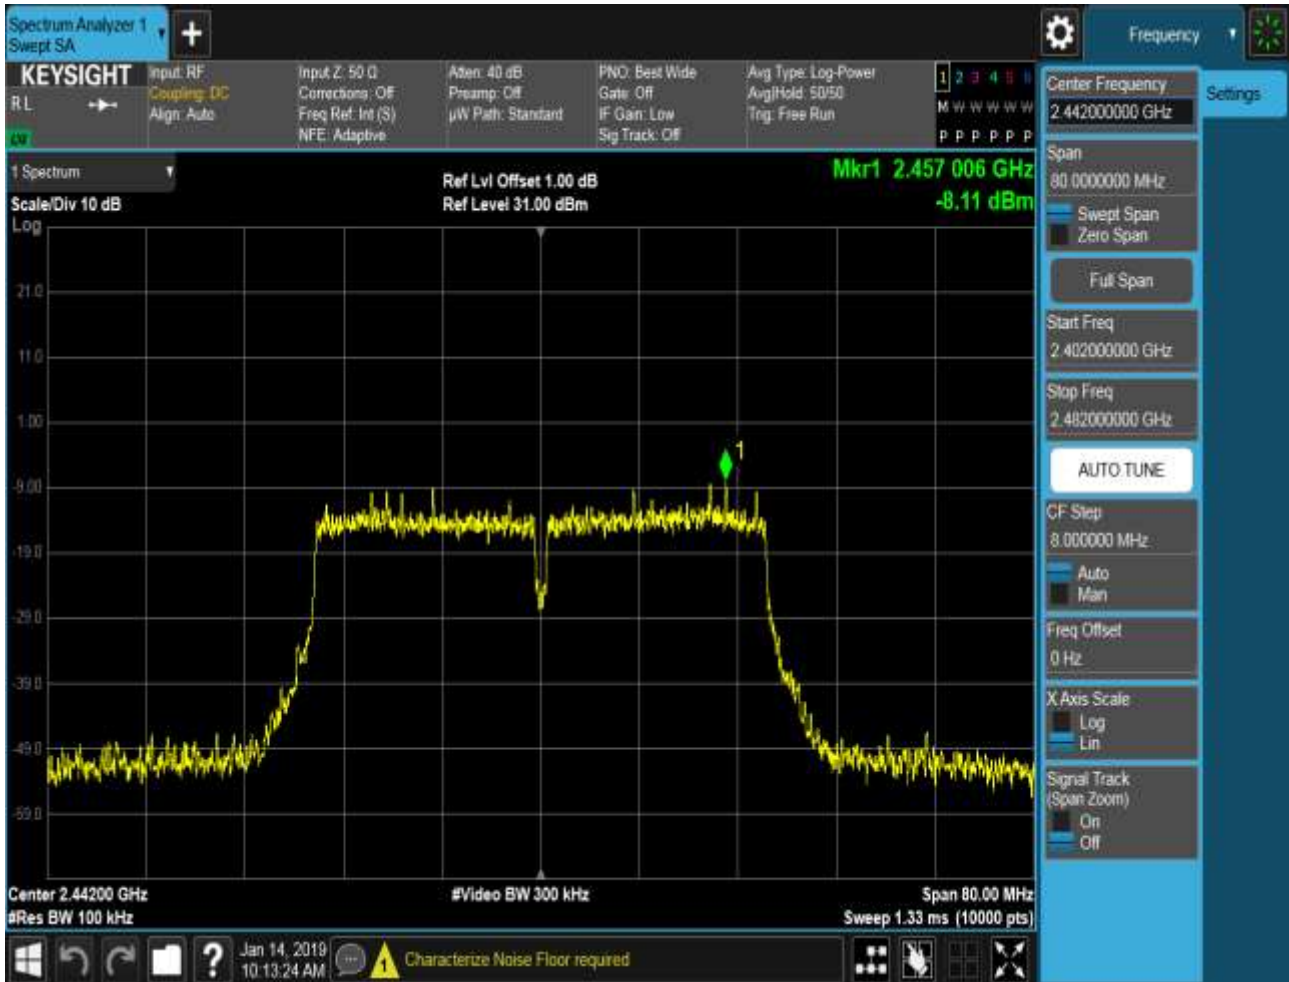

Puw:














1.78 11N40MIMO_Ant2_2442

Pref:

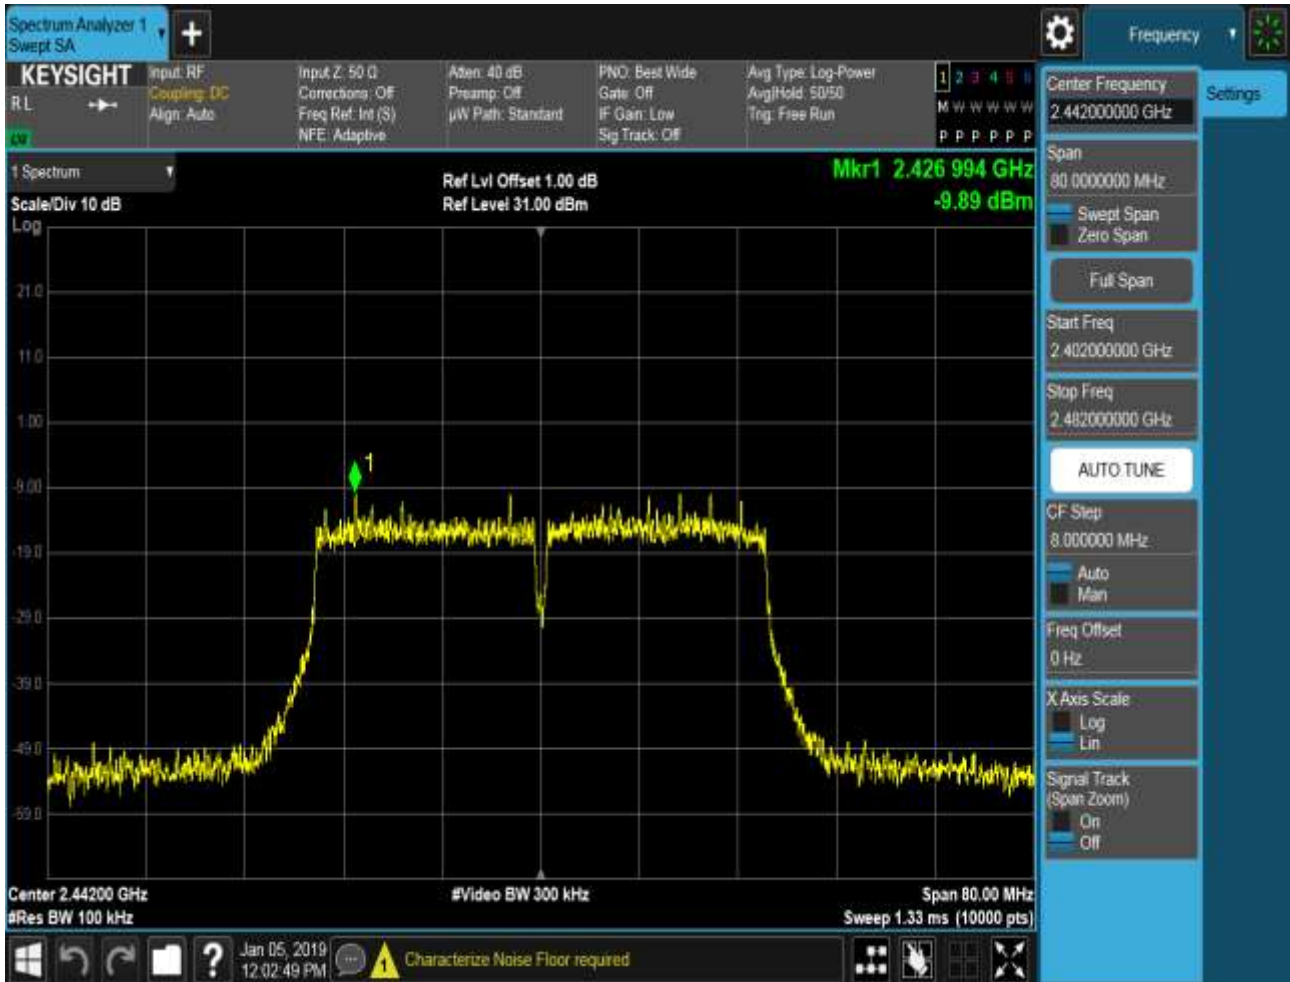

Puw:












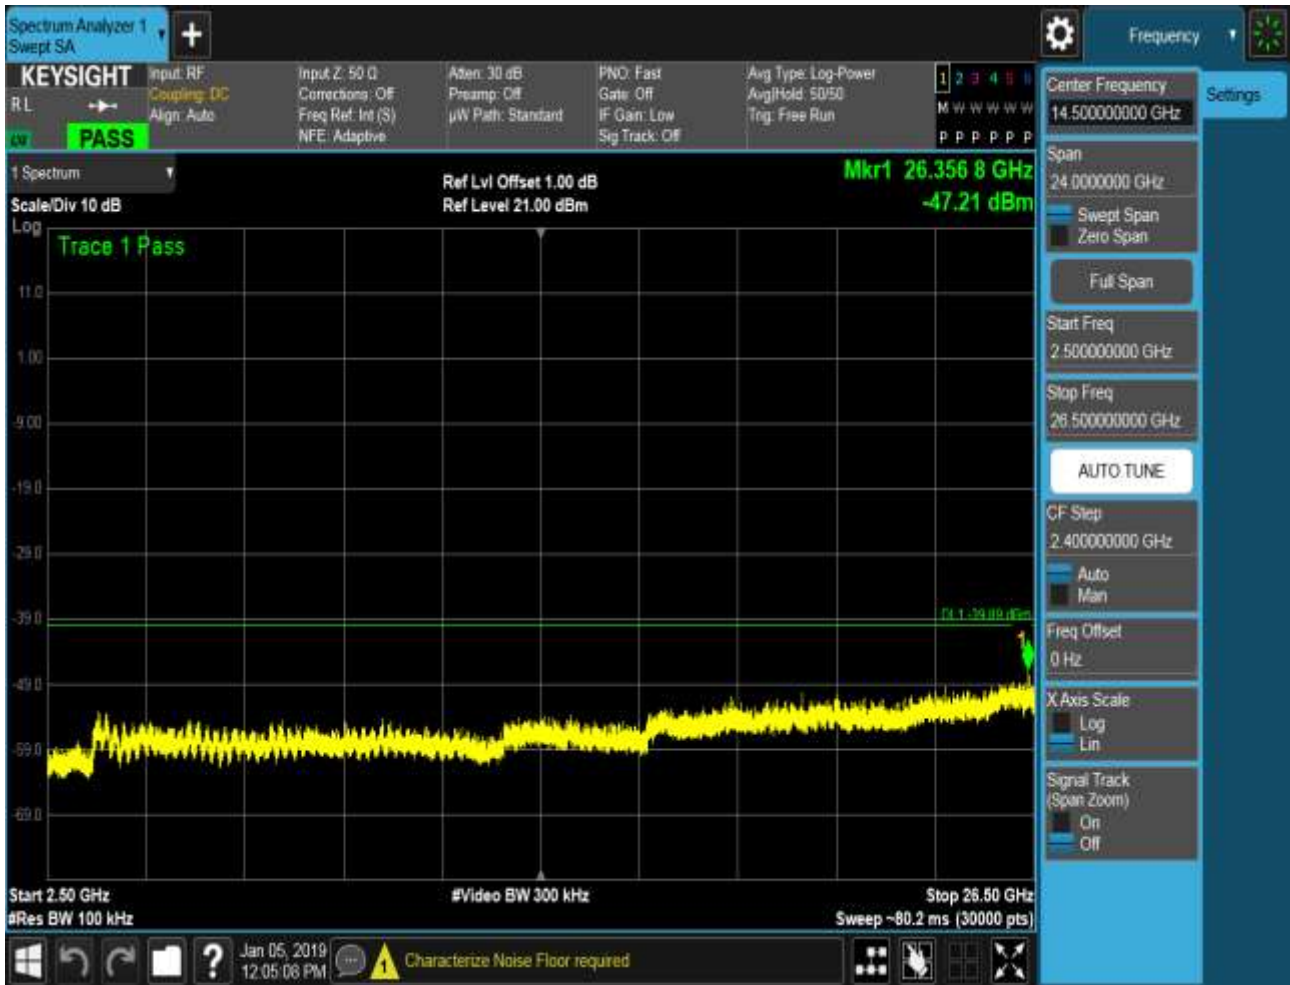

1.79 11N40MIMO_Ant1_2447

Pref:




Puw:











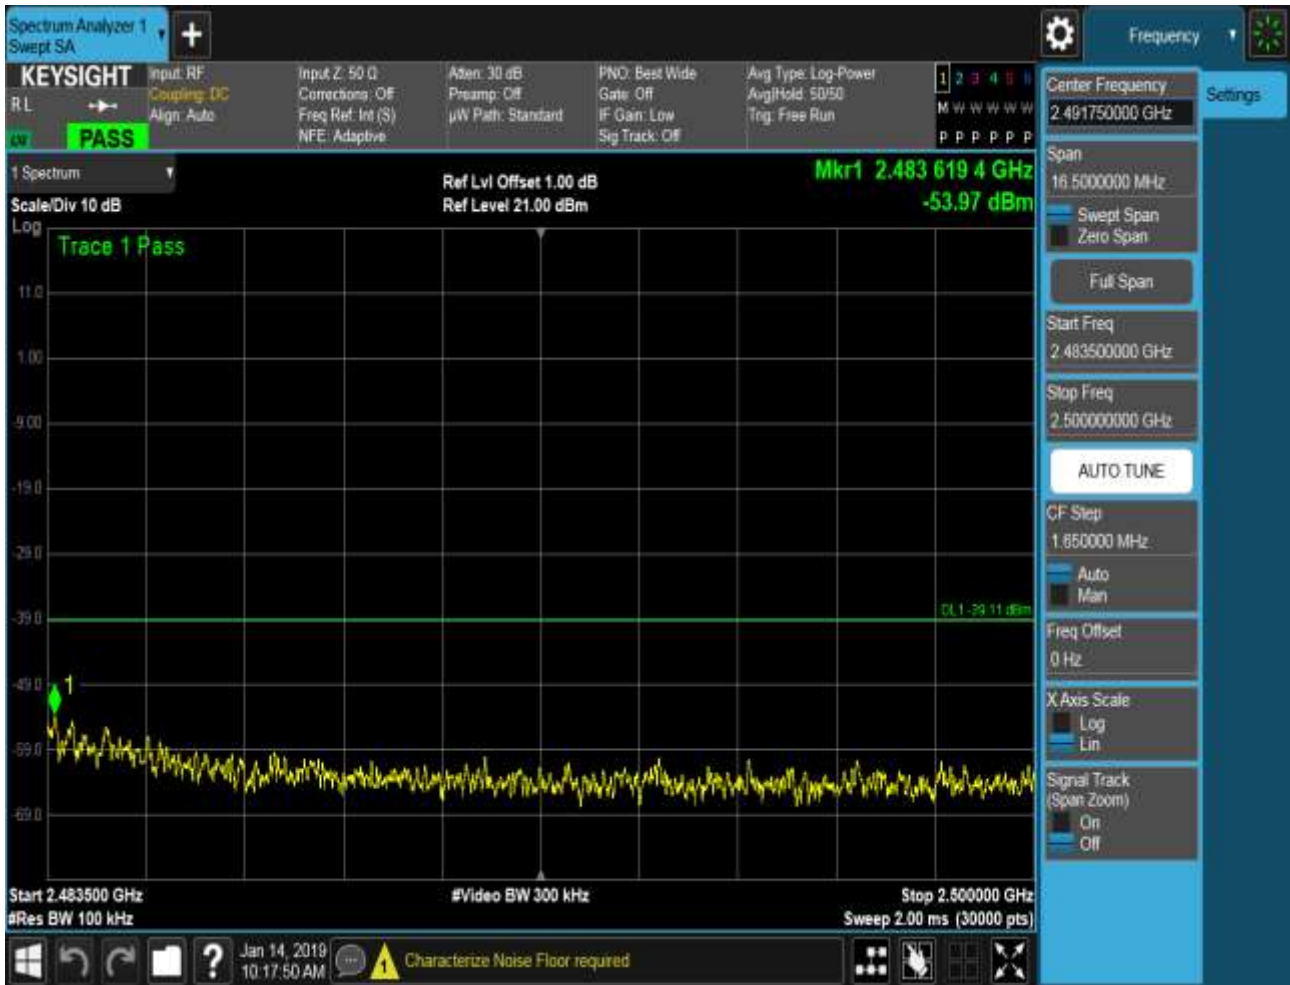

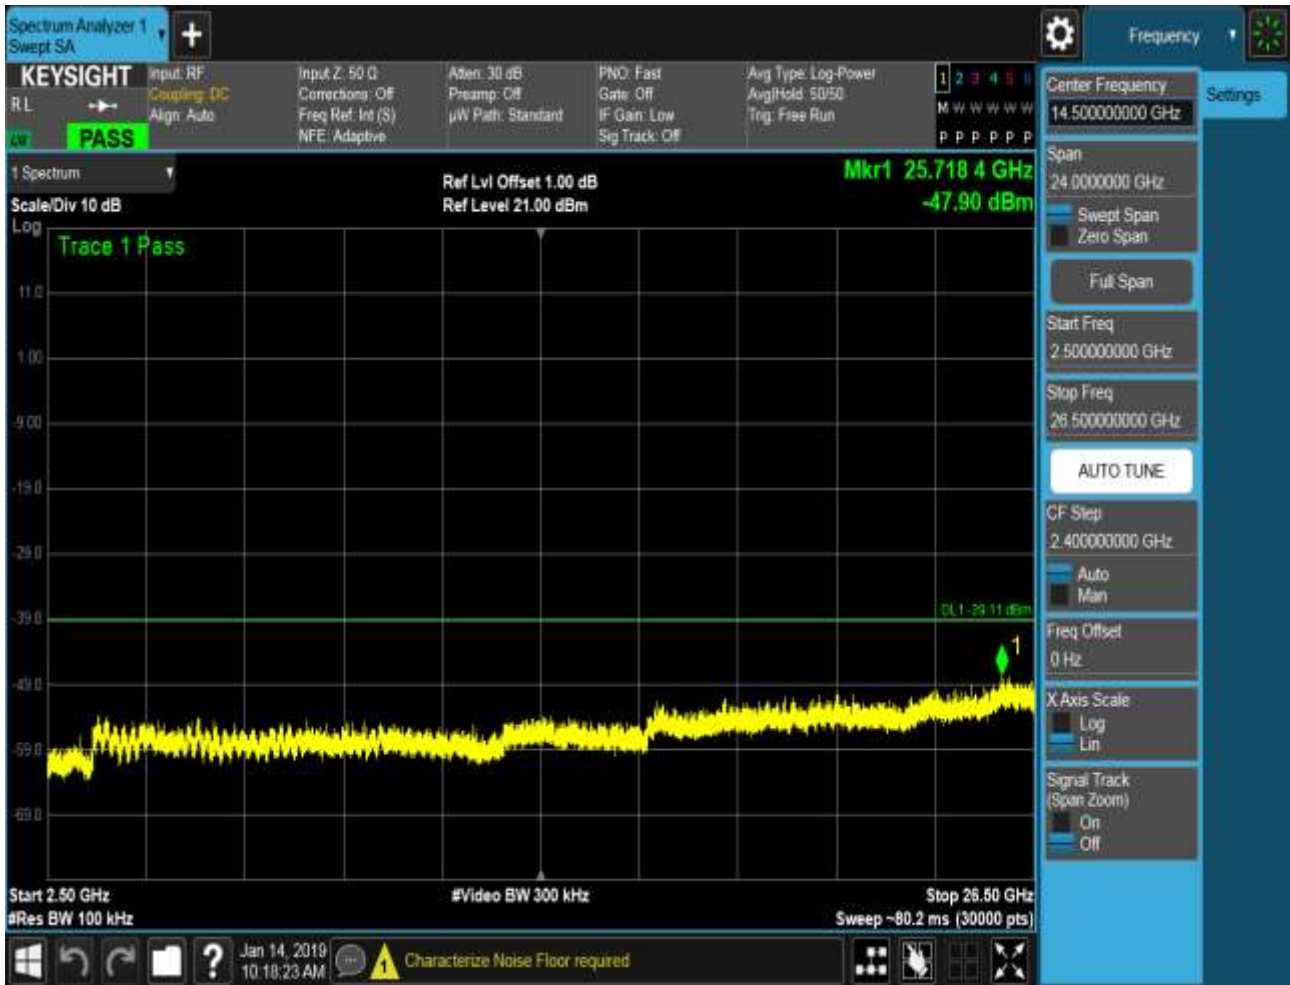

1.80 11N40MIMO_Ant2_2447

Pref:

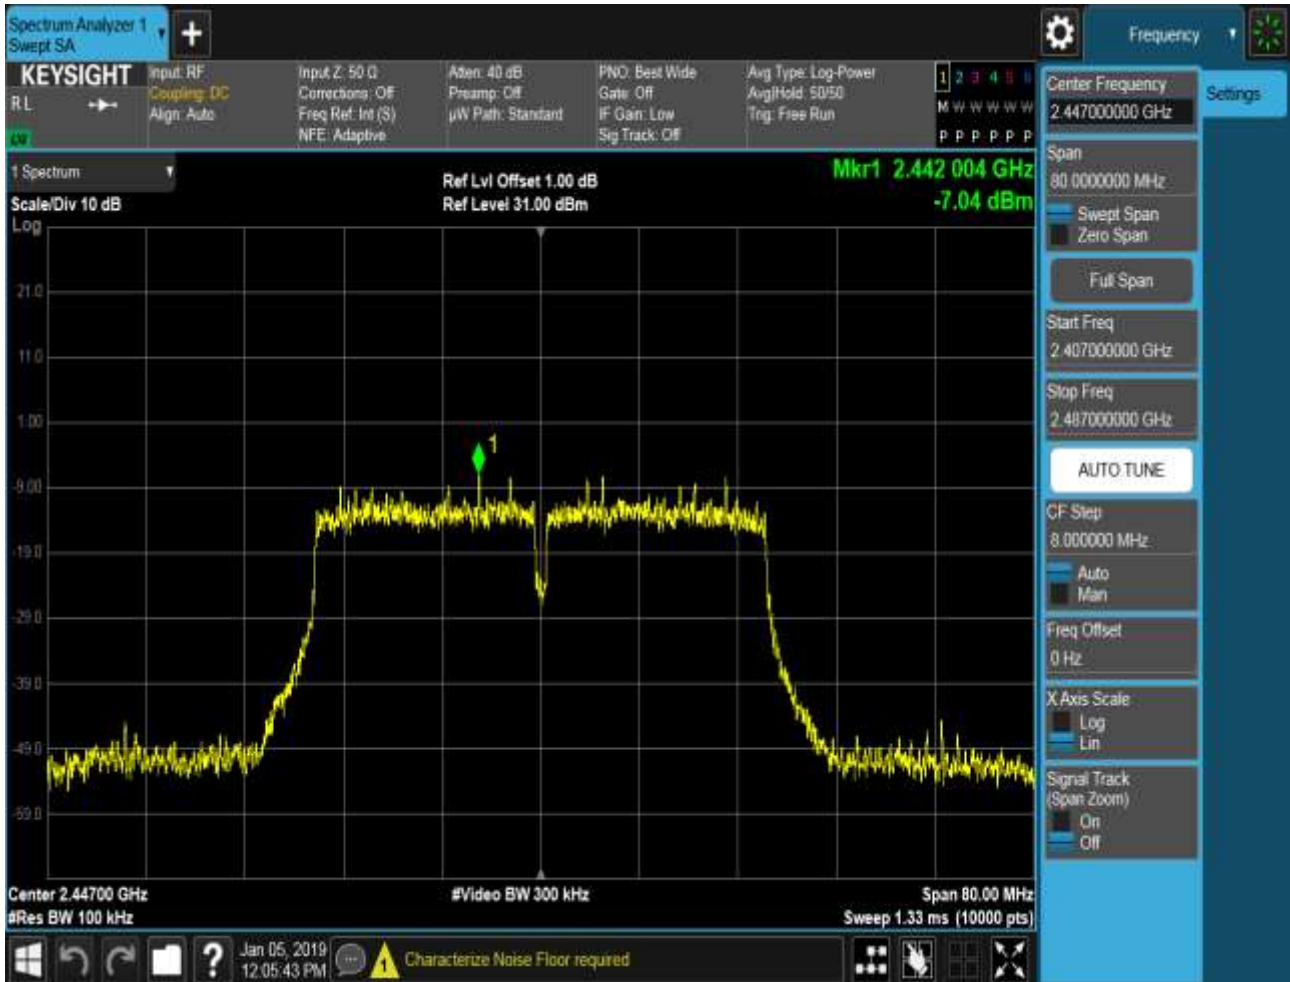


Puw:








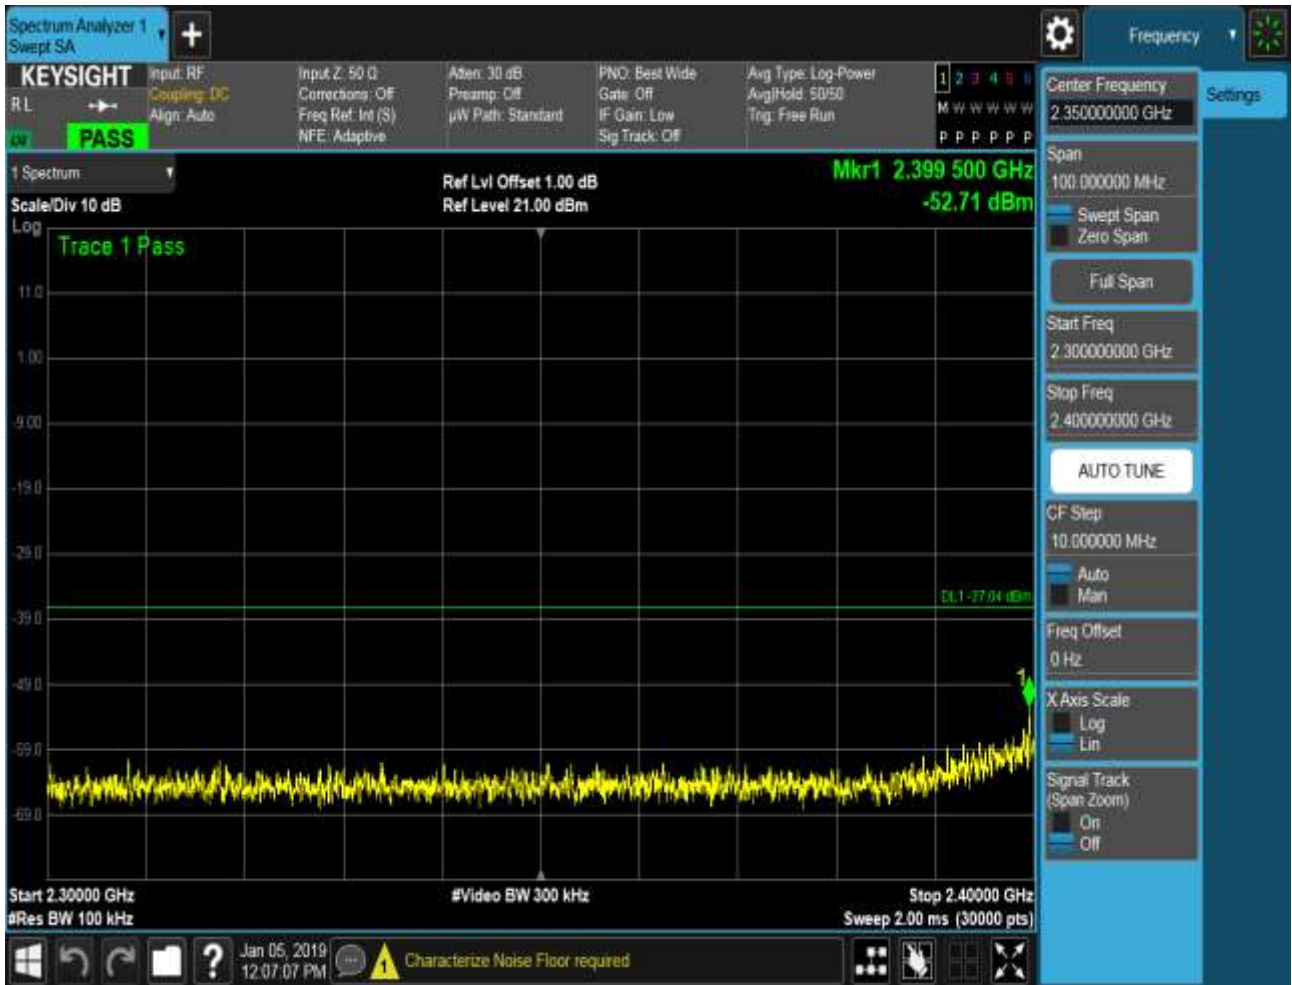




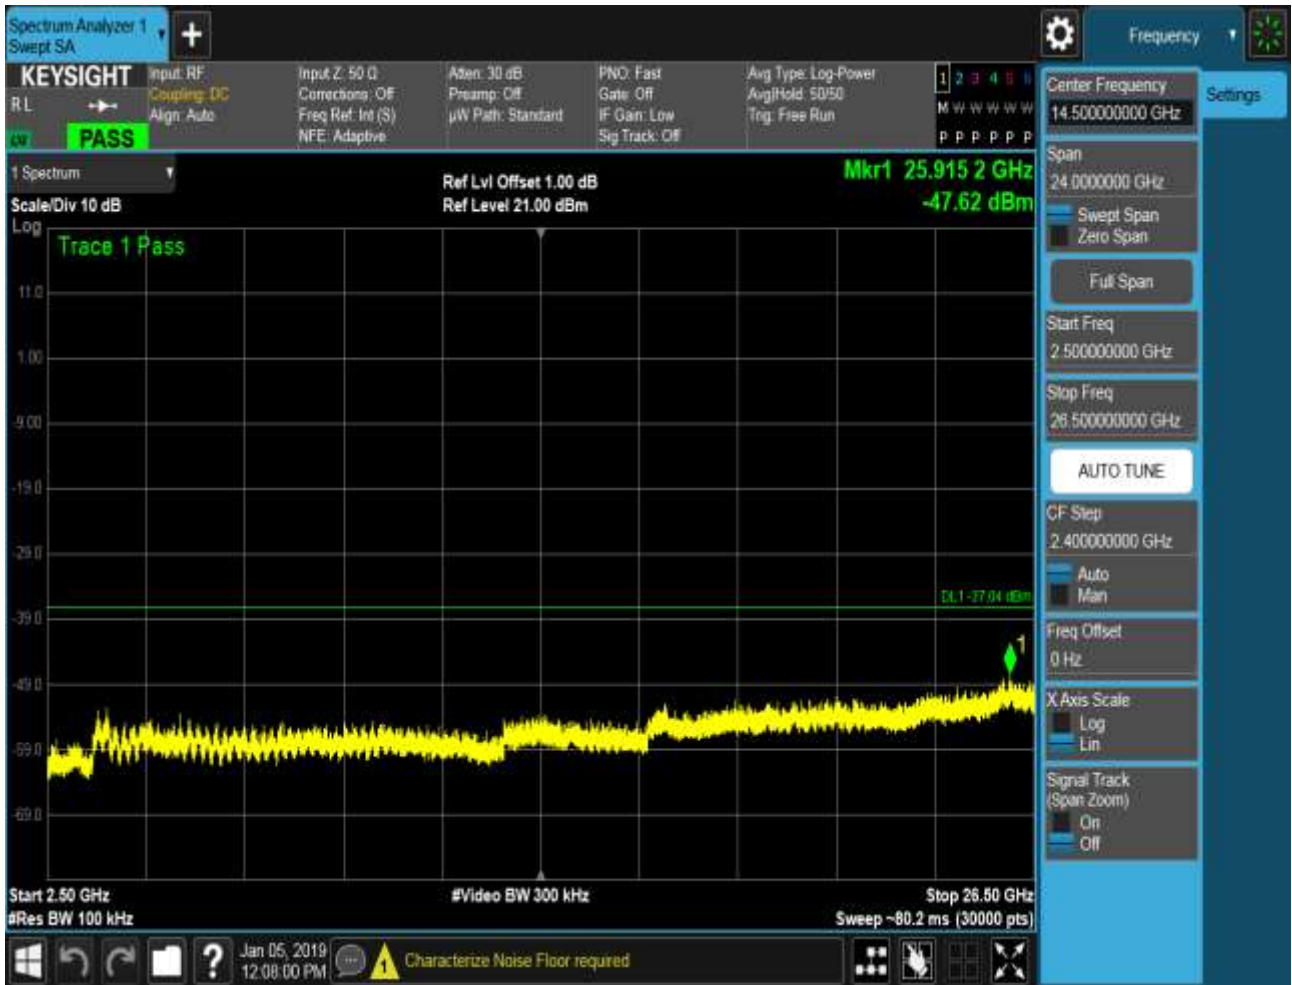

1.81 11N40MIMO_Ant1_2452

Pref:

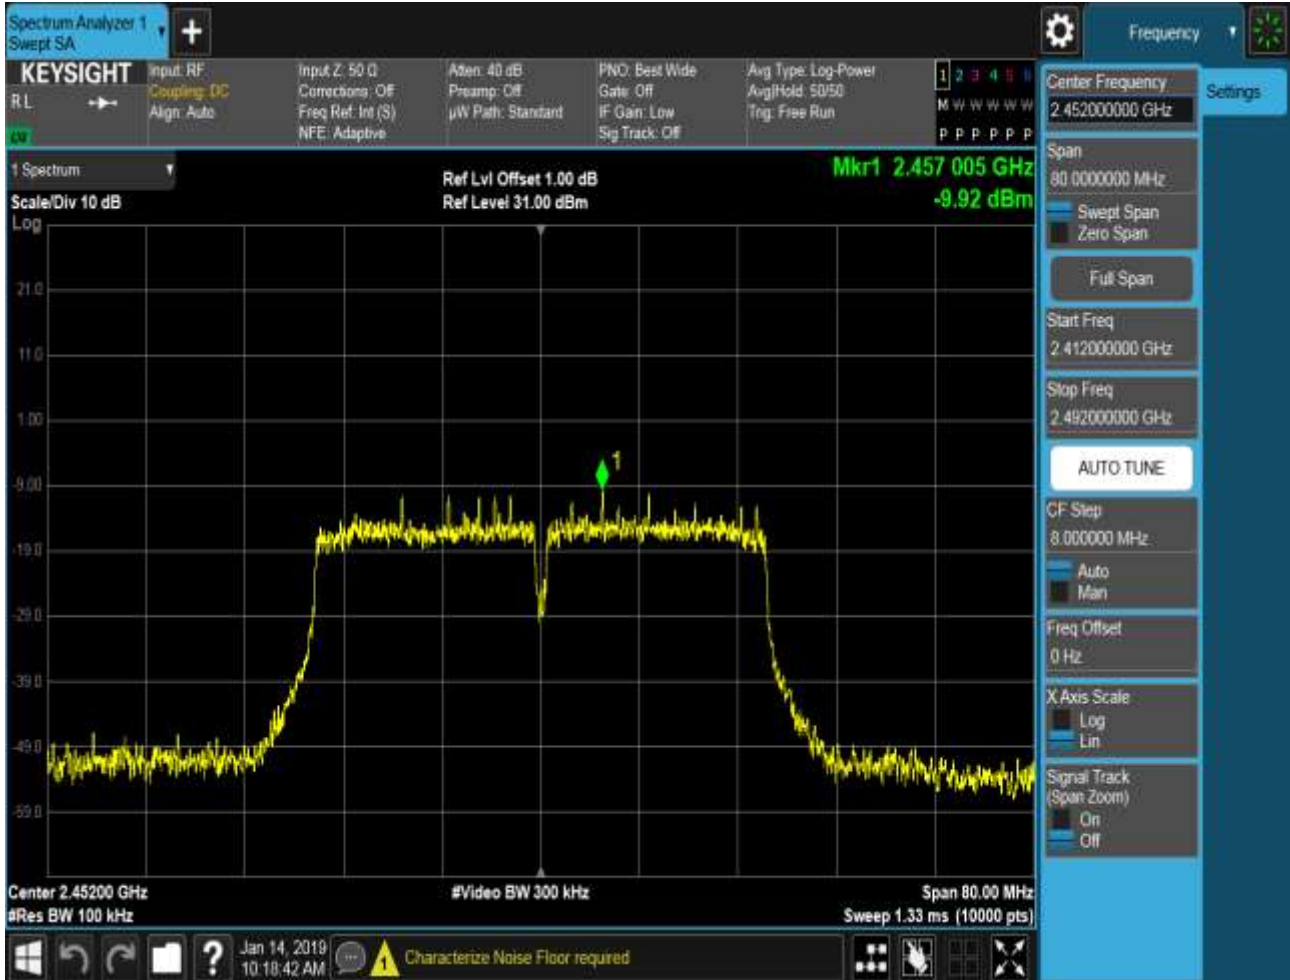

Puw:













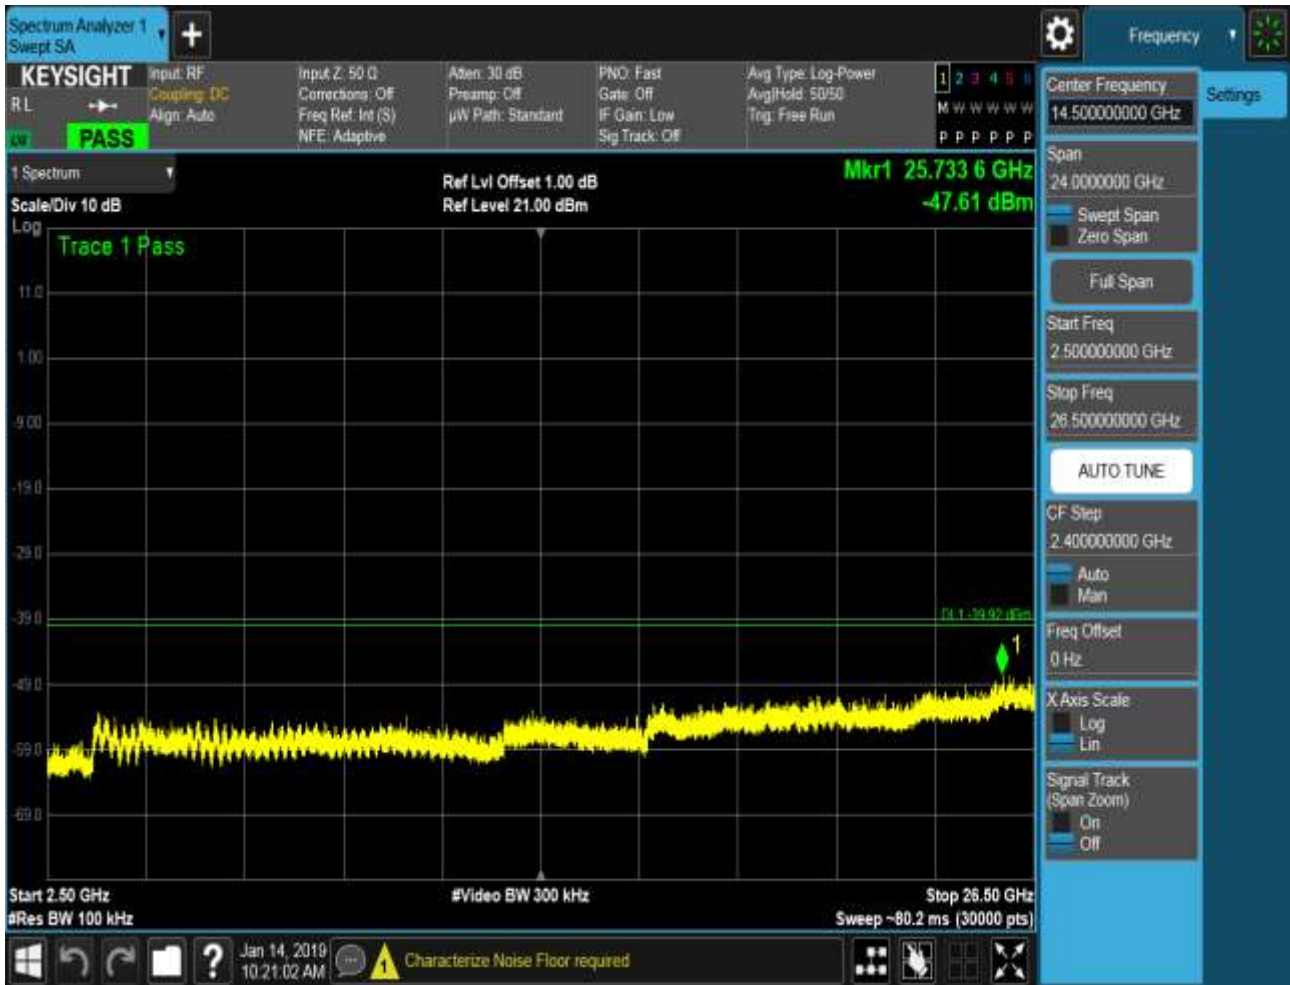

1.82 11N40MIMO_Ant2_2452

Pref:

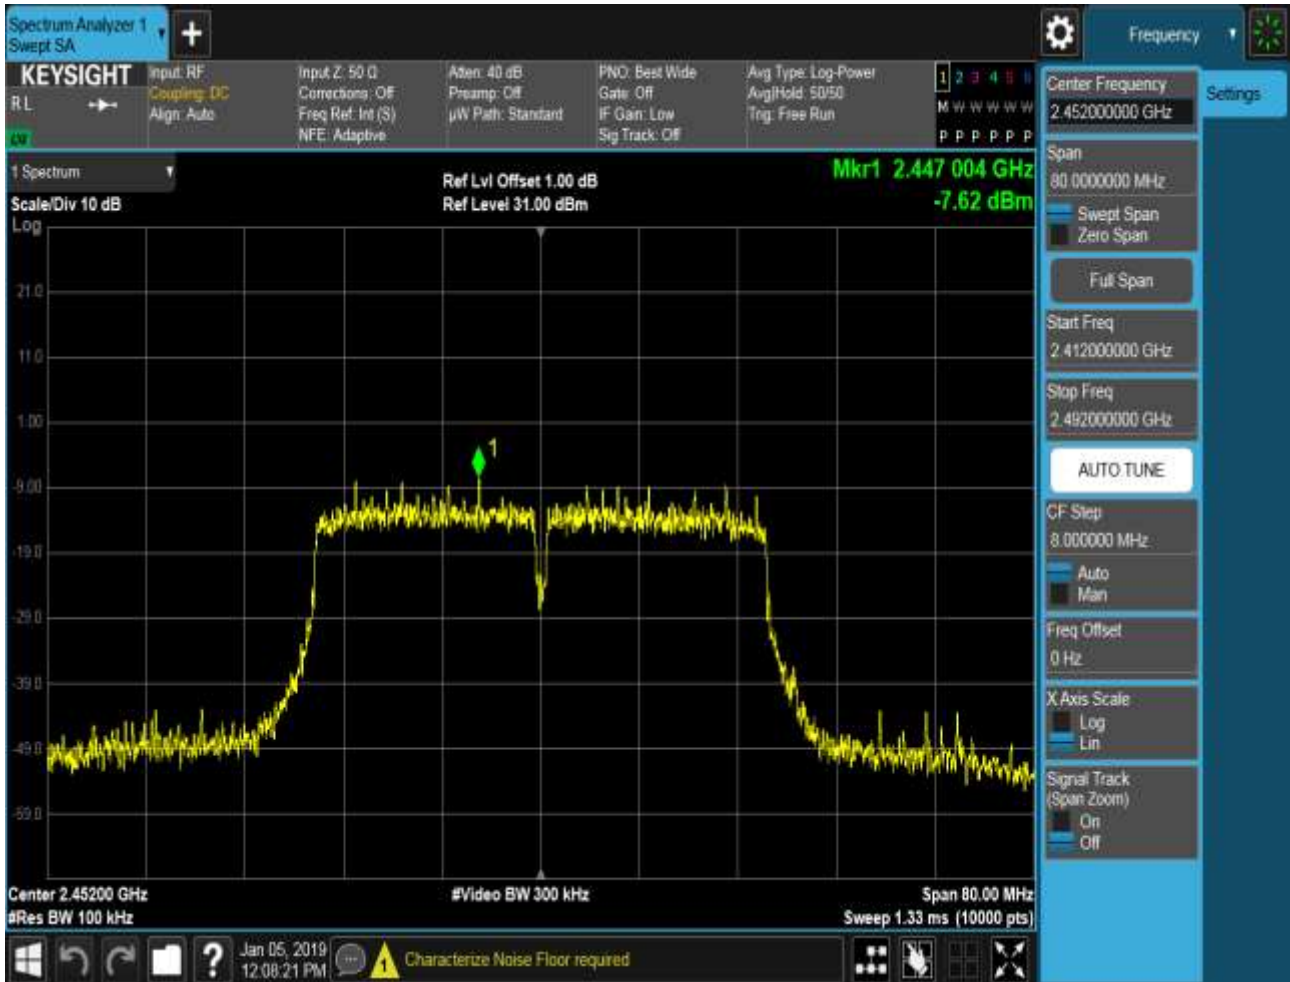

Puw:












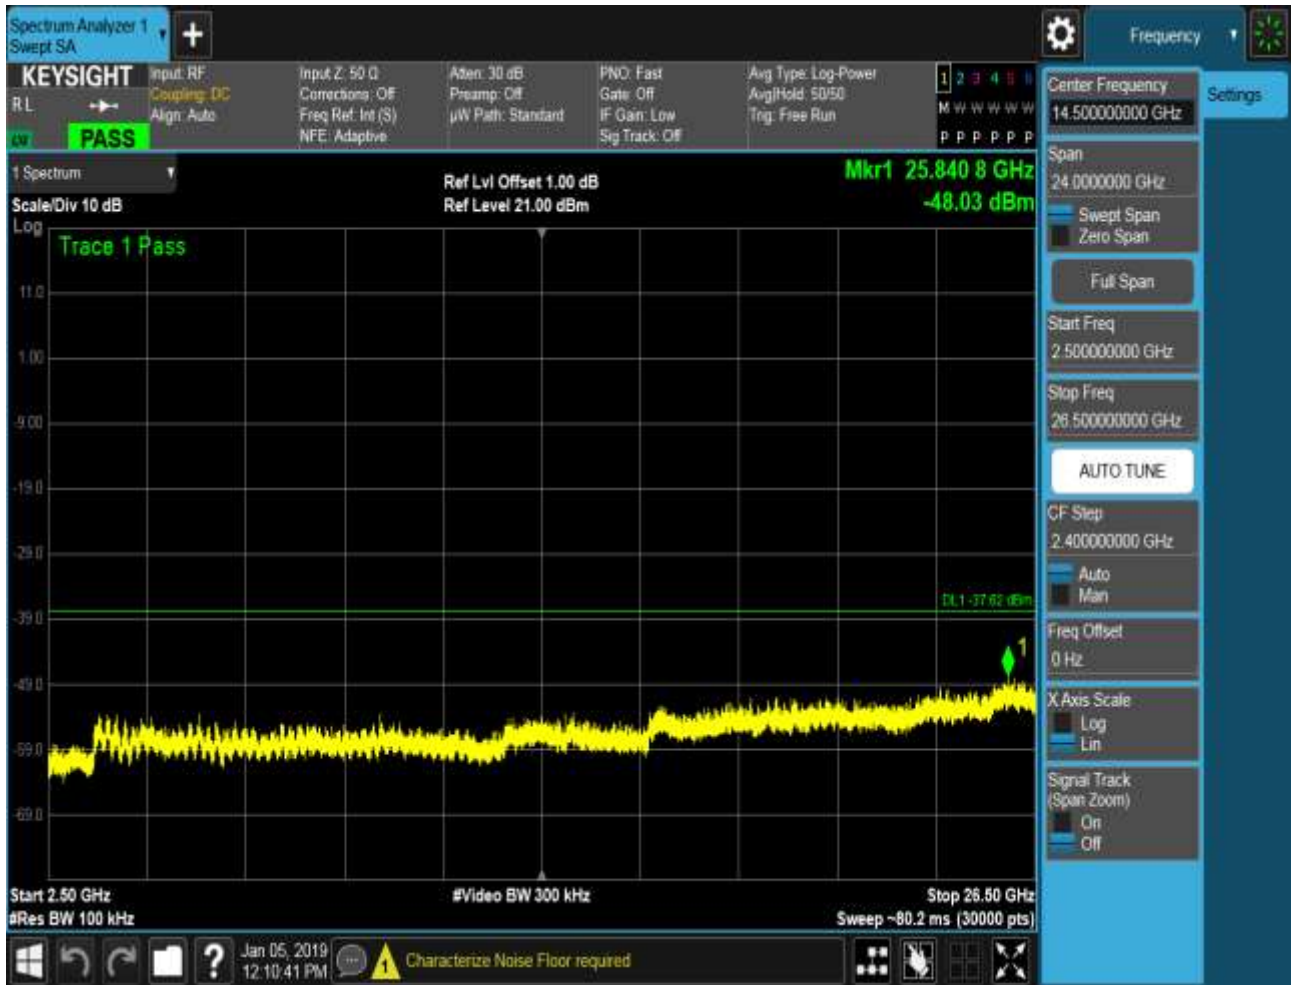

Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.


Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered

1.1 Part 1: Testing Range of “9 kHz to 30MHz”


Note 1: The test results and plot for testing range of “9 kHz to 30 MHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

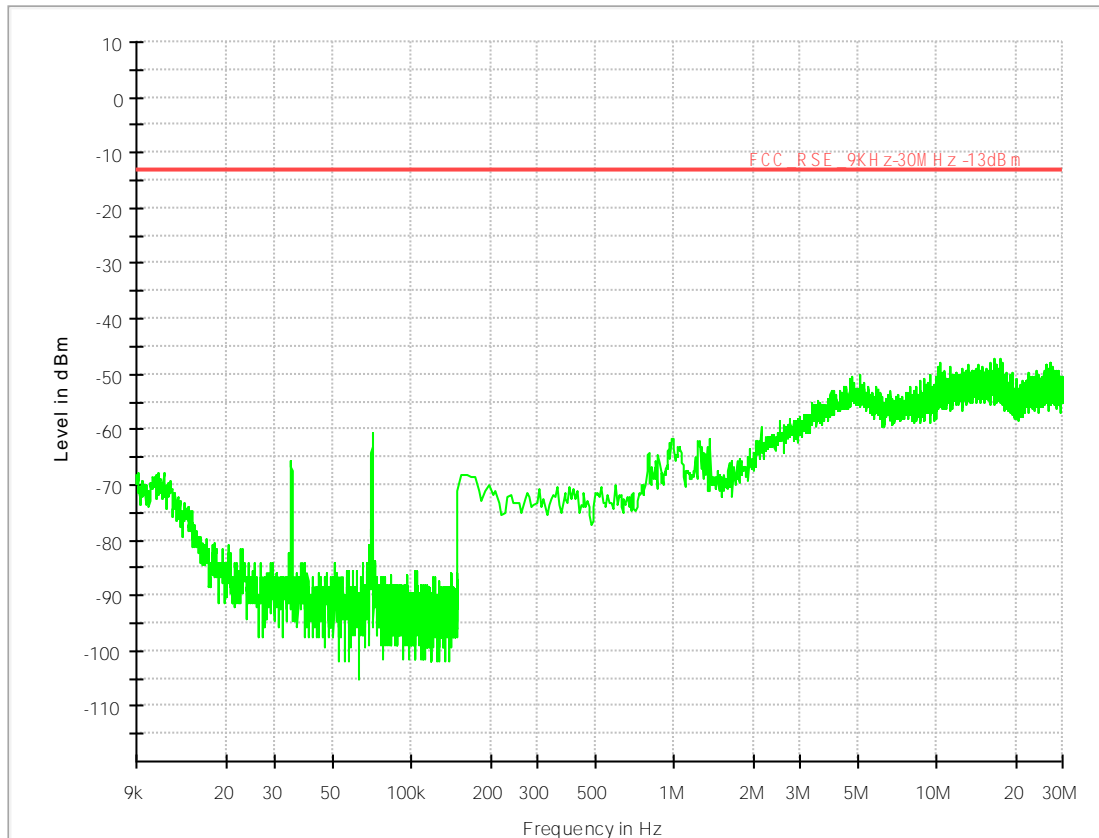

1.2 Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

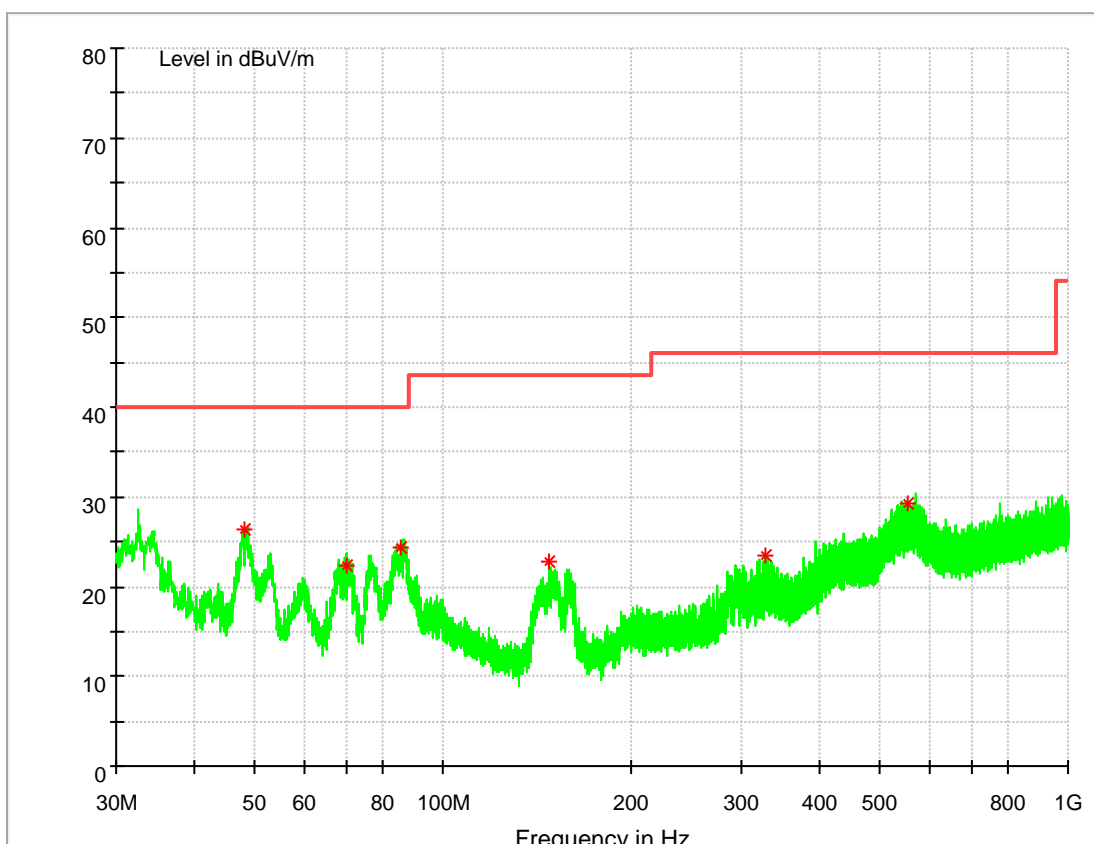

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
48.203667	26.42	40.00	13.58	100.0	V	322.0	14.4
70.319667	22.46	40.00	17.54	100.0	V	117.0	12.5
85.645667	24.33	40.00	15.67	100.0	V	349.0	14.3
148.275333	22.87	43.50	20.63	100.0	V	150.0	11.3
329.083333	23.44	46.00	22.56	100.0	V	286.0	13.4
555.546000	29.21	46.00	16.79	100.0	H	141.0	18.4

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level


1.3 Part 3: Testing Range of “1 GHz to 3 GHz”

Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.


Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

1.3.1 Test Mode: 11B

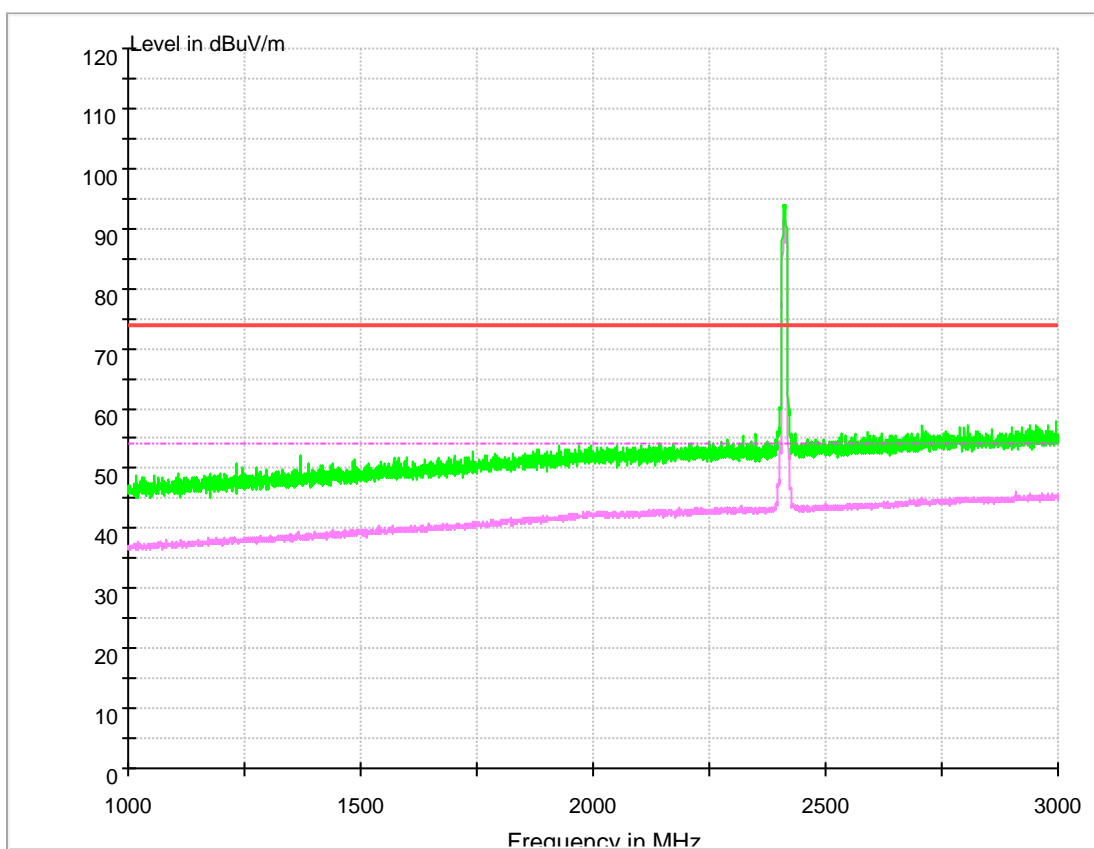

1.3.1.1 Channel 1 @Ant 1

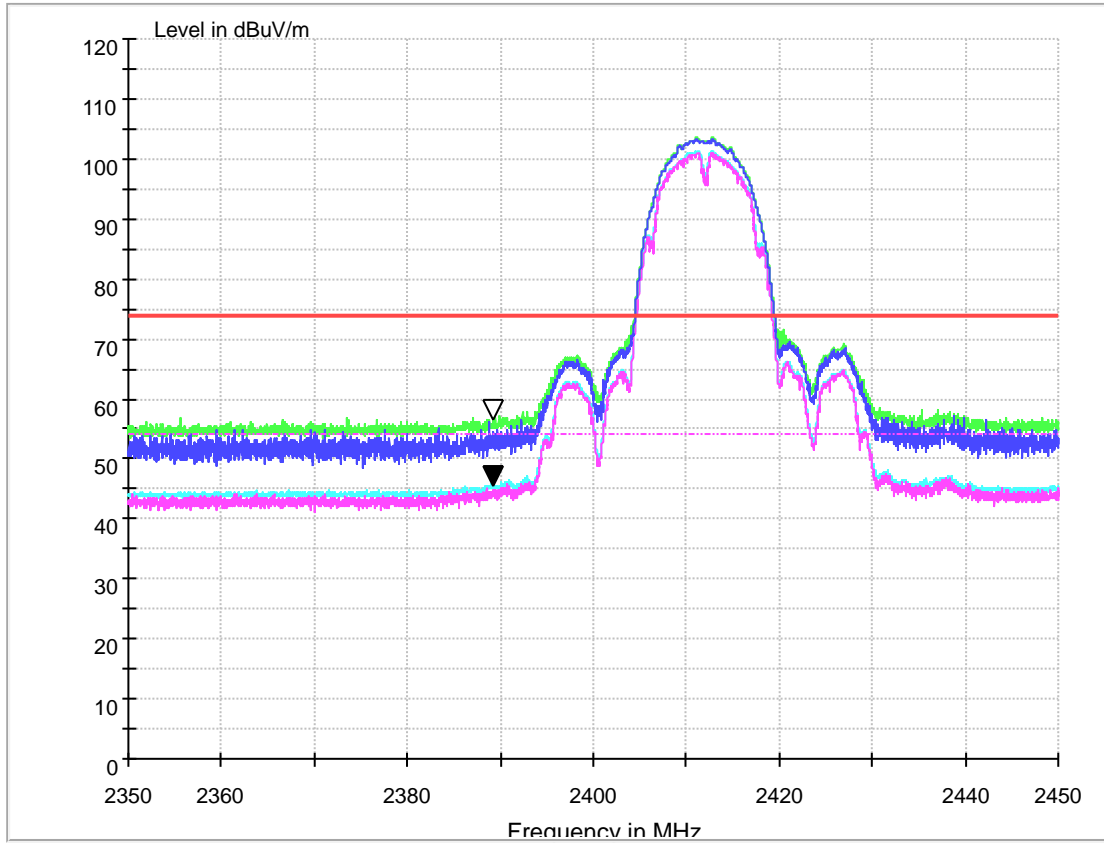

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	45.649	54.00	8.351	150.0	H	45.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	56.781	74.00	17.219	150.0	H	46.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.2 Channel 2 @Ant 1

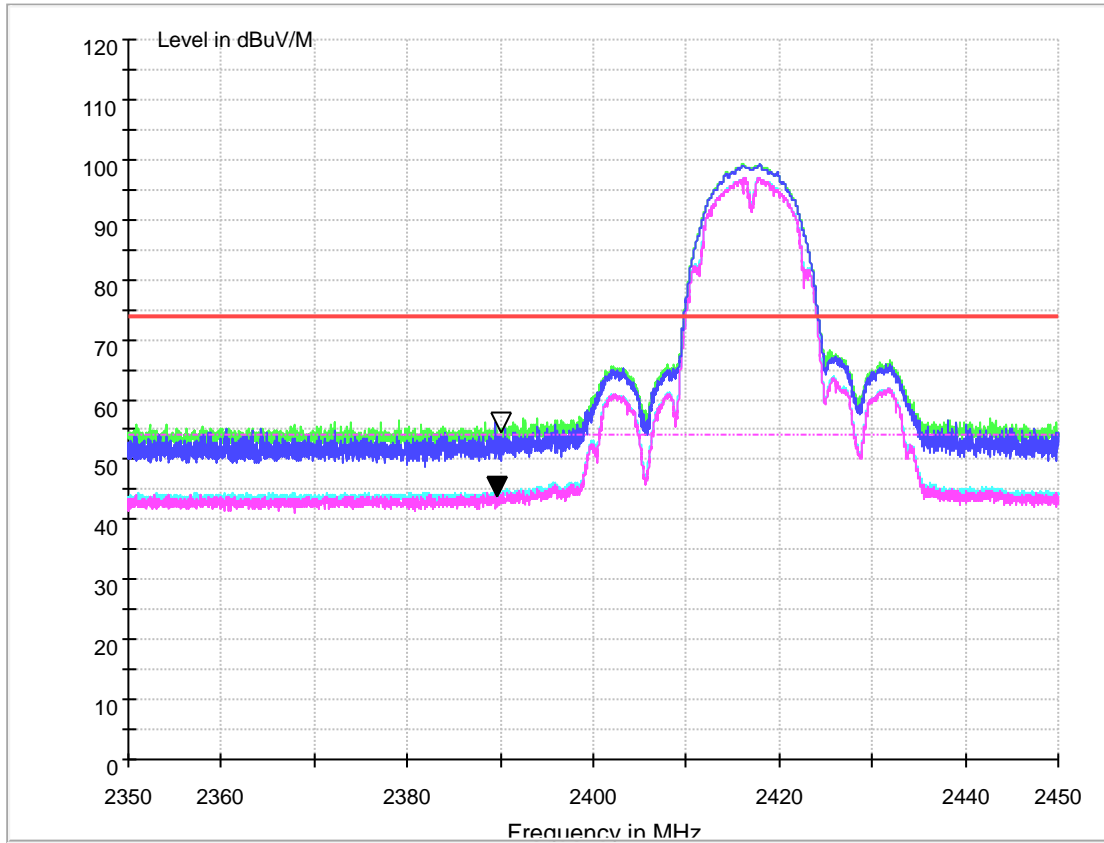

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.201	54.00	9.799	150.0	H	36.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	54.845	74.00	19.155	150.0	H	36.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.3 Channel 10@Ant 1

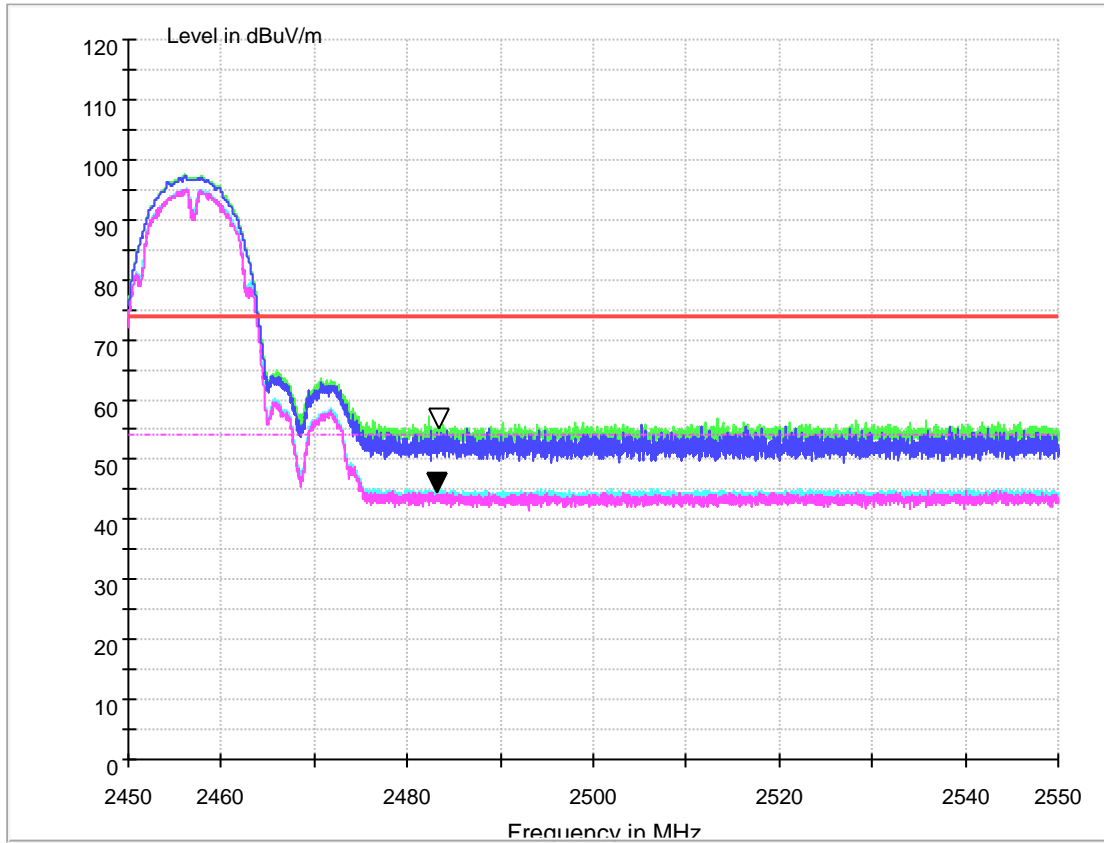

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.836	54.00	9.164	150.0	H	47.0	-10.2


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.413	74.00	18.587	150.0	H	43.0	-10.2

Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit – Level

1.3.1.4 Channel 11@Ant 1

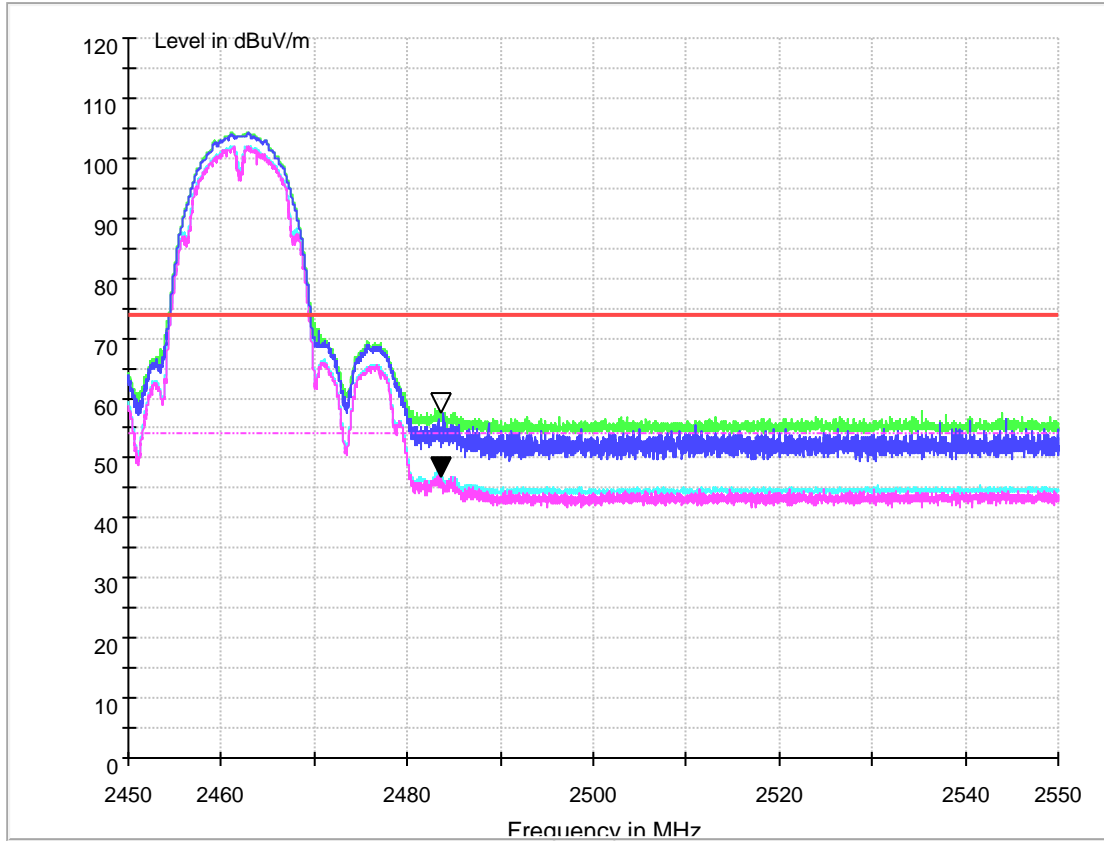

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	47.163	54.00	6.837	150.0	H	47.0	-10.2


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	57.847	74.00	16.153	150.0	H	-3.0	-10.2

Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit – Level

1.3.1.5 Channel 1 @Ant 2

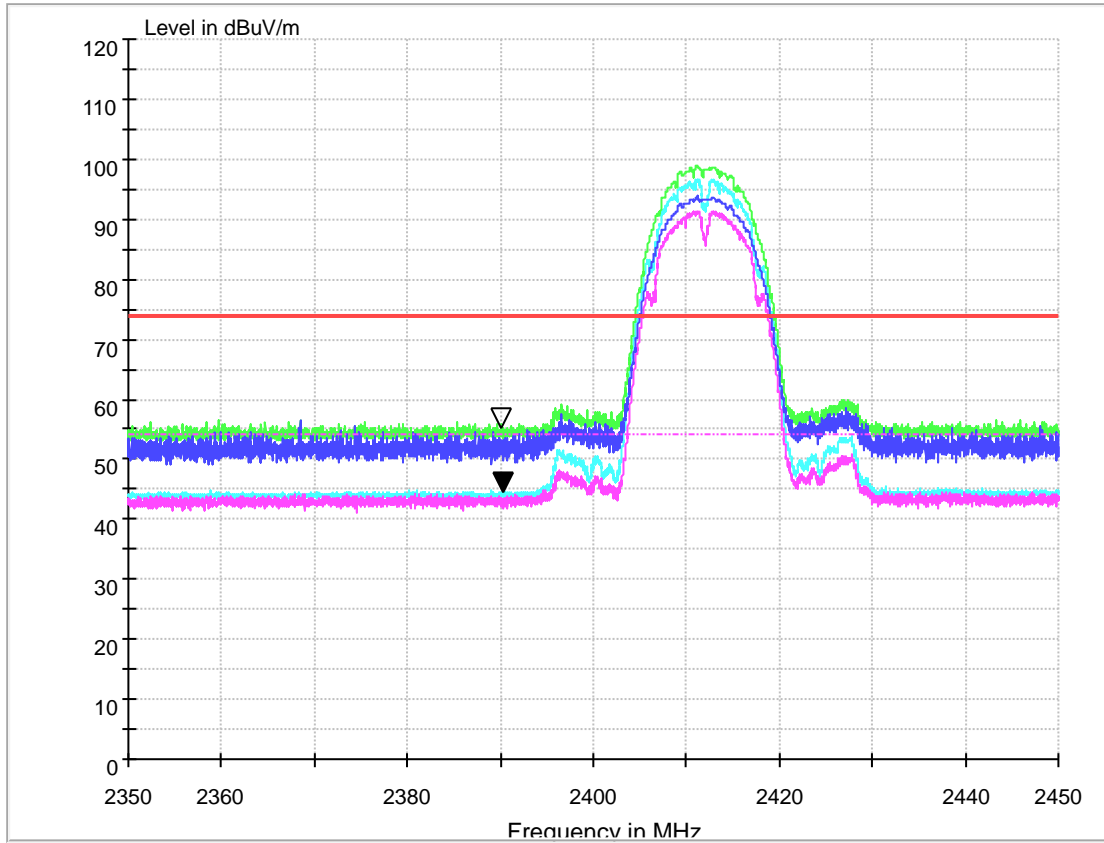

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	44.650	54.00	9.350	150.0	H	38.0	-6.8


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	55.532	74.00	18.468	150.0	H	43.0	-6.8

Note:

- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit – Level

1.3.1.6 Channel 2 @Ant 2

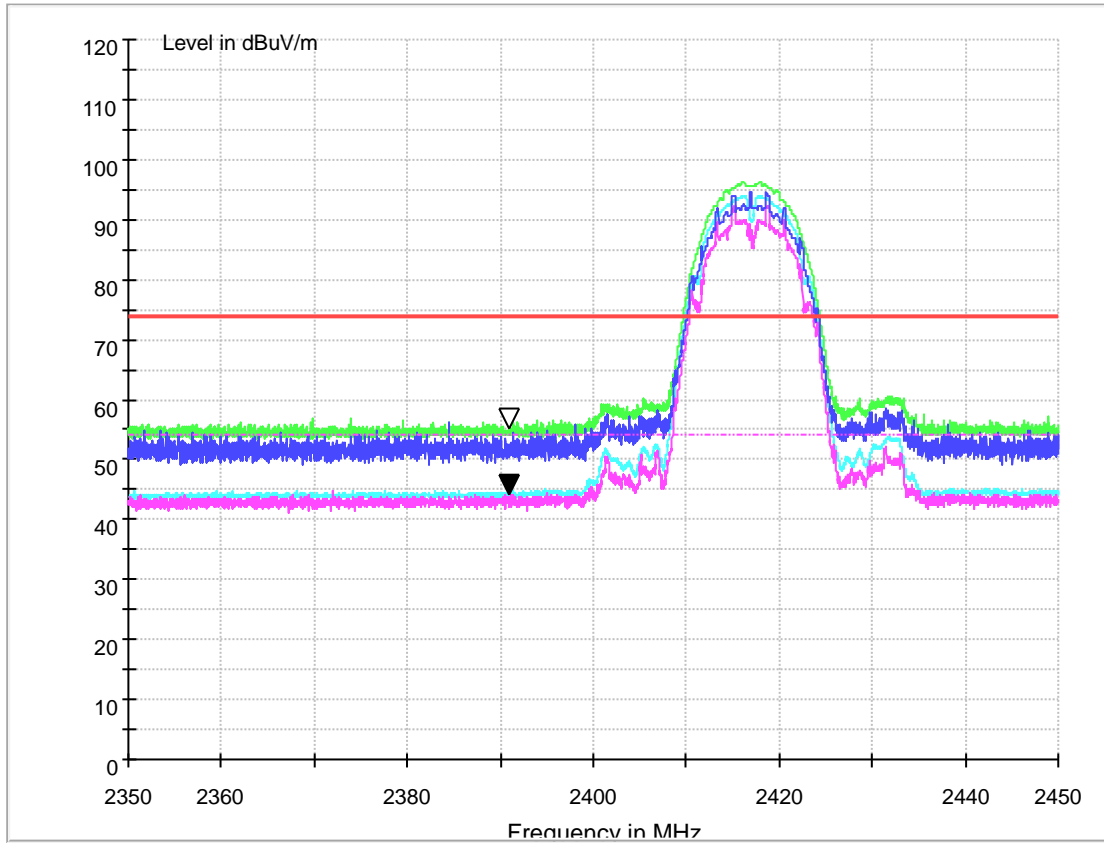

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.605	54.00	9.395	150.0	H	74.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	55.494	74.00	18.506	150.0	H	46.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.7 Channel 10@Ant 2

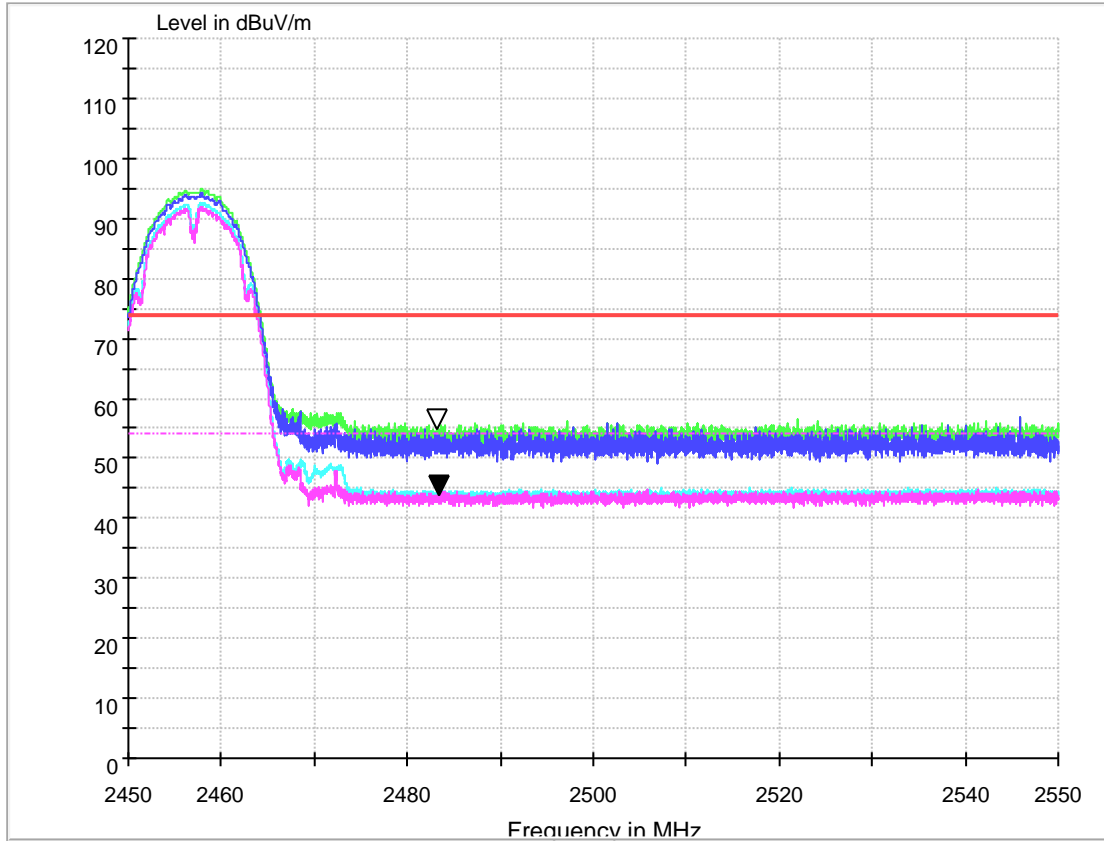

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.265	54.00	9.735	150.0	H	25.0	-10.2


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.180	74.00	18.820	150.0	H	21.0	-10.2

Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit - Level

1.3.1.8 Channel 11@Ant 2

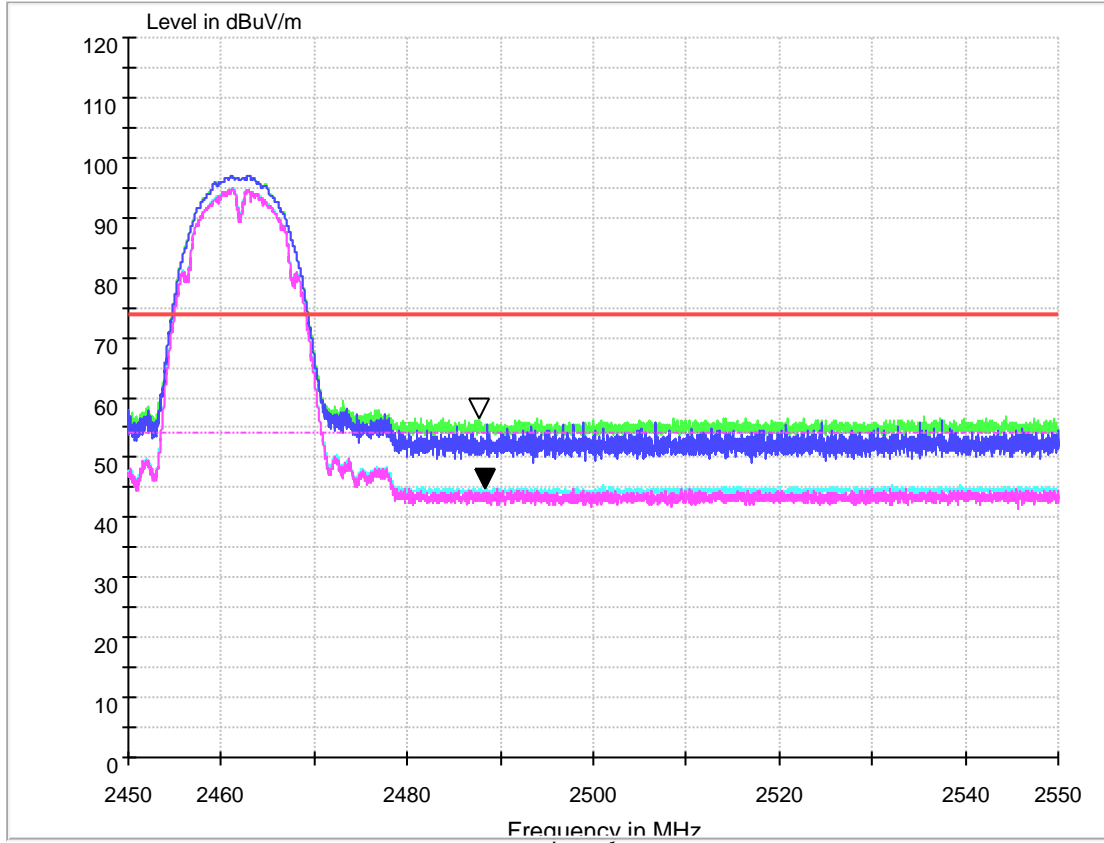

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	45.178	54.00	8.813	150.0	H	52.0	-10.2

MEASUREMENT RESULT: PK Detector


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2487.8	55.982	74.00	18.018	150.0	H	36.0	-10.2

Note:


- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit - Level



1.3.2 Test Mode: 11G

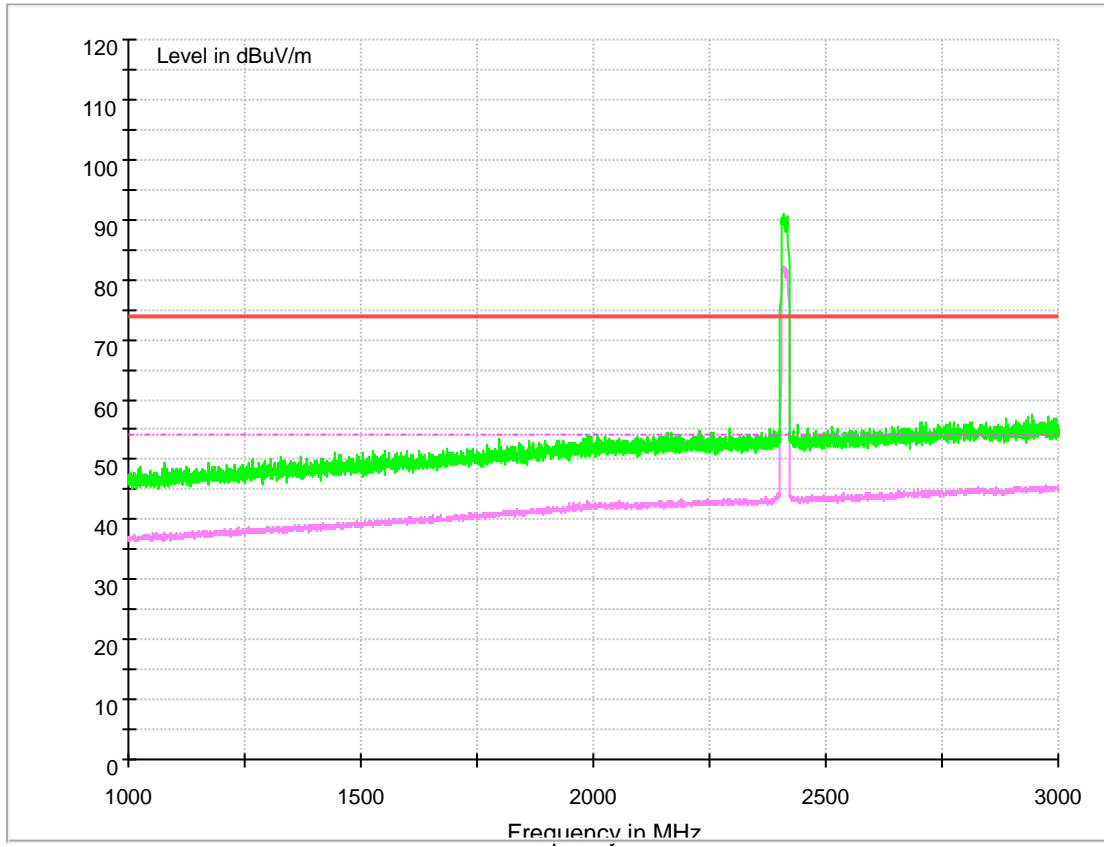

1.3.2.1 Channel 1 @Ant 1

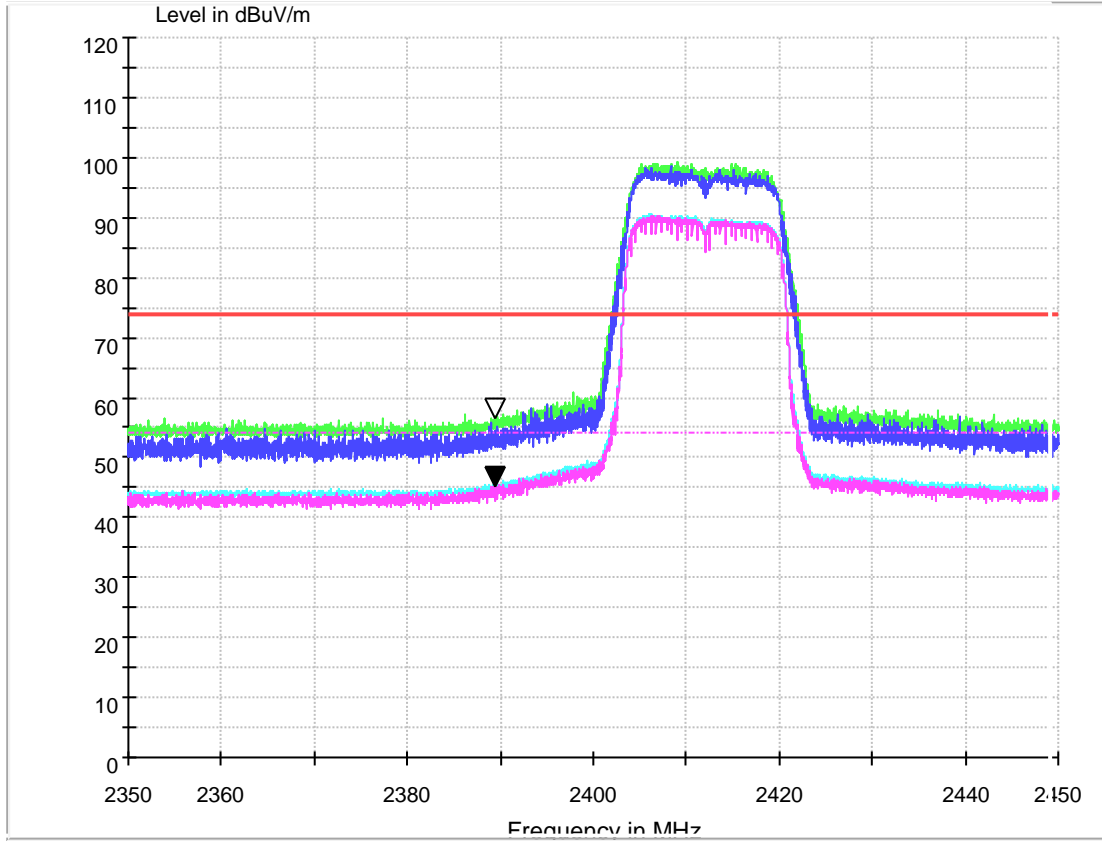

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	45.463	54.00	8.537	150.0	H	85.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	56.780	74.00	17.22	150.0	H	86.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.2 Channel 2 @Ant 1

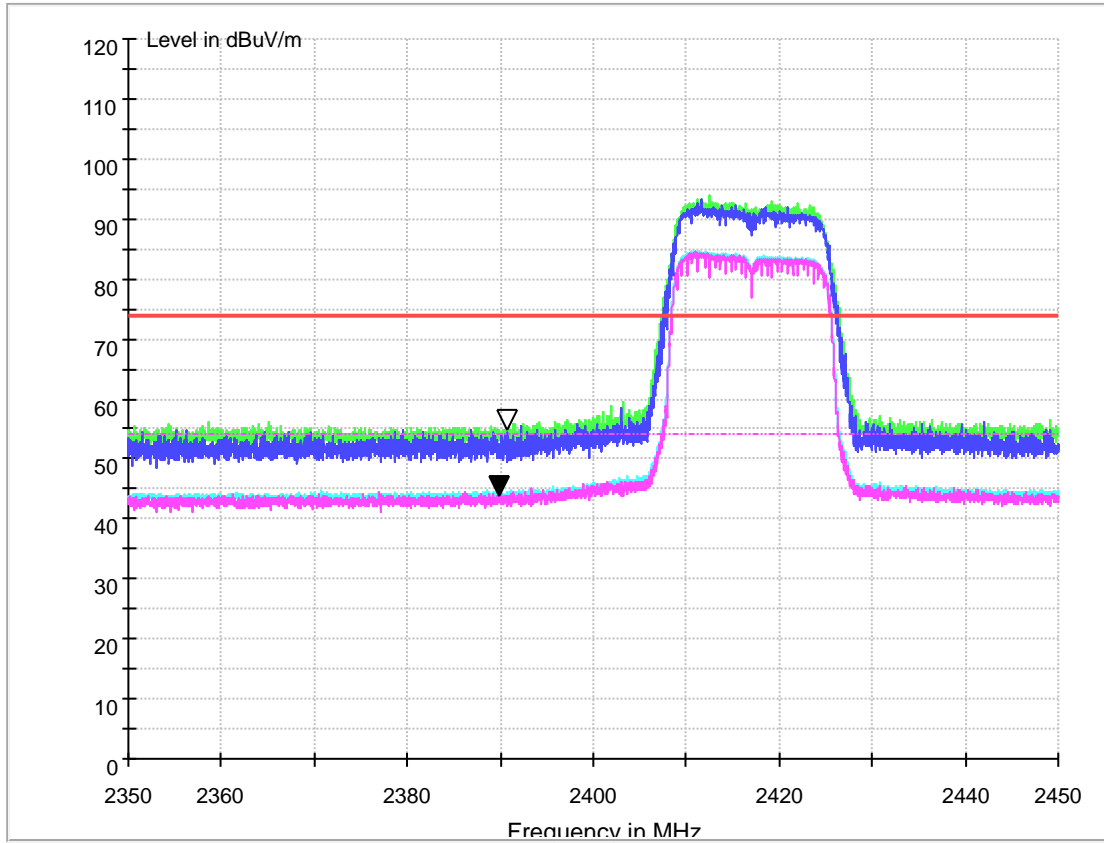

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	44.105	54.00	9.895	150.0	H	28.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	55.079	74.00	18.921	150.0	H	26.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.2.3 Channel 10@Ant 1

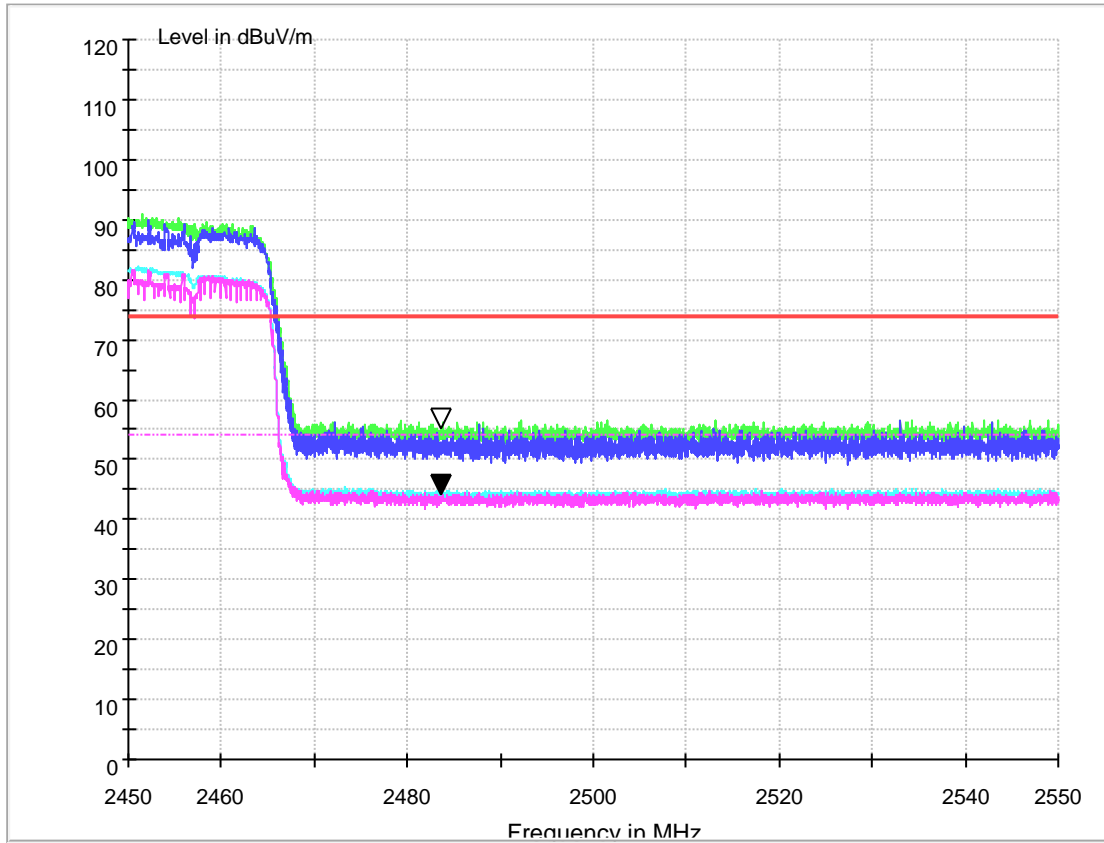

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.6	44.589	54.00	9.411	150.0	H	57.0	-10.2


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.7	55.458	74.00	18.542	150.0	H	58.0	-10.2

Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.9.098
- 2, Margin=Limit - Level

1.3.2.4 Channel 11@Ant 1

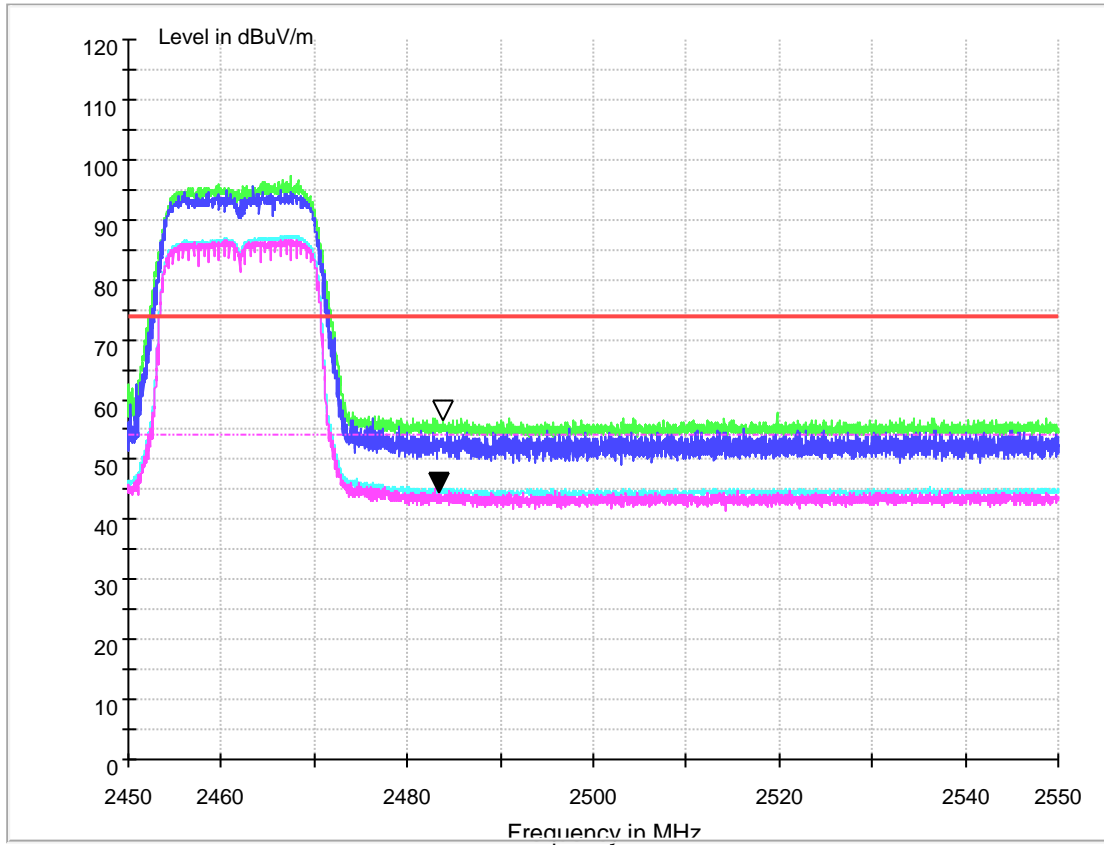

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.910	54.00	9.09	150.0	H	45.0	-10.2


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.7	56.882	74.00	17.118	150.0	H	46.0	-10.2

Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit - Level

1.3.2.5 Channel 1 @Ant 2

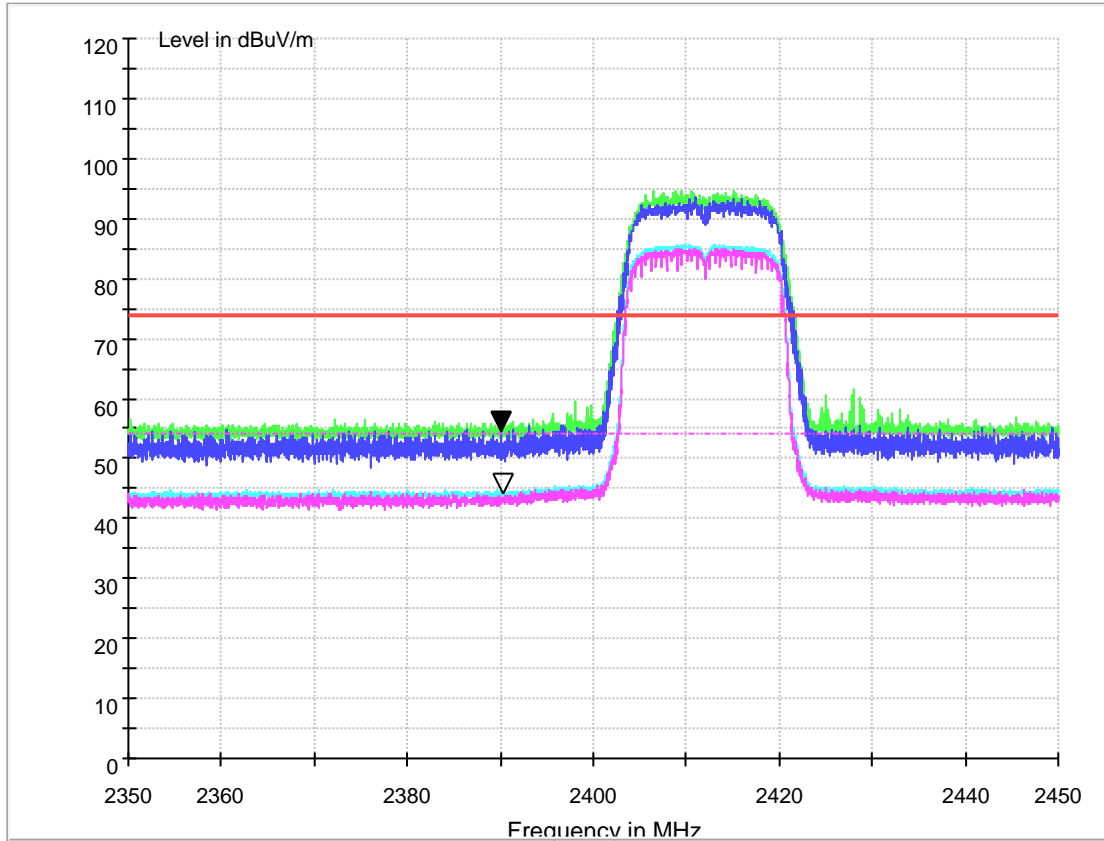

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.385	54.00	9.615	150.0	H	65.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	54.774	74.00	19.226	150.0	H	88.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.2.6 Channel 2 @Ant 2

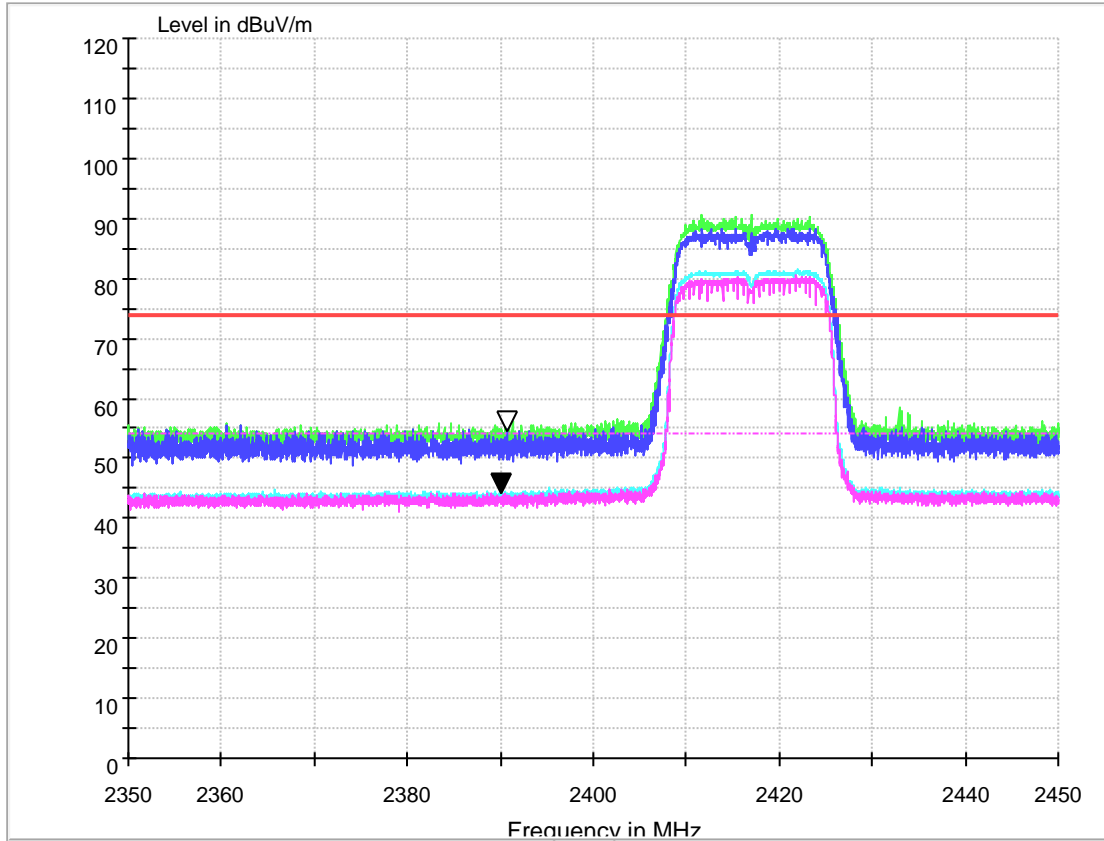

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.311	54.00	9.689	150.0	H	43.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	54.955	74.00	19.045	150.0	H	43.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.2.7 Channel 10@Ant 2

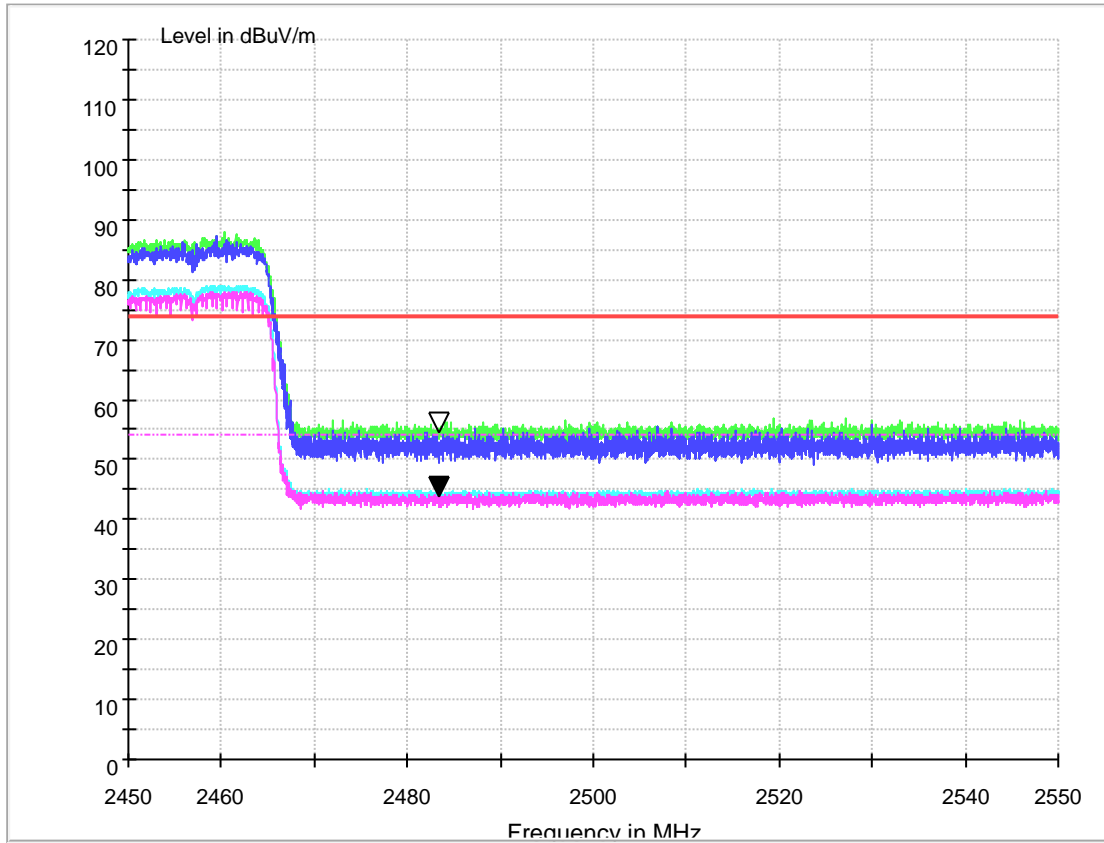

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.278	54.00	9.722	150.0	H	38.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	54.776	74.00	19.224	150.0	H	44.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.2.8 Channel 11@Ant 2

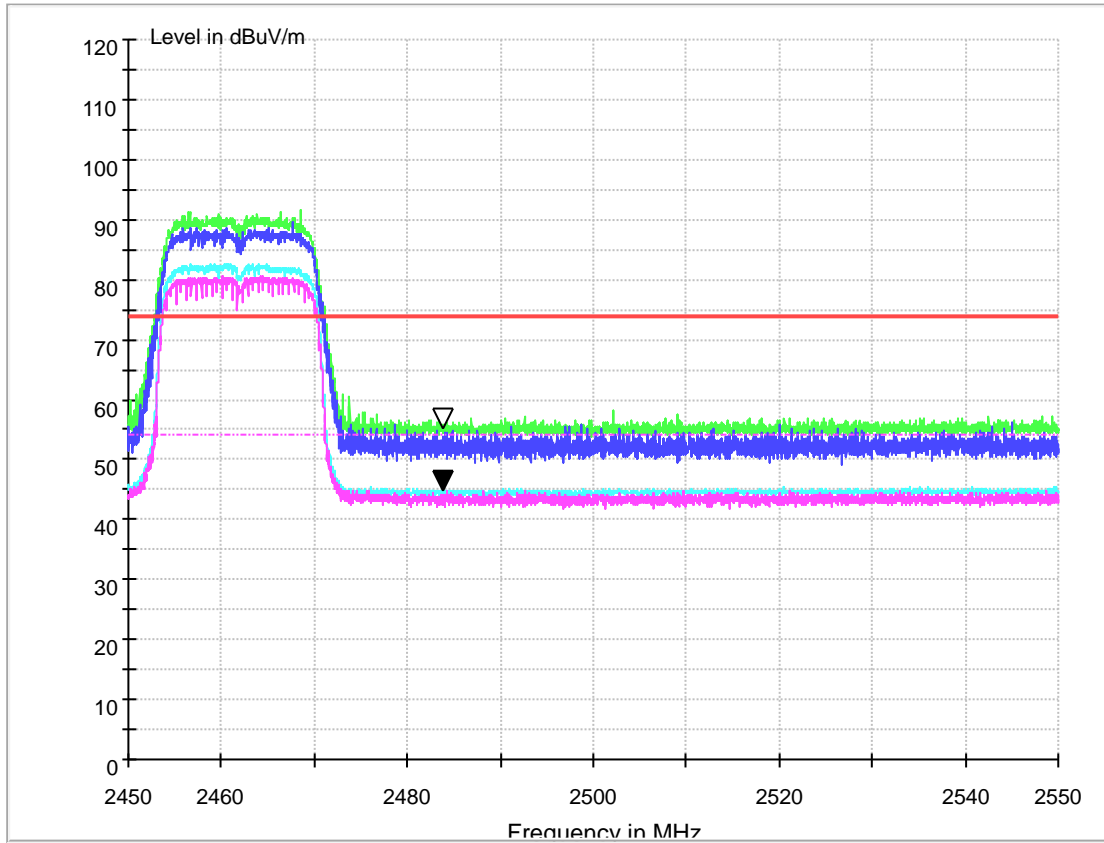

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	45.229	54.00	8.711	150.0	H	47.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.544	74.00	18.456	150.0	H	43.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3 Test Mode: 11N20

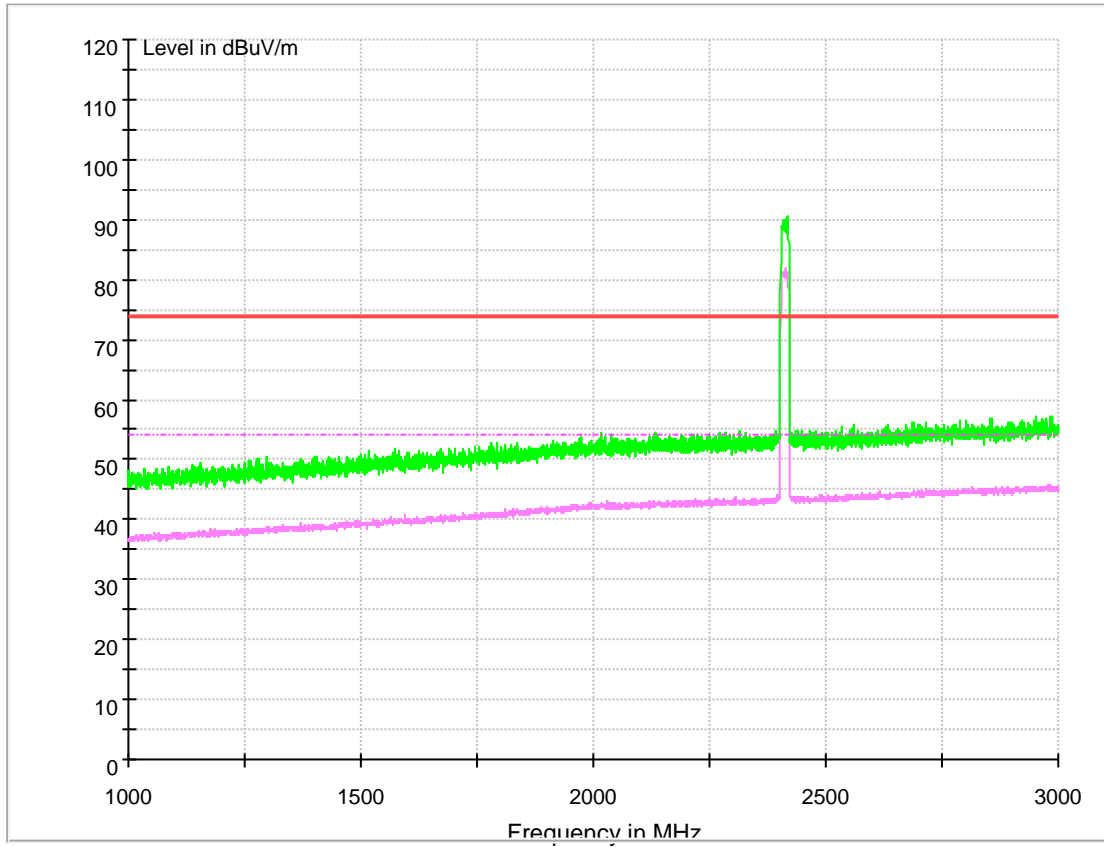

1.3.3.1 Channel 1 @Ant 1

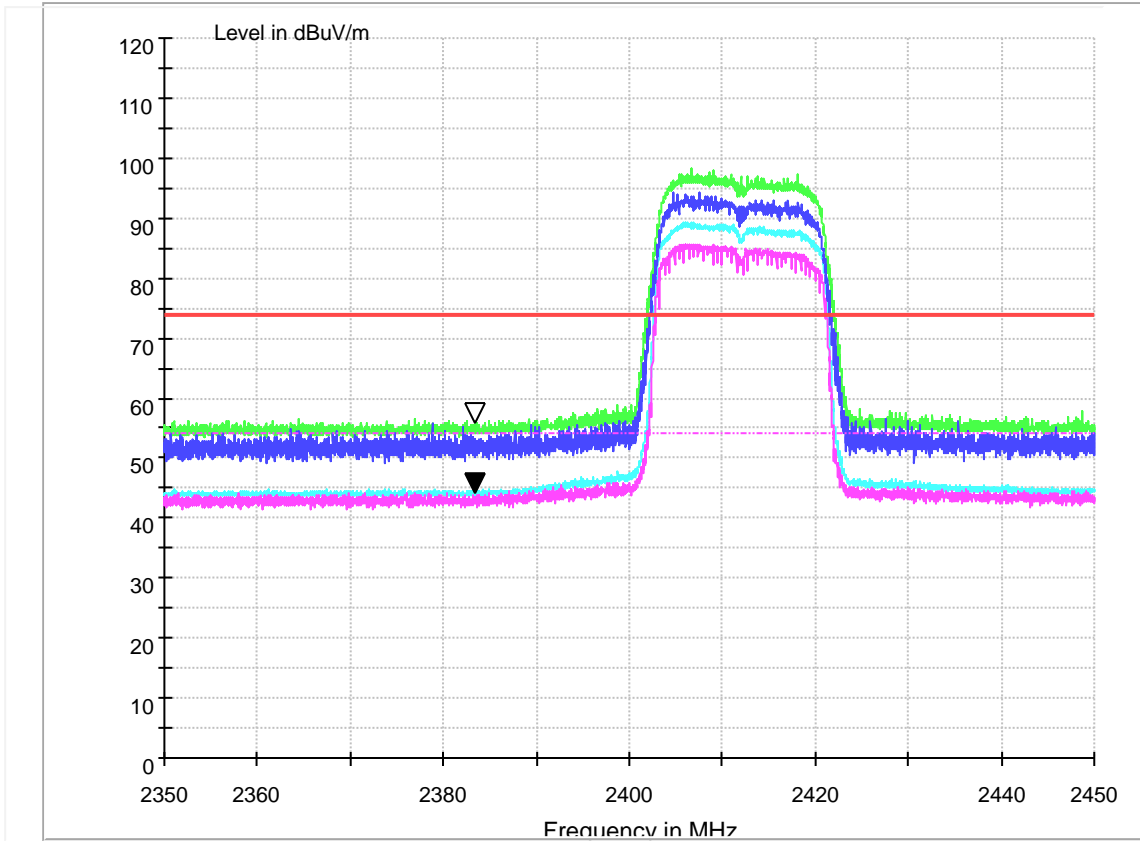

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	44.581	54.00	9.419	150.0	H	68.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	56.279	74.00	17.721	150.0	H	45.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.2 Channel 2 @Ant 1

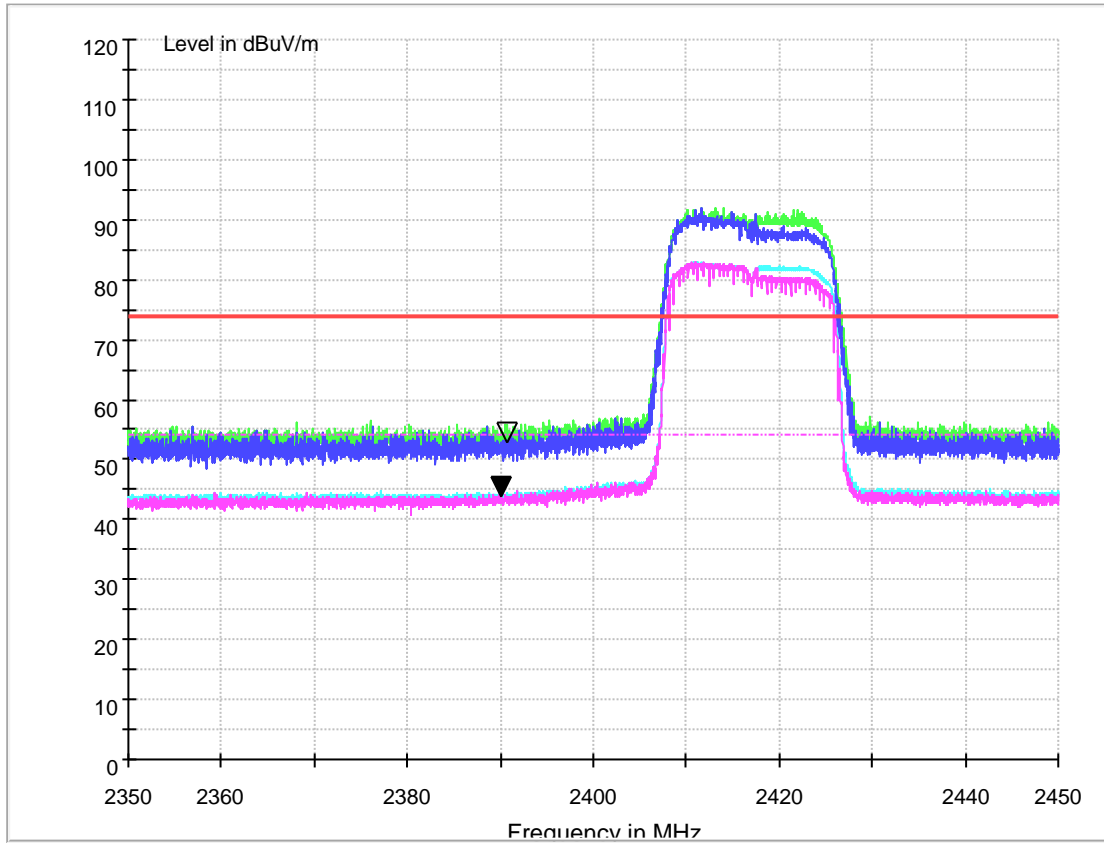

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.220	54.00	9.780	150.0	H	57.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	53.009	74.00	20.991	150.0	H	58.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.3 Channel 10@Ant 1

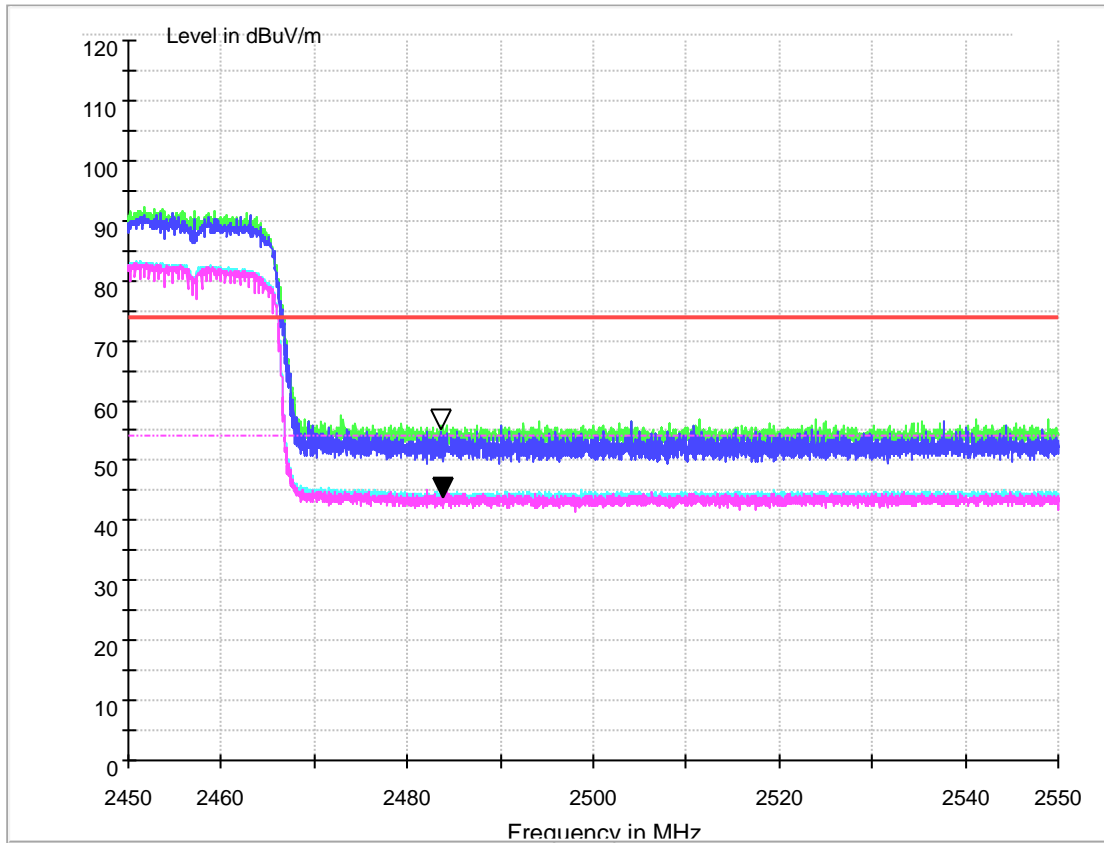

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h	Transd. (dB)
2483.5	44.148	54.00	9.852	150.0	H	57.0	-10.2


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h (deg)	Transd. (dB)
2483.5	55.406	74.00	18.594	150.0	H	56.0	-10.2

Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit – Level

1.3.3.4 Channel 11@Ant 1

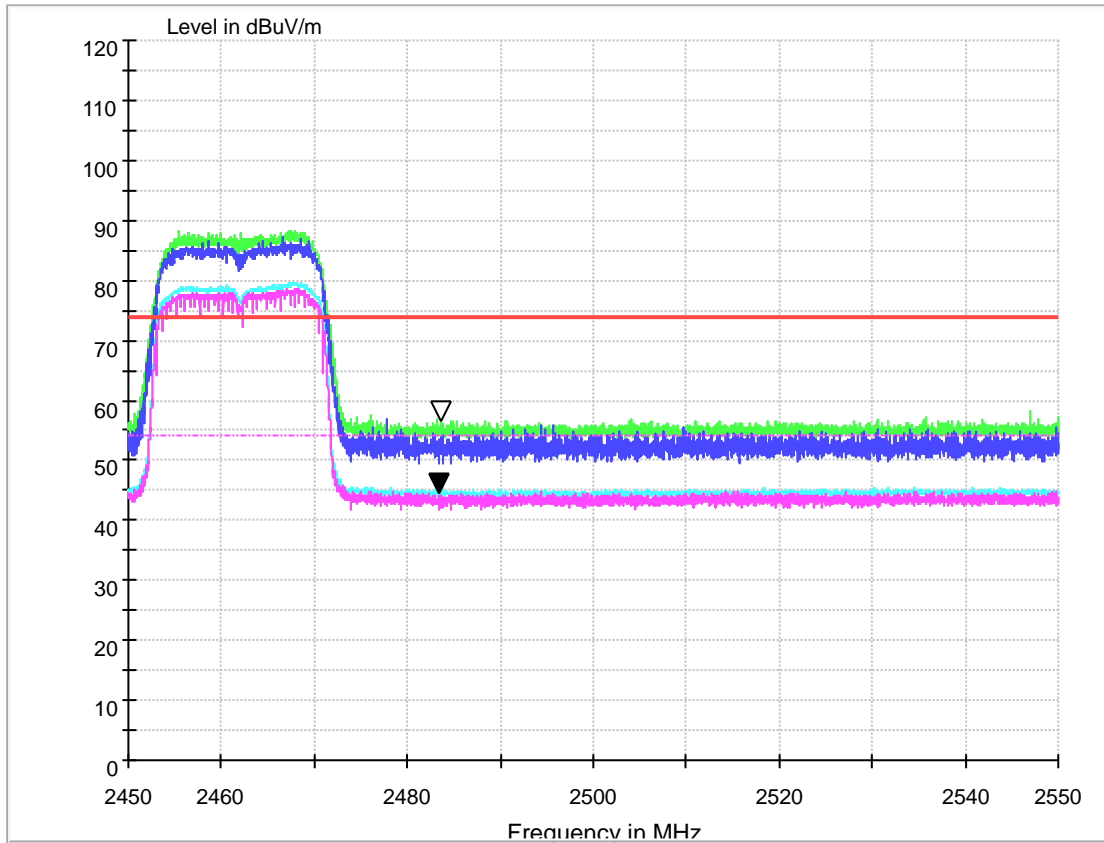

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.883	54.00	9.117	150.0	H	39.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	56.827	74.00	17.173	150.0	H	35.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.5 Channel 1 @Ant 2

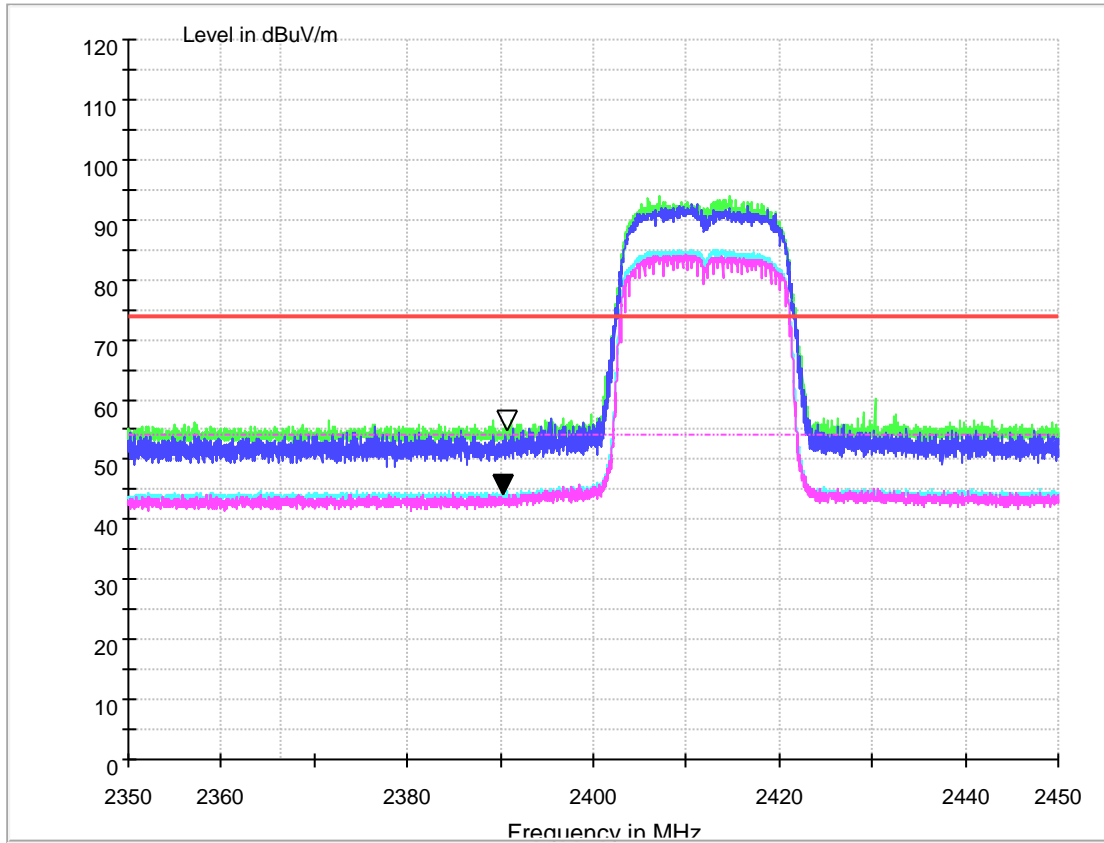

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.541	54.00	9.459	150.0	H	46.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	55.082	74.00	18.918	150.0	H	58.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.3.6 Channel 2 @Ant 2

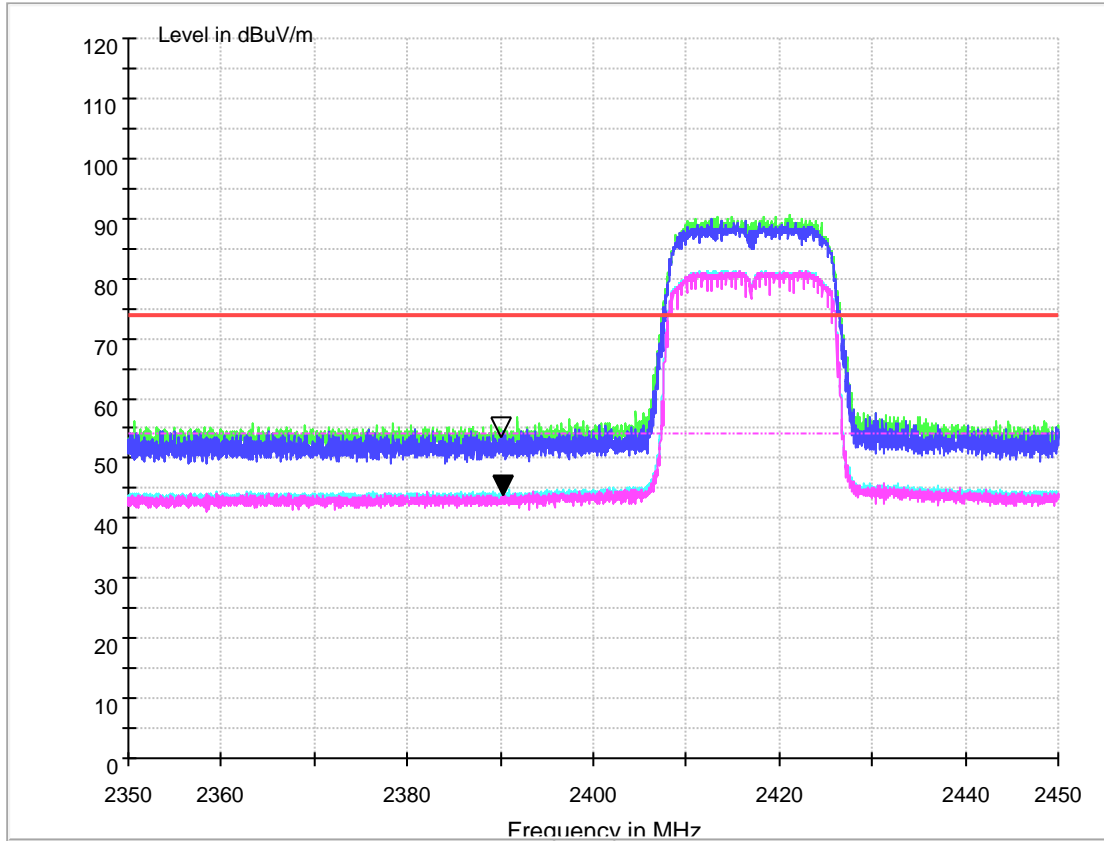

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	44.102	54.00	9.898	150.0	H	47.0	-6.8


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	53.791	74.00	20.209	150.0	H	59.0	-6.8

Note:

- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit – Level

1.3.3.7 Channel 10@Ant 2

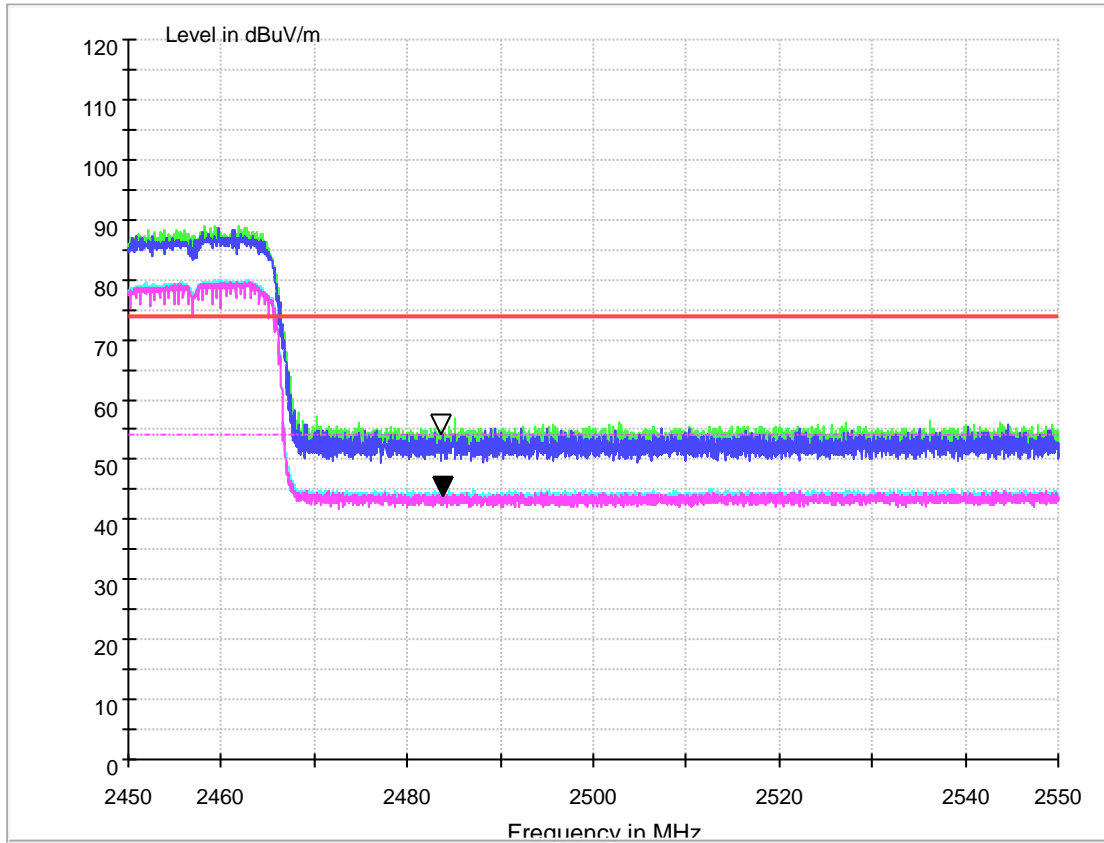

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	43.999	54.00	10.001	150.0	H	65.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	54.589	74.00	19.411	150.0	H	72.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.8 Channel 11@Ant 2

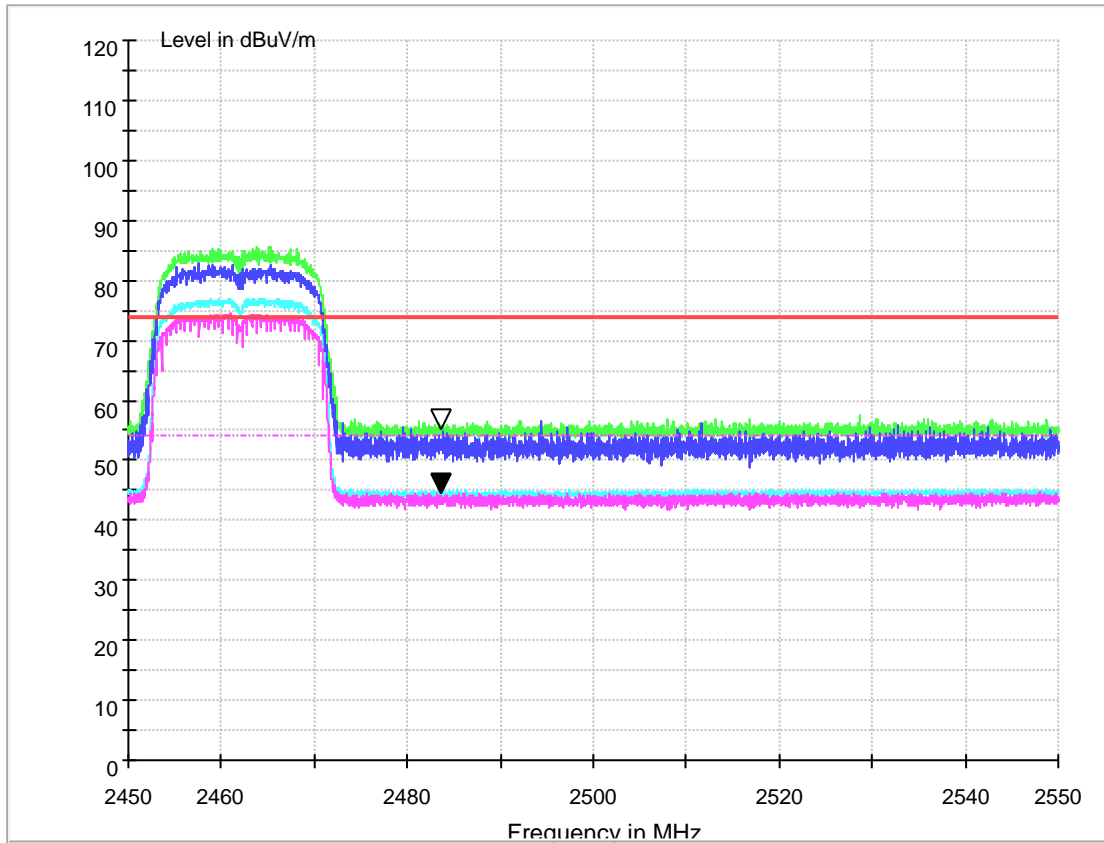

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.939	54.00	9.061	150.0	H	54.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.424	74.00	18.576	150.0	H	-31.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.4 Test Mode: 11N40

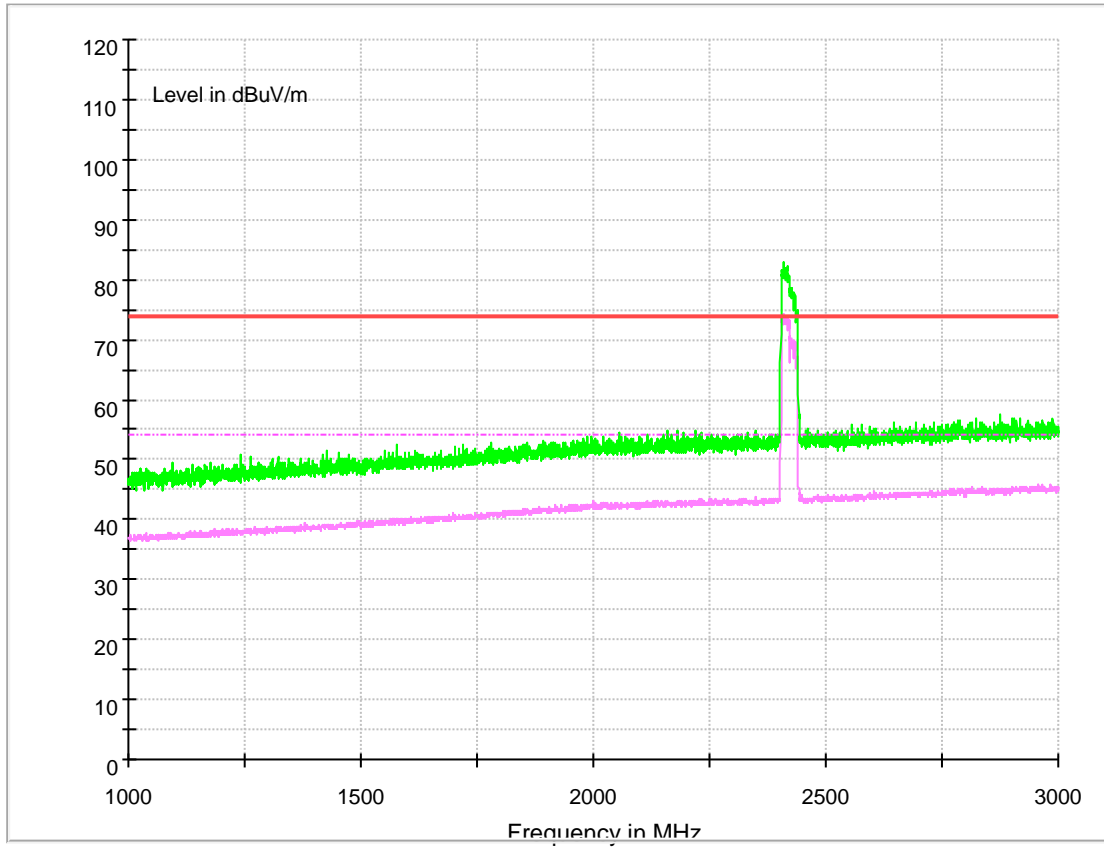

1.3.4.1 Channel 3 @Ant 1

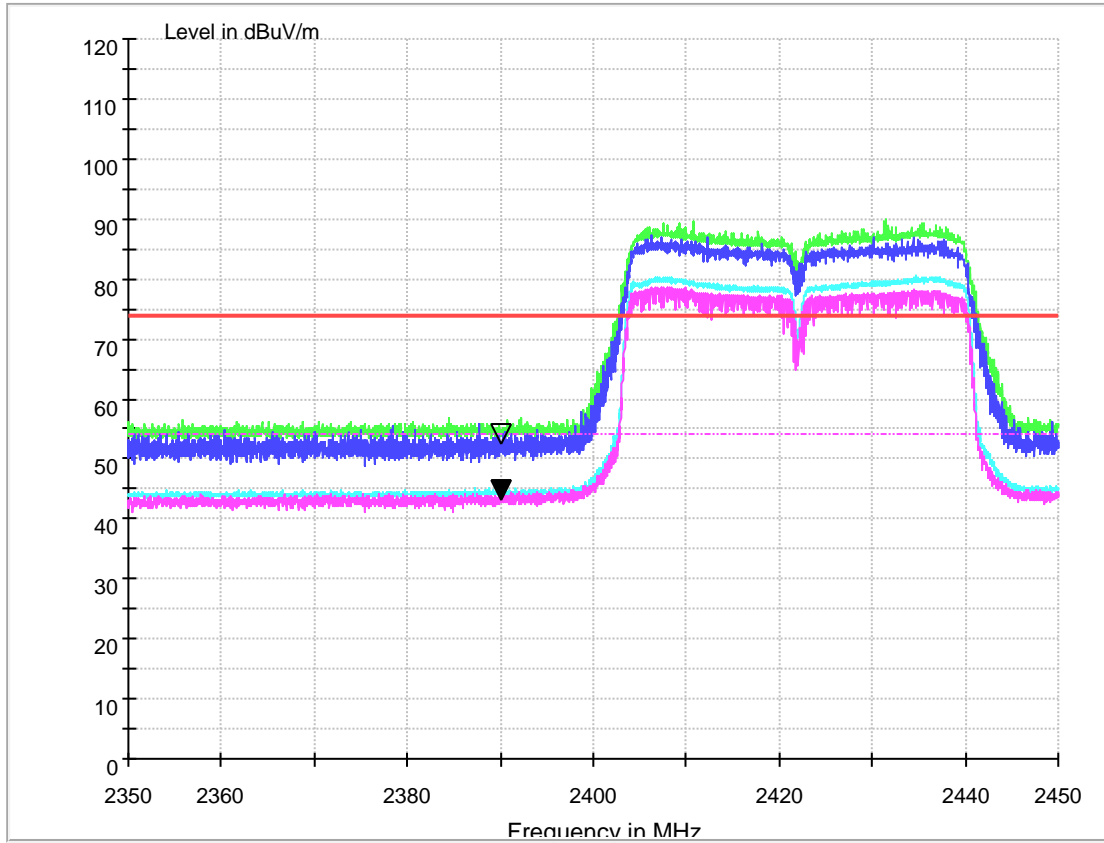

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	43.584	54.00	10.416	150.0	H	67.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	52.661	74.00	21.339	150.0	H	-16.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.4.2 Channel 4 @Ant 1

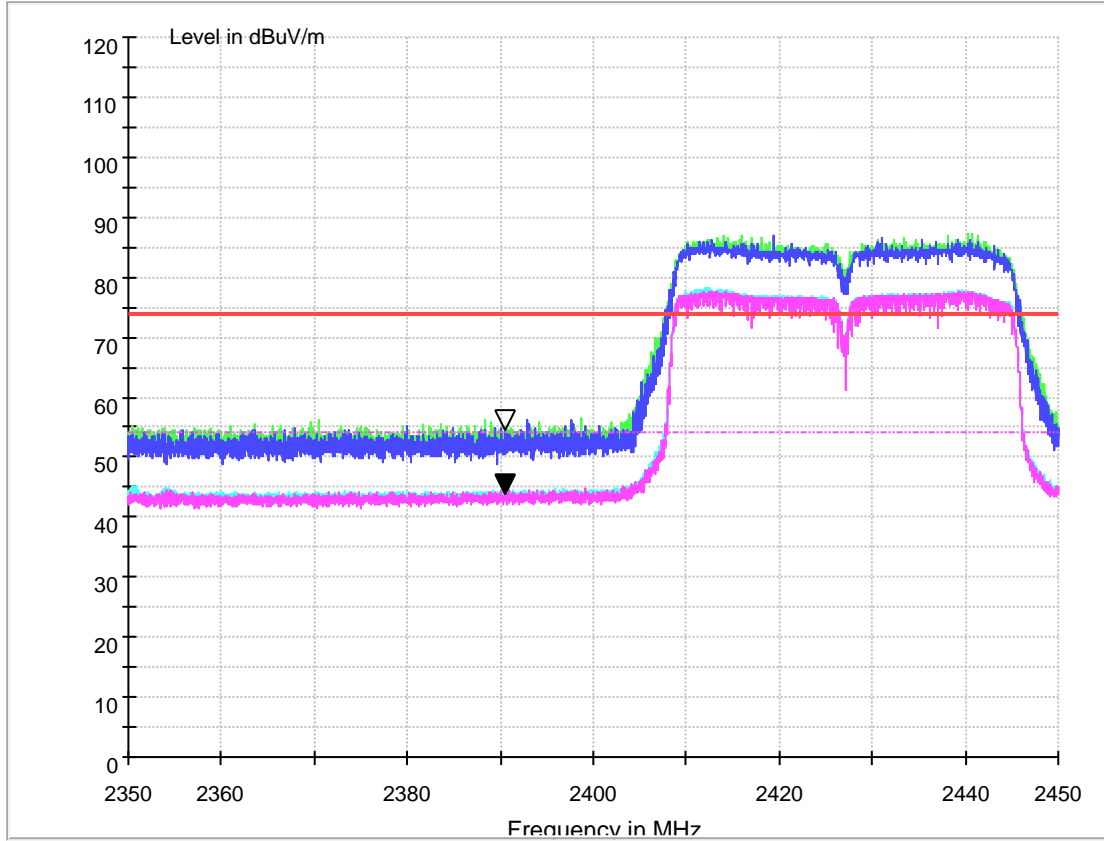

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.168	54.00	9.832	150.0	H	62.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	54.874	74.00	19.126	150.0	H	53.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.4.3 Channel 8 @Ant 1

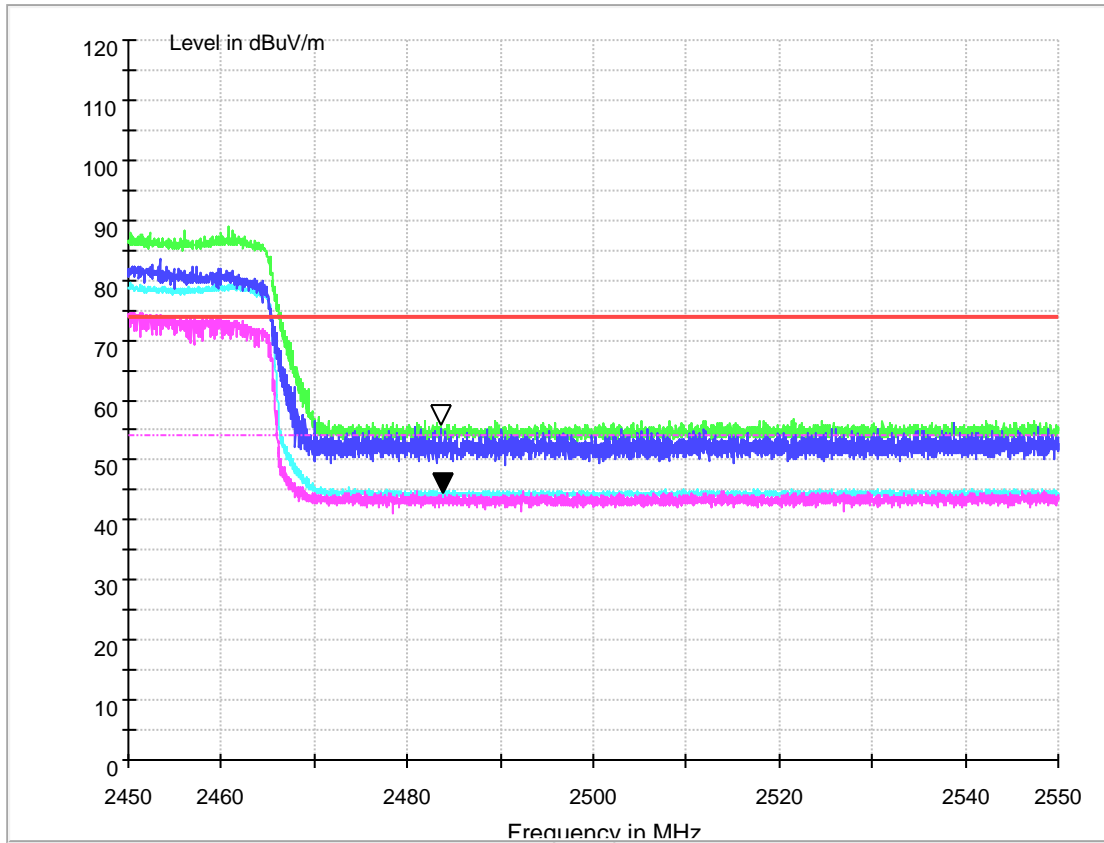

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.641	54.00	9.359	150.0	H	67.0	-10.2


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	56.266	74.00	17.734	150.0	H	65.0	-10.2

Note:

- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit - Level

1.3.4.4 Channel 9 @Ant 1

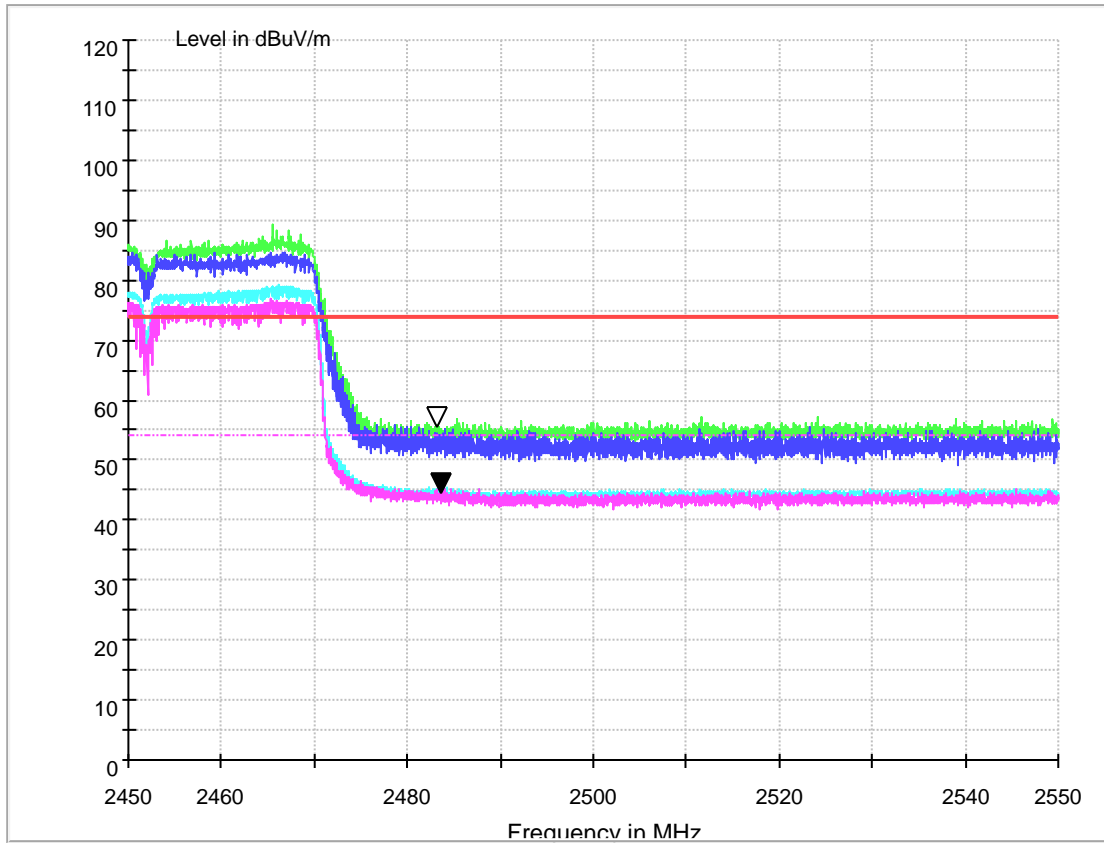

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.852	54.00	9.148	150.0	H	36.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.906	74.00	18.094	150.0	H	26.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.4.5 Channel 3 @Ant 2

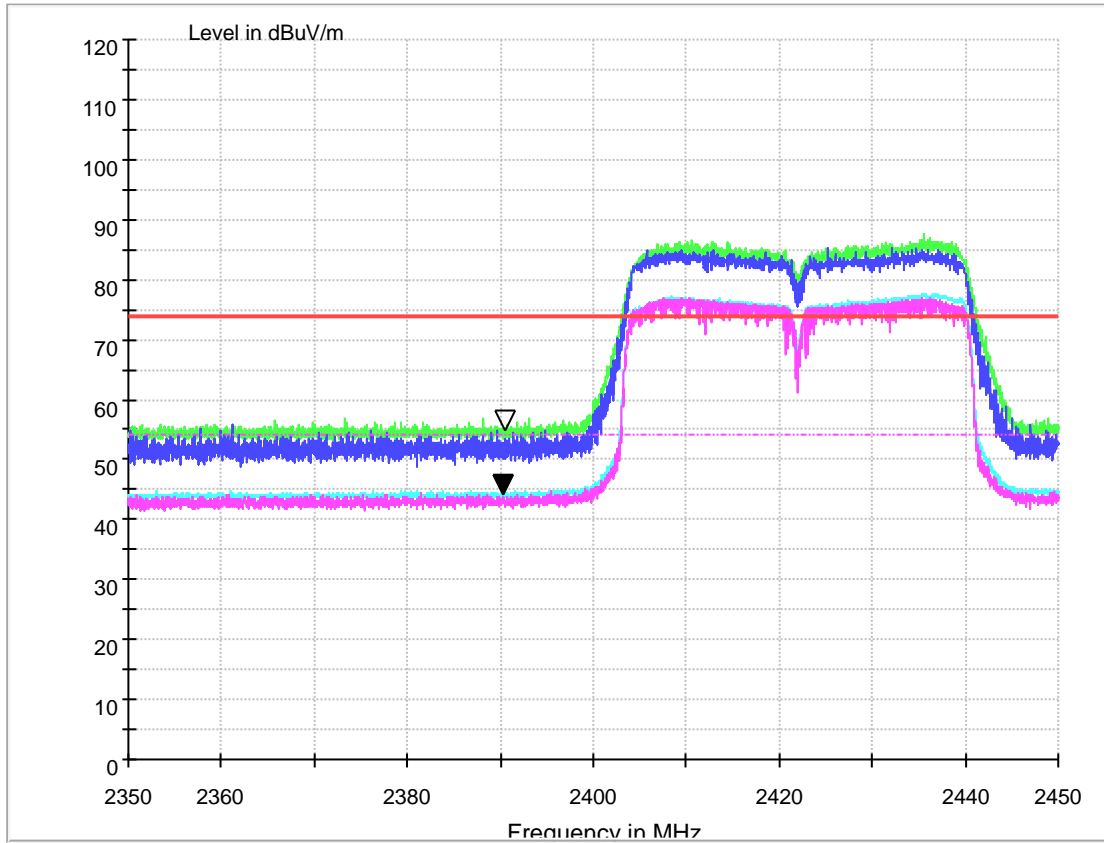

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.542	54.00	9.458	150.0	H	37.0	-6.8


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	55.287	74.00	18.713	150.0	H	38.0	-6.8

Note:

- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit - Level

1.3.4.6 Channel 4 @Ant 2

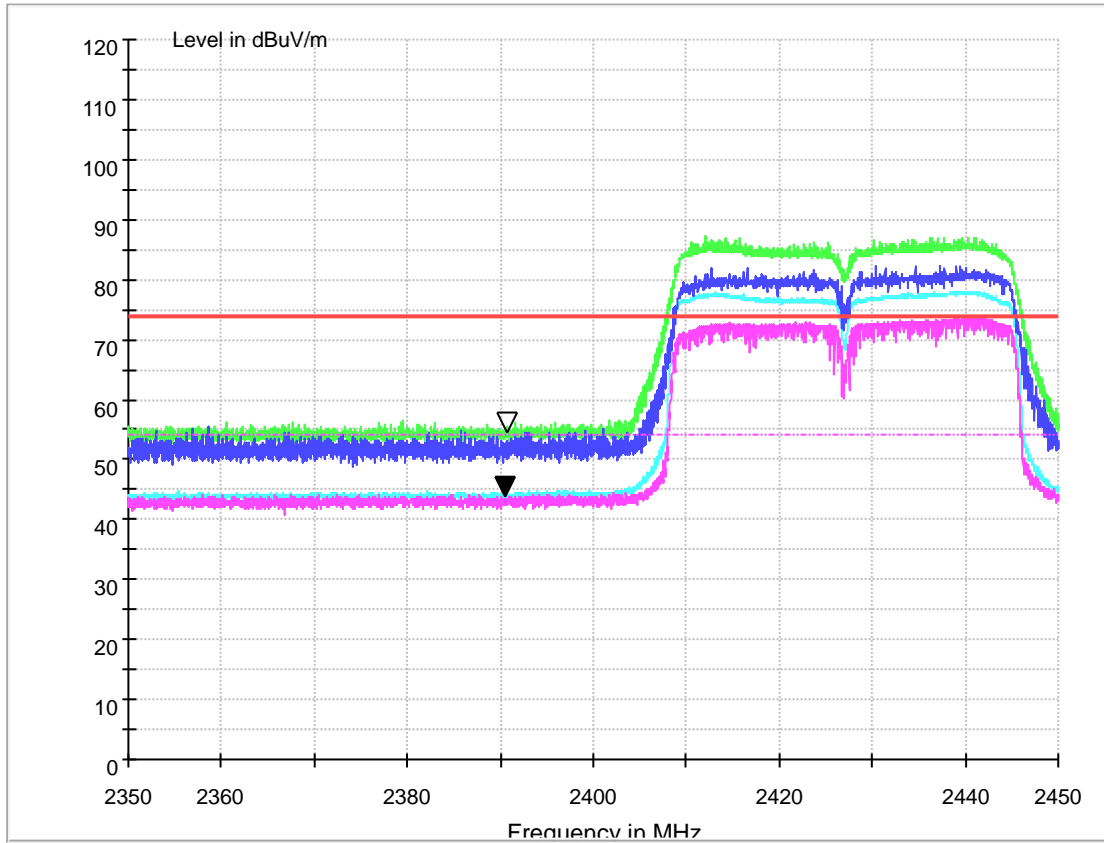

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.072	54.00	9.928	150.0	H	26.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	54.702	74.00	19.298	150.0	H	-11.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.4.7 Channel 8 @Ant 2

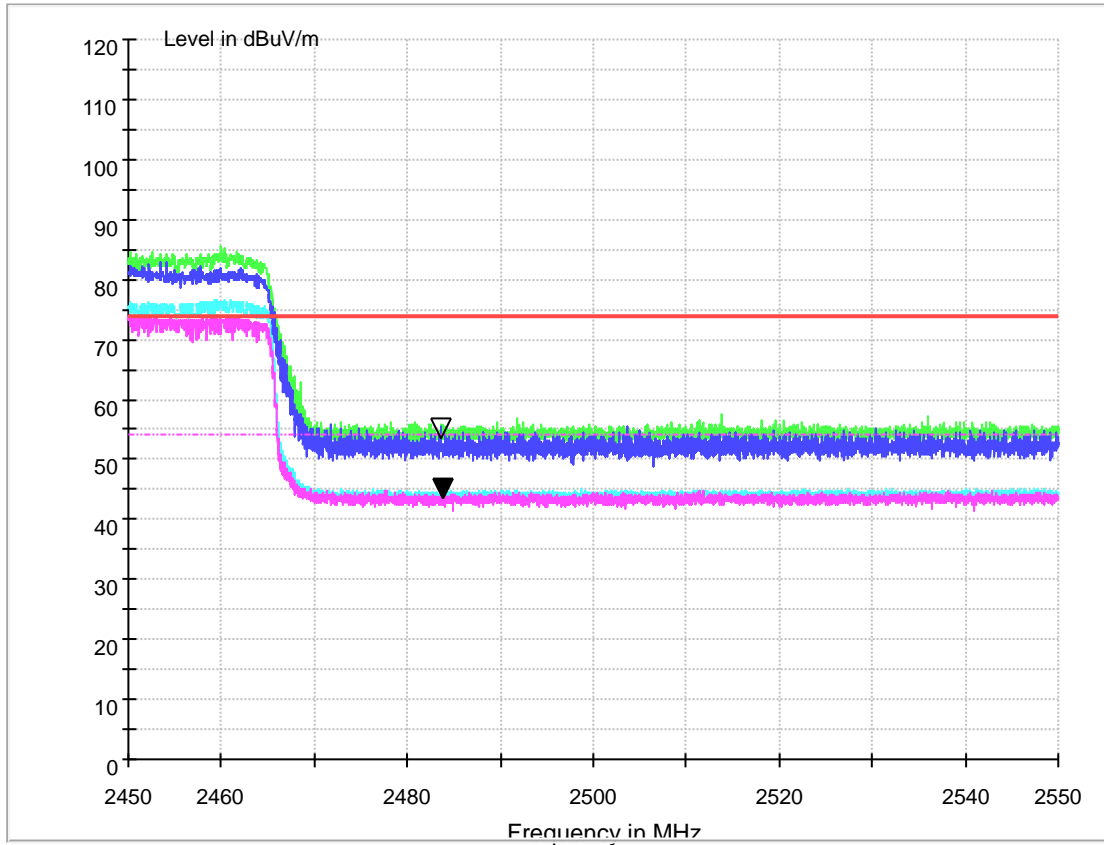

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	43.943	54.00	10.057	150.0	H	38.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	53.748	74.00	20.252	150.0	H	89.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.4.8 Channel 9 @Ant 2

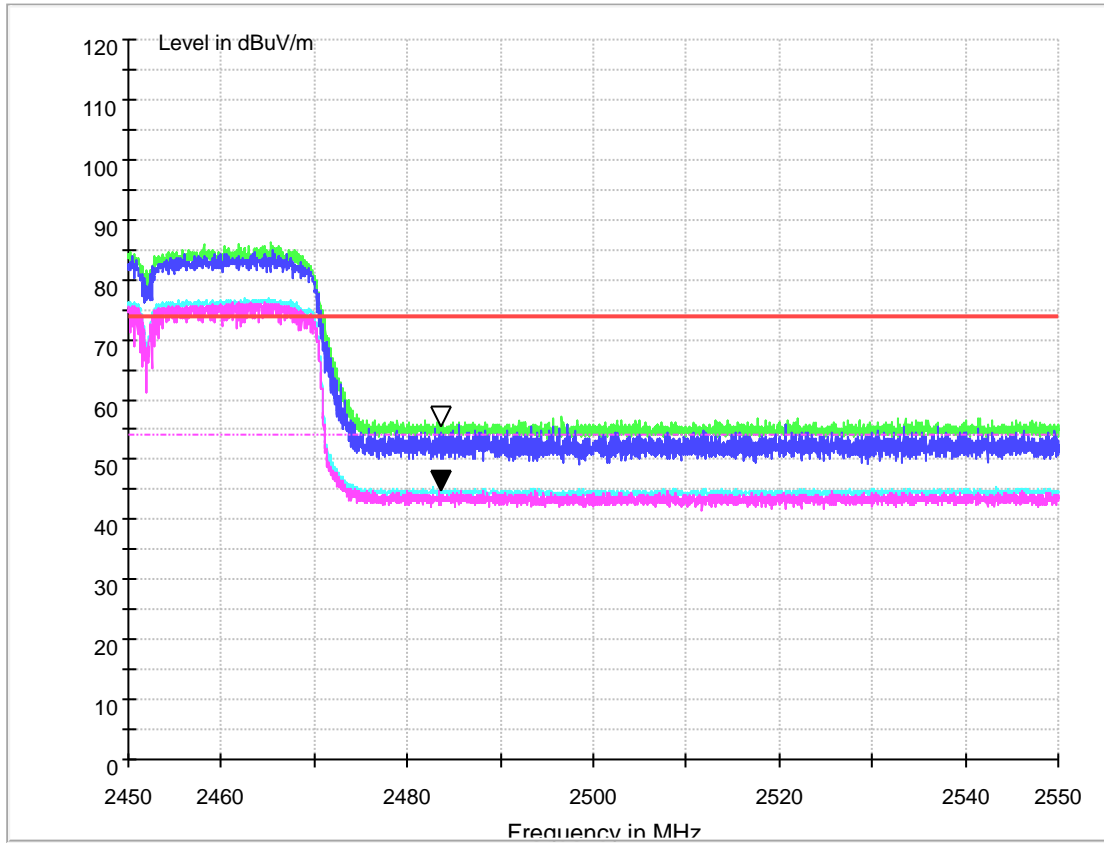

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.959	54.00	9.041	150.0	H	46.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.947	74.00	18.053	150.0	H	65.0	-10.2

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.


2, Margin=Limit - Level



1.3.5 Test Mode: 11G-CDD

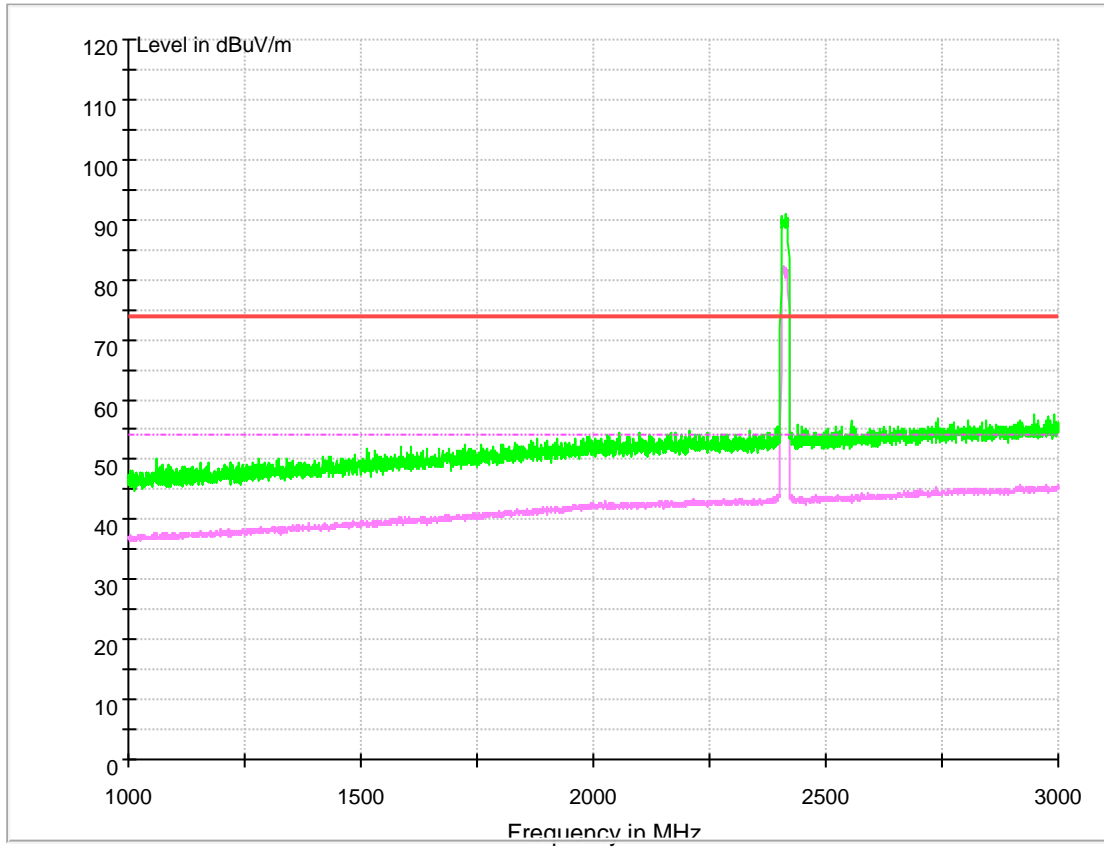

1.3.5.1 Channel 1

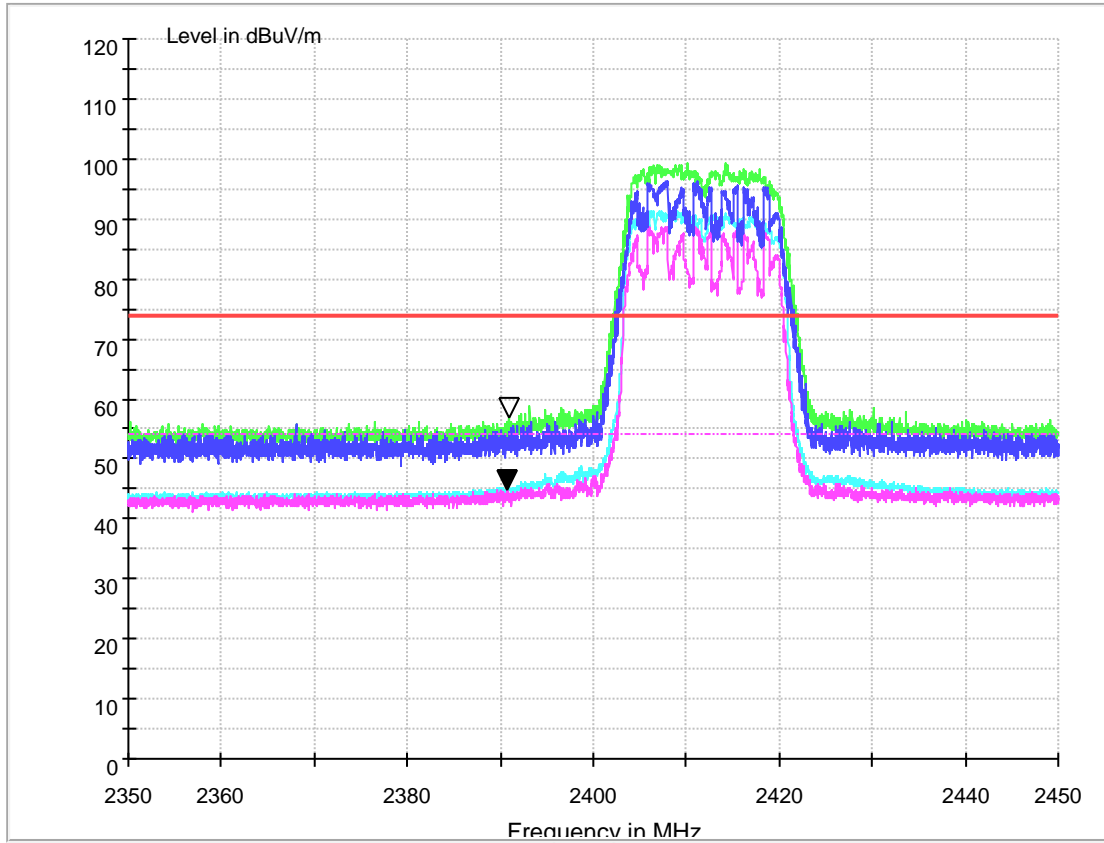

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h	Transd. (dB)
2390	45.068	54.00	8.932	150.0	H	67.0	-6.8


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h (deg)	Transd. (dB)
2390	57.085	74.00	16.915	150.0	H	66.0	-6.8

Note:

- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin=Limit – Level

1.3.5.2 Channel 2

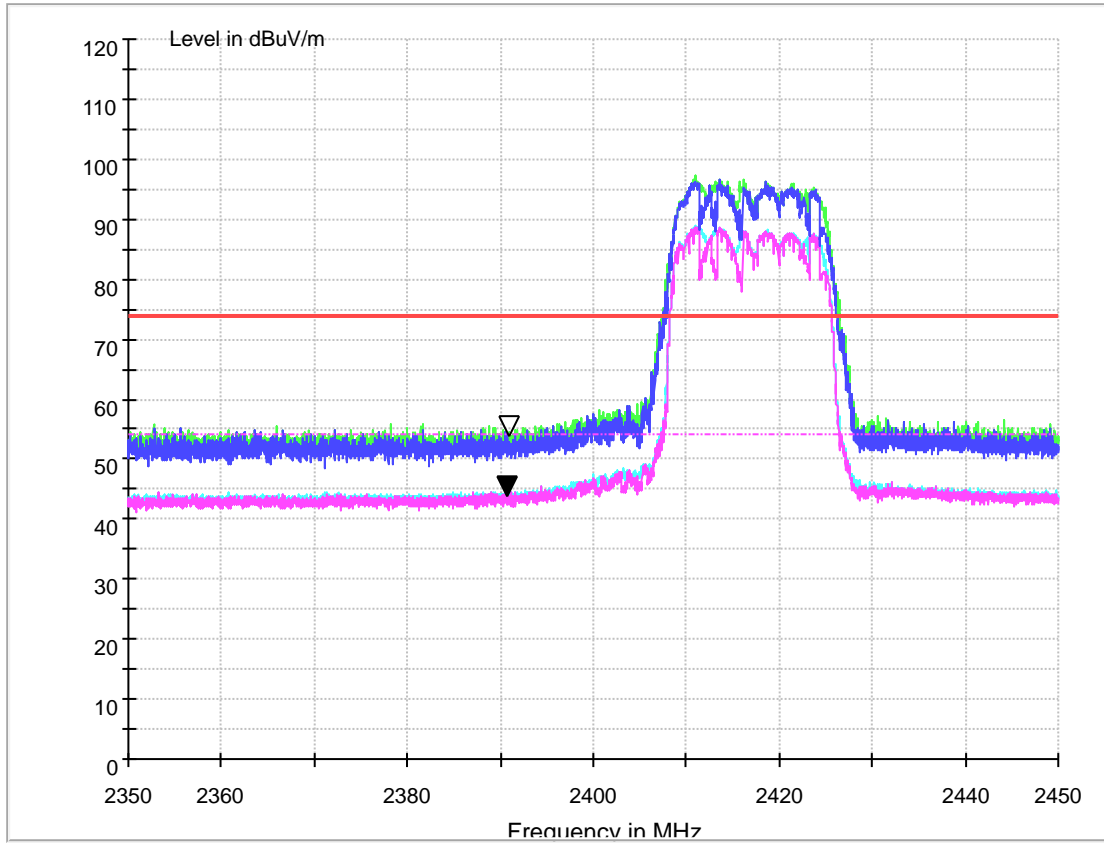

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	43.999	54.00	10.001	150.0	H	47.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	54.237	74.00	19.763	150.0	H	45.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.5.3 Channel 10

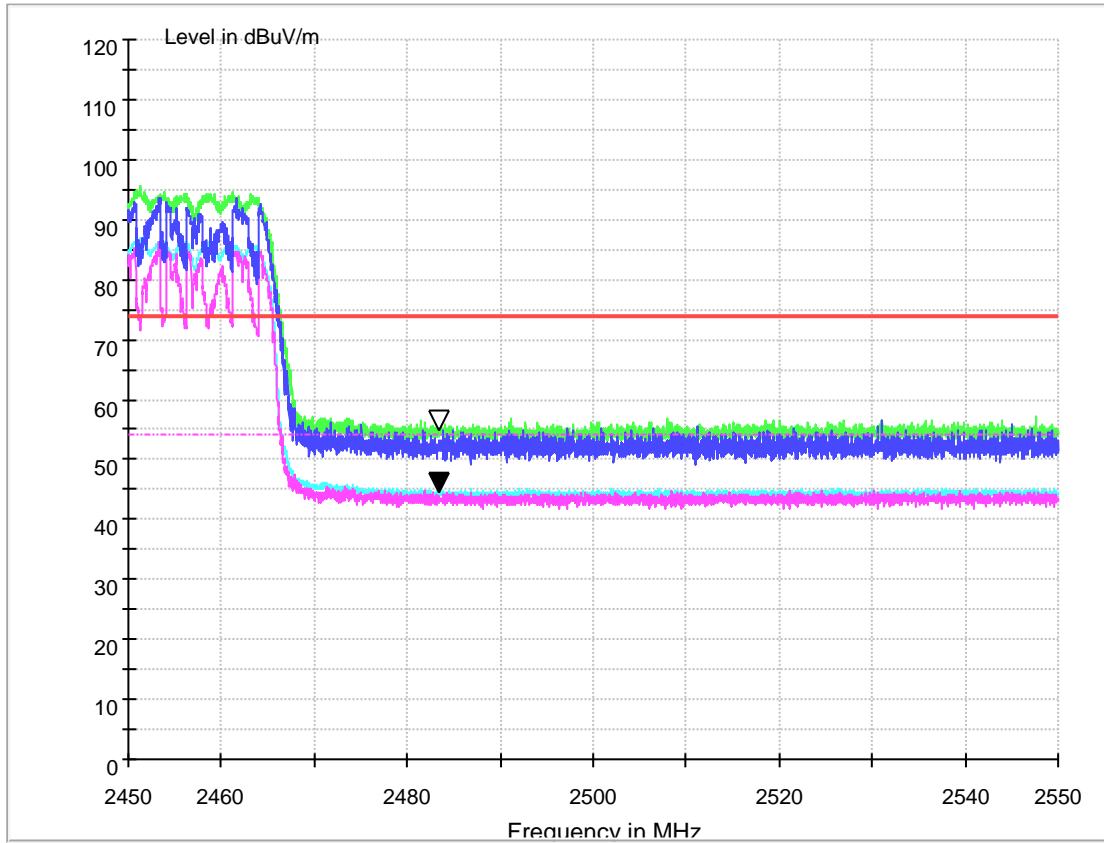

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.648	54.00	9.352	150.0	H	63.0	-10.2


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.080	74.00	18.920	150.0	H	56.0	-10.2

Note:

- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit – Level

1.3.5.4 Channel 11

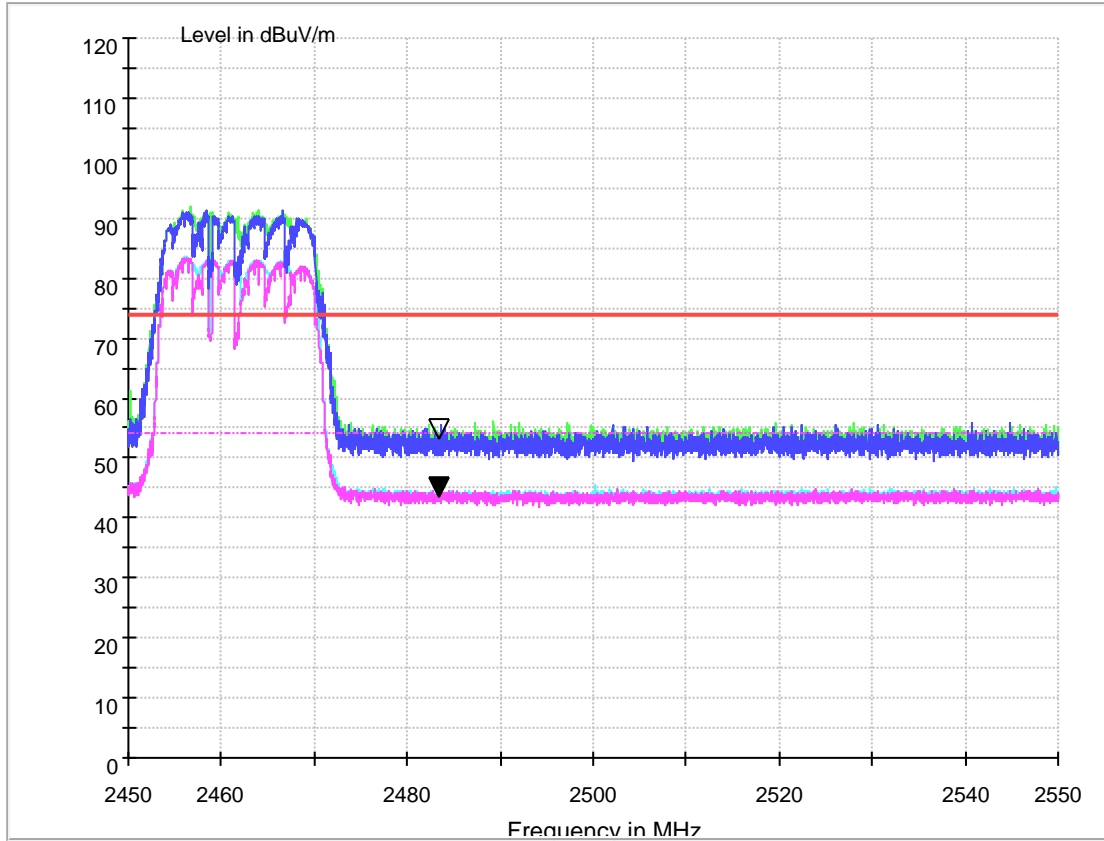

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	43.871	54.00	10.129	150.0	H	53.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	53.358	74.00	20.642	150.0	H	54.0	-10.2

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.6 Test Mode: 11N-20M-MIMO

1.3.6.1 Channel 1

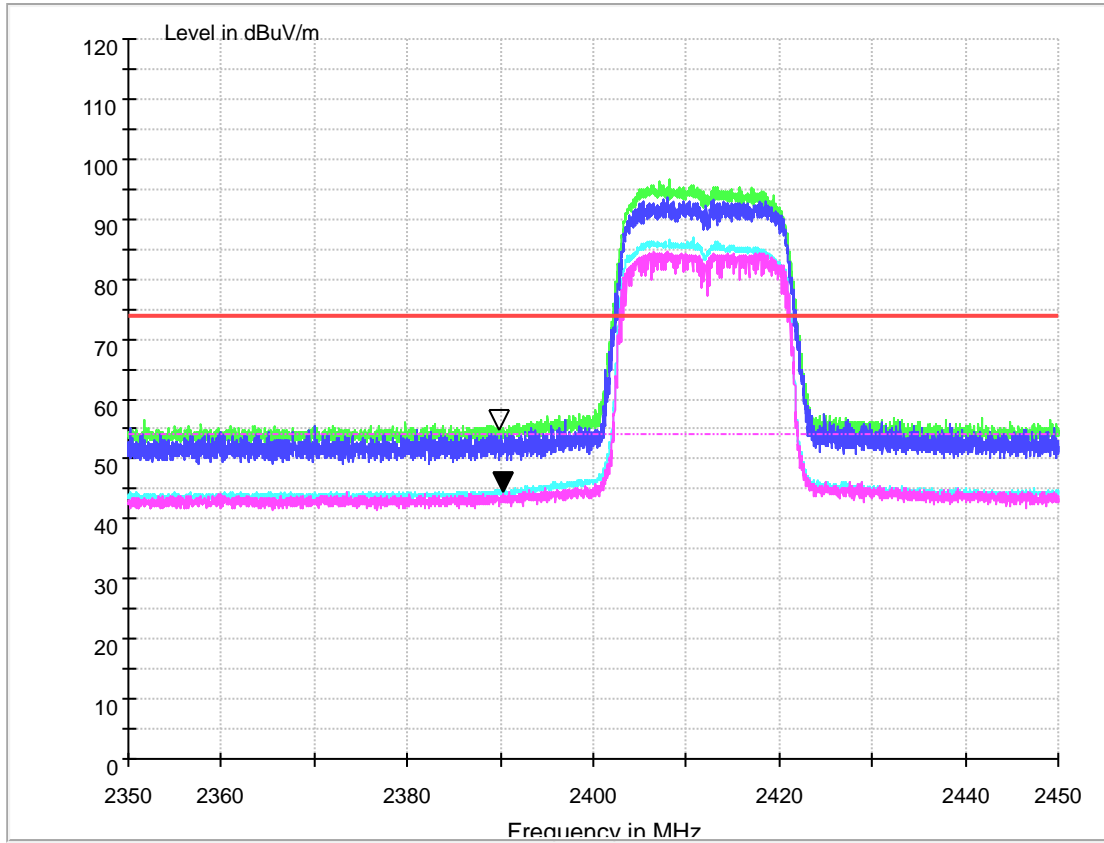

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	44.881	54.00	9.119	150.0	H	45.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	55.130	74.00	18.870	150.0	H	36.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.6.2 Channel 2

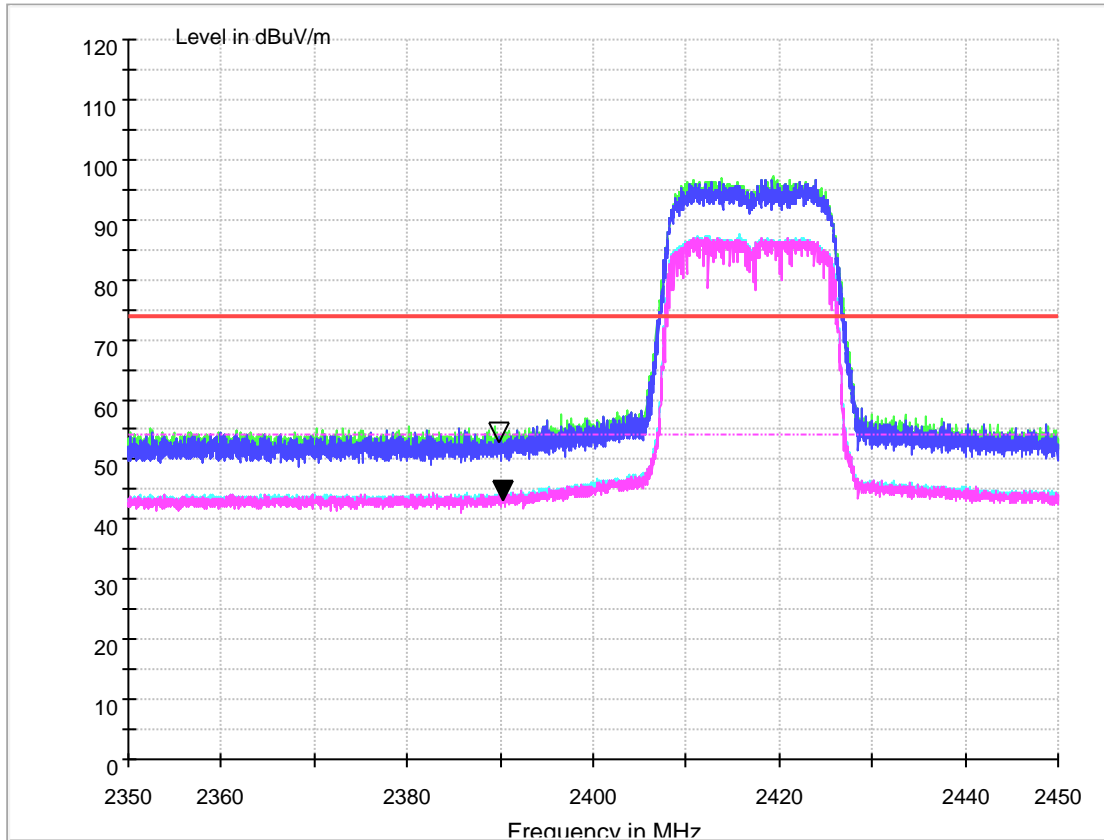

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	43.591	54.00	10.409	150.0	H	57.0	-6.8


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	53.277	74.00	20.723	150.0	H	59.0	-6.8

Note:

- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit – Level

1.3.6.3 Channel 10

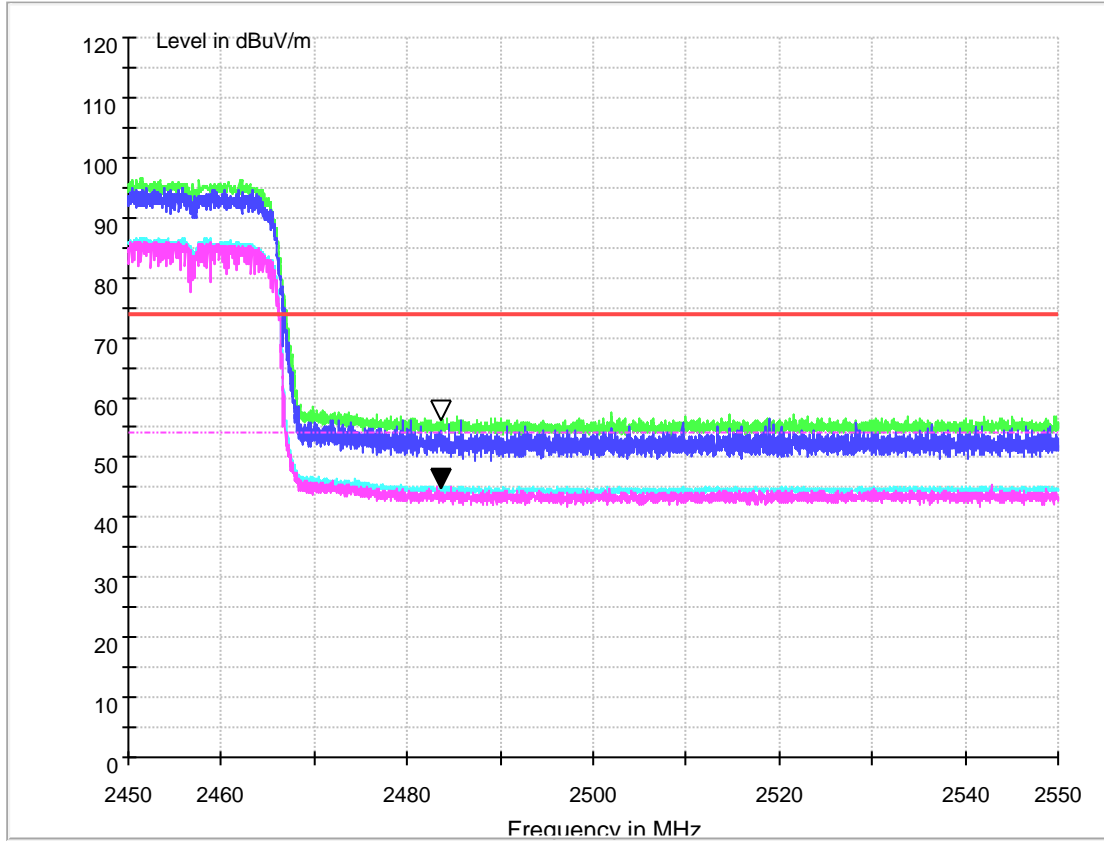

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	45.245	54.00	8.755	150.0	H	52.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	56.519	74.00	17.481	150.0	H	58.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.6.4 Channel 11

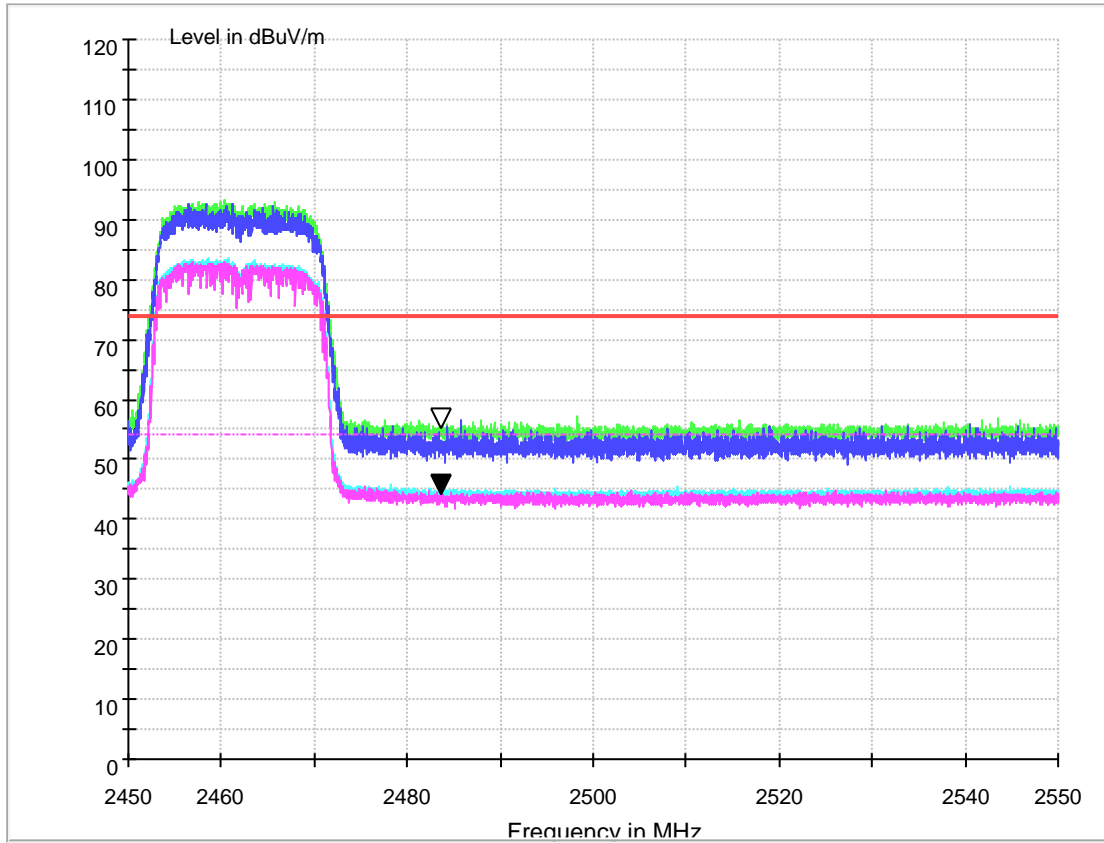

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	44.343	54.00	9.657	150.0	H	37.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.626	74.00	18.374	150.0	H	39.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.7 Test Mode: 11N-40M-MIMO

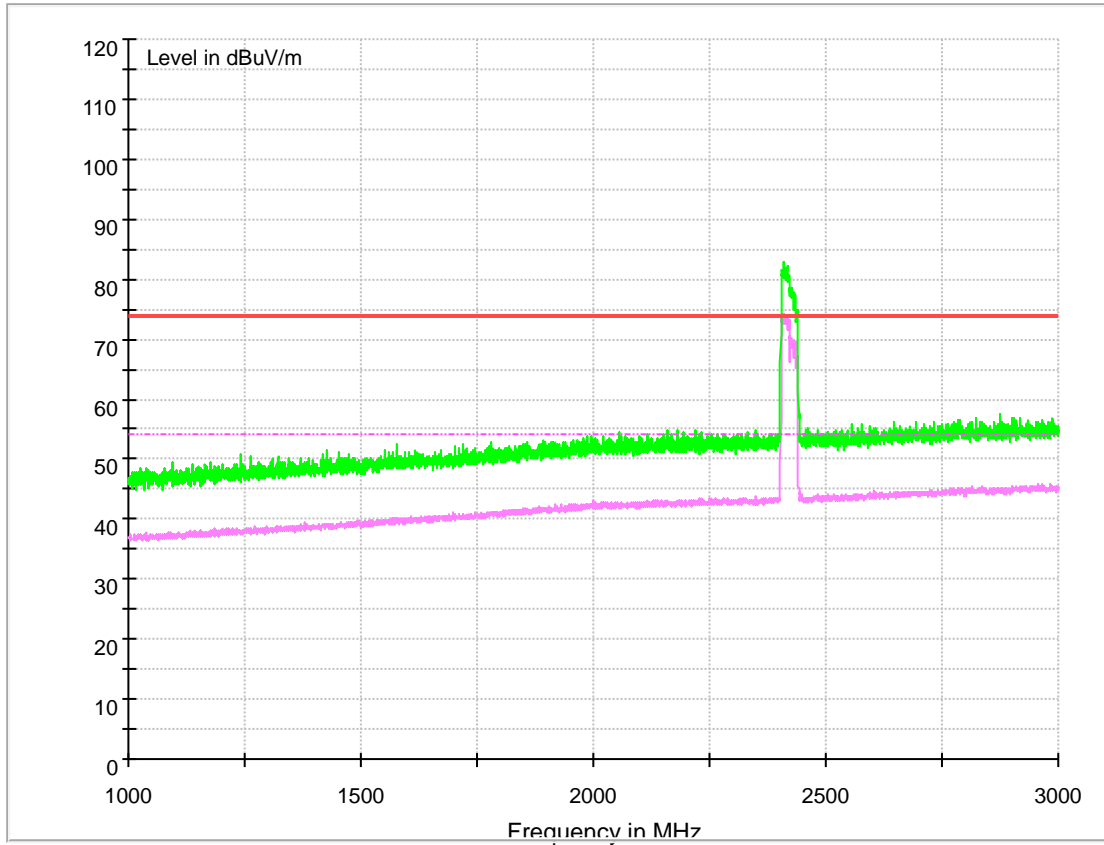

1.3.7.1 Channel 3

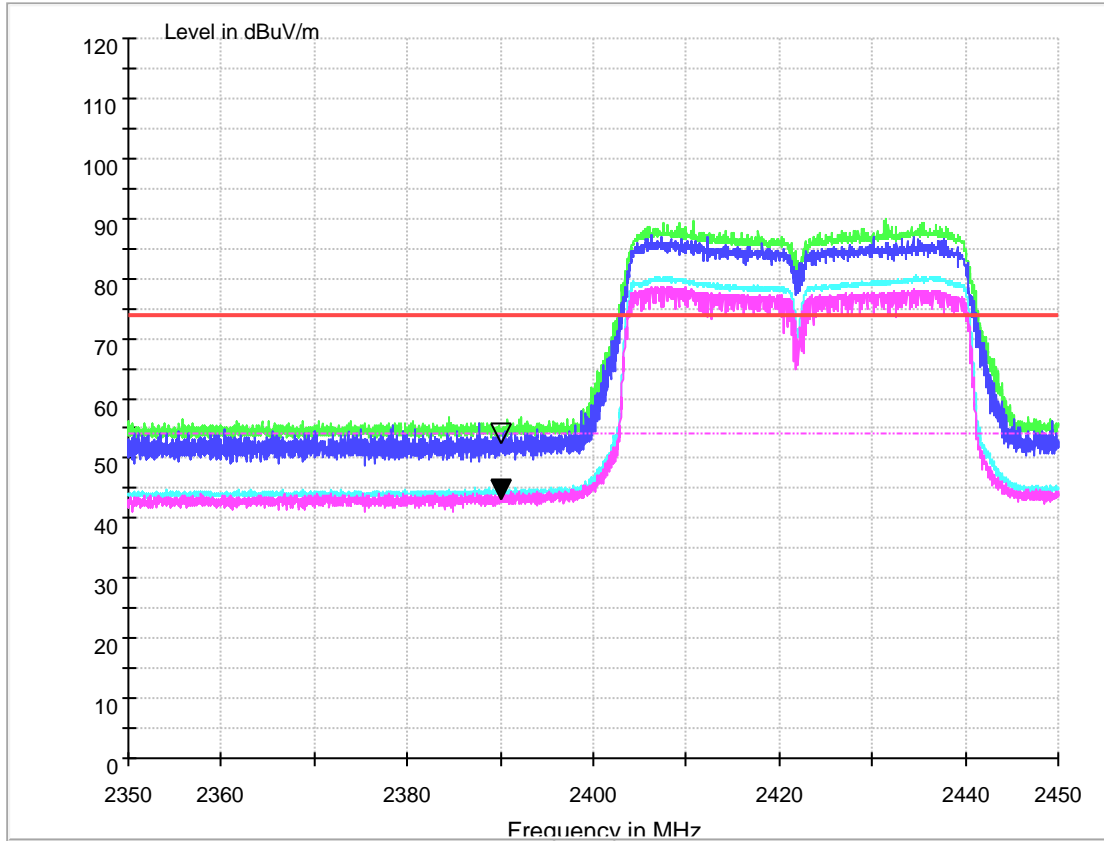

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	43.817	54.00	10.183	150.0	H	67.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	52.841	74.00	21.159	150.0	H	-16.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.7.2 Channel 4

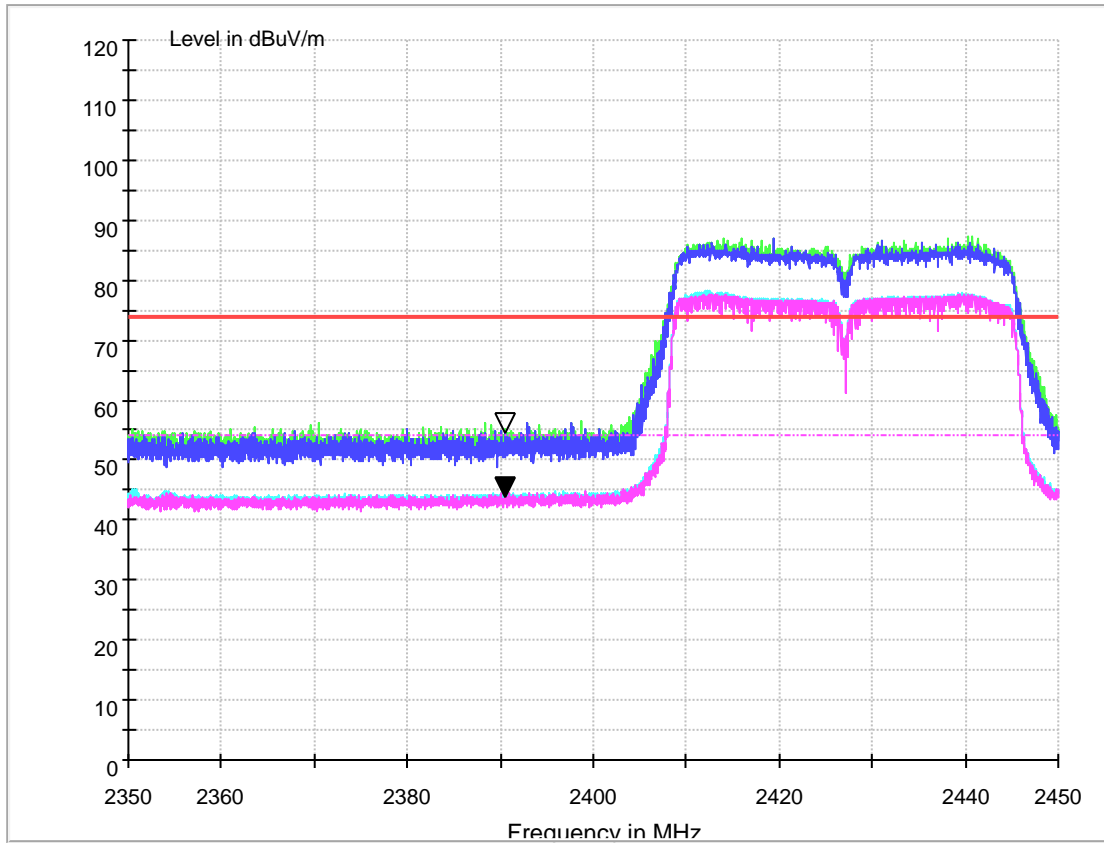

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	44.168	54.00	9.832	150.0	H	62.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	54.874	74.00	19.126	150.0	H	53.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.7.3 Channel 8

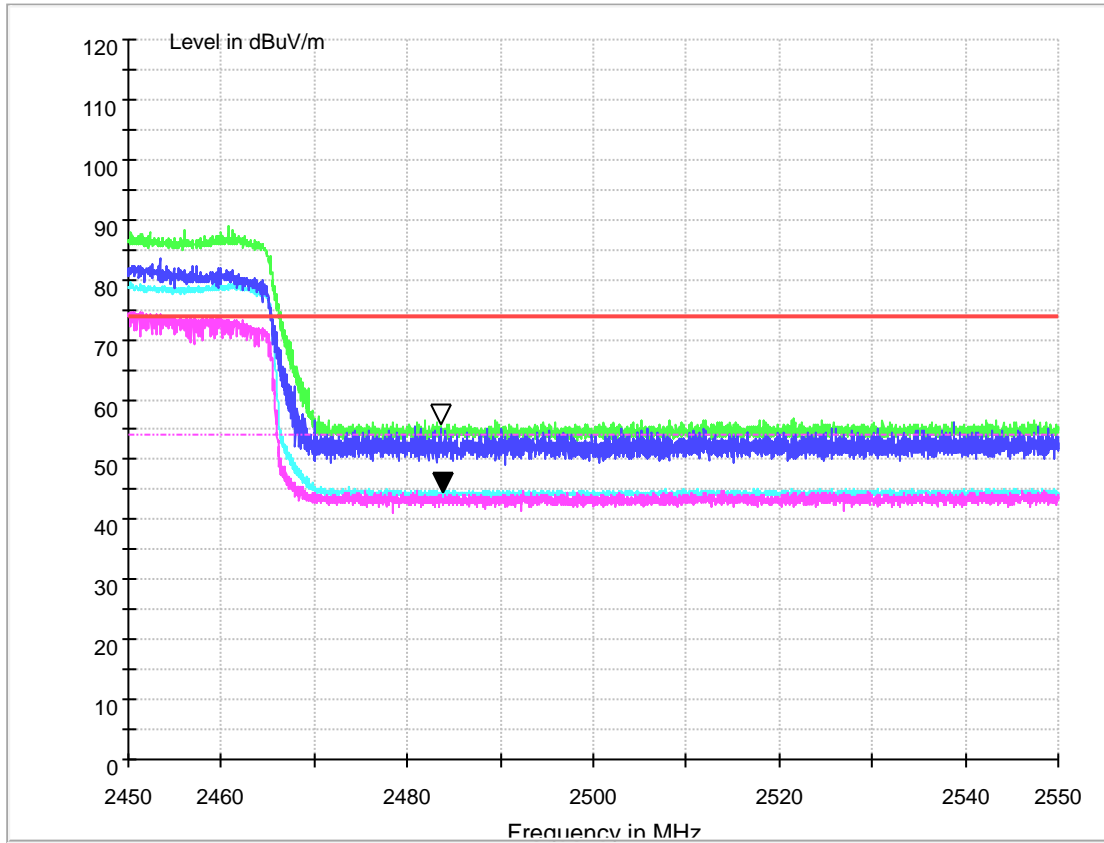

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.541	54.00	9.459	150.0	H	67.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	56.562	74.00	17.438	150.0	H	65.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.7.4 Channel 9

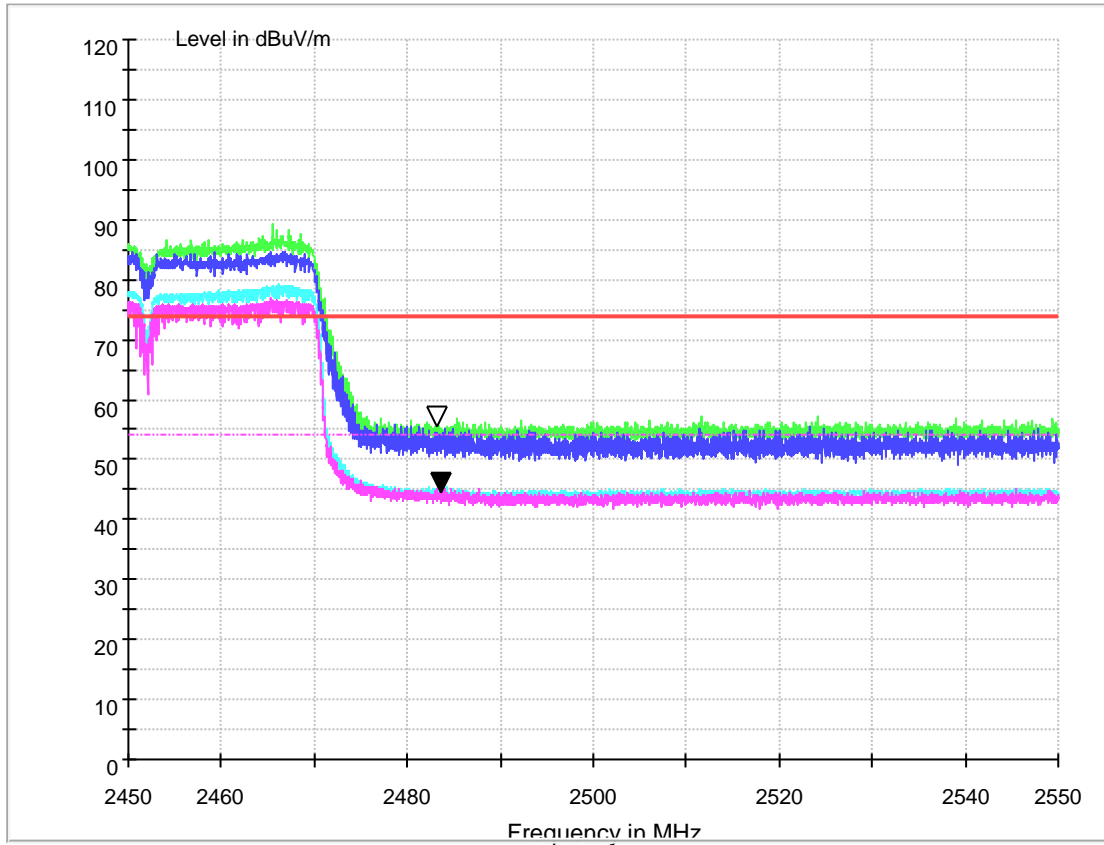

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.751	54.00	9.249	150.0	H	36.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	54.723	74.00	19.277	150.0	H	26.0	-10.2

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level


1.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

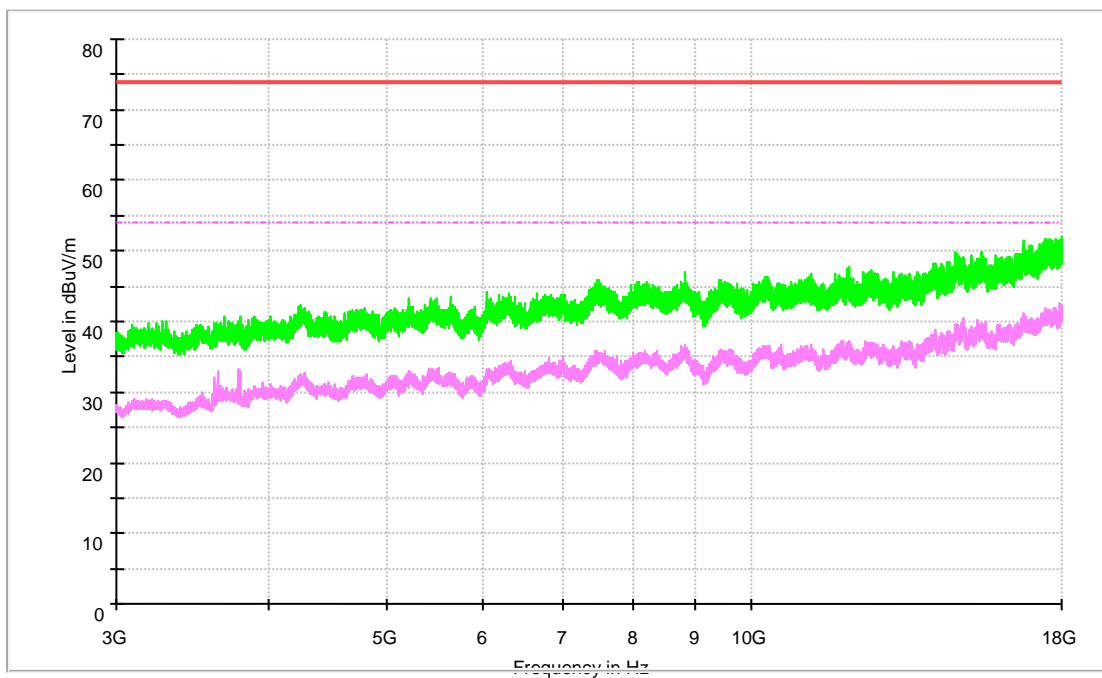


1.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

- Note 1: The test results and plot for testing range of “18 GHz to 26.5 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “18 GHz to 26.5 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

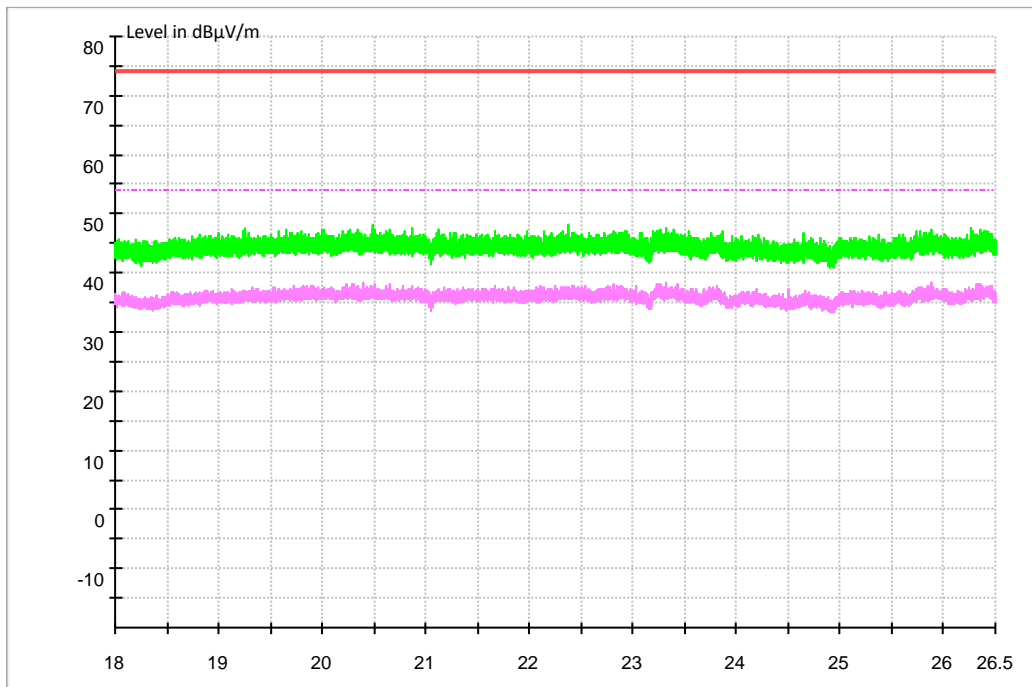

Appendix I: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

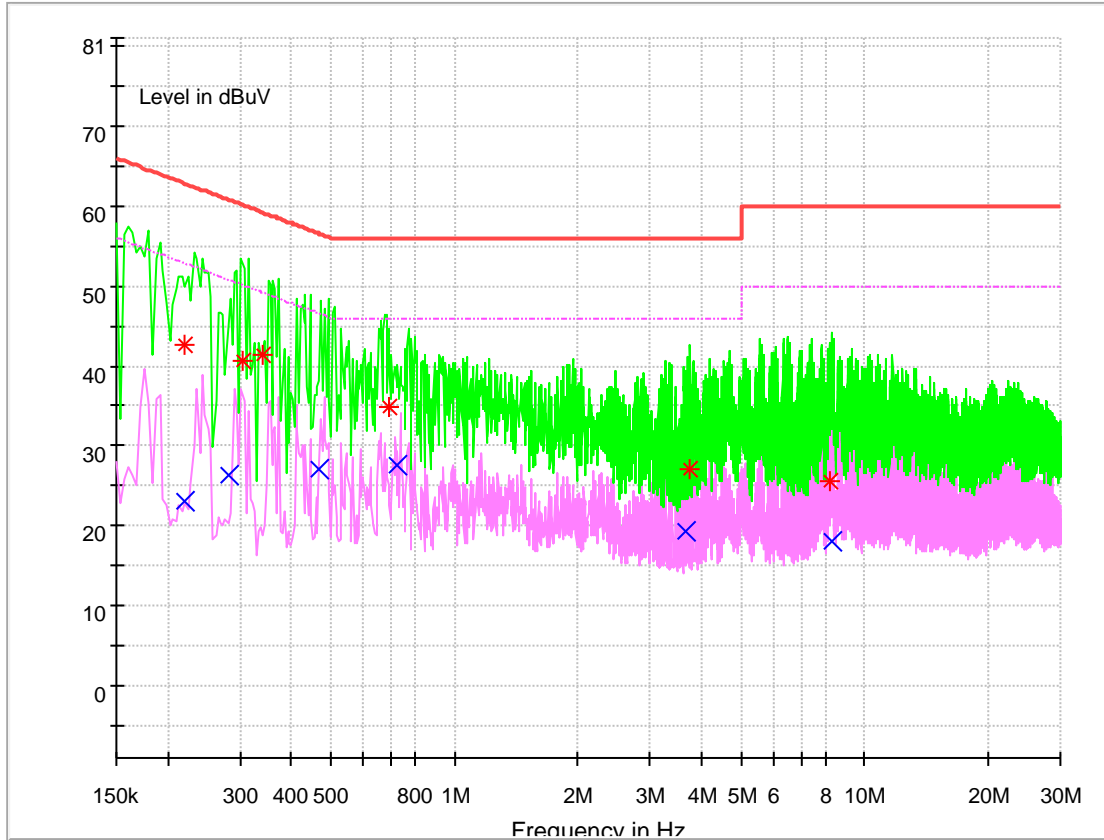

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Transd. (dB)	Margin (dB)	Line	PE
0.220992	23.02	52.78	9.7	29.76	L1	FLO
0.282096	26.26	50.75	9.7	24.49	L1	FLO
0.468561	27.17	46.54	9.7	19.37	L1	FLO
0.727449	27.62	46.00	9.7	18.38	L1	FLO
3.651974	19.41	46.00	9.7	26.59	L1	FLO
8.280920	18.16	50.00	9.7	31.84	L1	FLO

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Transd. (dB)	Margin (dB)	Line	PE
-----------------	--------------	--------------	--------------	-------------	------	----



0.218919	42.67	62.86	9.7	20.19	L1	FLO
0.305589	40.58	60.09	9.7	19.51	L1	FLO
0.341844	41.27	59.16	9.7	17.89	N	FLO
0.689714	34.78	56.00	9.7	21.22	L1	FLO
3.724848	27.13	56.00	9.7	28.87	N	FLO
8.231743	25.52	60.00	9.7	34.48	L1	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END