



Appendix for test report



1 Appendix_A: Effective (Isotropic) Radiated Power Output Data

Void



2Appendix_B: Peak-to-Average Ratio

Void



3Appendix_C: Modulation Characteristics

Void



4Appendix_D: Bandwidth

Void



5Appendix_E: Band Edges Compliance

Void



6Appendix_F: Spurious Emission at Antenna Terminal

Void

7Appendix_G: Field Strength of Spurious Radiation

Note: We tested all modes, but the data presented below is the worst case.

9kHz~150kHz, RBW = 200Hz, VBW = 600 Hz, Detector: PK

150kHz~30MHz, RBW = 9kHz, VBW = 30k Hz, Detector: PK

30MHz~1GHz, RBW = 100 kHz, VBW = 300 kHz. Detector: PK


Above 1GHz, RBW = 1 MHz, VBW = 3 MHz Detector: PK

Part I - Test Plots


7.1 For LTE

7.1.1 Test Band = Band26 (824-849MHz) _ ANT1


7.1.1.1 Test Bandwidth = 1.4

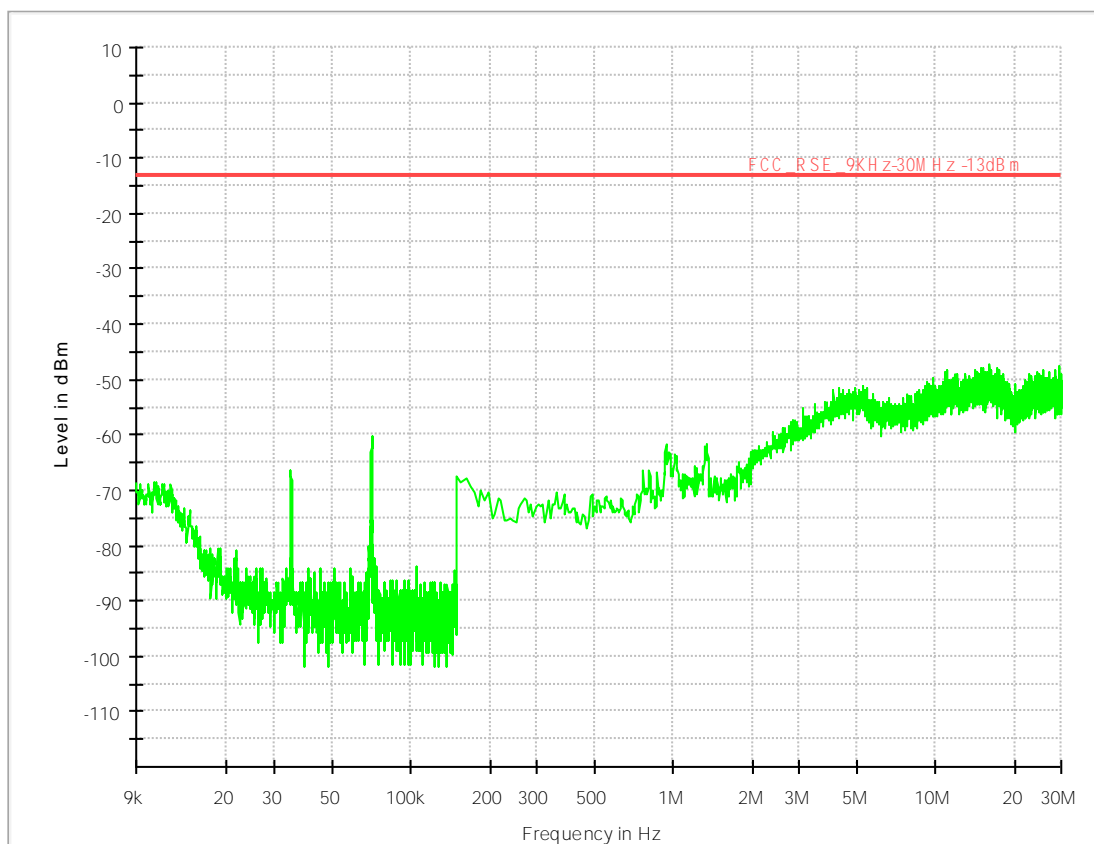


LTE FDD RSE-TX-DIRECTOR BELOW 1G_L

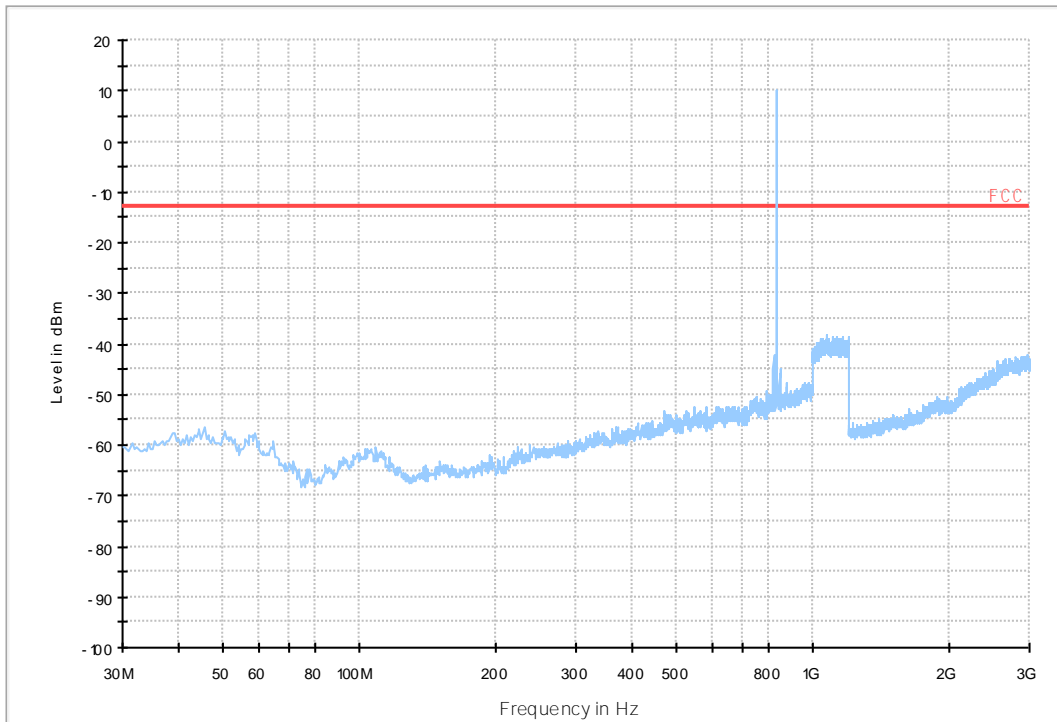


LTE FDD RSE-TX-DIRECTOR BELOW 1G_H

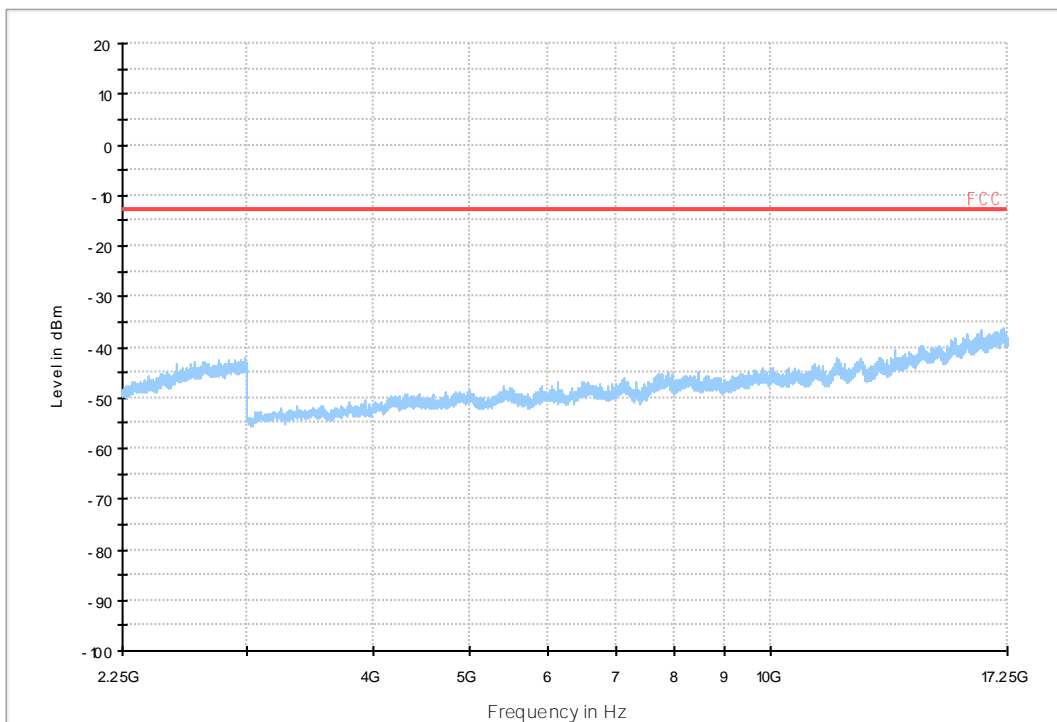


7.1.1.2 Test Bandwidth = 15

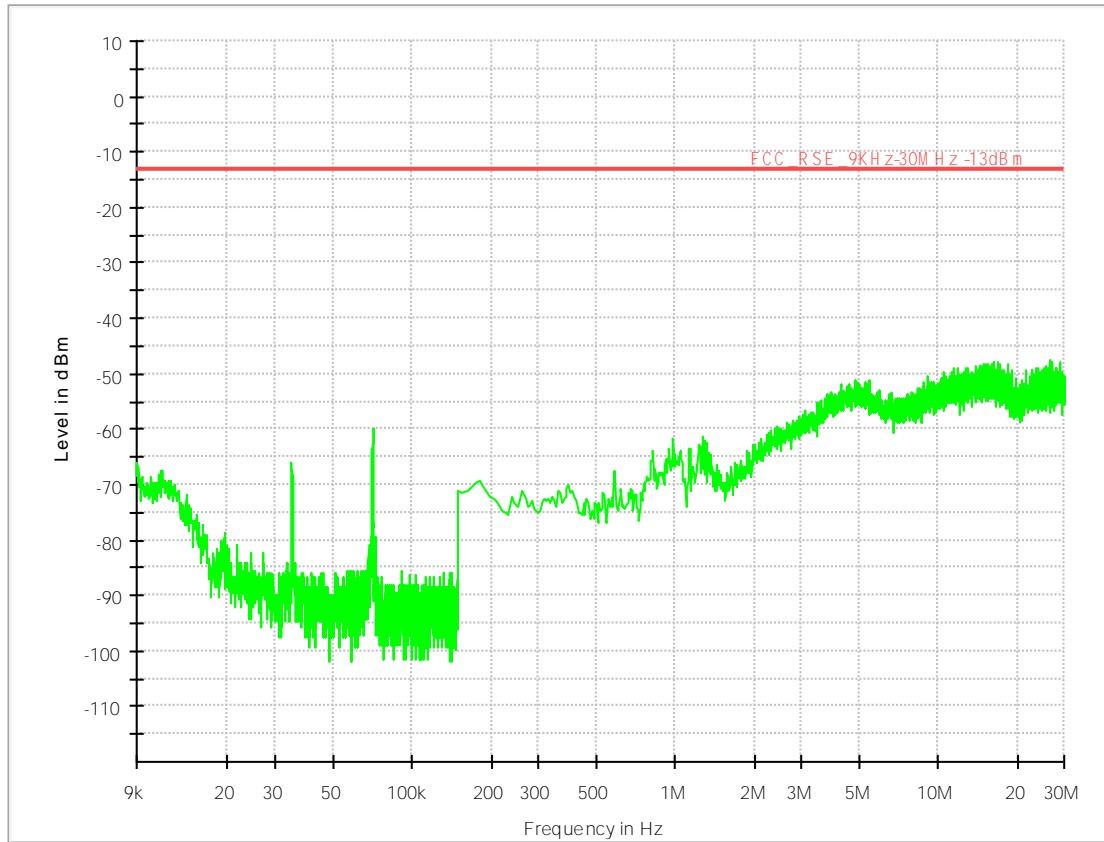

LTE FDD RSE-TX-DIRECTOR BELOW 1G_L

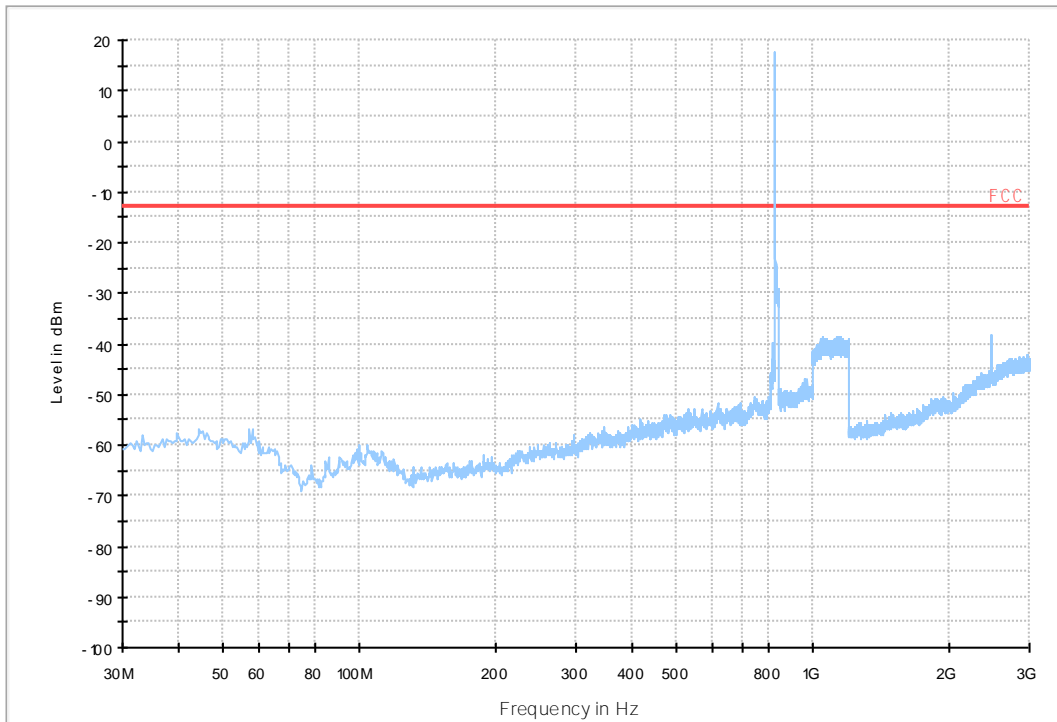


LTE FDD RSE-TX-DIRECTOR BELOW 1G_H

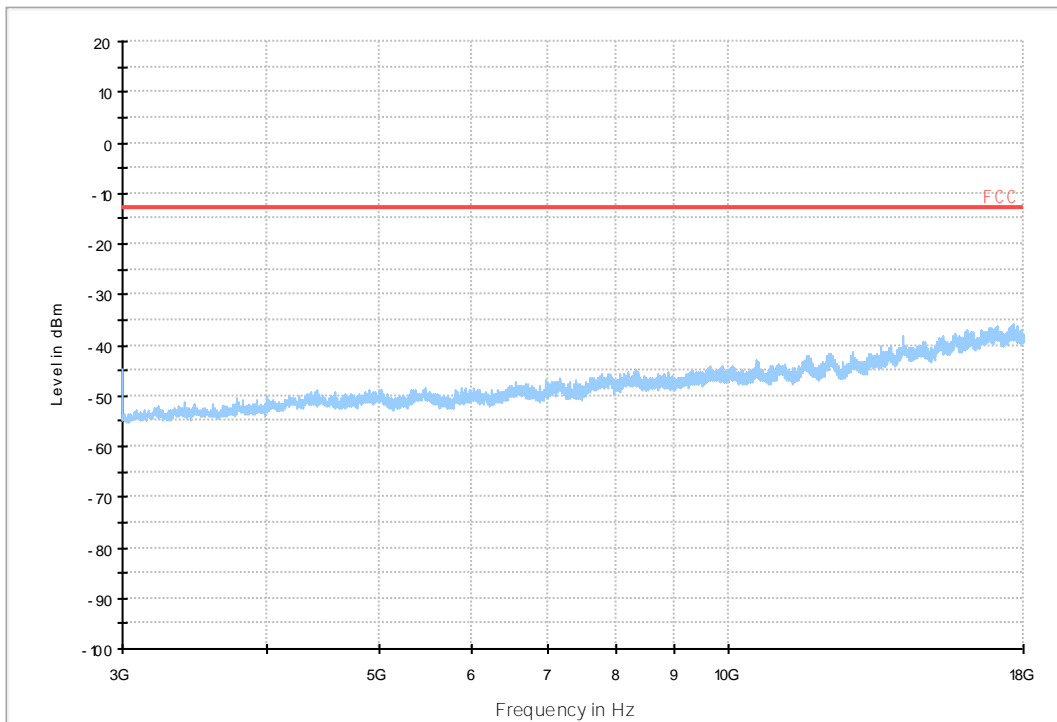


7.1.2 Test Band = Band26 (824-849MHz) _ ANT2


7.1.2.1 Test Bandwidth = 1.4

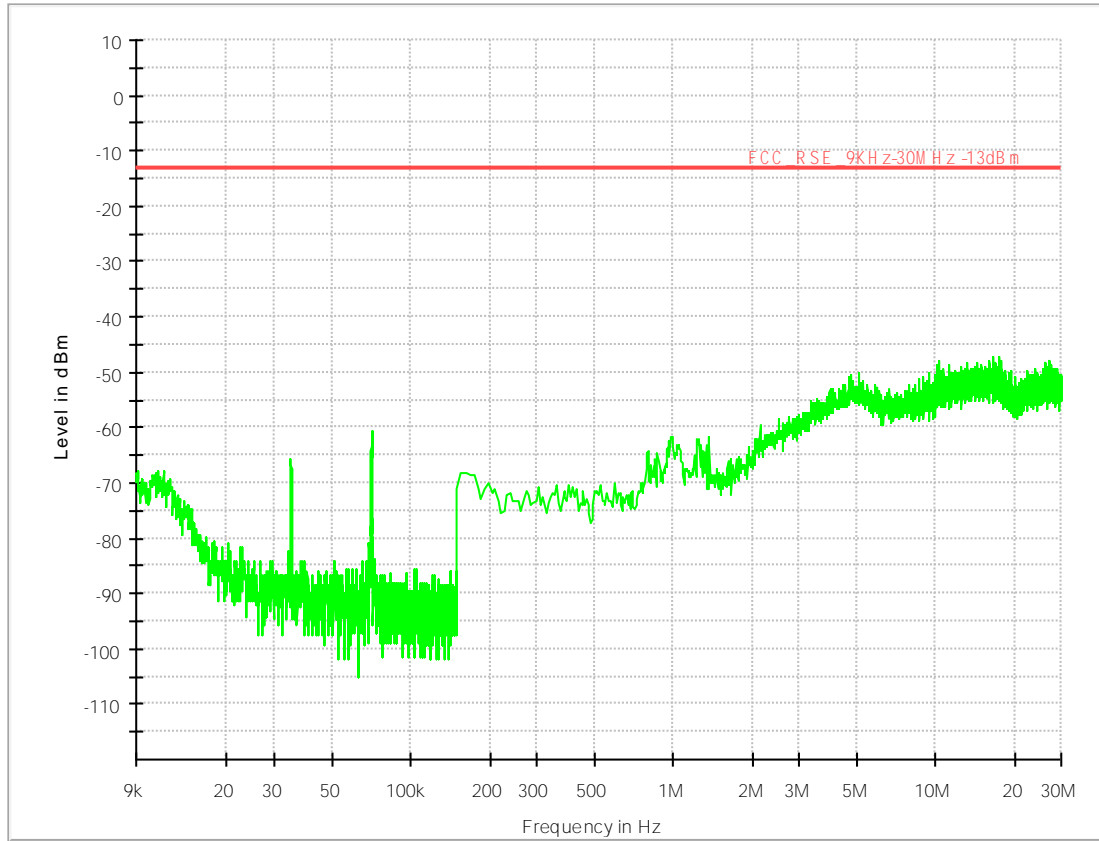


LTE FDD RSE-TX-DIRECTOR BELOW 1G_L

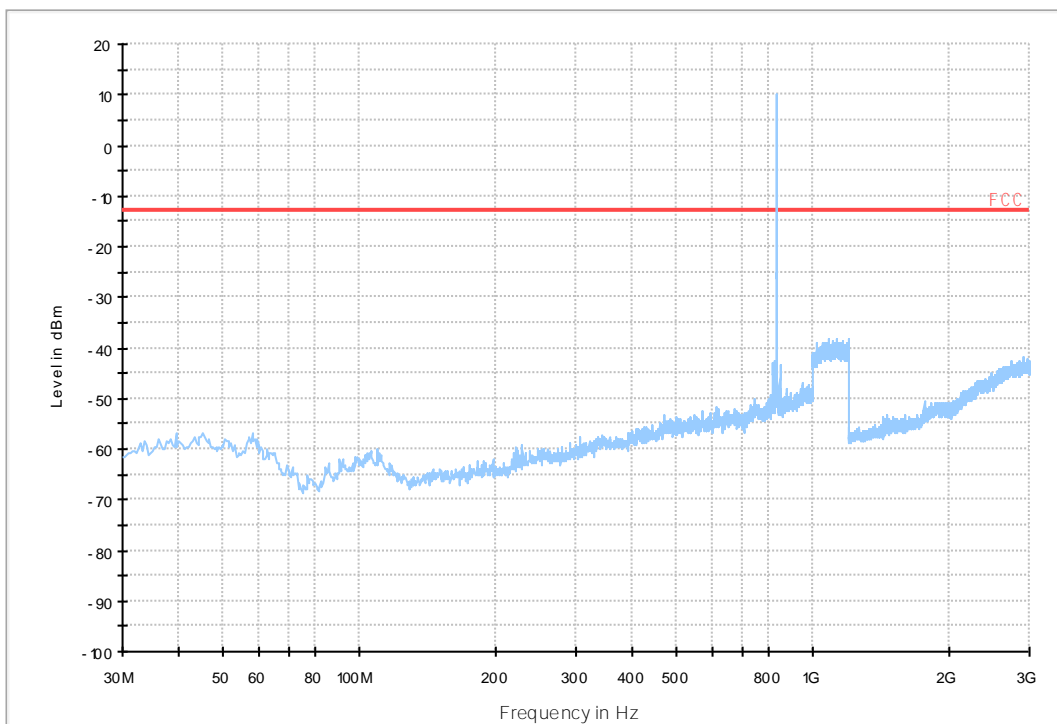


LTE FDD RSE-TX-DIRECTOR BELOW 1G_H

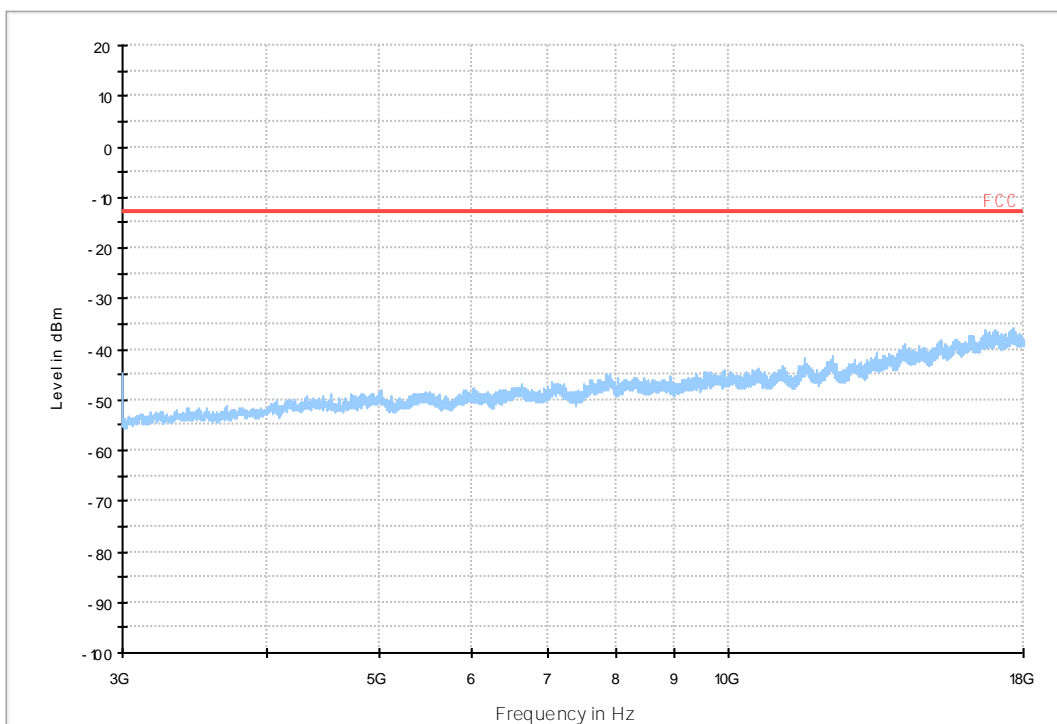


7.1.2.2 Test Bandwidth = 15

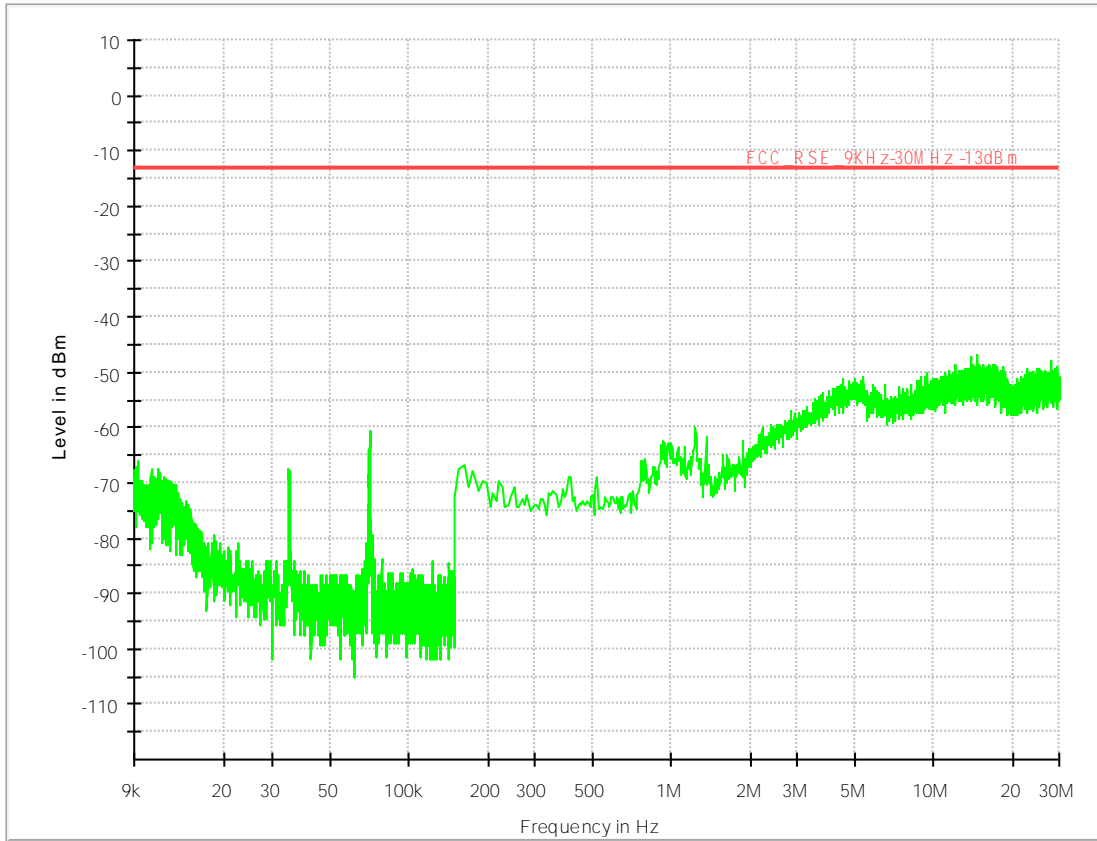

LTE FDD RSE-TX-DIRECTOR BELOW 1G_L

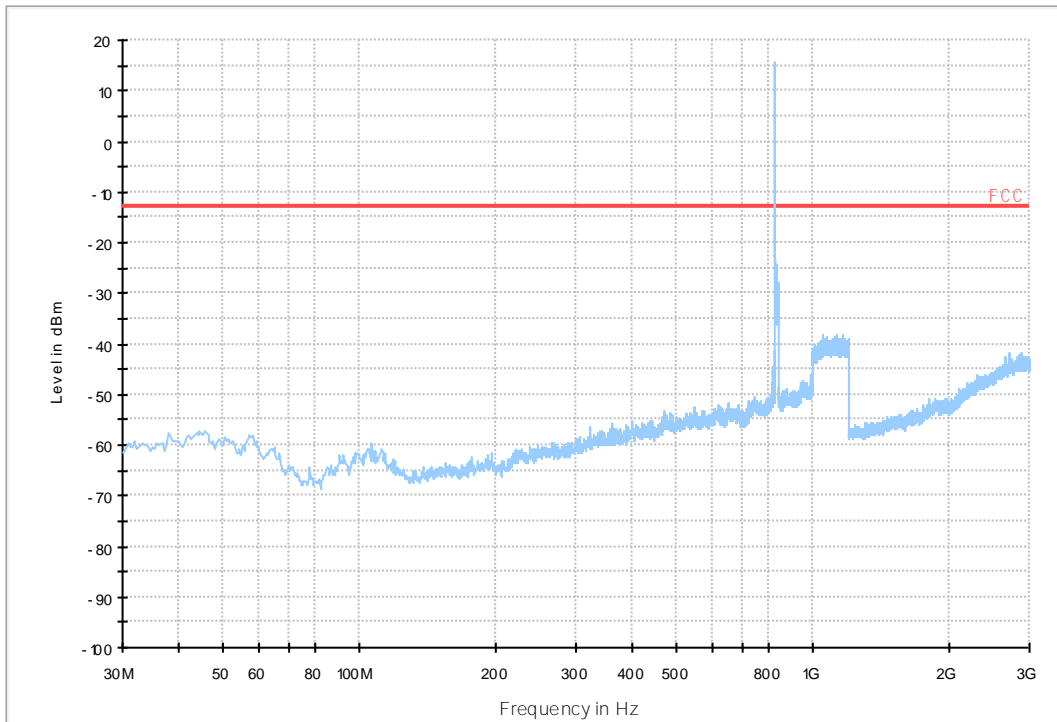

LTE FDD RSE-TX-DIRECTOR BELOW 1G_H

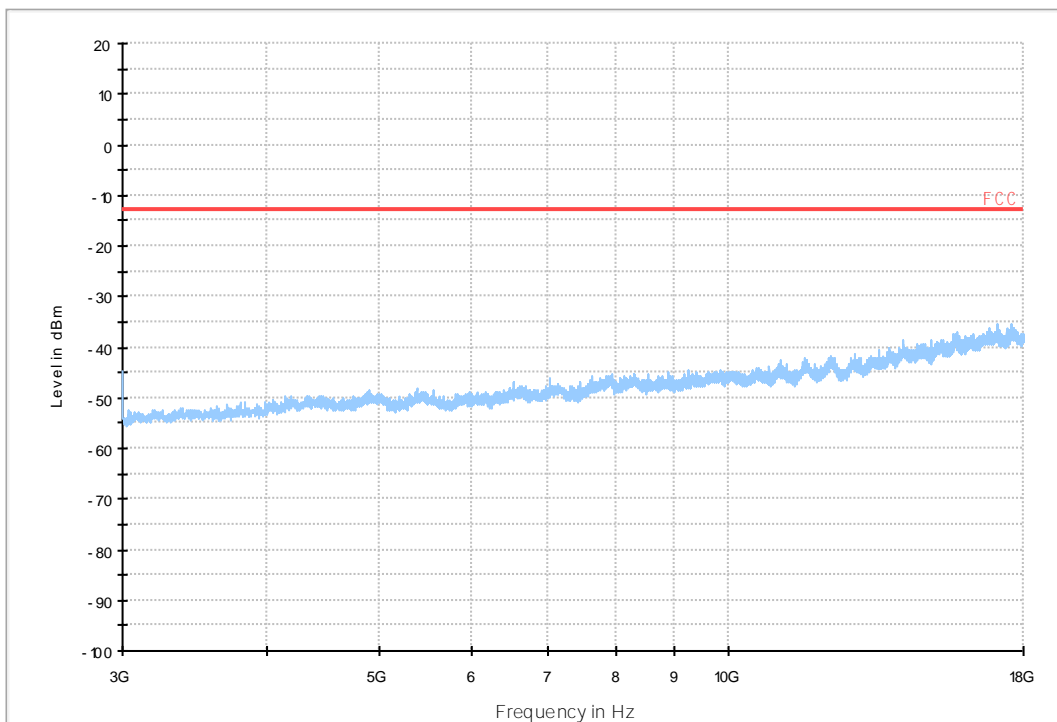



8Appendix_H: Frequency Stability

Void

END