



# Appendix for test report



## 1 Appendix\_A: Effective (Isotropic) Radiated Power Output Data

Void



## 2Appendix\_B: Peak-to-Average Ratio

Void



### **3Appendix\_C: Modulation Characteristics**

Void



## 4Appendix\_D: Bandwidth

Void



## 5Appendix\_E: Band Edges Compliance

Void



## 6Appendix\_F: Spurious Emission at Antenna Terminal

Void

## 7Appendix\_G: Field Strength of Spurious Radiation

Note: We tested all modes, but the data presented below is the worst case.

9kHz~150kHz, RBW = 200Hz, VBW = 600 Hz, Detector: PK

150kHz~30MHz, RBW = 9kHz, VBW = 30k Hz, Detector: PK

30MHz~1GHz, RBW = 100 kHz, VBW = 300 kHz. Detector: PK


Above 1GHz, RBW = 1 MHz, VBW = 3 MHz Detector: PK

### Part I - Test Plots

#### 7.1 For LTE


##### 7.1.1 Test Band = CA\_38C\_ANT1

##### 7.1.1.1 Test Bandwidth = 15MHz+15MHz

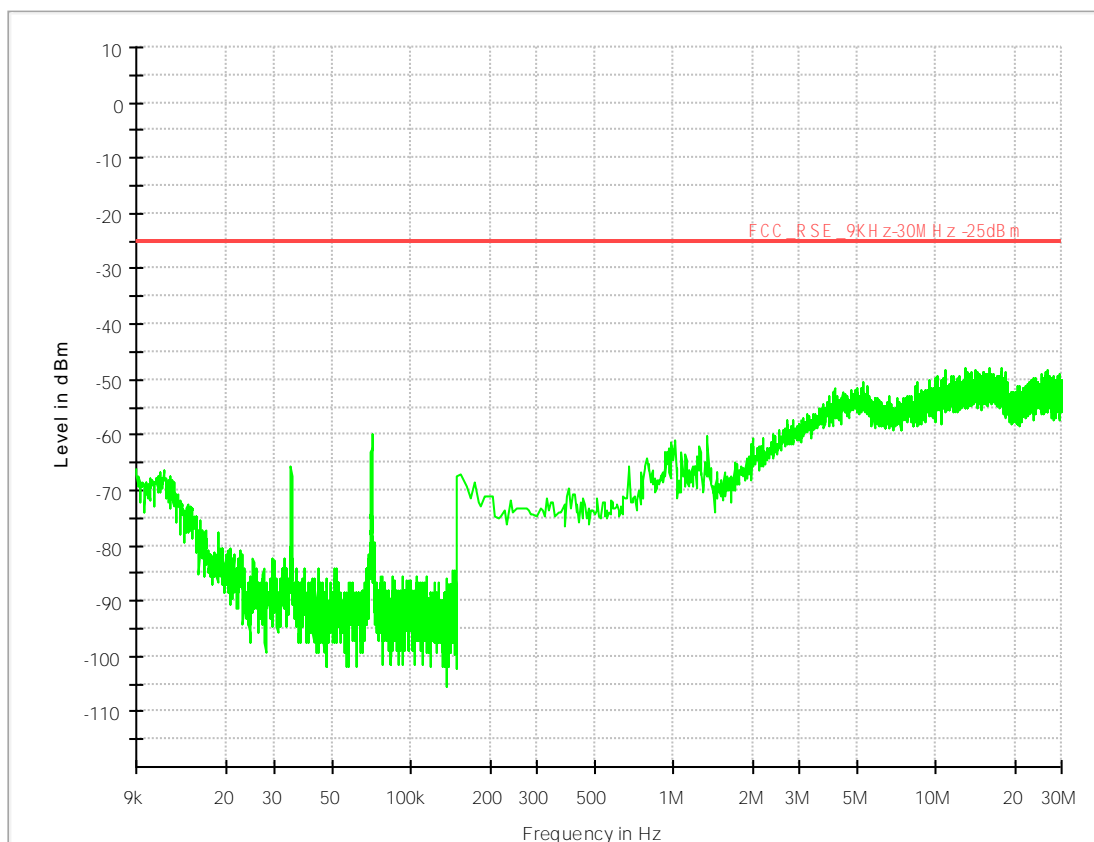





LTE TDD Band 38&41 RSE-TX-DIRECTOR ABOVE 1.5G\_L -25dBm limit

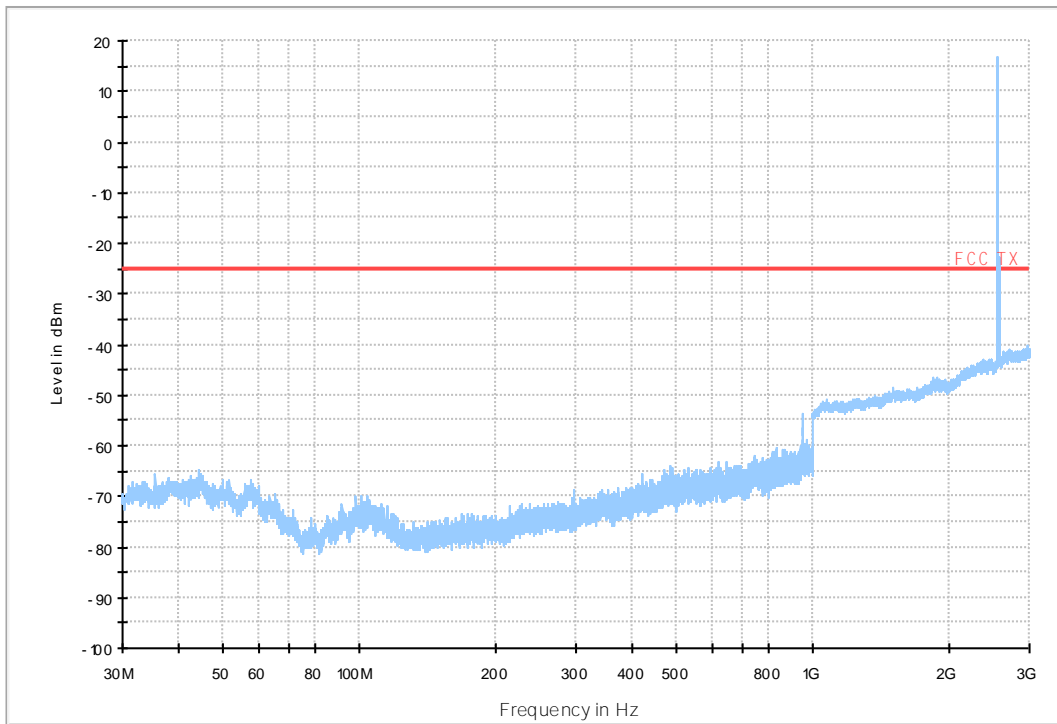


LTE TDD Band 38&41 RSE-TX-DIRECTOR ABOVE 1.5G\_H -25dBm limit

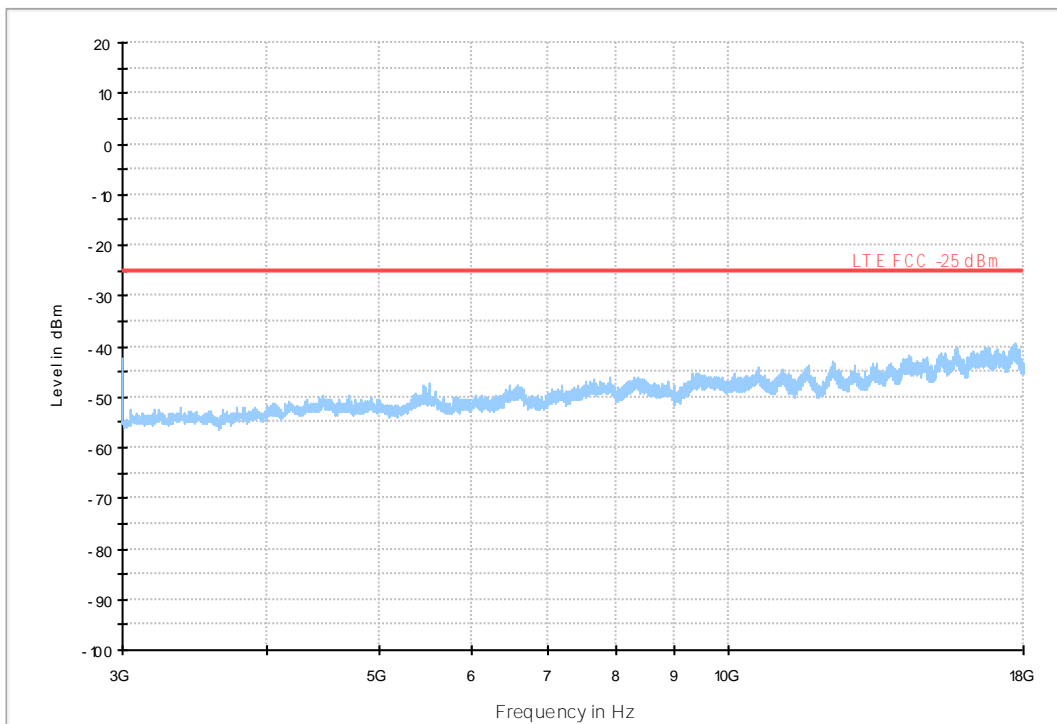


18G-26.5G RSE-TX-DIRECTOR ABOVE 1.5G PK

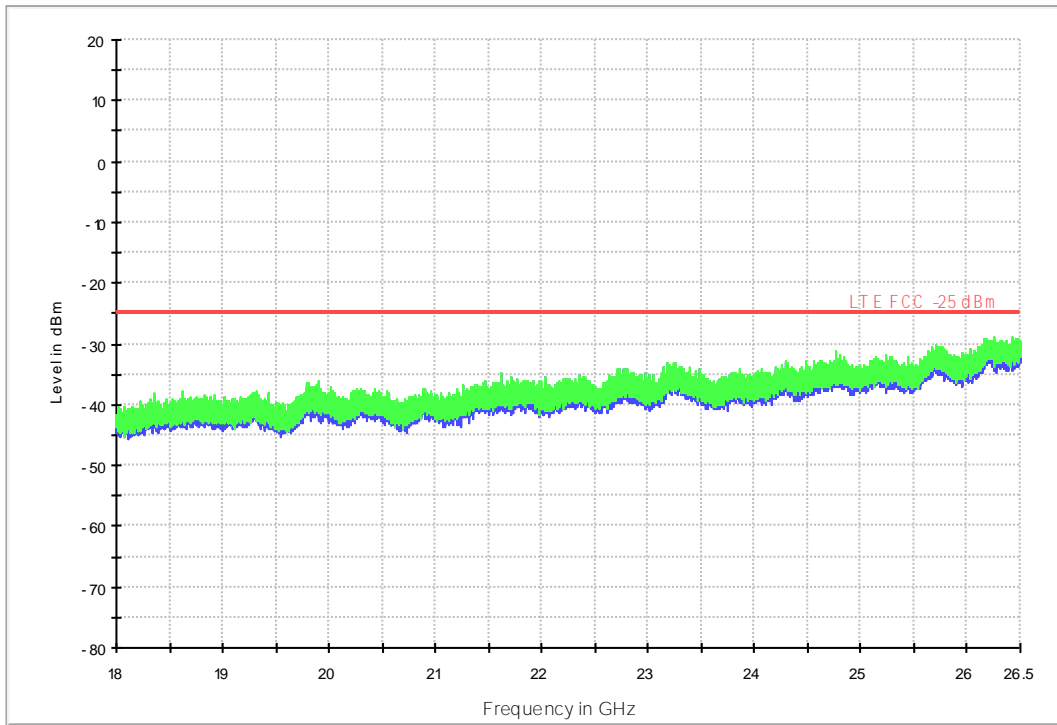


### 7.1.1.2 Test Bandwidth = 20MHz+20MHz

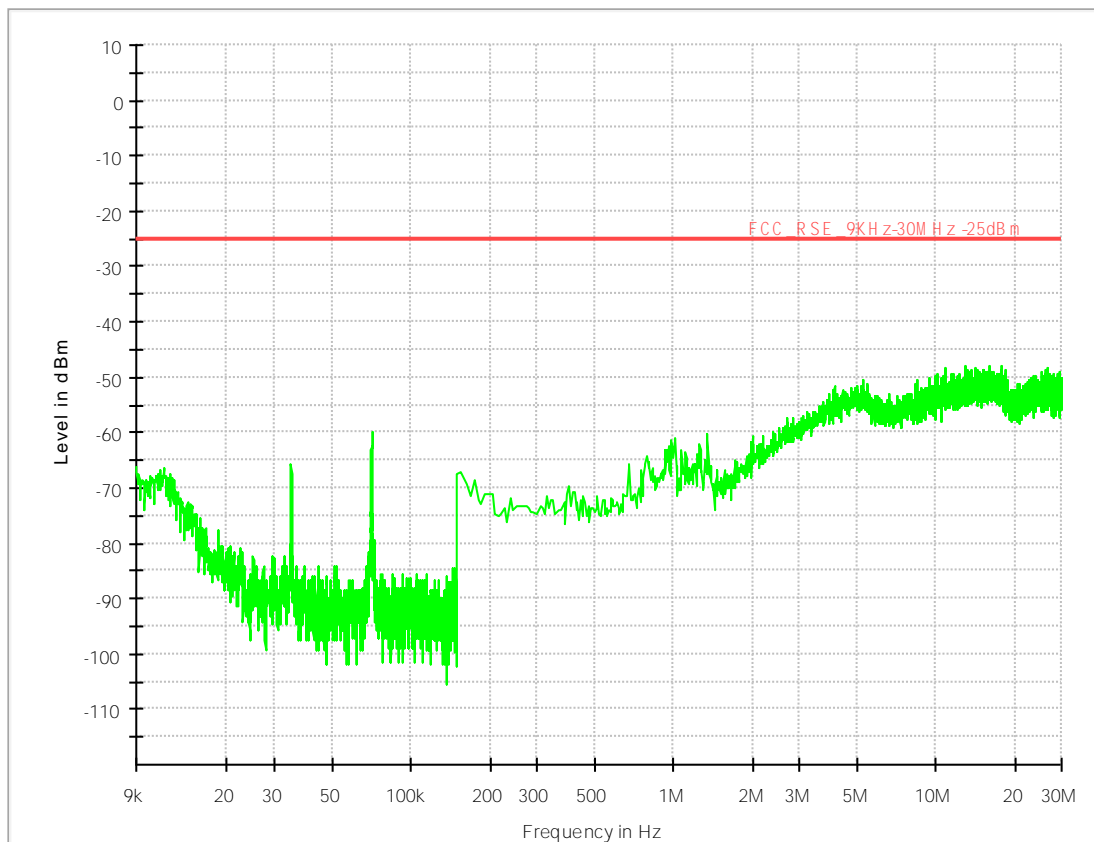


LTE TDD Band 38&41 RSE-TX-DIRECTOR ABOVE 1.5G\_L -25dBm limit

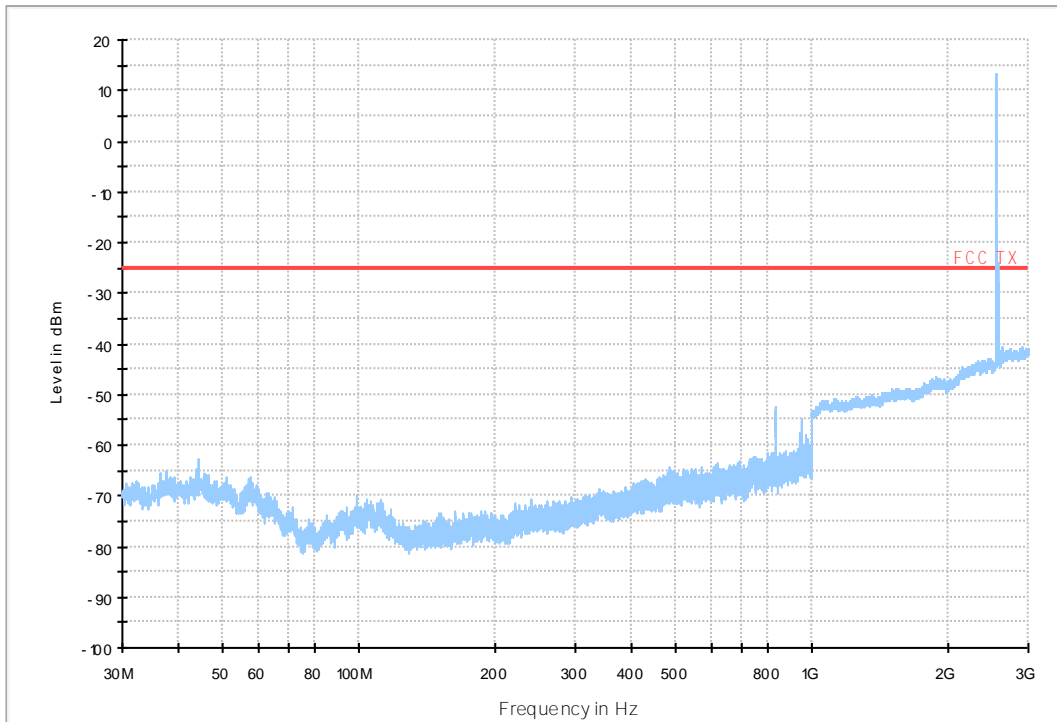

LTE TDD Band 38&41 RSE-TX-DIRECTOR ABOVE 1.5G\_H -25dBm limit

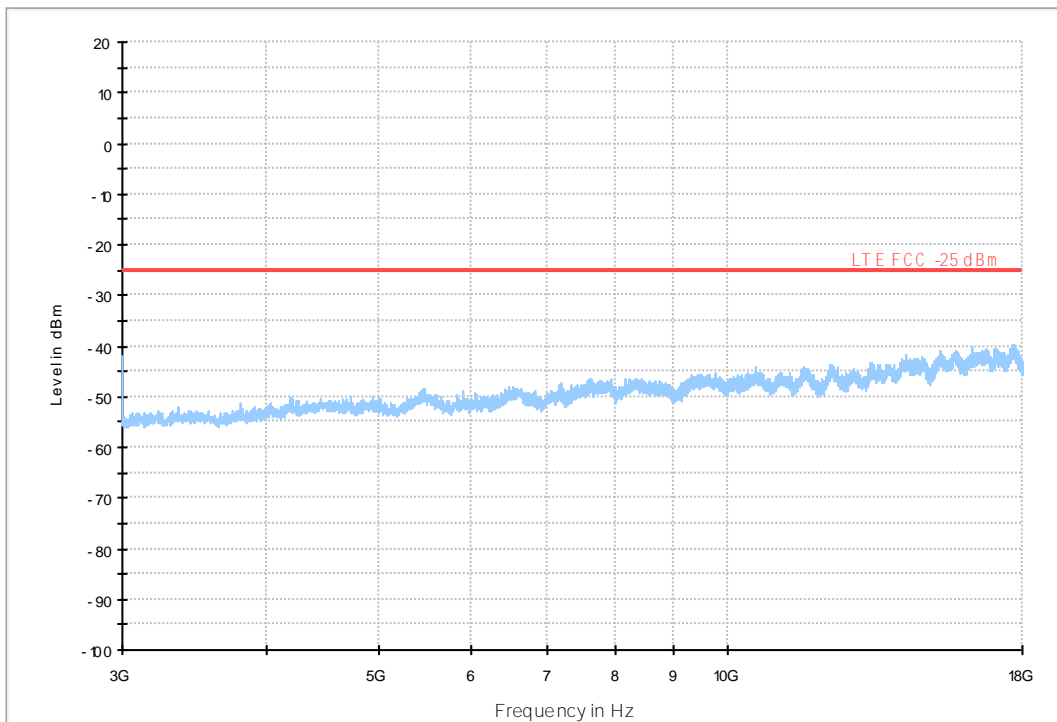


18G-26.5G RSE-TX-DIRECT OR ABOVE 1.5G PK

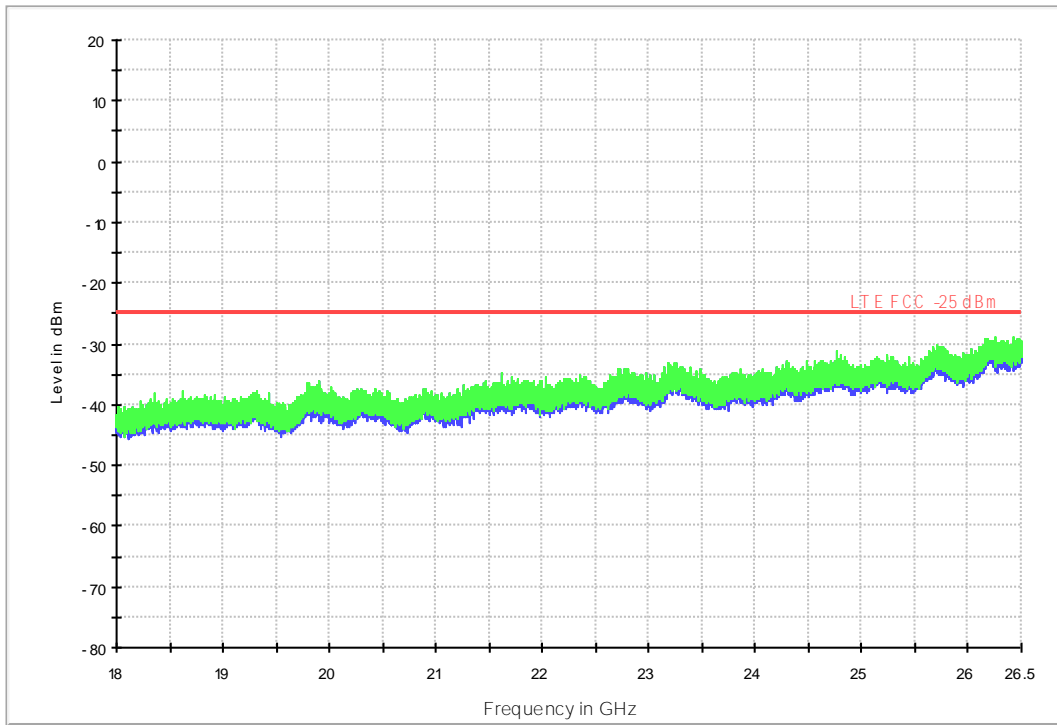


## 7.1.2 Test Band = CA\_38C\_ANT2


### 7.1.2.1 Test Bandwidth = 15MHz+15MHz

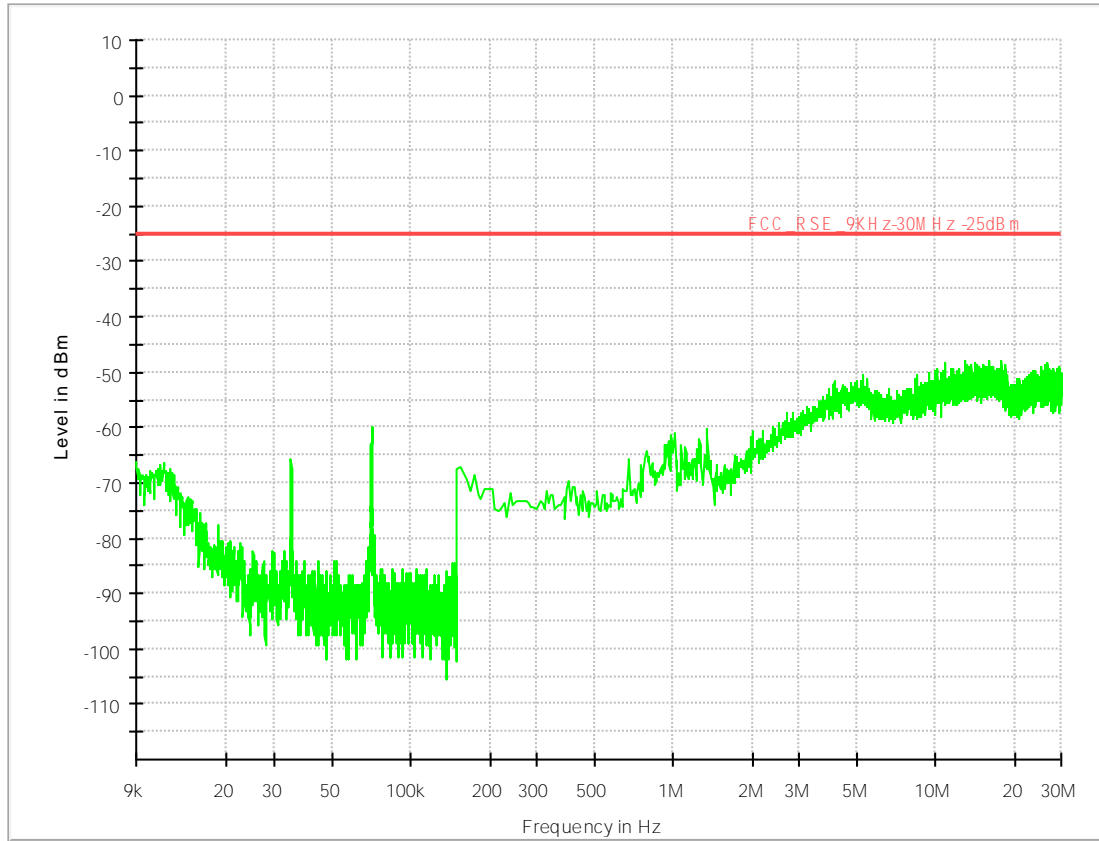


LTE TDD Band 38&41 RSE-TX-DIRECTOR ABOVE 1.5G\_L -25dBm limit

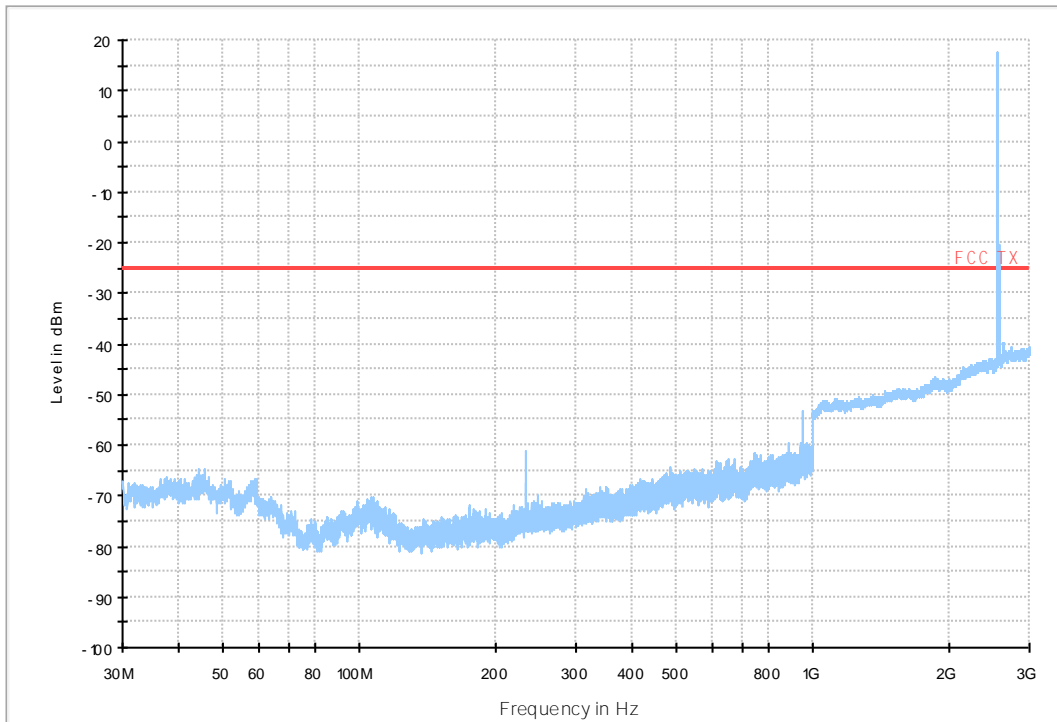

LTE TDD Band 38&41 RSE-TX-DIRECTOR ABOVE 1.5G\_H -25dBm limit

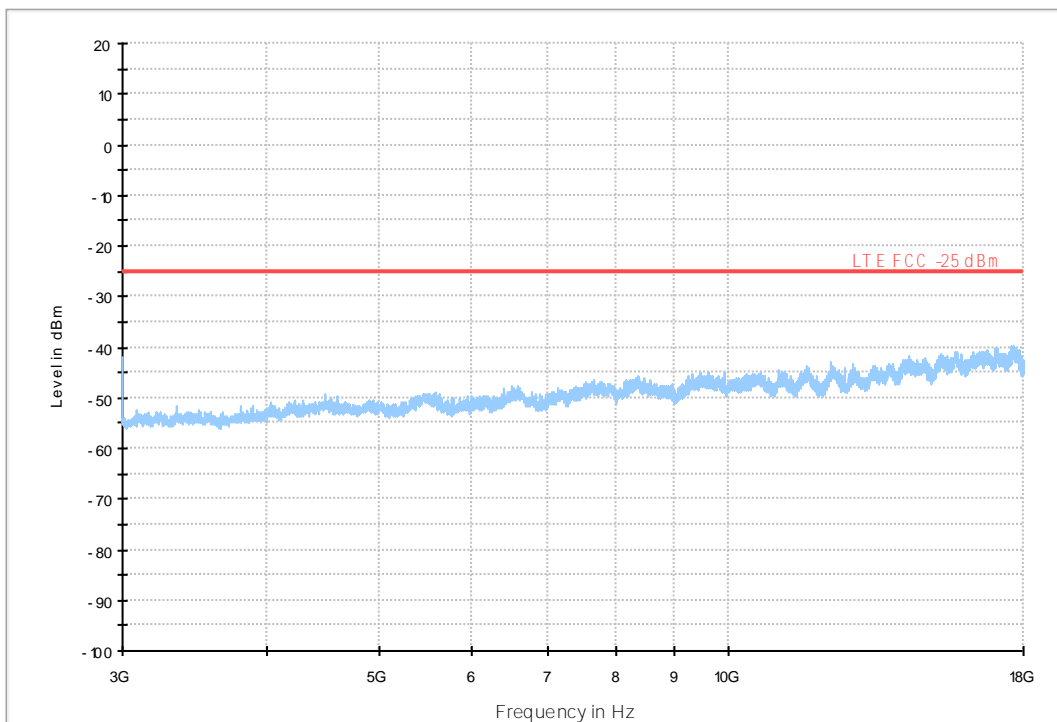


18G-26.5G RSE-TX-DIRECT OR ABOVE 1.5G PK

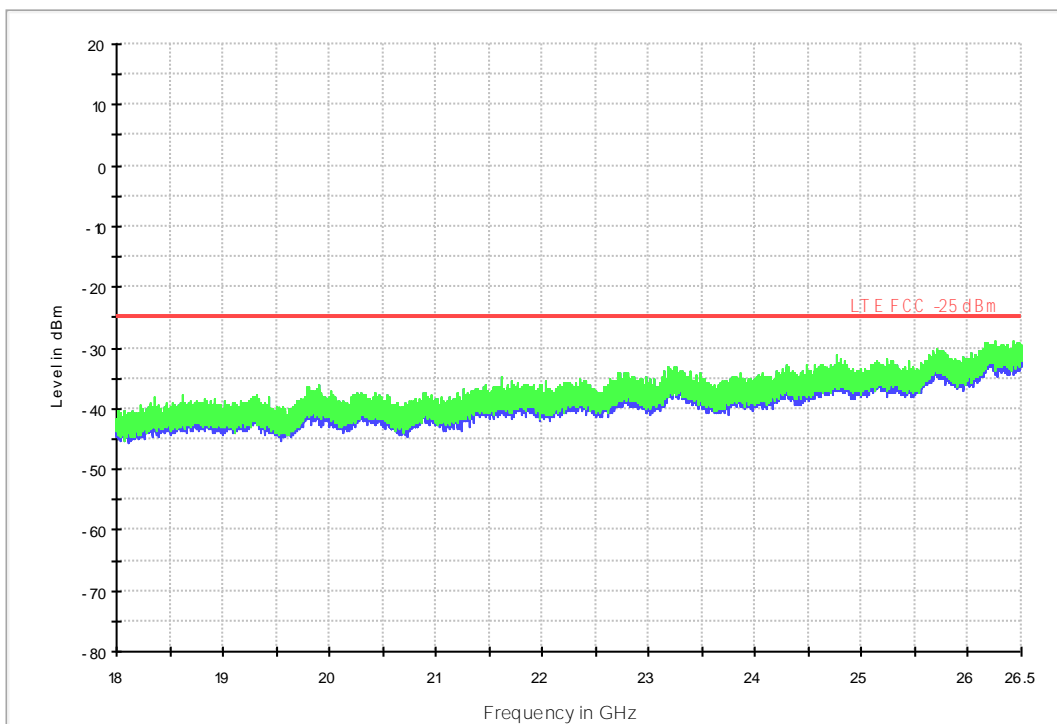





### 7.1.2.2 Test Bandwidth = 20MHz+20MHz

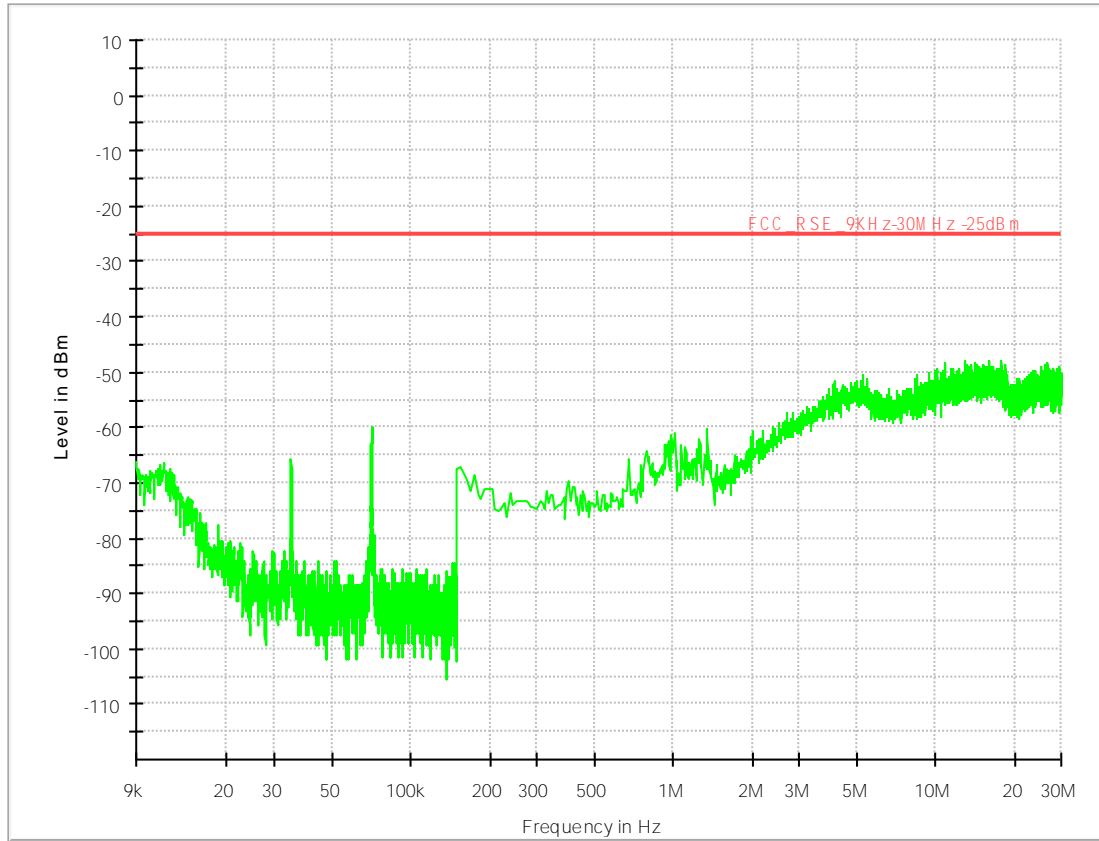


LTE TDD Band 38&41 RSE-TX-DIRECTOR ABOVE 1.5G\_L -25dBm limit

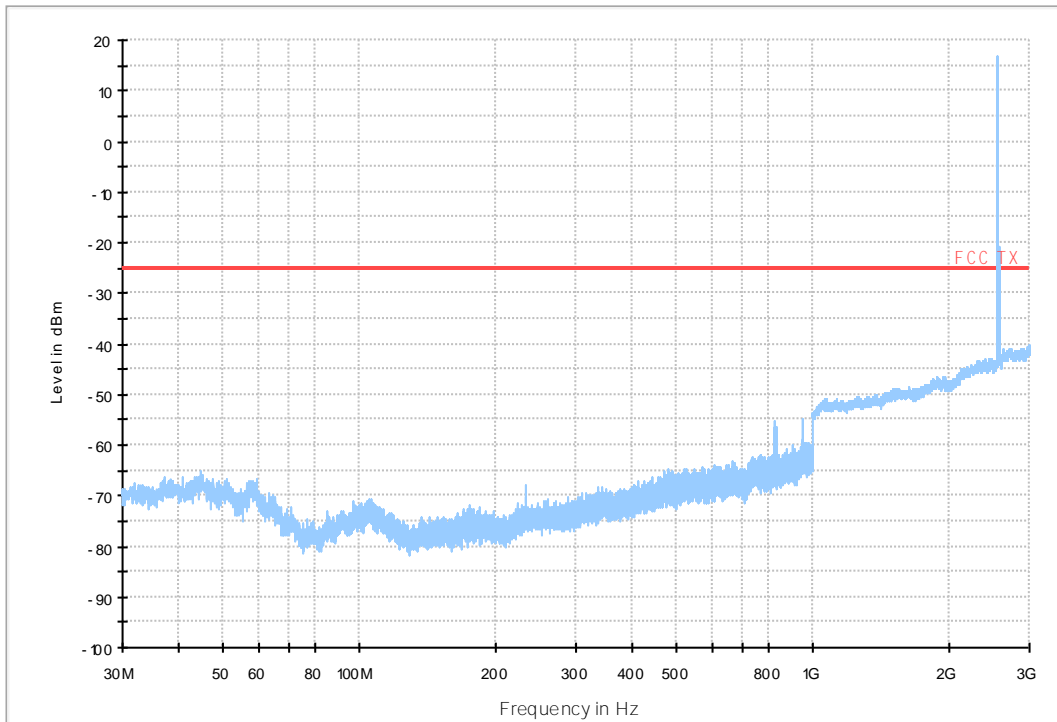

LTE TDD Band 38&41 RSE-TX-DIRECTOR ABOVE 1.5G\_H -25dBm limit

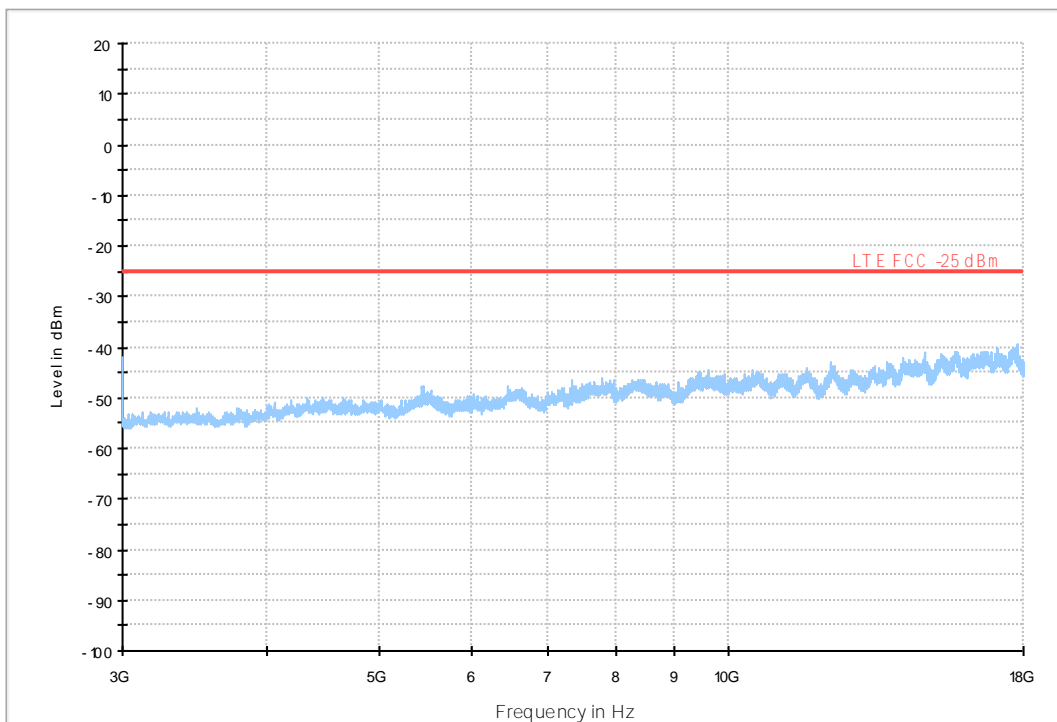

18G-26.5G RSE-TX-DIRECT OR ABOVE 1.5G PK

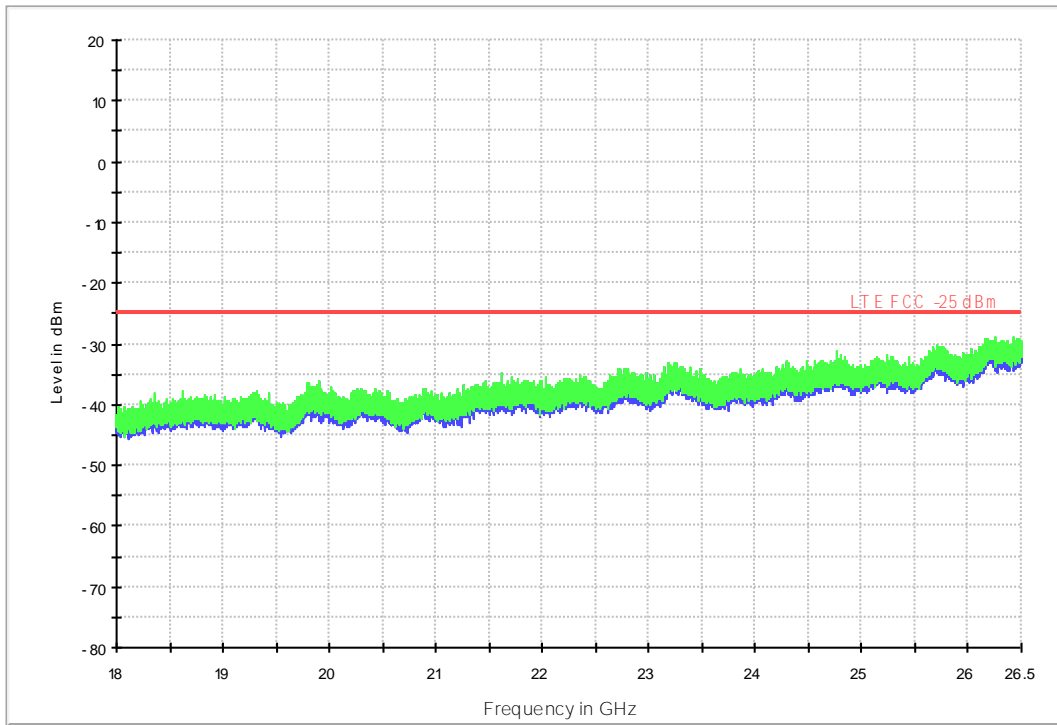



## 8Appendix\_H: Frequency Stability

Void

---

END