

FCC

EMC

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
HUAWEI MateBook


ISSUED TO
Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

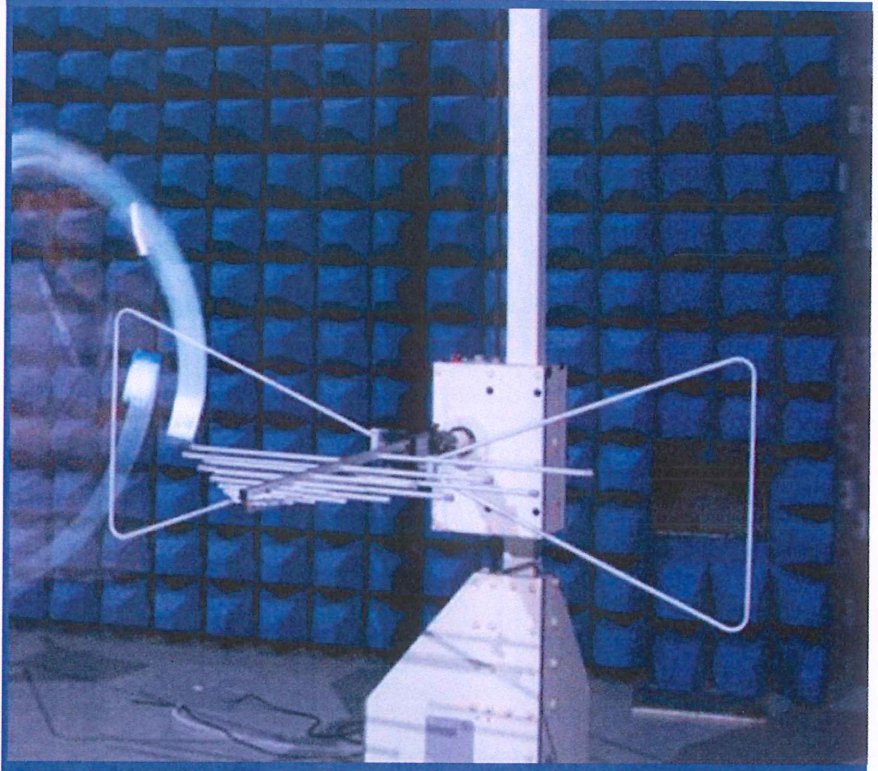

Tested by: Xia Long
Xia Long
(Engineer)
Date: Mar. 19, 2019

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)
Date: Mar. 19, 2019

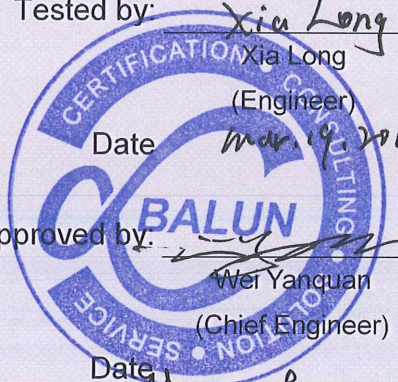

Report No.: BL-SZ1920109-401
EUT Name: HUAWEI MateBook
Model Name: WRT-W19, WRT-W29, WRT-W09
Brand Name: HUAWEI
Test Standard: 47 CFR Part 15 Subpart B
FCC ID: QISWRT-WX9

Test Conclusion: Pass
Test Date: Feb. 20, 2019 ~ Mar. 04, 2019
Date of Issue: Mar. 19, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Mar. 19, 2019</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Identification of the Testing Laboratory.....	4
1.2	Identification of the Responsible Testing Location.....	4
1.3	Laboratory Condition.....	4
1.4	Announce.....	4
2	PRODUCT INFORMATION.....	5
2.1	Applicant Information.....	5
2.2	Manufacturer Information.....	5
2.3	Factory Information.....	5
2.4	General Description for Equipment under Test (EUT).....	5
2.5	Differences Description.....	5
2.6	Ancillary Equipment.....	6
2.7	Technical Information.....	7
3	SUMMARY OF TEST RESULTS.....	8
3.1	Test Standards.....	8
3.2	Verdict.....	8
3.3	Test Uncertainty.....	8
4	GENERAL TEST CONFIGURATIONS.....	9
4.1	Test Environments.....	9
4.2	Test Equipment List.....	9
4.3	Test Enclosure list.....	11
4.4	Test Configurations.....	12
4.5	Test Setups.....	13
4.6	Test Conditions.....	15
5	TEST ITEMS.....	16
5.1	Emission Tests.....	16

ANNEX A TEST RESULTS..... 18

 A.1 Radiated Emission 18

 A.2 Conducted Emission 25

ANNEX B TEST SETUP PHOTOS 28

ANNEX C EUT EXTERNAL PHOTOS 28

ANNEX D EUT INTERNAL PHOTOS..... 28

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report refer to the BALUN report mode v6.7.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

2.2 Manufacturer Information

Manufacturer	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	HUAWEI MateBook
Model Name Under Test	WRT-W19, WRT-W29, WRT-W09
Series Model Name	WRT-WXXXXX (The "X" in model name can be 0 to 9, A to Z, a to z, "-" or blank, only differences are the appearance and model names for trading purpose)
Description of Model name differentiation	Refer section 2.5
Hardware Version	NX8309_PCB_MB_V5_HF
Software Version	1.4.0.11 (C001)
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Differences Description

	WRT-W29 (with GPU version)	WRT-W29 (without GPU version)	WRT-W19 (with GPU version)	WRT-W19 (without GPU version)	WRT-W09 (without GPU version)
PCB layout	The same	The same	The same	The same	The same
Main board	The same	Delete GPU chip and related components	The same	Delete GPU chip and related components	Delete GPU chip and related components
Frequency bands	The same, Support Wi-Fi 2.4G&5G,	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT	The same, Support Wi-Fi 2.4G&5G, Support BT

	Support BT				
BT/Wi-Fi antenna	The same	The same	The same	The same	The same
Appearance	The same	The same	The same	The same	The same
Dimension	The same	The same	The same	The same	The same
CPU	Intel core i7, Support Max 4.6GHz	Intel core i7, Support Max 4.6GHz	Intel core i5, Support Max 3.9GHz	Intel core i5, Support Max 3.9GHz	Intel core i3, Support Max 3.9GHz
GPU	Support	Not support	Support	Not support	Not support
Memory	16G/8G	8G	8G	8G	8G/4G
SSD	512G/256G	512G	256G	512G/256G	256G
Rear camera	Not support	Not support	Not support	Not support	Not support
Front camera	The same	The same	The same	The same	The same
Adapter	The same	The same	The same	The same	The same
Battery	The same	The same	The same	The same	The same
Accessories	Docking Station	Docking Station	Docking Station	Docking Station	Docking Station
The models WRT-W29, WRT-W19 and WRT-W09 are identical each other, except model name and main board and memory and CPU and GPU and SSD.					

2.6 Ancillary Equipment

Ancillary Equipment 1	Rechargeable Li-ion Polymer Battery	
	Brand Name	HUAWEI
	Model No.	HB4593J6ECW
	Serial No.	N/A
	Capacity	3660 mAh
	Rated Voltage	11.4 V
	Limit Charge Voltage	13.05 V
Ancillary Equipment 2	Adapter 1	
	Brand Name	HUAWEI
	Model No.	HW-200325BP0 (UK Plug)
	Serial No.	C978Y9J7F00037
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 3	Adapter 2	
	Brand Name	HUAWEI
	Model No.	HW-200325UP0 (US Plug)

	Serial No.	C976Y1J8P00106
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 4	Adapter 3	
	Brand Name	HUAWEI
	Model No.	HW-200325EP0 (EU Plug)
	Serial No.	C974Y1J8W01182
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 5	Adapter 4	
	Brand Name	HUAWEI
	Model No.	HW-200325CP0 (GB Plug)
	Serial No.	C973Y1J5S01577
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 6	USB-A to RJ45	
	Model No.	AD70
	Serial No.	48XJU17A18011914
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 7	Docking Station	
	Model No.	AD11
	Serial No.	N/A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 8	USB Cable	
	Length (Approx.)	1.8 m
Ancillary Equipment 9	USB-C to USB-A	
Note: All adapter models only with different plug for marketing purpose. We select HW-200325UP0 (US Plug) during testing.		

2.7 Technical Information

Network and Wireless connectivity	WIFI, Bluetooth
-----------------------------------	-----------------

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	FCC 47 CFR Part 15 Subpart B (10-1-17 Edition)	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	Pass	Annex A .2

Note: Based on the initial report no.: BL-SZ1880358-401 issued by Shenzhen BALUN Technology Co., Ltd. on Nov. 05, 2018, just add the new model name WRT-W09 (for details information refer Differences Description form), test the worst case(from initial report) of each item on WRT-W09 in this report.

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.23 dB
Radiated emissions (30 MHz-1 GHz)	4.30 dB
Radiated emissions (1 GHz-18 GHz)	4.81 dB
Radiated emissions (18 GHz-40 GHz)	5.71 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	23°C to 25°C	AC 120 V/60 Hz or DC 11.4 V from Battery	50% to 55%	100 kPa to 102 kPa

4.2 Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-977	2017.07.22	2019.07.21	<input checked="" type="checkbox"/>
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1600	2018.07.11	2020.07.10	<input type="checkbox"/>
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2018.08.08	2020.08.07	<input checked="" type="checkbox"/>
Test Software	BALUN	BL410_E	V18.705	--	--	<input checked="" type="checkbox"/>

Radiated Emission Test For Frequency 1 GHz-18 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.07	2019.11.06	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21	<input type="checkbox"/>
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10	<input checked="" type="checkbox"/>
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2020.02.20	<input checked="" type="checkbox"/>
Test Software	BALUN	BL410_E	V18.717	--	--	<input checked="" type="checkbox"/>

Radiated Emission Test For Frequency Above 18 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE & SCHWARZ	FSV40	101544	2019.02.15	2020.02.14	<input checked="" type="checkbox"/>
Test Antenna-Horn	A-INFOMW	LB-180400KF	J211060273	2019.01.05	2020.01.04	<input checked="" type="checkbox"/>
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2020.02.20	<input checked="" type="checkbox"/>
Test Software	BALUN	BL410_E	V18.717	--	--	<input checked="" type="checkbox"/>

Conducted Emission Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NNLK 8129	8129-462	2018.11.07	2019.11.06	<input type="checkbox"/>
ISN	TESEQ	ISN T800	34449	2018.12.04	2019.12.03	<input type="checkbox"/>
Shielded Enclosure	ChangNing	CN-130701	130703	N/A	N/A	<input checked="" type="checkbox"/>
Test Software	BALUN	BL410_E	V18.717	--	--	<input checked="" type="checkbox"/>

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
Laptop	Lenovo	E31-80	R3026PU9	N/A	N/A	<input checked="" type="checkbox"/>
Mobile Disk	WD Element	WDBUZG0010BB K	WXA1A48LD 5JT	N/A	N/A	<input checked="" type="checkbox"/>
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input checked="" type="checkbox"/>
VGA Cable	N/A	N/A	N/A	1.0 m	Shielded with core	<input checked="" type="checkbox"/>
Earphone	OPPO	N/A	N/A	1.1 m	N/A	<input checked="" type="checkbox"/>
RJ45 Cable	N/A	N/A	N/A	1.0 m	Shielded with core	<input checked="" type="checkbox"/>
Display Screen	SAMSUNG	S24B360HL	0ZK6STQK51 0032P	N/A	N/A	<input checked="" type="checkbox"/>
Display Screen	ASUS	MX27U	H9LMRS0334 74	N/A	N/A	<input checked="" type="checkbox"/>
USB C to USB-A Connector	UGREEN	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>

4.4 Test Configurations

Test Mode	
Mode 1:	Charging + Earphone + Mobile Disk + Video Playing + WIFI + BT ON + Burn-in test
Mode 2:	Charging + USB + Dock (USB C + USB-A + HDMI Playing)
Mode 3:	Charging + USB + Dock (USB C + USB-A + VGA Playing)
Mode 4:	Charging + Camera On
Mode 5:	Charging + Data Transmitting (USB C + USB-A)
Mode 6:	Charging + Data Transmitting (USB C + USB-A) + Camera On + Earphone + Video Playing + WIFI + BT ON + Burn-in test
Mode 7:	Charging + LAN + Camera On + Earphone + Video Playing + WIFI + BT ON + Burn-in test


4.5 Test Setups

Test Setup 1

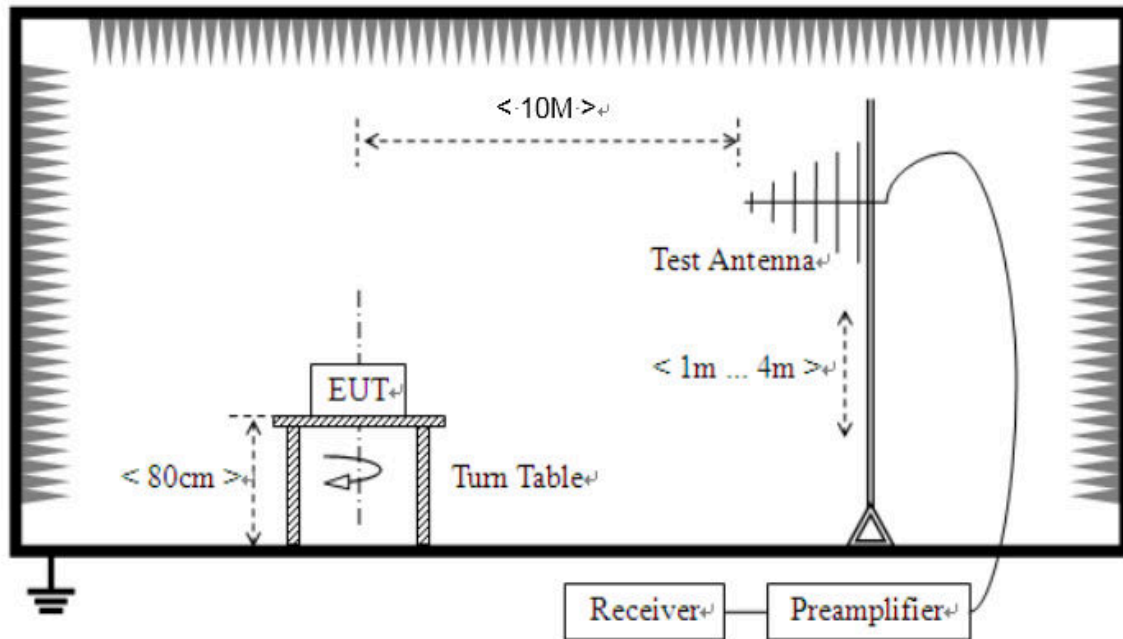


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

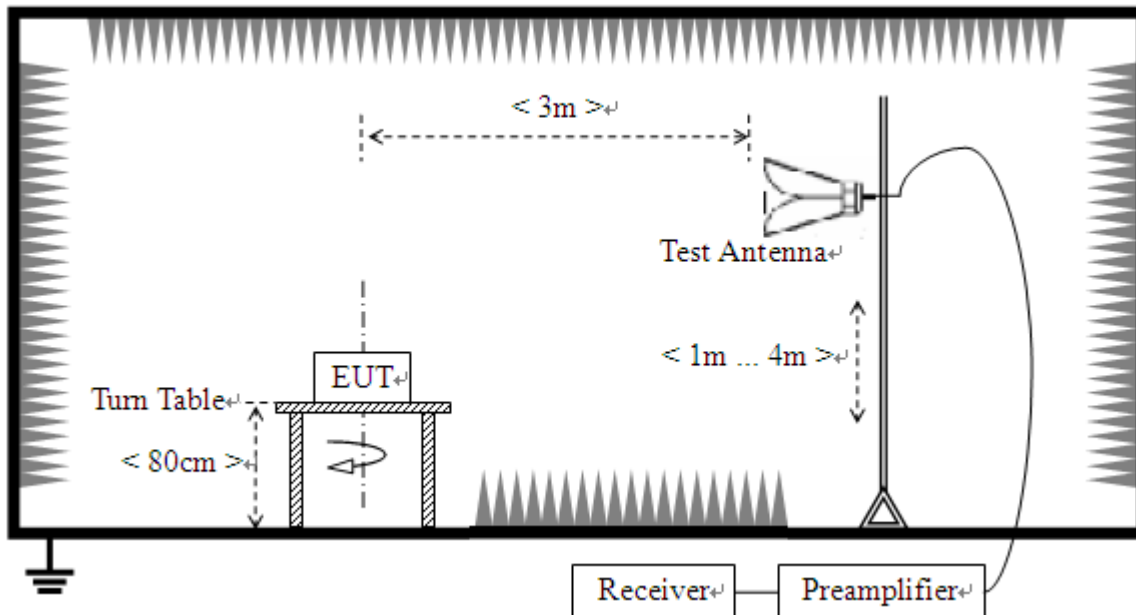

(For Radiated Emission Test (above 1 GHz))

Test Setup 3

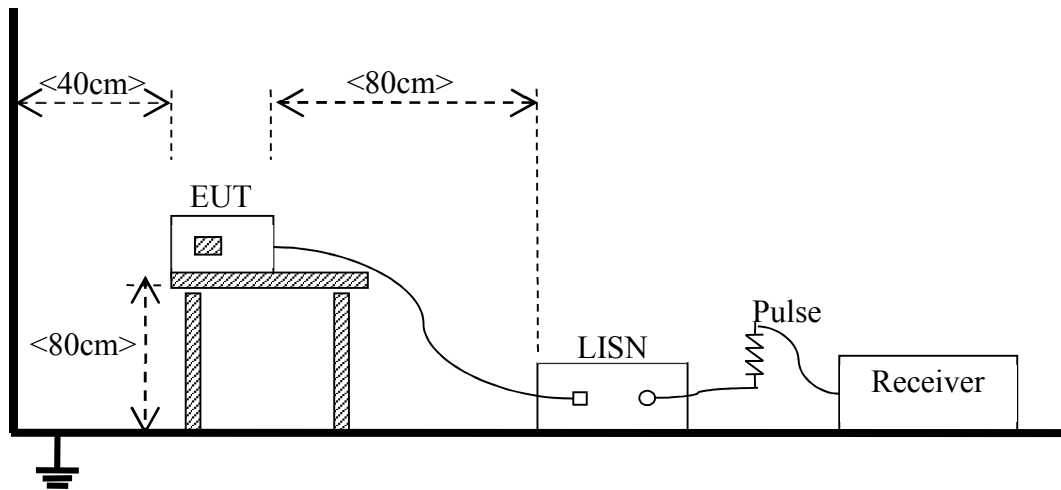

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC07 ^{Note}
Conducted Emission, AC Ports	Test Env.	NTNV
	Test Setup	Test Setup 3
	Test Configuration	TC01~TC07 ^{Note}

Note:

- 1) If there is one kind of accessories with different models, each one should be applied throughout the compliance test respectively, however, only the worst case will be recorded in this report.
- 2) If EUT has more than one typical operation, only the worst test mode will be recorded in this report.

Worst Case:

1) Radiated Emission

Mode 6: Adapter (Model: HW-200325UP0, SN: C976Y1J8P00106) + Charging + Date Transmitting (USB C + USB-A) + Camera On + Earphone + Mobile Disk + Video Playing + WIFI + BT ON + Burn-in test. This result is the worst case. (30MHz-1GHz).

Mode 6: Adapter (Model: HW-200325UP0, SN: C976Y1J8P00106) + Charging + Date Transmitting (USB C + USB-A) + Camera On + Earphone + Mobile Disk + Video Playing + WIFI + BT ON + Burn-in test. This result is the worst case. (1GHz-18GHz).

Mode 6: Adapter (Model: HW-200325UP0, SN: C976Y1J8P00106) + Charging + Date Transmitting (USB C + USB-A) + Camera On + Earphone + Mobile Disk + Video Playing + WIFI + BT ON + Burn-in test. This result is the worst case. (18GHz-40GHz).

2) Conducted Emission

Mode 6: Adapter (Model: HW-200325UP0, SN: C976Y1J8P00106) + Charging + Date Transmitting (USB C + USB-A) + Camera On + Earphone + Mobile Disk + Video Playing + WIFI + BT ON + Burn-in test. This result is the worst case.

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class B (at 10 m)	Class A (at 10 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)
30 - 88	100	40	30	90	39
88 - 216	150	43.5	33.5	150	43.5
216 - 960	200	46	36	210	46.4
Above 960	500	54	44	300	49.5

NOTE:

- 1) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log$ [Field Strength ($\mu\text{V/m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

NOTE:

1. Results ($\text{dB}\mu\text{V/m}$) = Reading ($\text{dB}\mu\text{V}$) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Over limit = Results – Limit.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

NOTE:

$$1. \text{ Results (dBuV/m)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

The reading level is calculated by software which is not shown in the sheet

$$2. \text{ Factor} = \text{Insertion loss} + \text{Cable loss}$$

$$3. \text{ Over limit} = \text{Results} - \text{Limit.}$$

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The marked spikes near 2400 MHz with circle should be ignored because they are Bluetooth or WIFI carrier frequency.

Test Data and Plots


Test Mode 6: Charging + Data Transmitting (USB C + USB-A) + Camera On + Earphone + Video Playing + WIFI + BT ON + Burn-in test

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

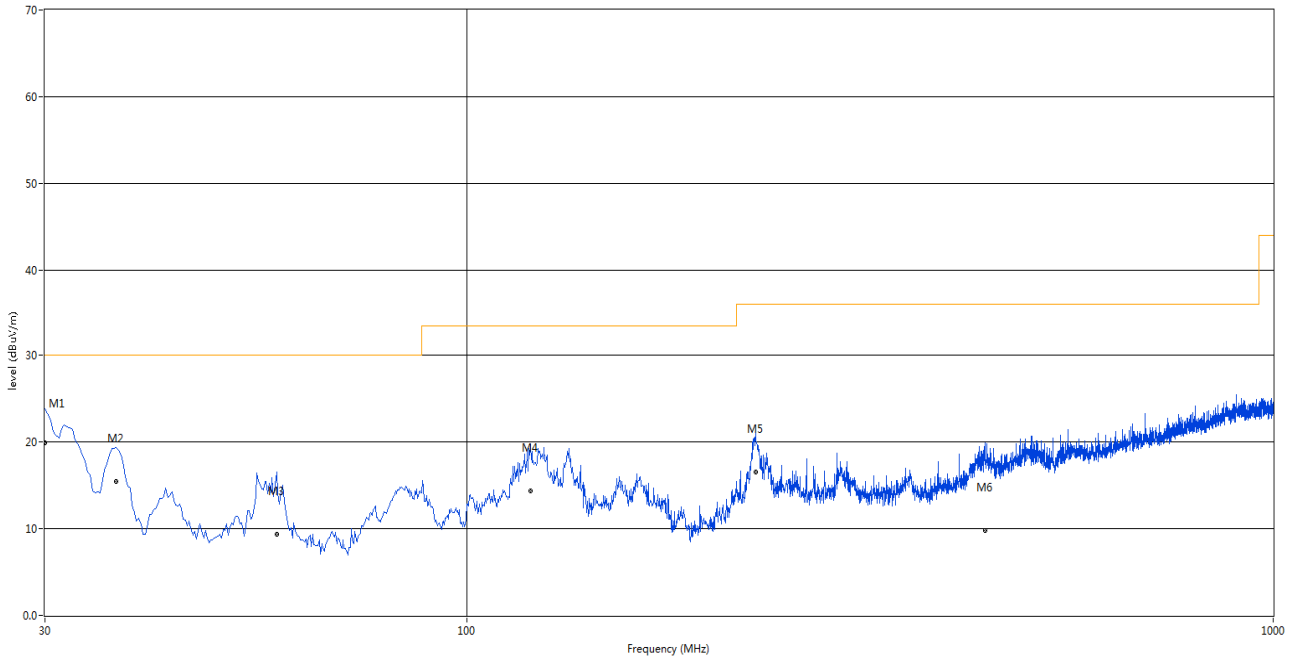


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	30.000	22.80	-27.47	30.0	-7.20	Peak	360.00	111	V	N/A
1*	30.000	19.94	-27.47	30.0	-10.06	QP	360.00	111	V	Pass
2	36.790	18.29	-27.17	30.0	-11.71	Peak	218.00	228	V	N/A
2*	36.790	15.47	-27.17	30.0	-14.53	QP	218.00	228	V	Pass
3	58.130	15.61	-27.79	30.0	-14.39	Peak	60.00	273	V	N/A
3*	58.130	9.33	-27.79	30.0	-20.67	QP	60.00	273	V	Pass
4	119.967	19.62	-28.03	33.5	-13.88	Peak	288.00	123	V	N/A
4*	119.967	14.33	-28.03	33.5	-19.17	QP	288.00	123	V	Pass
5	228.122	21.40	-28.21	36.0	-14.60	Peak	174.00	116	V	N/A
5*	228.122	16.53	-28.21	36.0	-19.47	QP	174.00	116	V	Pass
6	439.340	15.53	-21.90	36.0	-20.47	Peak	155.00	108	V	N/A
6*	439.340	9.84	-21.90	36.0	-26.16	QP	155.00	108	V	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

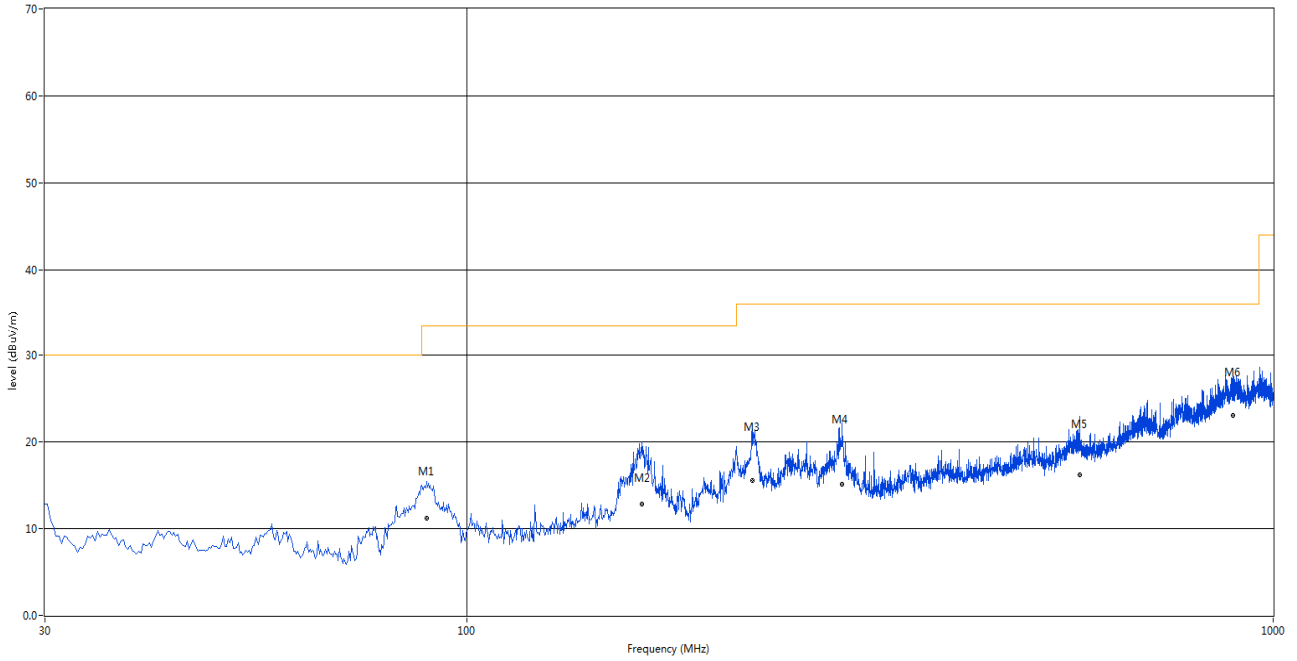


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	89.170	15.75	-31.19	33.5	-17.75	Peak	117.00	220	H	N/A
1*	89.170	11.20	-31.19	33.5	-22.30	QP	117.00	220	H	Pass
2	165.072	18.59	-26.27	33.5	-14.91	Peak	130.00	299	H	N/A
2*	165.072	12.81	-26.27	33.5	-20.69	QP	130.00	299	H	Pass
3	225.940	21.67	-28.22	36.0	-14.33	Peak	73.00	254	H	N/A
3*	225.940	15.54	-28.22	36.0	-20.46	QP	73.00	254	H	Pass
4	291.900	24.04	-26.26	36.0	-11.96	Peak	120.00	292	H	N/A
4*	291.900	15.18	-26.26	36.0	-20.82	QP	120.00	292	H	Pass
5	575.140	22.29	-18.78	36.0	-13.71	Peak	180.00	190	H	N/A
5*	575.140	16.18	-18.78	36.0	-19.82	QP	180.00	190	H	Pass
6	892.572	28.97	-12.61	36.0	-7.03	Peak	136.00	107	H	N/A
6*	892.572	23.07	-12.61	36.0	-12.93	QP	136.00	107	H	Pass

A.1.3 Test Antenna Vertical, 1 GHz – 18 GHz

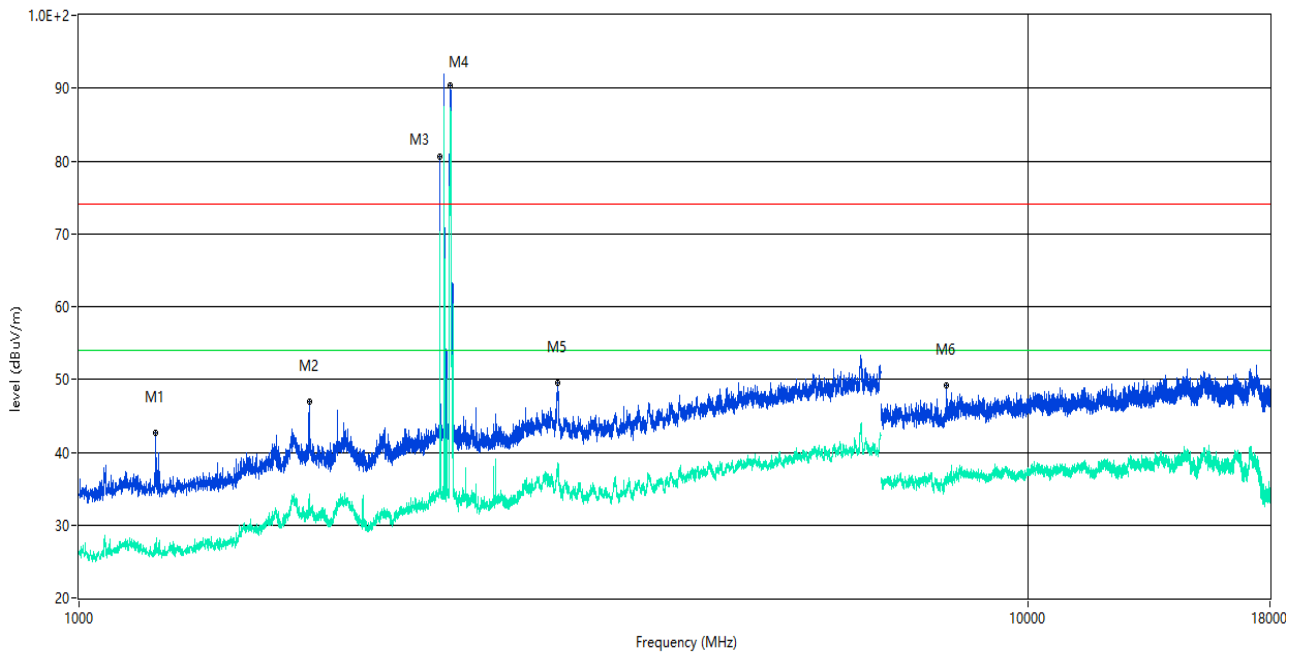


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1205.500	27.08	-17.80	54.0	-26.92	AV	336.00	100	V	Pass
1	1205.500	42.67	-17.80	74.0	-31.33	Peak	336.00	100	V	Pass
2**	1749.000	31.93	-16.90	54.0	-22.07	AV	250.00	100	V	Pass
2	1749.000	46.92	-16.90	74.0	-27.08	Peak	250.00	100	V	Pass
3**	2401.500	66.51	-12.23	54.0	12.51	AV	80.00	100	V	N/A
3	2401.500	80.59	-12.23	74.0	6.59	Peak	80.00	100	V	N/A
4**	2462.500	84.68	-12.43	54.0	30.68	AV	154.00	100	V	N/A
4	2462.500	90.43	-12.43	74.0	16.43	Peak	154.00	100	V	N/A
5**	3197.000	37.79	-6.92	54.0	-16.21	AV	159.00	100	V	Pass
5	3197.000	49.52	-6.92	74.0	-24.48	Peak	159.00	100	V	Pass
6**	8217.563	36.29	-1.47	54.0	-17.71	AV	192.00	100	V	Pass
6	8217.563	49.12	-1.47	74.0	-24.88	Peak	192.00	100	V	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 18 GHz

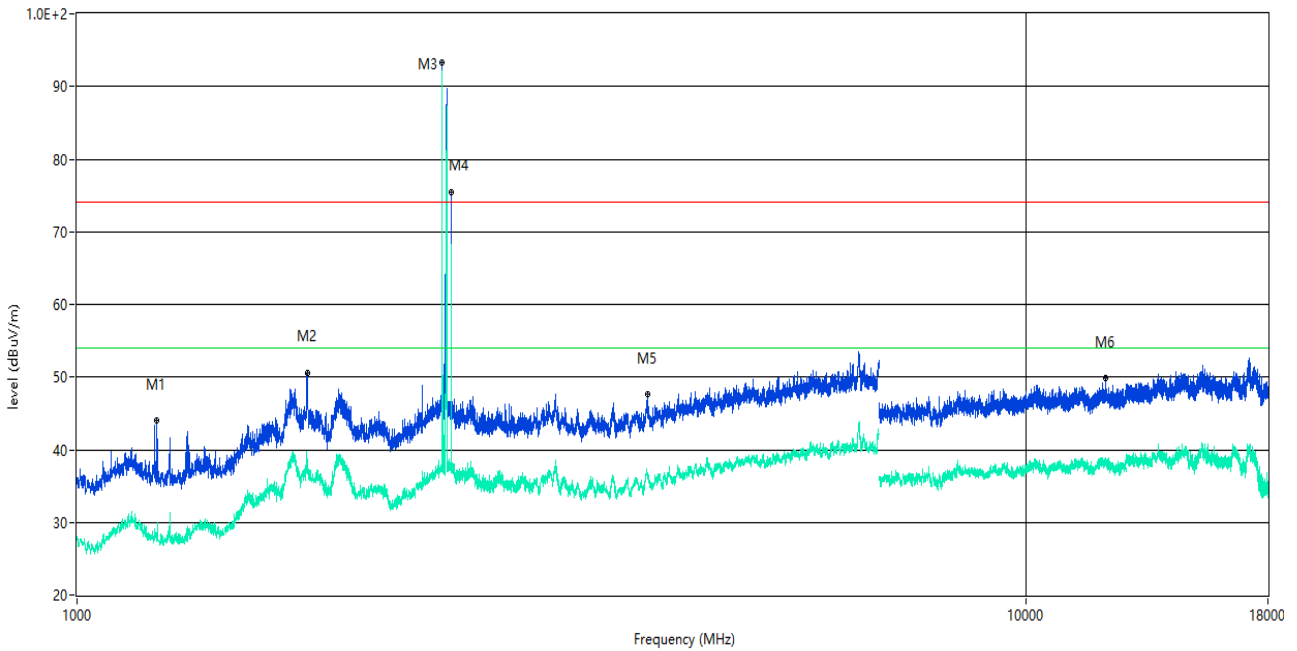


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1214.500	27.37	-17.66	54.0	-26.63	AV	184.00	100	H	Pass
1	1214.500	44.04	-17.66	74.0	-29.96	Peak	184.00	100	H	Pass
2**	1751.500	37.68	-17.08	54.0	-16.32	AV	18.00	100	H	Pass
2	1751.500	50.64	-17.08	74.0	-23.36	Peak	18.00	100	H	Pass
3**	2425.500	79.33	-12.92	54.0	25.33	AV	274.00	100	H	N/A
3	2425.500	93.25	-12.92	74.0	19.25	Peak	274.00	100	H	N/A
4**	2480.500	37.52	-11.69	54.0	-16.48	AV	177.00	100	H	N/A
4	2480.500	75.50	-11.69	74.0	1.50	Peak	177.00	100	H	N/A
5**	3991.000	36.57	-3.95	54.0	-17.43	AV	133.00	100	H	Pass
5	3991.000	47.56	-3.95	74.0	-26.44	Peak	133.00	100	H	Pass
6**	12152.001	38.06	0.89	54.0	-15.94	AV	19.00	100	H	Pass
6	12152.001	49.93	0.89	74.0	-24.07	Peak	19.00	100	H	Pass

A.1.5 Test Antenna Vertical, 18 GHz – 40 GHz

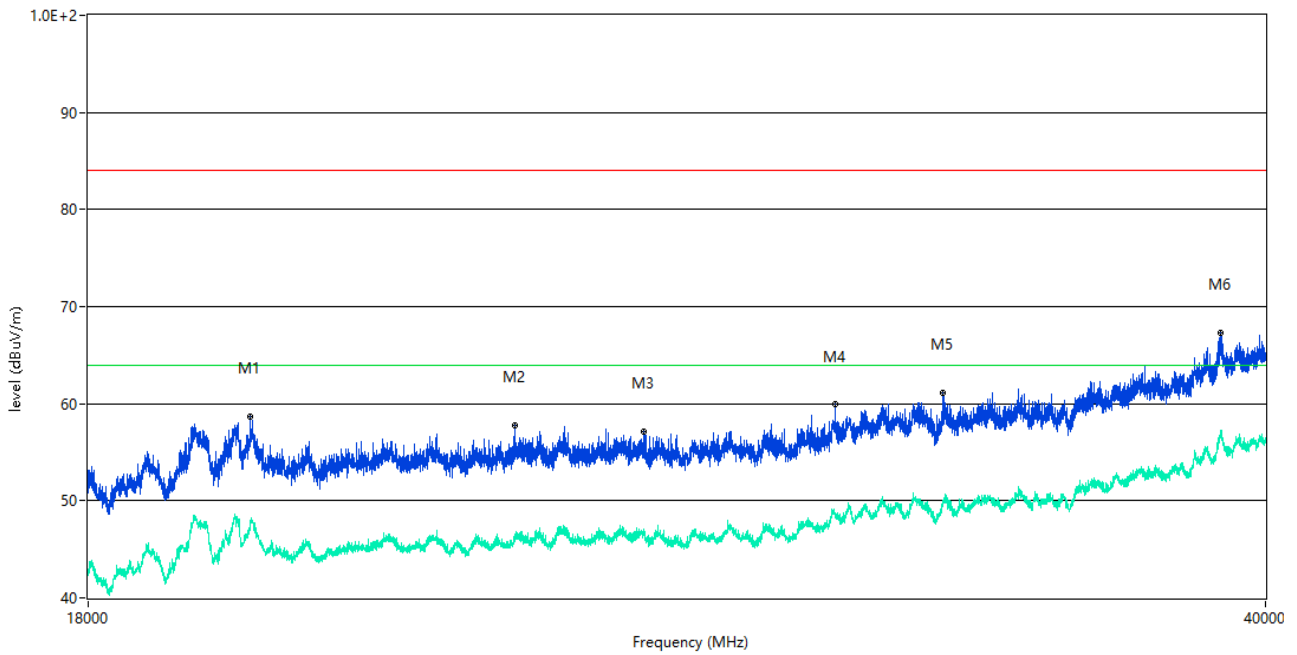

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	20096.851	47.98	20.53	64.0	-16.02	AV	0.00	100	V	Pass
1	20096.851	58.67	20.53	84.0	-25.33	Peak	0.00	100	V	Pass
2**	24039.865	46.56	20.84	64.0	-17.44	AV	180.00	100	V	Pass
2	24039.865	57.73	20.84	84.0	-26.27	Peak	180.00	100	V	Pass
3**	26247.188	47.03	21.15	64.0	-16.97	AV	173.00	100	V	Pass
3	26247.188	57.09	21.15	84.0	-26.91	Peak	173.00	100	V	Pass
4**	29867.408	48.76	22.16	64.0	-15.24	AV	12.00	100	V	Pass
4	29867.408	59.90	22.16	84.0	-24.10	Peak	12.00	100	V	Pass
5**	32148.338	49.61	22.93	64.0	-14.39	AV	99.00	100	V	Pass
5	32148.338	61.16	22.93	84.0	-22.84	Peak	99.00	100	V	Pass
6**	38802.174	57.18	24.39	64.0	-6.82	AV	52.00	100	V	Pass
6	38802.174	67.26	24.39	84.0	-16.74	Peak	52.00	100	V	Pass

A.1.6 Test Antenna Horizontal, 18 GHz – 40 GHz

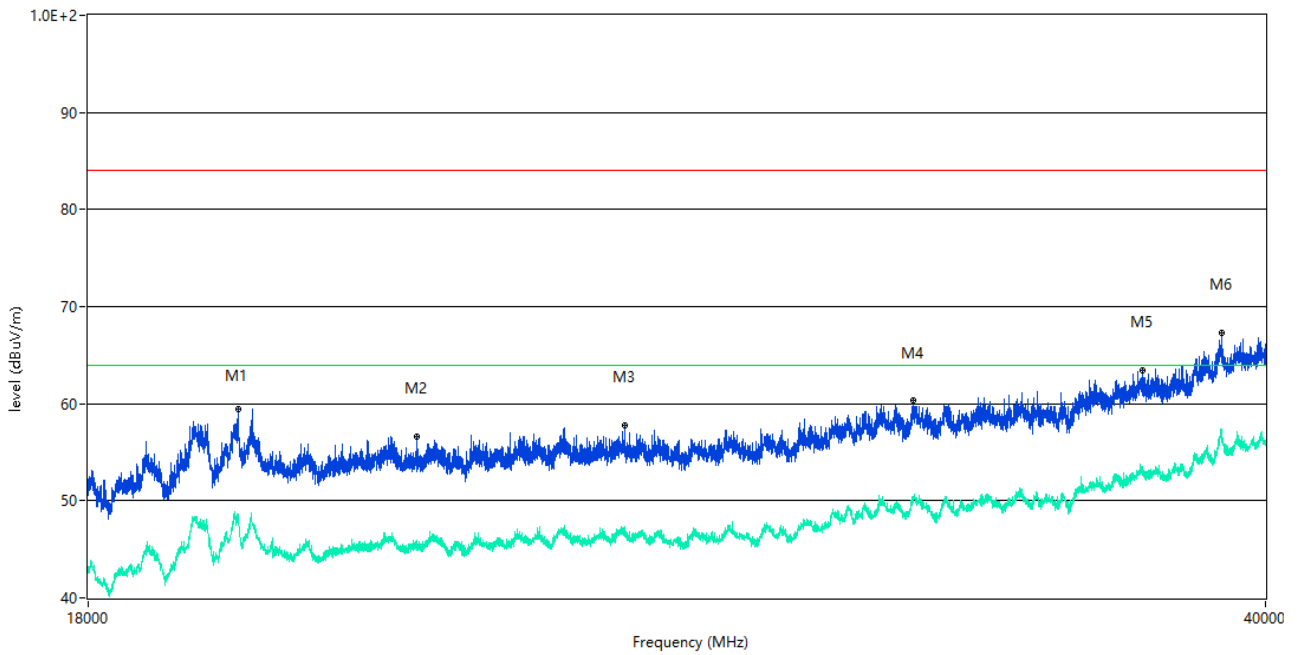

No.	Frequency (MHz)	Results (dBuH/m)	Factor (dB)	Limit (dBuH/m)	OHer Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Herdict
1**	19922.644	48.57	22.65	64.0	-15.43	AV	120.00	100	H	Pass
1	19922.644	59.45	22.65	84.0	-24.55	Peak	120.00	100	H	Pass
2**	22489.003	45.79	21.35	64.0	-18.21	AV	101.00	100	H	Pass
2	22489.003	56.60	21.35	84.0	-27.40	Peak	101.00	100	H	Pass
3**	25900.900	46.26	21.08	64.0	-17.74	AV	133.00	100	H	Pass
3	25900.900	57.74	21.08	84.0	-26.26	Peak	133.00	100	H	Pass
4**	31503.874	50.14	22.65	64.0	-13.86	AV	30.00	100	H	Pass
4	31503.874	60.28	22.65	84.0	-23.72	Peak	30.00	100	H	Pass
5**	36787.803	52.83	23.77	64.0	-11.17	AV	19.00	100	H	Pass
5	36787.803	63.45	23.77	84.0	-20.55	Peak	19.00	100	H	Pass
6**	38825.794	56.63	24.40	64.0	-7.37	AV	135.00	100	H	Pass
6	38825.794	67.35	24.40	84.0	-16.65	Peak	135.00	100	H	Pass


A.2 Conducted Emission

Test Data and Plots

Test Mode 6: Charging + Data Transmitting (USB C + USB-A) + Camera On + Earphone + Video Playing + WIFI + BT ON + Burn-in test


Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

A.2.1 L Phase

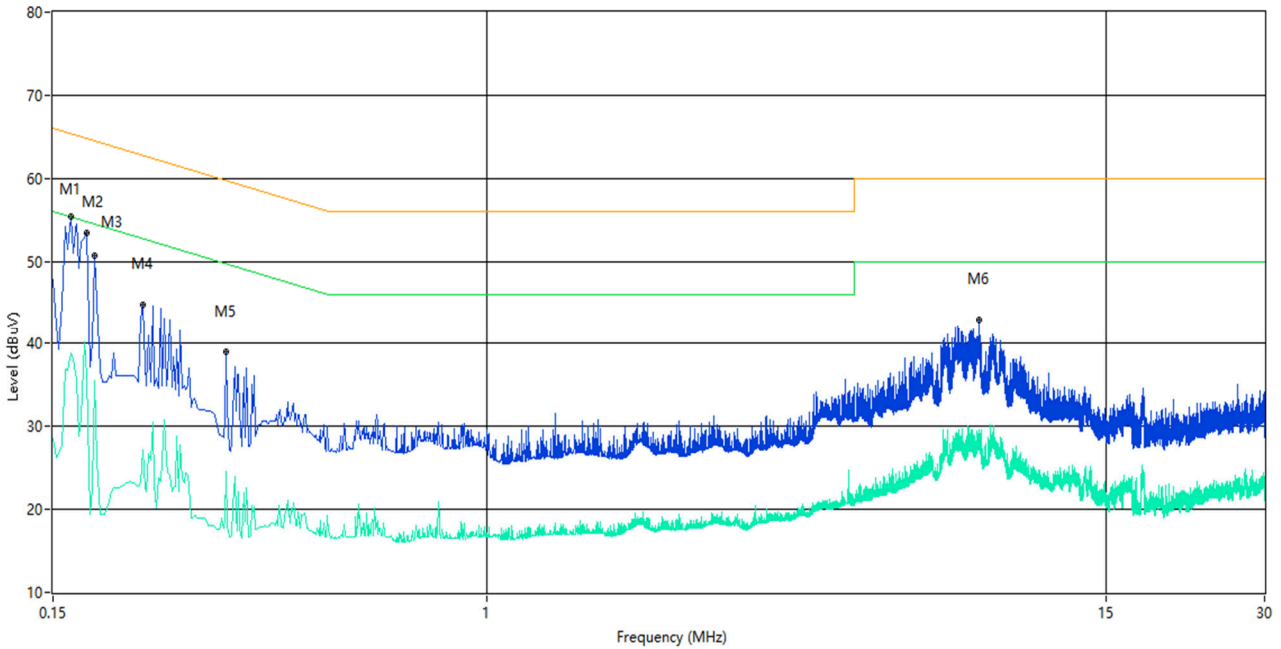

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.162	55.26	10.01	65.4	-10.14	Peak	L Line	N/A
1*	0.162	52.94	10.01	65.4	-12.46	QP	L Line	Pass
1**	0.162	38.74	10.01	55.4	-16.66	AV	L Line	Pass
2	0.174	53.53	10.01	64.8	-11.27	Peak	L Line	N/A
2*	0.174	50.54	10.01	64.8	-14.26	QP	L Line	Pass
2**	0.174	35.85	10.01	54.8	-18.95	AV	L Line	Pass
3	0.180	52.80	10.01	64.5	-11.70	Peak	L Line	N/A
3*	0.180	49.23	10.01	64.5	-15.27	QP	L Line	Pass
3**	0.180	31.61	10.01	54.5	-22.89	AV	L Line	Pass
4	0.222	45.15	10.02	62.7	-17.55	Peak	L Line	N/A
4*	0.222	41.85	10.02	62.7	-20.85	QP	L Line	Pass
4**	0.222	25.43	10.02	52.7	-27.27	AV	L Line	Pass
5	0.320	38.93	10.03	59.7	-20.77	Peak	L Line	N/A
5*	0.320	34.54	10.03	59.7	-25.16	QP	L Line	Pass
5**	0.320	19.72	10.03	49.7	-29.98	AV	L Line	Pass
6	8.598	42.79	10.15	60.0	-17.21	Peak	L Line	N/A
6*	8.598	35.49	10.15	60.0	-24.51	QP	L Line	Pass
6**	8.598	27.59	10.15	50.0	-22.41	AV	L Line	Pass

A.2.2 N Phase

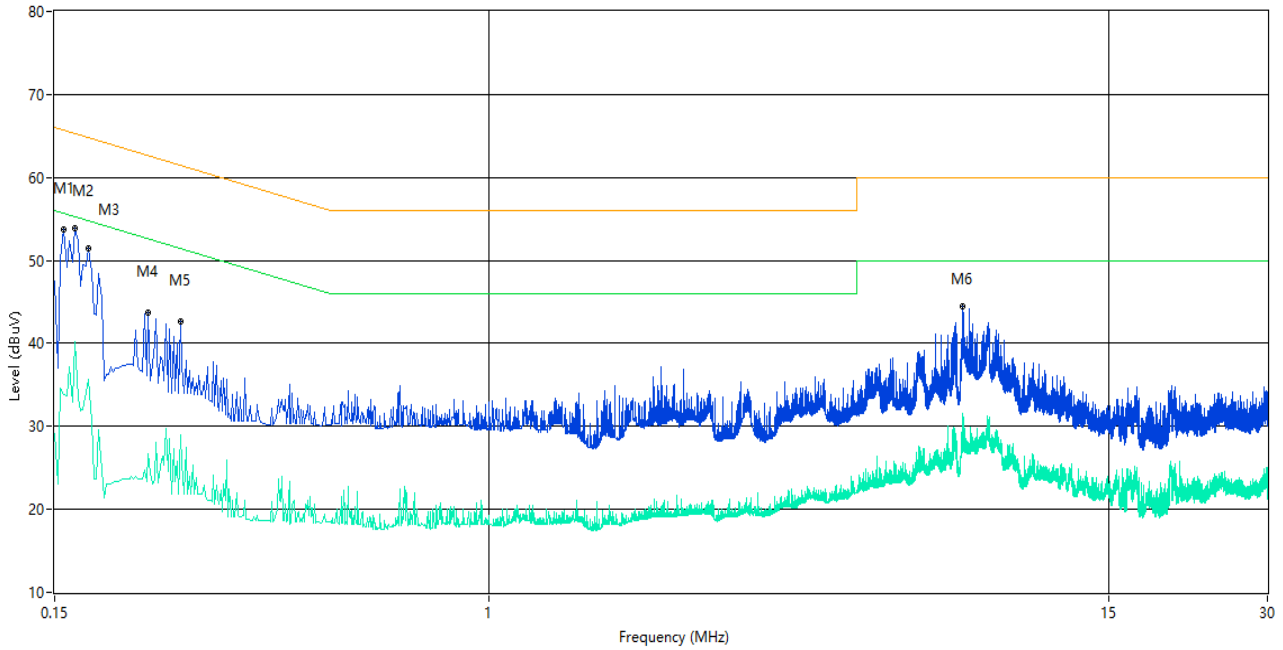

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	55.10	10.01	65.7	-10.60	Peak	N Line	N/A
1*	0.156	52.43	10.01	65.7	-13.27	QP	N Line	Pass
1**	0.156	38.80	10.01	55.7	-16.90	AV	N Line	Pass
2	0.164	53.71	10.01	65.3	-11.59	Peak	N Line	N/A
2*	0.164	51.44	10.01	65.3	-13.86	QP	N Line	Pass
2**	0.164	36.97	10.01	55.3	-18.33	AV	N Line	Pass
3	0.174	52.23	10.01	64.8	-12.57	Peak	N Line	N/A
3*	0.174	46.25	10.01	64.8	-18.55	QP	N Line	Pass
3**	0.174	28.25	10.01	54.8	-26.55	AV	N Line	Pass
4	0.226	45.05	10.02	62.6	-17.55	Peak	N Line	N/A
4*	0.226	41.43	10.02	62.6	-21.17	QP	N Line	Pass
4**	0.226	26.04	10.02	52.6	-26.56	AV	N Line	Pass
5	0.260	44.36	10.01	61.4	-17.04	Peak	N Line	N/A
5*	0.260	40.75	10.01	61.4	-20.65	QP	N Line	Pass
5**	0.260	25.52	10.01	51.4	-25.88	AV	N Line	Pass
6	7.922	41.22	10.15	60.0	-18.78	Peak	N Line	N/A
6*	7.922	32.03	10.15	60.0	-27.97	QP	N Line	Pass
6**	7.922	25.79	10.15	50.0	-24.21	AV	N Line	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ1920109-AE.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1920109-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ1920109-AI.PDF".

--END OF REPORT--