



# RF TEST REPORT

**Applicant** Huawei Technologies Co., Ltd.  
**FCC ID** QISWS5200V2  
**Product** 1200Mbps Wireless Router  
**Model** WS5200 V2  
**Report No.** R1909H0175-R2  
**Issue Date** September 30, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Peng Tao*

Performed by: Peng Tao

*Kai Xu*

Approved by: Kai Xu

---

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards .....	7
4. Test Configuration .....	8
5. Test Case Results .....	11
5.1. Occupied Bandwidth .....	11
5.2. Average Power Output –Conducted.....	21
5.3. Frequency Stability.....	31
5.4. Power Spectral Density .....	34
5.5. Unwanted Emission .....	64
5.6. Conducted Emission .....	108
6. Main Test Instruments.....	111



## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average conducted output power	15.407(a)	PASS
2	Occupied bandwidth	15.407(e)	PASS
3	Frequency stability	15.407(g)	PASS
4	Power spectral density	15.407(a)	PASS
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS
Date of Testing: September 21, 2019~ September 25, 2019			



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

#### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

<b>Applicant</b>	Huawei Technologies Co., Ltd.
<b>Applicant address</b>	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
<b>Manufacturer</b>	Huawei Technologies Co., Ltd.
<b>Manufacturer address</b>	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

### General information

EUT Description	
Model	WS5200 V2
SN	VXC7S1981400018931
Hardware Version	AM1WS5200V2M1
Software Version	10.0.2.7
Power Supply	AC /DC Adapter
Antenna Type	External Antenna
Antenna Gain	Antenna 1: 4 dBi Antenna 2: 4 dBi
additional beamforming gain	4 dBi
Test Mode(s)	U-NII-1(5150MHz-5250MHz) U-NII-3(5725MHz-5850MHz)
Modulation Type	802.11a/n (HT20/HT40) : OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM
Max. Conducted Power	22.90 dBm
Operating Frequency Range(s)	U-NII-1: 5150-5250MHz U-NII-3: 5725-5850MHz
Operating temperature range:	0 ° C to 40° C
Operating voltage range:	11.4 V to 12.6 V
State DC voltage:	12V
EUT Accessory	
Adapter	Manufacture: Huawei Technologies Co., Ltd. Model : HW-120100U01
Note: The information of the EUT is declared by the manufacturer.	



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR47 Part 15E (2018)** Unlicensed National Information Infrastructure Devices

**ANSI C63.10 (2013)**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

The device supports non-beamforming and beamforming function in 802.11n/ac, after pre-testing, beamforming mode has the worst emission value, so the worst case was recorded.

Band	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11a	6 Mbps	6 Mbps	MCS8
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8
802.11ac VHT20	MCS0	MCS0	MCS8
802.11ac VHT40	MCS0	MCS0	MCS8
802.11ac VHT80	MCS0	MCS0	MCS8

The device supports non-beamforming and beamforming function in 802.11n/ac, after pre-testing, beamforming mode has the worst emission value, so the worst case was recorded.





The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Average conducted output power	O	O	O
Occupied bandwidth	--	802.11a	802.11n HT20/HT40/ 802.11ac VHT20/VHT40/VHT80
Frequency stability	--	802.11a	--
Power Spectral Density	O	O	O
Unwanted Emissions	--	802.11a	802.11n HT20/HT40/ 802.11ac VHT80
Conducted Emissions	--	O	--

Note: "O": test all bands

According to RF Output power results in chapter 5.1, MIMO was selected as the worst antenna for 802.11n HT20/40, 802.11ac VHT20/40/80. SISO Antenna 2 was selected as the worst SISO antenna for 802.11a.

**Wireless Technology and Frequency Range**

Wireless Technology		Bandwidth	Channel	Frequency
Wi-Fi	U-NII-1	20 MHz	36	5180MHz
			40	5200MHz
			44	5220MHz
			48	5240MHz
		40 MHz	38	5190MHz
			46	5230MHz
	80 MHz	42	5210MHz	
	U-NII-3	20 MHz	149	5745MHz
			153	5765MHz
			157	5785MHz
			161	5805MHz
			165	5825MHz
		40 MHz	151	5755MHz
			159	5795MHz
80 MHz		155	5775MHz	
Does this device support TPC Function? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Does this device support TDWR Band? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				

## 5. Test Case Results

### 5.1. Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1/U-NII-2A/U-NII-2C, set RBW  $\approx$ 1% OCB kHz, VBW  $\geq$  3  $\times$  RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW  $\geq$  3  $\times$  RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

#### Test Setup



#### Limits

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:****U-NII-1**

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5180	16.486	19.51	PASS
	5200	16.496	19.42	PASS
	5240	16.538	20.26	PASS
802.11n HT20	5180	17.564	19.74	PASS
	5200	17.570	19.65	PASS
	5240	17.584	23.66	PASS
802.11n HT40	5190	35.741	38.91	PASS
	5230	35.729	38.70	PASS
802.11ac VHT20	5180	17.564	19.73	PASS
	5200	17.566	19.69	PASS
	5240	17.587	20.52	PASS
802.11ac VHT40	5190	35.748	38.69	PASS
	5230	35.741	38.59	PASS
802.11ac VHT80	5210	75.239	84.02	PASS

**U-NII-3**

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11a	5745	16.473	16.38	500	PASS
	5785	16.501	16.40	500	PASS
	5825	16.481	16.36	500	PASS
802.11n HT20	5745	17.576	17.58	500	PASS
	5785	17.583	17.59	500	PASS
	5825	17.580	17.59	500	PASS
802.11n HT40	5755	35.759	34.94	500	PASS
	5795	35.839	34.12	500	PASS
802.11ac VHT20	5745	17.577	17.34	500	PASS
	5785	17.589	17.62	500	PASS
	5825	17.573	17.57	500	PASS
802.11ac VHT40	5755	35.767	33.41	500	PASS
	5795	35.814	35.07	500	PASS
802.11ac VHT80	5775	75.353	75.17	500	PASS




Antenna 1


U-NII-1, 802.11a  
Carrier frequency (MHz): 5180




U-NII-1, 802.11n HT20  
Carrier frequency (MHz): 5180

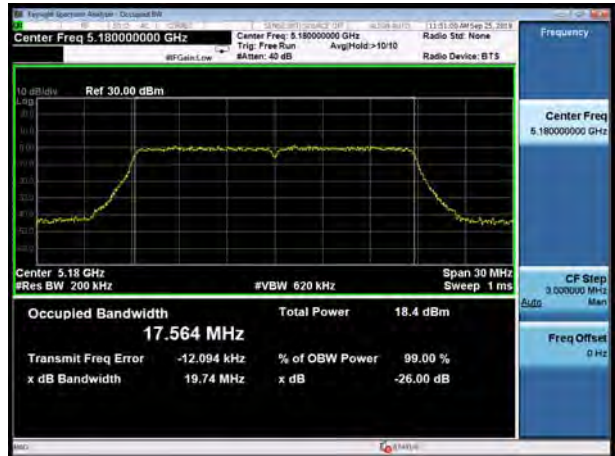

U-NII-1, 802.11a  
Carrier frequency (MHz): 5200

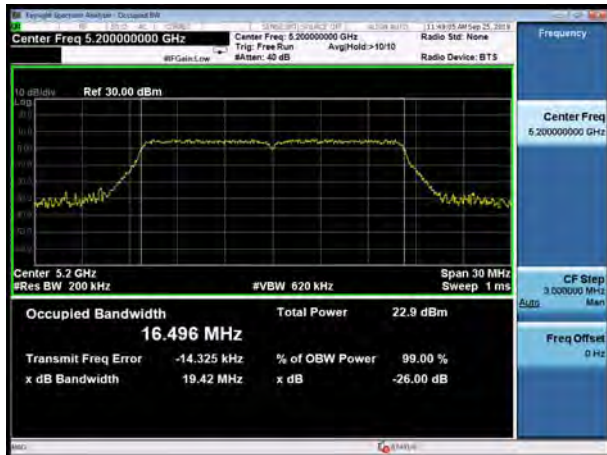


U-NII-1, 802.11n HT20  
Carrier frequency (MHz): 5200

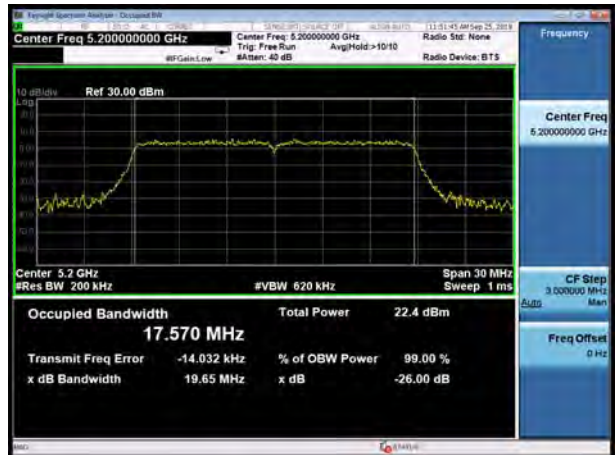

U-NII-1, 802.11a  
Carrier frequency (MHz): 5240



U-NII-1, 802.11n HT20  
Carrier frequency (MHz): 5240

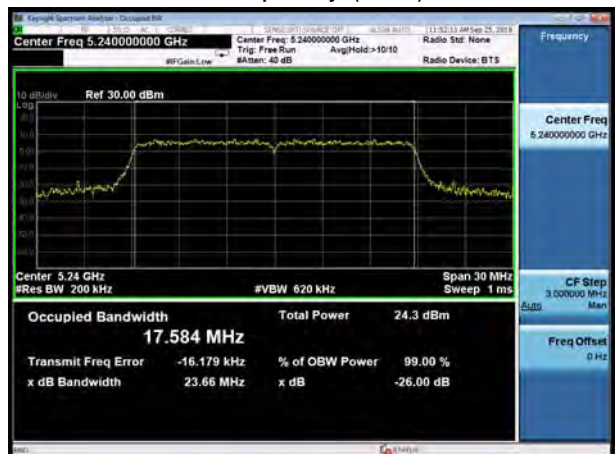

U-NII-1, 802.11n HT40  
Carrier frequency (MHz): 5190




U-NII-1, 802.11ac VHT20  
Carrier frequency (MHz): 5180



U-NII-1, 802.11n HT40  
Carrier frequency (MHz): 5230



U-NII-1, 802.11ac VHT20  
Carrier frequency (MHz): 5200

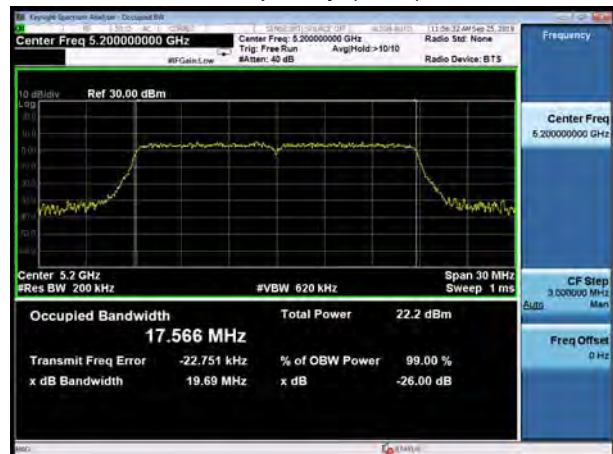

U-NII-1, 802.11ac VHT40  
Carrier frequency (MHz): 5190



U-NII-1, 802.11ac VHT20  
Carrier frequency (MHz): 5240






U-NII-1, 802.11ac VHT40  
Carrier frequency (MHz): 5230




U-NII-1, 802.11ac VHT80  
Carrier frequency (MHz): 5210

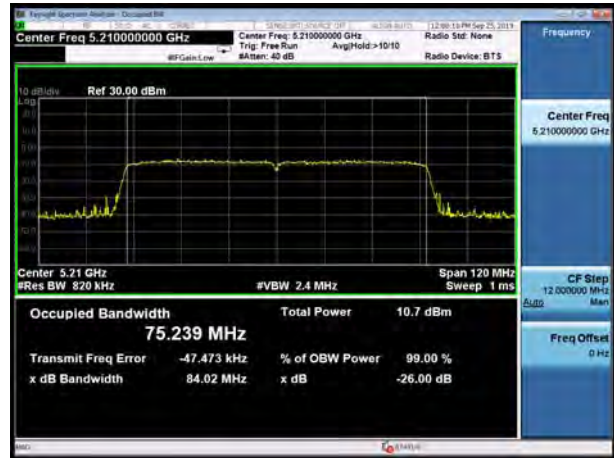



99% bandwidth

U-NII-3, 802.11a  
Carrier frequency (MHz): 5745

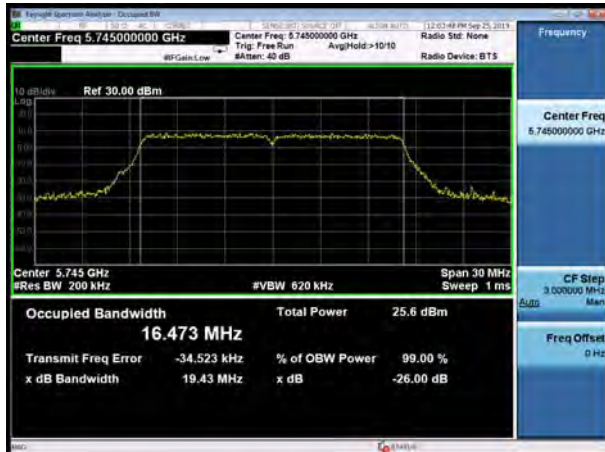


U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5745



U-NII-3, 802.11a  
Carrier frequency (MHz): 5785



U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5785

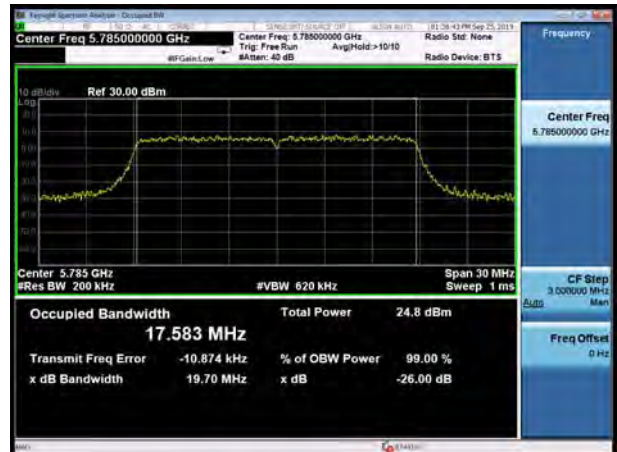

U-NII-3, 802.11a  
Carrier frequency (MHz): 5825



U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5825






U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5745

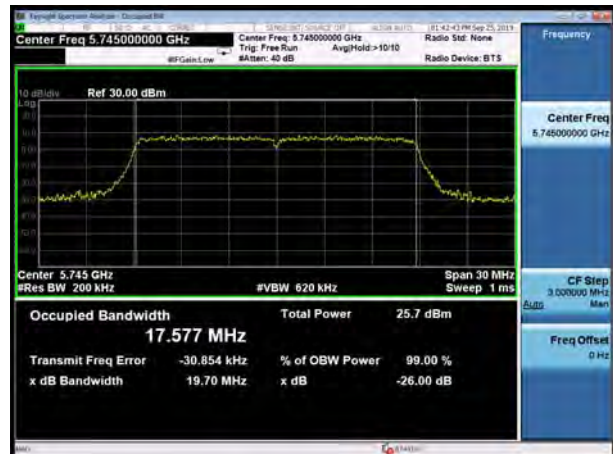

U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5785



U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5825





U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT80  
Carrier frequency (MHz): 5775




Minimum 6 dB bandwidth

U-NII-3, 802.11a  
Carrier frequency (MHz): 5745




U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5745

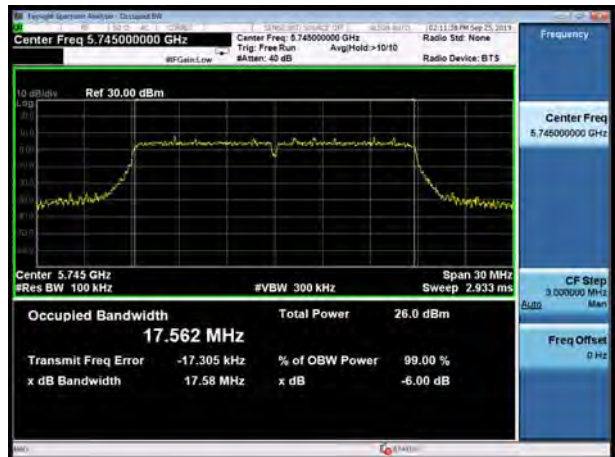

U-NII-3, 802.11a  
Carrier frequency (MHz): 5785



U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5785

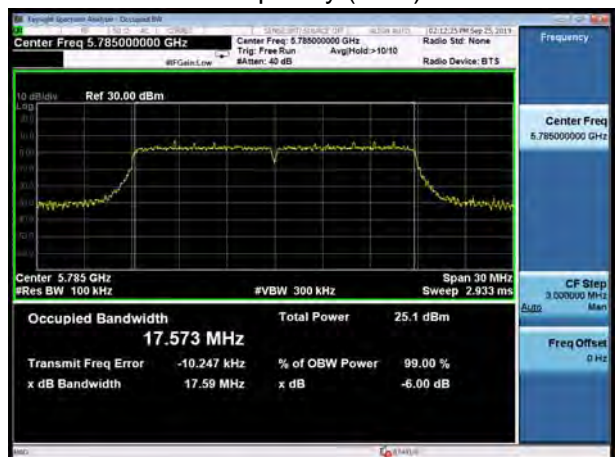

U-NII-3, 802.11a  
Carrier frequency (MHz): 5825




U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5825



U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5745

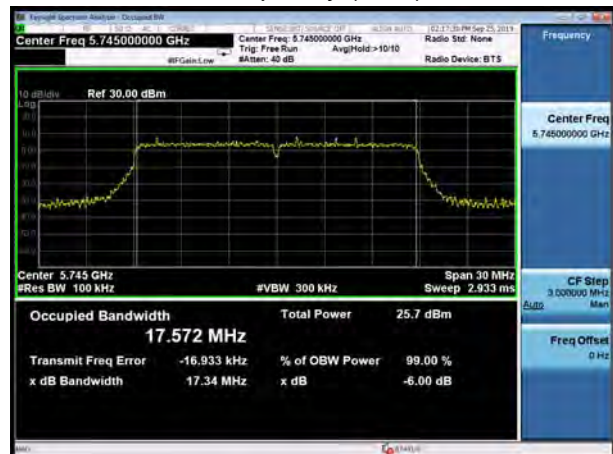

U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5795




U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5785




U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5755




U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5825

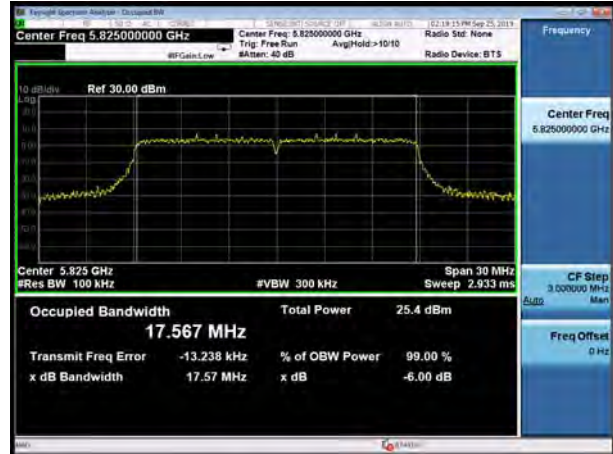

U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5795

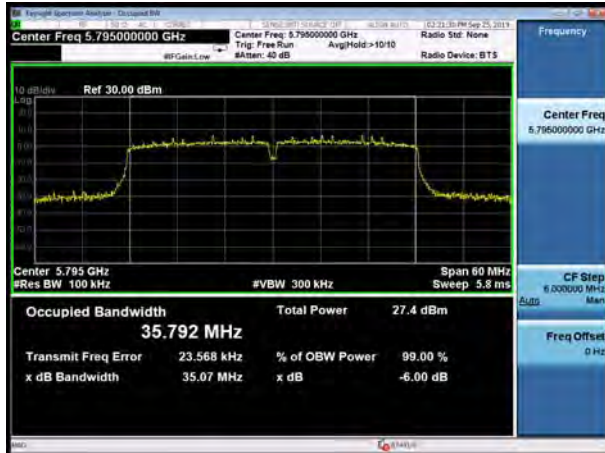

U-NII-3, 802.11ac VHT80  
Carrier frequency (MHz): 5775

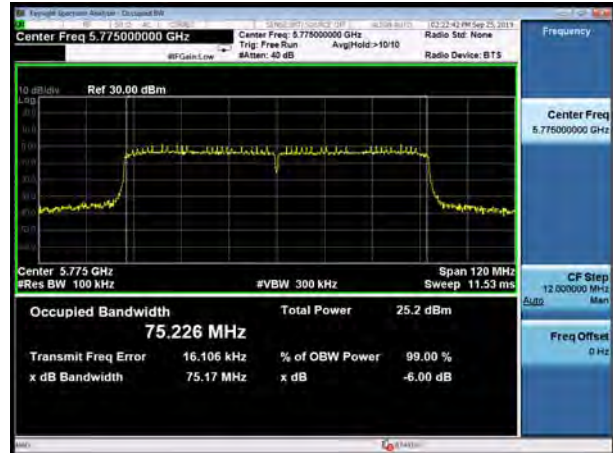

## 5.2. Average Power Output –Conducted

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

During the process of the testing, The EUT was connected to the average power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum average Conducted Output Power Level Method in KDB789033 for this test

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test Setup



### Limits

Rule FCC Part 15.407(a)(1)(2)(3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23



dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.



## Test Results

Band	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11a	2.75	2.77	0.99	0.03
802.11n HT20	2.55	2.58	0.99	0.05
802.11n HT40	1.25	1.29	0.97	0.14
802.11ac VHT20	2.56	2.59	0.99	0.05
802.11ac VHT40	1.26	1.33	0.95	0.24
802.11ac VHT80	0.60	0.64	0.94	0.28

Note: when Duty cycle>0.98, Duty cycle correction Factor not required.

SISO Antenna1& SISO Antenna2 Power Index						
Packet Type	CH36	CH40	CH48	CH149	CH157	CH165
802.11a	300	300	190	190	190	190
802.11n HT20	300	300	190	190	190	190
802.11ac VHT20	190	190	190	190	190	190
Packet Type	CH38	CH46	CH151	CH159	/	/
802.11n HT40	300	300	300	300	/	/
802.11ac VHT40	300	300	300	300	/	/
Packet Type	CH42	CH155	/	/	/	/
802.11ac VHT80	50	300	/	/	/	/

MIMO Antenna1& MIMO Antenna2 Power Index(without Beamforming)						
Packet Type	CH36	CH40	CH48	CH149	CH157	CH165
802.11a	300	300	190	190	190	190
802.11n HT20	300	300	190	190	190	190
802.11ac VHT20	190	190	190	190	190	190
Packet Type	CH38	CH46	CH151	CH159	/	/
802.11n HT40	300	300	300	300	/	/
802.11ac VHT40	300	300	300	300	/	/
Packet Type	CH42	CH155	/	/	/	/
802.11ac VHT80	50	300	/	/	/	/

MIMO Antenna1& MIMO Antenna2 Power Index(with Beamforming)
--



Packet Type	CH36	CH40	CH48	CH149	CH157	CH165
802.11ac VHT20	190	190	190	190	190	190
Packet Type	CH38	CH46	CH151	CH159	/	/
802.11ac VHT40	300	300	300	300	/	/
Packet Type	CH42	CH155	/	/	/	/
802.11ac VHT80	50	300	/	/	/	/



**SISO Antenna 1****U-NII-1**

Network Standards	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	36/5180	11.77	11.80	30	PASS
	40/5200	15.69	15.72	30	PASS
	48/5240	17.47	17.50	30	PASS
802.11n HT20	36/5180	11.58	11.63	30	PASS
	40/5200	15.48	15.53	30	PASS
	48/5240	17.43	17.48	30	PASS
802.11n HT40	38/5190	9.08	9.22	30	PASS
	46/5230	15.14	15.28	30	PASS
802.11ac VHT20	36/5180	11.53	11.58	30	PASS
	40/5200	15.48	15.53	30	PASS
	48/5240	17.38	17.43	30	PASS
802.11ac VHT40	38/5190	9.10	9.34	30	PASS
	46/5230	15.22	15.46	30	PASS
802.11ac VHT80	42/5210	2.24	2.52	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

**U-NII-3**

Network Standards	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	149/5745	18.34	18.37	30	PASS
	157/5785	18.10	18.13	30	PASS
	165/5825	18.26	18.29	30	PASS
802.11n HT20	149/5745	18.76	18.81	30	PASS
	157/5785	18.28	18.33	30	PASS
	165/5825	18.31	18.36	30	PASS
802.11n HT40	151/5755	19.01	19.15	30	PASS
	159/5795	19.63	19.77	30	PASS
802.11ac VHT20	149/5745	18.72	18.77	30	PASS
	157/5785	18.50	18.55	30	PASS
	165/5825	18.31	18.36	30	PASS
802.11ac VHT40	151/5755	18.92	19.16	30	PASS
	159/5795	19.64	19.88	30	PASS
802.11ac VHT80	155/5775	17.01	17.29	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

**SISO Antenna 2****U-NII-1**

Network Standards	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	36/5180	11.85	11.88	30	PASS
	40/5200	15.62	15.65	30	PASS
	48/5240	17.32	17.35	30	PASS
802.11n HT20	36/5180	11.45	11.50	30	PASS
	40/5200	15.23	15.28	30	PASS
	48/5240	17.41	17.46	30	PASS
802.11n HT40	38/5190	9.23	9.37	30	PASS
	46/5230	14.88	15.02	30	PASS
802.11ac VHT20	36/5180	11.39	11.44	30	PASS
	40/5200	15.30	15.35	30	PASS
	48/5240	17.33	17.38	30	PASS
802.11ac VHT40	38/5190	9.18	9.42	30	PASS
	46/5230	14.78	15.02	30	PASS
802.11ac VHT80	42/5210	3.07	3.35	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

**U-NII-3**

Network Standards	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	149/5745	19.02	19.05	30	PASS
	157/5785	18.82	18.85	30	PASS
	165/5825	18.53	18.56	30	PASS
802.11n HT20	149/5745	18.88	18.93	30	PASS
	157/5785	18.88	18.93	30	PASS
	165/5825	18.57	18.62	30	PASS
802.11n HT40	151/5755	19.31	19.45	30	PASS
	159/5795	19.80	19.94	30	PASS
802.11ac VHT20	149/5745	18.98	19.03	30	PASS
	157/5785	18.74	18.79	30	PASS
	165/5825	18.64	18.69	30	PASS
802.11ac VHT40	151/5755	19.35	19.59	30	PASS
	159/5795	19.75	19.99	30	PASS
802.11ac VHT80	155/5775	17.15	17.43	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



**MIMO**  
**without Beamforming**  
**U-NII-1**

Network Standards	Channel/ Frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11a	36/5180	11.91	11.94	11.45	11.48	14.73	30	PASS
	44/5220	15.66	15.69	15.58	15.61	18.66	30	PASS
	48/5240	17.61	17.64	17.46	17.49	20.58	30	PASS
802.11n HT20	36/5180	11.49	11.54	11.04	11.09	14.33	30	PASS
	44/5220	15.44	15.49	15.37	15.42	18.47	30	PASS
	48/5240	17.46	17.51	17.40	17.45	20.49	30	PASS
802.11n HT40	38/5190	9.02	9.16	8.70	8.84	12.01	30	PASS
	46/5230	15.15	15.29	14.88	15.02	18.16	30	PASS
802.11ac VHT20	36/5180	11.35	11.40	11.12	11.17	14.30	30	PASS
	44/5220	15.49	15.54	15.33	15.38	18.47	30	PASS
	48/5240	17.33	17.38	17.43	17.48	20.44	30	PASS
802.11ac VHT40	38/5190	8.88	9.12	8.83	9.07	12.11	30	PASS
	46/5230	15.14	15.38	14.98	15.22	18.31	30	PASS
802.11ac VHT80	42/5210	1.19	1.47	1.35	1.63	4.56	30	PASS

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And  $N_{SS}=2$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ ,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT} + \text{Array Gain} = 4 + 0 = 4$  dBi < 6 dBi. So the power limit is 30 dBm.



## U-NII-3

Network Standards	Channel/Frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11a	36/5180	18.50	18.53	18.95	18.98	21.77	30	PASS
	44/5220	18.69	18.72	18.66	18.69	21.72	30	PASS
	48/5240	18.23	18.26	18.37	18.40	21.34	30	PASS
802.11n HT20	36/5180	18.62	18.67	18.83	18.88	21.79	30	PASS
	44/5220	18.43	18.48	18.82	18.87	21.69	30	PASS
	48/5240	18.23	18.28	18.54	18.59	21.45	30	PASS
802.11n HT40	38/5190	18.92	19.06	19.38	19.52	22.30	30	PASS
	46/5230	19.62	19.76	19.63	19.77	22.77	30	PASS
802.11ac VHT20	36/5180	18.59	18.64	18.93	18.98	21.82	30	PASS
	44/5220	18.41	18.46	18.78	18.83	21.66	30	PASS
	48/5240	18.03	18.08	18.49	18.54	21.33	30	PASS
802.11ac VHT40	38/5190	18.92	19.16	19.44	19.68	22.44	30	PASS
	46/5230	19.58	19.82	19.70	19.94	22.89	30	PASS
802.11ac VHT80	42/5210	16.82	17.10	17.06	17.34	20.23	30	PASS

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And  $N_{SS}=2$ . According to KDB 662911 D01

Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ ,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT} + \text{Array Gain} = 4 + 0 = 4 \text{ dBi} < 6 \text{ dBi}$ . So the power limit is 30dBm.



**MIMO**  
**with Beamforming**  
**U-NII-1**

Network Standards	Channel/Frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11ac VHT20	36/5180	11.83	11.88	11.28	11.33	14.62	30	PASS
	44/5220	15.71	15.76	15.31	15.36	18.58	30	PASS
	48/5240	17.38	17.43	17.34	17.39	20.42	30	PASS
802.11ac VHT40	38/5190	8.92	9.16	8.98	9.22	12.20	30	PASS
	46/5230	15.10	15.34	14.89	15.13	18.25	30	PASS
802.11ac VHT80	42/5210	1.08	1.36	1.06	1.34	4.36	30	PASS

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And  $N_{SS}=2$ . According to KDB 662911 D01

Multiple Transmitter Output v02r01 2)f(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ ,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT} + \text{Array Gain} = 4 + 0 = 4 \text{ dBi} < 6 \text{ dBi}$ . So the power limit is 30dBm.



## U-NII-3

Network Standards	Channel/ Frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11ac VHT20	36/5180	18.70	18.75	18.91	18.96	21.87	30	PASS
	44/5220	18.62	18.67	18.76	18.81	21.75	30	PASS
	48/5240	18.08	18.13	18.56	18.61	21.39	30	PASS
802.11ac VHT40	38/5190	18.92	19.16	19.44	19.68	22.44	30	PASS
	46/5230	19.56	19.80	19.74	19.98	22.90	30	PASS
802.11ac VHT80	42/5210	16.75	17.03	17.03	17.31	20.18	30	PASS

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And  $N_{SS}=2$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ ,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT} + \text{Array Gain} = 4 + 0 = 4 \text{ dBi} < 6 \text{ dBi}$ . So the power limit is 30dBm.

### 5.3. Frequency Stability

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

##### 1. Frequency stability with respect to ambient temperature

- a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.
- c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in 5.6.
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

##### 2. Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.



- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

**Limit**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936\text{Hz}$





## Test Results

Voltage (V)	Temperature (°C)	U-NII-1 Test Results			
		5200MHz			
		1min	2min	5min	10min
12	0	5199.999402	5199.996118	5199.986629	5199.977226
12	5	5199.993370	5199.994544	5199.977152	5199.971406
12	10	5199.987865	5199.987347	5199.976179	5199.967189
12	15	5199.978390	5199.985260	5199.975513	5199.964182
12	20	5199.975467	5199.979512	5199.967497	5199.961062
12	30	5199.968282	5199.975339	5199.966451	5199.951746
12	35	5199.960827	5199.971358	5199.964069	5199.942791
12	40	5199.955715	5199.964006	5199.962120	5199.936615
11.4	25	5199.946876	5199.958760	5199.957170	5199.926745
12.6	25	5199.942540	5199.955091	5199.948982	5199.921795
MHz		-0.057460	-0.044909	-0.051018	-0.078205
PPM		-11.049982	-8.636435	-9.811089	-15.039498

Voltage (V)	Temperature (°C)	U-NII-3 Test Results			
		5785MHz			
		1min	2min	5min	10min
12	0	5785.005383	5785.000651	5784.994343	5784.987627
12	5	5784.997157	5784.998256	5784.992831	5784.984239
12	10	5784.993271	5784.991273	5784.990695	5784.978299
12	15	5784.986356	5784.989272	5784.988745	5784.968516
12	20	5784.976464	5784.987352	5784.981545	5784.964863
12	30	5784.967383	5784.985788	5784.973511	5784.957800
12	35	5784.962825	5784.978685	5784.970095	5784.952075
12	40	5784.956121	5784.977194	5784.960170	5784.951012
11.4	25	5784.951707	5784.972312	5784.952642	5784.948059
12.6	25	5784.948656	5784.963159	5784.951627	5784.942347
MHz		-0.051344	-0.036841	-0.048373	-0.057653
PPM		-8.875340	-6.368364	-8.361801	-9.966031