




9KHz~~~30MHz

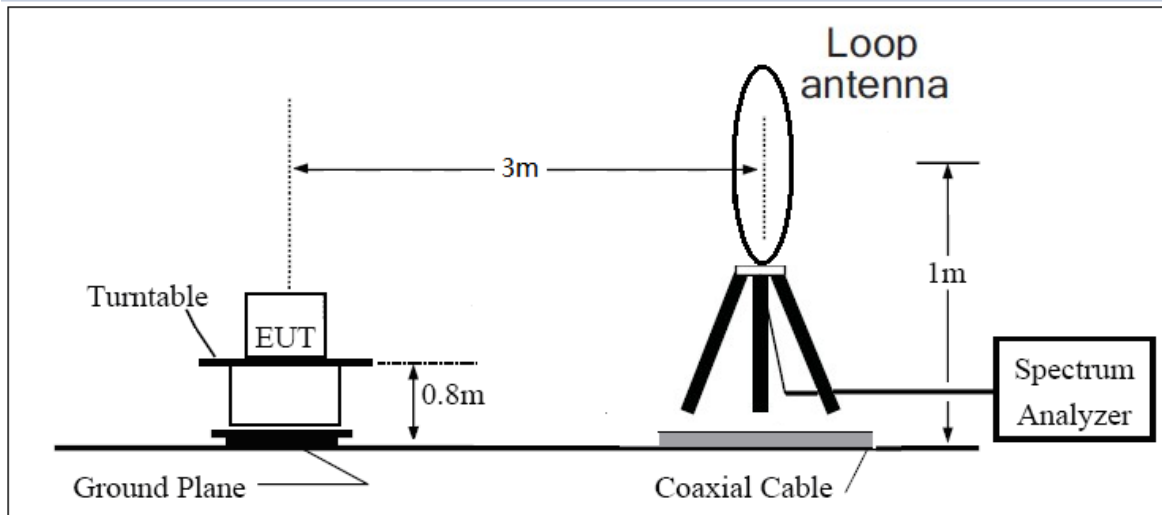

30MHz~~~ 1GHz

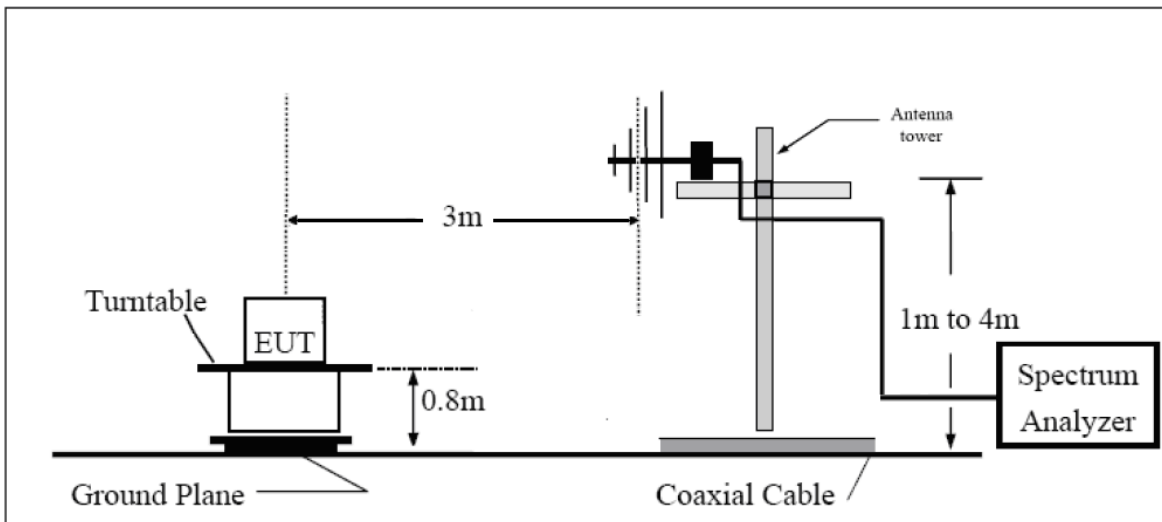

Above 1GHz

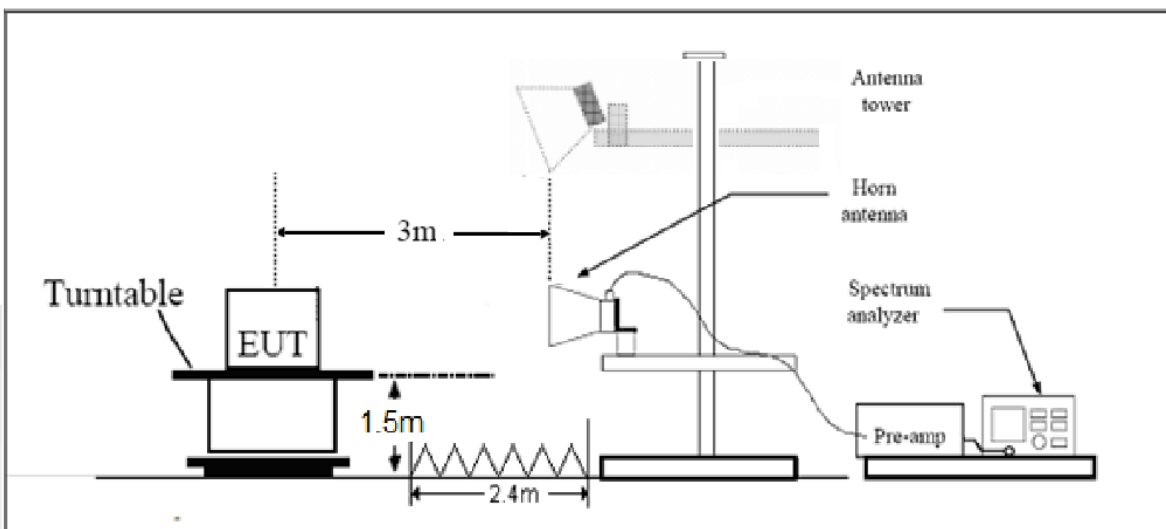

Note: Area side:2.4mX3.6m

**Limits**

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、 $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、 $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54



MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.02 dB
200MHz-1GHz	3.28 dB
1GHz-18G	3.70 dB
18GHz-26.5GHz	5.78 dB
26.5G-40GHz	5.82 dB





Test Results:

The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.

The signal beyond the limit is carrier.

U-NII-1

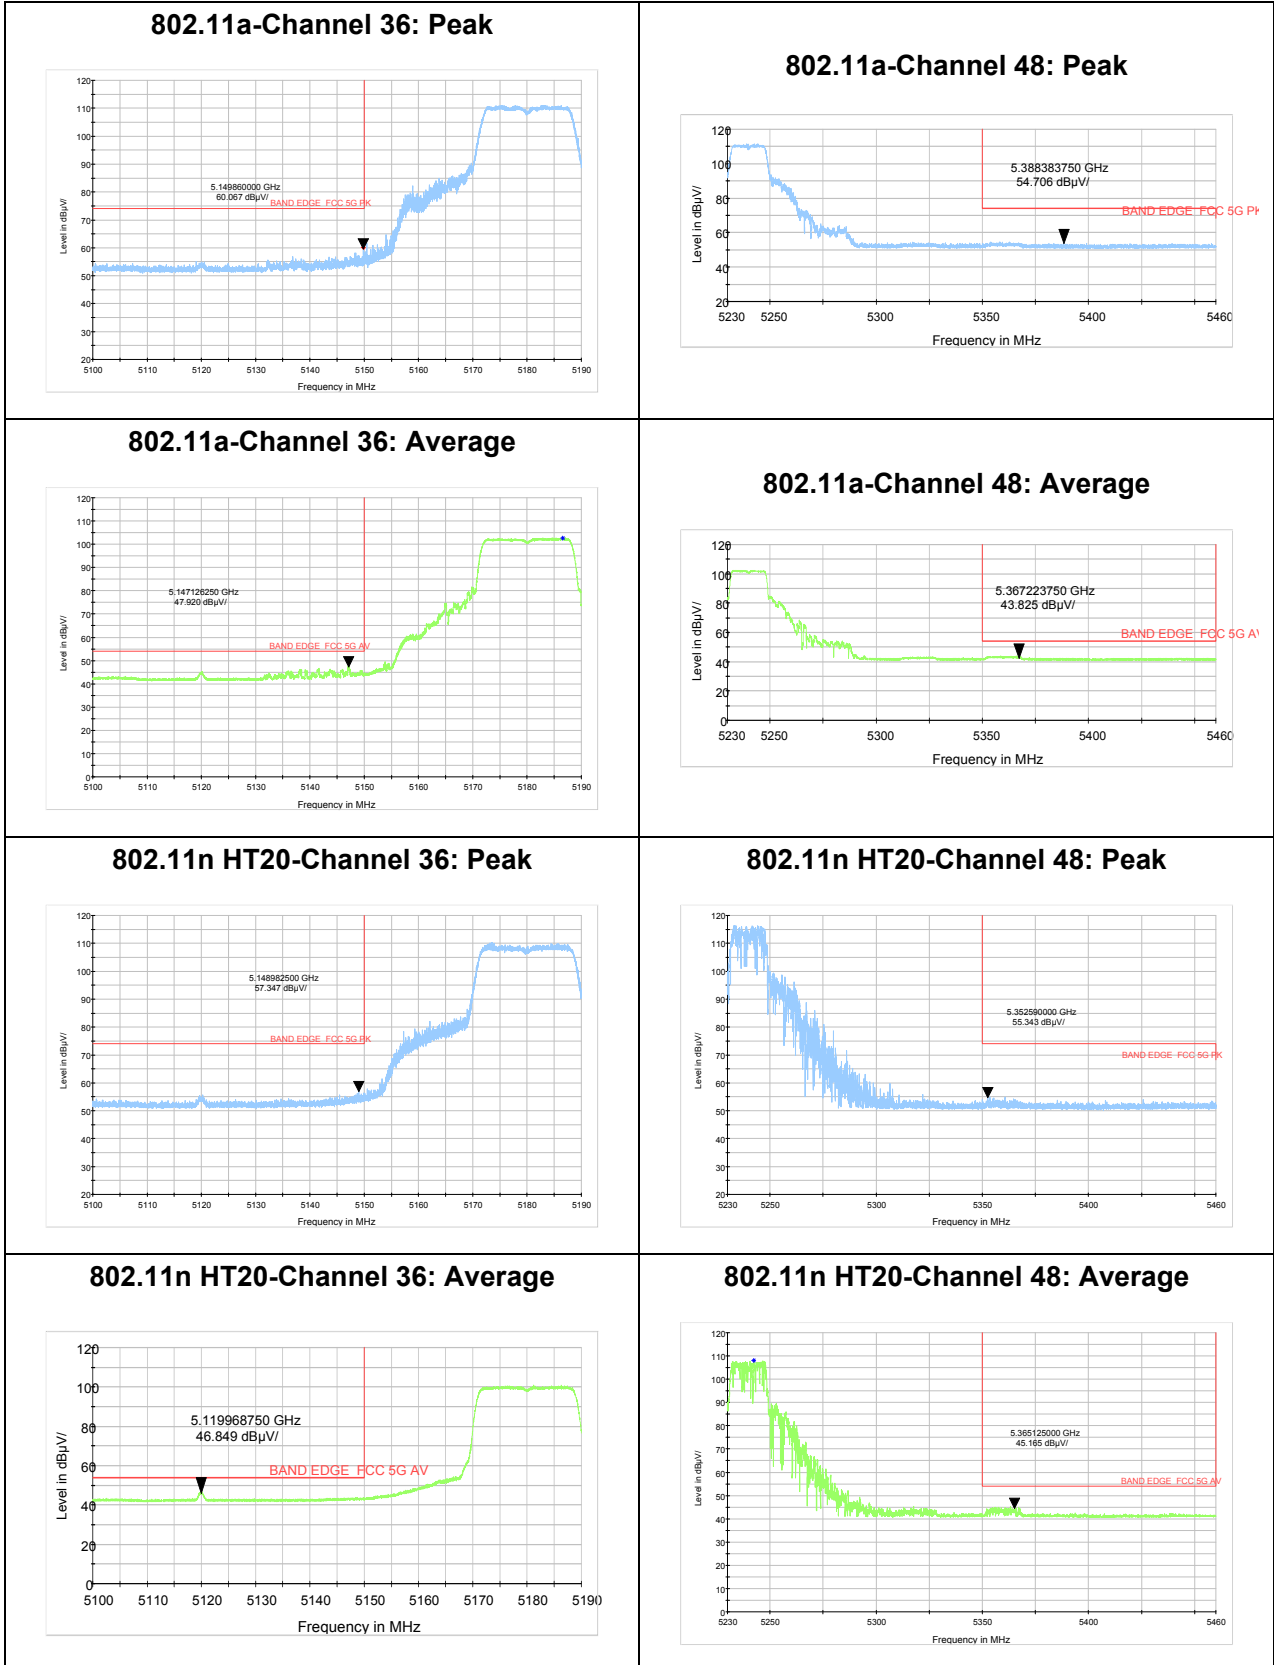


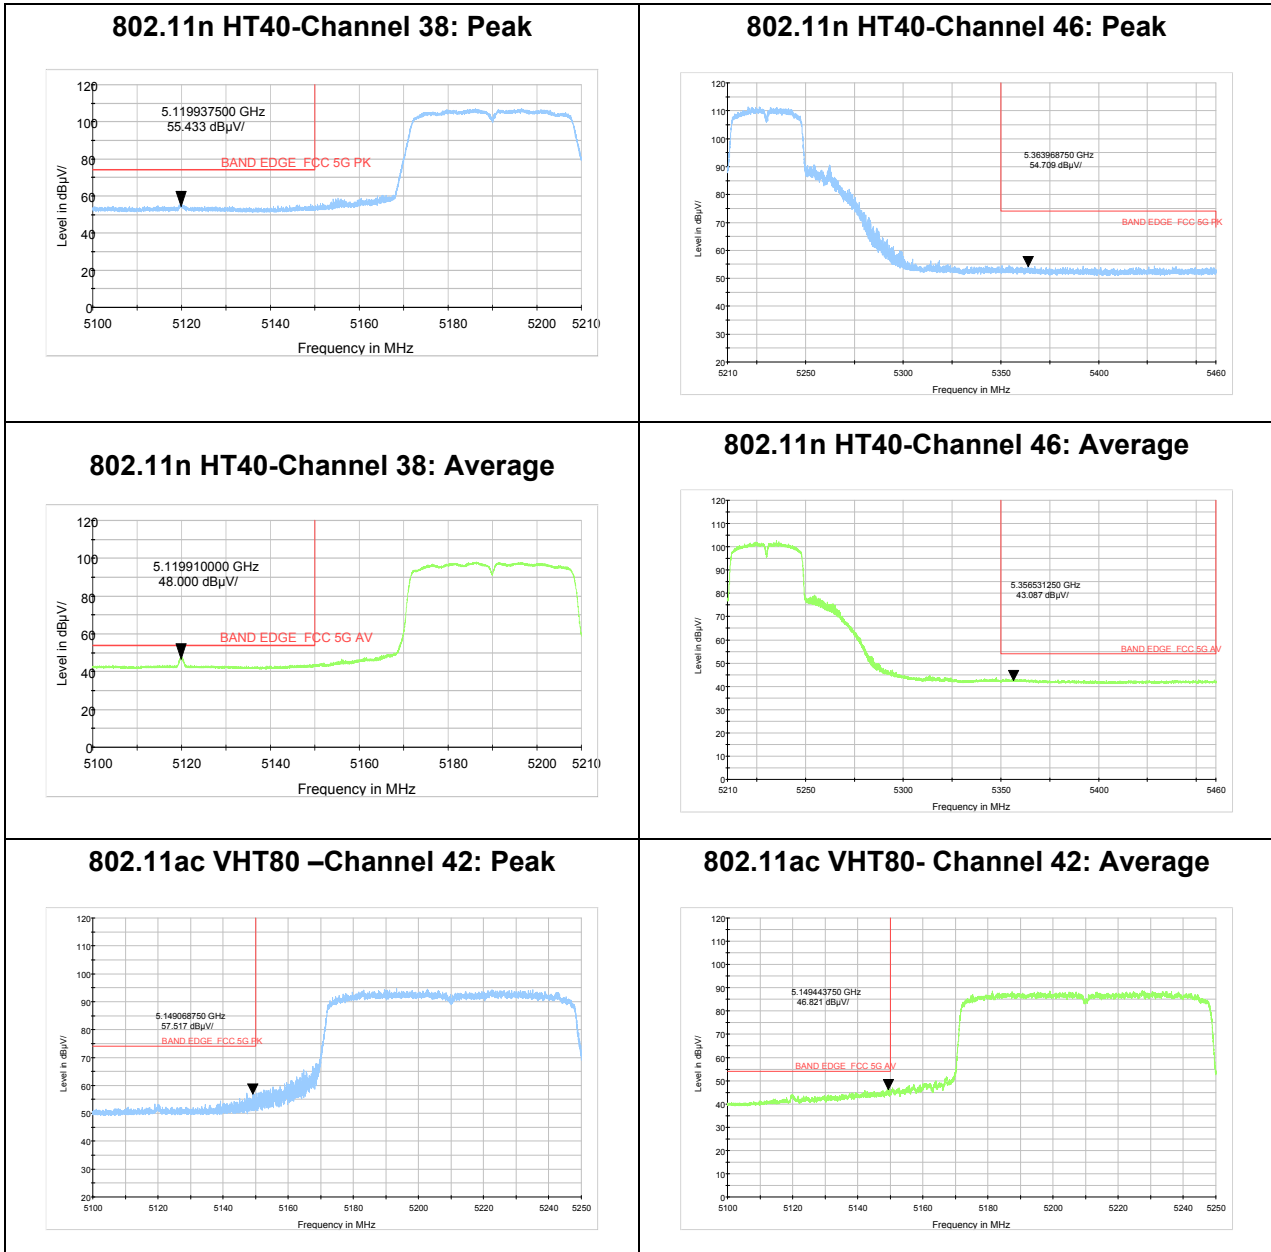




U-NII-3


802.11a-Channel 149: Peak

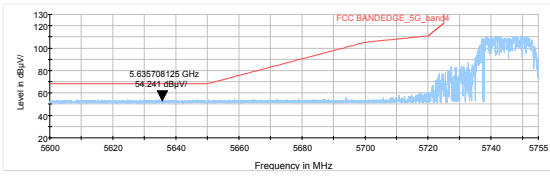


802.11a-Channel 165: Peak

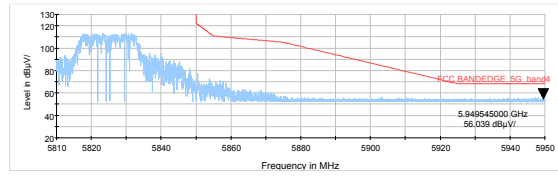


802.11n HT20-Channel 149: Peak

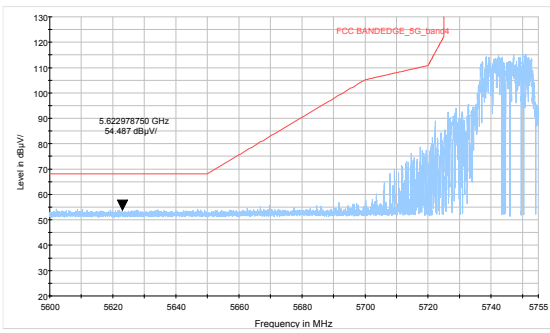


802.11n HT20-Channel 165: Peak

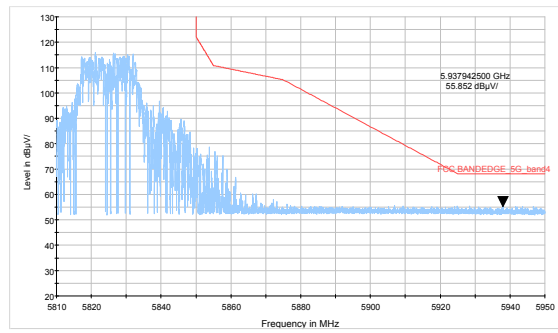


802.11n HT40-Channel 151: Peak

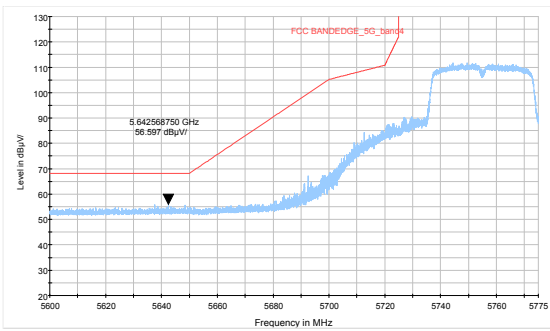

802.11n HT40-Channel 159: Peak

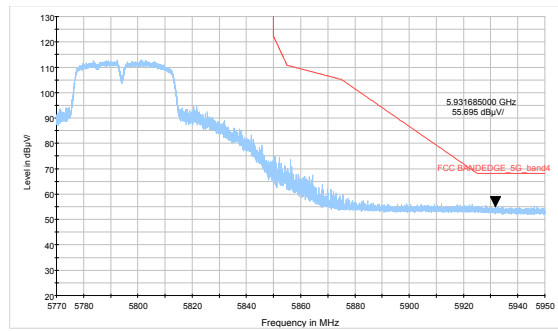

802.11ac VHT80- Channel 155: Peak

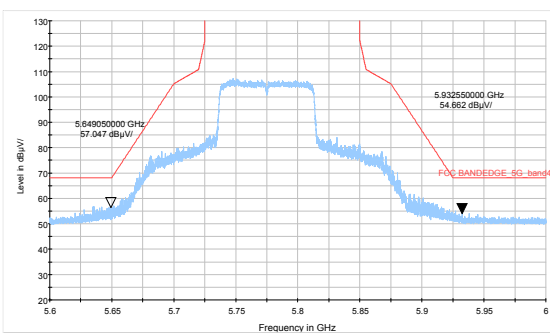



Result of RE

Test result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 26.5GHz-40GHz are more than 20dB below the limit are not reported.

After the pretest, MIMO was selected as the worst antenna. SISO Antenna 2 was selected as the worst SISO antenna.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11a, Channel 36 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


Continuous TX mode:

FCC RE 9K-90KHz AV

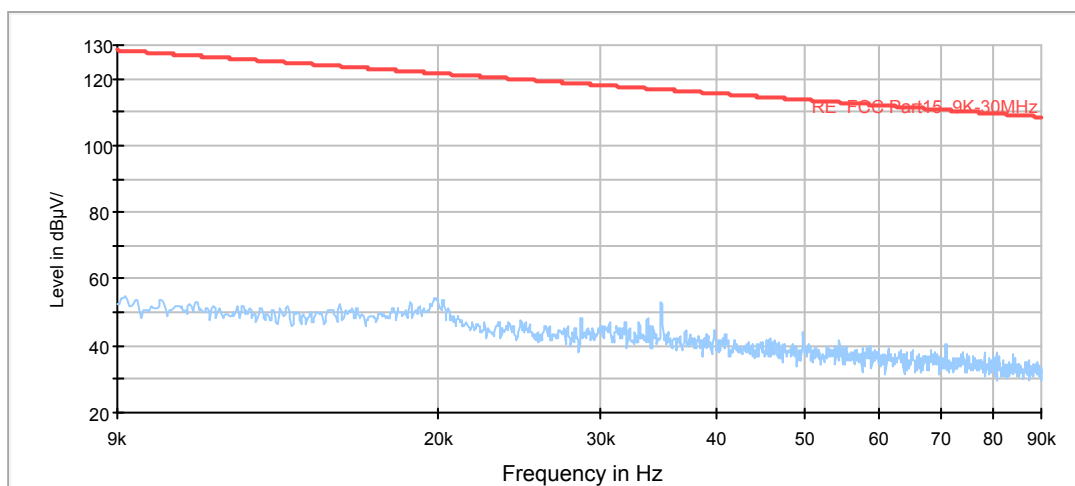


Radiates Emission from 9KHz to 90KHz

FCC RE 90K-110KHz QP

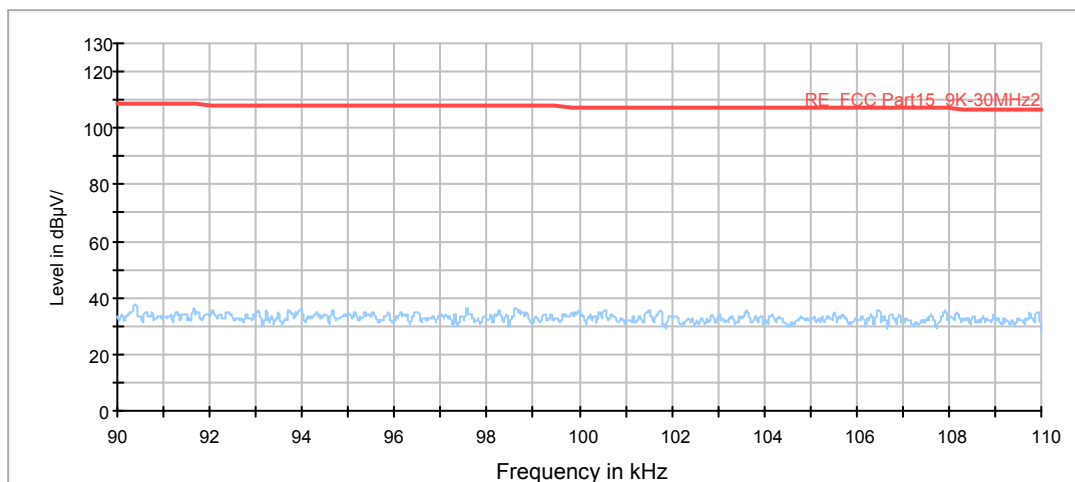


Radiates Emission from 90KHz to 110KHz

FCC RE 110K-490KHz AV

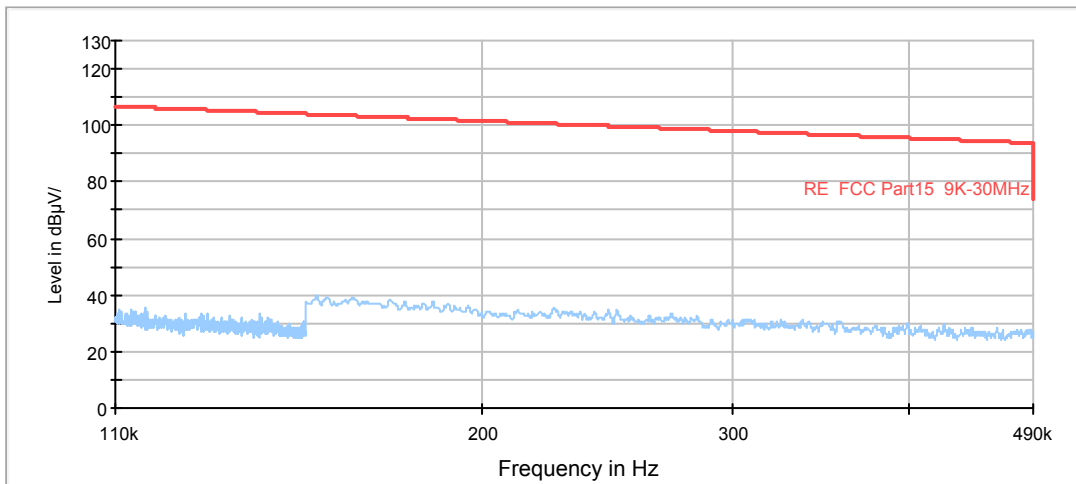


Radiates Emission from 110KHz to 490KHz

FCC RE 490K-30MHz QP

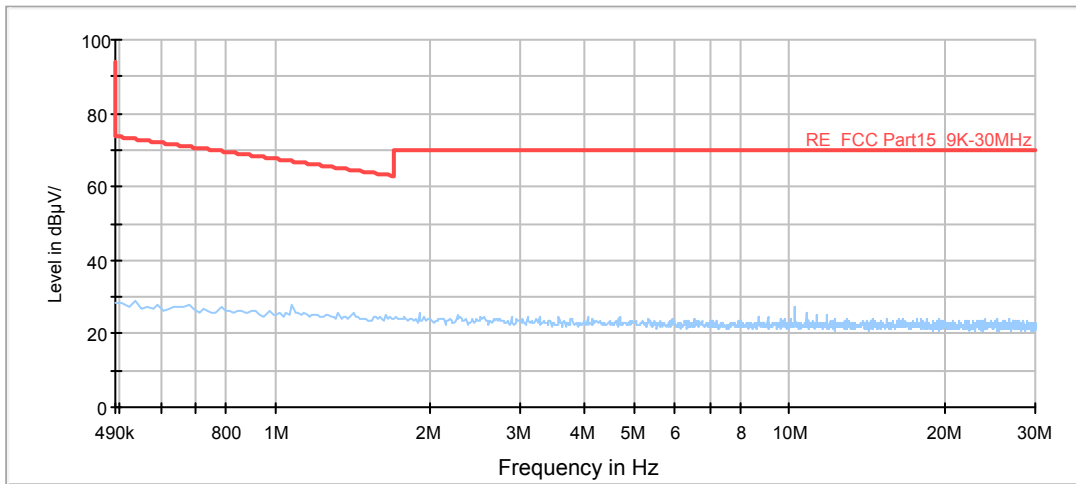

Radiates Emission from 490KHz to 30MHz

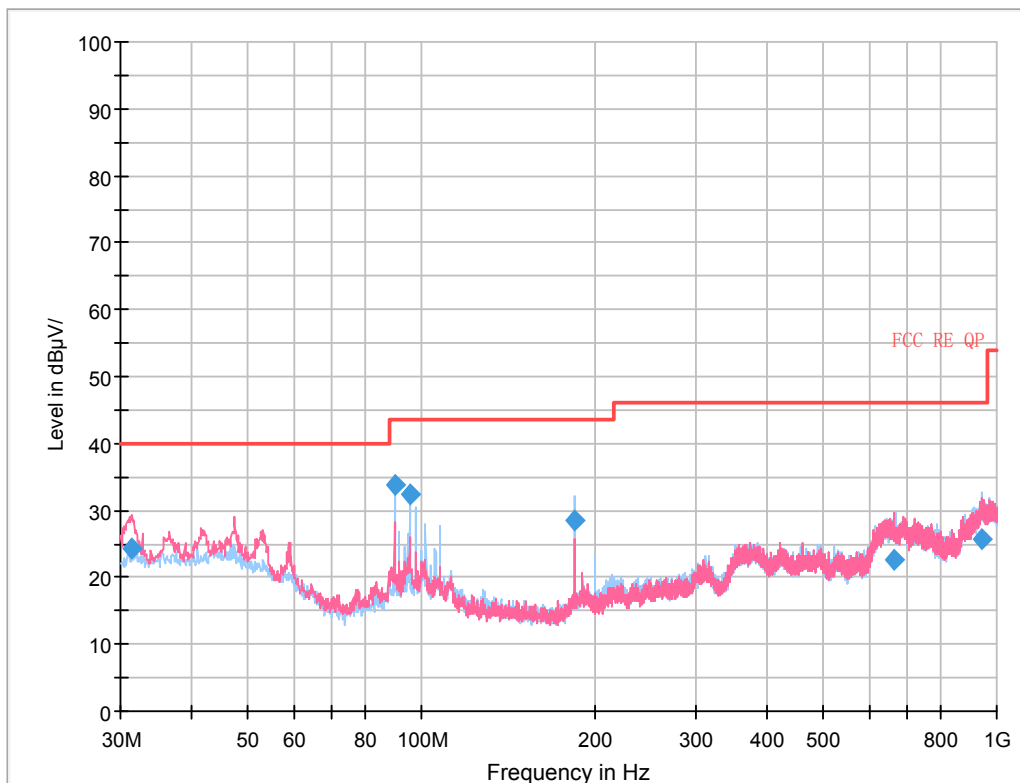


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
31.416363	24.41	100.0	V	270.0	-3.1	15.59	40.00
89.912756	33.69	198.0	H	274.0	-10.4	9.81	43.50
95.516313	32.53	197.0	H	273.0	-10.2	10.97	43.50
184.249425	28.38	109.0	H	51.0	-13.0	15.12	43.50
660.577250	22.57	109.0	V	172.0	-1.7	23.43	46.00
942.605500	25.77	175.0	H	125.0	2.0	20.23	46.00


Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

802.11a CH36

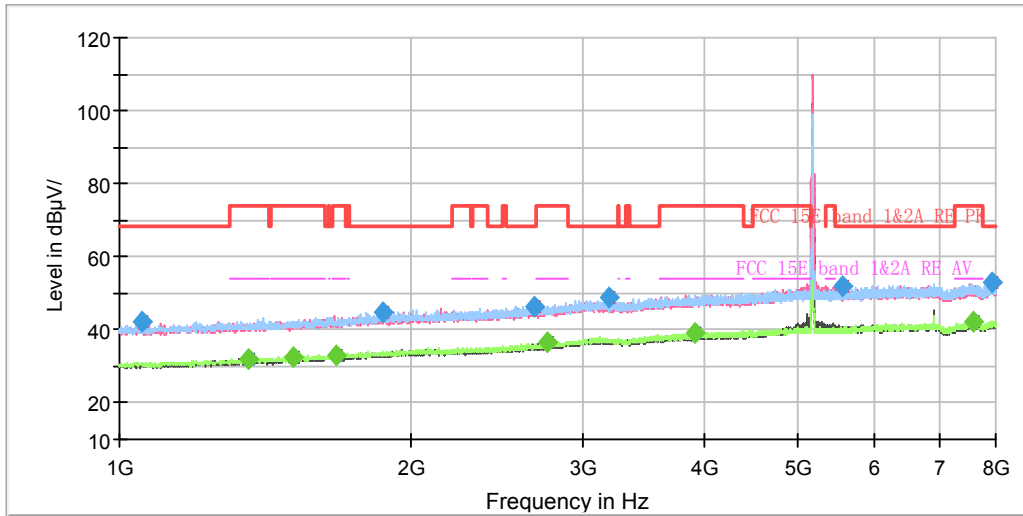

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

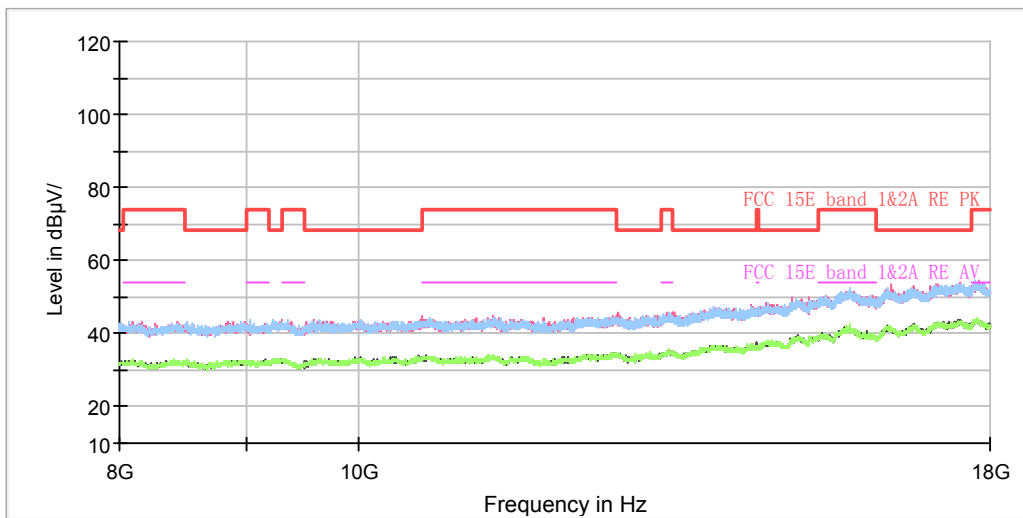

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1056.000000	42.26	---	68.20	25.94	200.0	H	32.0	-8.4
1359.625000	---	32.18	54.00	21.82	200.0	H	224.0	-6.7
1511.875000	---	32.33	54.00	21.67	200.0	V	354.0	-5.9
1672.000000	---	33.17	54.00	20.83	100.0	H	224.0	-5.0
1869.750000	44.94	---	68.20	23.26	100.0	H	82.0	-3.9
2672.125000	46.45	---	68.20	21.75	200.0	V	36.0	-0.5
2763.125000	---	36.67	54.00	17.33	100.0	H	341.0	-0.1
3191.000000	48.72	---	68.20	19.48	200.0	V	358.0	1.9
3925.125000	---	38.92	54.00	15.08	200.0	H	202.0	4.2
5571.000000	51.78	---	68.20	16.42	200.0	V	196.0	7.5
7600.125000	---	42.44	54.00	11.56	100.0	H	0.0	10.3
7938.750000	52.76	---	68.20	15.44	200.0	H	299.0	10.5


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH40

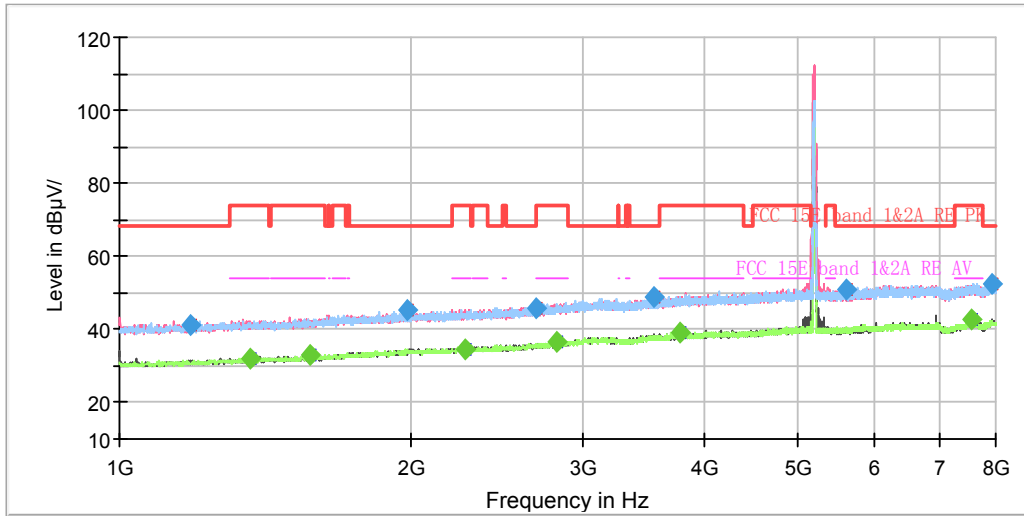

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

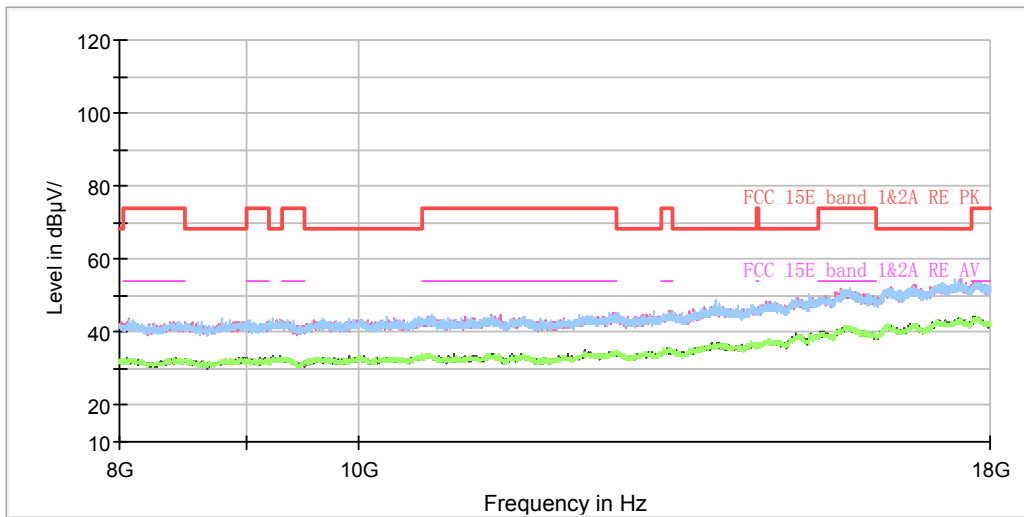

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1181.125000	41.37	---	68.20	26.83	200.0	V	249.0	-7.7
1361.375000	---	31.76	54.00	22.24	100.0	V	139.0	-6.7
1574.000000	---	33.24	54.00	20.76	100.0	V	231.0	-5.6
1982.625000	45.06	---	68.20	23.14	100.0	V	277.0	-3.3
2269.625000	---	34.55	54.00	19.45	200.0	V	316.0	-2.2
2686.125000	46.05	---	68.20	22.15	200.0	H	338.0	-0.5
2822.625000	---	36.55	54.00	17.45	200.0	H	282.0	0.3
3561.125000	48.94	---	68.20	19.26	200.0	H	5.0	3.1
3789.500000	---	39.02	54.00	14.98	100.0	H	156.0	3.8
5617.375000	50.80	---	68.20	17.40	100.0	V	298.0	7.4
7567.750000	---	42.58	54.00	11.42	200.0	H	260.0	10.3
7934.375000	52.70	---	68.20	15.50	100.0	H	145.0	10.5


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH48

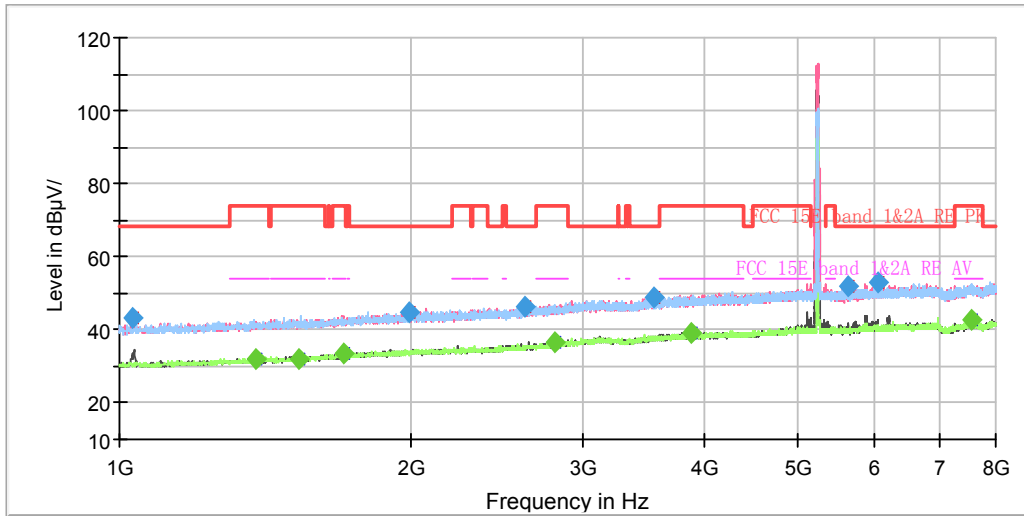

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

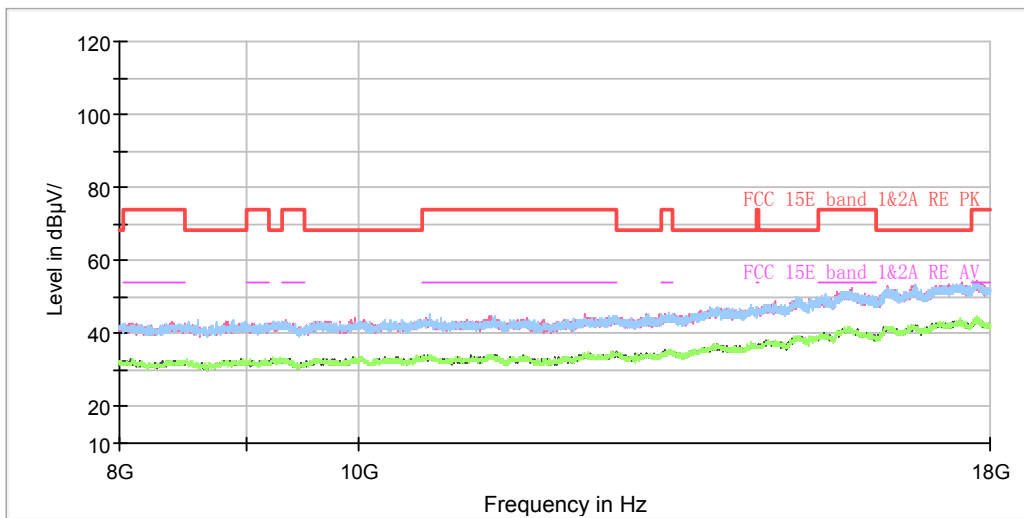


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1032.375000	43.49	---	68.20	24.71	100.0	V	19.0	-8.5
1381.500000	---	32.09	54.00	21.91	200.0	V	120.0	-6.6
1531.125000	---	32.16	54.00	21.84	100.0	V	37.0	-5.8
1702.625000	---	33.45	54.00	20.55	200.0	V	167.0	-4.8
1988.750000	44.87	---	68.20	23.33	100.0	H	216.0	-3.2
2611.750000	46.31	---	68.20	21.89	100.0	V	9.0	-0.8
2809.500000	---	36.84	54.00	17.16	100.0	H	170.0	0.2
3555.000000	48.85	---	68.20	19.35	100.0	V	330.0	3.0
3875.250000	---	39.19	54.00	14.81	100.0	H	138.0	4.0
5636.625000	52.14	---	68.20	16.06	200.0	H	306.0	7.5
6051.375000	53.10	---	68.20	15.10	200.0	V	238.0	8.2
7546.750000	---	42.49	54.00	11.51	200.0	H	0.0	10.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH149

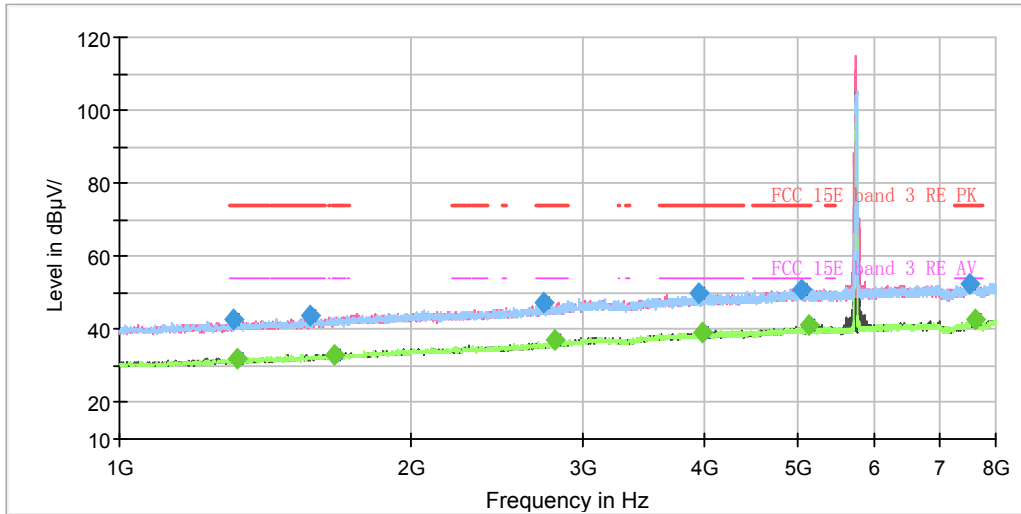

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

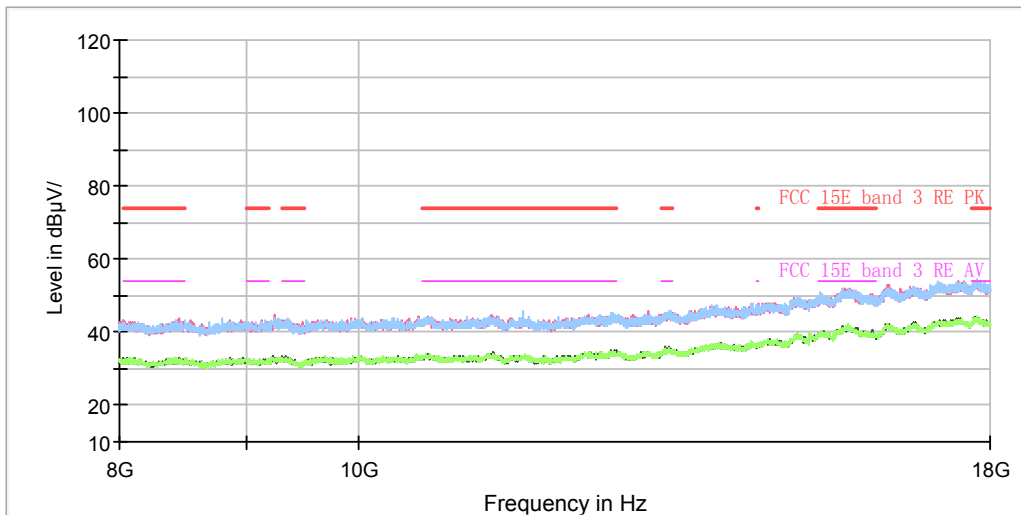


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1313.250000	42.60	---	74.00	31.40	100.0	V	80.0	-7.0
1319.375000	---	32.17	54.00	21.83	100.0	H	99.0	-6.9
1570.500000	43.71	---	74.00	30.29	100.0	V	126.0	-5.6
1662.375000	---	33.28	54.00	20.72	100.0	V	170.0	-5.0
2741.250000	47.15	---	74.00	26.85	200.0	V	320.0	-0.2
2806.000000	---	37.01	54.00	16.99	100.0	H	232.0	0.2
3961.000000	50.06	---	74.00	23.94	100.0	V	286.0	4.3
3995.125000	---	39.35	54.00	14.65	200.0	H	358.0	4.4
5053.000000	51.03	---	74.00	22.97	200.0	V	128.0	6.7
5128.250000	---	41.02	54.00	12.98	100.0	H	135.0	6.8
7517.875000	52.43	---	74.00	21.57	200.0	H	270.0	10.2
7610.625000	---	42.49	54.00	11.51	100.0	H	288.0	10.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

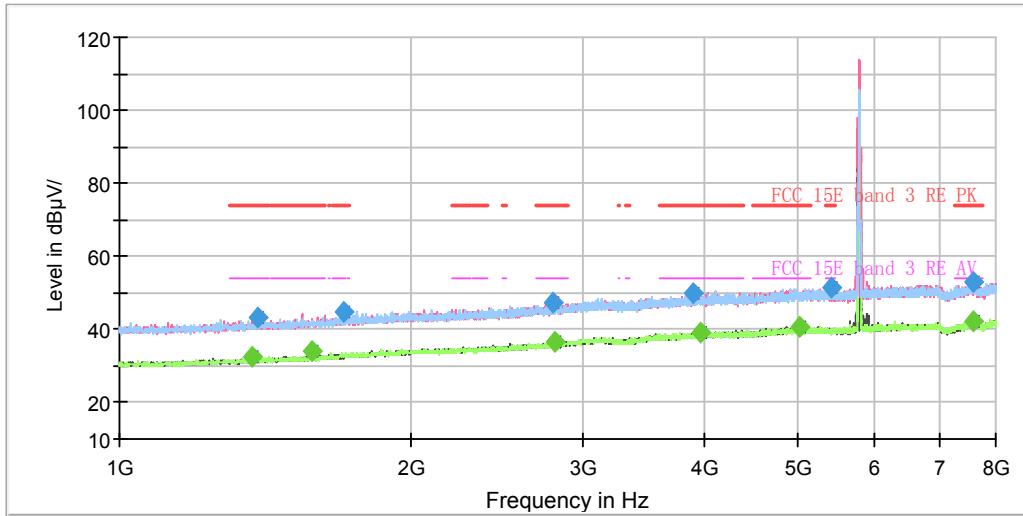

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

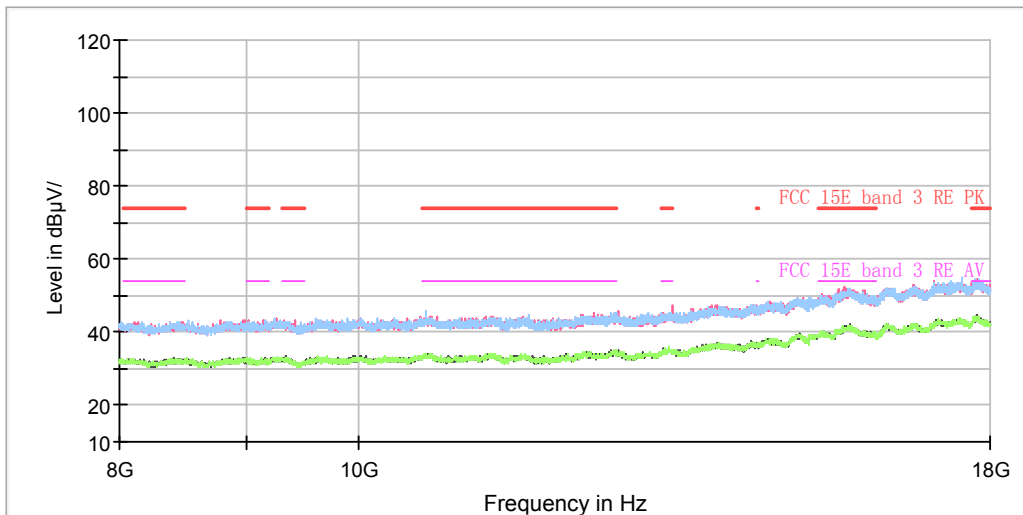


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1370.125000	---	32.31	54.00	21.69	100.0	H	30.0	-6.6
1387.625000	43.34	---	74.00	30.66	200.0	H	214.0	-6.5
1581.000000	---	33.97	54.00	20.03	200.0	V	341.0	-5.5
1701.750000	44.78	---	74.00	29.22	100.0	V	209.0	-4.8
2792.875000	47.33	---	74.00	26.67	100.0	H	52.0	0.1
2806.875000	---	36.62	54.00	17.38	200.0	H	167.0	0.2
3899.750000	49.73	---	74.00	24.27	200.0	V	171.0	4.0
3978.500000	---	39.20	54.00	14.80	200.0	H	86.0	4.3
5017.125000	---	40.82	54.00	13.18	100.0	V	288.0	6.7
5419.625000	51.22	---	74.00	22.78	100.0	V	242.0	7.1
7571.250000	---	42.24	54.00	11.76	200.0	V	106.0	10.3
7582.625000	52.76	---	74.00	21.24	100.0	H	333.0	10.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH36

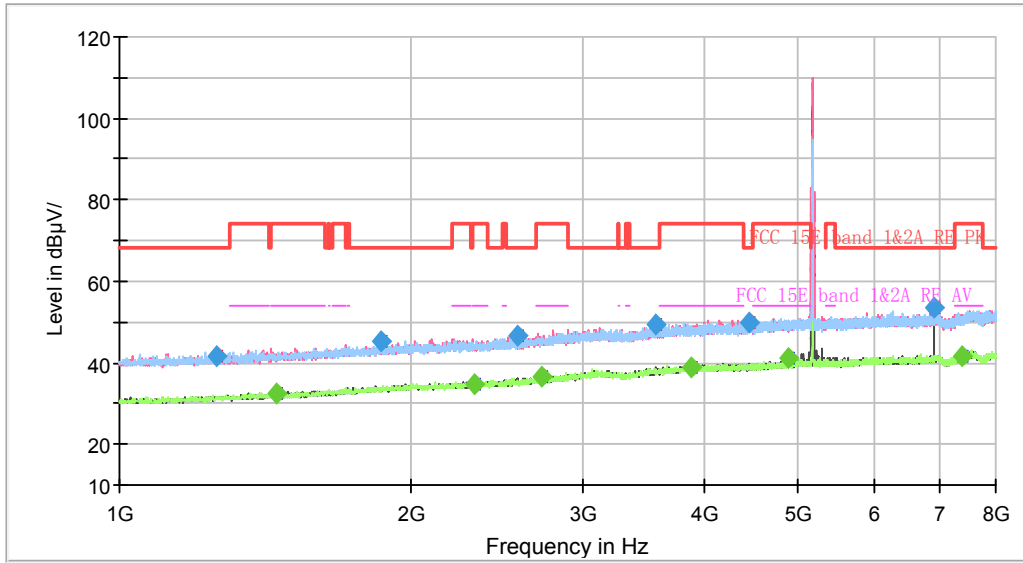

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

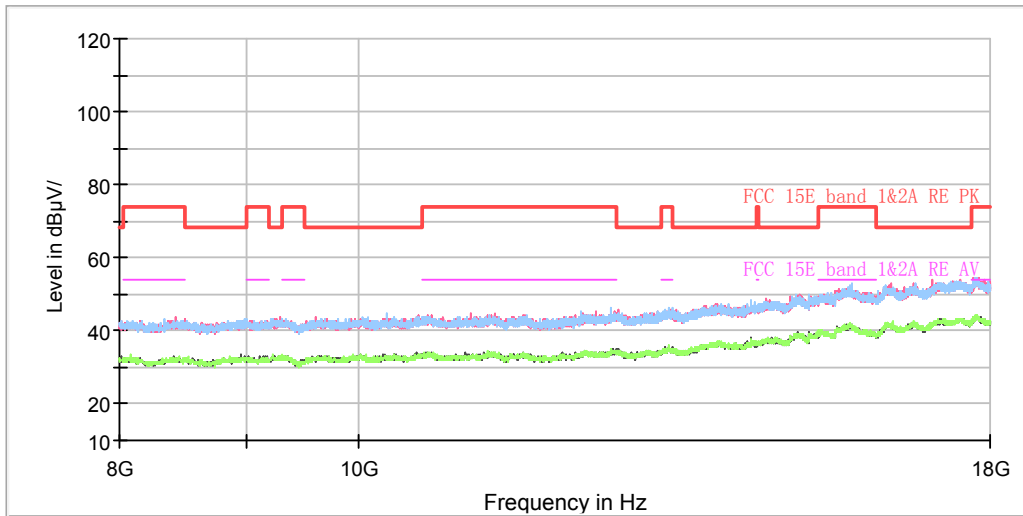


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1259.875000	41.59	---	68.20	26.61	200.0	H	23.0	-7.3
1450.625000	---	32.54	54.00	21.46	100.0	V	145.0	-6.2
1857.500000	45.10	---	68.20	23.10	200.0	V	309.0	-3.9
2323.875000	---	34.92	54.00	19.08	200.0	V	316.0	-1.9
2567.125000	46.50	---	68.20	21.70	100.0	V	13.0	-0.9
2722.000000	---	36.42	54.00	17.58	200.0	H	126.0	-0.3
3576.875000	49.53	---	68.20	18.67	200.0	H	164.0	3.2
3879.625000	---	39.03	54.00	14.97	200.0	V	349.0	4.0
4457.125000	50.08	---	68.20	18.12	100.0	V	177.0	5.1
4897.250000	---	41.15	54.00	12.85	100.0	V	35.0	6.4
6907.125000	53.69	---	68.20	14.51	200.0	V	195.0	9.1
7392.750000	---	41.51	54.00	12.49	100.0	V	99.0	10.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH40

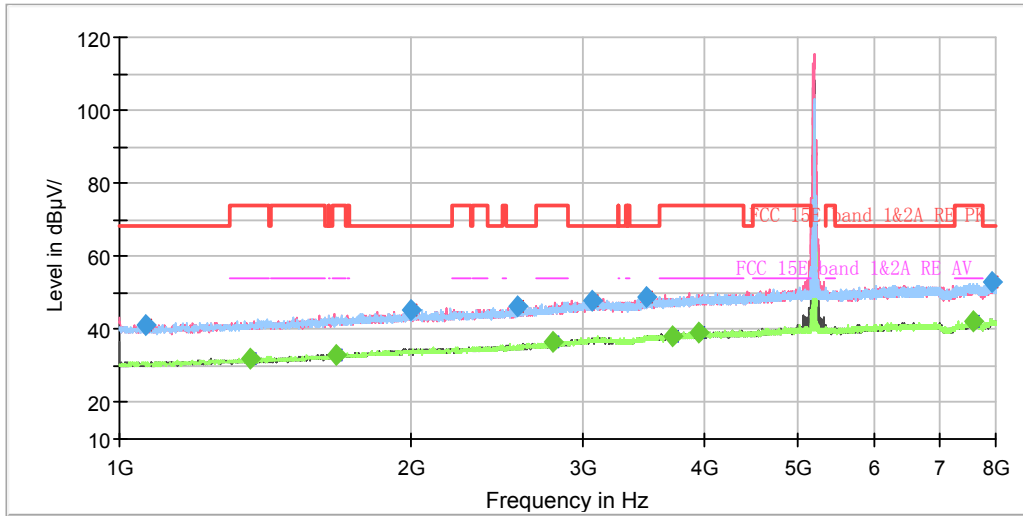

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

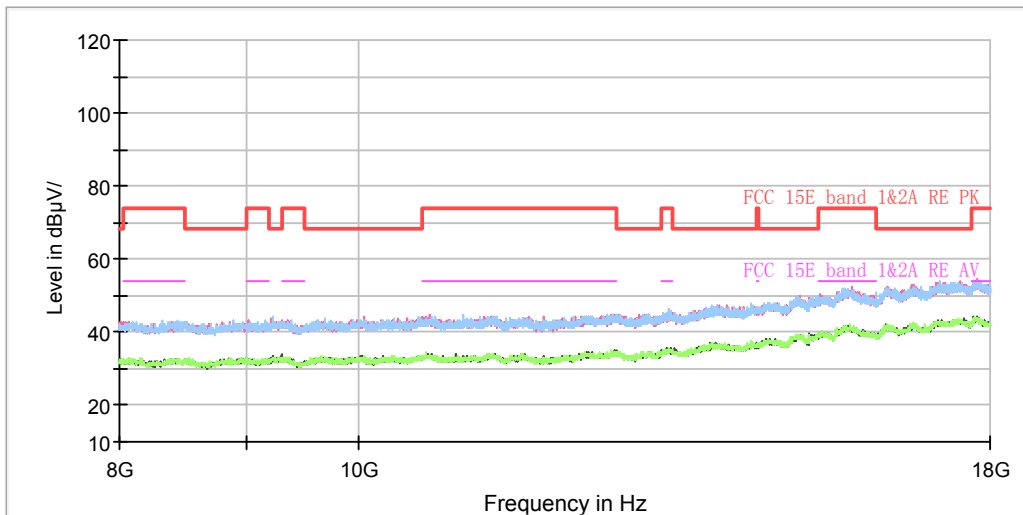


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1063.000000	41.43	---	68.20	26.77	200.0	H	45.0	-8.4
1362.250000	---	32.17	54.00	21.83	200.0	H	295.0	-6.7
1671.125000	---	33.13	54.00	20.87	200.0	H	273.0	-5.0
1994.875000	45.16	---	68.20	23.04	100.0	H	342.0	-3.2
2575.000000	46.41	---	68.20	21.79	200.0	V	268.0	-0.9
2798.125000	---	36.55	54.00	17.45	200.0	V	65.0	0.2
3075.500000	48.09	---	68.20	20.11	200.0	H	108.0	1.7
3489.375000	48.90	---	68.20	19.30	100.0	H	346.0	2.7
3716.875000	---	38.10	54.00	15.90	100.0	V	141.0	3.6
3945.250000	---	39.40	54.00	14.60	200.0	V	104.0	4.3
7572.125000	---	42.36	54.00	11.64	200.0	V	188.0	10.3
7920.375000	52.94	---	68.20	15.26	200.0	V	335.0	10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH48

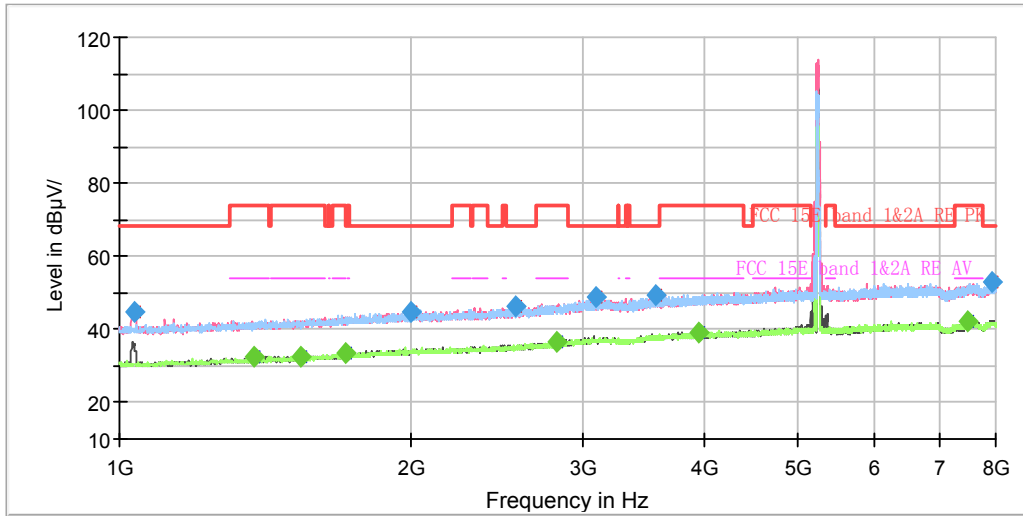

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

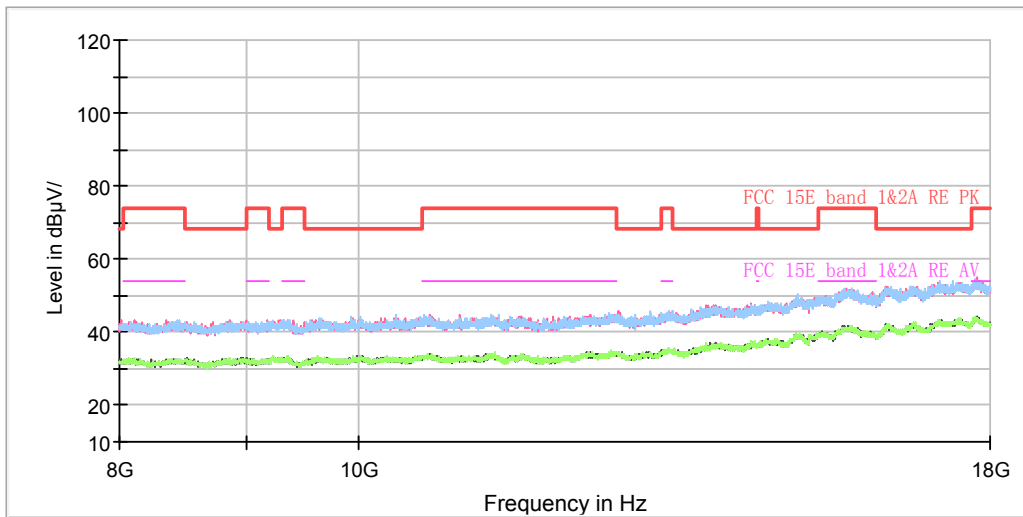

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1034.125000	44.93	---	68.20	23.27	100.0	V	142.0	-8.5
1374.500000	---	32.42	54.00	21.58	100.0	H	154.0	-6.6
1538.125000	---	32.43	54.00	21.57	200.0	V	307.0	-5.8
1707.875000	---	33.70	54.00	20.30	200.0	H	27.0	-4.8
1994.875000	44.76	---	68.20	23.44	200.0	H	15.0	-3.2
2556.625000	46.35	---	68.20	21.85	100.0	V	26.0	-1.0
2820.000000	---	36.48	54.00	17.52	200.0	V	297.0	0.3
3101.750000	48.91	---	68.20	19.29	200.0	H	198.0	1.8
3576.000000	49.30	---	68.20	18.90	100.0	V	156.0	3.2
3959.250000	---	39.27	54.00	14.73	100.0	H	105.0	4.3
7476.750000	---	42.32	54.00	11.68	100.0	H	298.0	10.1
7925.625000	53.10	---	68.20	15.10	100.0	V	107.0	10.5


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH149

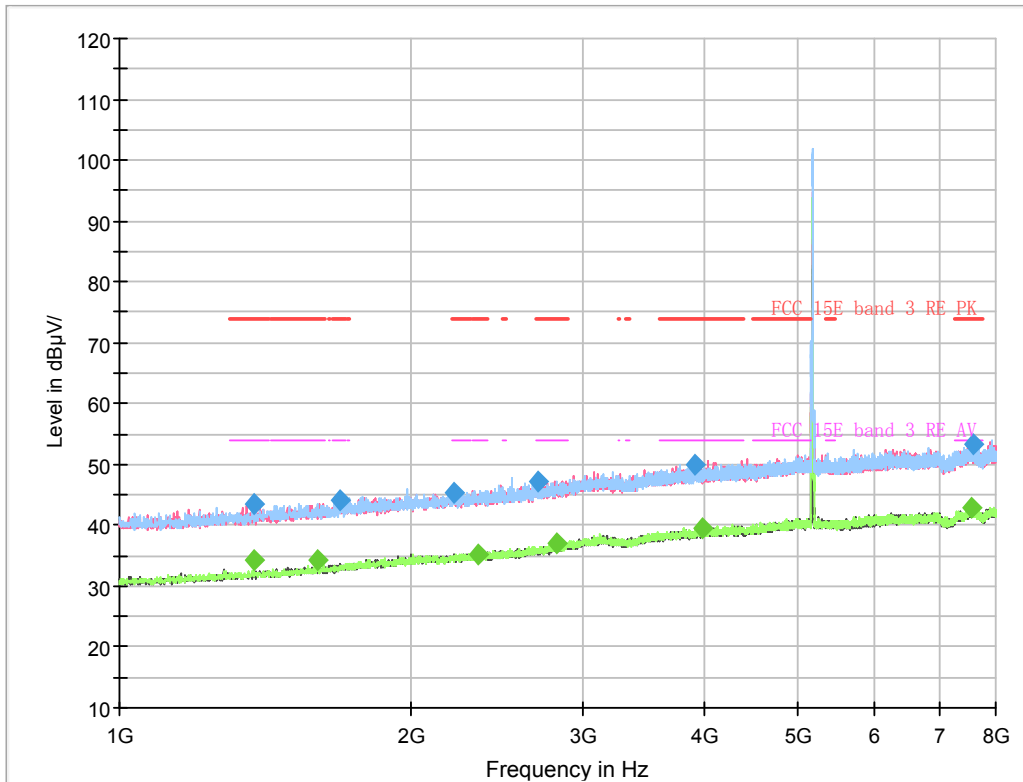

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

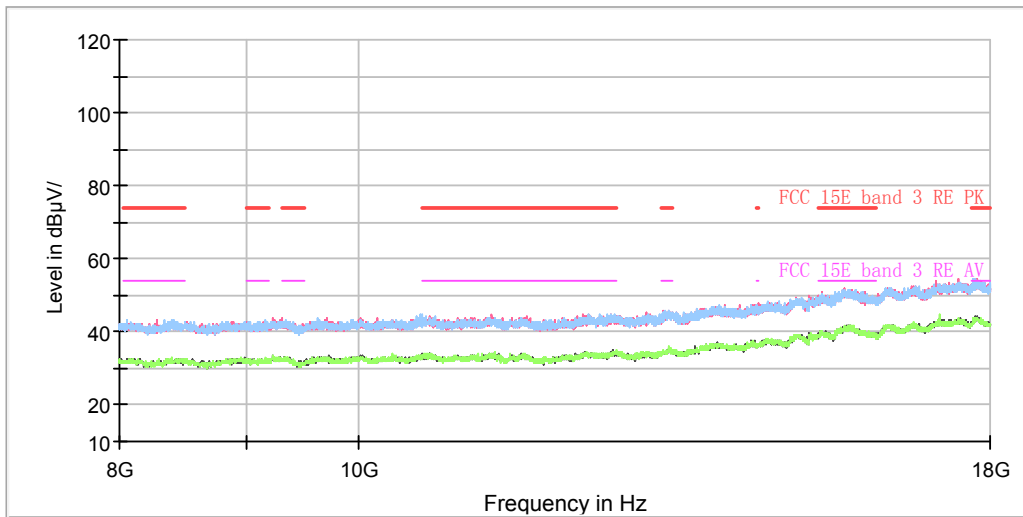


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1374.500000	---	34.13	54.00	19.87	100.0	H	217.0	-6.6
1375.375000	43.35	---	74.00	30.65	100.0	H	310.0	-6.6
1599.375000	---	34.42	54.00	19.58	100.0	H	234.0	-5.4
1686.875000	44.07	---	74.00	29.93	100.0	H	149.0	-4.9
2207.500000	45.46	---	74.00	28.54	100.0	H	217.0	-3.3
2347.500000	---	35.28	54.00	18.72	100.0	V	91.0	-3.0
2703.625000	47.10	---	74.00	26.90	200.0	V	208.0	-0.4
2821.750000	---	36.90	54.00	17.10	200.0	V	186.0	0.3
3918.125000	50.01	---	74.00	23.99	200.0	H	107.0	4.2
3984.625000	---	39.48	54.00	14.52	200.0	V	275.0	4.3
7545.000000	---	42.83	54.00	11.17	100.0	V	237.0	10.3
7597.500000	53.20	---	74.00	20.80	100.0	H	162.0	10.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH157

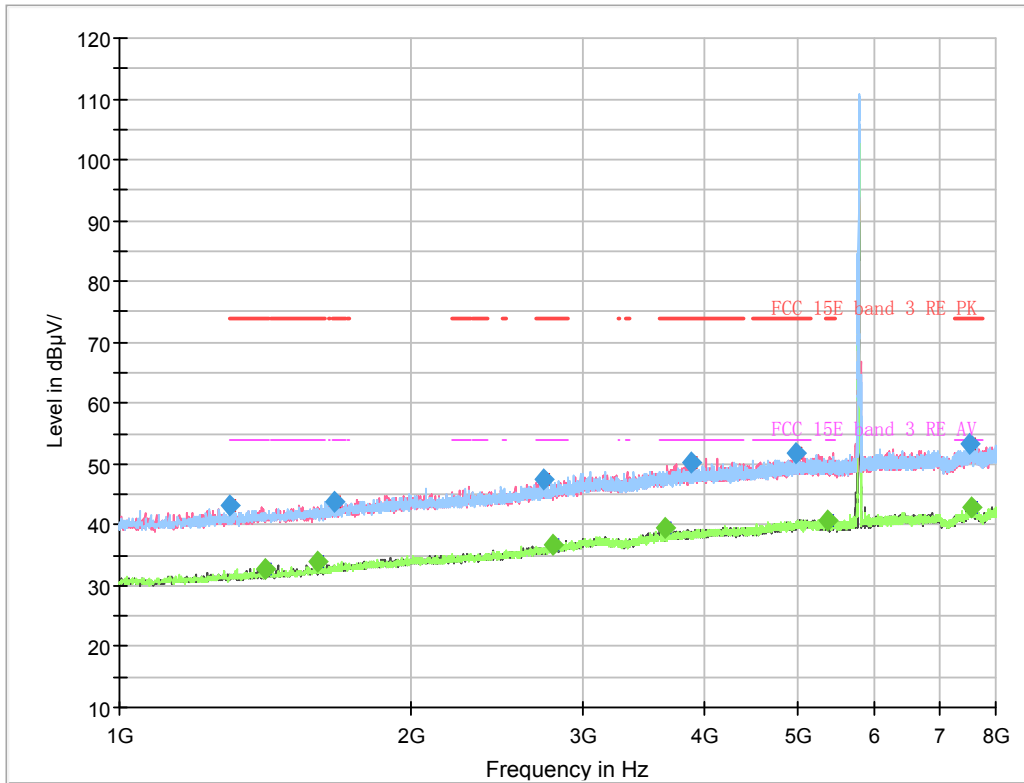

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

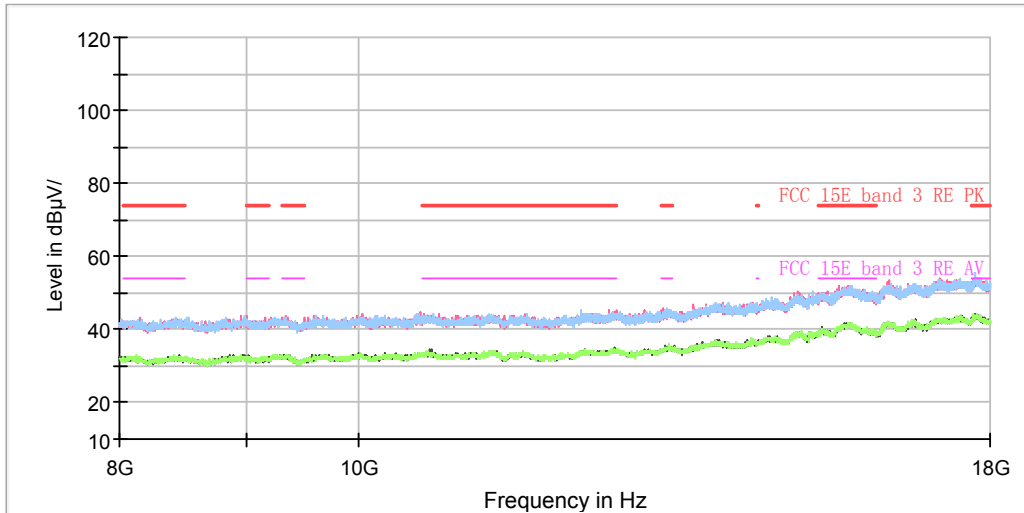


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1300.125000	43.29	---	74.00	30.71	100.0	H	344.0	-7.0
1412.125000	---	32.71	54.00	21.29	200.0	H	264.0	-6.4
1599.375000	---	34.00	54.00	20.00	200.0	H	222.0	-5.4
1664.125000	43.75	---	74.00	30.25	100.0	H	177.0	-5.0
2732.500000	47.38	---	74.00	26.62	200.0	V	184.0	-0.2
2800.750000	---	36.87	54.00	17.13	100.0	V	156.0	0.2
3648.625000	---	39.35	54.00	14.65	200.0	V	231.0	3.4
3881.375000	50.28	---	74.00	23.72	100.0	V	233.0	4.0
4969.875000	51.74	---	74.00	22.26	200.0	H	260.0	6.5
5372.375000	---	40.85	54.00	13.15	100.0	H	151.0	7.1
7514.375000	53.36	---	74.00	20.64	200.0	H	3.0	10.2
7547.625000	---	42.87	54.00	11.13	200.0	H	100.0	10.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH38

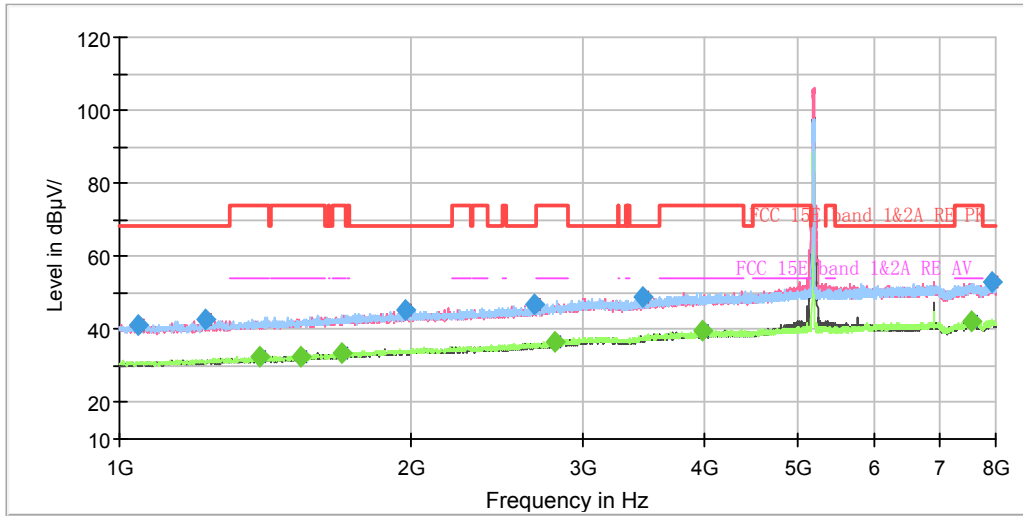

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

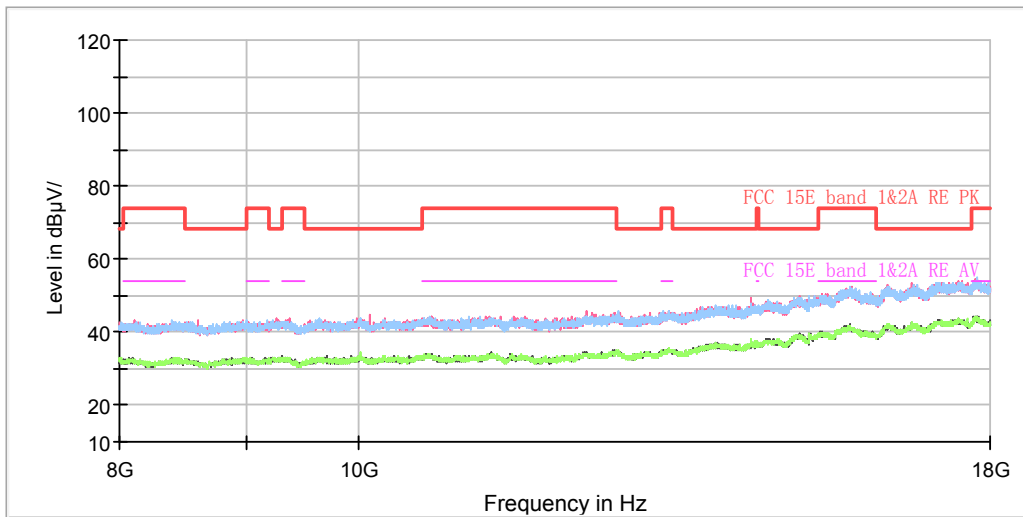


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1047.250000	41.36	---	68.20	26.84	100.0	H	357.0	-8.4
1227.500000	42.59	---	68.20	25.61	200.0	V	14.0	-7.4
1392.000000	---	32.47	54.00	21.53	100.0	H	23.0	-6.5
1539.000000	---	32.28	54.00	21.72	200.0	V	207.0	-5.8
1691.250000	---	33.71	54.00	20.29	200.0	H	74.0	-4.9
1966.875000	45.42	---	68.20	22.78	100.0	V	295.0	-3.4
2674.750000	46.93	---	68.20	21.27	100.0	V	214.0	-0.5
2815.625000	---	36.73	54.00	17.27	200.0	H	351.0	0.2
3467.500000	48.79	---	68.20	19.41	200.0	V	160.0	2.6
3982.000000	---	39.44	54.00	14.56	200.0	V	294.0	4.3
7535.375000	---	42.46	54.00	11.54	100.0	H	181.0	10.2
7939.625000	53.19	---	68.20	15.01	200.0	H	234.0	10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH46

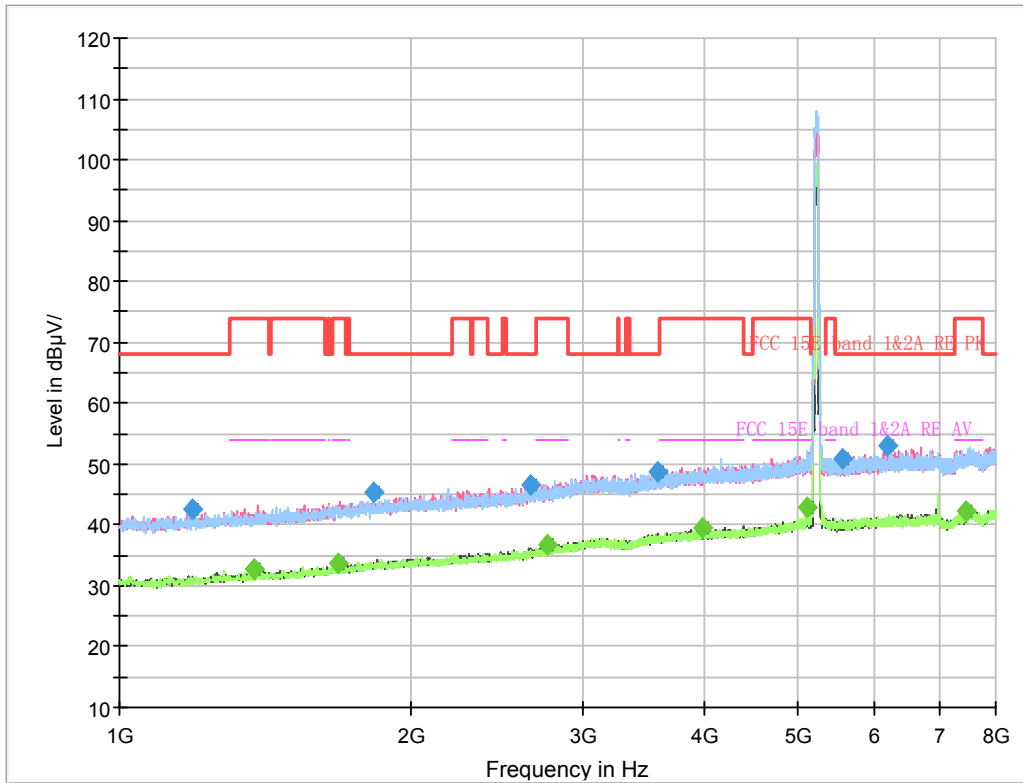

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

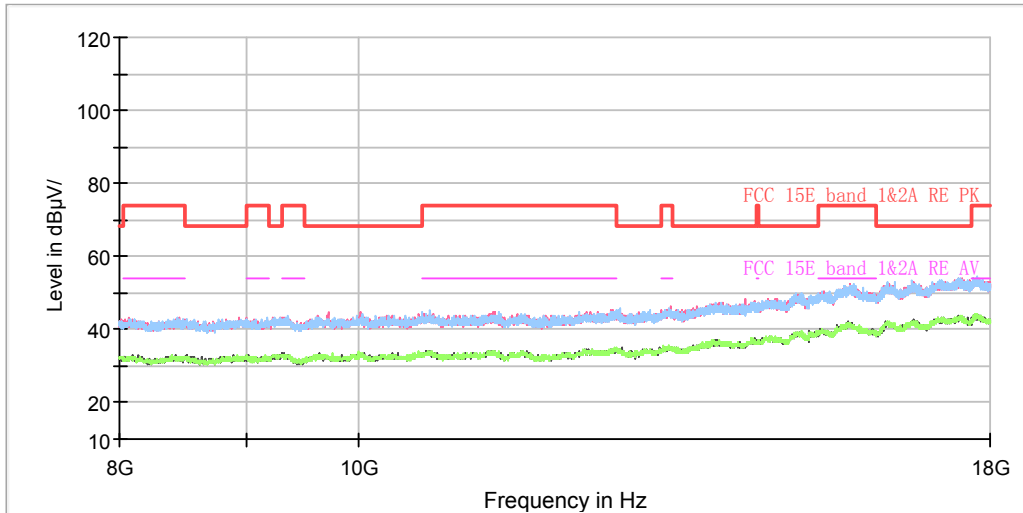

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1188.125000	42.58	---	68.20	25.62	200.0	H	17.0	-7.7
1374.500000	---	32.66	54.00	21.34	100.0	H	224.0	-6.6
1683.375000	---	33.68	54.00	20.32	100.0	H	310.0	-4.9
1826.000000	45.48	---	68.20	22.72	100.0	V	347.0	-4.1
2654.625000	46.48	---	68.20	21.72	200.0	V	213.0	-0.6
2756.125000	---	36.67	54.00	17.33	100.0	V	225.0	-0.1
3580.375000	48.58	---	68.20	19.62	100.0	H	228.0	3.2
3990.750000	---	39.48	54.00	14.52	200.0	H	109.0	4.3
5120.375000	---	42.76	54.00	11.24	200.0	H	98.0	6.8
5565.750000	50.73	---	68.20	17.47	100.0	H	95.0	7.5
6193.125000	52.91	---	68.20	15.29	200.0	V	278.0	8.4
7467.125000	---	42.37	54.00	11.63	100.0	H	187.0	10.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




802.11n (HT40) CH151

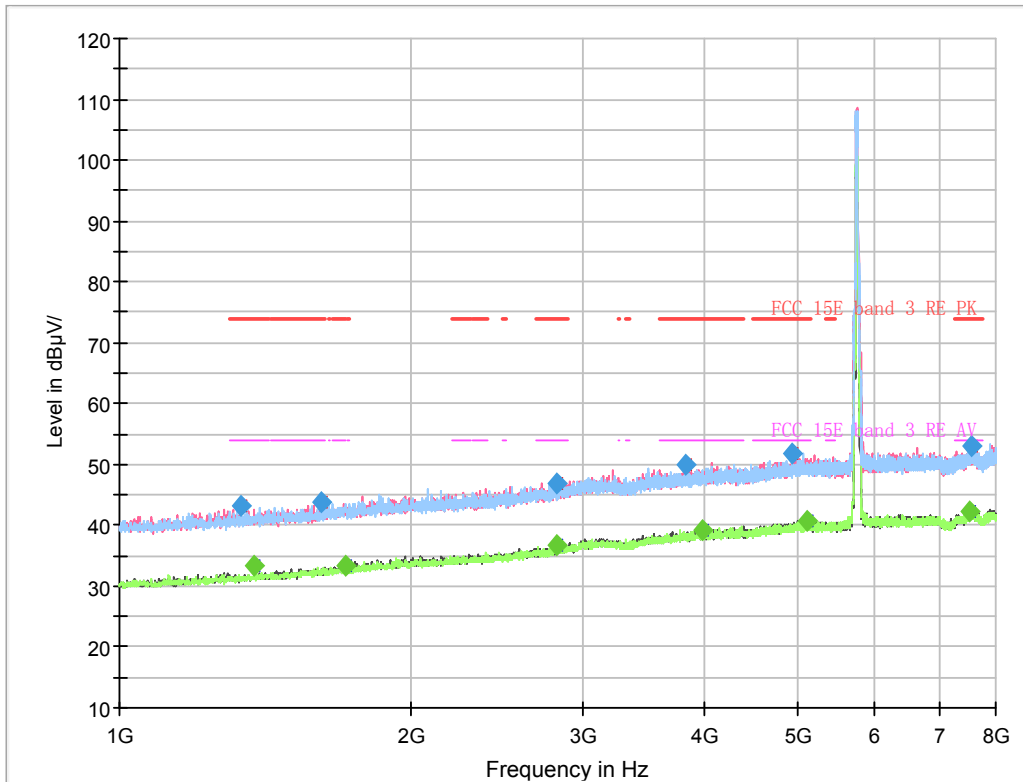

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

Full Spectrum

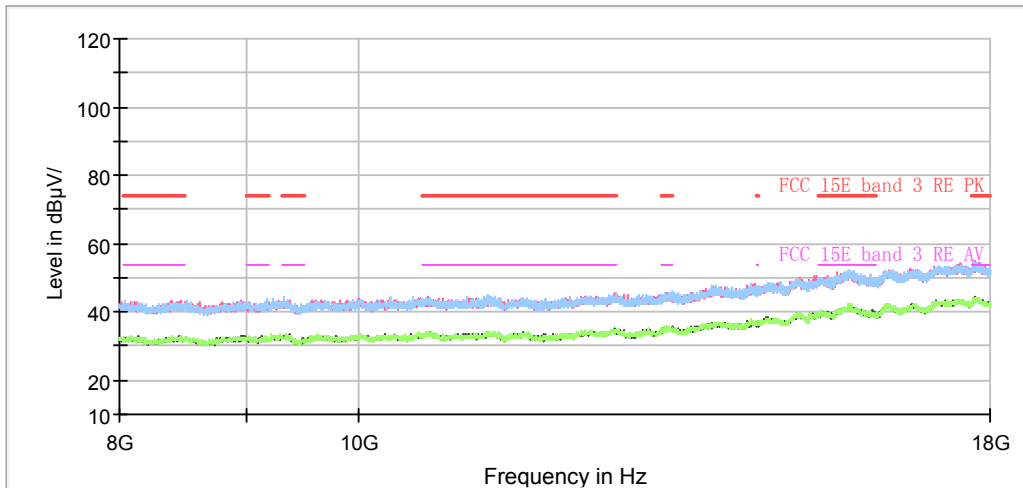


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1335.125000	43.05	---	74.00	30.95	200.0	V	343.0	-6.9
1374.500000	---	33.39	54.00	20.61	100.0	H	212.0	-6.6
1615.125000	43.72	---	74.00	30.28	200.0	V	126.0	-5.3
1709.625000	---	33.25	54.00	20.75	100.0	H	315.0	-4.8
2819.125000	---	36.63	54.00	17.37	100.0	V	161.0	0.3
2826.125000	46.93	---	74.00	27.07	100.0	H	269.0	0.3
3838.500000	50.03	---	74.00	23.97	200.0	V	346.0	4.0
3996.000000	---	39.19	54.00	14.81	200.0	H	135.0	4.4
4926.125000	51.70	---	74.00	22.30	200.0	H	252.0	6.4
5123.000000	---	40.78	54.00	13.22	100.0	H	262.0	6.8
7517.000000	---	42.31	54.00	11.69	200.0	H	38.0	10.2
7562.500000	53.08	---	74.00	20.92	200.0	H	128.0	10.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH159

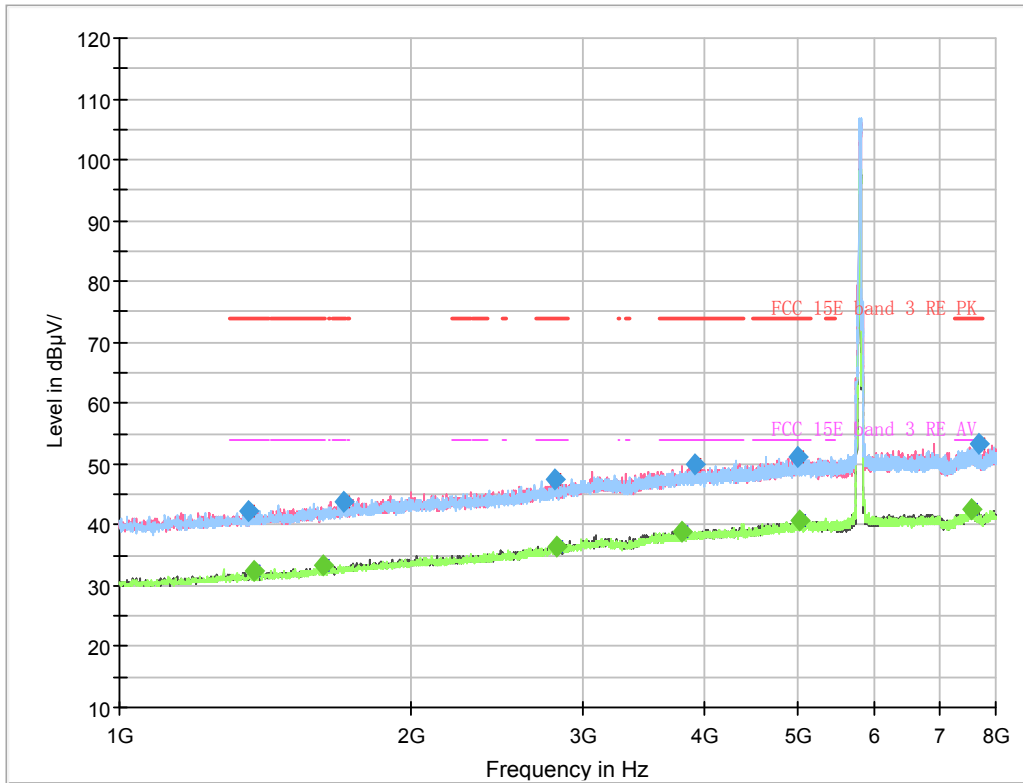

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

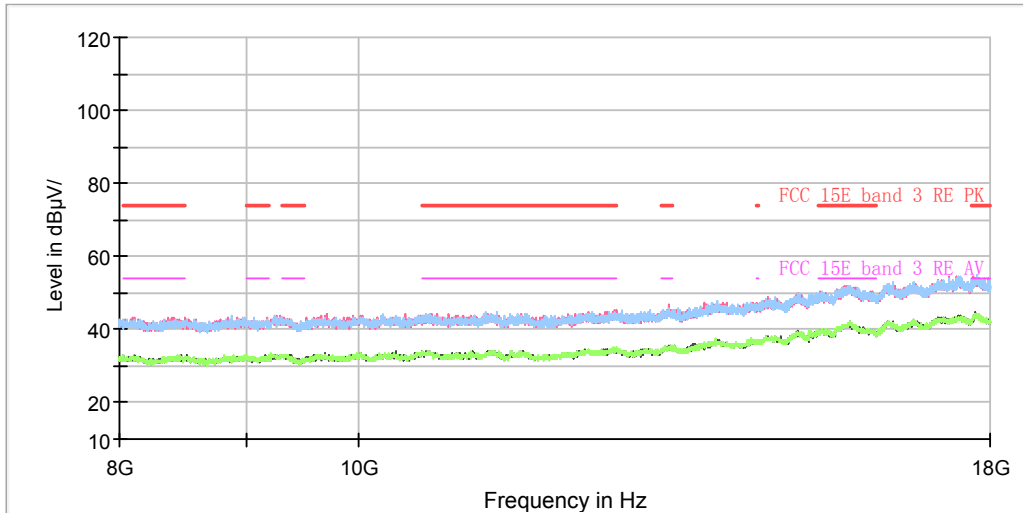

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1359.625000	42.21	---	74.00	31.79	100.0	V	202.0	-6.7
1374.500000	---	32.58	54.00	21.42	100.0	H	333.0	-6.6
1624.750000	---	33.48	54.00	20.52	100.0	H	241.0	-5.3
1704.375000	43.78	---	74.00	30.22	200.0	H	185.0	-4.8
2813.875000	47.62	---	74.00	26.38	200.0	H	0.0	0.2
2820.000000	---	36.47	54.00	17.53	100.0	V	133.0	0.3
3790.375000	---	38.88	54.00	15.12	200.0	H	200.0	3.8
3923.375000	49.93	---	74.00	24.07	100.0	V	30.0	4.2
5002.250000	51.19	---	74.00	22.81	100.0	H	0.0	6.7
5031.125000	---	40.77	54.00	13.23	100.0	V	265.0	6.7
7559.000000	---	42.43	54.00	11.57	100.0	H	193.0	10.3
7678.875000	53.47	---	74.00	20.53	200.0	V	252.0	10.3


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11ac (HT80) CH42

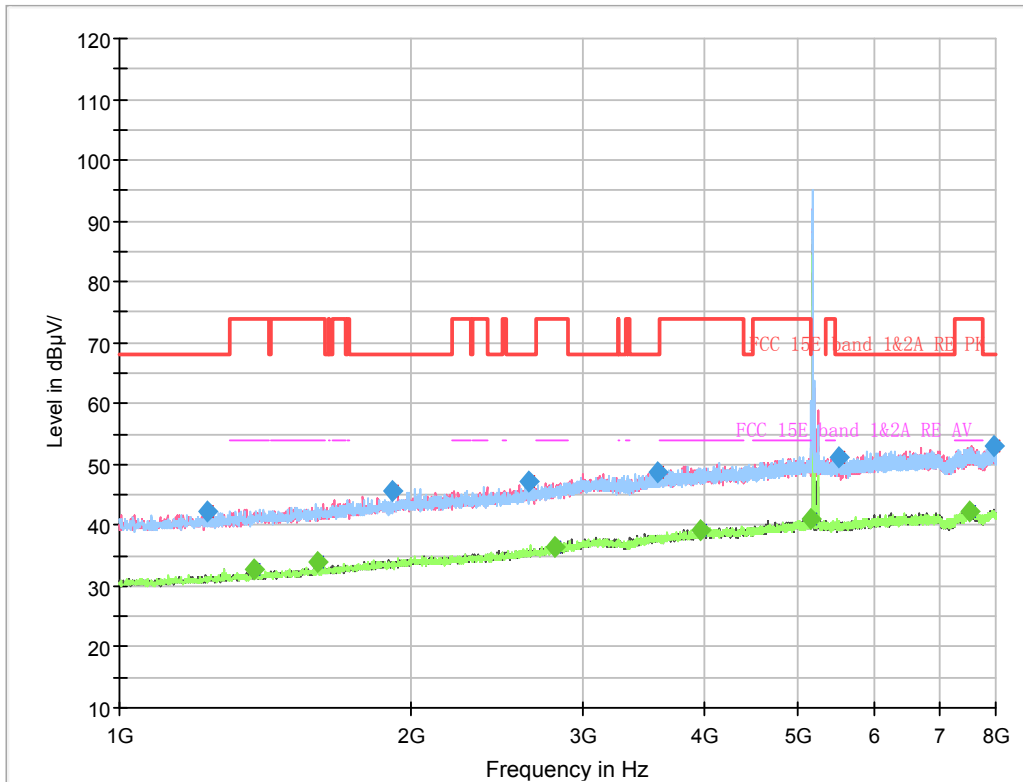

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

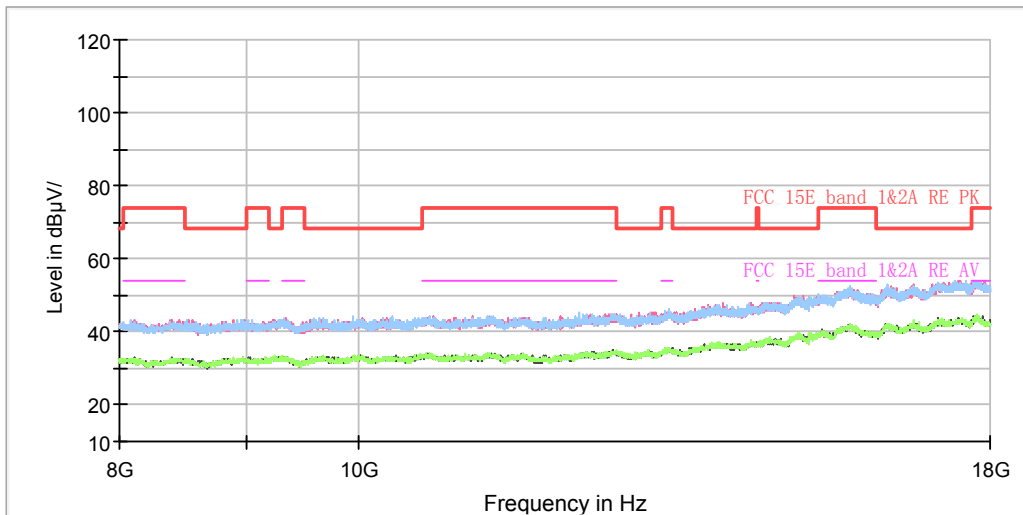

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1232.750000	42.30	---	68.20	25.90	100.0	V	205.0	-7.4
1374.500000	---	32.70	54.00	21.30	100.0	H	219.0	-6.6
1599.375000	---	33.87	54.00	20.13	200.0	H	135.0	-5.4
1906.500000	45.54	---	68.20	22.66	100.0	H	345.0	-3.7
2642.375000	47.06	---	68.20	21.14	200.0	V	351.0	-0.6
2809.500000	---	36.55	54.00	17.45	100.0	H	272.0	0.2
3584.750000	48.79	---	68.20	19.41	100.0	H	205.0	3.2
3962.750000	---	39.24	54.00	14.76	200.0	V	112.0	4.3
5149.250000	---	41.18	54.00	12.82	200.0	H	25.0	6.8
5503.625000	51.16	---	68.20	17.04	100.0	H	99.0	7.3
7532.750000	---	42.36	54.00	11.64	200.0	H	78.0	10.2
7972.875000	53.00	---	68.20	15.20	200.0	H	278.0	10.5


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11ac (HT80) CH155

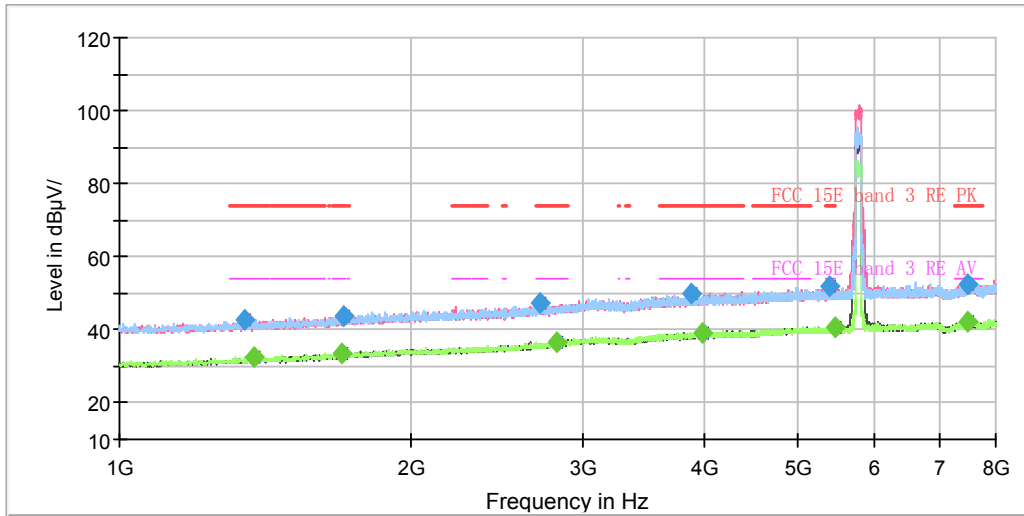

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

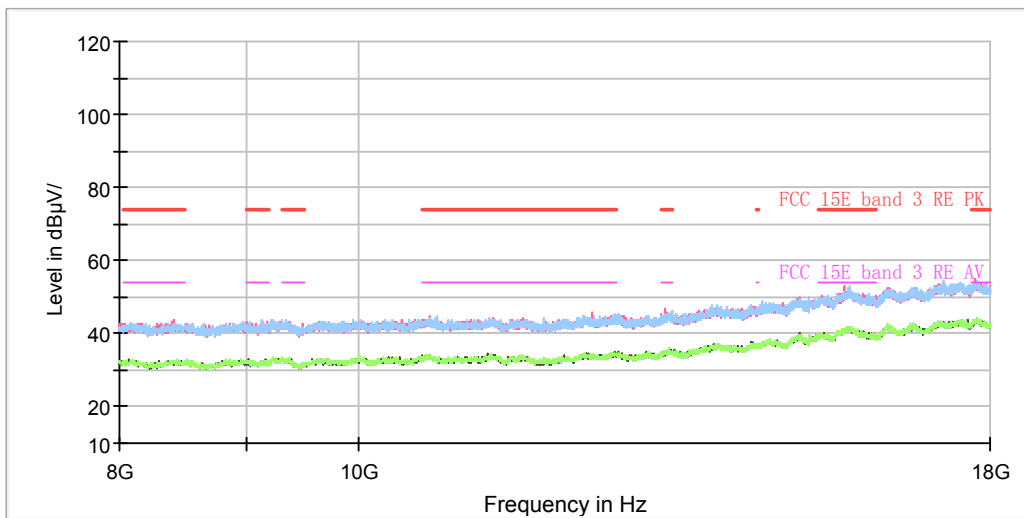

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1344.750000	42.91	---	74.00	31.09	100.0	H	0.0	-6.8
1374.500000	---	32.57	54.00	21.43	200.0	H	283.0	-6.6
1697.375000	---	33.42	54.00	20.58	200.0	H	116.0	-4.9
1705.250000	43.91	---	74.00	30.09	100.0	H	289.0	-4.8
2712.375000	47.31	---	74.00	26.69	200.0	H	46.0	-0.4
2825.250000	---	36.73	54.00	17.27	200.0	H	301.0	0.3
3885.750000	50.00	---	74.00	24.00	100.0	H	321.0	4.0
3983.750000	---	39.27	54.00	14.73	200.0	H	305.0	4.3
5389.875000	51.76	---	74.00	22.24	100.0	V	208.0	7.1
5452.875000	---	40.88	54.00	13.12	100.0	V	0.0	7.3
7495.125000	---	42.37	54.00	11.63	200.0	V	145.0	10.2
7497.750000	52.52	---	74.00	21.48	100.0	V	118.0	10.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




During the test, the Radiates Emission from 18GHz to 40GHz was performed in all modes with all channels, 802.11a, Channel 36 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

RE 18-26.5GHz PK+AV

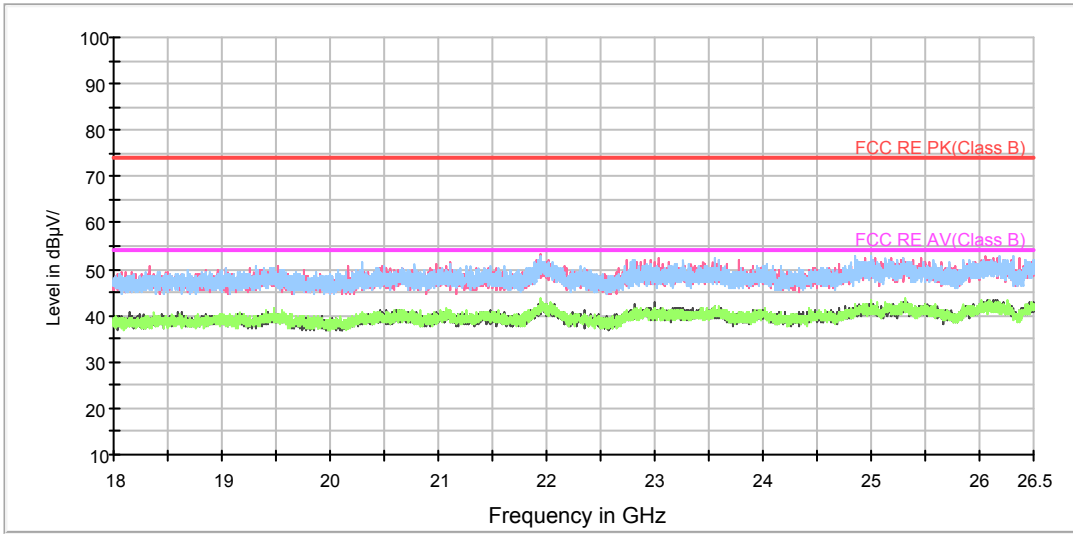

Radiates Emission from 18GHz to 26.5GHz

RE 26.5-40GHz PK+AV

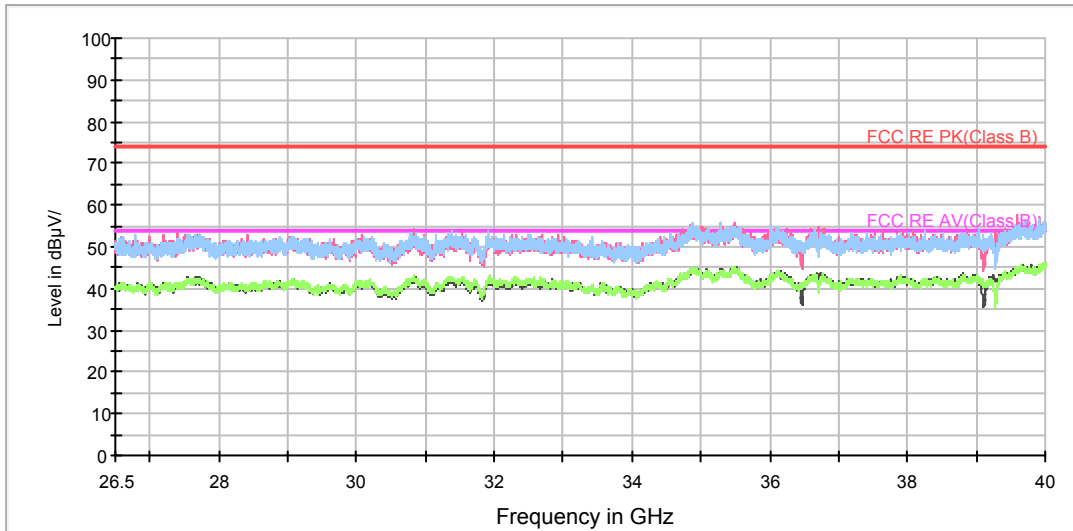

Radiates Emission from 26.5GHz to 40GHz

5.6. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

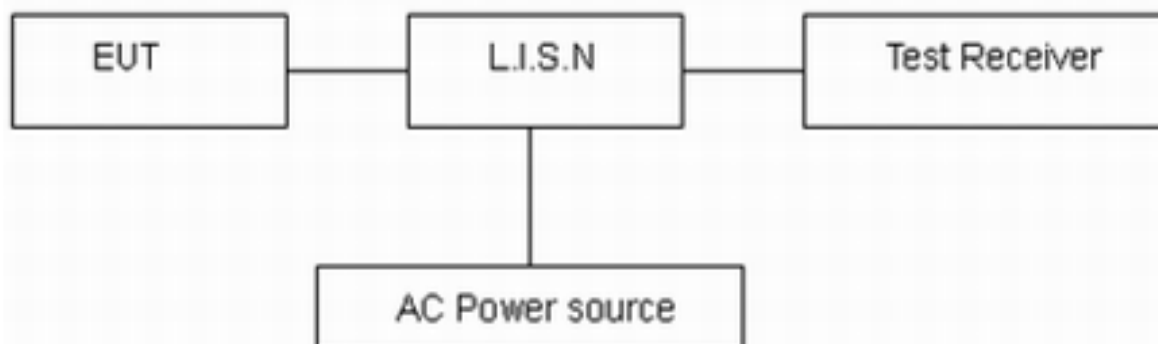

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11a, Channel 36 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

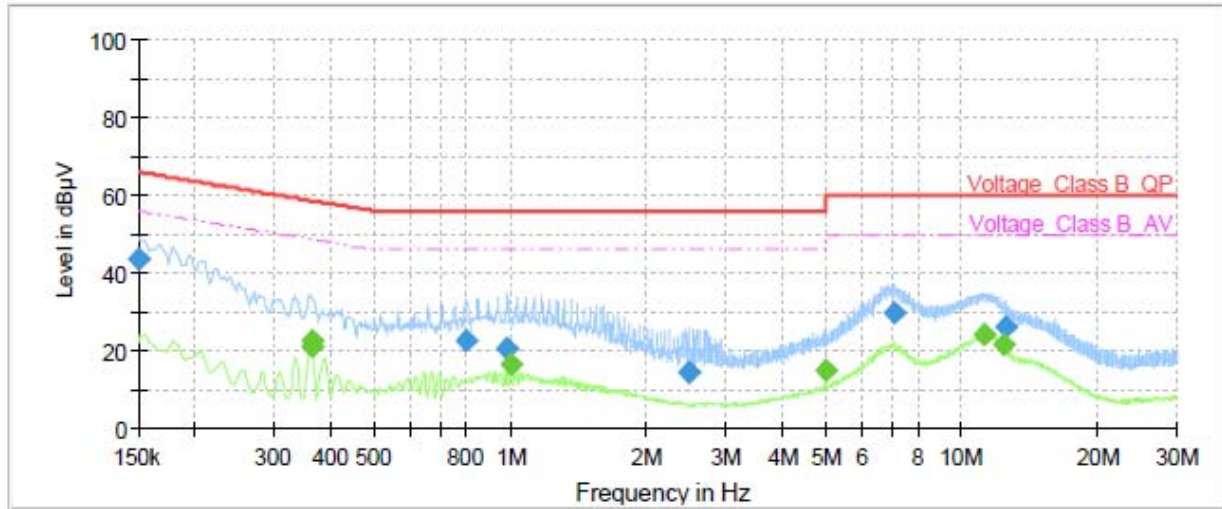

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	43.37	---	66.00	22.63	1000.0	9.000	L1	ON	19.06
0.36	---	22.44	48.69	26.25	1000.0	9.000	L1	ON	19.19
0.36	---	20.85	48.64	27.79	1000.0	9.000	L1	ON	19.19
0.80	22.48	---	56.00	33.52	1000.0	9.000	L1	ON	19.24
0.99	20.62	---	56.00	35.38	1000.0	9.000	L1	ON	19.24
1.00	---	16.29	46.00	29.71	1000.0	9.000	L1	ON	19.24
2.49	14.53	---	56.00	41.47	1000.0	9.000	L1	ON	19.02
4.97	---	15.06	46.00	30.94	1000.0	9.000	L1	ON	19.07
7.06	29.99	---	60.00	30.01	1000.0	9.000	L1	ON	19.16
11.25	---	24.27	50.00	25.73	1000.0	9.000	L1	ON	19.36
12.41	---	21.45	50.00	28.55	1000.0	9.000	L1	ON	19.43
12.47	26.31	---	60.00	33.69	1000.0	9.000	L1	ON	19.44

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

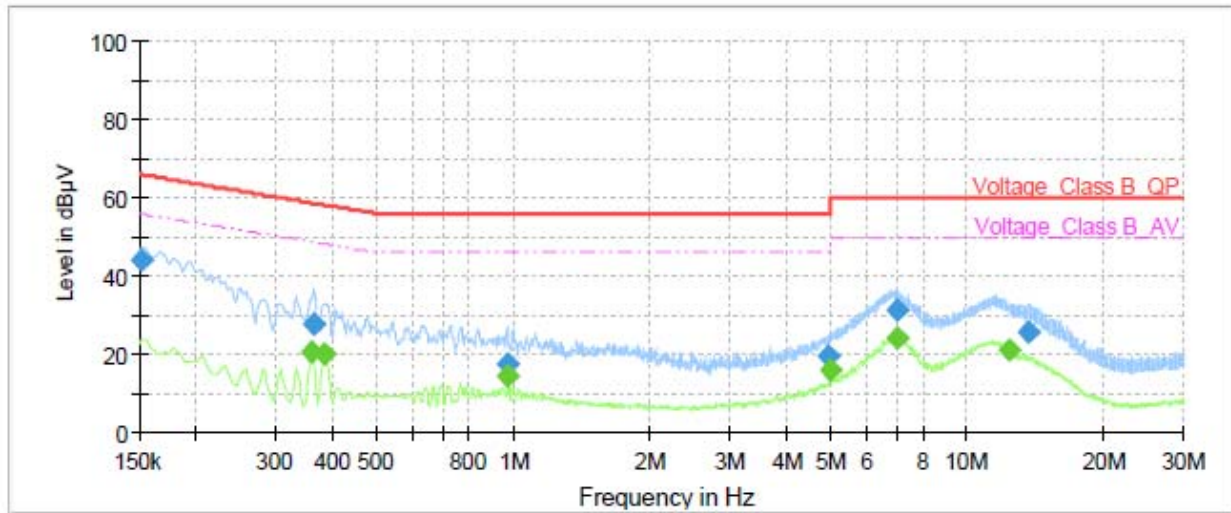

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	44.34	---	65.88	21.54	1000.0	9.000	N	ON	19.07
0.36	---	20.57	48.75	28.18	1000.0	9.000	N	ON	19.18
0.36	27.69	---	58.64	30.95	1000.0	9.000	N	ON	19.19
0.38	---	19.76	48.19	28.43	1000.0	9.000	N	ON	19.23
0.97	17.40	---	56.00	38.60	1000.0	9.000	N	ON	19.24
0.97	---	14.19	46.00	31.81	1000.0	9.000	N	ON	19.24
4.97	19.58	---	56.00	36.42	1000.0	9.000	N	ON	19.07
5.00	---	15.92	46.00	30.08	1000.0	9.000	N	ON	19.08
6.99	---	24.34	50.00	25.66	1000.0	9.000	N	ON	19.16
7.02	31.04	---	60.00	28.96	1000.0	9.000	N	ON	19.16
12.44	---	21.10	50.00	28.90	1000.0	9.000	N	ON	19.41
13.68	25.51	---	60.00	34.49	1000.0	9.000	N	ON	19.45

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV40	15195-01-00	2019-05-19	2020-05-18
EMI Test Receiver	R&S	ESCI	100948	2019-05-19	2020-05-18
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	9163-201	2017-11-18	2019-11-17
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Standard Gain Horn	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Standard Gain Horn	STEATITE	QSH-SL-26-40 -K-15	16779	2017-07-20	2020-07-19
Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2018-07-07	2020-07-06
EMI Test Receiver	R&S	ESR	101667	2019-05-19	2020-05-18
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2018-12-16	2019-12-15
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-09-13
RF Cable	Agilent	SMA 15cm	0001	2019-09-12	2019-12-11
TEMPERATURE CHAMBER	WEISS	VT4002	582261194500 10	2018-12-16	2019-12-15
AV Power Meter	R&S	NRP	104306	2019-05-19	2020-05-18
Power Probe	R&S	NRP-Z21	104799	2019-05-19	2020-05-18
DC Power Supply	GWINSTEK	GPS-3030D	GEP882653	2019-05-19	2020-05-18
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****