



CTK Co., Ltd.
The Power Leader of Global Engineering Companies

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

TEST REPORT For FCC

Test Report No. : 2009040085
Date of Issue : April 27, 2009
FCC ID : QJCT50XT
Model/Type No. : T50XT and T50
Kind of Product : Braille PDA
Applicant : HIMS Co., Ltd.
Applicant Address : 139-9, Gajung-dong, Yuseong-gu, Daejeon, KOREA
Manufacturer : HIMS Co., Ltd.
Manufacturer Address : 139-9, Gajung-dong, Yuseong-gu, Daejeon, KOREA
Contact Person : IL-Hyung, Kim / Team Leader
Telephone : +82-42-864-4460
Received Date : March 25, 2009
Test period : Start : March 25, 2009 End : April 27, 2009
Test Results : In Compliance Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by

Eun-Won, Lee
Test Engineer
Date: April 27, 2009

Reviewed by

Young-Joon, Park
Technical Manager
Date: April 27, 2009



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
April 27, 2009	Issued (2009040085)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Tested Frequency	4
1.2 Model Differences	4
1.3 Device Modifications	4
1.4 Peripheral Devices	5
1.5 Calibration Details of Equipment Used for Measurement	5
1.6 Test Facility.....	5
1.7 Laboratory Accreditations and Listings	6
2.0 Summary of tests	7
2.1 Transmitter Requirements	8
2.1.1 Carrier Frequency Separation	8
2.1.2 Number of Hopping Frequencies	10
2.1.3 20 dB bandwidth	12
2.1.4 Time of Occupancy (Dwell Time)	14
2.1.5 Maximum peak Conducted Output Power.....	18
2.1.6 Band-edge.....	21
2.1.7 Field Strength of Emissions	30
2.1.8 AC Conducted Emissions.....	35
APPENDIX A – Test Equipment Used For Tests	38



1.0 General Product Description

Equipment model name : T50XT and T50

Serial number : Prototype

EUT condition : Pre-production, not damaged

Antenna type : Chip antenna Gain 0dBi

Frequency Range : 2402 ~ 2480 MHz

RF output power Range : -6 dBm ~ +4 dBm (Class 2)

RF power : -0.71 dBm - Conducted

Number of channels : 79

Channel Spacing : 1MHz

Channel Access Protocol : Frequency Hopping

Type of Modulation : GFSK

Power Source : Internal Lithium ion Battery (DC 3.7V)

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

1.2 Model Differences

T50XT and T50 are identical to each other only except for model designations and internal memory size.

1.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

1.4 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
Switching Adapter	Dee Van Electronics(shen Zhen) Co., Ltd.	DSA-10P-05 050100	-	-
Earphone	-	-	-	-
Microphone	-	-	-	-
Personal Computer	Samsung Electronics Co., Ltd.	DB-P73	EZ9497AS200009H	DoC
LCD Monitor	Innocom Technology(Shenzhen) Co., Ltd.	SE198WFPf	CN-ORR716-72872-81T-OWG	DoC
PS/2 Mouse	Dongguan Primax Electronis Ltd.	MOAFKOA	-	DoC
PS/2 Keyboard	Hewlett-Packard Company	5219	BN5017686	DoC

1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.6 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance




CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

1.7 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 93250
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	KCC	EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 No. 51, KR0025



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 75 hops		C
15.247(a)	20 dB Bandwidth	< 1 MHz		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 /15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.207 /15.107	AC Conducted Emissions	EN 55022	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003

2.1 Transmitter Requirements

2.1.1 Carrier Frequency Separation

Test Location

RF Test Room

Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ($\geq 1\%$ of the span) Sweep = auto

VBW = 30 kHz (\geq RBW) Detector function = peak

Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

Limit

The EUT shall have hopping channel carrier frequencies separated minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Results

Carrier Frequency Separation (MHz)	Result
1.008	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Carrier Frequency Separation

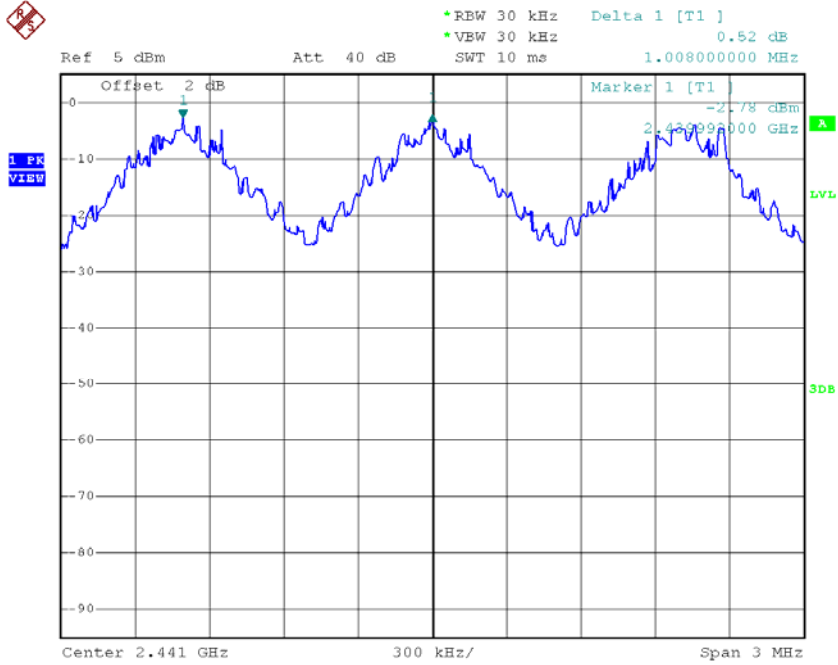

2.1.2 Number of Hopping Frequencies

Test Location

RF Test Room

Test Procedures

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5 MHz, Stop = 2439.5 MHz
 2: Start = 2439.5 MHz, Stop = 2489.5 MHz

Span = 50 MHz


RBW = 300 kHz (\geq 1% of the span)

VBW = 300 kHz (\geq RBW)

Trace = max hold

Sweep = auto

Detector function = peak



Limit

The EUT in the 2400-2483.5 MHz band shall use at least 75 channels.

Test Results

Total number of Hopping Channels	Result
79	Complies

See next pages for actual measured spectrum plots.





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Number of Hopping Frequencies

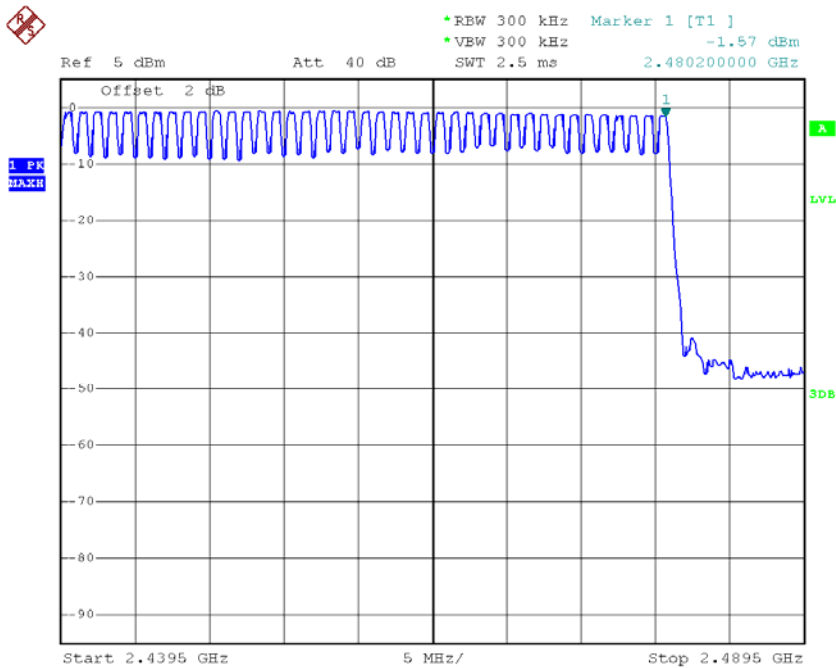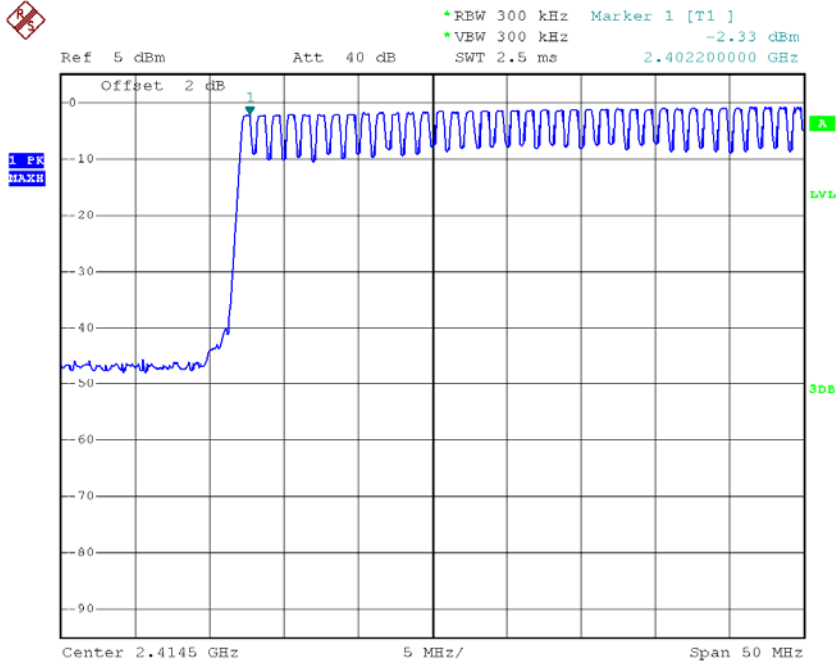

2.1.3 20 dB bandwidth

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz (\geq 1% of the span)

Sweep = auto

VBW = 30 kHz (\geq RBW)

Detector function = peak

Trace = max hold



Limit

The Transmitter shall have a maximum 20 dB bandwidth of 1 MHz.

Test Results

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2441	0	0.832	Complies

See next pages for actual measured spectrum plots.(worst case)



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

20 dB Bandwidth

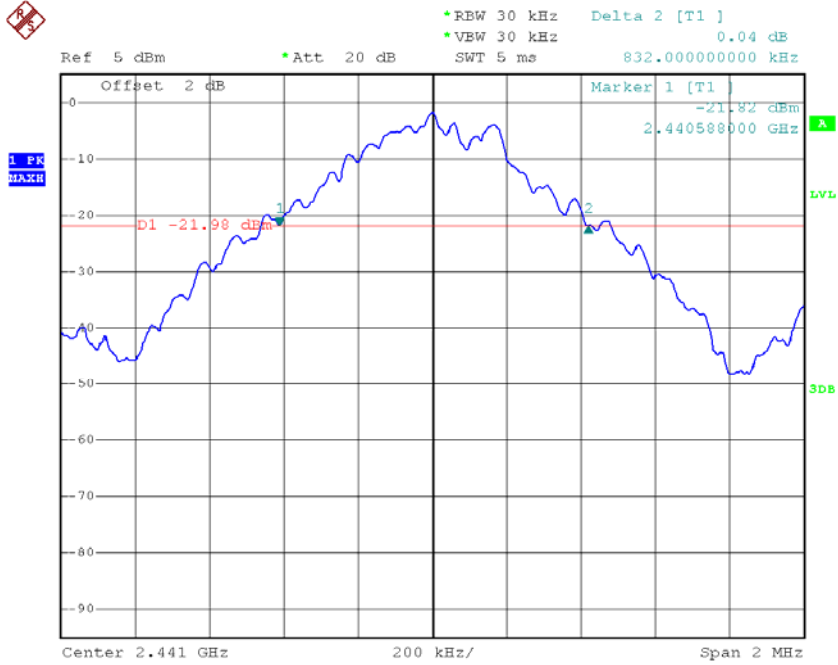

2.1.4 Time of Occupancy (Dwell Time)

Test Location

RF Test Room

Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz (\geq RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel



Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Results

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results	
			Dwell Time (ms)	Result
39	2441	DH 1	126.76	Complies
		DH 3	267.40	Complies
		DH 5	307.84	Complies

See next pages for actual measured spectrum plots. (Worst case)



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Time of Occupancy for PACKET Type DH 1

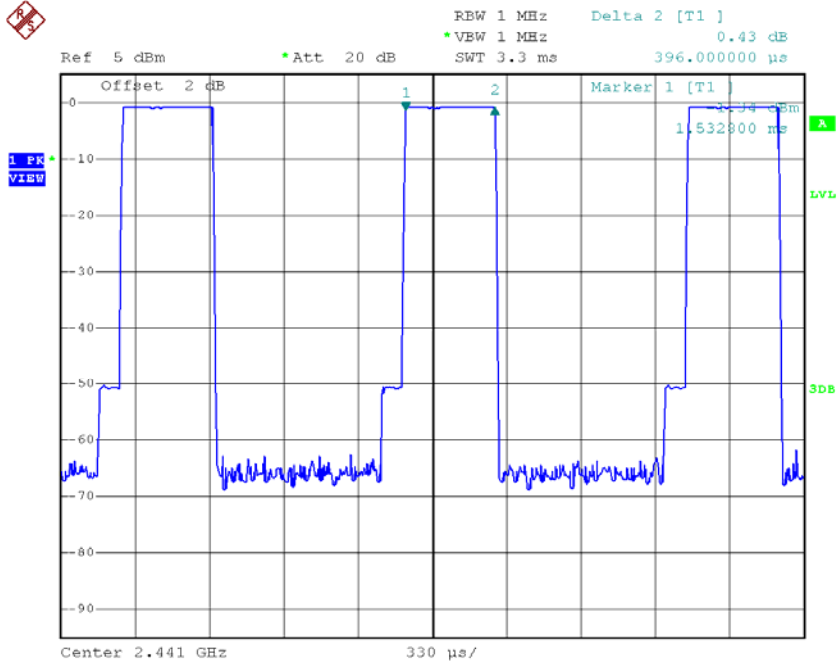



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Time of Occupancy for PACKET Type DH 3

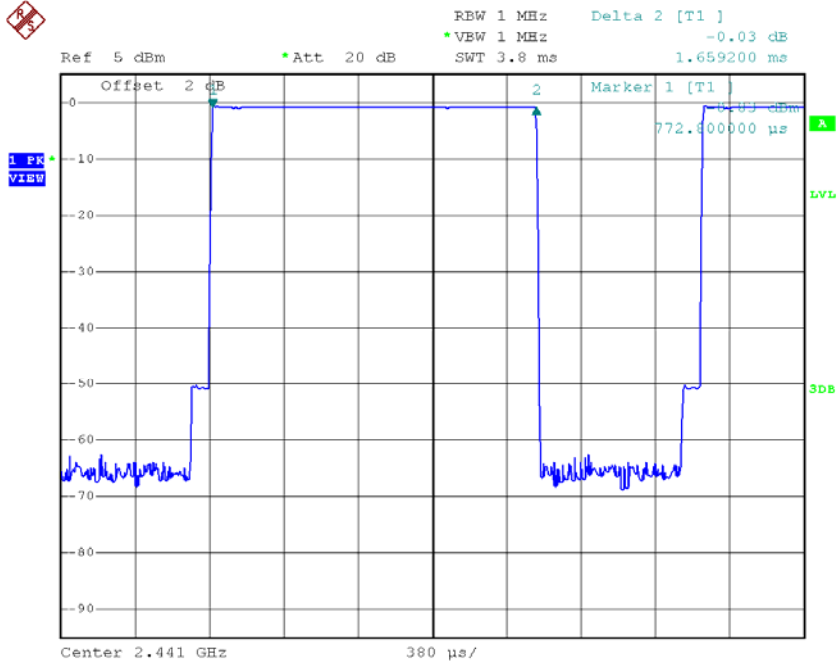



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Time of Occupancy for PACKET Type DH 5

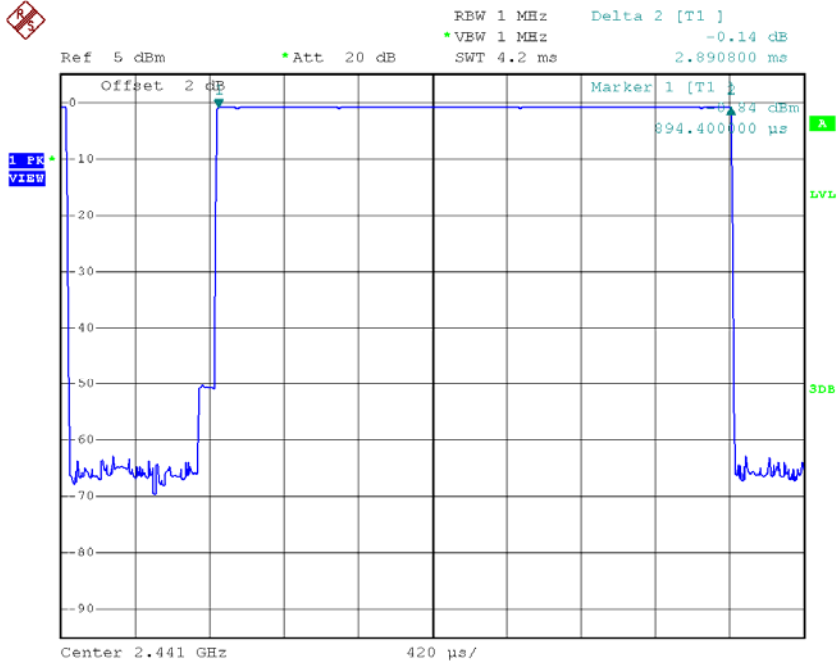

2.1.5 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz (\geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto



Limit

< 1 W

Test Results

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	-2.08	0.619	Complies
2441	39	-0.71	0.849	Complies
2480	78	-1.38	0.728	Complies

See next pages for actual measured spectrum plots.





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Maximum peak Conducted Output Power

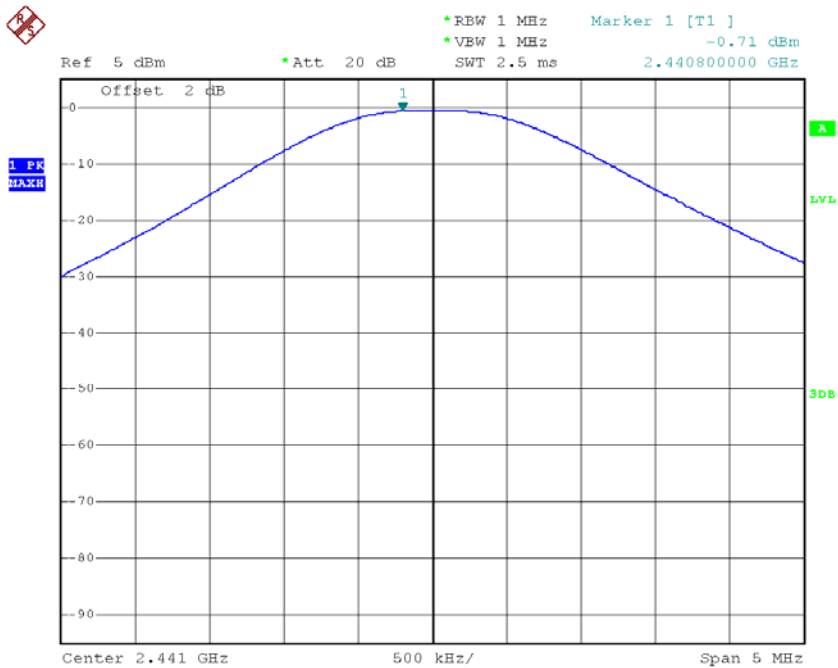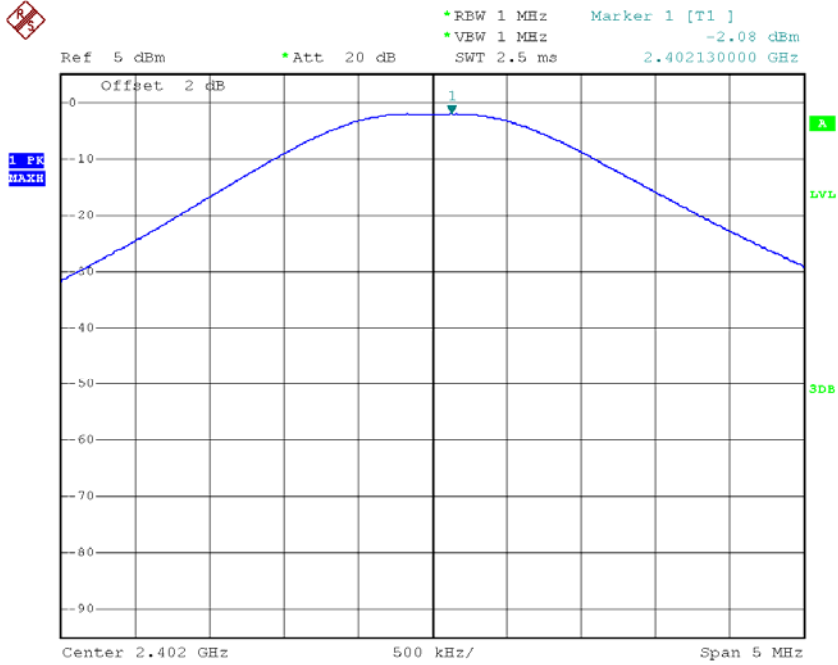




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

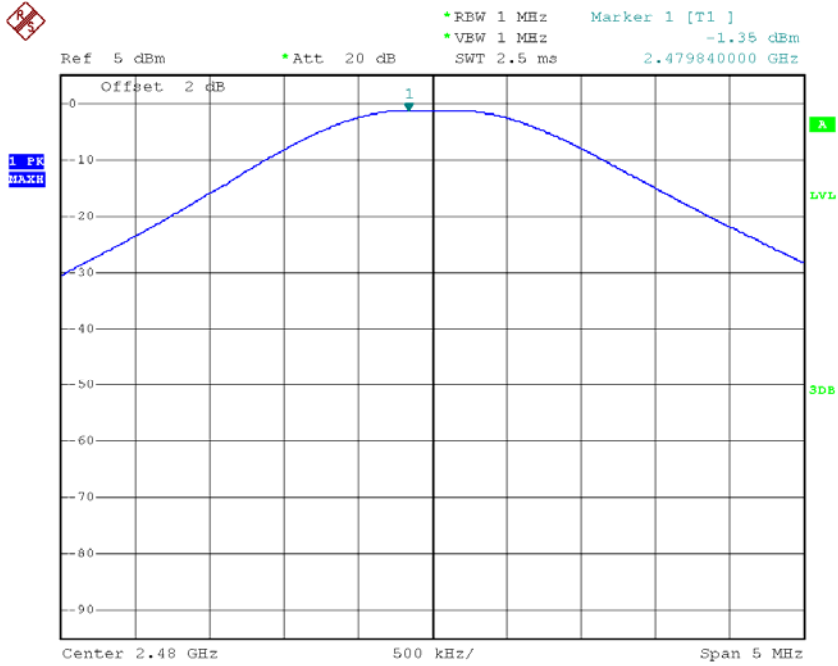

2.1.6 Band-edge

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz (\geq RBW)

Span = 100 MHz

Trace = max hold

Detector function = peak

Sweep = auto



Limit

> 20 dBc

Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement. See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Band – edge (with Hopping)

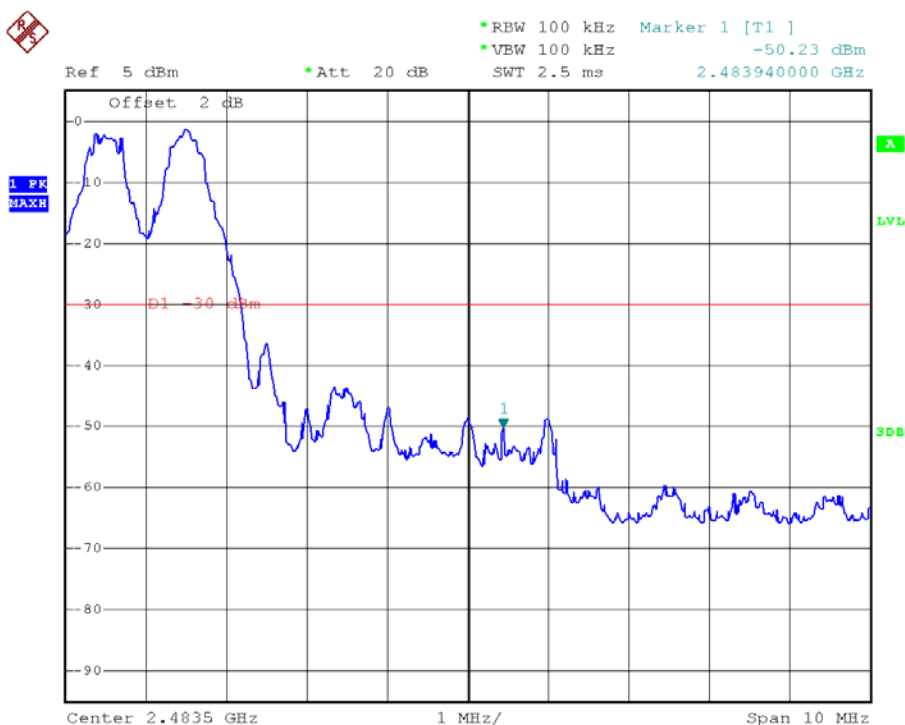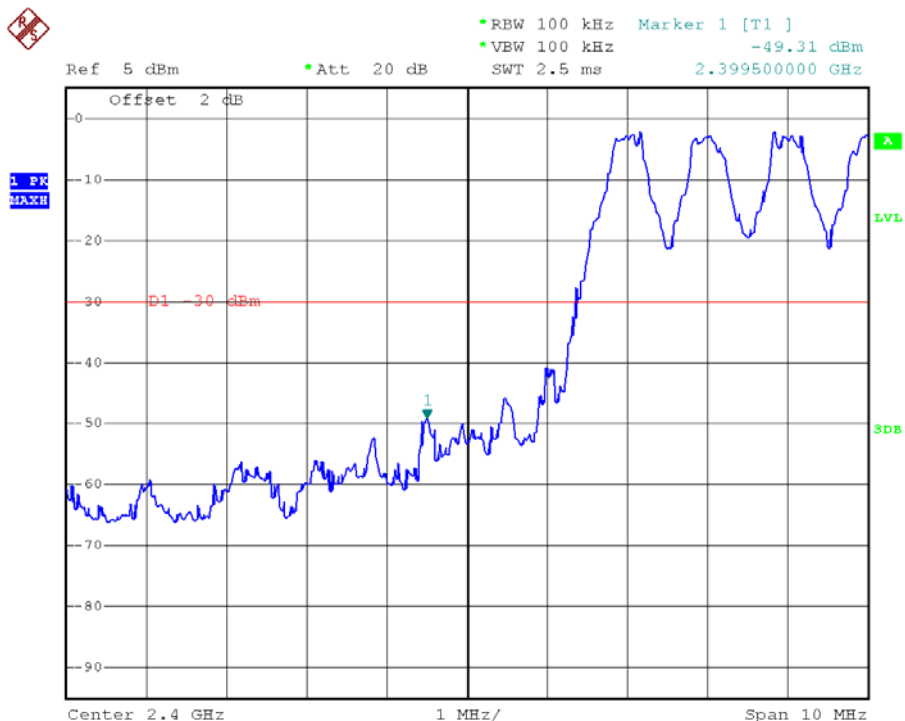



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Band – edge (without Hopping)

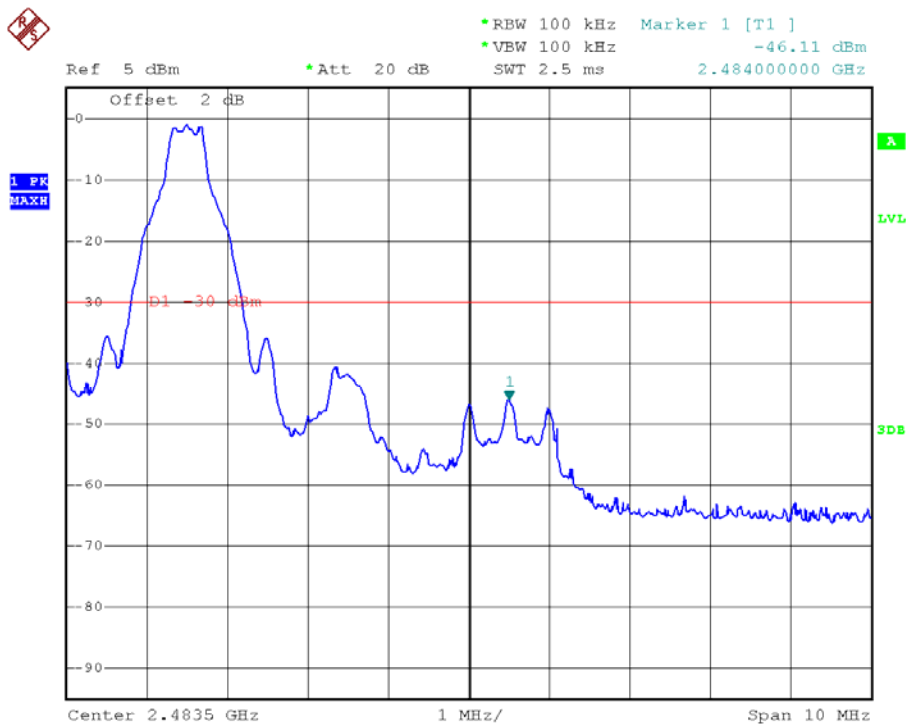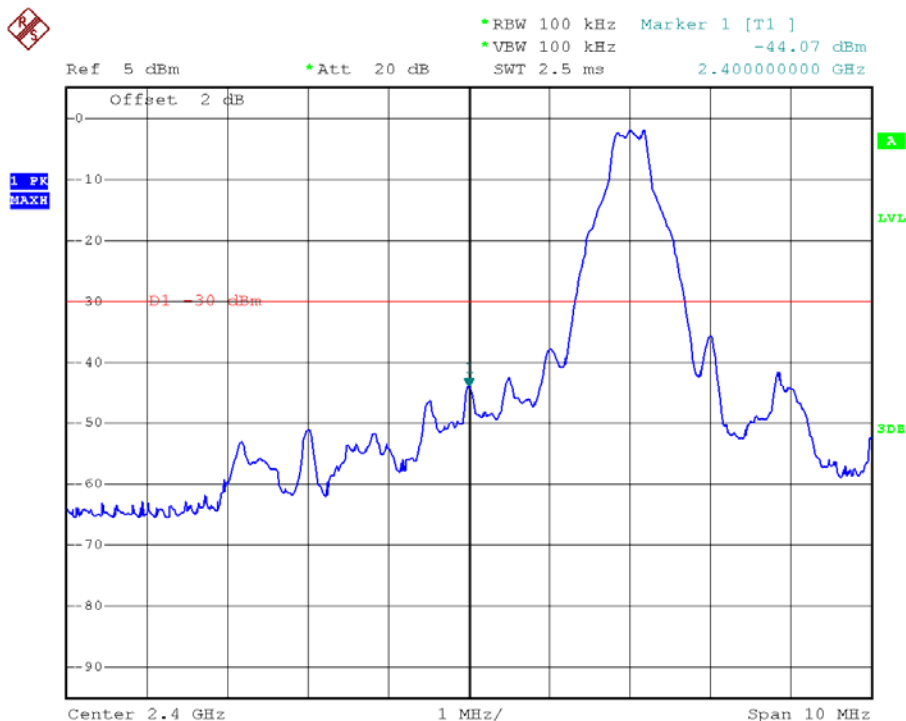





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (at 20 dB blow) – Low channel Frequency Range = 30 MHz ~ 10th harmonic

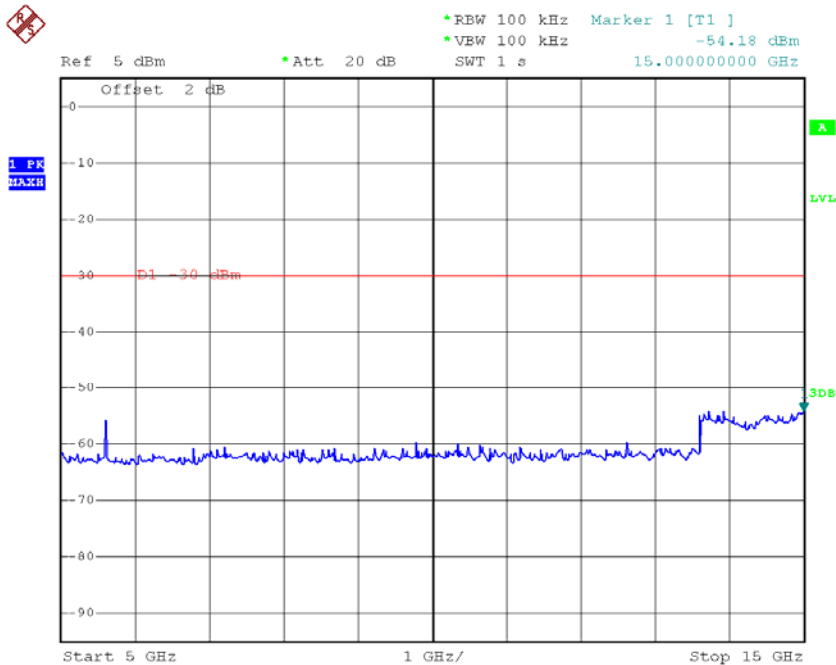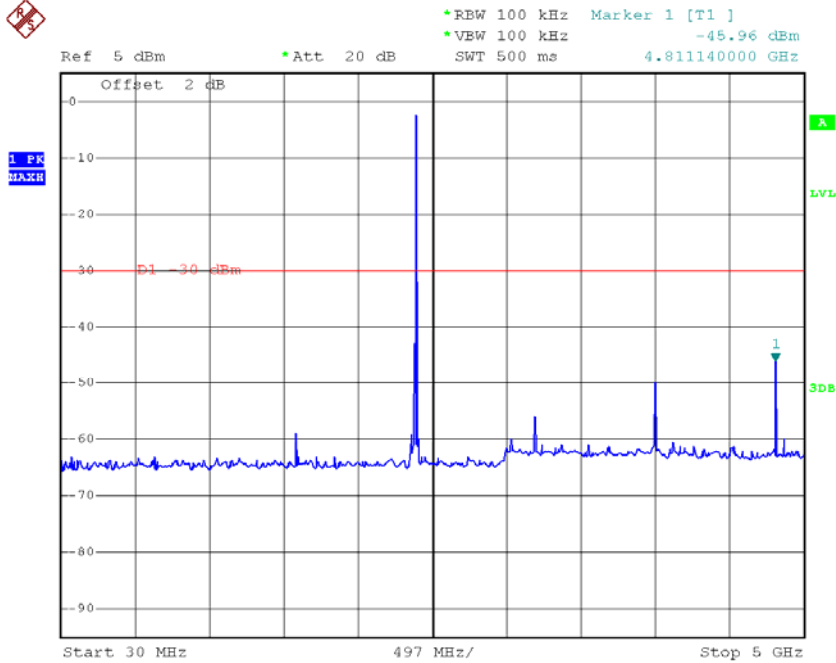




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

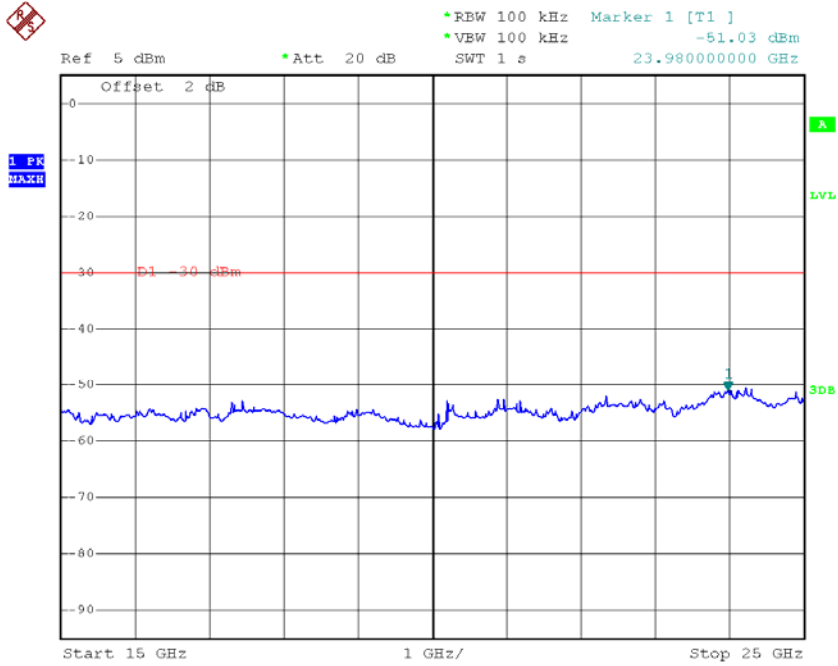





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel Frequency Range = 30 MHz ~ 10th harmonic

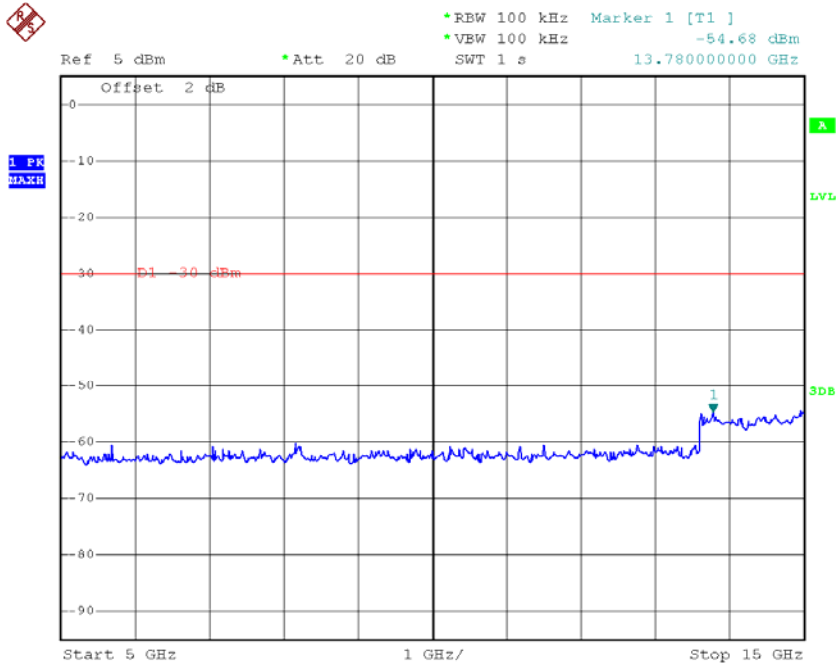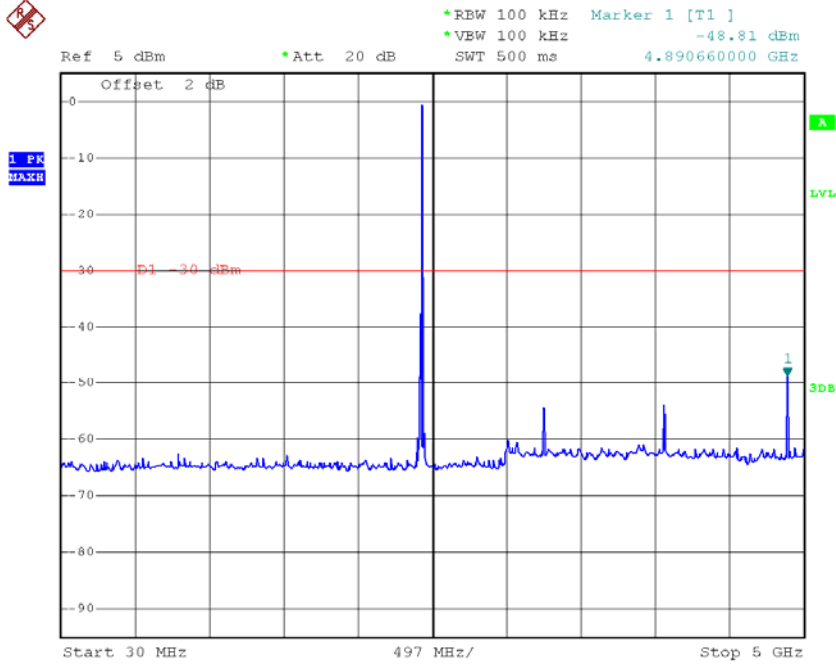




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

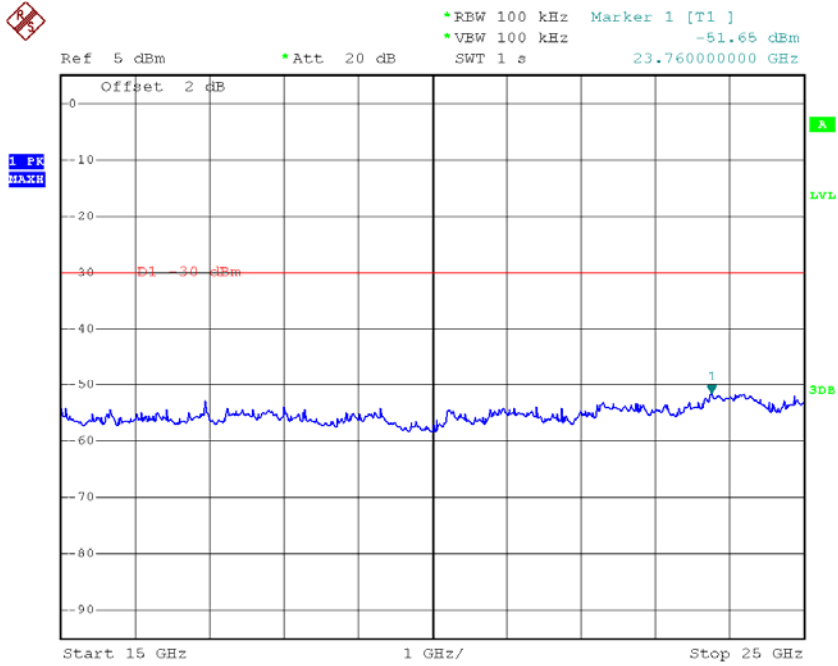





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic

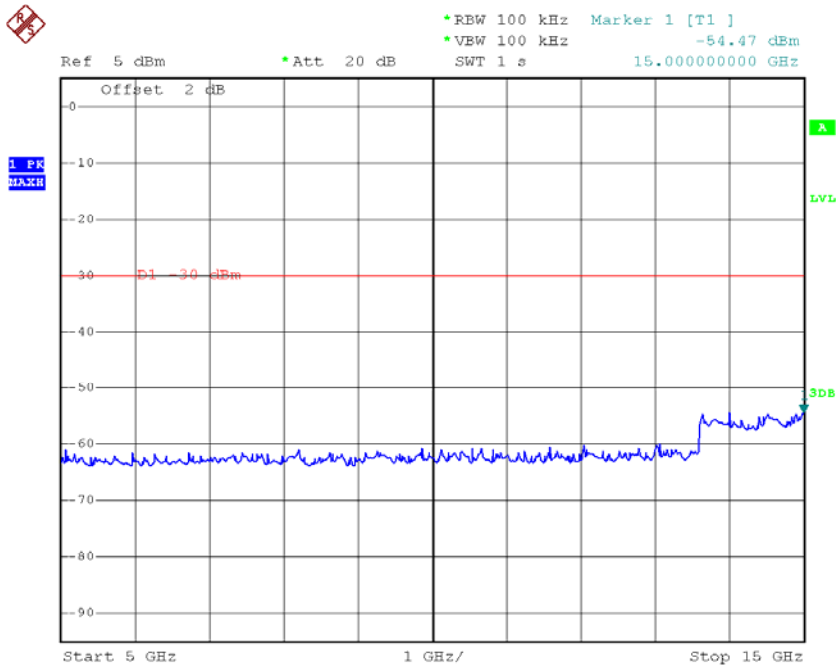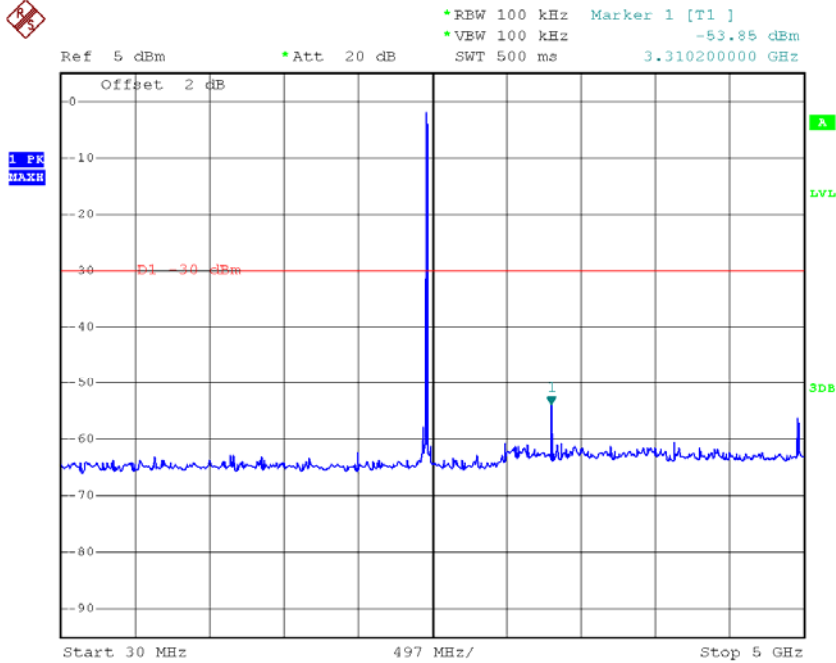




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

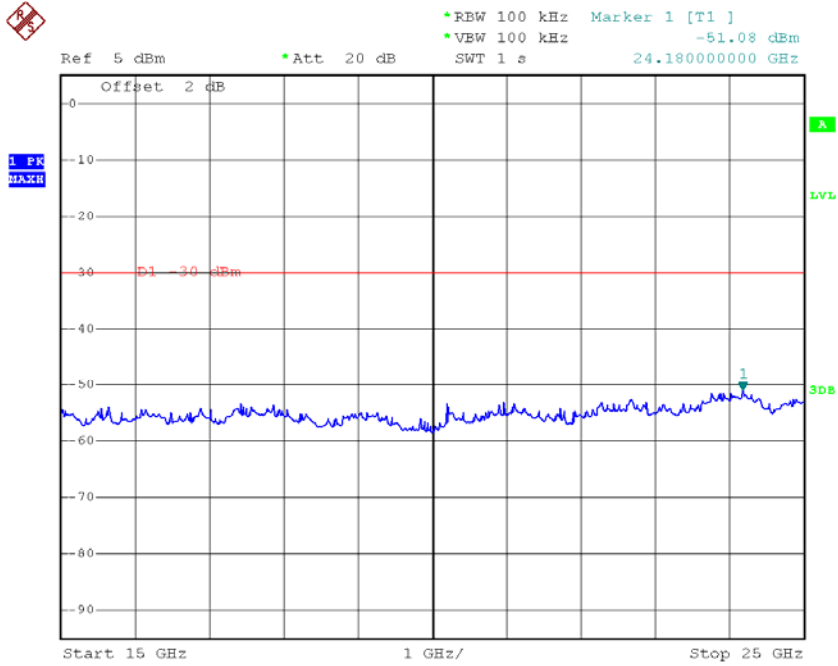

2.1.7 Field Strength of Emissions

Test Location

Testing was performed at a test distance of 3 meter Open Area Test Site

Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic


RBW = 120 kHz (30 MHz ~ 1 GHz) VBW ≥ RBW

 = 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Detector function = Quasi-peak

Trace = max hold

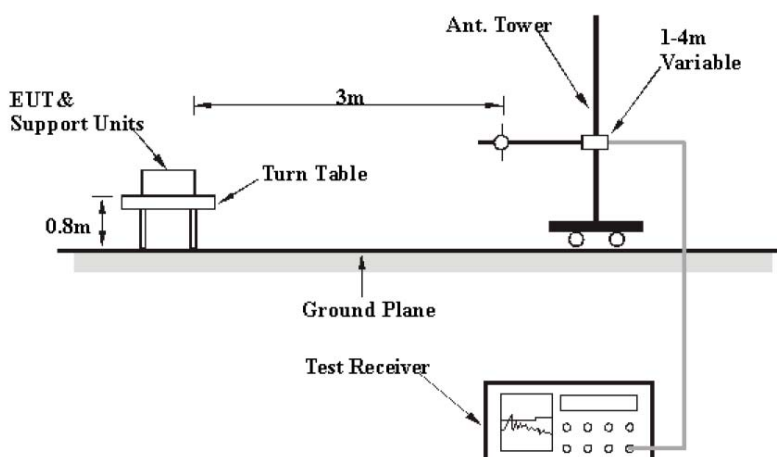

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m
30-88	100**	40
88-216	150**	43.5
216-960	200**	46
Above 960	500	54

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Test Results

EUT	Braille PDA	Measurement Detail	
Model	T50XT	Frequency Range	Below 1000MHz
Channel	-	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
50.36	37.2	2.8	Quasi-Peak

Test Data

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
32.70	15.9	V	4.0	18.7	0.5	40.0	35.1	4.9
50.36	28.3	V	1.0	7.9	1.0	40.0	37.2	2.8
60.42	27.6	V	4.0	4.4	1.2	40.0	33.2	6.8
401.55	21.6	H	1.8	13.3	5.1	46.0	40.0	6.0
480.00	17.2	H	2.0	15.0	5.8	46.0	38.0	8.0
935.26	11.1	H	2.0	21.4	8.3	46.0	40.8	5.2

H : Horizontal, V : Vertical

Remark :

The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Test Results

EUT	Braille PDA	Measurement Detail	
Model	T50XT	Frequency Range	1-25GHz
Channel	Channel 0	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	-

Test Data

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp.Gain	Cable			
No emission were detected at a level greater than 20dB below limit									

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp.Gain	Cable			
No emission were detected at a level greater than 20dB below limit									



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Test Results

EUT	Braille PDA	Measurement Detail	
Model	T50XT	Frequency Range	1-25GHz
Channel	Channel 39	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	

Test Data

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp.Gain	Cable			
No emission were detected at a level greater than 20dB below limit									

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp.Gain	Cable			
No emission were detected at a level greater than 20dB below limit									



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Test Results

EUT	Braille PDA	Measurement Detail	
Model	T50XT	Frequency Range	1-25GHz
Channel	Channel 78	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	-

Test Data

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp.Gain	Cable			
No emission were detected at a level greater than 20dB below limit									

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp.Gain	Cable			
No emission were detected at a level greater than 20dB below limit									



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

2.1.8 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
0.81	50.4	5.6	Quasi-peak



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Test Data

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
	LISN	Cable		Limit	Reading	Result	Margin	Limit	Reading	Result	Margin
				[dBuV]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dB]
0.31	0.1	0.2	H	60.0	50.7	51.0	9.0	50.0	39.7	40.0	10.0
0.81	0.1	0.4	N	56.0	49.9	50.4	5.6	46.0	30.4	30.9	15.1
0.84	0.1	0.4	H	56.0	47.8	48.3	7.7	46.0	24.2	24.7	21.3
5.77	0.2	0.4	N	60.0	50.4	51.0	9.0	50.0	35.0	35.6	14.4
5.90	0.2	0.4	N	60.0	50.2	50.8	9.2	50.0	32.4	33.0	17.0
23.84	1.0	0.6	N	60.0	49.6	51.2	8.8	50.0	21.6	23.2	26.8

H : HOT, N : NEUTRAL



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea


Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

[Hot]

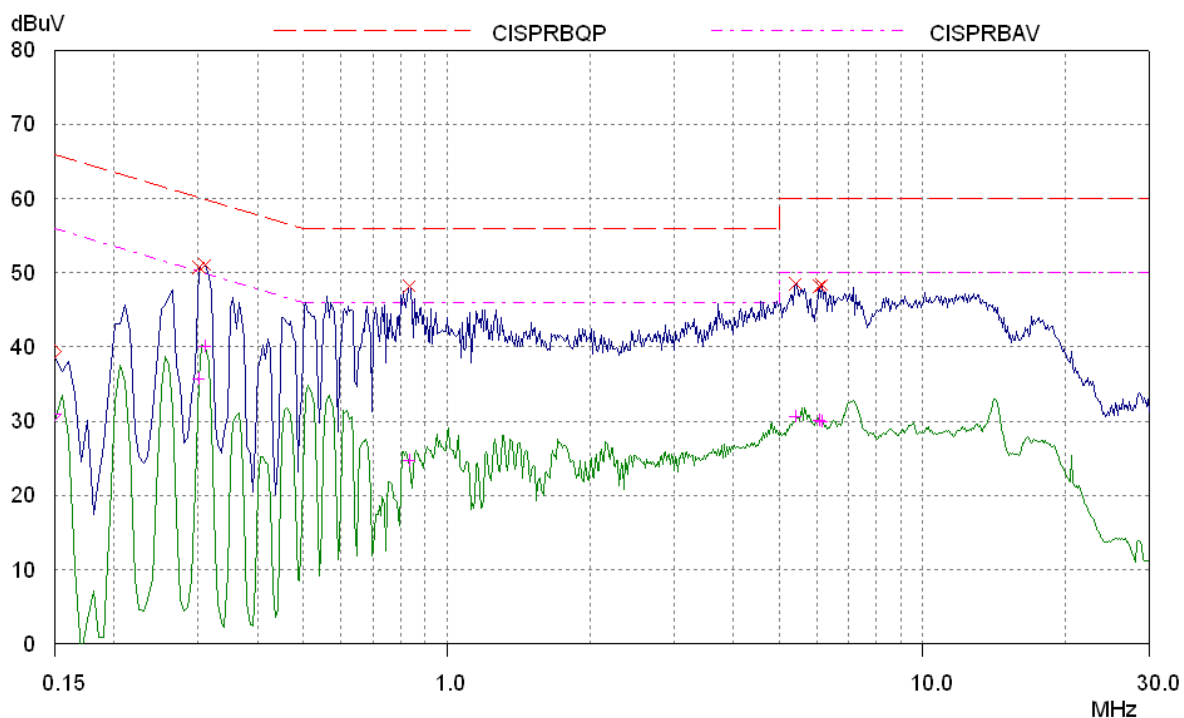

[Neutral]

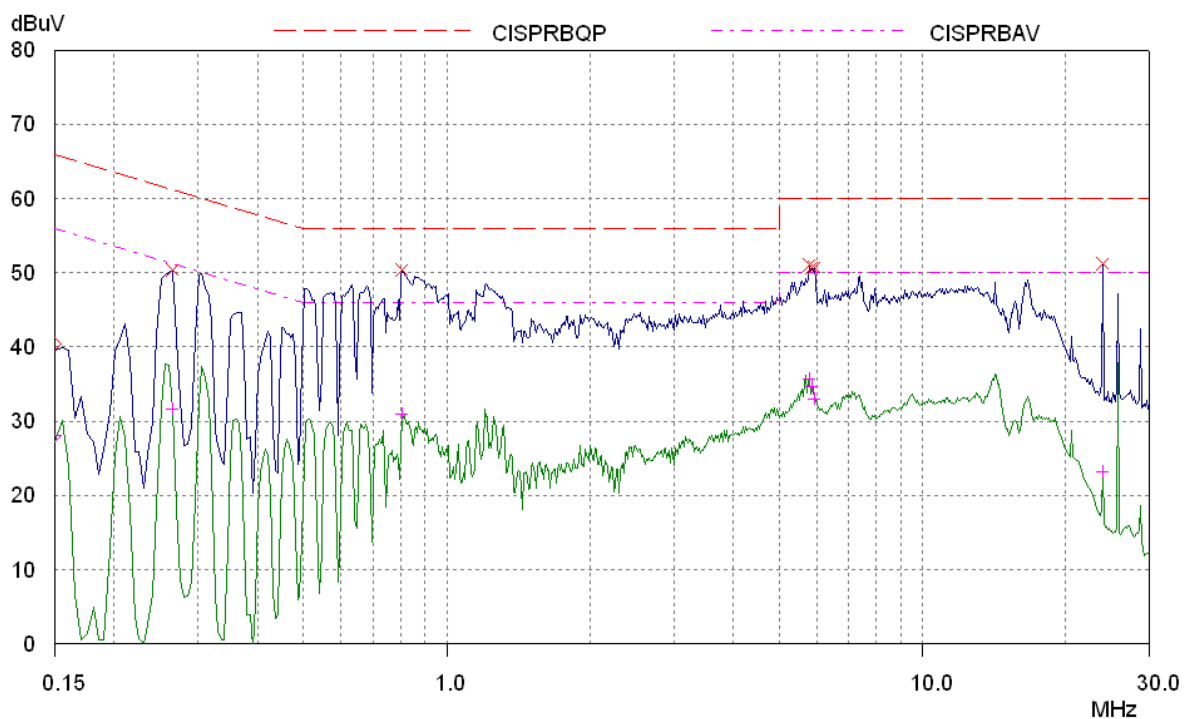



CTK Co., Ltd.
The Power Leader of Global Engineering Companies

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2009-10-29
2	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2009-10-31
3	EMI Test Receiver	Rohde & Schwarz	ESVS30	826638/008	2009-06-10
4	ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014	2010-06-12
5	LOOP ANTENNA	EMCO	6502	9107-2652	2010-10-17
6	LOOP ANTENNA	EMCO	6502	9607-3020	2010-03-06
7	System Power Supply	HP	6032A	3440A-10521	2009-07-07
8	EPM Series Power Meter	HP	E4418A	GB38272734	2009-10-31
9	Power Sensor	HP	8481A	331BA92056	2009-10-31
10	Audio Analyzer	HP	8903B	2747A03432	2009-11-03
11	ESG-D Series Signal Generator	Agilent	E4432B	US40054094	2009-10-31
12	SYNTHESIZED SWEEPER	HP	8341B	2819A01563	2009-10-31
13	Modulation Analyzer	HP	8901B	3438A05228	2009-11-03
14	Attenuator	HP	8494A	3308A33351	2009-10-31
15	Temp&Humi Chamber	Kunpoong	KP-1000	2002KP050041	2010-01-29
16	Temp&Humi Chamber	Kunpoong	KP-RC2000	2002KP650042	2010-01-29
17	EMC Analyzer	Agilent	E7403A	MY42000054	2009-09-03
18	Horn Antenna	ETS-Lindgren	3115	00078894	2010-11-29
19	Horn Antenna	ETS-Lindgren	3115	00078895	2010-11-29
20	Horn Antenna	ETS-Lindgren	3116	00062504	2010-11-27
21	Horn Antenna	ETS-Lindgren	3116	00062916	2010-11-27
22	Dipole Antenna	SCHWARZBECK	VHA 9103	VHA91032557	2009-11-27
23	Dipole Antenna	SCHWARZBECK	UHA 9105	UHA91052417	2009-11-27
24	OPT H64 AMPLIFIER	HP	8447F	3113A06814	2010-04-09
25	PREAMPLIFIER	Agilent	8449B	3008A02307	2009-10-31
26	Radio Communication Tester	Rohde & Schwarz	CMU200	106765	2010-02-19
27	Band Reject Filter	Wainwright Instruments	WRCG824	-	2010-04-09
28	Band Reject Filter	Wainwright Instruments	WRCG1750	-	2010-04-09
29	Field Strength Meter	Rohde & Schwarz	ESHS30	862024/001	2010-03-04
30	LISN	Rohde & Schwarz	ESH3-Z5	100207	2009-12-20
31	LISN	EMCO	3825/2	9206-1971	2009-12-20
32	DC POWER SUPPLY	Agilent	E3632A	MY40000004	2009-07-07