

FCC EVALUATION REPORT FOR CERTIFICATION

Korea Standard Technology

Test report No.: KST-FCC0410

Manufacturer's Name : Megavision Co., Ltd.

Manufacturer's Address: 799 Anyang Megavalley, Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA

EUT's:

FCC ID : QJSMV141

Product Name : LCD MONITOR

Model Number(s) : MV141

Product Options : None

Category : FCC Part 15 sub. part B Class B Digital Device

Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Issue Date : May 15, 2004

Tested by:



Choi, Jae-Rak

**Approved
by:**



Lee, Woen-Woo

EMI TEST REPORT

Report reference No: KST-FCC0410



Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Sample Label

EMI TEST REPORT



Report reference No: KST-FCC0410

1. Description of Device

1) Kind of equipment:	LCD MONITOR
2) FCC ID:	QJSMV141
3) Model Name:	MV141
4) Serial No.:	None
5) Type of Sample Tested:	Pre-production
6) High Frequency Used:	24.576MHz 12.000MHz
7) Adapter	Model name: LSE9901B1250 Manufacturer: LI SHIN INTERNATIONAL ENTERPRISE CORP. Serial no: A20333056148 1phase AC100-240V, 1.0A, 50/60Hz Output: DC 12V, 3.33A
8) Power Rating:	1phase AC120V, 60Hz
9) Tested Power supply:	1phase AC120V, 60Hz
10) Date of Manufacture:	May , 2004
11) Manufacture:	Megavision Co., Ltd
12) Description of Operating:	Scroll All "H" Character Resolution 1024*768 Vertical Frequency: 75Hz
13) Dates of Test:	May 10, 2004
14) Place of Tests:	Korea Standard Technology EMC site
15) Test Report No:	KST-FCC0410

EMI TEST REPORT



Report reference No: KST-FCC0410

2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology (KOSTEC Co., Ltd)

Head office:

302 City Bild, 1600-3 Kwanyang-dong, Dongan-gu, Anyang-shi, Kyunggi-do, Korea

Telephone No : 82-31-388-2051

Facsimile No: 82-31-388-2052

Test Lab

:180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Telephone No : 82-31-222-4251

Facsimile No: 82-31-222-4252

MIC(Ministry of Information and Communication) No: **KR0042**

FCC Filing No. : **525762**

VCCI Membership Number : **2005**

VCCI Registration Number : **R-1657 / C-1763**


EMI TEST REPORT




Report reference No: KST-FCC0410

3. MAP

Korea

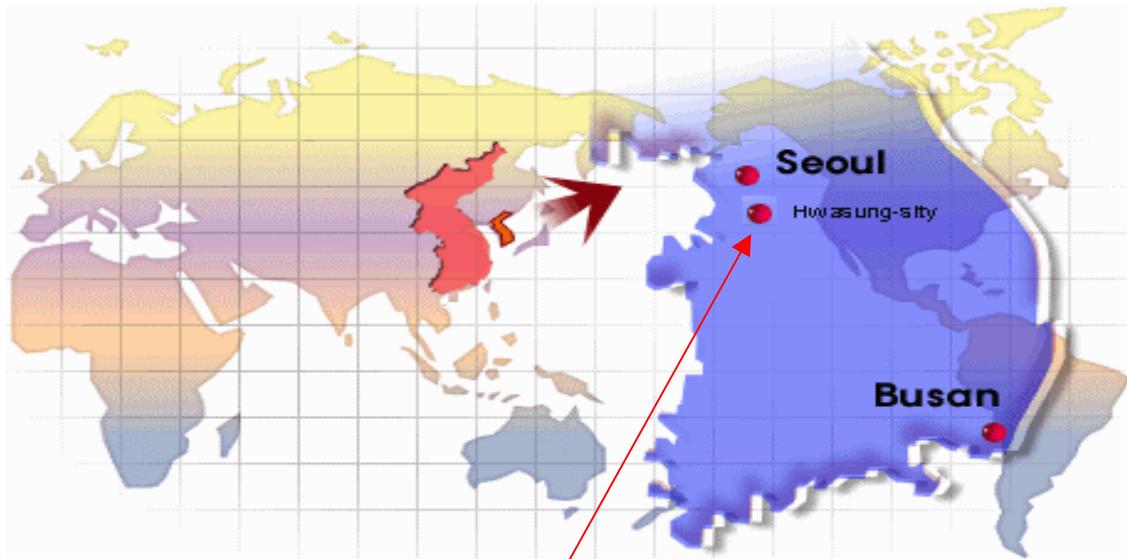

Hwasung-si (open area test site)

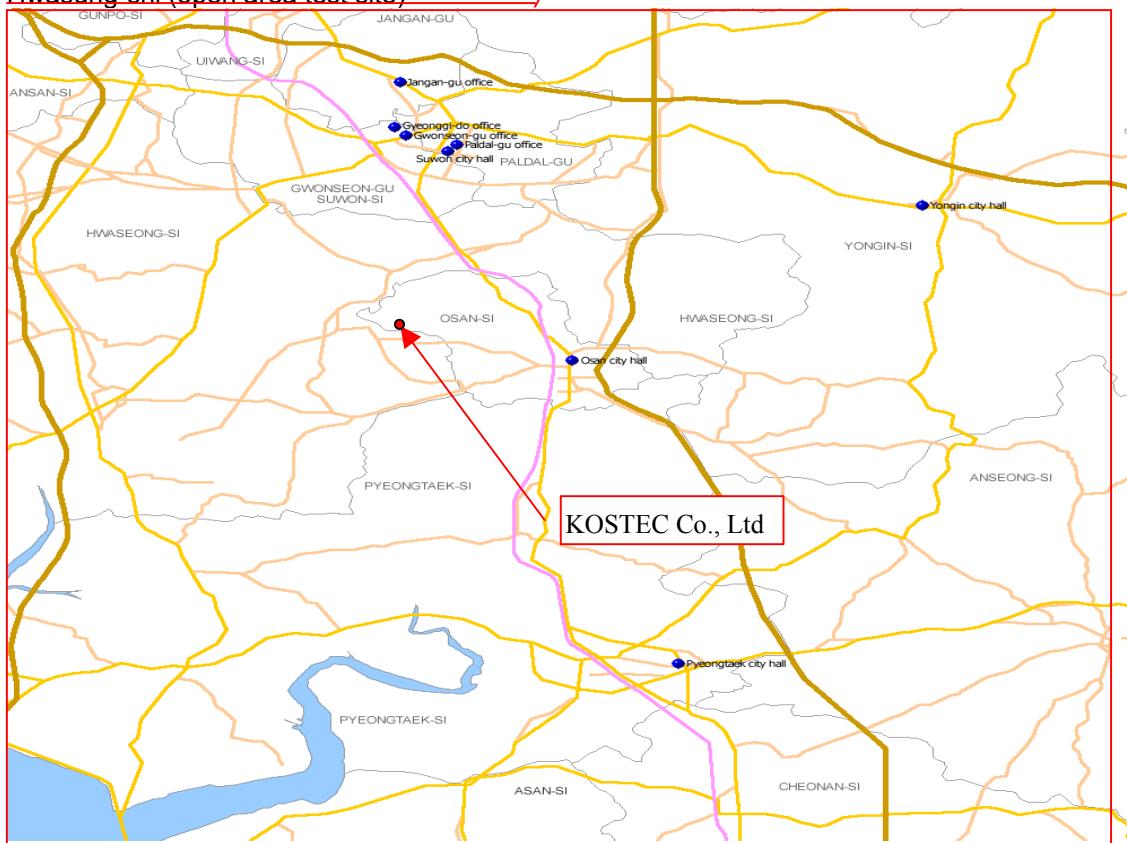

EMI TEST REPORT



Report reference No: KST-FCC0410

4. TEST SYSTEM CONFIGURATION

Operation Environment

Ambient	<u>Temperature</u> (° C)	<u>Humidity</u> (%)	<u>Pressure</u> (hPa)
10m Open Area site	18.9	42	1010
Shielded room:	18.5	41	1011

Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10m Open Area Site: Radiated Emission

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, ite imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$

EMI TEST REPORT



Report reference No: KST-FCC0410

5. Description of E.U.T.

Product Description

Manufactured By:	Megavision Co.,Ltd.
Address:	799 Anyang Megavalley,Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA
Model:	MV141
Serial Number:	None

Configuration of EUT

Description	Manufacturer	Model/Part #	Serial Number
LCD Panel	BOEhydis	HT14X19-300	NRQ03630011000030
Main Board	Megavision Co.,Ltd.	14&15 inch Monitor	None
Ac/dc adapter	LI SHIN INTERNATIONAL ENTERPRISE CORP.	LSE9901B1250	A20333056148

EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Yes	1.2	-	DC INLET	Ac/dc adapter	Main power source
VGA In	Yes	1.5	Y	D-sub	EUT	Personal computer
PS/2	Y	1.2	Y	Din	PC	Keyboard
PS/2	Y	1.5	-	Din	PC	Mouse
Parallel	Y	1.5	Y	D-sub	PC	Printer

Operating conditions

The operating mode/system were as follows in details:

Operating: After Connected from personal computer to E.U.T by RGB cable(D-sub 15 pin).And then use to "H" pattern program for data transmission and continuously 'H' pattern displayed on the LCD Monitor.

EMI TEST REPORT



Report reference No: KST-FCC0410

7. TEST RESULTS

7.1 Conducted emission

Measurement procedure

Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4m above the reference ground plane. They were folded back and forth forming a bundle 30cm to 40Cm long and were hanged at a 40cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2005.03.17	●
L.I.S.N.	ESH2-Z5	100044	R&S	2005.04.23	●
	ESH2-Z5	100147	R&S	2005.04.23	●

measurement uncertainty

Conducted Emission measurement : $\pm 2.4\text{dB}$ (K=2)

Test data

FREQ. (MHz)	LEVEL(dB μ V)		LINE Pol	Loss (dB)	LIMIT(dB μ V)		MARGIN(dB μ V)	
	QP	AV			QP	AV	QP	AV
0.210	43.25	33.58	N	0.29	61.89	51.89	18.35	18.02
0.262	40.00	32.74	L	0.29	59.66	49.66	19.37	16.63
0.418	31.73	28.73	N	0.29	56.00	46.00	23.98	16.98
0.574	34.35	31.60	N	0.90	56.00	46.00	20.75	13.50
0.834	31.38	29.55	N	0.43	56.00	46.00	24.19	16.02
1.674	28.98	26.26	N	0.44	56.00	46.00	26.58	19.30
5.458	25.38	18.53	N	0.75	60.00	50.00	33.87	30.72
12.390	31.00	30.80	N	1.52	60.00	50.00	27.48	17.68
20.646	26.91	22.01	N	1.77	60.00	50.00	31.32	26.22

* Level = test receiver reading value / * Loss = LISN insertion Loss + Cable Loss


EMI TEST REPORT



Report reference No: KST-FCC0410


Conducted emission test graph

Line. Live

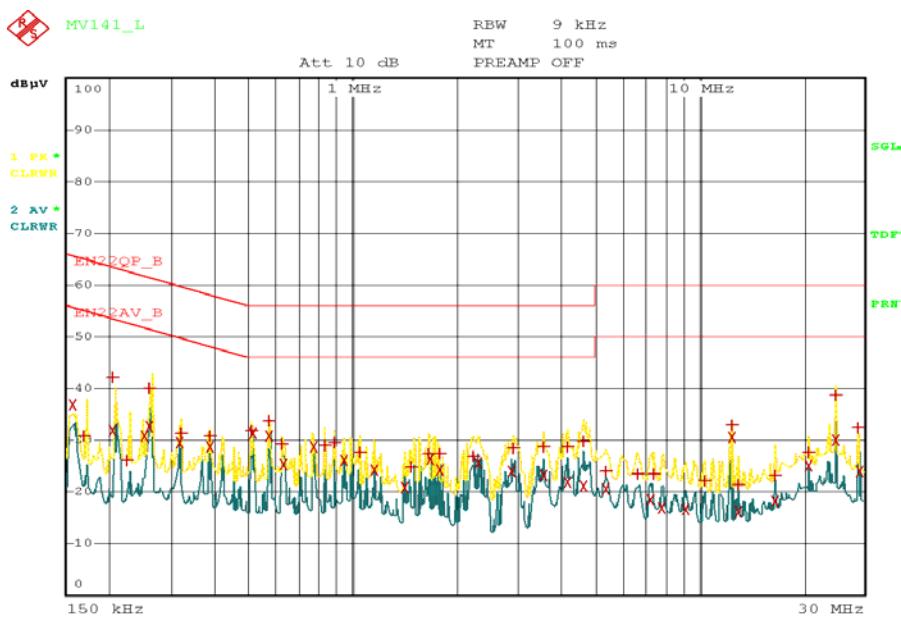

Date: 10.MAY.2004 12:00:29

Line. Neutral

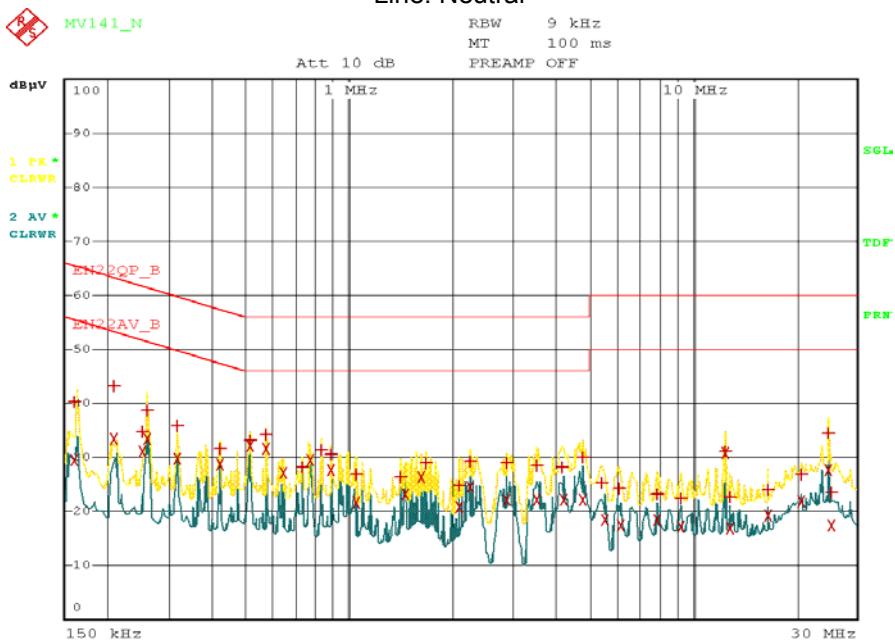

Date: 10.MAY.2004 11:57:32

EMI TEST REPORT



Report reference No: KST-FCC0410

7.2 Radiated Emission

Measurement procedure

A pretest was performed at 3m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal	Used
Test receiver	ESCS30	100111	R&S	2005.3.17	●
Ultra broadband antenna	HL562	100075	R&S	2005.3.16	●
Antenna Mast	AT14	none	Daeil EMC	-	●
Turn Table	TT15	none	Daeil EMC	-	●
10m Open area site	None	none	KOSTEC Lab	-	●
chamber(3m)	none	none	FRANCONIA	-	

Measurement uncertainty

Radiated Emission measurement : 30-300MHz +3.96dB / -4.04dB
300-1000MHz +3.04dB / -3.00dB

Test data

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dB)	Margin (dB)
30.28	8.90	H	3.80	70	19.50	1.80	30.20	40.0	9.80
110.25	19.50	V	2.00	250	9.20	3.80	32.50	43.5	11.00
125.98	21.60	H	3.50	90	9.20	3.90	34.70	43.5	8.80
157.50	22.41	H	3.40	90	7.68	4.41	34.50	43.5	9.00
212.59	22.60	H	3.30	270	7.72	4.98	35.30	43.5	8.20
233.85	25.85	H	3.50	250	8.82	5.13	39.80	46.0	6.20
400.90	15.20	H	2.90	90	13.50	7.40	36.10	46.0	9.90
551.24	13.48	H	2.80	100	16.22	9.10	38.80	46.0	7.20
629.99	13.00	H	2.40	90	17.39	9.41	39.80	46.0	6.20
708.74	12.04	H	2.00	250	18.48	10.08	40.60	46.0	5.40

Reading = Receiver reading / P= Antenna Polarization / H=antenna Height / A=Table Angle
/ Antenna = antenna factor / Cable loss = used cable / Result = reading + antenna + loss
/ Margin = Limit – result / * Test site: 10m Open area site