

# EMC TEST REPORT



## FCC EVALUATION REPORT FOR CERTIFICATION

*Korea Standard Technology*

*Test report No.: KST-FCC0302*

**Manufacturer's Name :** Megavision Co., Ltd.

**Manufacturer's Address:** 799 Anyang Megavalley, Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA

**EUT's:**

**FCC ID** : QJSMV173

**Product Name** : LCD Monitor

**Model Number(s)** : MV173

**Product Options** : N/A

**Category** : FCC Part 15 sub. part B Class B Digital Device

### Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Date:** JULY 11, 2003

**Tested by:**

Kim, Ha-Hyoung

**Approved  
by:**

Lee, Woen-Woo

# EMC TEST REPORT



Report reference No: KST-FCC0302

## Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Sample Label

# EMC TEST REPORT

Report reference No: KST-FCC0302



## 1. Description of Device

1) Kind of equipment:	LCD Monitor
2) FCC ID:	QJSMV173
3) Model Name:	MV173
4) Serial No.:	None
5) Type of Sample Tested:	Pre-production
6) High Frequency Used:	27.000MHz / 24.576MHz 12.000MHz
7) Adapter	Model name: LSE9901B1250 Manufacturer: LI SHIN INTERNATIONAL ENTERPRISE CORP. Serial no: A20307120461
8) Power Rating:	1phase AC100-240V, 1.5A, 50/60Hz Output: DC 12V, 4.1A
9) Tested Power supply:	1phase AC120V, 60Hz
10) Date of Manufacture:	June 23, 2003
11) Manufacture:	Megavision Co., Ltd
12) Description of Operating:	Scroll All "H" Character Resolution 1024*768 Vertical Frequency: 75Hz
13) Dates of Test:	July 11, 2003
14) Place of Tests:	Korea Standard Technology EMC site
15) Test Report No:	KST-FCC0302

# EMC TEST REPORT

Report reference No: KST-FCC0302



## 2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology ( KOSTEC Co., Ltd)

Head office:

302 City Bild, 1600-3 Kwanyang-dong, Dongan-gu, Anyang-shi, Kyunggi-do,  
Korea  
Telephone No : 82-31-388-2051  
Facsimile No: 82-31-388-2052

Test Lab

:180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Telephone No : 82-31-222-4251  
Facsimile No: 82-31-222-4252

MIC (Ministry of Information and Communication) No: **KR0042**

FCC Filing No. : **525762**

VCCI Membership Number : **2005**

VCCI Registration Number : **R-1657 / C-1763**


# EMC TEST REPORT

Report reference No: KST-FCC0302




## 3. MAP

Korea

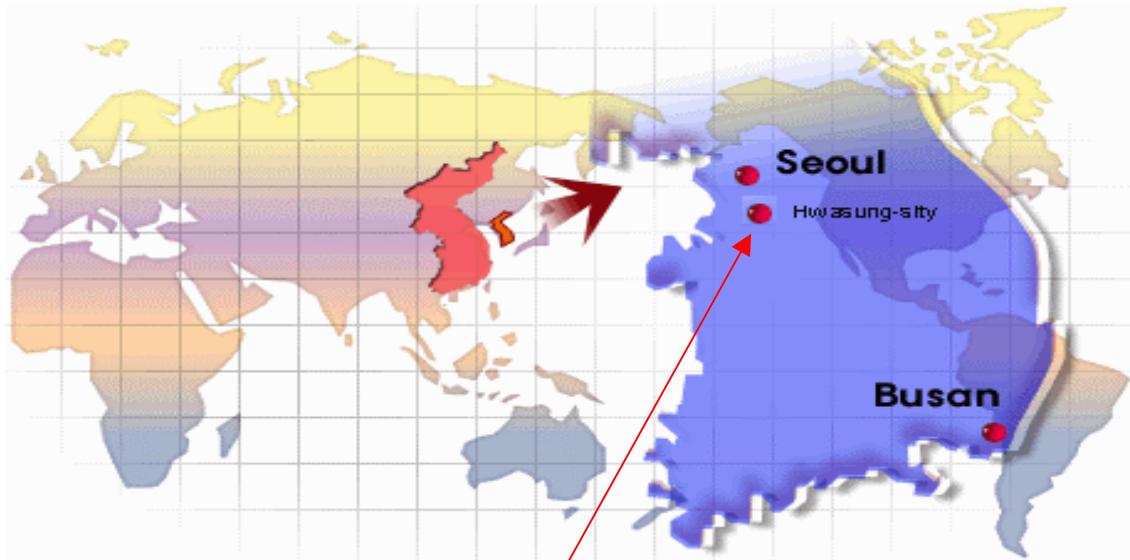

Hwasung-shi (open area test site)

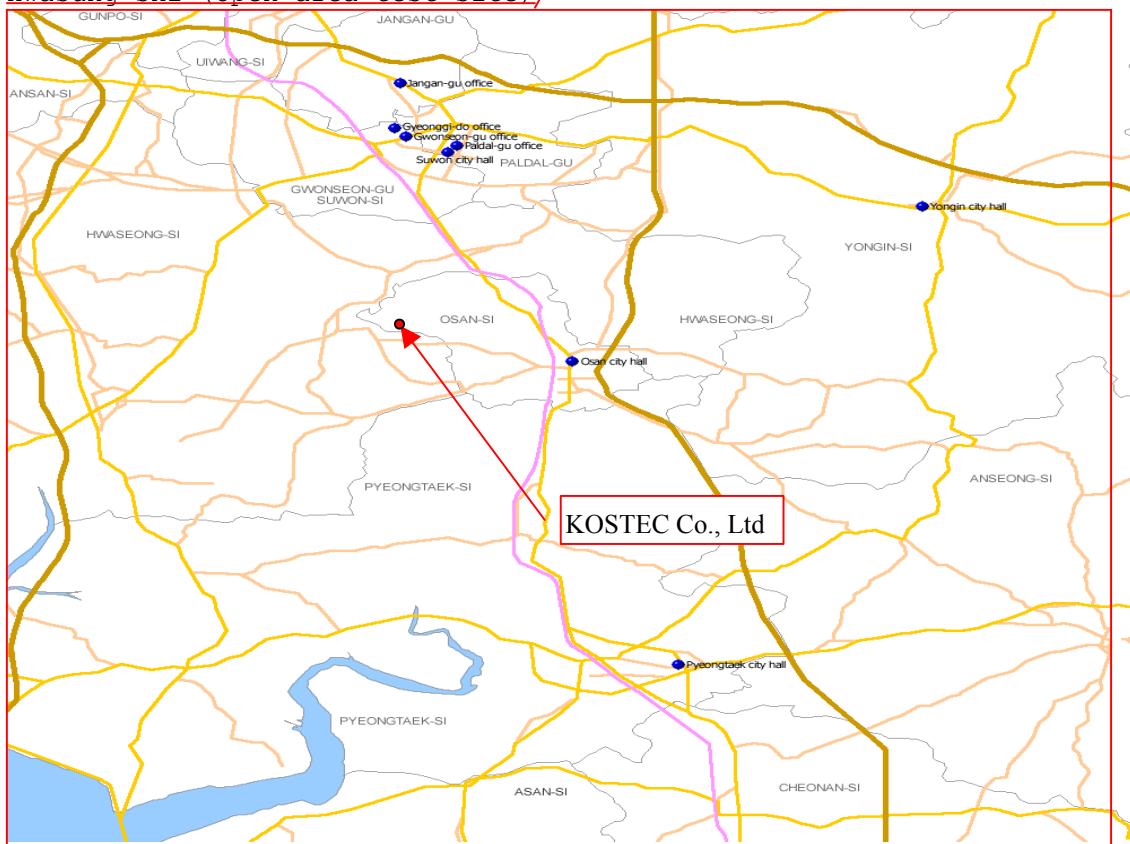

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 5 of 5  
JULY 15, 2003

# EMC TEST REPORT



Report reference No: KST-FCC0302

## 4. TEST SYSTEM CONFIGURATION

### Operation Environment

Ambient	<u>Temperature</u> ( ° C )	<u>Humidity</u> ( % )	<u>Pressure</u> ( hPa )
10m Open Area site	26.2	51	1008
Shielded room:	23.1	50	1007

### Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10m Open Area Site: Radiated Emission

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

### sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

FS = MR + LF + CL  
MR = Meter Reading  
LF = LISN Factor  
CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB  
The result (MR) is

30 + 1 + 1 = 32dBuV

# EMC TEST REPORT



Report reference No: KST-FCC0302

## 5. Description of E.U.T.

### Product Description

Manufactured By:	Megavision Co.,Ltd.		
Address:	799 Anyang Megavalley, Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA		
Model:	MV173		
Serial Number:	None		

### ConfigUration of EUT

Description	Manufacturer	Model/Part #	Serial Number
LCD Panel	Hyundai	HT17E12-201	QHQ03121011000192
AD Board	Megavision Co.,Ltd.	MV173	None
Inverter Board	P.I.S. CORP	AT-0150XHCBIT	None
OSD Board	Megavision Co.,Ltd.	None	None
Ac/dc adapter	LI SHIN INTERNATIONAL ENTERPRISE CORP.	LSE9901B1250	A20307120461

### EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER Line	Yes	1.2	-	DC INLET	Ac/dc adapter	Main power source
VGA In	Yes	1.5	yes	D-sub	EUT	Personal computer
S-Video	Yes	1.0	-	Din	EUT	-
DVI	Yes	1.0	Yes	D-sub	EUT	-

### Operating conditions

The operating mode/system were as follows in details:

Operating: After Connected from personal comput to E.U.T by RGB cable(D-sub 15 pin).And then use to "H" pattern program for data transmission and continuously 'H' pattern displayed on the LCD Monitor.

.

### Peripherals

No	Description	Manufacturer	Model/Part #	Serial Number
1	Personal computer	TG KOREA	HP Pavillion t212k	KRJ32101BH
2	LCD MONITOR	Megavision Co., Ltd	MV173	None
3	Ac/dc adapter	LI SHIN INTERNATIONAL ENTERPRISE CORP.	LSE9901B1250	A20307120461

KOSTEC Co.,Ltd.

180-254,Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>


# EMC TEST REPORT



Report reference No: KST-FCC0302

4	Keyboard	HP	5219	BN31719954
5	Mouse	HP	M042K0	30205141
6	Printer	HP	C2605A	SG55M1B0RN
7	Ac/dc adapter	HP	Deskwriter	None

## E.U.T Test Configuration (example)

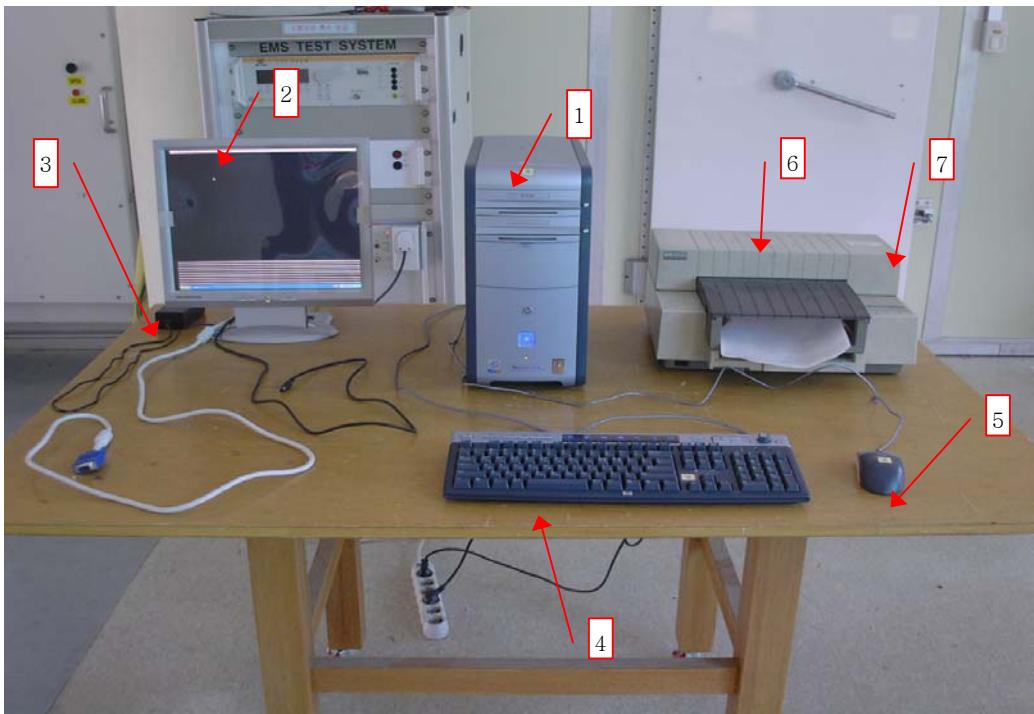

## 6. Summary of test results

Modification to the E.U.T.

- None

Result :

- **PASS**

# EMC TEST REPORT



Report reference No: KST-FCC0302

## 7. TEST RESULTS

### 7.1 Conducted emission

Measurement procedure

#### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4m above the reference ground plane. They were folded back and forth forming a bundle 30cm to 40Cm long and were hanged at a 40cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2004.03.11	●
L.I.S.N.	ESH2-Z5	100044	R&S	2004.04.25	●
	ESH2-Z5	100147	R&S	2004.04.25	●

measurement uncertainty

Conducted Emission measurement :  $\pm 2.4\text{dB}$  (K=2)

test data

FREQ. (MHz)	LEVEL(dB $\mu$ V)		LINE Pol	Loss (dB)	LIMIT(dB $\mu$ V)		MARGIN(dB $\mu$ V)	
	QP	AV			QP	AV	QP	AV
0.202	39.82	35.88	L	0.29	65.57	55.57	26.04	19.98
0.274	34.66	31.60	L	0.29	61.89	51.89	27.52	20.58
0.482	33.45	30.17	L	0.29	59.66	49.66	26.50	19.78
4.394	33.88	33.11	L	0.68	56.00	46.00	22.80	13.57
15.518	29.68	20.88	L	1.77	60.00	50.00	32.09	30.89
17.098	31.17	22.98	L	1.77	60.00	50.00	30.60	28.79
24.526	27.91	22.65	N	2.20	60.00	50.00	34.29	29.55

\* Level = test receiver reading value

\* Loss = LISN insertion Loss + Cable Loss

Conducted emission test graph

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252


<http://www.kosteclab.com>

# EMC TEST REPORT

Report reference No: KST-FCC0302




## Line. Live

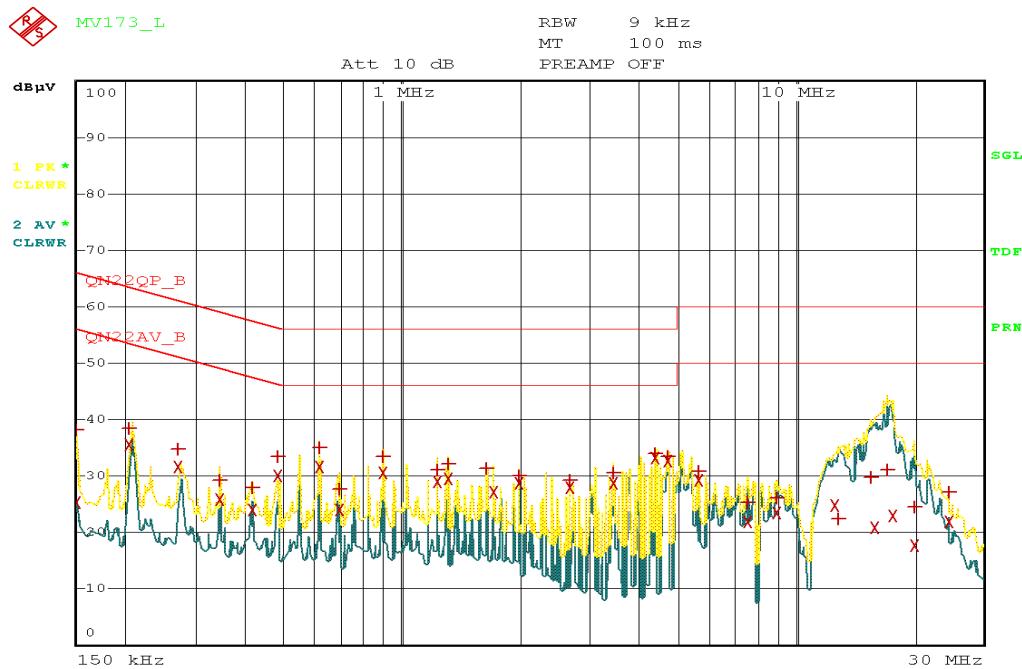

Date: 11.JUL.2003 13:43:27

## Line. Neutral

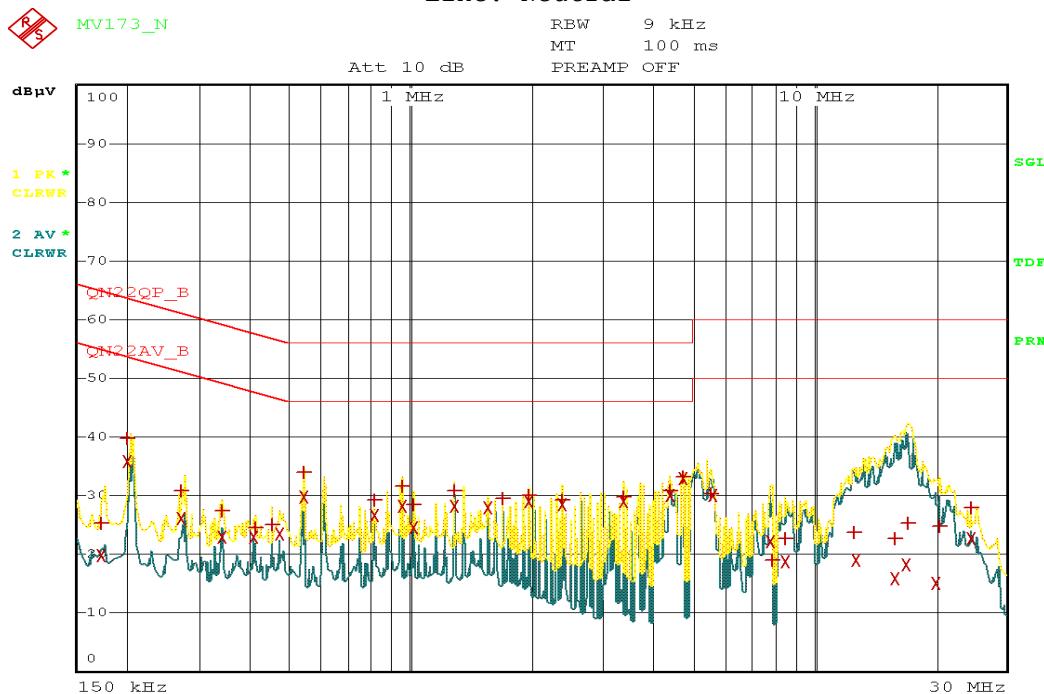

Date: 11.JUL.2003 13:39:25

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 10 of 10  
JULY 15, 2003

# EMC TEST REPORT

Report reference No: KST-FCC0302



## 7.2 Radiated Emission

### Measurement procedure

A pretest was performed at 3m distances in a semi-anechoic chamber for searching correct frequency.

The final test was done at a 10m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	USED
Test receiver	ESCS30	100111	R&S	2004.3.17	●
Ultra broadband antenna	HL562	100075	R&S	2004.3.18	●
Antenna Mast	AT14	none	Daeil EMC	-	●
Turn Table	TT15	none	Daeil EMC	-	●
10m Open area site	None	none	KOSTEC Lab	-	●
chamber (3m)	none	none	FRANCONIA	-	

### measurement uncertainty

Radiated Emission measurement :

30-300MHz +3.96dB / -4.04dB  
300-1000MHz +3.04dB / -3.00dB

# EMC TEST REPORT

Report reference No: KST-FCC0302



test data

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A ( . )	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dB)	Margin (dB)
54.00	19.41	V	1.50	180	5.07	3.02	27.50	40.0	12.50
135.00	18.40	V	1.80	160	8.30	4.10	30.80	43.5	12.70
162.00	19.48	H	3.50	180	7.46	4.46	31.40	43.5	12.10
297.00	18.47	V	2.30	150	10.86	6.47	35.80	46.0	10.20
351.00	15.47	H	3.30	200	12.33	7.10	34.90	46.0	11.10
405.00	15.85	V	2.10	110	13.60	7.45	36.90	46.0	9.10
459.00	14.56	H	3.20	150	14.78	7.86	37.20	46.0	8.80
616.98	13.03	V	2.00	50	17.22	9.35	39.60	46.0	6.40

Reading = Test receiver reading

P= antenna Polarization

H=antenna Height

A=turn table Angle

Antenna = antenna factor

Cable loss = used cable loss

Result = reading + antenna + loss

Margin = Limit - result

\* Receiving Antenna Mode: Horizontal, Vertical

\* Test site: 3m Open area site