

FCC EVALUATION REPORT FOR CERTIFICATION

KOREA Standard Technology

Test report No.: KST-FCC07004

Applicant's Name : Megavision Co., Ltd.

Applicant's Address : 799 Anyang Megavalley, Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA

Manufacturer's Name : Megavision Co., Ltd.

Manufacturer's Address : 799 Anyang Megavalley, Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA

EUT's:

FCC ID : QJSMV220FB

Product Name : TFT LCD Monitor

Model Number(s) : MV220FB

Product Options : N/A

Category : FCC Part 15 subpart B

Class B Computing Digital Device

Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Test Date : January 17, 2007

Issued Date : January 19, 2007

Tested by:



Jae-rak, Choi

Approved by:



Weon-Woo, Lee

Contents

1. Description of E.U.T
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Sample Label, enlarged photo



EMI TEST REPORT

Report reference No: KST-FCC07004



1. Description of E.U.T

1) Kind of equipment: TFT LCD Monitor

2) FCC ID: QJSMV220FB

3) Model Name: MV220FB

4) Serial No.: None

5) Type of Sample Tested: Pre-production

6) High Frequency Used: 14.31818 MHz

7) Adapter: Model name: LSE9901B1250
Manufacturer: LI SHIN INTERNATIONAL ENTERPRISE CORP.
Serial no: A30647205804

8) Power : Input: 100 ~ 240 V, 50/60 Hz 1.5 A
Output: 12V, 4.16 A

9) Tested Power supply: 1phase AC120 V, 60 Hz

10) Date of Manufacture: December, 2006

11) Manufacture: Megavision Co., Ltd.

12) Description of Operating: Scroll "H" Character

13) Dates of Test: January 17, 2007

14) Place of Tests: KOSTEC Co., Ltd. EMC site

15) Test Report No: KST-FCC07004



EMI TEST REPORT

Report reference No: KST-FCC07004



2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

KOSTEC CO., LTD. (Korea Standard Technology)

Head office & Test Lab ;

:180-254, Annyung-dong, Hwasung-shi, Gyeonggi-do, Korea

Telephone Number : 82-31-222-4251

Facsimile Number: 82-31-222-4252

MIC(Ministry of Information and Communication) Number: **KR0041**

FCC Filing Number. : **525762**

VCCI Membership Number : **2005**

VCCI Registration Number : **R-1657 / C-1763**

KOSTEC CO., LTD.

180-254, Annyung-dong, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 4 of 22
January 19, 2007




EMI TEST REPORT

Report reference No: KST-FCC07004




3. MAP

Korea

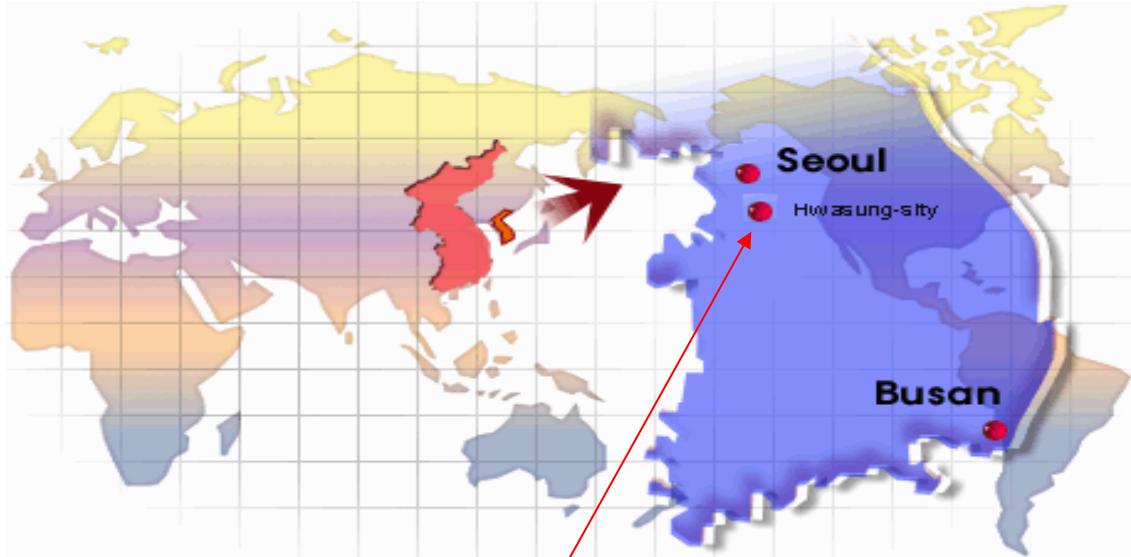

Hwasung-si (open area test site)

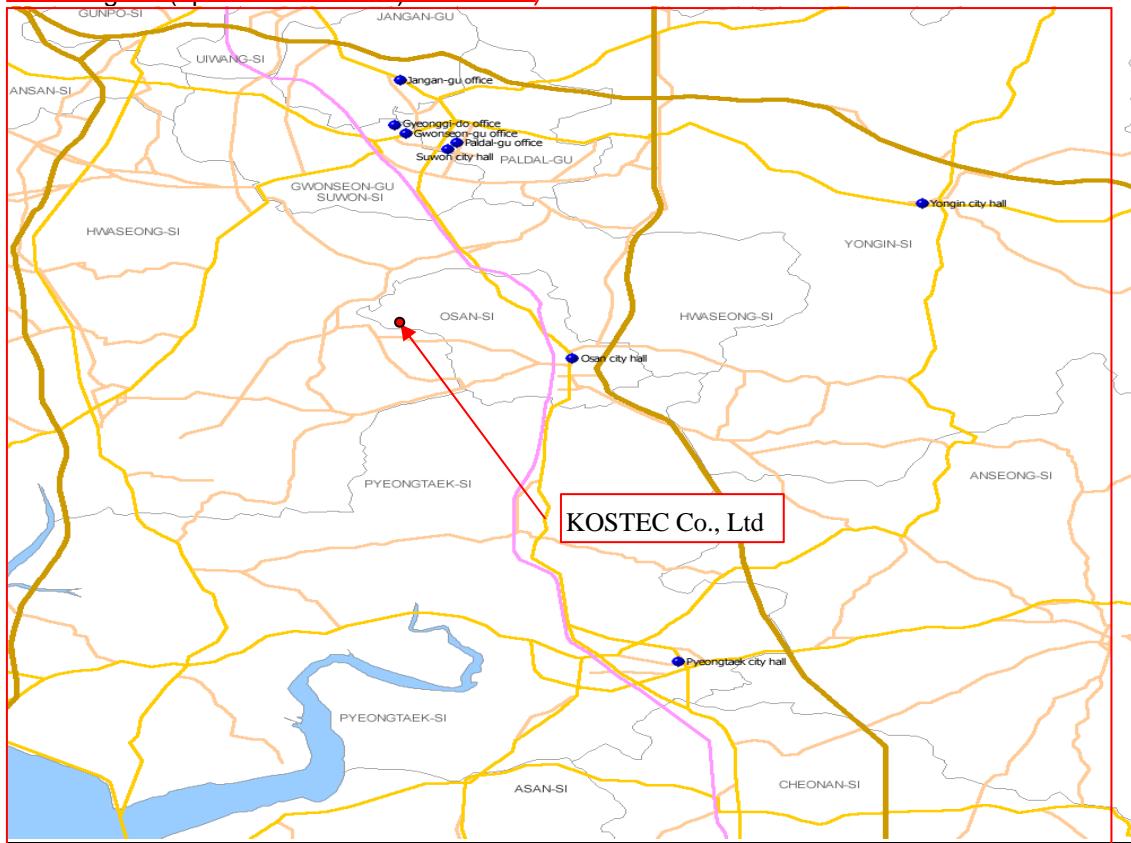

KOSTEC CO., LTD.

180-254, Annyung-dong, Hwasung-si, Kyunggi-do, Korea
Tel : +82-31-222-4251 Fax: +82-31-222-4252
<http://www.kosteclab.com>

Page : 5 of 22
January 19, 2007



4. TEST SYSTEM CONFIGURATION

Operation Environment

	<u>Temperature</u> (°C)	<u>Humidity</u> (%)	<u>Pressure</u> (hPa)
10 m Open Area site	4	33	1018
Shielded room:	20	36	1018

Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, ite imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95 % confidence level were applied.

sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30 dB, LISN Factor 1 dB, CL 1 dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$



EMI TEST REPORT

Report reference No: KST-FCC07004



5. Description of E.U.T.

Product Description

Manufactured By:	Megavision Co., Ltd.
Address:	799 Anyang Megavalley, Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA
Model:	MV220FB
Serial Number:	None

Configuration of EUT

Description	Manufacturer	Model/Part #	Serial Number
LCD Panel	None	M220EW01	AU220010GCLT 8LT06BL25TB
OSD board	Megavision Co., Ltd.	MV220 OSD	None
AD board	Megavision Co., Ltd.	None	None
Inverter	Megavision Co., Ltd.	MV220	20061205

EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Yes	1.5	No	AC INLET	AC/DC adapter	Main power source
DC IN	Yes	1.5	Yes	Jack	EUT	AC/DC adapter
VGA	Yes	1.5	Yes	D-sub	EUT	PC
Audio IN	Yes	1.2	No	Jack	EUT	PC
Audio OUT	No	1.0	No	Jack	EUT	Headphone
DVI	Yes	1.5	No	-	-	-
RCA	No	1.5	No	-	-	-

Operating conditions

The operating mode/system were as follows in details:

Operating: After setting, Connected from PC to E.U.T by VGA Cable and audio cable. E.U.T was tested in state of data transmission and continuously 'H' pattern displayed on the **TFT LCD Monitor(EUT)** for video & audio signal From PC.

KOSTEC CO., LTD.

180-254, Annyung-dong, Hwasung-shi, Kyunggi-do, Korea
Tel : +82-31-222-4251 Fax: +82-31-222-4252
<http://www.kosteclab.com>

Page : 7 of 22
January 19, 2007



EMI TEST REPORT

Report reference No: KST-FCC07004



7. TEST RESULTS

7.1 Conducted emission

Measurement procedure

Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 Cm to 40 Cm long and were hanged at a 40 Cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2007.3.3	●
L.I.S.N.	ESH2-Z5	100044	R&S	2007.5.1	●
	ESH3-Z5	100147	R&S	2007.8.11	●

Measurement uncertainty

Conducted Emission measurement : ± 2.4 dB (K=2)

Test Data

< Class B >

FREQ. (MHz)	LEVEL(dB μ V)		LINE Pol	Loss (dB)	LIMIT(dB μ V)		MARGIN(dB μ V)	
	QP	AV			QP	AV	QP	AV
0.178	43.15	26.51	N	0.08	64.58	54.58	21.35	27.99
0.190	55.59	44.09	L	0.08	64.04	54.04	8.37	9.87
0.254	47.69	36.94	N	0.29	61.63	51.63	13.65	14.40
0.814	36.71	33.81	N	0.43	56.00	46.00	18.86	11.76
0.878	36.50	33.52	N	0.43	56.00	46.00	19.07	12.05
1.502	35.43	32.77	N	0.44	56.00	46.00	20.13	12.79
7.566	34.31	28.21	L	1.20	60.00	50.00	24.49	20.59
23.986	40.32	33.61	L	2.08	60.00	50.00	17.60	14.31
27.874	41.09	34.24	L	2.29	60.00	50.00	16.62	13.47

* Level = test receiver reading value

* Loss = LISN insertion Loss + Cable Loss

KOSTEC CO., LTD.

180-254, Annyung-dong, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 9 of 22
January 19, 2007




EMI TEST REPORT



Report reference No: KST-FCC07004


Conducted emission test graph

Line. Live

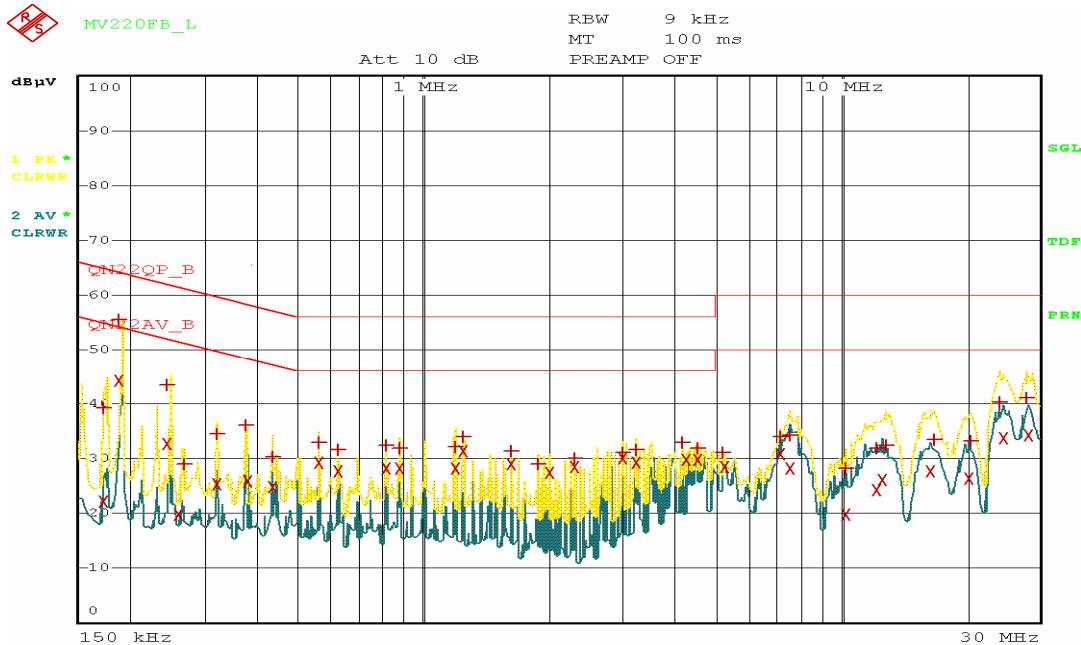

Date: 17.JAN.2007 10:46:11

Line. Neutral

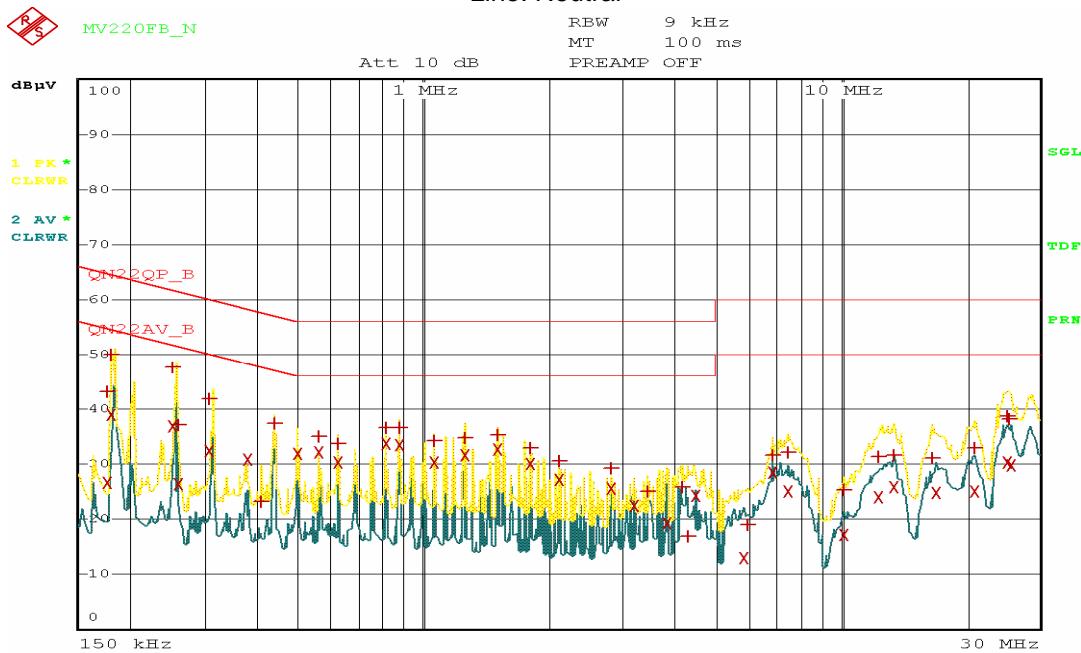

Date: 17.JAN.2007 10:41:38

KOSTEC CO., LTD.

180-254, Annyung-dong, Hwasung-shi, Kyunggi-do, Korea
Tel : +82-31-222-4251 Fax: +82-31-222-4252
<http://www.kosteclab.com>

Page : 10 of 22
January 19, 2007



EMI TEST REPORT

Report reference No: KST-FCC07004



7.2 Radiated Emission

Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal	USED
Test receiver	ESCS30	100111	R&S	2007.3.06	●
Ultra broadband antenna	HL562	100075	R&S	2007.3.23	●
Antenna Mast	AT14	none	Daeil EMC	-	●
Turn Table	TT15	none	Daeil EMC	-	●
10m Open area site chamber(3m)	None	none	KOSTEC Lab	-	●
	none	none	FRANCONIA	-	

Measurement uncertainty

Radiated Emission measurement : :

30-300 MHz + 3.96 dB / -4.04 dB
300-1000 MHz + 3.04 dB / -3.00 dB

Test Data

<Class B>

Freq (MHz)	Reading (dB _{UV} /m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)
40.17	15.80	V	2.70	110	14.10	2.50	32.40	40.0	7.60
80.57	20.10	V	2.00	180	8.20	3.40	31.70	40.0	8.30
126.15	17.06	H	2.50	200	9.10	3.94	30.10	43.5	13.40
189.20	18.39	V	2.00	180	7.22	4.69	30.30	43.5	13.20
213.00	17.65	H	2.50	110	7.78	4.97	30.40	43.5	13.10
297.31	24.07	V	2.50	60	10.86	6.47	41.40	46.0	4.60
371.65	20.88	V	2.20	180	12.73	7.19	40.80	46.0	5.20
520.30	17.40	V	2.00	160	16.10	8.20	41.70	46.0	4.30

Reading = Test receiver reading / P= antenna Polarization / H=antenna Hight

A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss

Result = reading + antenna + loss / Margin = Limit - result

* Receiving Antenna Mode: Horizontal, Vertical / * Test site: 10 m Open area site

KOSTEC CO., LTD.

180-254, Annyung-dong, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 11 of 22

January 19, 2007

