

October 25, 2002

Mr. Mike Churchman
Rocky Mountain Radar
6469 Doniphan Drive
El Paso, TX 79932

Dear Mr. Churchman:

Enclosed is the test report for the **Rocky Mountain Radar** Radar Detector RMR C410 tested at our facility, 556 Route 222 in Groton, New York. This facility is on file with the FCC per CFR 47 2.948 (Site File Number 31040/SIT) and is NVLAP accredited.

As narrated in the report, the product configuration meets the requirements of the FCC per CFR 47 Part 15 Class B for Unintentional Radiators.

Thank you for selecting Diversified T.E.S.T. Technologies, Inc. for your testing needs. We look forward to working with you on future projects. Should you have any questions, or concerns regarding this report please contact me at (800) 724-6452 or (607) 898-4218.

Sincerely,

Shaun Hotaling
Technical Associate

Rocky Mountain Radar
Radar Detector, RMR C410

Project Number:
5487

TEST REPORT

***FCC per CFR 47
Part 15 Class B***

September 25, 2002

Prepared for: **Rocky Mountain Radar**
by: Diversified TEST Technologies, Inc.

<i>DIVERSIFIED T.E.S.T. TECHNOLOGIES, INC. FCC Part 15 Class B TEST REPORT</i>	
Rocky Mountain Radar Radar Detector, RMR C410	Project Number: 5487

Table of Contents

PRODUCT DESCRIPTION	Page 2
TEST SITE INFORMATION	Page 3
RADIATED EMISSIONS CALCULATIONS	Page 4
RADIATED EMISSIONS TEST PROCEDURE	Page 5
DEVIATIONS FROM TEST METHOD	Page 5
DIAGRAMS	Page 6
PHOTOGRAPHS	Page 7
DATA CHARTS	Page 8

Sections omitted from your report were not required as per the agreed test plan

DIVERSIFIED T.E.S.T. TECHNOLOGIES, INC. FCC Part 15 Class B TEST REPORT

Rocky Mountain Radar
Radar Detector, RMR C410

Project Number:
5487

Standard Information & Product Description

STANDARD: FCC Part 15 Class B

CLIENT: **Rocky Mountain Radar**
6469 Doniphan Drive
El Paso, TX 79932

PRODUCT: Radar Detector
Model #: RMR C410
Condition: New

PRODUCT RECEIVED: September 23, 2002

TEST DATES: September 23, 2002

PREPARED BY: Diversified TEST Technologies, Inc.
556 Route 222 • PO Box 8
Groton, New York 13073
(607) 898-4218
(607) 898-4830/fax

COMPILED BY: Shaun Hotaling

Technical Associate

REVIEWED BY: Thomas P. Sims

President

DIVERSIFIED T.E.S.T. TECHNOLOGIES, INC. FCC Part 15 Class B TEST REPORT

Rocky Mountain Radar
Radar Detector, RMR C410

Project Number:
5487

Test Site Information

Location and Registration:

- Open field test site, Diversified T.E.S.T. Technologies, Inc., 556 Rte 222 in Groton NY

Radiated Emissions:

- 30-meter open field
- The equipment under test (EUT) was placed at a 10-meter range in an RF transparent shelter.

Calibration:

- Calibrated to ANSI Procedure C 63.4-1992
- Copy of calibration on file with FCC per Title CFR 47 Section 2.948.

Equipment Calibration:

- The test equipment used is calibrated by the manufacturer or independent calibration laboratory.
- These test results are traceable to NIST, because all calibrations are traceable to NIST standards.

Test Performance:

- Federal Communication Commissions (FCC) regulations as outlined in Title CFR 47, Part 15, for Class A Unintentional Radiators.
- Test procedures used were to CFR 47 15.31, ANSI C 63.4-1992.
- Radiated Emissions per limits 15.109
- Conducted Emissions per limits 15.107

DIVERSIFIED T.E.S.T. TECHNOLOGIES, INC. FCC Part 15 Class B TEST REPORT

Rocky Mountain Radar
Radar Detector, RMR C410

Project Number:
5487

Radiated Emissions Calculations

Diversified T.E.S.T. Technologies, Inc. uses automated data reductions to determine product compliance to radiated emissions regulations. The program is fully automated and plots the signal amplitude against the frequency grid to which it was tested. The plotted charts will print out, in tabular form, the maximized frequencies that were near or over the specification limit. The automatic computation takes into account the programmed parameters required by the FCC specifications; i.e., bandwidth, scan speed and the antenna/cable loss and amplifier gain factors.

The product's signal data is compared to a current ambient scan. The frequencies that are of significant amplitude are automatically sorted out by the computer and are brought out to be further analyzed and maximized. These same frequencies are also profiled by rotating the product 360 degrees on the EMCO 12-foot turntable.

Test Instruments Used

1. ☒ Ridge Horn ANT: Electro-Metrics, Model #: RGA 60, Serial # 2981
2. ☒ HP Spectrum Analyzer, Model # 8593EM
3. ☒ COAX: PIN Style R/G 142-B/V
4. ☒ Power Supply: SORESEN & Co., Inc., Model #: T50-1.5
5. ☒ Printer: EPSON LX-810

<i>DIVERSIFIED T.E.S.T. TECHNOLOGIES, INC. FCC Part 15 Class B TEST REPORT</i>	
Rocky Mountain Radar Radar Detector, RMR C410	Project Number: 5487

Radiated Emissions Test Procedure

The product was tested on our open field range, according to Title CFR 47 15.31, ANSI C 63.4-1992 procedures. The test sample was placed on a non-conductive, wooden table 0.8 meter off the ground grid. The table stands on a 12-foot diameter, non-conductive turntable. With the equipment under test (EUT) operating, the turntable was rotated 360 degrees in increments to show the worse case to the antenna.

The antenna was placed on a mast and raised to a search height of 1-4 meters. The distance from the product and the antennas was 10 meters. The spectrum receiving equipment operates the test remotely from inside a nearby building.

The product/s were found, as submitted or with any modifications as noted in the report, to meet the minimum requirement of the Federal Communications Commission (FCC) Title CFR 47 Part 15, Subpart B for Class B Unintentional Radiators.

DEVIATIONS FROM TEST METHOD

There were no deviations from, additions to or exclusions from the test method, and any other information relevant to the test.

This report stands on the basis of only one sample. Any changes made to the system documented in this report, (i.e. engineering design, manufacturing or process variables) may change the emissions profile, thereby voiding these conclusions.

The findings are for Radiated Emissions per limits 15.109 and Conducted Emissions per limits 15.107 as enforced at the time the testing was performed.

It is the responsibility of the manufacturer to ensure that product identification and labeling are in compliance with the requirements of CFR 47, 15.19 and CFR 47 15.21 information to the user.

Worse Case Cable Placement for Radiated Emissions Testing

The procedure used to determine the worse case analysis of cable placement is accomplished by reviewing the shielding, grounding, and bonding of ALL I/O cables. Using the manufacturer's installation instructions the initial set-up is pre-scanned.

Upon completion, the high level (low margin) areas are reviewed and cables are moved to obtain maximum radiation patterns.

*This report shall not be reproduced, except in full, without the written approval of DTT, Inc.
And must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.*


DIVERSIFIED T.E.S.T. TECHNOLOGIES, INC. FCC Part 15 Class B TEST REPORT

Rocky Mountain Radar
Radar Detector, RMR C410

Project Number:
5487

Diagrams for Radiated Emissions

1 Diagram to Follow

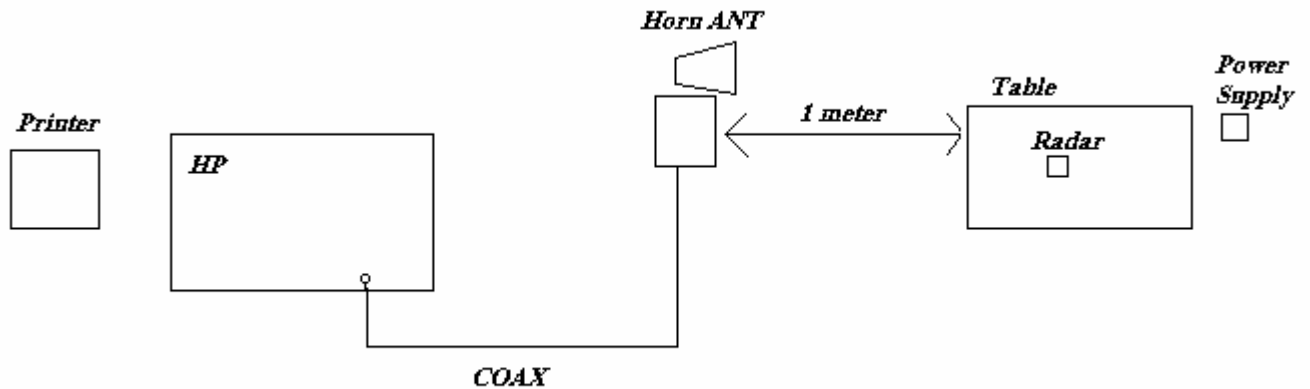

Rocky Mountain Radar
Radar Detector, RMR C410

Project Number:
5487

Photographs for Radiated Emissions



Photograph #1: Radiated Emissions



Photograph #2: Radiated Emissions

<i>DIVERSIFIED T.E.S.T. TECHNOLOGIES, INC. FCC Part 15 Class B TEST REPORT</i>	
Rocky Mountain Radar Radar Detector, RMR C410	Project Number: 5487

Data Charts for Radiated Emissions

[1] Pages of Data Charts to Follow

Rocky Mountain Radar
Radar Detector, RMR C410

14:55:47 SEP 23, 2002

HARKER	ACTV SET: FERR
14.285 GHz	RENG SET: PEAK 3P AVG
47.62 dBm	REF 14.285 GHz
	47.62 dBm

[illegible]

15:03:06 SEP 20, 2002

```

VIDEO AVG          ACTV DET: SNPL
X                  MEAS DET: PEAK QP AVG
                      MKR 11.285 GHz
                      25.29 dBuV

```

LOG REF 80.0 dBu VIDEO BW ON RMR 4/10

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

```
START 10.500 GHz                                STOP 12.000 GHz
#IF BW 1.0 MHz      #AUG BW 1 MHz      #SNP 10.0 sec
```

9