

# Curtis-Straus

**Worldwide Regulatory Approvals Experts**

(A2LA Certificate Number 1627-01)

## Technical Report

Company: Escort, Inc.  
FRN: 0007508732  
Model: Passport SRX  
FCC ID: QKLSRX  
Equipment Code: CRD

Report prepared for:

Escort, Inc.  
5440 West Chester Road  
West Chester, OH 45069  
Phone: (513)-870-8535  
FAX: (513)-870-8523

Report prepared by:

Evan D. Gould  
Curtis-Straus LLC  
527 Great Road  
Phone: (978)-486-8880  
FAX: (978)-486-8828



EMC Manager

**Introduction**

This report is an application for Certification of a Radar Detector operating pursuant to 47 CFR 15.109, as amended by ET Docket No. 01-278; FCC 02-211, published in the Federal Register Vol. 67, No. 145 on Monday July 29, 2002.

**Statement of Conformity**

47 CFR 15.109(h) states that “*Radar detectors shall comply with the emissions limits...of [section 15.109(a)] over the frequency range of 11.7 – 12.2GHz.*” The applicable limit being 500µV/m measured at a distance of 3m. The Escort Passport SRX has been tested and found to comply with this requirement.

**Test Methodology**

Radiated emission testing was performed according to the procedures in ANSI C63.4 (2001). The testing was performed at an antenna to EUT distance of 1 meter. Performance was investigated in the range 11.7-12.2GHz. The Passport SRX was powered by a HP E3612A DC Power Supply. Since the device is a hand-held unit, the emissions were maximized around the three orthogonal axes and the maximum reading was recorded. The integrated antenna cannot be maximized separately.

Test Equipment

<b>SPECTRUM ANALYZERS</b>					
x	Analyzer	Model No.	Company	Serial No.	Calibration Due
X	<b>ORANGE</b> 9kHz-26.5GHz	E4407B	HP	US39440975	07-JUN-2003

<b>OPEN AREA TEST SITES (OATS)</b>					
x	Site	FCC Code	IC Code	VCCI Code	Calibration Due
X	<b>"T"</b> Texas	93448	IC 2762-T	R-905/ C-480	04-FEB-2004

<b>ANTENNAS</b>					
x	Antenna	Model No.	Company	Serial No.	Calibration Due
X	<b>BLACK</b> Horn: 1-18GHz	3115	EMCO	9703-5148	12-JUN-2003

<b>PREAMPLIFIERS / ATTENUATORS</b>					
x	Preamplifier	Model No.	Company	Serial No.	Calibration Due
X	<b>ORANGE-BLACK</b> 1-20GHz	SMC-12A	MITEQ	690639	06-SEP-2002

Unless otherwise noted the calibration interval is one year. All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard. All Open Area Test Sites are located at 527 Great Road, Littleton, MA 01460.

Setup Photo



Model: Passport SRX


**Measurement Results**

All measurements taken were peak detector readings of the noise floor.  
 There were no emissions detected from the EUT.

Radiated Emissions Table							Curtis-Straus LLC		
Date: 08-Aug-02		Company: Escort			Table 1				
Engineer: Evan Gould		EUT Desc: Passport SRX			Work Order: C0610				
Frequency Range: 11.7-12.2GHz				Measurement Distance: 1 m					
Notes: Emissions maximized Horizontally and Vertically. All measurements are noise floor readings.									
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	47 CFR 15.209(a)		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
SRX	12150.0	31.7	20.1	38.9	4.7	55.2	63.5	-8.3	Pass
Test Sites: "T"      Pre-Amp: Or-Blk      Cable: 3m Microflex      Analyzer: Orange      Antennas: Black Horn									

### Emission Plot

Agilent 16:14:59 Aug 8, 2002

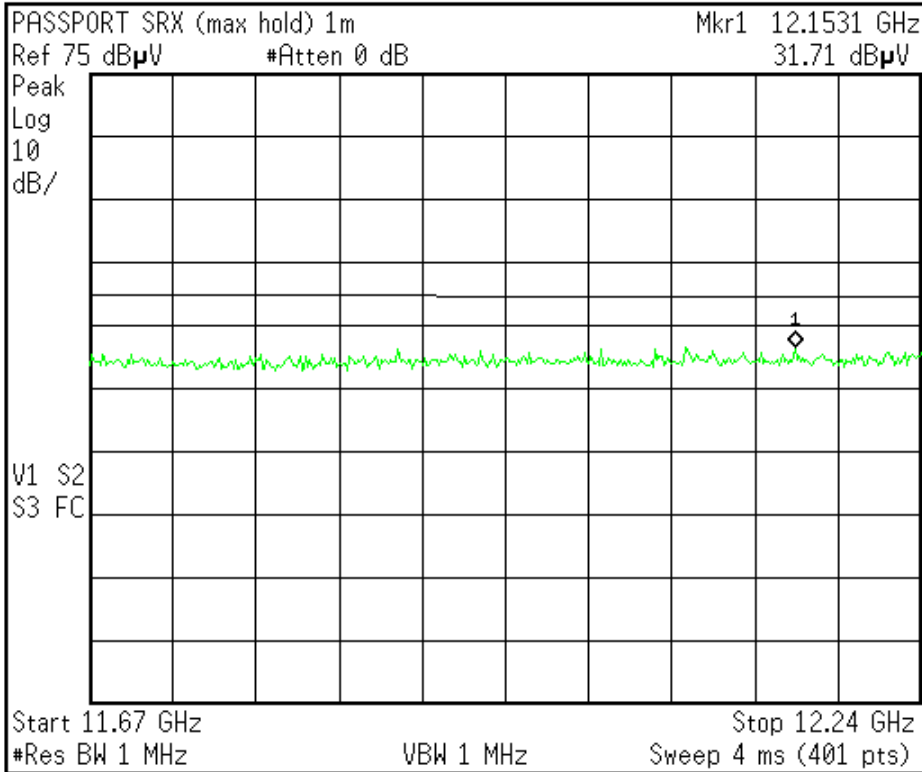

Alpha Editor
a b c d e f g >
h i j k l m n >
o p q r s t u >
v w x y z >
π ρ τ μ
Space
More 2 of 3

A:\LRREMOTE.GIF file saved