

XGM950 (Body)

SAM I Phantom: Flat Section: Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1798; ConvF(7.60,7.60,7.60); Crest factor: 1.0; Body 450 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 56.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.98 mW/g, SAR (10g): 1.36 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -1.79 dB

Comment:

FCC ID : QL2GMRSXGM950

Company : GLOBAL LINK CO., LTD.


Body / Antenna : in (fixed)

Conducted Power : 4.23 W (Battery Type : Rocket)

Mode : FM GMRS Channel : 15 (462.5500 MHz)

Liquid Temperature : 21.3 °C

Date Tested : October 31, 2003

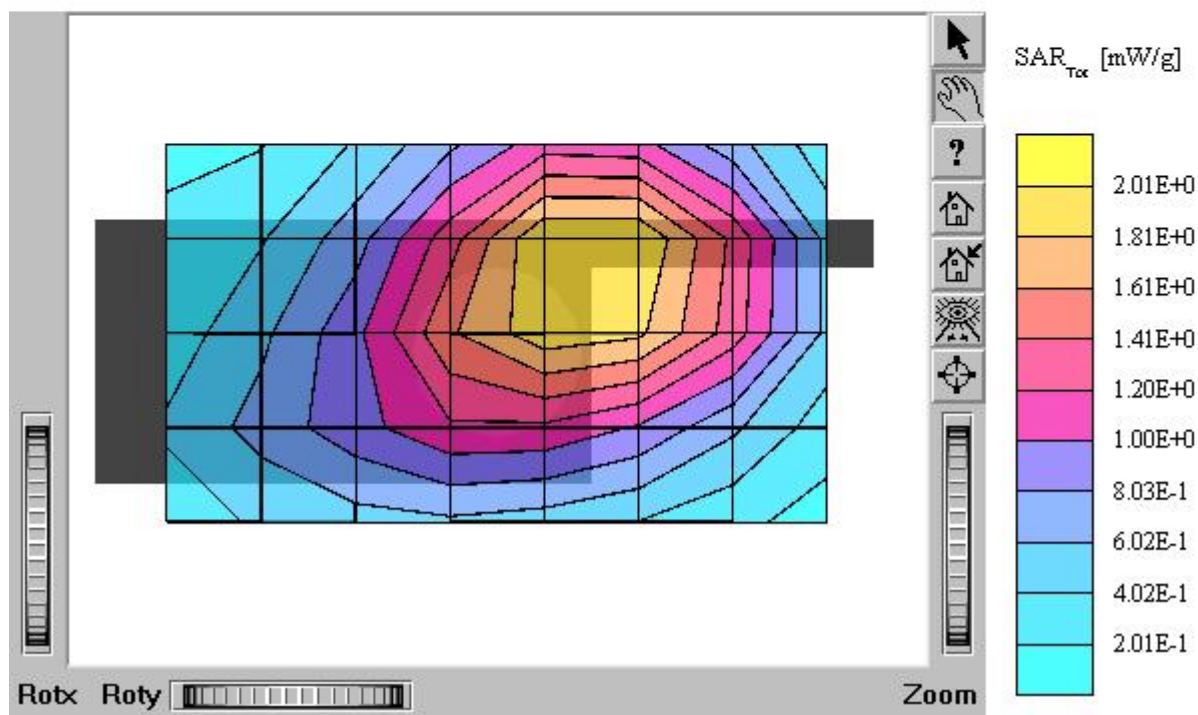

Date Tested : October 31, 2003



XGM950 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1798; ConvF(7.60,7.60,7.60); Crest factor: 1.0; Body 450 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 56.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.471 mW/g, SAR (10g): 0.324 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.55 dB

Comment:

FCC ID : QL2GMRSXGM950

Company : GLOBAL LINK CO., LTD.


Body / Antenna : in (fixed)

Conducted Power : 0.67 W (Battery Type : Rocket)

Mode : FM FRS Channel : 8 (467.5625 MHz)

Liquid Temperature : 21.3 °C

Date Tested : October 31, 2003

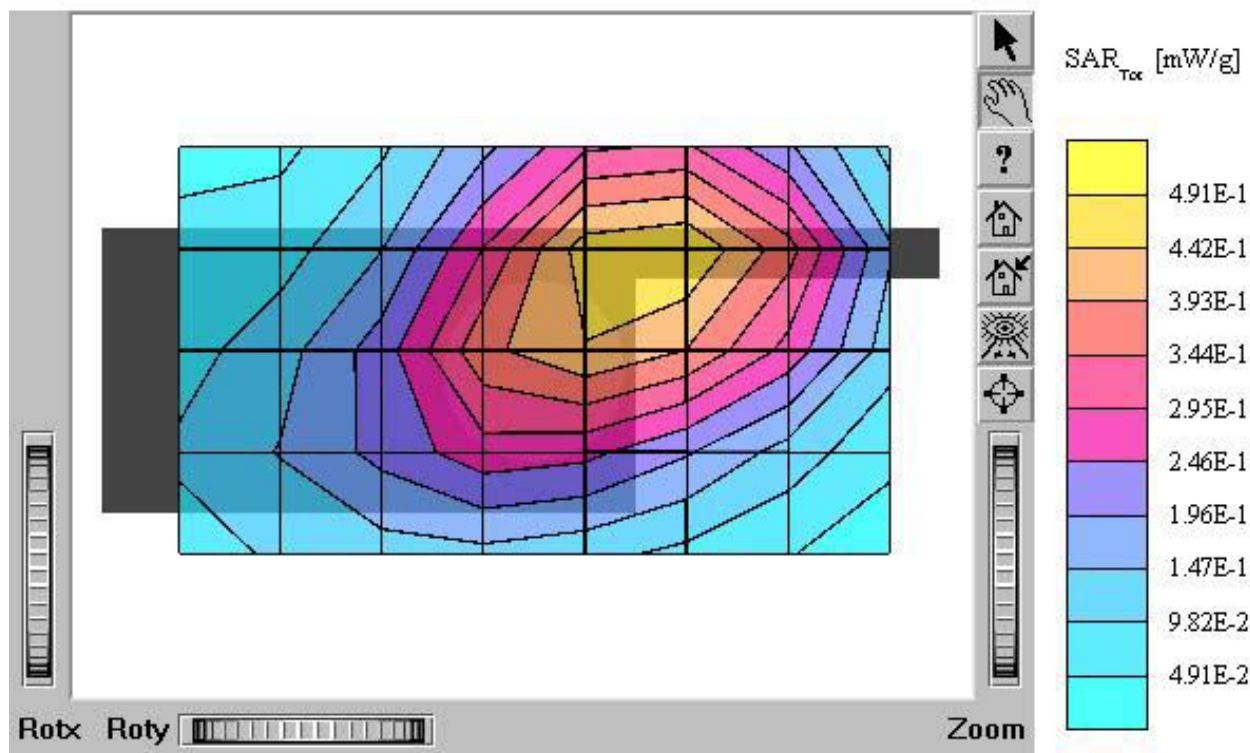

XGM950 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1798; ConvF(7.60,7.60,7.60); Crest factor: 1.0; Body 450 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 56.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 1.83 mW/g, SAR (10g): 1.25 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -1.41 dB

Comment:

FCC ID : QL2GMRSXGM950

Company : GLOBAL LINK CO., LTD.


Body / Antenna : in (fixed)

Conducted Power : 3.71 W (Battery Type : Energizer)

Mode : FM GMRS Channel : 1 (462.5625 MHz)

Liquid Temperature : 21.3 °C

Date Tested : October 31, 2003

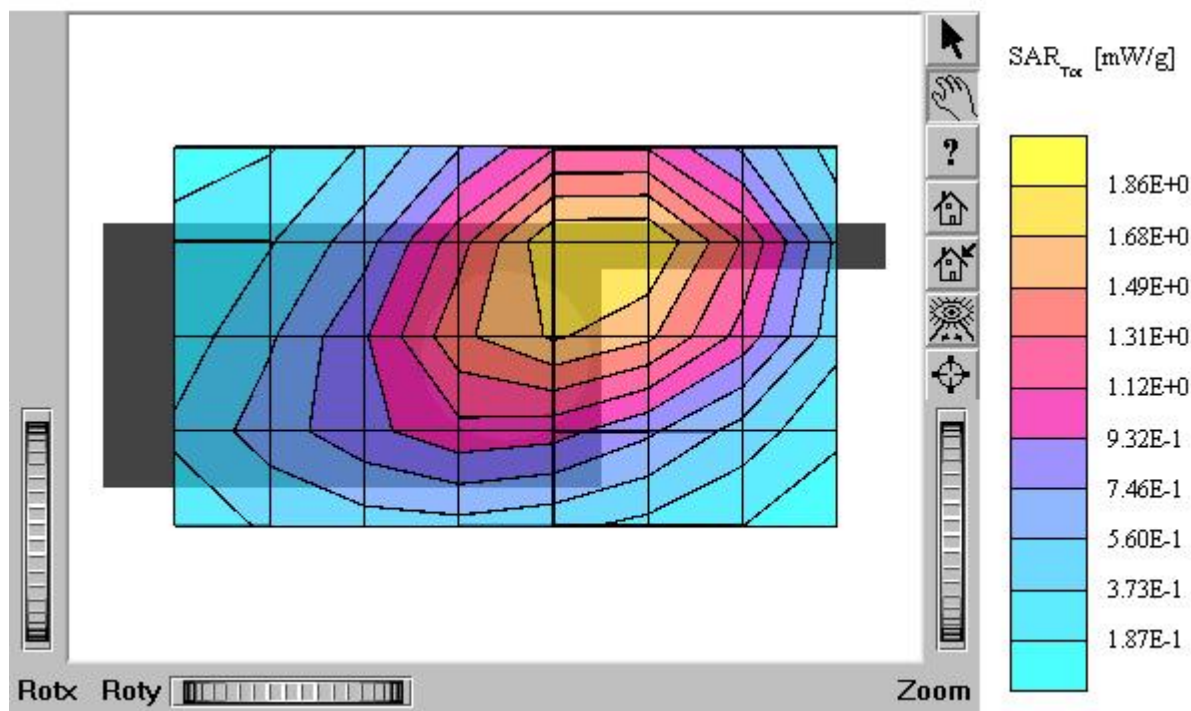

XGM950 (Body)

SAM I Phantom: Flat Section: Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1798; ConvF(7.60,7.60,7.60); Crest factor: 1.0; Body 450 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 56.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.79 mW/g, SAR (10g): 1.22 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.43 dB

Comment:

FCC ID : QL2GMRSXGM950

Company : GLOBAL LINK CO., LTD.


Body / Antenna : in (fixed)

Conducted Power : 3.65 W (Battery Type : Duracell)

Mode : FM GMRS Channel : 1 (462.5625 MHz)

Liquid Temperature : 21.3 °C

Date Tested : October 31, 2003

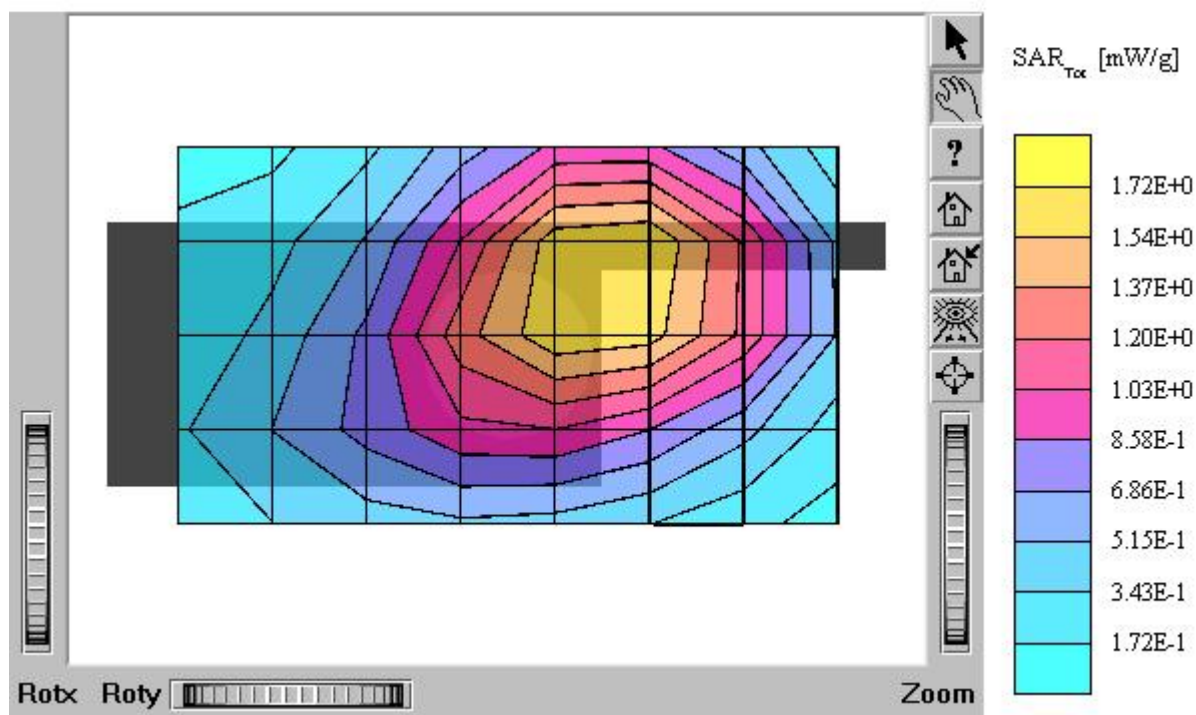

XGM950 (Body)

SAM I Phantom: Flat Section: Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1798; ConvF(7.60,7.60,7.60); Crest factor: 1.0; Body 450 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 56.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.409 mW/g, SAR (10g): 0.284 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.56 dB

Comment:

FCC ID : QL2GMRSXGM950

Company : GLOBAL LINK CO., LTD.


Body / Antenna : in (fixed)

Conducted Power : 0.81 W (Battery Type : Energizer)

Mode : FM FRS Channel : 8 (467.5625 MHz)

Liquid Temperature : 21.3 °C

Date Tested : October 31, 2003

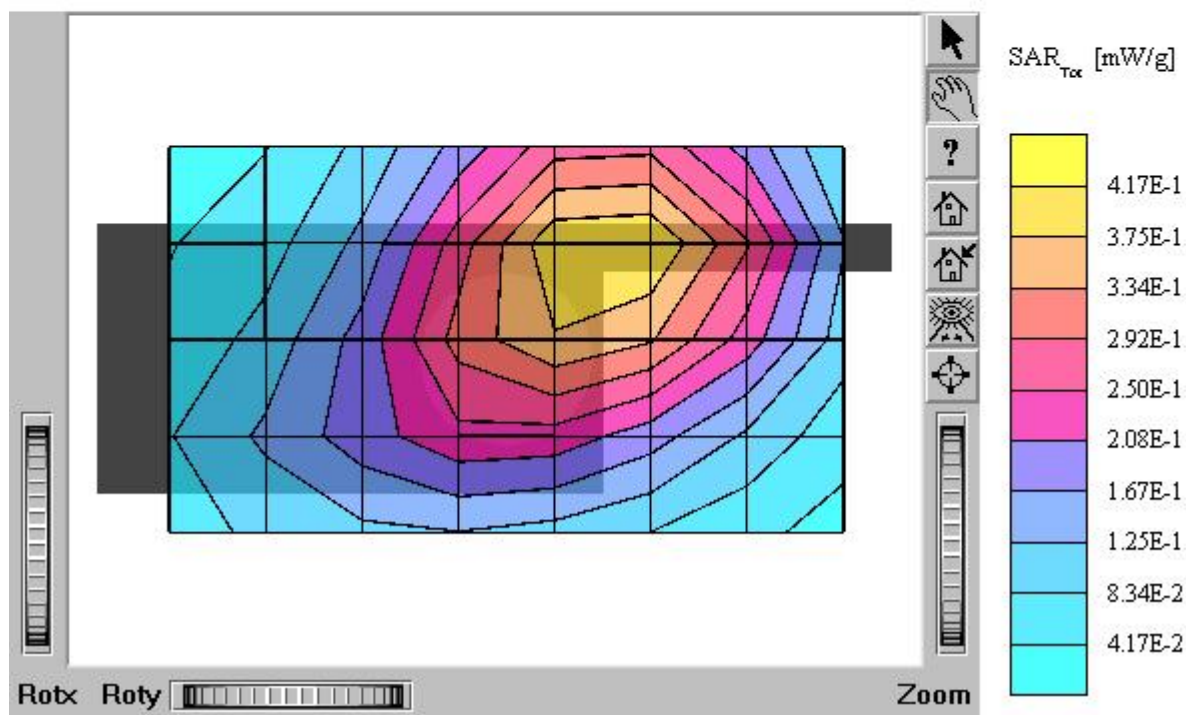

XGM950 (Body)

SAM I Phantom: Flat Section: Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1798; ConvF(7.60,7.60,7.60); Crest factor: 1.0; Body 450 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 56.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.487 mW/g, SAR (10g): 0.334 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.36 dB

Comment:

FCC ID : QL2GMRSXGM950

Company : GLOBAL LINK CO., LTD.


Body / Antenna : in (fixed)

Conducted Power : 0.80 W (Battery Type : Duracell)

Mode : FM FRS Channel : 8 (467.5625 MHz)

Liquid Temperature : 21.3 °C

Date Tested : October 31, 2003

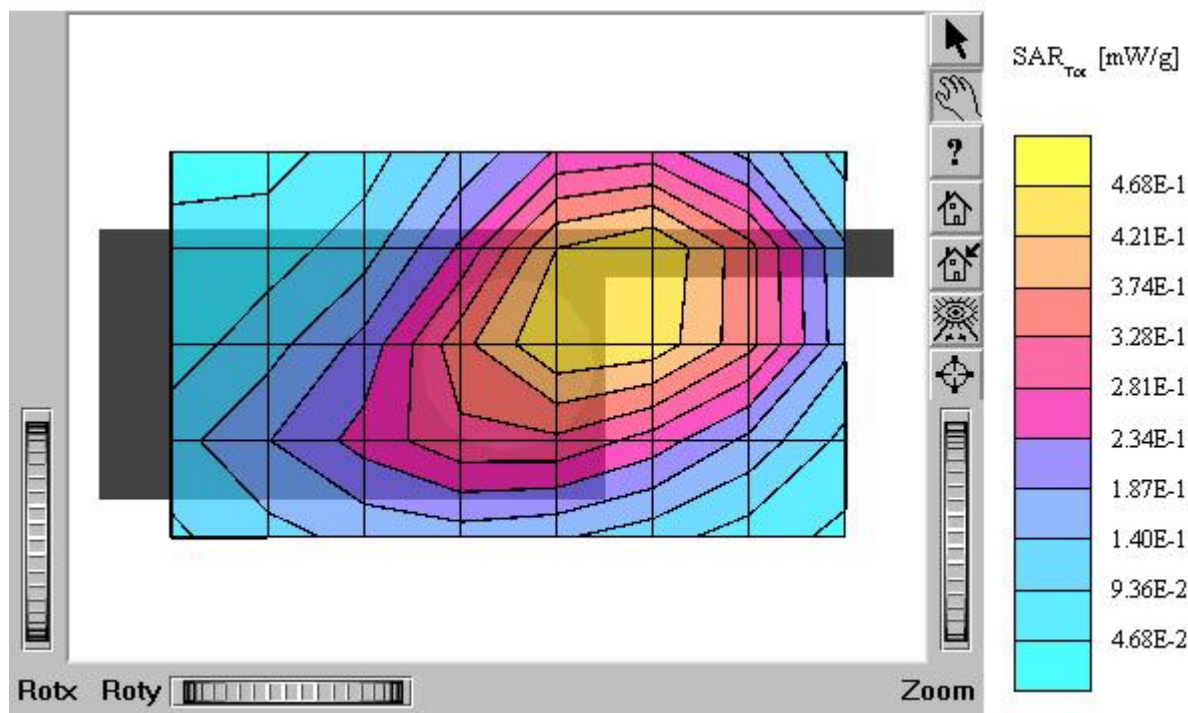

XGM950 (Face)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1798; ConvF(7.50,7.50,7.50); Crest factor: 1.0; Brain 450 MHz: $\sigma = 0.86$ mho/m $\epsilon_r = 44.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 2.02 mW/g, SAR (10g): 1.40 mW/g

Cube 5x5x7; Dx = 8.0, Dy = 8.0, Dz = 5.0

Comment:

FCC ID : QL2GMRSXGM950

Company : GLOBAL LINK CO., LTD.


Face / Antenna : in (fixed)

Conducted Power : 4.30 W (Battery Type : Energizer)

Mode : FM GMRS Channel : 22 (462.7250 MHz)

Liquid Temperature : 21.3 °C

Date Tested : October 31, 2003

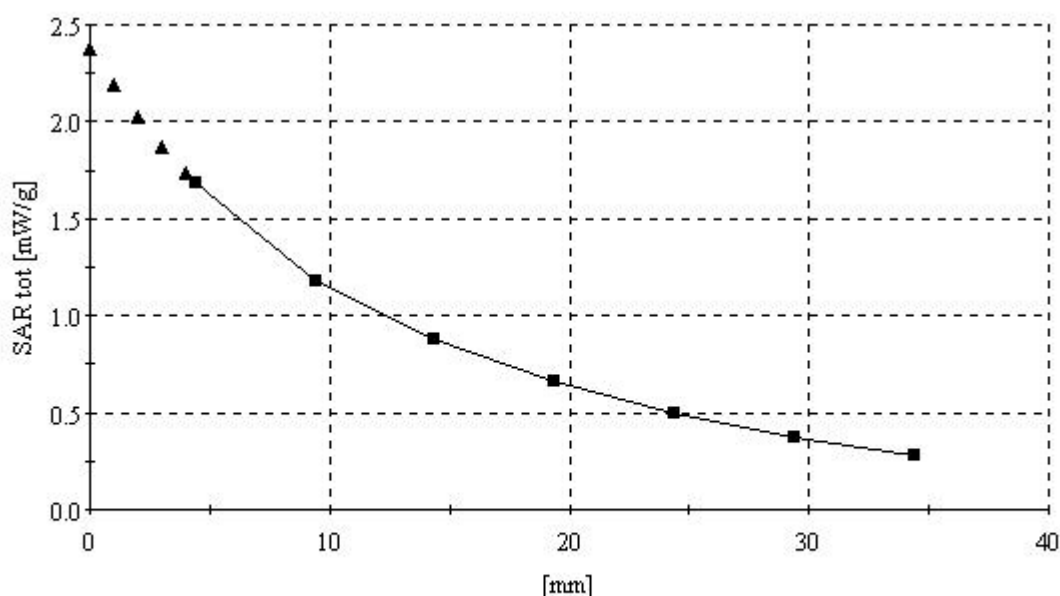

XGM950 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 450 MHz

Probe: ET3DV6 - SN1798; ConvF(7.60,7.60,7.60); Crest factor: 1.0; Body 450 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 56.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 2.04 mW/g, SAR (10g): 1.40 mW/g

Cube 5x5x7; Dx = 8.0, Dy = 8.0, Dz = 5.0

Comment:

FCC ID : QL2GMRSXGM950

Company : GLOBAL LINK CO., LTD.

Body / Antenna : in (fixed)

Conducted Power : 3.50 W (Battery Type : Rocket)

Mode : FM GMRS Channel : 1 (462.5625 MHz)

Liquid Temperature : 21.3 °C

Date Tested : October 31, 2003

