



SAAB

Överföring av dokument i elektronisk form

Detta dokument är en elektronisk kopia.

Vid konvertering eller överföring i elektronisk form kan dokumentet bli förvanskat.

Det fastställda pappersoriginalet är det gällande dokumentet.

Transfer of document in electronic form

This document is an electronic copy of the original.

When converting or transferring the document into electronic form, it could be distorted.

The original paper document is to be considered the valid document.

Saab AB (publ)

Saab Aerotech

Postal address

Box 360
SE-831 25 Östersund
Sweden

Visiting address

Storlienvägen 56

Telephone

+46 63 15 60 00

Telefax

+46 63 15 61 99

Registered office

Linköping

Registered No

556036-0793

VAT No

SE556036079301

www.saabgroup.com

We are represented in

Arboga, Göteborg, Lidköping, Linköping, Ljungbyhed, Norrtälje, Nyköping,
Stockholm, Uppsala, Växjö, Äryd, Örebro, Östersund

Distribution

Malå GeoScience AB
Rickard Josefsson
Skolgatan 11
930 70 Malå
Copy
FB/archive, FBM/archive

Document

Test Report

Date

March 22, 2006

Prepared

FFBM, Henrik Olsson
EMC Test Engineer

Ref. No

FBM06-0247

Supersedes

Page

1 (22)

Title

EMC Test, 2.5 GHz Shielded antenna**Equipment under test (EUT):**

Description: Ground Penetrating Radar System
Manufacturer: Malå Geoscience AB
Model name: 2.5 GHz Shielded antenna

Summary:

The EUT complied with the requirement of radiated emissions given in FCC Part 15 Subpart F, measured in the frequency range 30 – 10 000 MHz.

Approved:

Petter Gärdin

EMC Test Supervisor

Contents

1 Introduction	3
2 Test methods and results	4
2.1 Results	4
3 Applicable documents	4
4 Equipment under test (EUT)	5
4.1 Identification of equipment under test	5
4.2 General configuration of EUT	5
4.3 Test set-up of EUT	5
4.4 Operation of EUT during tests	6
5 Test site	7
5.1 Description	7
5.2 Ambient signals	7
6 Emission	8
6.1 Measurement of radiated emission, ANSI C63.4	8
6.2 Measurement of radiated emission	13
6.3 Measurement of UWB bandwidth and peak emissions	18



1 Introduction

The object of the test is to show compliance with the emission requirements of FCC Part 15 Subpart F.

Date of test:	March 1-2, 2006
Location:	Saab Aerotech, Östersund, Sweden
Test performed by:	Henrik Olsson, Saab Aerotech / FFBM
Client:	Malå Geoscience Skolgatan 11 SE-930 70 Malå Sweden
Client's observer:	Rickard Josefsson, Malå Geoscience AB

2 Test methods and results

2.1 Results

The test results in this report apply only for the tested specimen.

EMISSION REQUIREMENTS ACCORDING TO FCC Part 15 Subpart F					
Environmental phenomena	Test method	Requirement	Result	Comments	Test order
Radiated emission	ANSI C63.4	FCC 15.209	PASS		5
UWB definition		FCC 15.503 (a) 15.509(a)	PASS	f_L : 125 MHz f_C : 182 MHz f_H : 238 MHz	4
Peak emission at f_M	FCC 02-42	FCC 15.509 (f)	PASS	f_M below 960 MHz	1
Radiated emission	FCC 02-42	FCC 15.509 (d)	PASS		3
Radiated emission	FCC 02-42	FCC 15.509 (e)	PASS		2

3 Applicable documents

Measurements		
ANSI C63.4	01/30/2004	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
FCC Part 15	2/1/2006	Radio Frequency Devices
FCC 02-48	4/22/2002	Revision of Part 15 of the Commission's Rules Regarding Ultra-Wideband Transmission Systems

4 Equipment under test (EUT)

4.1 Identification of equipment under test

Equipment under test (EUT):

Description:	Ground Penetrating Radar System
Manufacturer:	Malå Geoscience AB
Model name:	2.5 GHz Shielded antenna
Build state:	Production sample
Serial no:	17524


4.2 General configuration of EUT

The EUT was connected to a support system for normal operation. The support system was battery powered.

4.3 Test set-up of EUT

The EUT was placed directly on the dry sand with no ground plane under it.

The support system was placed on a non-conductive material to achieve the same arrangement of the EUT when rotated on the sand bed.

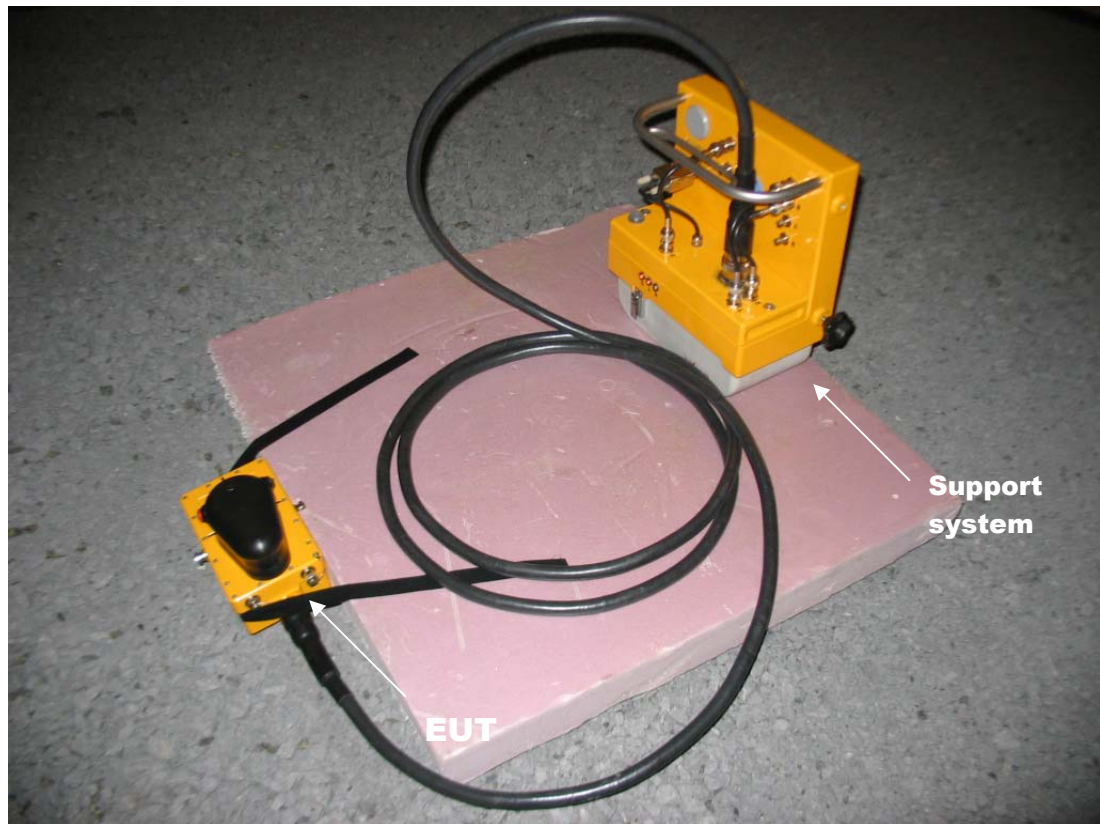

Picture 1: EUT set-up on sand bed

4.4 Operation of EUT during tests

The EUT was gathering data like in normal operation.

5 Test site

5.1 Description

The measurements were all performed on a weather protected open area test site that was modified with a flat sand bed located in the ground plane. The sand bed is about 50 cm deep.



Picture 2: Test Site

The measurement distance antenna to EUT was 1 and 3 m. The measurement system and related equipment were placed next to the test site.

5.2 Ambient signals

A number of ambient signals were detected in the different frequency ranges where measurement was made; some of those are listed below.

Mobile telephones:	460 – 470 MHz, 935 – 960 MHz, 1.8 GHz
FM broadcasts:	87 – 108 MHz
Television:	60 – 70 MHz, 650 – 800 MHz
Radar system:	1.3 GHz

In addition many signals of short-term duration were found. Each measurement signal close to or above the limit was examined if ambient or related to the EUT.

6 Emission

6.1 Measurement of radiated emission, ANSI C63.4

6.1.1 Requirements according to FCC 15.509 (d) and 15.209

Radiated emission from the EUT in the frequency range 30 to 960 MHz shall not exceed the limit as specified below.

Frequency range	Limit
30 - 88 MHz	40 dB μ V/m
88 – 216 MHz	43.5 dB μ V/m
216 – 960 MHz	46 dB μ V/m

6.1.2 Procedures

The radiated emission was measured on an Open Area Test Site (OATS) with 3 meters measuring distance described in section 5.

The EUT was configured and the test was performed in accordance with ANSI C63.4.

The test was initiated with a pre-scan in the frequency range 30 - 960 MHz, where the emission level was measured in 16 different combinations of 8 EUT angle positions and vertical/horizontal polarisation of the receiving antenna. For each position the EUT was turned manually.

Measurement software added antenna factors and cable attenuation and a composite trace of the peak field strength measurement was drawn.

Subsequently, frequencies with the highest emission were selected. EUT position, antenna height and polarisation were adjusted in order to find the position with the highest emission level. Quasi peak values were measured in the maximised positions.

The diagrams are shown with the quasi peak limit according to FCC 15.209.



Picture 3: Test set-up

6.1.3 Deviations from the standard

The ground plane was arranged according to FCC 02-42.

6.1.4 Climatic conditions

	Requirement according to standard	Climatic conditions during the test
Temperature	--	-10 °C
Relative humidity	--	Not measured

6.1.5 Results


Given measured values are valid for the described arrangement and operation of the EUT.

The EUT complied with the requirement of radiated emission specified in FCC 15.209 in the frequency range 30 – 960 MHz. No narrowband signals above the limit line were related to the EUT.


Emission measured with quasi-peak detector

Frequency (MHz)	Raw value (dBμV)	Cable loss (dB)	Antenna factor	Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)	Notes
32.7	19.3	0.6	18.1	40	38.1	1.9	PASS
37.1	15.6	0.7	15.5	40	31.8	8.2	PASS
53.5	30.7	0.7	7.7	40	39.1	0.9	PASS
55.4	25.7	0.8	6.4	40	32.9	7.1	PASS
124.1	13.1	1.4	11.7	43.5	26.2	17.3	PASS
128.4	18.8	1.4	11.7	43.5	31.9	11.6	PASS
134.8	19.6	1.5	11.7	43.5	32.8	10.7	PASS
200.0	23.2	1.8	8.0	43.5	33.0	10.5	PASS
315.9	13.9	2.3	13.3	46	29.5	16.5	PASS
547.9	2.9	3.5	19.8	46	26.2	19.8	PASS
850.4	0.1	4.2	23.3	46	27.6	18.4	PASS

Emission measured with peak detector

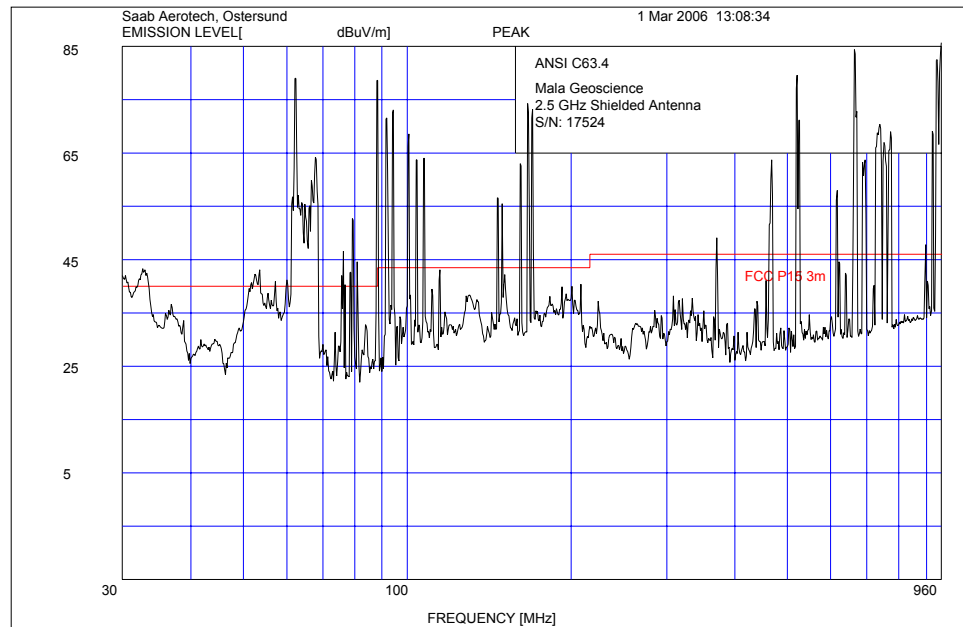

Background emission measured with peak detector

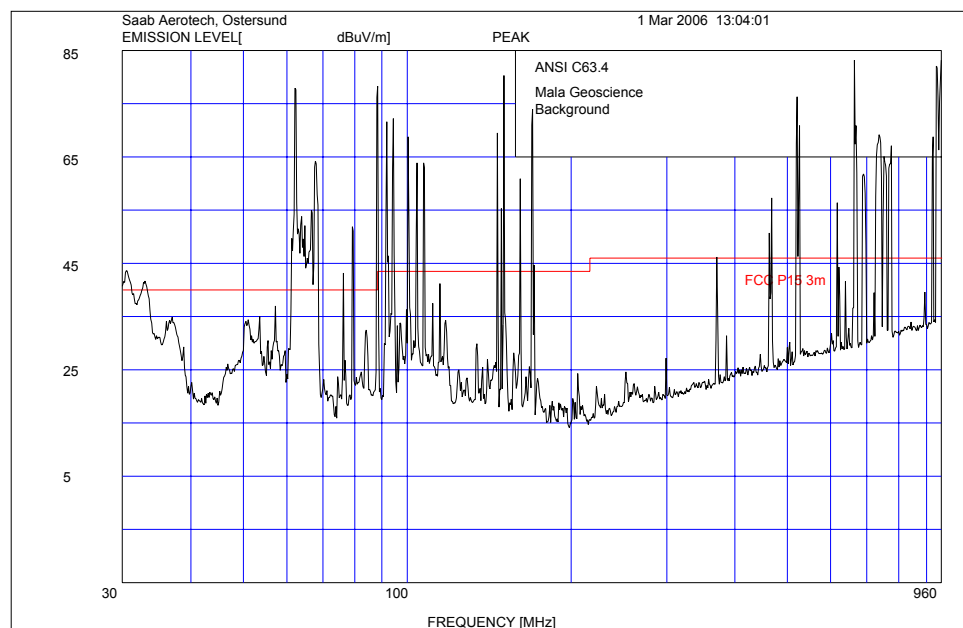

6.1.6 Instrumentation

Hewlett Packard RF Preselector	85685A	20 Hz - 2 GHz	2724A00609
Hewlett Packard Spectrum analyser	8566B	100 Hz - 22 GHz	2404A08864 / 2504A01320
Hewlett Packard Quasi-Peak Adapter	85650A		3303A01810
Chase Bilog antenna	CBL6111A	30 - 1000 MHz	1831

6.2 Measurement of radiated emission

6.2.1 Requirements according to FCC 15.509 (d) and (e)

Radiated emission from the EUT shall not exceed the limit as specified below.

Frequency range	Limit	Limit*
960 – 1610 MHz	-65.3 dBm EIRP	29.9 dB μ V/m
1610 – 1990 MHz	-53.3 dBm EIRP	41.9 dB μ V/m
1990 – 3100 MHz	-51.3 dBm EIRP	43.9 dB μ V/m
3100 – 10600 MHz	-41.3 dBm EIRP	53.9 dB μ V/m
> 10600 MHz	-51.3 dBm EIRP	43.9 dB μ V/m

Frequency range	Limit	Limit*
1164 – 1240 MHz	-75.3 dBm EIRP	19.9 dB μ V/m
1559 – 1610 MHz	-75.3 dBm EIRP	19.9 dB μ V/m

* Converted to field strength level at 3 meters according to FCC 15.521 (g)

6.2.2 Procedures

The radiated emission was measured on an Open Area Test Site (OATS) as described in section 5 with 1 meters measuring distance. The measurement level was re-calculated to a 3 m measurement distance (with 9.5 dB).

As described in the provisions of FCC 15.509 (d) and (e), the emission was measured with a RMS detector. The number of bins of the RMS detector was 500, and a sweep time of 500 ms was used to achieve a 1 ms integration time.

The following resolution bandwidths and video bandwidths were used during the measurements.

Frequency range	RBw	VBw
960 – 10 000 MHz	1 MHz	3 MHz
1164 – 1240 MHz	1 kHz	1 kHz
1559 – 1610 MHz	1 kHz	1 kHz

The measurements were made with the EUT in 8 different positions on the sand bed and the antenna position was changed as well as its polarization.

A sweep of the frequency range was made at each position. Measurement software added antenna factors and cable attenuation and the resulting maximum field strength level were plotted.

After the sweeps the maximum radiated field strength were controlled manually due to the high number of ambient signals.

The maximum emission was then manually measured with a RMS detector and then calculated to the correct field strength shown in the spreadsheets under section 6.2.3.
Results.



Picture 4: Test set-up

6.2.3 Results

Given measured values are valid for the described arrangement and operation of the EUT.

The EUT complied with the requirement of radiated emission specified in FCC 15.509 (d) and (e) in the frequency range 960 – 10 000 MHz.

In the spreadsheets below, “cable loss” denotes the total correction for cable loss and preamplifier gain. Negative value means amplification.


Maximum emissions measured with a RMS detector

Frequency (MHz)	Raw value (dBμV)	Cable loss (dB)	Antenna factor	Distance factor	Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)	Notes
988	41.9	-34.2	24.0	9.5	29.9	22.2	7.7	PASS
1000	40.4	-34.1	24.0	9.5	29.9	20.8	9.1	PASS
1050	44.5	-33.8	24.0	9.5	29.9	25.2	4.7	PASS
1100	40.2	-33.6	24.0	9.5	29.9	21.1	8.8	PASS
1240	38.3	-33.0	24.0	9.5	29.9	19.8	10.1	PASS
1250	45.2	-32.9	24.7	9.5	29.9	27.5	2.4	PASS
1280	39.7	-32.8	24.7	9.5	29.9	22.1	7.8	PASS
1470	36.3	-32.0	24.7	9.5	29.9	19.5	10.4	PASS
2000	32.5	-30.4	27.7	9.5	41.9	20.3	21.6	PASS
2500	30.7	-28.8	28.9	9.5	41.9	21.3	20.6	PASS


Maximum emission in GPS band 1164 – 1240 MHz and 1559-1610 MHz, measured with RMS detector

Frequency (MHz)	Raw value (dBμV)	Cable loss (dB)	Antenna factor	Distance factor	Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)	Notes
1164	23.4	-33.3	24.0	9.5	19.9	4.6	15.3	PASS
1200	23.5	-33.1	24.0	9.5	19.9	4.9	15.0	PASS
1227	19.9	-33.0	24.0	9.5	19.9	1.4	18.5	PASS
1560	10.9	-31.7	25.4	9.5	19.9	-4.9	24.8	PASS
1589	11.5	-31.6	25.4	9.5	19.9	-4.2	24.1	PASS
1600	11.3	-31.6	25.4	9.5	19.9	-4.4	24.3	PASS

Composite trace of peak emissions

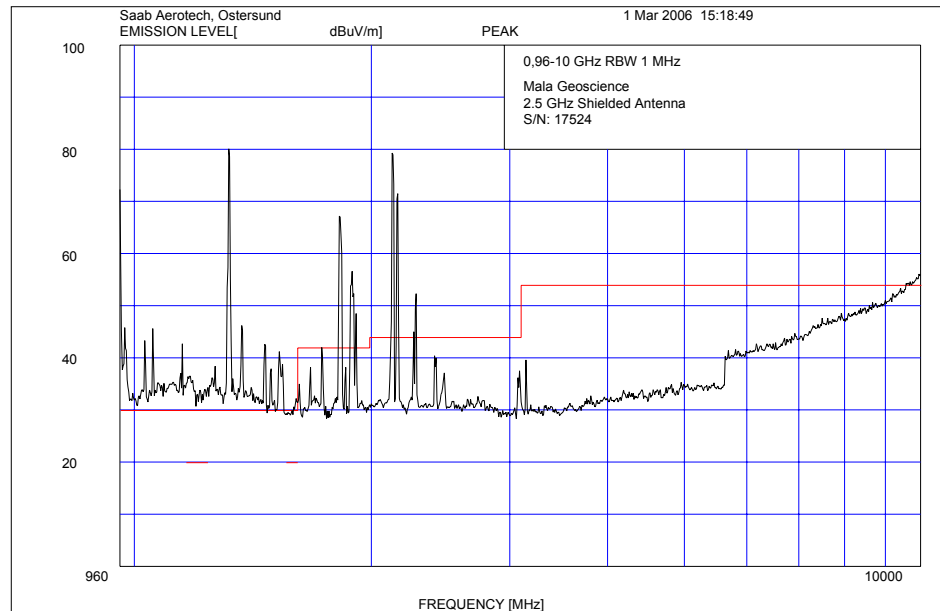

Composite trace of background peak emissions

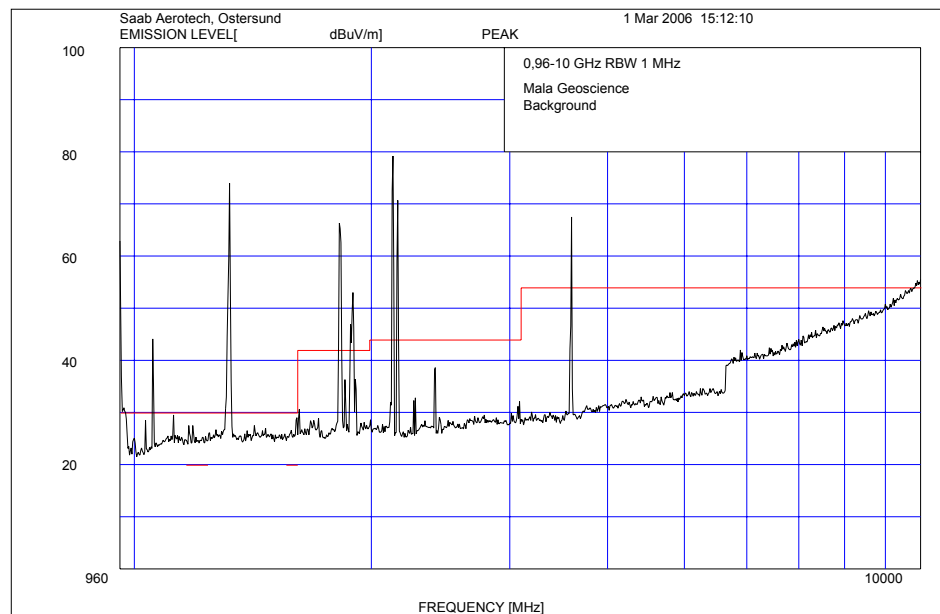

6.2.4 Instrumentation

Hewlett Packard Spectrum analyser	8566B	100 Hz - 22 GHz	2404A08864 / 2504A01320
Hewlett Packard Pre-amplifier	8449B	1 GHz - 26.5 GHz	3008A00103
Rohde & Schwarz Spectrum analyser	FSEM	20 Hz – 26.5 GHz	848254/025
Emco Double Ridge Waveguide	3115	0.96 GHz - 18 GHz	2800

6.3 Measurement of UWB bandwidth and peak emissions

6.3.1 Requirements according to FCC 15

6.3.1.1 Definition according to FCC 15.503 (a)

The UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission as based on the complete transmission system including antenna.

6.3.1.2 Requirements according to FCC 15.509 (a)

The UWB bandwidth of an imaging system operating under the provisions of this section must be below 10.6 GHz.

6.3.1.3 Requirements according to FCC 15.509 (f)

For UWB devices where the frequency at which the highest radiated emission occurs, f_M , is above 960 MHz, there is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth and a correspondingly different peak emission limit, following the procedures described in Section 15.521.

6.3.2 Procedures

The equipment was placed on the test site described under section 5 and the radiated emission was measured at 3 meters or 1 meter.

The measurements were made with the EUT in 8 different positions on the sand bed and the antenna position was changed as well as its polarization resulting in 16 different sweeps of the frequency range.

A 1 MHz resolution bandwidth was used during the measurement.

Measurement software added antenna factors and cable attenuation and a composite trace of the peak field strength were drawn.

At the peak of emission (f_M), the emission was measured with a resolution bandwidth of 1 MHz.

6.3.3 Results

Given measured values are valid for the described arrangement and operation of the EUT.

The EUT complies with the requirement in FCC 15.509 (a) and (f).

According to 15.509 (a)

Data regarding UWB transmissions was gathered and calculated from the diagrams below:

Frequency of highest emission f_M : ~ 193 MHz

Upper boundary f_H : ~ 238 MHz

Lower boundary f_L : ~ 125 MHz

Centre frequency f_C : ~ 182 MHz

Fractional bandwidth: 0.62

According to 15.509 (f)

Emission at f_M : Radiated emission: 50.0 dB μ V/m (RBw: 1 MHz)

Limit 0 dBm EIRP at 50 MHz RBw



Limit -34 dBm EIRP at 1 MHz RBw

Limit -34 dBm EIRP = 61.2 dB μ V/m



Margin to limit: $61.2 - 50.0 = 11.2$ dB

Because f_M is below 960 MHz there is no requirement of emission at f_M for this EUT.

Composite trace of peak emission

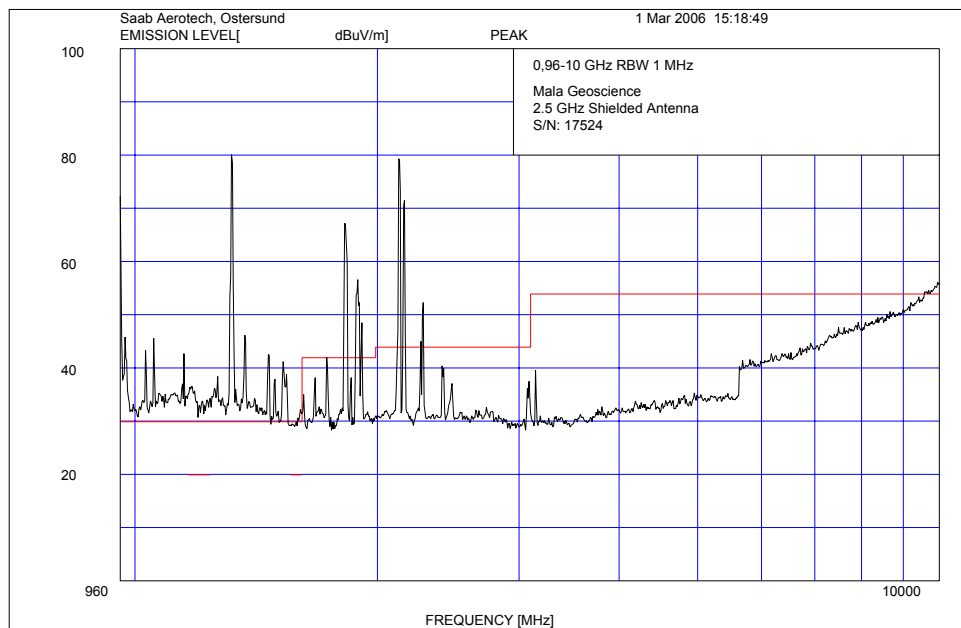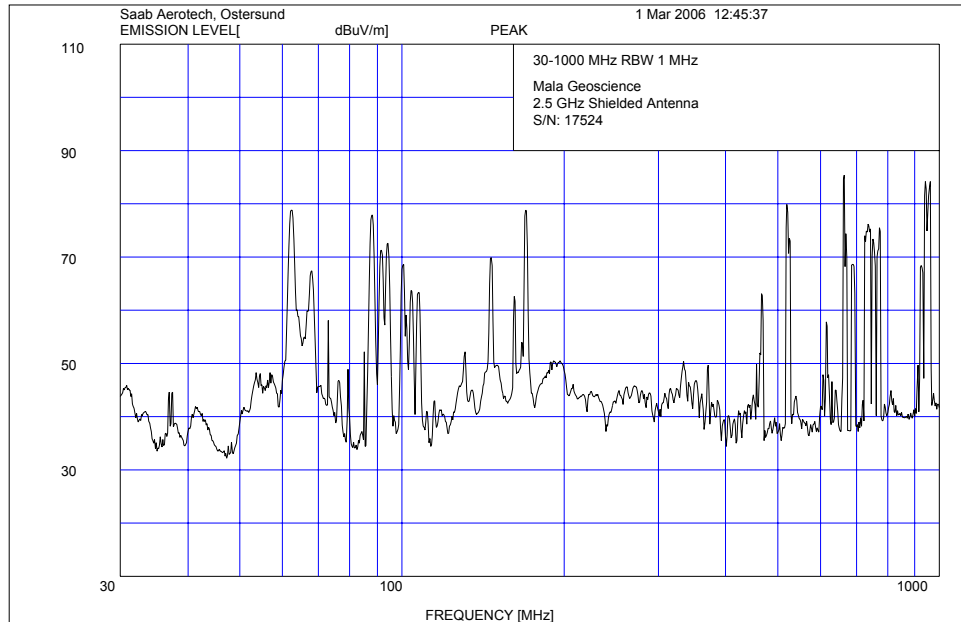

Composite trace of background emission

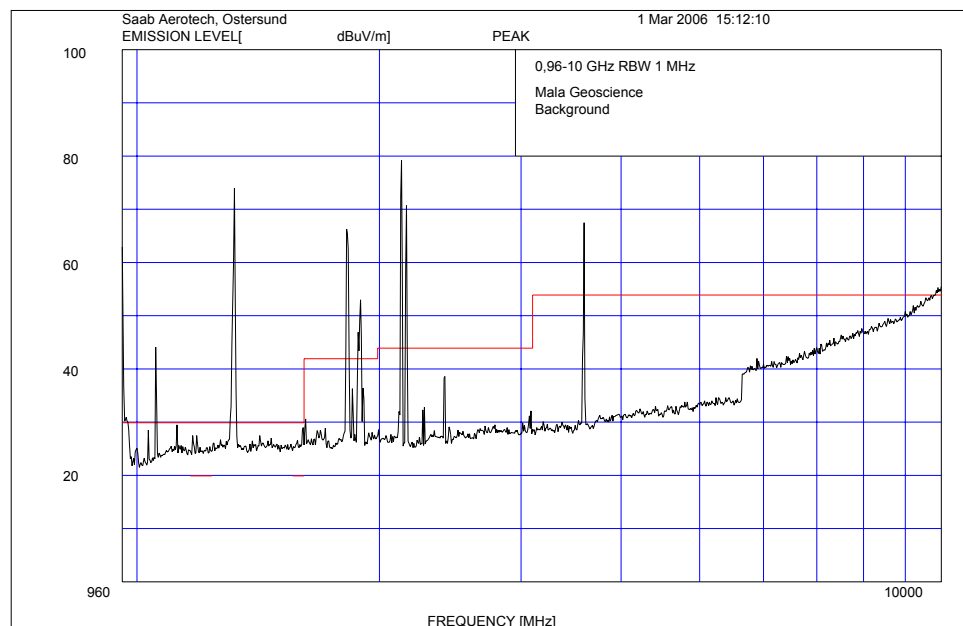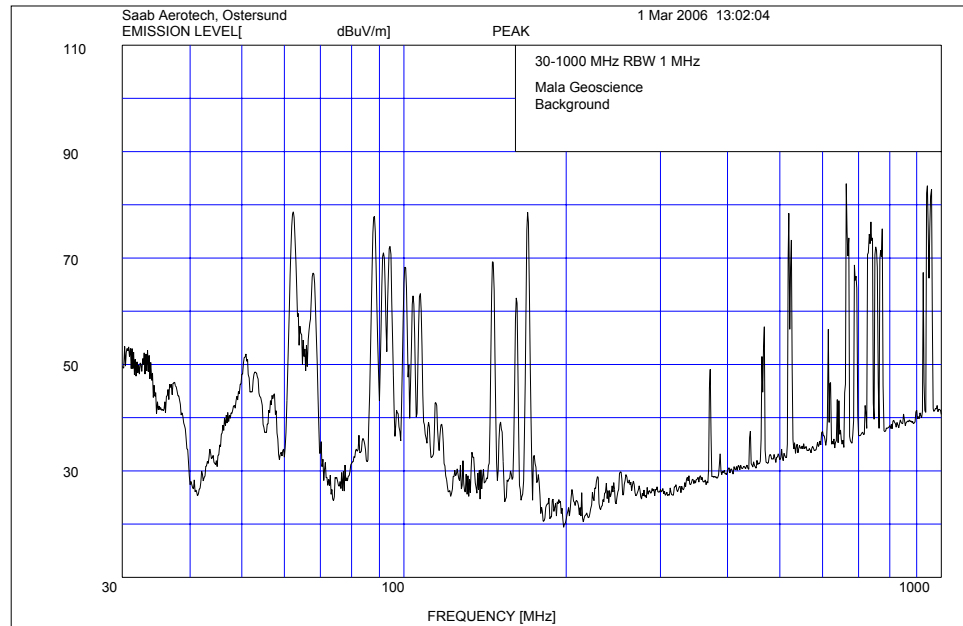



SAAB

6.3.4 Instrumentation

Hewlett Packard RF Preselector	85685A	20 Hz - 2 GHz	2724A00609
Hewlett Packard Spectrum analyser	8566B	100 Hz - 22 GHz	2404A08864 / 2504A01320
Hewlett Packard Pre-amplifier	8449B	1 GHz - 26.5 GHz	3008A00103
Emco Double Ridge Waveguide	3115	0.96 GHz - 18 GHz	2800
Chase Bilog antenna	CBL6111A	30 - 1000 MHz	1831