



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

TEST REPORT PER FCC PT 15.247 FHSS

APPLICANT	PEGASUS TECHNOLOGIES, INC.
ADDRESS	108 PAWNOOK FARM ROAD LENOIR CITY TN 37771 USA
FCC ID	QLBPTSS2011
PRODUCT DESCRIPTION	TRANSMITTER MODULE
DATE SAMPLE RECEIVED	3/22/2011
DATE TESTED	4/11/2011
TESTED BY	Joe Scoglio
APPROVED BY	Mario R. de Aranzeta
TIMCO REPORT NO.	560AUT11TestReport.doc
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

ATTESTATION	3
REPORT SUMMARY	4
TEST ENVIRONMENT AND TEST SETUP	4
DUT DESCRIPTION	5
EMC EQUIPMENT LIST.....	6
TEST PROCEDURES.....	7
POWER LINE CONDUCTED INTERFERENCE.....	9
NUMBER OF HOPPING CHANNELS	10
DWELL TIME OF A HOPPING CHANNEL.....	11
20 dB BANDWIDTH	12
CARRIER FREQUENCY SEPARATION	13
POWER OUTPUT	14
SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	15
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	16
RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND	18
POWER SPECTRAL DENSITY.....	22

APPLICANT: PEGASUS TECHNOLOGIES, INC.
FCC ID: QLBPTSS2011
REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

ATTESTATION

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made by me or under my supervision, at Timco Engineering, Inc. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.



Testing Certificate #0955-01

AUTHORIZED BY: Mario de Aranzeta



SIGNATURE:

FUNCTION: Lab Supervisor/ Test Engineer

DATE: 4/20/2011

APPLICANT: PEGASUS TECHNOLOGIES, INC.
FCC ID: QLBPTSS2011
REPORT: P\PEGASUSQLB\560AUT11\560AUT11TestReport.doc

REPORT SUMMARY

Disclaimer:	The test results relate only to the items tested.
Purpose of Test:	To demonstrate that the DUT is compliant with FCC Pt 15.247 requirements for a FHSS radio.
Applicable Standards:	FCC Pt 15.247, ANSI C63.4: 2003, ANSI TIA-603: 2004, FCC Pt 15.109
Related Reports:	N/A

TEST ENVIRONMENT AND TEST SETUP

Test Facilities:	All measurements were made at one or more of the test sites of TIMCO ENGINEERING INC. located at 849 N.W. State Road 45, Newberry, FL 32669.
Laboratory Test Conditions:	Temperature: 26°C, Humidity: 55%
Test Exercise:	The DUT was set in continuous transmit mode of operation.
Deviation to the Standards:	There was no deviation from the standard.
Modification to the DUT:	No modification was made.
Supporting Accessories:	None

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUSQLB\560AUT11\560AUT11TestReport.doc

DUT DESCRIPTION

DUT Description	TRANSMITTER MODULE
FCC ID	QLBPTSS2011
Frequency	902 to 928 MHz band
Modulation	Binary FSK
DUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed
	<input checked="" type="checkbox"/> Mobile
	<input type="checkbox"/> Portable

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 3/10/10	3/10/12
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/11
Frequency Counter	HP	5385A	3242A07460	CAL 5/26/09	5/26/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/18/09	5/18/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/10	4/25/12

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc


TEST PROCEDURES

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed with the DUT transmitting. The resolution bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.


BANDWIDTH 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

RF Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Output Power Test Setup Diagram

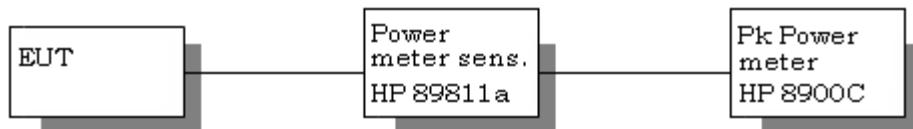

ANTENNA CONDUCTED EMISSIONS: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz. Power was measured by disconnecting the antennas and measuring across a 50 ohm load as recommended by the manufacturer using a peak power meter. The antenna is non-directional and doesn't exceed 6 dBi gain. The power output was measured at three places in the band highest is reported below.

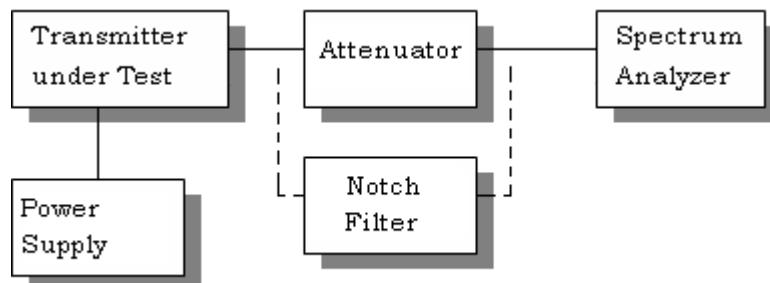

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUSQLB\560AUT11\560AUT11TestReport.doc

RADIATION INTERFERENCE: The test procedure used was ANSI C63.4-2003 using an Agilent spectrum receiver with preselector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND: An in band field strength measurement of the fundamental emission using the RBW and detector function required by ANSI C63.4-2003 and the FCC rules.

APPLICANT: PEGASUS TECHNOLOGIES, INC.
FCC ID: QLBPTSS2011
REPORT: P\PEGASUSQLB\560AUT11\560AUT11TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

RULES PART NO.: 15.207

REQUIREMENTS:

Emission Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak (QP)	Average (AV)
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

TEST DATA: Not applicable. Battery operated device.

APPLICANT: PEGASUS TECHNOLOGIES, INC.
FCC ID: QLBPTSS2011
REPORT: P\PEGASUSQLB\560AUT11\560AUT11TestReport.doc


NUMBER OF HOPPING CHANNELS

Rules Part No.: 15.247(a)(1), RSS-210

Requirements:

902-928 MHz	If the 20 dB bandwidth is < 250 kHz, the system shall use at least 50 hopping frequencies.
	If the 20 dB bandwidth is 250 kHz or greater, the system shall use at least 25 hopping frequencies.
2400-2483.5 MHz	At least 15 channels
5725-5850 MHz	At least 75 channels

Test Data: There are 50 hopping channels

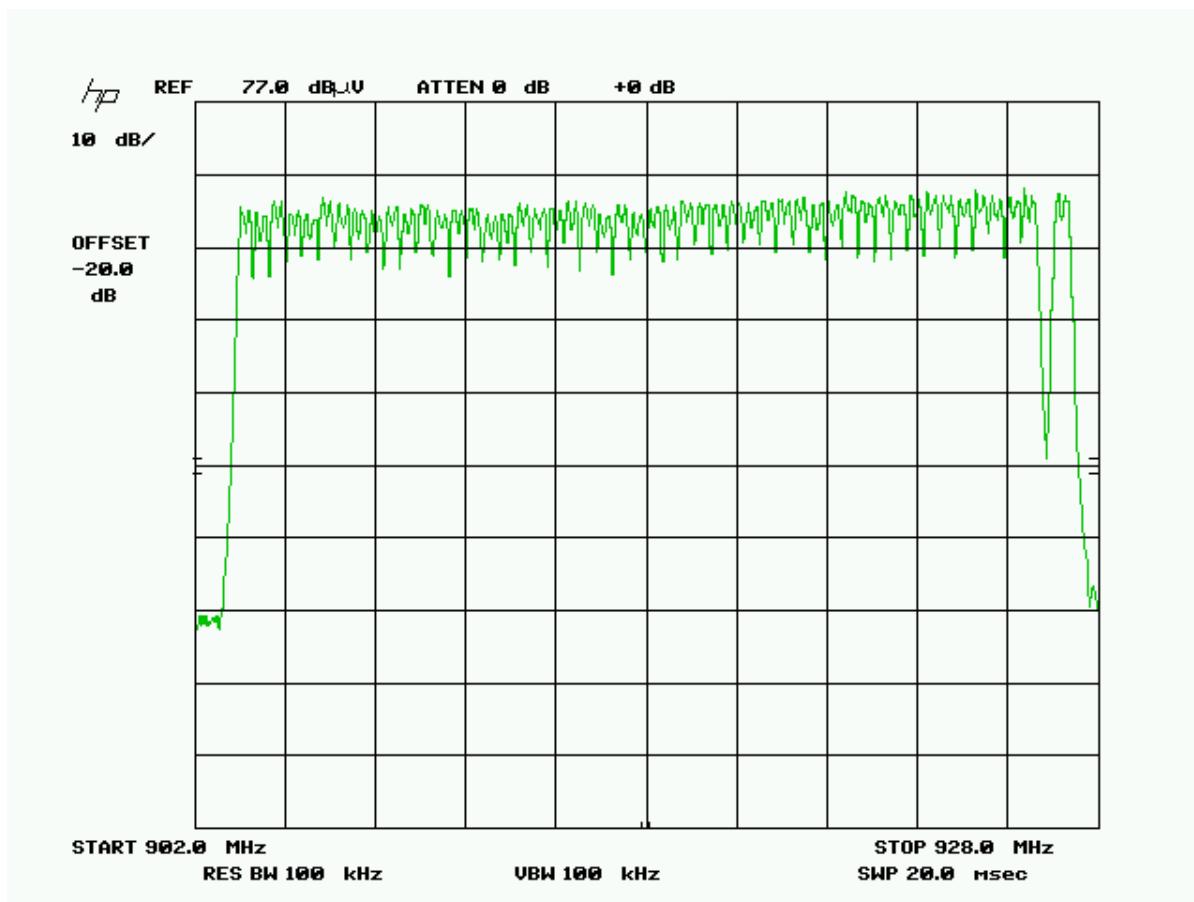

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

DWELL TIME OF A HOPPING CHANNEL


RULES PART NO.: 15.247(a)(1)(i)

REQUIREMENTS:

902-928 MHz	If 20 dB bandwidth is < 250 kHz, average time of occupancy of any frequency shall not exceed 0.4 sec in 20 seconds. If 20 dB bandwidth is 250 kHz or greater, dwell time \leq 0.4 seconds in a 10 second period.
2400-2483.5 MHz	\leq 0.4 seconds in a 0.4 seconds multiplied the number of hopping channels employed.
5725-5850 MHz	\leq 0.4 seconds in a 30 second period.

TEST DATA: The dwell time is 28 msec per hop.

Three places in the band were measured and the worst case presented.

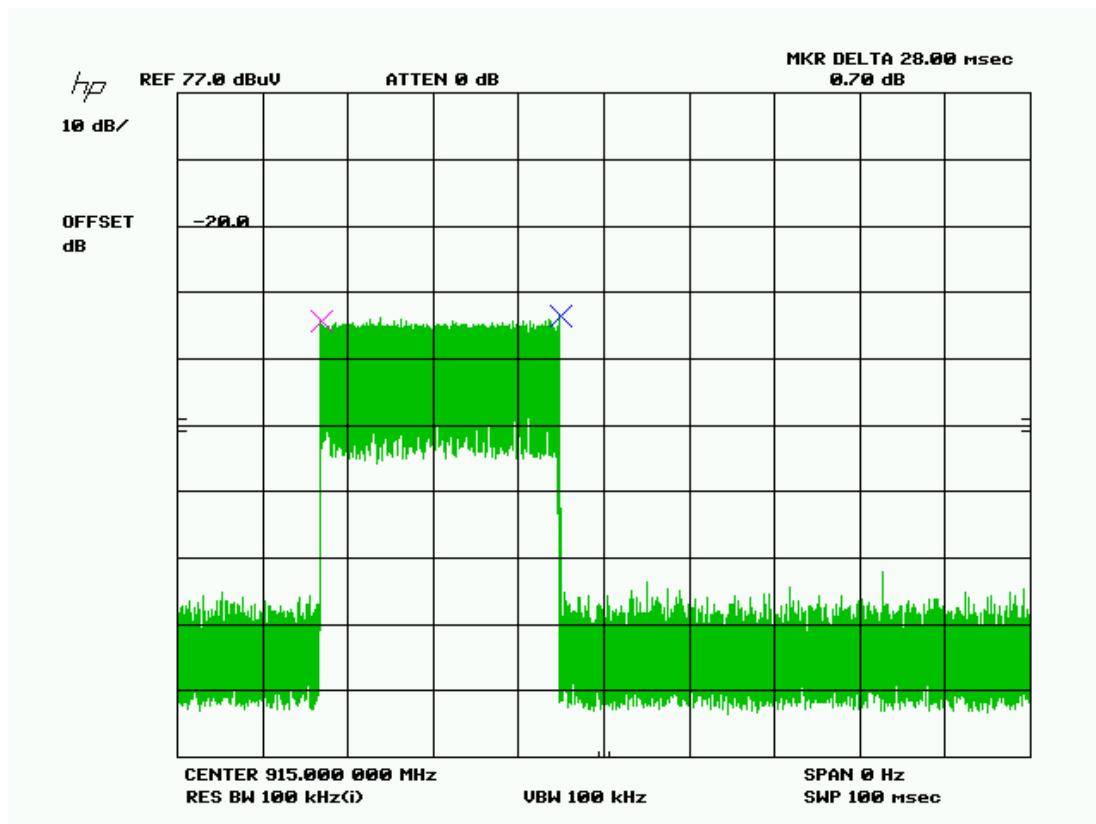

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011


REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

20 dB BANDWIDTH

RULES PART NO.: 15.247(a)(2), RSS-210

REQUIREMENTS:

TEST DATA: See the following plot(s). 398 kHz

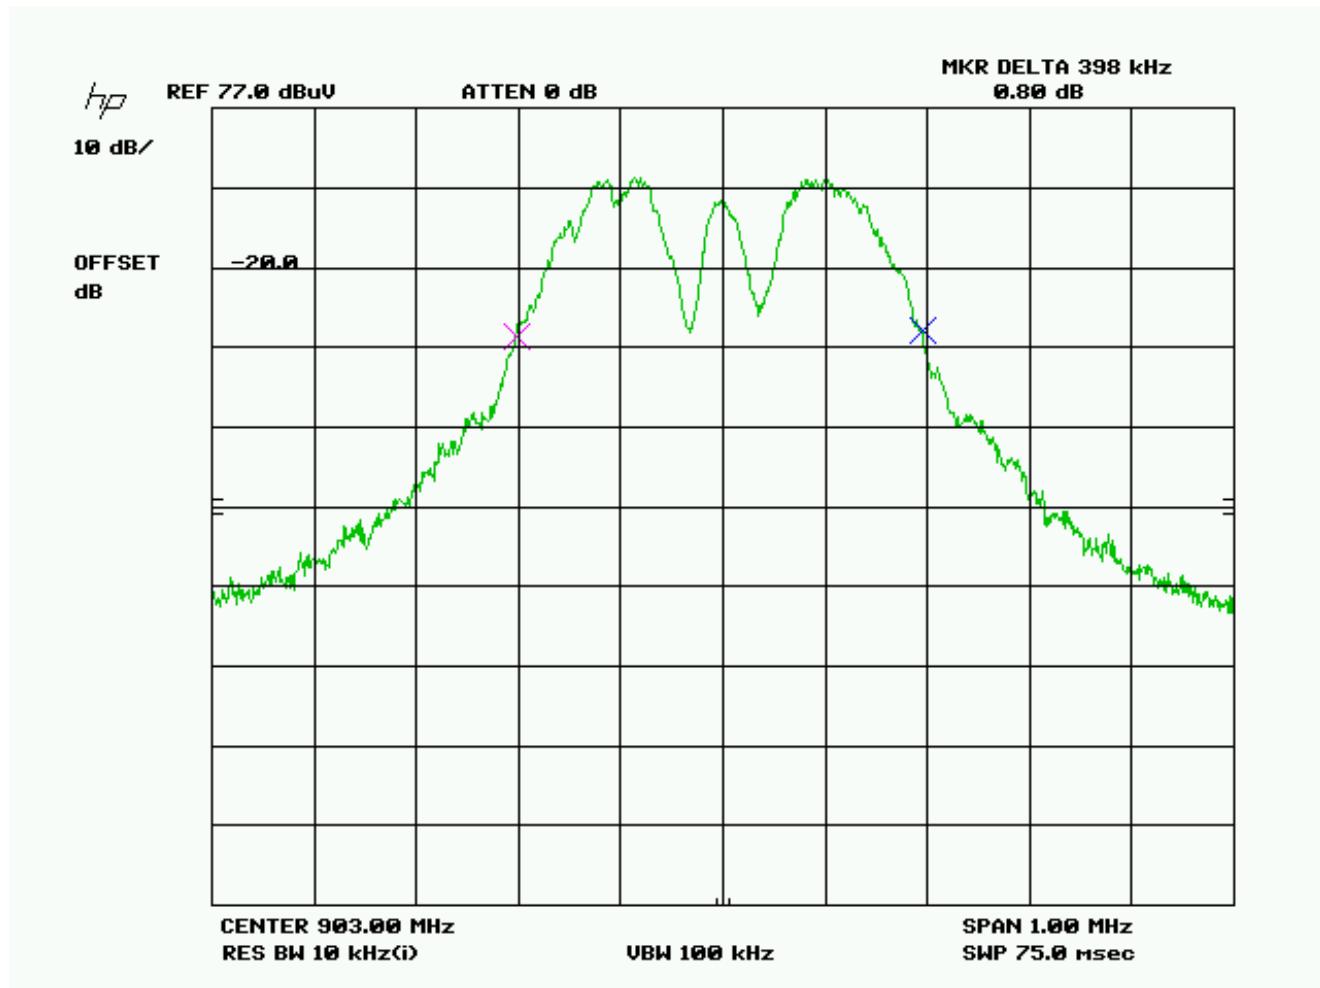

Three places in the band were measured and the worst case presented above.


APPLICANT: PEGASUS TECHNOLOGIES, INC.
FCC ID: QLBPTSS2011
REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

CARRIER FREQUENCY SEPARATION

RULES PART NO.: 15.247(a)(2)

REQUIREMENTS: The hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

TEST DATA: See the following plot.

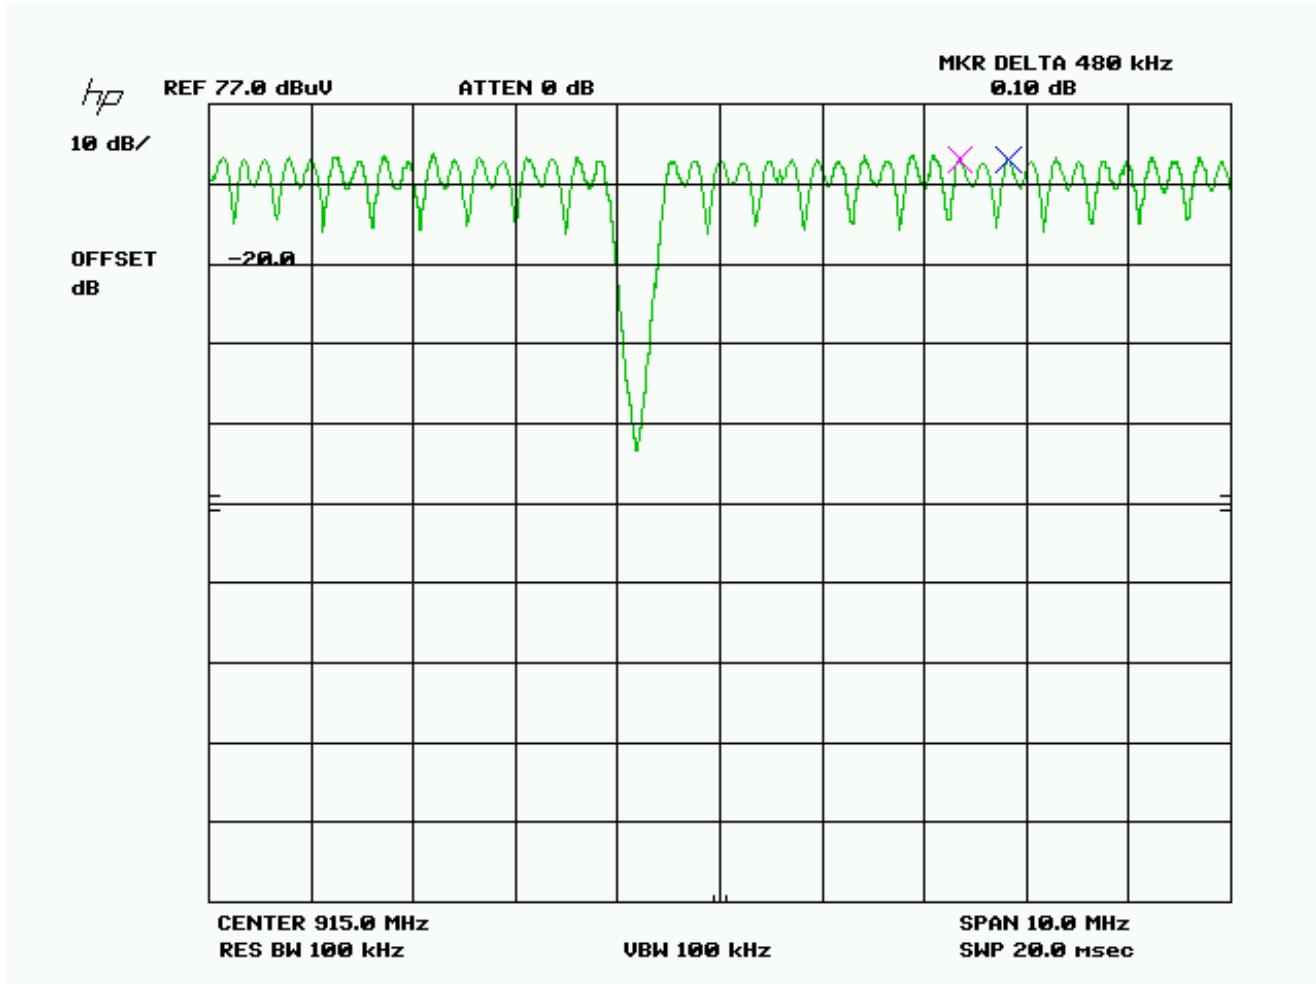

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

POWER OUTPUT

Rules Part No.: 15.247(b)

Requirements: The maximum peak output power shall not exceed 1 watt (30 dBm). If directional transmitting antennas with a gain of more than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Data: Conducted

Frequency MHz	Power mW
903	32.0
915	30.0
927	27.0

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUSQLB\560AUT11\560AUT11TestReport.doc

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

RULES PART NO.: 15.247(c)

REQUIREMENTS: Emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

Note: The spectrum was scanned to the tenth harmonic.

TEST DATA

Frequency			Frequency			Frequency	
MHz	dBc		MHz	dBc		MHz	dBc
903	0		915	0		927	0
1806	72.7		1830	73.5		1854	71
2709	81.9		2745	83		2781	85.6
3612	83.3		3660	81.1		3708	82.2
4515	71.3		4575	68.5		4635	69.1
5418	95.9		5490	90.1		5562	87.4
6321	90.5		6405	91.4		6489	90.3
7224	100.1		7320	100.8		7416	101.1
8127	97.3		8235	96.3		8343	95.1
9030	111.7		9150	101.8		9270	100.3

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUSQLB\560AUT11\560AUT11TestReport.doc

FIELD STRENGTH OF SPURIOUS EMISSIONS

RULES PART NO.: 15.247(c), 15.205 &15.209(b)

REQUIREMENTS:

§15.247(c)& §15.205	
(Fundamental) Frequency	(Field Strength) Limits
902 – 928MHz 2.4 – 2.4835GHz	127.37 dB μ V/m
§15.209	
30 - 88 MHz	40 dB μ V/m @3M
88 -216 MHz	43.5 dB μ V/m @3M
216 -960 MHz	46 dB μ V/m @3M
ABOVE 960 MHz	54dB μ V/m

Emissions that fall in the restricted bands (15.205) must be less than or equal to 500 μ V/m (54 dB μ V/m). Spurious not in a restricted band must be 20 dBc.

Harmonics were measured to the 10th harmonic.

Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB	Field Strength dB μ V/m	Margin dB
903.0	903.00	78.4	H	1.95	23.33	103.68	23.70
903.0	903.00	87.5	V	1.95	22.67	112.12	15.26
903.0	2,709.00	15.0	H	3.40	32.54	50.94	3.06
903.0	2,709.00	17.3	V	3.40	32.54	53.24	0.76
903.0	3,612.00	10.9	H	4.15	32.98	48.03	5.97
903.0	3,612.00	11.2	V	4.15	32.98	48.33	5.67
903.0	4,515.00	7.3	V	4.76	34.10	46.16	7.84
903.0	4,515.00	8.3	H	4.76	34.10	47.16	6.84
903.0	5,418.00	7.1	H	5.13	34.60	46.83	7.17
903.0	5,418.00	8.5	V	5.13	34.60	48.23	5.77
915.0	915.00	72.5	H	1.97	23.35	97.82	29.56
915.0	915.00	87.1	V	1.97	22.60	111.67	15.71
915.0	2,745.00	15.1	H	3.42	32.55	51.07	2.93
915.0	2,745.00	17.2	V	3.42	32.55	53.17	0.83
915.0	3,660.00	9.9	H	4.19	33.06	47.15	6.85
915.0	3,660.00	10.8	V	4.19	33.06	48.05	5.95

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

TEST DATA CONT'D.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB	Field Strength dB μ V/m	Margin dB
915.0	4,575.00	7.0	H	4.79	34.10	45.89	8.11
915.0	4,575.00	8.0	V	4.79	34.10	46.89	7.11
915.0	5,490.00	8.1	H	5.15	34.69	47.94	6.06
915.0	5,490.00	9.0	V	5.15	34.69	48.84	5.16
927.0	927.00	73.4	H	1.99	23.44	98.83	28.55
927.0	927.00	86.5	V	1.99	22.67	111.16	16.22
927.0	2,781.00	13.8	V	3.45	32.56	49.81	4.19
927.0	2,781.00	14.0	H	3.45	32.56	50.01	3.99
927.0	3,708.00	10.0	H	4.24	33.13	47.37	6.63
927.0	3,708.00	10.7	V	4.24	33.13	48.07	5.93
927.0	4,635.00	7.6	H	4.82	34.10	46.52	7.48
927.0	4,635.00	7.9	V	4.82	34.10	46.82	7.18
927.0	5,562.00	6.2	H	5.17	34.79	46.16	7.84
927.0	5,562.00	7.1	V	5.17	34.79	47.06	6.94

All readings are peak unless marked otherwise.

P= Peak, A= Average, R= Restricted band frequency


Harmonics were checked through the 10th harmonic.

RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND

REQUIREMENTS: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 μ V/m (54 dB μ V/m). Emissions not in the restricted band must be 20 dBc.

TEST DATA: The plots are presented below.

Lower bandedge (peak)

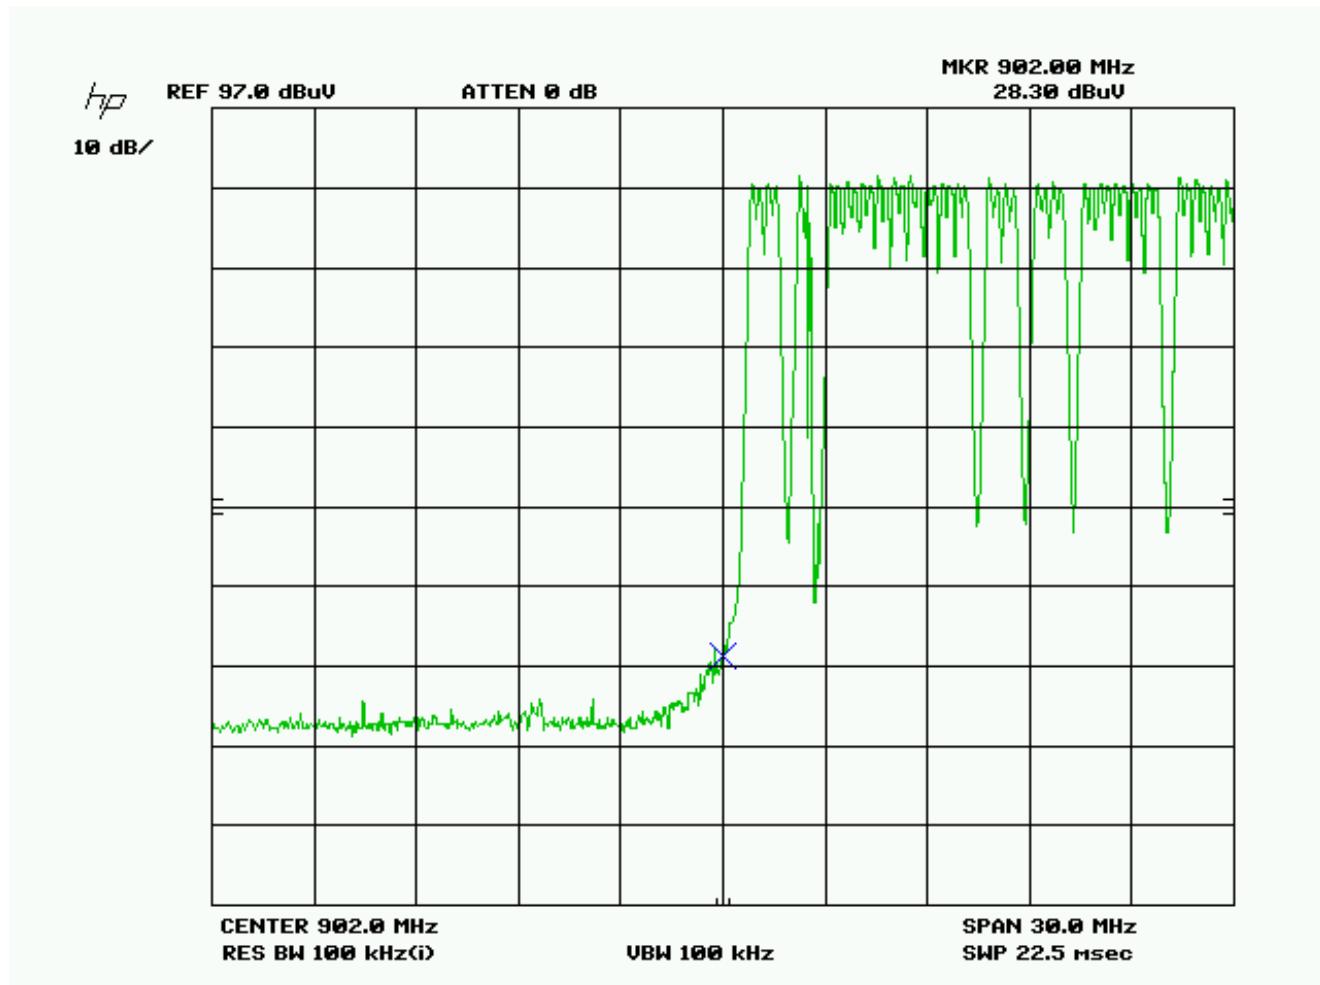


APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011


REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

Lower bandedge (average)

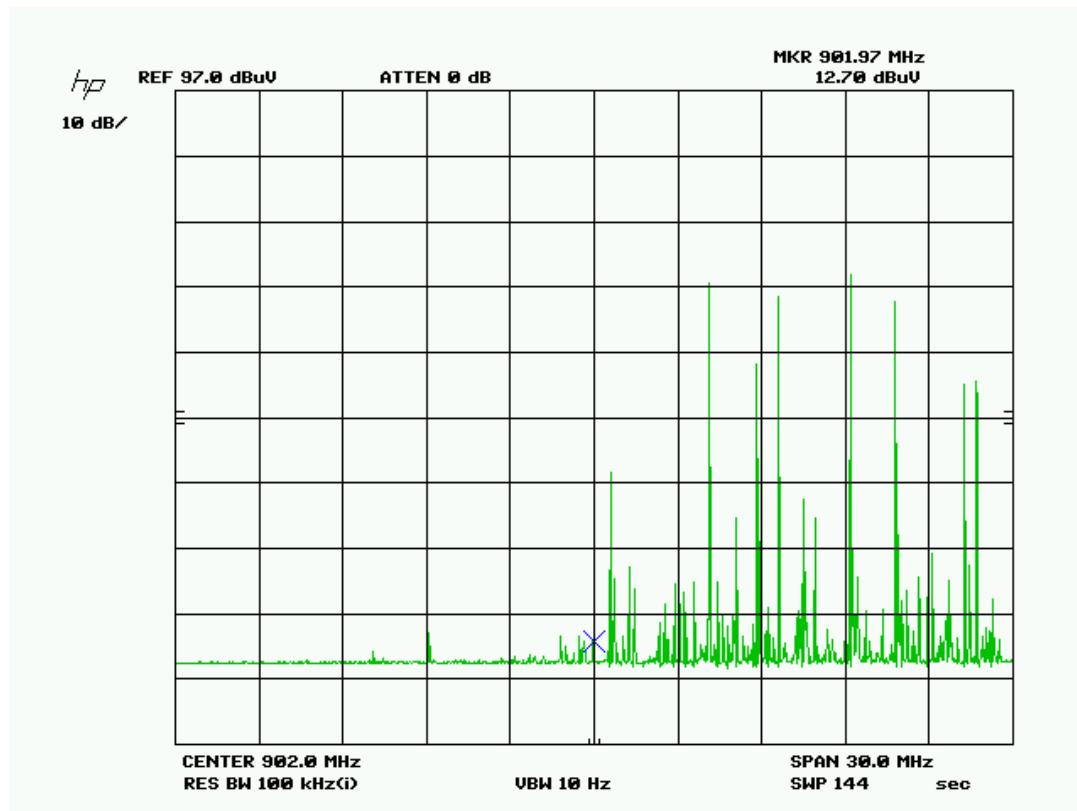


APPLICANT: PEGASUS TECHNOLOGIES, INC.
FCC ID: QLBPTSS2011
REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

Upper bandedge (peak)

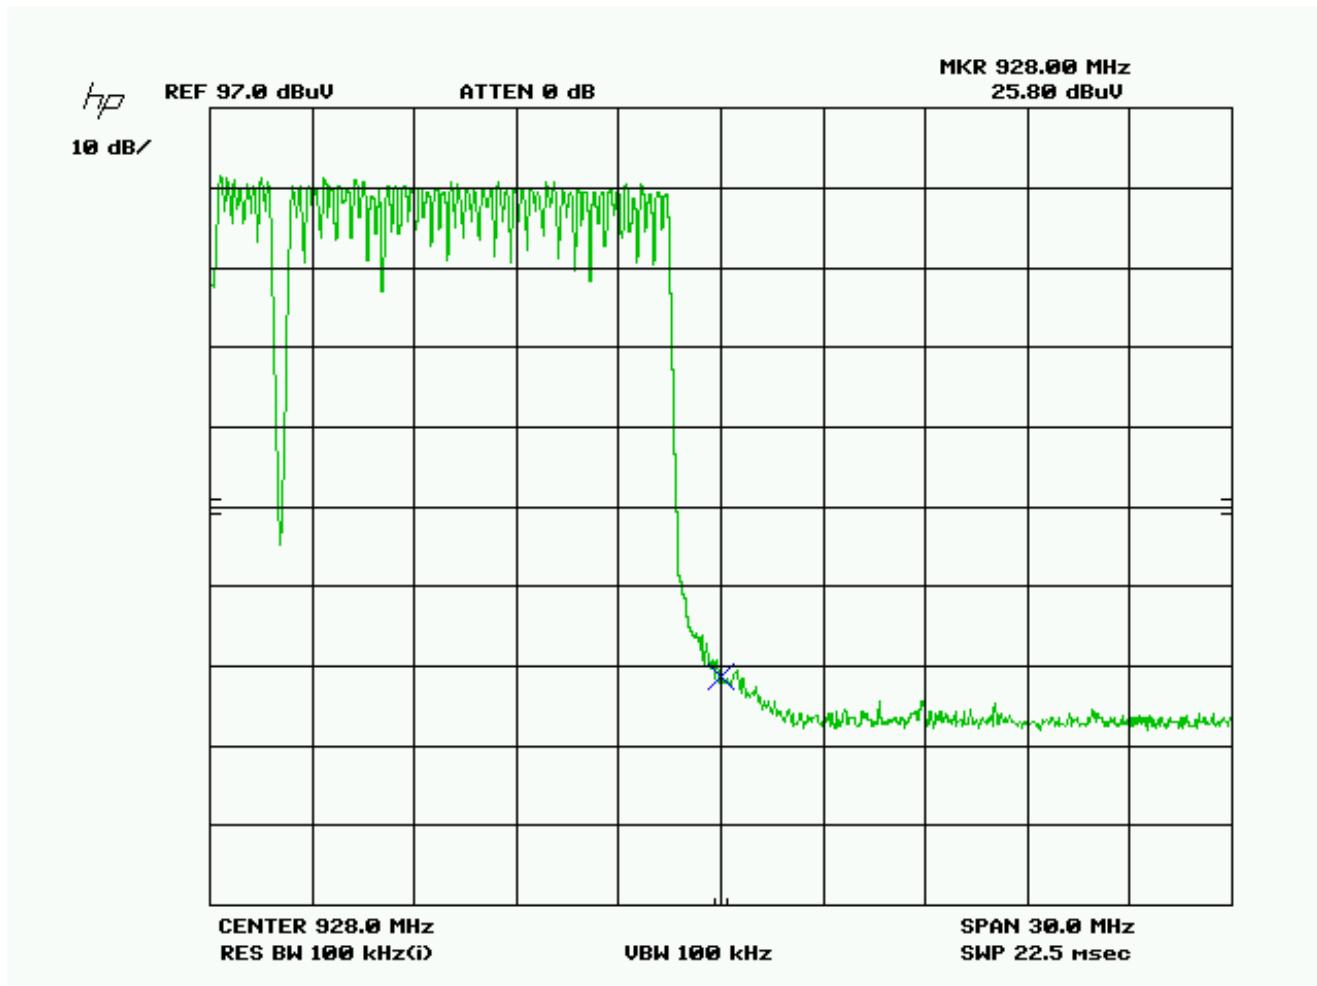

APPLICANT: PEGASUS TECHNOLOGIES, INC.
FCC ID: QLBPTSS2011
REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc

Upper bandedge (average)

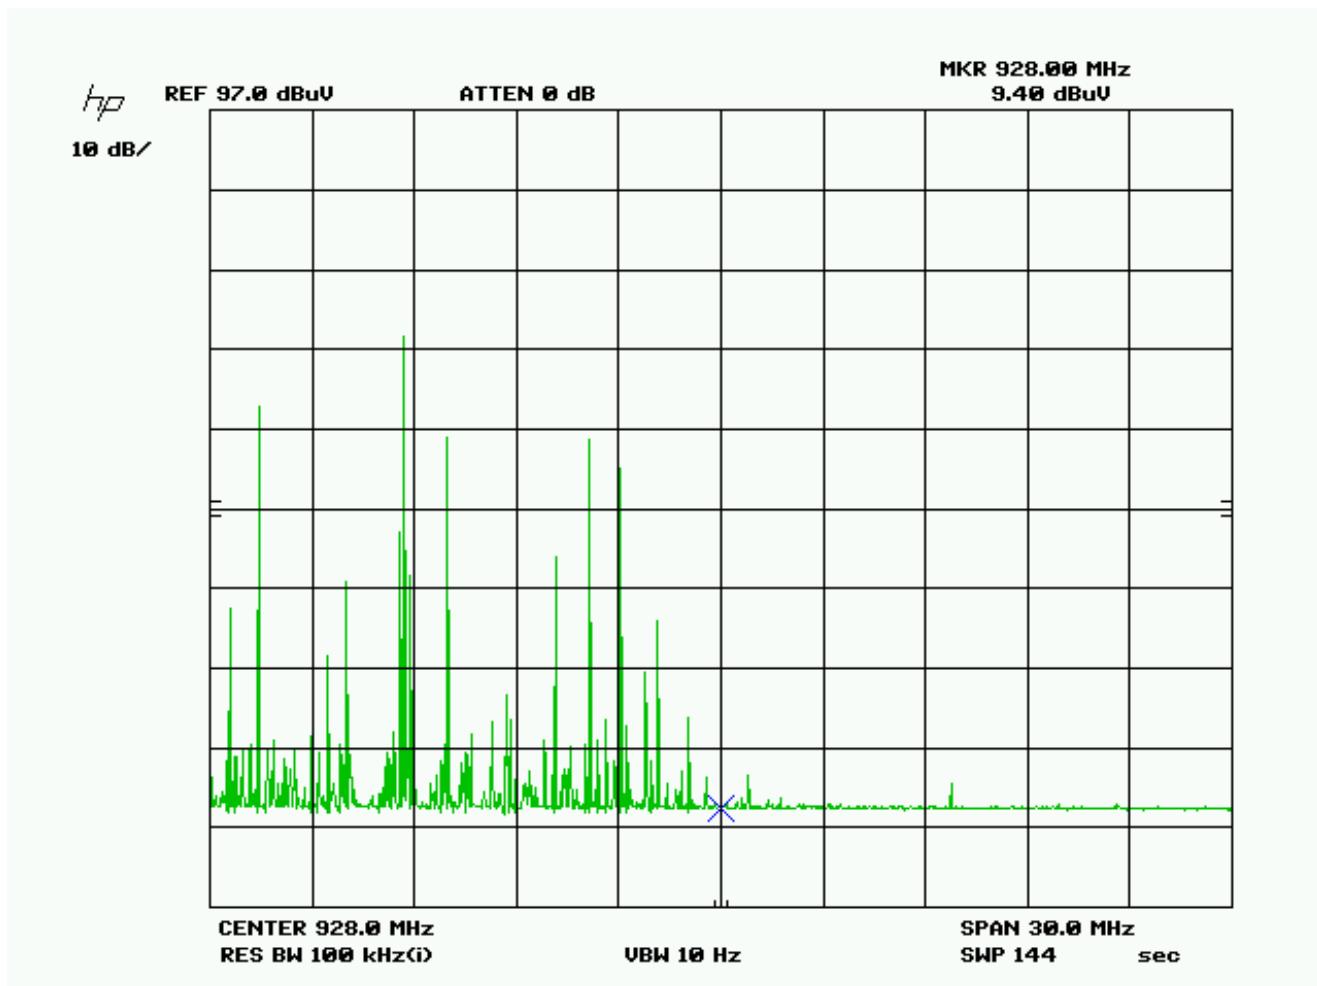

APPLICANT: PEGASUS TECHNOLOGIES, INC.
FCC ID: QLBPTSS2011
REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc


POWER SPECTRAL DENSITY

Rules Part No.: 15.247(d)

Requirements: The peak level measured must be less than +8.0 dBm.

Test Data: SEE THE FOLLOWING PLOT(S)

Spectral Density Plot using a 20db attenuator

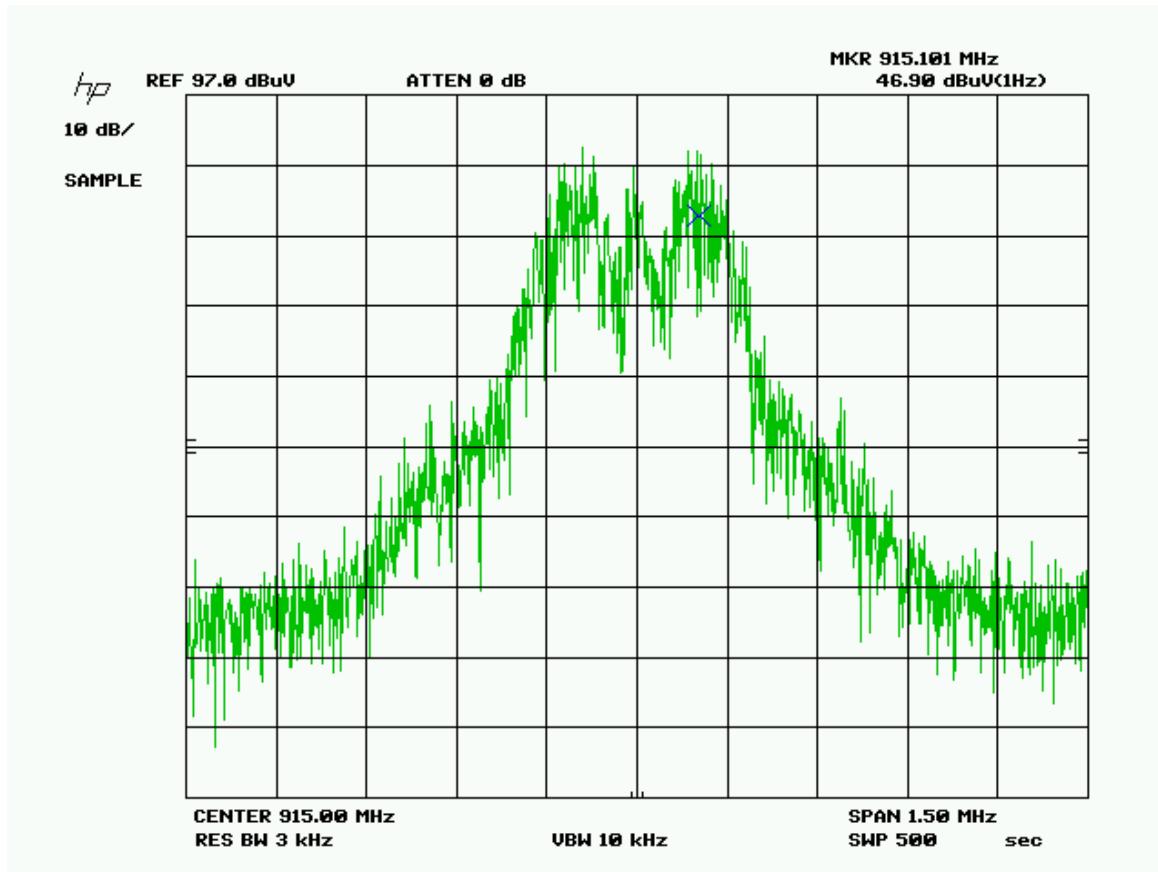

46.9 dB μ V

35.0 dB

20.0 dB

101.9 dB μ V

-107 conversion factor

-5.1 dBm

-5.1 dBm is less than +8 dBm

Three places in the band were tested and the worst case presented.

APPLICANT: PEGASUS TECHNOLOGIES, INC.

FCC ID: QLBPTSS2011

REPORT: P\PEGASUS_QLB\560AUT11\560AUT11TestReport.doc